



Appendix B

Detailed Test Results

1. LTE
LTE Band 2 for Body
LTE Band 5 for Body
LTE Band 7 for Body
LTE Band 12 for Body
LTE Band 13 for Body
LTE Band 41 for Body
LTE Band 66 for Body



Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 2 20M 1RB49 18900CH Front Side 0mm

DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1


Communication System: UID 0, LTE-FDD (0); Frequency: 1880 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 1880 \text{ MHz}$; $\sigma = 1.444 \text{ S/m}$; $\epsilon_r = 40.534$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.85, 7.85, 7.85); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front side 0mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.719 W/kg

Configuration/Front side 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 14.23 V/m ; Power Drift = 0.12 dB
Peak SAR (extrapolated) = 1.25 W/kg
SAR(1 g) = 0.591 W/kg ; SAR(10 g) = 0.296 W/kg
Maximum value of SAR (measured) = 0.728 W/kg

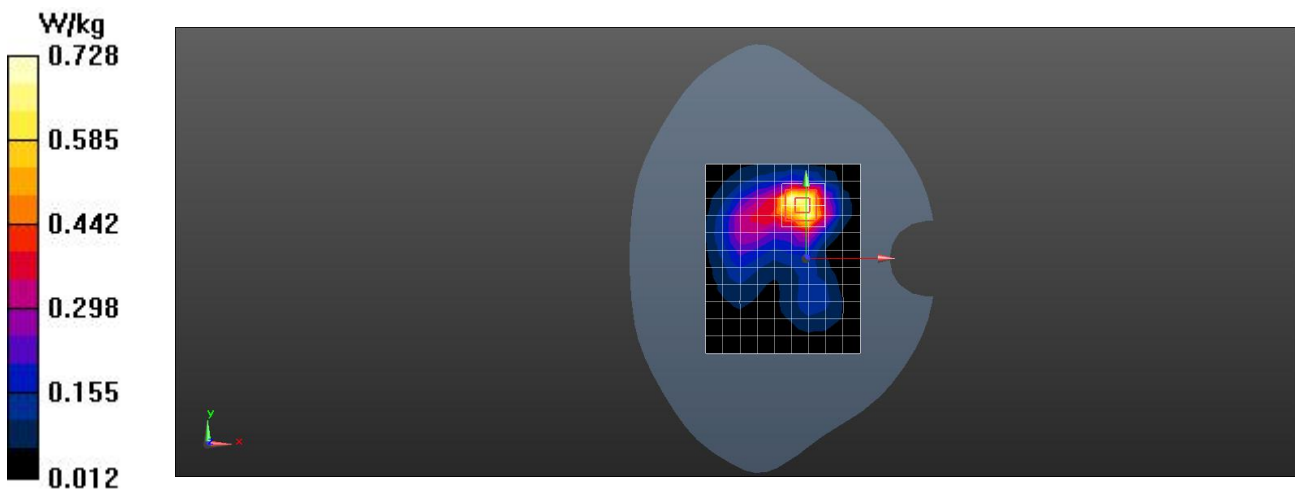



Date: 2024/10/9

Test Laboratory: LCS-SAR Lab

LTE Band 5 10M 1RB0 20600CH Front Side 0mm**DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1**


Communication System: UID 0, LTE-FDD (0); Frequency: 844 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.951 \text{ S/m}$; $\epsilon_r = 43.154$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.26, 9.26, 9.26); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

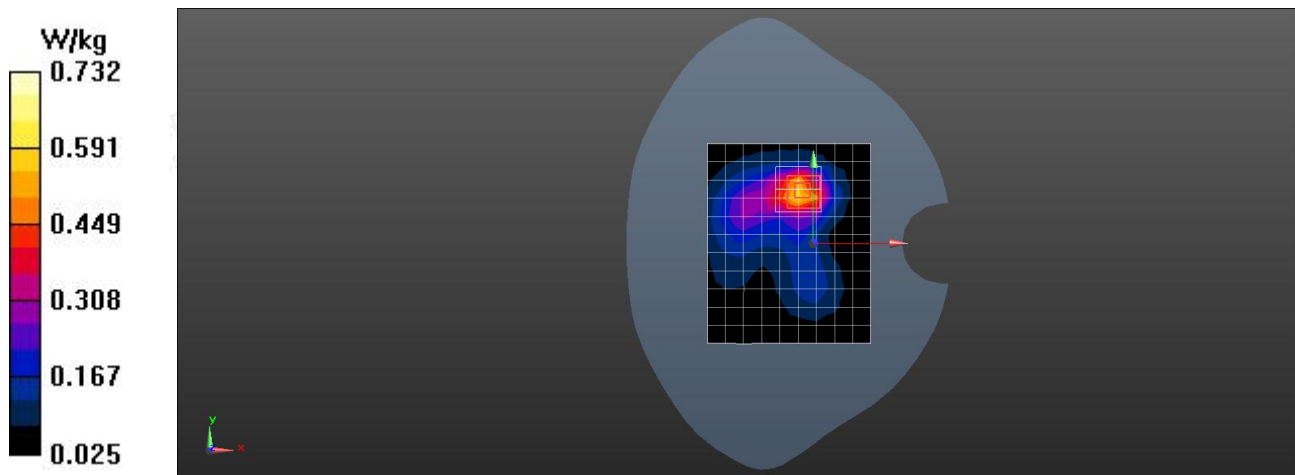Configuration/Front side 0mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (measured) = 0.726 W/kg **Configuration/Front side 0mm/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 23.89 V/m ; Power Drift = 0.07 dB Peak SAR (extrapolated) = 1.29 W/kg **SAR(1 g) = 0.618 W/kg ; SAR(10 g) = 0.378 W/kg** Maximum value of SAR (measured) = 0.732 W/kg 

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE B7 20M QPSK 1RB99 21100 Front side 0mm

DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1


Communication System: UID 0, LTE-FDD (0); Frequency: 2535 MHz;Duty Cycle: 1:1
Medium parameters used: $f = 2535 \text{ MHz}$; $\sigma = 1.862 \text{ S/m}$; $\epsilon_r = 39.461$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front side 0mm/Area Scan (10x12x1): Measurement grid: $dx=12\text{mm}$, $dy=12\text{mm}$
Maximum value of SAR (measured) = 0.839 W/kg

Configuration/Front side 0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$
Reference Value = 6.949 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.34 W/kg
SAR(1 g) = 0.684 W/kg; SAR(10 g) = 0.392 W/kg
Maximum value of SAR (measured) = 0.842 W/kg

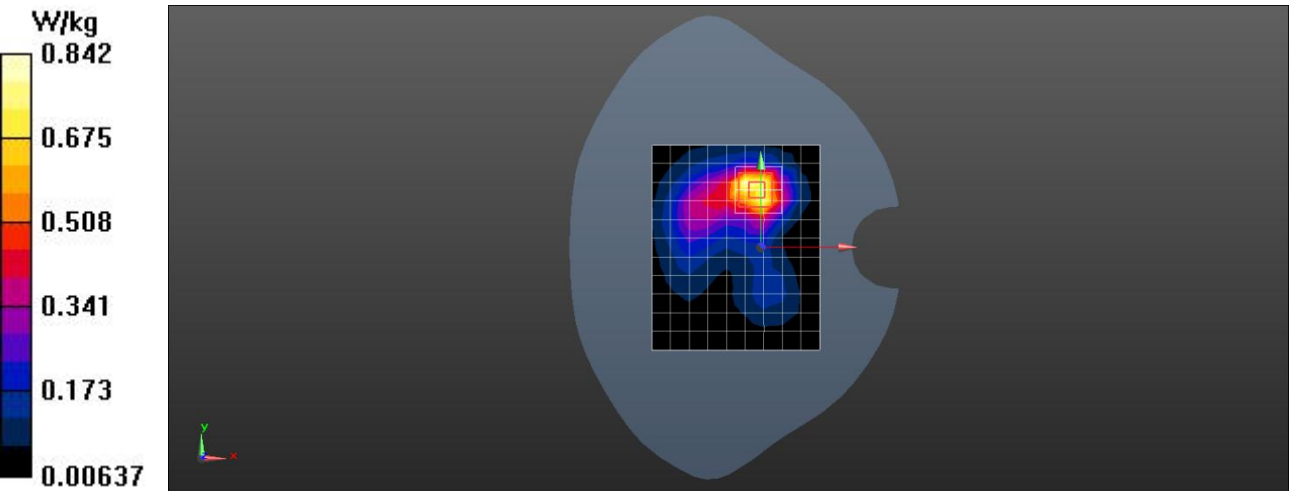



Date: 2024/10/8

Test Laboratory: LCS-SAR Lab

LTE Band 12 10M 1RB0 23095CH Front Side 0mm

DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1

Communication System: UID 0, LTE-FDD (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 707.5$ MHz; $\sigma = 0.9$ S/m; $\epsilon_r = 43.75$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.66, 9.66, 9.66); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front side 0mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.647 W/kg



Configuration/Front side 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.20 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.896 W/kg

SAR(1 g) = 0.456 W/kg; SAR(10 g) = 0.237 W/kg

Maximum value of SAR (measured) = 0.651 W/kg

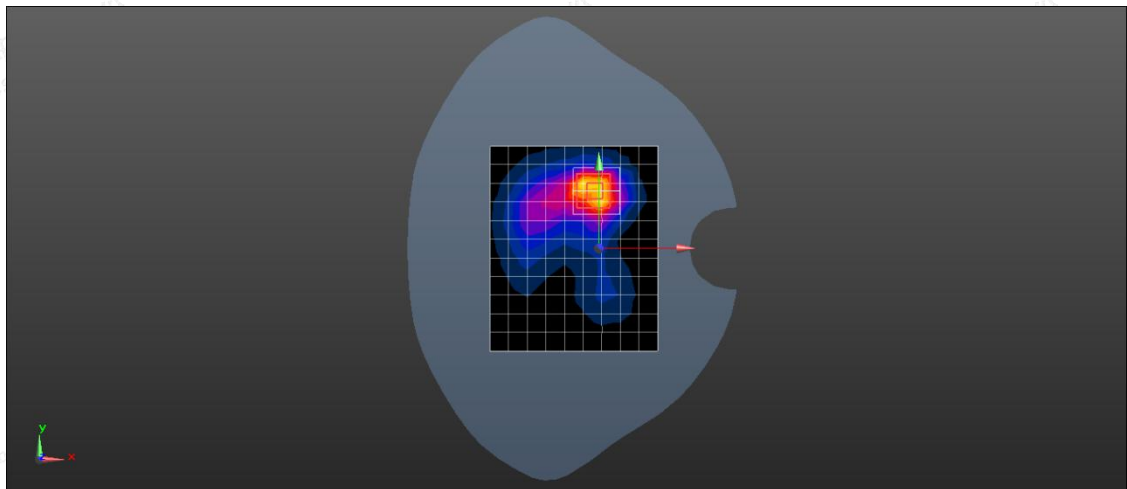

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 13 10M 1RB24 23230CH Front Side 0mm

DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1


Communication System: UID 0, LTE-FDD (0); Frequency: 782 MHz; Duty Cycle: 1:1
Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.927 \text{ S/m}$; $\epsilon_r = 43.395$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(9.66, 9.66, 9.66); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front side 0mm/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.448 W/kg

Configuration/Front side 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 23.48 V/m ; Power Drift = -0.10 dB
Peak SAR (extrapolated) = 0.725 W/kg
SAR(1 g) = 0.372 W/kg ; SAR(10 g) = 0.196 W/kg
Maximum value of SAR (measured) = 0.452 W/kg

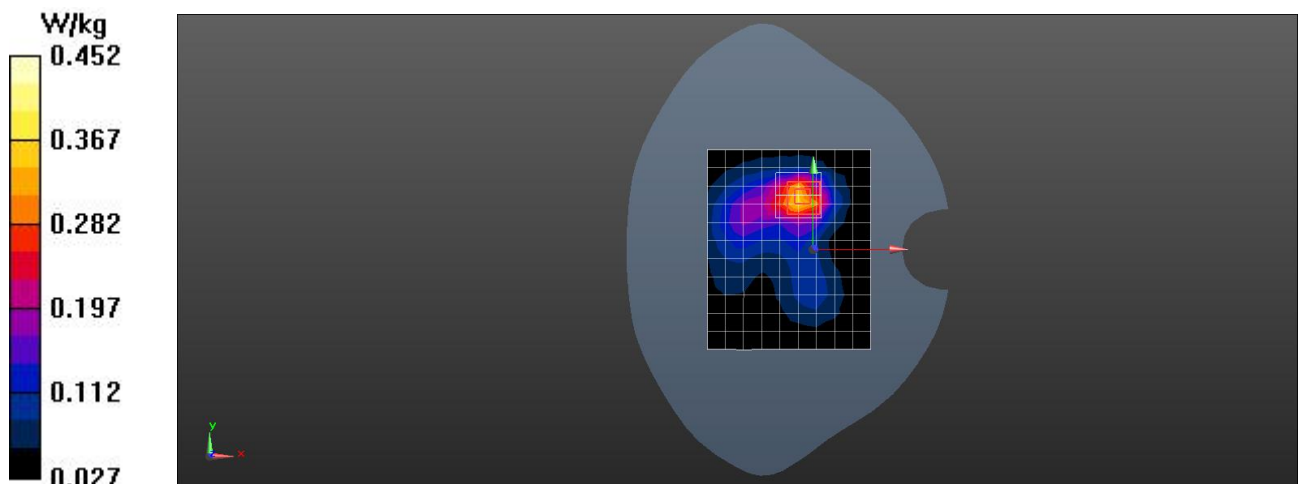



Date: 2024/10/12

Test Laboratory: LCS-SAR Lab

LTE B41 20M QPSK 1RB0 39750 Front side 0mm

DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1

Communication System: UID 0, LTE-TDD (0); Frequency: 2506 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2506$ MHz; $\sigma = 1.841$ S/m; $\epsilon_r = 39.516$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(7.42, 7.42, 7.42); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Rear side 0mm/Area Scan (10x12x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.796 W/kg


Configuration/Rear side 0mm/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.925 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.652 W/kg; SAR(10 g) = 0.364 W/kg

Maximum value of SAR (measured) = 0.801 W/kg

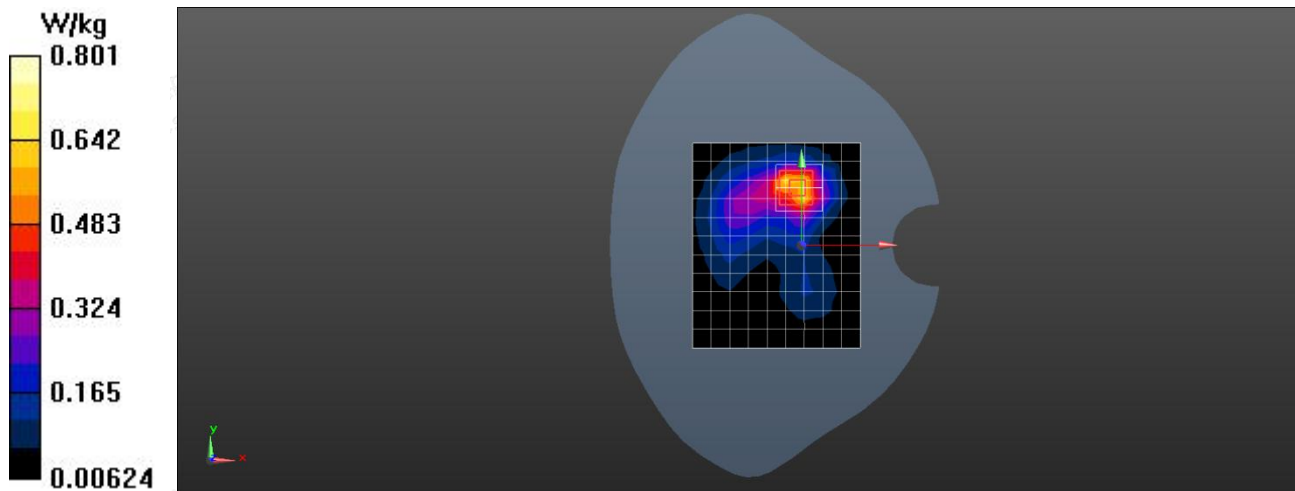

Shenzhen LCS Compliance Testing Laboratory Ltd.

Add: 101, 201 Bldg A & 301 Bldg C, Juji Industrial Park Yabianxueziwei, Shajing Street, Baoan District, Shenzhen, 518000, China

Tel: +(86) 0755-82591330 | E-mail: webmaster@lcs-cert.com | Web: www.lcs-cert.com

Scan code to check authenticity

Test Laboratory: LCS-SAR Lab

LTE Band 66 20M 1RB0 132572CH Front Side 0mm

DUT: Pet GPS Tracker & Health Monitor; Type: C09; Serial: A240923093-1

Communication System: UID 0, LTE-FDD (0); Frequency: 1770 MHz; Duty Cycle: 1:3.74111

Medium parameters used: $f = 1770$ MHz; $\sigma = 1.382$ S/m; $\epsilon_r = 40.742$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY Configuration:

- Probe: EX3DV4 - SN3805; ConvF(8.16, 8.16, 8.16); Calibrated: 2023/11/23;
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn373; Calibrated: 2024/1/3
- Phantom: SAM v5.0; Type: SAM; Serial: 1850
- DASY52 52.8.8(1222); SEMCAD X 14.6.10(7331)

Configuration/Front side 0mm/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.693 W/kg

Configuration/Front side 0mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.05 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.16 W/kg

SAR(1 g) = 0.574 W/kg; SAR(10 g) = 0.269 W/kg

Maximum value of SAR (measured) = 0.698 W/kg

