



ELEMENT WASHINGTON DC LLC

7185 Oakland Mills Road, Columbia, MD 21046 USA
Tel. 410.290.6652 / Fax 410.290.6654
<http://www.element.com>

MEASUREMENT REPORT FCC Part 15C Wireless Power Transfer

Applicant Name:

SetPoint Medical
25101 Rye Canyon Loop
Valencia, CA 91355

Date of Testing:

06/13/2024

Test Report Issue Date:

09/12/2024

Test Site/Location:

Element lab., Columbia, MD, USA

Test Report Serial No.:

1M2407150058-01-R2.2BG3Y

FCC ID:

2BG3YC01

APPLICANT:

SetPoint Medical

Application Type:

Certification

Model:

20087-03

EUT Type:

Docking Station

Frequency Range:

110 – 205kHz

FCC Classification:

Part 15 Low Power Transmitter Below 1705kHz (DCD)

FCC Rule Part(s):

Part 15 Subpart C

Test Procedure(s):

ANSI C63.10-2013

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and has been tested in accordance with the measurement procedures specified in ANSI C63.10-2013. Test results reported herein relate only to the item(s) tested.

This revised Test Report (S/N: 1M2407150058-01-R2.2BG3Y) supersedes and replaces the previously issued test report (S/N: 1M2407150058-01-R1.2BG3Y) on the same subject device for the same type of testing as indicated. Please discard or destroy the previously issued test report(s) and dispose of it accordingly.

I attest to the accuracy of data. All measurements reported herein were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

RJ Ortanez
Executive Vice President



FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 1 of 19

TABLE OF CONTENTS

1.0	INTRODUCTION.....	3
1.1	Scope.....	3
1.2	Element Test Location	3
1.3	Test Facility / Accreditations	3
2.0	PRODUCT INFORMATION	4
2.1	Equipment Description.....	4
2.2	Device Capabilities	4
2.3	Test Configuration	4
2.4	Software and Firmware.....	4
2.5	EMI Suppression Device(s)/Modifications.....	4
3.0	DESCRIPTION OF TESTS	5
3.1	Evaluation Procedure	5
3.2	AC Line Conducted Emissions	5
3.3	Radiated Emissions	6
3.4	Environmental Conditions	6
4.0	ANTENNA REQUIREMENTS	7
5.0	SAMPLE CALCULATIONS.....	8
5.1	Conducted Emission Measurement Sample Calculation	8
5.2	Radiated Emission Measurement Sample Calculation	8
6.0	MEASUREMENT UNCERTAINTY	9
7.0	TEST EQUIPMENT CALIBRATION DATA.....	10
8.0	TEST DATA	11
8.1	Summary	11
8.2	Test Support Equipment	11
8.3	Radiated Measurement Data	12
8.4	Line Conducted Measurement Data	16
9.0	CONCLUSION	19

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 2 of 19

1.0 INTRODUCTION

1.1 Scope

Measurement and determination of electromagnetic emissions (EMC) of radio frequency devices including intentional and/or unintentional radiators for compliance with the technical rules and regulations of the Federal Communications Commission and Innovation, Science and Economic Development Canada.

1.2 Element Test Location

These measurement tests were conducted at the Element laboratory located at 7185 Oakland Mills Road, Columbia, MD 21046. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014.

1.3 Test Facility / Accreditations

Measurements were performed at Element lab located in Columbia, MD 21046, U.S.A.

- Element Washington DC LLC is an ISO 17025-2017 accredited test facility under the American Association for Laboratory Accreditation (A2LA) with Certificate number 2041.01 for Specific Absorption Rate (SAR), Hearing Aid Compatibility (HAC) testing, where applicable, and Electromagnetic Compatibility (EMC) testing for FCC and Innovation, Science, and Economic Development Canada rules.
- Element Washington DC LLC TCB is a Telecommunication Certification Body (TCB) accredited to ISO/IEC 17065-2012 by A2LA (Certificate number 2041.03) in all scopes of FCC Rules and ISED Standards (RSS).
- Element Washington DC LLC facility is a registered (2451B) test laboratory with the site description on file with ISED.
- Element Washington DC LLC is a Recognized U.S. Certification Assessment Body (CAB # US0110) for ISED Canada as designated by NIST under the U.S. and Canada Mutual Recognition Agreements (MRAs).

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 3 of 19

2.0 PRODUCT INFORMATION

2.1 Equipment Description

The Equipment Under Test (EUT) is the **SetPoint Medical Docking Station FCC ID: 2BG3YC01**. The test data contained in this report pertains only to the emissions due to the wireless power transfer circuitry of the EUT.

To assess compliance to the AC line conducted emissions requirements under FCC Part 15.207, a charger (certified under FCC ID: 2BG3YE04) was placed on the docking station for testing.

Test Device Serial No.: C01-002781

Charger Serial No.: E04-002671

2.2 Device Capabilities

This device contains the following capabilities:

Wireless Power Transfer (110 – 205kHz)

2.3 Test Configuration

The EUT was exercised during testing by means of placing a Charger with a low battery level on the docking station to draw maximum output power. The EUT setup was placed on the test tabletop and arranged in a typical configuration in accordance with ANSI C63.10-2013.

The test configurations are further described in the SetPoint PD-00902 rev A DVeP, Externals, FCC Emissions document

For more information, please see Section 8.0 for test data and the test setup photos document for the test setup photographs.

2.4 Software and Firmware

The EUT does not use any specific software or firmware controlled by the applicant.

2.5 EMI Suppression Device(s)/Modifications

No EMI suppression device(s) were added and no modifications were made during testing.

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 4 of 19

3.0 DESCRIPTION OF TESTS

3.1 Evaluation Procedure

The measurement procedure described in the American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices (ANSI C63.10-2013) was used in the measurement of the EUT.

Deviation from measurement procedure.....None

3.2 AC Line Conducted Emissions

The line-conducted facility is located inside a 10'x16'x9' shielded enclosure. The shielded enclosure is manufactured by ETS Lindgren RF Enclosures. The shielding effectiveness of the shielded room is in accordance with MIL-Std-285 or NSA 65-5. A 1m x 1.5m wooden table 80cm high is placed 40cm away from the vertical wall and 80cm away from the sidewall of the shielded room. Two 10kHz-30MHz, 50Ω/50μH Line-Impedance Stabilization Networks (LISNs) are bonded to the shielded room floor. Power to the LISNs is filtered by external high-current high-insertion loss power line filters. The external power line filter is an ETS Lindgren Model LPRX-4X30 (100dB Attenuation, 14kHz-18GHz) and the two EMI/RFI filters are ETS Lindgren Model LRW-2030-S1 (100dB Minimum Insertion Loss, 14kHz – 10GHz). These filters attenuate ambient signal noise from entering the measurement lines. These filters are also bonded to the shielded enclosure.

The EUT is powered from one LISN and the support equipment is powered from the second LISN. If the EUT is a DC-powered device, power will be derived from the source power supply it normally will be powered from and this supply line(s) will be connected to the second LISN. All interconnecting cables more than 1 meter were shortened to a 1 meter length by non-inductive bundling (serpentine fashion) and draped over the back edge of the test table. All cables were at least 40cm above the horizontal reference groundplane. Power cables for support equipment were routed down to the second LISN while ensuring that that cables were not draped over the second LISN.

Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The RF output of the LISN was connected to the spectrum analyzer and exploratory measurements were made to determine the frequencies producing the maximum emission from the EUT. The spectrum was scanned from 150kHz to 30MHz with a spectrum analyzer. The detector function was set to peak mode for exploratory measurements while the bandwidth of the analyzer was set to 10kHz. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Once the worst case emissions have been identified, the one EUT cable configuration/arrangement and mode of operation that produced these emissions is used for final measurements on the same test site. The analyzer is set to CISPR quasi-peak and average detectors with a 9kHz resolution bandwidth for final measurements.

Line conducted emissions test results are shown in Section 8.4. The EMI Receiver mode of the Agilent MXE was used to perform AC line conducted emissions testing.

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 5 of 19

3.3 Radiated Emissions

The radiated test facilities consisted of an indoor 3 meter semi-anechoic chamber used for final measurements and exploratory measurements, when necessary. The measurement area is contained within the semi-anechoic chamber which is shielded from any ambient interference. The test site inside the chamber is a 6m x 5.2m elliptical, obstruction-free area in accordance with Clause 5, Figure 5.7 of ANSI C63.4-2014. A raised turntable is used for radiated measurement. It is a continuously rotatable, remote-controlled, metallic turntable and 2 meters (6.56 ft.) in diameter. The turn table is flush with the raised floor of the chamber in order to maintain its function as a ground plane. Absorbers are arranged on the floor between the turn table and the antenna mast in such a way so as to maximize the reduction of reflections for measurements above 1GHz. . An 80cm tall test table made of Styrodur is placed on top of the turn table. For measurements above 1GHz, an additional Styrodur pedestal is placed on top of the test table to bring the total table height to 1.5m.

For all measurements, the spectrum was scanned through all EUT azimuths and from 1 to 4 meter receive antenna height using a broadband antenna from 30MHz up to the upper frequency shown in 15.33(b)(1) depending on the highest frequency generated or used in the device or on which the device operates or tunes. For frequencies above 1GHz, linearly polarized double ridge horn antennas were used. For frequencies below 30MHz, a calibrated loop antenna was used. When exploratory measurements were necessary, they were performed at 1 meter test distance inside the semi-anechoic chamber using broadband antennas, broadband amplifiers, and spectrum analyzers to determine the frequencies and modes producing the maximum emissions. Sufficient time for the EUT, support equipment, and test equipment was allowed in order for them to warm up to their normal operating condition. The test set-up was placed on top of the 1 x 1.5 meter table. The EUT, support equipment, and interconnecting cables were arranged and manipulated to maximize each emission. Appropriate precaution was taken to ensure that all emissions from the EUT were maximized and investigated. The system configuration, mode of operation, turntable azimuth, and receive antenna height was noted for each frequency found.

Final measurements were made in the semi-anechoic chamber using calibrated, linearly polarized broadband and horn antennas. The test setup was configured to the setup that produced the worst case emissions. The spectrum analyzer was set to investigate all frequencies required for testing to compare the highest radiated disturbances with respect to the specified limits. The turntable containing the EUT was rotated through 360 degrees and the height of the receive antenna was varied 1 to 4 meters and stopped at the azimuth and height producing the maximum emission. Each emission was maximized by changing the orientation of the EUT through three orthogonal planes and changing the polarity of the receive antenna, whichever produced the worst-case emissions.

All radiated measurements are performed in a chamber that meets the site requirements per ANSI C63.4-2014. Additionally, radiated emissions below 30MHz are also validated on an Open Area Test Site to assert correlation with the chamber measurements per the requirements of KDB 474788 D01 v01r01.

3.4 Environmental Conditions

The temperature is controlled within range of 15°C to 35°C. The relative humidity is controlled within range of 10% to 75%. The atmospheric pressure is monitored within the range 86-106kPa (860-1060mbar).

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 6 of 19

4.0 ANTENNA REQUIREMENTS

Excerpt from §15.203 of the FCC Rules/Regulations:

“An intentional radiator antenna shall be designed to ensure that no antenna other than that furnished by the responsible party can be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.”

- The antenna of the EUT is **permanently attached**.

Conclusion:

The EUT complies with the requirement of §15.203.

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 7 of 19

5.0 SAMPLE CALCULATIONS

5.1 Conducted Emission Measurement Sample Calculation

@ 20.3 MHz

Class B limit = 60.0 dB μ V (Quasi-peak limit)
 Reading = - 57.8 dBm (calibrated quasi-peak level)
 Convert to dB μ V = - 57.8 + 107 = 49.2 dB μ V

 Margin = 49.2 - 60.0 = - 10.8 dB
 = **10.8 dB below limit**

5.2 Radiated Emission Measurement Sample Calculation

@ 66.7 MHz

Class B limit = 100 μ V/m = 40.0 dB μ V/m
 Reading = - 76.0 dBm (calibrated level)
 Convert to dB μ V = - 76.0 + 107 = 31.0 dB μ V
 Antenna Factor + Cable Loss = 5.8 dB/m
 Total = 36.8 dB μ V/m

 Margin = 36.8 - 40.0 = - 3.2 dB
 = **3.2 dB below limit**

Note:

$$\text{Level [dB}\mu\text{V]} = 20 \log_{10} (\text{Level } [\mu\text{V/m}])$$

$$\text{Level [dB}\mu\text{V]} = \text{Level [dBm]} + 107$$

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 8 of 19

6.0 MEASUREMENT UNCERTAINTY

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI C63.10-2013. All measurement uncertainty values are shown with a coverage factor of $k = 2$ to indicate a 95% level of confidence. The measurement uncertainty shown below meets or exceeds the U_{CISPR} measurement uncertainty values specified in CISPR 16-4-2 and, thus, can be compared directly to specified limits to determine compliance.

Contribution	Expanded Uncertainty ($\pm$ dB)
Conducted Disturbance	3.09
Radiated Disturbance (<1GHz)	4.98

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 9 of 19

7.0 TEST EQUIPMENT CALIBRATION DATA

Test Equipment Calibration is traceable to the National Institute of Standards and Technology (NIST). Measurements antennas used during testing were calibrated in accordance to the requirements of ANSI C63.5-2017.

Manufacturer	Model	Description	Cal Date	Cal Interval	Cal Due	Serial Number
Com-Power	AL-130R	9kHz - 30MHz Loop Antenna	2/22/2024	Biennial	2/22/2026	121085
Rohde & Schwarz	ESU26	EMI Test Receiver (26.5GHz)	9/25/2023	Annual	9/25/2024	100342
ETS-Lindgren	3816/2NM	LISN	8/11/2022	Biennial	8/11/2024	00114451
Keysight Technologies	N9030A	MXE EMI Receiver	8/30.2023	Annual	8/30/2024	MY51210133

Table 7-1. Annual Test Equipment Calibration Schedule

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 10 of 19

8.0 TEST DATA

8.1 Summary

Company Name: SetPoint Medical
 FCC ID: 2BG3YC01
 FCC Classification: Part 15 Low Power Transmitter Below 1705kHz (DCD)
 Frequency Range: 110 – 205kHz

FCC Part Section(s)	Test Description	Test Limit	Test Condition	Test Result	Reference
15.209	Out-of-Band Emissions	Emissions must meet the radiated limits detailed in 15.209	Radiated	PASS	Section 8.3
15.207	AC Conducted Emissions 150kHz – 30MHz	< FCC 15.207 limits	LINE CONDUCTED	PASS	Section 8.4

Table 8-1. Summary of Test Results

8.2 Test Support Equipment

SetPoint Coil Spacer (shim)	Part Number:	80481-01	S/N:	N/A
Charger	Model Number:	20067-03	S/N:	E04-002671

Table 8-2. Test Support Equipment Used

Note: See test setup photographs for actual system test setup.

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 11 of 19

8.3 Radiated Measurement Data

§15.209

Test Overview and Limit

The EUT was tested from 9kHz up to 30MHz. All measurements up to 30MHz were recorded with a spectrum analyzer employing a quasi-peak detector.

All out of band emissions must not exceed the limits shown in Table 8-3 per Section 15.209.

Frequency	Field Strength [μV/m]	Measured Distance [Meters]
0.009 – 0.490 MHz	2400/F (kHz)	300
0.490 – 1.705 MHz	24000/F (kHz)	30
1.705 – 30.00 MHz	30	30
30.00 – 88.00 MHz	100	3
88.00 – 216.0 MHz	150	3
216.0 – 960.0 MHz	200	3
Above 960.0 MHz	500	3

Table 8-3. Radiated Limits – Out of band

Test Procedures Used

ANSI C63.10-2013 – Section 6.5.4

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer frequency set to the frequency of the radiated spurious emission of interest
2. RBW = 9kHz for emissions below 30MHz
3. VBW = $\geq 3 \times$ RBW
4. Detector = Peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 12 of 19

Test Setup

The EUT and measurement equipment were set up as shown in the diagram below.

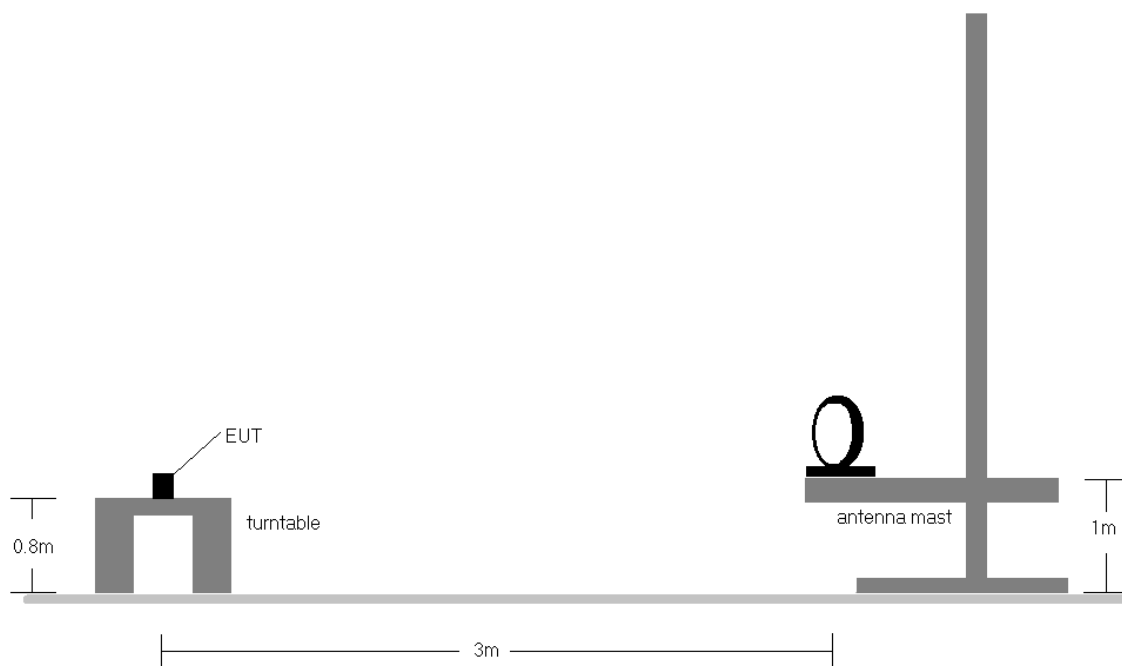



Figure 8-1. Radiated Test Setup < 30MHz

1. All measurements were recorded using a spectrum analyzer employing a quasi-peak detector for emissions below 30MHz.
2. A loop antenna was used to investigate emissions below 30MHz.
3. Below 30MHz the loop antenna was positioned in 3 orthogonal planes (X front, Y side, Z top) to determine the orientation resulting in the worst case emissions.
4. The EUT was positioned in three orthogonal planes to determine the orientation resulting in the worst case emissions.
5. The spectrum is investigated from 9kHz up to 30MHz per §15.33. The worst-case emissions are reported.
6. No spurious emissions levels were found to be greater than the level of the fundamental.
7. The "-" shown in the following RSE tables are used to denote a noise floor measurement.
8. A distance correction factor is applied per the provisions of 15.31(f)(2) to compensate for measurements performed at 3m in order to compare directly with the limits specified in 15.209.


FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 13 of 19

Radiated Spurious Emission Measurements, Out-of-Band, Wireless Power Transfer


\$15.209

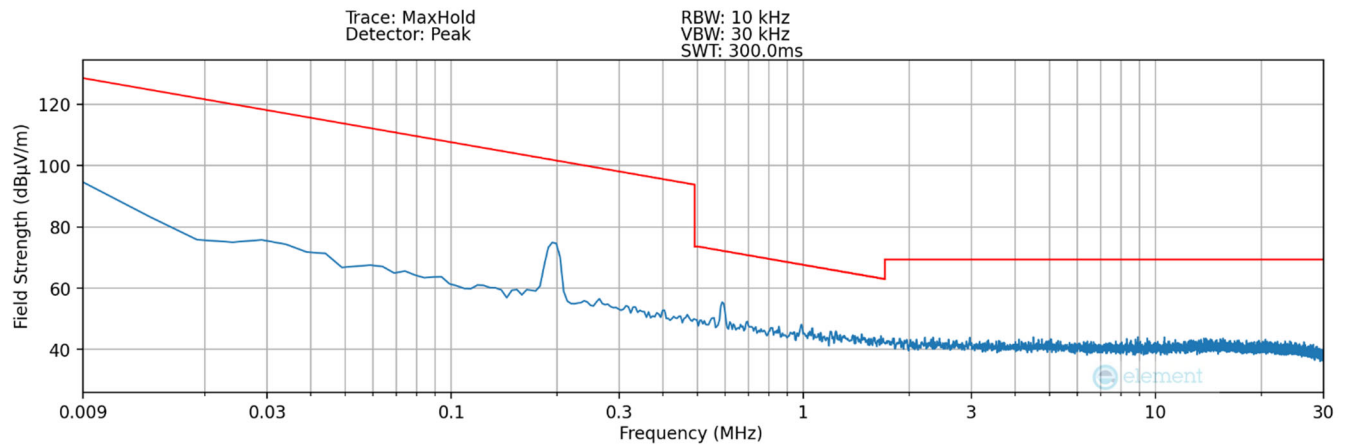

Plot 8-1. Radiated Spurious Plot 9kHz – 30MHz (Pol. X)

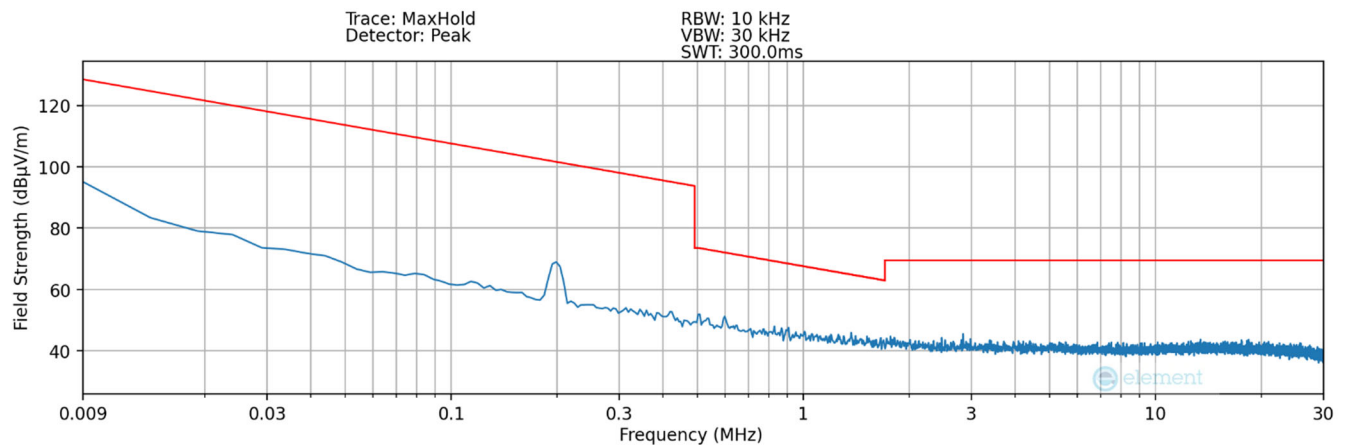

Plot 8-2. Radiated Spurious Plot 9kHz – 30MHz (Pol. Y)

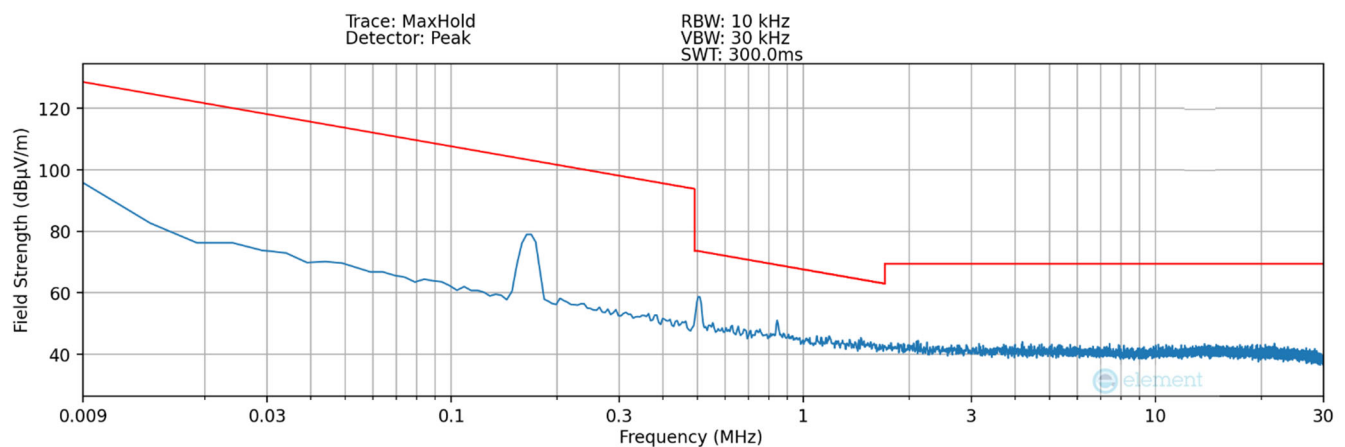

Plot 8-3. Radiated Spurious Plot 9kHz – 30MHz (Pol. Z)

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 14 of 19



Radiated Spurious Emission Measurements, Out-of-Band §15.209

Tx Frequency 131kHz

Measurement Distance: 3 Meters

Frequency [MHz]	Ant. Pol. [X/Y/Z]	Antenna Height [cm]	Turntable Azimuth [degree]	Level [dBm]	AFCL [dB/m]	3m Field Strength [dBµV/m]	Distance Correction Factor [dB]	Corrected Field Strength [dBµV/m]	Limit [µV/m]	Limit [dBµV/m]	Margin [dB]
0.131	Z	100	182	-32.64	13.88	88.24	80.00	8.24	18.35	25.27	-17.04
0.393	Z	100	182	-56.21	13.89	64.68	80.00	-15.32	6.11	15.72	-31.04
0.669	Z	100	182	-64.71	14.10	69.43	40.00	29.43	35.89	31.10	-1.67
0.939	Z	100	182	-70.07	14.28	51.21	40.00	11.21	25.57	28.15	-16.94

Table 8-4. Radiated Measurements

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 15 of 19

8.4 Line Conducted Measurement Data

§15.207

Test Overview and Limit

All AC line conducted spurious emissions are measured with a receiver connected to a grounded LISN while the EUT is operating at its maximum duty cycle, at maximum power, and at the appropriate frequencies. All data rates and modes were investigated for conducted spurious emissions. Only the conducted emissions of the configuration that produced the worst case emissions are reported in this section.

All conducted emissions must not exceed the limits shown in the table below per FCC Part 15.207.

Frequency of emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15 – 0.5	66 to 56*	56 to 46*
0.5 – 5	56	46
5 – 30	60	50

Table 8-5. Conducted Limits

*Decreases with the logarithm of the frequency.

Test Procedures Used

ANSI C63.10-2013, Section 6.2

Test Settings

Quasi-Peak Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = quasi-peak
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

Average Field Strength Measurements

1. Analyzer center frequency was set to the frequency of the spurious emission of interest
2. RBW = 9kHz (for emissions from 150kHz – 30MHz)
3. Detector = RMS
4. Sweep time = auto couple
5. Trace mode = max hold
6. Trace was allowed to stabilize

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 16 of 19

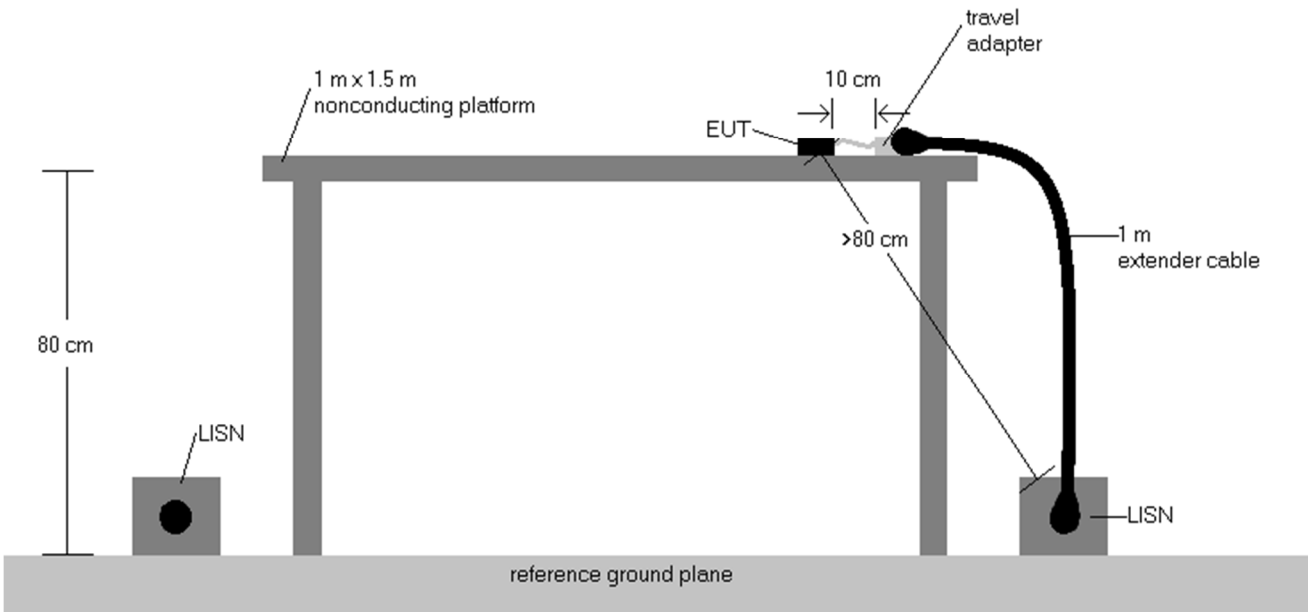


Figure 8-2. Test Instrument & Measurement Setup


Test Setup

The EUT and measurement equipment were set up as shown in the test setup photos provided.


Test Notes

1. All modes of operation were investigated and the worst-case emissions are reported using mid channel. The emissions found were not affected by the choice of channel used during testing.
2. The limit for an intentional radiator from 150kHz to 30MHz are specified in 15.207 and RSS-Gen (8.8).
3. $\text{Corr. (dB)} = \text{Cable loss (dB)} + \text{LISN insertion factor (dB)}$
4. $\text{QP/AV Level (dB}\mu\text{V)} = \text{QP/AV Analyzer/Receiver Level (dB}\mu\text{V)} + \text{Corr. (dB)}$
5. $\text{Margin (dB)} = \text{QP/AV Limit (dB}\mu\text{V)} - \text{QP/AV Level (dB}\mu\text{V)}$
6. Traces shown in plot are made using a peak detector.
7. Deviations to the Specifications: None.

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 17 of 19

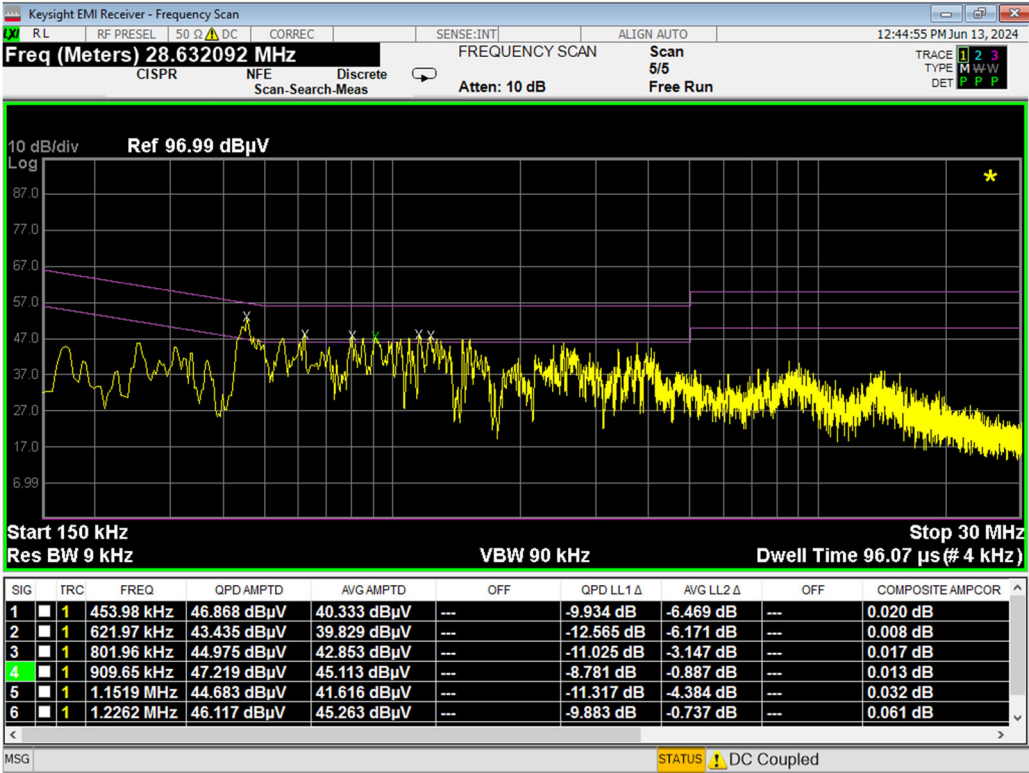

Plot 8-4. Line Conducted Plot (L1)

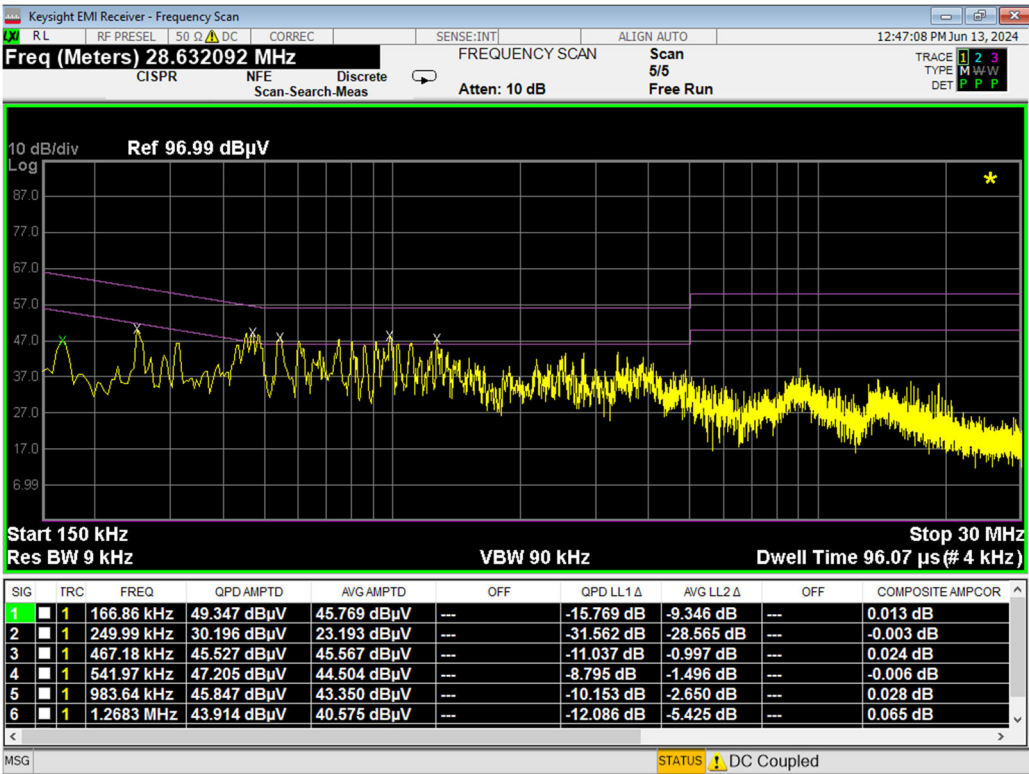

Plot 8-5. Line Conducted Plot (N)

FCC ID: 2BG3YC01		MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station		Page 18 of 19

9.0 CONCLUSION

The data collected relate only to the item(s) tested and show that the **SetPoint Medical Docking Station FCC ID: 2BG3YC01** has been tested to comply with the requirements specified in Part 15 (§15.207 and §15.209) of the FCC rules.

FCC ID: 2BG3YC01	MEASUREMENT REPORT (CERTIFICATION)		Approved by: Technical Manager
Test Report S/N: 1M2407150058-01-R2.2BG3Y	Test Dates: 06/13/2024	EUT Type: Docking Station	Page 19 of 19