


Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 81 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band2
Frequency :5320 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

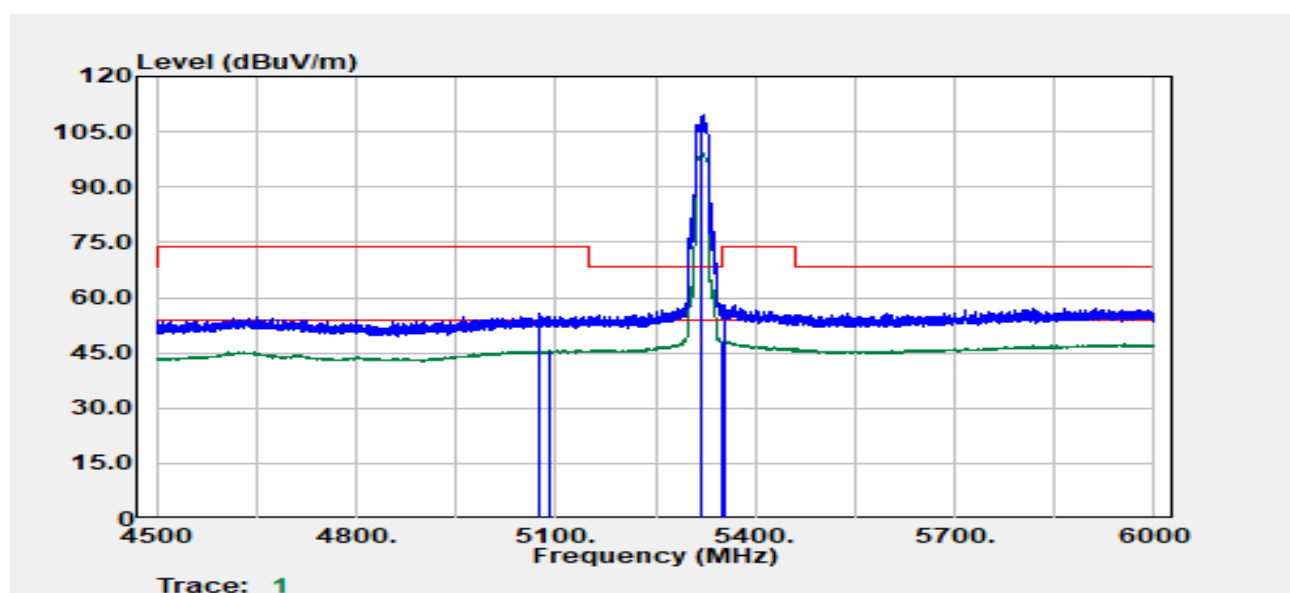


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5075.85	Peak	41.91	13.71	55.62	74.00	-18.38
5091.10	Average	31.95	13.73	45.68	54.00	-8.32
5320.00	Peak	95.57	14.06	109.63	--	--
5320.00	Average	85.16	14.06	99.22	--	--
5350.89	Average	34.20	13.92	48.12	54.00	-5.88
5353.14	Peak	44.03	13.92	57.95	74.00	-16.05

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 82 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band2
Frequency :5270 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

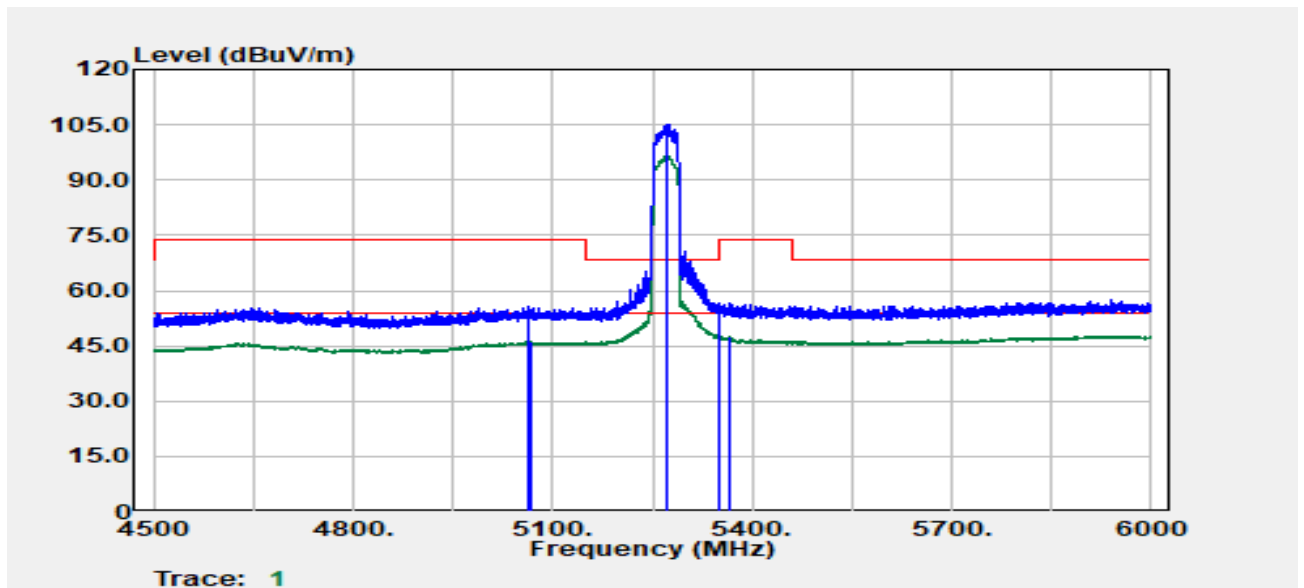


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5061.59	Peak	41.82	13.68	55.50	74.00	-18.50
5067.10	Average	32.59	13.69	46.28	54.00	-7.72
5270.00	Peak	91.13	14.02	105.15	--	--
5270.00	Average	82.68	14.02	96.70	--	--
5350.00	Peak	42.64	13.91	56.56	68.20	-11.64
5365.39	Average	33.46	13.95	47.41	54.00	-6.59

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 83 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band2
Frequency :5270 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

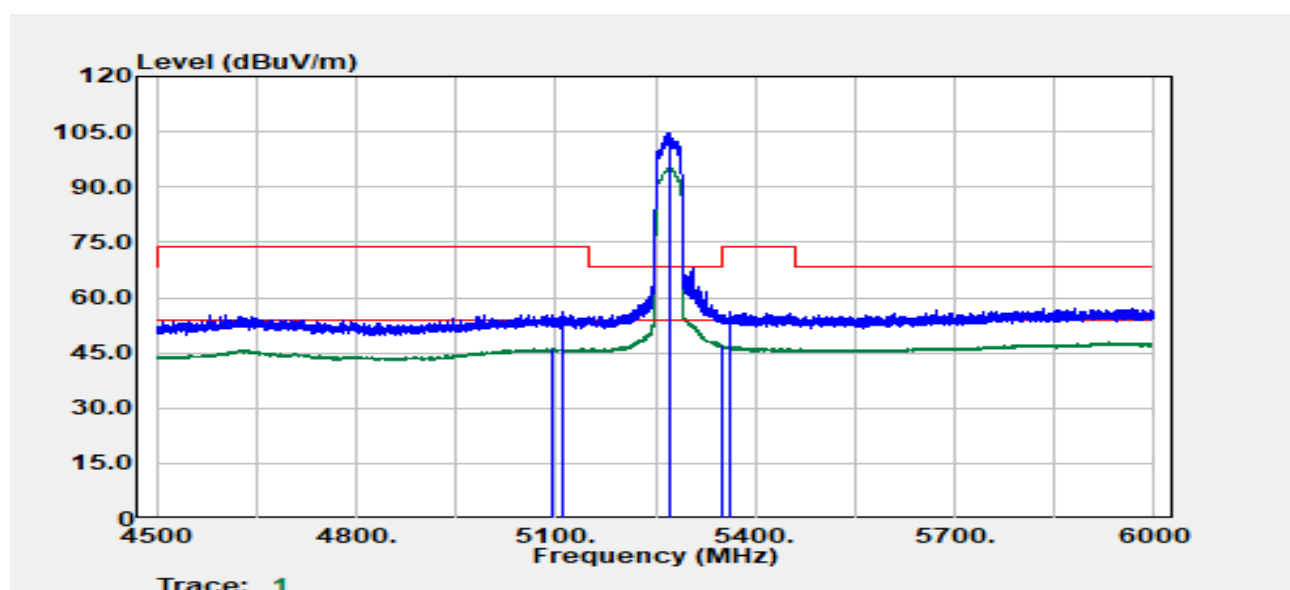


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5094.60	Average	32.31	13.74	46.05	54.00	-7.95
5108.60	Peak	42.21	13.75	55.95	74.00	-18.05
5270.00	Peak	90.49	14.02	104.51	--	--
5270.00	Average	81.46	14.02	95.48	--	--
5351.64	Average	33.12	13.92	47.04	54.00	-6.96
5361.64	Peak	42.09	13.94	56.03	74.00	-17.97

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 84 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band2
Frequency :5310 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

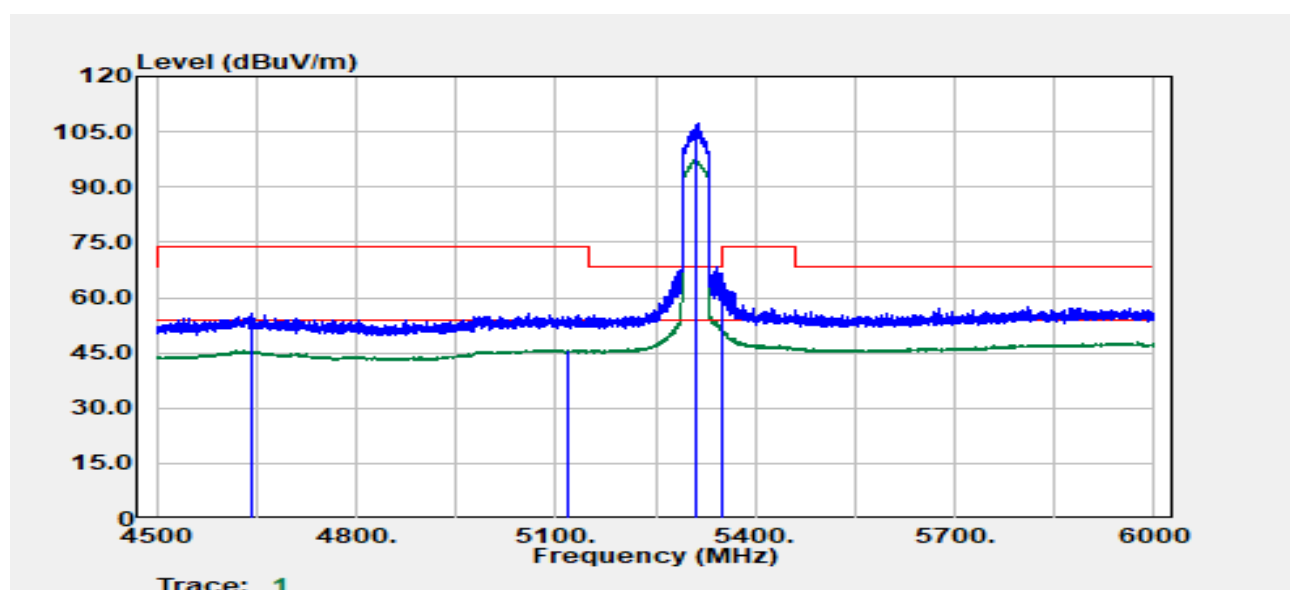


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4643.77	Peak	43.16	12.70	55.86	74.00	-18.14
5116.60	Average	32.09	13.74	45.83	54.00	-8.17
5310.00	Peak	93.13	14.11	107.24	--	--
5310.00	Average	83.49	14.11	97.61	--	--
5351.14	Average	37.46	13.92	51.37	54.00	-2.63
5352.14	Peak	50.01	13.92	63.93	74.00	-10.07

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 85 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band2
Frequency :5310 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

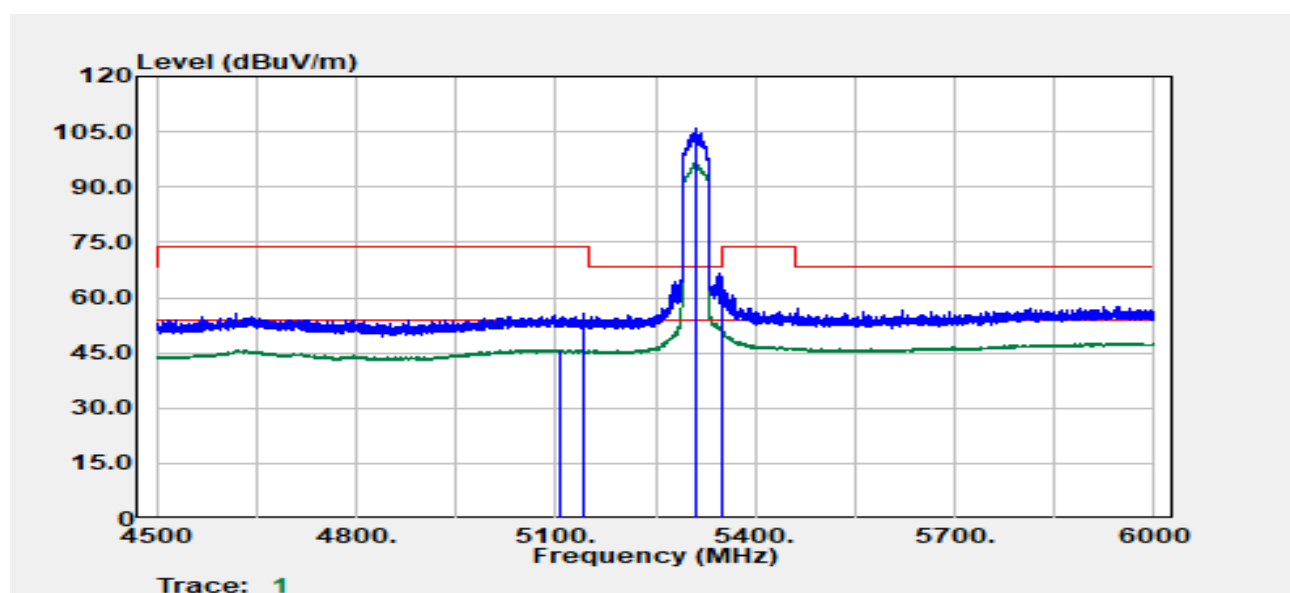


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5106.60	Average	32.06	13.75	45.80	54.00	-8.20
5143.36	Peak	42.04	13.73	55.78	74.00	-18.22
5310.00	Peak	91.81	14.11	105.92	--	--
5310.00	Average	82.19	14.11	96.30	--	--
5350.00	Average	37.14	13.91	51.06	54.00	-2.94
5351.89	Peak	50.82	13.92	64.74	74.00	-9.26

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 86 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band2
Frequency :5290 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

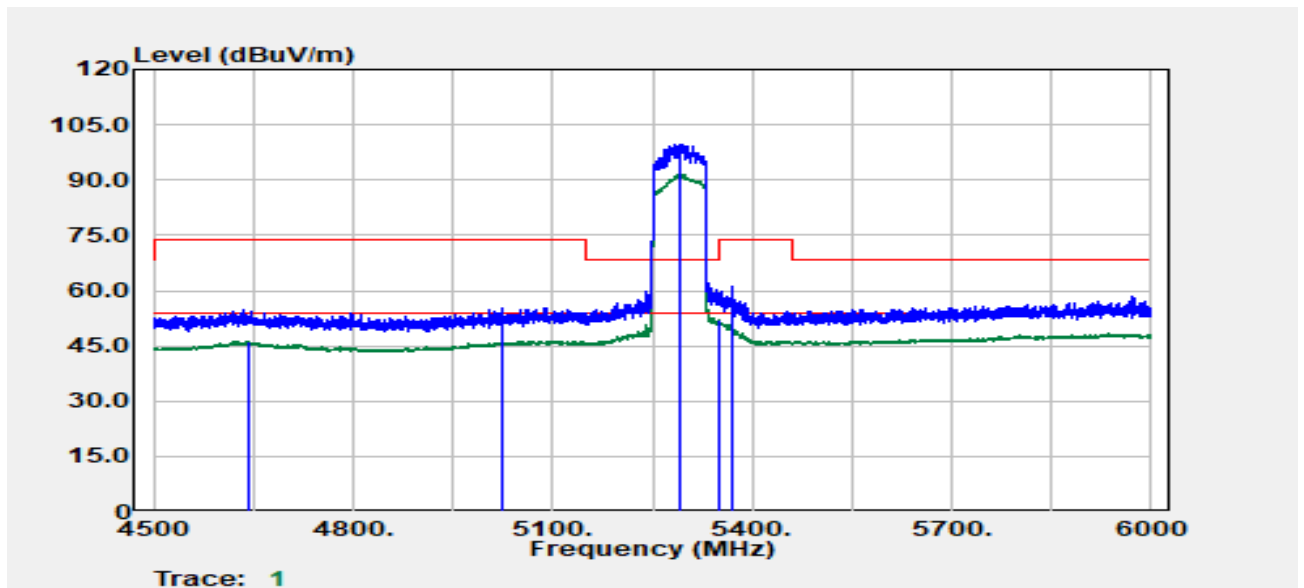


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
4642.27	Average	33.61	12.71	46.32	54.00	-7.68
5025.09	Peak	41.81	13.49	55.30	74.00	-18.70
5290.00	Peak	85.63	14.11	99.74	--	--
5290.00	Average	77.25	14.11	91.36	--	--
5350.14	Average	38.18	13.92	52.10	54.00	-1.90
5369.40	Peak	47.18	13.96	61.15	74.00	-12.85

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 87 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band2
Frequency :5290 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

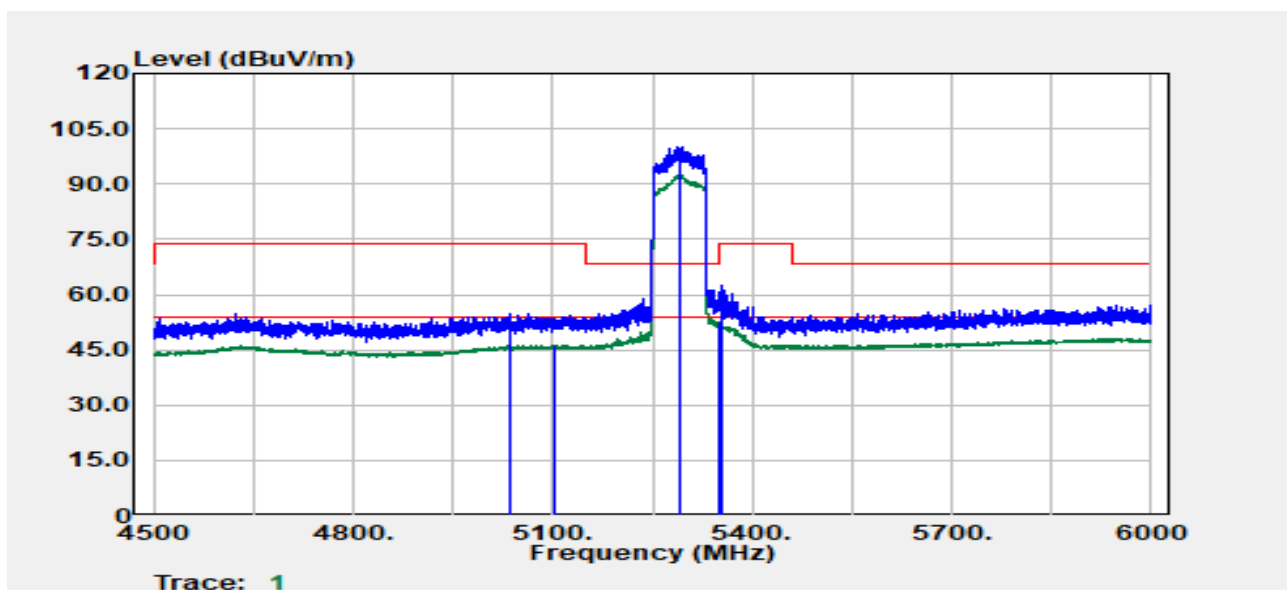


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5035.09	Peak	41.37	13.56	54.93	74.00	-19.07
5103.10	Average	32.45	13.75	46.20	54.00	-7.80
5290.00	Peak	85.90	14.11	100.01	--	--
5290.00	Average	78.60	14.11	92.72	--	--
5349.89	Average	38.59	13.92	52.50	54.00	-1.50
5353.39	Peak	48.56	13.92	62.48	74.00	-11.52

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 88 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH0
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

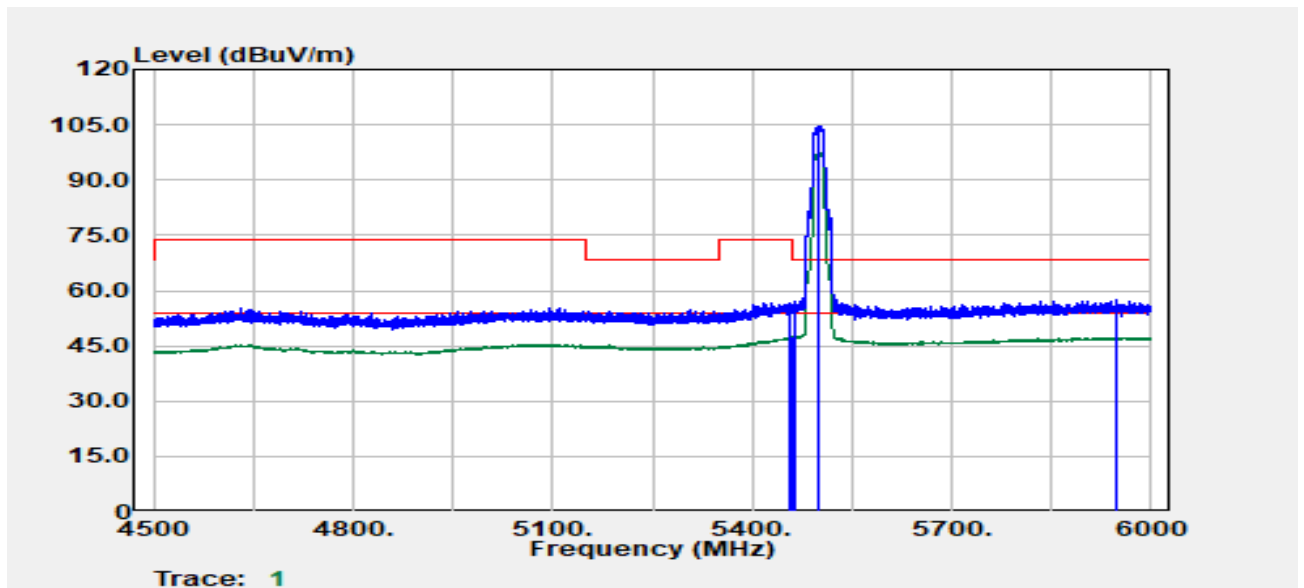


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5456.66	Peak	42.09	14.40	56.49	74.00	-17.51
5459.66	Average	33.03	14.39	47.42	54.00	-6.58
5465.91	Peak	42.50	14.37	56.87	68.20	-11.33
5500.00	Peak	90.26	14.27	104.53	--	--
5500.00	Average	83.46	14.27	97.73	--	--
5947.24	Peak	41.37	16.15	57.52	68.20	-10.68

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 89 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH0
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

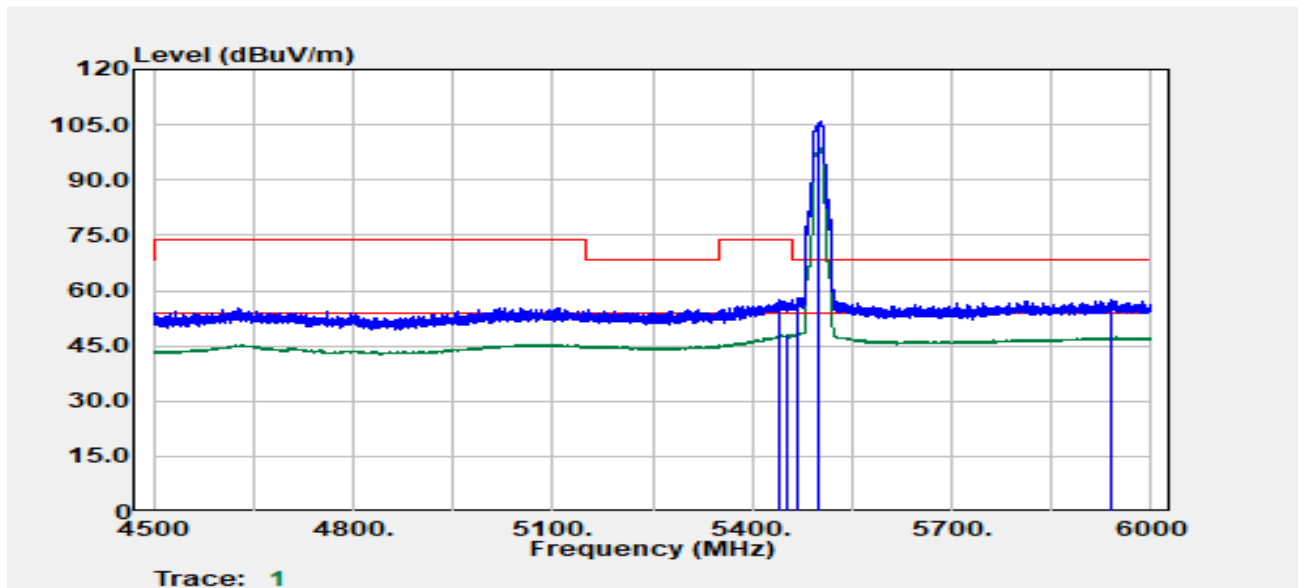


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5442.16	Peak	43.02	14.36	57.38	74.00	-16.62
5452.66	Average	33.58	14.41	47.99	54.00	-6.01
5467.41	Peak	43.38	14.36	57.74	68.20	-10.46
5500.00	Peak	91.87	14.27	106.14	--	--
5500.00	Average	84.28	14.27	98.55	--	--
5940.24	Peak	41.56	16.12	57.68	68.20	-10.52

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 90 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-02
Operation Band	:802.11a/Band3_CH0	Temp./Humi.	:24.6/57
Frequency	:5700 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

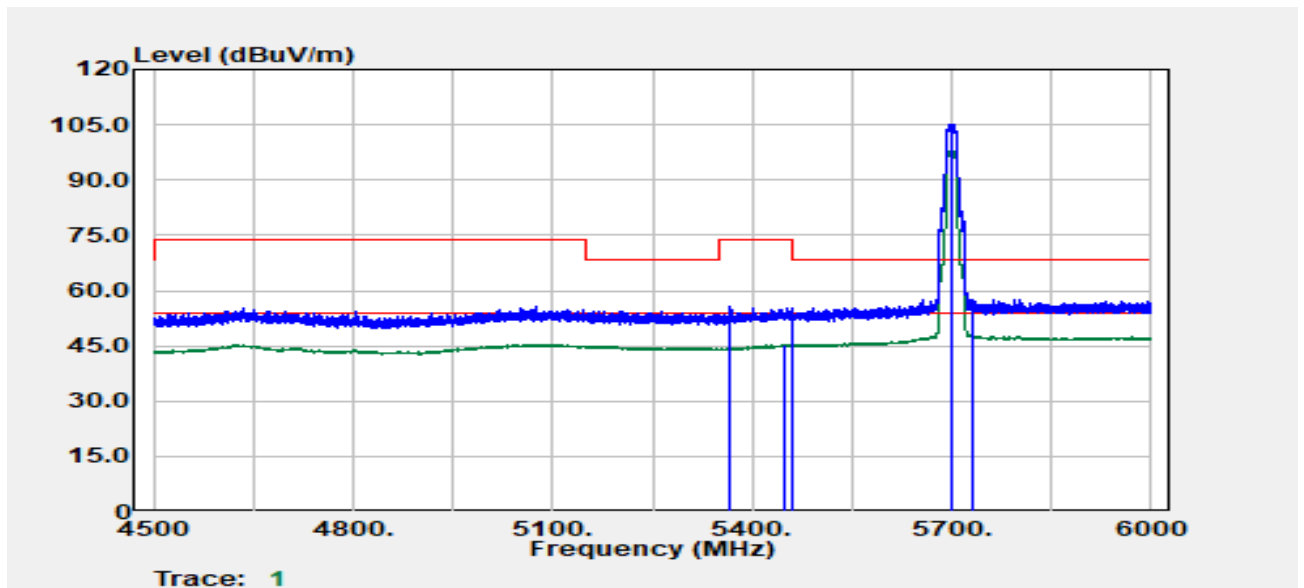


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5365.90	Peak	41.65	13.95	55.60	74.00	-18.40
5449.41	Average	30.96	14.41	45.37	54.00	-8.63
5460.66	Peak	40.67	14.38	55.05	68.20	-13.15
5700.00	Peak	89.60	15.63	105.23	--	--
5700.00	Average	82.61	15.63	98.24	--	--
5731.46	Peak	41.89	15.83	57.72	68.20	-10.48

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 91 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH0
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

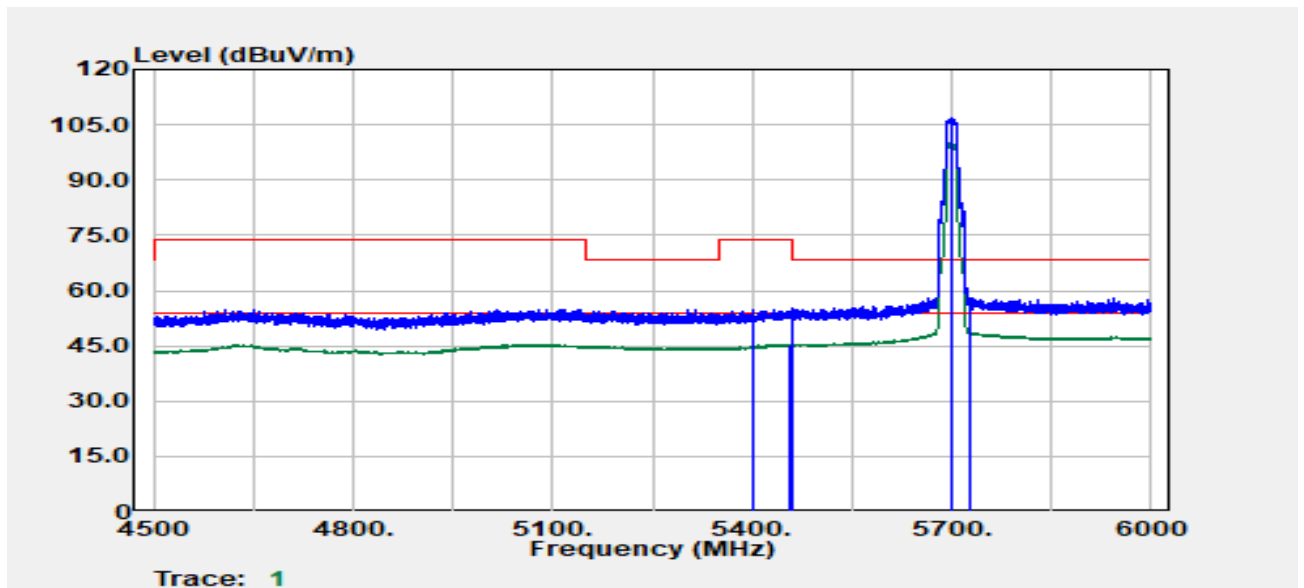


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5401.15	Peak	40.77	14.05	54.82	74.00	-19.18
5458.16	Average	31.03	14.39	45.42	54.00	-8.58
5462.16	Peak	41.07	14.38	55.45	68.20	-12.75
5700.00	Peak	91.29	15.63	106.92	--	--
5700.00	Average	84.71	15.63	100.34	--	--
5726.71	Peak	42.30	15.80	58.09	68.20	-10.11

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 92 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-02
Operation Band	:802.11a/Band3_CH1	Temp./Humi.	:24.6/57
Frequency	:5500 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

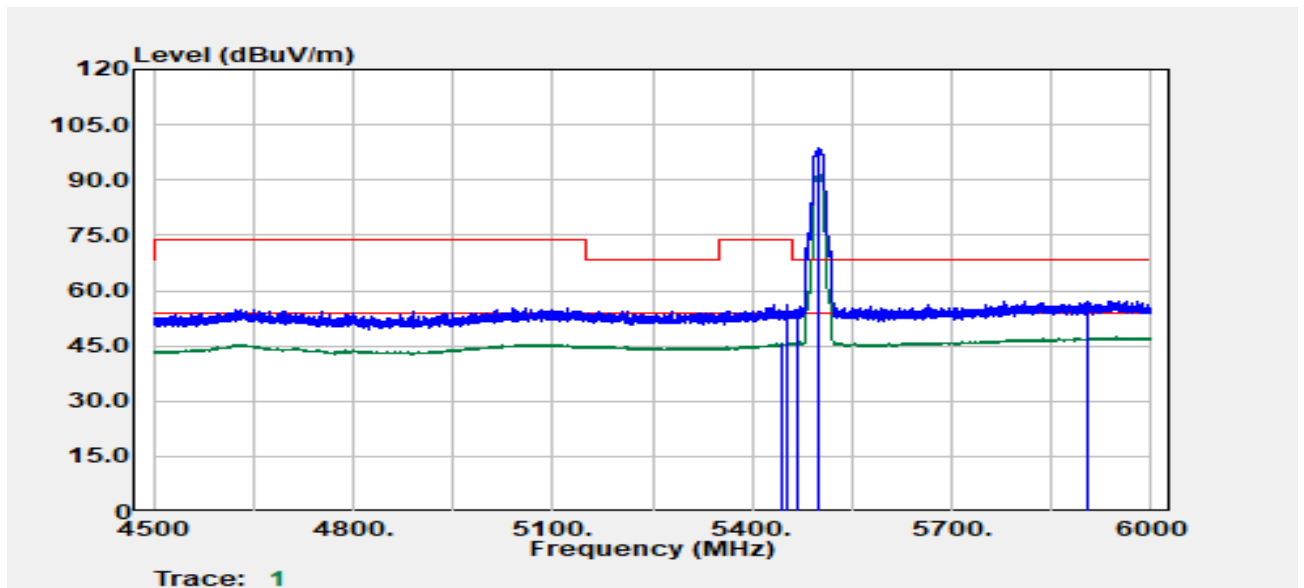


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5443.66	Average	31.18	14.37	45.55	54.00	-8.45
5452.66	Peak	41.87	14.41	56.28	74.00	-17.72
5468.41	Peak	40.56	14.36	54.92	68.20	-13.28
5500.00	Peak	84.28	14.27	98.55	--	--
5500.00	Average	77.19	14.27	91.46	--	--
5904.23	Peak	41.34	15.94	57.28	68.20	-10.92

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 93 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH1
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

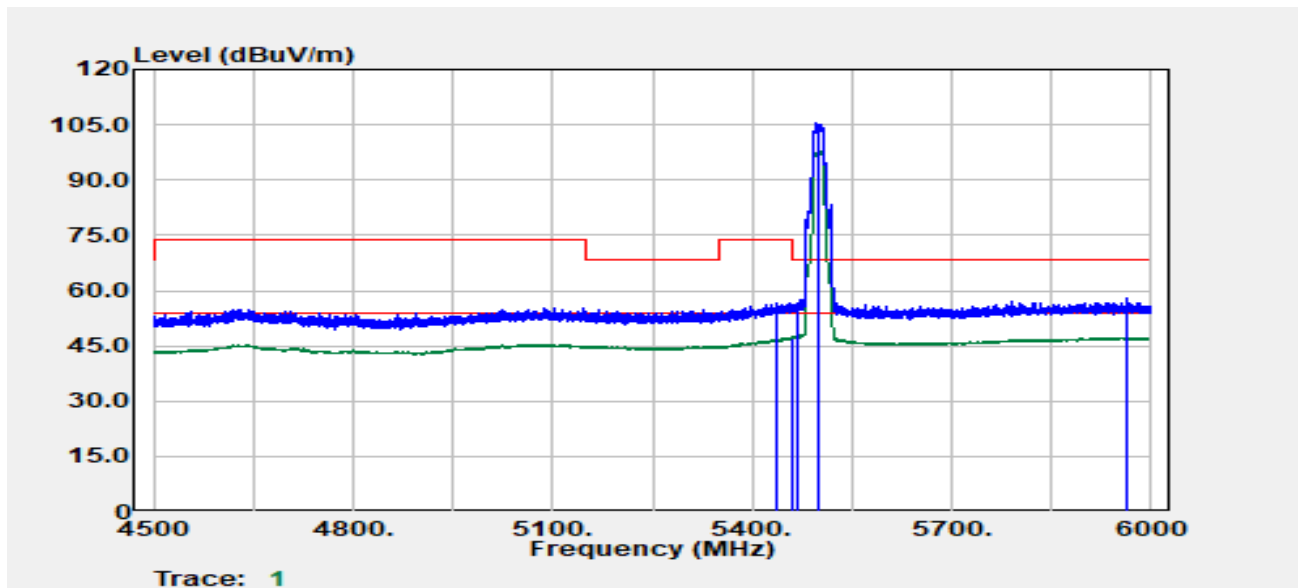


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5438.16	Peak	42.24	14.33	56.56	74.00	-17.44
5459.91	Average	32.60	14.39	46.98	54.00	-7.02
5469.91	Peak	42.31	14.36	56.66	68.20	-11.54
5500.00	Peak	91.07	14.27	105.34	--	--
5500.00	Average	83.71	14.27	97.98	--	--
5961.99	Peak	41.75	16.15	57.90	68.20	-10.30

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 94 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH1
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

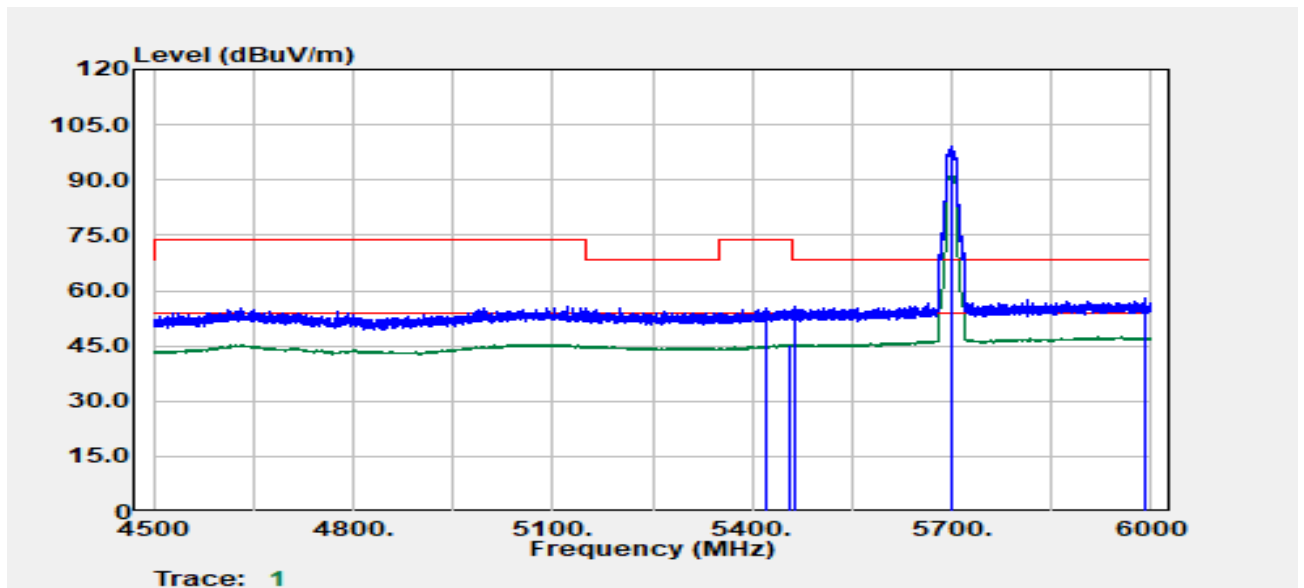


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5419.40	Peak	40.85	14.19	55.03	74.00	-18.97
5457.66	Average	30.81	14.39	45.20	54.00	-8.80
5462.41	Peak	41.09	14.38	55.47	68.20	-12.73
5700.00	Peak	83.49	15.63	99.12	--	--
5700.00	Average	75.71	15.63	91.34	--	--
5989.25	Peak	41.90	16.11	58.01	68.20	-10.19

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 95 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band3_CH1
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

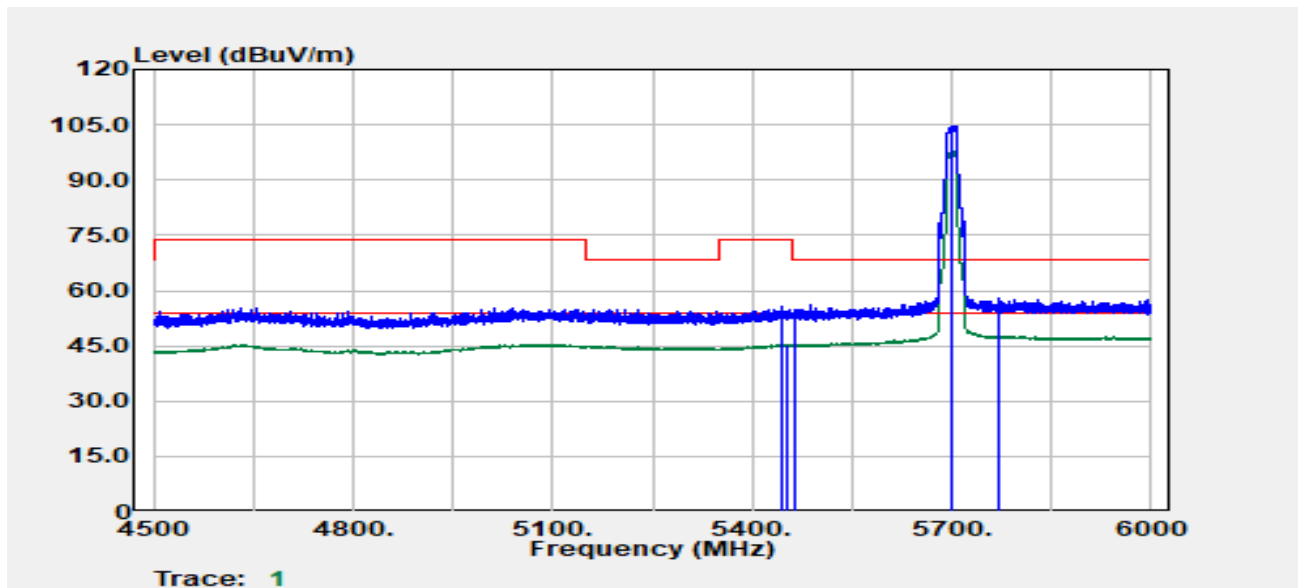


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5443.66	Peak	41.17	14.37	55.54	74.00	-18.46
5450.91	Average	31.01	14.41	45.43	54.00	-8.57
5465.66	Peak	40.51	14.37	54.88	68.20	-13.32
5700.00	Peak	89.06	15.63	104.69	--	--
5700.00	Average	82.37	15.63	98.00	--	--
5771.71	Peak	41.80	16.02	57.82	68.20	-10.38

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 96 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

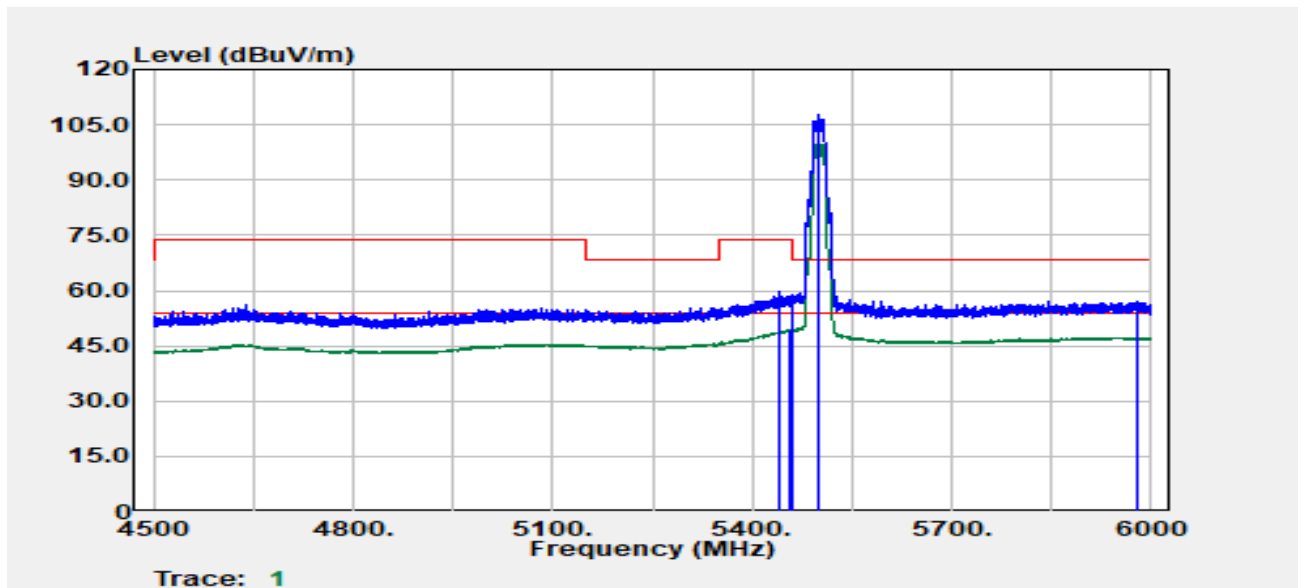


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5439.41	Peak	45.27	14.34	59.60	74.00	-14.40
5457.16	Average	34.84	14.39	49.24	54.00	-4.76
5460.16	Peak	44.33	14.39	58.71	68.20	-9.49
5500.00	Peak	93.48	14.27	107.75	--	--
5500.00	Average	86.41	14.27	100.68	--	--
5979.50	Peak	40.88	16.12	57.00	68.20	-11.20

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 97 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

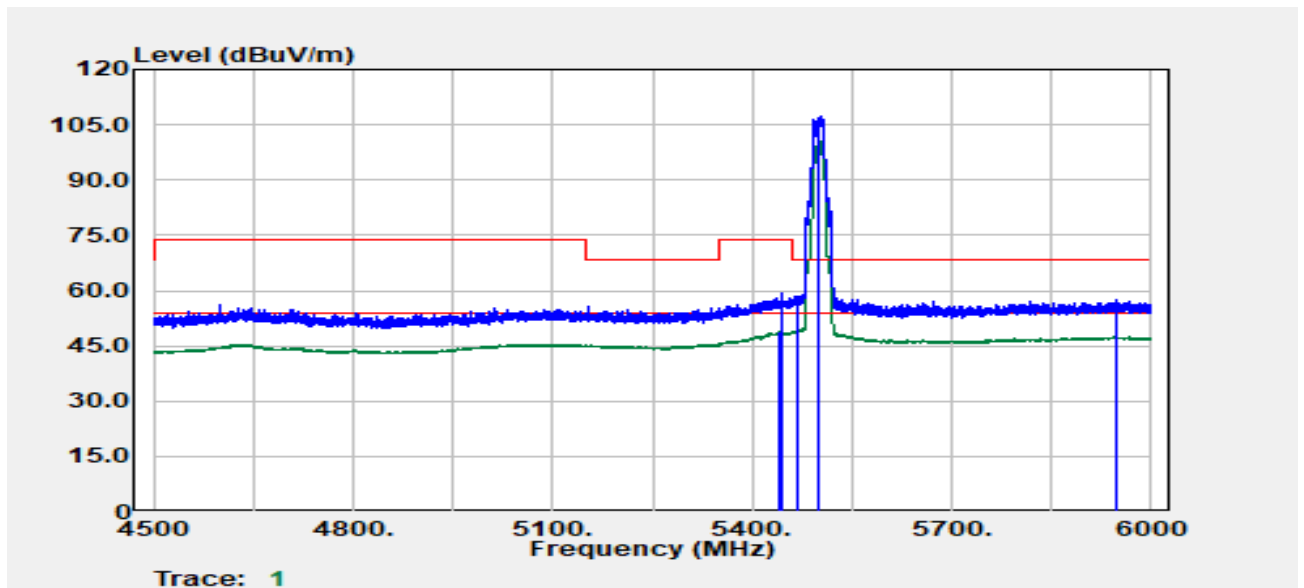


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5441.91	Average	34.45	14.35	48.80	54.00	-5.20
5444.16	Peak	44.80	14.37	59.17	74.00	-14.83
5467.16	Peak	44.15	14.37	58.51	68.20	-9.69
5500.00	Peak	92.87	14.27	107.14	--	--
5500.00	Average	86.35	14.27	100.62	--	--
5948.99	Peak	41.31	16.16	57.47	68.20	-10.73

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 98 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

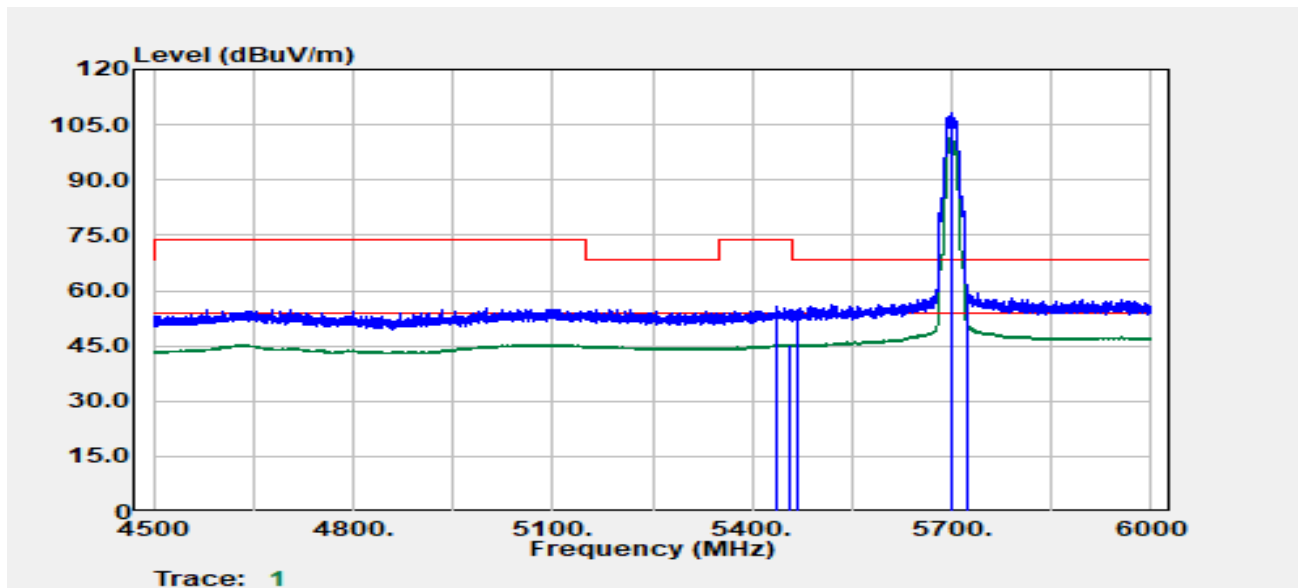


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5436.41	Peak	41.18	14.31	55.50	74.00	-18.50
5457.16	Average	31.00	14.39	45.39	54.00	-8.61
5466.91	Peak	40.64	14.37	55.01	68.20	-13.19
5700.00	Peak	92.68	15.63	108.31	--	--
5700.00	Average	85.94	15.63	101.57	--	--
5725.45	Peak	43.36	15.79	59.15	68.20	-9.05

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 99 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

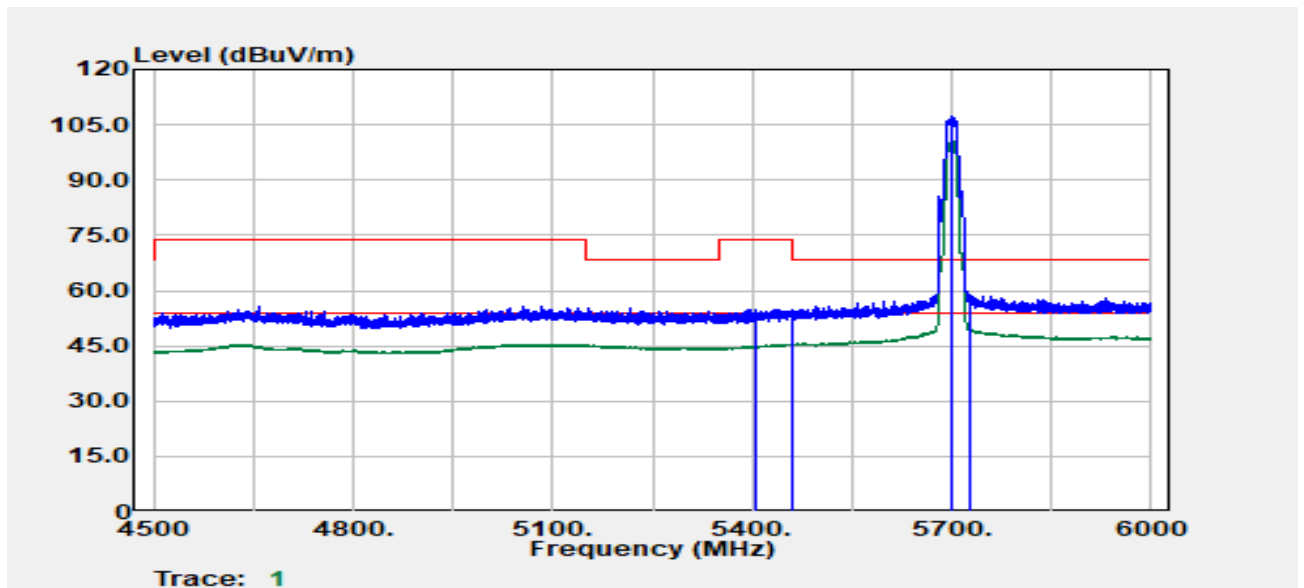


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5406.15	Peak	40.83	14.09	54.92	74.00	-19.08
5459.16	Average	31.07	14.39	45.46	54.00	-8.54
5461.91	Peak	40.31	14.38	54.69	68.20	-13.51
5700.00	Peak	91.67	15.63	107.30	--	--
5700.00	Average	85.19	15.63	100.82	--	--
5727.21	Peak	43.08	15.80	58.88	68.20	-9.32

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 100 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

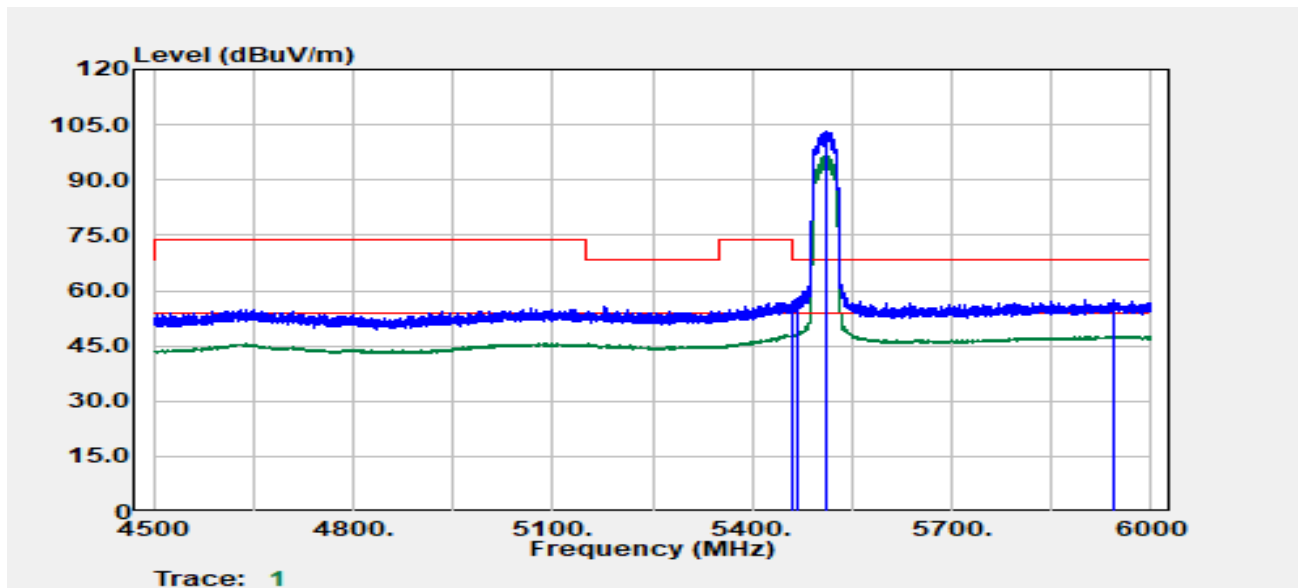


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5458.91	Peak	42.66	14.39	57.05	74.00	-16.95
5459.91	Average	33.57	14.39	47.95	54.00	-6.05
5469.16	Peak	43.45	14.36	57.81	68.20	-10.39
5510.00	Peak	89.02	14.31	103.33	--	--
5510.00	Average	82.59	14.31	96.89	--	--
5942.74	Peak	41.54	16.13	57.67	68.20	-10.53

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 101 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

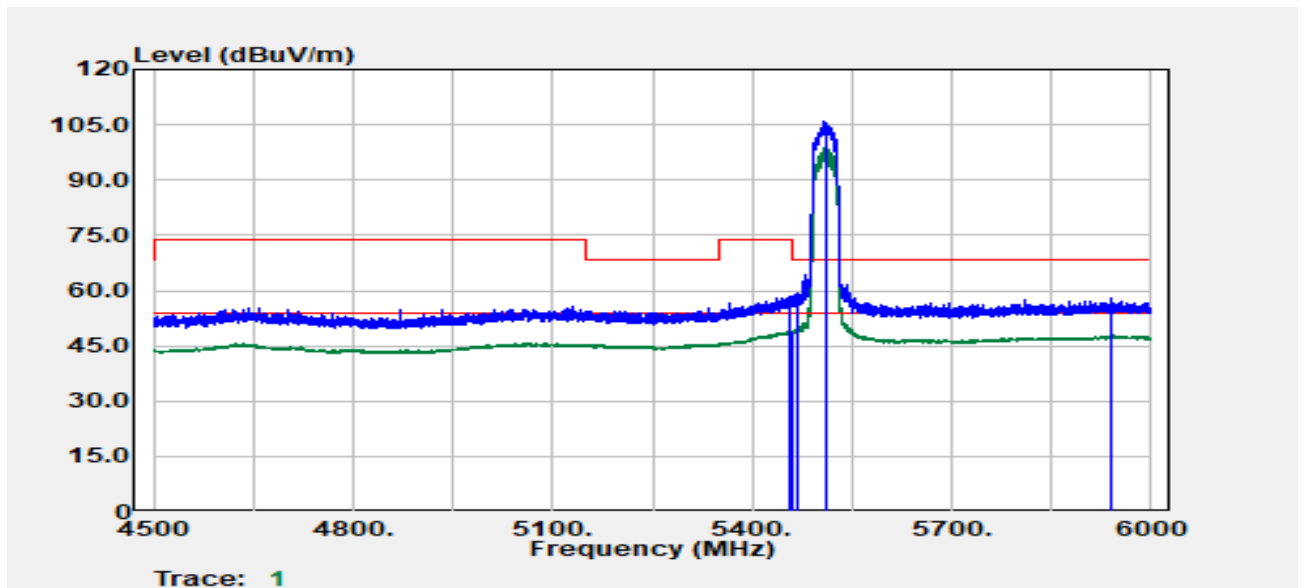


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5456.16	Peak	43.93	14.40	58.33	74.00	-15.67
5459.66	Average	34.68	14.39	49.07	54.00	-4.93
5466.41	Peak	44.95	14.37	59.31	68.20	-8.89
5510.00	Peak	91.55	14.31	105.85	--	--
5510.00	Average	84.39	14.31	98.70	--	--
5938.99	Peak	41.71	16.11	57.82	68.20	-10.38

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 102 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

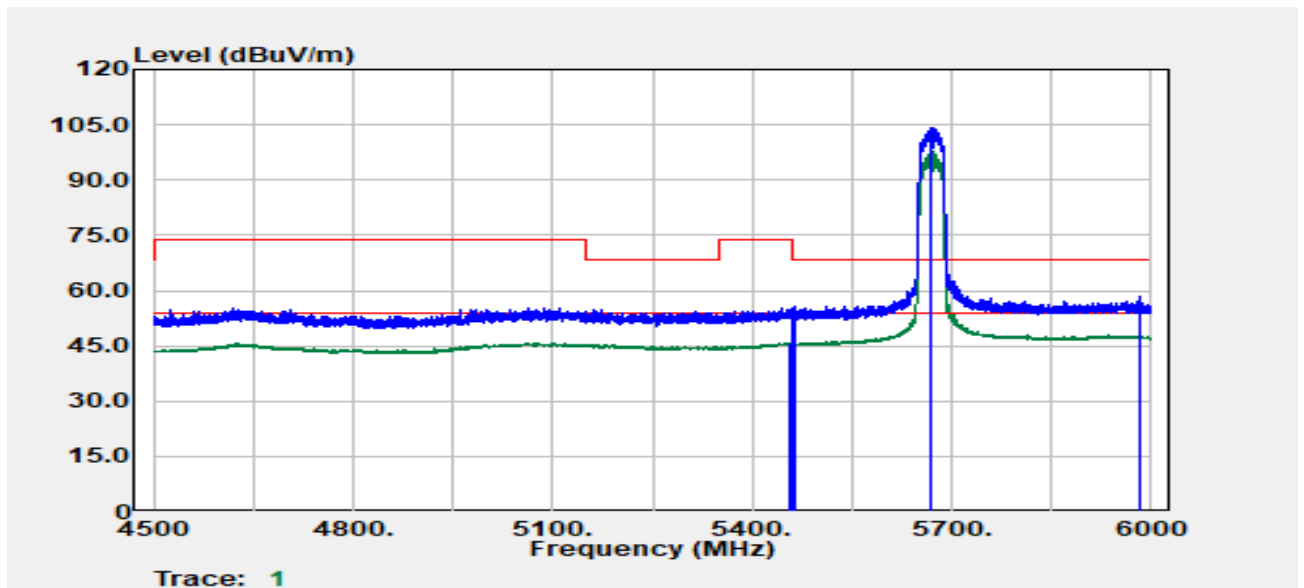


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5455.66	Average	31.28	14.40	45.68	54.00	-8.32
5458.41	Peak	40.64	14.39	55.03	74.00	-18.97
5465.41	Peak	41.44	14.37	55.81	68.20	-12.39
5670.00	Peak	88.90	15.35	104.25	--	--
5670.00	Average	82.56	15.35	97.92	--	--
5982.25	Peak	42.32	16.12	58.43	68.20	-9.77

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 103 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band3
Frequency :5670 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

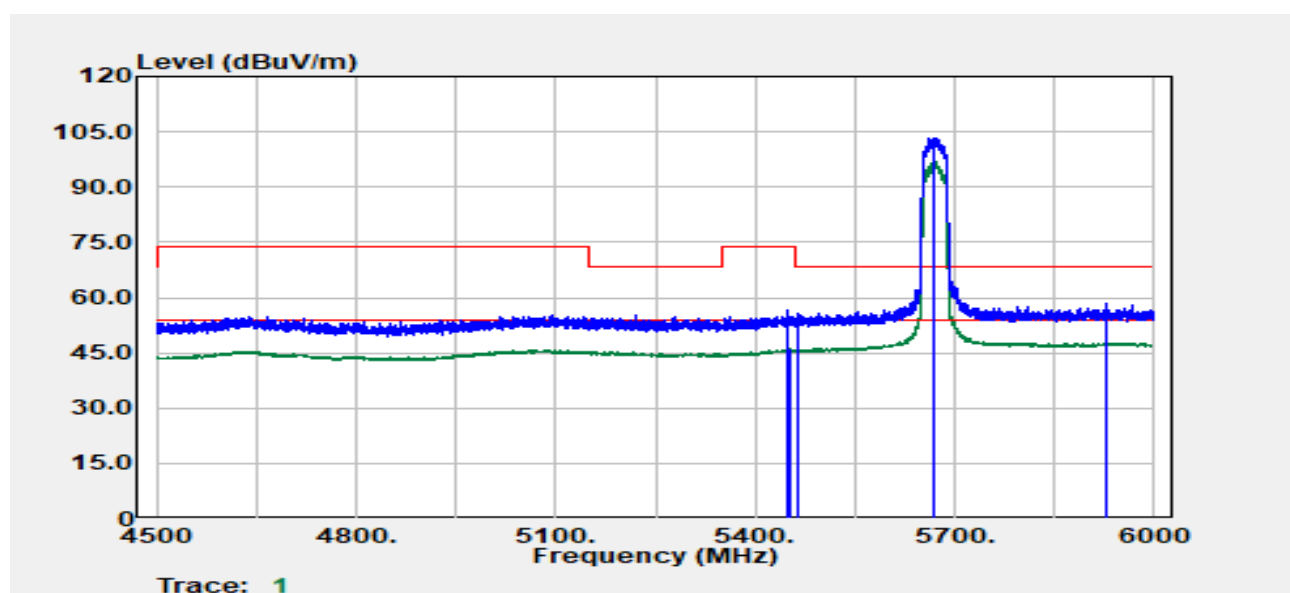


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5447.41	Peak	42.31	14.40	56.70	74.00	-17.30
5450.66	Average	31.65	14.41	46.06	54.00	-7.94
5462.91	Peak	41.26	14.38	55.64	68.20	-12.56
5670.00	Peak	88.06	15.35	103.41	--	--
5670.00	Average	81.62	15.35	96.97	--	--
5925.99	Peak	42.23	16.05	58.27	68.20	-9.93

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 104 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

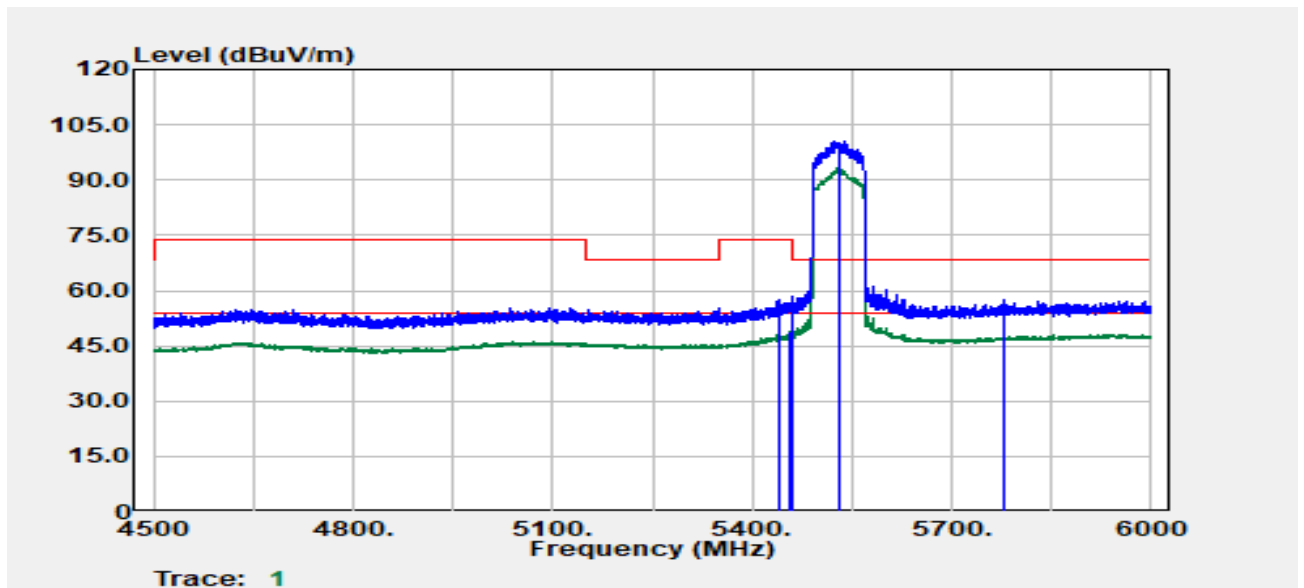


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5438.66	Peak	43.14	14.33	57.47	74.00	-16.53
5457.91	Average	34.31	14.39	48.70	54.00	-5.30
5461.91	Peak	43.84	14.38	58.22	68.20	-9.98
5530.00	Peak	86.36	14.38	100.74	--	--
5530.00	Average	79.09	14.38	93.47	--	--
5776.96	Peak	41.38	16.04	57.42	68.20	-10.78

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 105 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

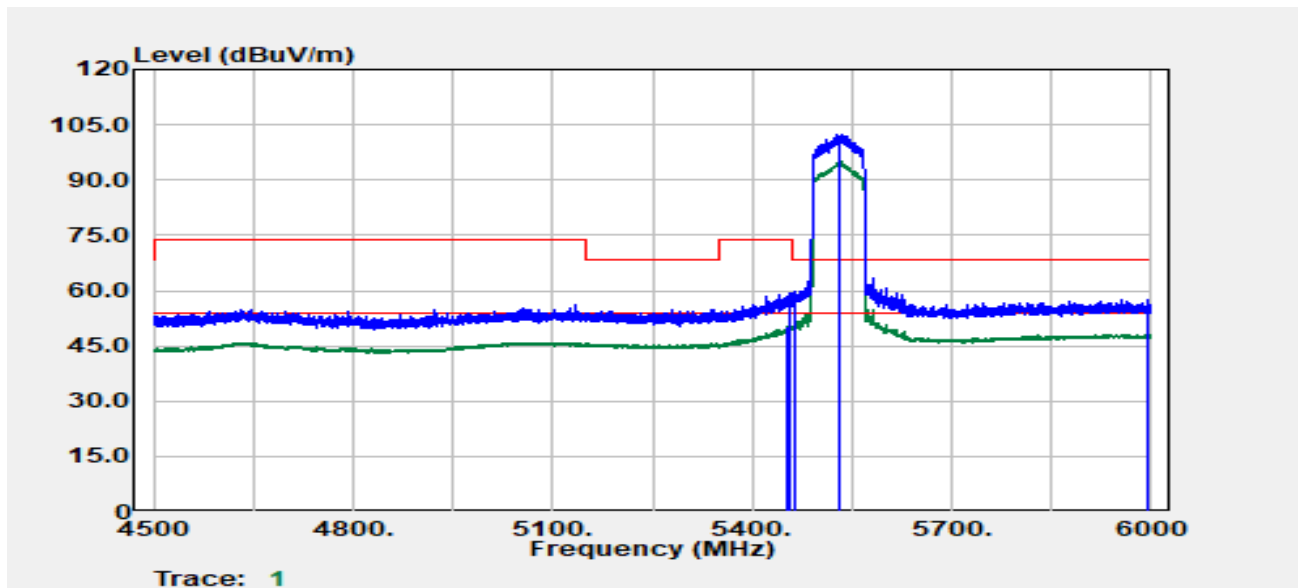


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5453.16	Average	35.87	14.41	50.28	54.00	-3.72
5456.91	Peak	45.12	14.40	59.52	74.00	-14.48
5465.91	Peak	45.37	14.37	59.74	68.20	-8.46
5530.00	Peak	87.91	14.38	102.28	--	--
5530.00	Average	80.63	14.38	95.01	--	--
5994.75	Peak	41.54	16.10	57.64	68.20	-10.56

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 106 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

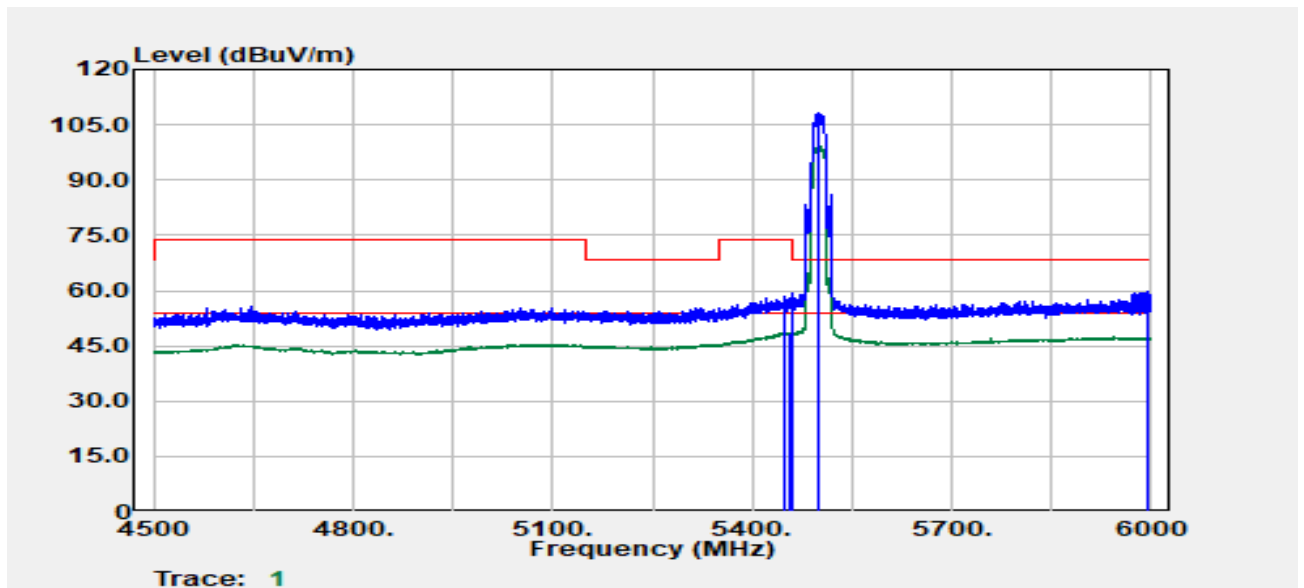


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5447.91	Peak	44.00	14.40	58.40	74.00	-15.60
5454.41	Average	34.05	14.40	48.45	54.00	-5.55
5461.16	Peak	44.91	14.38	59.29	68.20	-8.91
5500.00	Peak	94.17	14.27	108.44	--	--
5500.00	Average	84.82	14.27	99.09	--	--
5993.75	Peak	43.51	16.10	59.61	68.20	-8.59

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 107 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band3
Frequency :5500 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

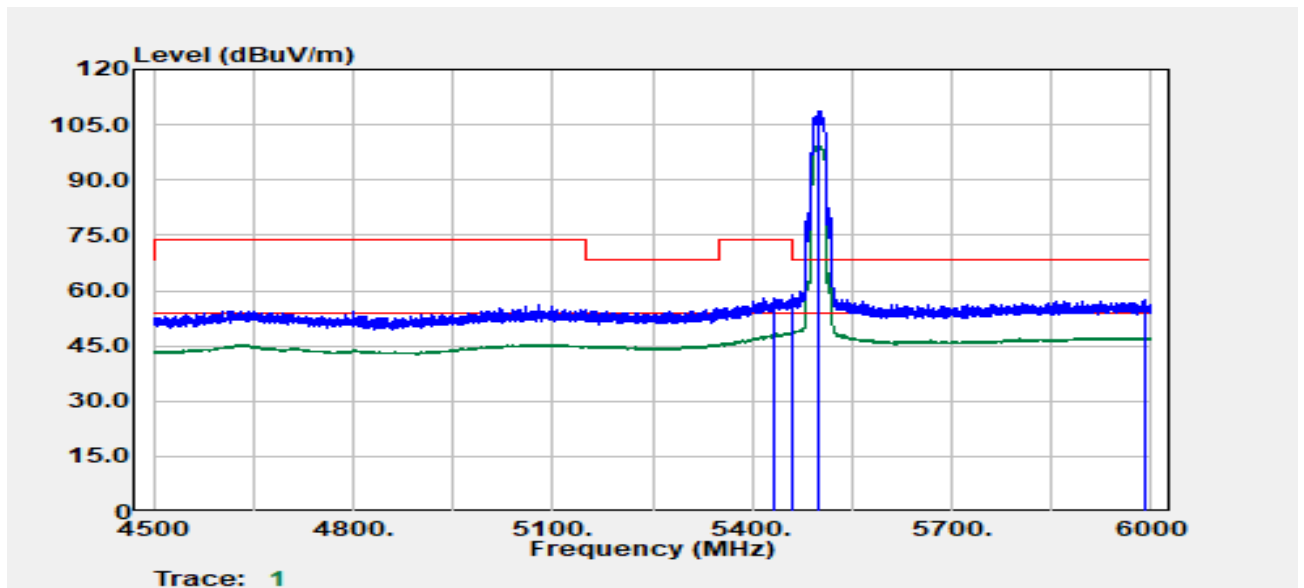


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5432.66	Peak	43.77	14.28	58.05	74.00	-15.95
5459.16	Average	34.32	14.39	48.71	54.00	-5.29
5461.41	Peak	44.48	14.38	58.86	68.20	-9.34
5500.00	Peak	94.59	14.27	108.86	--	--
5500.00	Average	85.26	14.27	99.53	--	--
5992.25	Peak	41.20	16.10	57.30	68.20	-10.90

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 108 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

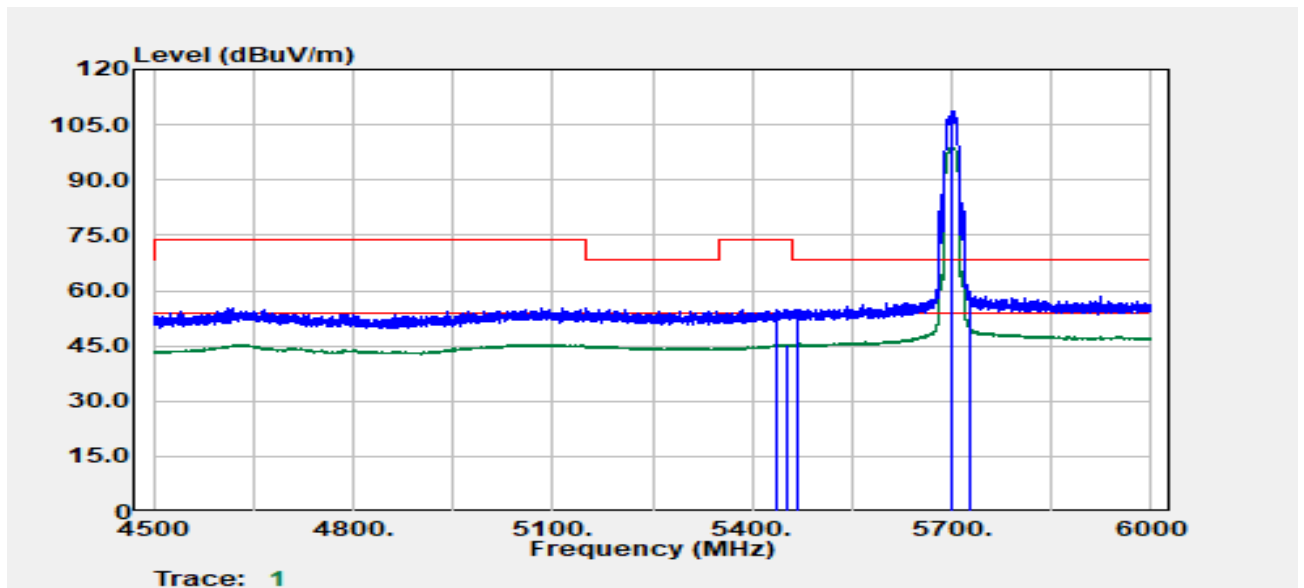


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5434.91	Peak	40.45	14.30	54.75	74.00	-19.25
5450.66	Average	30.97	14.41	45.39	54.00	-8.61
5467.66	Peak	40.33	14.36	54.69	68.20	-13.51
5700.00	Peak	93.13	15.63	108.76	--	--
5700.00	Average	83.43	15.63	99.06	--	--
5729.21	Peak	43.74	15.81	59.56	68.20	-8.64

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 109 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band3
Frequency :5700 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

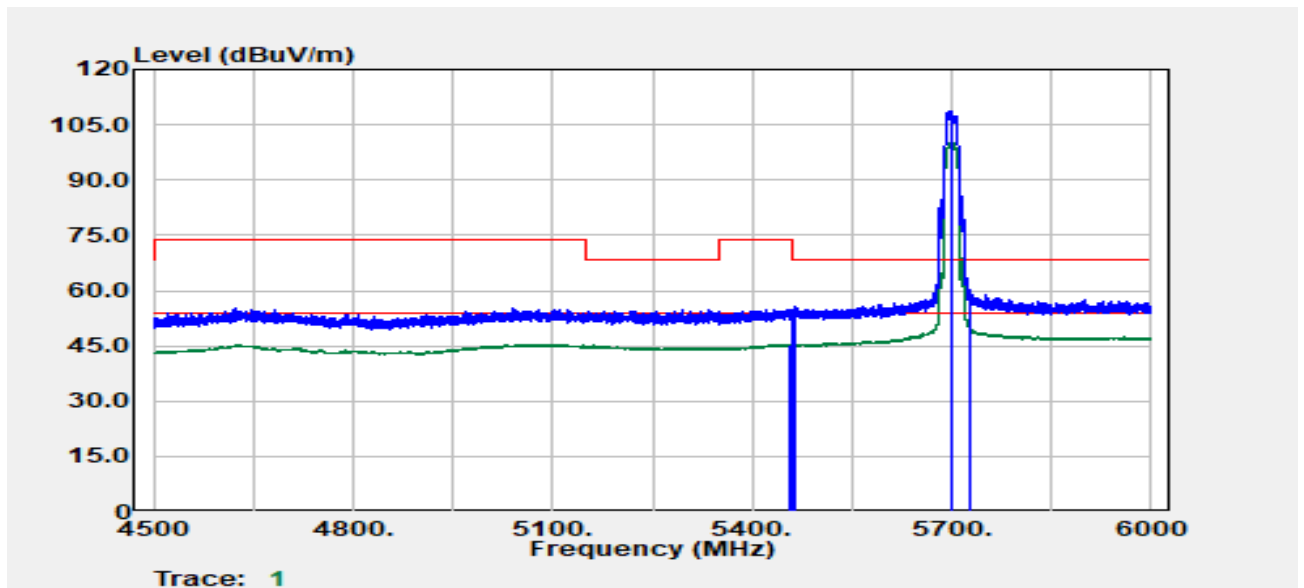


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5457.41	Average	31.02	14.39	45.41	54.00	-8.59
5459.41	Peak	40.53	14.39	54.92	74.00	-19.08
5464.16	Peak	41.11	14.37	55.48	68.20	-12.72
5700.00	Peak	93.17	15.63	108.80	--	--
5700.00	Average	84.45	15.63	100.08	--	--
5725.70	Peak	44.45	15.79	60.24	68.20	-7.96

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 110 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

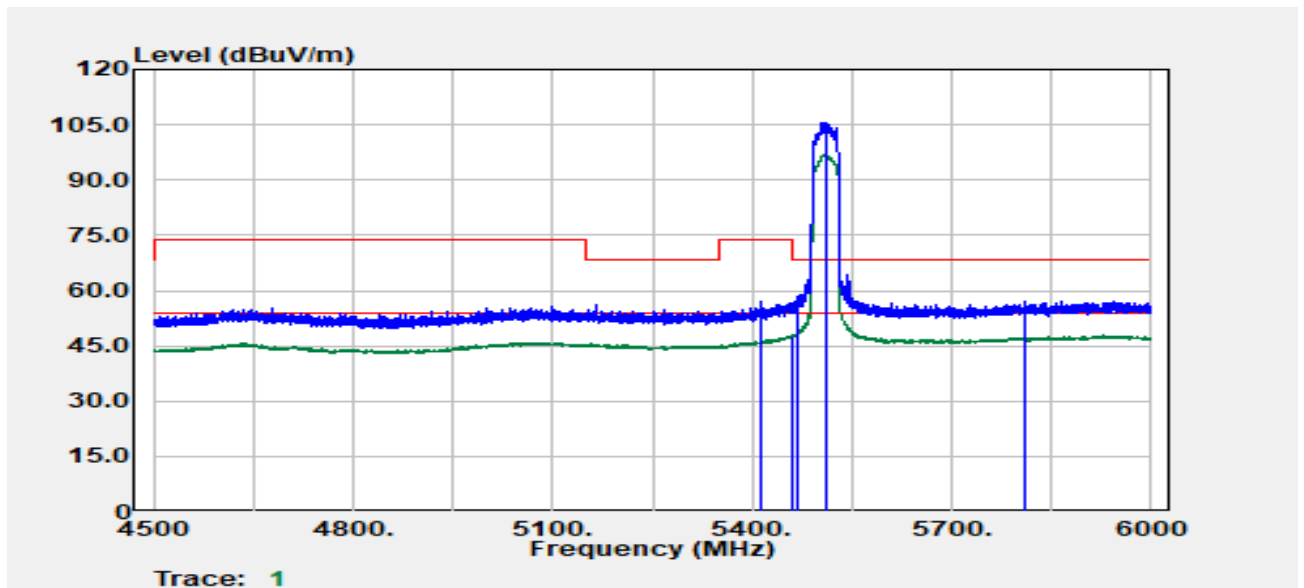


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5411.90	Peak	42.88	14.13	57.01	74.00	-16.99
5458.66	Average	33.34	14.39	47.73	54.00	-6.27
5469.16	Peak	44.15	14.36	58.51	68.20	-9.69
5510.00	Peak	91.34	14.31	105.64	--	--
5510.00	Average	82.74	14.31	97.05	--	--
5810.72	Peak	40.89	16.08	56.97	68.20	-11.23

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 111 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5510 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

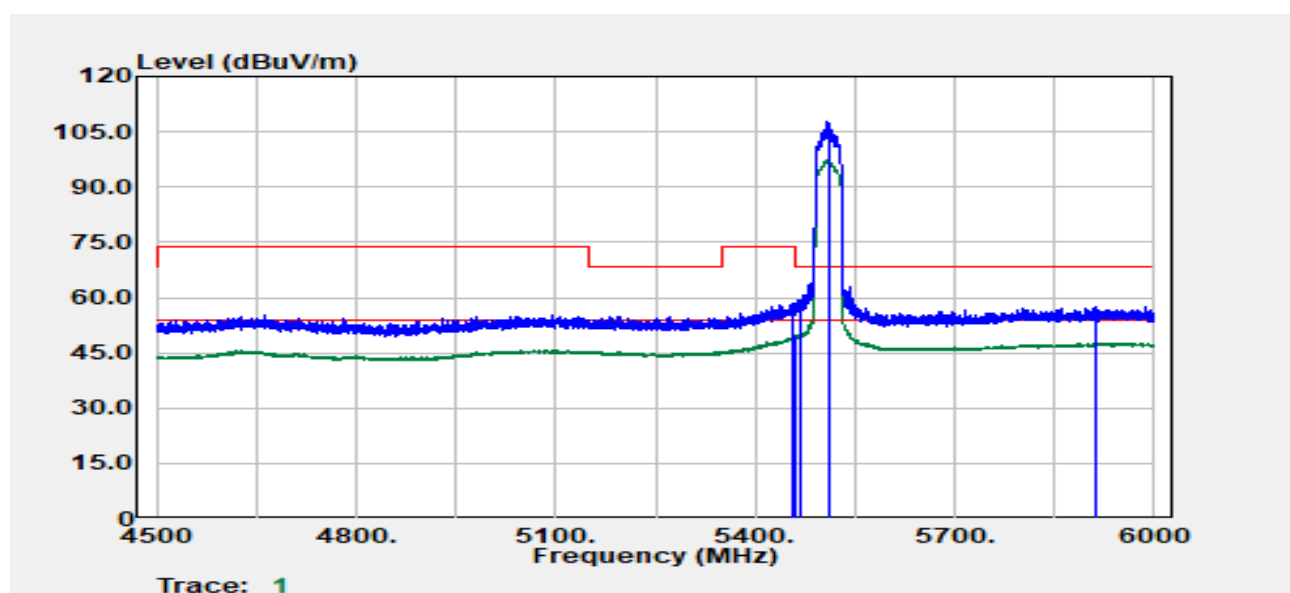


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5457.41	Peak	43.86	14.39	58.25	74.00	-15.75
5459.41	Average	35.20	14.39	49.59	54.00	-4.41
5467.16	Peak	45.09	14.37	59.46	68.20	-8.74
5510.00	Peak	93.49	14.31	107.80	--	--
5510.00	Average	82.98	14.31	97.28	--	--
5910.74	Peak	41.57	15.97	57.55	68.20	-10.65

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 112 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5670 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

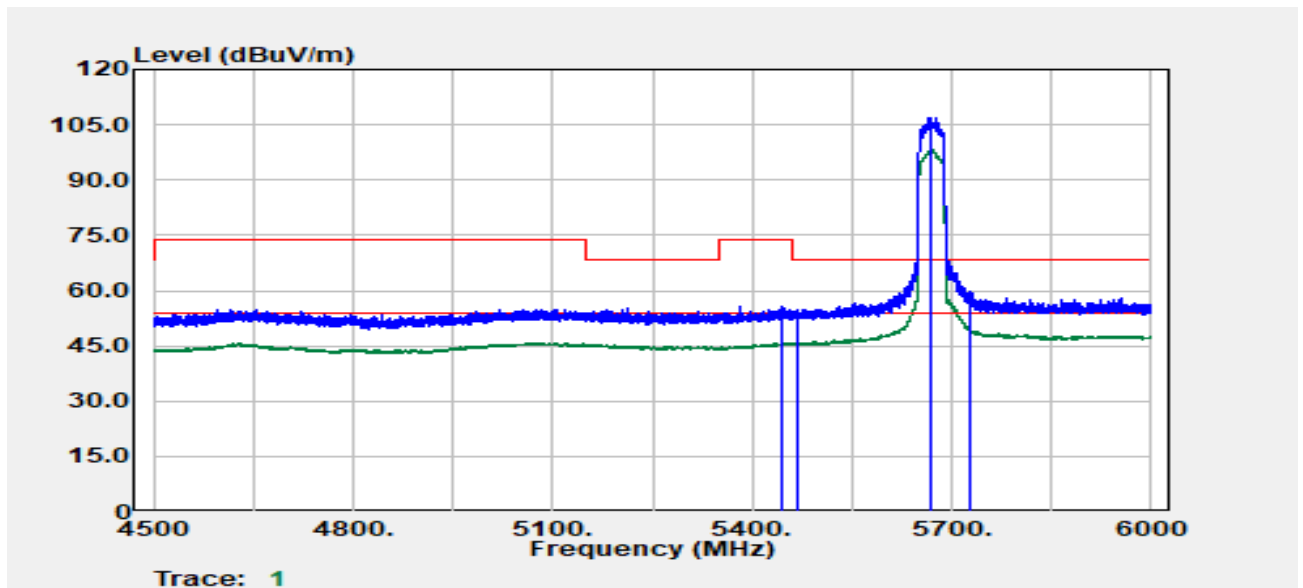


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5444.41	Peak	41.17	14.37	55.54	74.00	-18.46
5445.41	Average	31.40	14.38	45.79	54.00	-8.21
5467.91	Peak	40.24	14.36	54.61	68.20	-13.59
5670.00	Peak	91.64	15.35	107.00	--	--
5670.00	Average	82.77	15.35	98.12	--	--
5725.70	Peak	43.83	15.79	59.61	68.20	-8.59

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 113 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band3
Frequency :5670 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

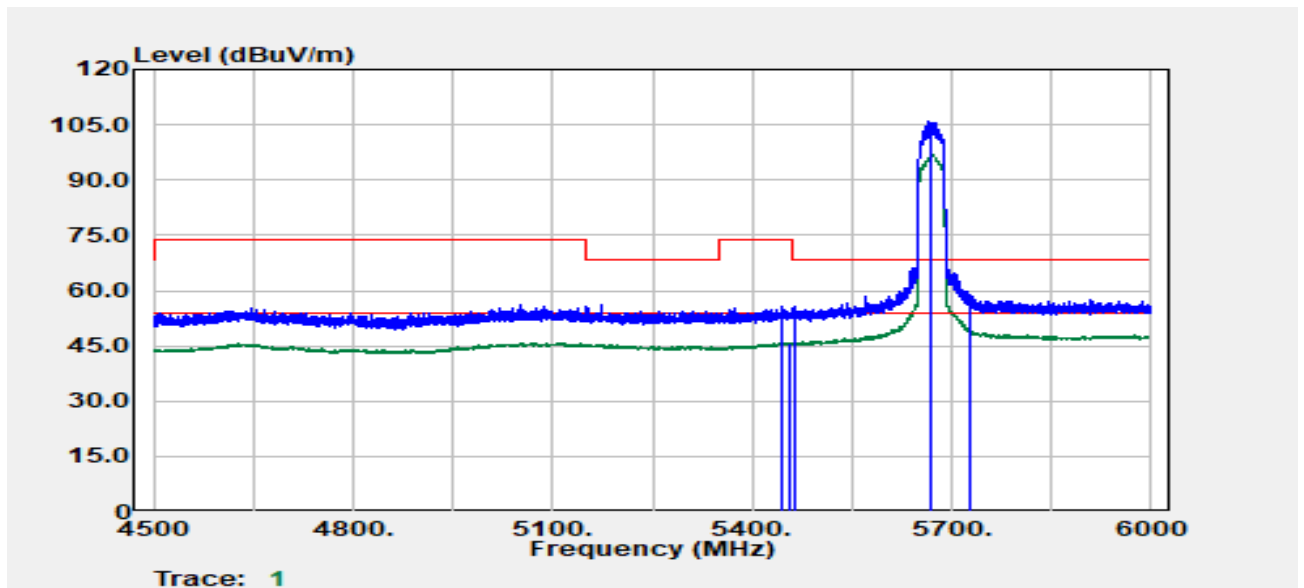


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5442.91	Peak	41.17	14.36	55.53	74.00	-18.47
5456.66	Average	31.30	14.40	45.69	54.00	-8.31
5465.66	Peak	41.11	14.37	55.48	68.20	-12.72
5670.00	Peak	90.57	15.35	105.92	--	--
5670.00	Average	81.47	15.35	96.82	--	--
5727.96	Peak	43.28	15.80	59.08	68.20	-9.12

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 114 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

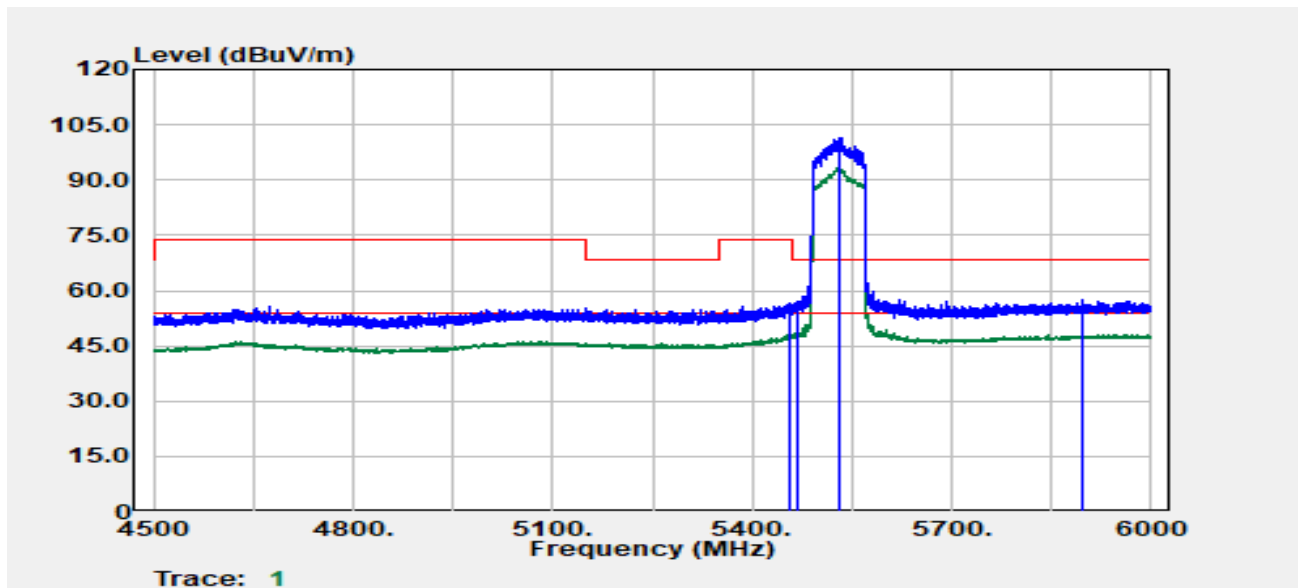


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5454.41	Peak	42.15	14.40	56.55	74.00	-17.45
5457.16	Average	33.62	14.39	48.01	54.00	-5.99
5469.16	Peak	42.72	14.36	57.08	68.20	-11.12
5530.00	Peak	87.00	14.38	101.38	--	--
5530.00	Average	78.70	14.38	93.08	--	--
5895.23	Peak	41.44	15.92	57.36	68.20	-10.84

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 115 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band3
Frequency :5530 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

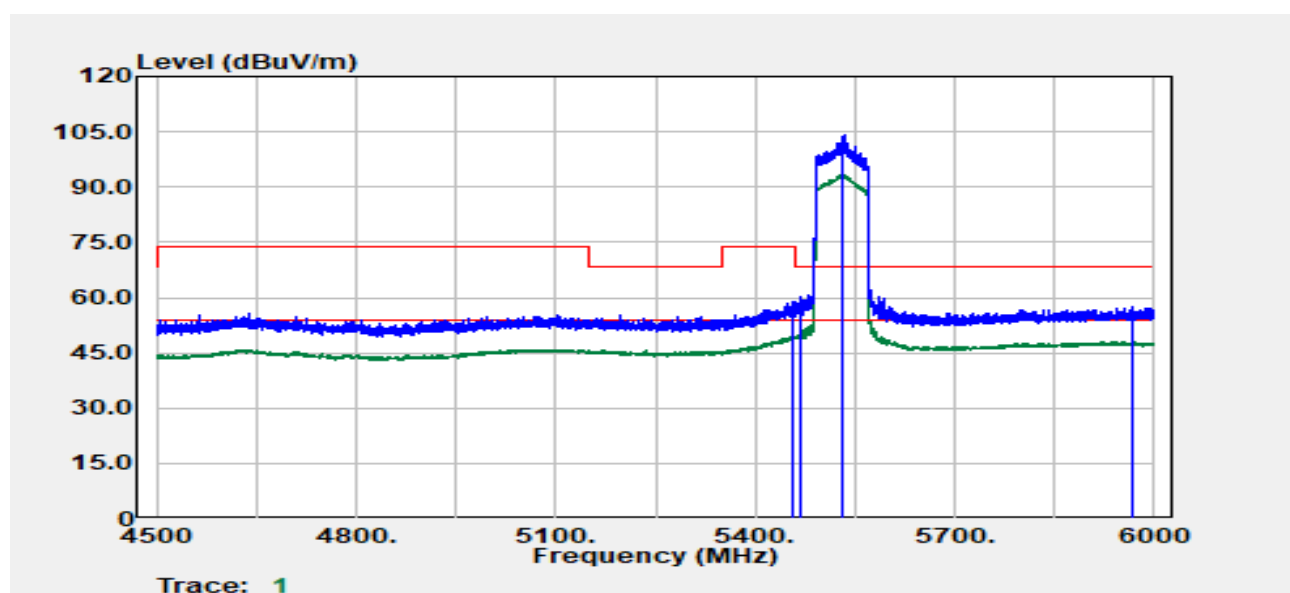


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
5457.41	Average	35.26	14.39	49.65	54.00	-4.35
5458.16	Peak	44.54	14.39	58.93	74.00	-15.07
5469.66	Peak	45.76	14.36	60.12	68.20	-8.08
5530.00	Peak	89.66	14.38	104.03	--	--
5530.00	Average	79.08	14.38	93.46	--	--
5965.49	Peak	41.42	16.14	57.56	68.20	-10.64

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 116 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-02
Operation Band	:802.11a/Band4_CH0	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12		

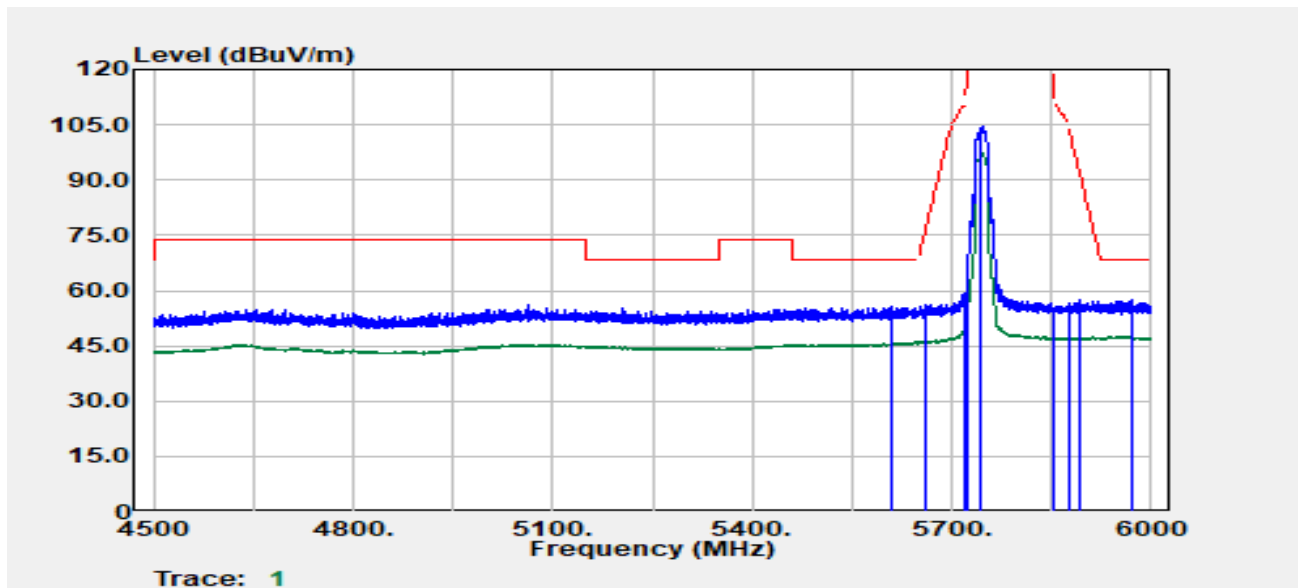


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5610.19	Peak	40.99	14.77	55.76	68.20	-12.44
5662.44	Peak	40.96	15.28	56.25	77.44	-21.19
5717.95	Peak	43.51	15.74	59.25	110.23	-50.98
5724.95	Peak	50.28	15.78	66.06	122.10	-56.03
5745.00	Peak	88.72	15.91	104.62	--	--
5745.00	Average	81.43	15.91	97.34	--	--
5852.23	Peak	39.47	15.94	55.42	117.12	-61.71
5874.98	Peak	39.95	15.93	55.88	105.21	-49.33
5893.73	Peak	41.69	15.92	57.62	91.30	-33.69
5969.50	Peak	41.56	16.14	57.69	68.20	-10.51

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 117 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band4_CH0
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

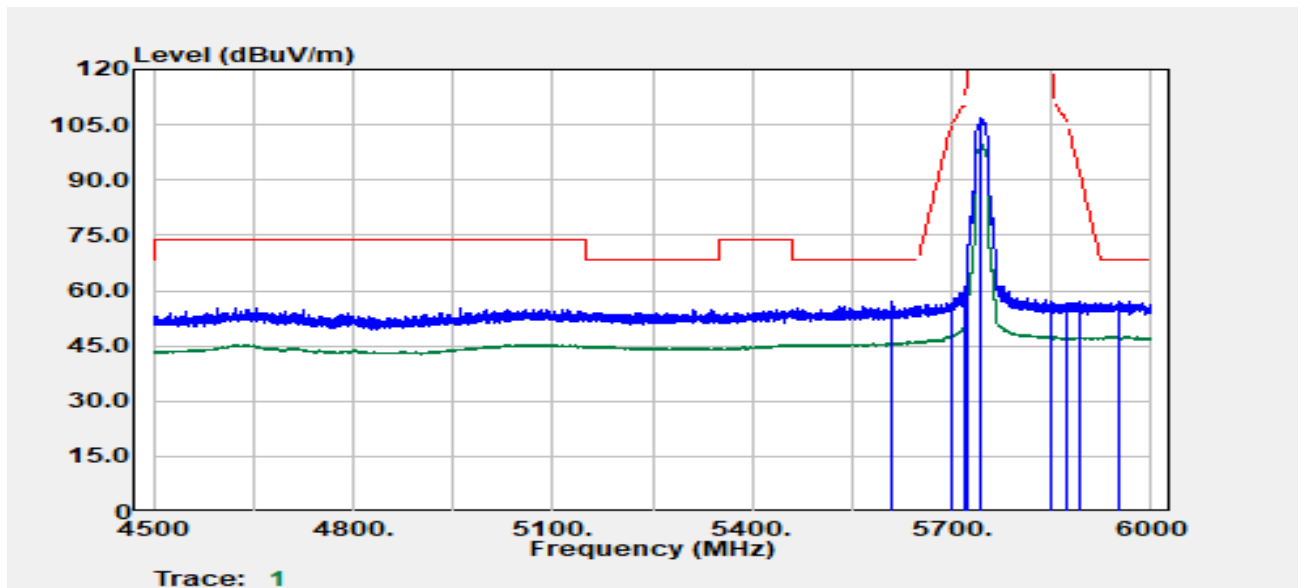


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5610.94	Peak	42.45	14.78	57.22	68.20	-10.98
5698.95	Peak	41.07	15.62	56.69	104.43	-47.73
5718.70	Peak	44.13	15.75	59.88	110.44	-50.56
5724.95	Peak	53.89	15.78	69.67	122.10	-52.42
5745.00	Peak	90.81	15.91	106.72	--	--
5745.00	Average	83.66	15.91	99.57	--	--
5850.73	Peak	41.23	15.94	57.18	120.55	-63.37
5872.48	Peak	40.89	15.93	56.82	105.90	-49.08
5892.23	Peak	41.32	15.92	57.24	92.41	-35.17
5951.24	Peak	41.06	16.16	57.23	68.20	-10.97

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 118 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band4_CH0
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

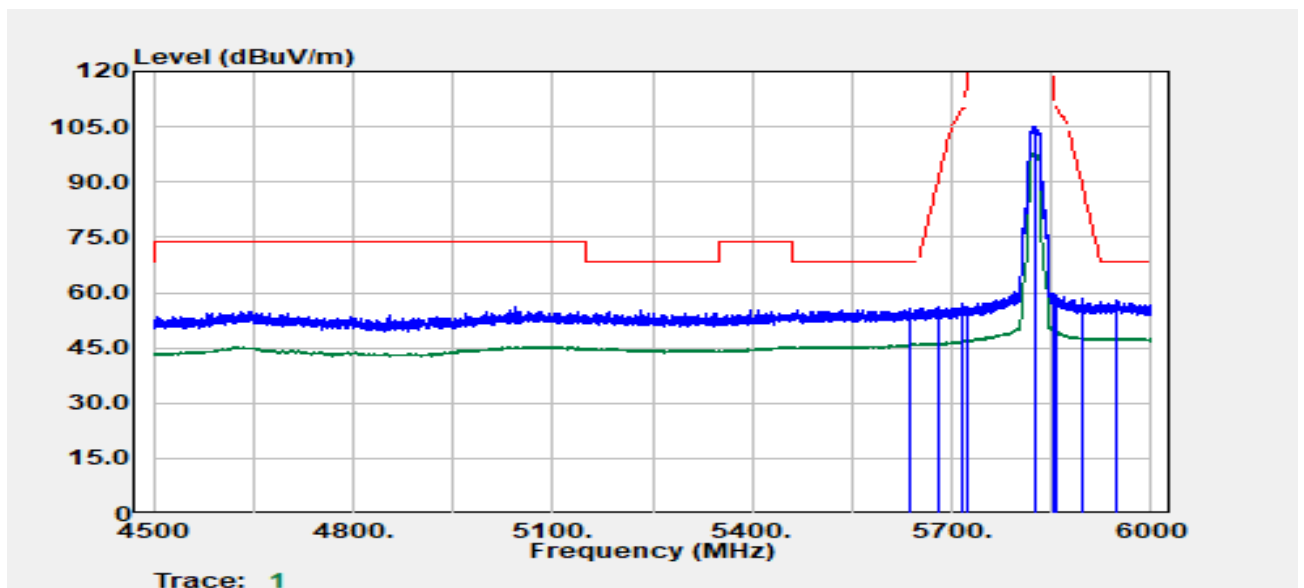


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5637.44	Peak	40.60	15.04	55.64	68.20	-12.56
5679.20	Peak	40.74	15.44	56.17	89.84	-33.67
5715.95	Peak	41.18	15.73	56.91	109.67	-52.76
5722.95	Peak	40.37	15.77	56.14	117.54	-61.40
5825.00	Peak	88.85	16.03	104.89	--	--
5825.00	Average	82.23	16.03	98.26	--	--
5853.98	Peak	43.67	15.94	59.62	113.13	-53.52
5855.73	Peak	43.25	15.94	59.19	110.60	-51.40
5895.98	Peak	42.64	15.92	58.56	89.64	-31.07
5947.24	Peak	41.90	16.15	58.05	68.20	-10.15

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 119 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band4_CH0
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

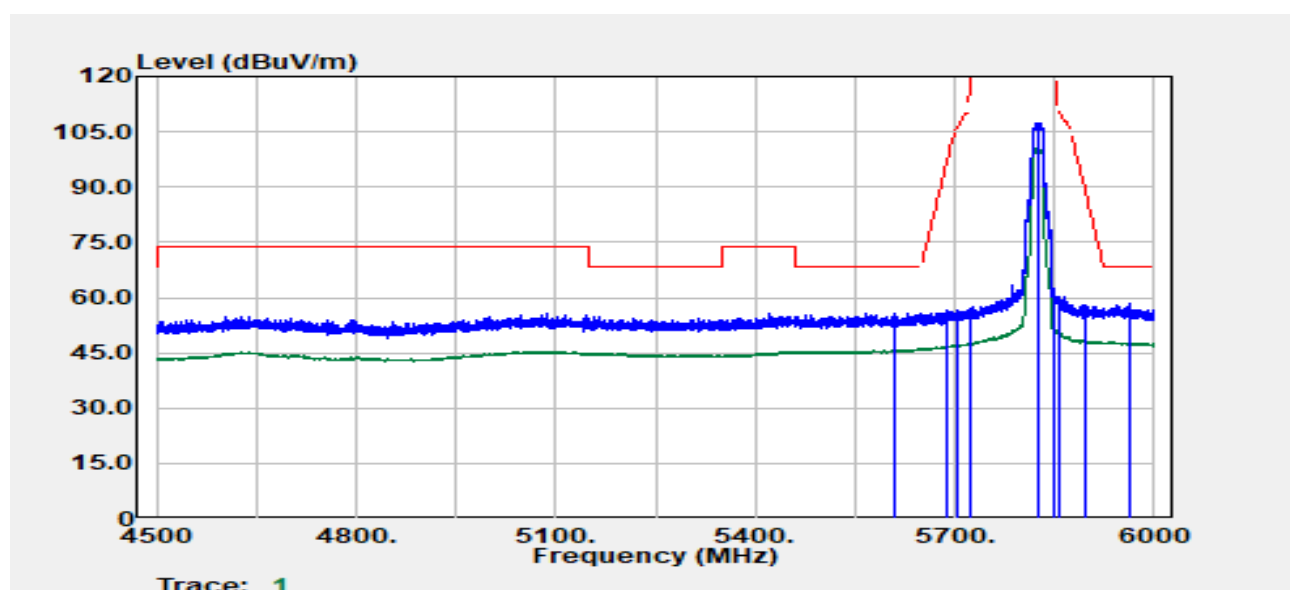


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5611.19	Peak	41.11	14.78	55.89	68.20	-12.31
5687.20	Peak	40.96	15.51	56.47	95.76	-39.28
5703.70	Peak	41.13	15.65	56.78	106.24	-49.45
5721.95	Peak	41.27	15.77	57.04	115.26	-58.22
5825.00	Peak	91.37	16.03	107.40	--	--
5825.00	Average	84.61	16.03	100.64	--	--
5850.98	Peak	45.19	15.94	61.13	119.98	-58.84
5855.23	Peak	44.24	15.94	60.19	110.74	-50.55
5896.48	Peak	42.20	15.92	58.12	89.26	-31.14
5963.74	Peak	42.31	16.14	58.45	68.20	-9.75

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 120 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-02
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5745 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

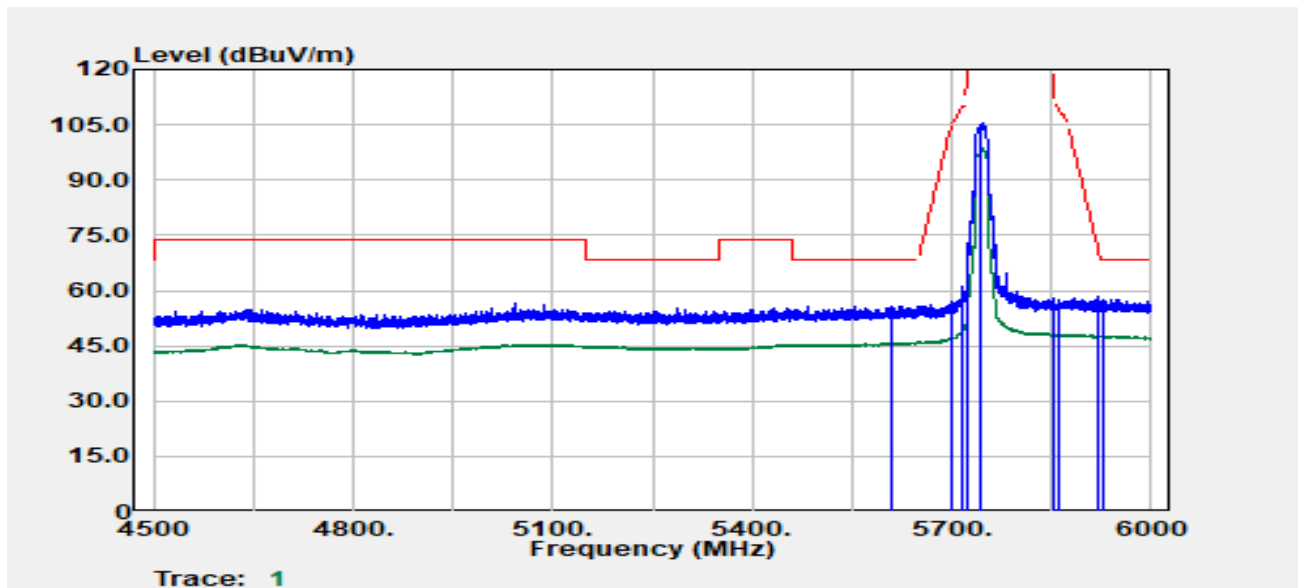


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5611.44	Peak	41.14	14.78	55.92	68.20	-12.28
5698.20	Peak	41.33	15.61	56.95	103.87	-46.93
5715.95	Peak	45.41	15.73	61.14	109.67	-48.53
5724.95	Peak	52.45	15.78	68.23	122.10	-53.86
5745.00	Peak	89.71	15.91	105.62	--	--
5745.00	Average	82.71	15.91	98.62	--	--
5851.98	Peak	41.81	15.94	57.75	117.70	-59.94
5860.73	Peak	41.51	15.94	57.45	109.19	-51.74
5919.49	Peak	42.41	16.02	58.43	72.26	-13.83
5926.99	Peak	41.67	16.05	57.72	68.20	-10.48

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 121 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band4_CH1
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

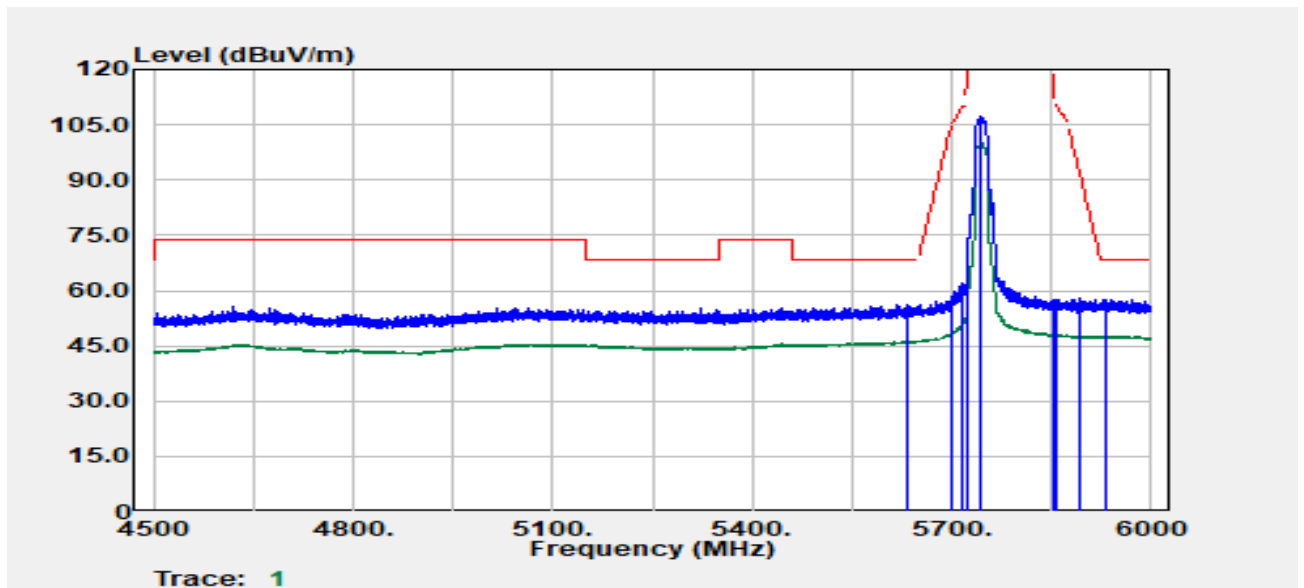


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5634.94	Peak	41.14	15.02	56.15	68.20	-12.05
5699.70	Peak	42.65	15.63	58.28	104.98	-46.70
5716.70	Peak	46.09	15.73	61.83	109.88	-48.05
5724.95	Peak	55.21	15.78	70.99	122.10	-51.10
5745.00	Peak	91.59	15.91	107.49	--	--
5745.00	Average	84.54	15.91	100.45	--	--
5851.73	Peak	41.51	15.94	57.46	118.27	-60.81
5857.73	Peak	41.48	15.94	57.42	110.04	-52.61
5891.48	Peak	42.04	15.92	57.96	92.97	-35.01
5930.74	Peak	41.64	16.07	57.71	68.20	-10.49

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 122 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-09-02
Operation Band	:802.11a/Band4_CH1	Temp./Humi.	:24.6/57
Frequency	:5825 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:Bandedge	Engineer	:Ray Li
EUT Pol	:E2	Test Chamber	: 966A
Setting	:14		

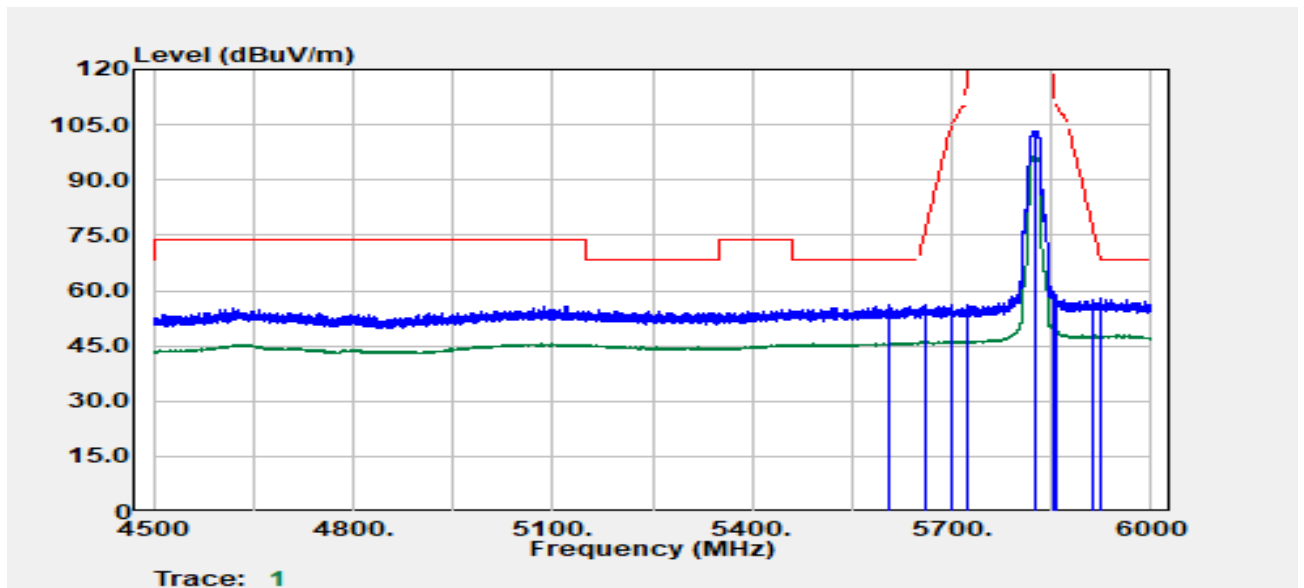


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5603.68	Peak	41.32	14.71	56.03	68.20	-12.17
5660.69	Peak	40.82	15.26	56.08	76.14	-20.06
5700.70	Peak	40.34	15.63	55.97	105.40	-49.43
5722.20	Peak	40.36	15.77	56.13	115.83	-59.69
5825.00	Peak	87.29	16.03	103.32	--	--
5825.00	Average	80.51	16.03	96.54	--	--
5852.48	Peak	43.72	15.94	59.66	116.55	-56.89
5856.98	Peak	42.98	15.94	58.92	110.25	-51.33
5913.24	Peak	41.34	15.98	57.33	76.88	-19.55
5925.49	Peak	41.72	16.04	57.76	68.20	-10.44

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 123 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band4_CH1
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :14

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

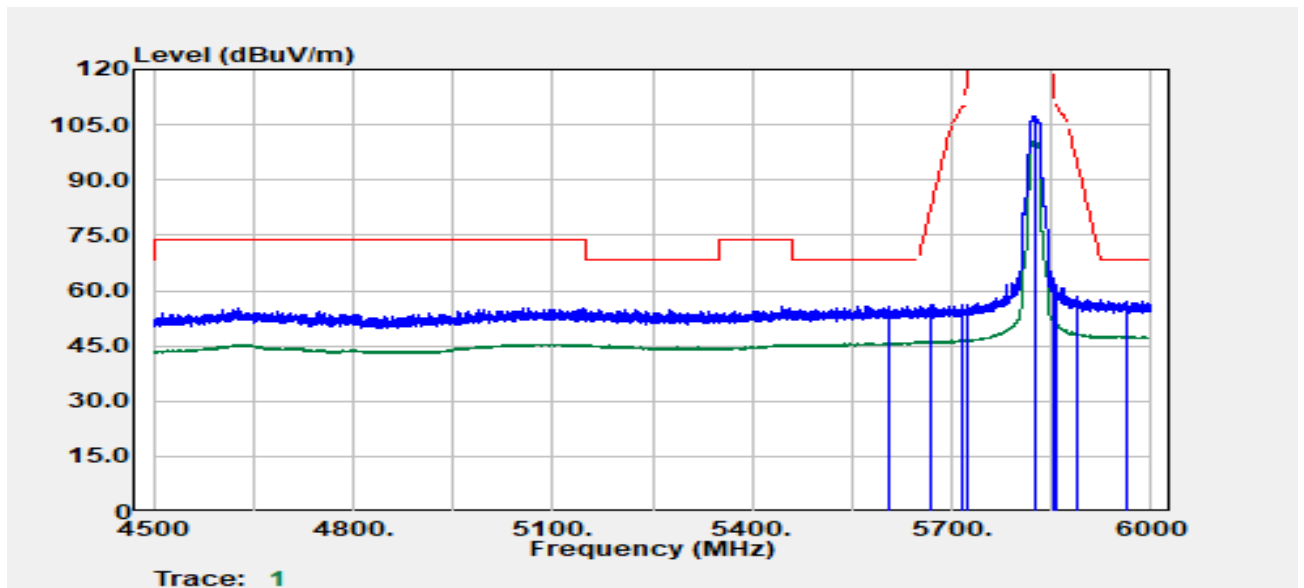


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5603.93	Peak	41.15	14.71	55.86	68.20	-12.34
5669.70	Peak	40.83	15.35	56.17	82.81	-26.64
5714.95	Peak	40.42	15.72	56.14	109.39	-53.25
5722.45	Peak	40.29	15.77	56.06	116.40	-60.34
5825.00	Peak	91.29	16.03	107.32	--	--
5825.00	Average	84.60	16.03	100.63	--	--
5853.98	Peak	47.29	15.94	63.24	113.13	-49.90
5858.48	Peak	45.55	15.94	61.49	109.83	-48.33
5888.23	Peak	42.35	15.93	58.28	95.38	-37.10
5964.49	Peak	40.89	16.14	57.04	68.20	-11.16

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 124 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :10.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

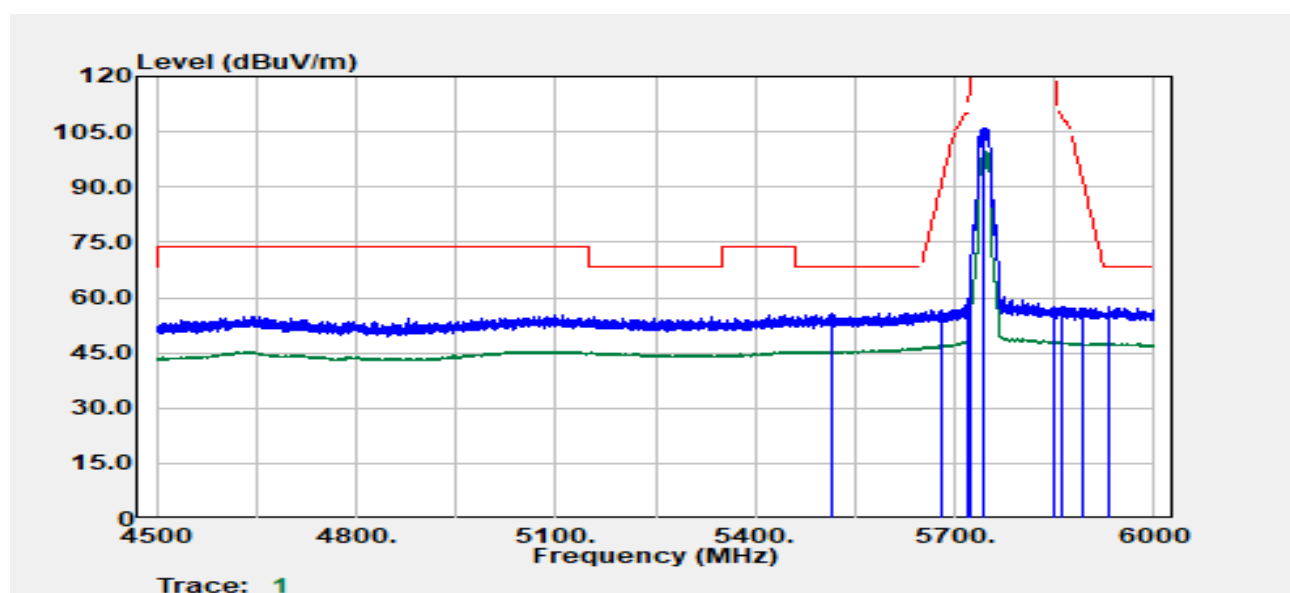


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5516.67	Peak	41.55	14.33	55.88	68.20	-12.32
5682.20	Peak	41.29	15.46	56.75	92.06	-35.31
5718.45	Peak	43.73	15.74	59.47	110.37	-50.89
5724.70	Peak	51.85	15.78	67.64	121.53	-53.89
5745.00	Peak	90.19	15.91	106.10	--	--
5745.00	Average	83.90	15.91	99.80	--	--
5850.00	Peak	40.78	15.95	56.73	122.20	-65.47
5862.23	Peak	41.58	15.94	57.52	108.77	-51.25
5893.73	Peak	41.19	15.92	57.12	91.30	-34.18
5930.24	Peak	41.27	16.07	57.34	68.20	-10.86

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 125 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :10.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

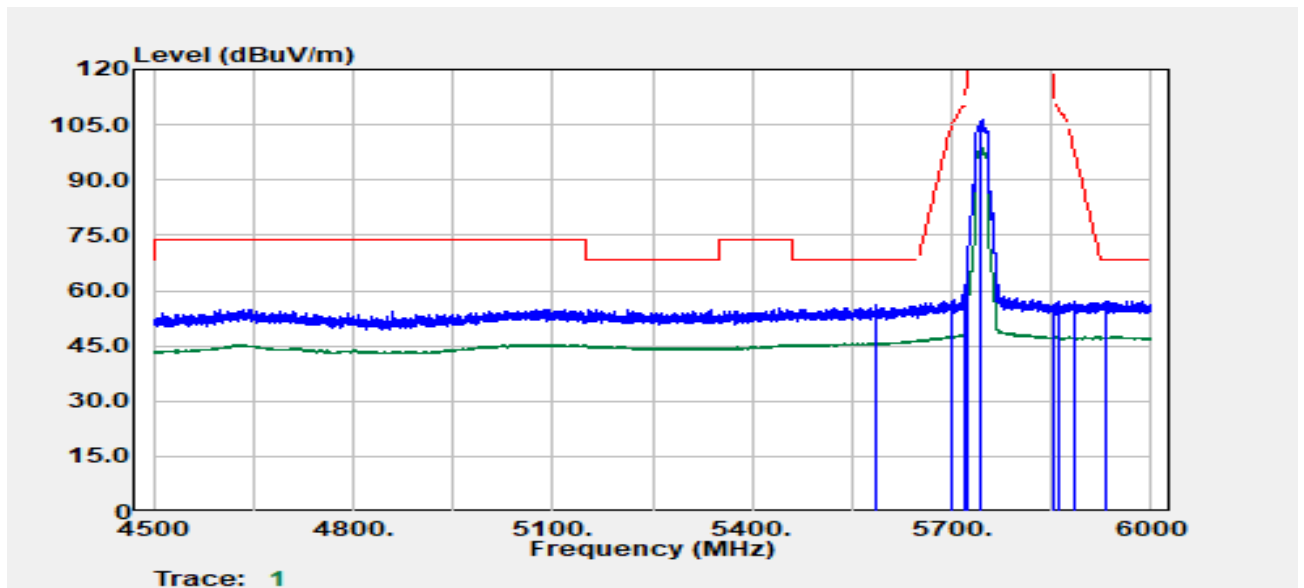


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5585.43	Peak	41.52	14.61	56.13	68.20	-12.07
5699.95	Peak	41.64	15.63	57.27	105.16	-47.90
5719.70	Peak	43.87	15.75	59.62	110.72	-51.10
5724.95	Peak	52.95	15.78	68.73	122.10	-53.36
5745.00	Peak	90.30	15.91	106.21	--	--
5745.00	Average	82.92	15.91	98.83	--	--
5852.98	Peak	40.38	15.94	56.33	115.41	-59.09
5860.23	Peak	40.93	15.94	56.87	109.33	-52.46
5883.48	Peak	41.18	15.93	57.11	98.90	-41.80
5930.49	Peak	41.08	16.07	57.15	68.20	-11.05

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 126 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

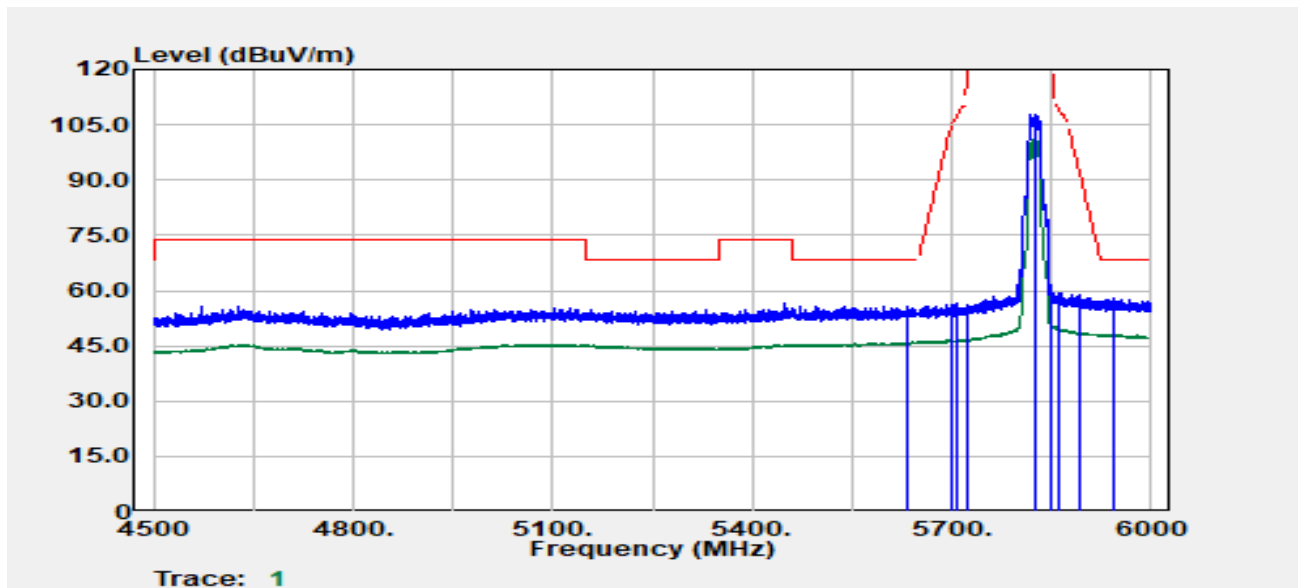


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5632.94	Peak	40.77	15.00	55.77	68.20	-12.43
5699.20	Peak	40.41	15.62	56.03	104.61	-48.58
5707.20	Peak	40.95	15.67	56.63	107.22	-50.59
5723.95	Peak	40.45	15.78	56.22	119.82	-63.59
5825.00	Peak	91.90	16.03	107.94	--	--
5825.00	Average	85.70	16.03	101.74	--	--
5850.00	Peak	43.41	15.95	59.35	122.20	-62.85
5859.73	Peak	43.60	15.94	59.54	109.47	-49.93
5892.48	Peak	43.15	15.92	59.07	92.23	-33.16
5945.24	Peak	41.79	16.14	57.93	68.20	-10.27

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 127 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

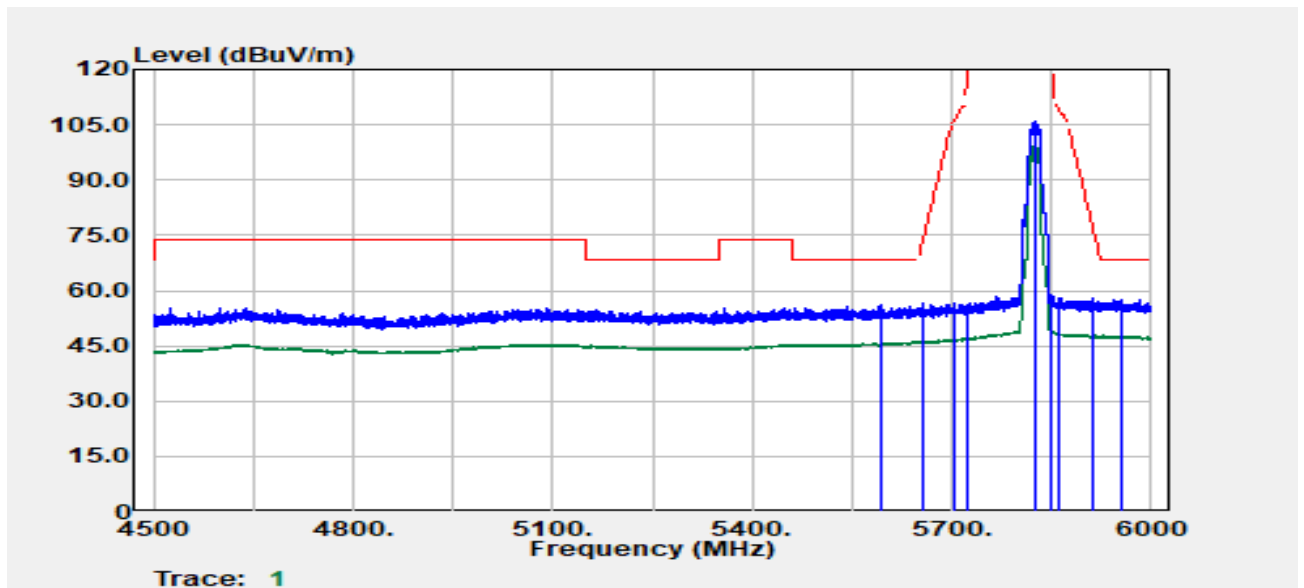


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5592.93	Peak	41.33	14.64	55.97	68.20	-12.23
5656.69	Peak	41.47	15.23	56.70	73.17	-16.47
5702.70	Peak	41.12	15.65	56.77	105.96	-49.19
5722.20	Peak	40.60	15.77	56.37	115.83	-59.46
5825.00	Peak	90.03	16.03	106.06	--	--
5825.00	Average	83.21	16.03	99.24	--	--
5850.48	Peak	42.81	15.94	58.76	121.12	-62.36
5860.23	Peak	41.85	15.94	57.79	109.33	-51.54
5912.24	Peak	42.16	15.98	58.14	77.62	-19.47
5954.24	Peak	41.54	16.16	57.70	68.20	-10.50

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 128 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

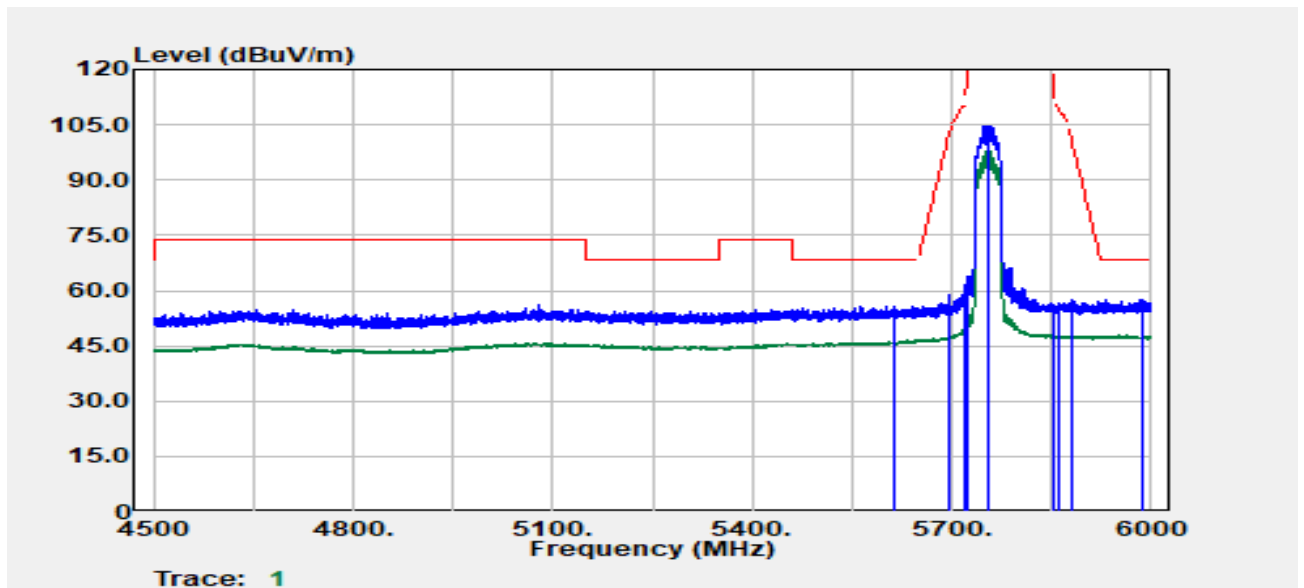


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5611.69	Peak	41.04	14.79	55.83	68.20	-12.37
5697.70	Peak	43.09	15.61	58.70	103.51	-44.81
5718.95	Peak	45.75	15.75	61.49	110.51	-49.01
5723.20	Peak	48.09	15.77	63.87	118.11	-54.24
5755.00	Peak	88.85	15.96	104.80	--	--
5755.00	Average	82.12	15.96	98.08	--	--
5852.73	Peak	40.33	15.94	56.27	115.98	-59.71
5861.48	Peak	40.86	15.94	56.80	108.98	-52.18
5881.98	Peak	41.38	15.93	57.31	100.02	-42.71
5985.00	Peak	41.23	16.11	57.35	68.20	-10.85

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 129 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

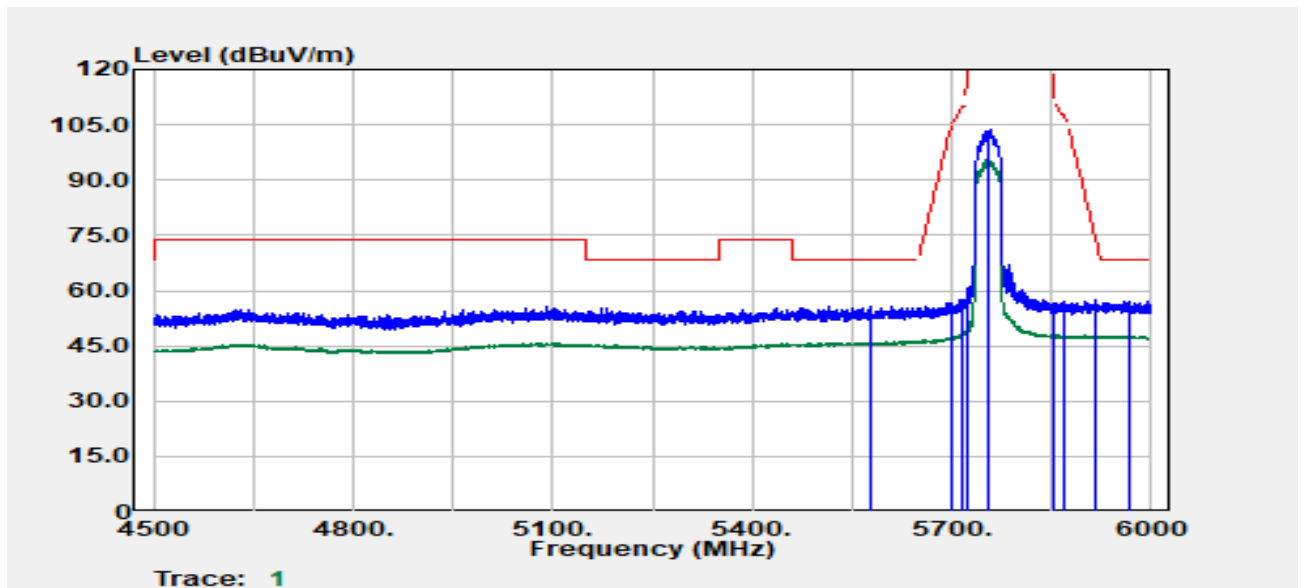


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5578.93	Peak	41.20	14.58	55.78	68.20	-12.42
5698.70	Peak	41.07	15.62	56.69	104.24	-47.55
5716.20	Peak	41.94	15.73	57.67	109.74	-52.07
5721.95	Peak	44.92	15.77	60.69	115.26	-54.57
5755.00	Peak	87.65	15.96	103.61	--	--
5755.00	Average	79.93	15.96	95.89	--	--
5851.98	Peak	40.44	15.94	56.38	117.70	-61.32
5867.23	Peak	41.04	15.94	56.97	107.37	-50.40
5917.74	Peak	41.46	16.01	57.46	73.56	-16.09
5965.99	Peak	40.97	16.14	57.11	68.20	-11.09

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 130 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

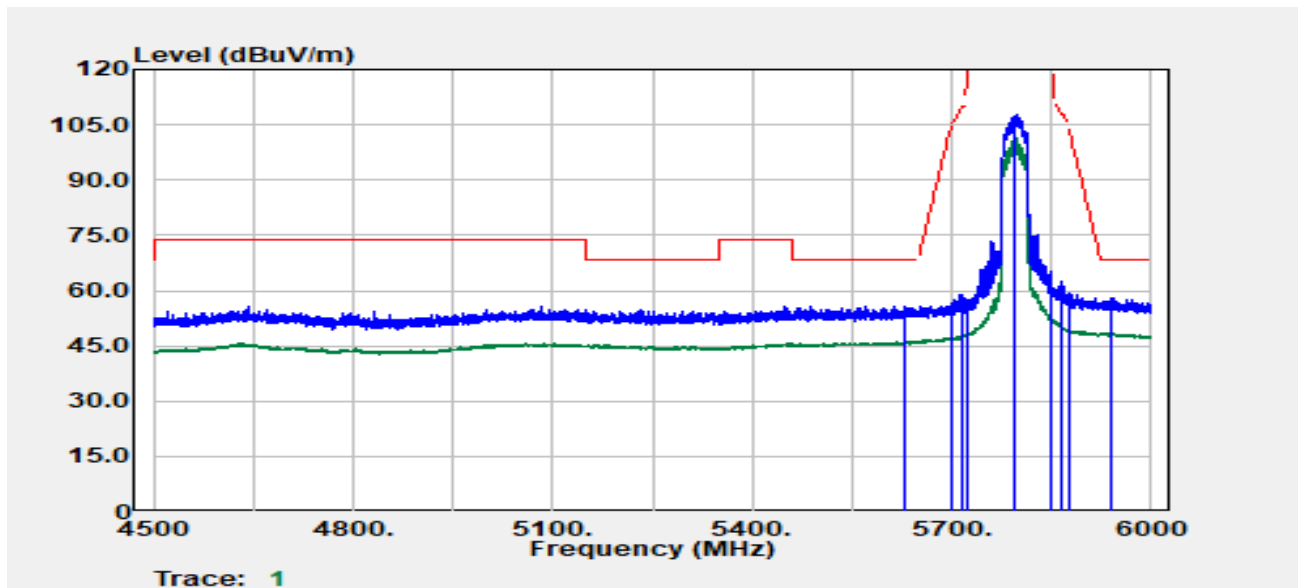


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5630.94	Peak	40.73	14.98	55.71	68.20	-12.49
5698.45	Peak	40.77	15.62	56.38	104.06	-47.67
5714.45	Peak	43.28	15.72	59.00	109.25	-50.25
5724.70	Peak	41.77	15.78	57.56	121.53	-63.97
5795.00	Peak	91.49	16.10	107.59	--	--
5795.00	Average	85.14	16.10	101.24	--	--
5850.23	Peak	44.98	15.94	60.92	121.69	-60.76
5864.73	Peak	46.46	15.94	62.40	108.07	-45.67
5876.98	Peak	43.53	15.93	59.46	103.73	-44.27
5937.74	Peak	41.99	16.10	58.09	68.20	-10.11

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 131 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

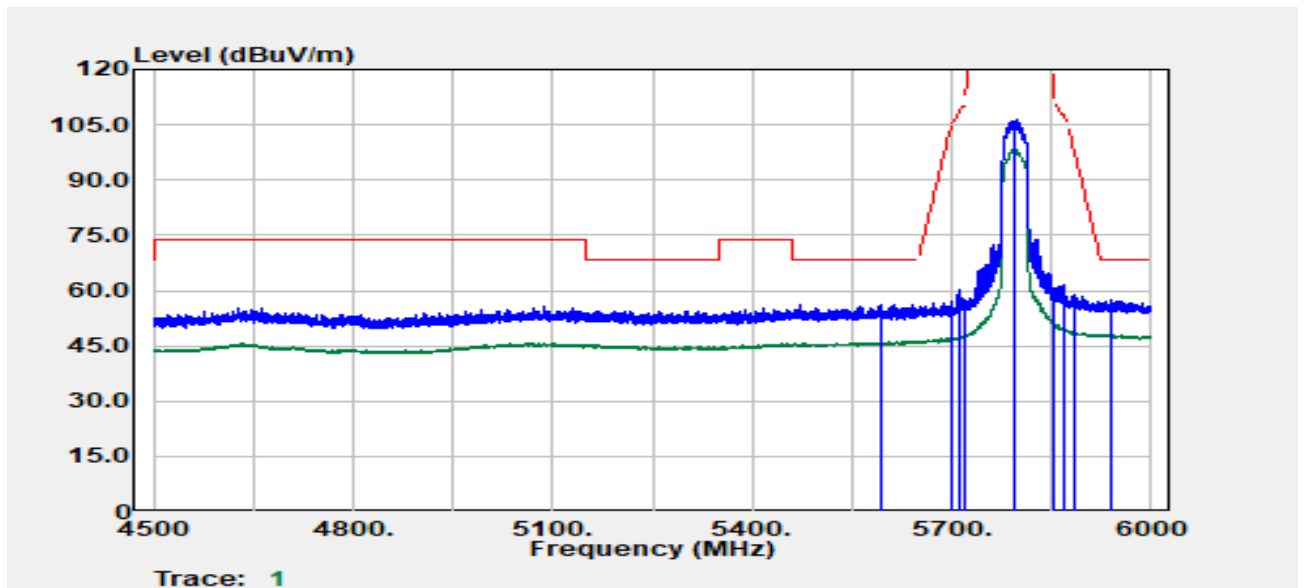


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5595.68	Peak	41.58	14.65	56.23	68.20	-11.97
5698.70	Peak	41.29	15.62	56.91	104.24	-47.33
5713.20	Peak	44.69	15.71	60.40	108.90	-48.50
5720.45	Peak	41.79	15.76	57.54	111.84	-54.29
5795.00	Peak	90.16	16.10	106.27	--	--
5795.00	Average	82.70	16.10	98.80	--	--
5852.23	Peak	44.96	15.94	60.90	117.12	-56.22
5867.23	Peak	45.70	15.94	61.64	107.37	-45.74
5885.48	Peak	42.93	15.93	58.85	97.42	-38.56
5941.49	Peak	41.20	16.12	57.32	68.20	-10.88

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 132 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

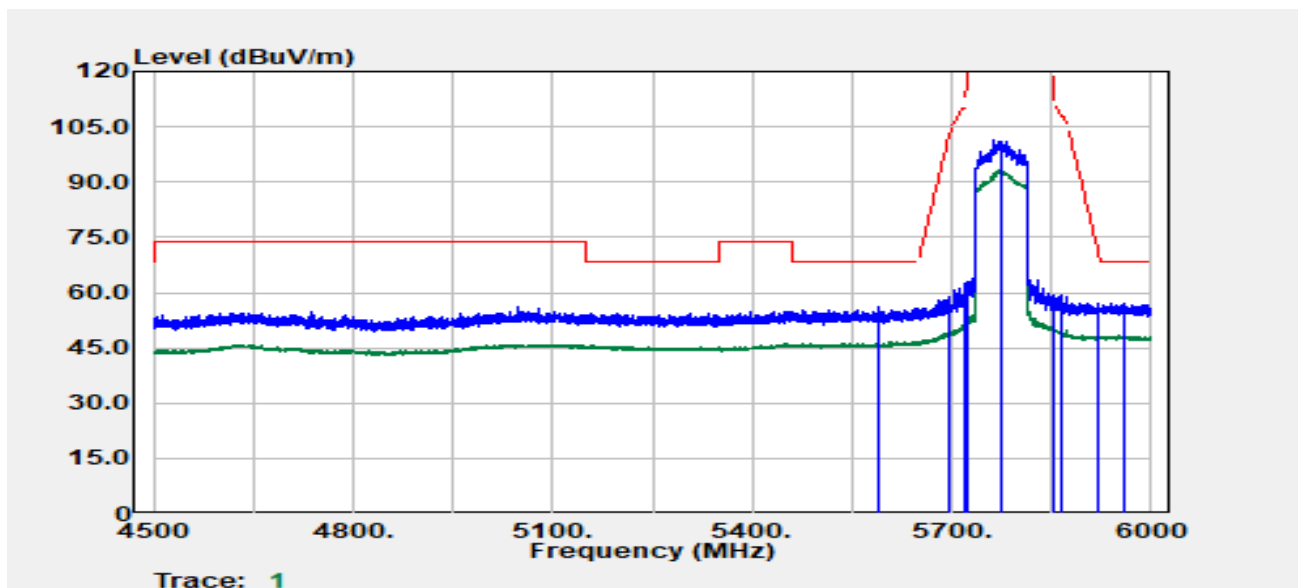


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5591.43	Peak	41.62	14.63	56.26	68.20	-11.94
5695.95	Peak	43.08	15.59	58.67	102.21	-43.55
5719.45	Peak	46.54	15.75	62.29	110.65	-48.35
5722.70	Peak	47.11	15.77	62.88	116.97	-54.08
5775.00	Peak	85.30	16.03	101.33	--	--
5775.00	Average	77.25	16.03	93.28	--	--
5851.23	Peak	43.50	15.94	59.44	119.41	-59.96
5863.73	Peak	43.22	15.94	59.16	108.35	-49.20
5920.74	Peak	41.07	16.02	57.09	71.34	-14.25
5960.99	Peak	40.85	16.15	57.00	68.20	-11.20

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 133 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ac80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

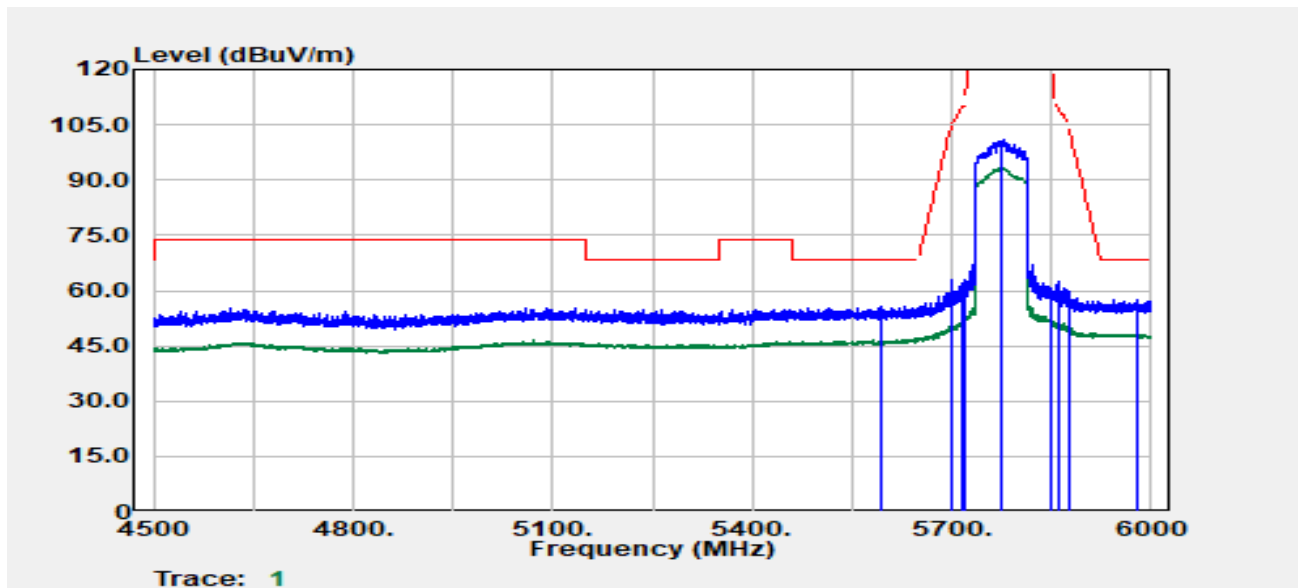


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5593.93	Peak	41.28	14.64	55.92	68.20	-12.28
5699.45	Peak	47.19	15.63	62.82	104.79	-41.98
5715.20	Peak	46.35	15.72	62.08	109.46	-47.38
5721.20	Peak	47.08	15.76	62.84	113.55	-50.70
5775.00	Peak	84.77	16.03	100.80	--	--
5775.00	Average	77.28	16.03	93.31	--	--
5850.73	Peak	44.96	15.94	60.90	120.55	-59.65
5859.48	Peak	46.33	15.94	62.27	109.54	-47.28
5875.73	Peak	44.01	15.93	59.94	104.66	-44.72
5980.00	Peak	41.61	16.12	57.73	68.20	-10.47

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 134 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

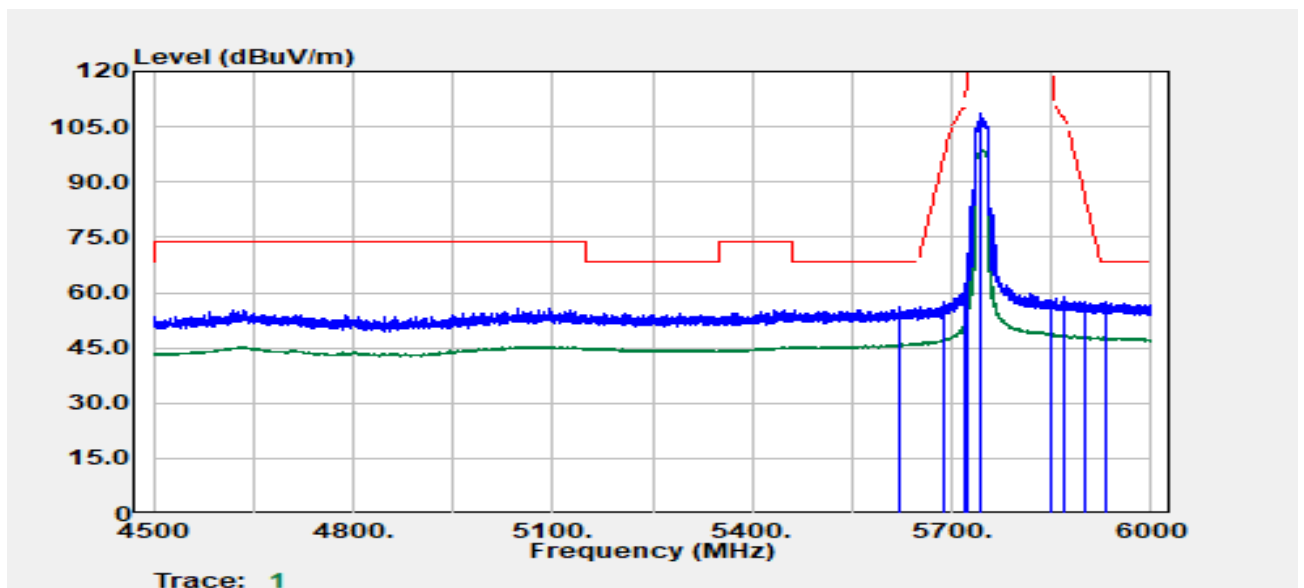


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5621.69	Peak	41.17	14.88	56.06	68.20	-12.14
5687.70	Peak	41.87	15.52	57.39	96.13	-38.74
5718.70	Peak	45.42	15.75	61.17	110.44	-49.27
5724.20	Peak	48.90	15.78	64.68	120.39	-55.70
5745.00	Peak	92.70	15.91	108.61	--	--
5745.00	Average	82.82	15.91	98.73	--	--
5850.98	Peak	42.09	15.94	58.04	119.98	-61.94
5870.48	Peak	42.83	15.93	58.76	106.46	-47.70
5901.98	Peak	41.79	15.93	57.72	85.19	-27.47
5930.49	Peak	41.67	16.07	57.73	68.20	-10.47

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 135 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5745 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12.5

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

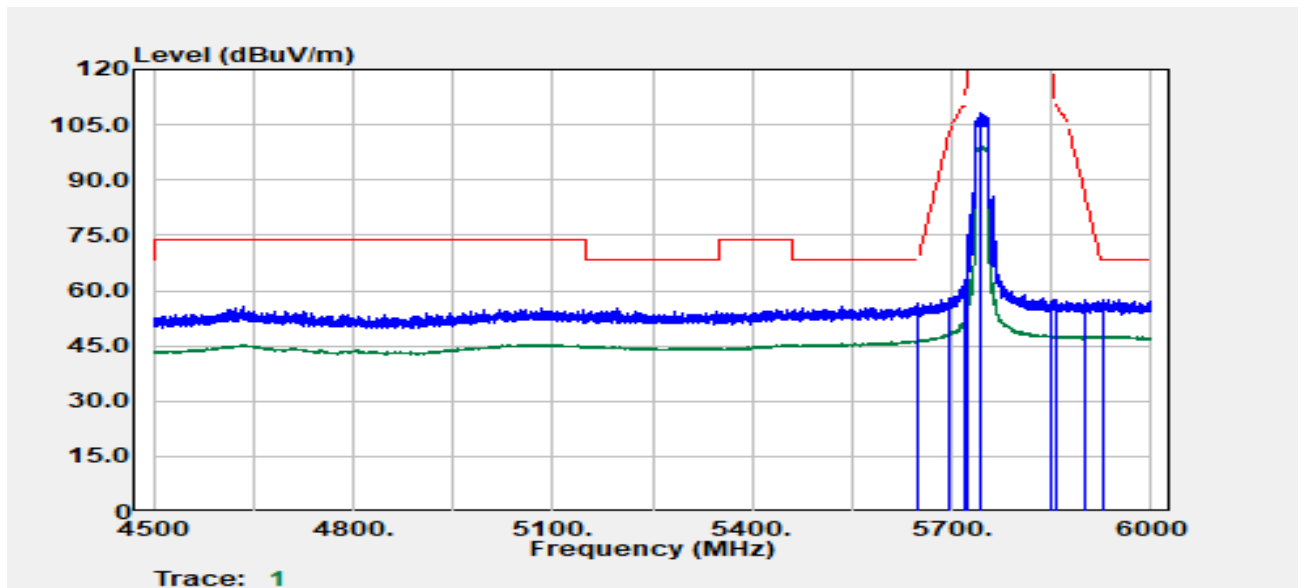


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5647.94	Peak	41.56	15.14	56.71	68.20	-11.49
5697.45	Peak	42.15	15.61	57.75	103.32	-45.57
5719.45	Peak	47.19	15.75	62.94	110.65	-47.71
5724.70	Peak	56.67	15.78	72.45	121.53	-49.08
5745.00	Peak	92.12	15.91	108.03	--	--
5745.00	Average	83.49	15.91	99.40	--	--
5850.98	Peak	41.27	15.94	57.22	119.98	-62.76
5856.23	Peak	41.44	15.94	57.38	110.46	-53.08
5901.23	Peak	41.52	15.93	57.45	85.75	-28.30
5927.24	Peak	41.54	16.05	57.59	68.20	-10.61

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 136 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-02
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Ray Li
Test Chamber : 966A

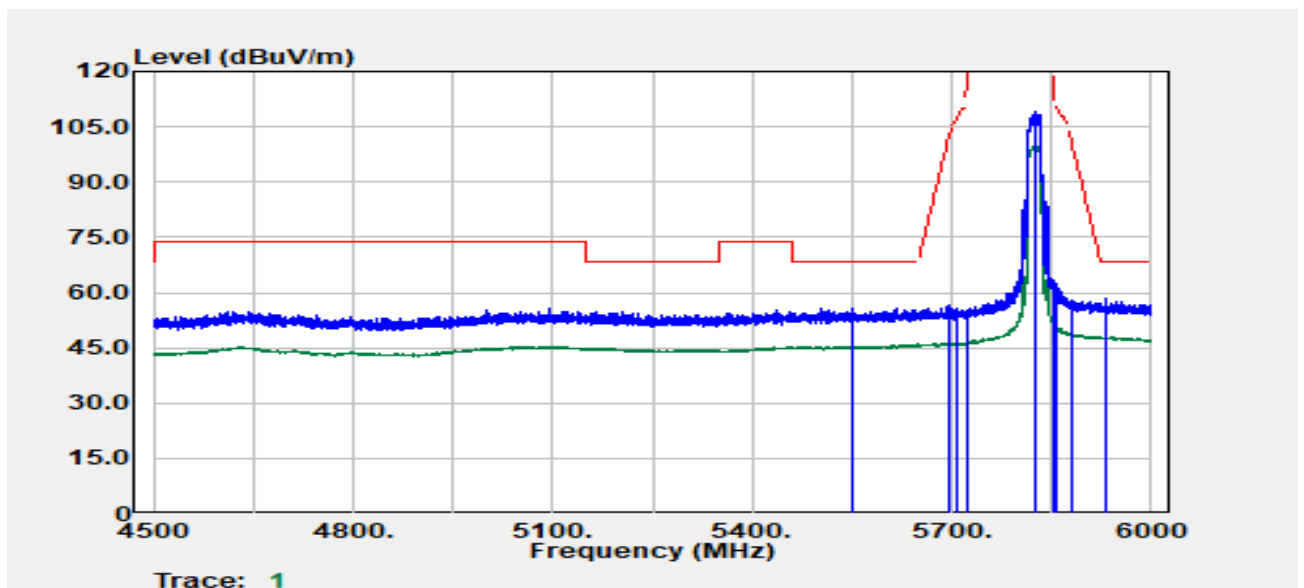


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5552.43	Peak	41.35	14.46	55.81	68.20	-12.39
5694.45	Peak	41.21	15.58	56.78	101.11	-44.32
5706.95	Peak	40.07	15.67	55.74	107.15	-51.41
5724.70	Peak	39.24	15.78	55.02	121.53	-66.50
5825.00	Peak	93.02	16.03	109.05	--	--
5825.00	Average	83.68	16.03	99.71	--	--
5851.48	Peak	47.65	15.94	63.59	118.84	-55.24
5855.98	Peak	46.39	15.94	62.33	110.53	-48.19
5879.73	Peak	42.11	15.93	58.04	101.69	-43.64
5931.99	Peak	42.41	16.08	58.49	68.20	-9.71

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 137 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax20/Band4
Frequency :5825 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Ray Li
Test Chamber : 966A

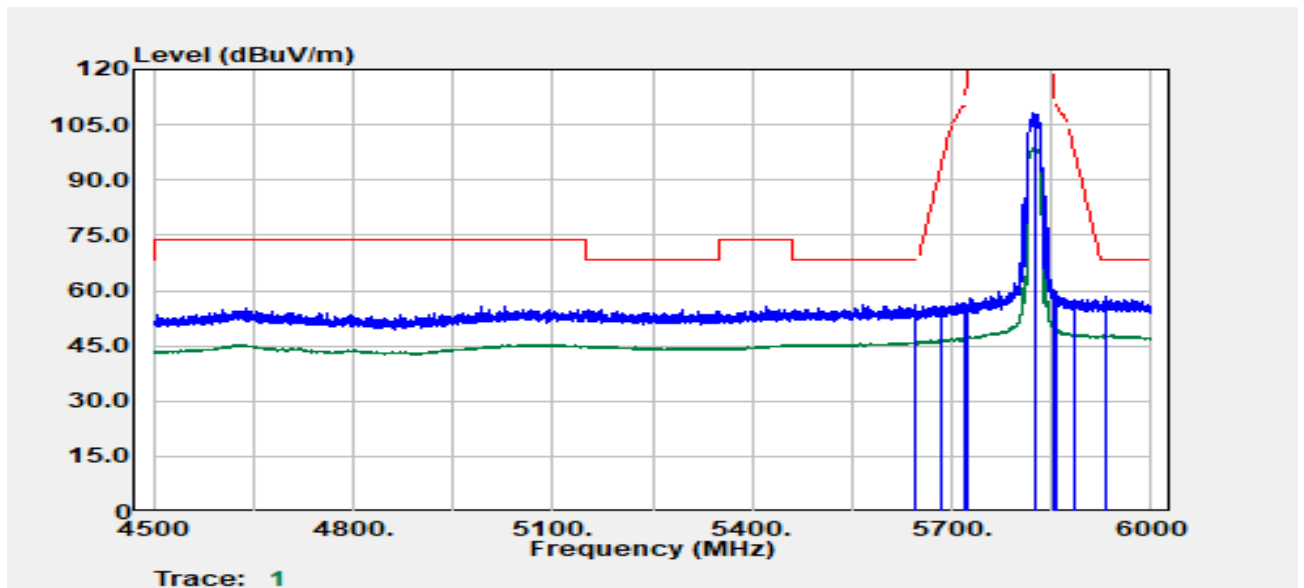


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5644.44	Peak	41.23	15.11	56.34	68.20	-11.86
5685.20	Peak	40.42	15.49	55.92	94.28	-38.36
5718.20	Peak	40.83	15.74	56.57	110.30	-53.72
5724.95	Peak	40.33	15.78	56.12	122.10	-65.98
5825.00	Peak	92.00	16.03	108.04	--	--
5825.00	Average	82.90	16.03	98.93	--	--
5851.48	Peak	44.18	15.94	60.12	118.84	-58.72
5855.48	Peak	43.72	15.94	59.66	110.67	-51.01
5883.73	Peak	41.81	15.93	57.74	98.72	-40.98
5931.99	Peak	42.38	16.08	58.46	68.20	-9.74

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 138 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

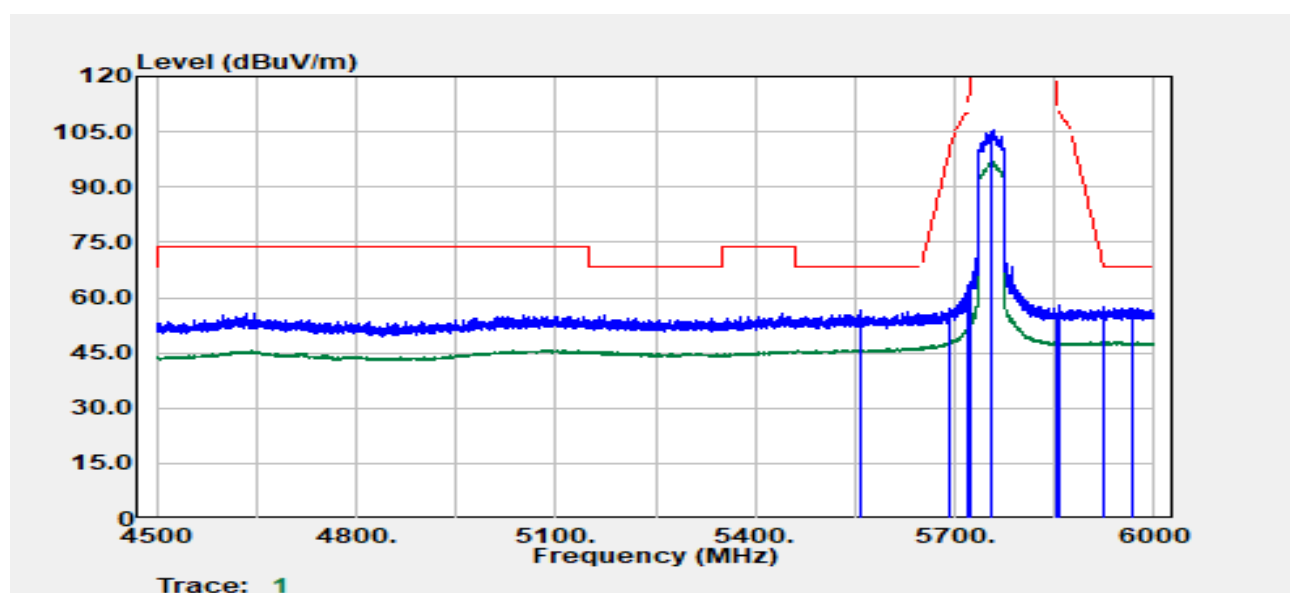


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5558.18	Peak	42.05	14.49	56.54	68.20	-11.66
5691.95	Peak	41.29	15.56	56.85	99.26	-42.42
5717.95	Peak	47.71	15.74	63.45	110.23	-46.78
5724.70	Peak	48.38	15.78	64.16	121.53	-57.37
5755.00	Peak	89.74	15.96	105.69	--	--
5755.00	Average	81.16	15.96	97.12	--	--
5851.98	Peak	39.57	15.94	55.51	117.70	-62.18
5858.23	Peak	42.20	15.94	58.14	109.90	-51.76
5924.24	Peak	41.52	16.04	57.56	68.76	-11.20
5968.50	Peak	41.11	16.14	57.24	68.20	-10.96

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 139 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band4
Frequency :5755 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :12

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

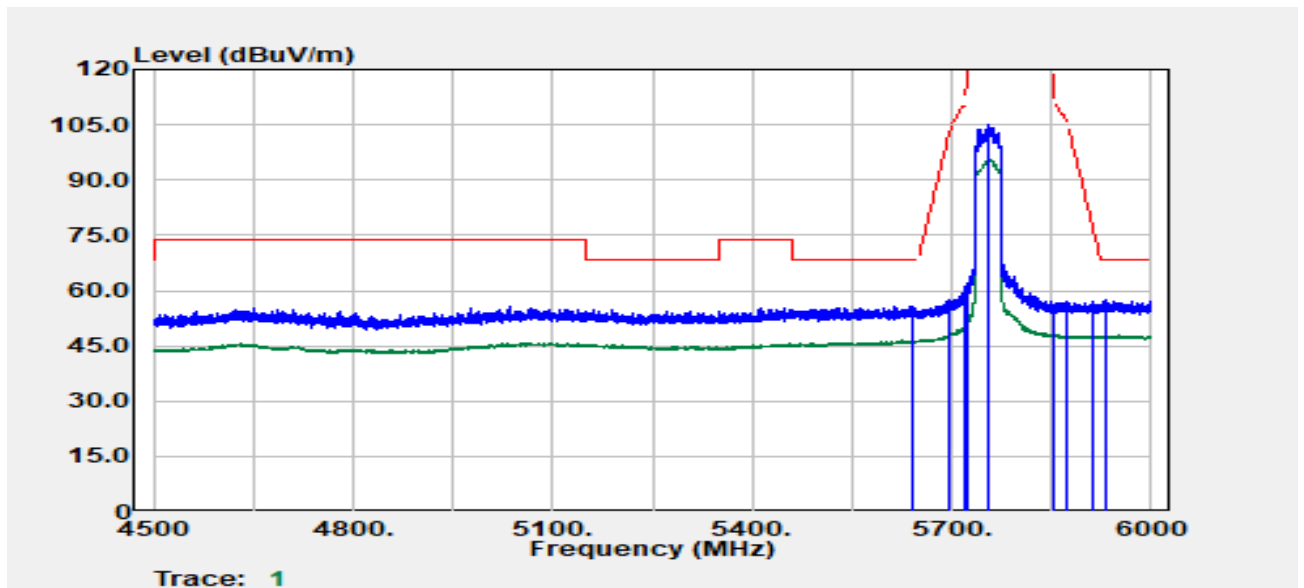


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5640.44	Peak	40.63	15.07	55.70	68.20	-12.50
5694.95	Peak	41.78	15.58	57.36	101.48	-44.11
5718.20	Peak	44.42	15.74	60.16	110.30	-50.13
5724.45	Peak	45.74	15.78	61.52	120.96	-59.43
5755.00	Peak	88.94	15.96	104.90	--	--
5755.00	Average	79.77	15.96	95.73	--	--
5851.98	Peak	40.42	15.94	56.37	117.70	-61.33
5871.23	Peak	40.91	15.93	56.84	106.25	-49.41
5911.24	Peak	40.95	15.98	56.93	78.35	-21.43
5931.74	Peak	41.41	16.08	57.49	68.20	-10.71

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 140 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

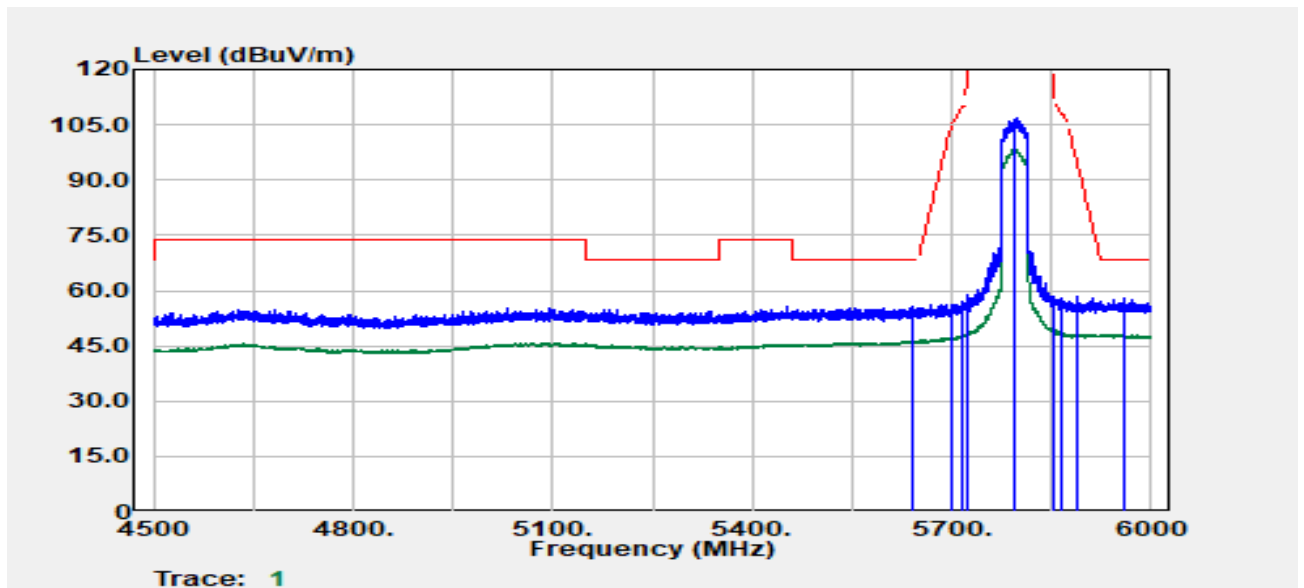


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5642.94	Peak	40.40	15.10	55.50	68.20	-12.70
5698.70	Peak	40.70	15.62	56.31	104.24	-47.93
5714.20	Peak	41.32	15.72	57.04	109.18	-52.14
5724.20	Peak	43.11	15.78	58.90	120.39	-61.49
5795.00	Peak	90.83	16.10	106.93	--	--
5795.00	Average	82.52	16.10	98.62	--	--
5852.48	Peak	42.38	15.94	58.32	116.55	-58.23
5866.23	Peak	42.04	15.94	57.97	107.65	-49.68
5887.23	Peak	42.30	15.93	58.23	96.12	-37.89
5959.99	Peak	41.63	16.15	57.78	68.20	-10.42

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 141 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band4
Frequency :5795 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :13

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

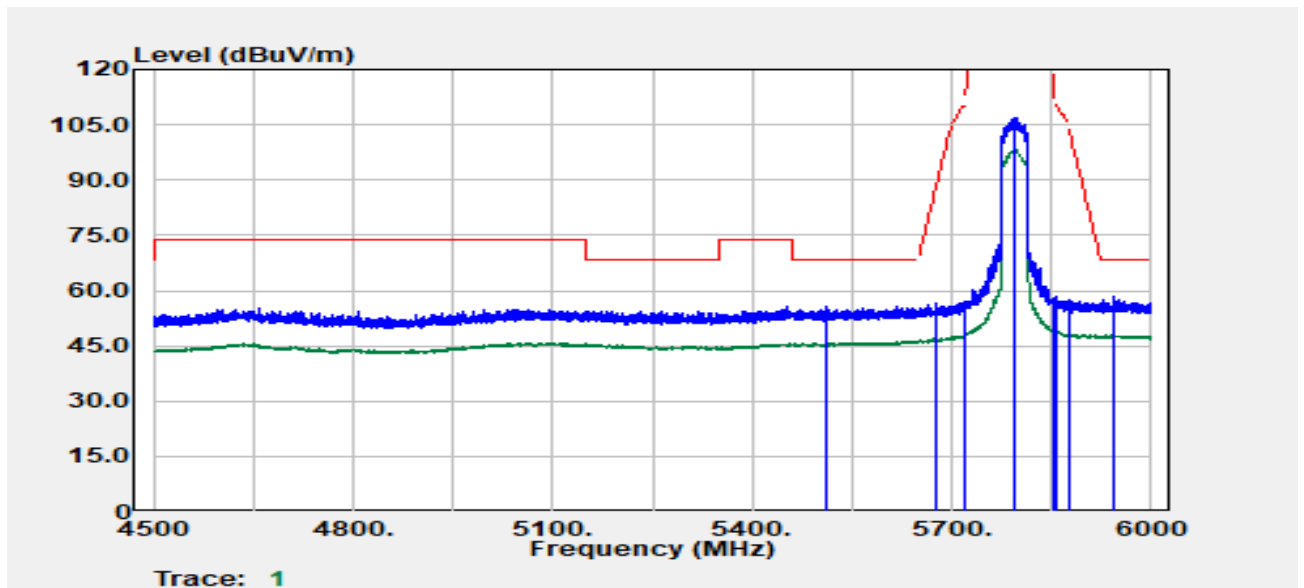


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5511.92	Peak	41.56	14.31	55.87	68.20	-12.33
5676.70	Peak	41.03	15.41	56.44	88.00	-31.55
5717.95	Peak	40.91	15.74	56.65	110.23	-53.58
5720.70	Peak	41.12	15.76	56.88	112.41	-55.53
5795.00	Peak	90.99	16.10	107.09	--	--
5795.00	Average	82.06	16.10	98.16	--	--
5851.73	Peak	42.16	15.94	58.11	118.27	-60.16
5857.48	Peak	42.25	15.94	58.19	110.11	-51.91
5878.23	Peak	41.40	15.93	57.33	102.80	-45.47
5944.24	Peak	42.17	16.14	58.31	68.20	-9.89

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 142 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5

Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :VERTICAL
Engineer :Tony Chao
Test Chamber : 966A

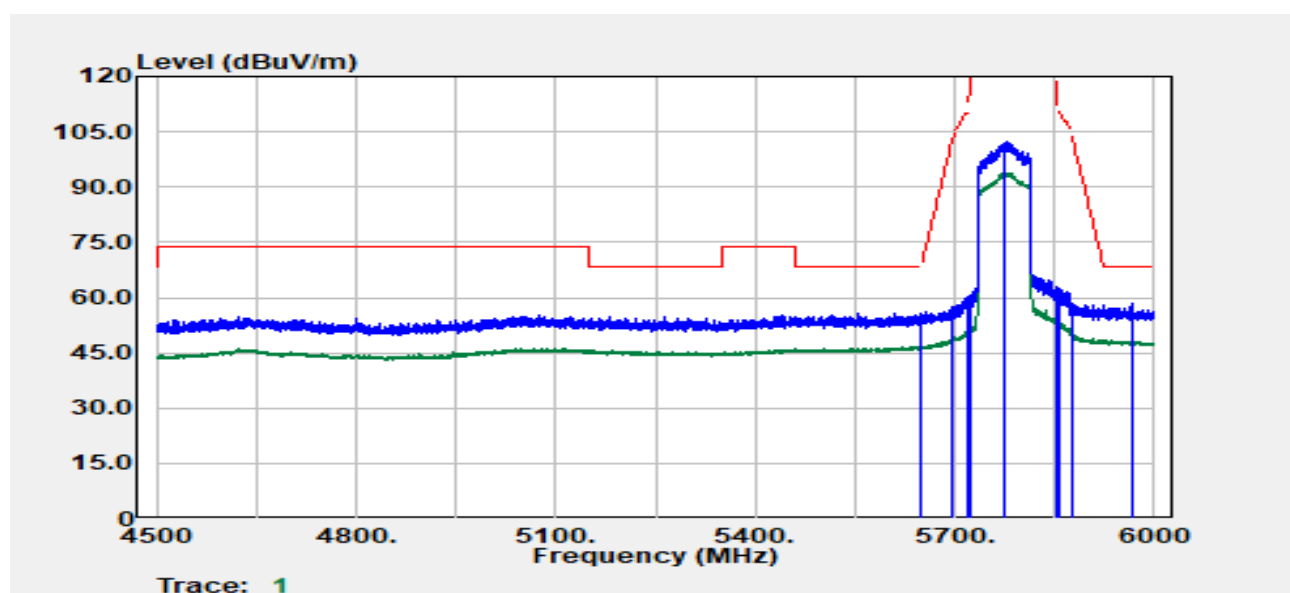


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5649.19	Peak	40.71	15.16	55.87	68.20	-12.33
5694.70	Peak	41.88	15.58	57.46	101.29	-43.83
5718.20	Peak	44.55	15.74	60.30	110.30	-50.00
5721.95	Peak	45.08	15.77	60.85	115.26	-54.41
5775.00	Peak	86.26	16.03	102.29	--	--
5775.00	Average	77.89	16.03	93.92	--	--
5851.23	Peak	46.87	15.94	62.81	119.41	-56.59
5856.73	Peak	46.59	15.94	62.53	110.32	-47.79
5876.73	Peak	42.42	15.93	58.35	103.92	-45.57
5968.50	Peak	42.10	16.14	58.24	68.20	-9.96

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 143 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band4
Frequency :5775 MHz
Operation Mode :Bandedge
EUT Pol :E2
Setting :11.5


Test Date :2024-09-03
Temp./Humi. :24.6/57
Antenna Pol. :HORIZONTAL
Engineer :Tony Chao
Test Chamber : 966A

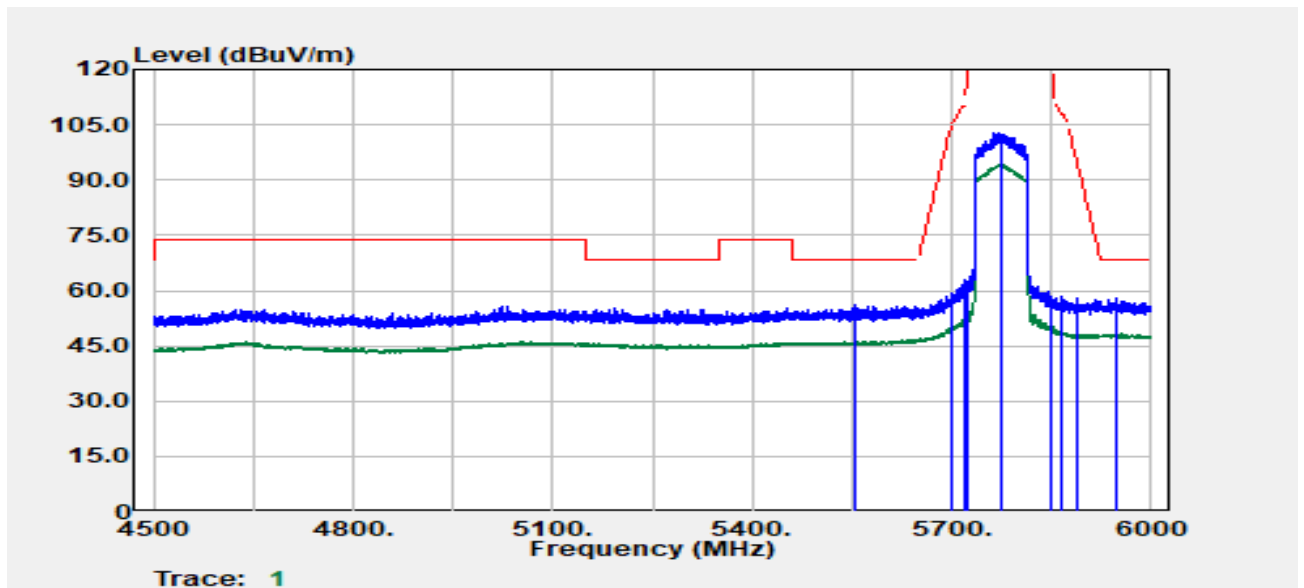

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
5554.43	Peak	41.50	14.47	55.97	68.20	-12.23
5698.45	Peak	43.59	15.62	59.21	104.06	-44.85
5719.20	Peak	47.29	15.75	63.04	110.58	-47.54
5723.70	Peak	46.59	15.78	62.36	119.25	-56.88
5775.00	Peak	86.82	16.03	102.85	--	--
5775.00	Average	78.43	16.03	94.46	--	--
5850.00	Peak	41.34	15.95	57.29	122.20	-64.91
5863.98	Peak	42.53	15.94	58.47	108.28	-49.81
5889.23	Peak	41.85	15.93	57.77	94.64	-36.86
5947.74	Peak	41.71	16.15	57.86	68.20	-10.34

TX Test Data

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax80/Band1	Temp./Humi.	:23.9/62
Frequency	:5210 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

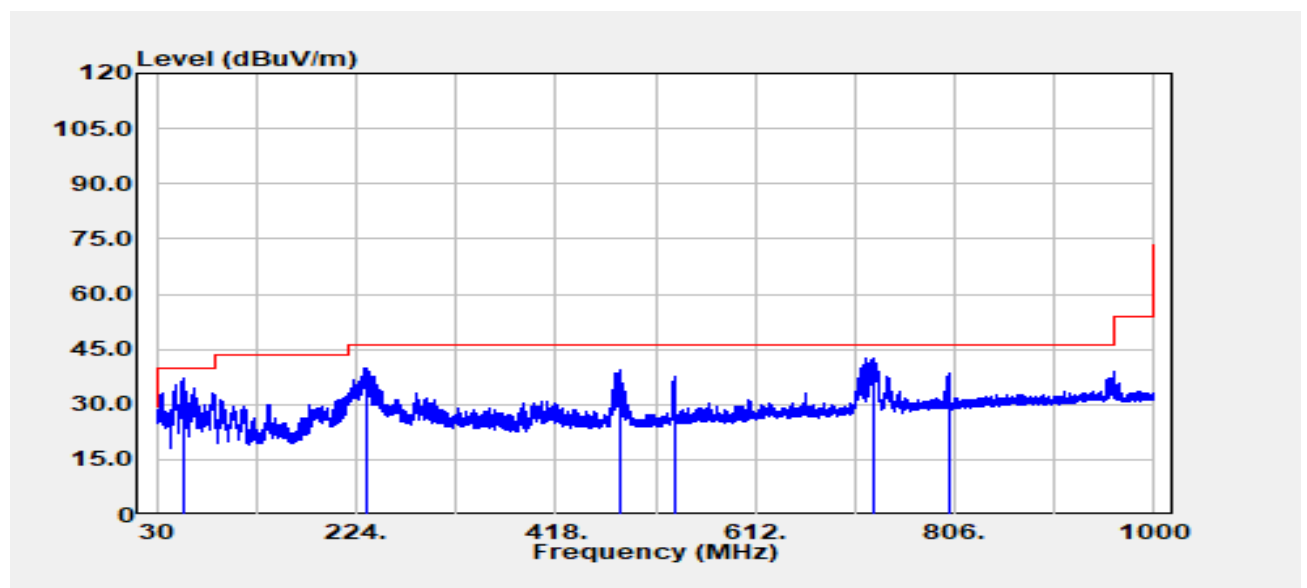


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
56.55	Peak	52.99	-15.77	37.21	40.00	-2.79
233.22	Peak	50.95	-11.03	39.93	46.00	-6.07
479.96	Peak	42.71	-3.42	39.29	46.00	-6.71
533.07	Peak	40.73	-2.95	37.77	46.00	-8.23
728.16	Peak	42.30	0.48	42.79	46.00	-3.21
800.06	Peak	36.79	1.48	38.27	46.00	-7.73

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 145 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax80/Band1
Frequency :5210 MHz
Operation Mode :TX
EUT Pol :E2
Setting :13.5

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966A

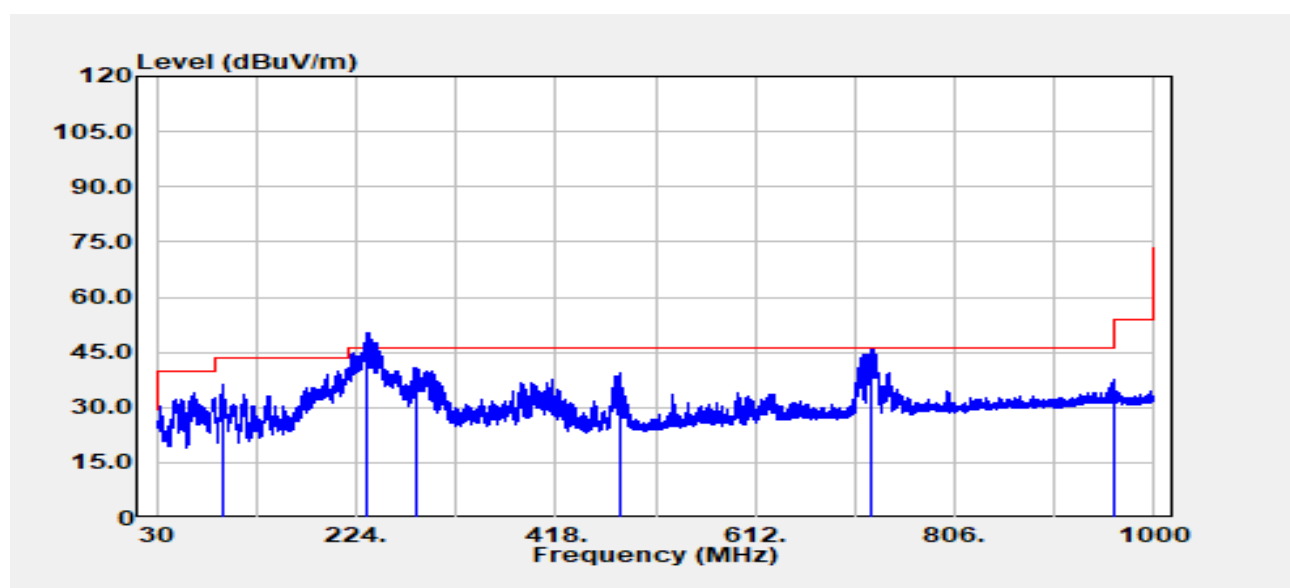


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBuV	Factor dB	Actual FS dBuV/m	Limit dBuV/m	Margin dB
93.54	Peak	50.46	-14.43	36.03	43.50	-7.47
233.22	QP	54.78	-11.03	43.75	46.00	-2.25
283.41	Peak	49.77	-8.80	40.97	46.00	-5.03
480.08	Peak	42.73	-3.42	39.31	46.00	-6.69
724.76	QP	38.81	0.37	39.18	46.00	-6.82
959.99	Peak	34.03	3.65	37.68	46.00	-8.32



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 146 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-06
Operation Band	:802.11a/Band1_Ch0	Temp./Humi.	:24.3/61
Frequency	:5180 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:15		

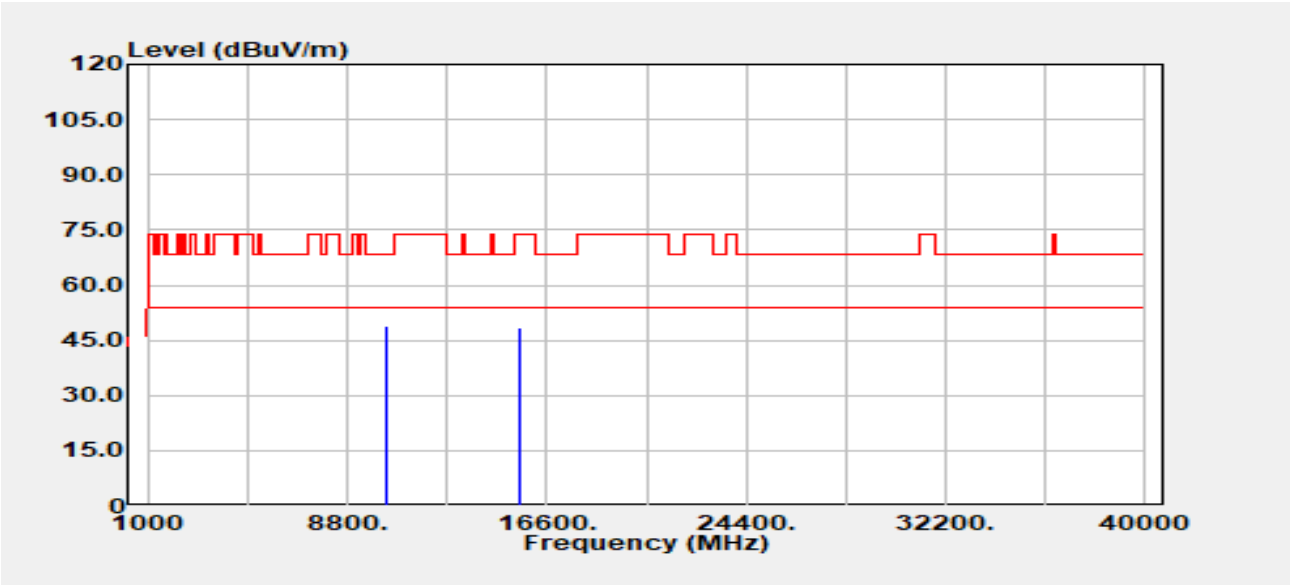


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	35.84	12.85	48.68	68.20	-19.52
15540.00	Peak	33.61	14.87	48.48	74.00	-25.52
15540.00	Average	24.92	14.87	39.79	54.00	-14.21



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 147 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-06
Operation Band	:802.11a/Band1_Ch0	Temp./Humi.	:24.3/61
Frequency	:5180 MHz	Antenna Pol.	:Horizontal
Operation Mode	:TX	Engineer	:Tony Chao
EUT Pol	:E2	Test Chamber	: 966A
Setting	:15		

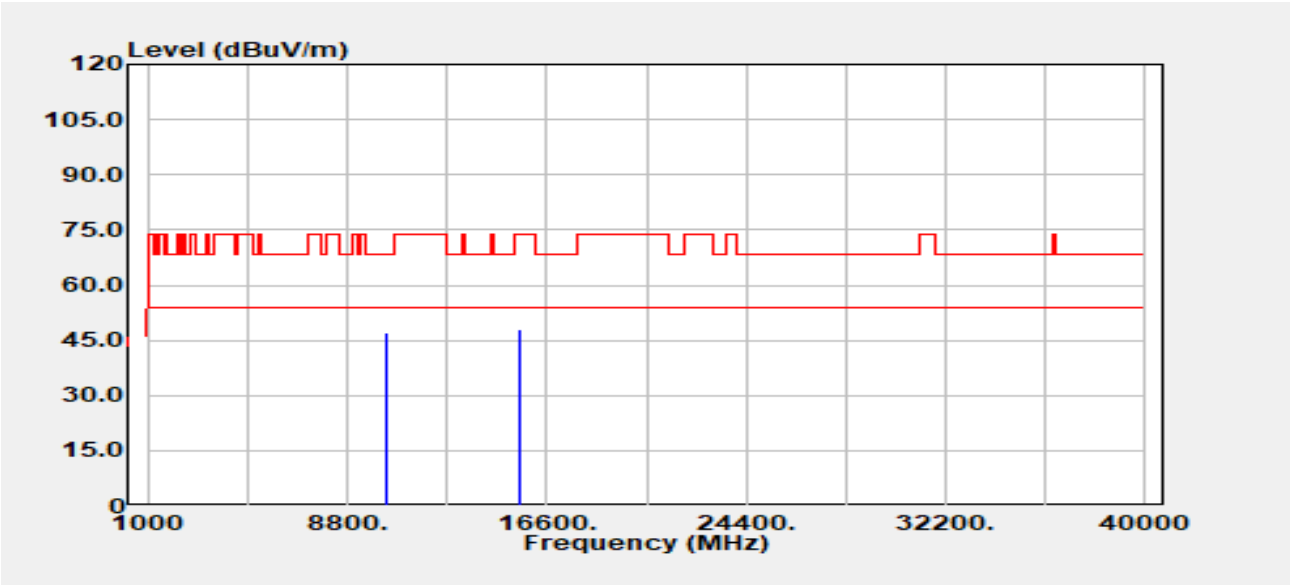


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	34.34	12.85	47.19	68.20	-21.01
15540.00	Peak	32.91	14.87	47.79	74.00	-26.21
15540.00	Average	25.00	14.87	39.87	54.00	-14.13



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 148 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_Ch0	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:15		

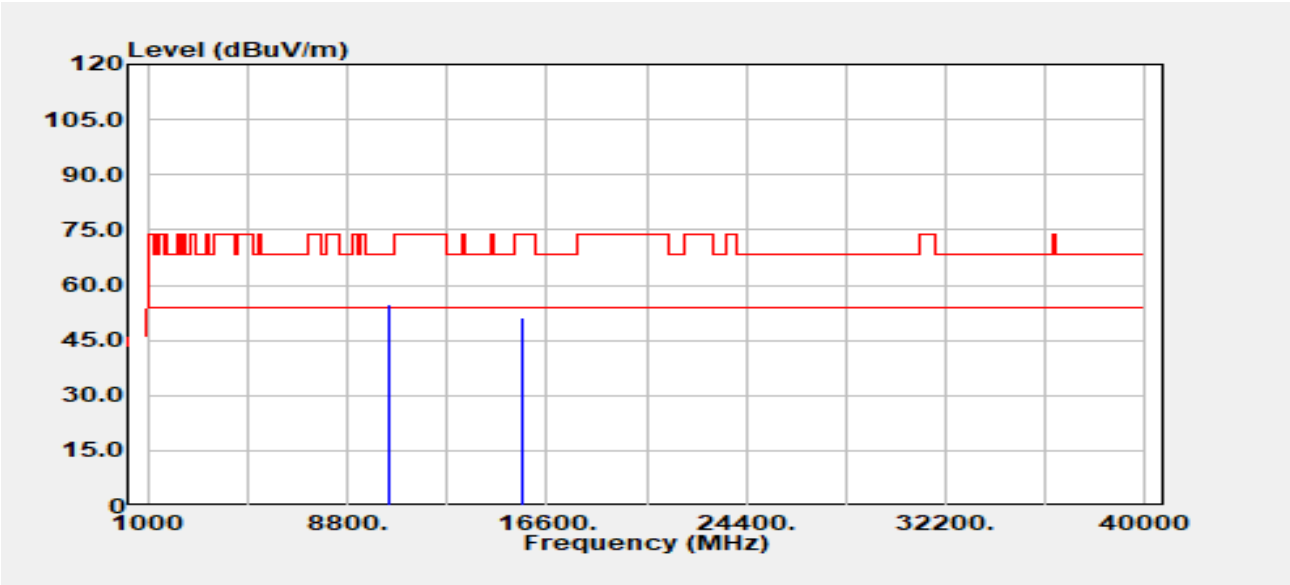


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	42.05	12.85	54.90	68.20	-13.30
15600.00	Peak	35.71	15.46	51.17	74.00	-22.83
15600.00	Average	25.57	15.46	41.03	54.00	-12.97



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 149 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_Ch0	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:15		

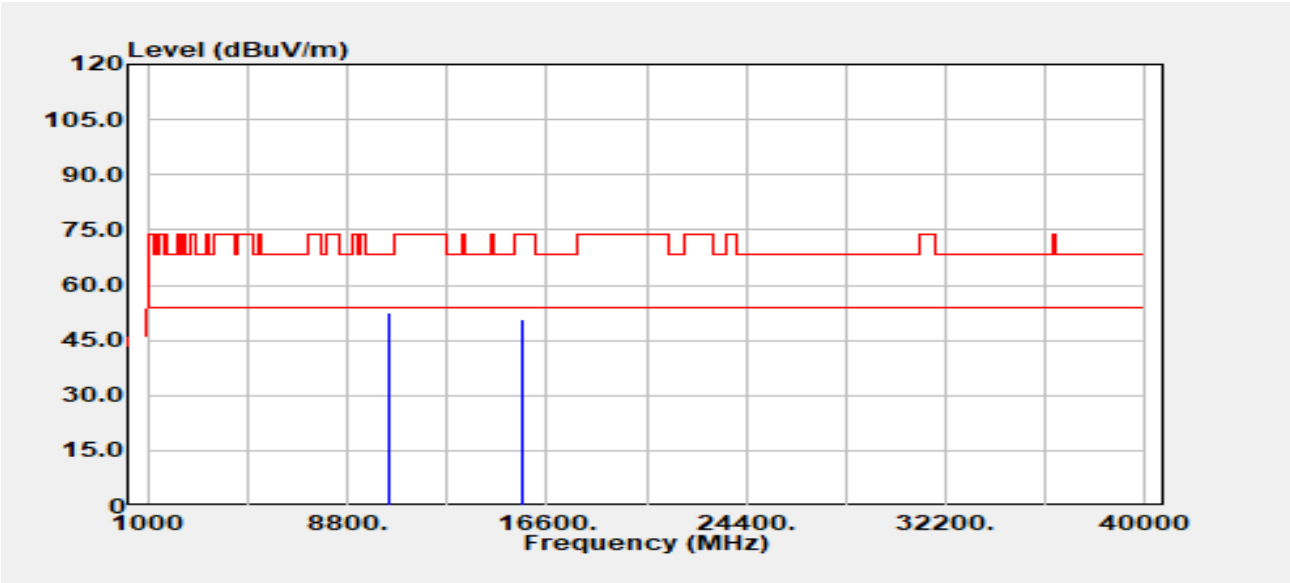


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	39.50	12.85	52.35	68.20	-15.85
15600.00	Peak	35.18	15.46	50.64	74.00	-23.36
15600.00	Average	25.63	15.46	41.09	54.00	-12.91



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 150 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_Ch0	Temp./Humi.	:23.9/62
Frequency	:5240 MHz	Antenna Pol.	:Vertical
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:14.5		

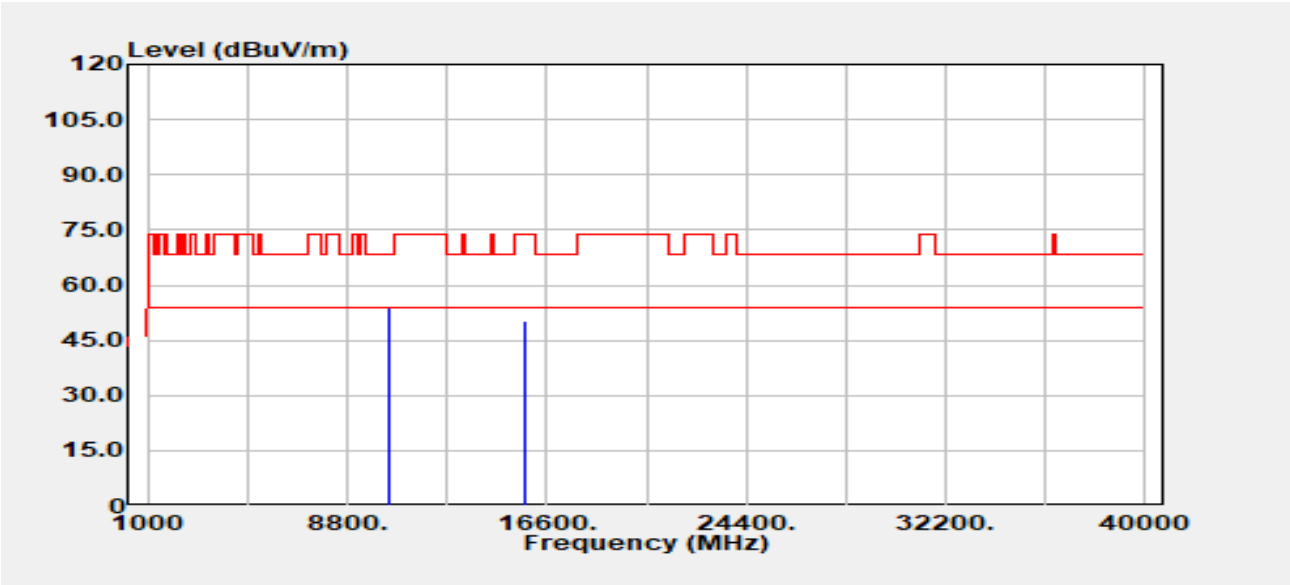


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	41.33	12.72	54.05	68.20	-14.15
15720.00	Peak	34.62	15.73	50.35	74.00	-23.65
15720.00	Average	25.67	15.73	41.39	54.00	-12.61

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 151 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band1_Ch0
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14.5

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966A

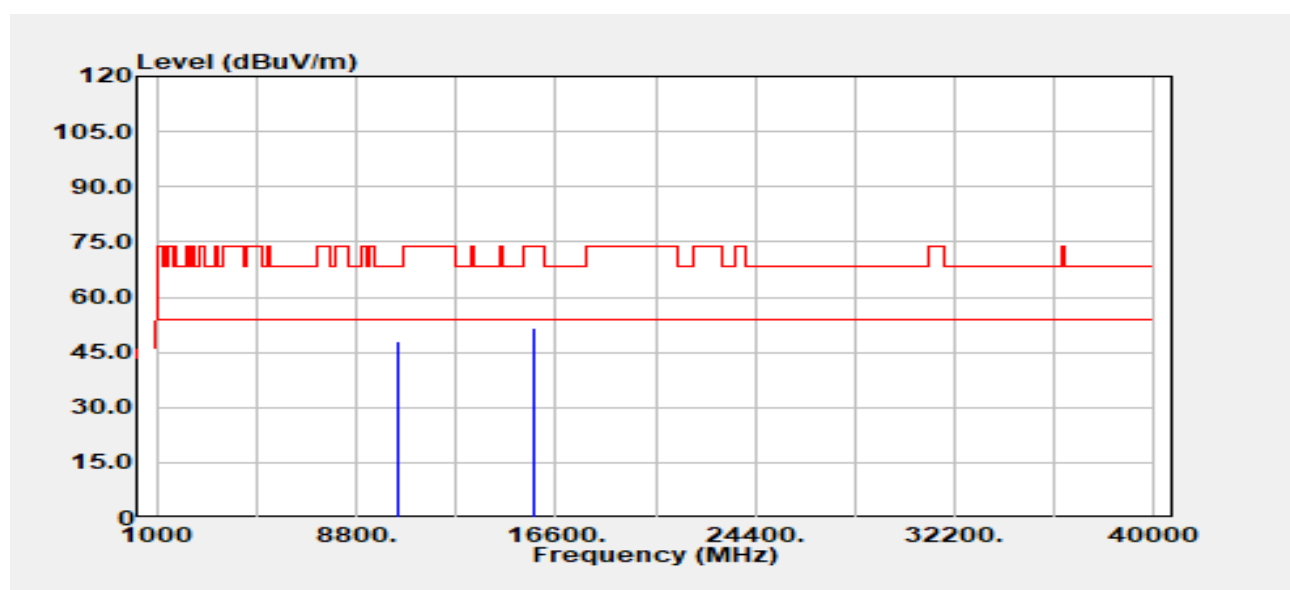


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10480.00	Peak	35.08	12.72	47.80	68.20	-20.40
15720.00	Peak	35.82	15.73	51.55	74.00	-22.45
15720.00	Average	25.73	15.73	41.46	54.00	-12.55



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 152 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_ch1	Temp./Humi.	:23.9/62
Frequency	:5180 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:15		

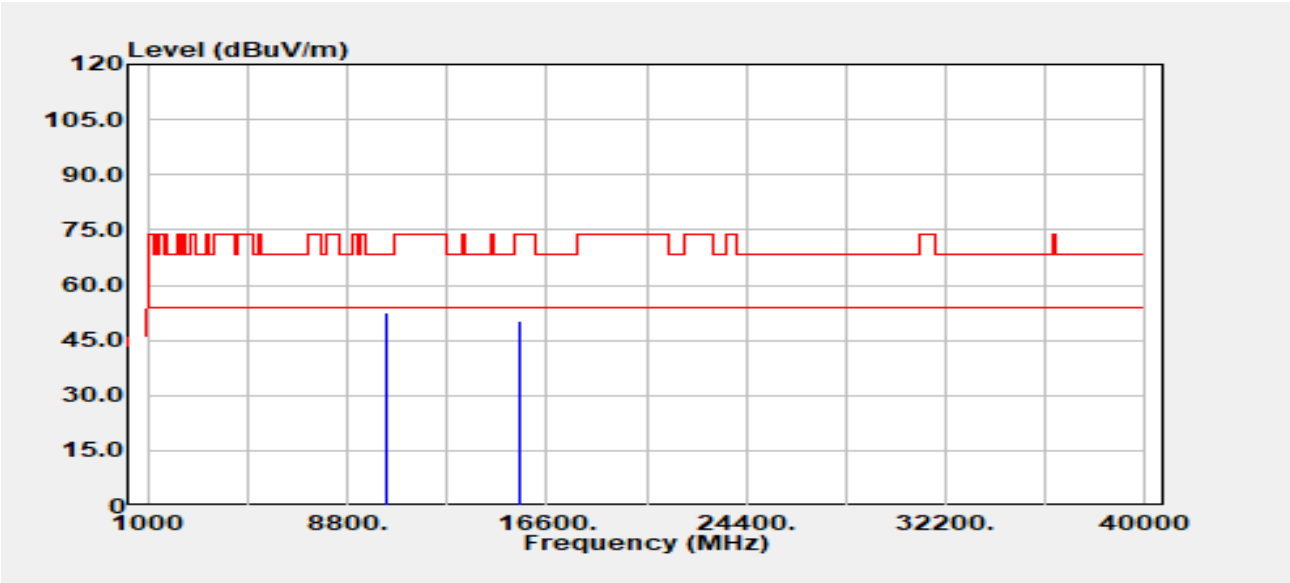


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	39.45	12.85	52.30	68.20	-15.90
15540.00	Peak	35.18	14.87	50.05	74.00	-23.95
15540.00	Average	26.14	14.87	41.01	54.00	-12.99

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 153 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band1_ch1
Frequency :5180 MHz
Operation Mode :TX
EUT Pol :E2
Setting :15

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966A

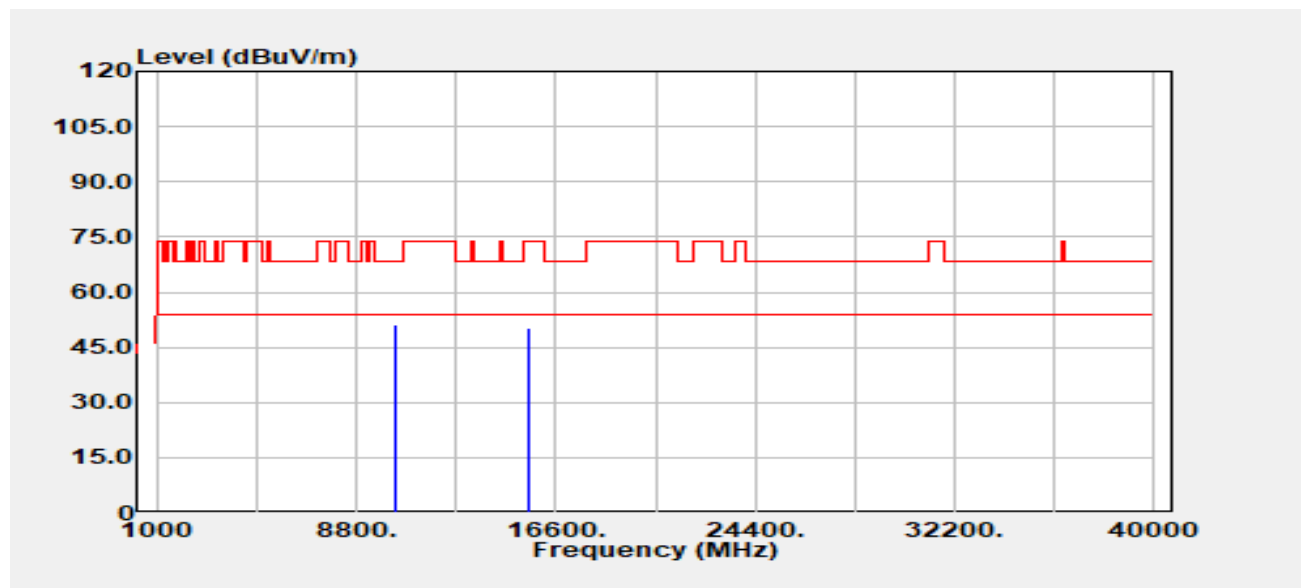


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	38.34	12.85	51.19	68.20	-17.01
15540.00	Peak	35.41	14.87	50.28	74.00	-23.72
15540.00	Average	26.01	14.87	40.89	54.00	-13.12

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 154 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11a/Band1_ch1
Frequency :5200 MHz
Operation Mode :TX
EUT Pol :E2
Setting :15

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966A

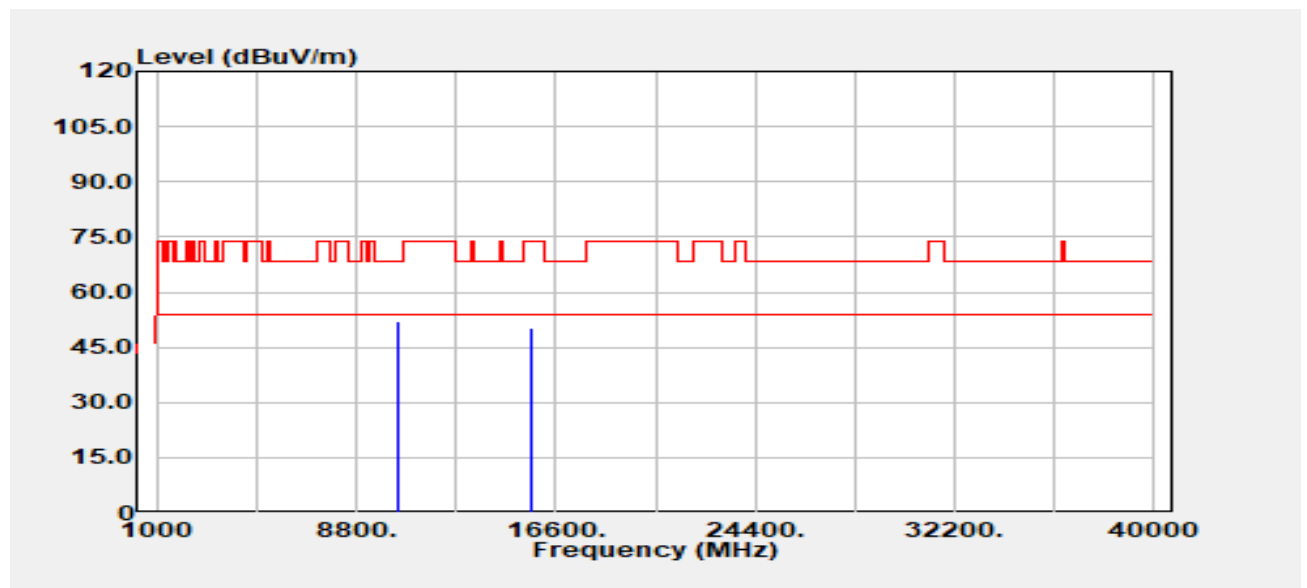


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	39.23	12.85	52.08	68.20	-16.12
15600.00	Peak	34.79	15.46	50.25	74.00	-23.75
15600.00	Average	26.31	15.46	41.77	54.00	-12.23



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 155 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_ch1	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:15		

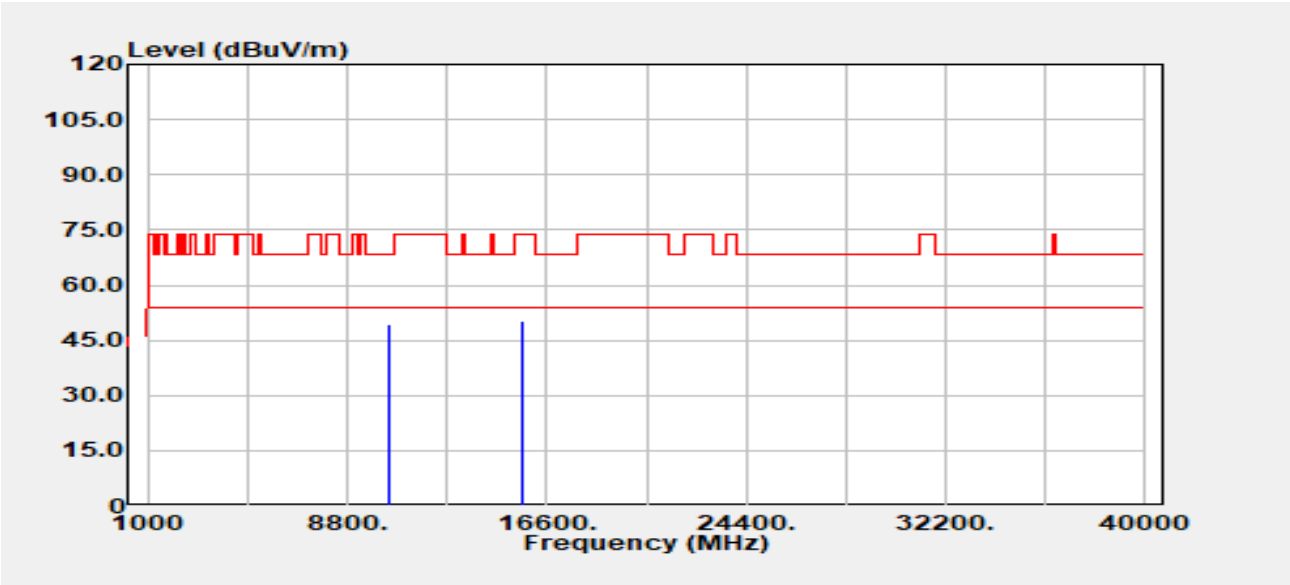


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	36.58	12.85	49.43	68.20	-18.77
15600.00	Peak	34.78	15.46	50.24	74.00	-23.76
15600.00	Average	26.21	15.46	41.67	54.00	-12.33



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 156 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_ch1	Temp./Humi.	:23.9/62
Frequency	:5240 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

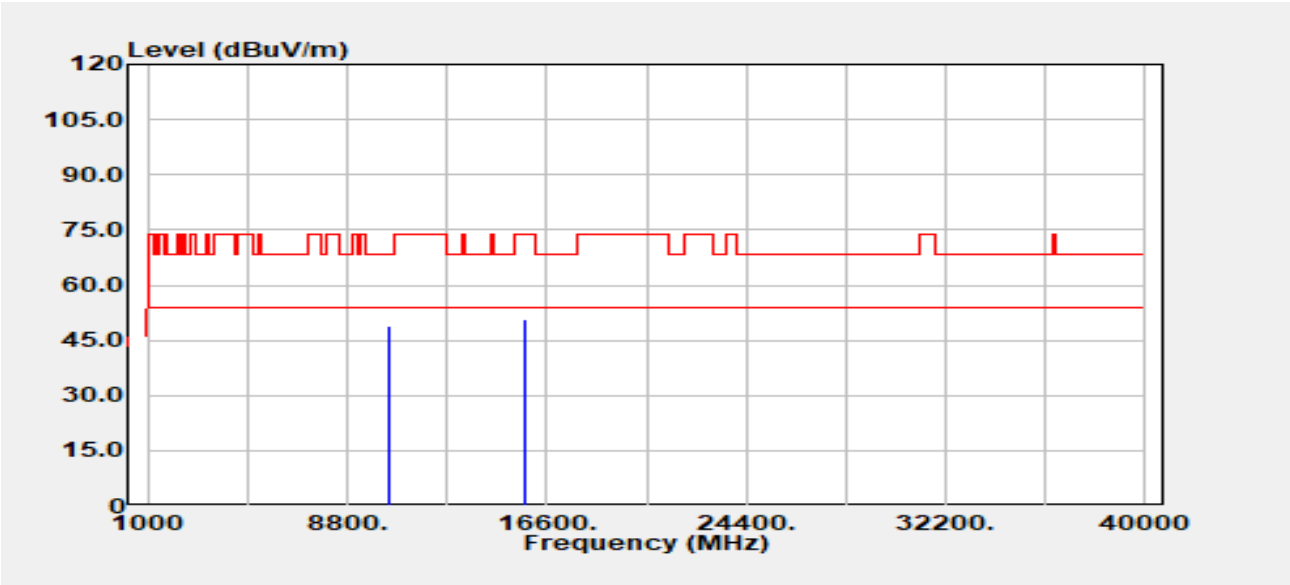


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	36.30	12.72	49.03	68.20	-19.17
15720.00	Peak	34.85	15.73	50.58	74.00	-23.42
15720.00	Average	25.91	15.73	41.64	54.00	-12.36



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 157 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11a/Band1_ch1	Temp./Humi.	:23.9/62
Frequency	:5240 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

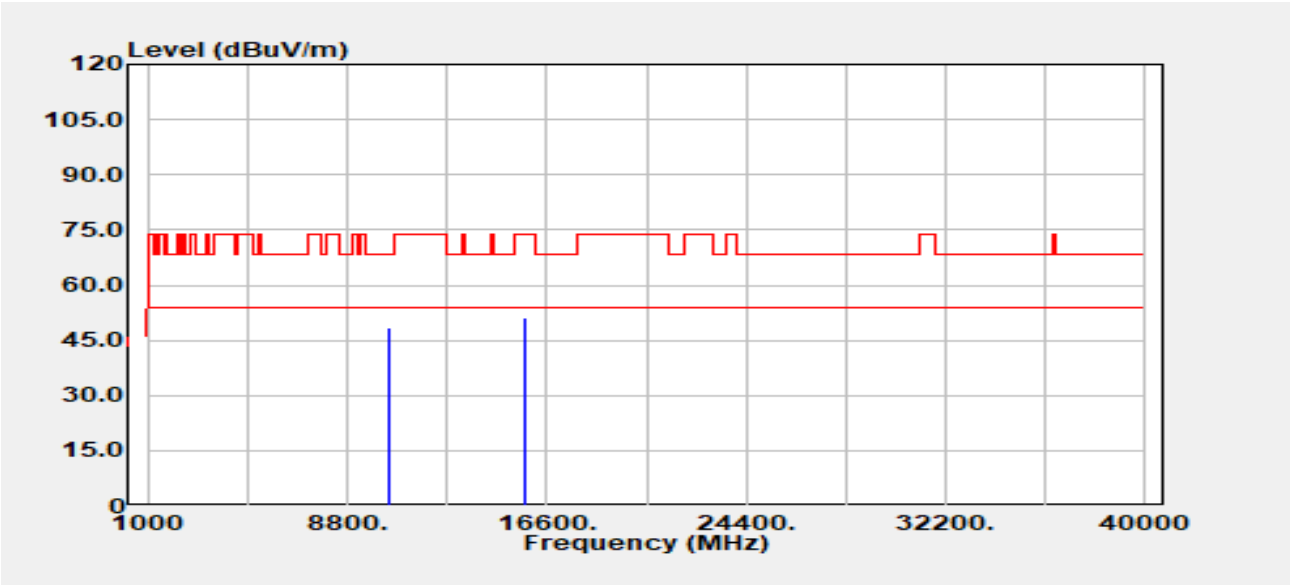


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	35.92	12.72	48.64	68.20	-19.56
15720.00	Peak	35.29	15.73	51.01	74.00	-22.99
15720.00	Average	25.88	15.73	41.60	54.00	-12.40



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 158 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n20/Band1	Temp./Humi.	:23.9/62
Frequency	:5180 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

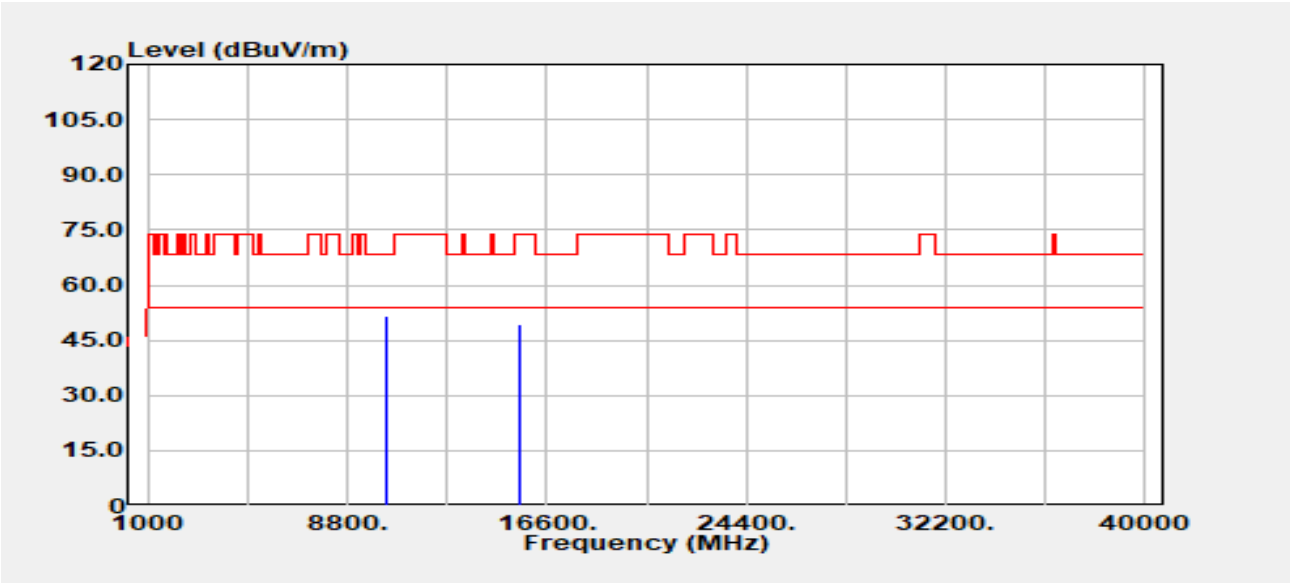


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	38.95	12.85	51.80	68.20	-16.40
15540.00	Peak	34.59	14.87	49.46	74.00	-24.54
15540.00	Average	25.04	14.87	39.91	54.00	-14.09



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 159 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n20/Band1	Temp./Humi.	:23.9/62
Frequency	:5180 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

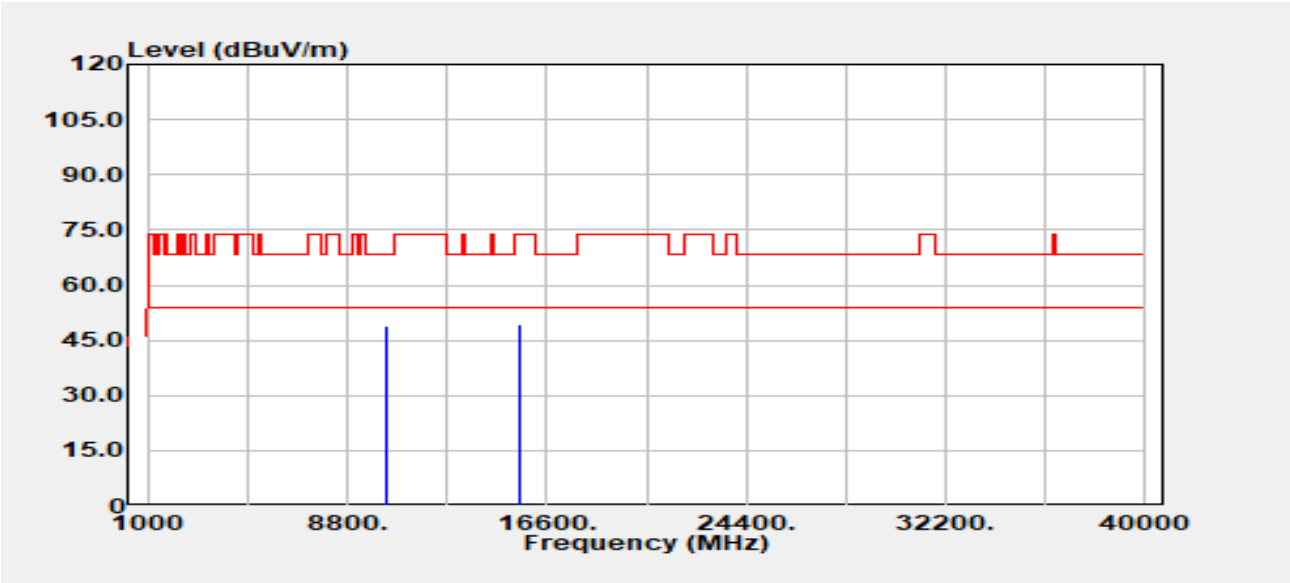


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10360.00	Peak	36.28	12.85	49.13	68.20	-19.07
15540.00	Peak	34.28	14.87	49.15	74.00	-24.85
15540.00	Average	24.89	14.87	39.76	54.00	-14.24



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 160 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n20/Band1	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

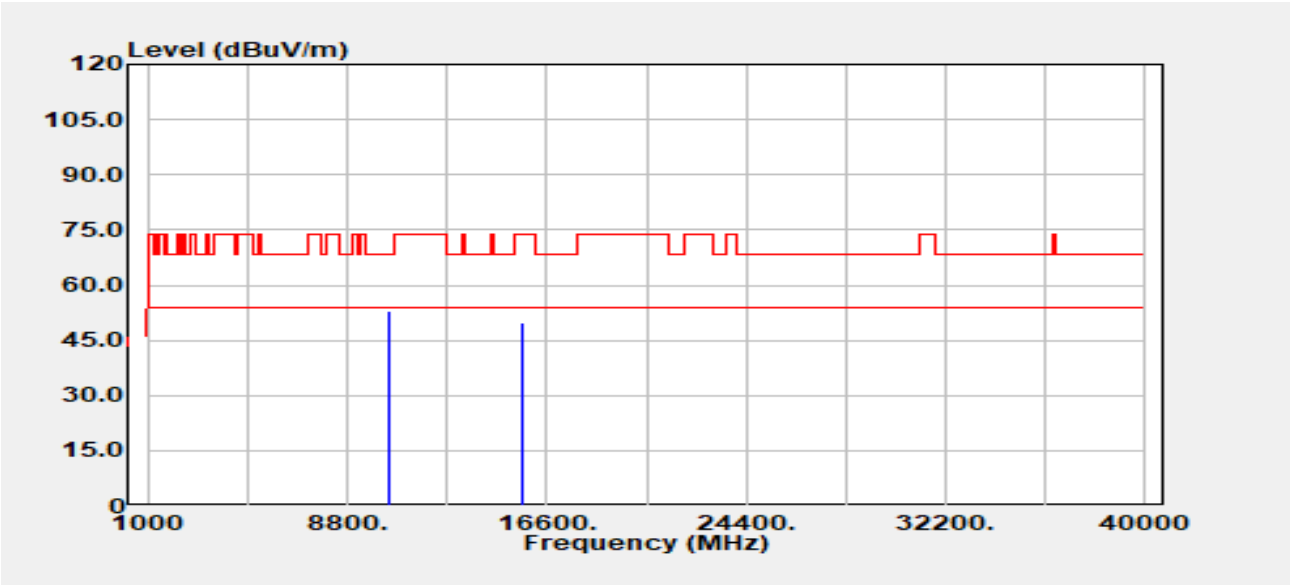


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	40.36	12.85	53.20	68.20	-15.00
15600.00	Peak	34.48	15.46	49.94	74.00	-24.06
15600.00	Average	25.43	15.46	40.89	54.00	-13.11



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 161 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n20/Band1	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13		

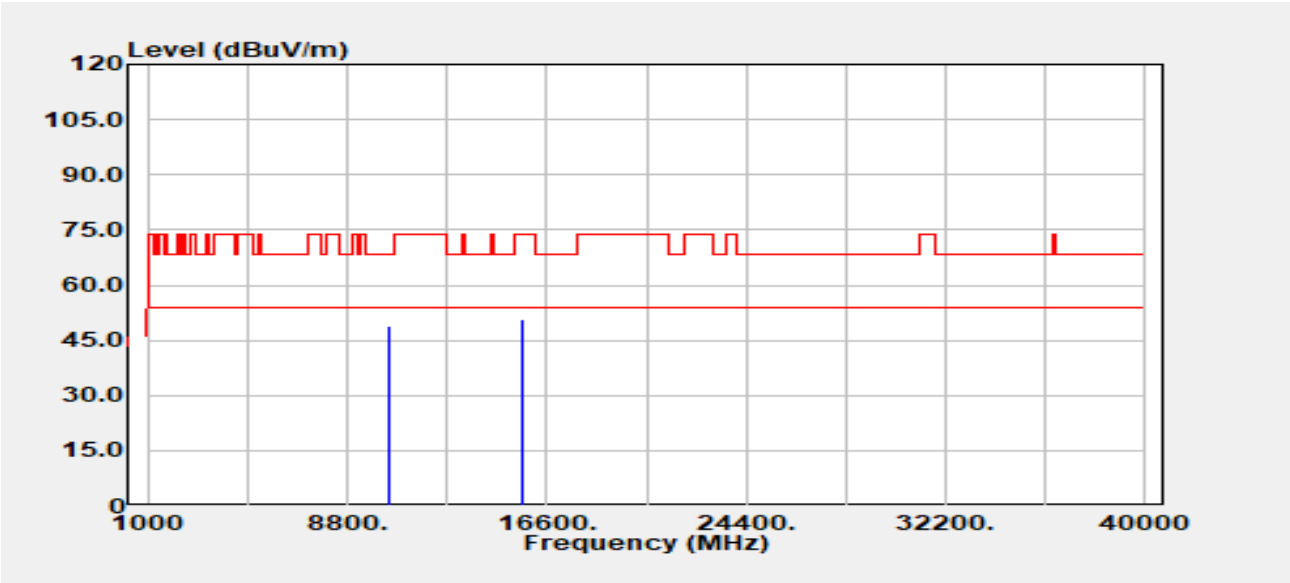


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10400.00	Peak	35.88	12.85	48.73	68.20	-19.47
15600.00	Peak	35.33	15.46	50.79	74.00	-23.21
15600.00	Average	25.43	15.46	40.89	54.00	-13.11

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 162 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n20/Band1
Frequency :5240 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966A

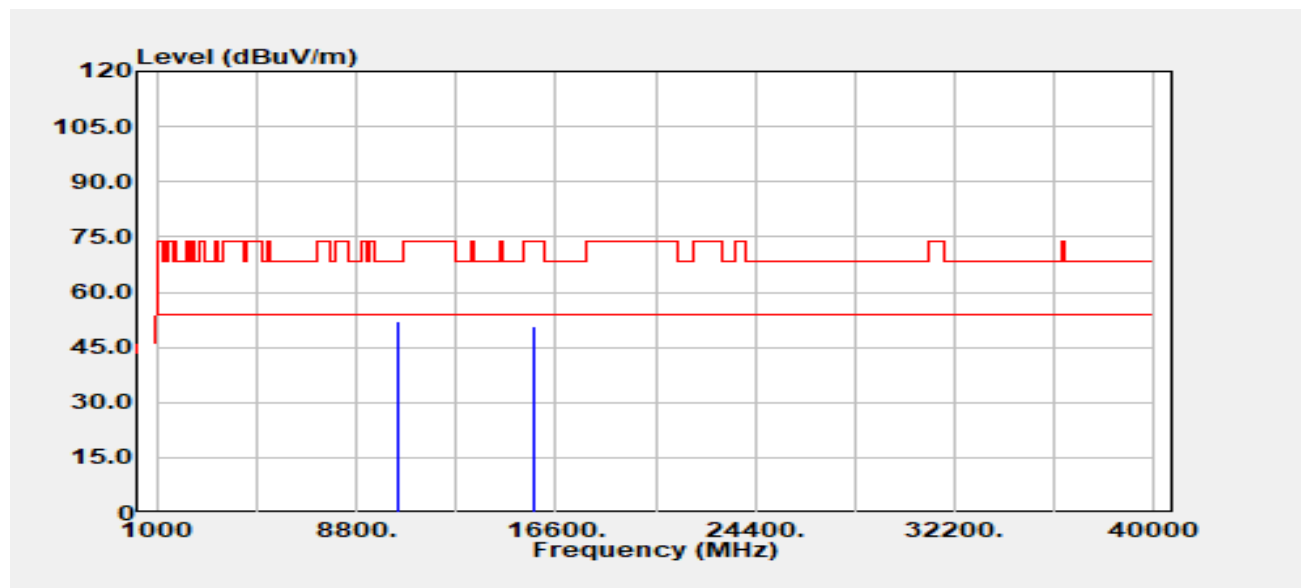


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	39.13	12.72	51.85	68.20	-16.35
15720.00	Peak	34.96	15.73	50.69	74.00	-23.31
15720.00	Average	25.51	15.73	41.24	54.00	-12.76



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 163 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n20/Band1	Temp./Humi.	:23.9/62
Frequency	:5240 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

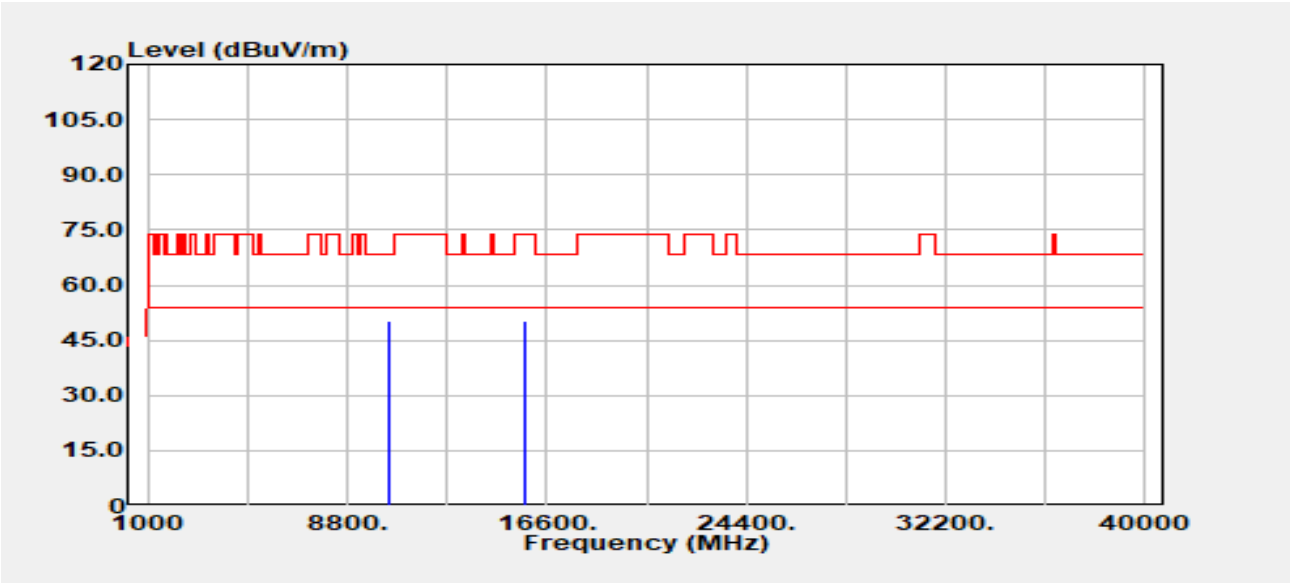


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	37.50	12.72	50.22	68.20	-17.98
15720.00	Peak	34.73	15.73	50.45	74.00	-23.55
15720.00	Average	25.68	15.73	41.41	54.00	-12.59

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 164 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966A

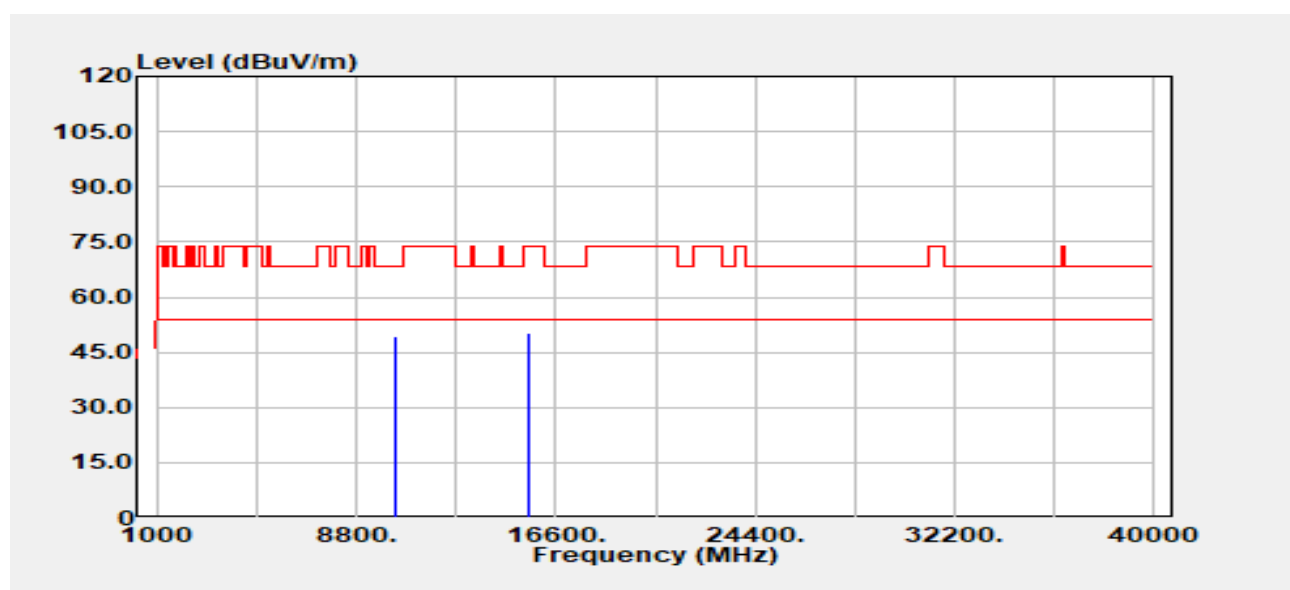


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	36.65	12.91	49.57	68.20	-18.63
15570.00	Peak	35.17	15.12	50.29	74.00	-23.71
15570.00	Average	25.59	15.12	40.71	54.00	-13.29



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 165 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n40/Band1	Temp./Humi.	:23.9/62
Frequency	:5190 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

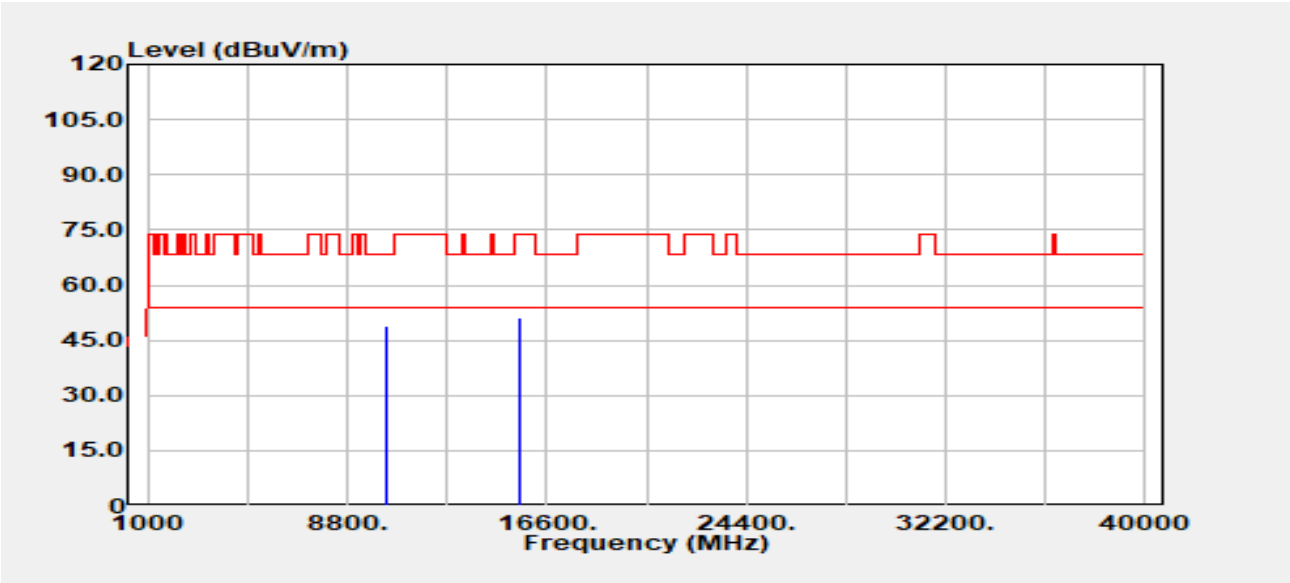


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	35.96	12.91	48.87	68.20	-19.33
15570.00	Peak	36.02	15.12	51.14	74.00	-22.86
15570.00	Average	24.69	15.12	39.81	54.00	-14.19

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 166 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11n40/Band1
Frequency :5230 MHz
Operation Mode :TX
EUT Pol :E2
Setting :12.5

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966A

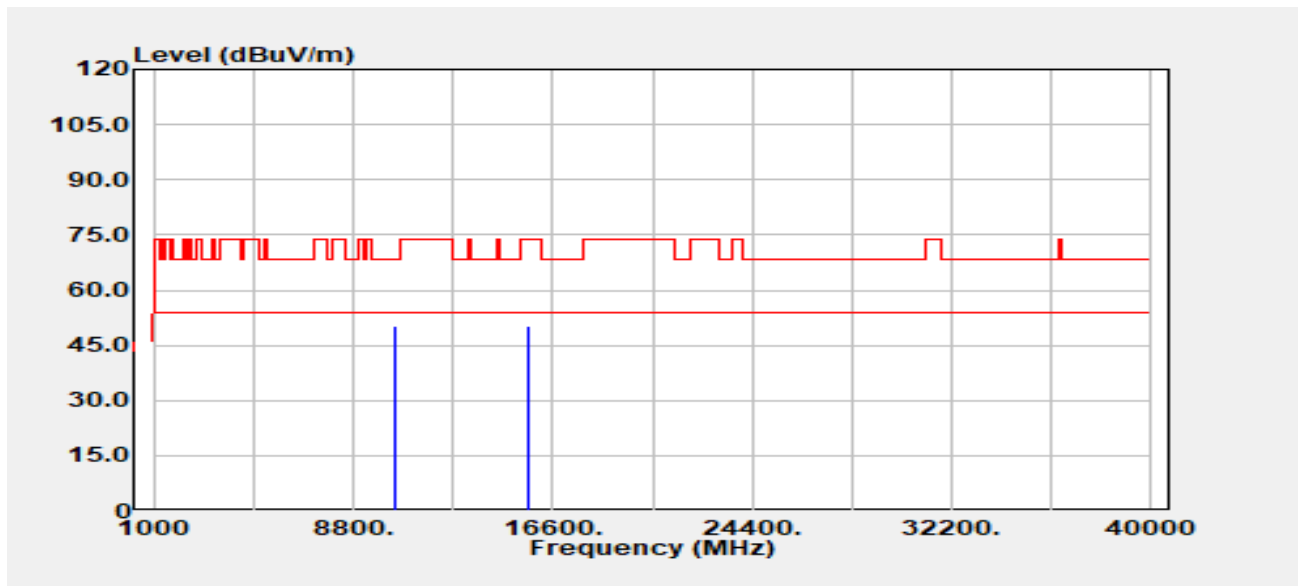


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10460.00	Peak	37.68	12.78	50.46	68.20	-17.74
15690.00	Peak	34.63	15.42	50.05	74.00	-23.95
15690.00	Average	25.33	15.42	40.74	54.00	-13.26



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 167 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11n40/Band1	Temp./Humi.	:23.9/62
Frequency	:5230 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

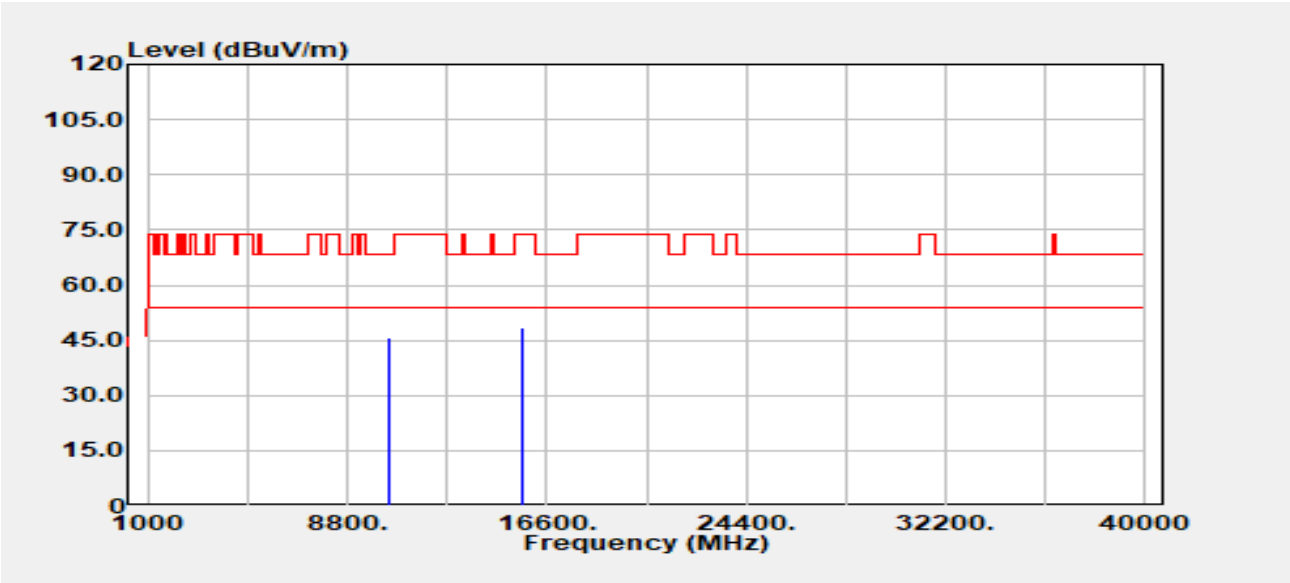


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	33.09	12.78	45.88	68.20	-22.32
15690.00	Peak	32.85	15.42	48.26	74.00	-25.74
15690.00	Average	25.44	15.42	40.86	54.00	-13.14



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 168 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ac80/Band1	Temp./Humi.	:23.9/62
Frequency	:5210 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

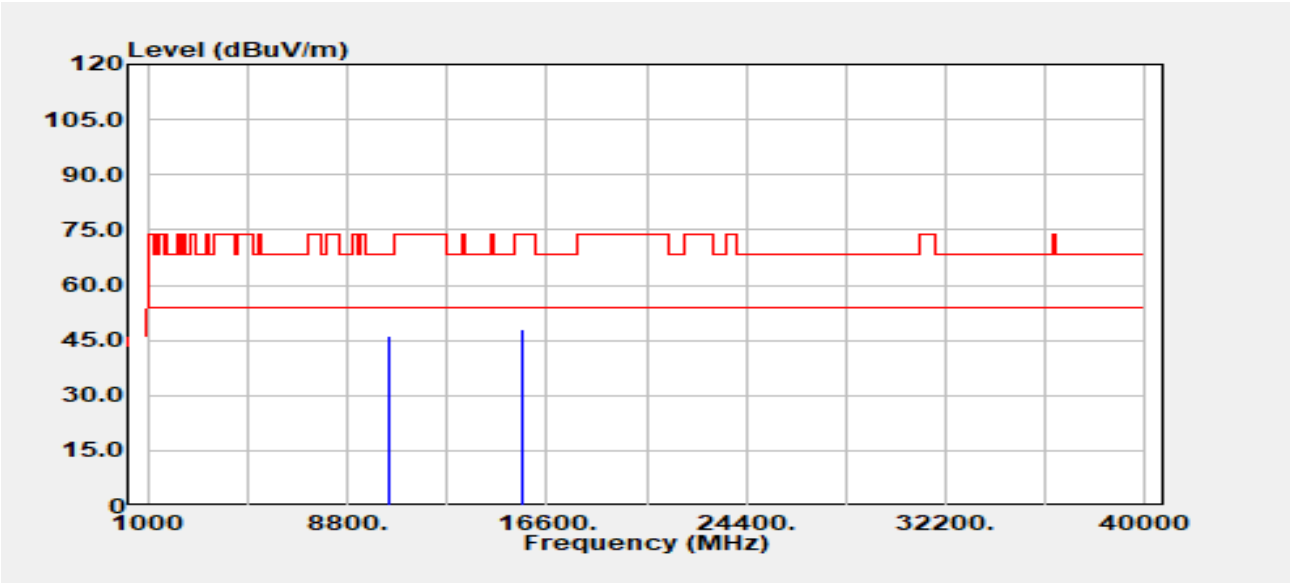


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10420.00	Peak	33.14	12.91	46.05	68.20	-22.15
15630.00	Peak	32.37	15.41	47.78	74.00	-26.22
15630.00	Average	25.14	15.41	40.56	54.00	-13.44



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 169 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ac80/Band1	Temp./Humi.	:23.9/62
Frequency	:5210 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

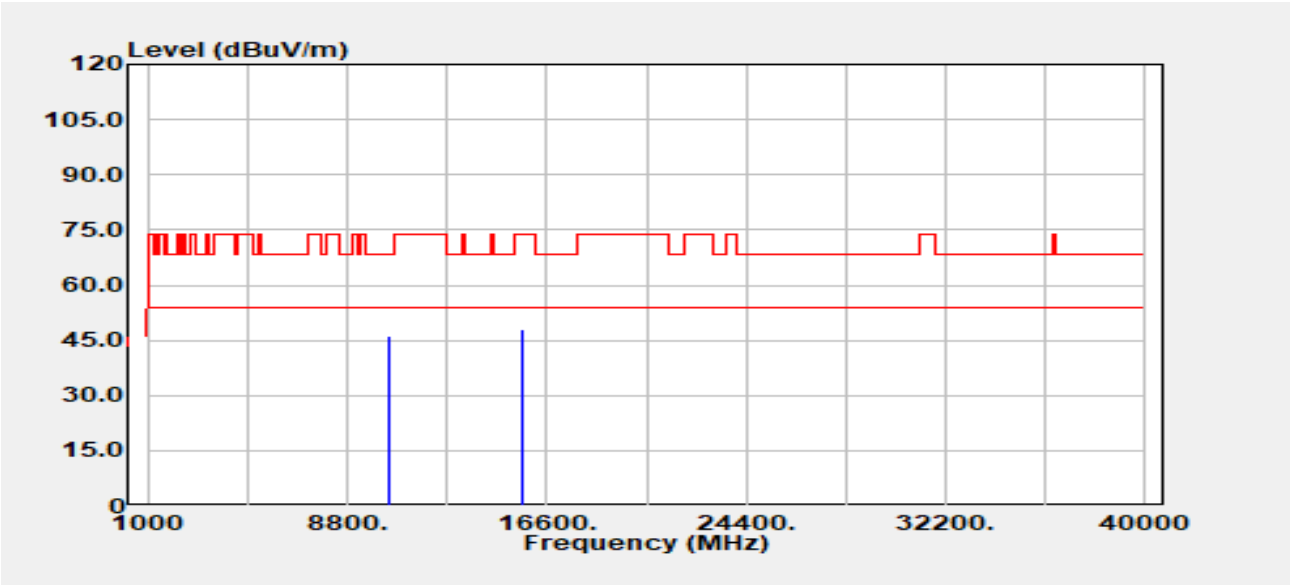


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10420.00	Peak	33.29	12.91	46.20	68.20	-22.00
15630.00	Peak	32.39	15.41	47.80	74.00	-26.20
15630.00	Average	25.14	15.41	40.55	54.00	-13.45



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 170 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax20/Band1	Temp./Humi.	:23.9/62
Frequency	:5180 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

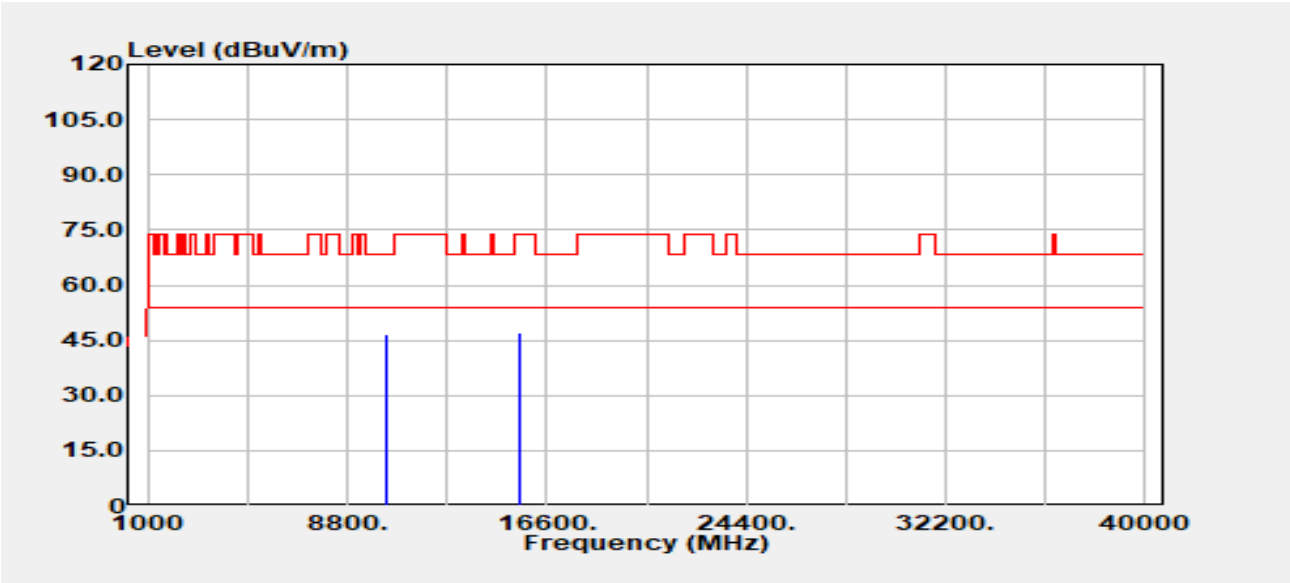


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	33.64	12.85	46.49	68.20	-21.71
15540.00	Peak	32.38	14.87	47.25	74.00	-26.75
15540.00	Average	24.67	14.87	39.55	54.00	-14.45



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 171 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax20/Band1	Temp./Humi.	:23.9/62
Frequency	:5180 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:12.5		

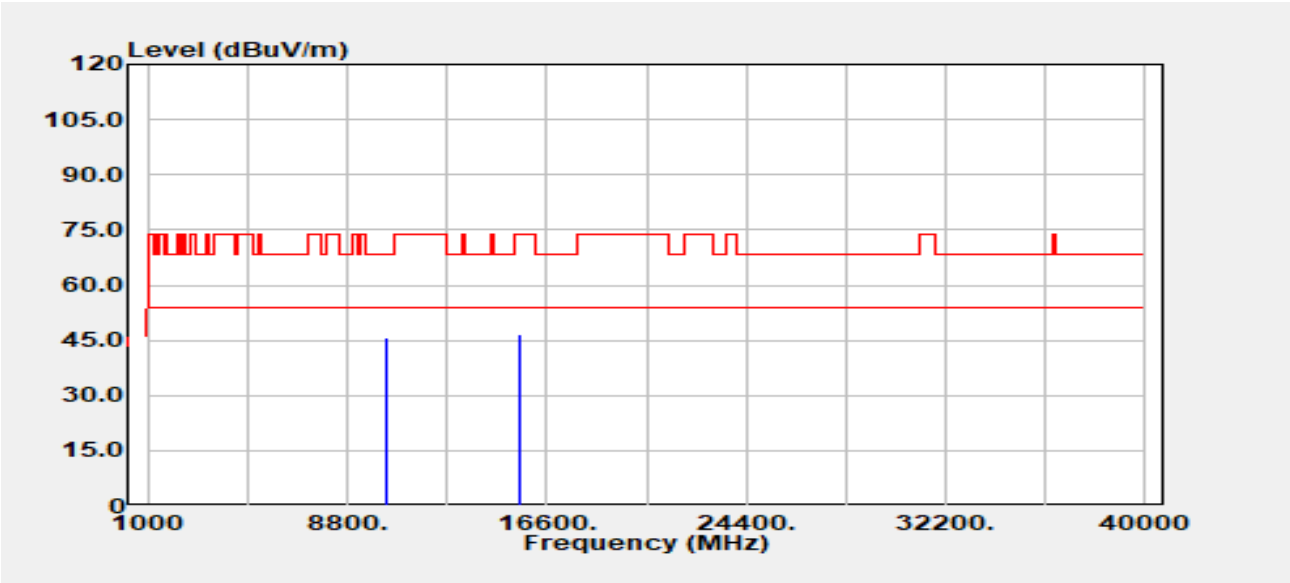


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10360.00	Peak	33.06	12.85	45.91	68.20	-22.29
15540.00	Peak	31.85	14.87	46.72	74.00	-27.28
15540.00	Average	24.85	14.87	39.72	54.00	-14.28



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 172 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax20/Band1	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

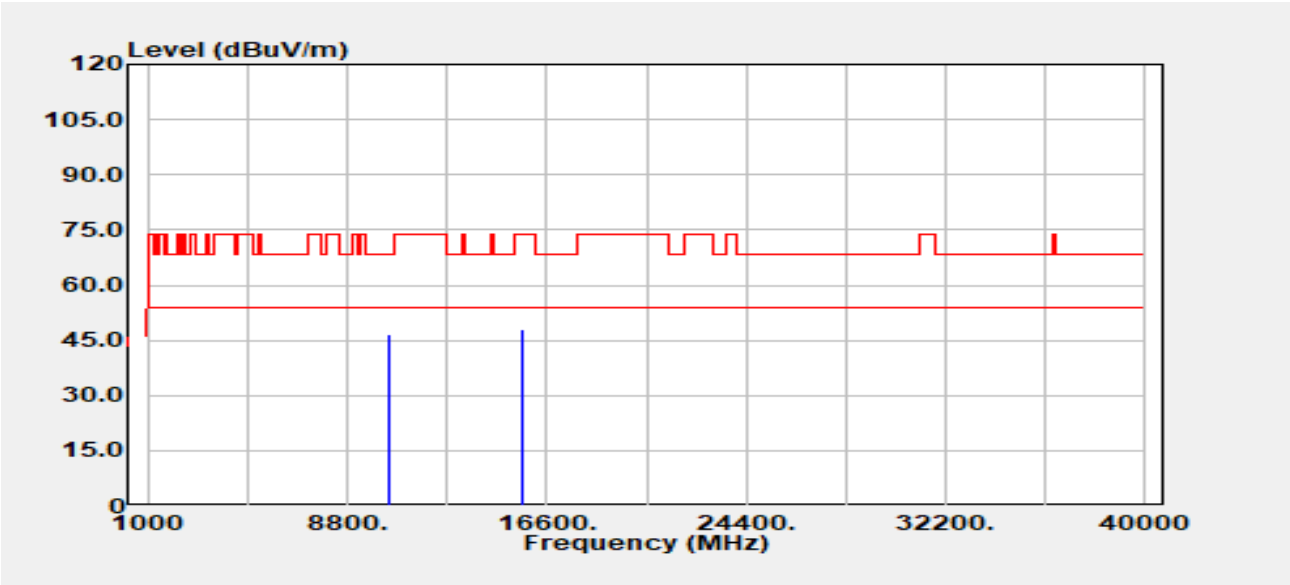


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	33.76	12.85	46.61	68.20	-21.59
15600.00	Peak	32.34	15.46	47.80	74.00	-26.20
15600.00	Average	25.42	15.46	40.88	54.00	-13.12



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 173 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax20/Band1	Temp./Humi.	:23.9/62
Frequency	:5200 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

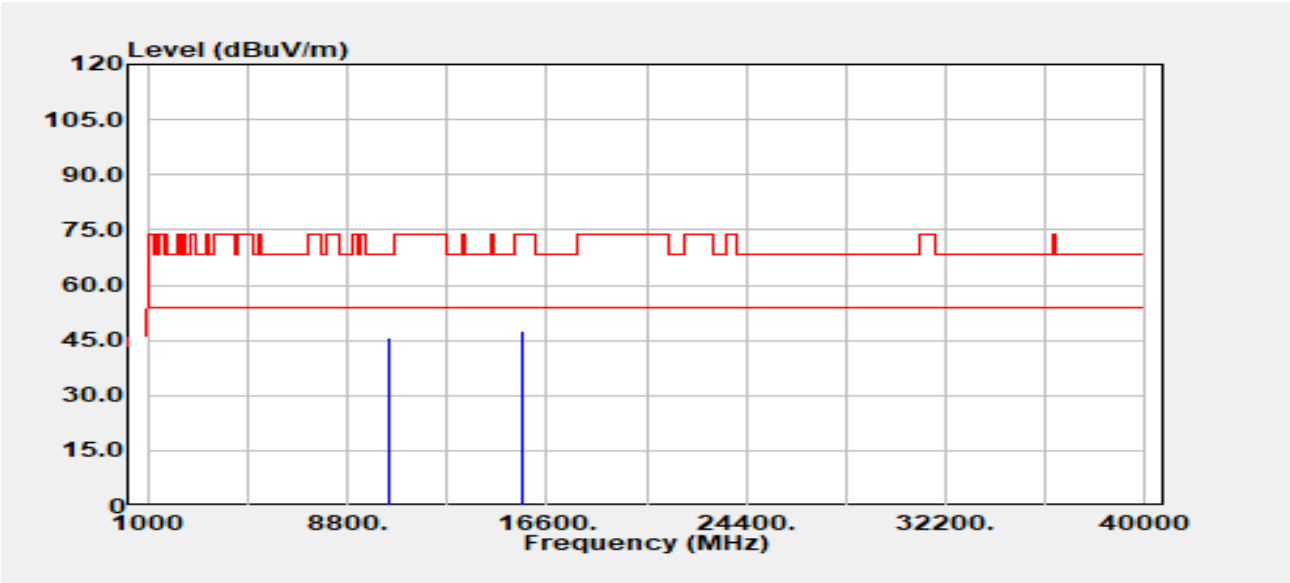


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10400.00	Peak	33.04	12.85	45.88	68.20	-22.32
15600.00	Peak	32.17	15.46	47.63	74.00	-26.37
15600.00	Average	25.25	15.46	40.71	54.00	-13.29



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 174 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax20/Band1	Temp./Humi.	:23.9/62
Frequency	:5240 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

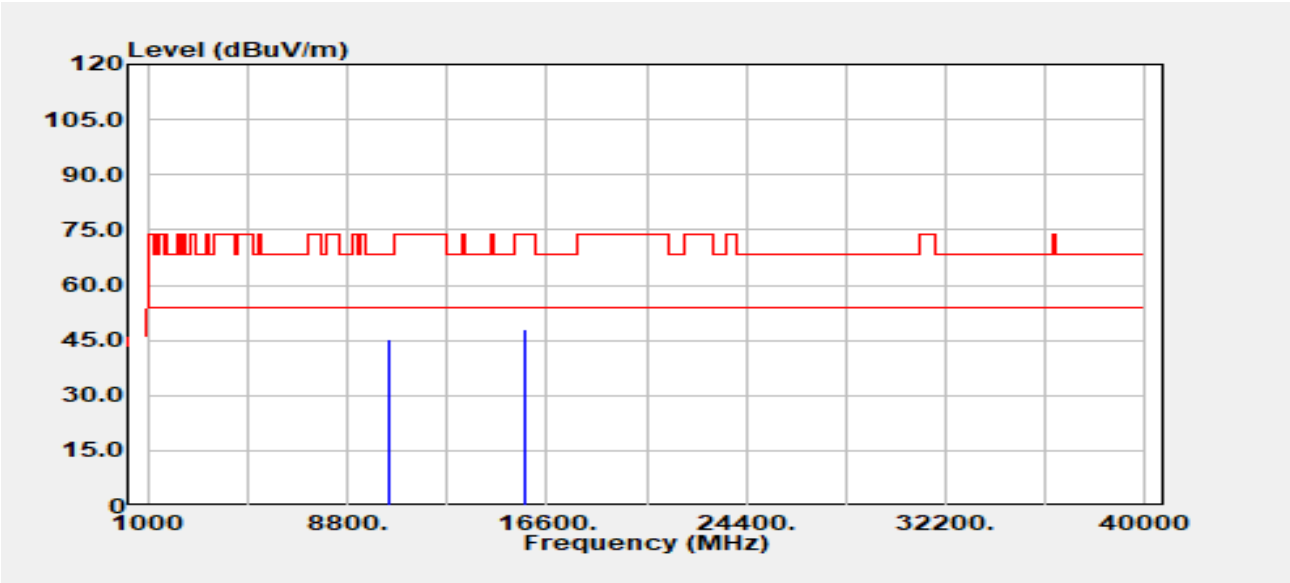


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	32.58	12.72	45.30	68.20	-22.90
15720.00	Peak	32.18	15.73	47.91	74.00	-26.09
15720.00	Average	25.51	15.73	41.24	54.00	-12.76



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 175 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax20/Band1	Temp./Humi.	:23.9/62
Frequency	:5240 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:13.5		

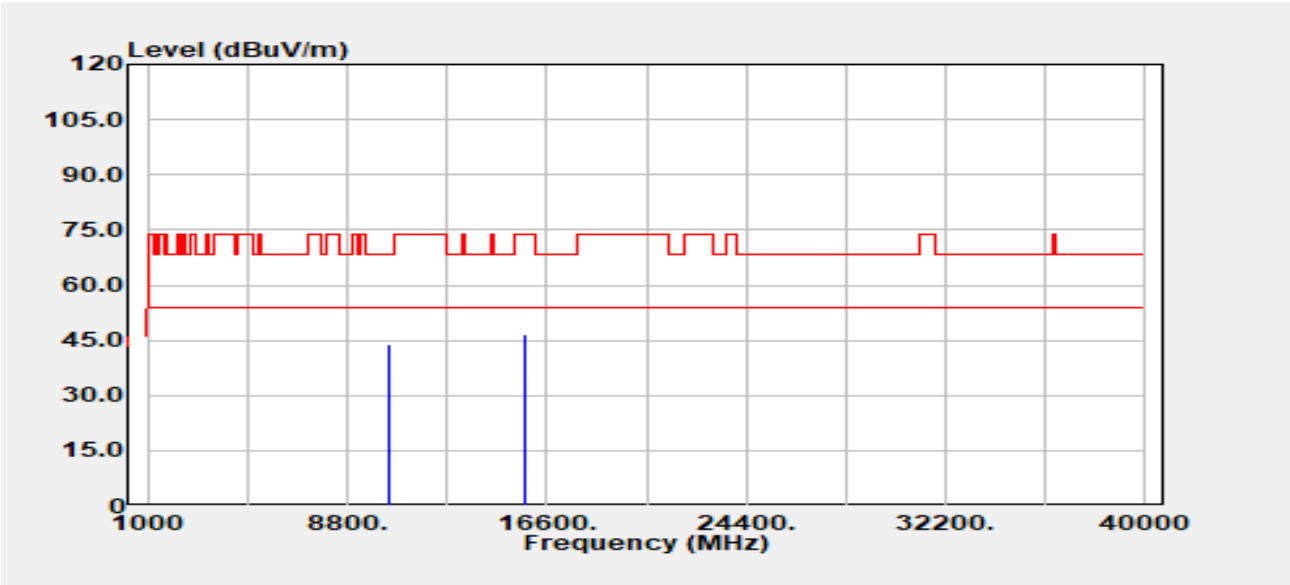


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10480.00	Peak	31.26	12.72	43.98	68.20	-24.22
15720.00	Peak	30.79	15.73	46.52	74.00	-27.48
15720.00	Average	25.76	15.73	41.49	54.00	-12.51

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 176 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :VERTICAL
Engineer :Czerny Lin
Test Chamber : 966A

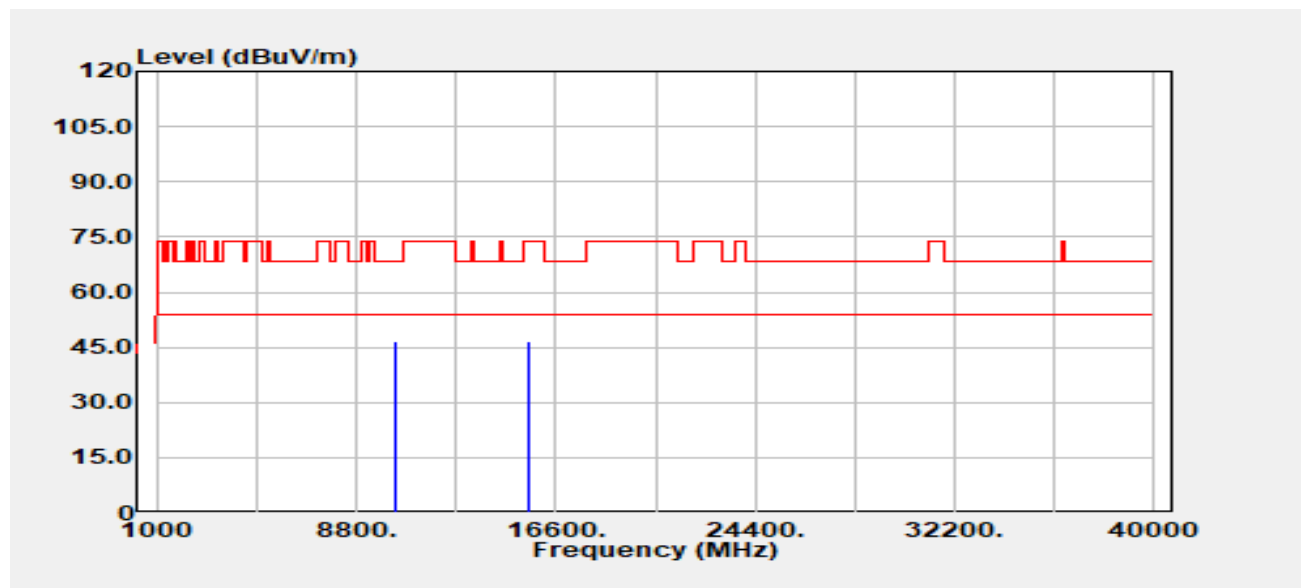


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10380.00	Peak	33.79	12.91	46.70	68.20	-21.50
15570.00	Peak	31.63	15.12	46.75	74.00	-27.25
15570.00	Average	24.91	15.12	40.02	54.00	-13.98

Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 177 / 299
Rev. 01

Project No :TM-2403000388P
Operation Band :802.11ax40/Band1
Frequency :5190 MHz
Operation Mode :TX
EUT Pol :E2
Setting :14

Test Date :2024-06-07
Temp./Humi. :23.9/62
Antenna Pol. :HORIZONTAL
Engineer :Czerny Lin
Test Chamber : 966A

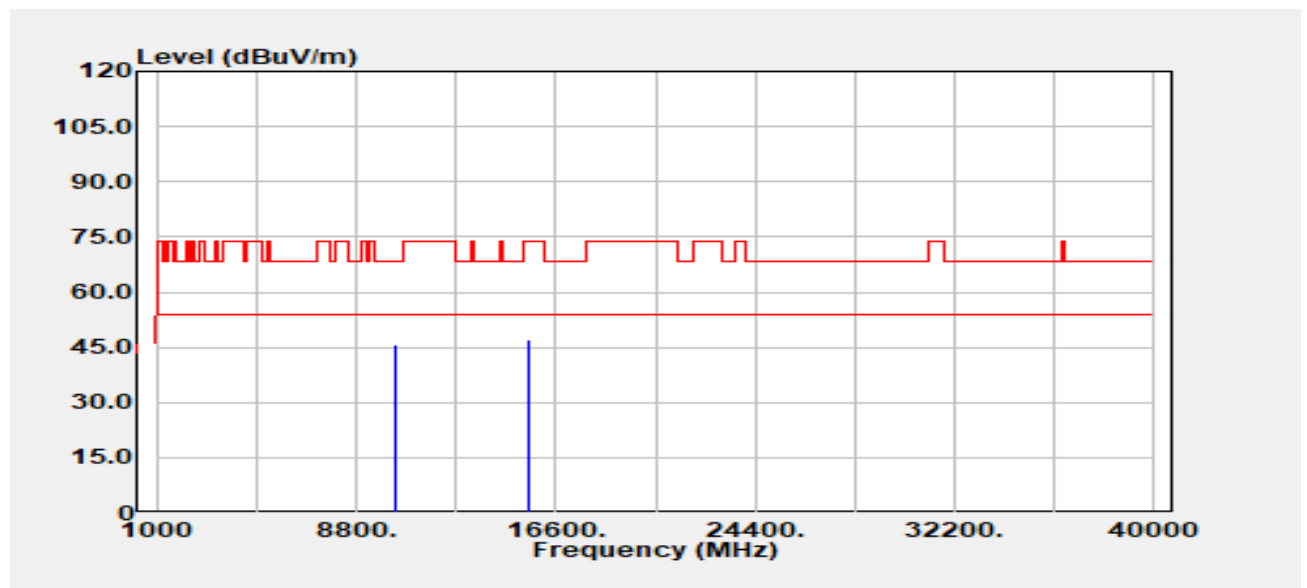


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBUV	Factor dB	Actual FS dBUV/m	Limit dBUV/m	Margin dB
10380.00	Peak	32.75	12.91	45.67	68.20	-22.53
15570.00	Peak	32.00	15.12	47.12	74.00	-26.88
15570.00	Average	25.03	15.12	40.15	54.00	-13.85



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 178 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax40/Band1	Temp./Humi.	:23.9/62
Frequency	:5230 MHz	Antenna Pol.	:VERTICAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:14.5		

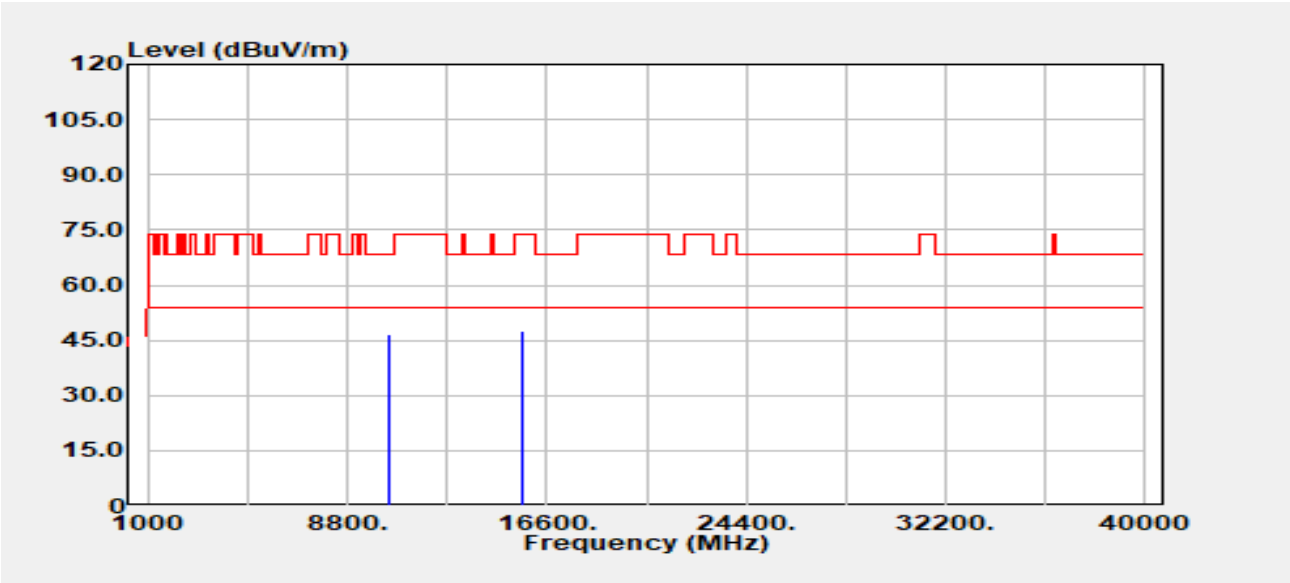


Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	33.90	12.78	46.68	68.20	-21.52
15690.00	Peak	32.06	15.42	47.48	74.00	-26.52
15690.00	Average	25.60	15.42	41.01	54.00	-12.99



Project No: TM-2403000388P
Report No.: TMWK2403000828KR

Page 179 / 299
Rev. 01

Project No	:TM-2403000388P	Test Date	:2024-06-07
Operation Band	:802.11ax40/Band1	Temp./Humi.	:23.9/62
Frequency	:5230 MHz	Antenna Pol.	:HORIZONTAL
Operation Mode	:TX	Engineer	:Czerny Lin
EUT Pol	:E2	Test Chamber	: 966A
Setting	:14.5		

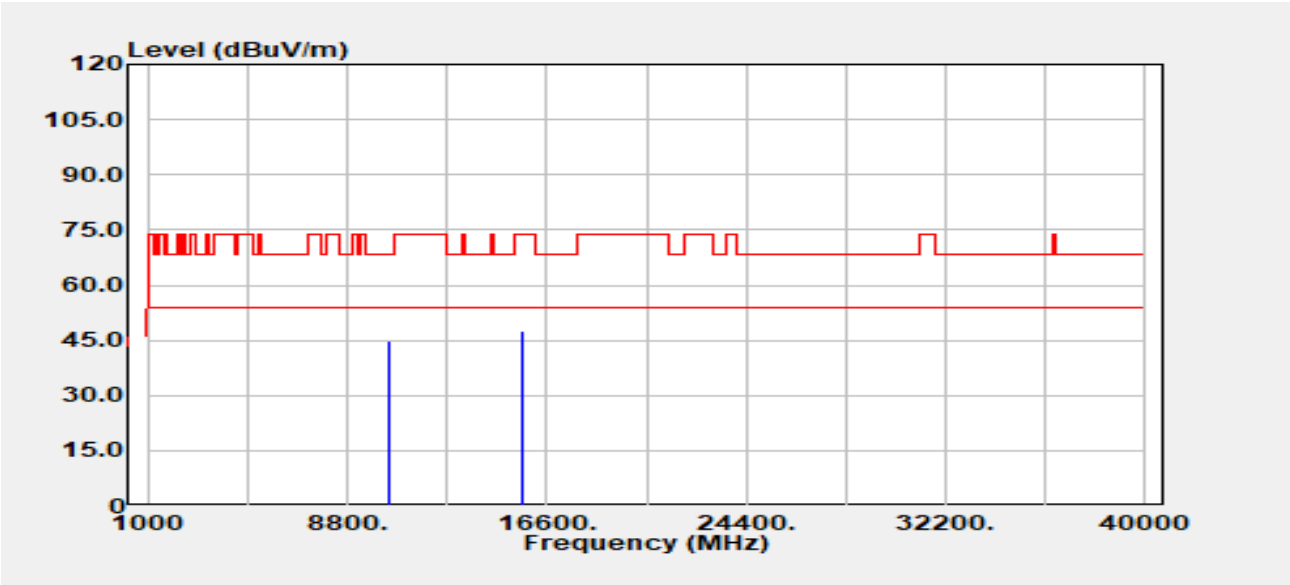

Freq. MHz	Detector Mode PK/QP/AV	Spectrum Read Level dBμV	Factor dB	Actual FS dBμV/m	Limit dBμV/m	Margin dB
10460.00	Peak	32.23	12.78	45.02	68.20	-23.18
15690.00	Peak	32.00	15.42	47.42	74.00	-26.58
15690.00	Average	25.74	15.42	41.16	54.00	-12.84