



Test Report No.:
FCC2025-0007-RF2

TEST REPORT

FCC ID : 2BG9T-TCLSMARTD2B
Applicant : Shenzhen TCL Smart Home Technology Co., Ltd
Product Name : TCL D2 Series Smart Door Lock
Model No. : D2 Pro,D2X Pro,D2XX Pro,D2 Pro X

CVC Testing Technology Co., Ltd.

Product Name	TCL D2 Series Smart Door Lock	Trade Mark	TCL
Type/Model	D2 Pro,D2X Pro,D2XX Pro,D2 Pro X	Sample Status	/
Applicant	Shenzhen TCL Smart Home Technology Co., Ltd		
Applicant Address	7/F,TCL G1 Building. TCL International E City, No.1001 Zhongshan Yuan Road, Nanshan		
Manufacturer	Shenzhen TCL Smart Home Technology Co., Ltd		
Manufacturer Address	7/F,TCL G1 Building. TCL International E City, No.1001 Zhongshan Yuan Road, Nanshan		
Factory	Guangdong Yongding Technology Co., Ltd		
Factory Address	No.10 Chenglong Road, Qianlong Village, Sanxiang Town, Zhongshan City, Guangdong Province		
Sample Identification	1-1	Test Item	See page 9
Tested According To	FCC CFR47 Part 15C Radio Frequency Devices ANSI C63.10-2020/Cor1-2023		
Receiving Date	2025-03-25	Completing Date	2025-04-26
Test conclusion	The equipment under test was found to comply with the requirements of the standards applied. Final Verdict: Pass. Seal of CVC Date of issue: 2025-05-13		
Abbreviations: / Pass= passed Fail = failed N/A= not applicable			
This test report relates only to the EUT, and shall not be reproduced except in full, without written approval of CVC.			

Approved by:

Chen Huawen



Reviewed by:

Xu Zhenfei



Tested by:

Lu Weiji



TABLE OF CONTENTS

RELEASE CONTROL RECORD 4

1. GENERAL PRODUCT INFORMATION 5

 1.1 GENERAL INFORMATION 5

2. TEST SITES 7

 2.1 TEST FACILITIES 7

 2.2 DESCRIPTION OF NON-STANDARD METHOD AND DEVIATIONS 7

 2.3 LIST OF TEST AND MEASUREMENT INSTRUMENTS 7

3. TEST CONFIGURATION 8

 3.1 TEST MODE 8

 3.2 DUTY CYCLE 9

4. SUMMARY OF MEASUREMENT RESULTS 10

5. MEASUREMENT PROCEDURE 11

 5.1 CONDUCTED EMISSION 11

 5.2 RADIATED EMISSION 15

 5.3 20dB BANDWIDTH MEASUREMENT 26

6. APPENDIX A 29

RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
FCC2025-0007-RF2	Original release	May.13,2025

1. General Product Information

1.1 General information

Product Name	TCL D2 Series Smart Door Lock	
Model No.	D2 Pro	
Additional model	D2X Pro,D2XX Pro,D2 Pro X	
Power Supply	Rated voltage	DC 5.0V
	Battery voltage	DC 3.6V
Serial Number(SN)	/	
Hardware Version	V1.1	
Software Version	V7.1	
Antenna Type	Internal Antenna	
Antenna Gain	2.0 dBi (provided by client)	
Beamforming gain	Unsupported (provided by client)	
Frequency Range	5800~5840MHz	
Channel Number	41 Channels	
Type of Modulation	Unmodulation	
Max. Conducted Power	-14.16dBm	
Operate Temp. Range	-20°C~+70°C	

Note:

1. The information of the EUT is declared by the manufacturer.
2. The laboratory is not responsible for the product technical specification provided by the client.
3. EUT photo refer to report (Report NO.:FCC2025-0007-EUT).
4. The EUT have SISO function, provides 1 completed transmitter and 1 receiver.
5. All the models are electrical identical including the same software parameter and hardware design (i.e., circuit design, PCB Layout, RF module/circuit, antenna type(s) and antenna location, components on PCB, etc.), same mechanical structure and design (including product enclosure, materials, etc.), the only difference is the model name, color, package.

No.	Model	Difference	Remarks
1	D2 Pro	1. Only the appearance color difference is different, include Dark grey、Brushed Nickel、Obsidian Black、Aged Bronze. 2. Only the printing style/label on the surface of the package is different, the product inside the package is the same. 3. D2X,D2XX, Pro X,the “X” is a number from 0~9,or is an alphabet in A~Z.	Inspection model
2	D2X Pro		Coverage model
3	D2XX Pro		Coverage model
4	D2 Pro X		Coverage model

6. All the tests carried out on model D2 Pro.

7. Channel List(Unit: MHz):

1	2	3	4	5	6	7	8	9	10
5800	5801	5802	5803	5804	5805	5806	5807	5808	5809
11	12	13	14	15	16	17	18	19	20
5810	5811	5812	5813	5814	5815	5816	5817	5818	5819
21	22	23	24	25	26	27	28	29	30
5820	5821	5822	5823	5824	5825	5826	5827	5828	5829

31	32	33	34	35	36	37	38	39	40
5830	5831	5832	5833	5834	5835	5836	5837	5838	5839
41	--	--	--	--	--	--	--	--	--
5840	--	--	--	--	--	--	--	--	--

2. Test Sites

2.1 Test Facilities

The tests and measurements refer to this report were performed by RF testing Lab. of CVC Testing Technology Co., Ltd.

Add.: No.3, Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou,Guangdong,510663, People's Republic of China

Telephone : +86-20-32293888

Fax : +86-20-32293889

FCC(Test firm designation number: CN1282)

IC(Test firm CAB identifier number: CN0103)

CNAS(Test firm designation number: L0095)

2.2 Description of Non-standard Method and Deviations

The testing and measurement methods used in this report are applied by all standard methods. Not any non-standard method or deviation from the used standards was used.

2.3 List of Test and Measurement Instruments

Refer to **Appendix A**.

3. Test Configuration

3.1 Test Mode

The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application.

Test Mode	Antenna Delivery	Test Channel [MHz]
Transmitting	1TX / 1RX	5800
	1TX / 1RX	5820
	1TX / 1RX	5840

The radiated emission was measured in the following position: EUT stand-up position (Z axis), lie-down position (X, Y axis). The worst emission was found in lie-down position (X axis) and the worst case was recorded.

In order to find the worst case condition, Pre-tests are needed at the presence of different data rate and different channels. Preliminary tests have been done on all the configuration for confirming worst case.

Data rate below means worst-case rate of each test item.

Worst-case Antenna and channels are shown as following table.

Test Mode	Antenna 1	Antenna 2	MIMO
Transmitting	√	/	/

Test Items	Test Antennas	Test Modes	Test Frequency [MHz]
Conducted Emissions	Antenna 1	Transmitting	5800
Radiated Emissions	Antenna 1	Transmitting	5800,5820,5840
Occupied Channel Bandwidth	Antenna 1	Transmitting	5800,5820,5840
Antenna Requirement	Antenna 1	/	/

3.2 Duty cycle

TestMode	Antenna	Channel [MHz]	Transmission Duration [us]	Transmission Period [us]	Duty Cycle [%]	Limit	Verdict
Transmitting	Ant1	5800	8.70	1973.91	0.44	---	PASS
	Ant1	5820	8.70	1969.57	0.44	---	PASS
	Ant1	5840	13.04	1973.91	0.66	---	PASS

4. Summary of measurement results

Summary of measurements of results	Clause in FCC rules	Verdict	Note
Conducted Emissions	15.207	PASS	/
Radiated Emissions	15.249(a)(d)(e), 15.205, 15.209	PASS	/
20dB BANDWIDTH MEASUREMENT	15.215(c)	PASS	/
Antenna Requirement	15.203	PASS	See Note1

Note 1: According to 15.203, it is considered sufficient to comply with the provisions of this section.

5. Measurement procedure

5.1 Conducted Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was setup according to ANSI C63.10-2020/Cor1-2023 for compliance to FCC 47CFR 15.249 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.

Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9 kHz.


Limits:

Frequency (MHz)	Conducted Limits(dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56 *	56 to 46*
0.5 - 5	56	46
5 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.5 MHz.

Test Setup:

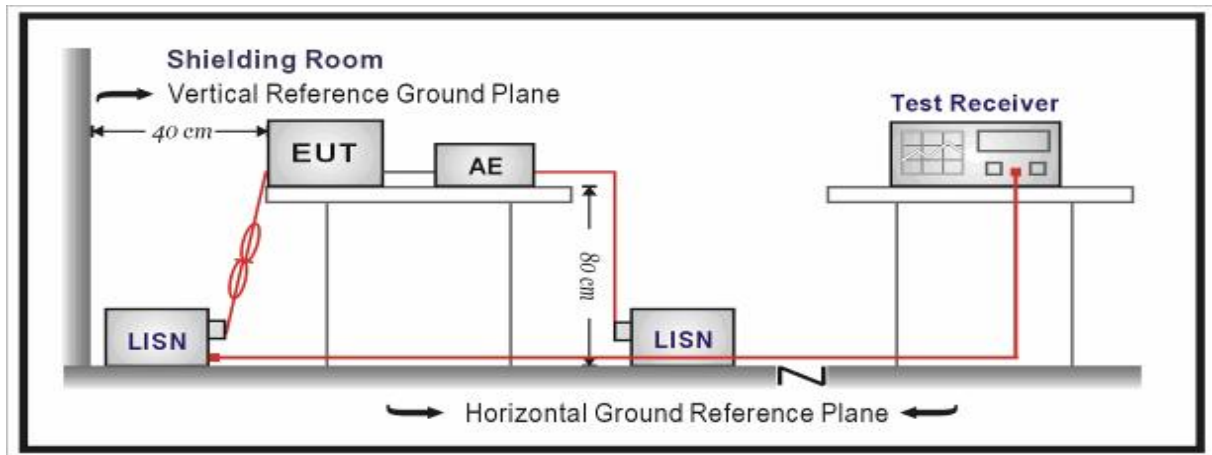

Measurement Data

An initial pre-scan was performed on the live and neutral lines with peak detector.

Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.

Notes:

1. The following Quasi-Peak and Average measurements were performed on the EUT:
2. Final Level = Reading + Factor.


Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$. $U = 3.12$ dB.


Test Results:

During the test, the Conducted Emission from 150kHz to 30MHz was performed in all modes with all channels, and all antennas. Transmitting, Channel 1, Antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission		150k~30MHz				
Power Line		L				
Test channel		Worst-Case				
Suspected List						
Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
1.111	---	34.2	46.0	11.8	L1	20.4
2.018	---	35.5	46.0	10.5	L1	20.7
2.085	44.3	---	56.0	11.7	L1	20.7
2.222	---	35.5	46.0	10.5	L1	20.8
2.243	45.1	---	56.0	10.9	L1	20.8
2.704	43.7	---	56.0	12.3	L1	20.9

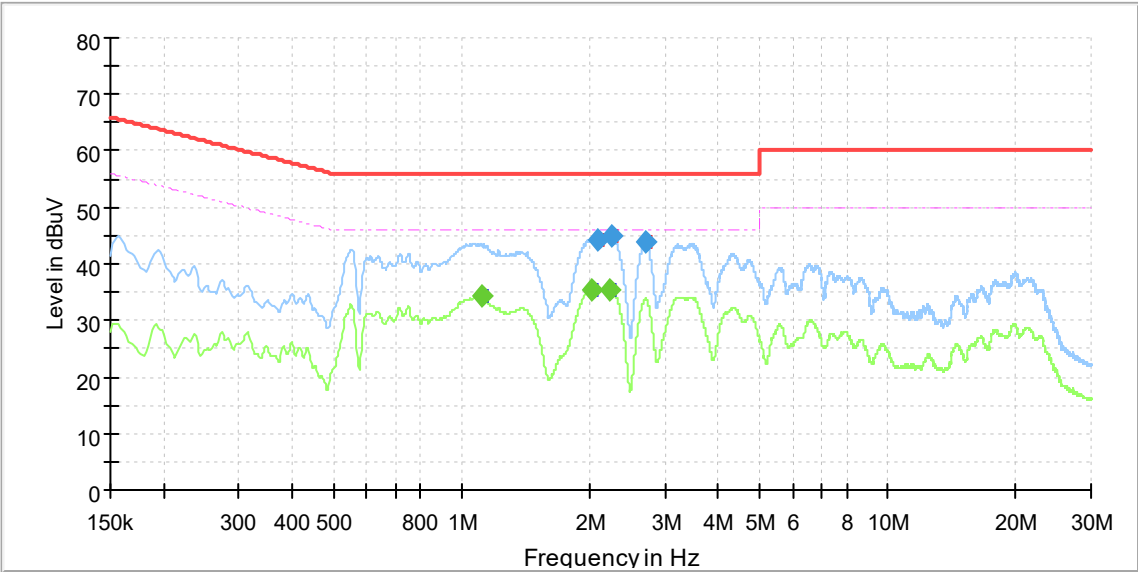

Radiates Emission		150k~30MHz				
Power Line		N				
Test channel		Worst-Case				
Suspected List						
Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Corr. (dB)
1.223	38.6	---	56.0	17.4	N	20.4
1.928	---	28.8	46.0	17.2	N	20.6
2.090	39.2	---	56.0	16.8	N	20.7
2.236	39.2	---	56.0	16.8	N	20.7
3.143	---	30.0	46.0	16.0	N	21.1
4.063	---	30.3	46.0	15.7	N	21.5

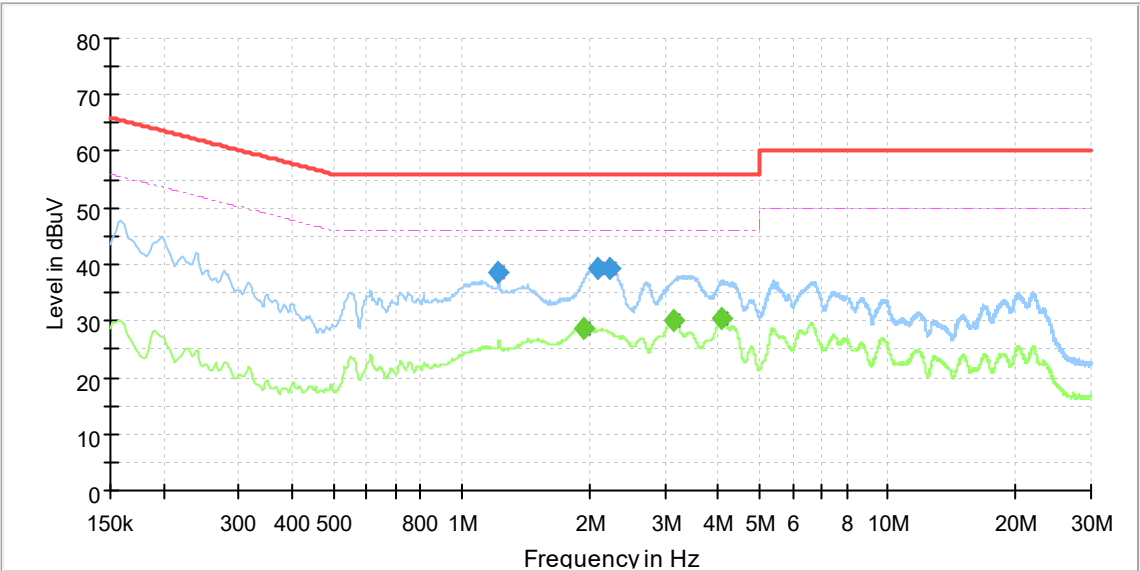

5.2 Radiated Emission

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa

Method of Measurement:

The EUT was setup and tested according to ANSI C63.10-2020/Cor1-2023.

The EUT is placed on a turn table which is 1.5 meter above ground. The turn table is rotated 360 degrees to determine the position of the maximum emission level. The EUT was positioned such that the distance from Antenna to the EUT was 3 meters.

The Antenna is scanned from 1 meter to 4 meters to find out the maximum emission level. This is repeated for both horizontal and vertical polarization of the Antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.10-2020/Cor1-2023 on radiated measurement. The resolution bandwidth below 1GHz setting on the field strength meter is 120 kHz and above 1GHz is 1MHz.

The frequency range from 30MHz to 10th harmonic is checked.

Note: When doing emission measurement above 1GHz, the horn Antenna will be bended down a little (as horn

Antenna has the narrow beamwidth) in order to keeping the Antenna in the “cone of radiation” of EUT. The 3dB beamwidth is 10~60 degrees for H-plane and 10~90 degrees for E-plane.

Limits:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Frequency	Limit ($\mu\text{V/m}$)	Limit ($\text{dB}\mu\text{V/m @3m}$)	Remark
0.009MHz-0.490MHz	2400/F(kHz)@300m	$20\lg(24000000/F(\text{kHz}))$	Quasi-peak Level
0.490MHz~1.705MHz	24000/F(kHz)@30m	$20\lg(2400000/F(\text{kHz}))$	Quasi-peak Level
1.705MHz~30.0MHz	30@30m	69.54	Quasi-peak Level
30MHz-88MHz	100@3m	40.0	Quasi-peak Level
88MHz-216MHz	150@3m	43.5	Quasi-peak Level
216MHz-960MHz	200@3m	46.0	Quasi-peak Level
960MHz-1GHz	500@3m	54.0	Quasi-peak Level

Above 1GHz	500@3m	54.0	Average Level
	5000@3m	74.0	Peak Level

Spurious Radiated Emissions are permitted in any of the frequency bands listed below:


MHz	MHz	MHz	GHz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.
12.57675-12.57725	322-335.4	3600-4400	/
13.36-13.41	/	/	/

The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:


Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/ meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500
902-928 MHz	50	500

Test Setup:


Below 30MHz Test Setup:

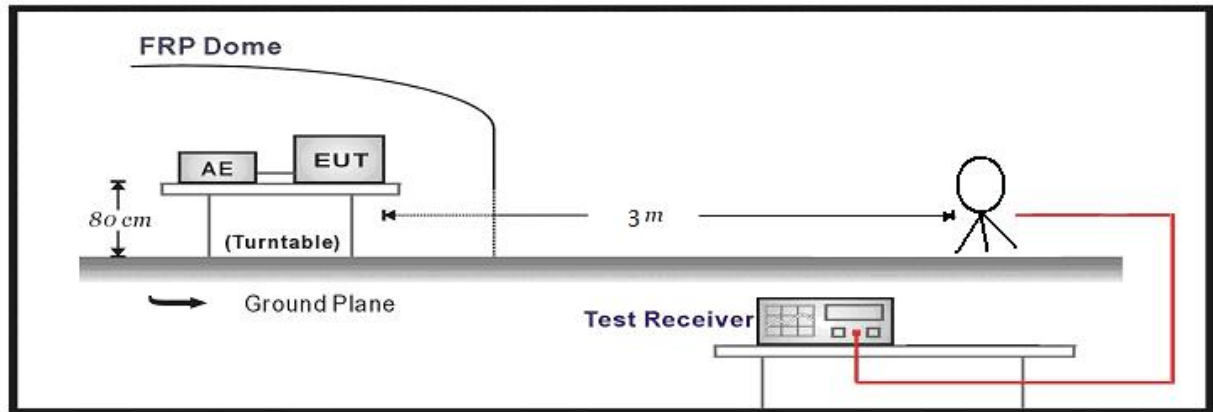

Below 1GHz Test Setup:

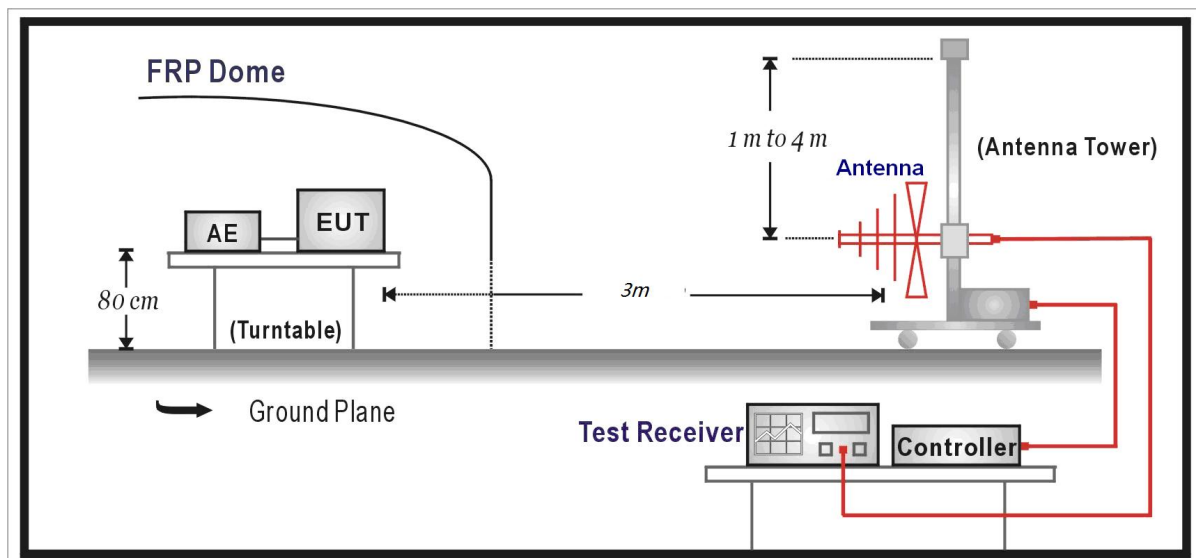

Above 1GHz Test Setup:

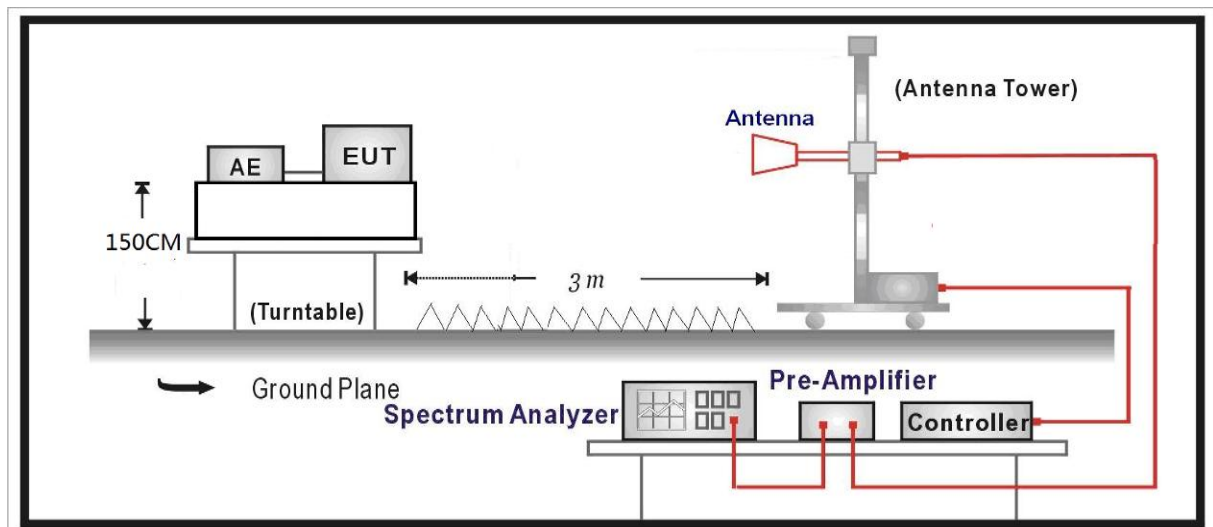

Measurement Data:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Level = Reading - Factor

Factor = Preamplifier Factor – Antenna Factor–Cable Loss

Measurement Uncertainty:

The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 1.96$.

Frequency	Uncertainty
9KHz-30MHz	3.55 dB
30MHz-200MHz	4.19 dB
200MHz-1GHz	3.63 dB
Above 1GHz	3.68 dB

Test Results:


Fundamental Field Strength and SPURIOUS EMISSIONS:

During the test, the Radiates Emission from 9kHz to 1GHz was performed in 5.8G Radar all modes with all channels and all antenna. Transmitting, Channel 1, Antenna 1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission			9k~1G							
Test channel			Worst-Case							
Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
47.5588	Horizontal	12.86	8.99	21.85	40.00	18.15	PK	100	240	PASS
100.5261	Horizontal	11.83	7.52	19.35	43.50	24.15	PK	100	90	PASS
163.2913	Horizontal	10.27	9.34	19.61	43.50	23.89	PK	100	210	PASS

Note: 9kHz~30MHz have been test and test data more than 20dB margin.


Final Data List									
Frequency [MHz]	Polarity	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail	
47.5588	Horizontal	12.86	20.55	40.00	19.45	220	239	PASS	
100.5261	Horizontal	11.83	17.96	43.50	25.54	320	88	PASS	
163.2913	Horizontal	10.27	18.40	43.50	25.10	260	215	PASS	

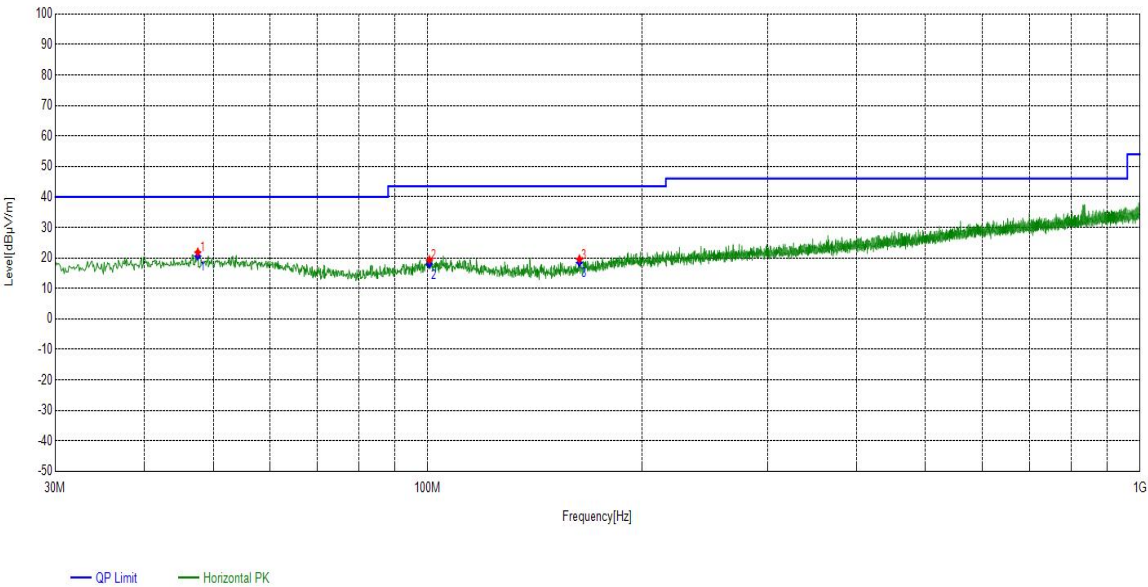

Radiates Emission			9k~1G							
Test channel			Worst-Case							
Suspected List										
Frequency [MHz]	Polarity	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
51.4391	Vertical	12.97	7.39	20.36	40.00	19.64	PK	100	280	PASS
106.5407	Vertical	11.69	7.84	19.53	43.50	23.97	PK	100	40	PASS
412.0242	Vertical	18.11	10.01	28.12	46.00	17.88	PK	100	150	PASS

Note: 9kHz~30MHz have been test and test data more than 20dB margin.

Final Data List									
Frequency [MHz]	Polarity	Factor [dB]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Height [cm]	Angle [°]	Pass/Fail	
51.4391	Vertical	12.97	18.95	40.00	21.05	287	279	PASS	
106.5407	Vertical	11.69	18.30	43.50	25.20	196	43	PASS	
412.0242	Vertical	18.11	26.89	46.00	19.11	275	159	PASS	

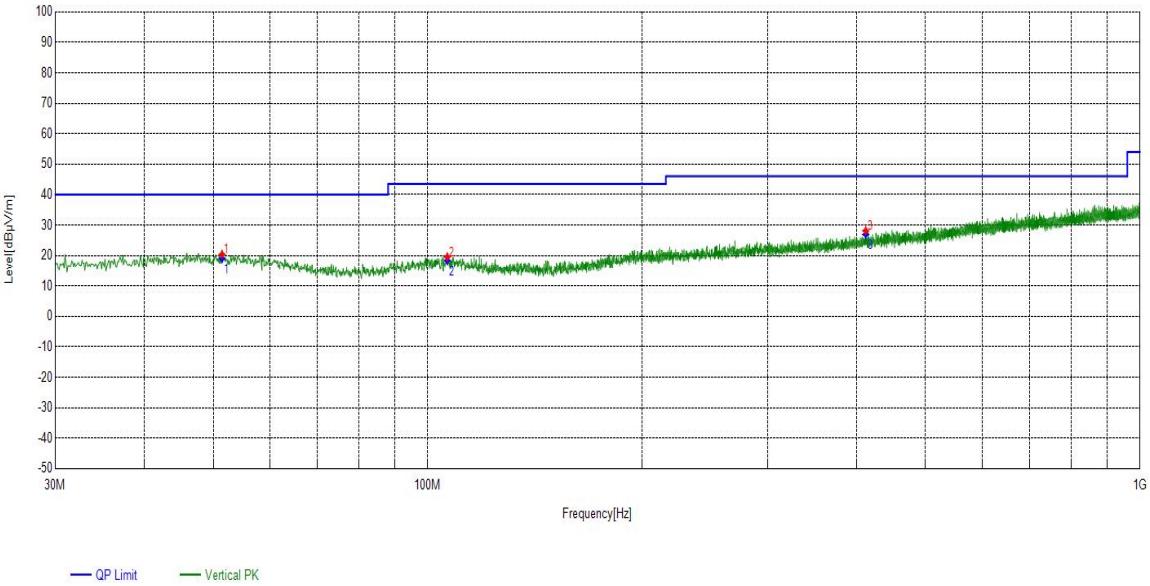

During the test, the Radiates Emission from Above 1G was performed in 5.8G Radar all modes with all channels and all antennas. Transmitting, Highest, medium, lowest channels, Ant1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission		Above 1G							
Test channel		Lowest							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1011.0011	-6.33	42.65	36.32	74.00	37.68	PK	150	315	PASS
2045.104511	-5.55	37.80	32.25	74.00	41.75	PK	150	315	PASS
3291.229123	-1.32	36.89	35.57	74.00	38.43	PK	150	93	PASS
5800*	5.07	55.53	60.60	114.00	53.40	PK	150	55	PASS
1011.0011	-6.33	29.97	23.64	54.00	30.36	AV	150	55	PASS
2045.104511	-5.55	27.27	21.72	54.00	32.28	AV	150	100	PASS
3291.229123	-1.32	26.43	25.11	54.00	28.89	AV	150	359	PASS
5800*	5.07	21.37	26.44	94.00	67.56	AV	150	341	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Note2": * ": Fundamental frequency.

Radiates Emission		Above 1G							
Test channel		Lowest							
polarization		Vertical							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1088.008801	-6.83	40.81	33.98	74.00	40.02	PK	150	360	PASS
1715.071507	-6.48	41.50	35.02	74.00	38.98	PK	150	188	PASS
3700.270027	-0.10	39.36	39.26	74.00	34.74	PK	150	318	PASS
5800*	5.07	75.97	81.04	114.00	32.96	PK	150	70	PASS
1088.008801	-6.83	29.84	23.01	54.00	30.99	AV	150	351	PASS
1715.071507	-6.48	28.49	22.01	54.00	31.99	AV	150	97	PASS
3700.270027	-0.10	26.62	26.52	54.00	27.48	AV	150	1	PASS
5800*	5.07	27.17	32.24	94.00	61.76	AV	150	70	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Note2": * ": Fundamental frequency.

Radiates Emission		Above 1G							
Test channel		Medium							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1089.008901	-6.84	42.25	35.41	74.00	38.59	PK	150	110	PASS
1711.071107	-6.51	41.13	34.62	74.00	39.38	PK	150	209	PASS
4113.311331	0.49	39.20	39.69	74.00	34.31	PK	150	345	PASS
5820*	5.14	71.63	76.77	114.00	37.23	PK	150	84	PASS
1089.008901	-6.84	30.23	23.39	54.00	30.61	AV	150	25	PASS
1711.071107	-6.51	28.00	21.49	54.00	32.51	AV	150	1	PASS
4113.311331	0.49	26.50	26.99	54.00	27.01	AV	150	56	PASS
5820*	5.14	27.93	33.07	94.00	60.93	AV	150	86	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Note2": * ": Fundamental frequency.

Radiates Emission		Above 1G							
Test channel		Medium							
polarization		Vertical							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1082.008201	-6.79	42.14	35.35	74.00	38.65	PK	150	19	PASS
2719.171917	-3.43	39.53	36.10	74.00	37.90	PK	150	315	PASS
4016.30163	0.57	37.74	38.31	74.00	35.69	PK	150	39	PASS
5820*	5.14	73.41	78.55	114.00	35.45	PK	150	71	PASS
1082.008201	-6.79	29.97	23.18	54.00	30.82	AV	150	39	PASS
2719.171917	-3.43	27.41	23.98	54.00	30.02	AV	150	359	PASS
4016.30163	0.57	26.69	27.26	54.00	26.74	AV	150	359	PASS
5820*	5.14	26.66	31.80	94.00	62.20	AV	150	78	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Note2": * ": Fundamental frequency.

Radiates Emission		Above 1G							
Test channel		Highest							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1136.013601	-7.13	39.95	32.82	74.00	41.18	PK	150	360	PASS
2975.19752	-2.56	36.84	34.28	74.00	39.72	PK	150	360	PASS
4074.307431	0.53	38.92	39.45	74.00	34.55	PK	150	154	PASS
5840*	5.21	65.95	71.16	114.00	42.84	PK	150	129	PASS
1136.013601	-7.13	29.31	22.18	54.00	31.82	AV	150	12	PASS
2975.19752	-2.56	26.55	23.99	54.00	30.01	AV	150	199	PASS
4074.307431	0.53	25.88	26.41	54.00	27.59	AV	150	1	PASS
5840*	5.21	23.54	28.75	94.00	65.25	AV	150	136	PASS

" * ": Fundamental frequency.

Radiates Emission		Above 1G							
Test channel		Highest							
polarization		Vertical							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
1352.035204	-7.32	41.45	34.13	74.00	39.87	PK	150	276	PASS
1819.081908	-6.12	40.20	34.08	74.00	39.92	PK	150	334	PASS
4027.30273	0.57	37.11	37.68	74.00	36.32	PK	150	63	PASS
5840*	5.22	72.53	77.75	114.00	36.25	PK	150	56	PASS
1352.035204	-7.32	27.93	20.61	54.00	33.39	AV	150	354	PASS
1819.081908	-6.12	27.99	21.87	54.00	32.13	AV	150	359	PASS
4027.30273	0.57	26.04	26.61	54.00	27.39	AV	150	0	PASS
5840*	5.21	26.83	32.04	94.00	61.96	AV	150	43	PASS

" * ": Fundamental frequency.

Band Edge:

During the test, the Band Edge was performed in 5.8G Radar all modes with all channels and all antennas. Transmitting, Highest and lowest channels, Ant1 are selected as the worst condition. The test data of the worst-case condition was recorded in this report.

Radiates Emission		Above 1G							
Test channel		Lowest							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/m]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/Fail
5628.462846	4.35	32.70	37.05	74.00	36.95	PK	150	145	PASS
5691.469147	4.62	33.36	37.98	74.00	36.02	PK	150	295	PASS
5725.472547	4.75	33.06	37.81	74.00	36.19	PK	150	23	PASS
5628.462846	4.35	22.12	26.47	54.00	27.53	AV	150	348	PASS
5691.469147	4.62	22.28	26.90	54.00	27.10	AV	150	335	PASS
5725.472547	4.75	21.98	26.73	54.00	27.27	AV	150	359	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G							
Test channel		Lowest							
polarization		Vertical							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
5654.465447	4.46	34.21	38.67	74.00	35.33	PK	150	64	PASS
5676.467647	4.55	34.36	38.91	74.00	35.09	PK	150	351	PASS
5725.472547	4.75	32.38	37.13	74.00	36.87	PK	150	168	PASS
5654.465447	4.46	22.37	26.83	54.00	27.17	AV	150	19	PASS
5676.467647	4.55	22.38	26.93	54.00	27.07	AV	150	344	PASS
5725.472547	4.75	21.66	26.41	54.00	27.59	AV	150	357	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission		Above 1G							
Test channel		Highest							
polarization		Horizontal							
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
5875.487549	5.33	32.14	37.47	74.00	36.53	PK	150	148	PASS
5912.491249	5.45	33.47	38.92	74.00	35.08	PK	150	277	PASS
5951.9952	5.58	32.06	37.64	74.00	36.36	PK	150	335	PASS
5875.487549	5.33	21.78	27.11	54.00	26.89	AV	150	81	PASS
5912.491249	5.45	21.48	26.93	54.00	27.07	AV	150	12	PASS
5951.9952	5.58	22.17	27.75	54.00	26.25	AV	150	106	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

Radiates Emission	Above 1G								
Test channel	Highest								
polarization	Vertical								
Suspected List									
Frequency [MHz]	Factor [dB]	Reading [dBμV/ m]	Level [dBμV/ m]	Limit [dBμV/ m]	Margin [dB]	Detect or	Height [cm]	Angle deg	Pass/ Fail
5875.487549	5.33	32.15	37.48	74.00	36.52	PK	150	1	PASS
5897.489749	5.41	33.75	39.16	74.00	34.84	PK	150	205	PASS
5979.998	5.68	34.73	40.41	74.00	33.59	PK	150	173	PASS
5875.487549	5.33	21.64	26.97	54.00	27.03	AV	150	341	PASS
5897.489749	5.41	22.05	27.46	54.00	26.54	AV	150	348	PASS
5979.998	5.68	22.02	27.70	54.00	26.30	AV	150	348	PASS

Note1: The emission levels of other frequencies were greater than 20dB margin.

5.3 20dB BANDWIDTH MEASUREMENT

Ambient condition:

Temperature	Relative humidity	Pressure
23°C ~25°C	45%~50%	101.3kPa


Method of Measurement:

The spectrum analyzer was receiving the maximum emission level. The 20dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 20dB.

Limit:

20 dB bandwidth of the emission, or whatever bandwidth may otherwise be specified in the specific rule section under which the equipment operates, is contained within the frequency band designated in the rule section under which the equipment is operated.

Test Setup:

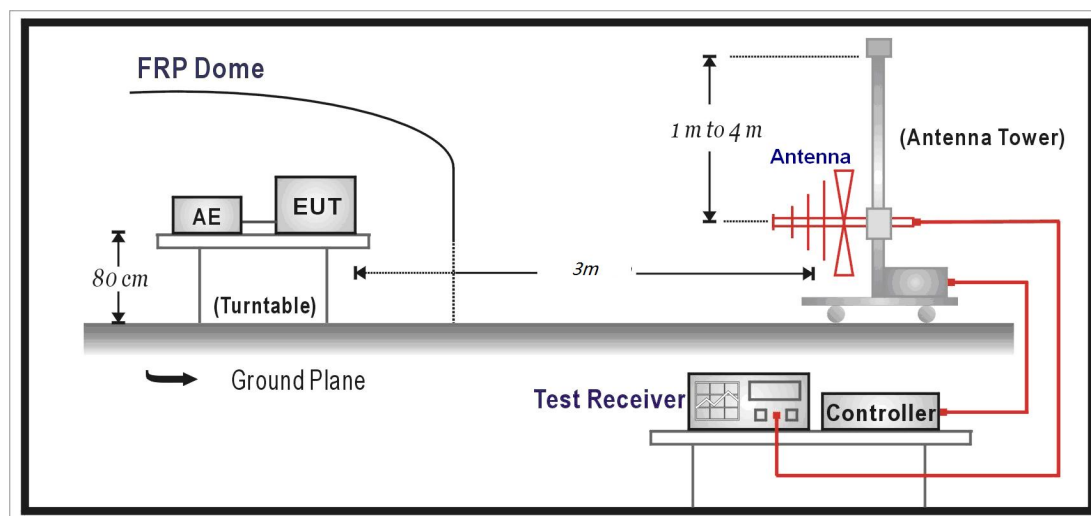


Measurement Uncertainty:


The assessed measurement uncertainty to ensure 95% confidence level for the normal distribution is with the coverage factor $k = 2$, $U = 936$ Hz.

Test Results:

TestMode	Antenna	Channel	20dB Bandwidth [kHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
Transmitting	Ant1	5800	686.0	5800.000	5800.686	5725~5875	PASS
	Ant1	5820	798.8	5819.7221	5820.521	5725~5875	PASS
	Ant1	5840	720.7	5839.8784	5840.5991	5725~5875	PASS

Test Graphs:

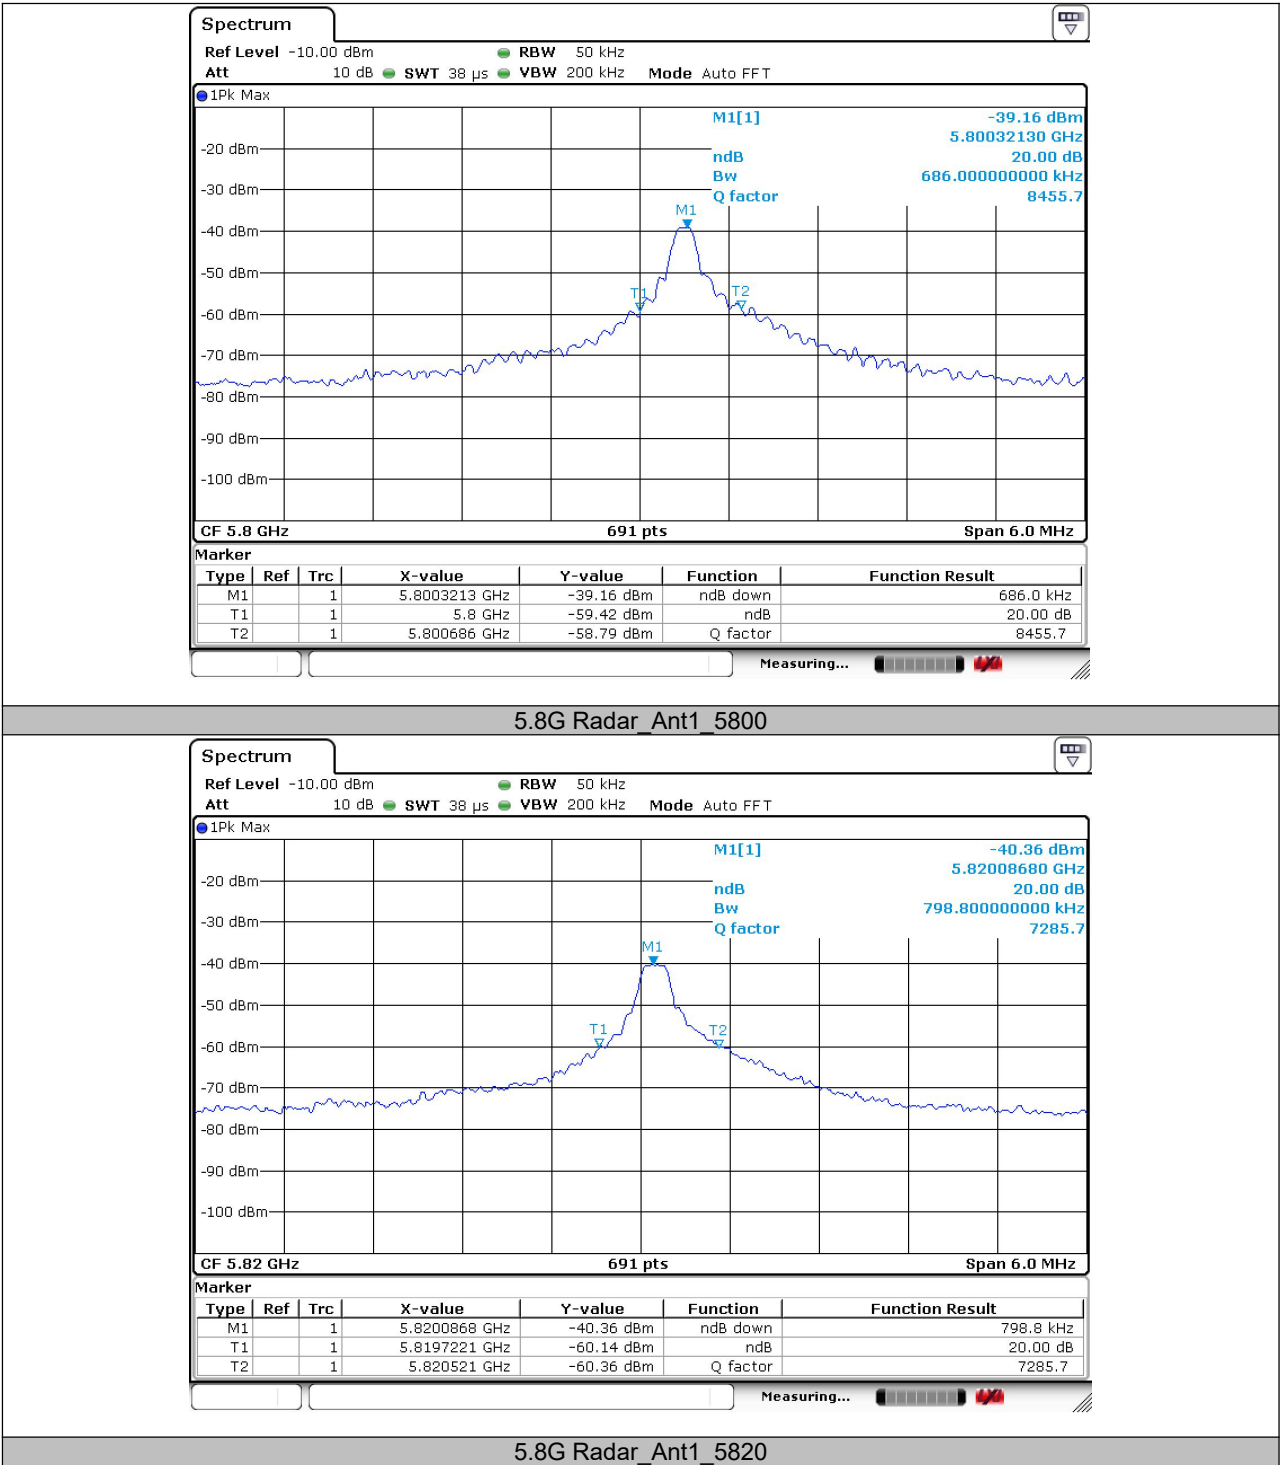

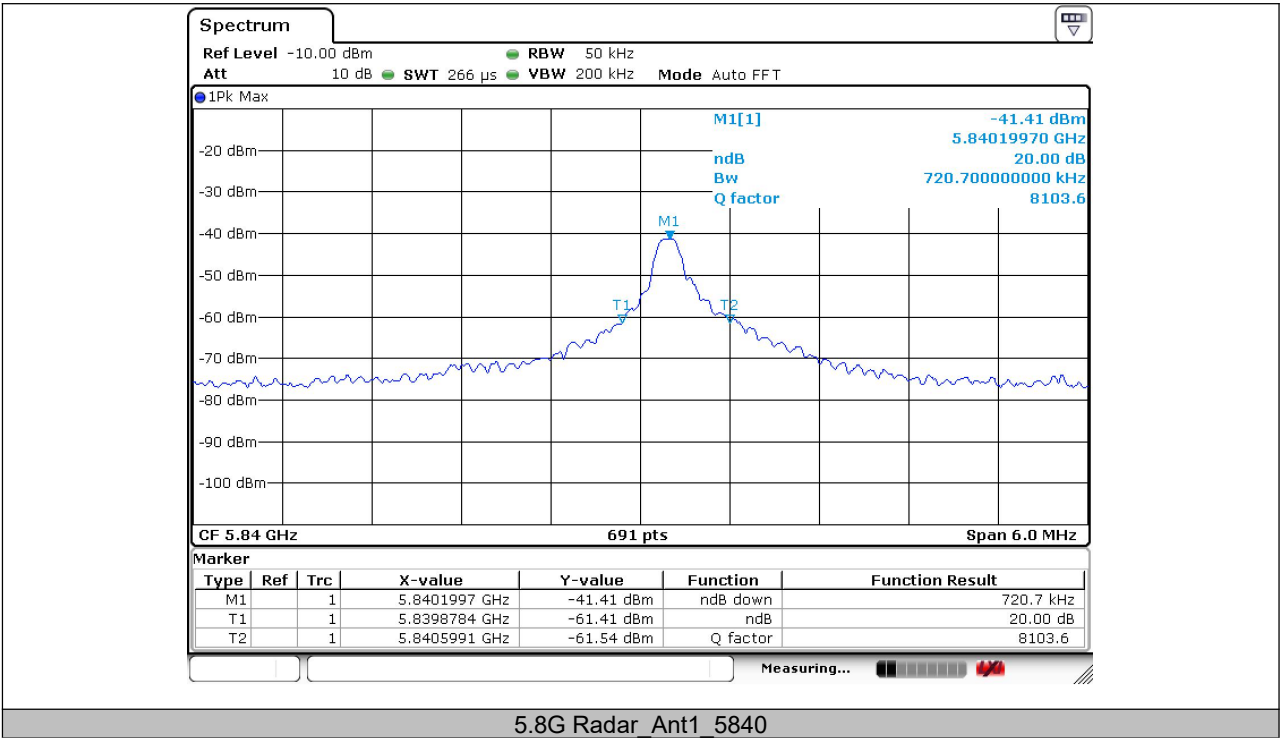

6. Appendix A

Test Equipment	Type/Mode	SERIAL NO.	Equipment No.	Manufacturer	Cal. Due
Communication Shielded Room 2	4m*3m*3m	CRTDSWKS44301	/	CRT	2027/04/22
Spectrum Analyzer	FSV40	101580	DZ-000238-3	R&S	2026/03/27
RF Radio Frequency Switch	JS0806-2	19H9080187	DZ-000241	Tonscend	2026/03/27
5m Semi-Anechoic Chamber	SAC-5	SAC-5-2.0	EM-000557	COMTEST	2027/02/01
Spectrum Analyzer	N9010B	MY57470323	DZ-000174	KEYSIGHT	2026/01/01
EMI Test Receiver	N9038A-508	MY532290079	EM-000397	Agilent	2025/12/26
EMI Test Receiver	ESR7	102235	EM-000574	R&S	2026/01/05
loop antenna	HLA 6121	540046	EM-000546	TESEQ	2025/06/04
Broadband Antenna	VULB 9163	9163-530	EM-000342	SCHWARZBECK	2025/06/09
Waveguide Horn Antenna	HF906	360306/008	EM-000093	R&S	2025/12/26
Waveguide Horn Antenna	BBHA9170	00949	DZ-000209-2	SCHWARZBECK	2025/08/03
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2025/06/02
5.8GHz band resistance	ZBSF6-C5725-5850-1627	1232740	DZ-000399-2	Tonscend	2025/05/30
Preamplifier	BBV 9721	9721-050	DZ-000209-1	SCHWARZBECK	2025/06/03
Temperature and humidity meter	UT330THC	C231446122	DZ-000249-2	UNI-T	2025/07/28
Temperature and humidity meter	UT330THC	C231446087	DZ-000249-5	UNI-T	2025/07/28
SuperCharge	HW-100400C01	/	/	HUAWEI	/

Dynacomm	Software Release	Software Developer
TS1120-3 Test System(Conduction test)	3.3.38	Tonscend
TS+ (5m,Radiation test)	JS32-RE 5.0.0	Tonscend

— No Body Text Below —

Important

1. The test report is invalid without the official stamp of CVC;
2. Any part photocopies of the test report are forbidden without the written permission from CVC;
3. The test report is invalid without the signatures of Author and Reviewer;
4. The test report is invalid if altered;
5. Objections to the test report must be submitted to CVC within 15 days;
6. Generally, commission test is responsible for the tested samples only;
7. As for the test result, “—” or “N/A” means “not applicable”, “/” means “not testing”, “P” means “pass” and “F” means “fail”.

Address: No.3,Tiantaiyi Road, Kaitai Avenue, Science City, Guangzhou, China (Test location)

Post Code: 510663 Tel: 020-32293888

FAX: 020 32293889 E-mail: office@cvc.org.cn