

FCC TEST REPORT

FCC ID:2BGC4-CX1

Report No..... : ZHT-251011110W01-1
Product..... : Magnetic Power Bank
Trademark..... : /
Model(s)..... : CX1
Model Difference..... : /
Applicant..... : Shenzhenshi shunjingyuan yishusheji youxiangongsi
Address..... : Shenzhenshi longgangqu longgangjiedao tongxinshequ tongxinlu85hao
zonghelou7lou China
Manufacturer..... : Shenzhenshi shunjingyuan yishusheji youxiangongsi
Address..... : Shenzhenshi longgangqu longgangjiedao tongxinshequ tongxinlu85hao
zonghelou7lou China
Prepared by..... : Guangdong Zhonghan Testing Technology Co., Ltd.
Address..... : Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai
Subdistrict, Bao'an District, Shenzhen, Guangdong, China
Date of Receipt..... : Oct. 11, 2025
Date of Test(s)..... : Oct. 11, 2025 to Oct. 21, 2025
Date of Issue..... : Oct. 23, 2025
Standard..... : FCC CFR Title 47 Part 15 Subpart C
Test procedure..... : /

In the configuration tested, the EUT complied with the standards specified above.

Prepared by:

Reviewed by:

Approved by:

Kimi Lu

Kimi Lu/ Engineer

Baret Wu

Baret Wu/ Director

Levi Lee

Levi Lee/ Manager

Note: This device described above has been tested by ZHT, and the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report. This report shall not be reproduced except in full, without the written approval of ZHT, this document may be altered or revised by ZHT, personal only, and shall be noted in the revision of the document.



TABLE OF CONTENTS

1. VERSION	3
2. TEST SUMMARY	4
3. GENERAL INFORMATION	5
3.1 GENERAL DESCRIPTION OF EUT	5
3.2 Test mode	6
3.3 Block Diagram of EUT Configuration	7
3.4 Test Conditions	7
3.5 Description Of Support Units (Conducted Mode)	7
4. TAEST FACILITY AND TEST INSTRUMENT USED	8
4.1 TEST FACILITY	8
4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS	8
4.3 TESTING SOFTWARE	9
5. CONDUCTED EMISSION TEST	11
5.1 CONDUCTED EMISSION MEASUREMENT	11
5.1.1 POWER LINE CONDUCTED EMISSION Limits	11
5.1.2 TEST PROCEDURE	11
5.1.3 DEVIATION FROM TEST STANDARD	11
5.1.4 TEST SETUP	12
5.1.5 EUT OPERATING CONDITIONS	12
5.1.6 Test Result	13
6. RADIATED EMISSION MEASUREMENT	15
6.1 Radiated Emission Limits	15
6.2 Anechoic Chamber Test Setup Diagram	16
6.3 Test Procedure	16
6.4 DEVIATION FROM TEST STANDARD	16
6.5 Test Result	17
7. BANDWIDTH TEST	21
8. ANTENNA REQUIREMENT	25
9. TEST SETUP PHOTO	26
10. EUT CONSTRUCTIONAL DETAILS	26

1. VERSION

Report No.	Issue Date	Description	Approved
ZHT-251011110W01-1	Oct. 23, 2025	Original	Valid

2. TEST SUMMARY

Test Item	Section in CFR 47	Result
Antenna requirement	15.203	Pass
AC Power Line Conducted Emission	15.207	Pass
Spurious Emission	15.209(a)(f)	Pass
20dB Bandwidth	15.215	Pass

NOTE:

(1) "N/A" denotes test is not applicable in this Test Report

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Product Name:	Magnetic Power Bank
Test Model No.:	CX1
Hardware version:	V1.0
Software version:	V1.0
Operation Frequency:	Phone: 110.1-205 KHz, 350-370 KHz Earphone: 110.1-205 KHz Watch: 320-345 KHz
Modulation type:	ASK
Antenna Type:	Inductive loop coil Antenna
Antenna gain:	0dBi
Ratings:	Battery capacity: DC 3.85 V/10000 mAh/ 38.5 Wh Type-C Input: 5 V---3 A/ 9 V---2 A/ 12 V---1.5 A Type-C Input cable: 5 V---2 A/ 9 V---2 A/ 12 V---1.5 A Type-C Output: 5 V---3 A/ 9 V---2.22 A/ 10 V---2.25 A/ 12 V---1.67 A(22.5 W) Type-C Output cable: 5 V---3 A/ 9 V---2.22 A/ 10 V---2.25 A/ 12 V---1.67 A (22.5W) Lightning Output: 5 V---2.4 A Wireless charging output: 5 W/7.5 W/10 W/15 W Earphone Output: 2.5 W(max) Watch Output: 3 W(max)
Sample Number:	251011110YP001
Remark: The antenna gain is provided by the customer, if the data provided by the customer is not accurate, Guangdong Zhonghan Testing Technology Co., Ltd. does not assume any responsibility.	




3.2 Test mode


Test Modes:	
Mode 1	AC Mains + Watch charging port (Battery Status:≤1%)
Mode 2	AC Mains + Watch charging port (Battery Status:50%)
Mode 3	AC Mains + Watch charging port (Battery Status:≥98%)
Mode 4	Watch charging port (Battery Status:≤1%)
Mode 5	Watch charging port (Battery Status:50%)
Mode 6	Watch charging port (Battery Status:≥98%)
Mode 7	AC Mains + Earphone charging port (Battery Status:≤1%)
Mode 8	AC Mains + Earphone charging port (Battery Status:50%)
Mode 9	AC Mains + Earphone charging port (Battery Status:≥98%)
Mode 10	Earphone charging port (Battery Status:≤1%)
Mode 11	Earphone charging port (Battery Status:50%)
Mode 12	Earphone charging port (Battery Status:≥98%)
Mode 13	AC Mains + Phone charging port (Battery Status:≤1%) -110.1-205KHz
Mode 14	AC Mains + Phone charging port (Battery Status:50%) -110.1-205KHz
Mode 15	AC Mains + Phone charging port (Battery Status:≥98%) -110.1-205KHz
Mode 16	Phone charging port (Battery Status:≤1%) -110.1-205KHz
Mode 17	Phone charging port (Battery Status:50%) -110.1-205KHz
Mode 18	Phone charging port (Battery Status:≥98%) -110.1-205KHz
Mode 19	AC Mains + Phone charging port (Battery Status:≤1%) -350-370KHz
Mode 20	AC Mains + Phone charging port (Battery Status:50%) -350-370KHz
Mode 21	AC Mains + Phone charging port (Battery Status:≥98%) -350-370KHz
Mode 22	Phone charging port (Battery Status:≤1%) -350-370KHz
Mode 23	Phone charging port (Battery Status:50%) -350-370KHz
Mode 24	Phone charging port (Battery Status:≥98%) -350-370KHz
Mode 25	Standby
Note: 1. All test modes has been tested, this report only reflected the worst mode. 2. Mode 13, Mode 16 and Mode 22 is worst case for Conducted Emission and Spurious Emission.	

3.3 Block Diagram of EUT Configuration

Mode 1 & 2 & 3 & 7 & 8 & 9 & 13 & 14 & 15 & 19 & 20 & 21

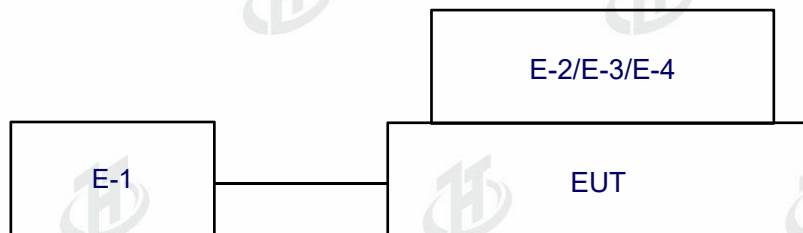

Mode 4 & 5 & 6 & 10 & 11 & 12 & 16 & 17 & 18 & 22 & 23 & 24

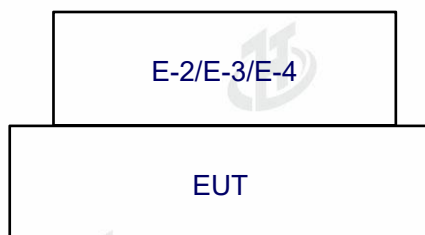

3.4 Test Conditions

Temperature: 25.6℃

Relative Humidity: 54.3 %

3.5 Description Of Support Units (Conducted Mode)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Series No.	Note
E-1	AC Adapter	Xiaomi	MDY-08-EH	/	AE
E-2	Apple watch	Apple Inc.	ultra 2	/	AE
E-3	Earphone	Apple Inc.	A2031	/	AE
E-4	Mobile phone	Xiaomi Communications Co., Ltd.	Xiaomi 13	/	AE

Item	Shielded Type	Ferrite Core	Length	Note

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) “YES” is means “shielded” “with core”; “NO” is means “unshielded” “without core”.

4. TAEST FACILITY AND TEST INSTRUMENT USED

4.1 TEST FACILITY

Guangdong Zhonghan Testing Technology Co., Ltd.
Add.: Room 104/201, Building 1, Yibaolai Industrial Park, Qiaotou, Fuhai Subdistrict, Bao'an District, Shenzhen, Guangdong, China

FCC Registration Number:255941
Designation Number: CN0325
IC Registered No.: 29832
CAB identifier: CN0143

4.2 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
2	Loop Antenna	TESEQ	HLA6121	58357	Sept. 8, 2025	Sept. 7, 2026
3	Amplifier	Schwarzbeck	BBV 9743 B	00378	May 6, 2025	May 5, 2026
4	Amplifier	Schwarzbeck	BBV 9718 B	00040	May 7, 2025	May 6, 2026
5	Bilog Antenna	Schwarzbeck	VULB9162	00498	May 15, 2025	May 14, 2026
6	Horn Antenna	Schwarzbeck	BBHA9120D	02623	May 15, 2025	May 14, 2026
7	Horn Antenna	A.H.SYSTEMS	SAS574	588	Oct. 20, 2025	Oct. 19, 2026
8	Amplifier	AEROFLEX	100KHz-40GHz	097	Oct. 20, 2025	Oct. 19, 2026
9	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
10	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
11	WIDBAND RADIO COMMUNICATION TESTER	R&S	CMW500	109863	May 7, 2025	May 6, 2026
12	Single Generator	Agilent	N5182A	MY48180575	May 7, 2025	May 6, 2026
13	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026
14	CABLE	EMToni	DA800-NM-NM-11000MM	/	May 6, 2025	May 5, 2026

Conduction Test equipment

Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
Receiver	R&S	ESCI	100874	May 6, 2025	May 5, 2026
LISN	R&S	ENV216	102794	May 6, 2025	May 5, 2026
ISN CAT 6	Schwarzbeck	NTFM 8158	00318	May 7, 2025	May 6, 2026
ISN CAT 5	Schwarzbeck	CAT5 8158	00343	May 7, 2025	May 6, 2026
Capacitive Voltage Probe	Schwarzbeck	CVP 9222 C	00101	May 8, 2025	May 7, 2026
Current Transformer Clamp	Schwarzbeck	SW 9605	SW9605 #209	May 8, 2025	May 7, 2026
CABLE	EMToni	G223-NM-BNC M-2000MM	/	May 7, 2025	May 6, 2026

RF Conducted Test equipment

Item	Equipment	Manufacturer	Model	Serial No.	Last Cal.	Next Cal.
1	Spectrum Analyzer	R&S	FSV40	101413	Oct. 20, 2025	Oct. 19, 2026
2	Spectrum Analyzer	KEYSIGHT	N9020A	MY53420208	May 7, 2025	May 6, 2026
3	Power Sensor	MWRFTest	MW100-RFCB	/	May 7, 2025	May 6, 2026

4.3 TESTING SOFTWARE

Project	Software name	Edition
Radiated Emission	EZ-EMC	FA-03A2 RE+
RF Test	MTS 8310	2.0.0.0

4.4 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

No.	Item	Uncertainty
1	Conducted Emission Test	0.92dB
2	RF conducted power	0.16dB
3	Conducted spurious emissions	0.21dB
4	All radiated emissions (9k-30MHz)	4.68dB
5	All radiated emissions (30-1GHz)	5.1dB
6	All radiated emissions (1-6GHz)	3.9dB
7	All radiated emissions (6GHz-18GHz)	4.3dB
8	All radiated emissions (18-40GHz)	4.65dB
9	Temperature	0.5°C
10	Humidity	2%
11	Occupied Bandwidth	4.96%

Decision Rule

- ☒ Uncertainty is not included
☐ Uncertainty is included

5. CONDUCTED EMISSION TEST

5.1 CONDUCTED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.207
Test Method:	ANSI C63.10:2020
Test Frequency Range:	150KHz to 30MHz
Receiver setup:	RBW=9KHz, VBW=30KHz, Sweep time=auto

5.1.1 POWER LINE CONDUCTED EMISSION Limits

FREQUENCY (MHz)	Limit (dBuV)		Standard
	QP	AVG	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) *Decreases with the logarithm of the frequency.


5.1.2 TEST PROCEDURE

- The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN at least 80 cm from nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.1.3 DEVIATION FROM TEST STANDARD

No deviation

5.1.4 TEST SETUP

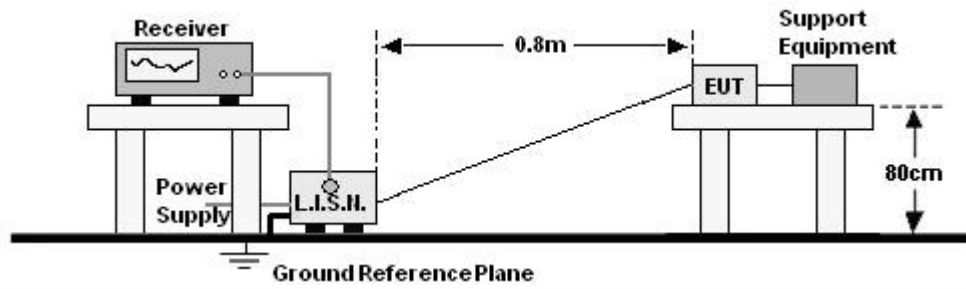


5.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

5.1.6 Test Result

Temperature:	24.6℃	Humidity	56.7%
Pressure:	1014 kPa	Phase :	L
Test Voltage:	AC 120V/60Hz	Test mode:	Mode 13

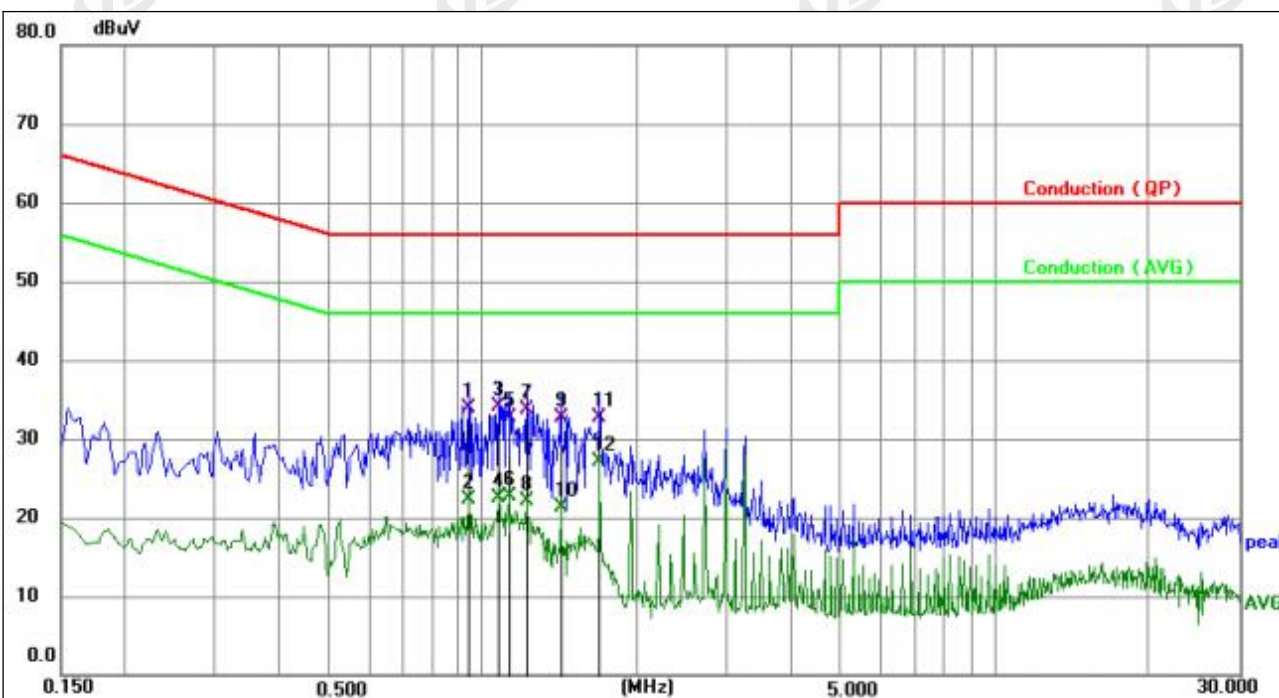


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.9420	23.80	10.06	33.86	56.00	-22.14	QP	P	
2	0.9420	12.33	10.06	22.39	46.00	-23.61	AVG	P	
3	1.0725	24.00	10.06	34.06	56.00	-21.94	QP	P	
4	1.0725	12.36	10.06	22.42	46.00	-23.58	AVG	P	
5	1.1265	22.69	10.06	32.75	56.00	-23.25	QP	P	
6	1.1265	12.74	10.06	22.80	46.00	-23.20	AVG	P	
7	1.2210	23.66	10.06	33.72	56.00	-22.28	QP	P	
8	1.2210	12.08	10.06	22.14	46.00	-23.86	AVG	P	
9	1.4190	22.66	10.07	32.73	56.00	-23.27	QP	P	
10	1.4190	11.17	10.07	21.24	46.00	-24.76	AVG	P	
11	1.6935	22.64	10.06	32.70	56.00	-23.30	QP	P	
12 *	1.6935	16.97	10.06	27.03	46.00	-18.97	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The emission levels of other frequencies are very lower than the limit and not show in test report.



Temperature:	24.6°C	Humidity	56.7%
Pressure:	1014 kPa	Phase :	N
Test Voltage:	AC 120V/60Hz	Test mode:	Mode 13

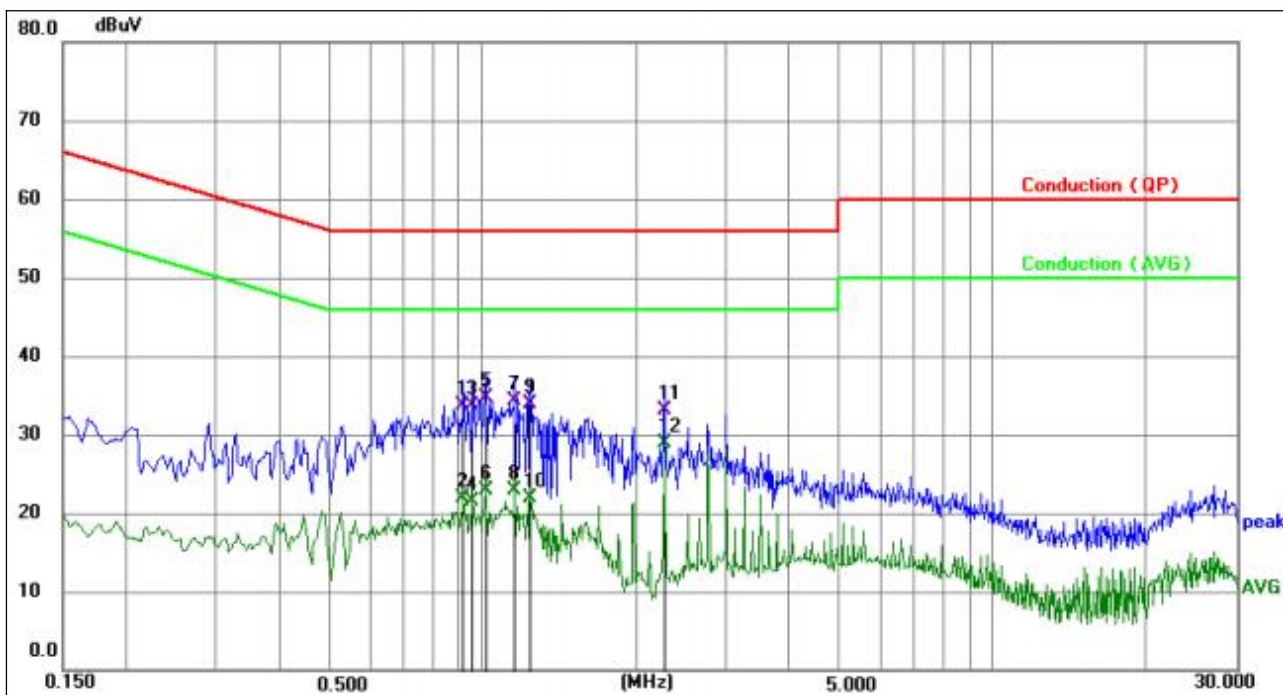

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.9150	23.66	10.05	33.71	56.00	-22.29	QP	P	
2	0.9150	11.81	10.05	21.86	46.00	-24.14	AVG	P	
3	0.9555	23.74	10.06	33.80	56.00	-22.20	QP	P	
4	0.9555	11.42	10.06	21.48	46.00	-24.52	AVG	P	
5	1.0140	24.60	10.06	34.66	56.00	-21.34	QP	P	
6	1.0140	12.90	10.06	22.96	46.00	-23.04	AVG	P	
7	1.1580	24.34	10.06	34.40	56.00	-21.60	QP	P	
8	1.1580	12.91	10.06	22.97	46.00	-23.03	AVG	P	
9	1.2390	23.82	10.06	33.88	56.00	-22.12	QP	P	
10	1.2390	11.80	10.06	21.86	46.00	-24.14	AVG	P	
11	2.2694	23.04	10.07	33.11	56.00	-22.89	QP	P	
12 *	2.2694	18.78	10.07	28.85	46.00	-17.15	AVG	P	

Notes:

1. An initial pre-scan was performed on the line and neutral lines with peak detector.
2. Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission.
3. Measurement Level = Reading level + Correct Factor
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

6. RADIATED EMISSION MEASUREMENT

Test Requirement:	FCC Part15 C Section 15.209				
Test Method:	ANSI C63.10:2020				
Test Frequency Range:	9kHz to 1GHz				
Test site:	Measurement Distance: 3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Value
	9KHz-150KHz	Quasi-peak	200Hz	600Hz	Peak Value
	150KHz-30MHz	Quasi-peak	9KHz	30KHz	Quasi-peak
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak
	Above 1GHz	Peak	1MHz	3MHz	Peak
		Peak	1MHz	10Hz	Average

6.1 Radiated Emission Limits

Limits for frequency below 30MHz


Frequency	Limit (uV/m)	Measurement Distance(m)	Remark
0.009-0.490	2400/F(kHz)	300	Peak Value
0.490-1.705	24000/F(kHz)	30	Quasi-peak Value
1.705-30	30	30	Quasi-peak Value

Limits for frequency Above 30MHz


Frequency	Limit (dBuV/m @3m)	Remark
30MHz-88MHz	40.00	Quasi-peak Value
88MHz-216MHz	43.50	Quasi-peak Value
216MHz-960MHz	46.00	Quasi-peak Value
960MHz-1GHz	54.00	Quasi-peak Value
Above 1GHz	54.00	Average Value
	74.00	Peak Value

6.2 Anechoic Chamber Test Setup Diagram

(A) Radiated Emission Test-Up Frequency Below 30MHz

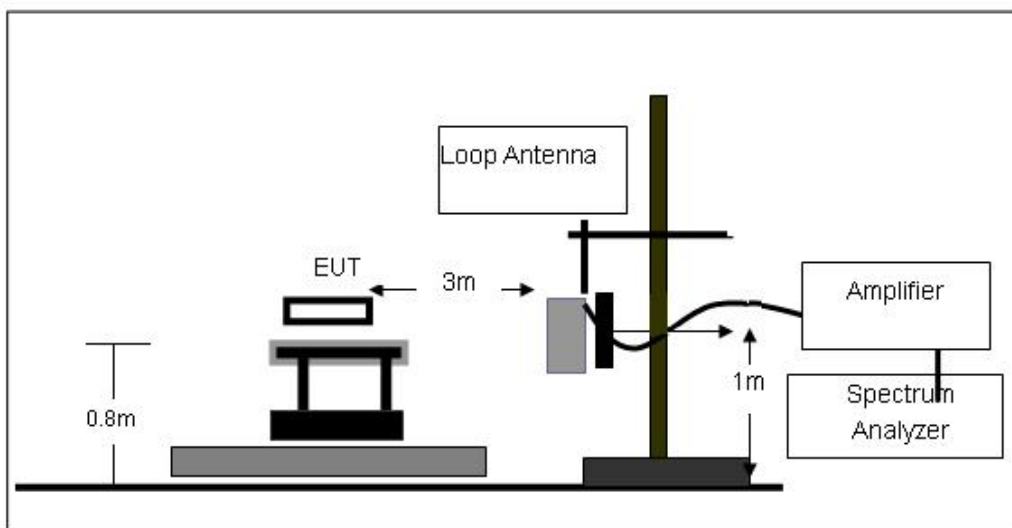

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

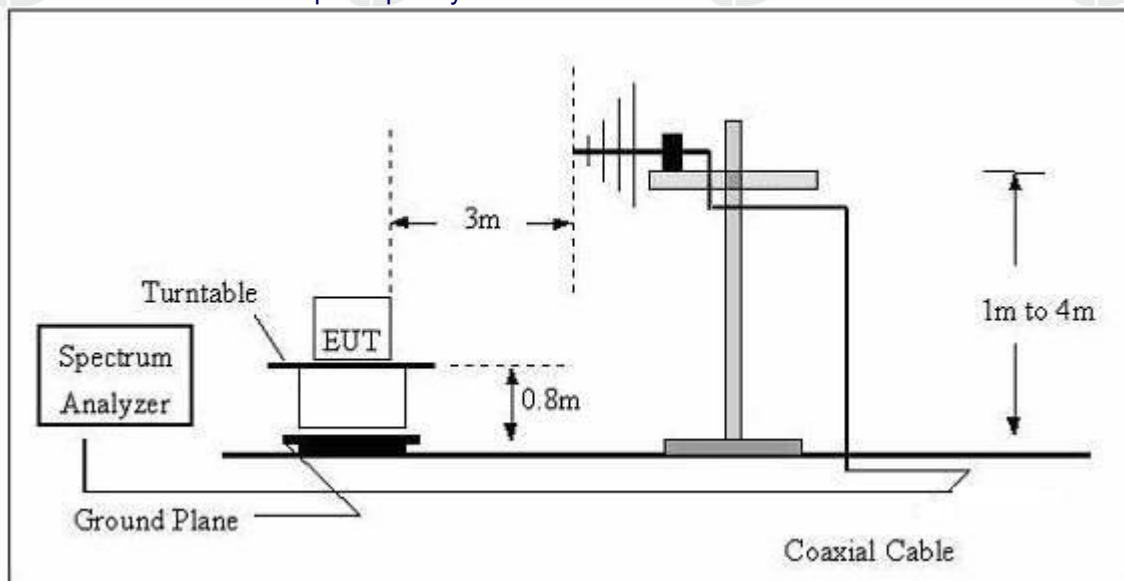

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209 and FCC 15.205 limits.

6.3 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on measurement.

6.4 DEVIATION FROM TEST STANDARD

No deviation



6.5 Test Result


Measurement data:

Note: Limit dBuV/m @3m = Limit dBuV/m @300m+ 80

Limit dBuV/m @3m = Limit dBuV/m @30m + 40

9 kHz~30 MHz

Mode 16:

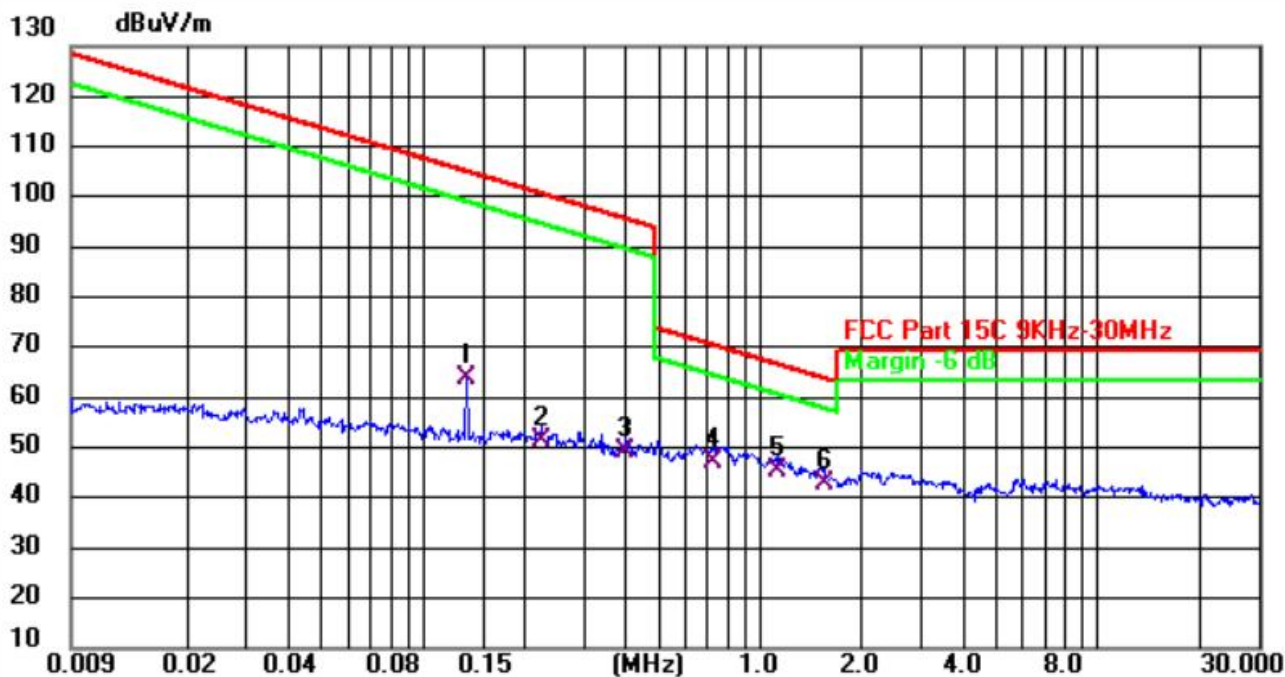

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	0.1338	63.45	0.16	63.61	105.07	-41.46	Peak	-	-	P
2	0.2235	50.75	0.58	51.33	100.62	-49.29	Peak	-	-	P
3	0.3975	48.22	0.92	49.14	95.62	-46.48	Peak	-	-	P
4	0.7186	45.55	1.54	47.09	70.47	-23.38	QP	-	-	P
5	1.1130	43.07	2.34	45.41	66.67	-21.26	QP	-	-	P
6 *	1.5403	39.73	3.22	42.95	63.85	-20.90	QP	-	-	P

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Emission Level = Meter Reading - Factor


Margin = Emission Level- Limit.

1. The amplitude of emissions which are attenuated by more than 20db below the permissible value has no need to be reported.

2. '-'Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.



Mode 22:

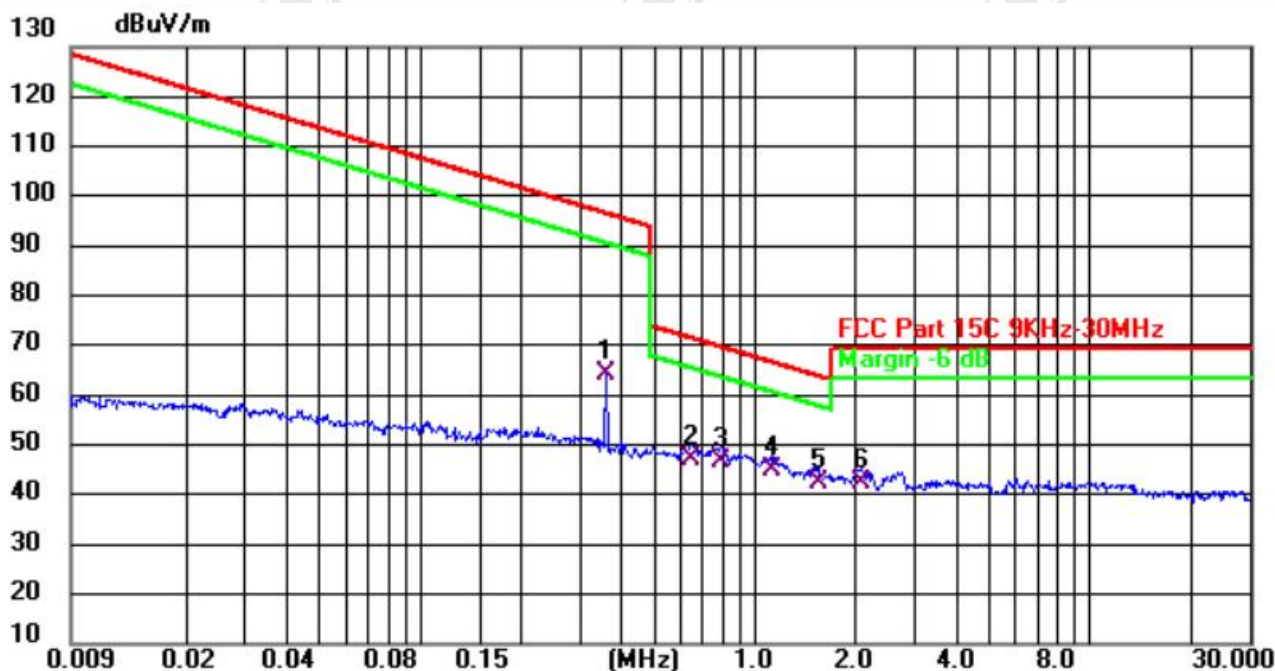

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	0.3604	63.29	0.84	64.13	96.47	-32.34	Peak	-	-	P
2	0.6411	45.81	1.38	47.19	71.47	-24.28	QP	-	-	P
3	0.7922	45.12	1.69	46.81	69.63	-22.82	QP	-	-	P
4	1.1130	42.57	2.34	44.91	66.67	-21.76	QP	-	-	P
5 *	1.5403	39.23	3.22	42.45	63.85	-21.40	QP	-	-	P
6	2.0800	38.12	4.32	42.44	69.54	-27.10	QP	-	-	P

Note:

Pre-scan in the all of mode, the worst case in of was recorded.

Factor = antenna factor + cable loss – pre-amplifier.

Emission Level = Meter Reading - Factor

Margin = Emission Level- Limit.


3. The amplitude of emissions which are attenuated by more than 20db below the permissible value has no need to be reported.

4. '-'Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.



30MHz-1GHz


Temperature:	24.6℃	Humidity	56.7%
Pressure:	1014 kPa	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Test mode:	Mode 13

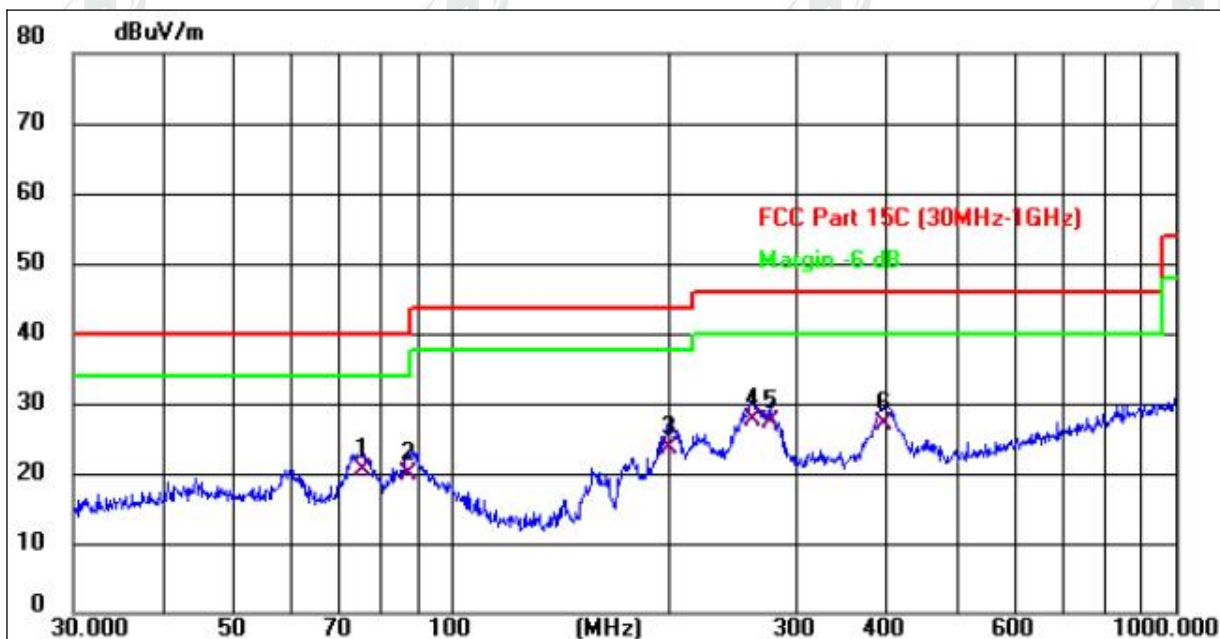

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	75.1821	32.99	-12.68	20.31	40.00	-19.69	QP	-	-	P
2	87.4175	31.70	-11.97	19.73	40.00	-20.27	QP	-	-	P
3	199.9855	33.70	-9.99	23.71	43.50	-19.79	QP	-	-	P
4 *	260.1444	35.43	-7.96	27.47	46.00	-18.53	QP	-	-	P
5	275.1570	34.83	-7.68	27.15	46.00	-18.85	QP	-	-	P
6	396.2412	32.11	-5.12	26.99	46.00	-19.01	QP	-	-	P



Temperature:	24.6°C	Humidity	56.7%
Pressure:	1014 kPa	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Test mode:	Mode 13

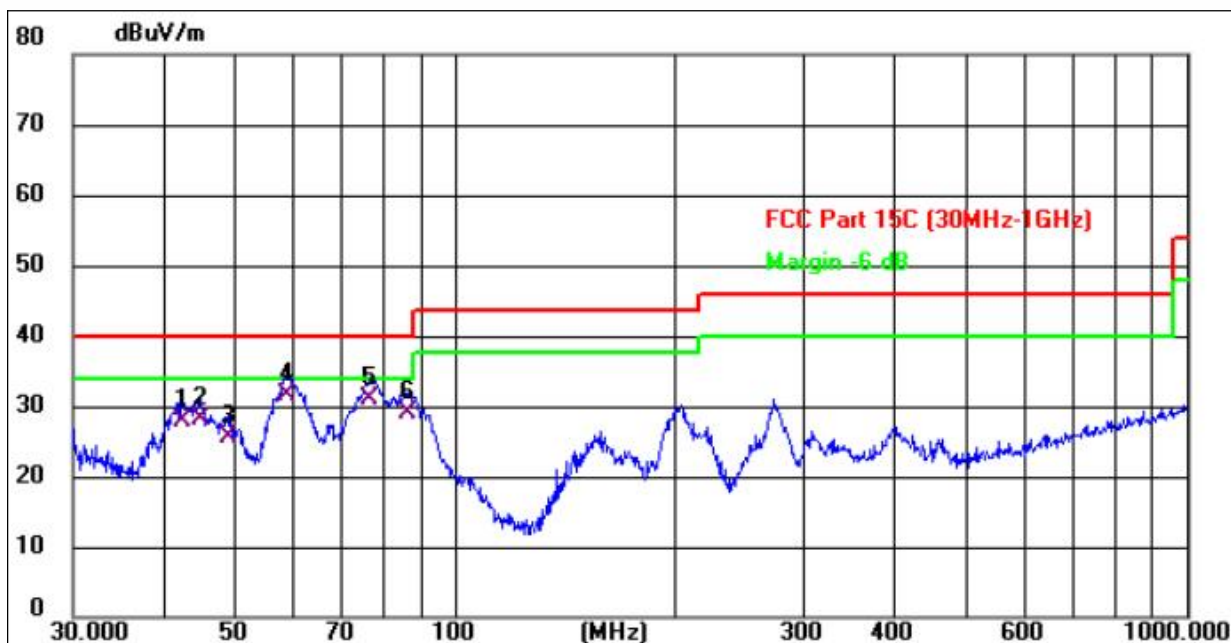

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Height (cm)	Azimuth (deg.)	P/F
1	42.4508	36.63	-8.88	27.75	40.00	-12.25	QP	-	-	P
2	44.7433	36.86	-8.76	28.10	40.00	-11.90	QP	-	-	P
3	48.8428	34.12	-8.50	25.62	40.00	-14.38	QP	-	-	P
4 *	58.8185	40.87	-9.29	31.58	40.00	-8.42	QP	-	-	P
5	76.5119	43.78	-12.85	30.93	40.00	-9.07	QP	-	-	P
6	86.2000	41.15	-12.19	28.96	40.00	-11.04	QP	-	-	P

Remarks:


1. Factor = Antenna Factor + Cable Loss – Preamplifier Factor
2. Level = Reading + Factor
3. Margin = Emission Level- Limit.
4. The emission levels of other frequencies are very lower than the limit and not show in test report.
5. '-' Means the test Degree and Height are not recorded by the test software and only show the worstcase in the test report.



7. BANDWIDTH TEST

1. Set RBW = 1%-5%OBW.
2. Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
3. Detector = Peak.
4. Trace mode = max hold.
5. Sweep = auto couple.
6. Allow the trace to stabilize.
7. Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 20 dB relative to the maximum level measured in the fundamental emission.

TEST SETUP

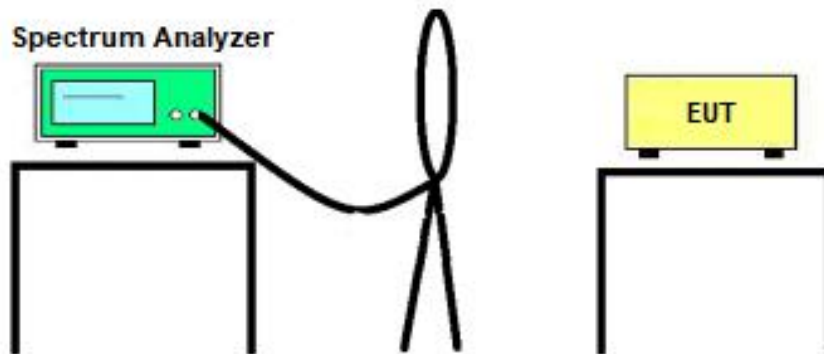



Temperature:	25.5 °C	Relative Humidity:	54%
Pressure:	1014kPa		

	Frequency (KHz)	20dB bandwidth (KHz)	Result
Watch coil	334.9	0.173	Pass
Phone coil	133.8	0.157	Pass
	360.4	0.327	Pass
Earphone coil	153.9	0.101	Pass


Watch coil




Phone coil



Phone coil

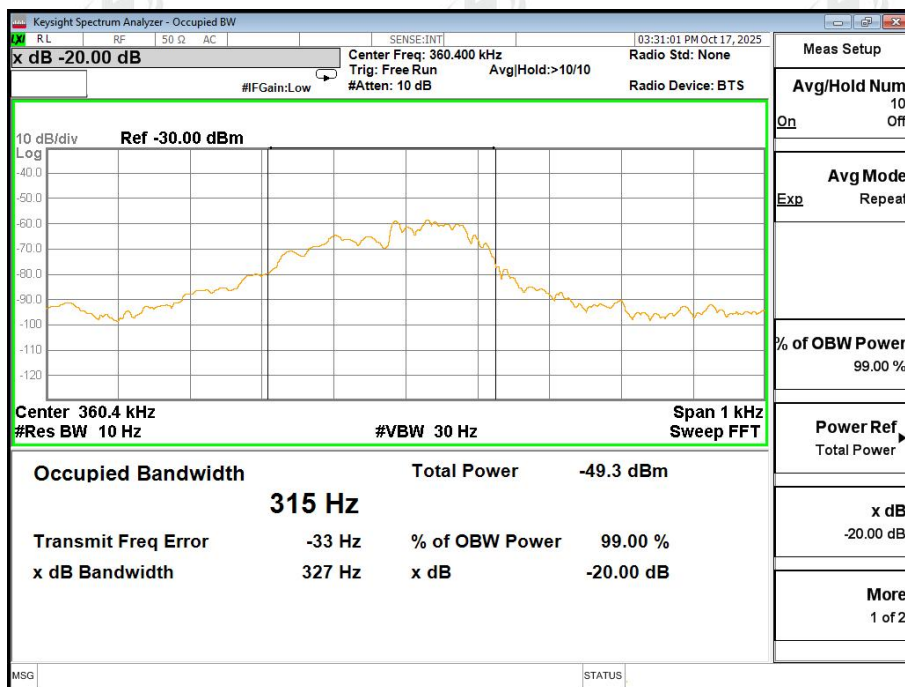

Earphone coil

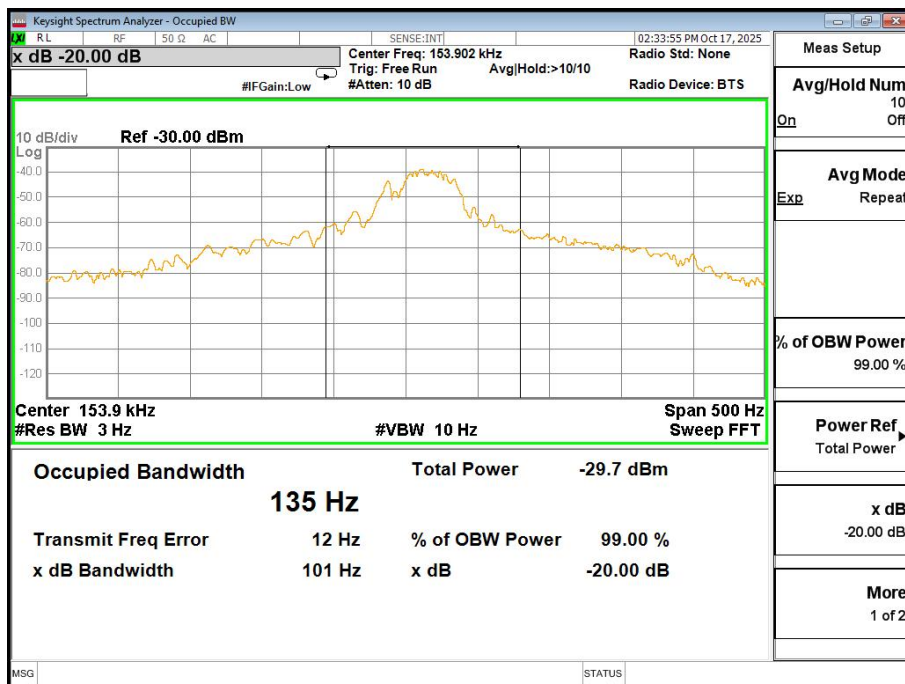

ANTENNA REQUIREMENT

Standard requirement:	FCC Part15 C Section 15.203
15.203 requirement: An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.	
EUT Antenna:	
The antenna is Coil Antenna, the best case gain of the antennas is 0dBi, reference to the appendix II for details	

8. TEST SETUP PHOTO

Reference to the appendix I for details.

9. EUT CONSTRUCTIONAL DETAILS

Reference to the appendix II for details.

******* END OF REPORT *******