

TEST REPORT

Applicant: Chengdu Xiaochen Technology Co., Ltd
EUT Description: VERTU META3 5G DIGITAL MOBILE PHONE
Model: VTL-202403
Brand: VERTU
FCC ID: 2BGHD-VTL202403
Standards: FCC 47 CFR Part 15 Subpart B
Date of Receipt: 2025/08/28
Date of Test: 2025/08/28 to 2025/10/20
Date of Issue: 2025/11/05

TOWE. tested the above equipment in accordance with the requirements set forth in the above standards. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

the results documented in this report apply only to the tested sample, under the conditions and modes of operation as described herein. It is the manufacturer's responsibility to assure that additional production units of the model are manufactured with identical electrical and mechanical components. All sample tested were in good operating condition throughout the entire test program. Measurement Uncertainties are published for informational purposes only and were not taken into account unless noted otherwise. without written approval of TOWE, the test report shall not be reproduced except in full.



Jim Huang
Approved By:



Mike Ou
Reviewed By:

Revision History

Rev.	Issue Date	Description	Revised by
01	2025/11/05	Original	Mike Ou

Summary of Test Results

Test Items	Test Standard	Result
AC Conducted Emissions	§15.107	PASS
Radiated Emissions	§15.109	PASS
Test Method: ANSI C63.4-2014		
Remark: Pass is EUT meets standard requirements.		

Table of Contents

1	General Description	5
1.1	Lab Information	5
1.1.1	Testing Location	5
1.1.2	Test Facility / Accreditations	5
1.2	Client Information	5
1.2.1	Applicant	5
1.2.2	Manufacturer	5
1.3	Product Information	6
2	Test Configuration During Test	7
2.1	Support Unit used in test	7
2.2	Accessory	7
2.3	Test Environment	7
2.4	Modifications	7
2.5	EUT Test Mode	8
3	Equipment and Measurement Uncertainty	9
3.1	Test Equipment List	9
3.2	Measurement Uncertainty	9
4	Test Results	10
4.1	AC Conducted Emissions	10
4.2	Radiated Emissions	16
5	Test Setup Photos	26

1 General Description

1.1 Lab Information

1.1.1 Testing Location

These measurements tests were conducted at the Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. facility located at F401 and F101, Building E, Hongwei Industrial Zone, Liuxian 3rd Road, Bao'an District, Shenzhen, China. The measurement facility is compliant with the test site requirements specified in ANSI C63.4-2014

Tel.: +86-755-27212361

Contact Email: info@towewireless.com

1.1.2 Test Facility / Accreditations

A2LA (Certificate Number: 7088.01)

This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2017 General requirements for the competence of testing and calibration laboratories. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated April 2017).

FCC Designation No.: CN1353

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized as an accredited testing laboratory. Designation Number: CN1353.

ISED CAB identifier: CN0152

Sushi TOWE Wireless Testing(Shenzhen) Co., Ltd. has been recognized by ISED as an accredited testing laboratory.

CAB identifier: CN0152

Company Number: 31000

1.2 Client Information

1.2.1 Applicant

Applicant:	Chengdu Xiaochen Technology Co., Ltd
Address:	3rd Floor,Building B15,Ganzhizhongguo Chengdu Center,No.777 Huafu Avenue Shuangliu County,Chengdu City,Sichuan Province,China

1.2.2 Manufacturer

Manufacturer:	VERTU INTERNATIONAL CORPORATION LIMITED
Address:	Chase Business Centre 39-41 Chase Side London England N14 5BP

1.3 Product Information

EUT Description:	VERTU META3 5G DIGITAL MOBILE PHONE		
Model:	VTL-202403		
Brand:	VERTU		
Hardware Version:	P10		
Software Version:	15.0.1_6.01.01.01		
IMEI:	357125130005048		
Device Capabilities:	GSM/WCDMA/LTE/NR + BT/BLE + Wi-Fi DTS/UNII a/b/g/n/ac/ax/be + GNSS, NFC		
Frequency bands within 30-960MHz	Frequency Bands	Tx Frequency	Rx Frequency
	GSM 850	824 ~ 849 MHz	869 ~ 894 MHz
	WCDMA Band V	824 ~ 849 MHz	869 ~ 894 MHz
	LTE Band 5	824 ~ 849 MHz	869 ~ 894 MHz
	LTE Band 12	699 ~ 716 MHz	729 ~ 746 MHz
	LTE Band 17	704 ~ 716 MHz	734 ~ 746 MHz
	LTE Band 26 (814 ~ 824 MHz)	814 ~ 824MHz	859 ~ 869 MHz
	LTE Band 26 (824 ~ 849 MHz)	824 ~ 849 MHz	869 ~ 894 MHz
	NR Band n5	824 to 849 MHz	869 to 894 MHz
Remark: The above EUT's information was declared by applicant, please refer to the specifications or user's manual for more detailed description.			

2 Test Configuration During Test

2.1 Support Unit used in test

Description	Manufacturer	Model	Serial Number
Wideband Radio Communication Tester	R&S	CMW500	150645
Radio Communication Test Station	Anritsu	MT8000A	6262036781
Laptop	Dell	P104F	19W9NG3
Laptop	Lenovo	Thinkbook 14 G4+IAP	YX05AZ13

2.2 Accessory

Name	Model	Manufacturer
Adapter	STC-A515A-Z	RUIJING
USB Cable	USB-MU5-W-70-M-L	Dongguan Guojun Plastic Electronic Co.,Ltd
Headset	JWEP1036-Z01R	JUWEI ELECTRONICS CO.,LTD

2.3 Test Environment

Temperature:	Normal: 15°C ~ 35°C
Humidity:	30-75 % RH Ambient
Test Voltage:	AC 120V/60Hz
Remark: The testing environment is within the scope of the EUT user manual and meets the requirements of the standard testing environment.	

2.4 Modifications

No modifications were made during testing.

2.5 EUT Test Mode

Test Items	Test mode
AC Conducted Emissions	Mode1: Charging (USB AC Adapter) + Camera (Rear) Mode2: Charging (USB AC Adapter) + Camera (Front) (worst case for JBP) Mode3: Charging (USB AC Adapter) + MP4 Playing Mode4: USB Data Communication with PC Mode5: Charging (USB AC Adapter) + GSM 850 Idle (worst case for CXX) Mode6: Charging (USB AC Adapter) + WCDMA Band V Idle Mode7: Charging (USB AC Adapter) + LTE Band 5 Idle Mode8: Charging (USB AC Adapter) + LTE Band 12 Idle Mode9: Charging (USB AC Adapter) + LTE Band 17 Idle Mode10: Charging (USB AC Adapter) + LTE Band 26 Idle Mode11: Charging (USB AC Adapter) + NR Band n5 Idle
Radiated Emissions	Mode1: Charging (USB AC Adapter) + Camera (Rear) (worst case for JBP, above 1GHz) Mode2: Charging (USB AC Adapter) + Camera (Front) Mode3: Charging (USB AC Adapter) + MP4 Playing (worst case for JBP, below 1GHz) Mode4: USB Data Communication with PC Mode5: Charging (USB AC Adapter) + GSM 850 Idle (worst case for CXX) Mode6: Charging (USB AC Adapter) + WCDMA Band V Idle Mode7: Charging (USB AC Adapter) + LTE Band 5 Idle Mode8: Charging (USB AC Adapter) + LTE Band 12 Idle Mode9: Charging (USB AC Adapter) + LTE Band 17 Idle Mode10: Charging (USB AC Adapter) + LTE Band 26 Idle Mode11: Charging (USB AC Adapter) + NR Band n5 Idle

Note: All modes of operation were investigated, and only the worst case emissions are reported.

3 Equipment and Measurement Uncertainty

All test and measuring equipment utilized to perform the tests documented in this report are calibrated on a regular basis, whichever is less, and where applicable is traceable to recognized national standards.

3.1 Test Equipment List

Radiated Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
Biconic Logarithmic Periodic Antennas	Schwarzbeck	VULB9163	1643	2023/06/25	2026/06/24
Double-Ridged Horn Antennas	Schwarzbeck	BBHA 9120D	2809	2023/06/25	2026/06/24
Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	1290	2023/06/25	2026/06/24
Signal Analyzer	Keysight	N9020A	MY49100252	2025/03/11	2026/03/10
EXA Signal Analyzer, Multi-touch	Keysight	N9010B	MY63440541	2025/05/29	2026/05/28
EMI Tester Receiver	Rohde & Schwarz	ESR7	102719	2025/05/29	2026/05/28
Low Noise Amplifier	Tonscend	TAP9K3G40	AP23A8060273	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP01018050	AP22G806258	2025/03/11	2027/03/10
Low Noise Amplifier	Tonscend	TAP18040048	AP22G806247	2025/03/11	2027/03/10
Band Reject Filter Group	Townshend	JS0806-F	23A806F0652	N/A	N/A
Test Software	Tonscend	TS+	Version: 5.0.0	N/A	N/A
N/A: Not applicable, confirmed internally by the laboratory					

Conducted Emission					
Description	Manufacturer	Model	S.N.	Last Due	Cal Due
EMI Tester Receiver	Rohde & Schwarz	ESR3	103108	2025/05/29	2026/05/28
LISN	Rohde & Schwarz	ENV 216	102836	2025/01/04	2026/01/03
Test software	Rohde & Schwarz	ELEKTRA V4.61	N/A	N/A	N/A

3.2 Measurement Uncertainty

Parameter	U _{lab}
Conducted Emissions(150kHz~30MHz)	2.43dB
Radiated Emissions(30MHz~1000MHz)	4.66dB
Radiated Emissions(1GHz~18GHz)	5.42dB
Radiated Emissions(18GHz~40GHz)	5.46dB

Uncertainty figures are valid to a confidence level of 95%

4 Test Results

4.1 AC Conducted Emissions

Limits

Frequency range (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency.


Test Procedure

ANSI C63.4-2014.

Test Settings

1. The EUT was connected to AC power source through a LISN 1 (Line Impedance Stabilization Network) which provides a $50\Omega/50\mu\text{H} + 5\Omega$ linear impedance. The power cables of all other units of the EUT were connected to a second LISN 2, which was bonded to the ground reference plane in the same way as the LISN 1 for the unit being measured. A multiple socket outlet strip was used to connect multiple power cables to a single LISN provided the rating of the LISN was not exceeded.
2. The tabletop EUT was placed upon a non-metallic table 0.8m above the ground reference plane. And for floor-standing arrangement, the EUT was placed on the horizontal ground reference plane.
3. The test was performed with a vertical ground reference plane. The rear of the EUT shall be 0.4 m from the vertical ground reference plane. The vertical ground reference plane was bonded to the horizontal ground reference plane. The LISN 1 was placed 0.8 m from the boundary of the unit under test and bonded to a ground reference plane for LISNs mounted on top of the ground reference plane. This distance was between the closest points of the LISN 1 and the EUT. All other units of the EUT and associated equipment was at least 0.8 m from the LISN 2.
4. Set the test-receiver system to Peak detect function and specified bandwidth (if bandwidth =9kHz) with maximum hold mode. Then measurement is also conducted by average detector and Quasi-Peak detector function respectively.
5. Both sides of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4 on conducted measurement.

Test Setup

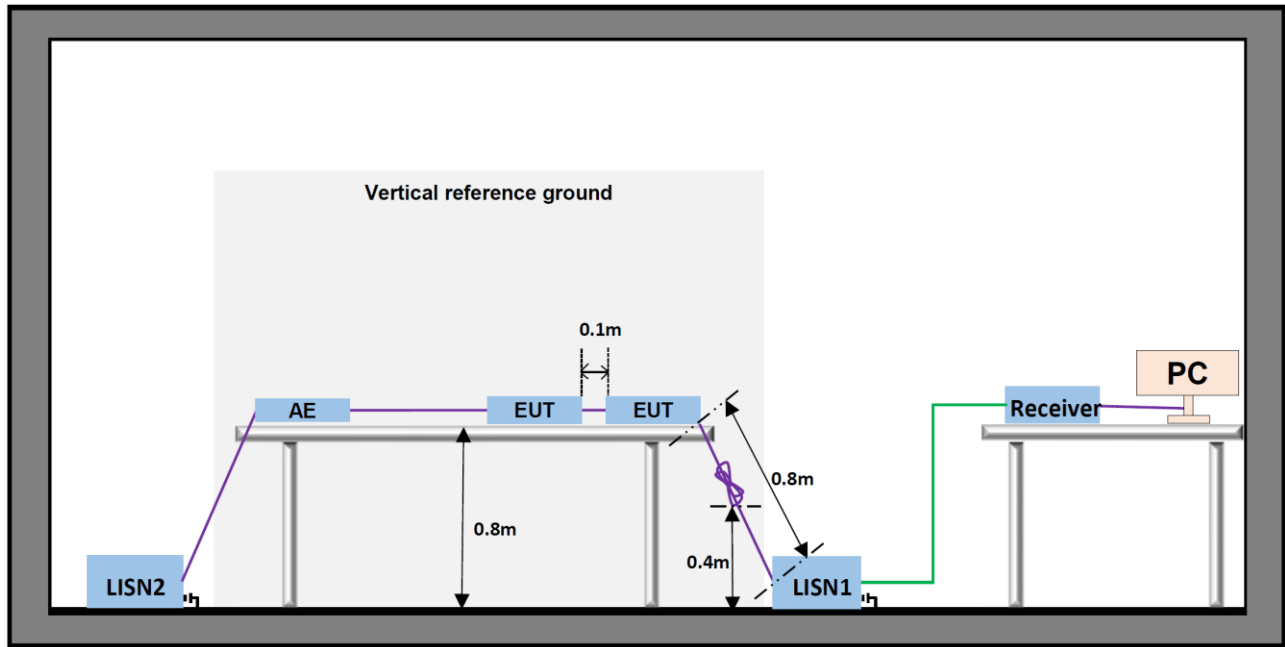

Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result for JBP:

Final Test mode:	Mode 2		
Test Voltage:	AC 120V / 60Hz	Phase:	Line



○ AVG Level @CriticalPoint
 ▲ AVG Level @Spectrum Overview
 ○ PK+ Level @CriticalPoint
 ▲ PK+ Level @Spectrum Overview
 ▲ AVG Limit @FCC Part 15 Class B
 ▲ QPK Limit @FCC Part 15 Class B

Rg	Frequency [MHz]	PK+ Level [dBμV]	PK+: QPK Limit [dBμV]	PK+ Margin [dB]	AVG Level [dBμV]	AVG Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line
1	0.159	59.05	65.52	6.47	43.91	55.52	11.60	9.52	L1
2	0.177	57.97	64.63	6.65	39.75	54.63	14.88	9.49	L1
3	0.186	51.55	64.21	12.67	24.08	54.21	30.14	9.50	L1
4	0.204	48.60	63.45	14.84	33.53	53.45	19.91	9.53	L1
5	0.227	49.88	62.58	12.70	29.90	52.58	22.68	9.60	L1
6	0.236	51.47	62.25	10.78	33.04	52.25	19.22	9.62	L1


Note:

1. Margin = Limit(dBμV) - Level(dBμV).



Test Result for CXX:

Final Test mode:	Mode 5		
Test Voltage:	AC 120V / 60Hz	Phase:	Line

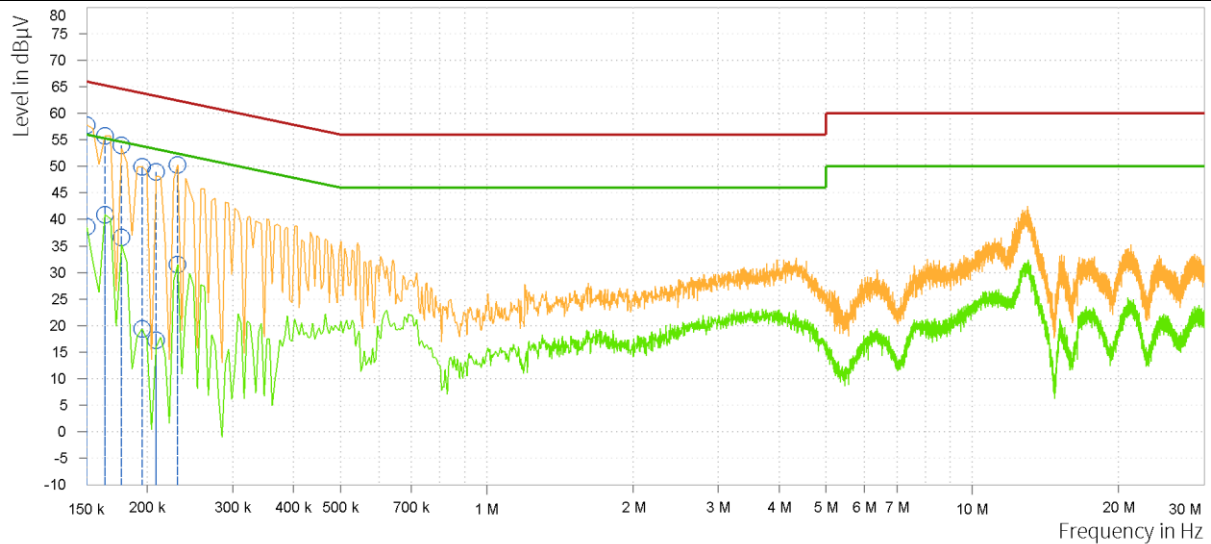

○ AVG Level @CriticalPoint
 ▲ AVG Level @Spectrum Overview
 ○ PK+ Level @CriticalPoint
 ▲ PK+ Level @Spectrum Overview
 ▲ AVG Limit @FCC Part 15 Class B
 ▲ QPK Limit @FCC Part 15 Class B

Rg	Frequency [MHz]	PK+ Level [dBμV]	PK+: QPK Limit [dBμV]	PK+ Margin [dB]	AVG Level [dBμV]	AVG Limit [dBμV]	AVG Margin [dB]	Correction [dB]	Line
1	0.150	57.81	66.00	8.19	38.68	56.00	17.32	9.57	L1
2	0.164	55.69	65.28	9.60	40.92	55.28	14.36	9.50	L1
3	0.177	53.97	64.63	10.65	36.61	54.63	18.01	9.49	L1
4	0.195	49.97	63.82	13.85	19.37	53.82	34.45	9.51	L1
5	0.209	49.01	63.26	14.26	17.28	53.26	35.99	9.55	L1
6	0.231	50.32	62.41	12.09	31.47	52.41	20.94	9.61	L1

Note:

1. Margin = Limit(dBμV) - Level(dBμV).



4.2 Radiated Emissions

Limits

Frequency	Field strength ($\mu\text{V/m}$)	Limit (dB $\mu\text{V/m}$)	Remark	Measurement distance (m)
30MHz-88MHz	100	40.0	Quasi-peak	3
88MHz-216MHz	150	43.5	Quasi-peak	3
216MHz-960MHz	200	46.0	Quasi-peak	3
960MHz-1GHz	500	54.0	Quasi-peak	3
Above 1GHz	500	74.0	Peak	3
		54.0	Average	

Test Procedure

ANSI C63.4:2014


Test Settings

- For radiated emissions measurement, the EUT shall be placed on a RF-transparent table or support at a nominal height of 80cm above the reference ground plane.
- Radiated measurements shall be made with the measurement antenna positioned in both horizontal and vertical polarization. The measurement antenna shall be varied from 1m to 4m in height above the reference ground in a search for the relative positioning that produces the maximum radiated signal level (i.e, field strength or received power), when orienting the measurement antenna in vertical polarization, the minimum height of the lowest element of the antenna shall clear the site reference ground plane by at least 25cm.
- For each suspected emission, the EUT was ranged to its worst case and then tune the antenna tower(from 1~4m) and turntable(from 0~360°) to find the maximum reading. Preamplifier and a high pass filter are used for the test in order to get better signal level to comply with the guidelines.
- Exploratory radiated emissions testing of handheld and/or body-worn devices shall include rotation of the EUT through three orthogonal axes (X/Y/Z Plane) to determine the orientation(attitude) that maximizes the emissions.
- For measurements below 1GHz the resolution bandwidth is set to 100kHz for peak detection measurements or 120kHz for Quasi-peak detection measurements in the 30~1000MHz range.
- If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, peak values of EUT will be reported. Otherwise, the emission will be repeated by using the quasi-peak method and reported for frequency range below 1GHz.
- For measurements above 1GHz the resolution bandwidth is set to 1MHz and the video resolution is set to 3MHz, the peak emission measurement will be measured by the peak detector, the average emission measurement will be measured by the average detector.
- The field strength is calculated by adding the Antenna Factor, Cable Factor. The basic equation with a sample calculation is as follows:
 Level = Reading(dB μV) + Factor(dB):
 Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
 AF = Antenna Factor(dB/m)
 Margin = Limit(dB $\mu\text{V/m}$) – Level(dB $\mu\text{V/m}$)
- Repeat above procedures until all frequencies measured was complete.
- Measure and record the results in the test report.

Test notes

- adiated emissions were measured from 30MHz - 40GHz to ensure that the provisions of 15.33(b)(1) are satisfied with respect to the upper frequency scanning range. No Spurious emissions were detected within 20dB of the limit above 18GHz.

Test Setup

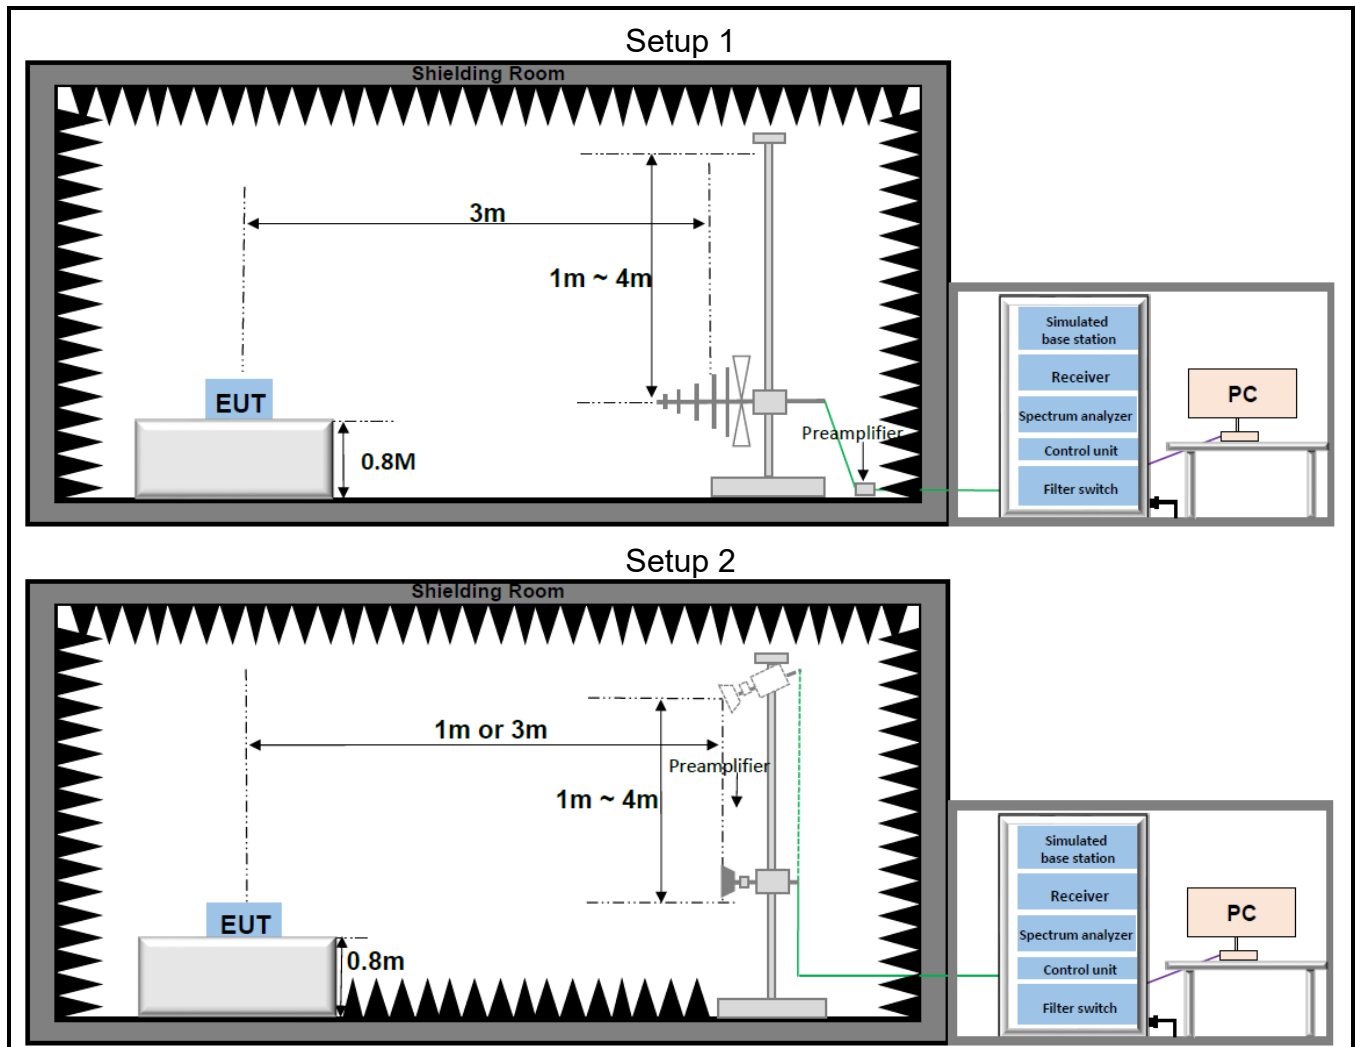


Measuring Instruments

The measuring equipment is listed in the section 3.1 of this test report.

Test Result for JBP:

Test Frequency	Below 1000MHz	Final Test mode:	Mode 3
Test Voltage:	AC 120V / 60Hz	Polarization:	Horizontal

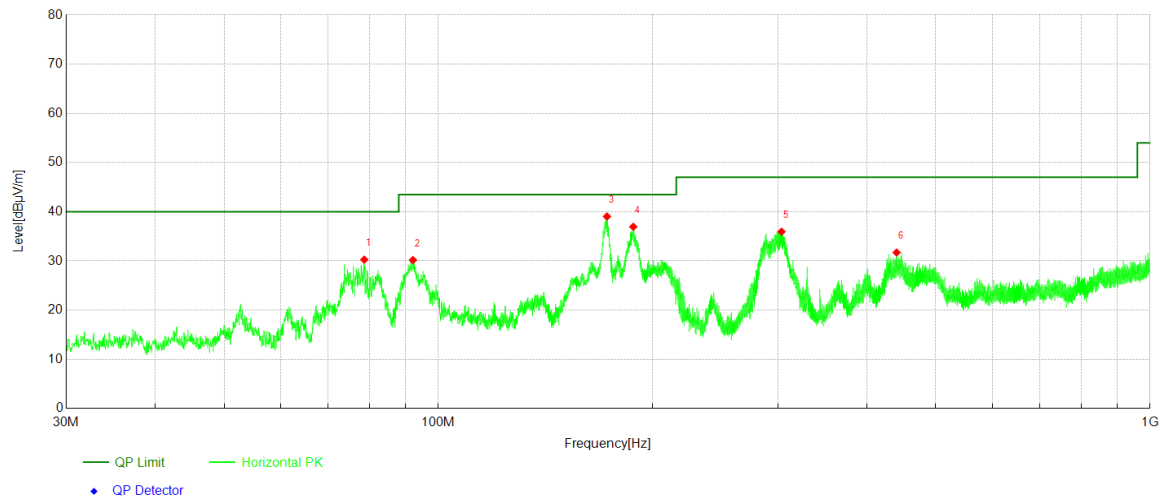


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	78.69	57.36	-27.10	30.26	40.00	9.74	Horizontal	PASS
2	92.13	55.66	-25.48	30.18	43.50	13.32	Horizontal	PASS
3	172.59	63.17	-24.13	39.04	43.50	4.46	Horizontal	PASS
4	187.92	61.04	-24.09	36.95	43.50	6.55	Horizontal	PASS
5	303.54	55.18	-19.23	35.95	47.00	11.05	Horizontal	PASS
6	440.46	40.42	-8.71	31.71	47.00	15.29	Horizontal	PASS

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)

Test Frequency	Below 1000MHz	Final Test mode:	Mode 3
Test Voltage:	AC 120V / 60Hz	Polarization:	Vertical

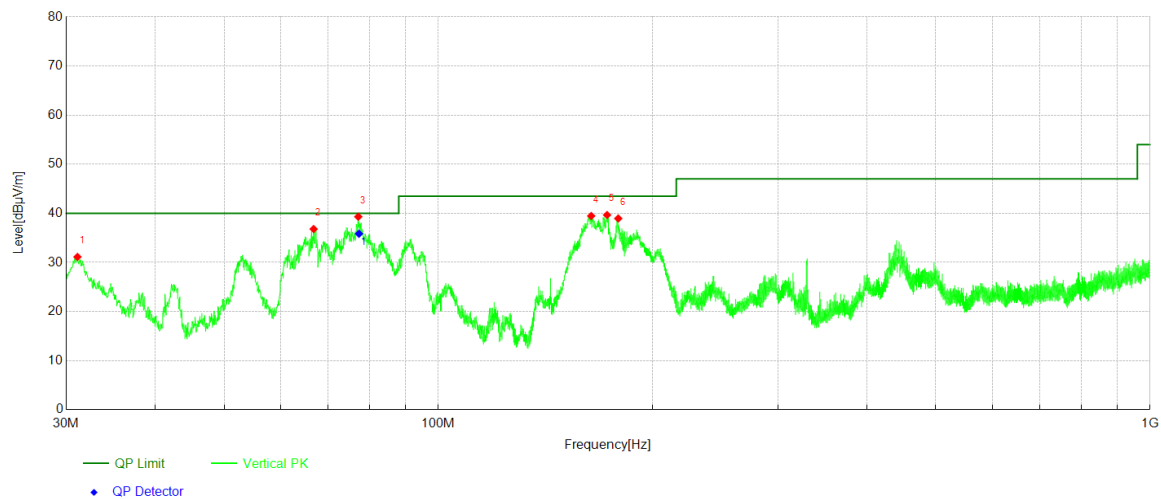

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	31.12	56.42	-25.30	31.12	40.00	8.88	Vertical	PASS
2	66.81	61.36	-24.56	36.80	40.00	3.20	Vertical	PASS
3	77.19	66.83	-27.52	39.31	40.00	0.69	Vertical	PASS
4	164.01	64.83	-25.37	39.46	43.50	4.04	Vertical	PASS
5	172.64	63.92	-24.26	39.66	43.50	3.84	Vertical	PASS
6	178.99	62.39	-23.44	38.95	43.50	4.55	Vertical	PASS


Data List

NO.	Freq. [MHz]	QP Reading [dBμV]	QP Value [dBμV/m]	QP Limit [dBμV/m]	QP Margin [dB]	Polarity	Verdict
1	77.3627	63.36	35.84	40.00	4.16	Vertical	PASS

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)

Test Frequency	Above 1000MHz	Final Test mode:	Mode 1
Test Voltage:	AC 120V / 60Hz	Polarization:	Horizontal

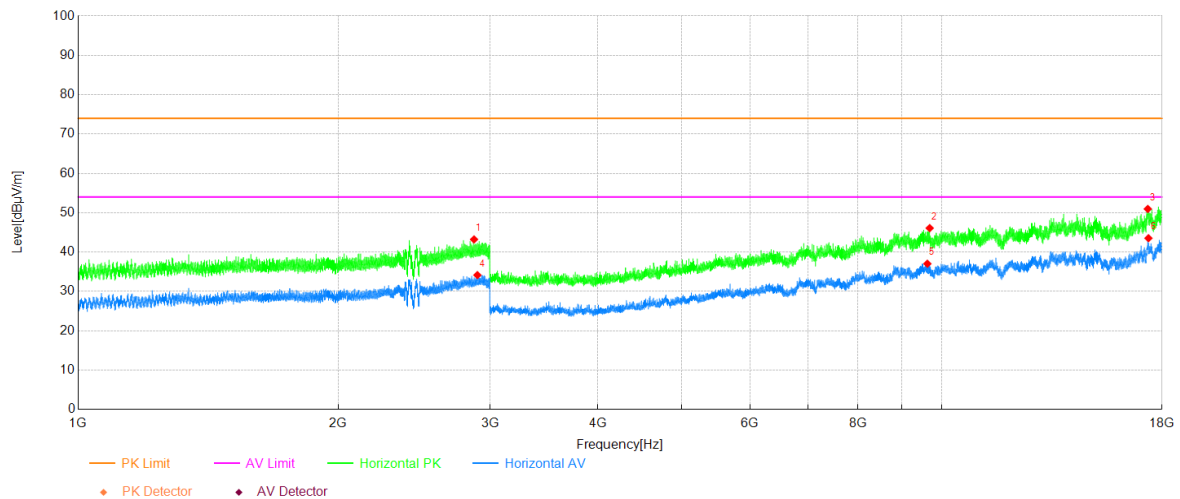


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2873.90	38.05	5.17	43.22	74.00	30.78	Horizontal	PASS
2	9687.00	42.81	3.29	46.10	74.00	27.90	Horizontal	PASS
3	17328.00	39.12	11.85	50.97	74.00	23.03	Horizontal	PASS
4	2899.90	28.85	5.30	34.15	54.00	19.85	Horizontal	PASS
5	9627.00	34.21	2.84	37.05	54.00	16.95	Horizontal	PASS
6	17359.50	31.05	12.49	43.54	54.00	10.46	Horizontal	PASS

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)

Test Frequency	Above 1000MHz	Final Test mode:	Mode 1
Test Voltage:	AC 120V / 60Hz	Polarization:	Vertical

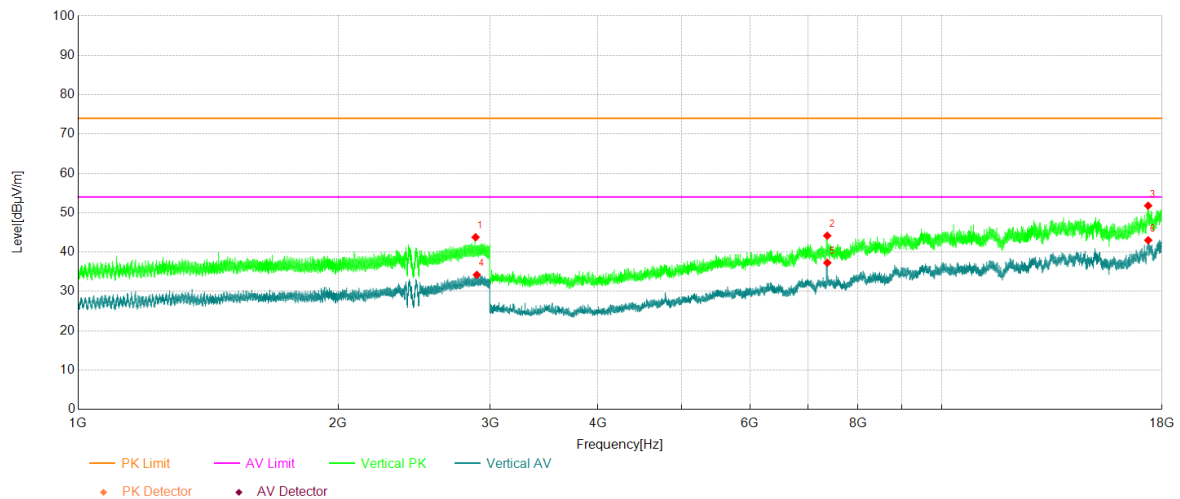

Data List


NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2885.90	38.56	5.22	43.78	74.00	30.22	Vertical	PASS
2	7371.75	45.49	-1.32	44.17	74.00	29.83	Vertical	PASS
3	17346.00	39.11	12.68	51.79	74.00	22.21	Vertical	PASS
4	2895.60	28.94	5.28	34.22	54.00	19.78	Vertical	PASS
5	7373.25	38.60	-1.30	37.30	54.00	16.70	Vertical	PASS
6	17349.75	30.17	12.85	43.02	54.00	10.98	Vertical	PASS

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)

Test Result for CXX:

Test Frequency	Below 1000MHz	Final Test mode:	Mode 5
Test Voltage:	AC 120V / 60Hz	Polarization:	Horizontal

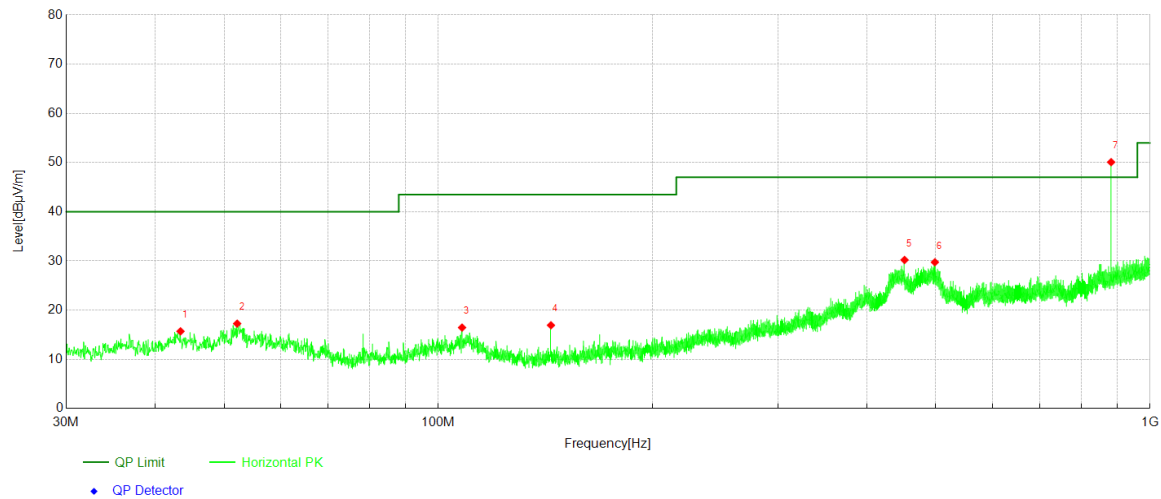


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	43.43	38.46	-22.77	15.69	40.00	24.31	Horizontal	PASS
2	52.16	39.39	-22.13	17.26	40.00	22.74	Horizontal	PASS
3	107.99	39.23	-22.78	16.45	43.50	27.05	Horizontal	PASS
4	143.98	42.50	-25.58	16.92	43.50	26.58	Horizontal	PASS
5	451.95	39.32	-9.12	30.20	47.00	16.80	Horizontal	PASS
6	498.56	38.17	-8.43	29.74	47.00	17.26	Horizontal	PASS
7	881.66	58.34	-8.25	50.09	-	-	Horizontal	NA

Note:

- Level = Reading(dBμV) + Factor(dB):
- Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
- AF = Antenna Factor(dB/m)
- Margin = Limit(dBμV/m) - Value(dBμV/m)
- This frequency which near "-" should be ignored because this is Fundamental (Downlink) frequency.

Test Frequency	Below 1000MHz	Final Test mode:	Mode 5
Test Voltage:	AC 120V / 60Hz	Polarization:	Vertical

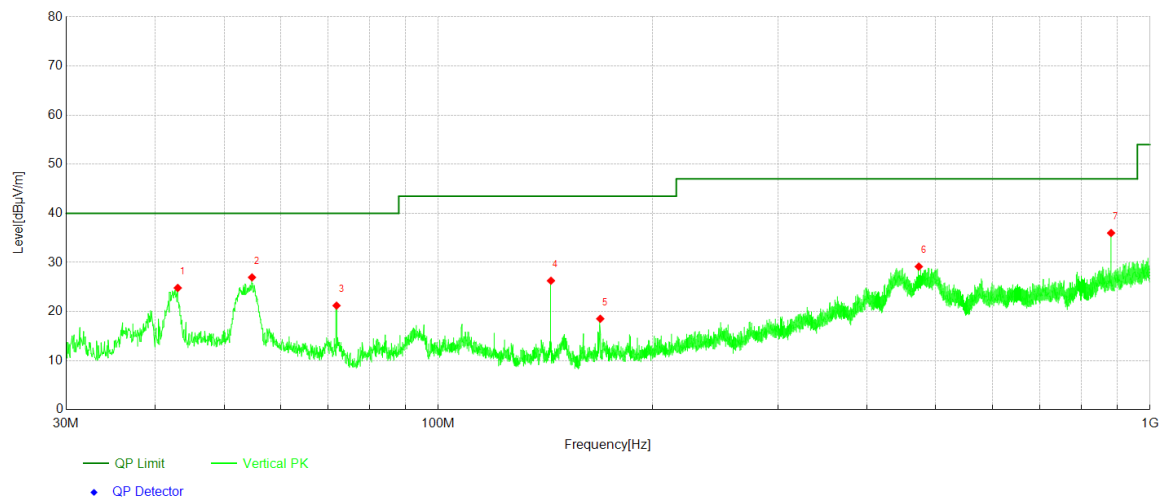


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	43.05	47.32	-22.52	24.80	40.00	15.20	Vertical	PASS
2	54.74	49.54	-22.59	26.95	40.00	13.05	Vertical	PASS
3	71.95	46.84	-25.64	21.20	40.00	18.80	Vertical	PASS
4	143.98	51.47	-25.20	26.27	43.50	17.23	Vertical	PASS
5	168.86	43.44	-24.92	18.52	43.50	24.98	Vertical	PASS
6	473.29	38.40	-9.25	29.15	47.00	17.85	Vertical	PASS
7	881.66	44.04	-8.05	35.99	-	-	Vertical	NA

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)
5. This frequency which near “-” should be ignored because this is Fundamental (Downlink) frequency.

Test Frequency	Above 1000MHz	Final Test mode:	Mode 5
Test Voltage:	AC 120V / 60Hz	Polarization:	Horizontal

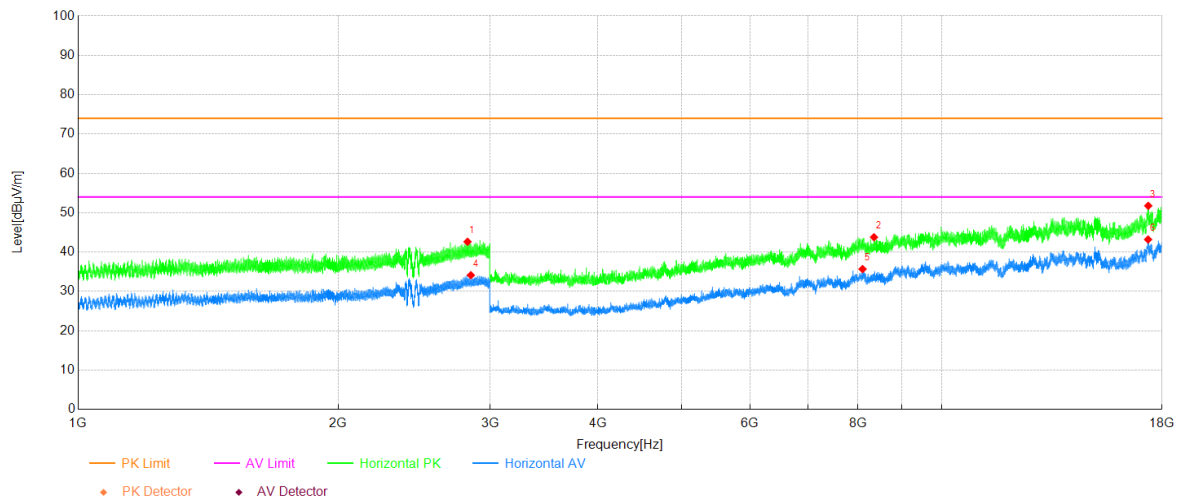


Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2824.50	37.73	4.90	42.63	74.00	31.37	Horizontal	PASS
2	8350.50	42.77	1.01	43.78	74.00	30.22	Horizontal	PASS
3	17350.50	38.93	12.84	51.77	74.00	22.23	Horizontal	PASS
4	2849.80	29.09	5.04	34.13	54.00	19.87	Horizontal	PASS
5	8099.25	35.36	0.32	35.68	54.00	18.32	Horizontal	PASS
6	17343.00	30.67	12.54	43.21	54.00	10.79	Horizontal	PASS

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)

Test Frequency	Above 1000MHz	Final Test mode:	Mode 5
Test Voltage:	AC 120V / 60Hz	Polarization:	Vertical

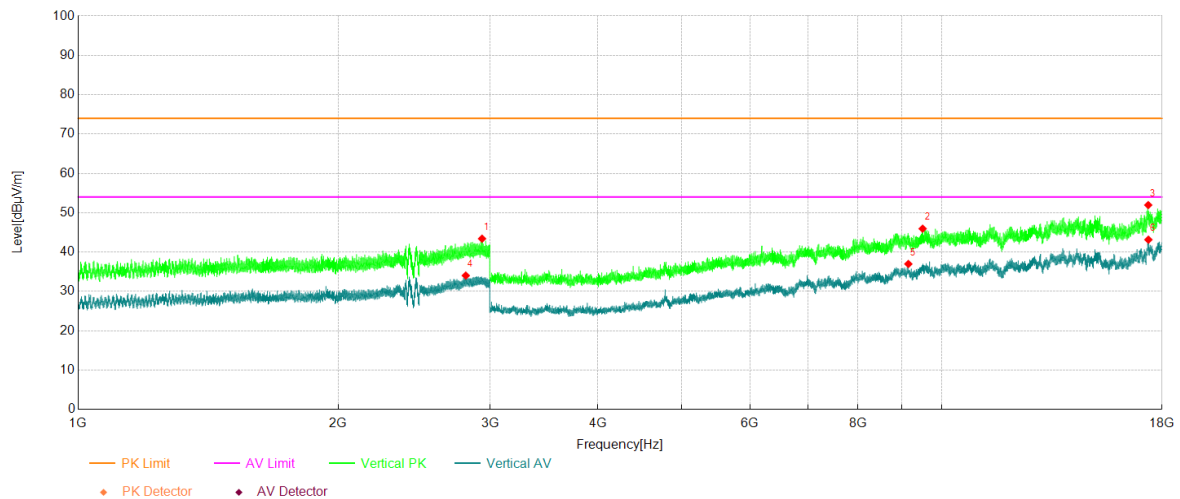

Data List

NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity	Verdict
1	2936.10	37.95	5.46	43.41	74.00	30.59	Vertical	PASS
2	9506.25	43.30	2.65	45.95	74.00	28.05	Vertical	PASS
3	17349.75	39.11	12.85	51.96	74.00	22.04	Vertical	PASS
4	2811.40	29.20	4.83	34.03	54.00	19.97	Vertical	PASS
5	9151.50	33.73	3.25	36.98	54.00	17.02	Vertical	PASS
6	17357.25	30.57	12.58	43.15	54.00	10.85	Vertical	PASS

Note:

1. Level = Reading(dBμV) + Factor(dB):
2. Factor = Cable Factor(dB) + AF(dB/m) - Preamplifier gain(dB)
3. AF = Antenna Factor(dB/m)
4. Margin = Limit(dBμV/m) - Value(dBμV/m)

5 Test Setup Photos

The detailed test data see: **Appendix-F 15B Setup Photos**

~The End~