


WIFI 2.4G 802.11b 6CH Right tilted Ant8

Communication System: WLAN 2.4GHz; Frequency: 2437.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2437.000 MHz; σ = 1.83 S/m; ϵ_r = 40.3

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.55, 7.55, 7.55); Calibrated: 2026-02-02
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2025-11-11
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.434 W/kg; SAR (10g) = 0.217 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.461 W/kg; SAR (10g) = 0.217 W/kg;
M2/M1 [%]=81.3
Dist 3dB Peak [mm]=8.1

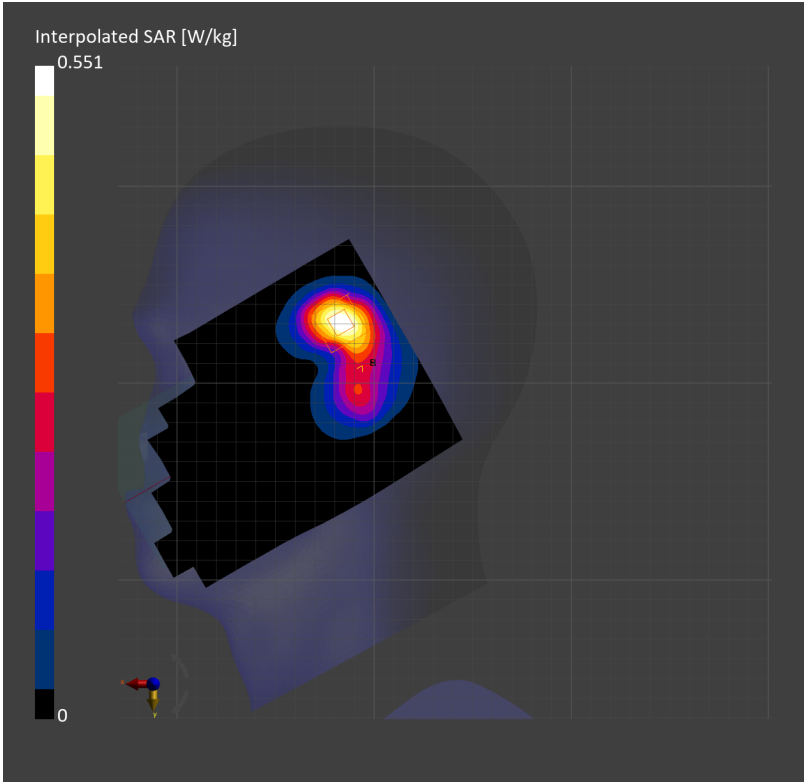


WIFI 2.4G 802.11b 6CH Right side 10mm fold MIMO

Communication System: WLAN 2.4GHz; Frequency: 2437.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2437.000 MHz; σ = 1.83 S/m; ϵ_r = 40.3

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.55, 7.55, 7.55); Calibrated: 2026-02-02
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2025-11-11
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 192.0 mm): Measurement Grid: 8.0 mm x 12.0 mm
SAR (1g) = 0.146 W/kg; SAR (10g) = 0.062 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.139 W/kg; SAR (10g) = 0.061 W/kg;
M2/M1 [%]=79.4
Dist 3dB Peak [mm]=6.0

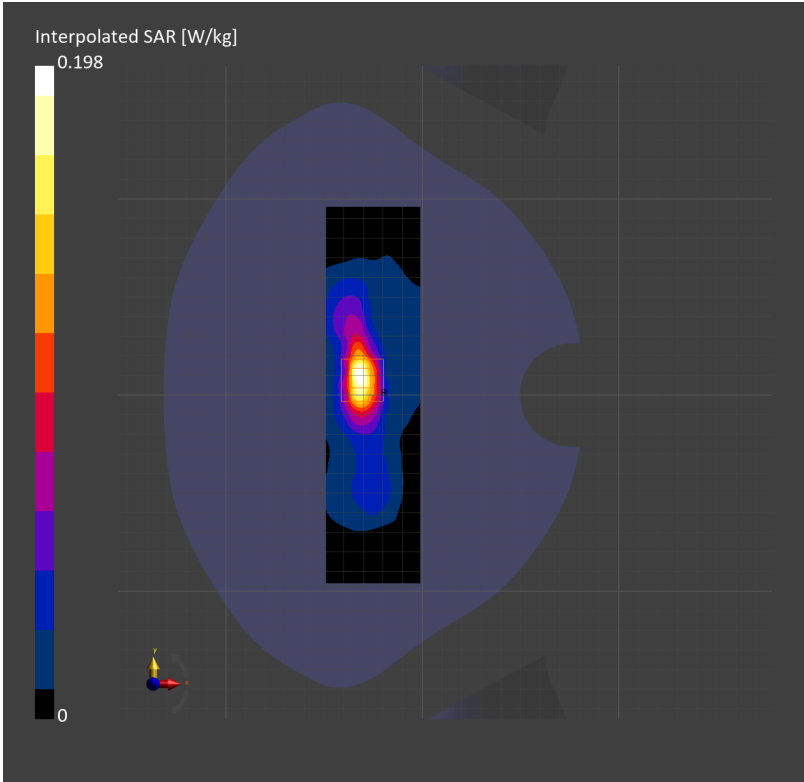


WIFI 2.4G 802.11b 1CH Right side 5mm MIMO

Communication System: WLAN 2.4GHz; Frequency: 2412.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2412.000 MHz; σ = 1.80 S/m; ϵ_r = 40.4

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.55, 7.55, 7.55); Calibrated: 2026-02-02
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2025-11-11
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 192.0 mm): Measurement Grid: 8.0 mm x 12.0 mm
SAR (1g) = 0.591 W/kg; SAR (10g) = 0.251 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = -0.05 dB
SAR (1g) = 0.550 W/kg; SAR (10g) = 0.224 W/kg;
M2/M1 [%]=77.6
Dist 3dB Peak [mm]=5.8

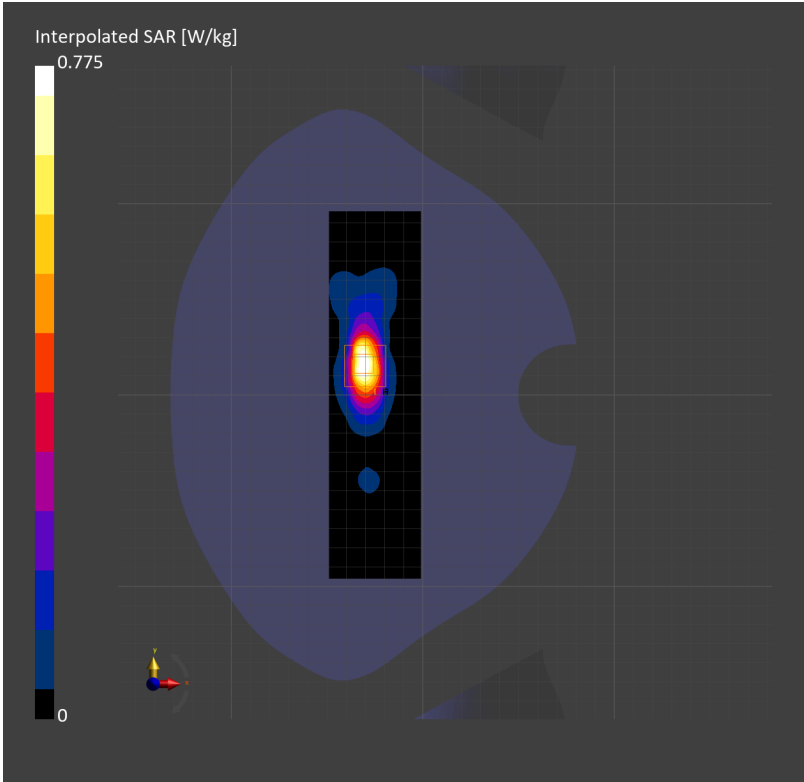


WIFI 5G 802.11a 20MHz 56CH Left Cheek MIMO

Communication System: WLAN 5GHz; Frequency: 5280.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 5280.000$ MHz; $\sigma= 4.68$ S/m; $\epsilon_r = 35.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(5.55, 5.55, 5.55); Calibrated: 2025-08-26
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2025-08-15
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 200.0 mm): Measurement Grid: 10.0 mm x 10.0 mm
SAR (1g) = 0.473 W/kg; SAR (10g) = 0.157 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 0.463 W/kg; SAR (10g) = 0.139 W/kg;
M2/M1 [%]=64.7
Dist 3dB Peak [mm]=5.8

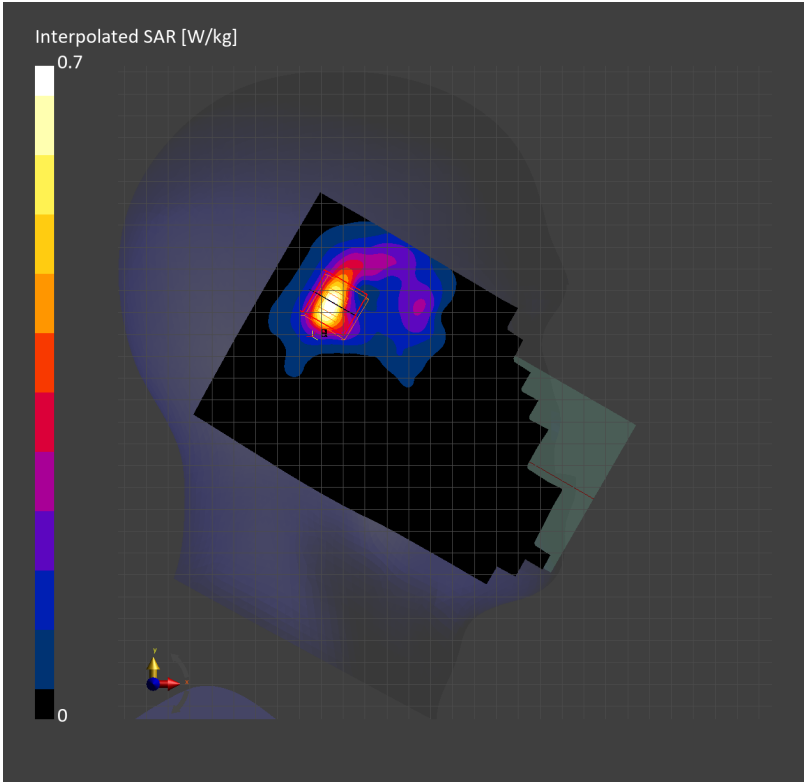


WIFI 5G 802.11ac 80MHz 138CH Right side 10mm MIMO

Communication System: U-NII-2C Standalone; Frequency: 5690.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 5690.000$ MHz; $\sigma= 5.12$ S/m; $\epsilon_r = 34.5$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(4.95, 4.95, 4.95); Calibrated: 2025-08-26
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2025-08-15
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.126 W/kg; SAR (10g) = 0.044 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = -0.04 dB
SAR (1g) = 0.131 W/kg; SAR (10g) = 0.045 W/kg;
M2/M1 [%]=60.1
Dist 3dB Peak [mm]=8.1

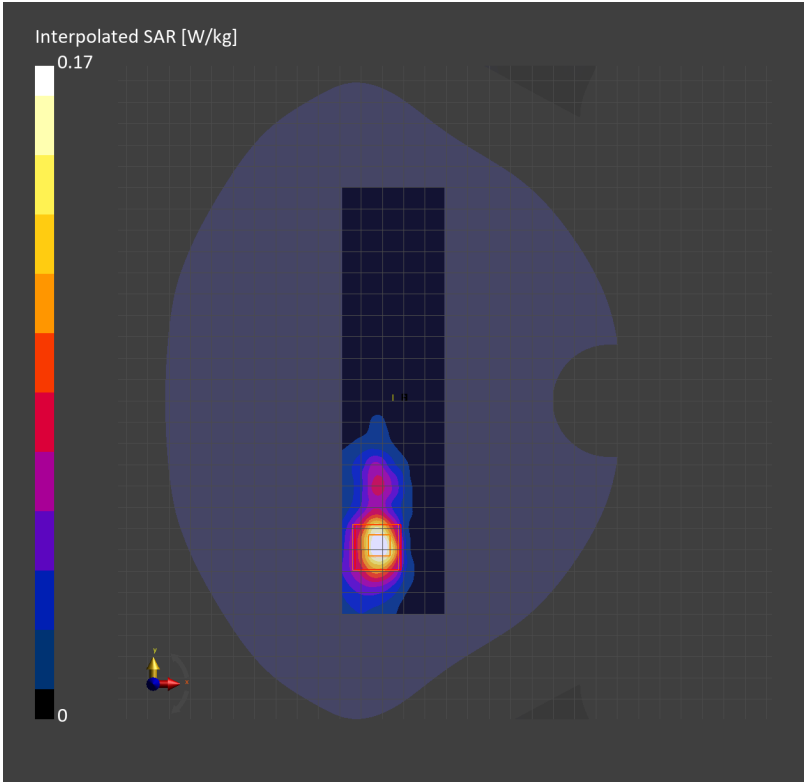


WIFI 5G 802.11a 20MHz 120CH Right side 5mm MIMO

Communication System: WLAN 5GHz; Frequency: 5600.000
Medium: Head Simulating Liquid. Medium parameters used: $f= 5600.000$ MHz; $\sigma= 5.04$ S/m; $\epsilon_r = 34.8$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(4.95, 4.95, 4.95); Calibrated: 2025-08-26
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2025-08-15
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 0.629 W/kg; SAR (10g) = 0.199 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.14 dB
SAR (1g) = 0.633 W/kg; SAR (10g) = 0.198 W/kg;
M2/M1 [%]=59.5
Dist 3dB Peak [mm]=6.4

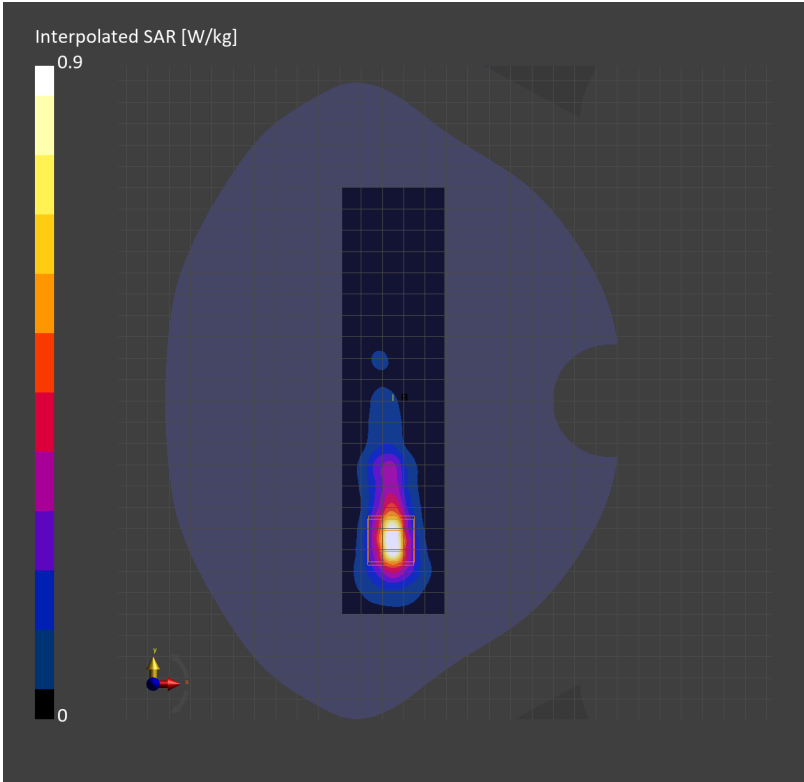


WIFI 5G 802.11n 40MHz 58CH Right side 0mm Ant5

Communication System: WLAN 5GHz; Frequency: 5270.000
Medium: Head Simulating Liquid. Medium parameters used: f= 5270.000 MHz; σ = 4.68 S/m; ϵ_r = 35.6

- DASY8 Configuration:
- Probe: EX3DV4 - SN7636; ConvF(5.55, 5.55, 5.55); Calibrated: 2025-08-26
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1803; Calibrated: 2025-08-15
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2156
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 200.0 mm): Measurement Grid: 8.0 mm x 10.0 mm
SAR (1g) = 1.09 W/kg; SAR (10g) = 0.315 W/kg;

Zoom Scan (24.0 mm x 24.0 mm x 22.0 mm): Measurement Grid: 4.0 mm x 4.0 mm x 1.4 mm
Power Drift = 0.02 dB
SAR (1g) = 1.35 W/kg; SAR (10g) = 0.331 W/kg;
M2/M1 [%]=60.7
Dist 3dB Peak [mm]=5.7

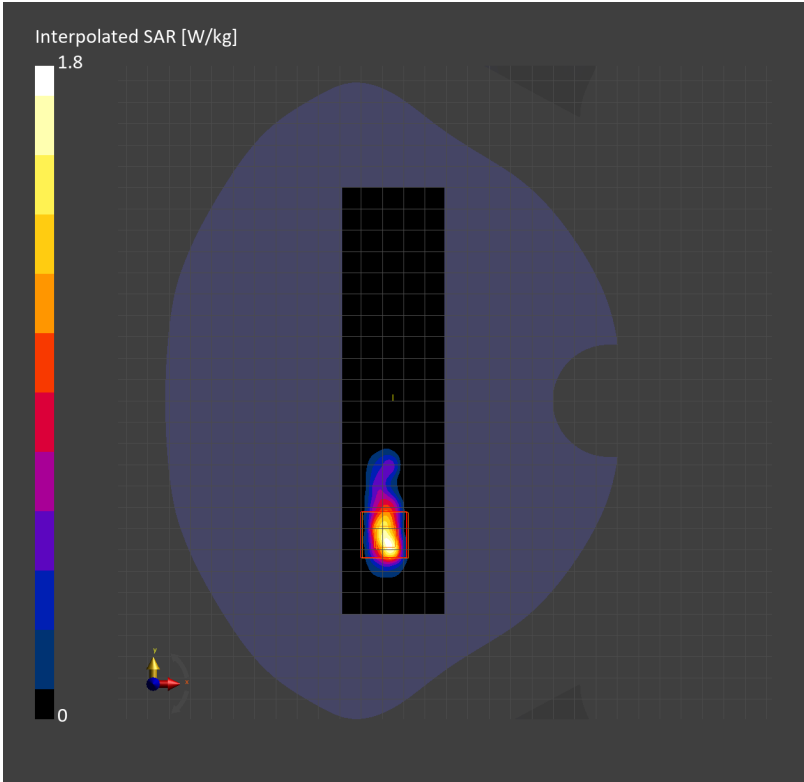


Bluetooth DH5 39CH Right tilted Ant8

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000
Medium: Head Simulating Liquid. Medium parameters used: $f=2441.000$ MHz; $\sigma=1.78$ S/m; $\epsilon_r=40.2$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.55, 7.55, 7.55); Calibrated: 2026-02-02
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2025-11-11
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (120.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.109 W/kg; SAR (10g) = 0.057 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.07 dB
SAR (1g) = 0.109 W/kg; SAR (10g) = 0.062 W/kg;
M2/M1 [%]=81.1
Dist 3dB Peak [mm]=9.1

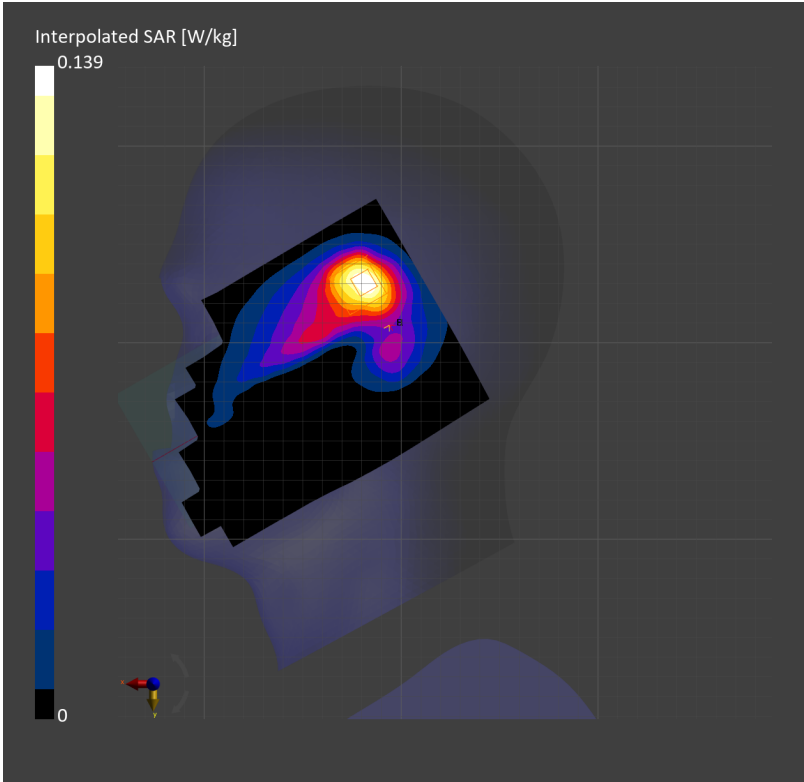


Bluetooth DH5 39CH Right side 10mm Ant4

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000
Medium: Head Simulating Liquid. Medium parameters used: f= 2441.000 MHz; σ = 1.78 S/m; ϵ_r = 40.1

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.55, 7.55, 7.55); Calibrated: 2026-02-02
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2025-11-11
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (48.0 mm x 192.0 mm): Measurement Grid: 8.0 mm x 12.0 mm
SAR (1g) = 0.127 W/kg; SAR (10g) = 0.063 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.05 dB
SAR (1g) = 0.127 W/kg; SAR (10g) = 0.063 W/kg;
M2/M1 [%]=78.4
Dist 3dB Peak [mm]=8.0

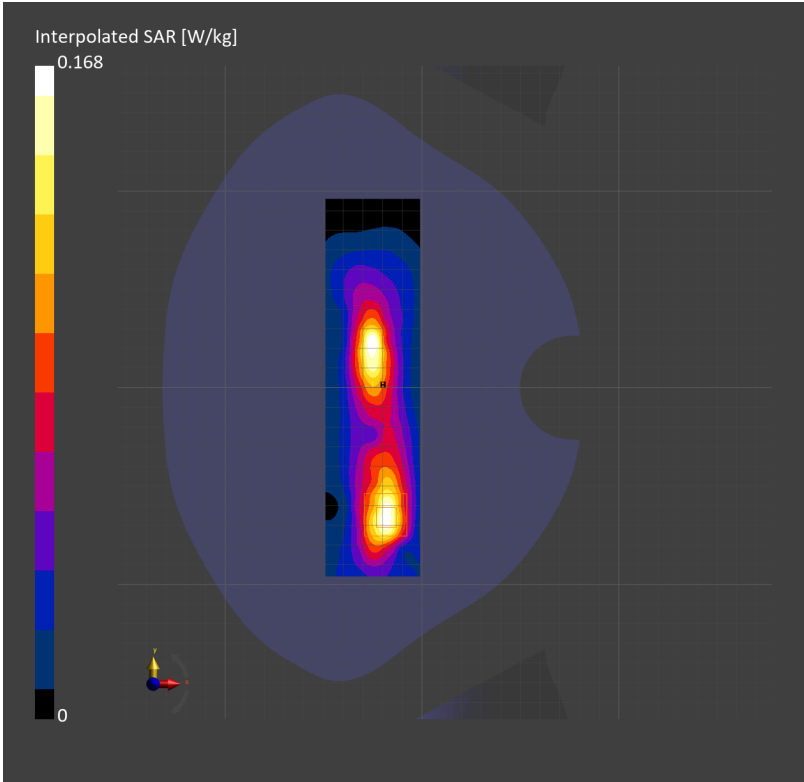

Bluetooth DH5 39CH Front side 5mm Ant4

Communication System: ISM 2.4 GHz Band; Frequency: 2441.000
Medium: Head Simulating Liquid. Medium parameters used: $f=2441.000$ MHz; $\sigma=1.78$ S/m; $\epsilon_r=40.1$

- DASY8 Configuration:
- Probe: EX3DV4 - SN7838; ConvF(7.55, 7.55, 7.55); Calibrated: 2026-02-02
 - Sensor-Surface: 1.4 mm
 - Electronics: DAE4ip Sn1830; Calibrated: 2025-11-11
 - Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2146
 - Measurement Software: cDASY8 V16.4.0.5005

Area Scan (192.0 mm x 192.0 mm): Measurement Grid: 12.0 mm x 12.0 mm
SAR (1g) = 0.285 W/kg; SAR (10g) = 0.145 W/kg;

Zoom Scan (30.0 mm x 30.0 mm x 30.0 mm): Measurement Grid: 5.0 mm x 5.0 mm x 1.5 mm
Power Drift = 0.02 dB
SAR (1g) = 0.317 W/kg; SAR (10g) = 0.160 W/kg;
M2/M1 [%]=77.0
Dist 3dB Peak [mm]=7.7

