



11n(40M)_TX_CH_09_Horizontal

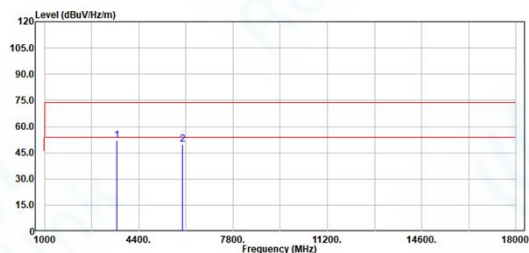

Site : chamber
Condition: 3m HORIZONTAL
EUT : VTL-202502
Mode : WIFI 2.4G TX_11N40_Ch 11
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	HORIZONTAL	51.19	52.12	74.00	-21.88	Peak	46.13	5.41	39.74
2 5982.000	HORIZONTAL	43.52	49.66	74.00	-24.34	Peak	47.19	9.76	33.37

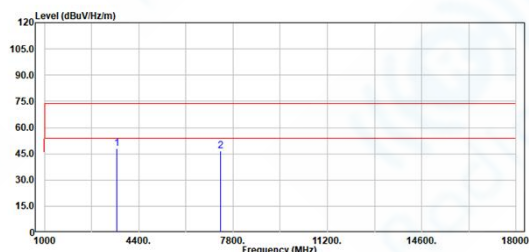

Site : chamber
Condition: 3m VERTICAL
EUT : VTL-202502
Mode : WIFI 2.4G TX_11N40_Ch 11
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	VERTICAL	47.19	48.12	74.00	-25.88	Peak	46.13	5.41	39.74
2 7345.000	VERTICAL	33.38	46.68	74.00	-27.32	Peak	47.53	11.35	37.57




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


11ax(20M)_TX_CH_01_Horizontal

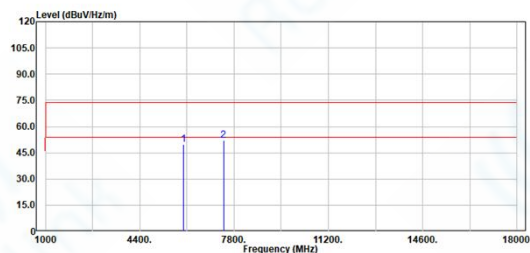

Site : chamber
Condition: 3m HORIZONTAL
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX20_Ch 1
Power : 19
Rate : MCS0
Note : IMEI:358028660010991


Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss Factor	Ant Loss Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 5982.000	HORIZONTAL	43.52	49.66	74.00	-24.34	Peak	47.19	9.76	33.37
2 7415.500	HORIZONTAL	39.00	51.97	74.00	-22.03	Peak	47.43	11.47	36.75

11ax(20M)_TX_CH_06_Horizontal

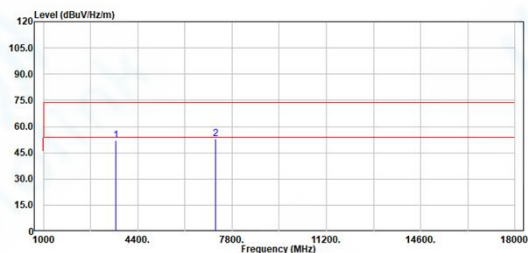


Site : chamber
Condition: 3m Horizontal
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX20_Ch 6
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss Factor	Ant Loss Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	Horizontal	51.02	51.95	74.00	-22.05	Peak	46.13	5.41	30.14
2 7192.250	Horizontal	41.33	52.77	74.00	-21.23	Peak	47.74	11.09	37.38

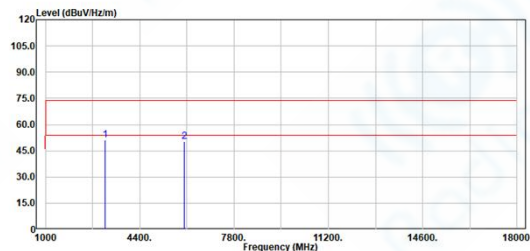

Site : chamber
Condition: 3m Vertical
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX20_Ch 1
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss Factor	Ant Loss Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3150.250	Horizontal	50.38	51.38	74.00	-22.70	Peak	46.48	5.26	29.50
2 5993.750	Horizontal	44.35	50.38	74.00	-23.62	Peak	47.21	9.81	33.33

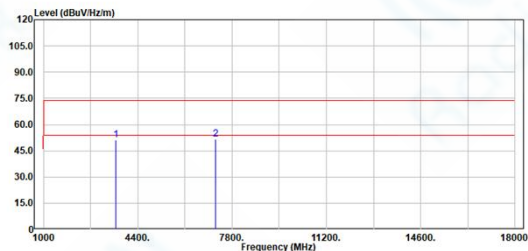


Site : chamber
Condition: 3m Vertical
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX20_Ch 6
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss Factor	Ant Loss Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	Horizontal	50.02	50.95	74.00	-23.05	Peak	46.13	5.41	30.14
2 7192.250	Horizontal	40.33	51.77	74.00	-22.23	Peak	47.74	11.09	37.38




11ax(20M)_TX_CH_11_Horizontal

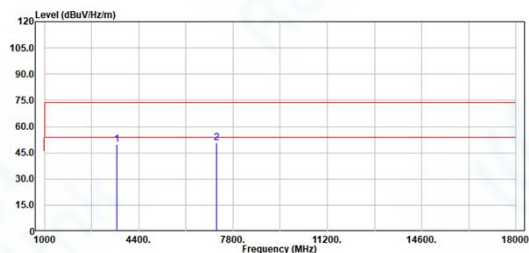

Site : chamber
Condition: 3m Horizontal
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX20_Ch 11
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	Horizontal	49.02	49.95	74.00	-24.05	Peak	46.13	5.41	30.14
2 7192.250	Horizontal	39.33	50.77	74.00	-23.23	Peak	47.74	11.09	37.30

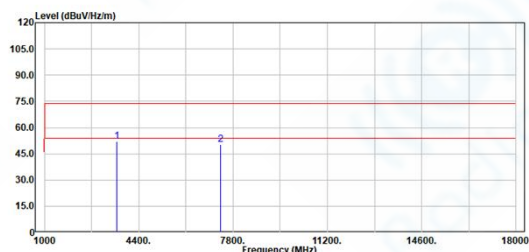

Site : chamber
Condition: 3m Vertical
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX20_Ch 11
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit Line	Over Limit	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	Vertical	51.36	52.29	74.00	-21.71	Peak	46.13	5.41	30.14
2 7356.750	Vertical	36.66	50.09	74.00	-23.91	Peak	47.51	11.37	37.54




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694


11ax(40M)_TX_CH_03_Horizontal

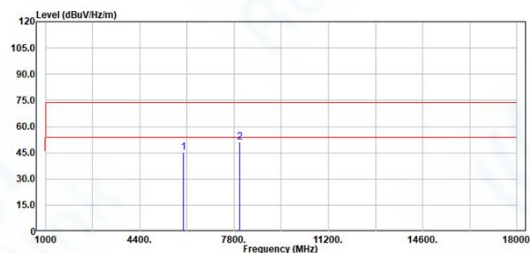

Site : chamber
Condition: 3m Horizontal
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX40_Ch 3
Power : 19
Rate : MCS0
Note : IMEI:358028660010991


Freq	Pol/Phase	Read Level	Level	Limit	Over	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1	5982.000 Horizontal	38.93	45.07	74.00	-28.93	Peak	47.19	9.76	33.37
2	7991.250 Horizontal	37.97	51.32	74.00	-22.68	Peak	47.45	11.90	37.42

11ax(40M)_TX_CH_06_Horizontal

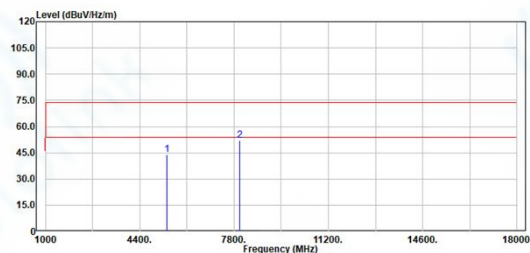


Site : chamber
Condition: 3m Horizontal
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX40_Ch 6
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit	Over	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1	5982.750 Horizontal	40.24	43.78	74.00	-30.22	Peak	46.55	7.74	32.88
2	7991.250 Horizontal	38.54	51.09	74.00	-22.91	Peak	47.45	11.90	37.42

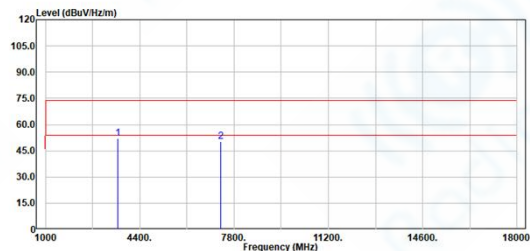

Site : chamber
Condition: 3m Vertical
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX40_Ch 3
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit	Over	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1	3596.750 Vertical	51.36	52.29	74.00	-21.71	Peak	46.13	5.41	39.14
2	7321.500 Vertical	37.93	50.32	74.00	-23.68	Peak	47.56	11.31	36.96

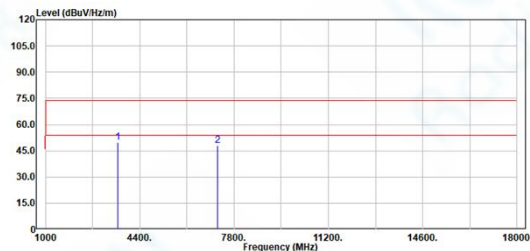


Site : chamber
Condition: 3m Vertical
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX40_Ch 6
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit	Over	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1	3596.750 Horizontal	48.92	49.05	74.00	-24.95	Peak	46.13	5.41	39.14
2	7192.250 Horizontal	36.60	48.04	74.00	-25.96	Peak	47.74	11.09	37.38




11ax(40M)_TX_CH_09_Horizontal

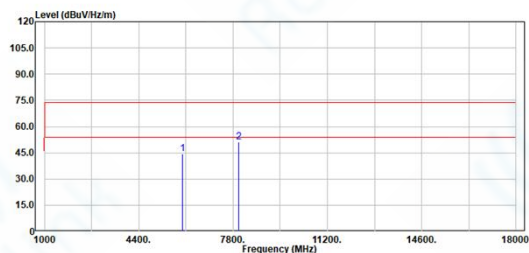

Site : chamber
Condition: 3m Horizontal
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX40_Ch 9
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit	Over Limit	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 5982.000	Horizontal	38.12	44.26	74.00	-29.74	Peak	47.19	9.76	33.37
2 7991.250	Horizontal	37.83	51.18	74.00	-22.82	Peak	47.45	11.90	37.42

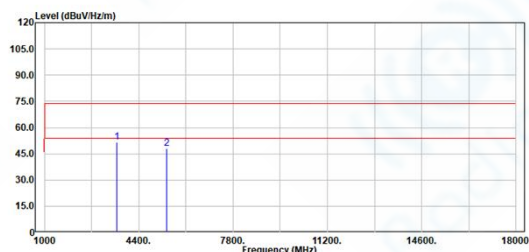

Site : chamber
Condition: 3m Vertical
EUT : VTL-202502
Mode : WIFI 2.4G TX_11AX40_Ch 9
Power : 19
Rate : MCS0
Note : IMEI:358028660010991

Freq	Pol/Phase	Read Level	Level	Limit	Over Limit	Remark	Preamp Factor	Cable Loss	Ant Factor
MHz		dBuV/H	dBuV/H	dBuV/H	dB		dB	dB	dB/m
1 3596.750	Vertical	50.92	51.85	74.00	-22.15	Peak	46.13	5.41	30.14
2 5394.500	Vertical	44.32	47.79	74.00	-26.21	Peak	46.55	7.76	32.62



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

7.5 Conducted Peak Output Power

Test Requirement 47 CFR Part 15, Subpart C 15.247(b)(3)
RSS-247 Section 6.3.2

Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Section 11.9.1

Limit:

Frequency range(MHz)	Output power of the intentional radiator(watt)
902-928	1 for ≥ 50 hopping channels
	0.25 for $25 \leq$ hopping channels < 50
	1 for digital modulation
2400-2483.5	1 for ≥ 75 non-overlapping hopping channels
	0.125 for all other frequency hopping systems
	1 for digital modulation
5725-5850	1 for frequency hopping systems and digital modulation


7.5.1 E.U.T. Operation

Operating Environment:
Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.5.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.5.3 Test Setup Diagram

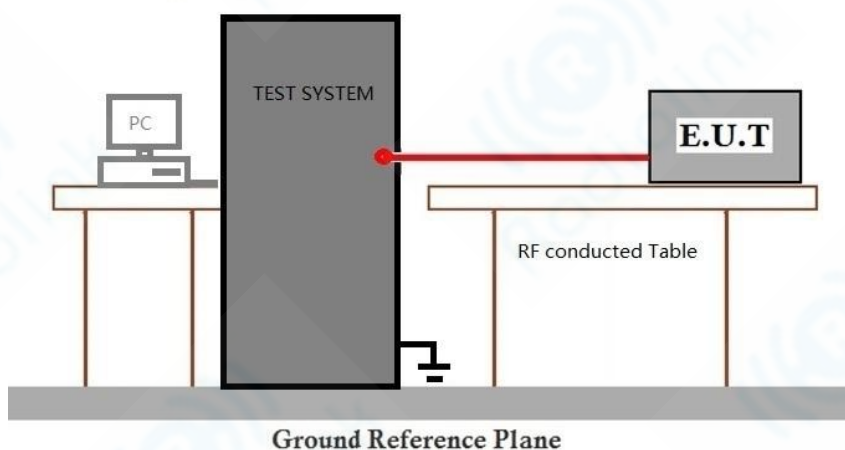

7.5.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

Please Refer to Appendix for Details

7.6 Minimum 6dB Bandwidth

Test Requirement 47 CFR Part 15, Subpart C 15.247a(2)
RSS-247 Section 6.3.1(a)

Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Section 11.8.1

Limit:
≥500 kHz


7.6.1 E.U.T. Operation

Operating Environment:
Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	02	TX mode_Keep the EUT in continuously transmitting mode.

7.6.3 Test Setup Diagram

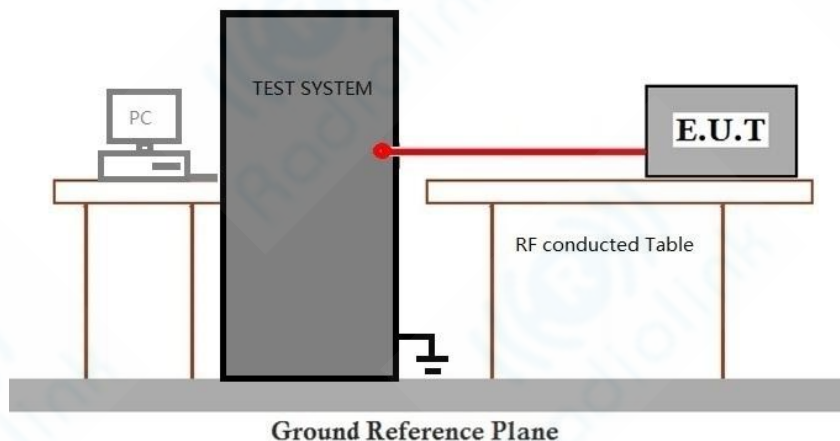

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 99% Bandwidth

Test Requirement RSS-Gen Section 6.7
Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024) Section 6.9.3


7.7.1 E.U.T. Operation

Operating Environment:
Temperature: 23.3 °C Humidity: 46.5 % RH Atmospheric Pressure: 1020 mbar

7.7.2 Test Mode Description

Mode Code	Description
1	TX mode(1Mbps)_Keep the EUT in continuously transmitting mode.

7.7.3 Test Setup Diagram

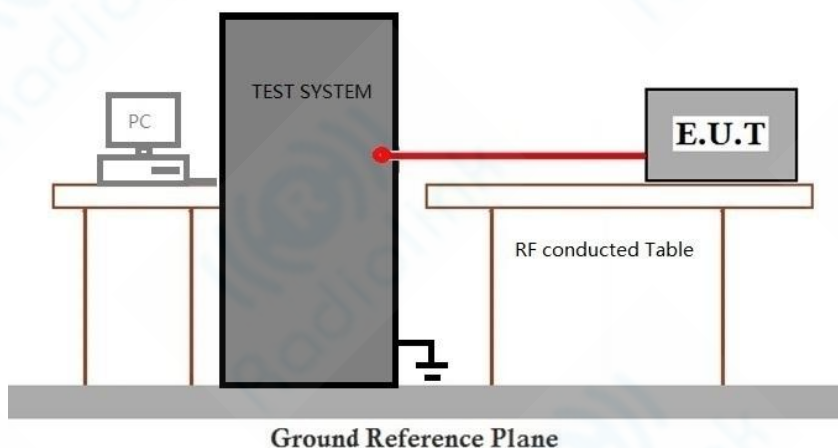

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Power Spectrum Density

Test Requirement 47 CFR Part 15, Subpart C 15.247(e)
RSS-247 Clause 6.3.1(b)

Test Method: ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024
Section 11.10.2

Limit:

$\leq 8\text{dBm}$ in any 3 kHz band during any time interval of continuous transmission

7.8.1 E.U.T. Operation


Operating Environment:

Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.8.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.8.3 Test Setup Diagram

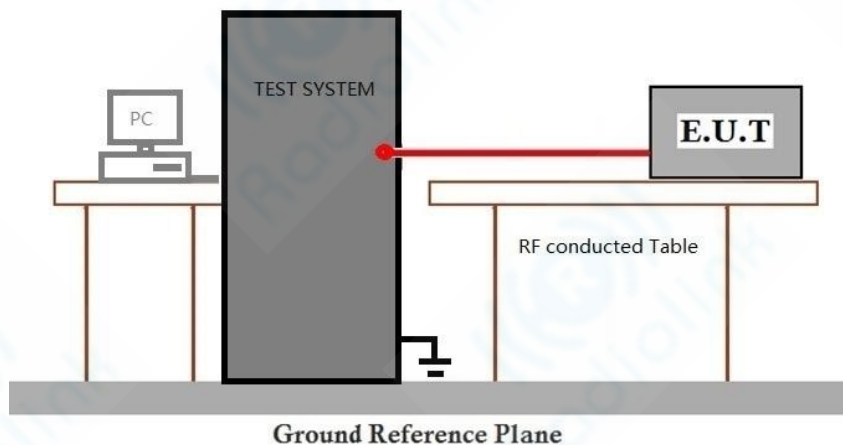

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Conducted Band Edges Measurement

Test Requirement	47 CFR Part 15, Subpart C 15.247(d) RSS-247 Section 7.3.1.1
Test Method:	ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 Section 6.10.4

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.9.1 E.U.T. Operation

Operating Environment:


Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.9.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.



7.9.3 Test Setup Diagram

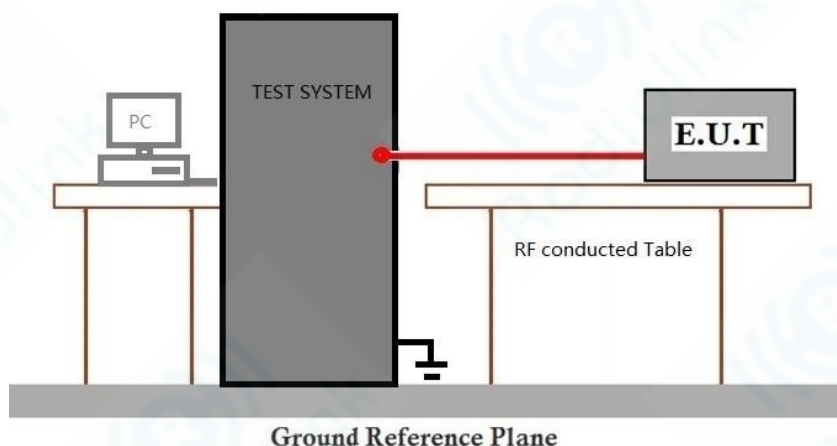

7.9.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.10 Conducted Spurious Emissions

Test Requirement	47 CFR Part 15, Subpart C 15.247(d) RSS-247 Section 7.3.1.3
Test Method:	ANSI C63.10-2020 + Cor.1-2023 + C63.10a-2024 + Errata to C63.10a-2024 Section 11.11

Limit:

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

7.10.1 E.U.T. Operation


Operating Environment:

Temperature: 22.2 °C Humidity: 40.0 % RH Atmospheric Pressure: 1020 mbar

7.10.2 Test Mode Description

Mode Code	Description
1	TX mode_Keep the EUT in continuously transmitting mode.

7.10.3 Test Setup Diagram

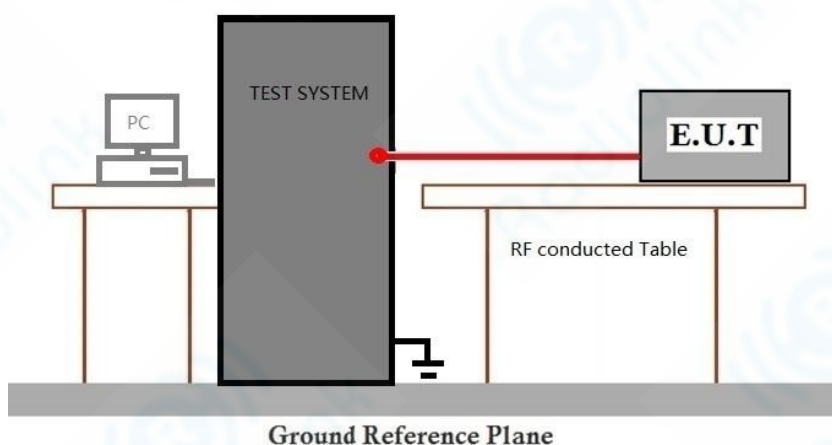

7.10.4 Measurement Procedure and Data

Please Refer to Appendix for Details

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

8 Test Setup Photo

Refer to Appendix A_Setup Photo (1.4)



9 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1

Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11b	SISO	2412	/	/	0.688	0.708	97.18	0.12	0.19
		2437	/	/	0.688	0.706	97.45	0.11	0.07
		2462	/	/	0.688	0.706	97.45	0.11	0.03
802.11g	SISO	2412	/	/	2.096	2.114	99.15	0.04	0.03
		2437	/	/	2.097	2.115	99.15	0.04	0.03
		2462	/	/	2.097	2.114	99.20	0.04	0.03
802.11n (HT20)	MIMO	2412	/	/	5.428	5.446	99.67	0.01	0.04
		2437	/	/	5.430	5.446	99.71	0.01	0.00
		2462	/	/	5.428	5.446	99.67	0.01	0.00
802.11n (HT40)	MIMO	2422	/	/	5.428	5.447	99.65	0.02	0.03
		2437	/	/	5.428	5.445	99.69	0.01	0.00
		2452	/	/	5.428	5.446	99.67	0.01	0.04
802.11ax (HEW20)	MIMO	2412	SU	/	5.446	5.464	99.67	0.01	0.03
		2437	SU	/	5.445	5.464	99.65	0.02	0.03
		2462	SU	/	5.444	5.462	99.67	0.01	0.04
802.11ax (HEW40)	MIMO	2422	SU	/	5.444	5.462	99.67	0.01	0.04
		2437	SU	/	5.445	5.463	99.67	0.01	0.03
		2452	SU	/	5.445	5.463	99.67	0.01	0.03




Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

1.2 Test Graph


1.2.1 Ant1

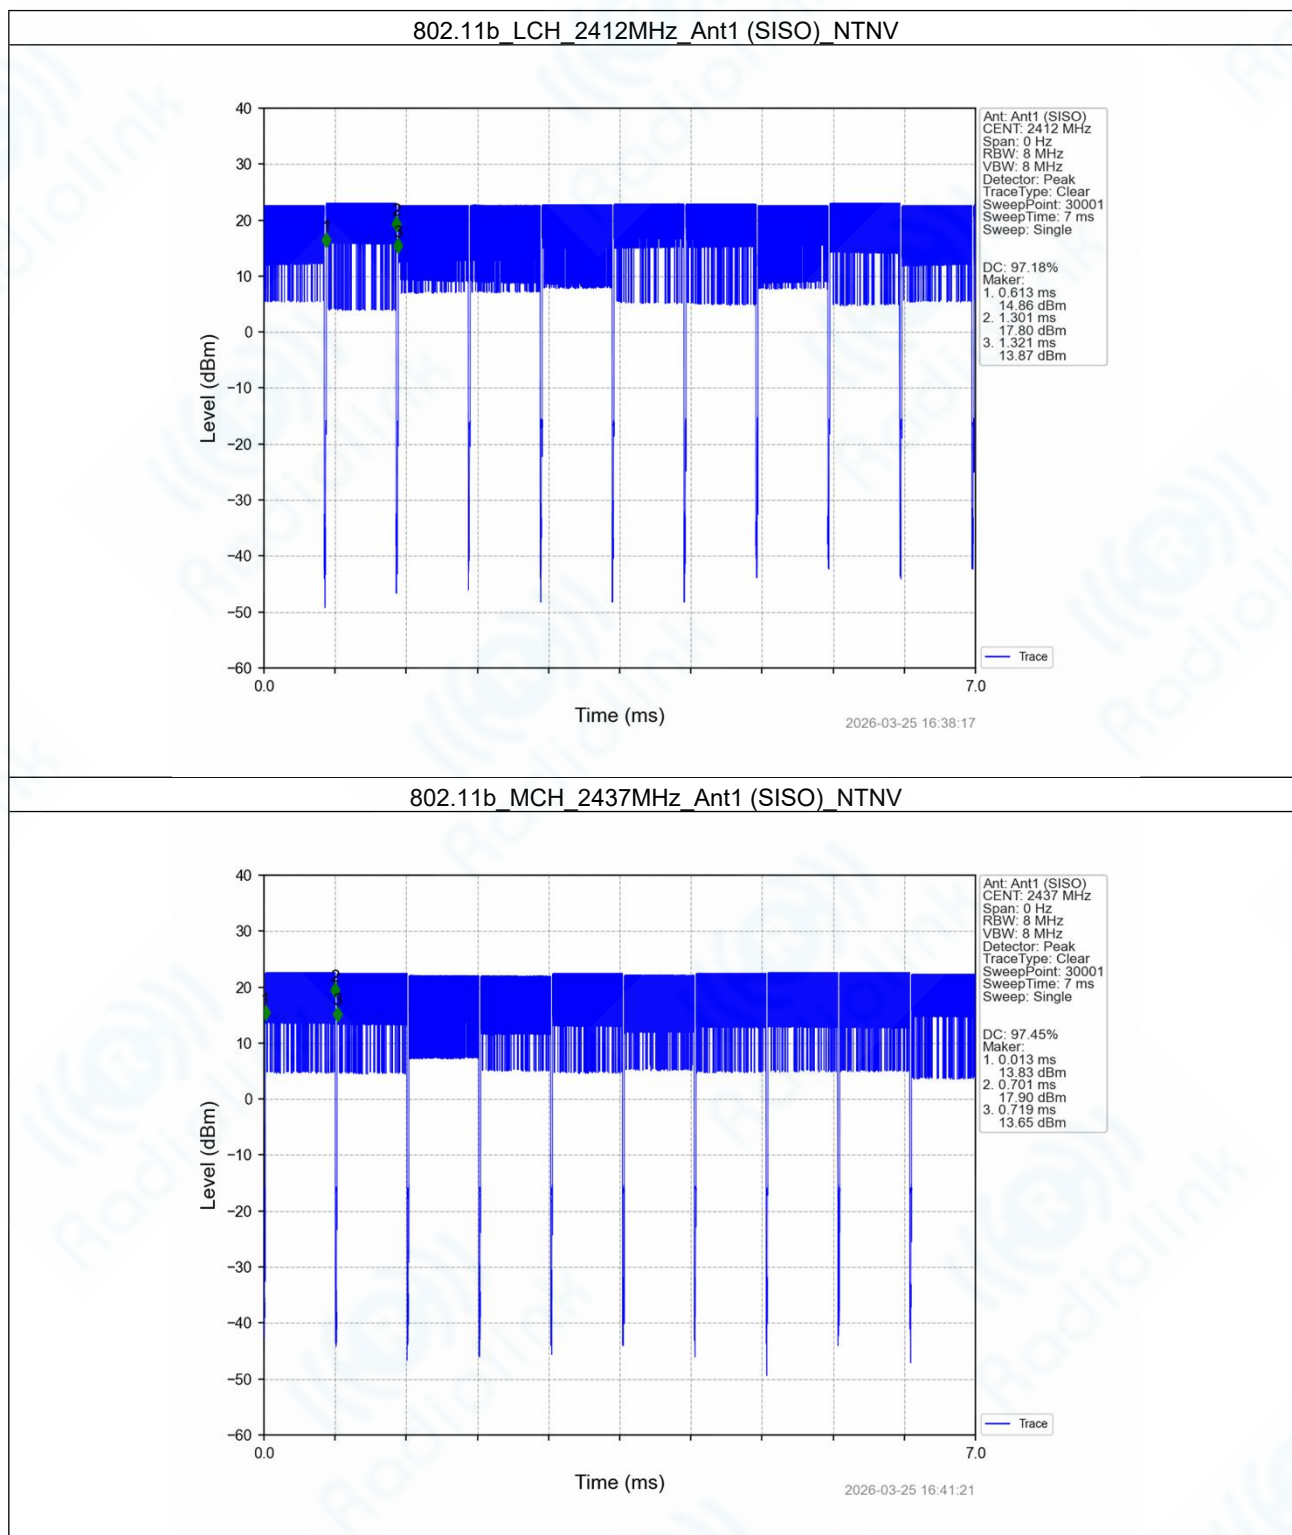

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

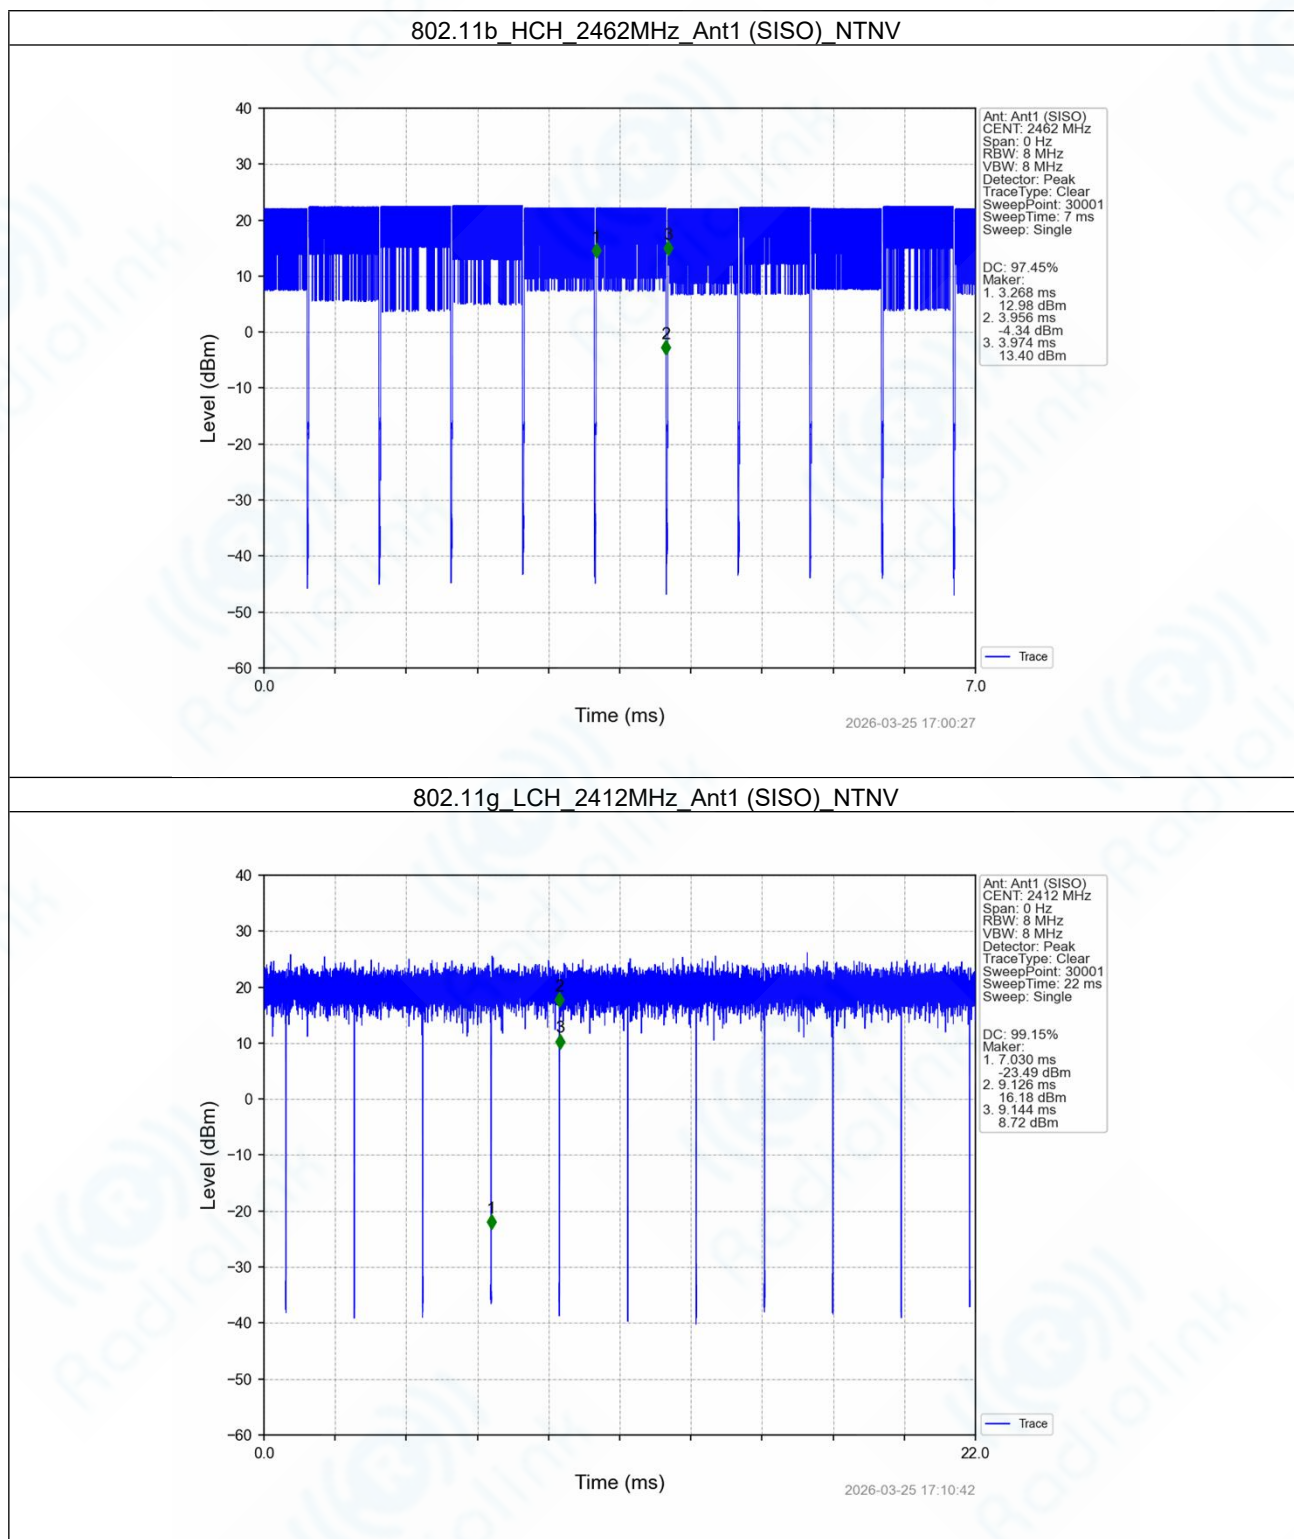

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

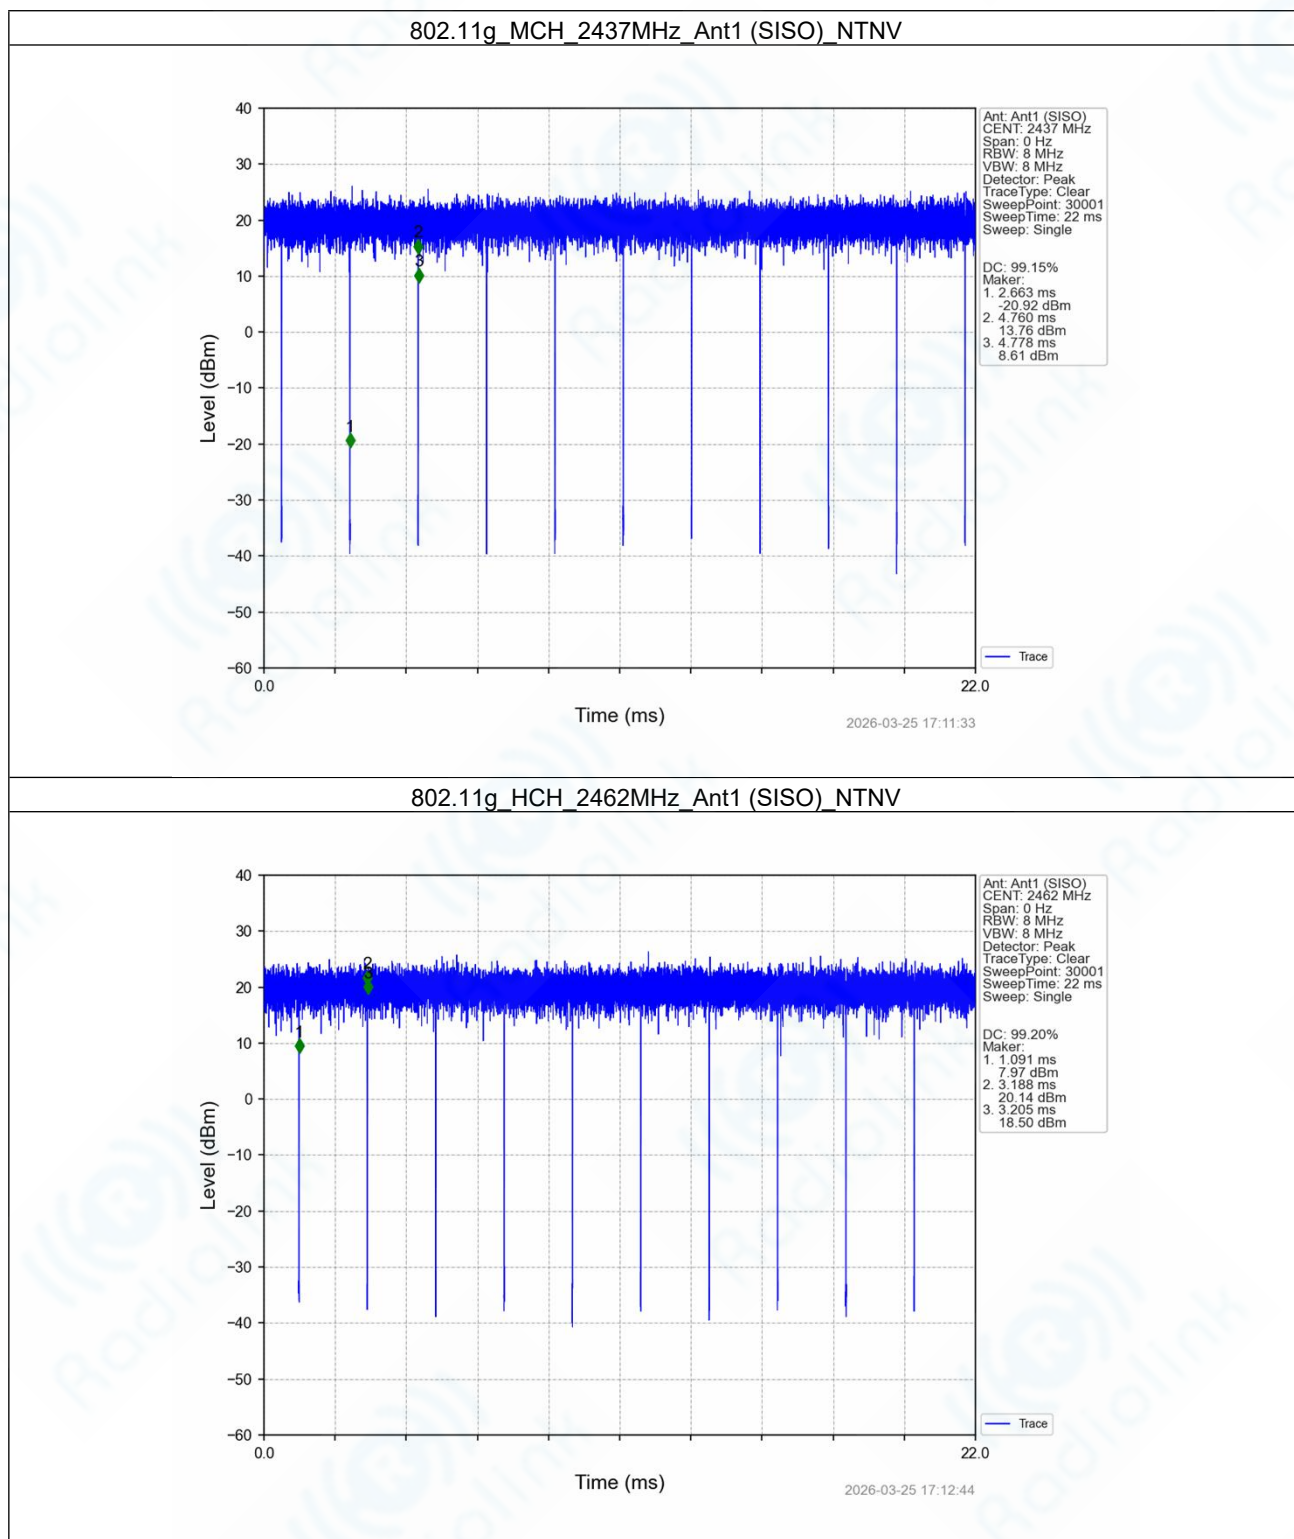

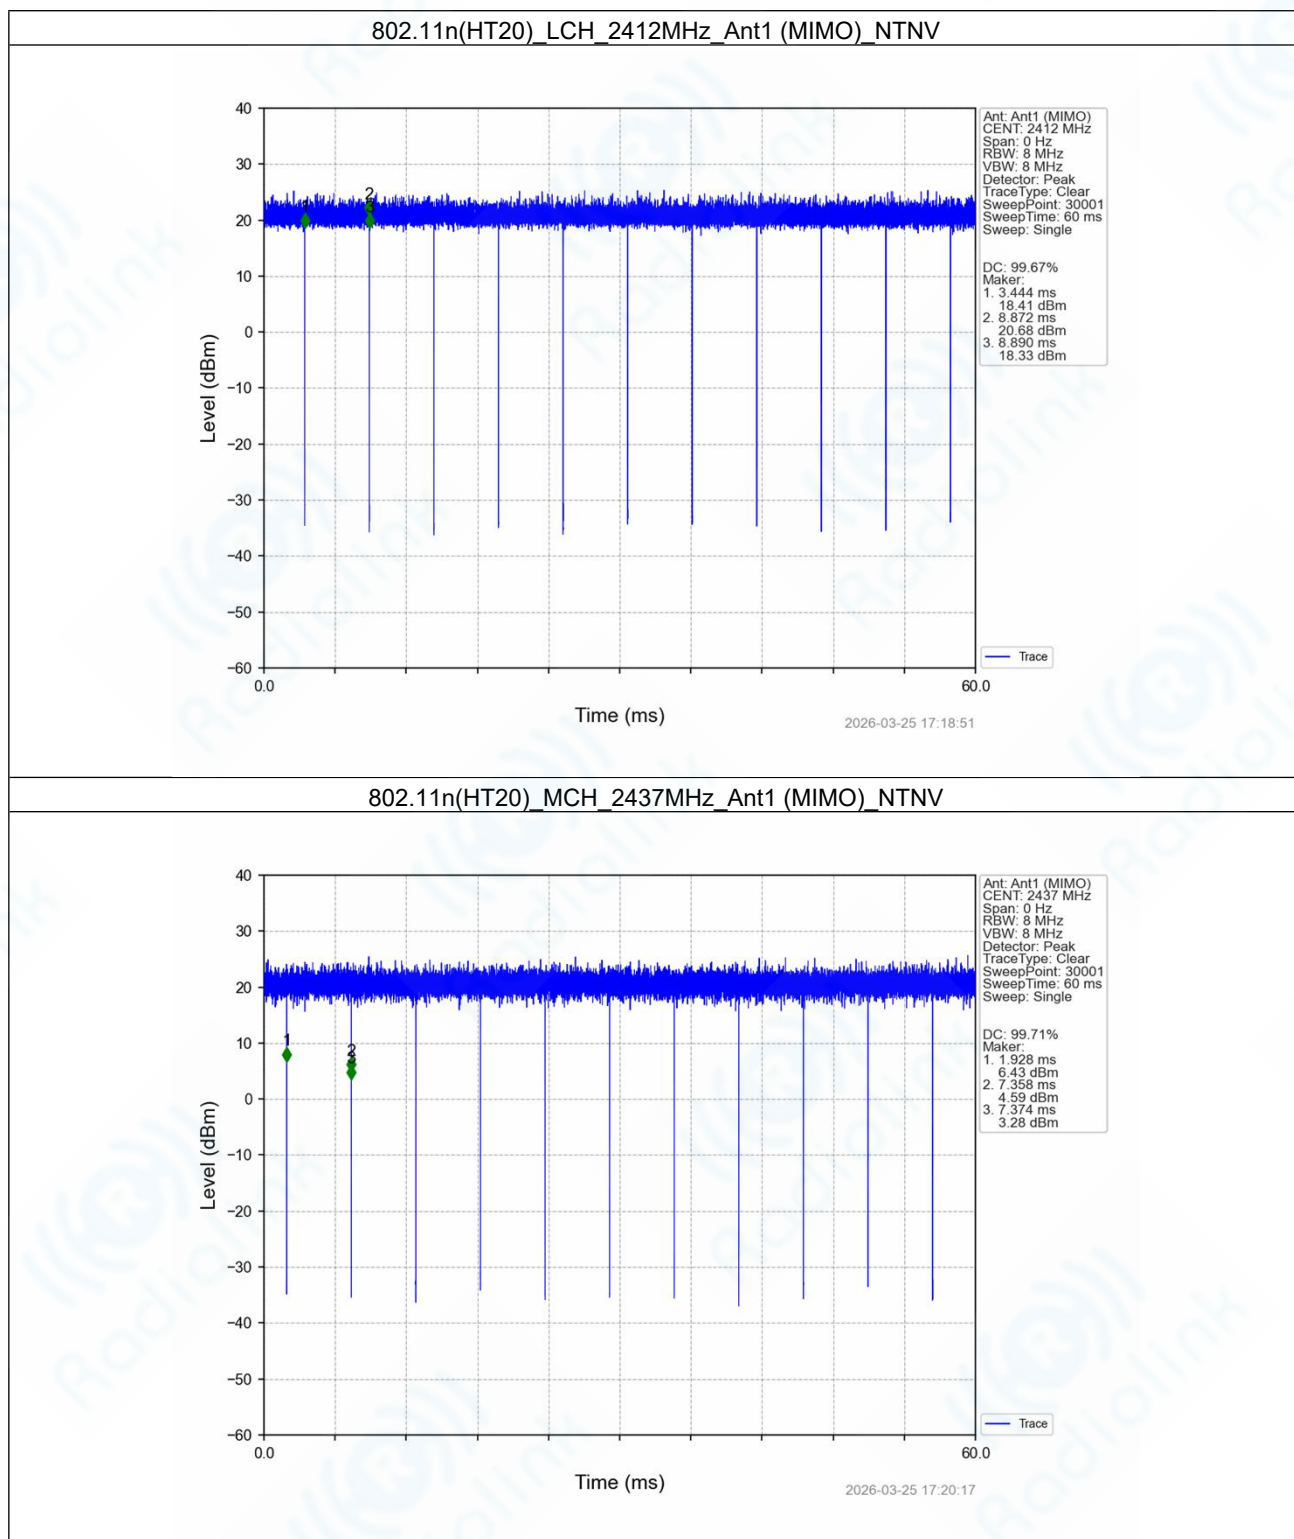


Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

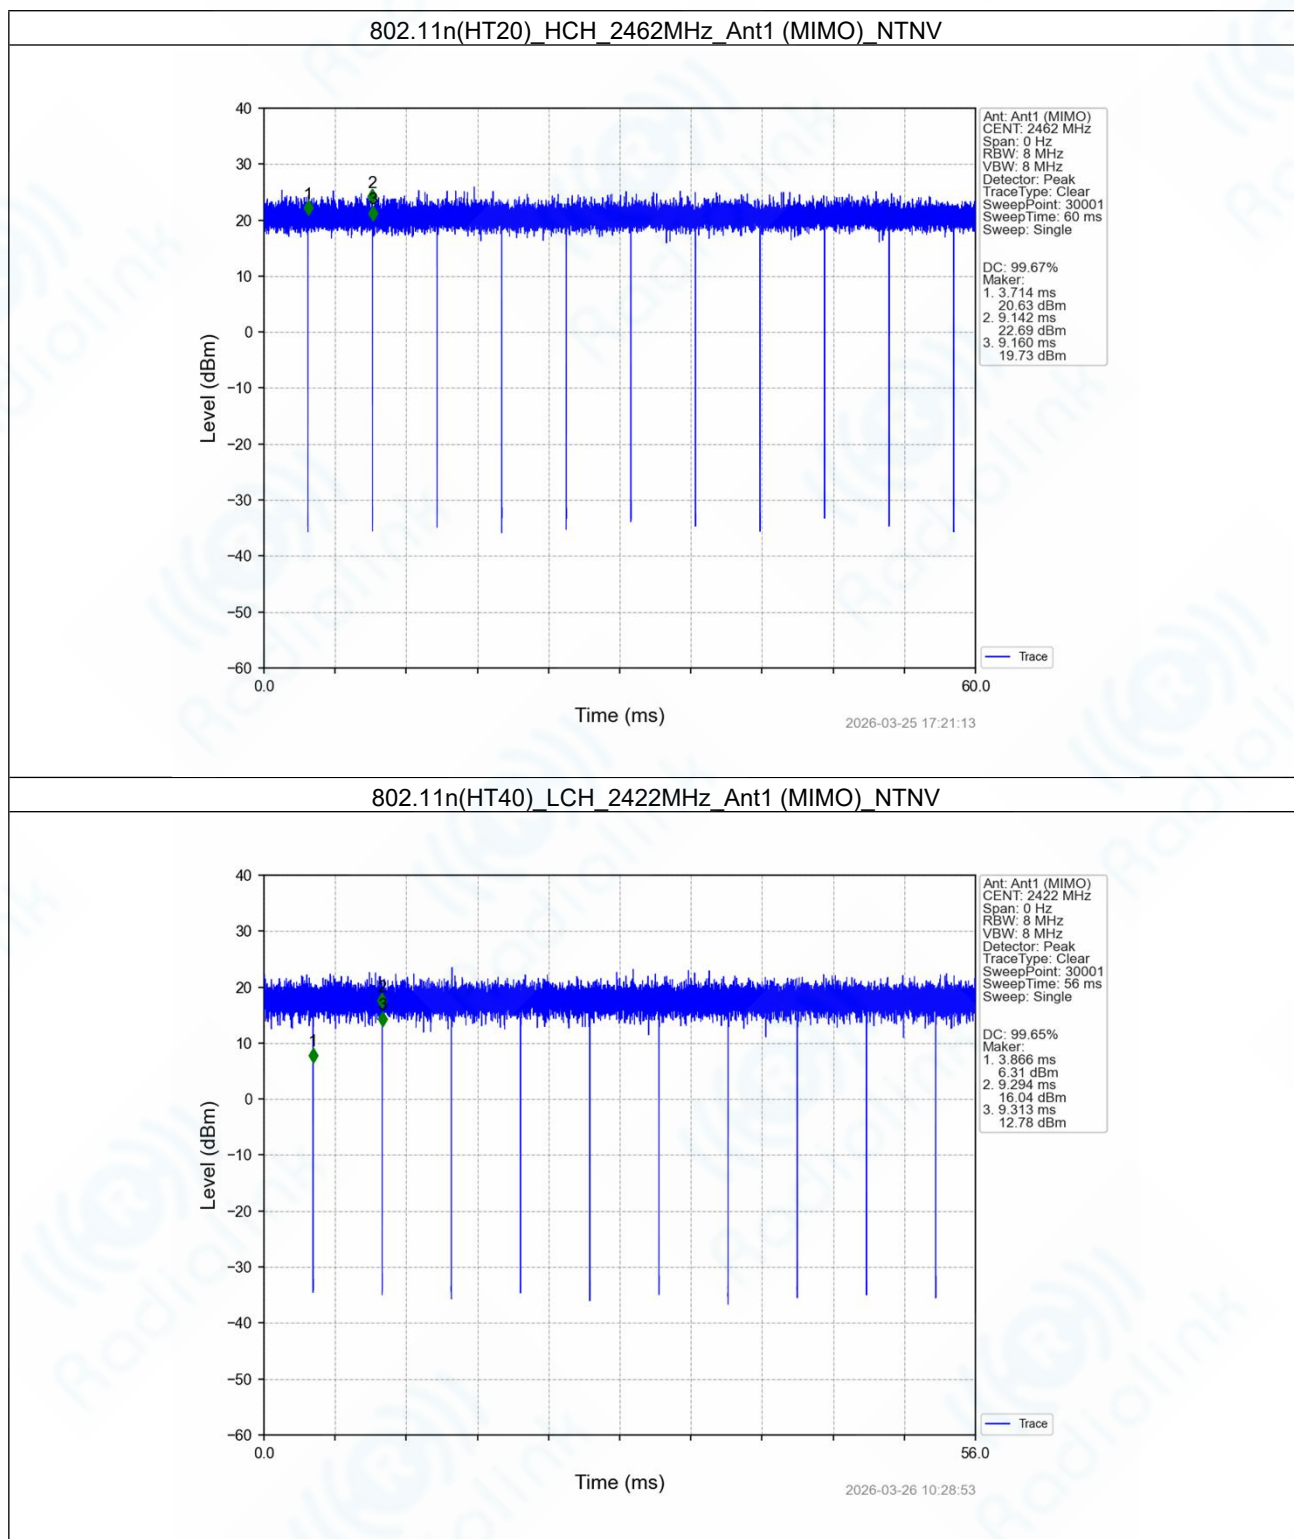

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

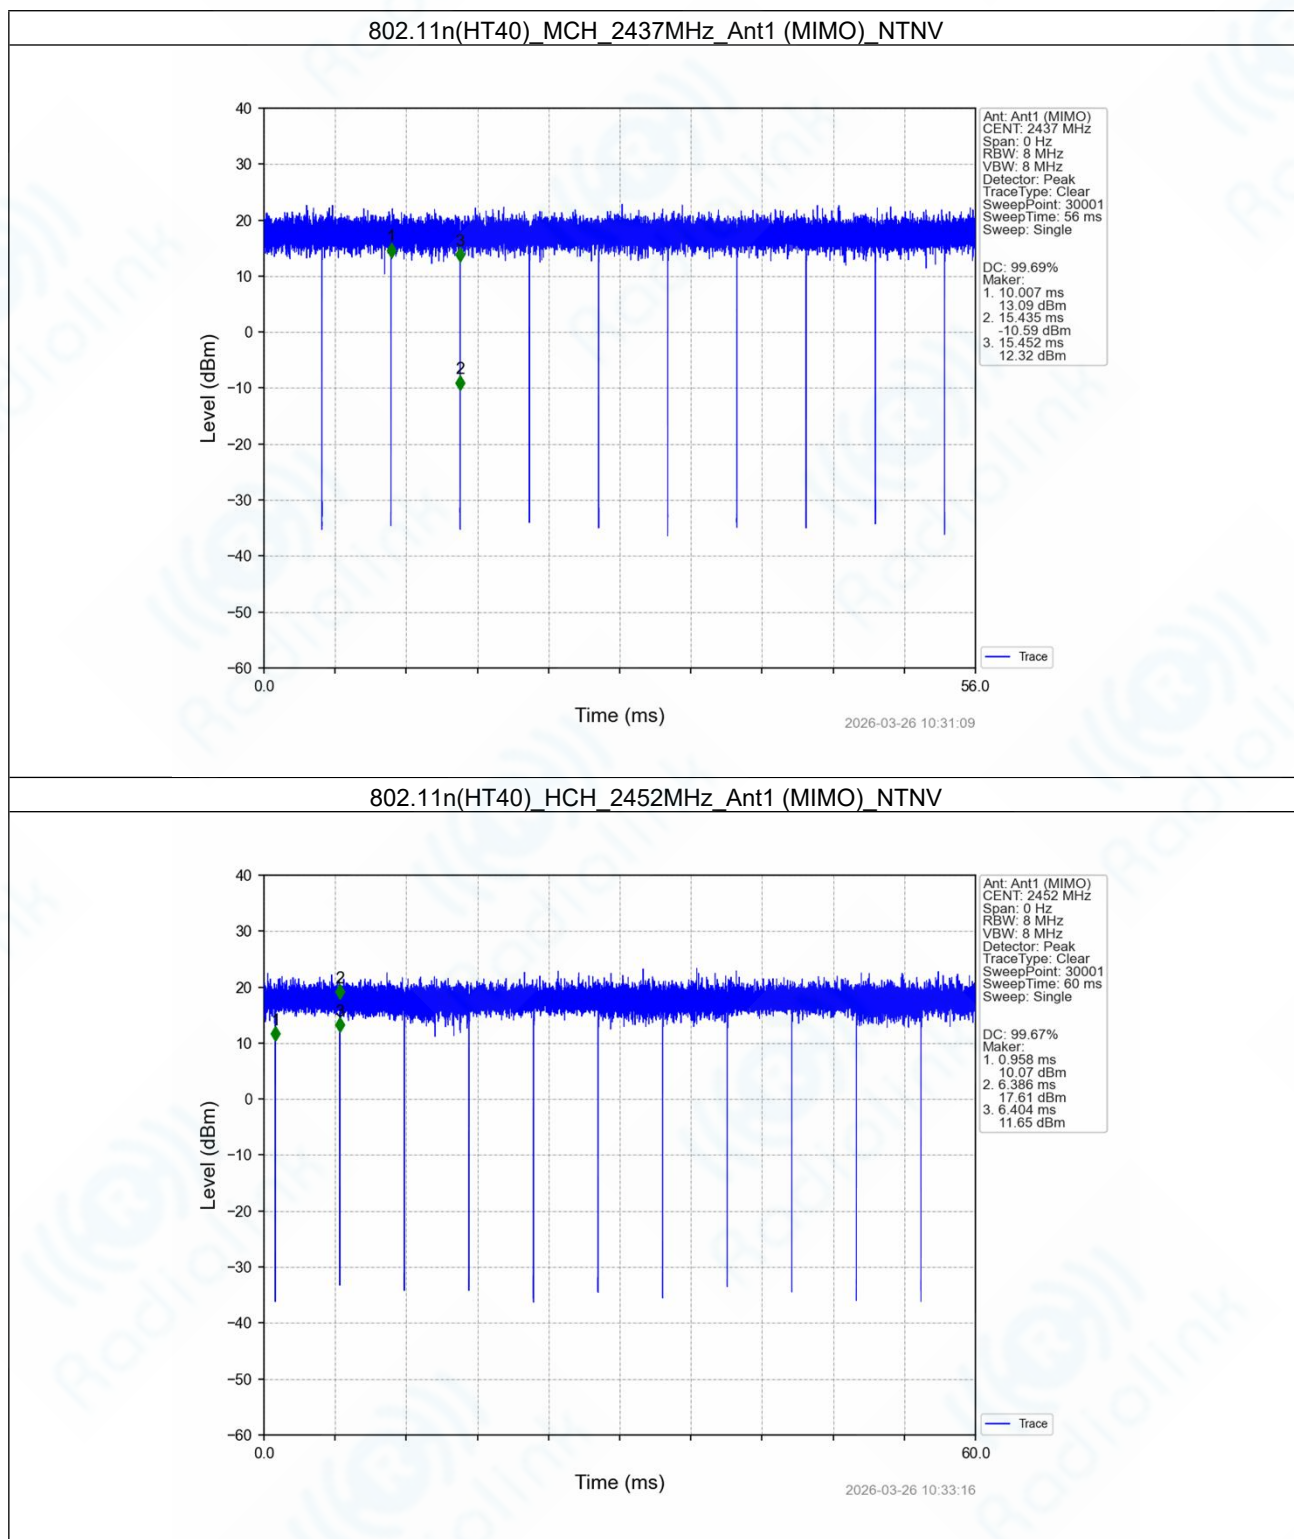

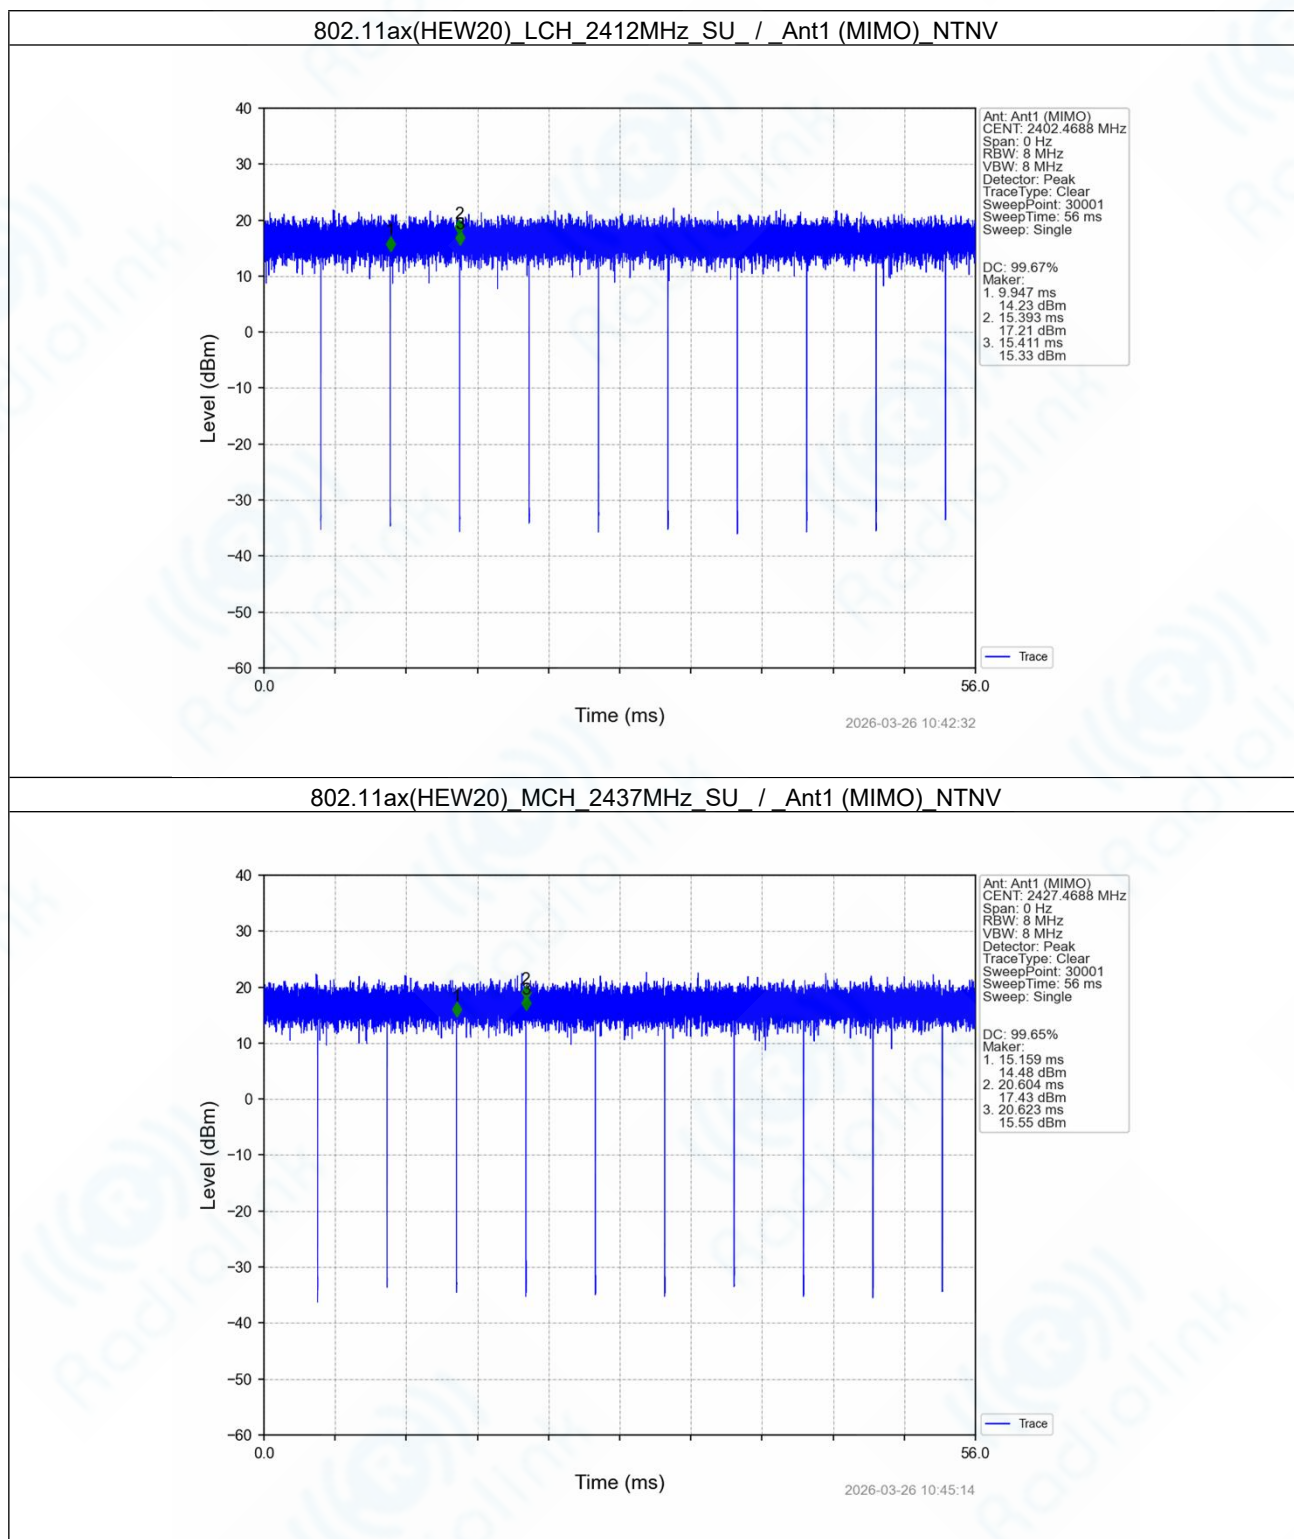

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

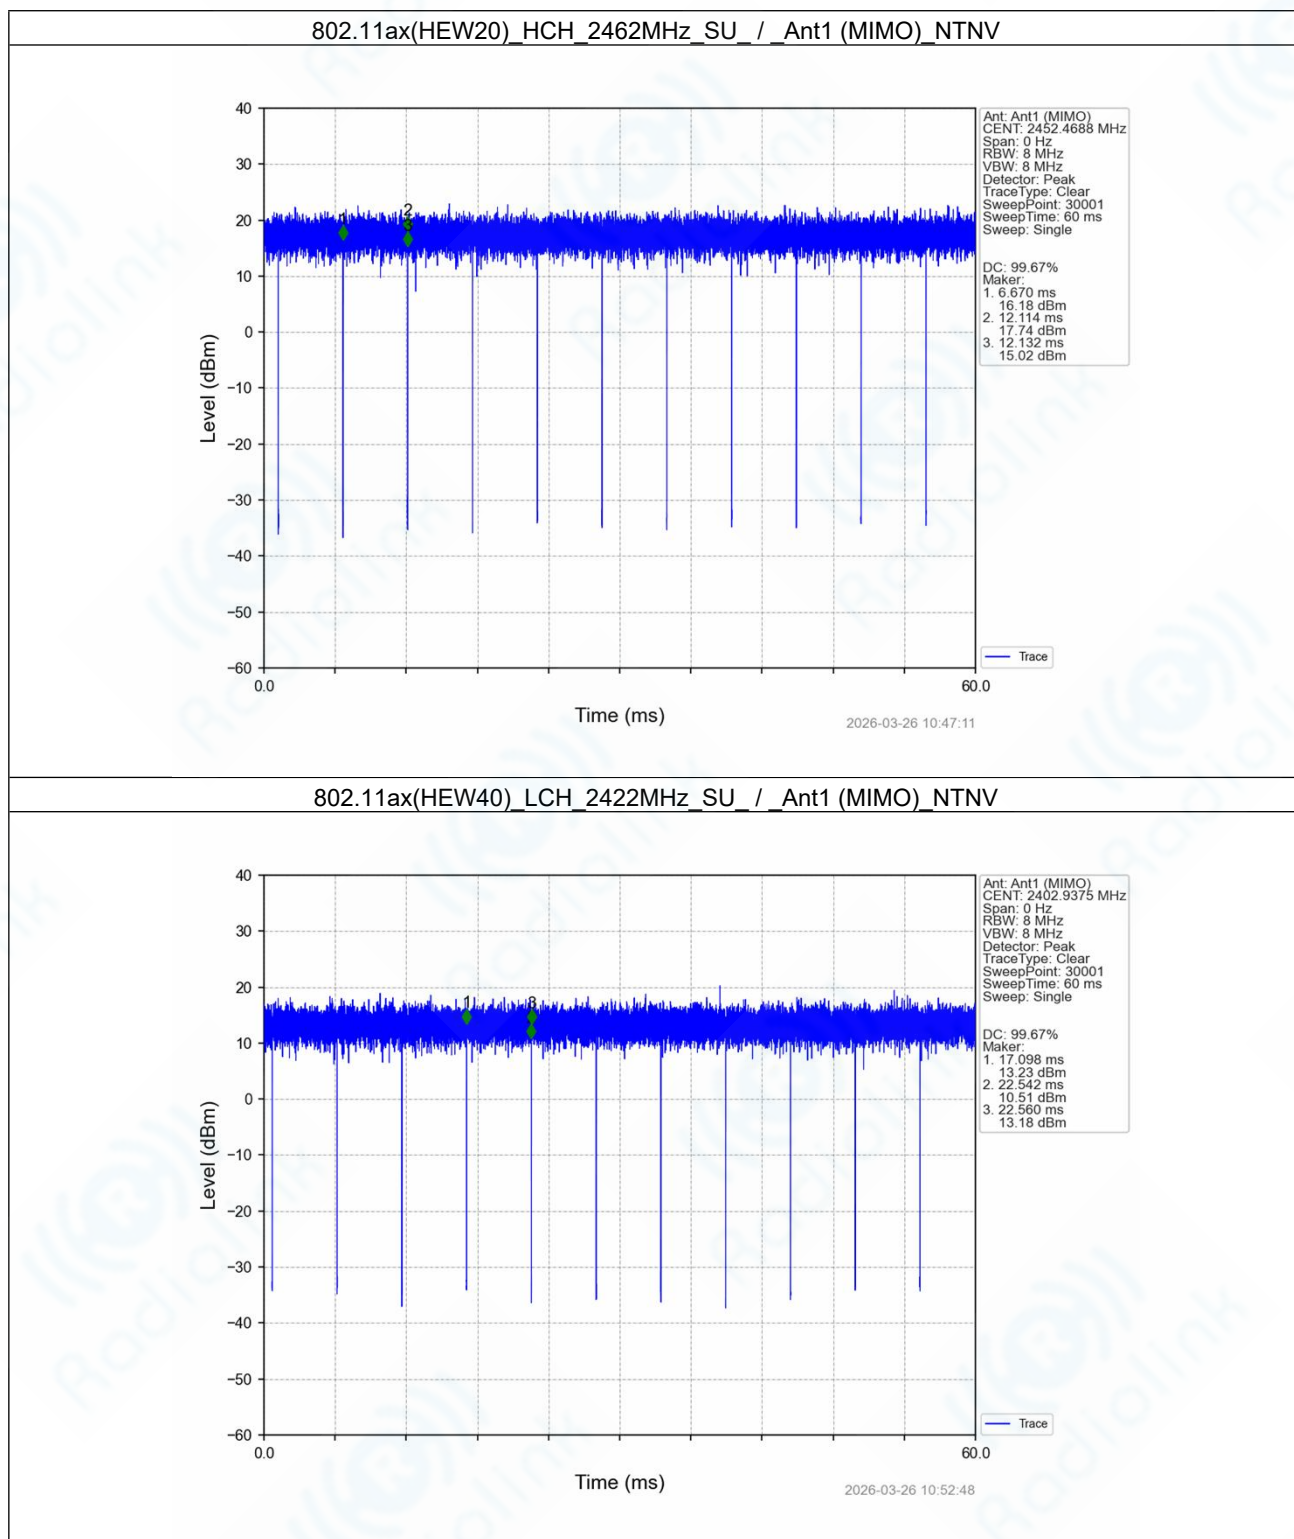

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

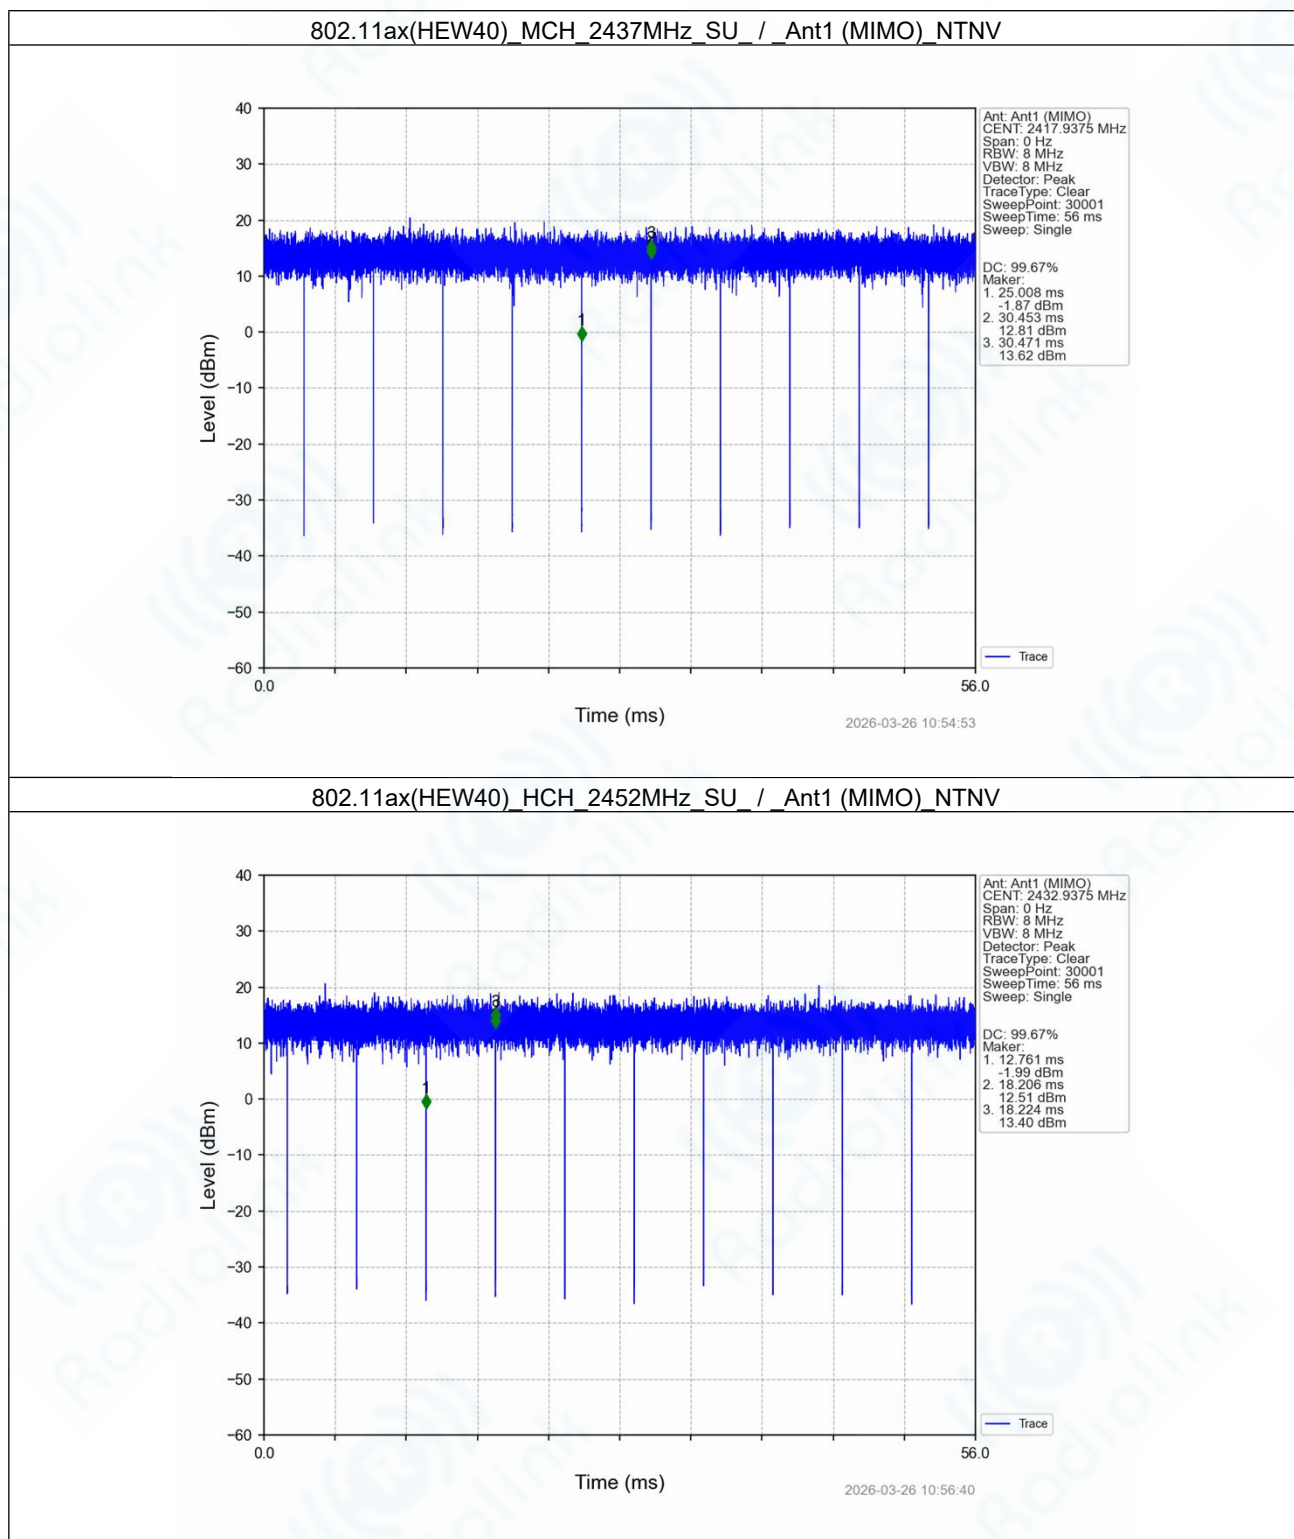

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	13.028	/	Pass
		2437	/	/	1	13.060	/	Pass
		2462	/	/	1	13.074	/	Pass
802.11g	SISO	2412	/	/	1	16.644	/	Pass
		2437	/	/	1	16.657	/	Pass
		2462	/	/	1	16.687	/	Pass
802.11n (HT20)	MIMO	2412	/	/	1	17.777	/	Pass
		2437	/	/	1	17.847	/	Pass
		2462	/	/	1	17.815	/	Pass
802.11n (HT40)	MIMO	2422	/	/	1	37.012	/	Pass
		2437	/	/	1	37.136	/	Pass
		2452	/	/	1	37.077	/	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	1	18.951	/	Pass
		2437	SU	/	1	19.007	/	Pass
		2462	SU	/	1	18.999	/	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	1	38.175	/	Pass
		2437	SU	/	1	38.249	/	Pass
		2452	SU	/	1	38.115	/	Pass

2.1.2 6dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11b	SISO	2412	/	/	1	7.140	≥ 0.5	Pass
		2437	/	/	1	8.069	≥ 0.5	Pass
		2462	/	/	1	8.076	≥ 0.5	Pass
802.11g	SISO	2412	/	/	1	16.406	≥ 0.5	Pass
		2437	/	/	1	16.382	≥ 0.5	Pass
		2462	/	/	1	16.376	≥ 0.5	Pass
802.11n (HT20)	MIMO	2412	/	/	1	17.575	≥ 0.5	Pass
		2437	/	/	1	17.634	≥ 0.5	Pass
		2462	/	/	1	17.577	≥ 0.5	Pass
802.11n (HT40)	MIMO	2422	/	/	1	36.328	≥ 0.5	Pass
		2437	/	/	1	35.714	≥ 0.5	Pass
		2452	/	/	1	36.069	≥ 0.5	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	1	18.800	≥ 0.5	Pass
		2437	SU	/	1	18.766	≥ 0.5	Pass
		2462	SU	/	1	18.657	≥ 0.5	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	1	37.818	≥ 0.5	Pass
		2437	SU	/	1	37.961	≥ 0.5	Pass
		2452	SU	/	1	37.619	≥ 0.5	Pass

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694



Radiolink Testing (Shenzhen) Co., Ltd.
Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

2.2 Test Graph


2.2.1 OBW

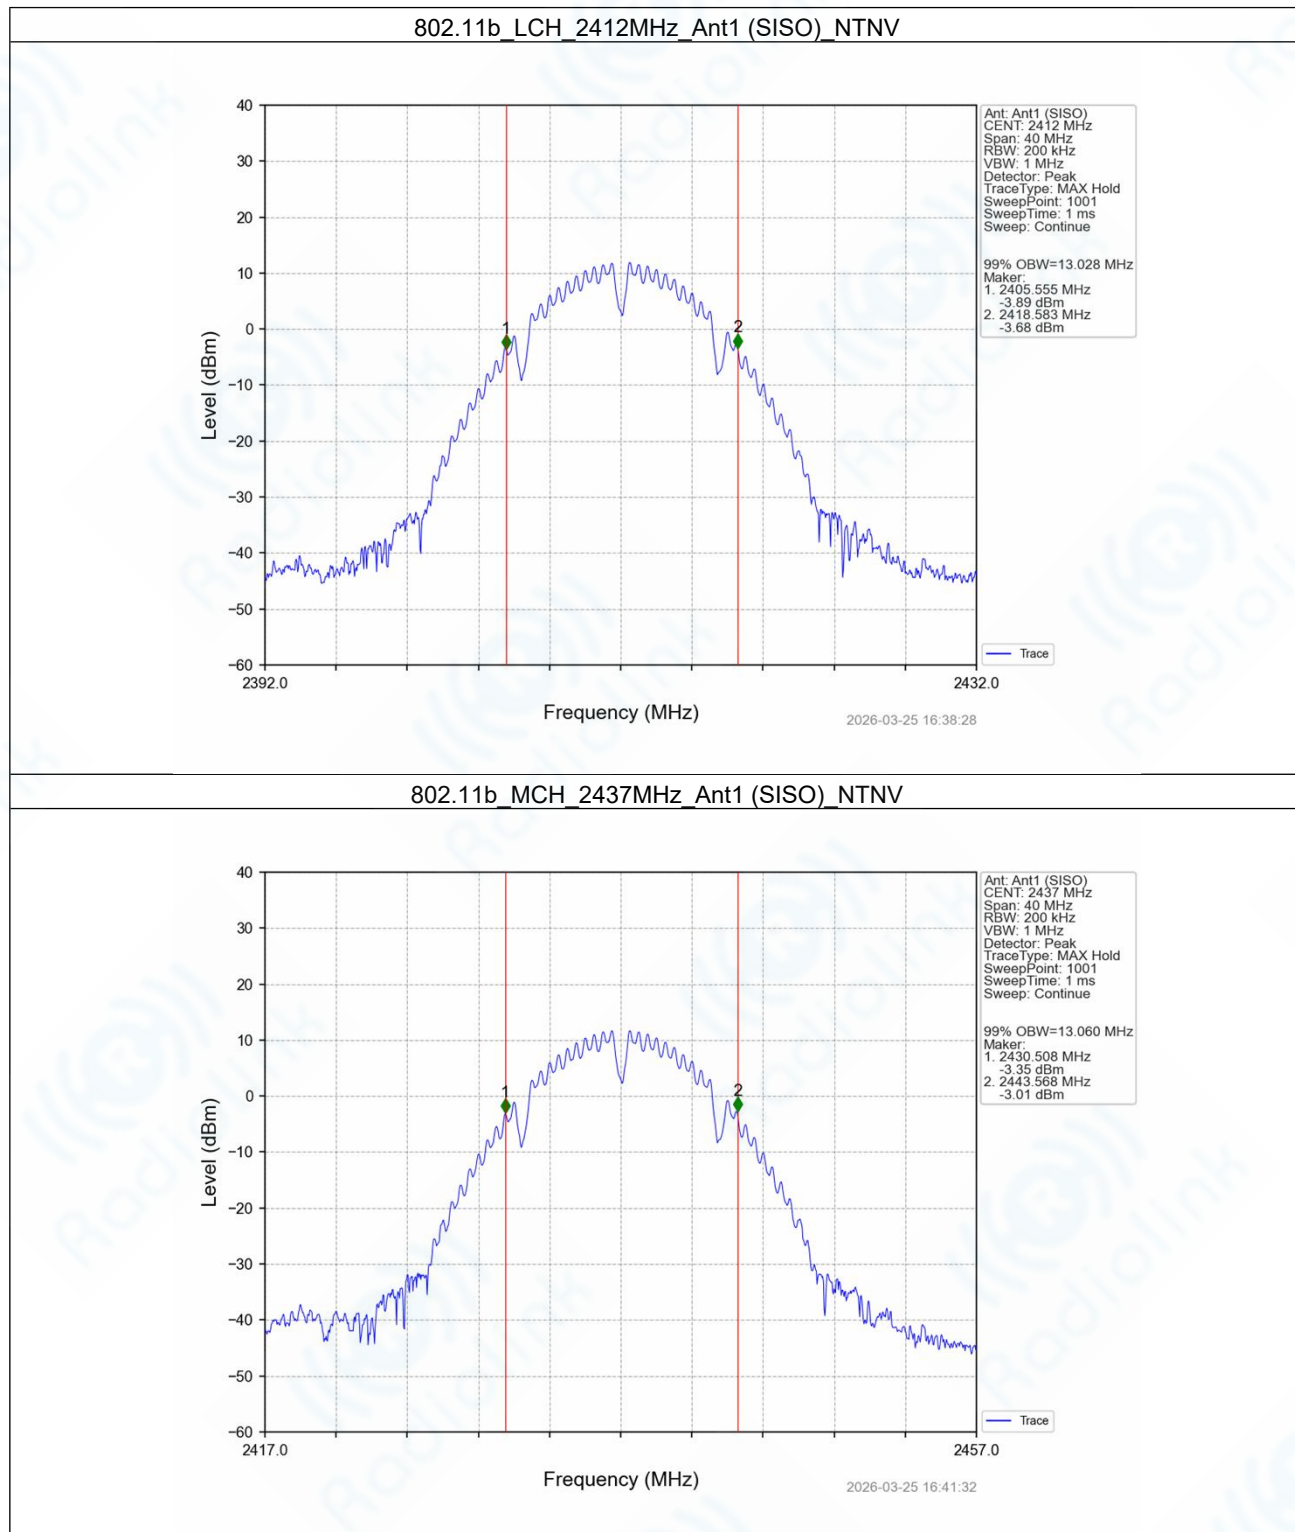

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

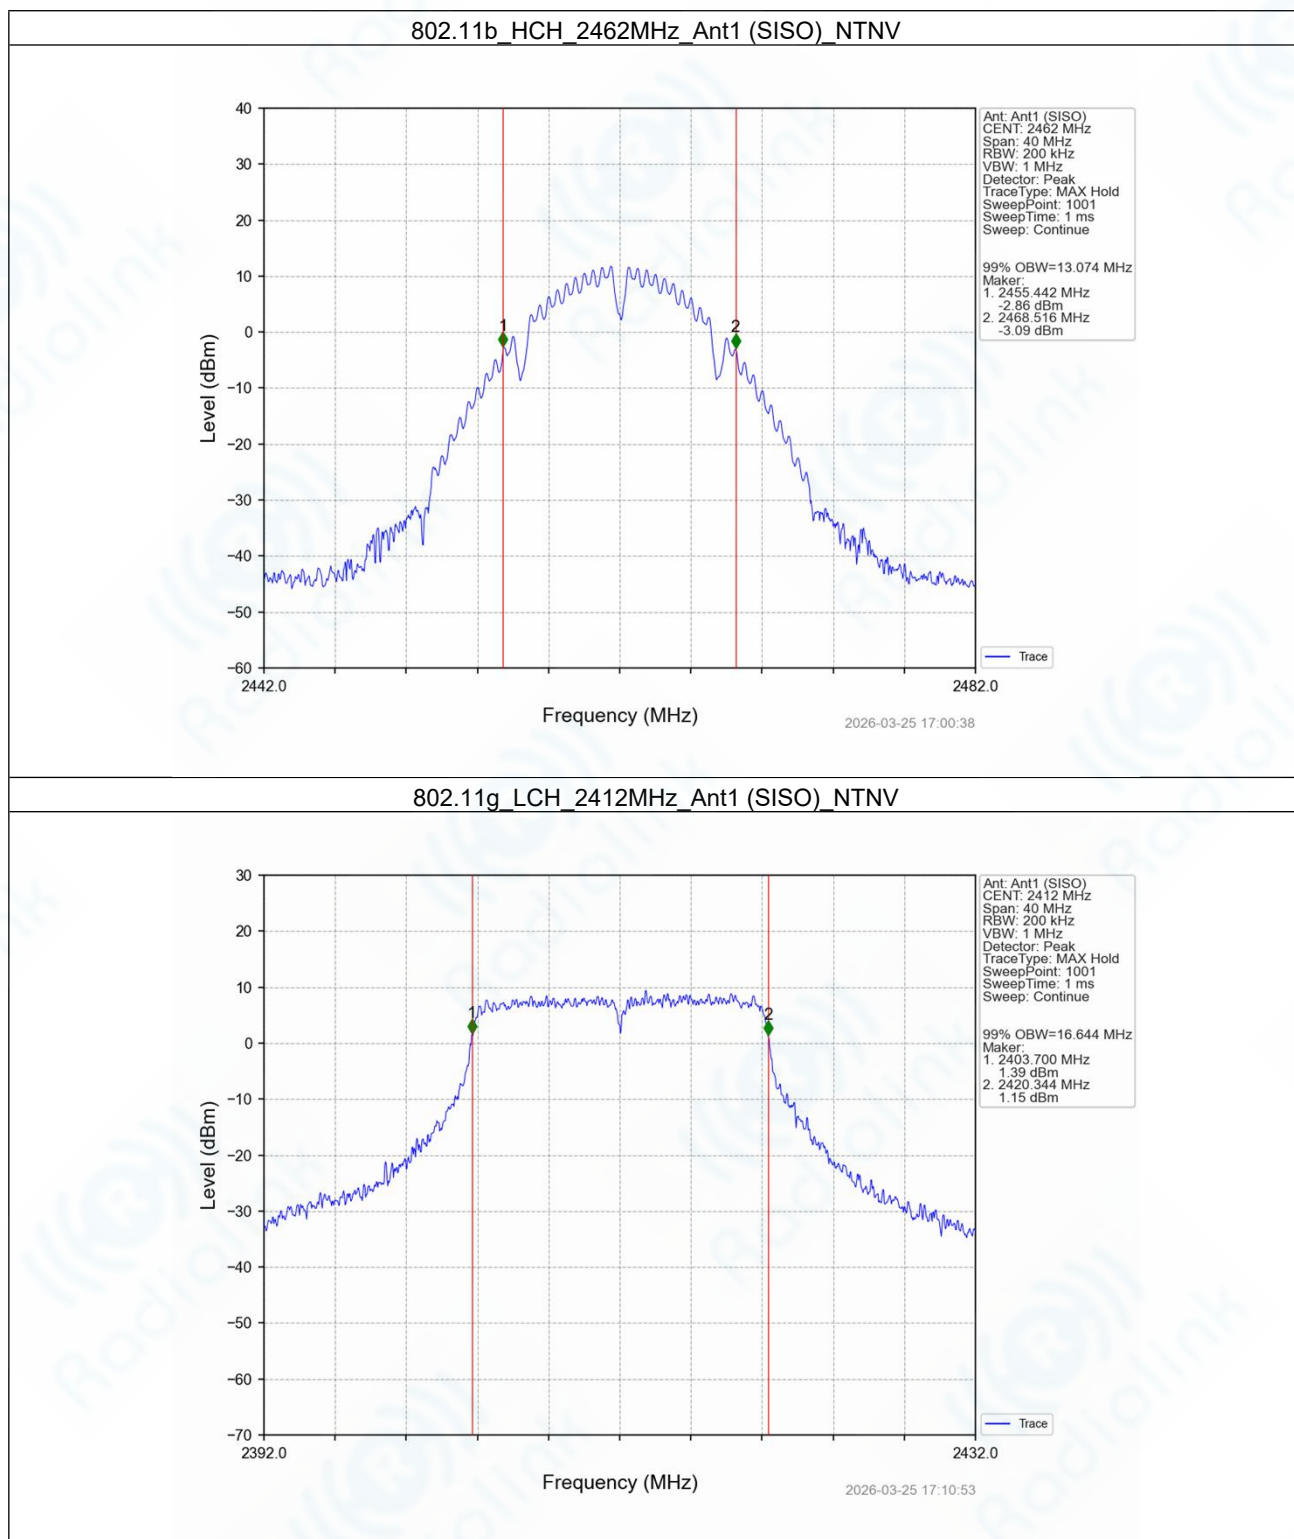


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

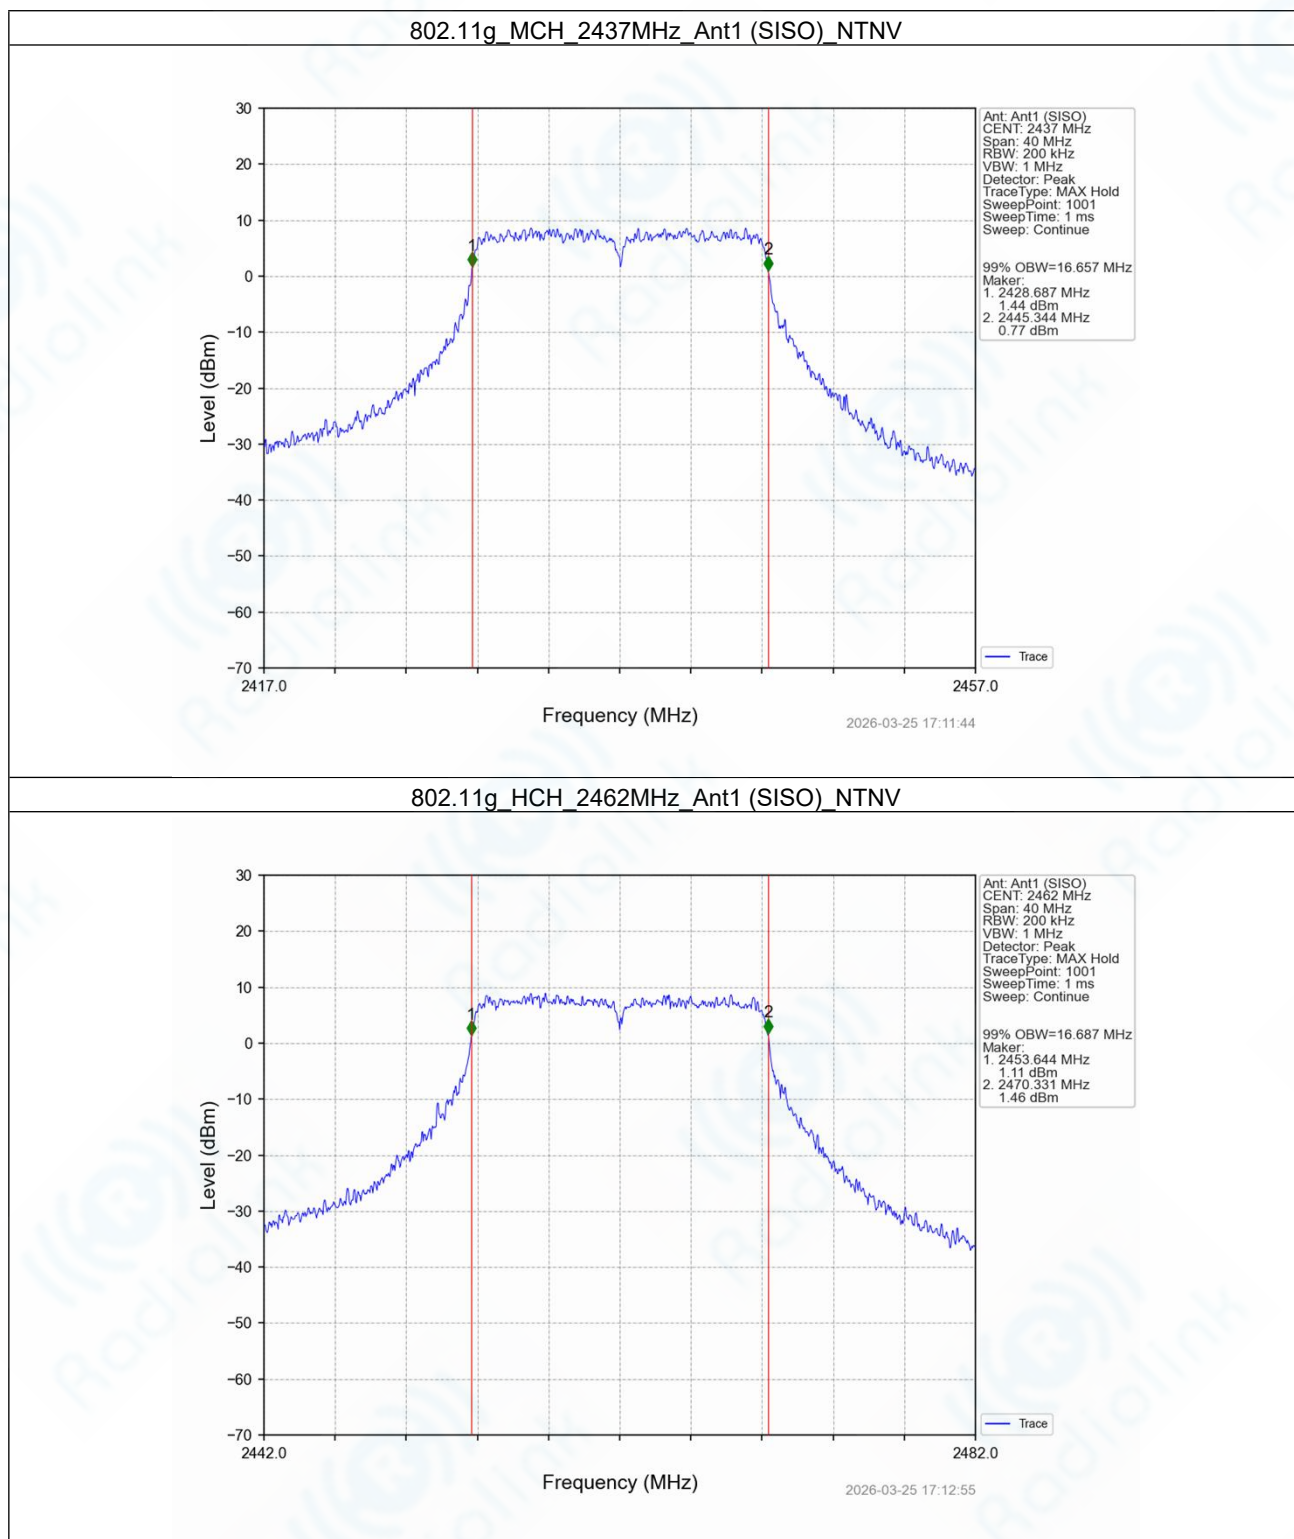


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

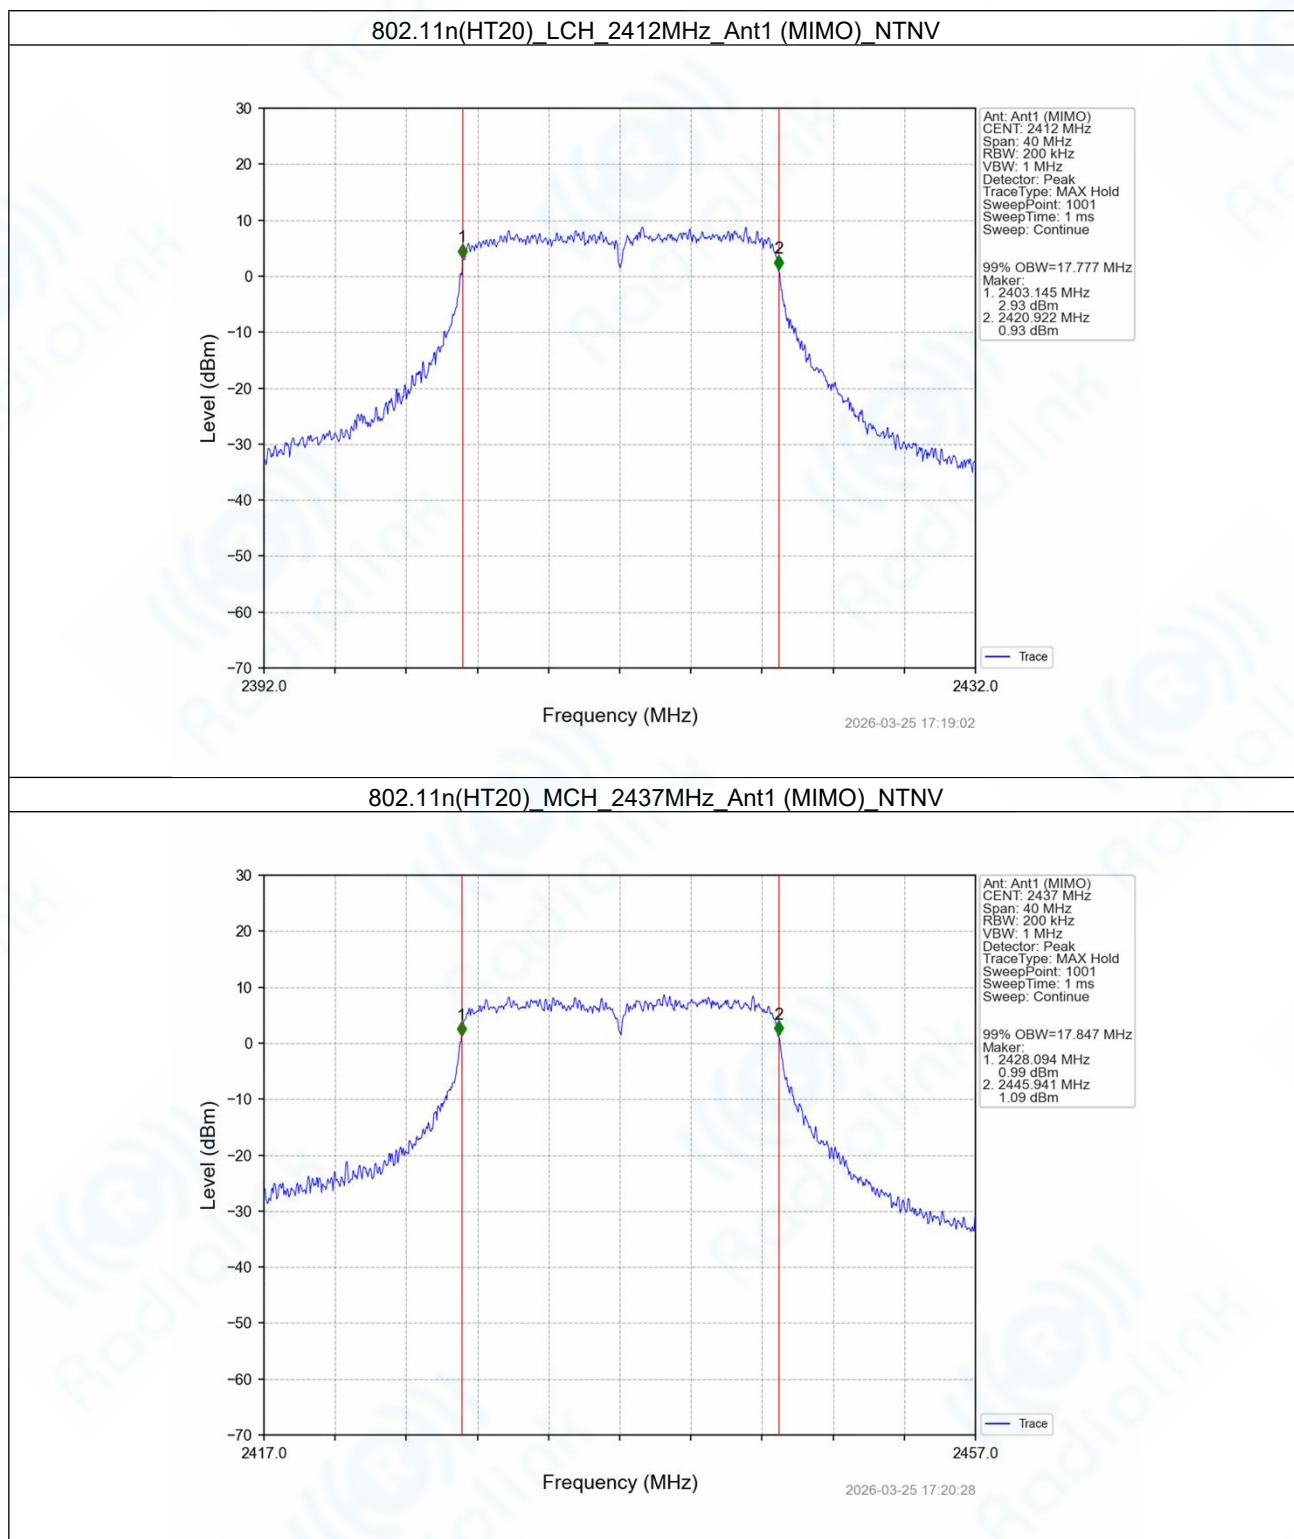


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

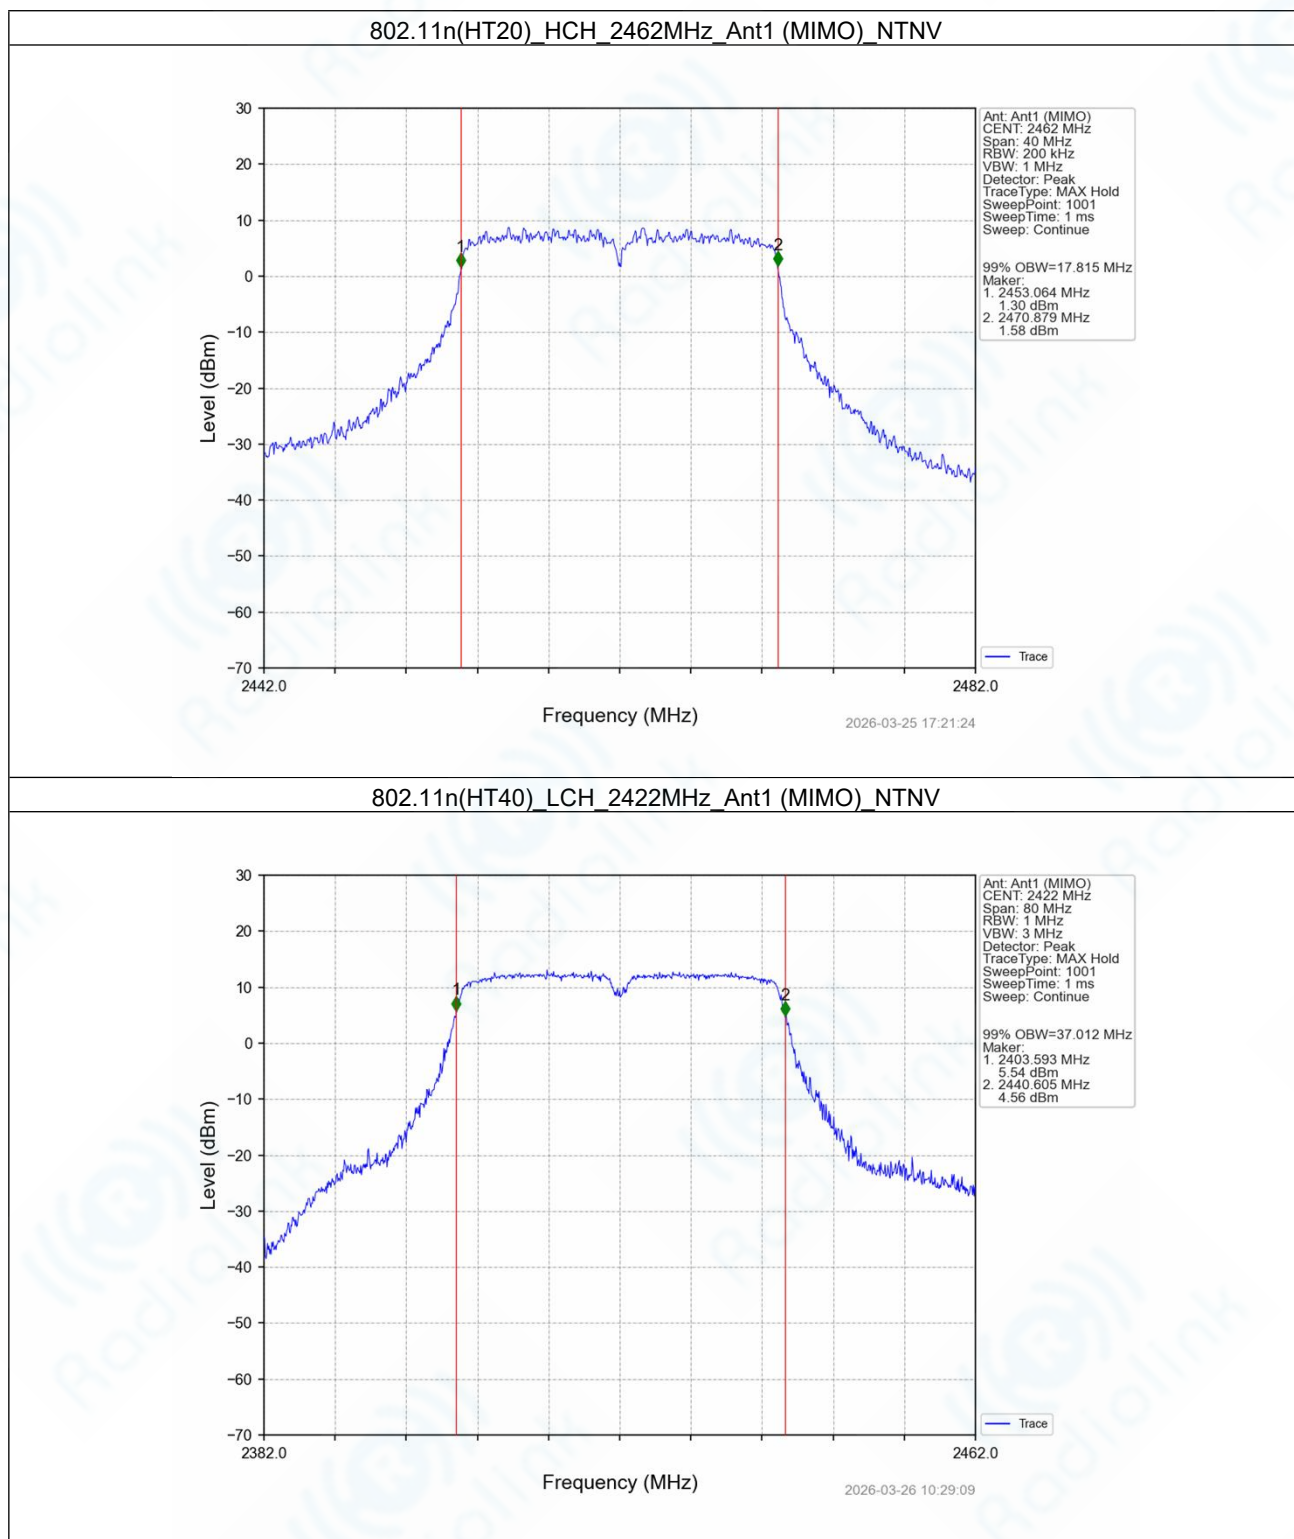

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

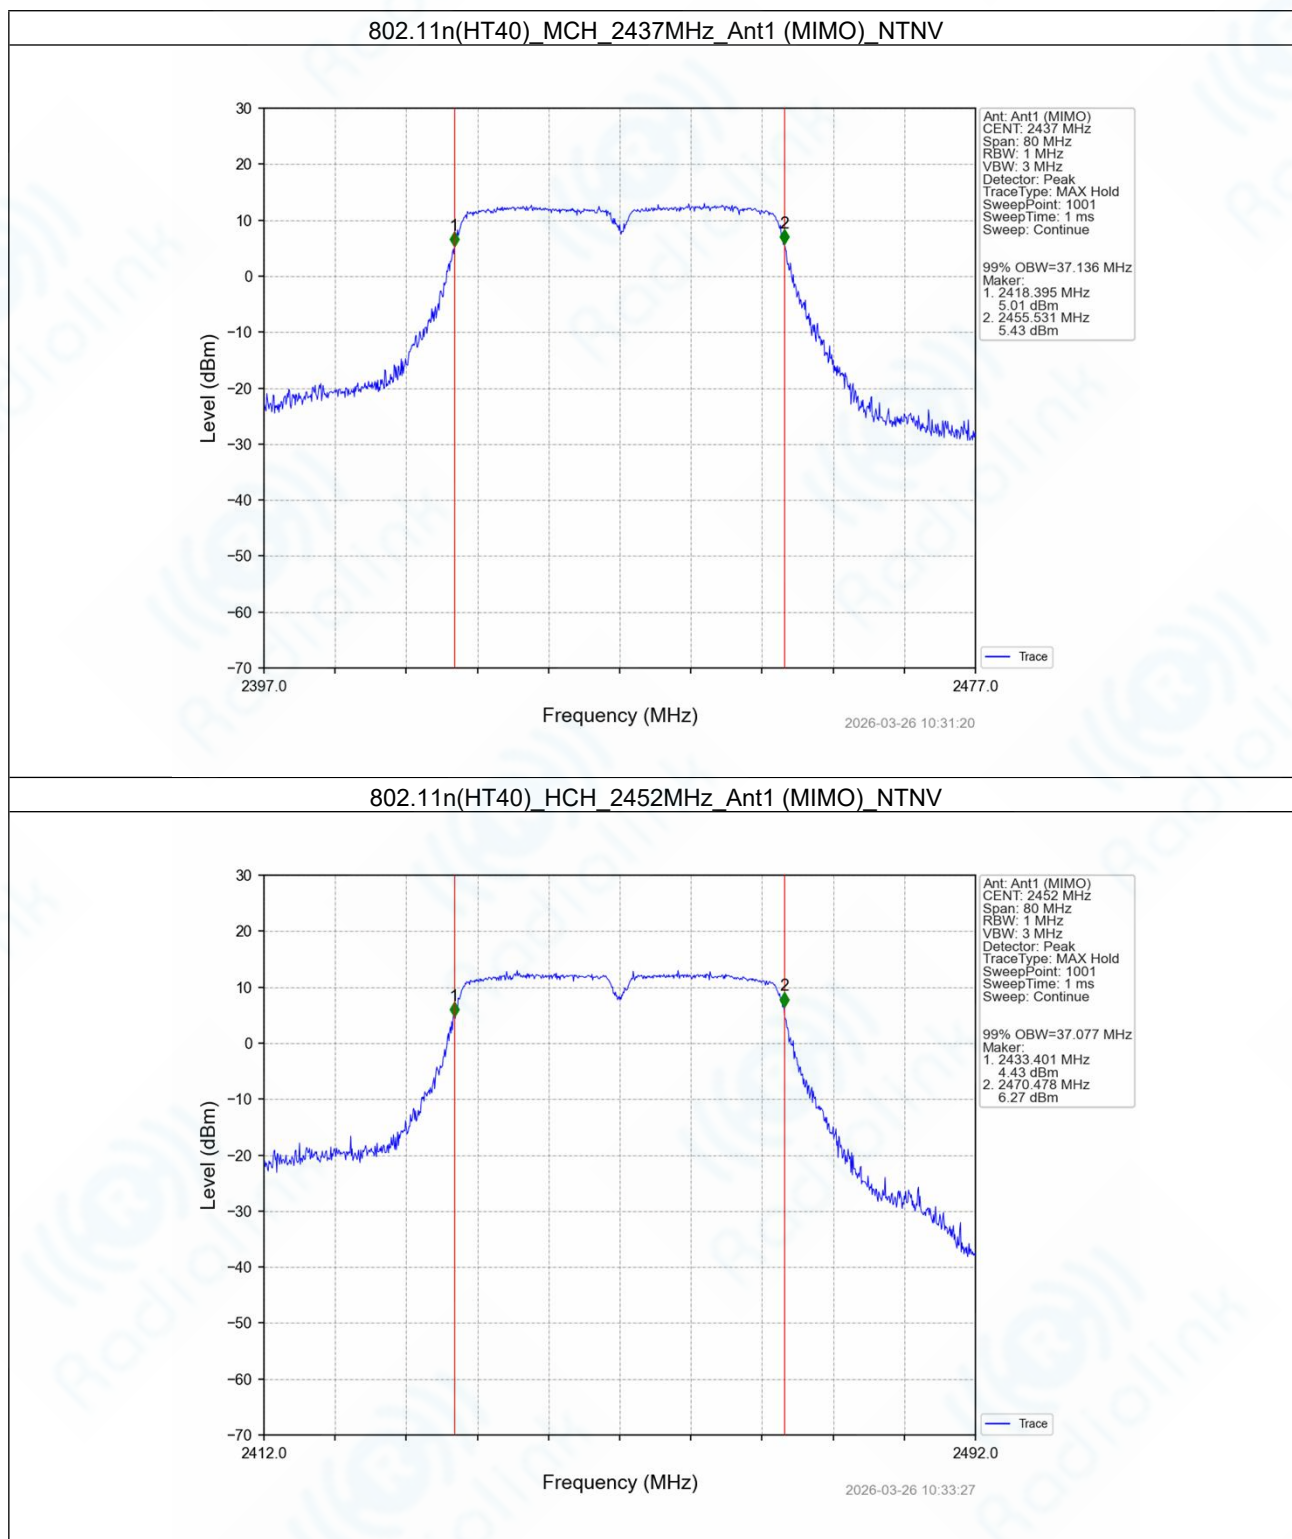

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

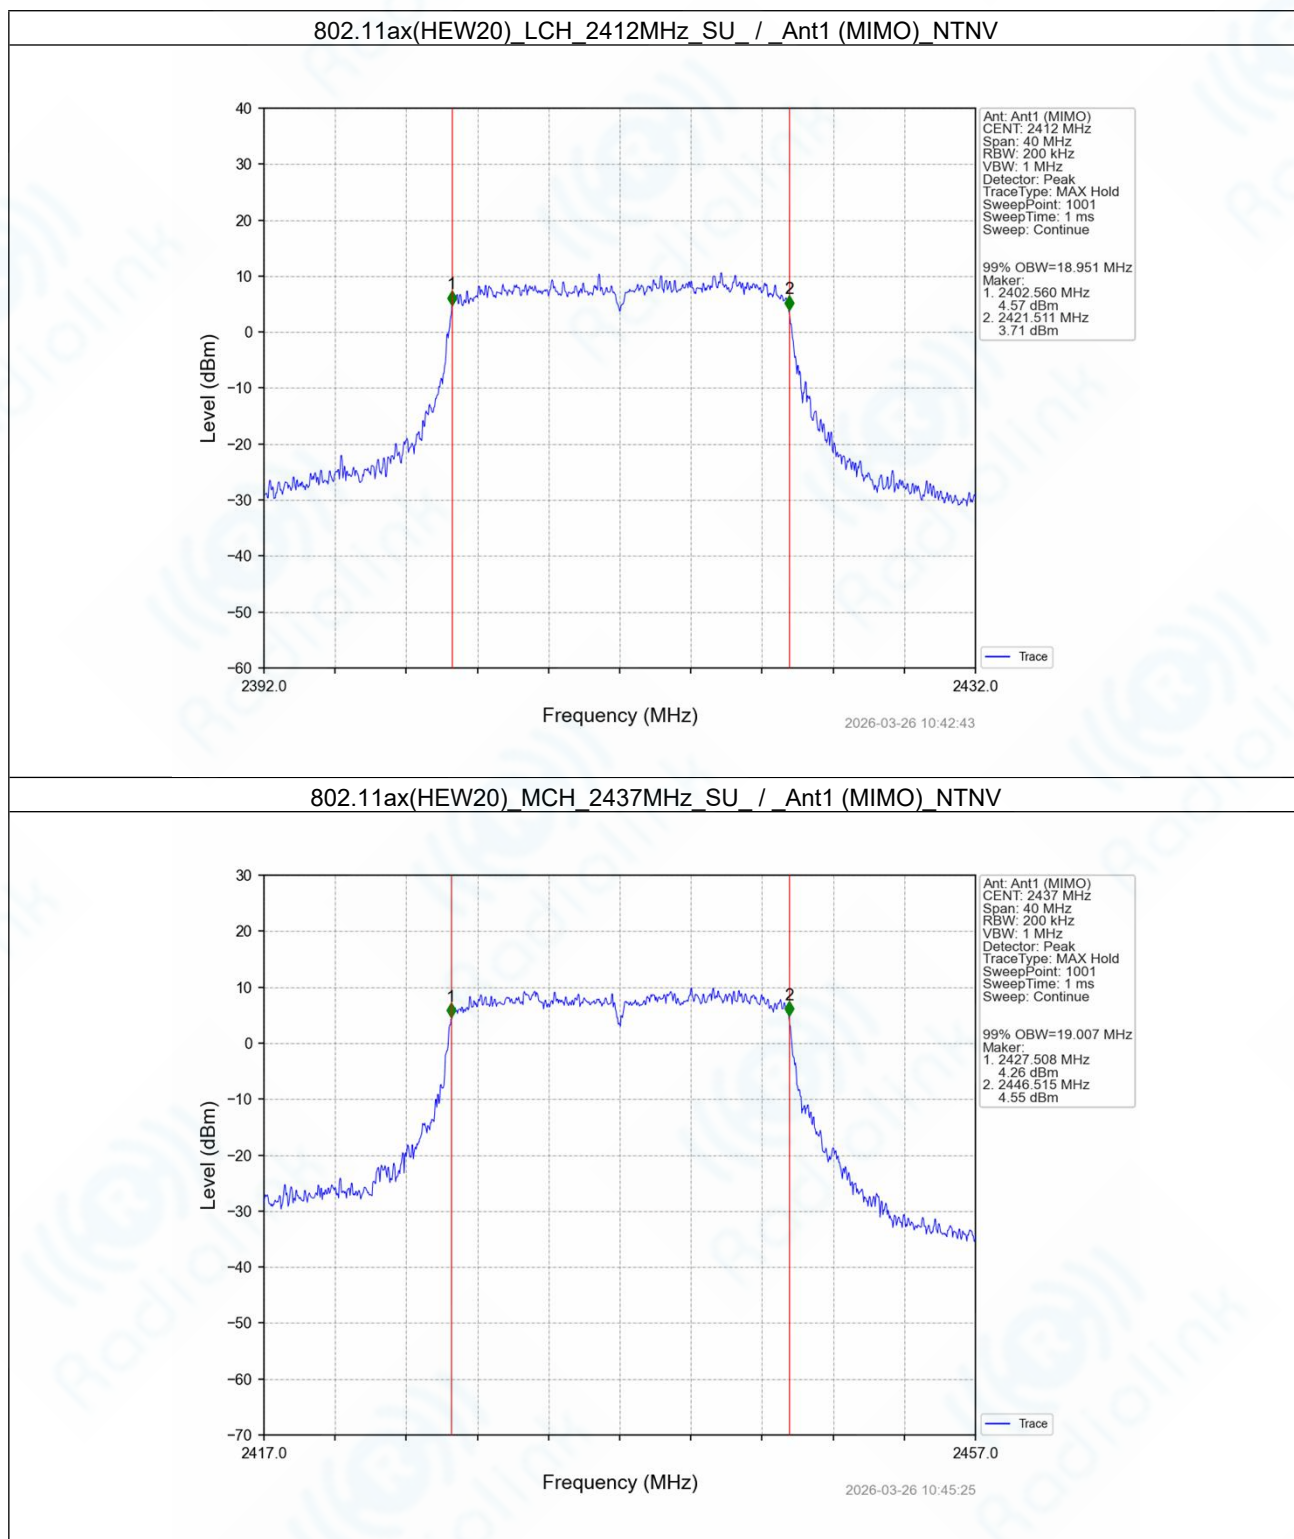


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

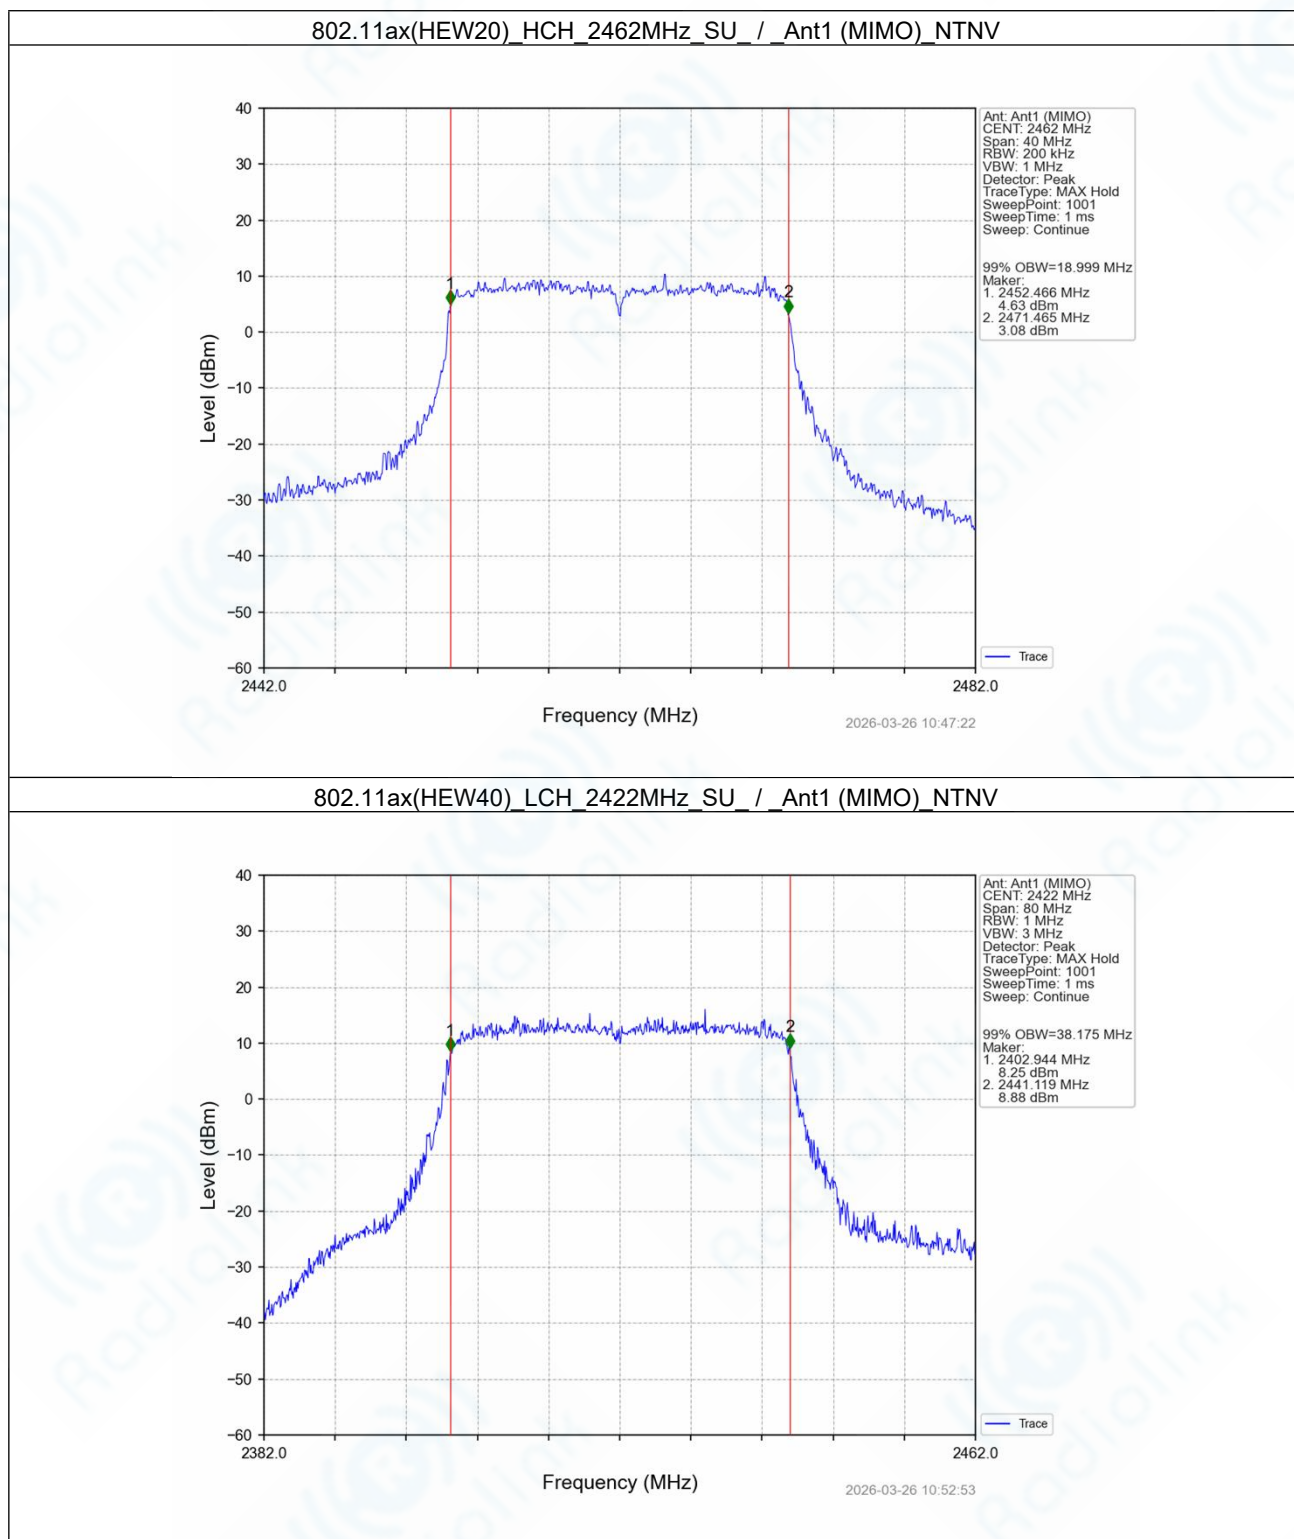

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

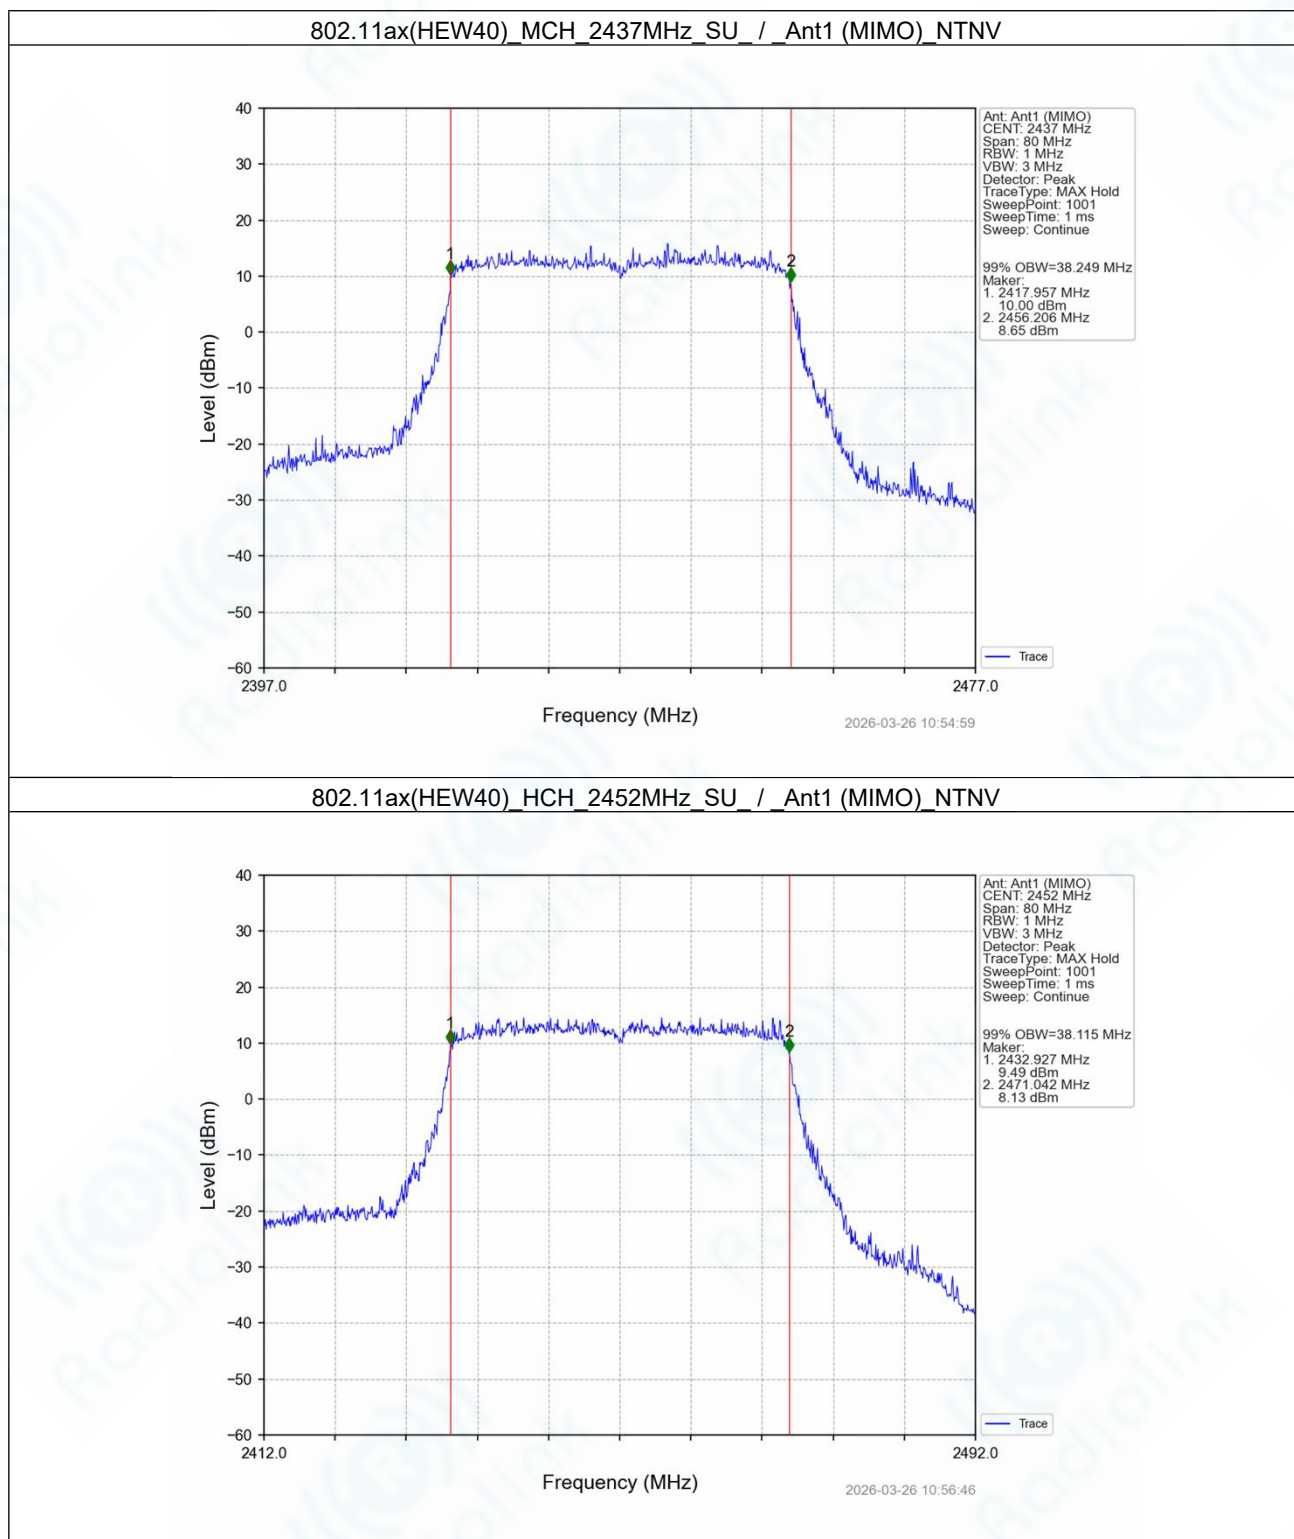

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

2.2.2 6dB BW

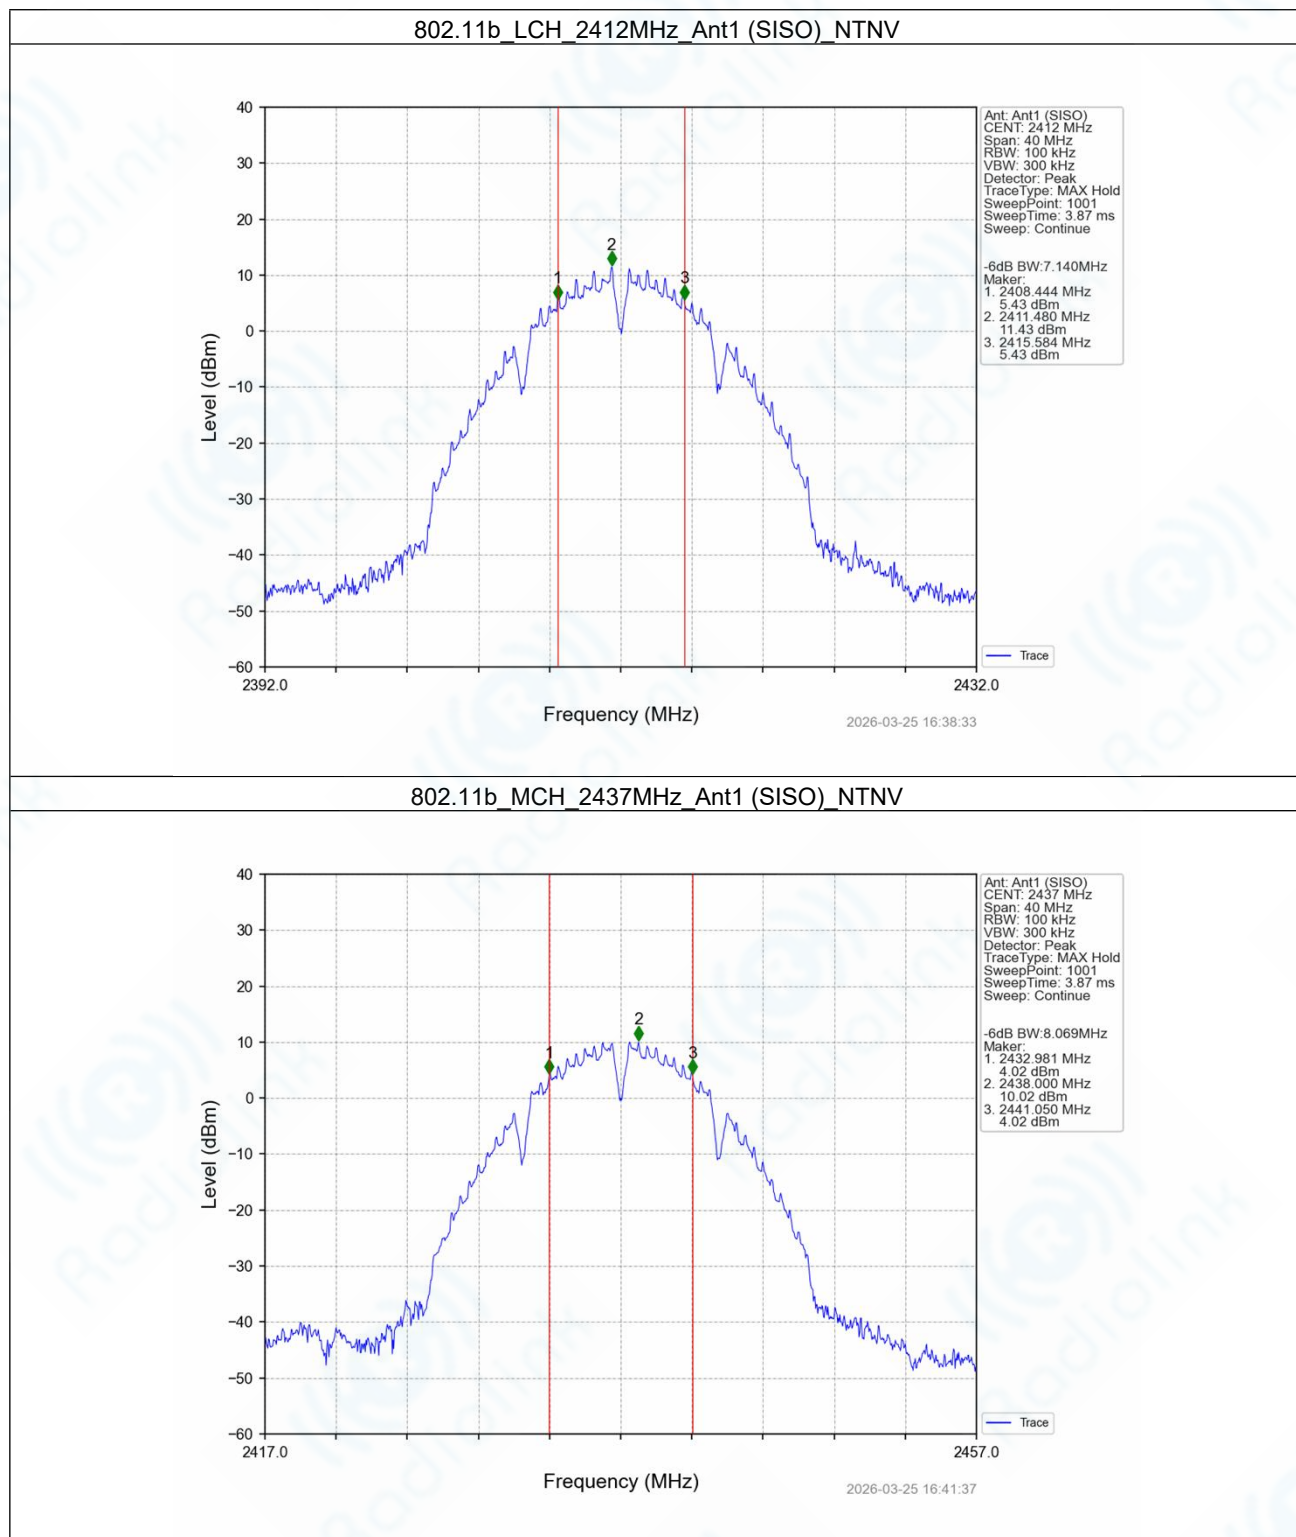

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

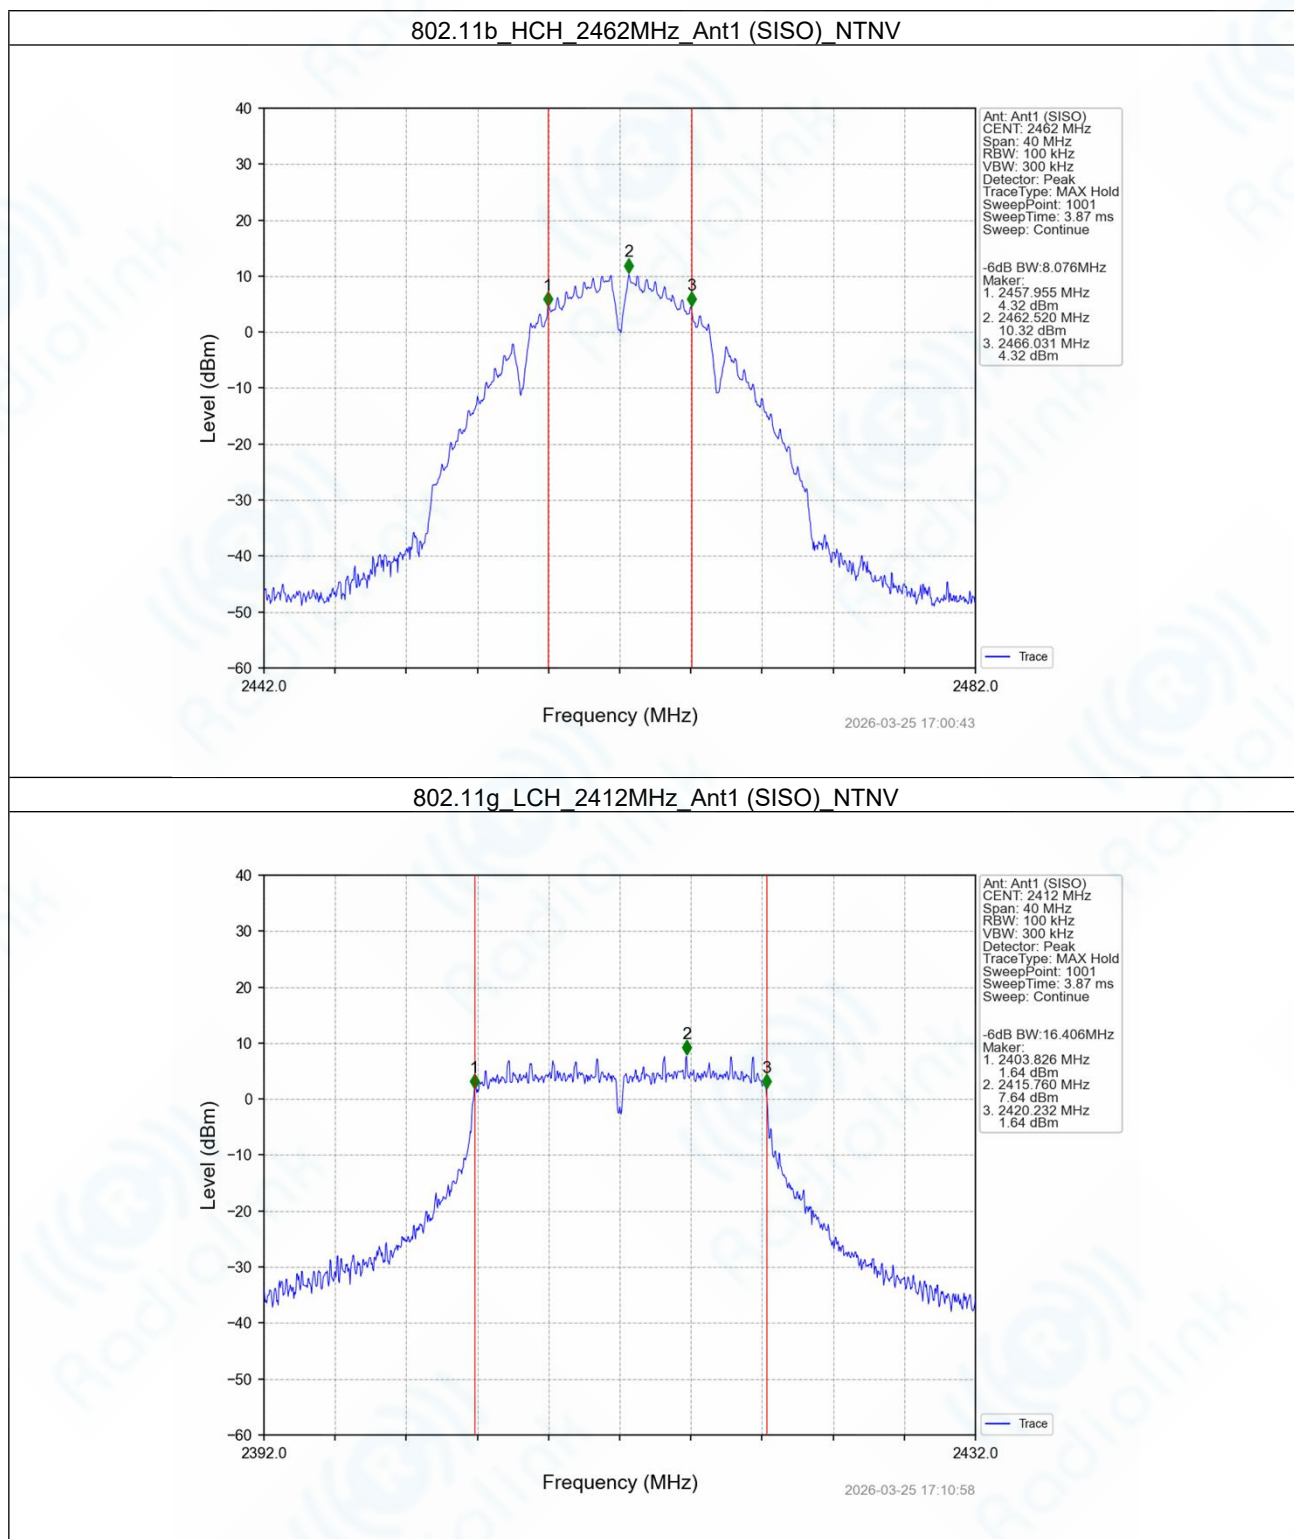

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

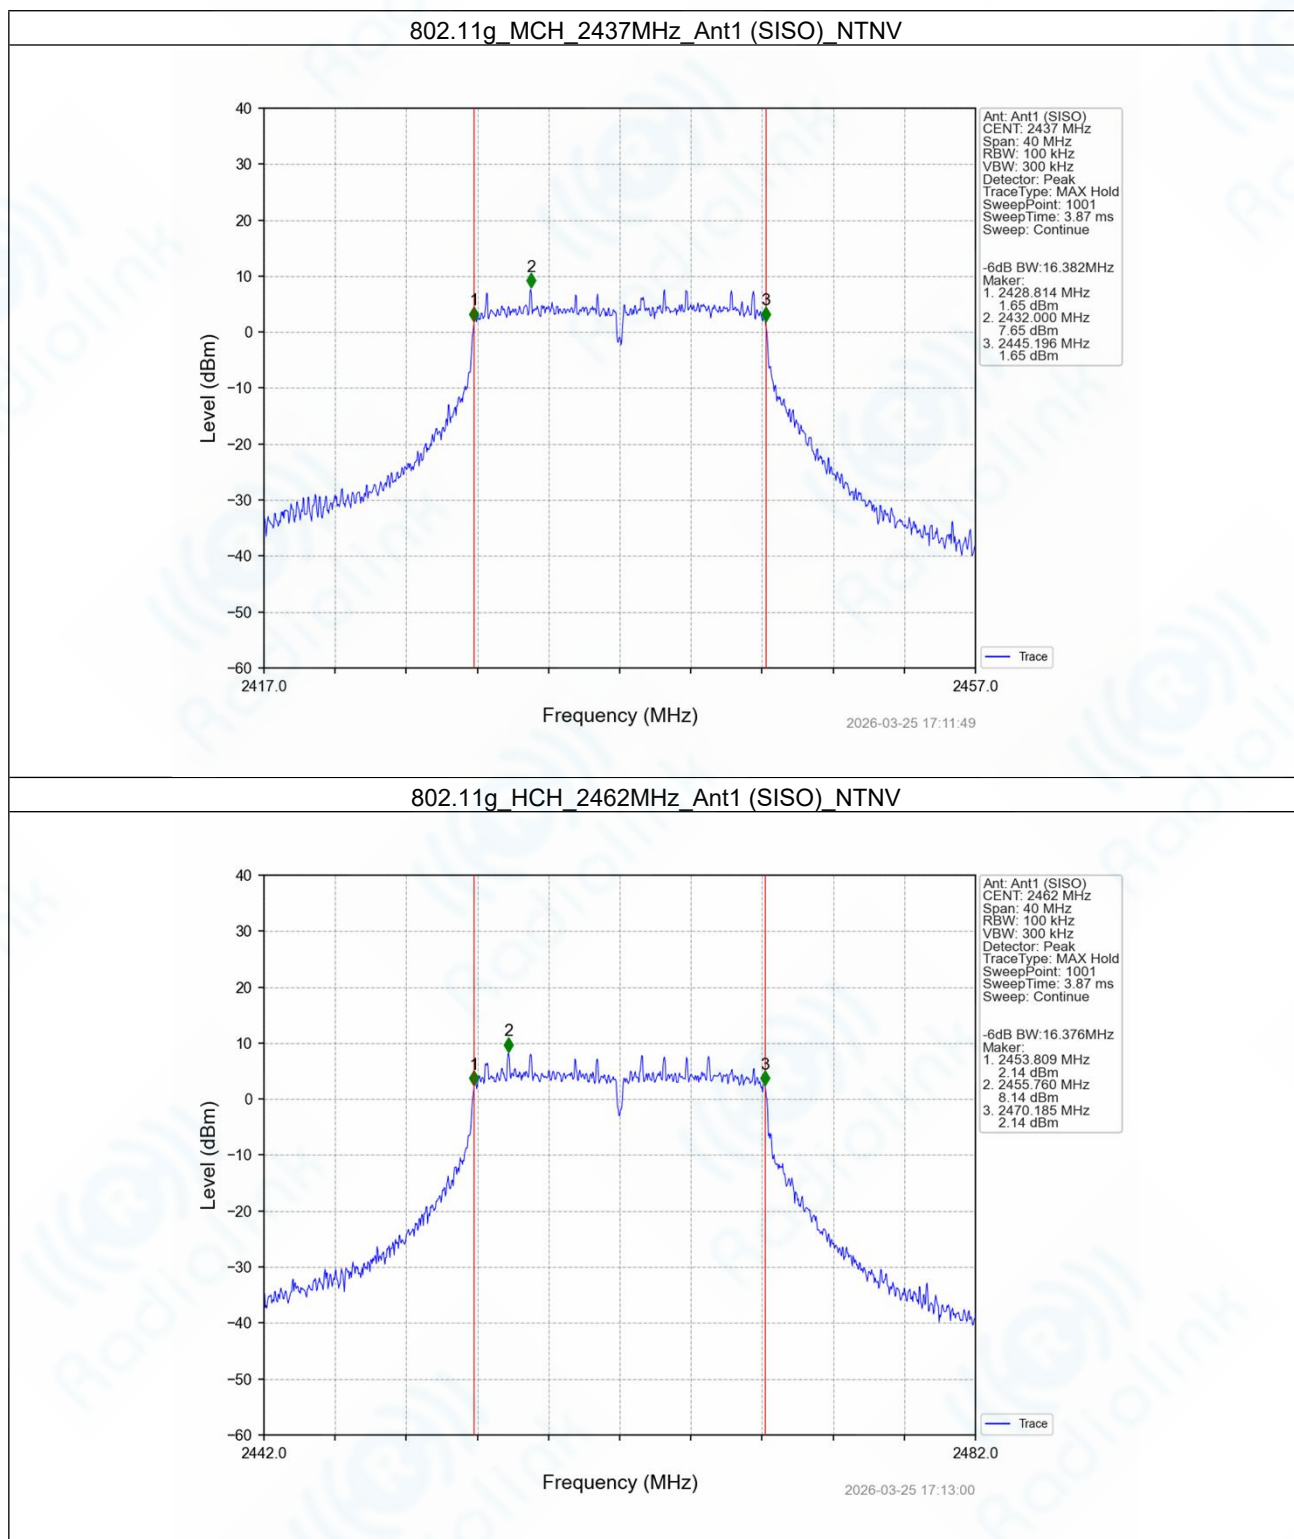

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

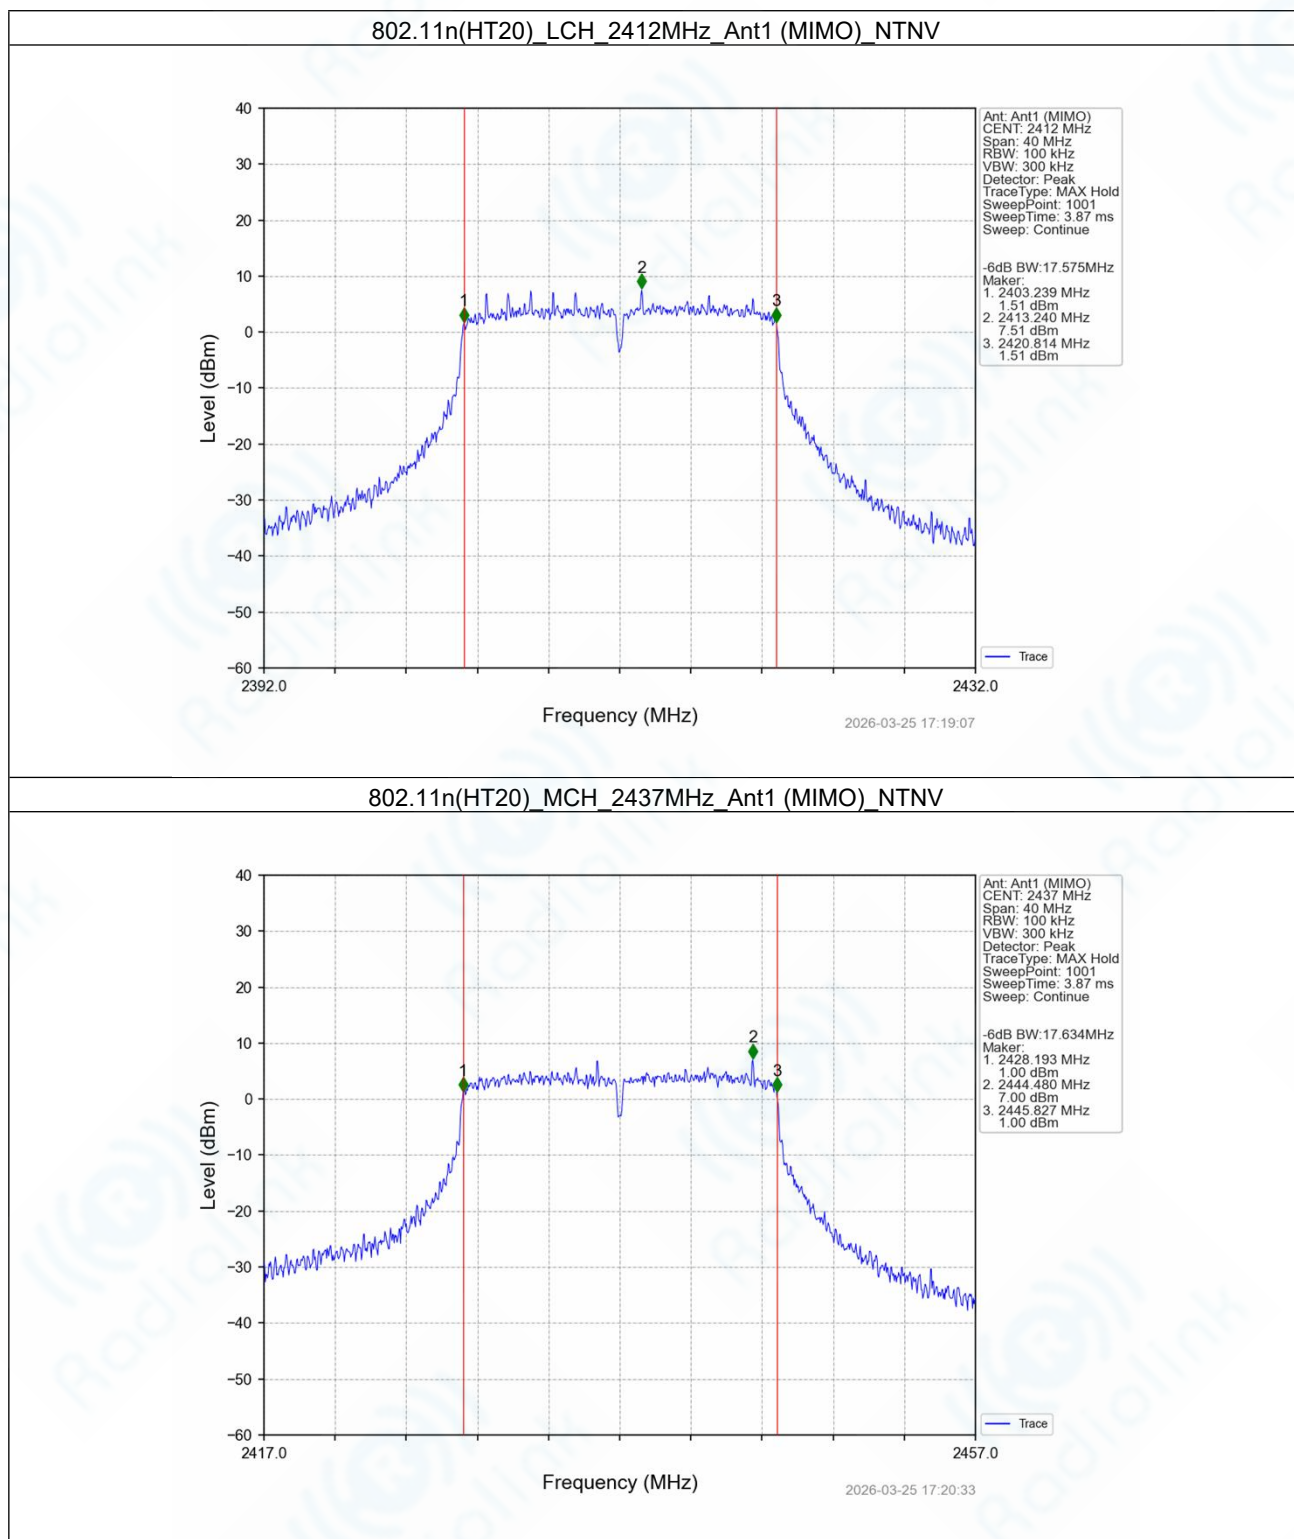

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

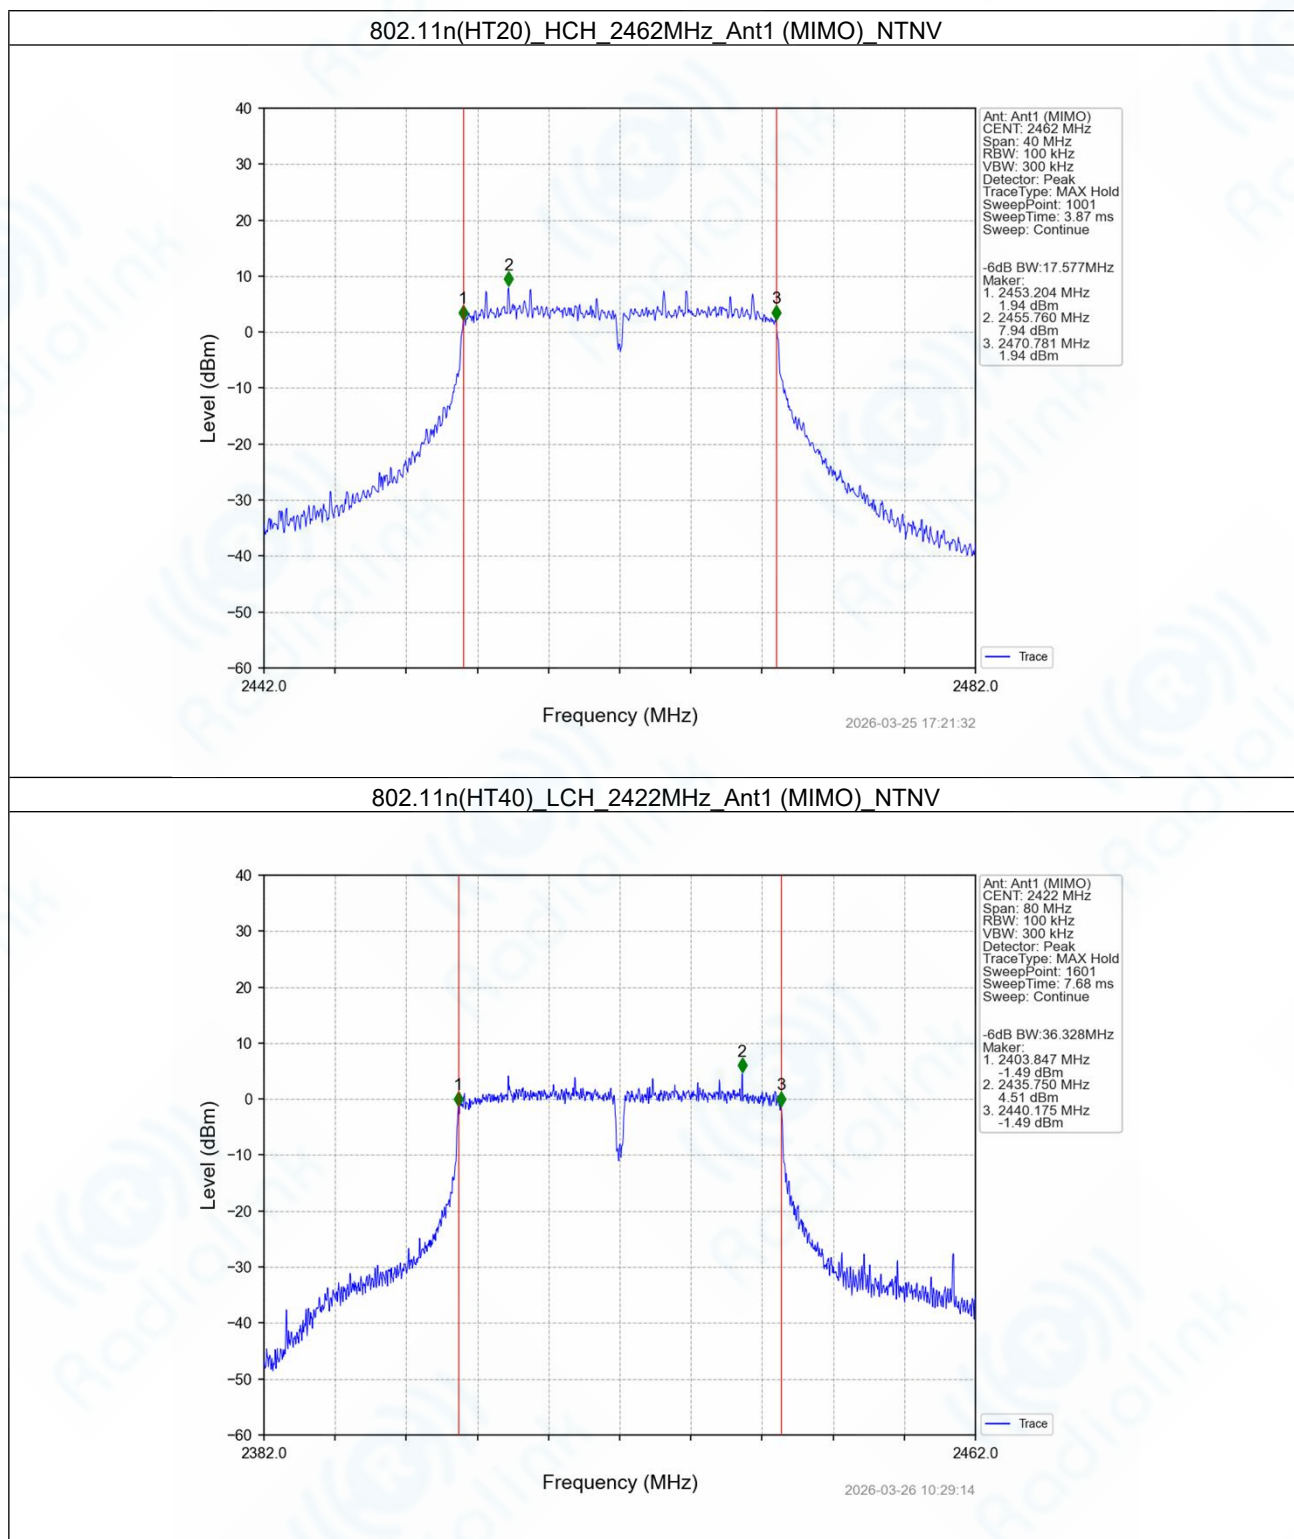


Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

802.11n(HT40)_MCH_2437MHz_Ant1 (MIMO)_NTNV

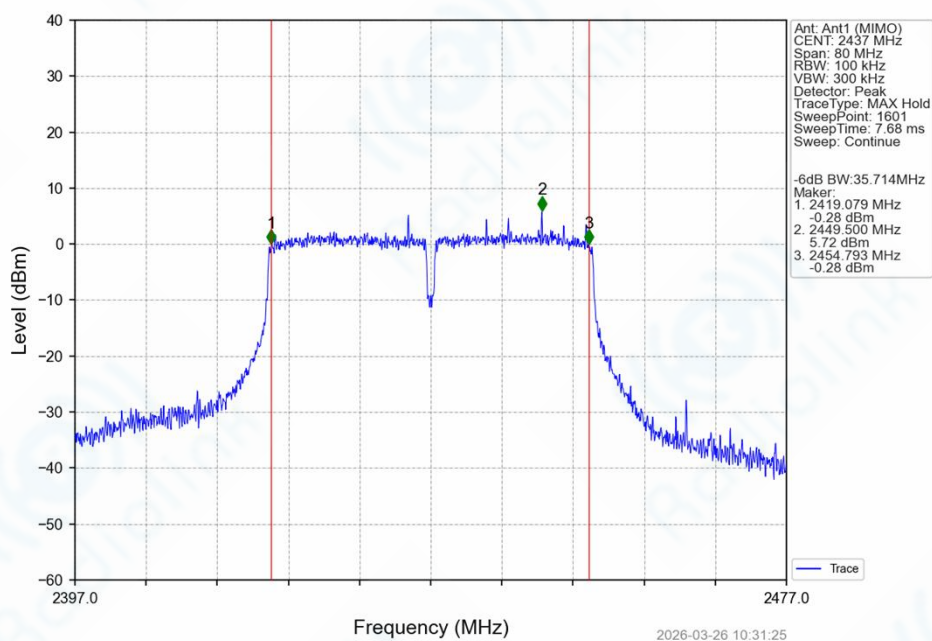


802.11n(HT40)_HCH_2452MHz_Ant1 (MIMO)_NTNV

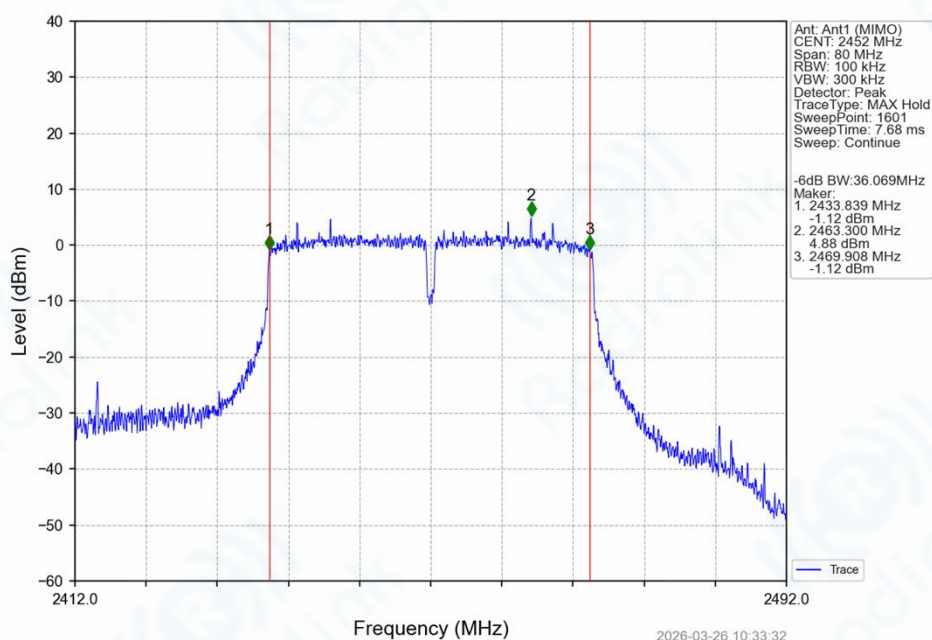

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China


Tel: +86 0755 23080694

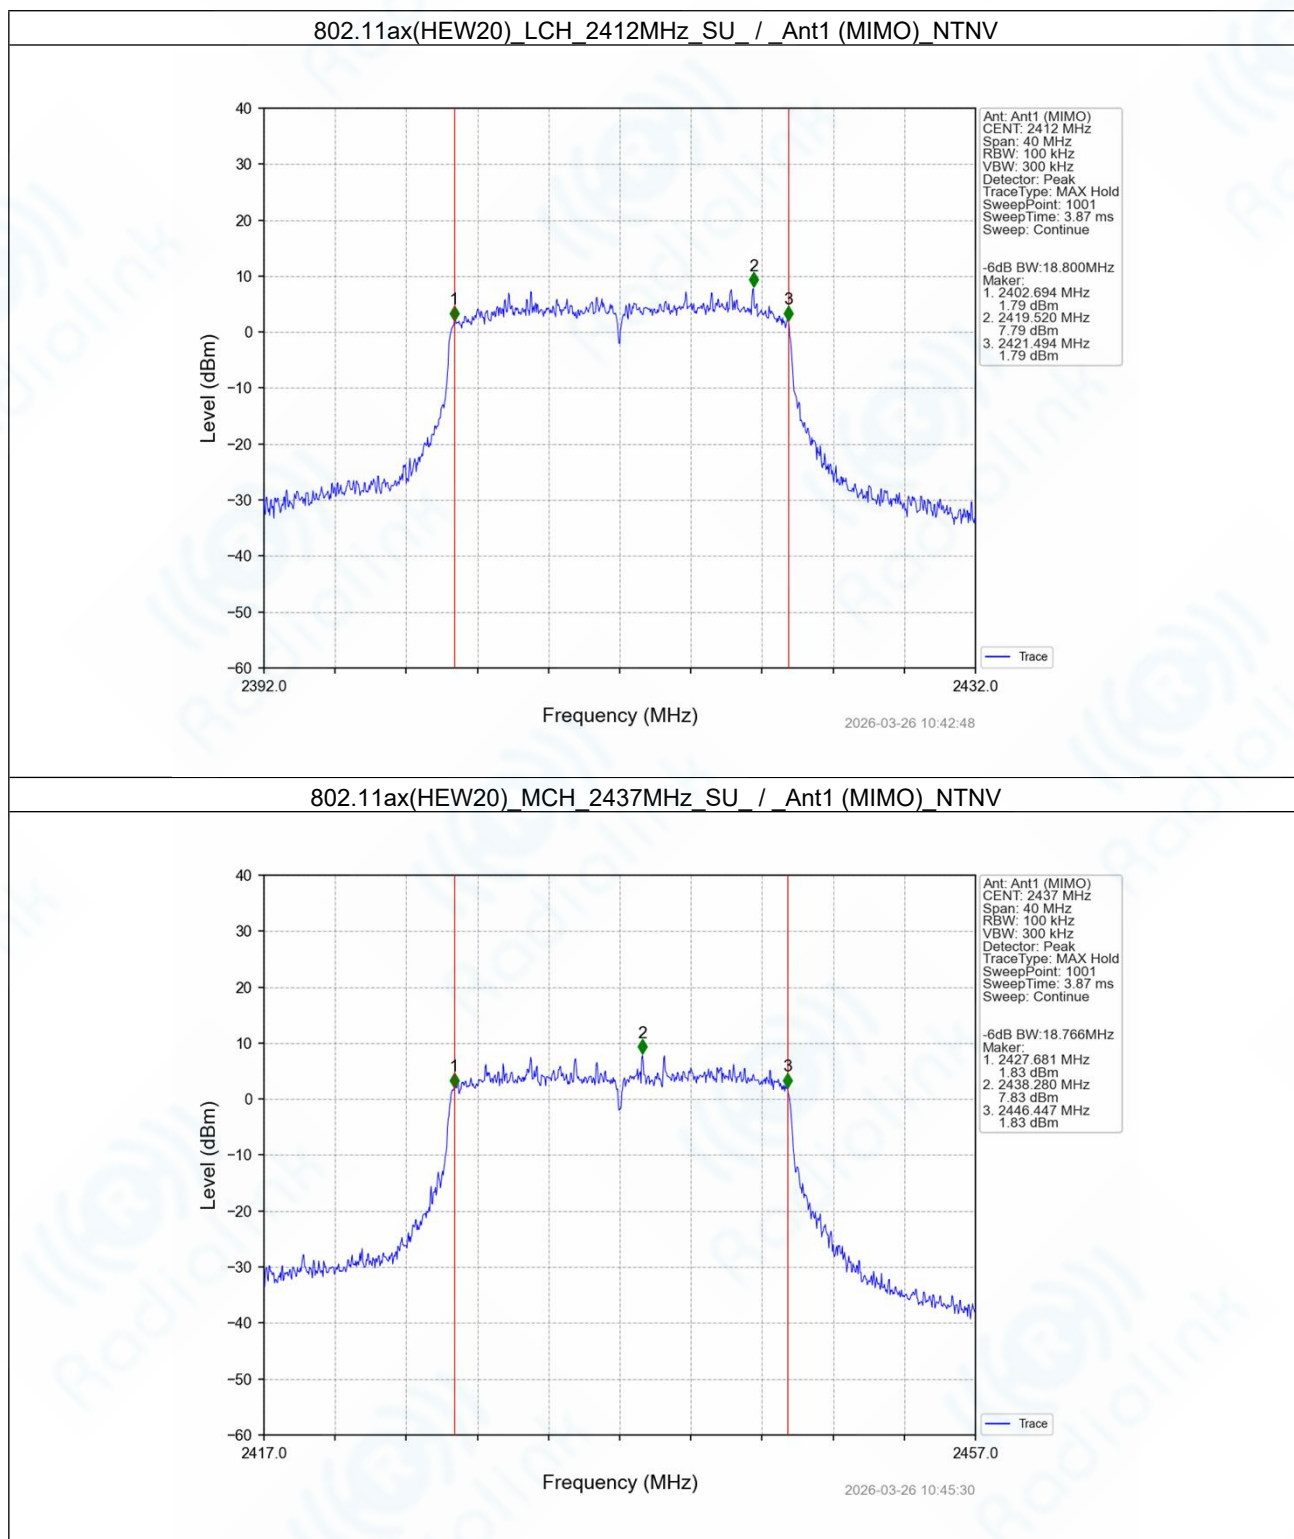

Radiolink Testing (Shenzhen) Co., Ltd.


Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

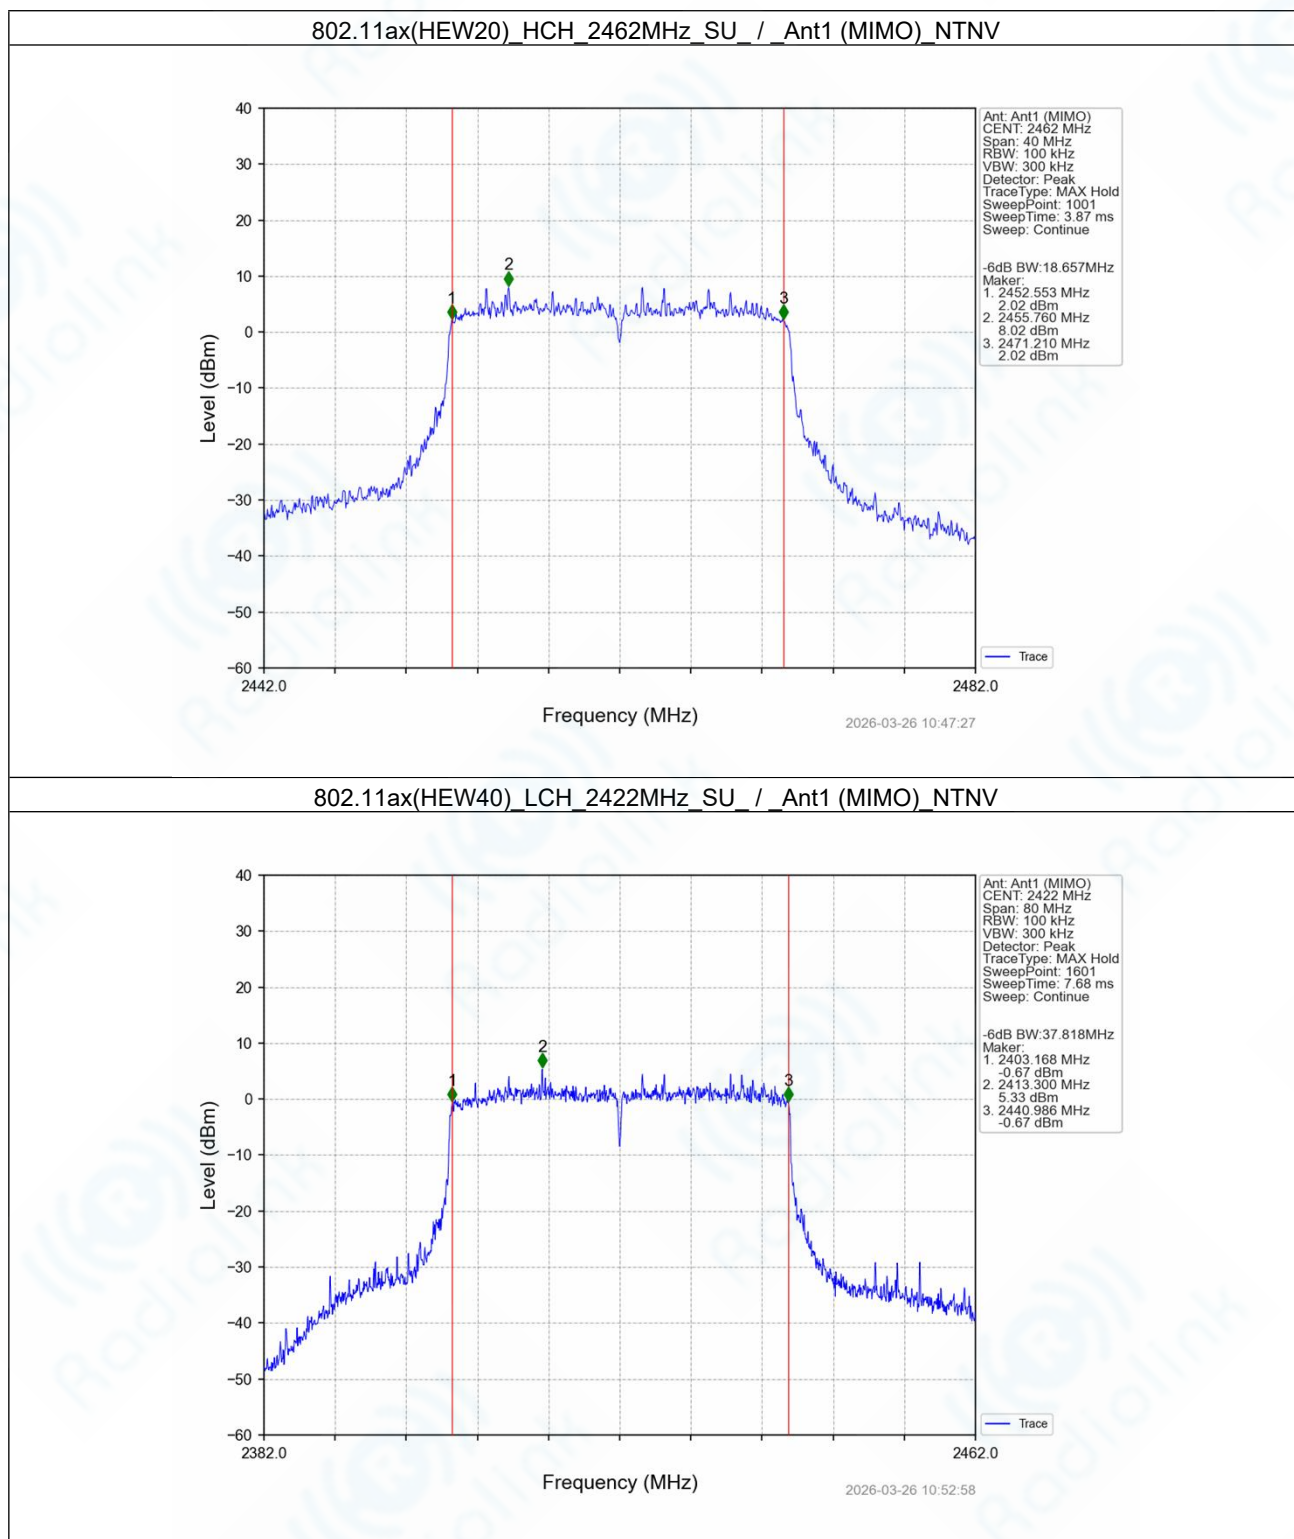

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

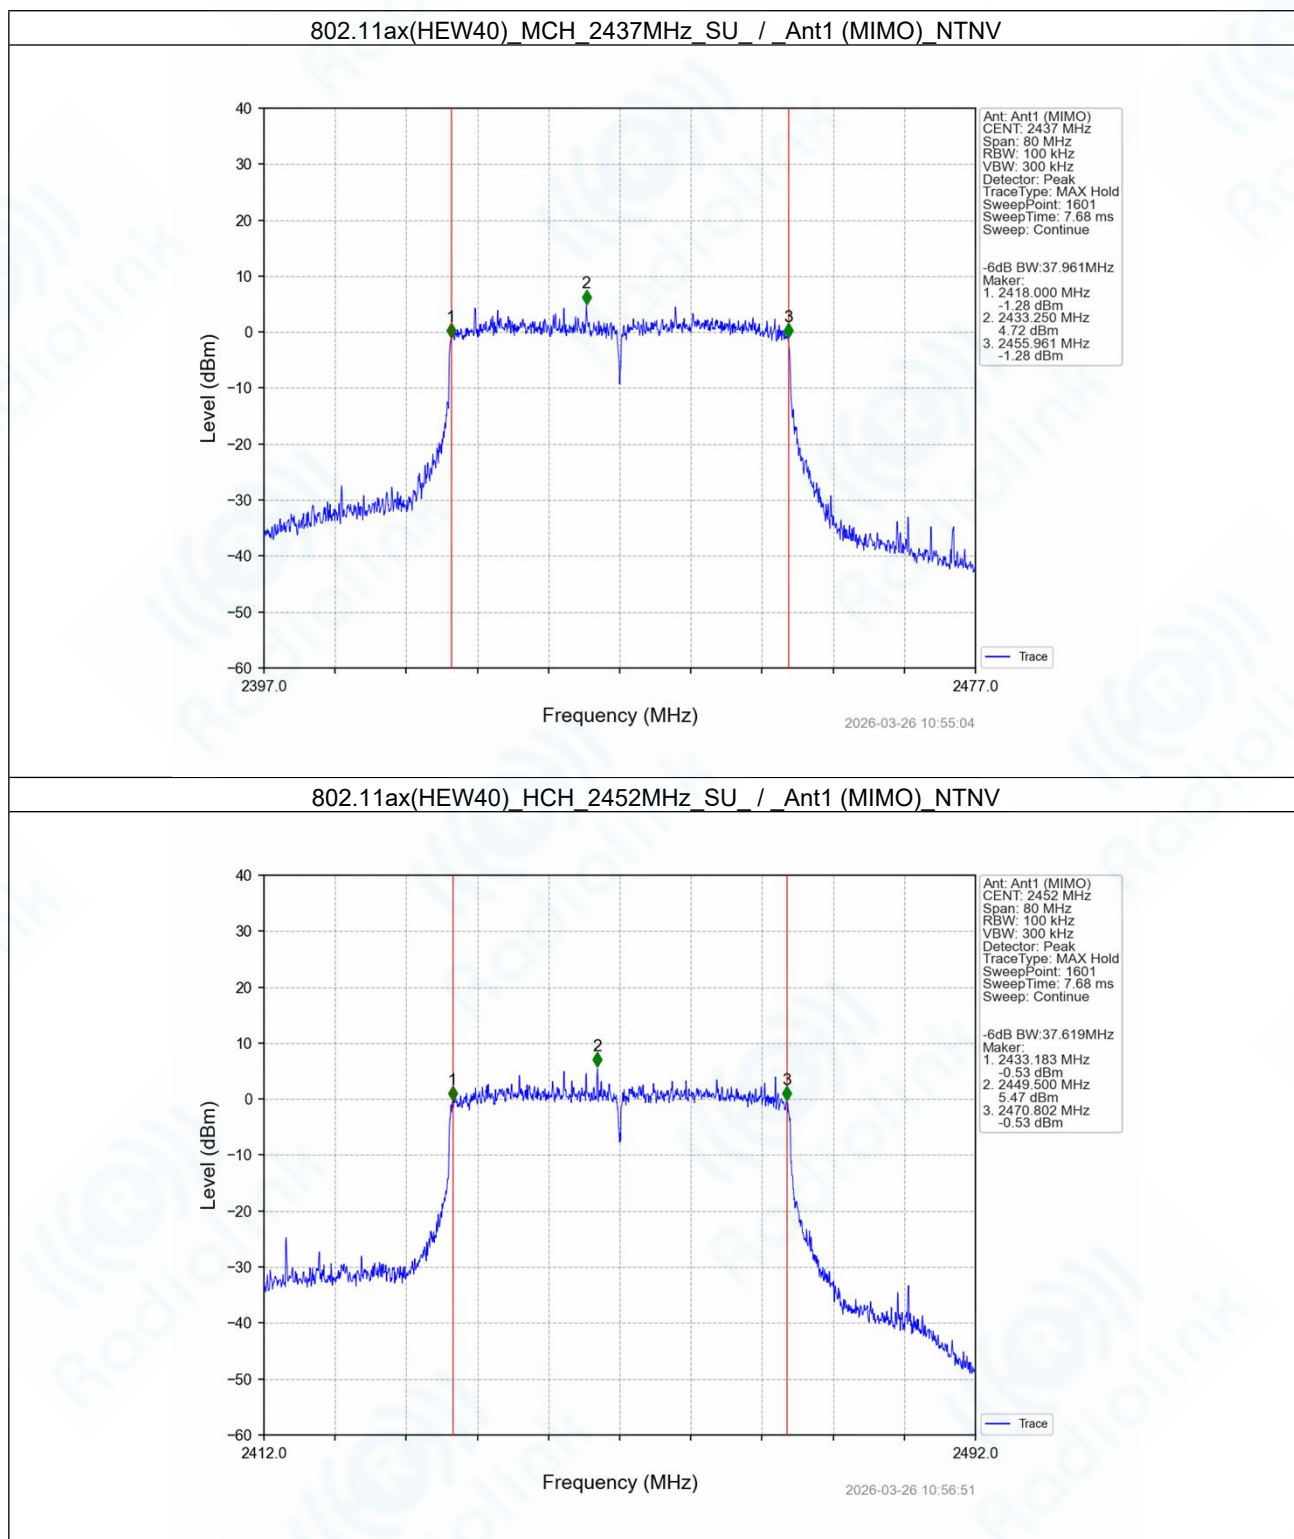

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China
Tel: +86 0755 23080694

3. Maximum Conducted Output Power

3.1 Test Result

3.1.1 Power

Mode	TX Type	Frequency (MHz)	RU	RU Pos	Maximum Average Conducted Output Power (dBm)				Verdict
					ANT1	ANT2	MIMO	Limit	
802.11b	SISO	2412	/	/	19.22	19.14	/	<=30	Pass
		2437	/	/	19.04	18.85	/	<=30	Pass
		2462	/	/	19.16	18.98	/	<=30	Pass
802.11g	SISO	2412	/	/	11.93	11.44	/	<=30	Pass
		2437	/	/	18.82	18.71	/	<=30	Pass
		2462	/	/	9.84	10.58	/	<=30	Pass
802.11n (HT20)	MIMO	2412	/	/	9.44	8.84	12.16	<=30	Pass
		2437	/	/	18.75	19.04	21.91	<=30	Pass
		2462	/	/	9.38	9.17	12.29	<=30	Pass
802.11n (HT40)	MIMO	2422	/	/	9.63	9.01	12.34	<=30	Pass
		2437	/	/	19.10	19.04	22.08	<=30	Pass
		2452	/	/	9.63	9.38	12.52	<=30	Pass
802.11ax (HEW20)	MIMO	2412	SU	/	10.75	10.13	13.46	<=30	Pass
		2437	SU	/	18.84	18.74	21.80	<=30	Pass
		2462	SU	/	10.81	7.47	12.46	<=30	Pass
802.11ax (HEW40)	MIMO	2422	SU	/	8.70	8.08	11.41	<=30	Pass
		2437	SU	/	19.05	18.98	22.03	<=30	Pass
		2452	SU	/	7.71	7.56	10.65	<=30	Pass

Note1: Antenna Gain: Ant1: -1.70dBi; Ant2: -3.70dBi;

Note2: Directional Gain: -1.7dBi



Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

3.2 Test Graph


3.2.1 Power

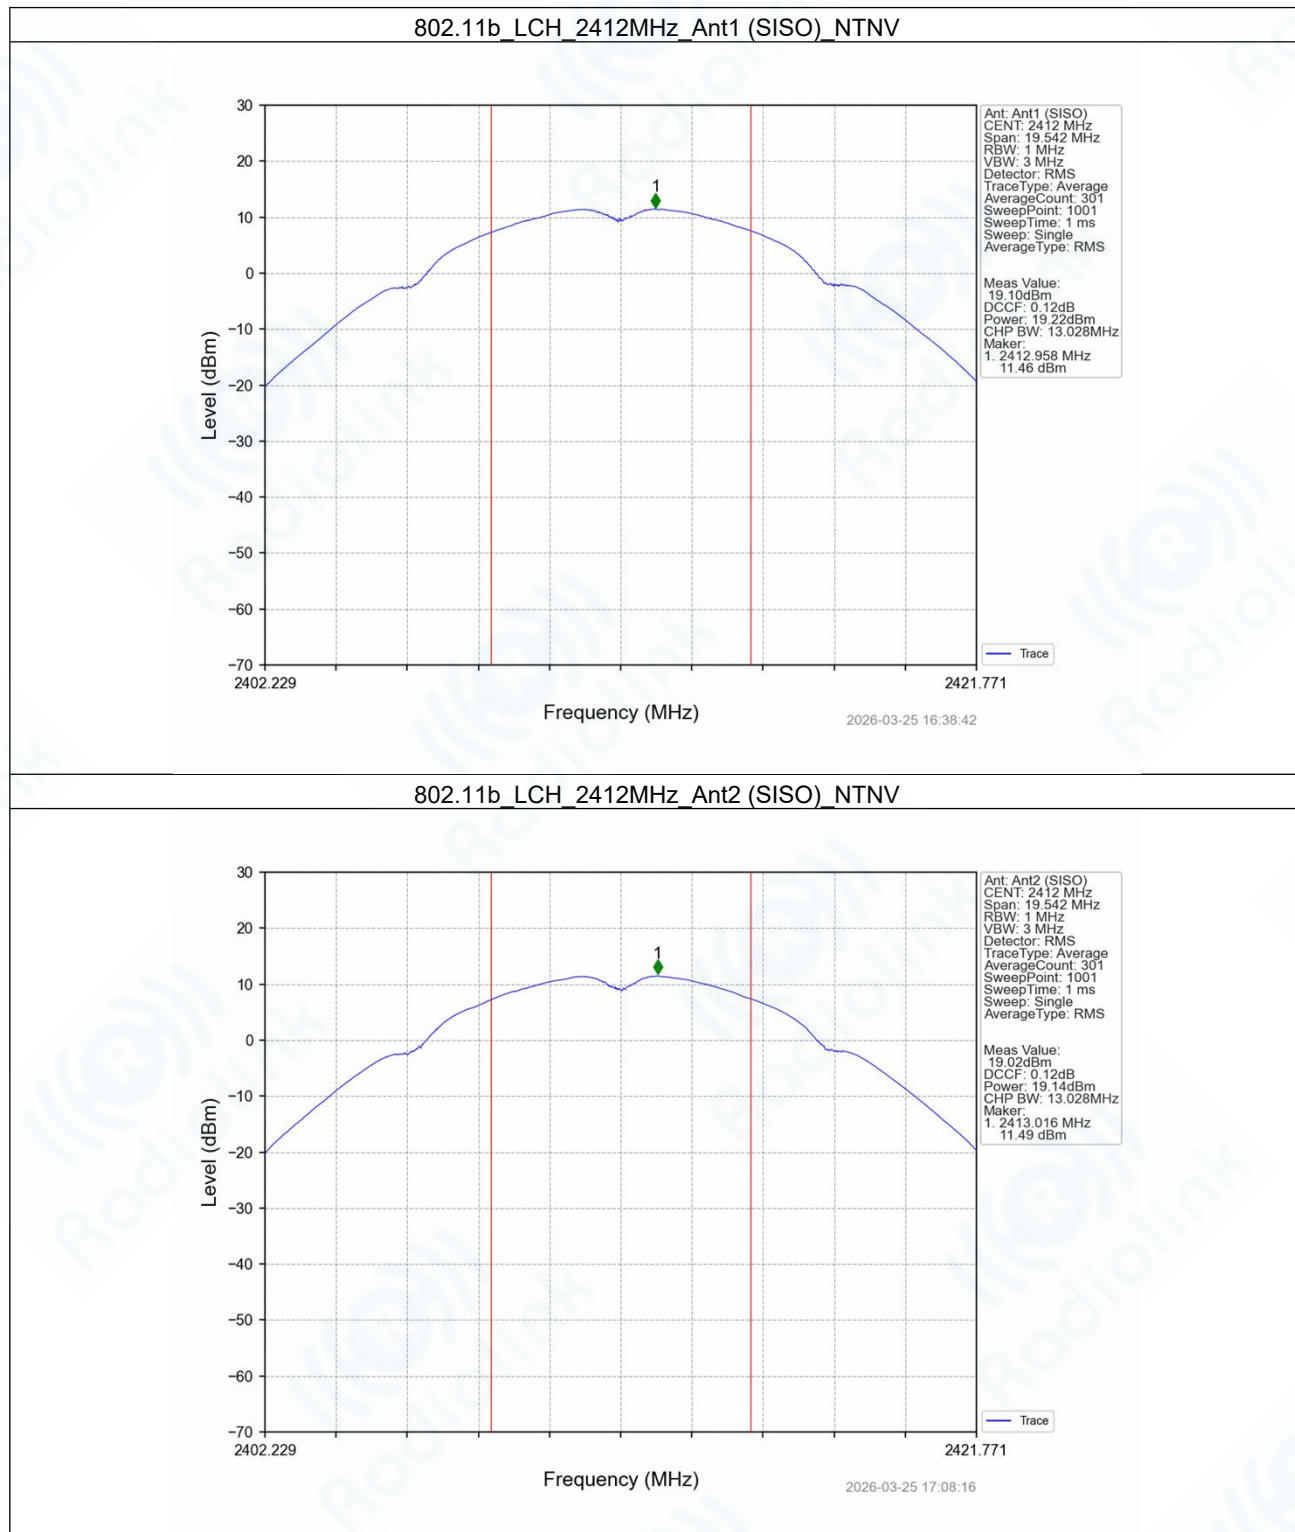

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District, Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

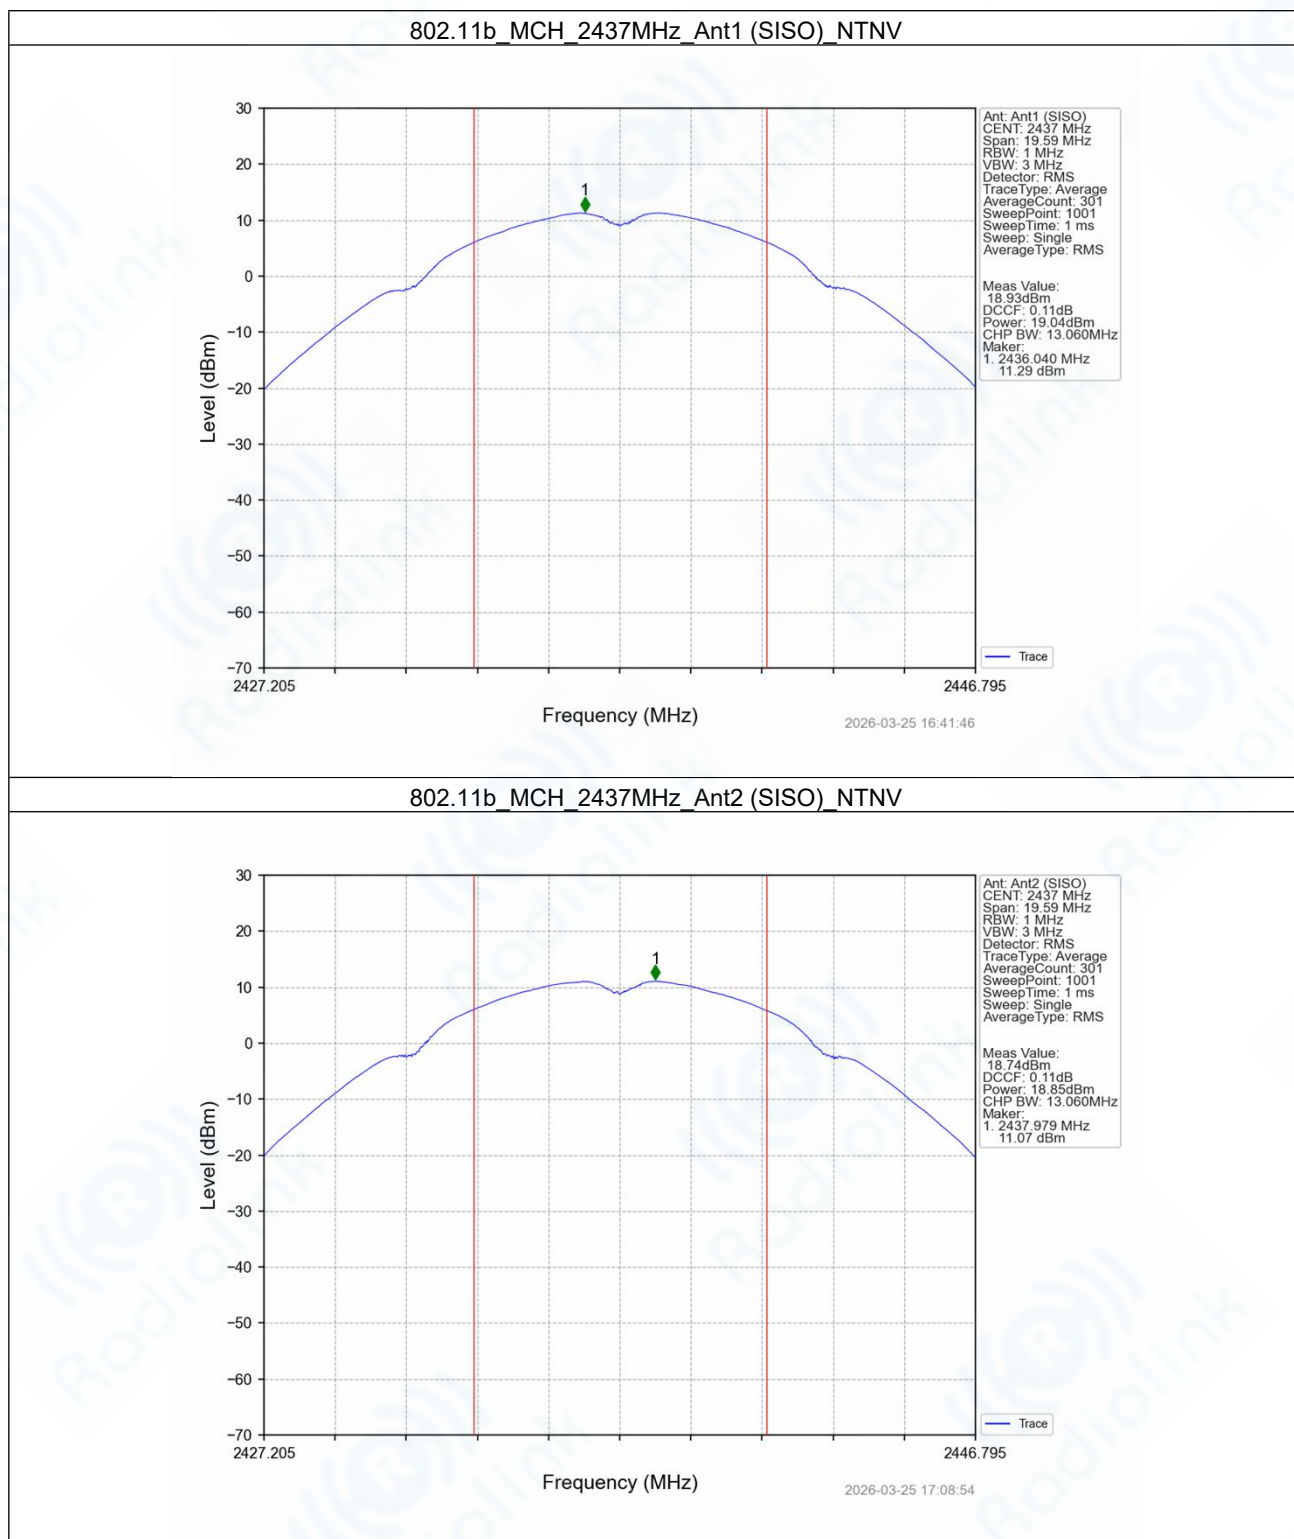

Radiolink Testing (Shenzhen) Co., Ltd.

Room 103, Building B, Jinghang Industrial Park, Area 71, Xingdong Community, Xin'an Subdistrict, Bao'an District,
Shenzhen, Guangdong Province, China

Tel: +86 0755 23080694

