



P3 HE Wireless Mechanical Keyboard

Fully Assembled Version

Keyboard

1 x Fully Assembled Keyboard

Including

1x Case

1x PCB

1x Aluminum Plate

1x Sound Absorbing Foam

1x EPDM Foam


1x Bottom Case PET Film

12 x 50° Gaskets Silicone Beans Installed

5 Sets x Stabilizers

1 Set x Keycaps (PBT Double-shot)

1 Set x Magnetic Switches

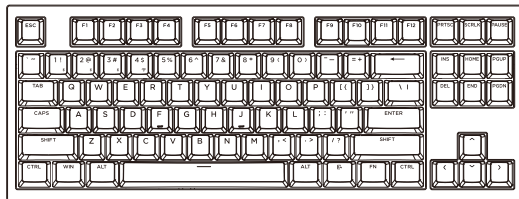

Cable

1 x Type-A to Type-C Cable

Receiver

1x Type-A 2.4GHz Receiver


1x Extension Adapter For Receiver

Tools

1 x Keycap-Switch Puller


1 x Screwdriver

1 x Hex Key

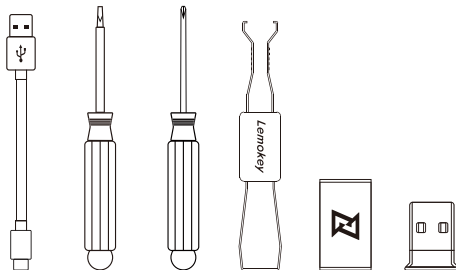


Quick Start Guide

The default system of this product is Windows.

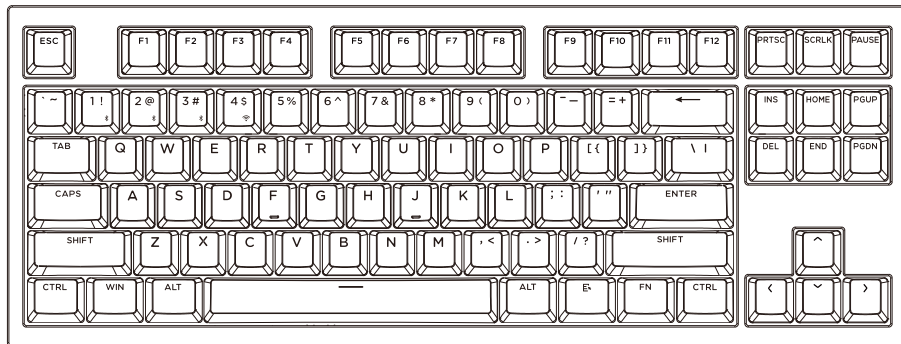


1 Connect 2.4GHz Receiver

Switch toggle to 2.4GHz mode



G = 2.4GHz

Press FN + 4 (for 3 seconds)


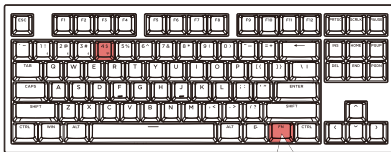


FN + 4


Connect the 2.4GHz receiver to the device USB port.




Note: For the best wireless experience, we recommend using the extension adapter for receiver and putting the 2.4GHz receiver somewhere on your desk close to your keyboard for a low rate of latency and fewer signal interferences.

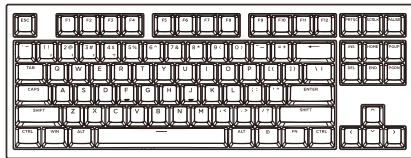

2 Connect Bluetooth




Switch toggle to Bluetooth




BT = Bluetooth

Press FN + 1 (for 3 seconds) and pair with device named Lemokey P3 HE.

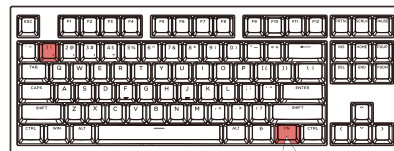


FN + 1

3 Connect Cable

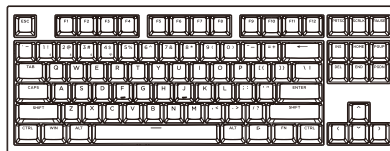

Switch toggle to Cable




4 The Lemokey Launcher App

Please visit launcher.lemokey.com to use the online Launcher web app to remap the keys, create macro commands, or flash the firmware. If the Launcher cannot recognize your keyboard, please reach our support to get the instructions.



*The online Launcher can only run on the latest version of Chrome, Edge, and Opera browsers.

5 Set Up Mac Layer

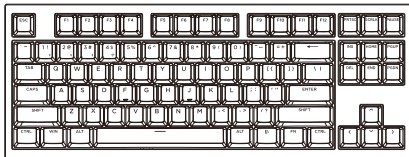


Use the online launcher app to remap the Windows keys to Mac keys.




6 The Backlight

Press FN + Q to change the lighting effect

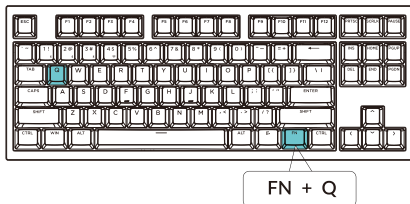


Press FN + Tab to turn the backlight on/off

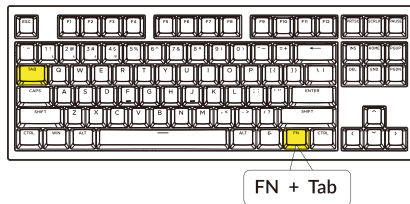


7 Adjust The Backlight Brightness

Press FN + W to increase the backlight brightness

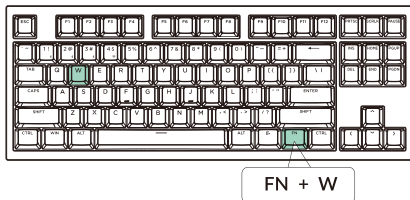


Press FN + S to decrease the backlight brightness

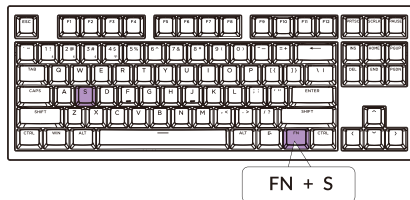


8 Adjust The Backlight Speed

Press FN + T to increase the light effect speed

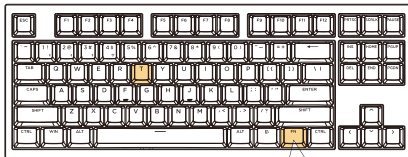

FN + T

Press FN + G to decrease the light effect speed

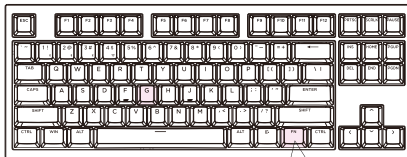


FN + G

9 Warranty

The keyboard is highly customizable and easy to be rebuilt. If anything goes wrong with any of the keyboard components of keyboard during the warranty period, we will only replace the defective parts of the keyboard, not the whole keyboard.



10 Factory Reset & Firmware Update

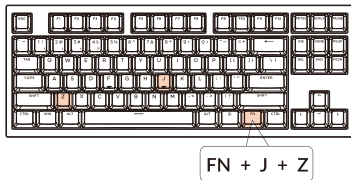

Troubleshooting? Don't know what's going on with the keyboard?

Factory reset your keyboard

1. Power on your keyboard.
2. Press and hold FN + J + Z (for 3 seconds). The keyboard backlight will flash in red quickly for 3 seconds, indicating that the keyboard has been reset.

Flash your keyboard firmware

1. Visit launcher.lemokey.com to open the online Launcher web app.
 2. Ensure the keyboard is in Cable or Wired mode and plug in the power cable.
 3. Find the 'Firmware Update' tab on the left side of the Launcher and connect your keyboard with it.
 4. Follow the instructions on the Launcher and complete the firmware update.
- * Step-by-step guide, search the keyword "firmware" on lemokey.com.

SPECIFICATIONS

Number of keys: 87

Switch type: Magnetic

Battery: 4000mAh

Charging time: Around 5 hours

Charging port: Type-C

Mode: 2.4GHz / Bluetooth / Wired

Bluetooth operating distance: Within 10 meters (open space)



Name of Bluetooth device: Lemokey P3 HE

Operating environment: -10 to 50°C

Technical specifications can be subjected to change without notice, we apologize for any inconvenience caused.

OVERVIEW

Windows

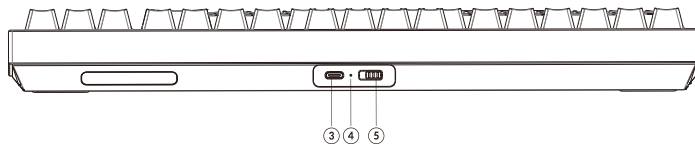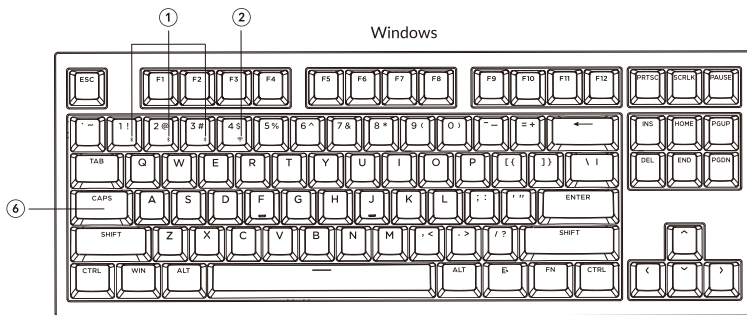

- ① Bluetooth Channel Indicator
- ② 2.4GHz Channel Indicator
- ③ Type-C Port
- ④ Power Indicator
- ⑤ 2.4G Cable Bluetooth (Connection Mode Toggle)
- ⑥ Caps Lock Indicator