


## Product specification

## Quick Reference Date



|                            |                                    |  |
|----------------------------|------------------------------------|--|
|                            | Antenna module on the system board |  |
| Frequenc Range             | 400-450MHz                         |  |
| Ant. Port Input Pwr. (dBm) | 0 (Typ. BT class 2 output power)   |  |
| Tot. Rad. Pwr. (dBm)       | -1.2 (Input pwr – loss pwr)        |  |
| Peak EIRP(dBm)             | 1.5                                |  |
| Directivity (dBi)          | 1 (all direction antenna)          |  |
| Efficiency (dB)            | 60.2 %                             |  |
| Gain (dBi)                 | 0 (Peak Gain XY-plane)             |  |
| Maximum Power (dBm)        | 1.7 (XY-plane)                     |  |
| Minimum Power (dBm)        | -4(XY-plane)                       |  |
| Avg. Power (dBm)           | -0.5(XY-plane)                     |  |
| Input Impendence(ohm)      | 50                                 |  |
| Polarization Type          | Vertical & Horizontal              |  |
| V. S .W. R                 | < 1.4                              |  |

All the technical data and information contained herein are subject to change without prior notice


## Antenna Layout & module on the system board

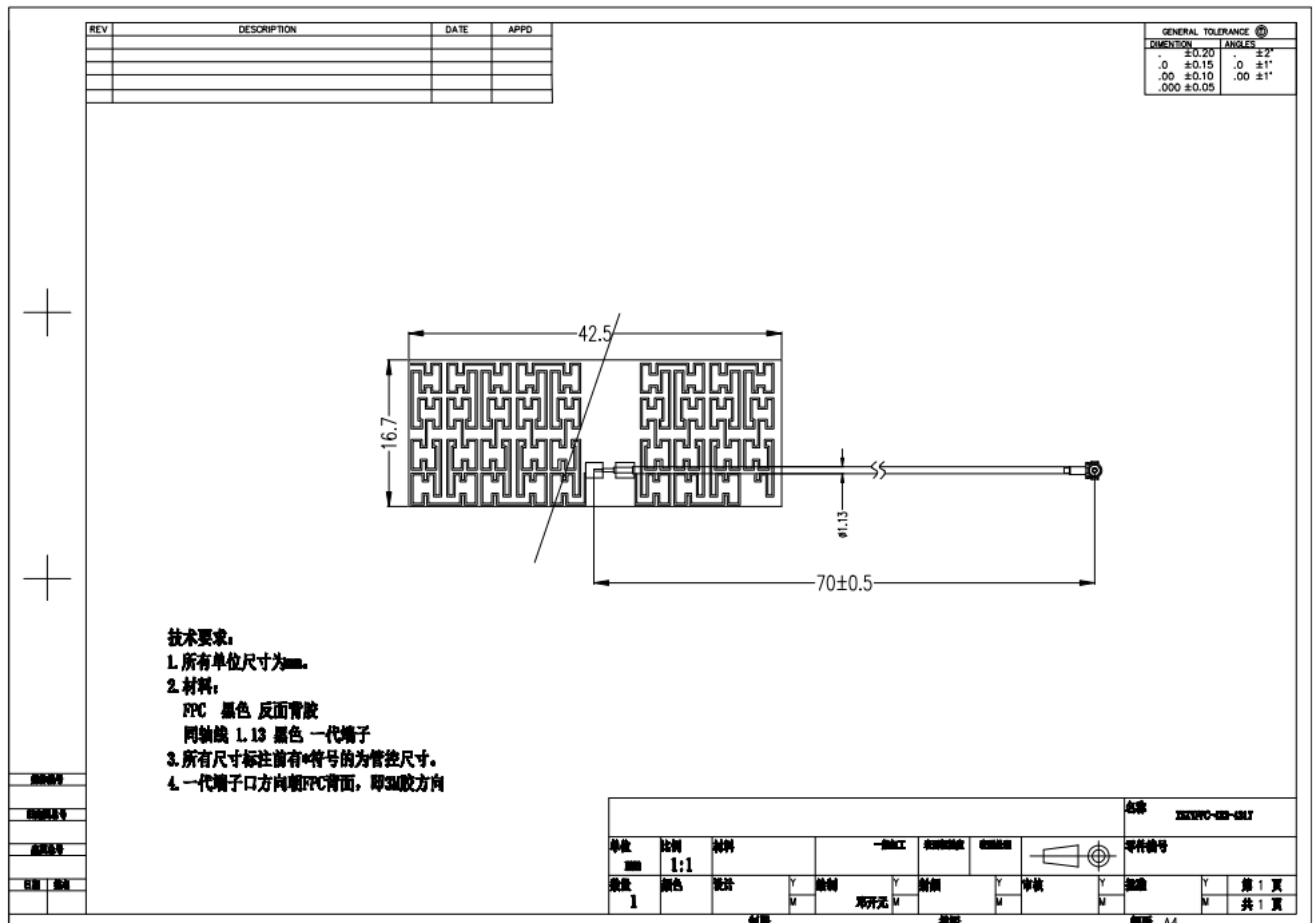



Antenna Gain

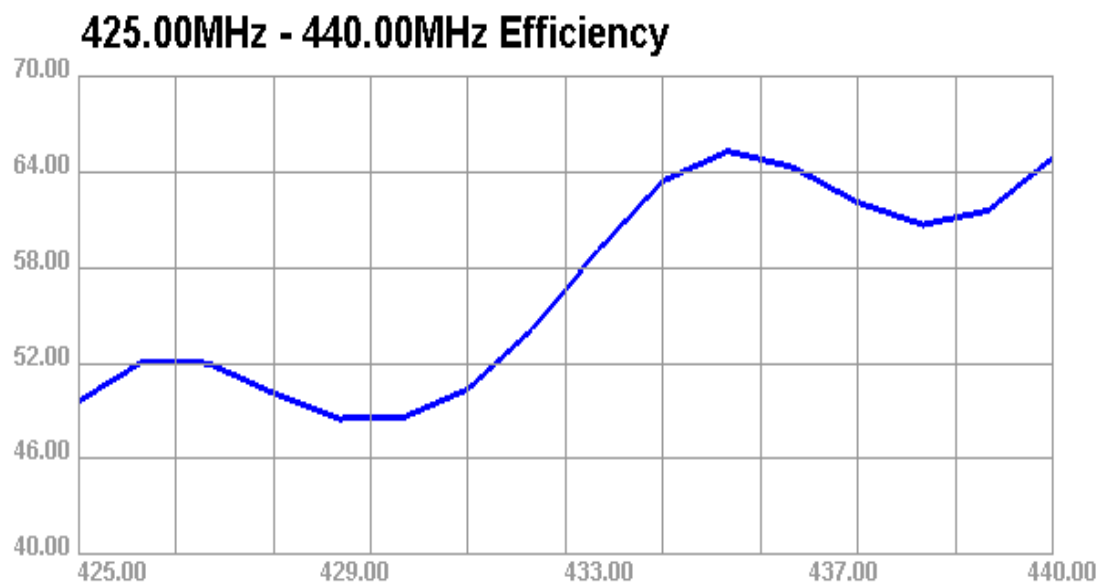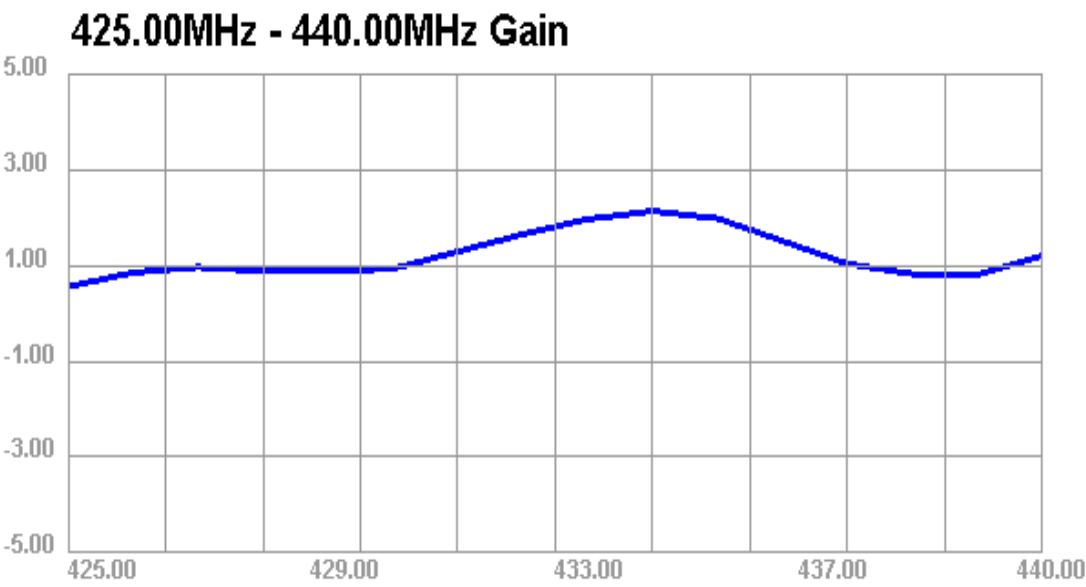


## Return Loss

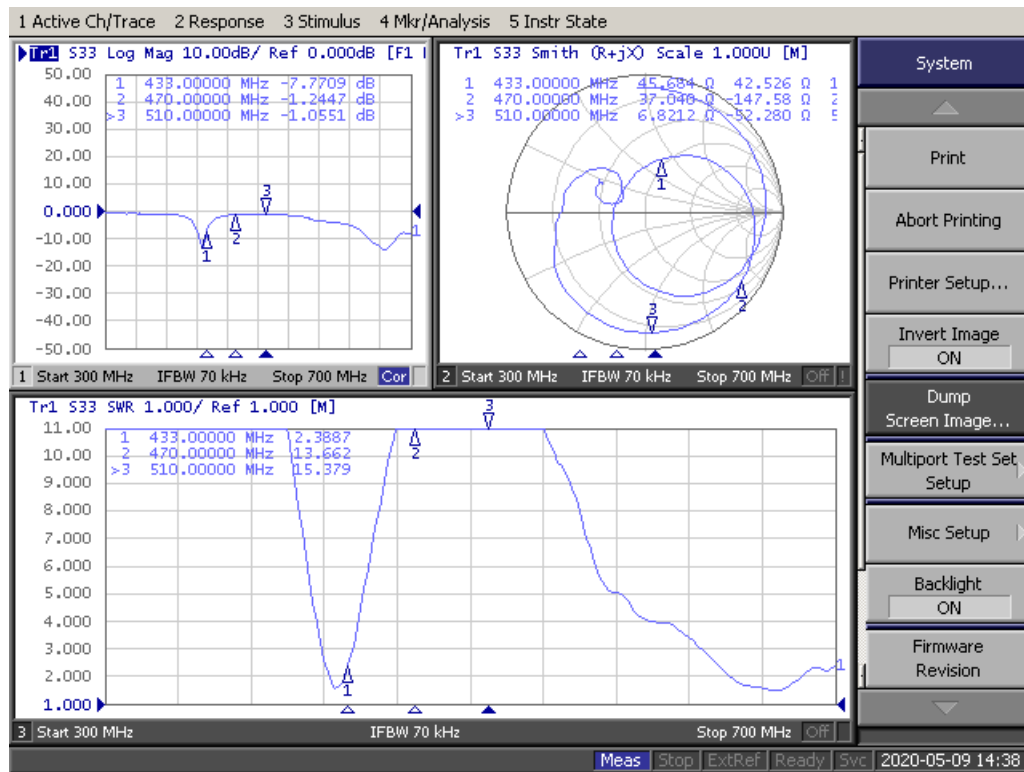


## The Environment of Antenna Radiation Pattern

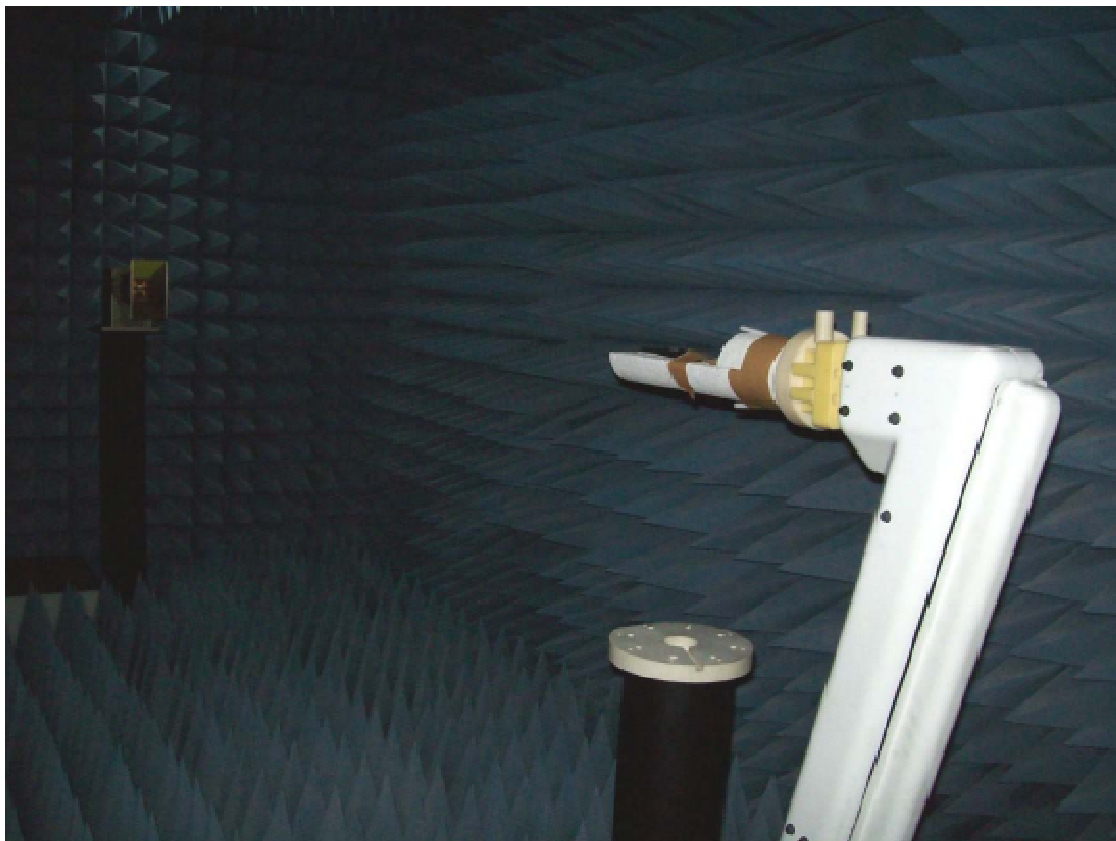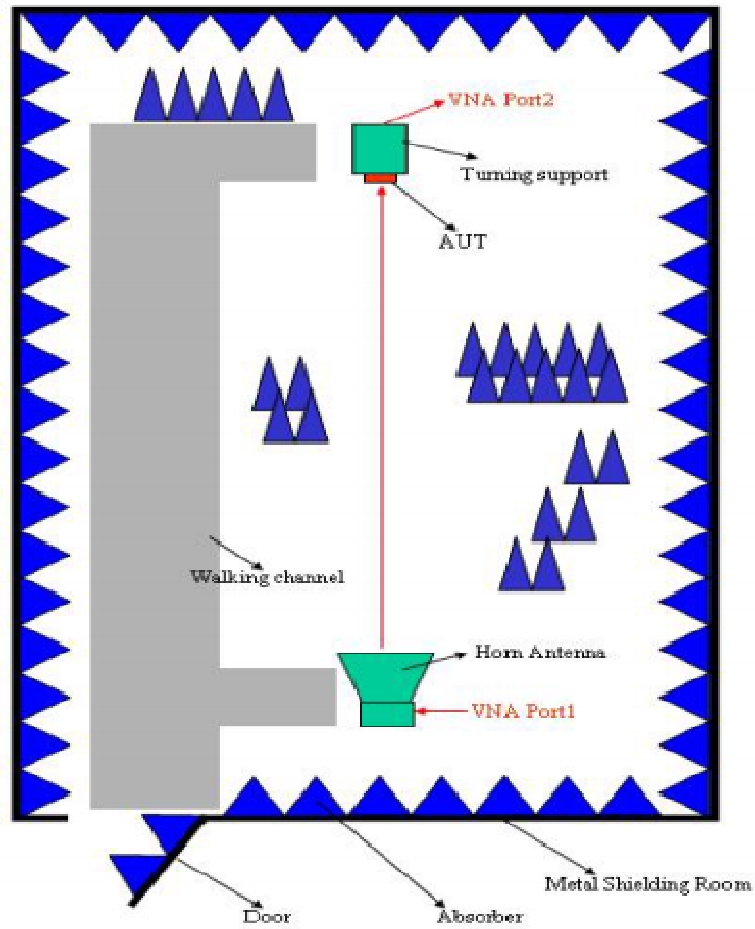


3D radiation pattern diagram

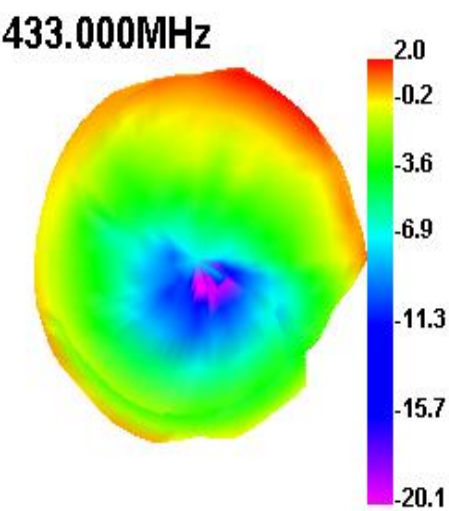

XY-plane

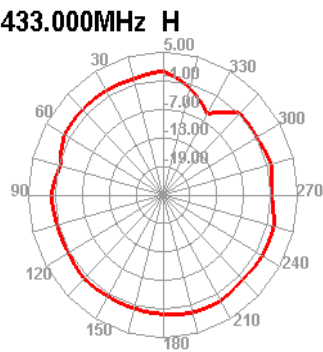

XZ-plane

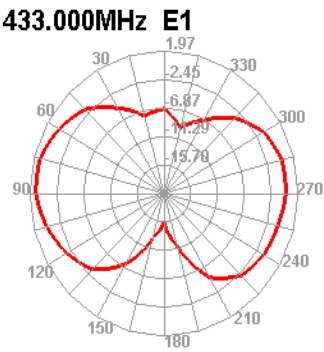

YZ-plane

