

承 认 书

SPECIFICATION FOR APPROVAL

客 户
CUSTOMER:

客 户 料 号:
CUST P/N:

天 夏 料 号:
TX P/N:

TX-WPCX-D41.5*0.6-6.5UH

产 品 型 号
DESC:

20.5*39-0.08*48P-10TS-95mm-D41.5*0.6

日 期
DATE:

2026/03/27

版 本:
Version:

A.0

拟制 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
Zeng Weihao	Zhang Yan	Luo Yongjun	

Shenzhen Tianxia Technology Co., Ltd.

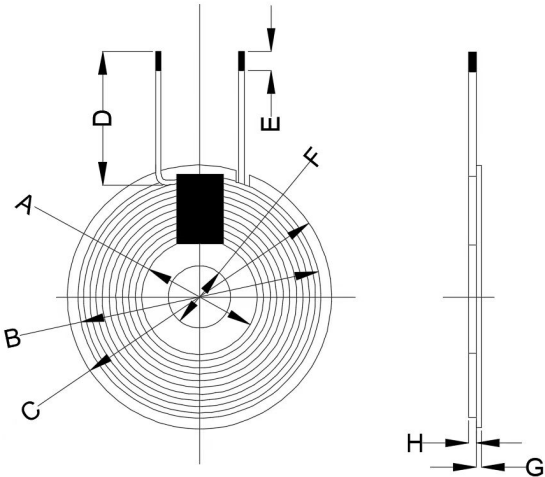
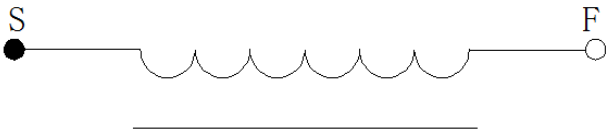
Address: Room 523-525, C33 Science and Technology Park,
District 33, Bao'an District, Shenzhen City

TEL: 18718699959

E-mail: 2321113770@qq.com

Version Change History

SPECIFICATION

产 品 型 号:		20.5 * 39 - 0.08 * 48P - 10TS - 95mmD 41.5		Rev: A.0	客户CUST:		
DESC		* 0.6 Dual-slot outlet with adhesive backing - 6.5uh			客户料号 CUST P/N:		
一、尺寸 DIMENSION:(mm) 					A	20.5±0.5mm	
					B	39.5±0.5mm	
					C	41.5±1mm	
					F	5.3±0.5mm	
					D	95±2mm	
					E	3mm±1.5mm	
					H	1.8mmMAX	
二、原理图 SCHEMATIC DIAGRAM 					Note: 1.1. Coil crossover output output 2. Coil not planar 3. Overall thickness of the coil: 1.8mm MAX; 4 - 20 degrees Celsius ~ + - 80 degrees Celsius		
三、绕线参数 Winding Specification:							
序号 NO.	端子 TERMINAL		线径 WIRE	圈数 Turns	绕线方向 Winding Direction		
1	S	F	0.08*48P	10Ts	anticlockwise		
四、电气特性 ELECTRICAL CHARACTERISTICS:							
温度 TEMPERATURE:25±10°C, 湿度 RELATIVE HUMIDITY:65±20%							
序号 NO.	项目 ITEM	端子 TERMINAL	标准 SPECIFICATION	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS		
1	IND.	S-F	4.0 uH ± 10% Independent Coil	100KHz/1.0V	LCZ METER 1062B		
2	IND.	S-F	6.5 microhenries ± 10% with magnetic core	100KHz/1.0V	LCZ METER 1062B		
3	DCR	S-F	600mΩ Max		LCZ METER 502B		
拟制/日期 PREPARED BY/DATE					审核/日期 CHECKED BY/DATE		
Zeng Weihao 2026/03/27					Zhang Yan 2026/03/27		