


PRODUCT INFORMATION (SKU: B0117-03018-BKPROFIT)



① Main Speaker

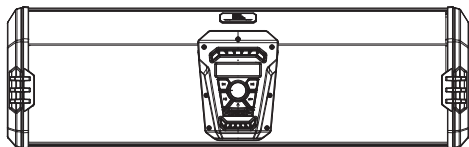

② 500*130 Mounting Bracket




③ Mounting Bracket




④ Profit Tube Clamp A



⑤ Profit Tube Clamp B



⑥ Single-sided Adhesive Non-slip Pad 80*110*2



⑦ Single-sided Adhesive Non-slip Pad 80*110*4



⑧ M6*25 Hex Flange Bolt



⑨ Flat Washer



⑨-1 Flat Washer



⑩ M6 Spring Washer



⑪ M6 Flange Lock Nut



⑫ M6*16 Hex Flange Bolt



⑬ M6*16 Holed Screw



⑭ $\phi 8 \times \phi 4.5 \times 15$ Dual-Hole Cable Lock



⑮ S2.5 Wrench



⑯ $\phi 2 \times 1000$ Dual-Hole Cable Lock



⑰ 10-13mm Open-End Wrench



⑱ 4m Electrical wire



⑲ Remote control




⑳ Fuse



㉑ 0.9m 3.5mm FM antenna

INSTALLATION COMPLETION DIAGRAM

NOTE: If a roof is installed, it needs to be removed before installing the sound system.

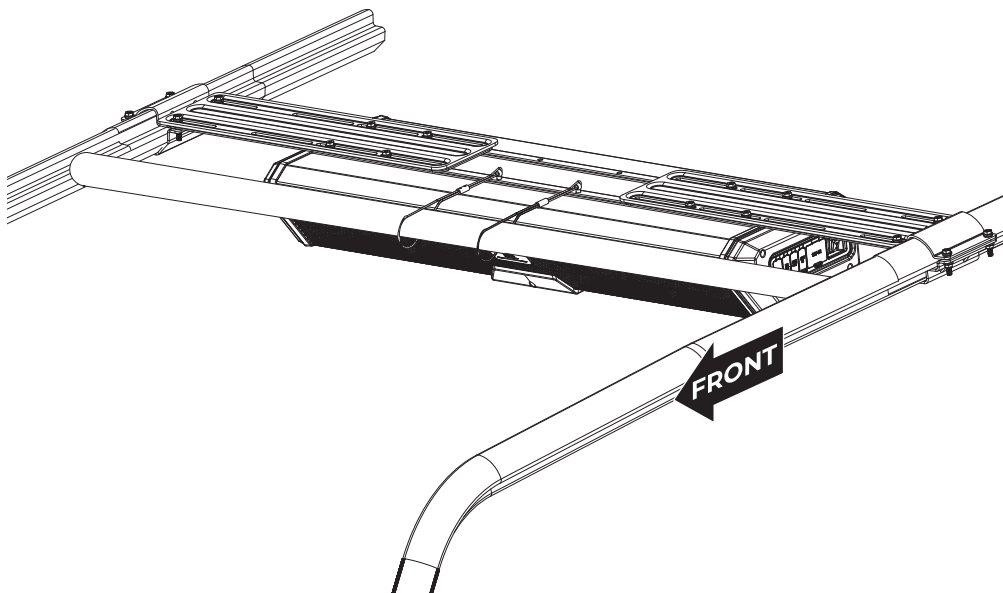

B0117-03018-BKPROFIT

INSTALLATION TIPS

PREPARATORY WORK

Remove the adhesive backing and stick it onto bracket **(2)**.





Can-am Defender HD8

Polaris RANGER XP1000 4-door/2-door


Uforce1000XL 4-seater



Zforce 950 4-seater

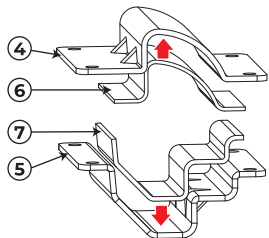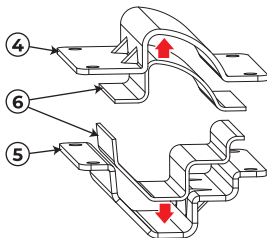


STEP 1

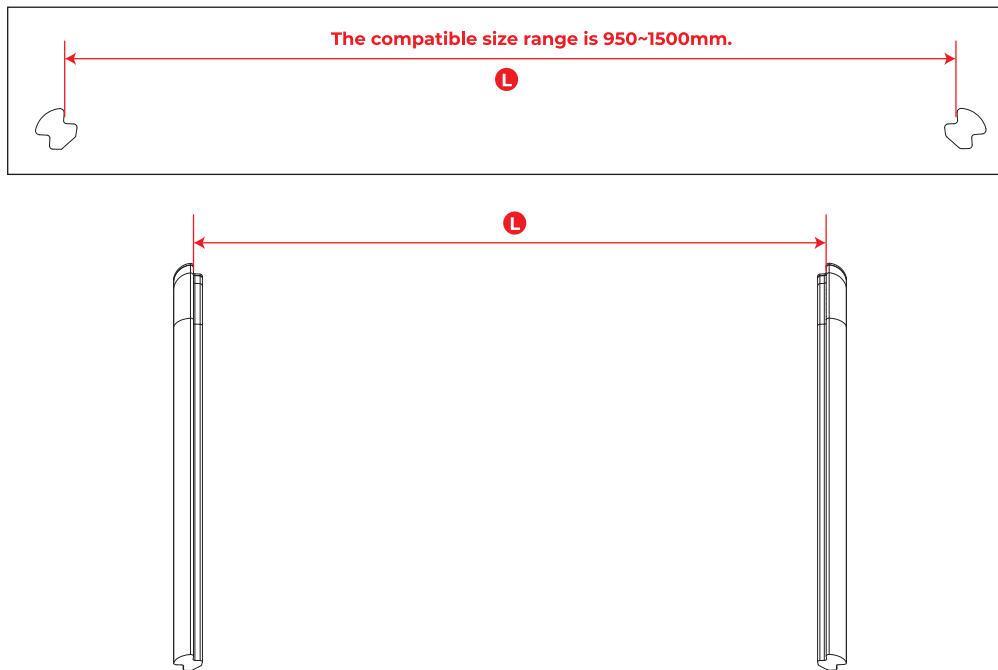


STEP 2

B0117-03018-BKPROFIT

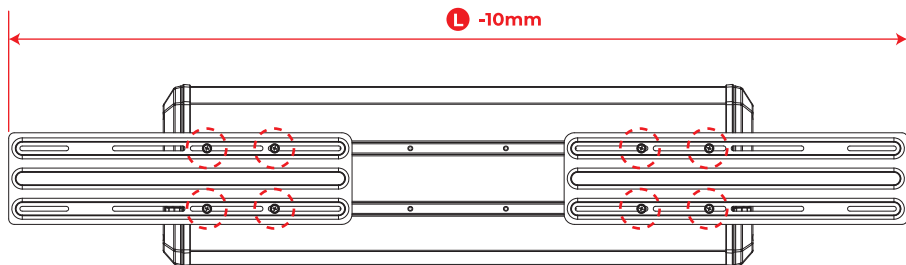



The bracket size can accommodate a range of 900~1500mm.

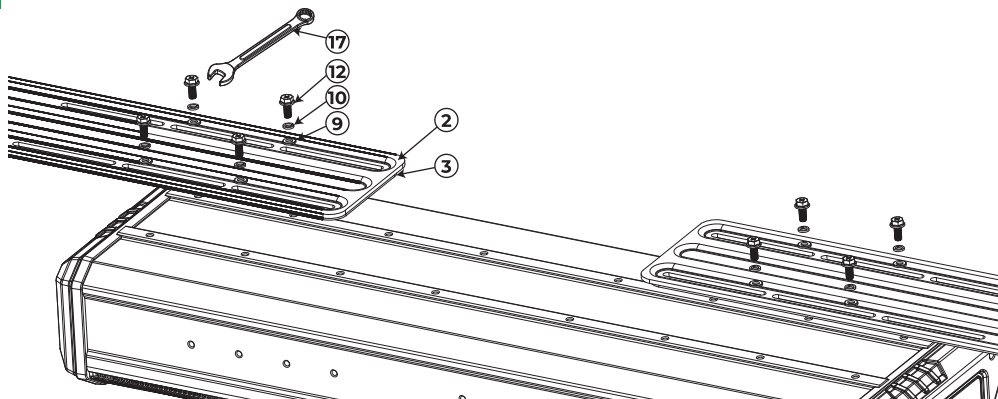

STEP 3 First, pre-install the pipe clamp. **The distance from the beam should be no less than 150mm.** There are two ways to install the outer screws; do not tighten them. **It is recommended to use Method 1.**

Method 1: Install the screw downward



Be aware of potential interference with the vehicle doors.

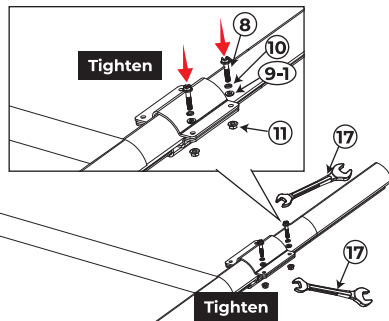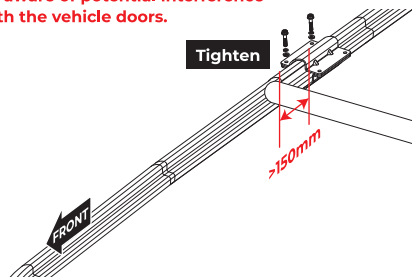



OR

Method 2: Install the screw upward



Be aware of potential interference with the roof.

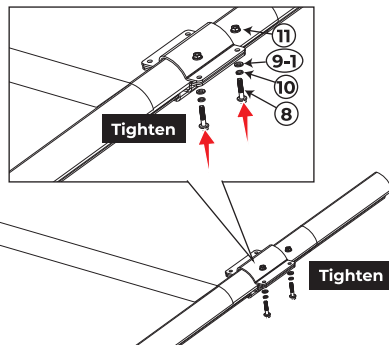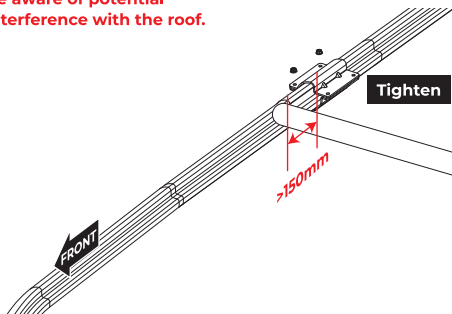


STEP 4

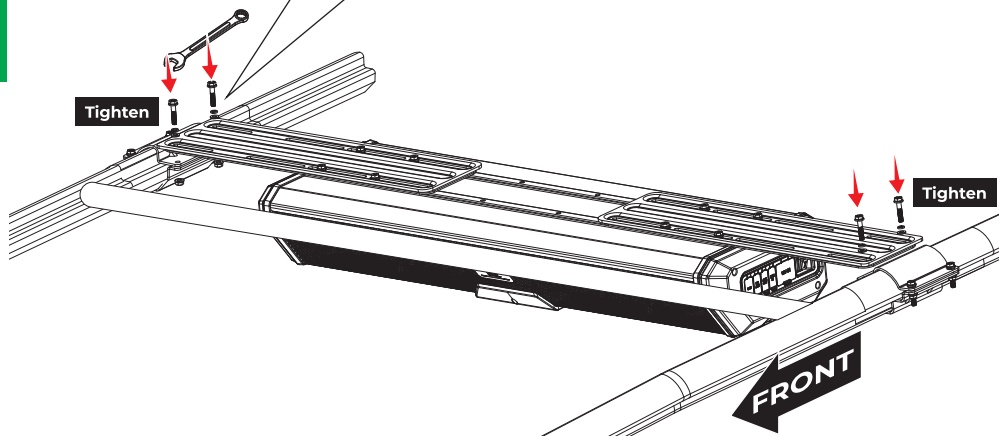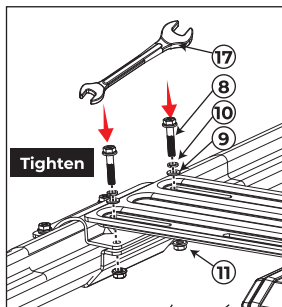

STEP 5

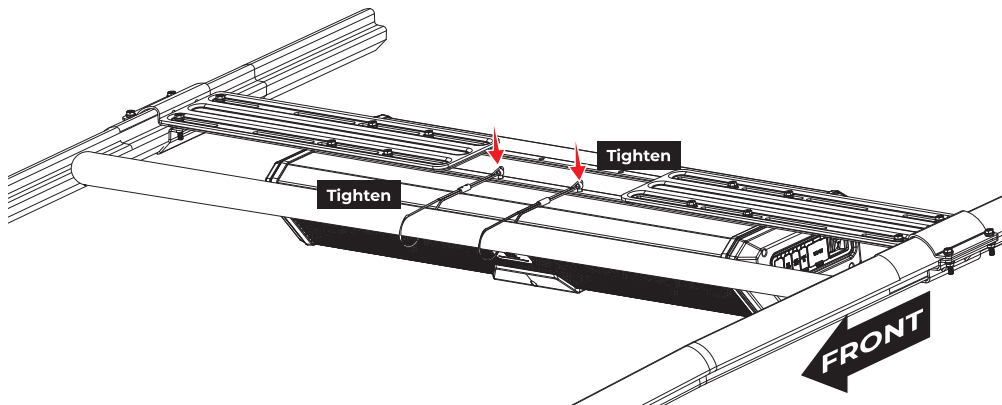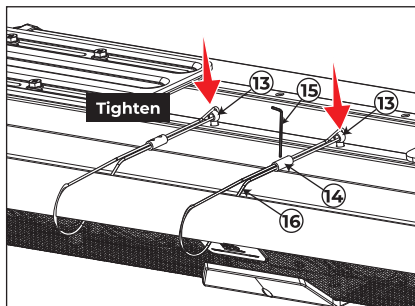

PRODUCT INFORMATION (SKU: B0117-03018-BK)

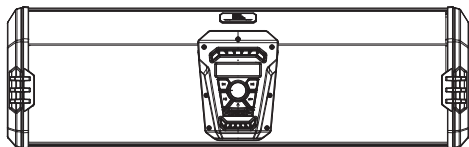

① Main Speaker




② 500*130 Mounting Bracket




③ Mounting Bracket




④ Tube Clamp A



⑤ Tube Clamp B



⑥ Single-sided Adhesive Non-slip Pad 80*110*2



⑦ Single-sided Adhesive Non-slip Pad 80*110*4



⑧ M6*25 Hex Flange Bolt



⑨ Flat Washer



⑨-1 Flat Washer



⑩ M6 Spring Washer



⑪ M6 Flange Lock Nut



⑫ M6*16 Hex Flange Bolt



⑬ M6*16 Holed Screw



⑭ φ 8X φ 4.5X15 Dual-Hole Cable Lock



⑮ S2.5 Wrench



⑯ φ 2X1000 Dual-Hole Cable Lock



⑰ 10-13mm Open-End Wrench



⑱ 4m Electrical wire



⑲ Remote control




⑳ Fuse



㉑ 0.9m 3.5mm FM antenna

INSTALLATION COMPLETION DIAGRAM





NOTE: If a roof is installed, it needs to be removed before installing the sound system.

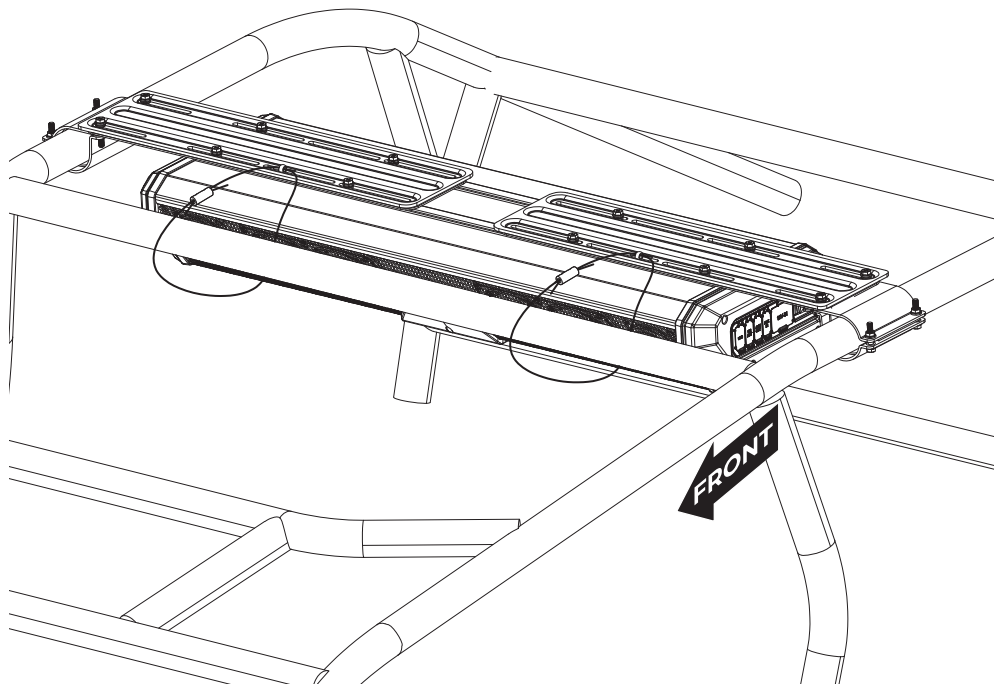



INSTALLATION TIPS

PREPARATORY WORK



Remove the adhesive backing and stick it onto bracket ②.

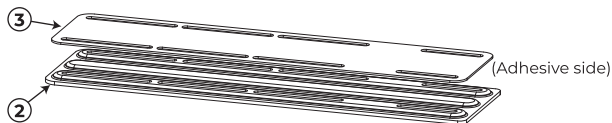



STEP 1

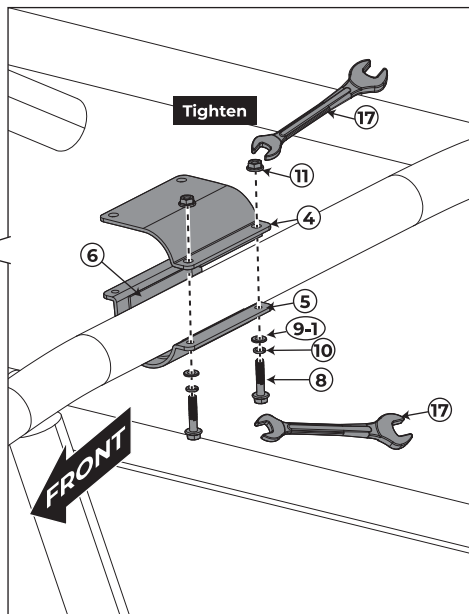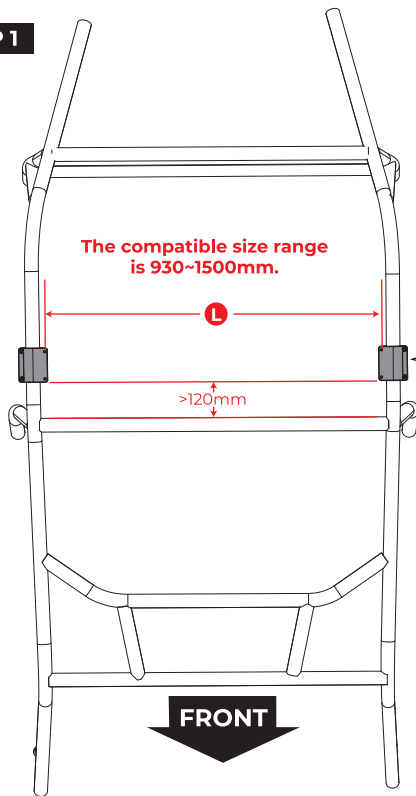


STEP 2

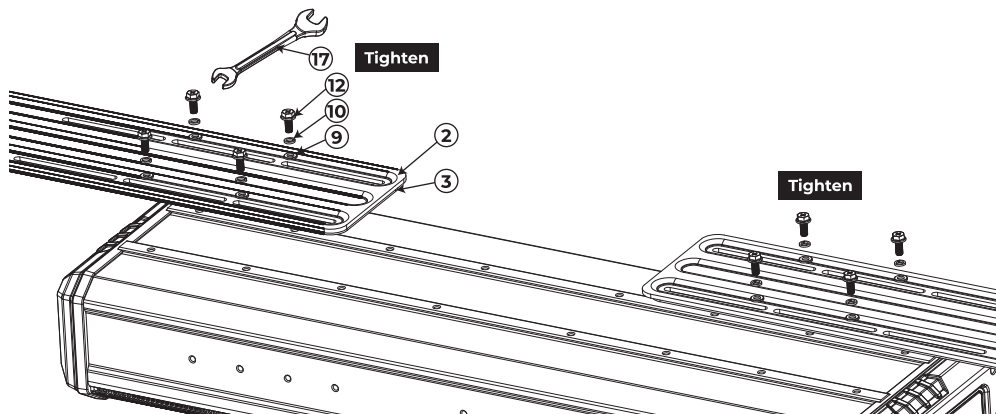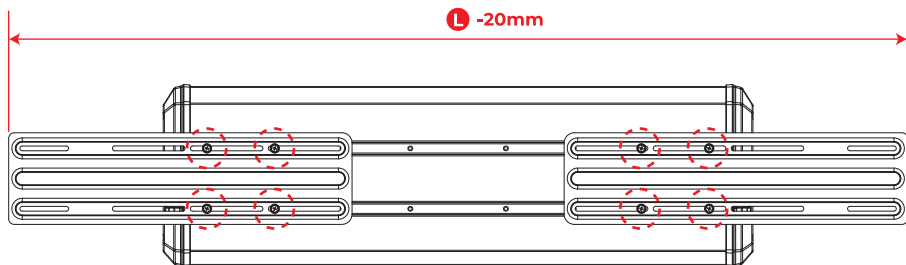


STEP 3

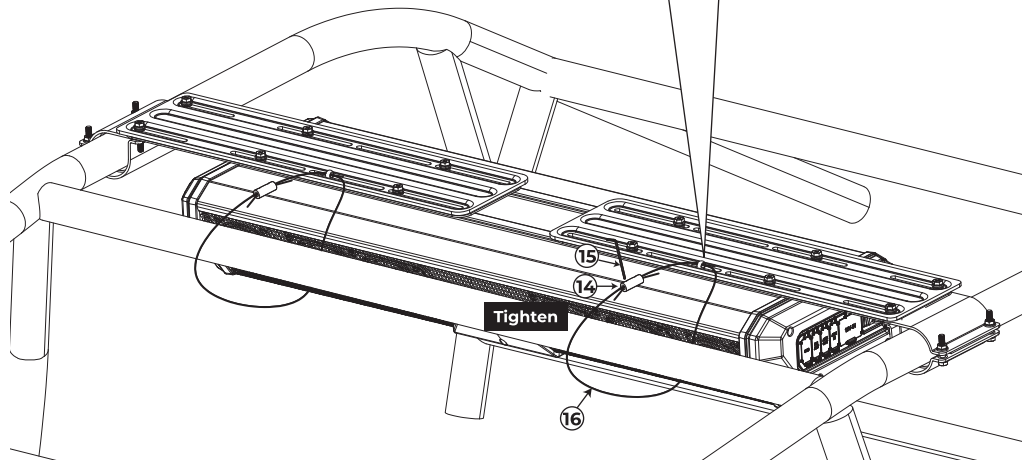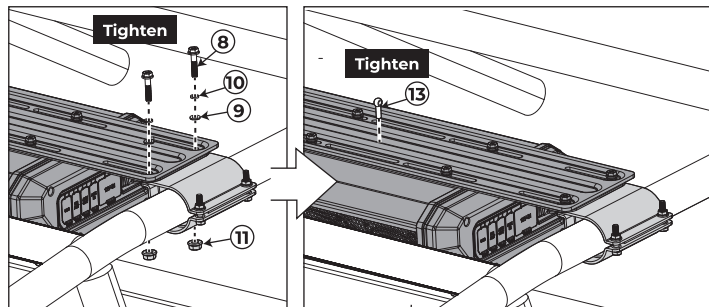

PRODUCT INFORMATION (SKU: B0117-03018-BKROUND)

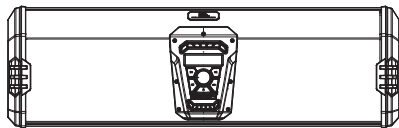



① Main Speaker



② Bracket



③ M6*14 Screw with washer



④ 50*18 Anti-slip mat



⑤ M6*30 Screw




⑥ M6*16 Holed Screw



⑦ φ 8X φ 4.5X15 Dual-Hole Cable Lock



⑧ S2.5 Wrench



⑨ φ 2X1000 Dual-Hole Cable Lock



⑩ S5 Wrench



⑪ 0.9m 3.5mm FM antenna



⑫ 4m Electrical wire



⑬ Remote control



⑭ Fuse



⑮ M6*50 Screw




⑯ Flat Washer



⑰ M6 Spring Washer

Prerequisite:

Disassemble ②



Compatible range

Compatible range:

round tube 36~52mm



Supports Profit pipes:



⑤ M6*30 Screw

Compatible pipe diameter range: 36-40mm

⑮ M6*50 Screw

Compatible pipe diameter range: 40-52mm

INSTALLATION COMPLETION DIAGRAM

NOTE: If a roof is installed, it needs to be removed before installing the sound system.

