

Product specification


Quick Reference Date

2.1 (2.4G Antenna)		
1	Method of polarization	Vertical
2	Fre	2400-2500MHZ
3	VSWR	≤2.0
4	Bandwidth	100MHZ
5	Impedance	50 ohm
6	Peak gain	4.4dbi
7	Power capacity	50W
8	Radiation direction	omnibearing
9	Antenna type	Dipole


Antenna Gain

BAND	2.4G			
Freq.[MHZ]	2400	2450	2500	
Gain [dBi]	4.2	4.4	4.3	

VSWR

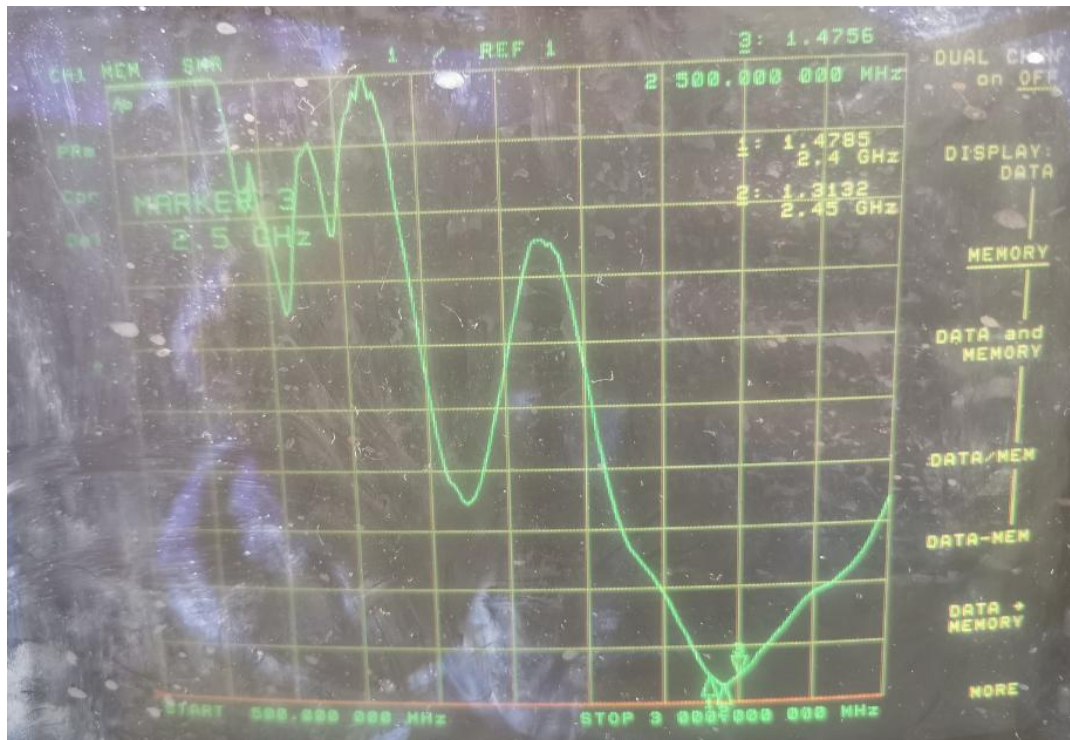


The Environment of Antenna Radiation Pattern

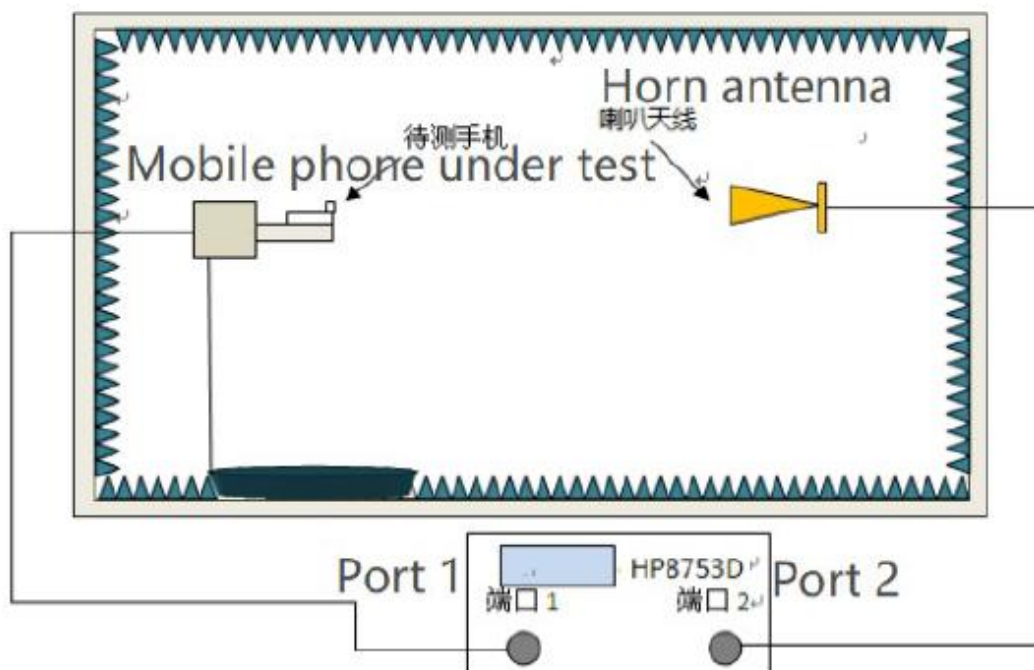


2D&3D radiation pattern diagram


2400.000MHz




2400.000MHz H

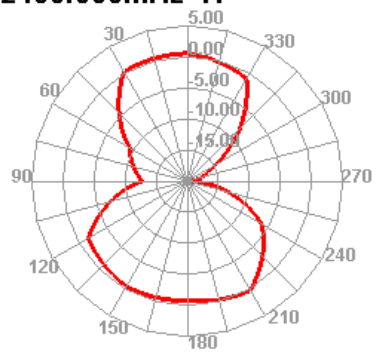


2400.000MHz E1

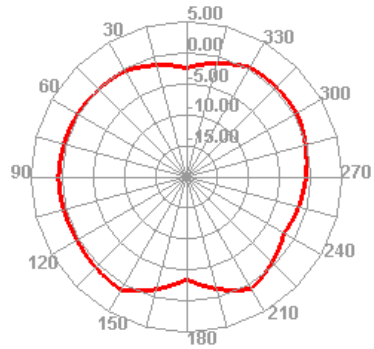


2400.000MHz E2

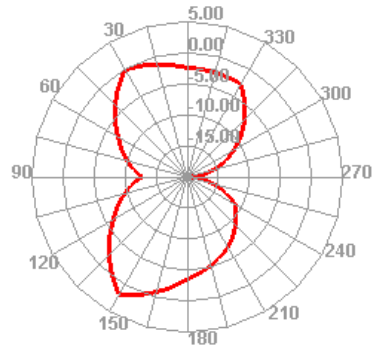


2450.000MHz




2450.000MHz H

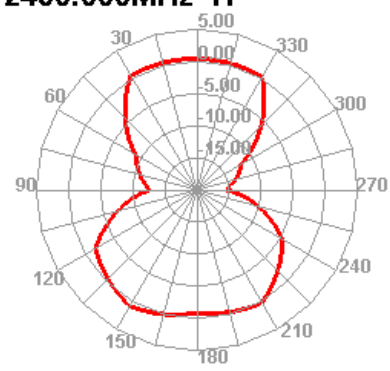



2450.000MHz E1

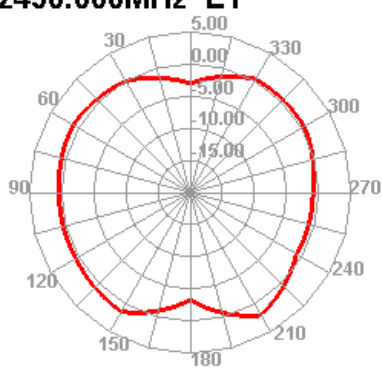


2450.000MHz E2

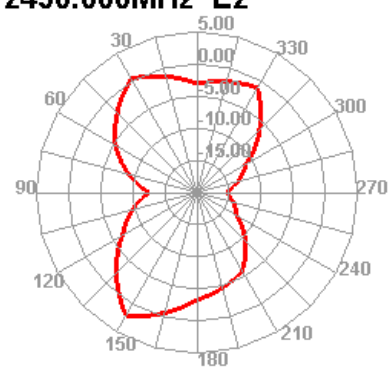


2500.000MHz




2500.000MHz H

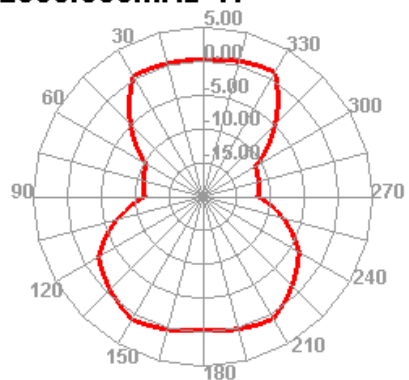


2500.000MHz E1

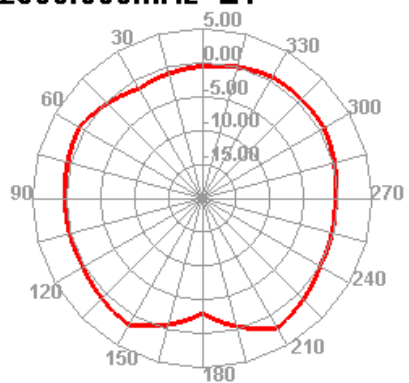

2500.000MHz E2

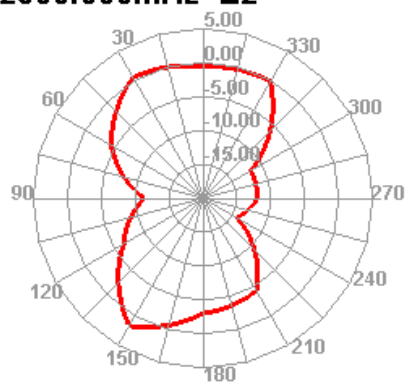

出 AUGUST 发行日期 1997 年 11 月

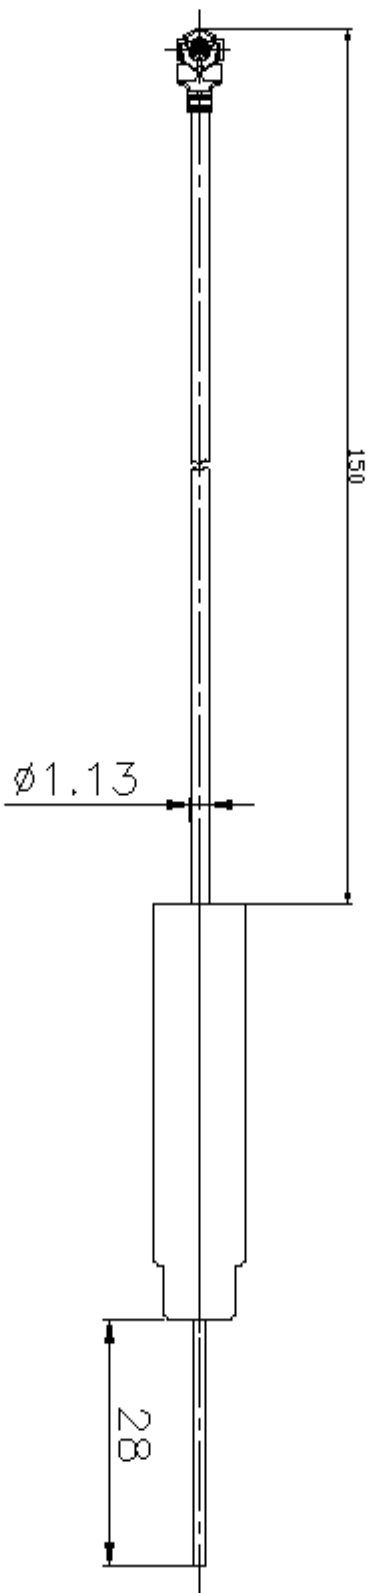

由 Autodesk 教育版 2014 制作

Autodesk 教育版 3ds Max 2016 教程

shenzhen signalisen telecom technology coltd									
DRAW NO.		DATE		DRAW NAME:					
DESIGN:		2028.1.12		FILE:					
CHECK:				MODEL:		P/N NO. 0404-1150-28			
APPROVED:				REV. NO		SCALE N/A		UNIT: mm	
DATE: 2028.1.12								SHEET: N/A	
								 	

Address:

Room 211, Hengbo science and technology Industrial Park, Qingning road,
Longhua District, Shenzhen

