



深圳信诺山通信技术有限公司

Shenzhen Signalsen Telecom Technology Co , .Ltd

BT 天线规格书

物料编号: W183-1B200B-A

客户：			项目名：		
频段： BT		日期： 2022.08.30		版本： R:A	
研发	结构：	审核：		批准：	
	射频：	审核：			
客户审核：			客户批准：		

深圳市龙华区龙华街道清湖社区清宁路恒博创新科技产业园二层211

211, Hengbo Innovation Technology Industrial Park, Qingji Road, Longhua Street, Longhua New District, Shenzhen

contents

contents.....	2
1. PROJECT INFORMATION AND ELECTRICAL SPECIFICATION.....	3
1-1 Project picture	3
1-2 Frequency Band:	3
1-3 Impedance matching	3
2. VSWR.....	3
2-1 Measuring Method:	3
2-2 S11 parameter values	4
3. EFFICIENCY AND GAIN.....	4
3-1 Efficiency/Gain- WIFI.....	5
4. THE PRODUCTION INDEX.....	7
5. STRUCTURAL DRAWINGS	8
6. THE ANTENNA PLACEMENT	8

1. Project information and Electrical Specification

Those specifications were specially defined for BT model, and all characteristics were measured under the model's handset testing jig .

1-1Antenna picture



1-2 Frequency Band:

Frequency Band	MHz
BT	2400-2500

1-3 Impedance matching


天线原匹配

2.VSWR

2-1 Measuring Method:

- 1. A 50 Ω coaxial cable is connected to the antenna. Then this cable is connected to a network analyzer to measure the VSWR,*
- 2. Keeping this jig away from metal at least 20cm.*

测试示意图如下:

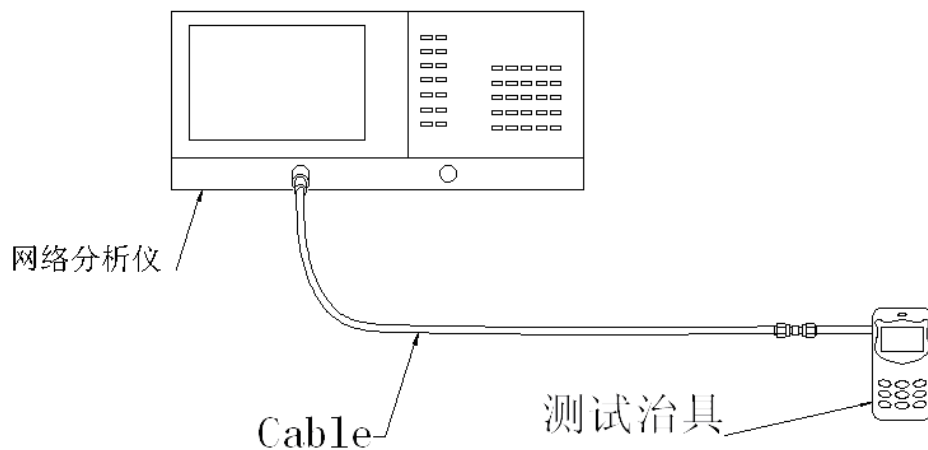

2-2 S11 parameter values

频率 (MHZ)	2400	2500
驻波	1.04	1.32




3. Efficiency and Gain

*measuring and test instruments:

微波暗室, Agilent 网络分析仪, Agilent 频谱分析仪, 8960 综合测试仪, 标准天线


*test method:

equipment 以 H 面放于转台中心位置固定, 与喇叭天线中心位置在同一个水平线上。


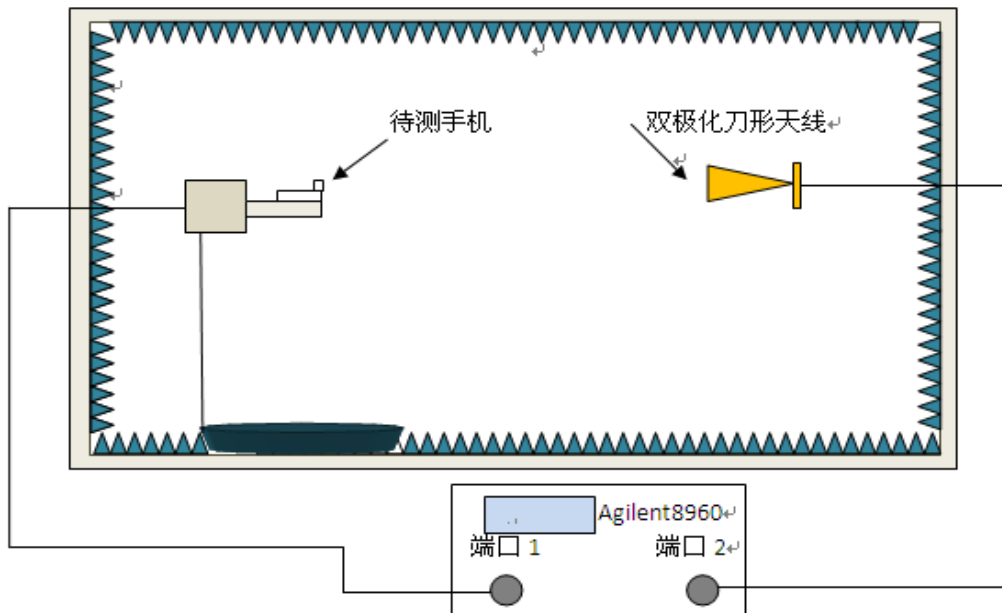


3-1 Efficiency/Gain- BT


Passive Test For WIFI BT								
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	Max (dB)	Min (dB)	Attenut Hor	Attenut Ver
2400	50.67	-2.95	1.73	-0.42	1.73	-18.33	51.53	51.61
2450	50.75	-2.95	1.69	-0.46	1.69	-18.53	51.67	51.63
2500	51.75	-2.86	1.9	-0.25	1.9	-12.83	51.56	51.46

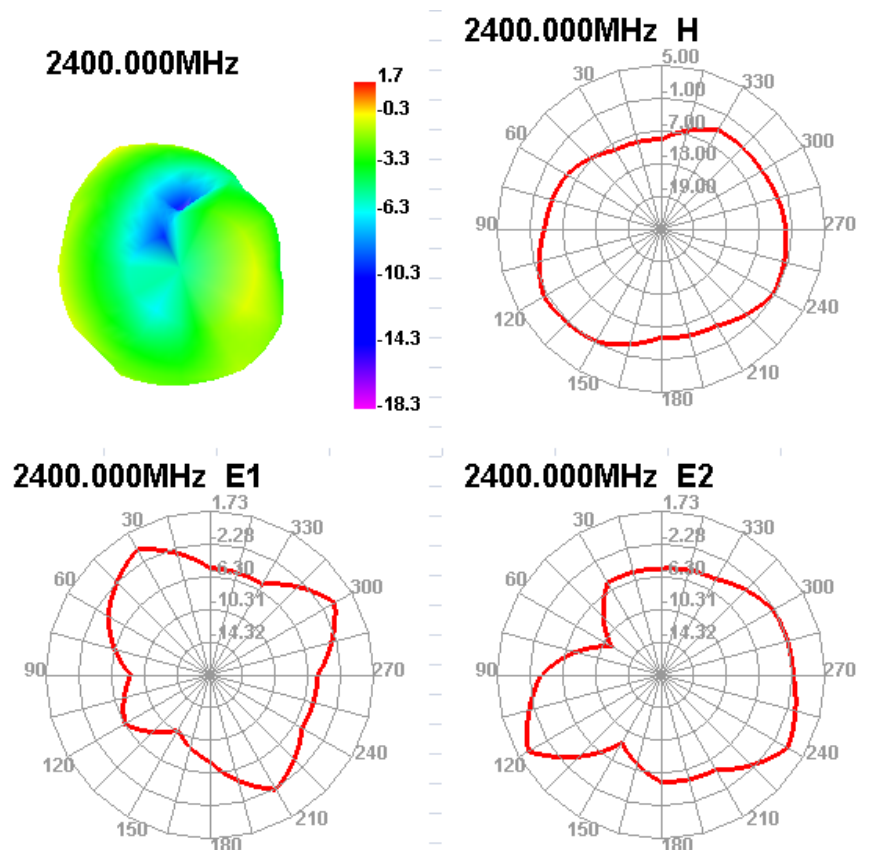


2450.000MHz




2450.000MHz H

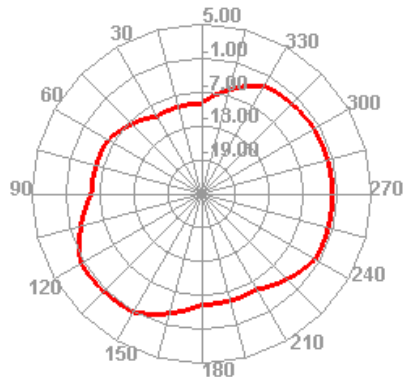



2450.000MHz E1

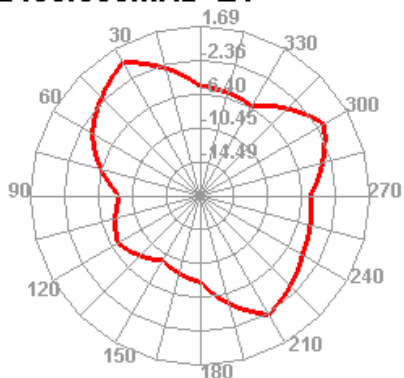


2450.000MHz E2

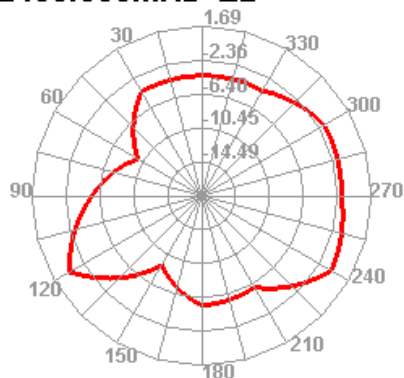


2500.000MHz




2500.000MHz H

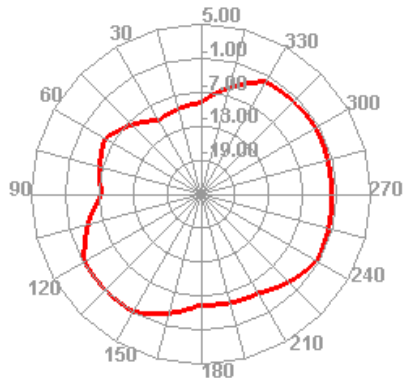

2500.000MHz E1

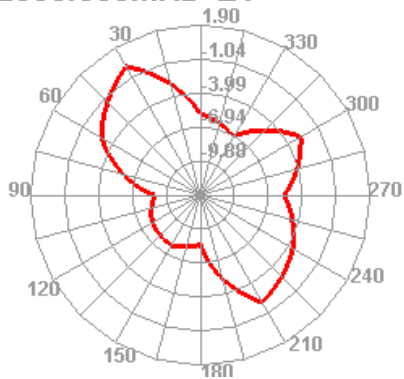

2500.000MHz E2

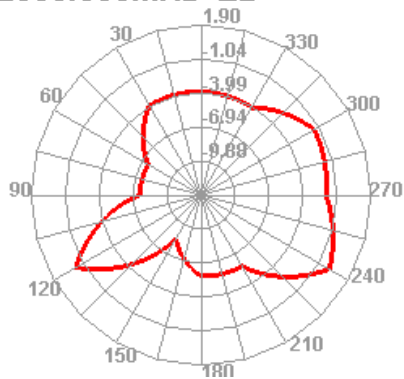


4. The production index

天线量产时，以驻波比作为量产测试标准。

根据项目本身的差异,给出如下标准:

频率	量产标准
BT (2400-2500Mhz)	VSWR (量产产品) < VSWR(设计样品)+0.5

5.structural drawings

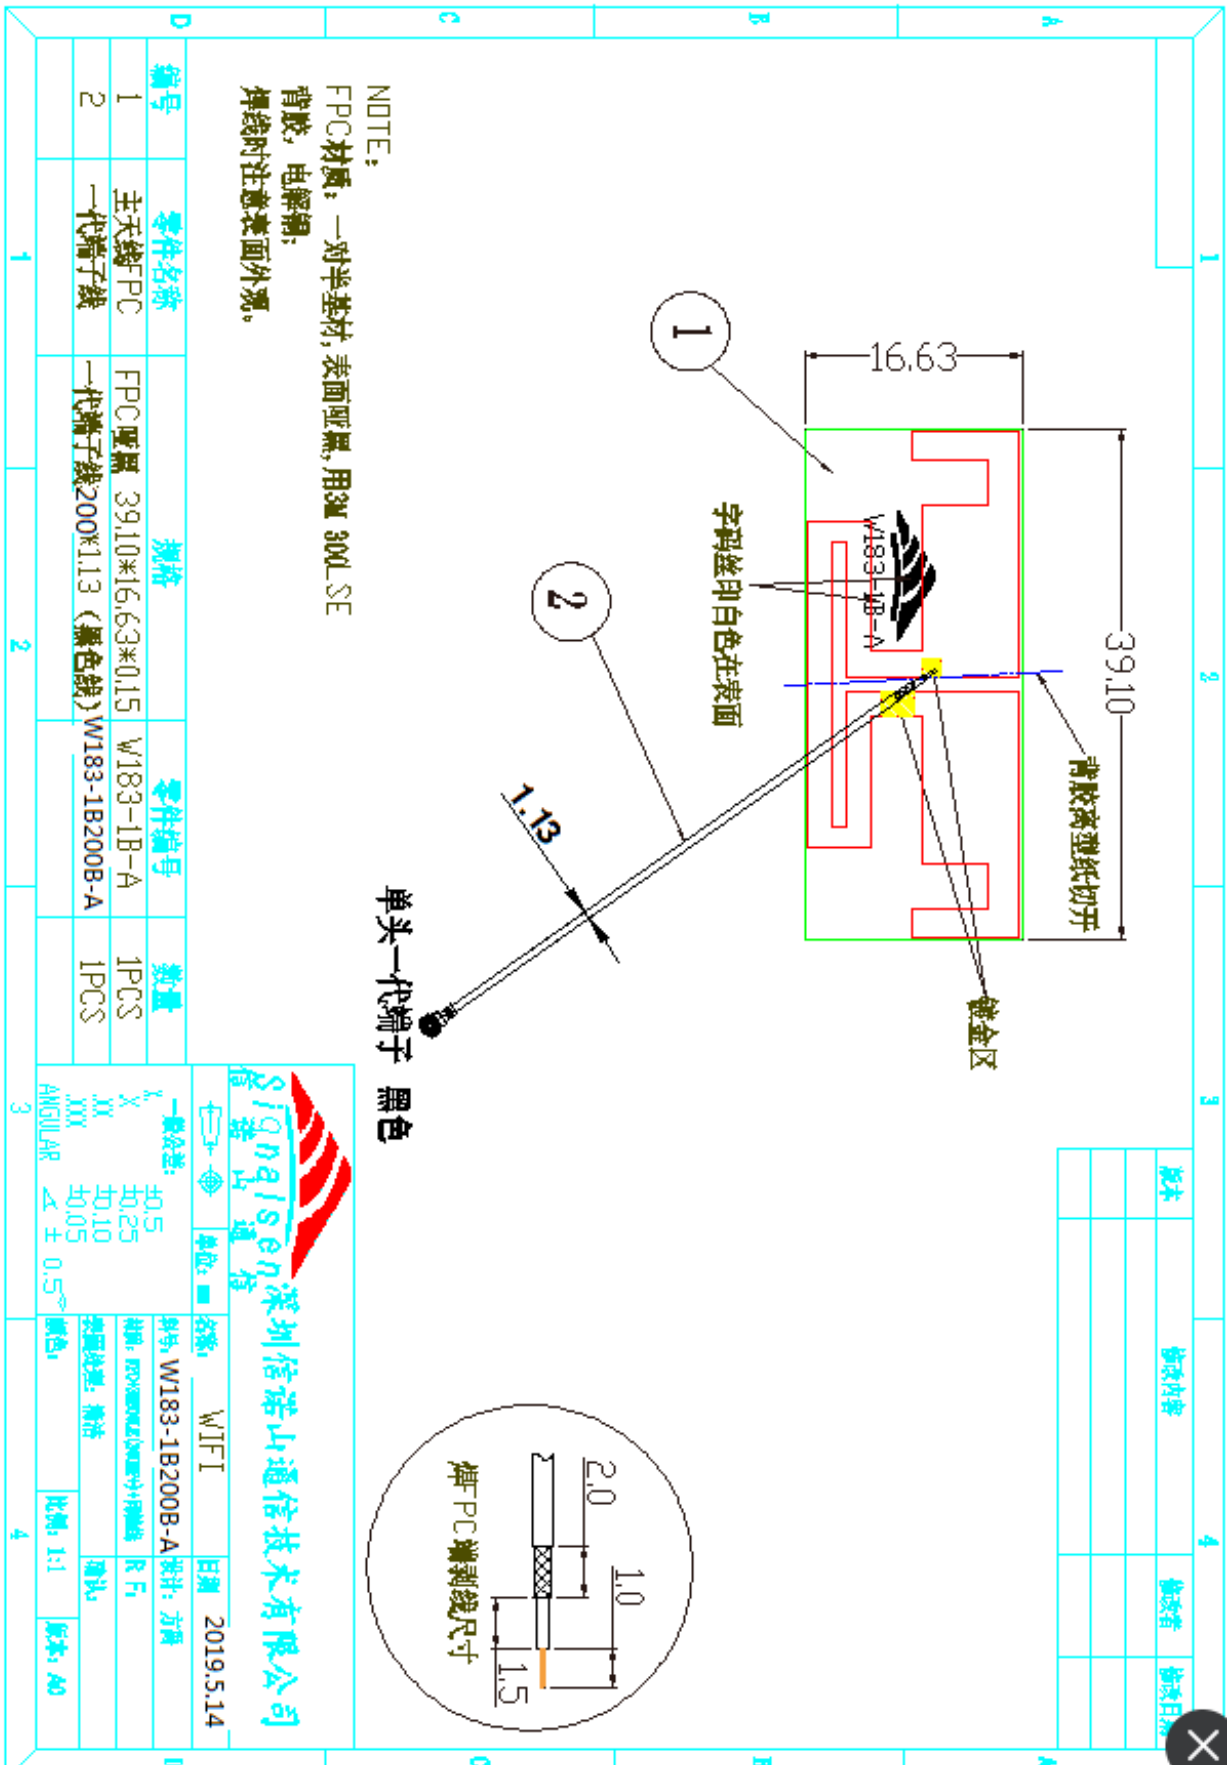

备注：增益测试设备及环境如图：

