***802.11g***

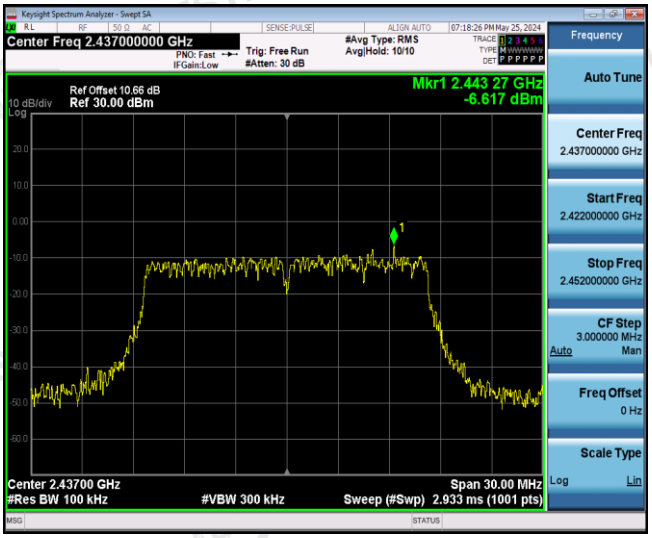


Reference

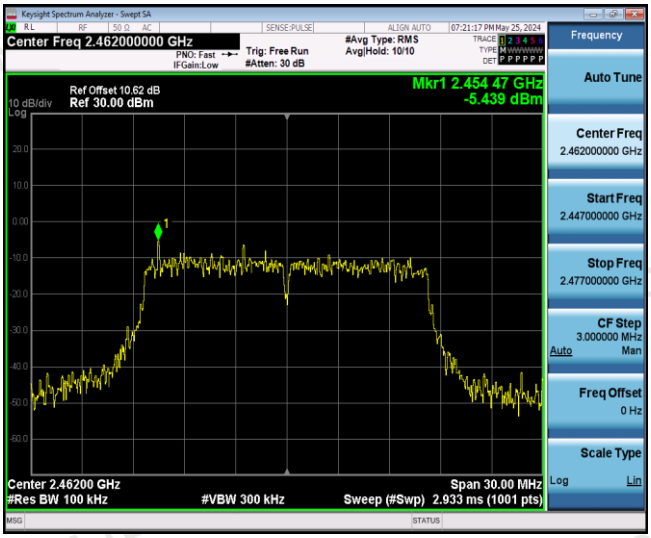


Reference

***CH06***

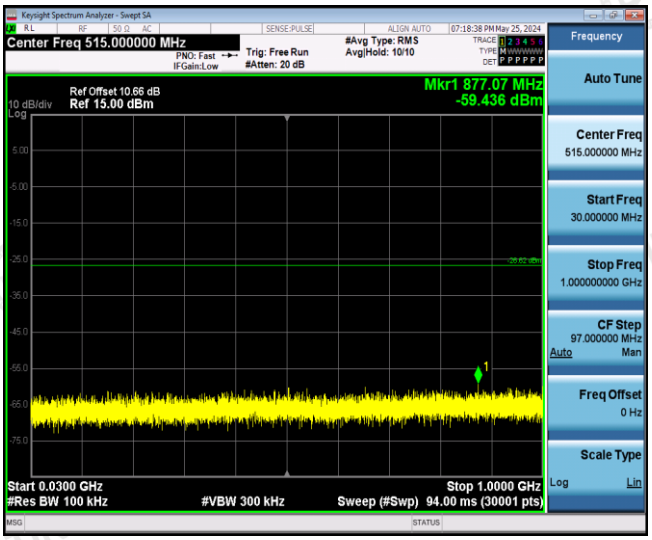


30MHz-3GHz

***CH11***

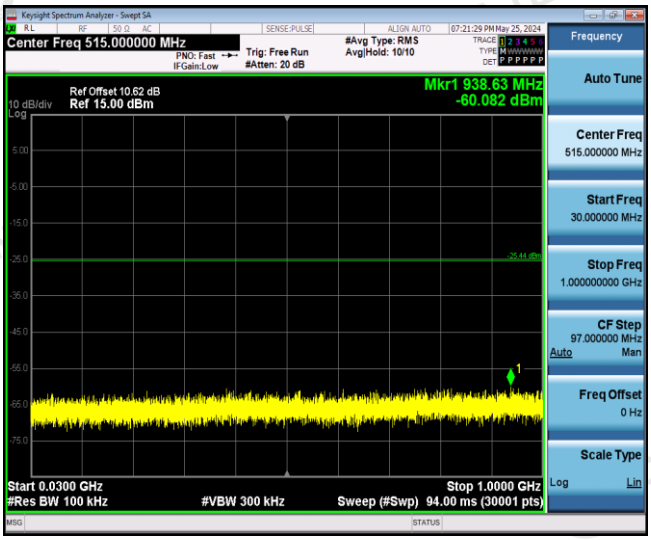


30MHz-3GHz

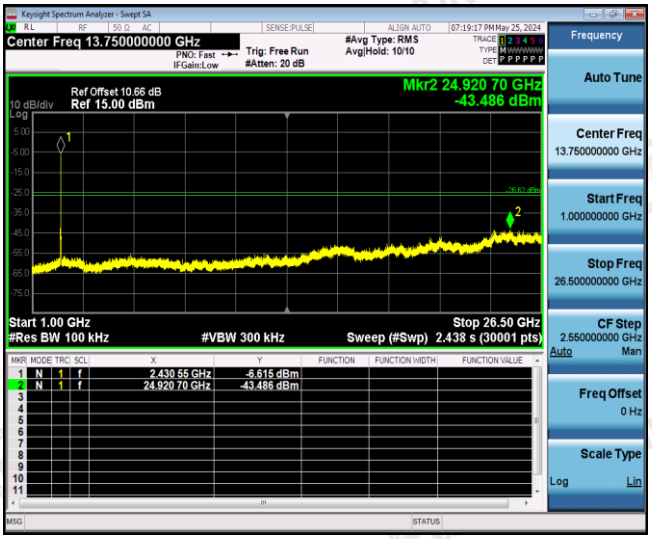


3GHz -25GHz

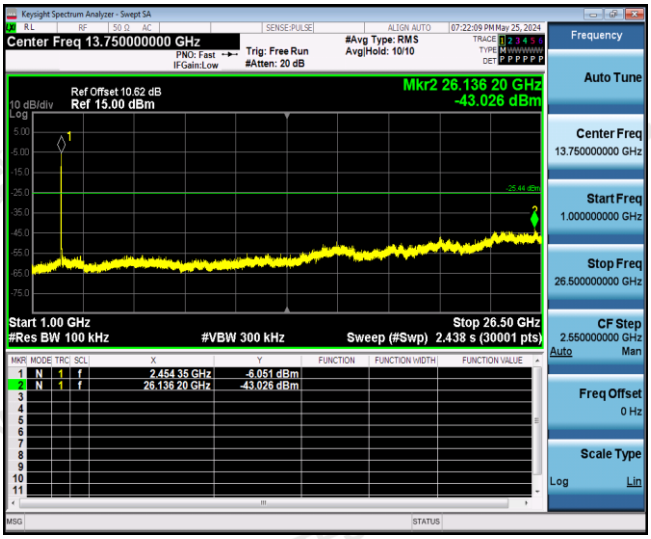


3GHz -25GHz

***802.11n20***

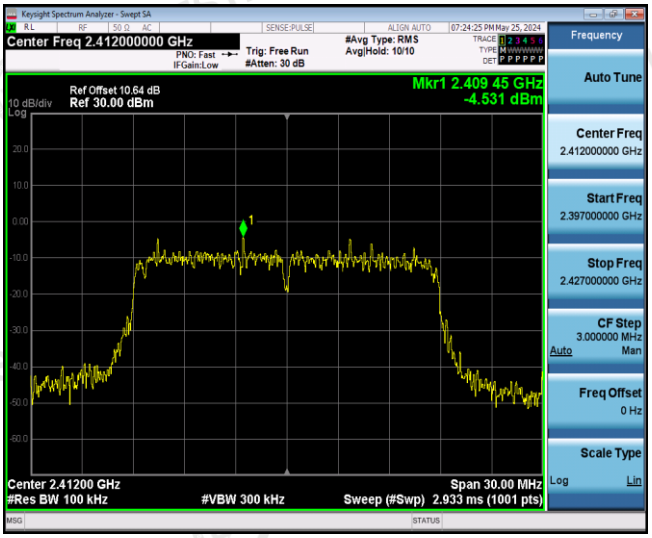


Reference

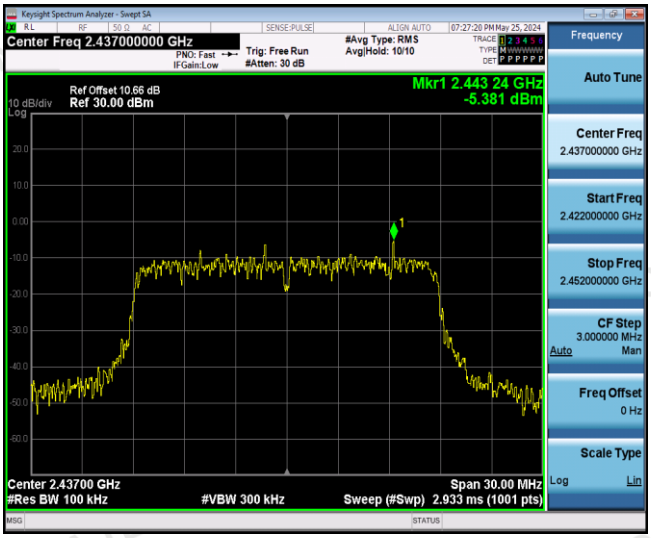


Reference

***CH01***

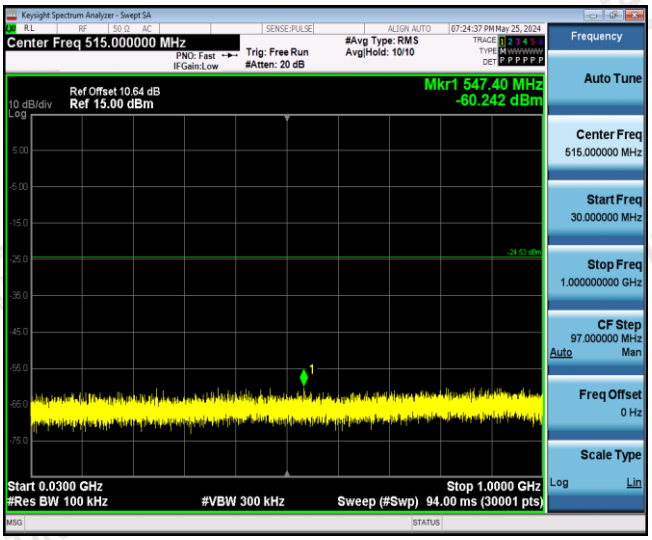


30MHz-3GHz

***CH06***

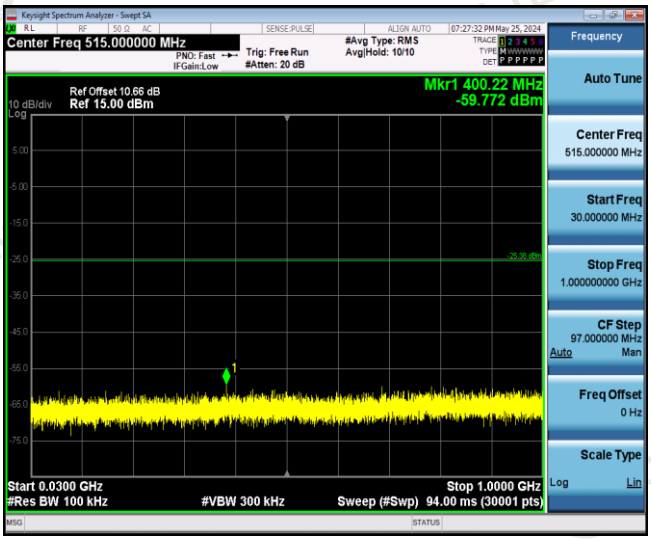


30MHz-3GHz

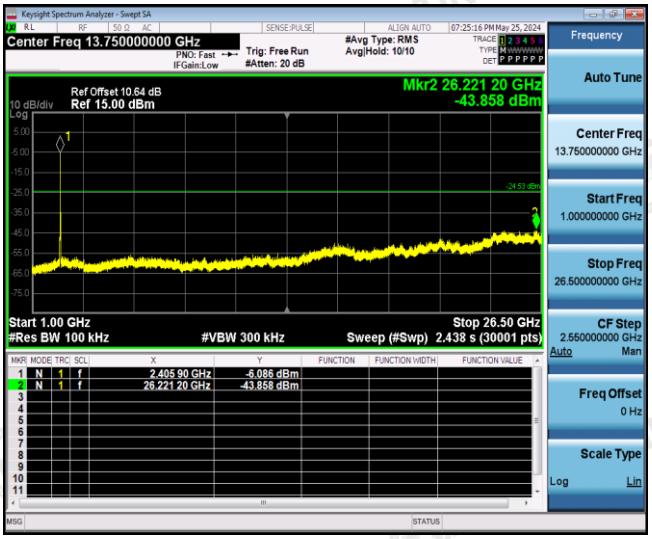


3GHz -25GHz

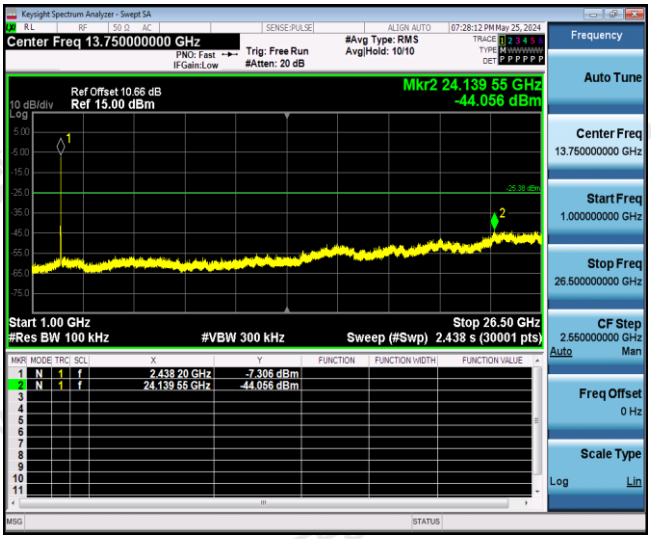


3GHz -25GHz

***802.11n20***

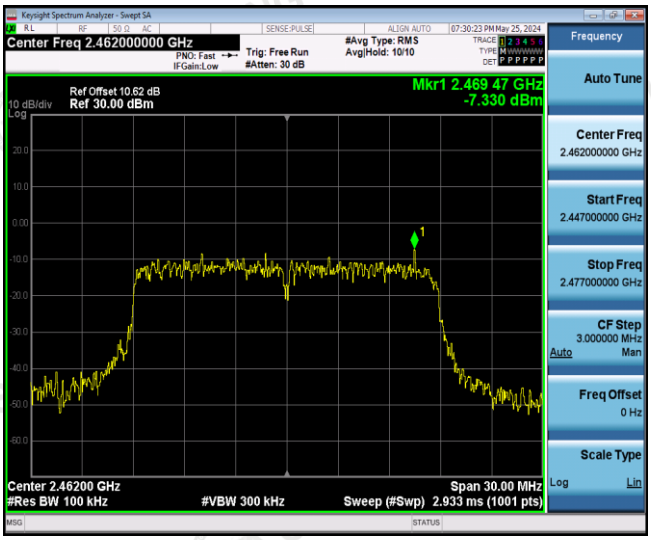


Reference

***CH11***

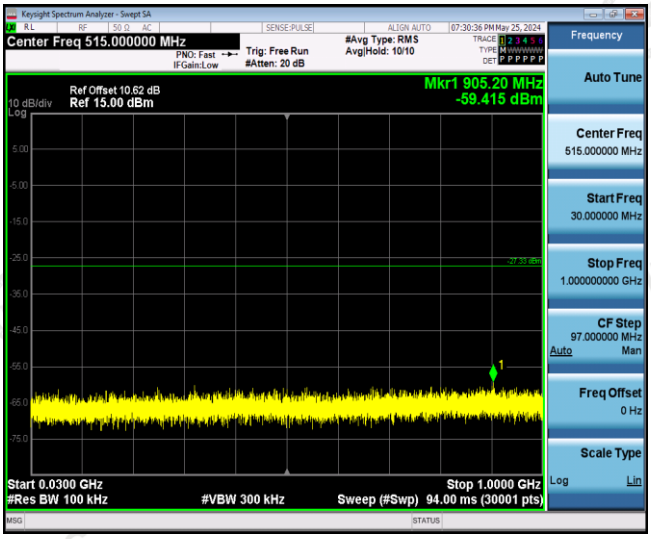


30MHz-3GHz

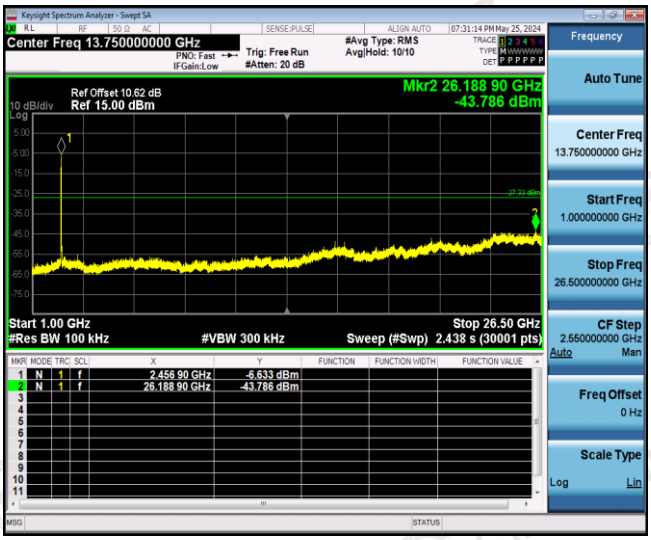


3GHz -25GHz

***Band-edge Measurements for RF Conducted Emissions:***

***802.11b***

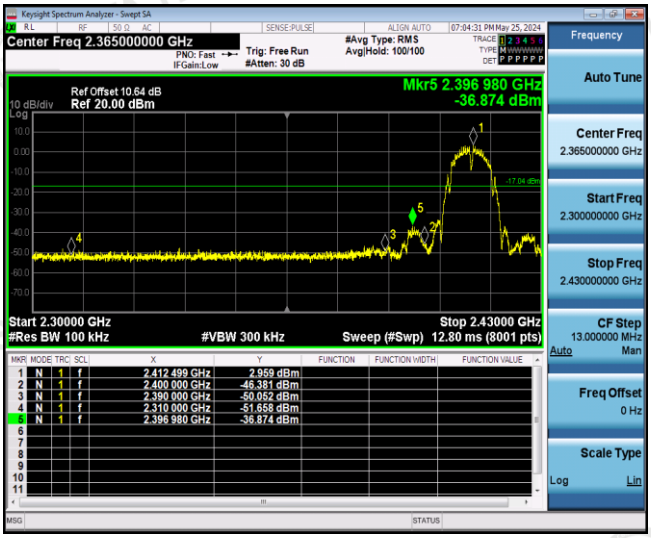


Left bandedge

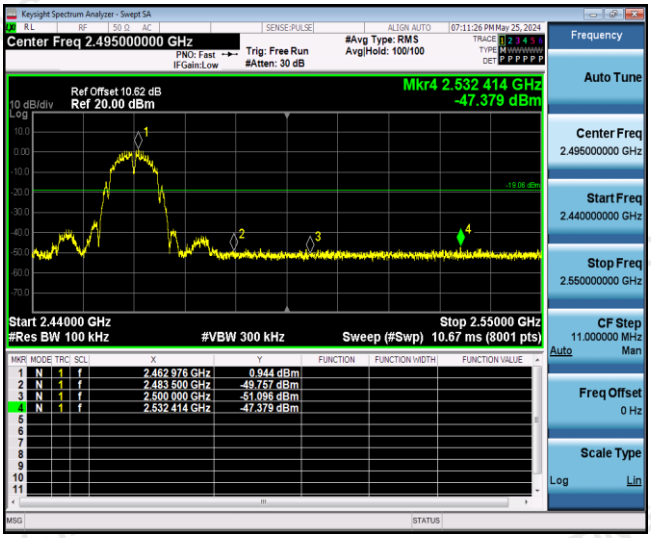


Right bandedge

***802.11g***

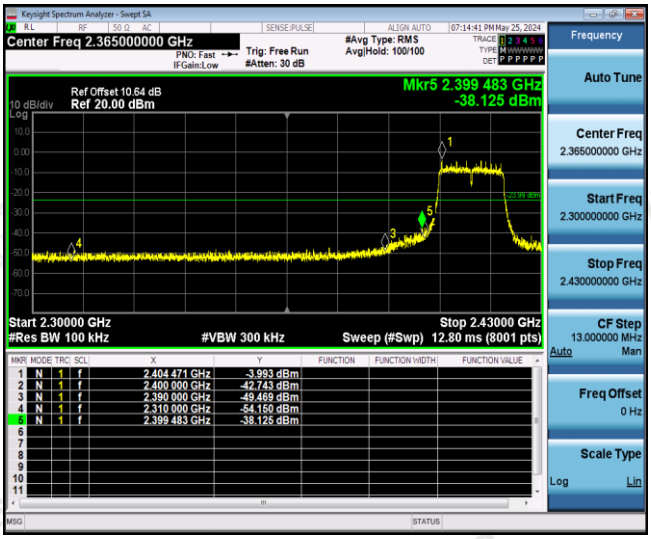


Left bandedge

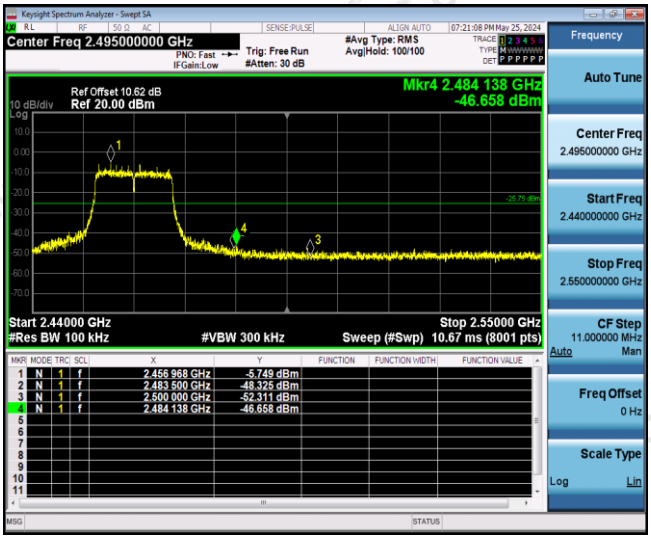


Right bandedge

***802.11n(HT20)***

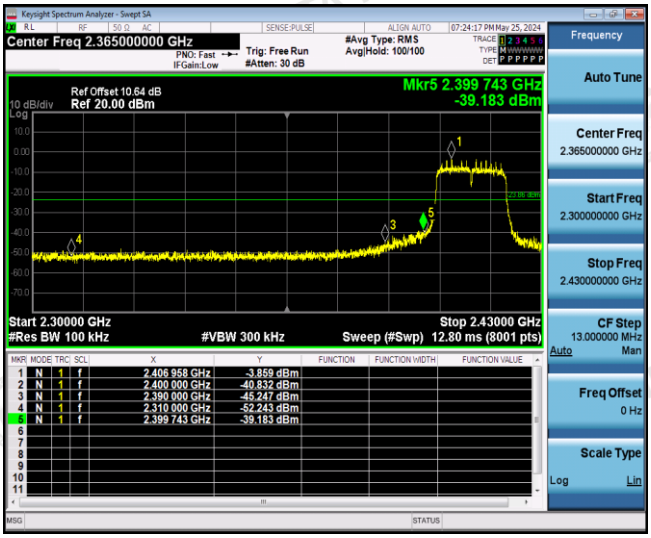


Left bandedge

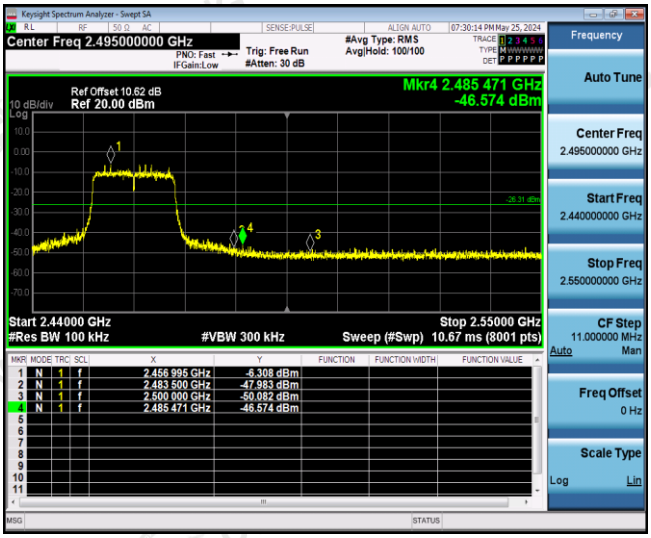


Right bandedge

## 4.7 Antenna Requirement

**Standard Applicable**

**For intentional device, according to FCC 47 CFR Section 15.203:**

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited

**FCC CFR Title 47 Part 15 Subpart C Section 15.247(c) (1) (I):**

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

**Test Result:**

The maximum gain of antenna was 2.50 dBi.

Remark:The antenna gain is provided by the customer , if the data provided by the customer is not accurate, Shenzhen CTA Testing Technology Co., Ltd. does not assume any responsibility.

# 5 Test Setup Photos of the EUT

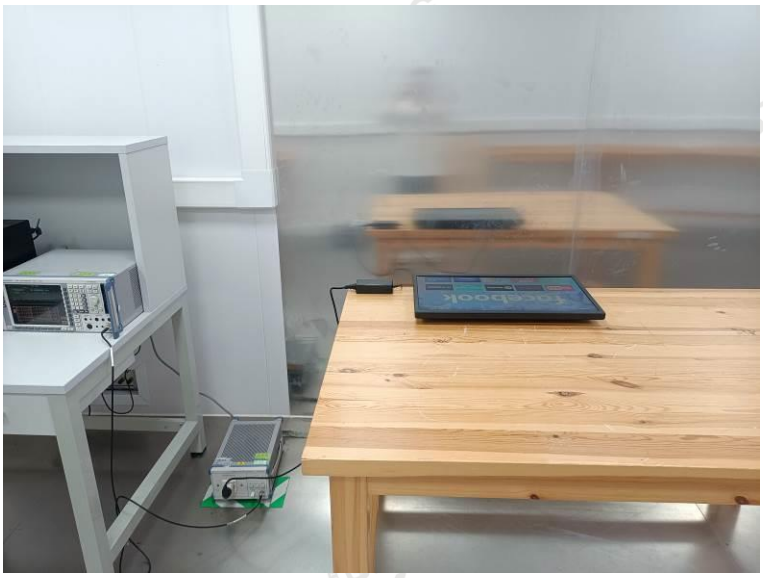

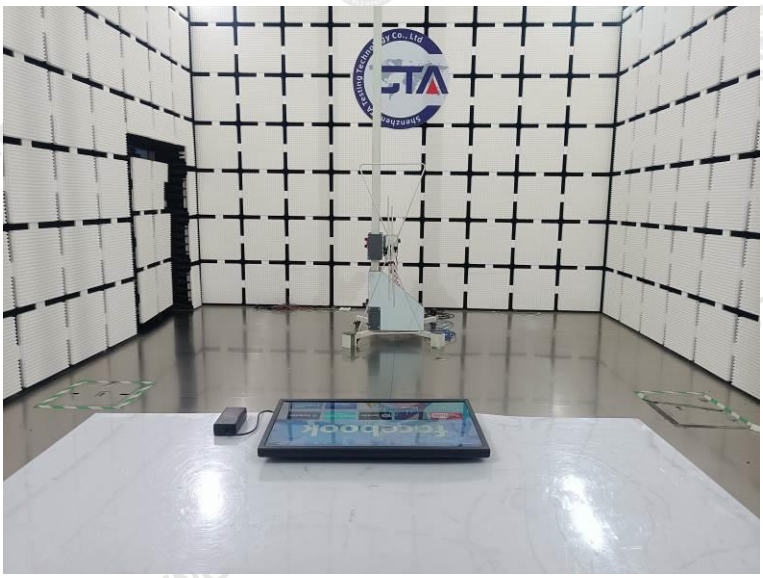

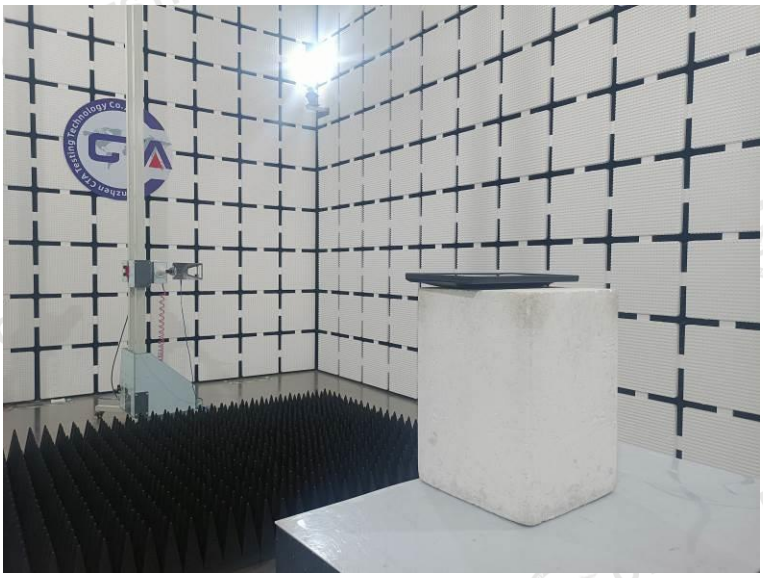

# 6 Photos of the EUT

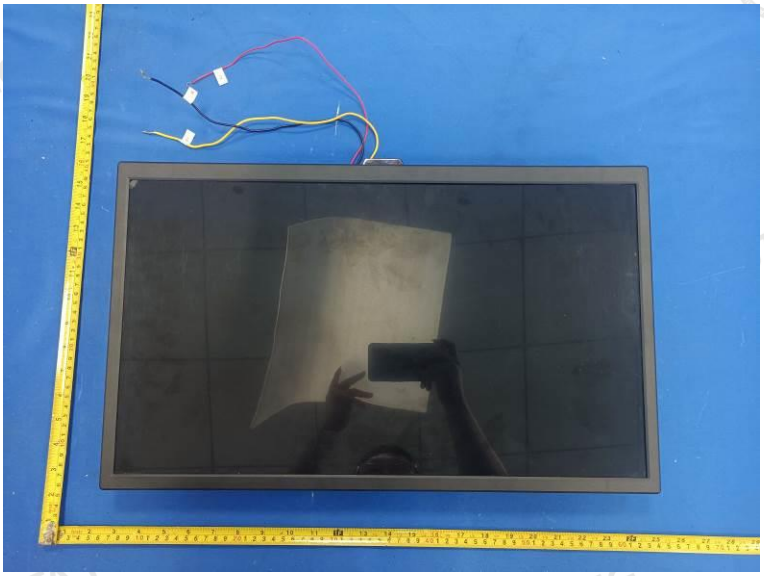

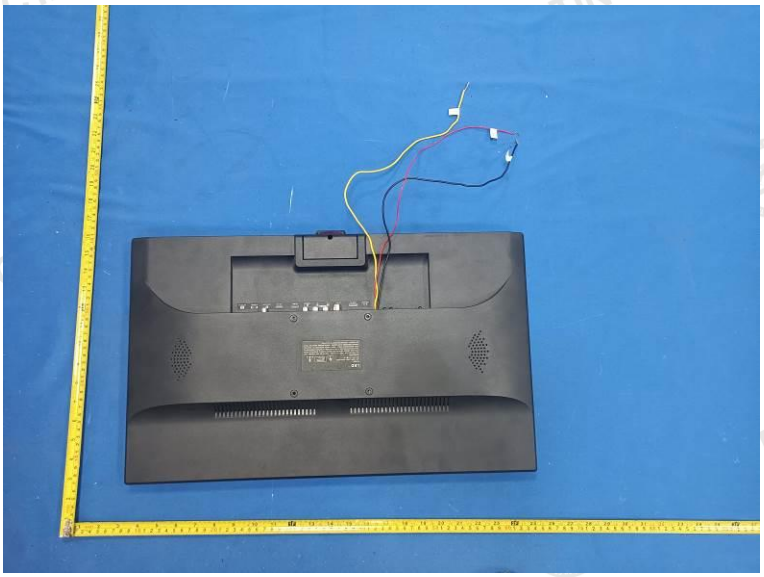

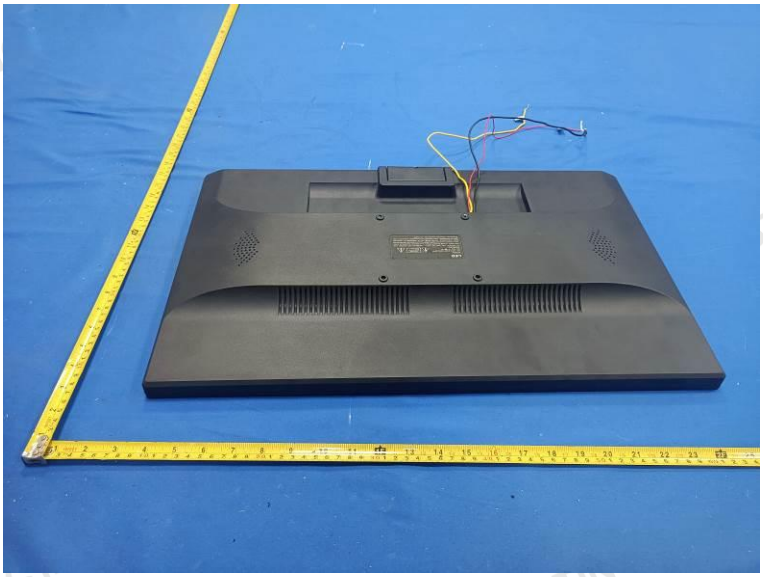

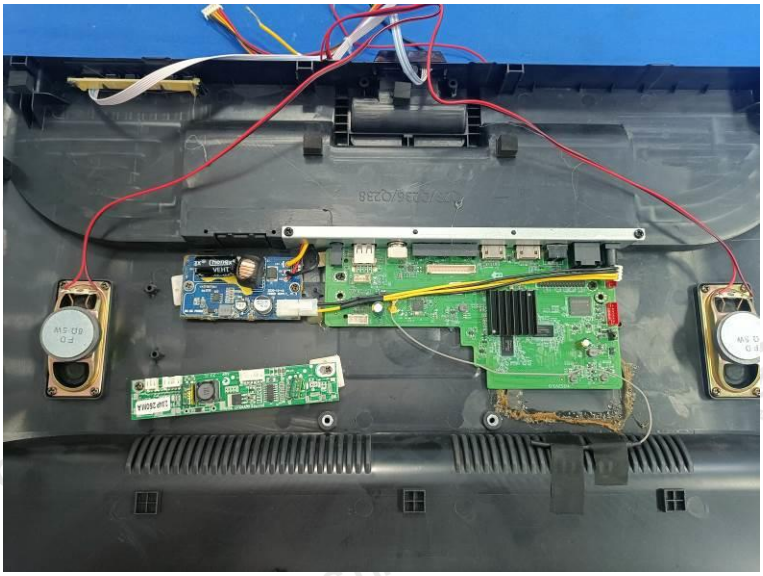

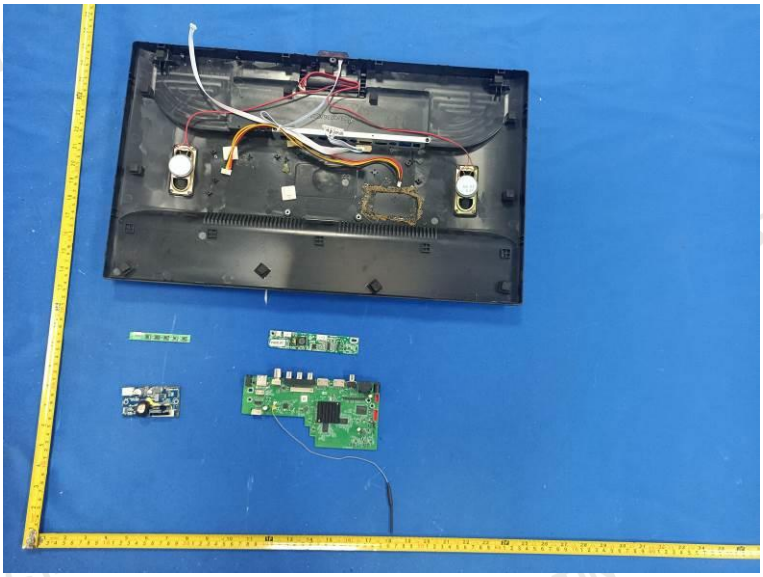

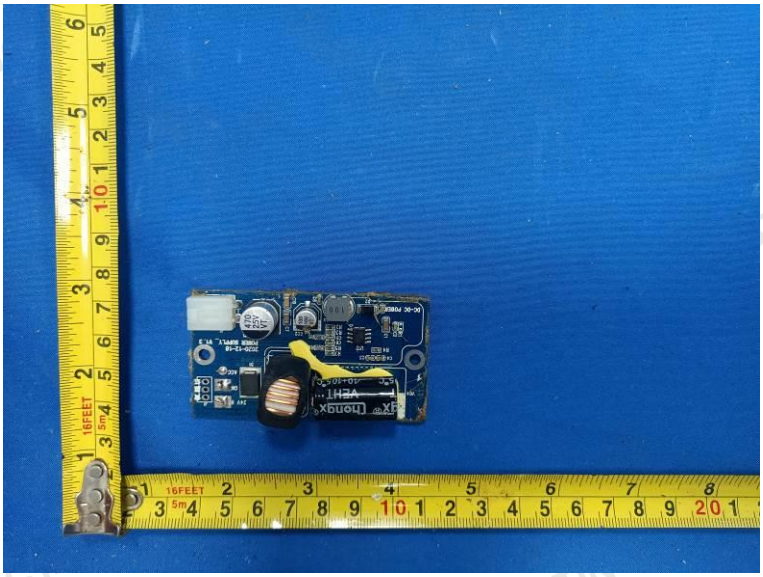

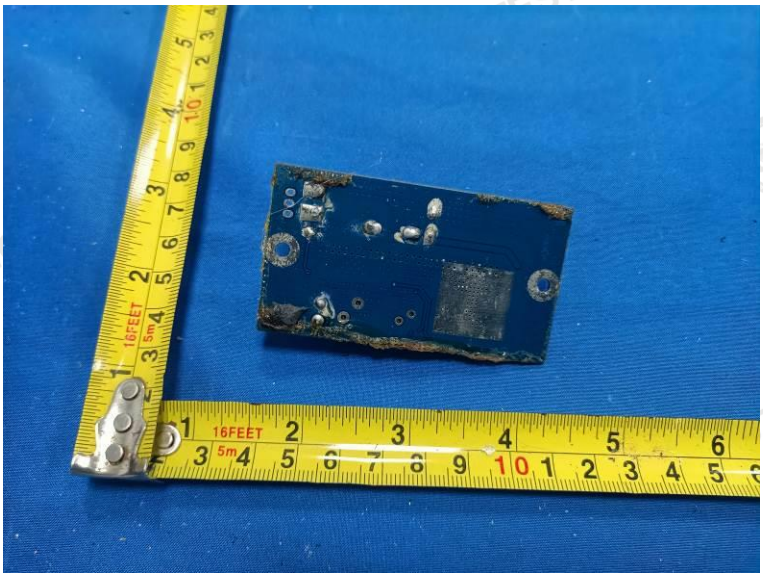

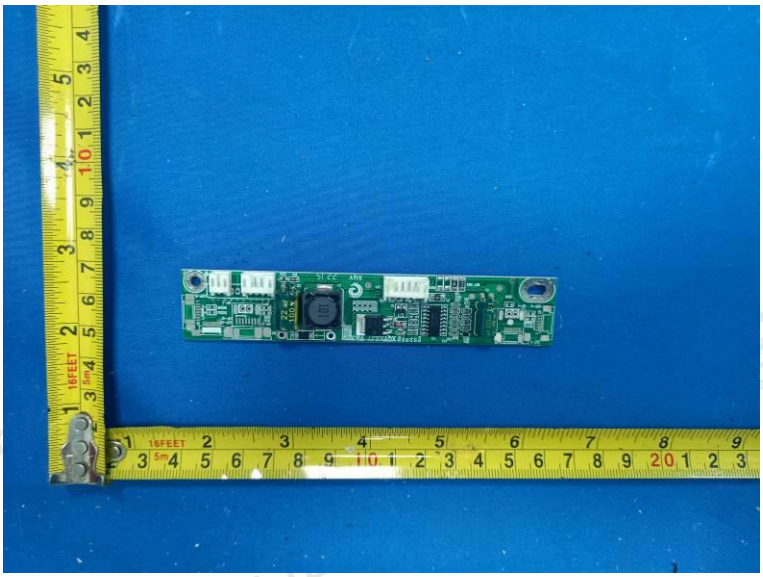

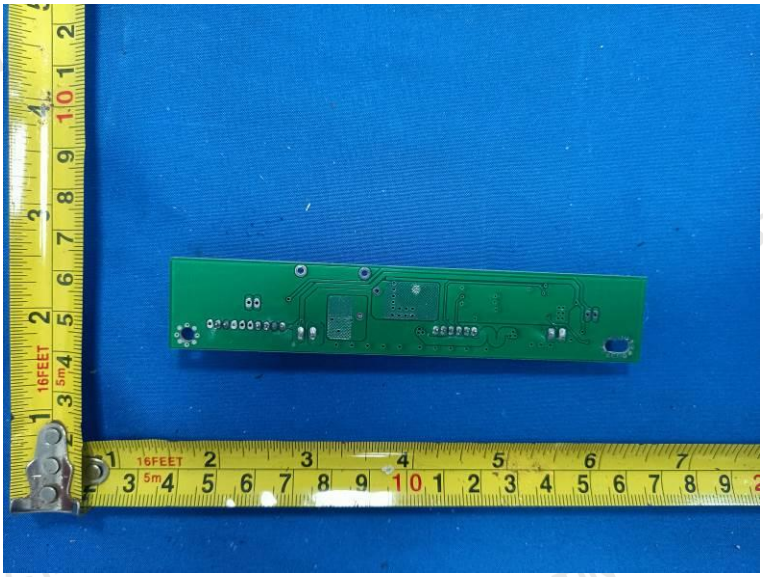

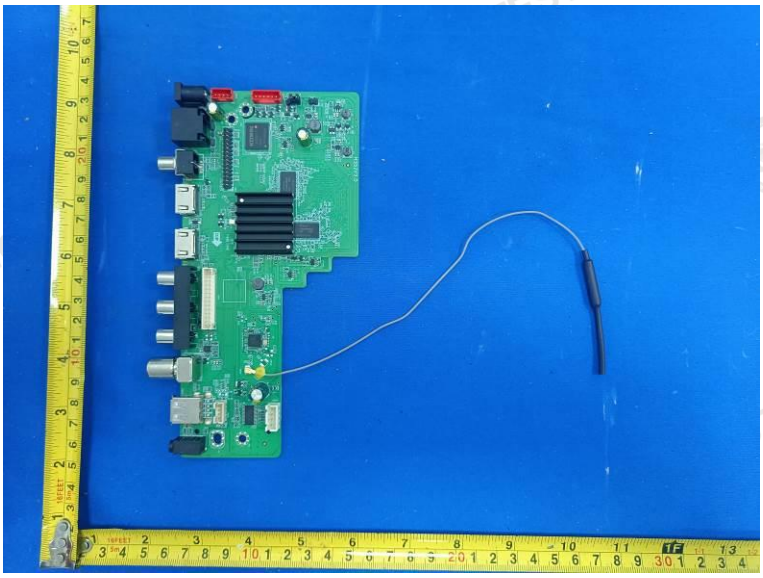

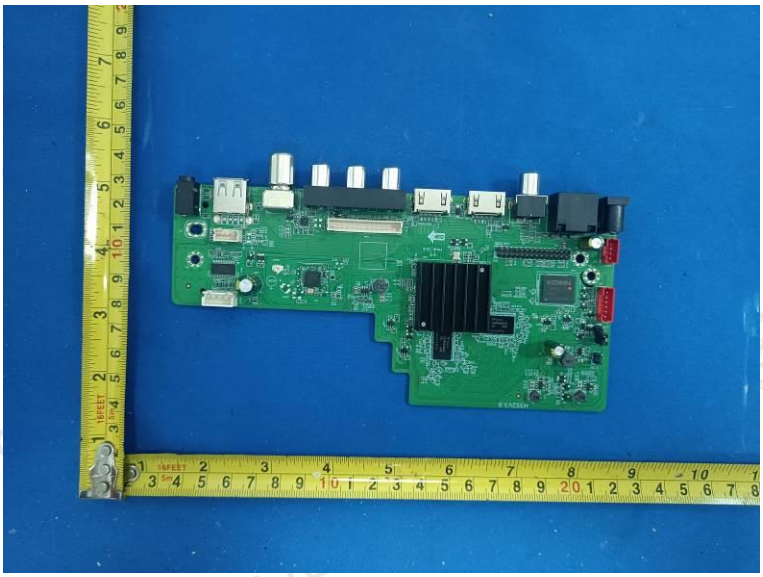

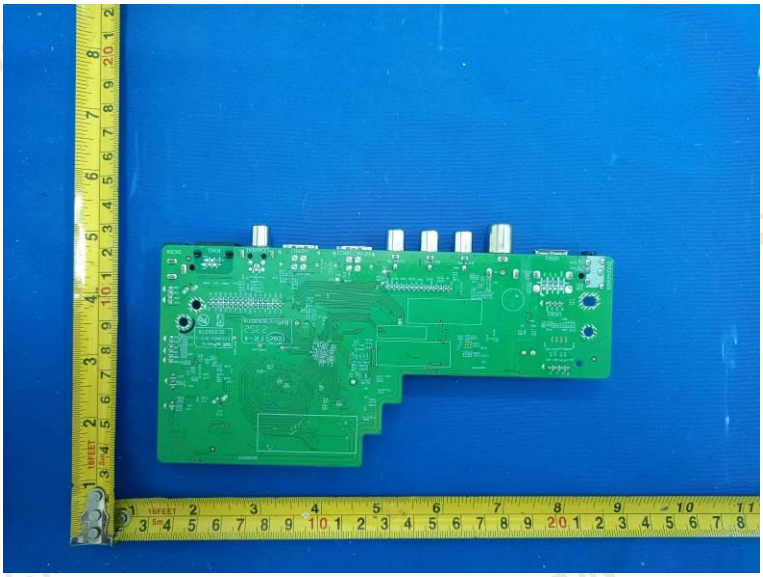

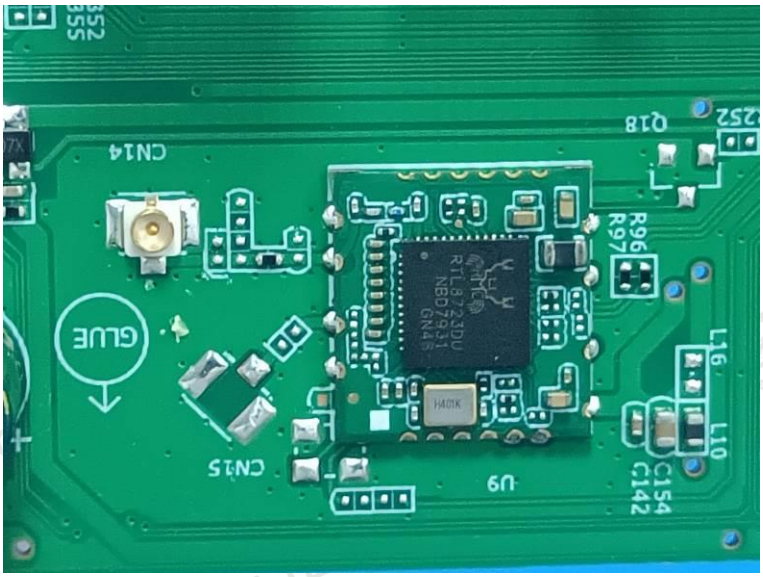
CN14
GLUE
CN15
U9
Q18
R96
R97
L16
L10
C154
C142

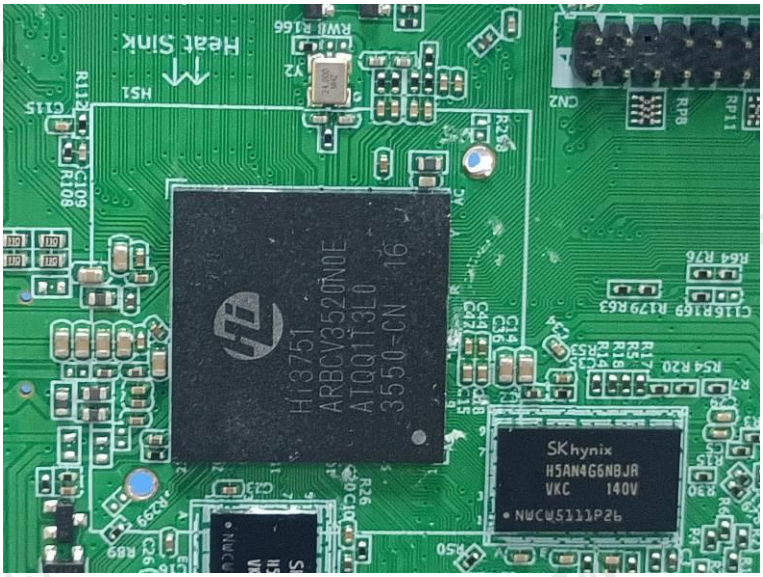


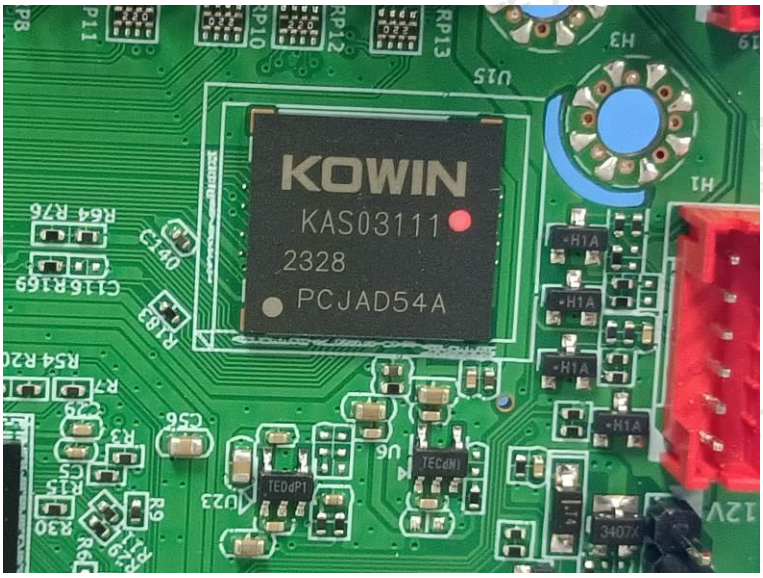

********** End of Report **********