Appendix D

RF Test Data for 5.2GWIFI(Conducted Measurement)

Product Name: Tablet PC

Test Model: Neotab

Environmental Conditions

Temperature:	23.9° C
Relative Humidity:	52.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng

D.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5180	Ant1	21.493	---	Pass
NVNT	a	5200	Ant1	20.913	---	Pass
NVNT	a	5240	Ant1	22.857	---	Pass
NVNT	n20	5180	Ant1	25.434	---	Pass
NVNT	n20	5200	Ant1	24.172	---	Pass
NVNT	n20	5240	Ant1	25.469	---	Pass
NVNT	n40	5190	Ant1	42.583	---	Pass
NVNT	n40	5230	Ant1	41.481	---	Pass
NVNT	ac20	5180	Ant1	25.295	---	Pass
NVNT	ac20	5200	Ant1	25.187	---	Pass
NVNT	ac20	5240	Ant1	24.868	---	Pass
NVNT	ac40	5190	Ant1	42.776	---	Pass
NVNT	ac40	5230	Ant1	40.205	---	Pass
NVNT	ac80	5210	Ant1	82.393	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5180MHz Ant1

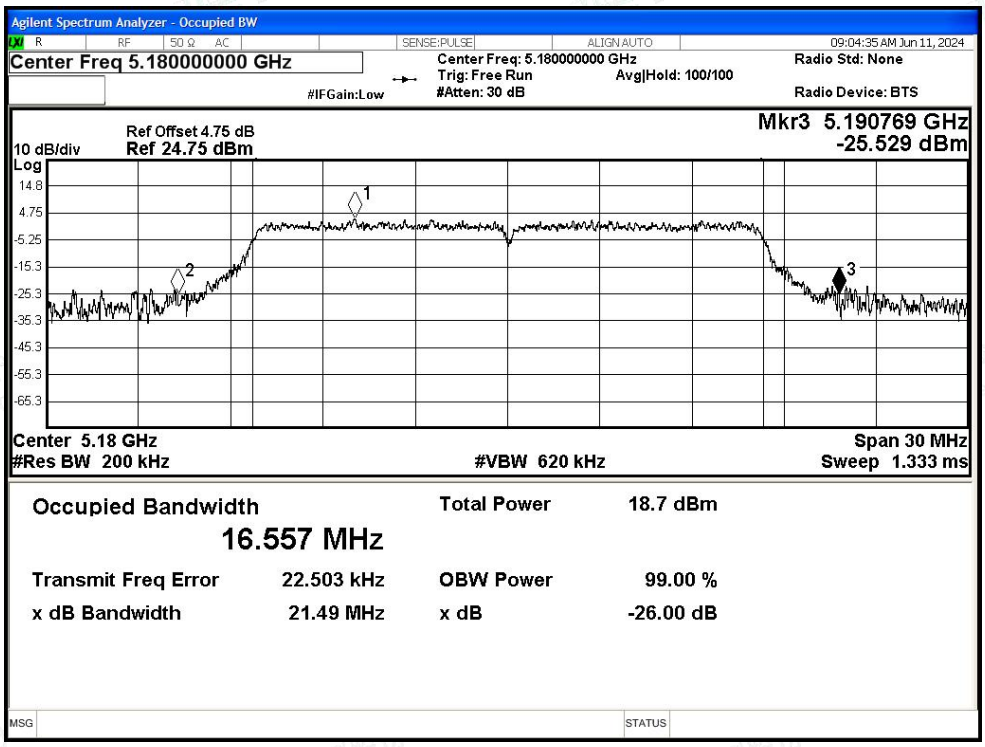

-26dB Bandwidth NVNT a 5200MHz Ant1

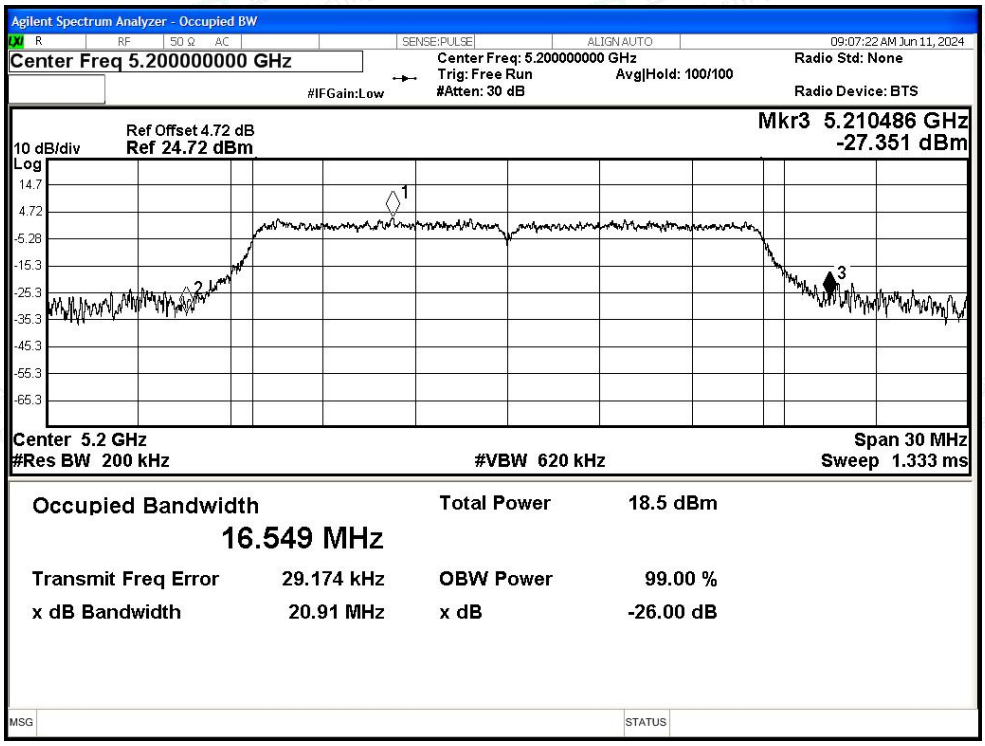

-26dB Bandwidth NVNT a 5240MHz Ant1

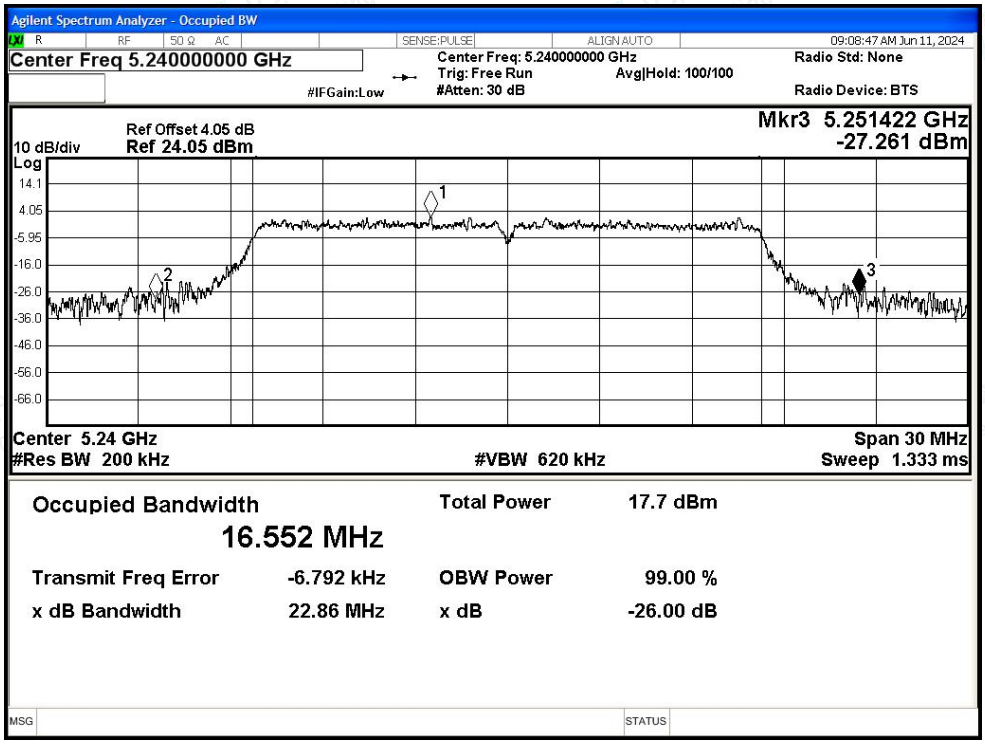

-26dB Bandwidth NVNT n20 5180MHz Ant1

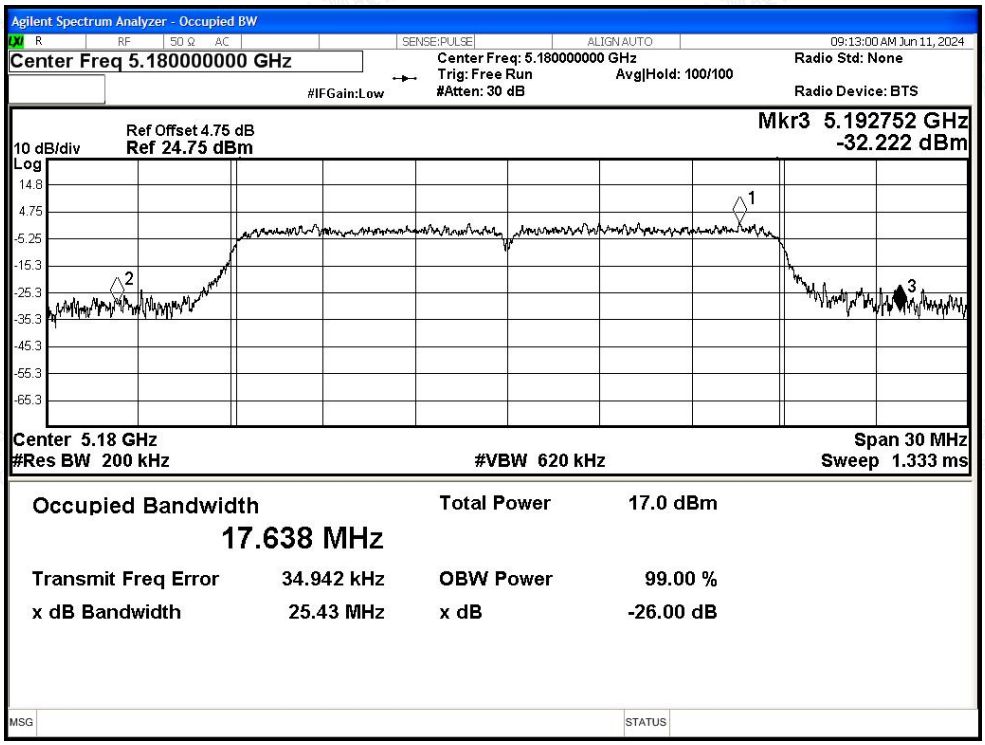

-26dB Bandwidth NVNT n20 5200MHz Ant1

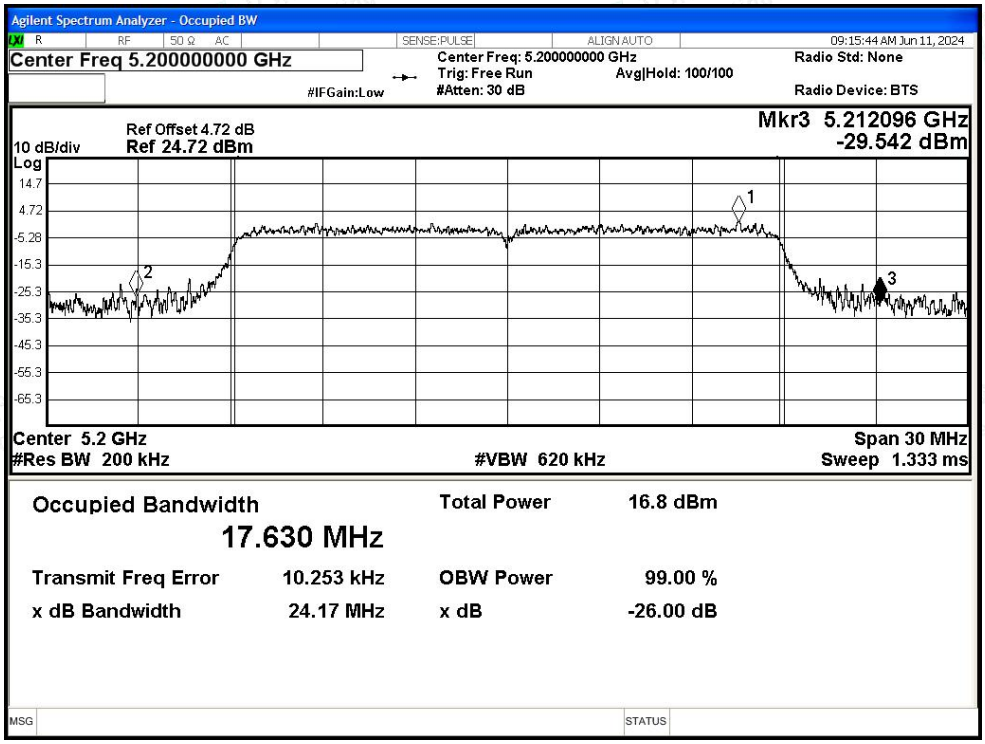

-26dB Bandwidth NVNT n20 5240MHz Ant1

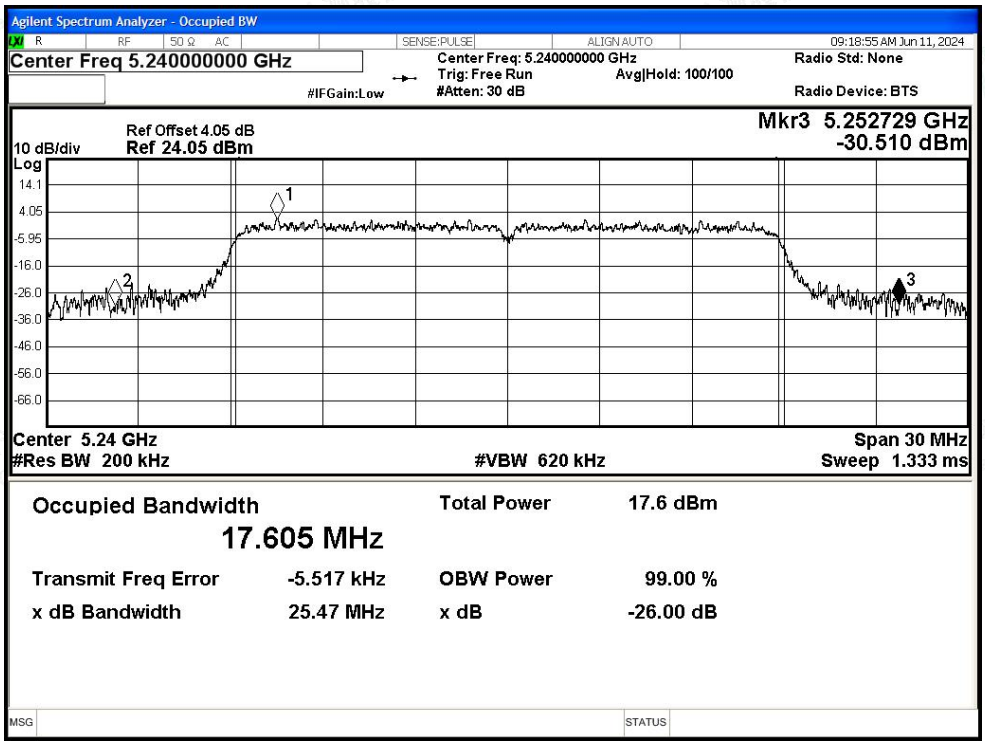

-26dB Bandwidth NVNT n40 5190MHz Ant1

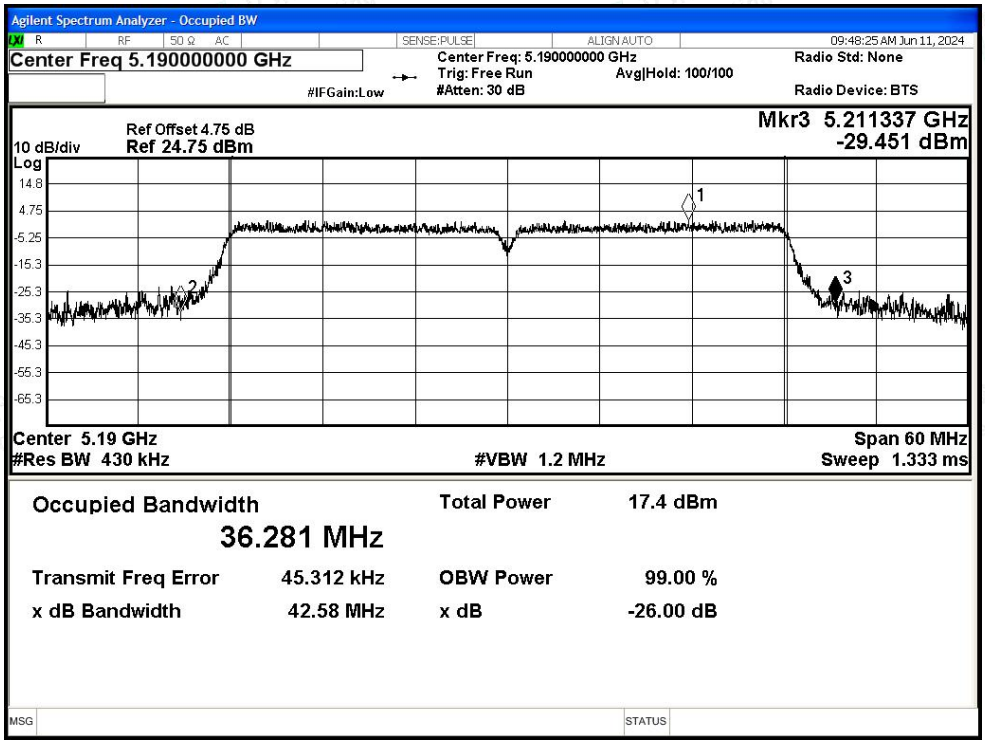

-26dB Bandwidth NVNT n40 5230MHz Ant1

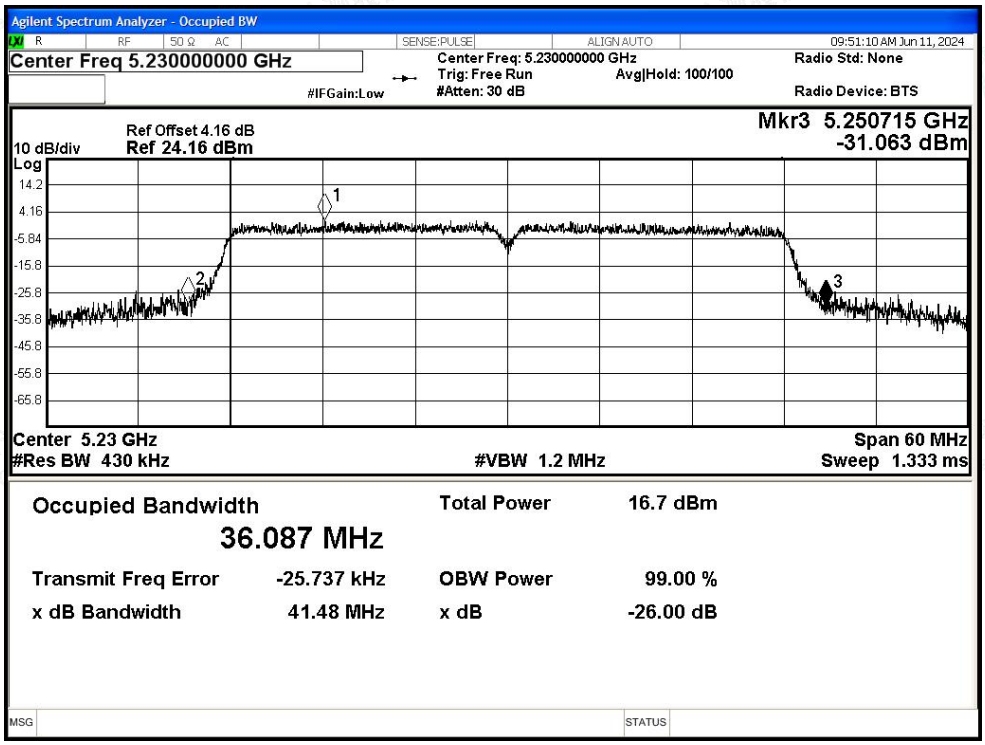

-26dB Bandwidth NVNT ac20 5180MHz Ant1

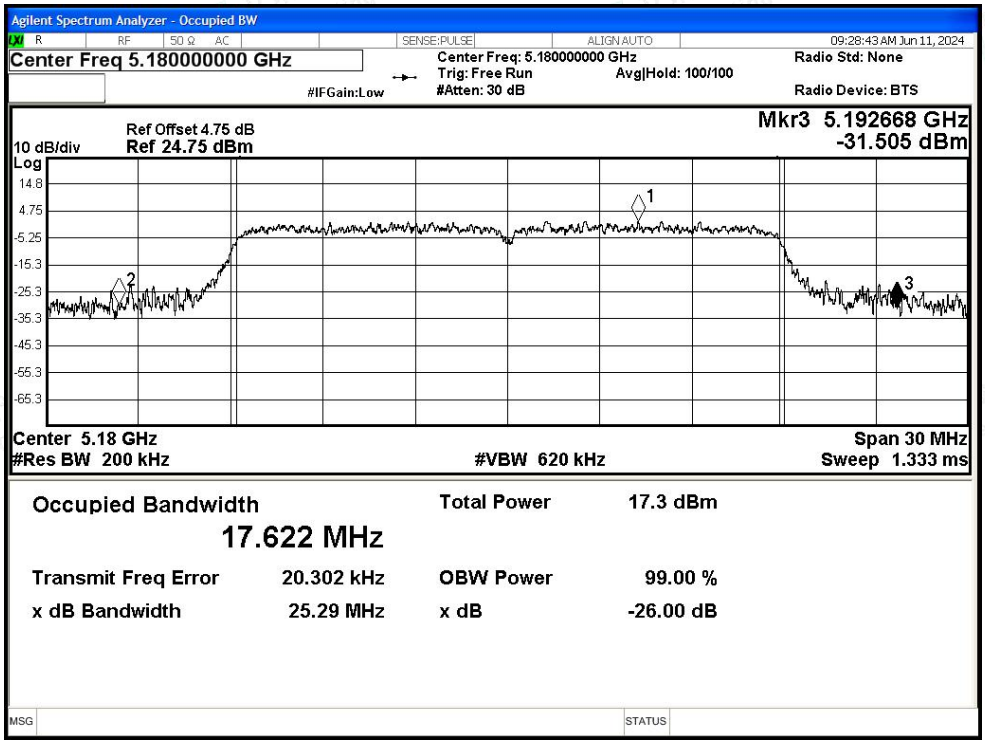

-26dB Bandwidth NVNT ac20 5200MHz Ant1

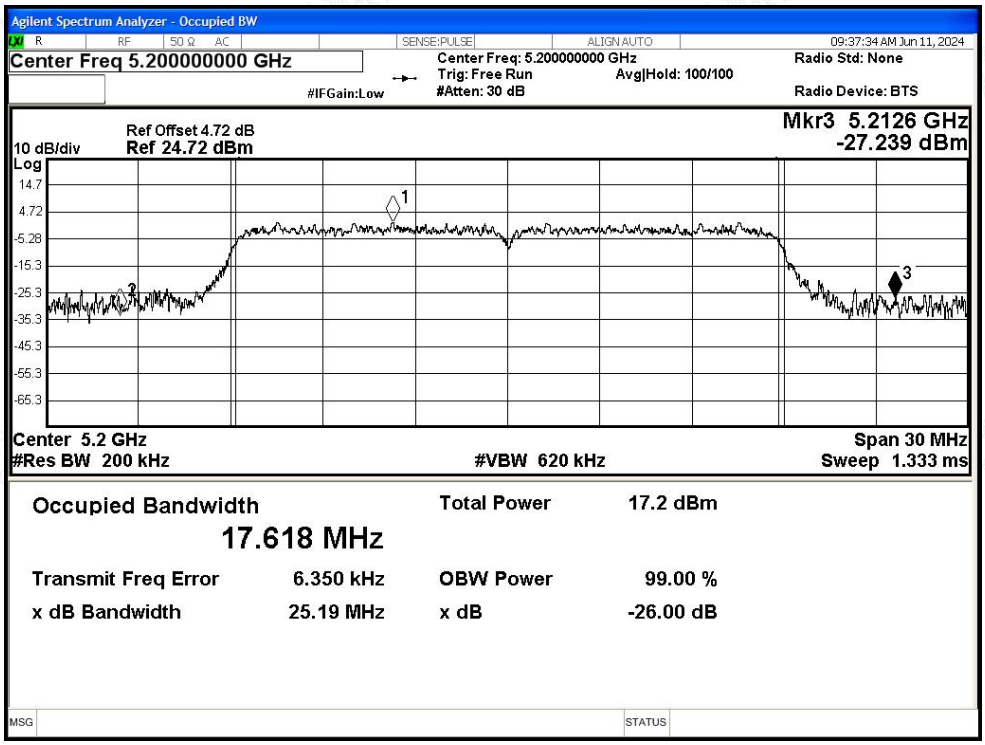

-26dB Bandwidth NVNT ac20 5240MHz Ant1

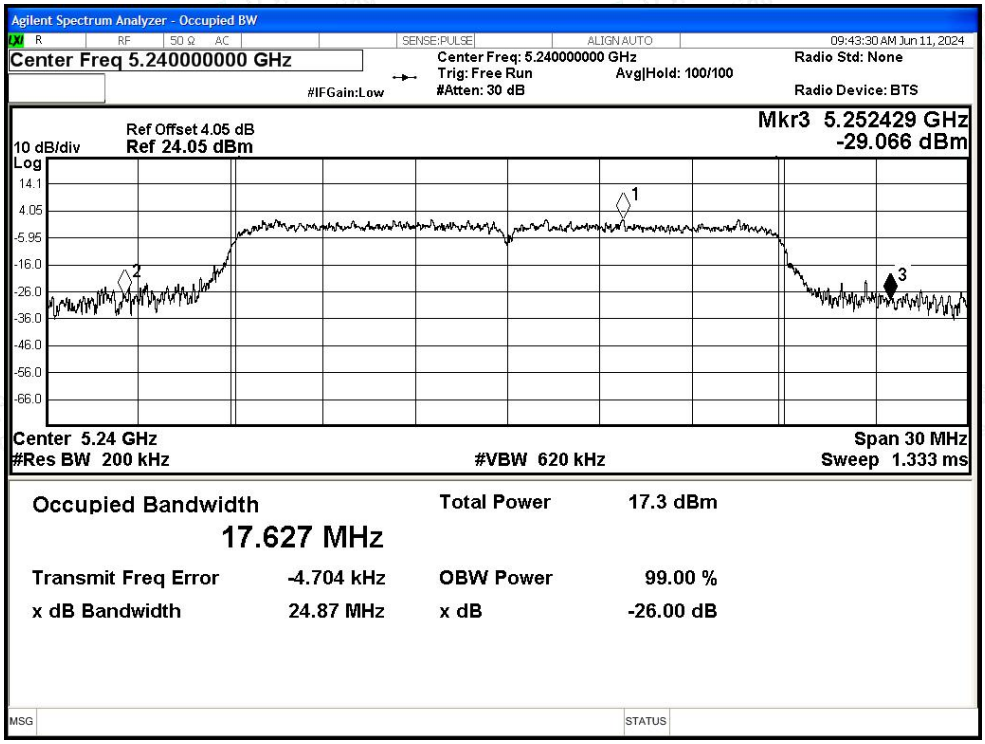

-26dB Bandwidth NVNT ac40 5190MHz Ant1

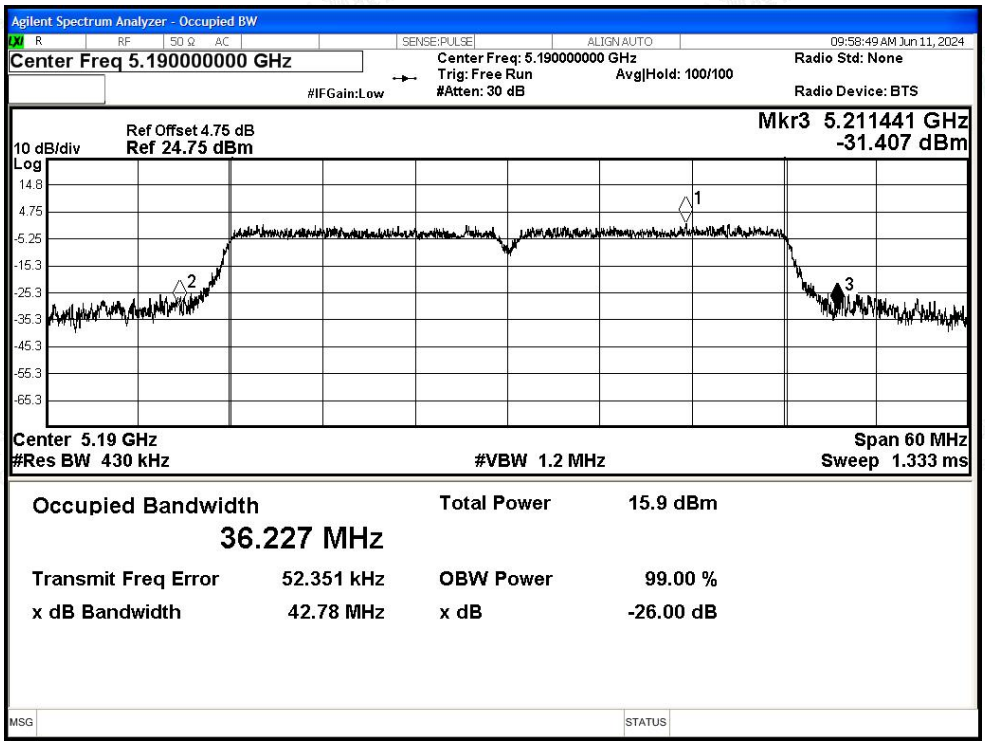

-26dB Bandwidth NVNT ac40 5230MHz Ant1

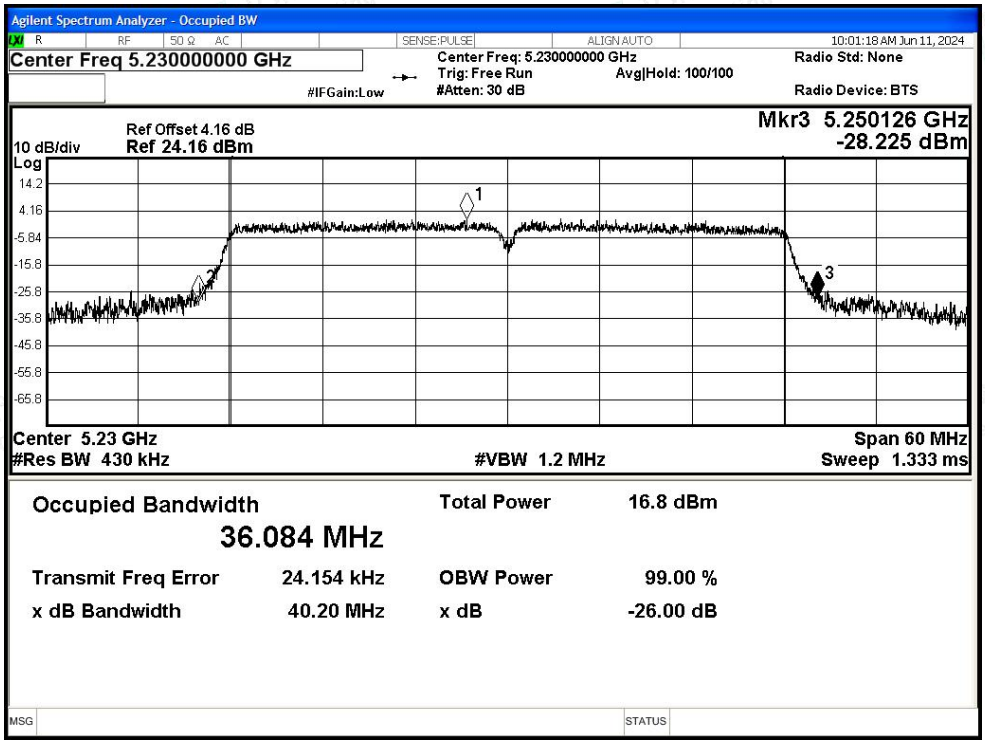

-26dB Bandwidth NVNT ac80 5210MHz Ant1

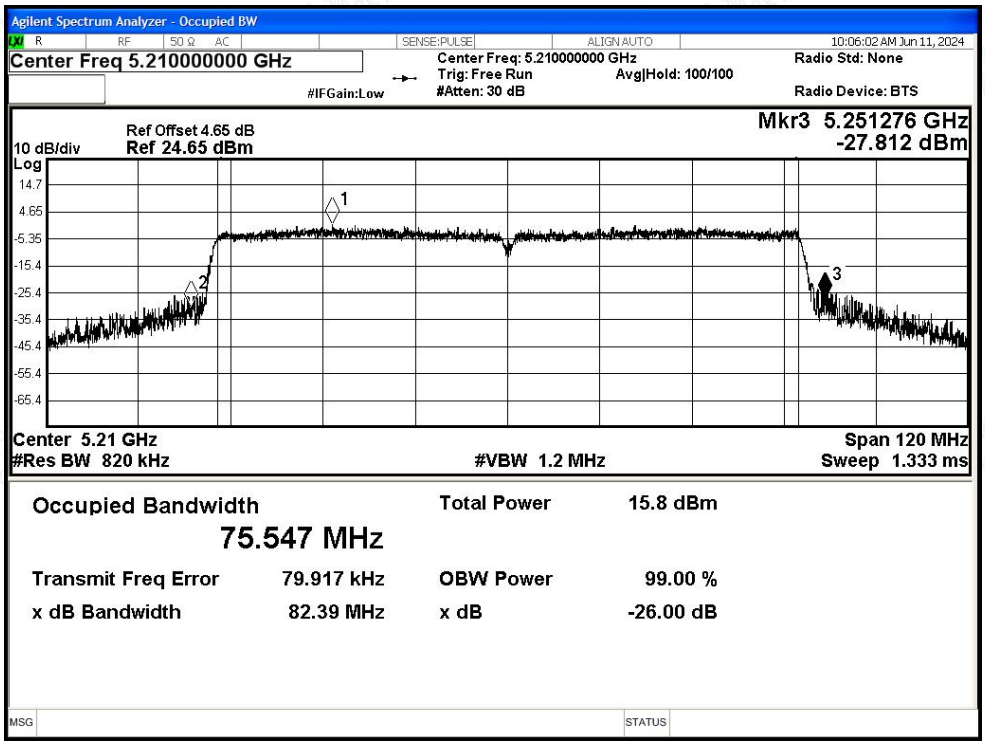

D.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5180	Ant1	12.56	0.24	12.8	24	Pass
NVNT	a	5200	Ant1	12.82	0.24	13.06	24	Pass
NVNT	a	5240	Ant1	12.05	0.24	12.29	24	Pass
NVNT	n20	5180	Ant1	11.21	0.28	11.49	24	Pass
NVNT	n20	5200	Ant1	11.11	0.28	11.39	24	Pass
NVNT	n20	5240	Ant1	11.38	0.28	11.66	24	Pass
NVNT	n40	5190	Ant1	10.78	0.44	11.22	24	Pass
NVNT	n40	5230	Ant1	10.74	0.44	11.18	24	Pass
NVNT	ac20	5180	Ant1	11	0.28	11.28	24	Pass
NVNT	ac20	5200	Ant1	11.29	0.28	11.57	24	Pass
NVNT	ac20	5240	Ant1	11.67	0.28	11.95	24	Pass
NVNT	ac40	5190	Ant1	10.01	0.44	10.45	24	Pass
NVNT	ac40	5230	Ant1	10.52	0.44	10.96	24	Pass
NVNT	ac80	5210	Ant1	9.35	0.52	9.87	24	Pass

D.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD (dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5180	Ant1	2.68	0.24	2.92	11	Pass
NVNT	a	5200	Ant1	2.16	0.24	2.4	11	Pass
NVNT	a	5240	Ant1	1.48	0.24	1.72	11	Pass
NVNT	n20	5180	Ant1	0.5	0.28	0.78	11	Pass
NVNT	n20	5200	Ant1	0.28	0.28	0.56	11	Pass
NVNT	n20	5240	Ant1	1.02	0.28	1.3	11	Pass
NVNT	n40	5190	Ant1	-2.69	0.44	-2.25	11	Pass
NVNT	n40	5230	Ant1	-2.76	0.44	-2.32	11	Pass
NVNT	ac20	5180	Ant1	0.79	0.28	1.07	11	Pass
NVNT	ac20	5200	Ant1	0.66	0.28	0.94	11	Pass
NVNT	ac20	5240	Ant1	0.76	0.28	1.04	11	Pass
NVNT	ac40	5190	Ant1	-4.01	0.44	-3.57	11	Pass
NVNT	ac40	5230	Ant1	-2.98	0.44	-2.54	11	Pass
NVNT	ac80	5210	Ant1	-7.59	0.52	-7.07	11	Pass

Test Graphs

PSD NVNT a 5180MHz Ant1

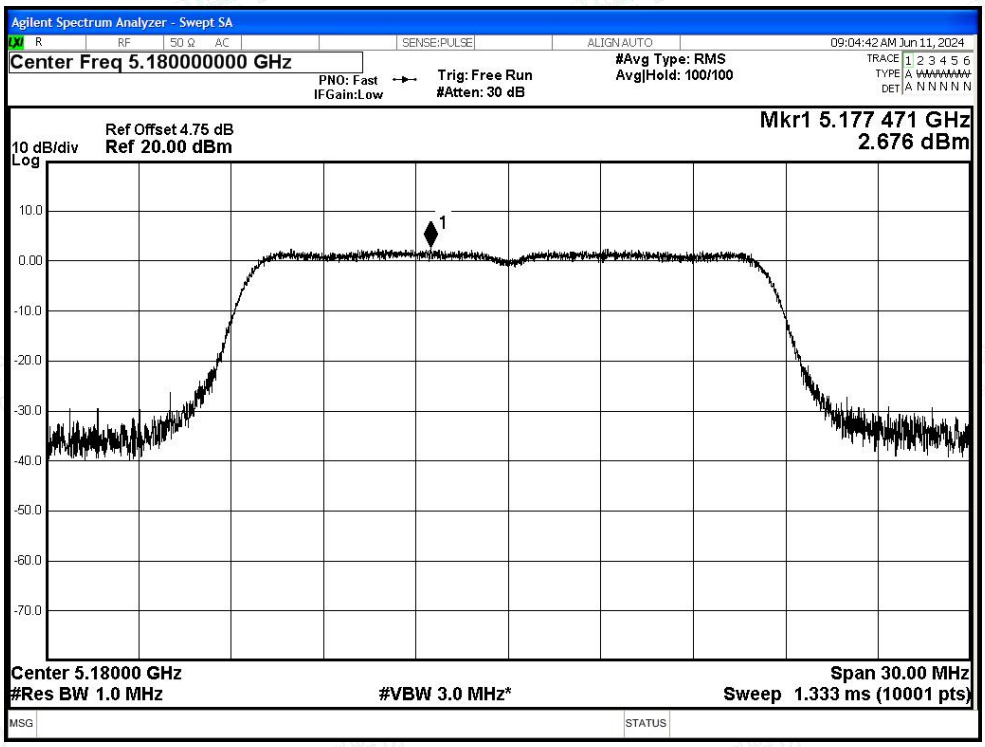

PSD NVNT a 5200MHz Ant1

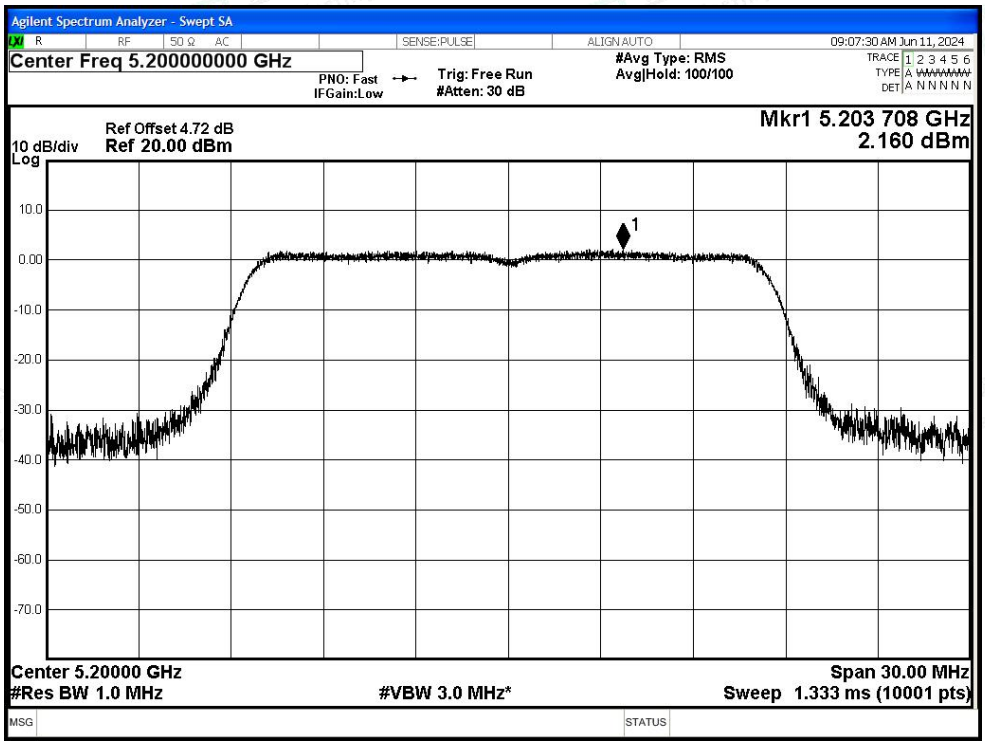

PSD NVNT a 5240MHz Ant1

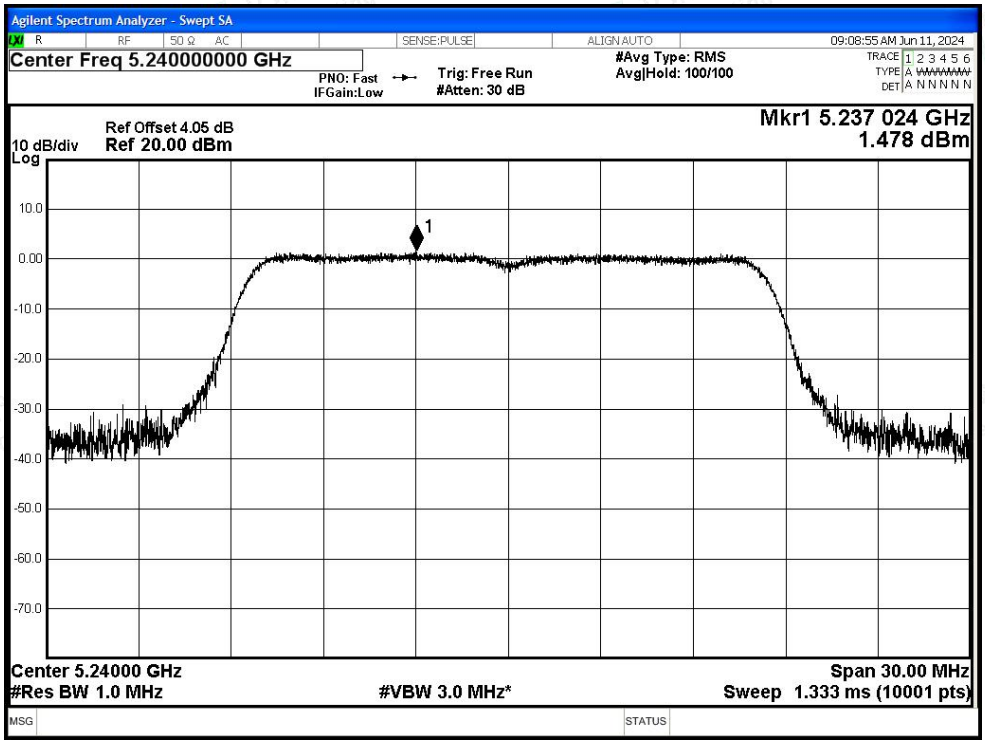

PSD NVNT n20 5180MHz Ant1

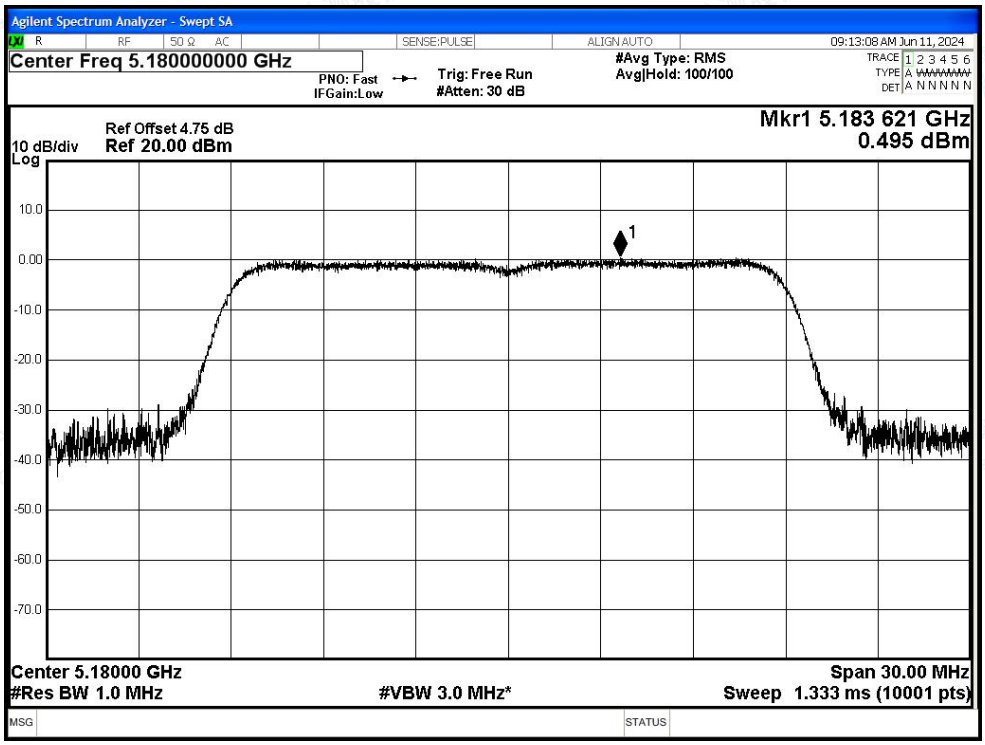

PSD NVNT n20 5200MHz Ant1

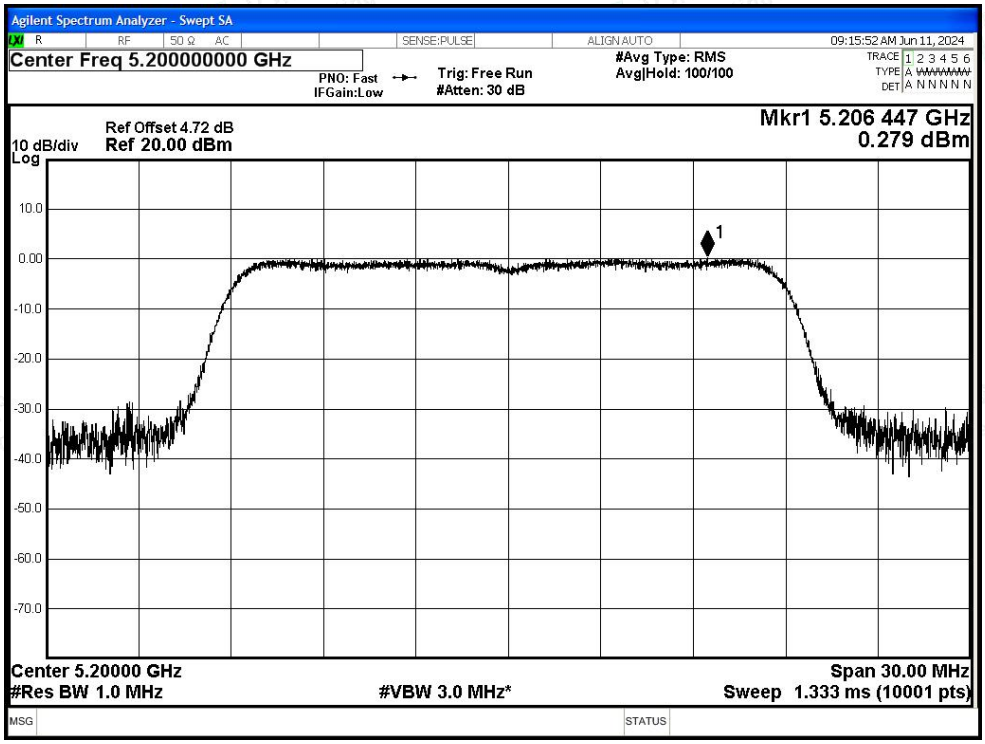

PSD NVNT n20 5240MHz Ant1

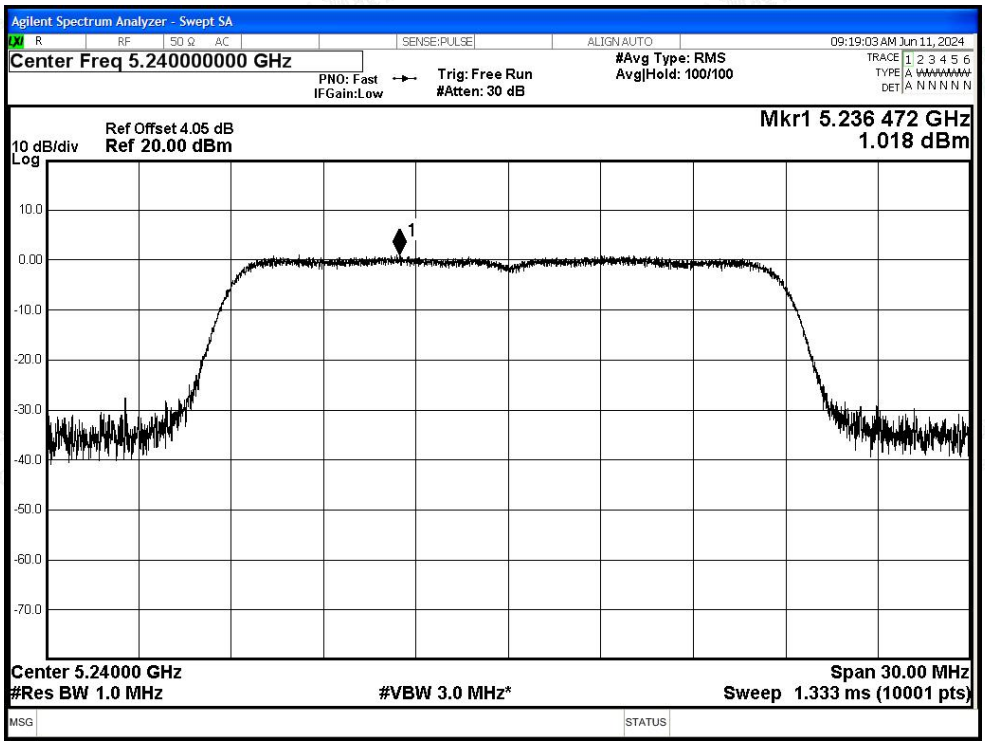

PSD NVNT n40 5190MHz Ant1

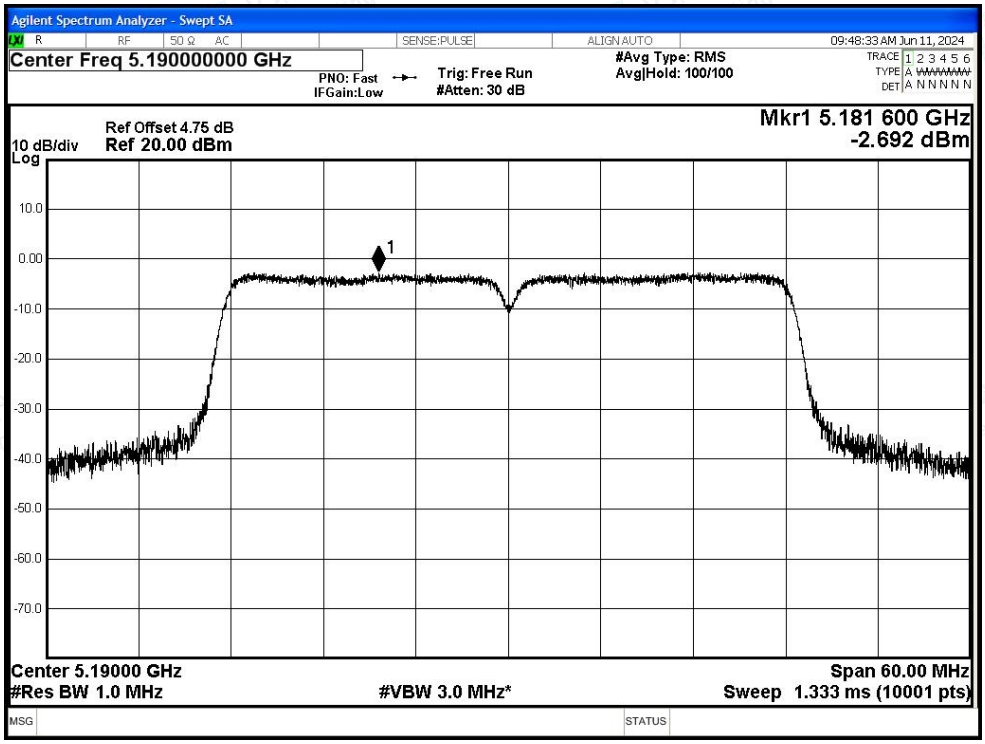

PSD NVNT n40 5230MHz Ant1

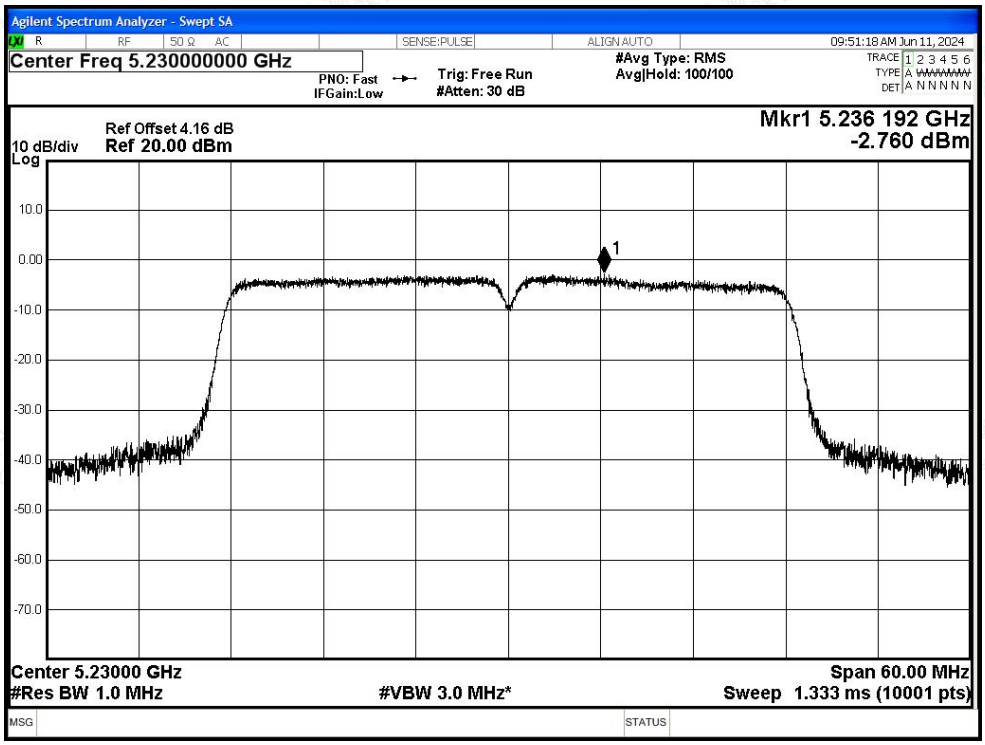

PSD NVNT ac20 5180MHz Ant1

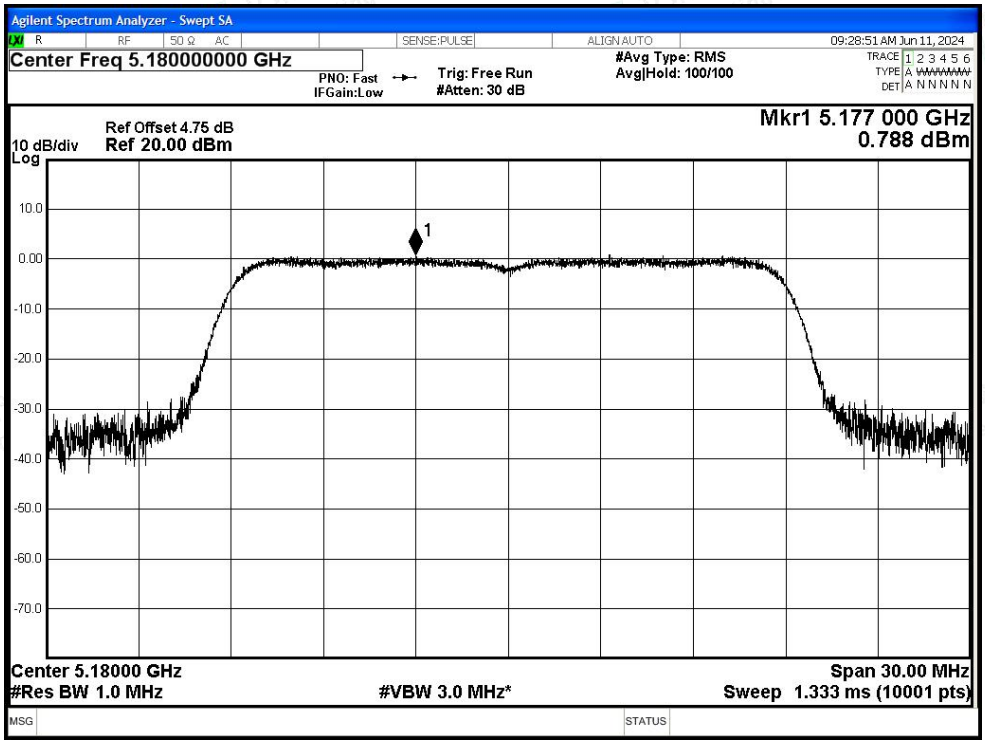

PSD NVNT ac20 5200MHz Ant1

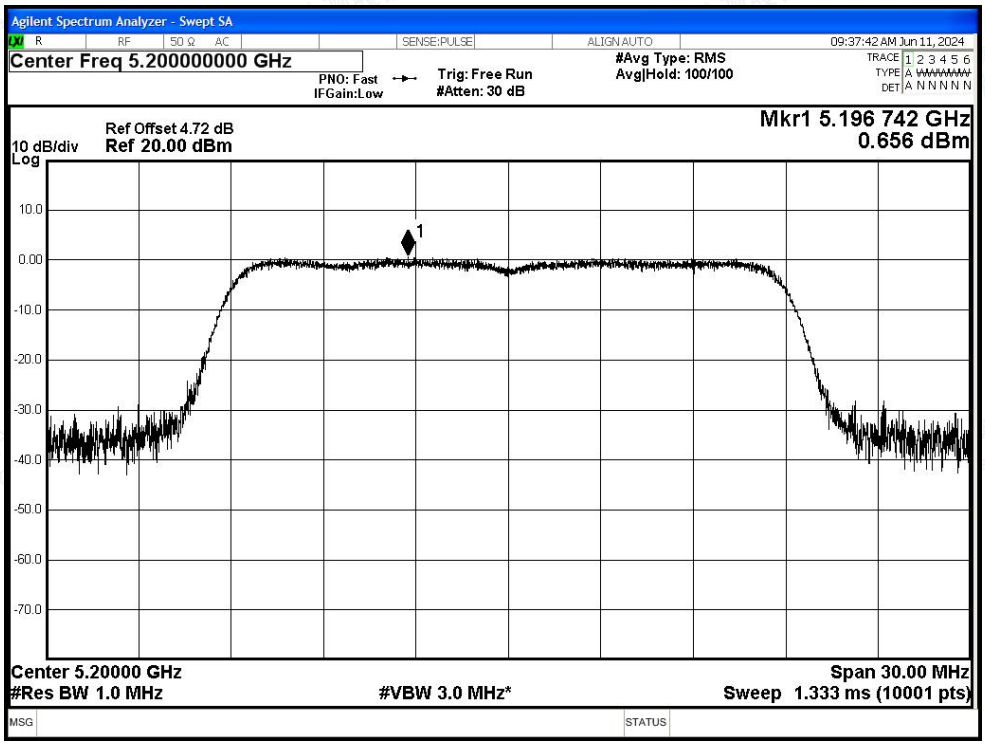

PSD NVNT ac20 5240MHz Ant1

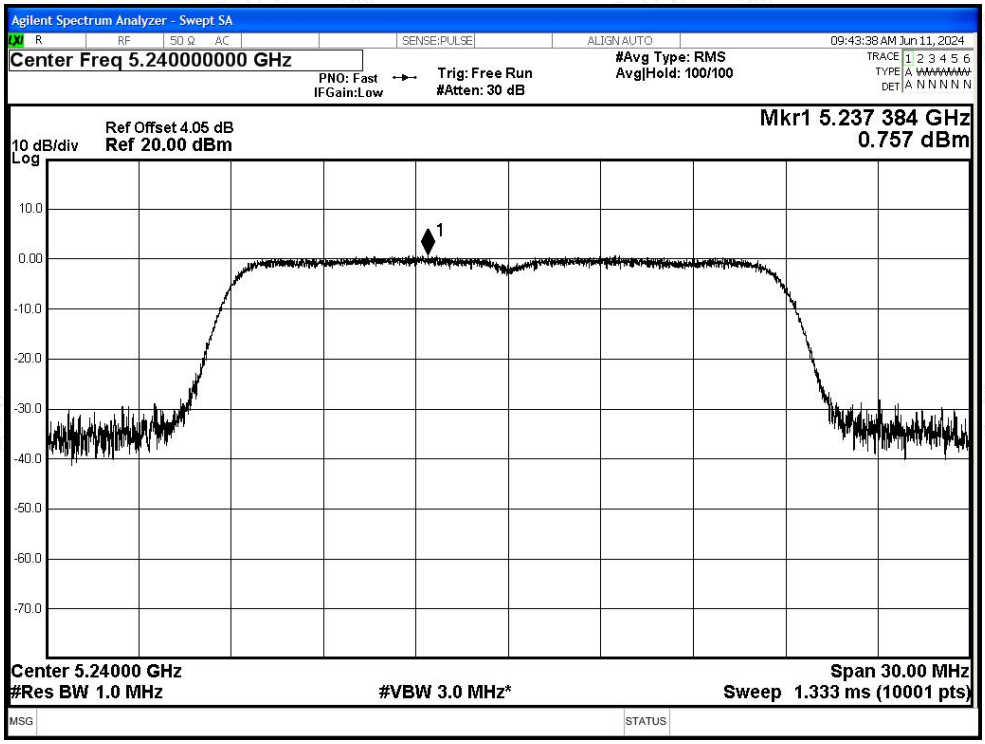

PSD NVNT ac40 5190MHz Ant1

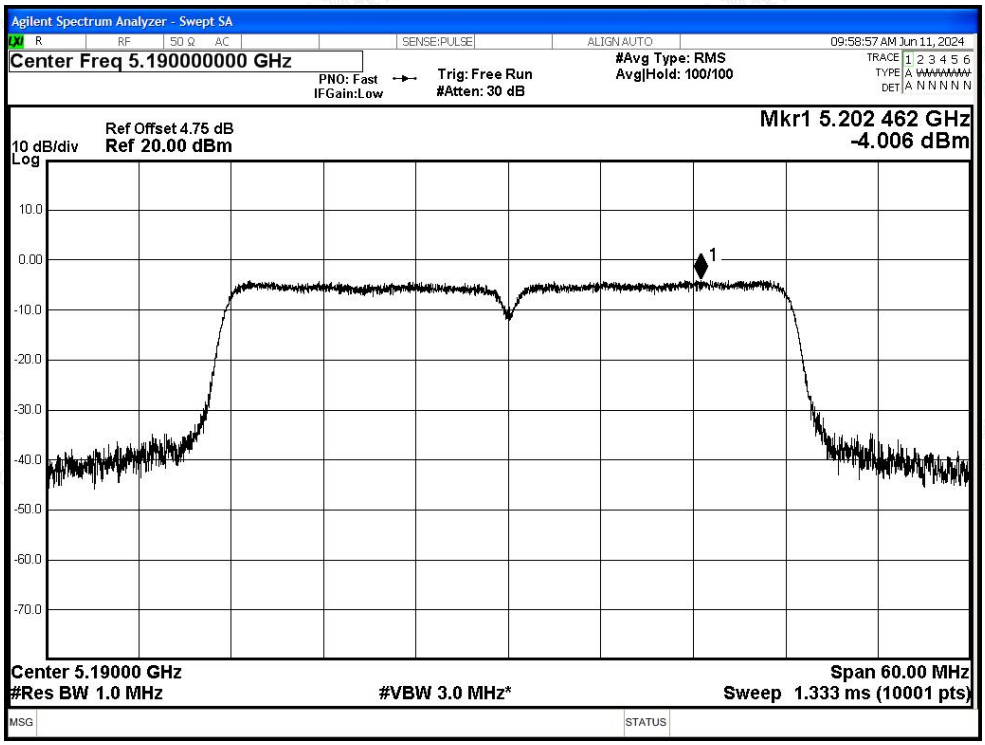

PSD NVNT ac40 5230MHz Ant1

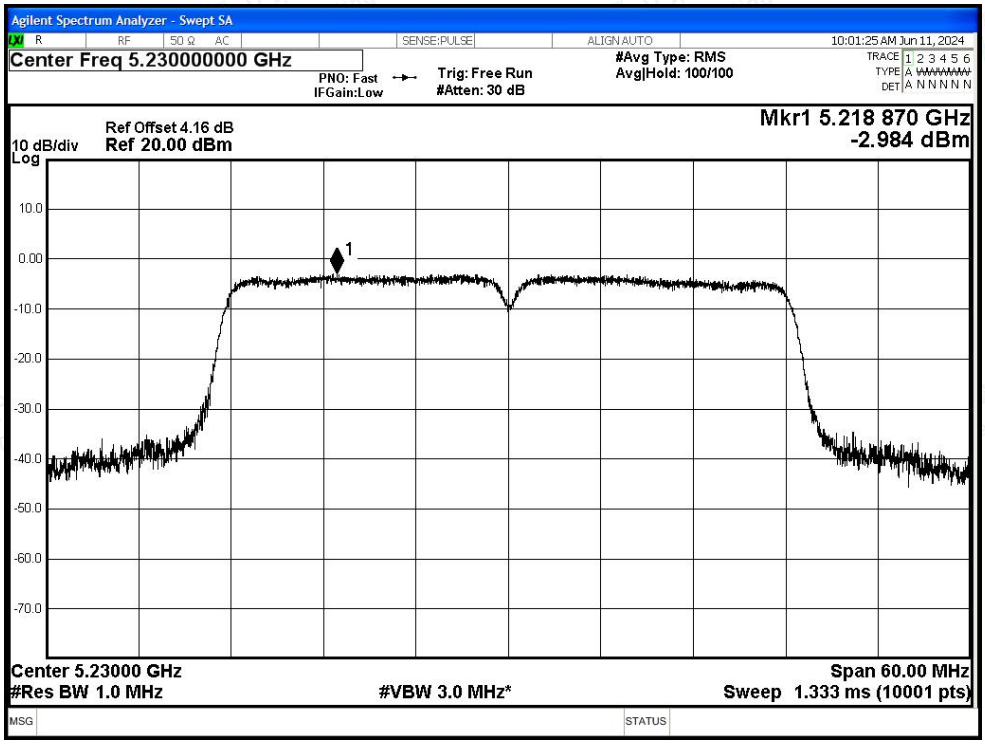

PSD NVNT ac80 5210MHz Ant1

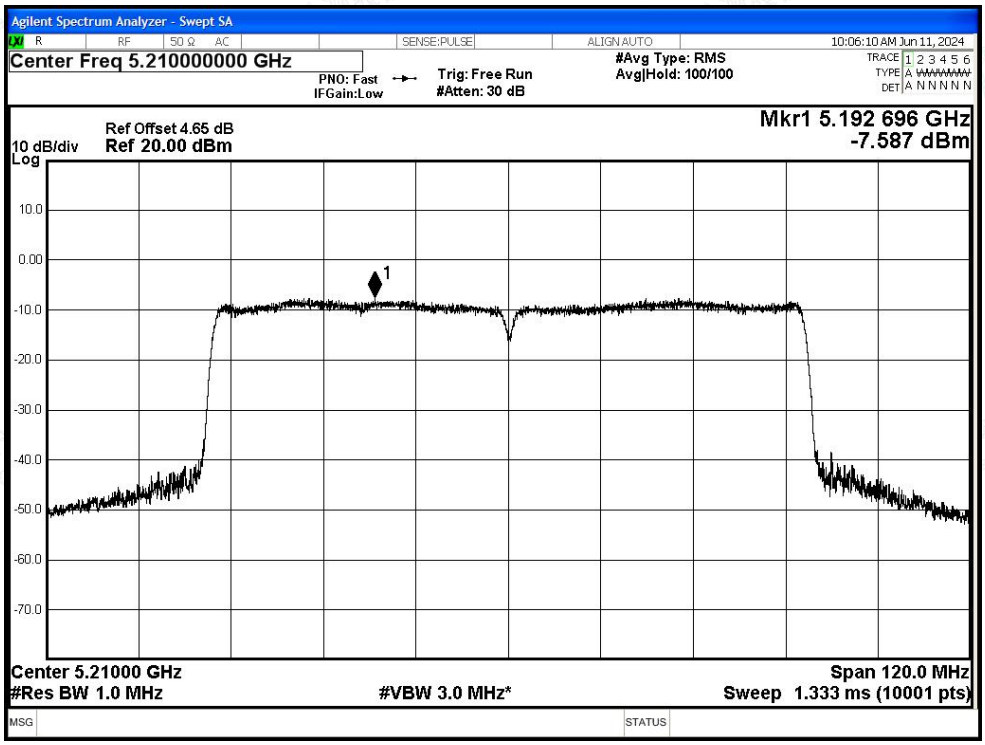

D.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5180	Ant1	4500	-49.76	2.68	-	48.15	Peak	68.2	Pass
NVNT	a	5180	Ant1	4500	-57.43	2.68	0.24	40.48	Average	54	Pass
NVNT	a	5180	Ant1	5149.6	-44.22	2.68	-	53.69	Peak	68.2	Pass
NVNT	a	5180	Ant1	5134.2	-54.47	2.68	0.24	43.44	Average	54	Pass
NVNT	a	5180	Ant1	5150	-41.85	2.68	-	56.06	Peak	68.2	Pass
NVNT	a	5180	Ant1	5150	-54.39	2.68	0.24	43.52	Average	54	Pass
NVNT	a	5240	Ant1	5350	-48.21	2.68	-	49.70	Peak	68.2	Pass
NVNT	a	5240	Ant1	5350	-57.07	2.68	0.24	40.84	Average	54	Pass
NVNT	a	5240	Ant1	5410.32	-45.83	2.68	-	52.08	Peak	68.2	Pass
NVNT	a	5240	Ant1	5373.6	-56.26	2.68	0.24	41.65	Average	54	Pass
NVNT	a	5240	Ant1	5460	-50.38	2.68	-	47.53	Peak	68.2	Pass
NVNT	a	5240	Ant1	5460	-57.58	2.68	0.24	40.33	Average	54	Pass
NVNT	n20	5180	Ant1	4500	-49.15	2.68	-	48.76	Peak	68.2	Pass
NVNT	n20	5180	Ant1	4500	-57.1	2.68	0.28	40.81	Average	54	Pass
NVNT	n20	5180	Ant1	5144.7	-39.54	2.68	-	58.37	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5149.6	-53.3	2.68	0.28	44.61	Average	54	Pass
NVNT	n20	5180	Ant1	5150	-42.19	2.68	-	55.72	Peak	68.2	Pass
NVNT	n20	5180	Ant1	5150	-53.8	2.68	0.28	44.11	Average	54	Pass
NVNT	n20	5240	Ant1	5350	-49.85	2.68	-	48.06	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5350	-57.19	2.68	0.28	40.72	Average	54	Pass
NVNT	n20	5240	Ant1	5418	-46.4	2.68	-	51.51	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5380.08	-56.31	2.68	0.28	41.60	Average	54	Pass
NVNT	n20	5240	Ant1	5460	-49.73	2.68	-	48.18	Peak	68.2	Pass
NVNT	n20	5240	Ant1	5460	-56.96	2.68	0.28	40.95	Average	54	Pass
NVNT	n40	5190	Ant1	4500	-48.03	2.68	-	49.88	Peak	68.2	Pass
NVNT	n40	5190	Ant1	4500	-57.04	2.68	0.44	40.87	Average	54	Pass
NVNT	n40	5190	Ant1	5148.24	-43.3	2.68	-	54.61	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5148.97	-53.66	2.68	0.44	44.25	Average	54	Pass
NVNT	n40	5190	Ant1	5150	-44.85	2.68	-	53.06	Peak	68.2	Pass
NVNT	n40	5190	Ant1	5150	-53.72	2.68	0.44	44.19	Average	54	Pass
NVNT	n40	5230	Ant1	5350	-48.74	2.68	-	49.17	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5350	-57.19	2.68	0.44	40.72	Average	54	Pass
NVNT	n40	5230	Ant1	5426.25	-46.5	2.68	-	51.41	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5368.74	-56.03	2.68	0.44	41.88	Average	54	Pass
NVNT	n40	5230	Ant1	5460	-48.87	2.68	-	49.04	Peak	68.2	Pass
NVNT	n40	5230	Ant1	5460	-56.98	2.68	0.44	40.93	Average	54	Pass

NVNT	ac20	5180	Ant1	4500	-47.37	2.68	-	50.54	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	4500	-57.95	2.68	0.28	39.96	Average	54	Pass
NVNT	ac20	5180	Ant1	5074.7	-44.45	2.68	-	53.46	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5148.9	-54.05	2.68	0.28	43.86	Average	54	Pass
NVNT	ac20	5180	Ant1	5150	-44.12	2.68	-	53.79	Peak	68.2	Pass
NVNT	ac20	5180	Ant1	5150	-54.33	2.68	0.28	43.58	Average	54	Pass
NVNT	ac20	5240	Ant1	5350	-48.1	2.68	-	49.81	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5350	-57.26	2.68	0.28	40.65	Average	54	Pass
NVNT	ac20	5240	Ant1	5420.88	-45.38	2.68	-	52.53	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5371.2	-56.21	2.68	0.28	41.70	Average	54	Pass
NVNT	ac20	5240	Ant1	5460	-49.06	2.68	-	48.85	Peak	68.2	Pass
NVNT	ac20	5240	Ant1	5460	-57.14	2.68	0.28	40.77	Average	54	Pass
NVNT	ac40	5190	Ant1	4500	-49.57	2.68	-	48.34	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	4500	-56.57	2.68	0.44	41.34	Average	54	Pass
NVNT	ac40	5190	Ant1	5148.24	-42.78	2.68	-	55.13	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5148.97	-53.74	2.68	0.44	44.17	Average	54	Pass
NVNT	ac40	5190	Ant1	5150	-43.55	2.68	-	54.36	Peak	68.2	Pass
NVNT	ac40	5190	Ant1	5150	-53.77	2.68	0.44	44.14	Average	54	Pass
NVNT	ac40	5230	Ant1	5350	-48.62	2.68	-	49.29	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5350	-56.32	2.68	0.44	41.59	Average	54	Pass
NVNT	ac40	5230	Ant1	5375.49	-45.55	2.68	-	52.36	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5369.01	-56.12	2.68	0.44	41.79	Average	54	Pass
NVNT	ac40	5230	Ant1	5460	-48.9	2.68	-	49.01	Peak	68.2	Pass
NVNT	ac40	5230	Ant1	5460	-56.96	2.68	0.44	40.95	Average	54	Pass
NVNT	ac80	5210	Ant1	5350	-46.28	2.68	-	51.63	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5350	-56.09	2.68	0.52	41.82	Average	54	Pass
NVNT	ac80	5210	Ant1	5400.93	-45.11	2.68	-	52.80	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5354.4	-55.52	2.68	0.52	42.39	Average	54	Pass
NVNT	ac80	5210	Ant1	5460	-47.95	2.68	-	49.96	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5460	-56.47	2.68	0.52	41.44	Average	54	Pass
NVNT	ac80	5210	Ant1	4500	-48.98	2.68	-	48.93	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	4500	-57.41	2.68	0.52	40.50	Average	54	Pass
NVNT	ac80	5210	Ant1	5146.22	-43.51	2.68	-	54.40	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5149.38	-53.56	2.68	0.52	44.35	Average	54	Pass
NVNT	ac80	5210	Ant1	5150	-44.8	2.68	-	53.11	Peak	68.2	Pass
NVNT	ac80	5210	Ant1	5150	-53.8	2.68	0.52	44.11	Average	54	Pass

Test Graphs

Restrict Band NVNT a 5180MHz Ant1 Peak

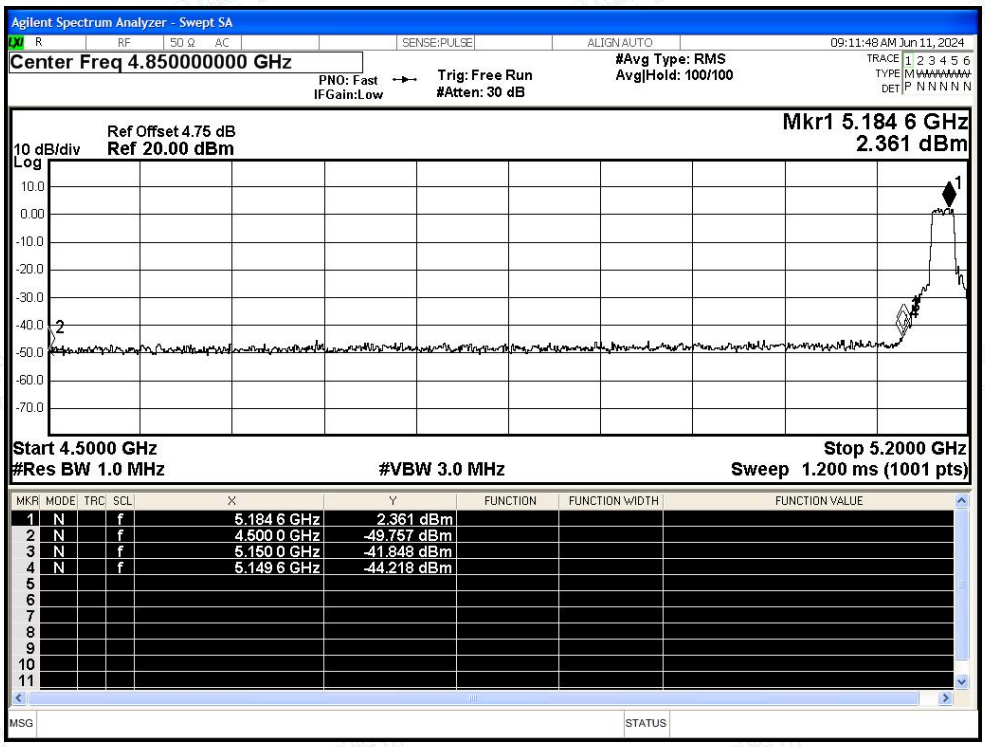

Restrict Band NVNT a 5180MHz Ant1 Average

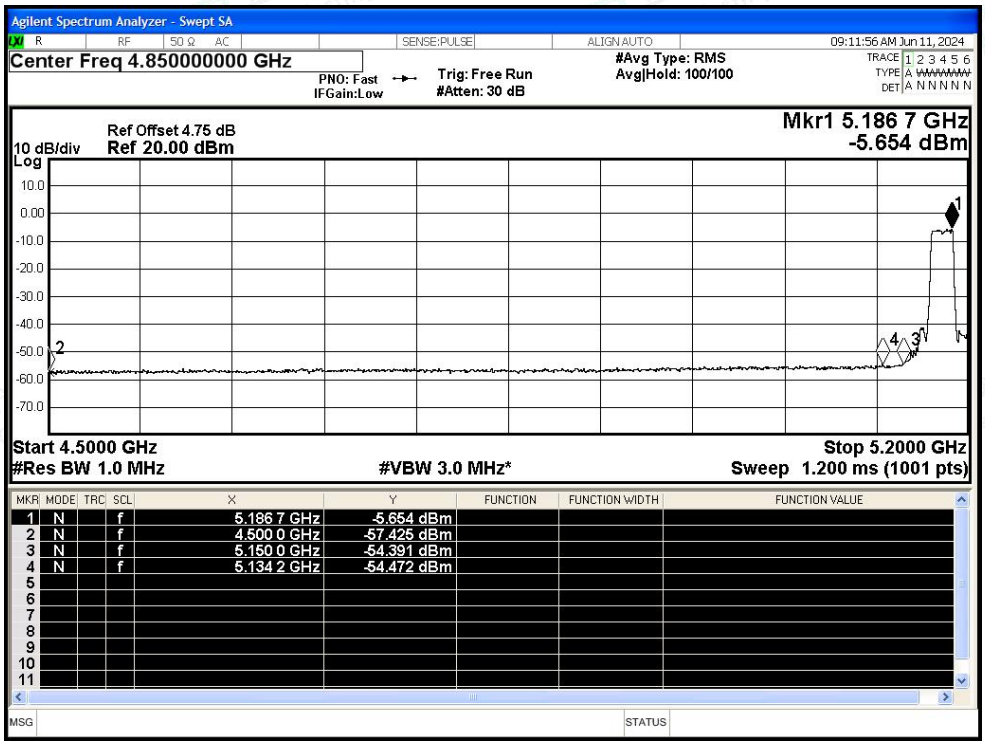

Restrict Band NVNT a 5240MHz Ant1 Peak

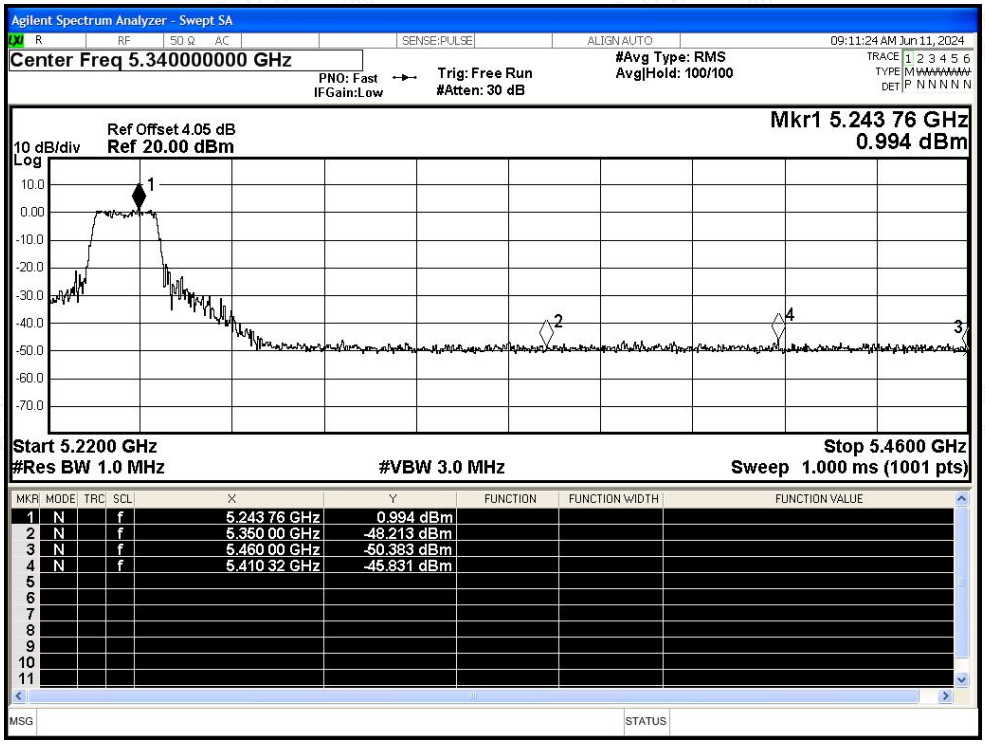

Restrict Band NVNT a 5240MHz Ant1 Average

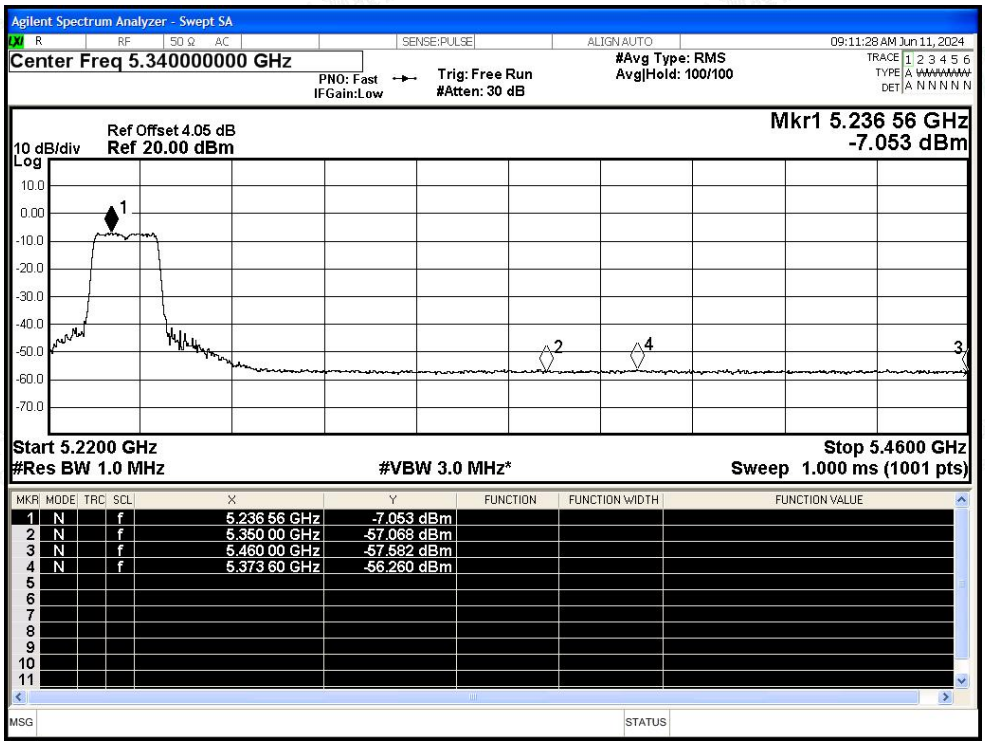

Restrict Band NVNT n20 5180MHz Ant1 Peak

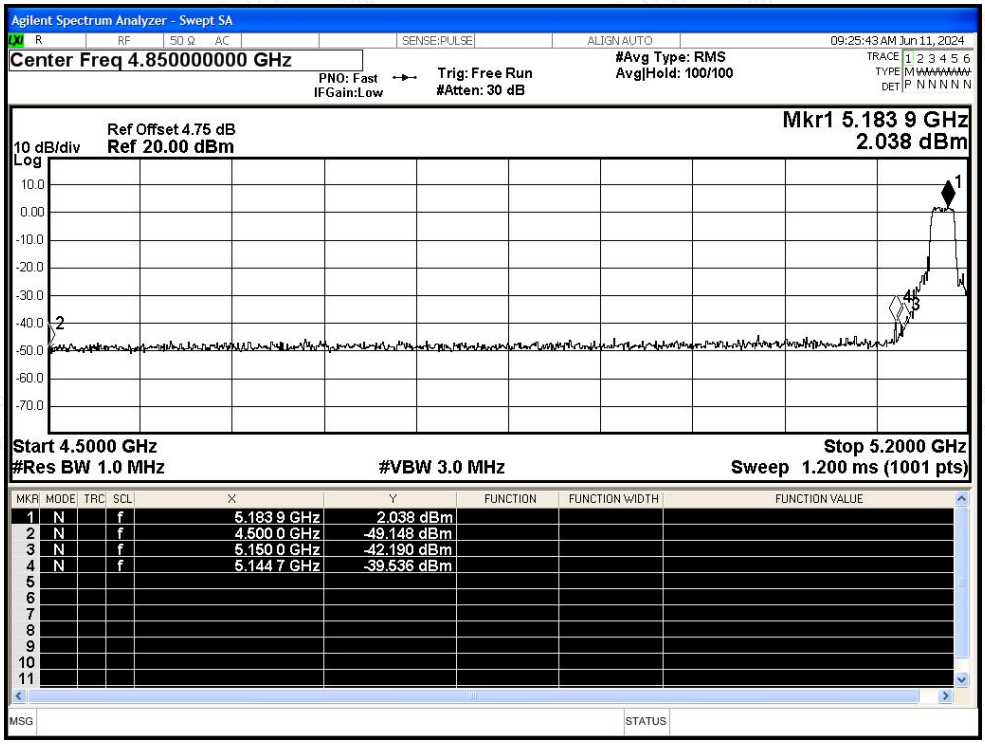

Restrict Band NVNT n20 5180MHz Ant1 Average

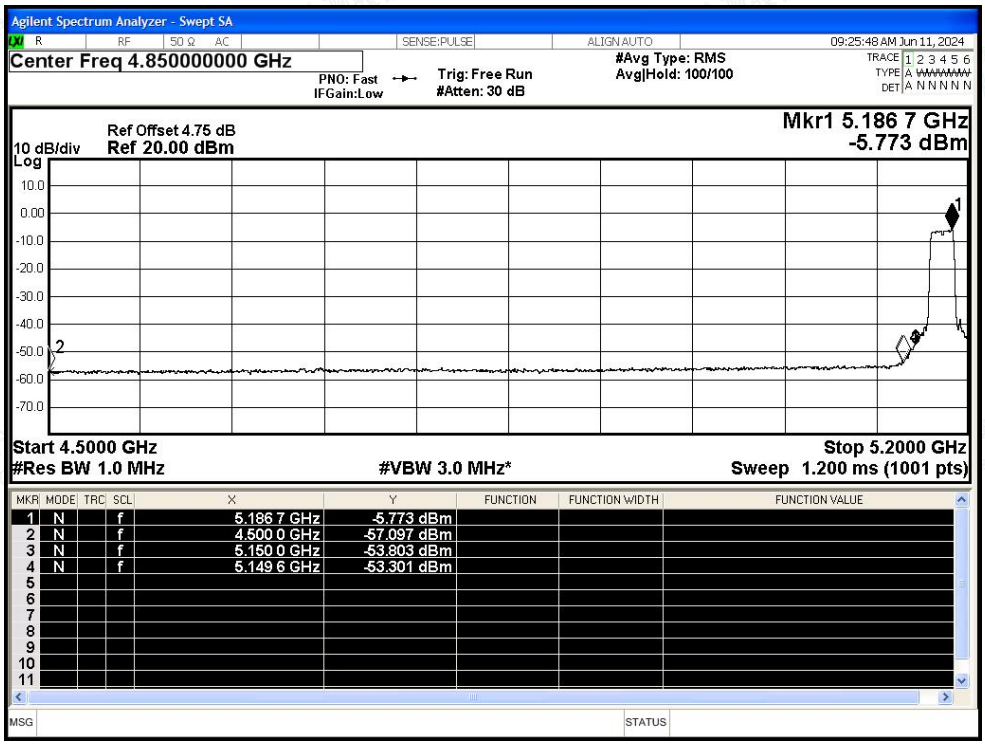

Restrict Band NVNT n20 5240MHz Ant1 Peak

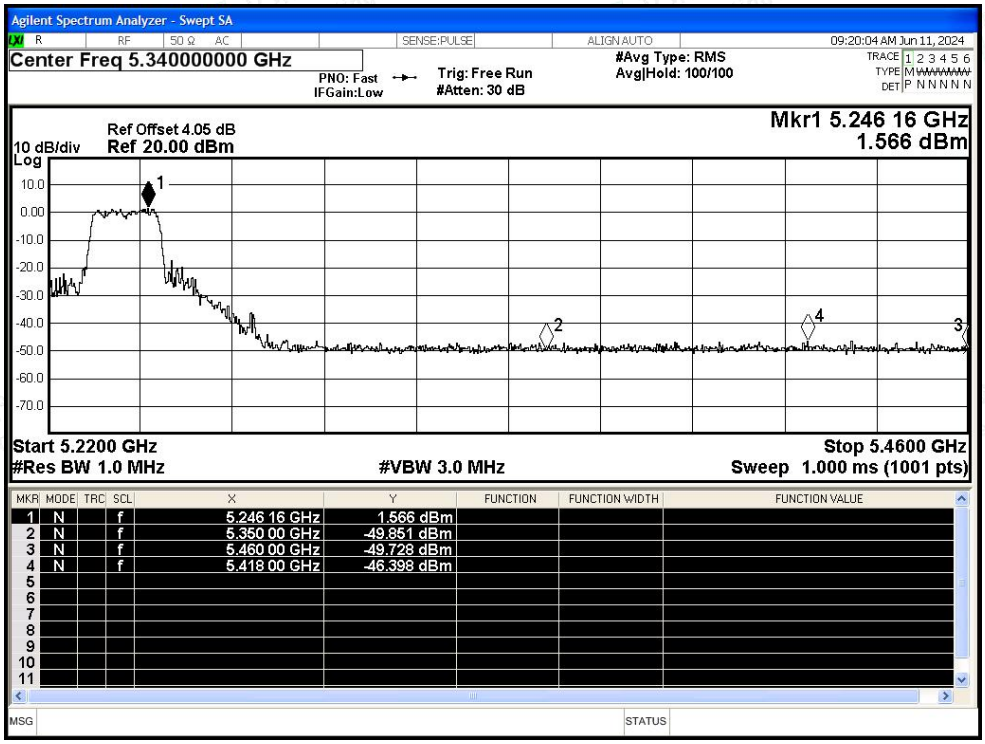

Restrict Band NVNT n20 5240MHz Ant1 Average

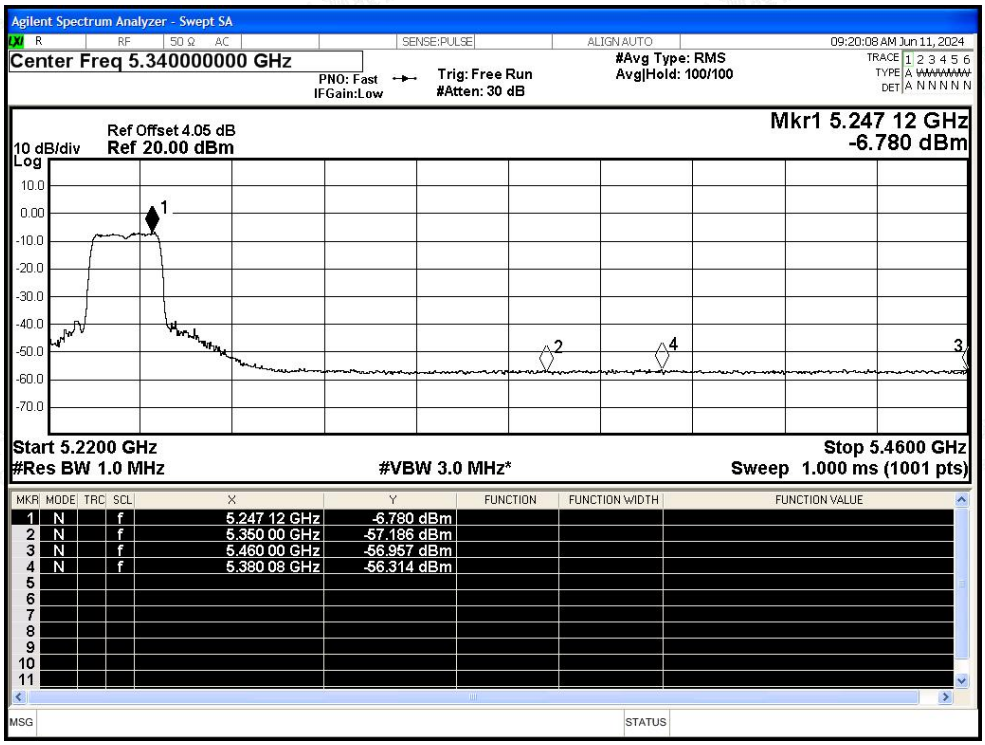

Restrict Band NVNT n40 5190MHz Ant1 Peak

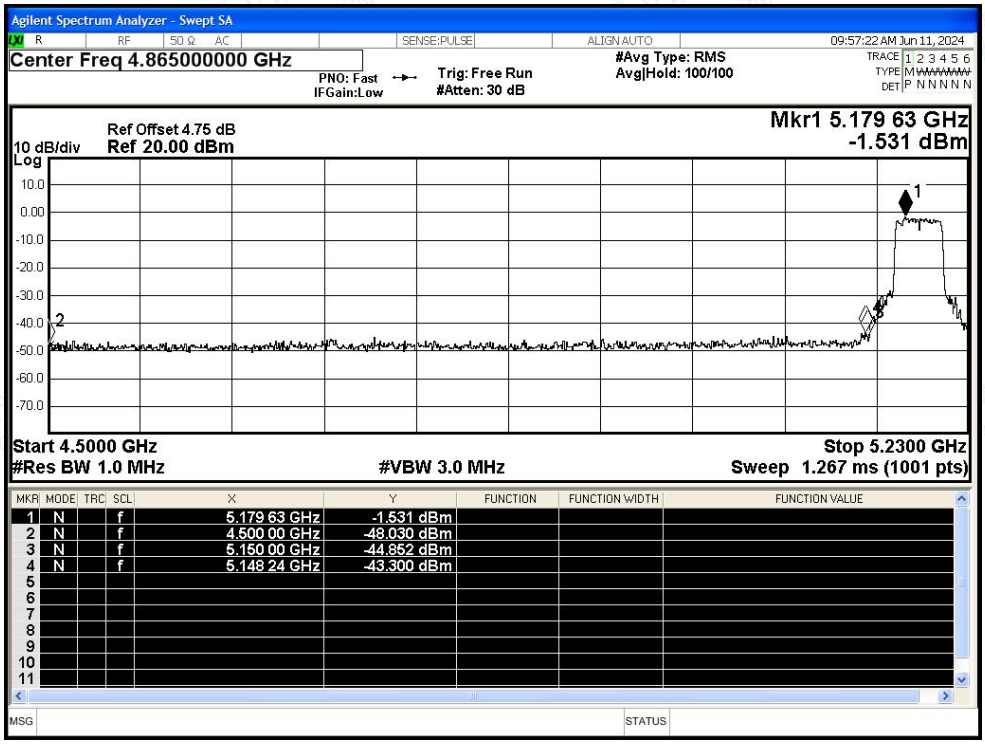

Restrict Band NVNT n40 5190MHz Ant1 Average

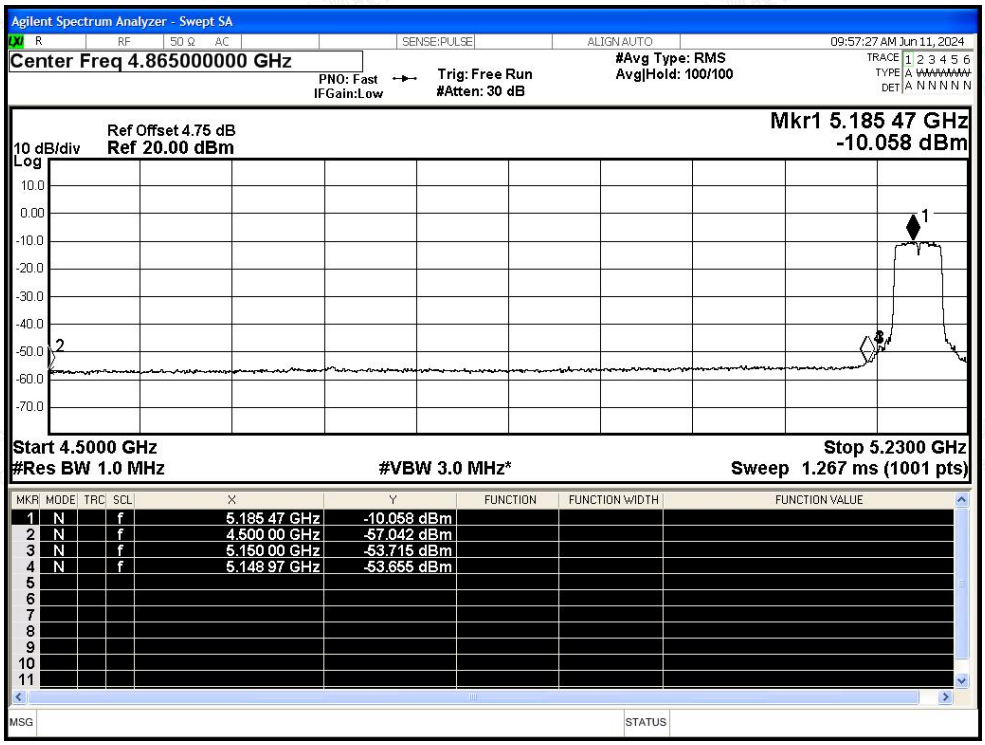

Restrict Band NVNT n40 5230MHz Ant1 Peak

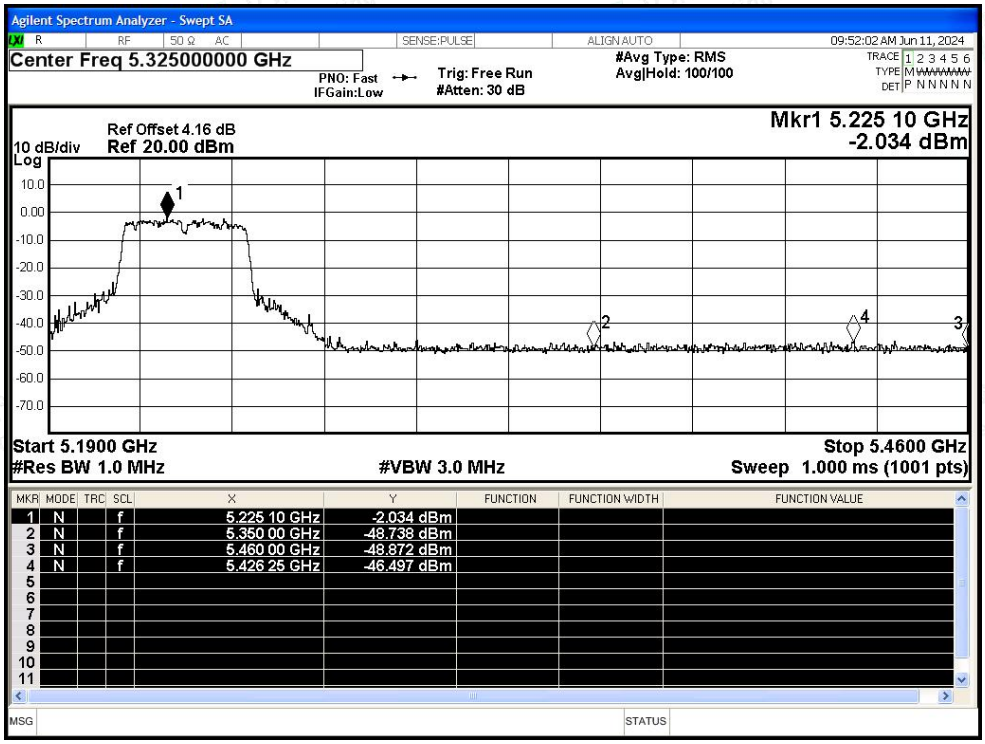

Restrict Band NVNT n40 5230MHz Ant1 Average

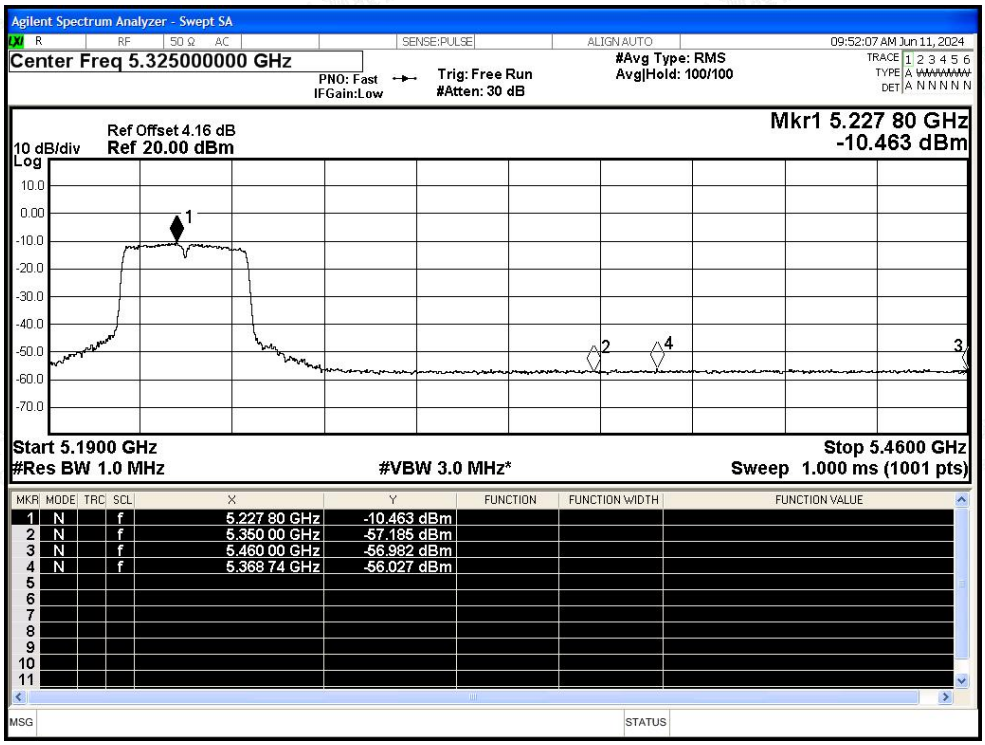

Restrict Band NVNT ac20 5180MHz Ant1 Peak

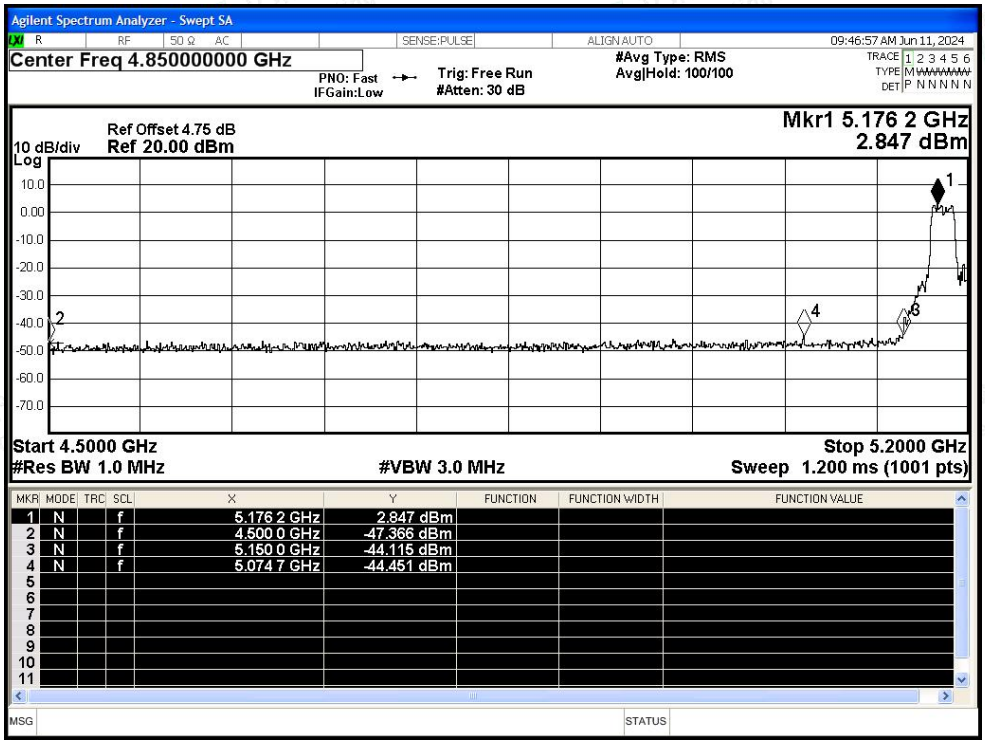

Restrict Band NVNT ac20 5180MHz Ant1 Average

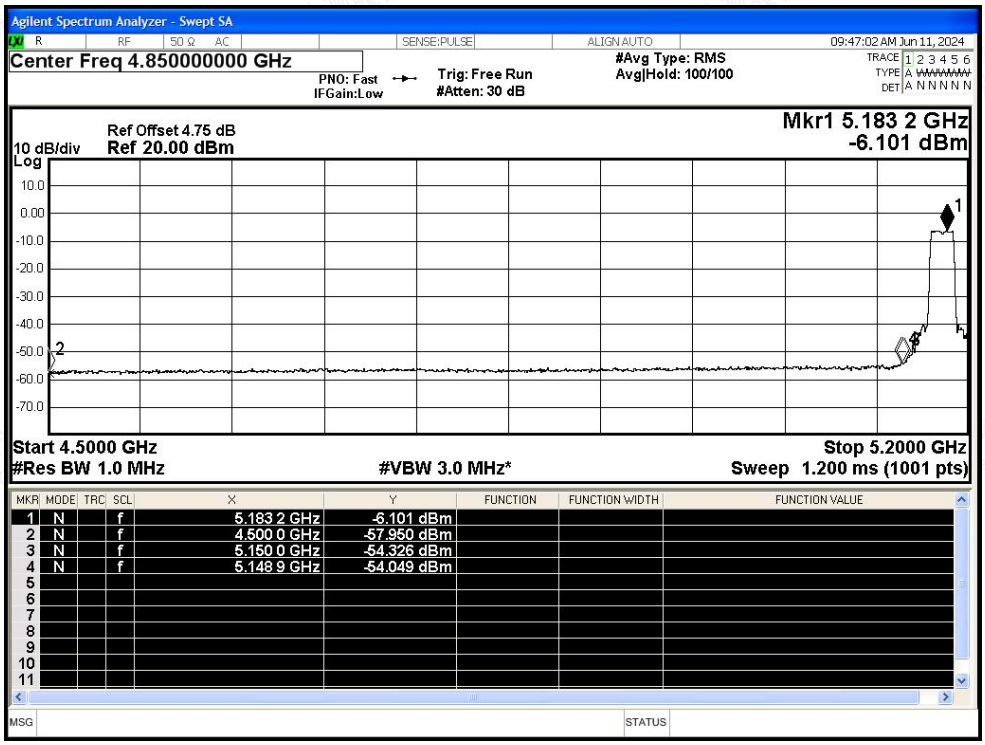

Restrict Band NVNT ac20 5240MHz Ant1 Peak

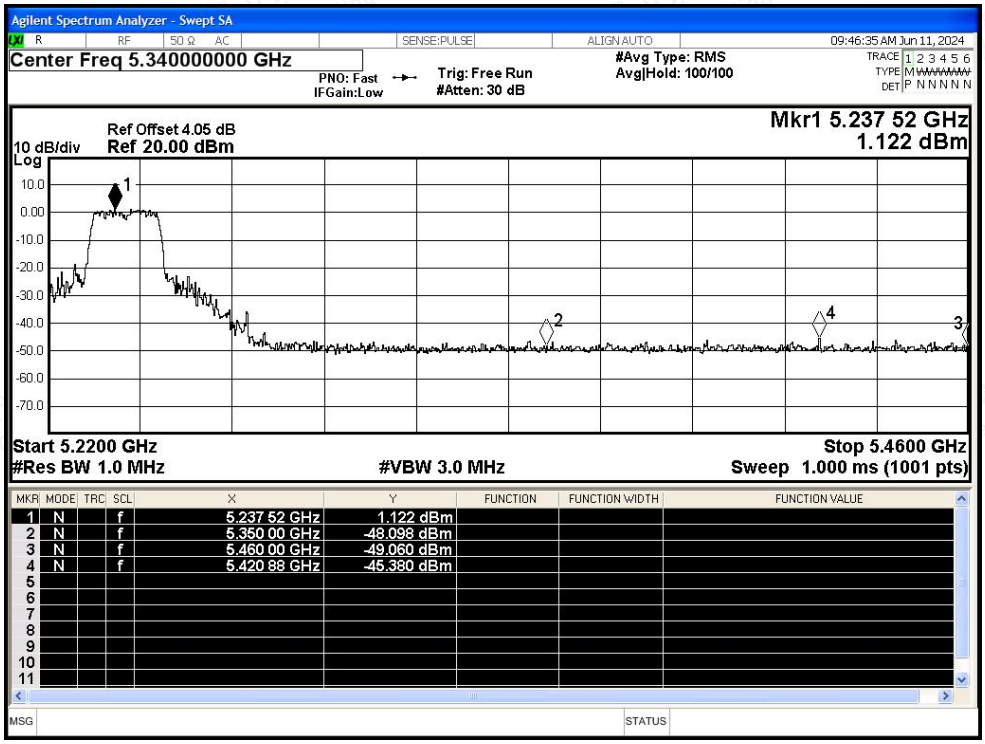
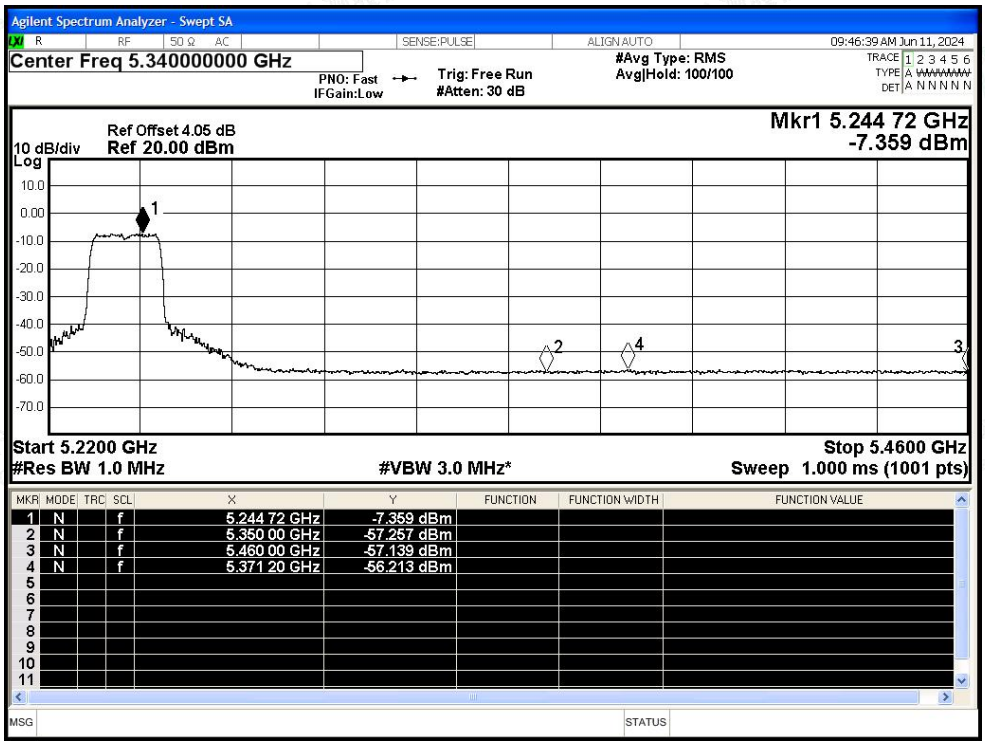
Restrict Band NVNT ac20 5240MHz Ant1 Average