Appendix F

RF Test Data for 5.5GWIFI(Conducted Measurement)

Product Name: Tablet PC

Test Model: Neotab

Environmental Conditions

Temperature:	23.9° C
Relative Humidity:	52.5%
ATM Pressure:	100.0 kPa
Test Engineer:	Paddi Chen
Supervised by:	Nick Peng

F.1 -26dB Bandwidth

Condition	Mode	Frequency (MHz)	Antenna	-26 dB Bandwidth (MHz)	Limit -26 dB Bandwidth (MHz)	Verdict
NVNT	a	5500	Ant1	24.724	---	Pass
NVNT	a	5580	Ant1	27.831	---	Pass
NVNT	a	5700	Ant1	29.173	---	Pass
NVNT	n20	5500	Ant1	28.403	---	Pass
NVNT	n20	5580	Ant1	27.806	---	Pass
NVNT	n20	5700	Ant1	27.581	---	Pass
NVNT	n40	5510	Ant1	43.362	---	Pass
NVNT	n40	5550	Ant1	39.335	---	Pass
NVNT	n40	5670	Ant1	40.261	---	Pass
NVNT	ac20	5500	Ant1	29.387	---	Pass
NVNT	ac20	5580	Ant1	27.758	---	Pass
NVNT	ac20	5700	Ant1	28.305	---	Pass
NVNT	ac40	5510	Ant1	43.91	---	Pass
NVNT	ac40	5550	Ant1	43.064	---	Pass
NVNT	ac40	5670	Ant1	48.082	---	Pass
NVNT	ac80	5530	Ant1	82.292	---	Pass
NVNT	ac80	5610	Ant1	78.905	---	Pass

Test Graphs

-26dB Bandwidth NVNT a 5500MHz Ant1

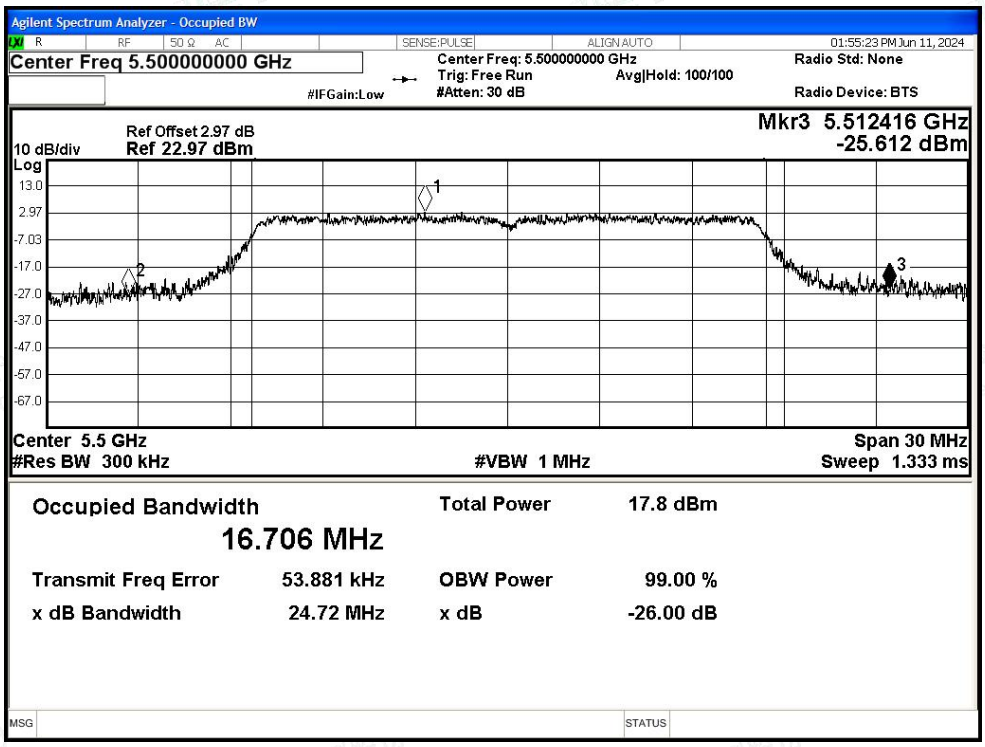

-26dB Bandwidth NVNT a 5580MHz Ant1

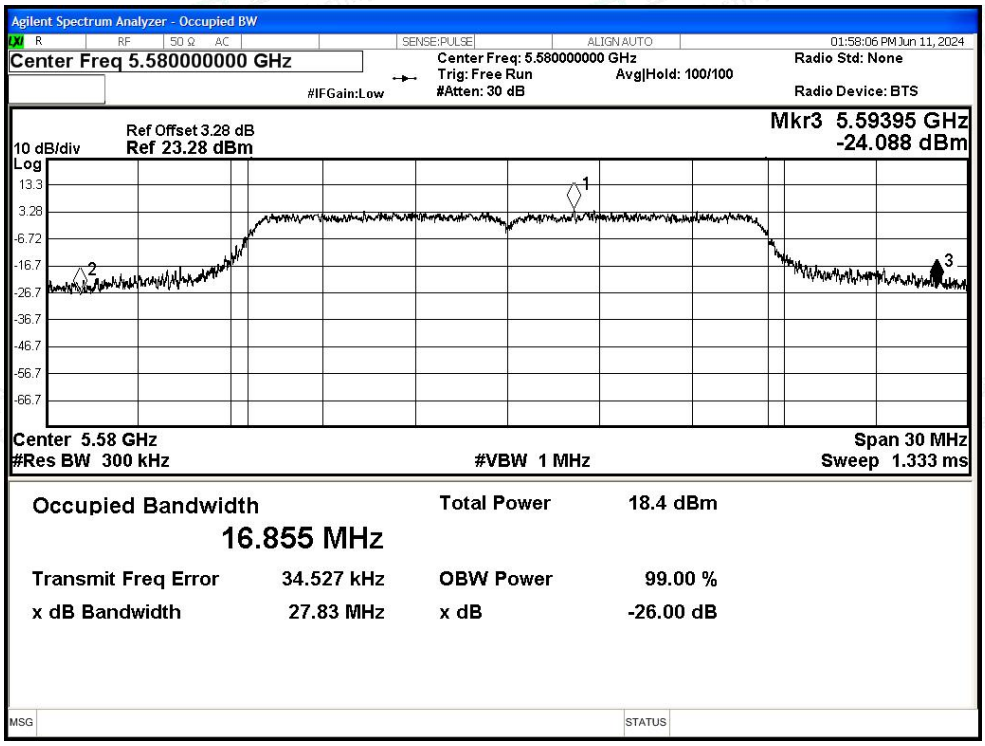

-26dB Bandwidth NVNT a 5700MHz Ant1

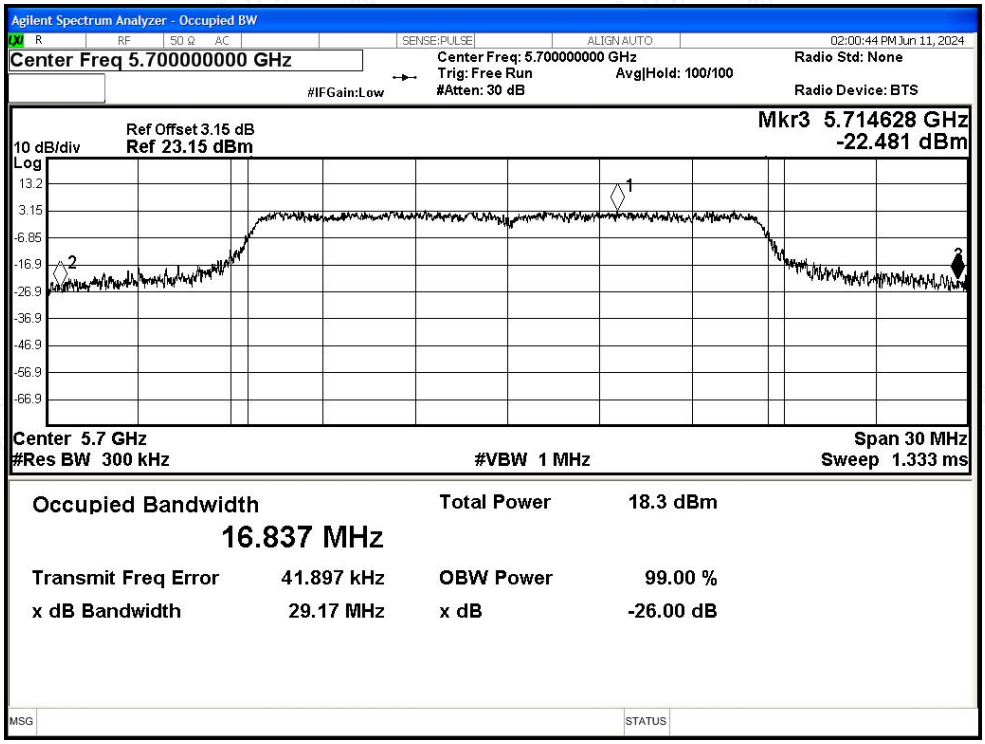

-26dB Bandwidth NVNT n20 5500MHz Ant1

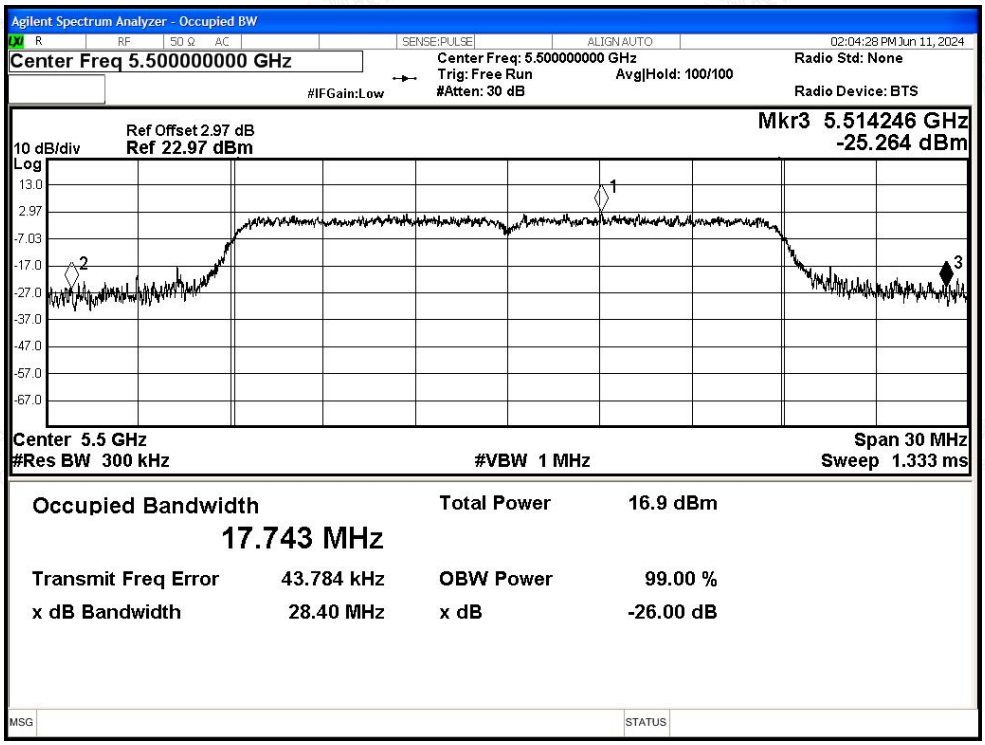

-26dB Bandwidth NVNT n20 5580MHz Ant1

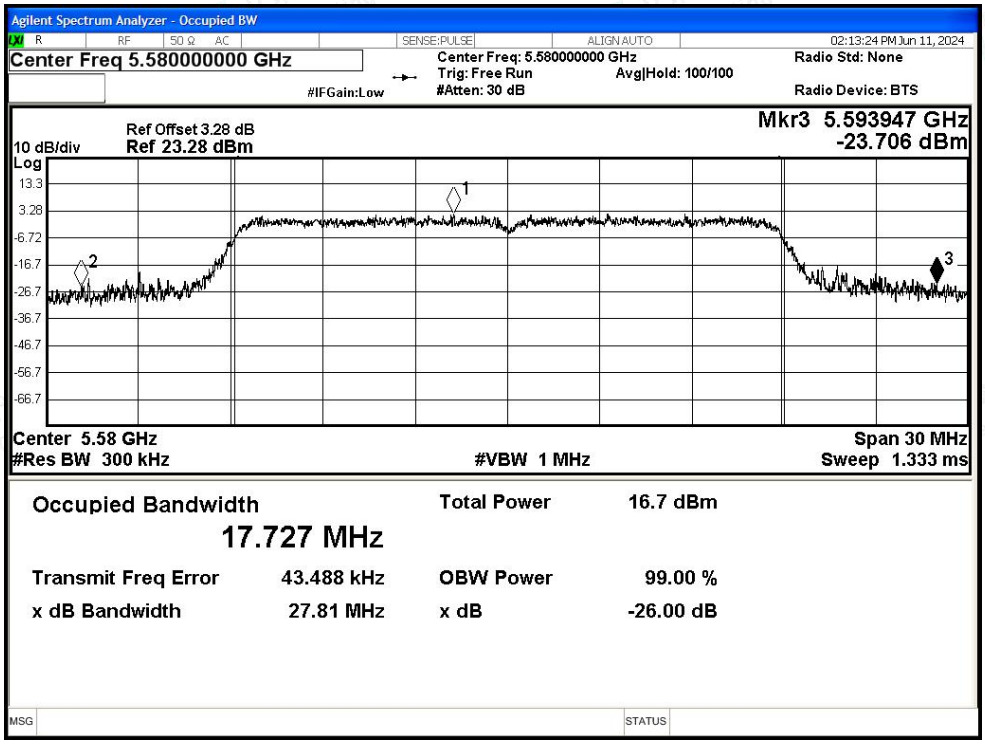

-26dB Bandwidth NVNT n20 5700MHz Ant1

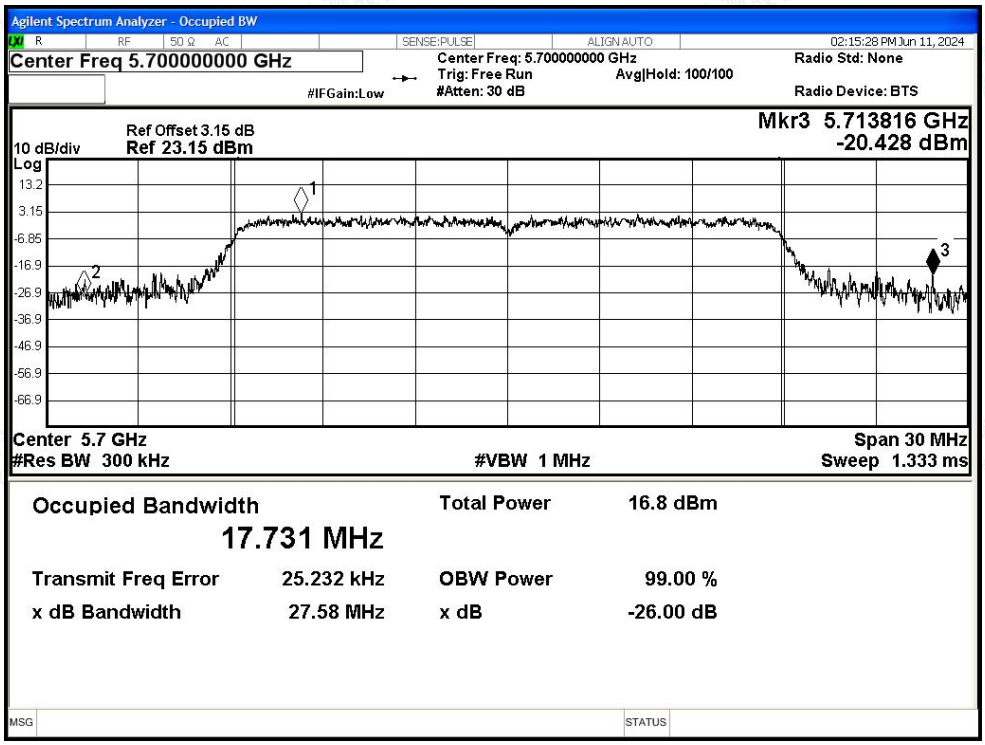

-26dB Bandwidth NVNT n40 5510MHz Ant1

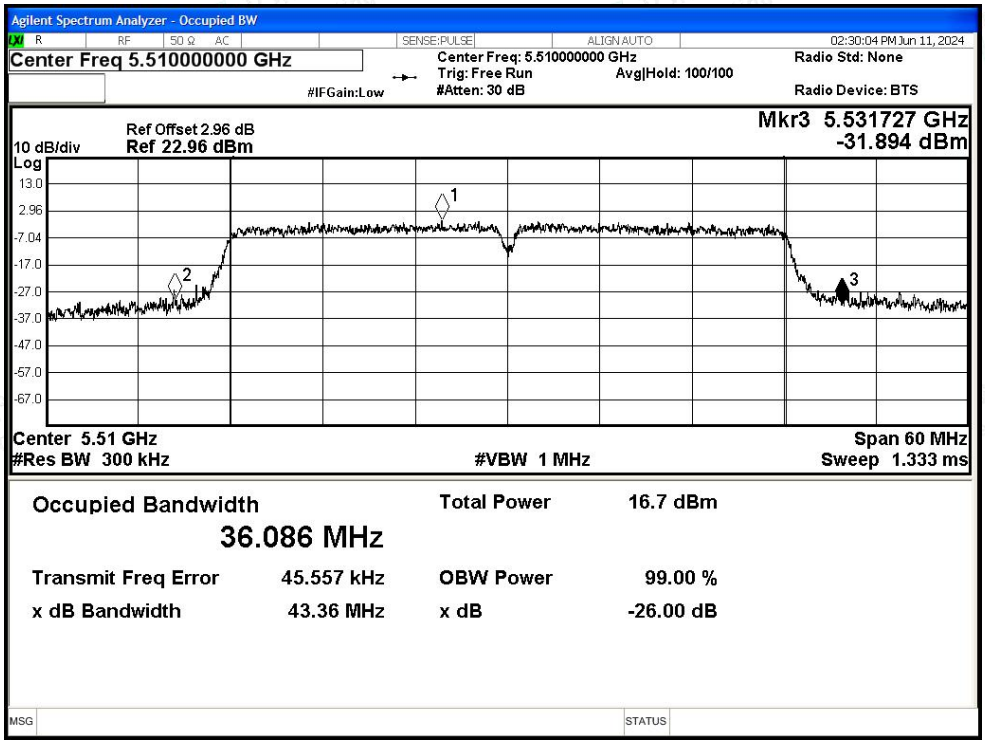

-26dB Bandwidth NVNT n40 5550MHz Ant1

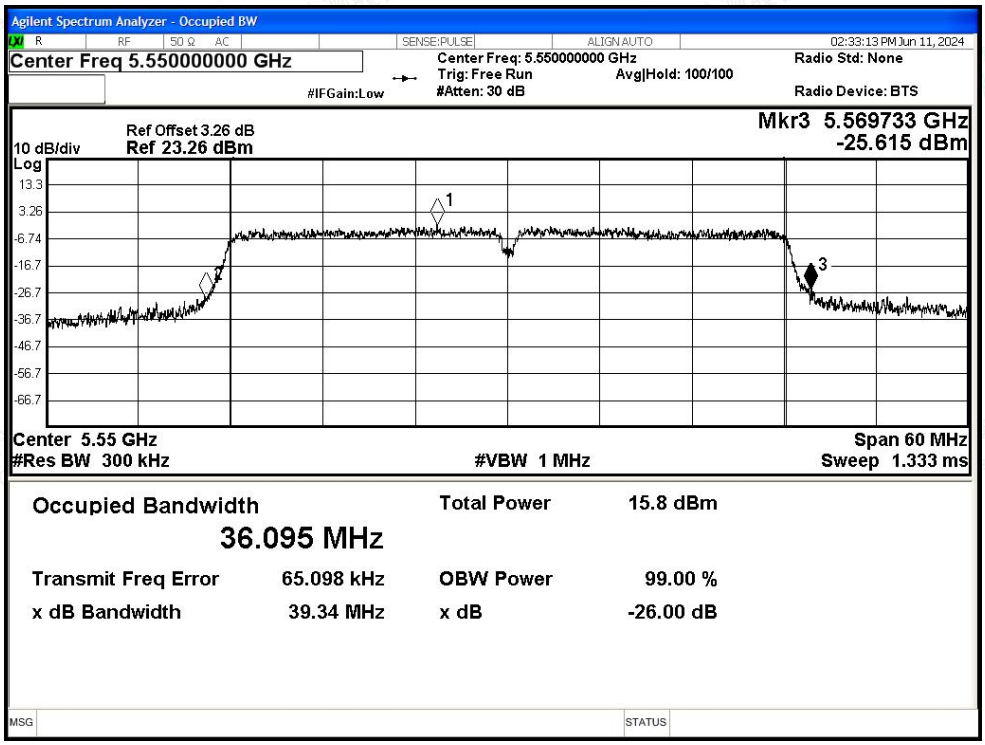

-26dB Bandwidth NVNT n40 5670MHz Ant1

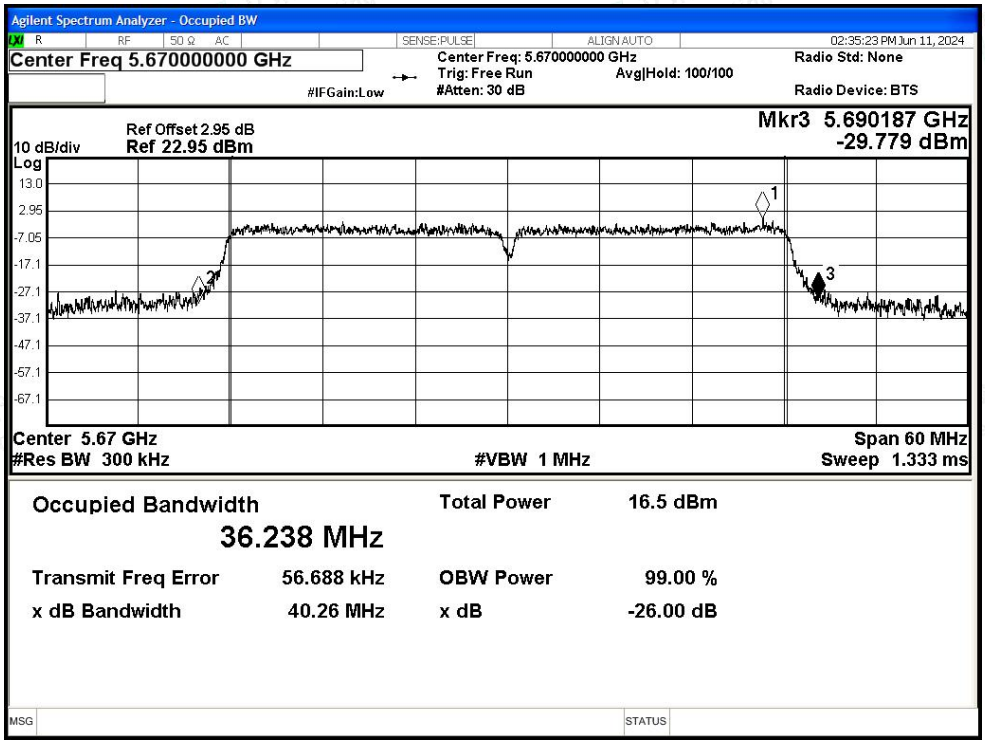

-26dB Bandwidth NVNT ac20 5500MHz Ant1

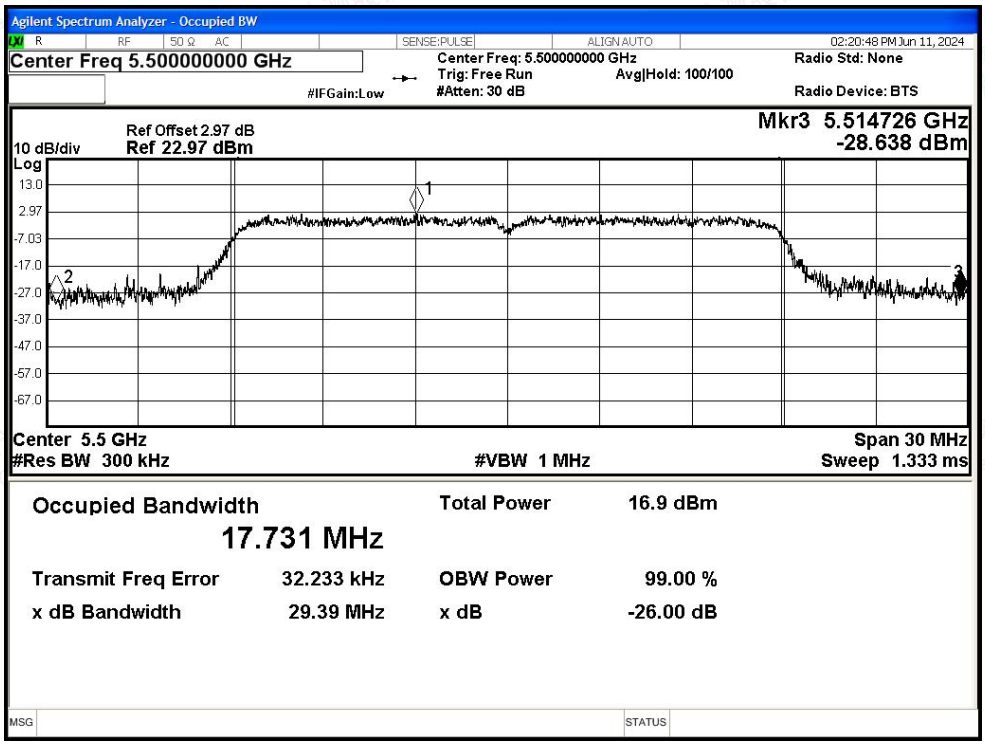

-26dB Bandwidth NVNT ac20 5580MHz Ant1

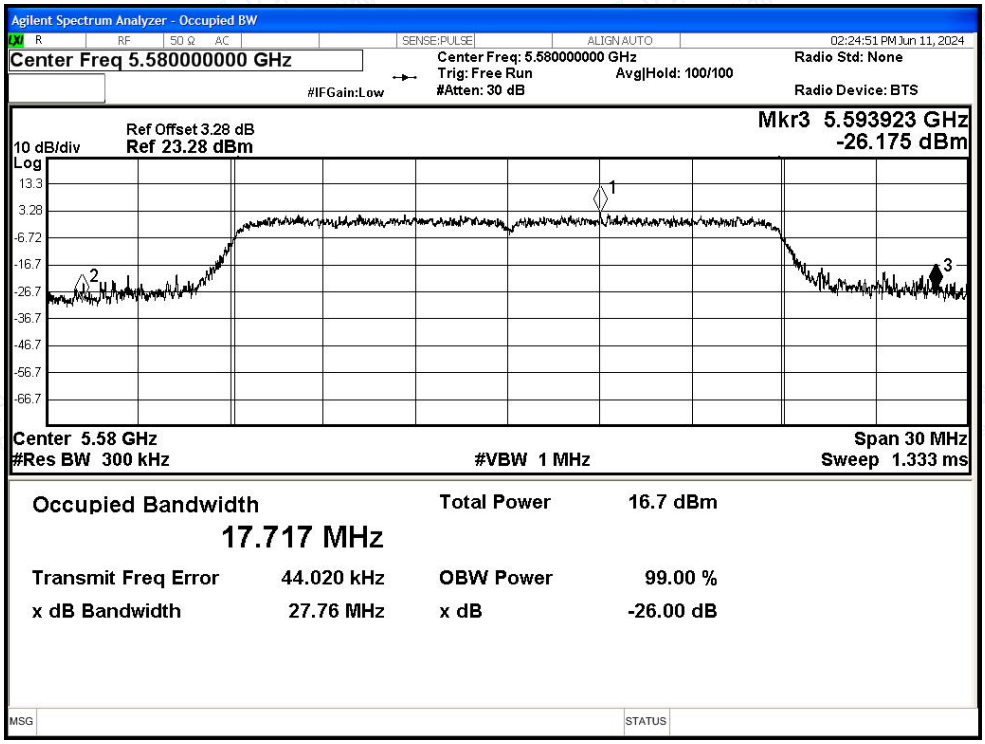

-26dB Bandwidth NVNT ac20 5700MHz Ant1

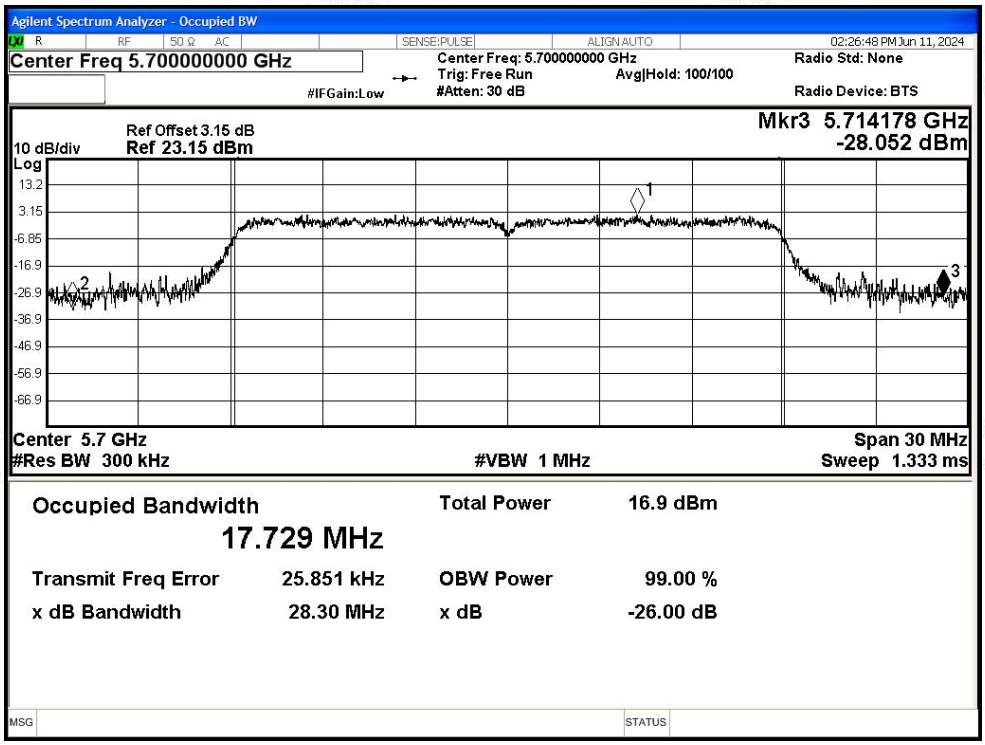

-26dB Bandwidth NVNT ac40 5510MHz Ant1

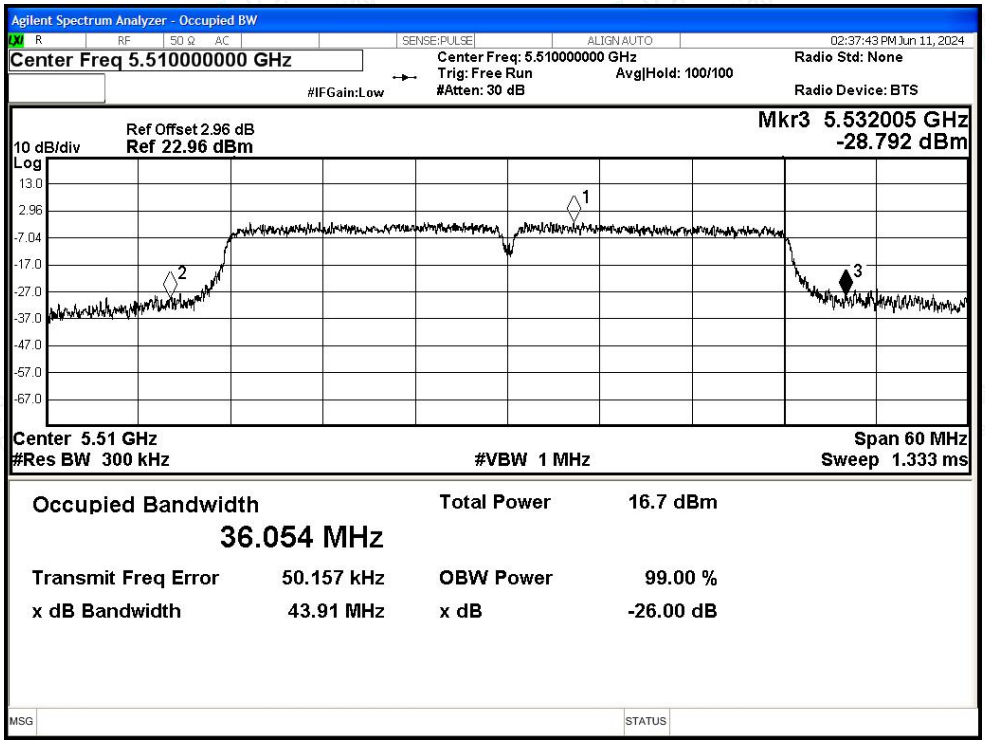

-26dB Bandwidth NVNT ac40 5550MHz Ant1

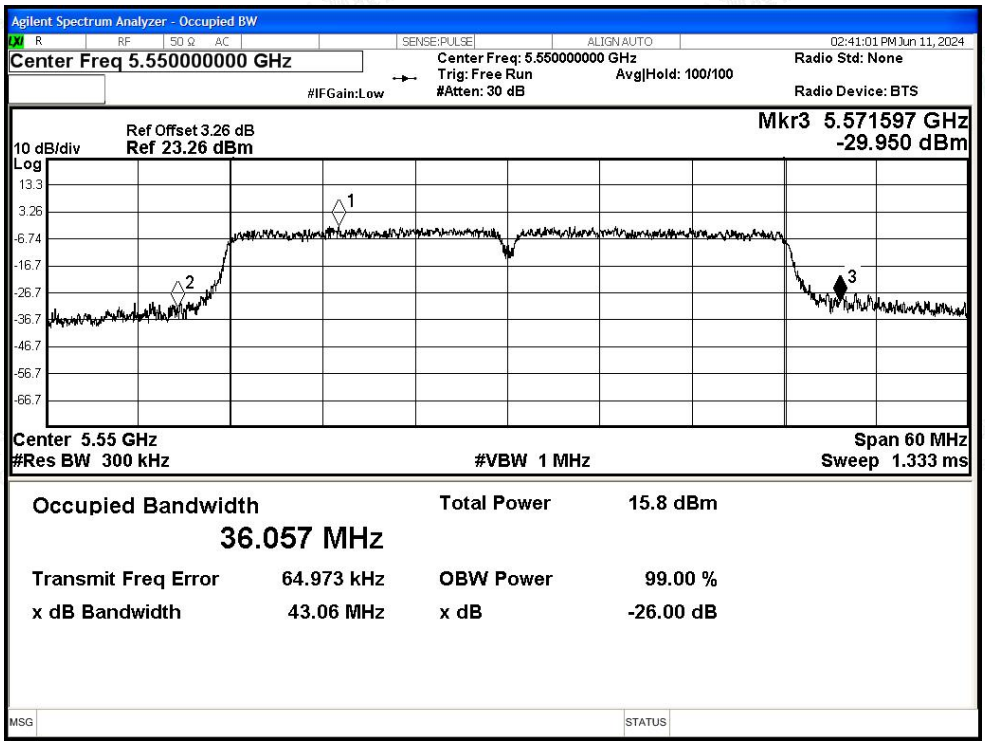

-26dB Bandwidth NVNT ac40 5670MHz Ant1

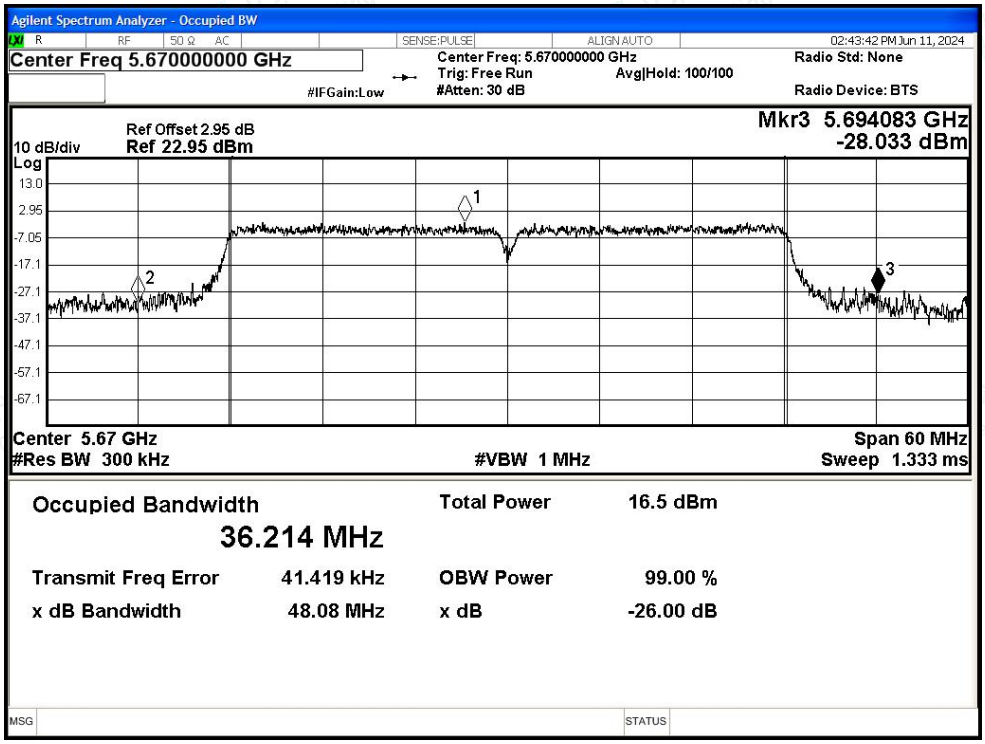

-26dB Bandwidth NVNT ac80 5530MHz Ant1

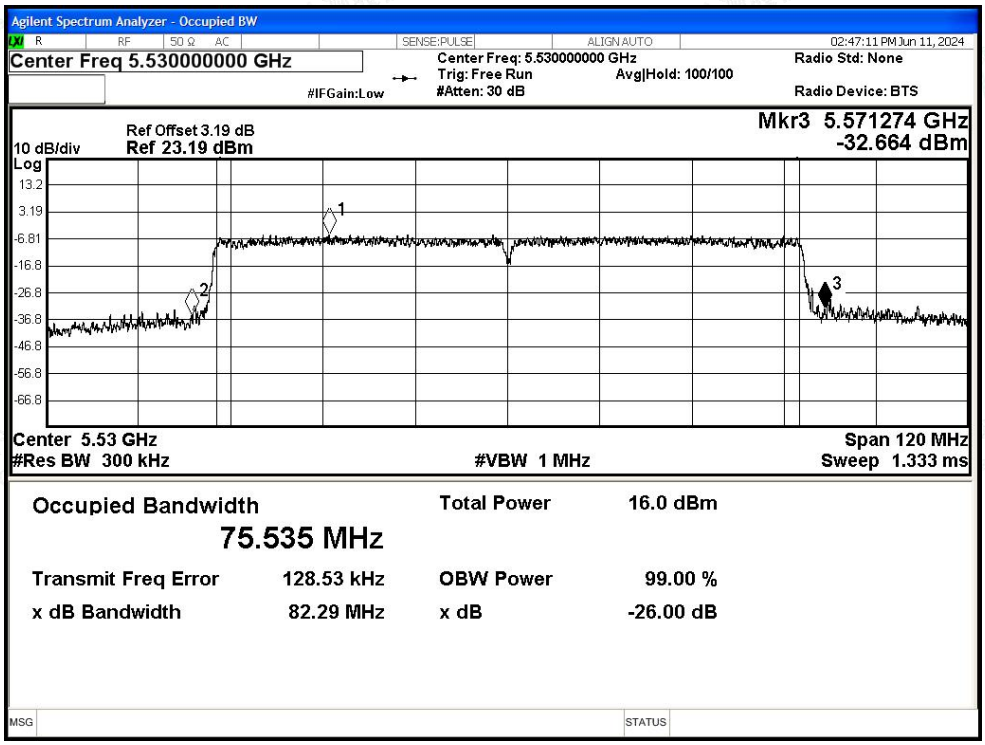

-26dB Bandwidth NVNT ac80 5610MHz Ant1

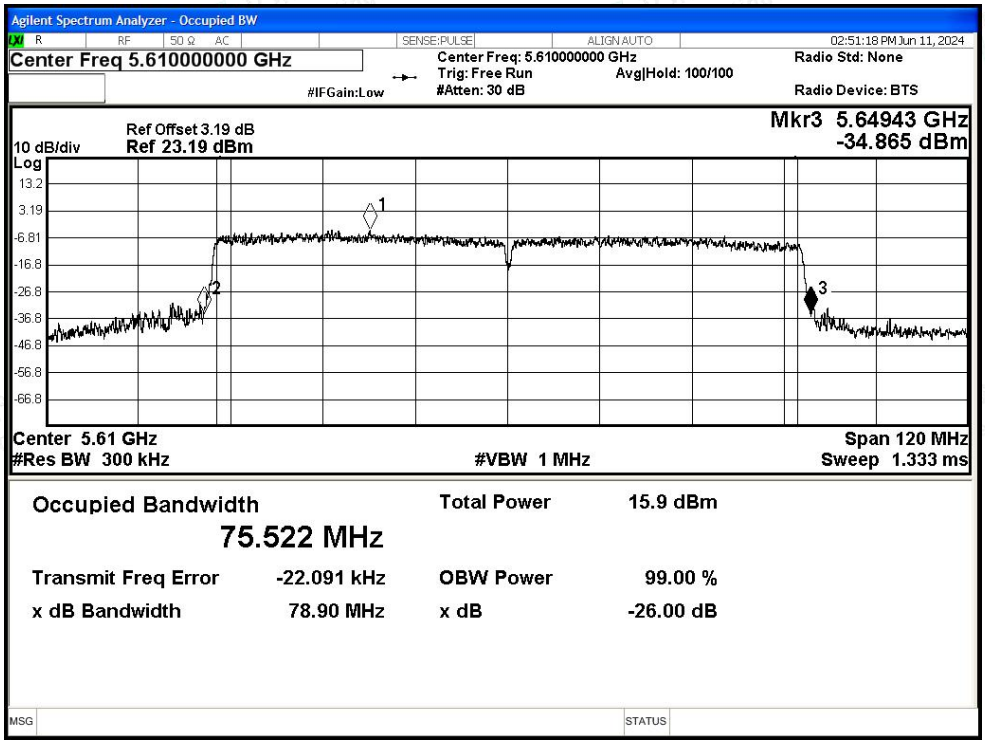

F.2 Maximum Conducted Output Power

Condition	Mode	Frequency (MHz)	Antenna	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	a	5500	Ant1	12.2	0.24	12.44	24	Pass
NVNT	a	5580	Ant1	12.75	0.24	12.99	24	Pass
NVNT	a	5700	Ant1	12.58	0.24	12.82	24	Pass
NVNT	n20	5500	Ant1	11.31	0.28	11.59	24	Pass
NVNT	n20	5580	Ant1	11.09	0.28	11.37	24	Pass
NVNT	n20	5700	Ant1	11.13	0.28	11.41	24	Pass
NVNT	n40	5510	Ant1	10.79	0.44	11.23	24	Pass
NVNT	n40	5550	Ant1	10.92	0.45	11.37	24	Pass
NVNT	n40	5670	Ant1	10.57	0.45	11.02	24	Pass
NVNT	ac20	5500	Ant1	11.32	0.28	11.60	24	Pass
NVNT	ac20	5580	Ant1	11.07	0.28	11.35	24	Pass
NVNT	ac20	5700	Ant1	11.2	0.28	11.48	24	Pass
NVNT	ac40	5510	Ant1	10.78	0.45	11.23	24	Pass
NVNT	ac40	5550	Ant1	10.84	0.45	11.29	24	Pass
NVNT	ac40	5670	Ant1	10.57	0.44	11.01	24	Pass
NVNT	ac80	5530	Ant1	9.34	0.52	9.86	24	Pass
NVNT	ac80	5610	Ant1	9.56	0.53	10.09	24	Pass

F.3 Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	Antenna	Conducted PSD(dBm/MHz)	Duty Factor (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Verdict
NVNT	a	5500	Ant1	1.47	0.24	1.71	11	Pass
NVNT	a	5580	Ant1	2.14	0.24	2.38	11	Pass
NVNT	a	5700	Ant1	1.89	0.24	2.13	11	Pass
NVNT	n20	5500	Ant1	0.55	0.28	0.83	11	Pass
NVNT	n20	5580	Ant1	0.12	0.28	0.4	11	Pass
NVNT	n20	5700	Ant1	0.34	0.28	0.62	11	Pass
NVNT	n40	5510	Ant1	-2.7	0.44	-2.26	11	Pass
NVNT	n40	5550	Ant1	-3.6	0.45	-3.15	11	Pass
NVNT	n40	5670	Ant1	-3.19	0.45	-2.74	11	Pass
NVNT	ac20	5500	Ant1	0.55	0.28	0.83	11	Pass
NVNT	ac20	5580	Ant1	0.29	0.28	0.57	11	Pass
NVNT	ac20	5700	Ant1	0.59	0.28	0.87	11	Pass
NVNT	ac40	5510	Ant1	-2.89	0.45	-2.44	11	Pass
NVNT	ac40	5550	Ant1	-3.77	0.45	-3.32	11	Pass
NVNT	ac40	5670	Ant1	-2.96	0.44	-2.52	11	Pass
NVNT	ac80	5530	Ant1	-7.11	0.52	-6.59	11	Pass
NVNT	ac80	5610	Ant1	-5.95	0.53	-5.42	11	Pass

Test Graphs

PSD NVNT a 5500MHz Ant1

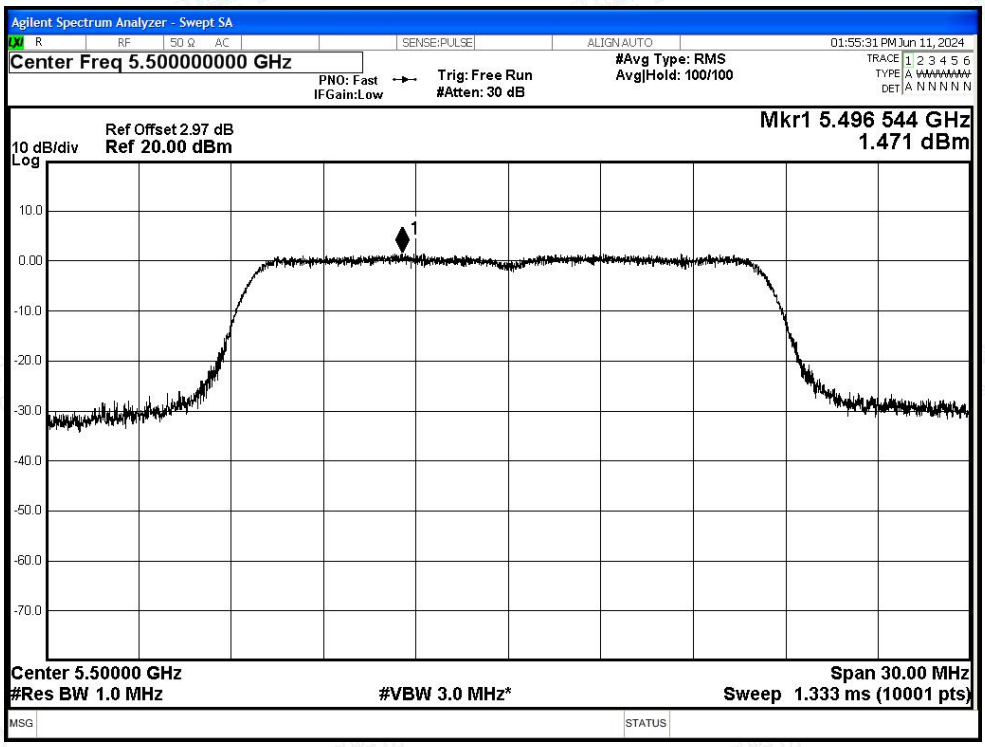

PSD NVNT a 5580MHz Ant1

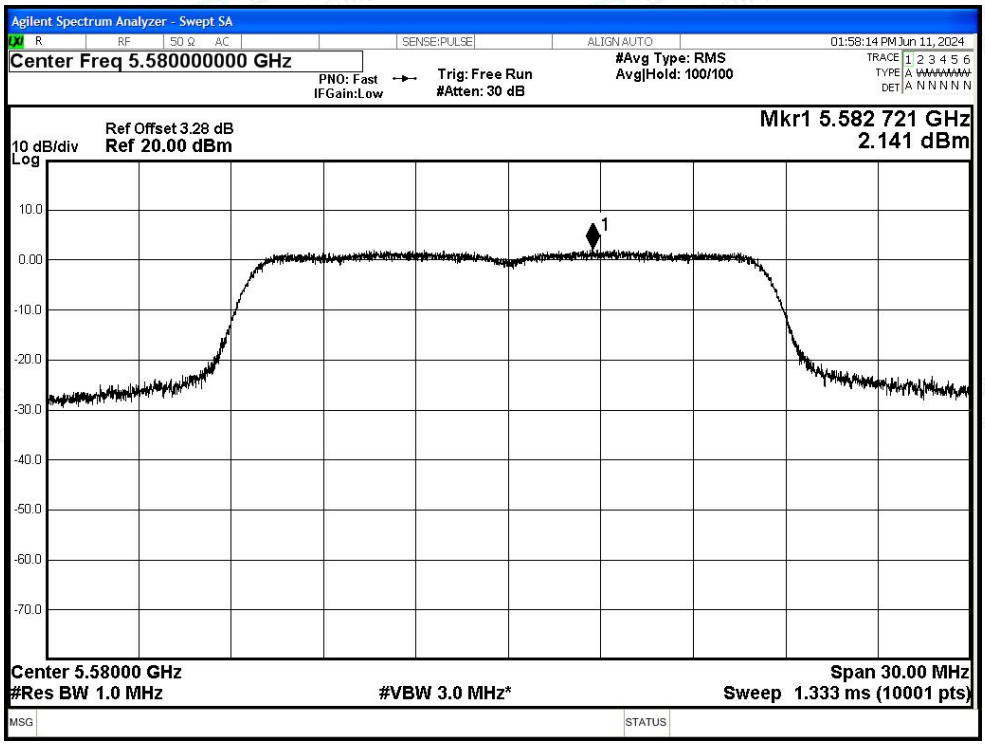

PSD NVNT a 5700MHz Ant1

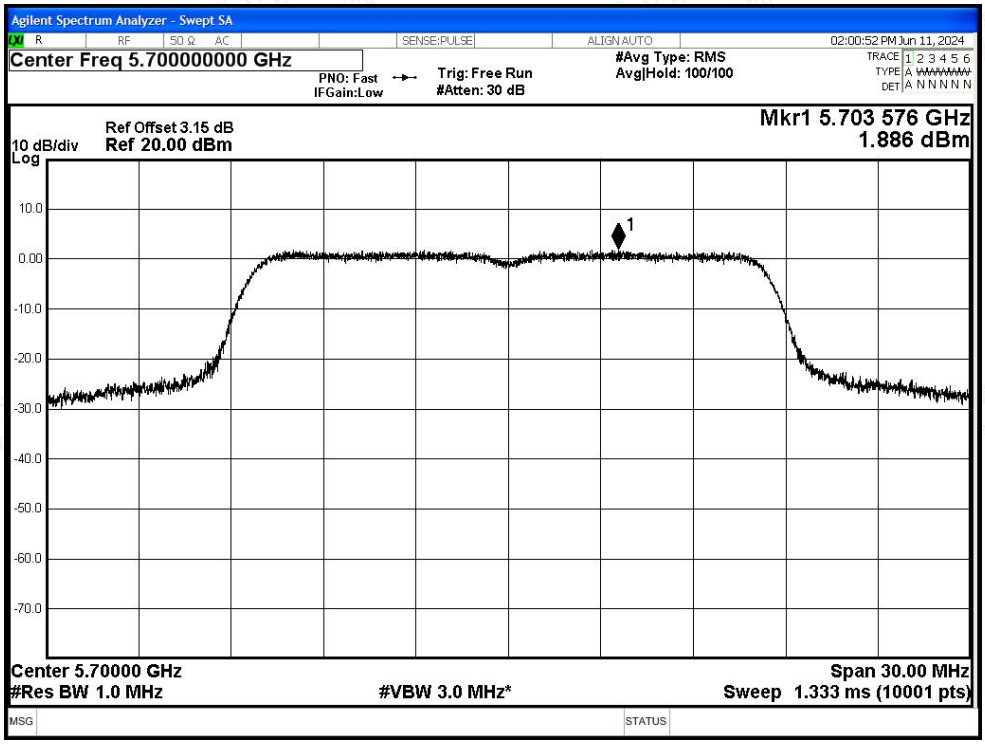

PSD NVNT n20 5500MHz Ant1

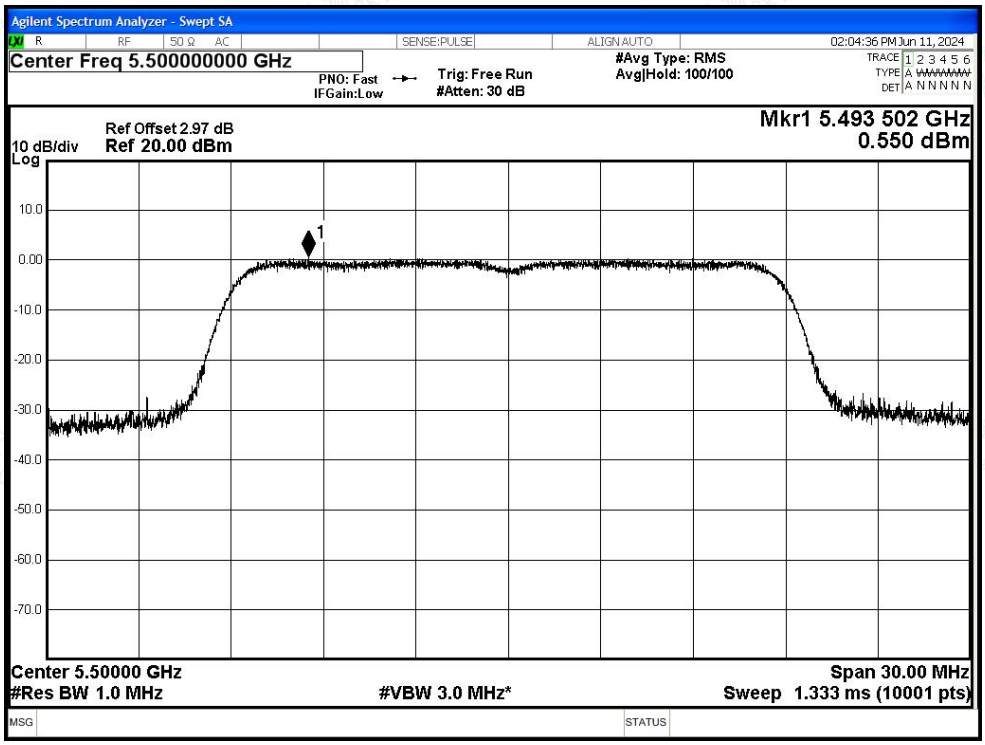

PSD NVNT n20 5580MHz Ant1

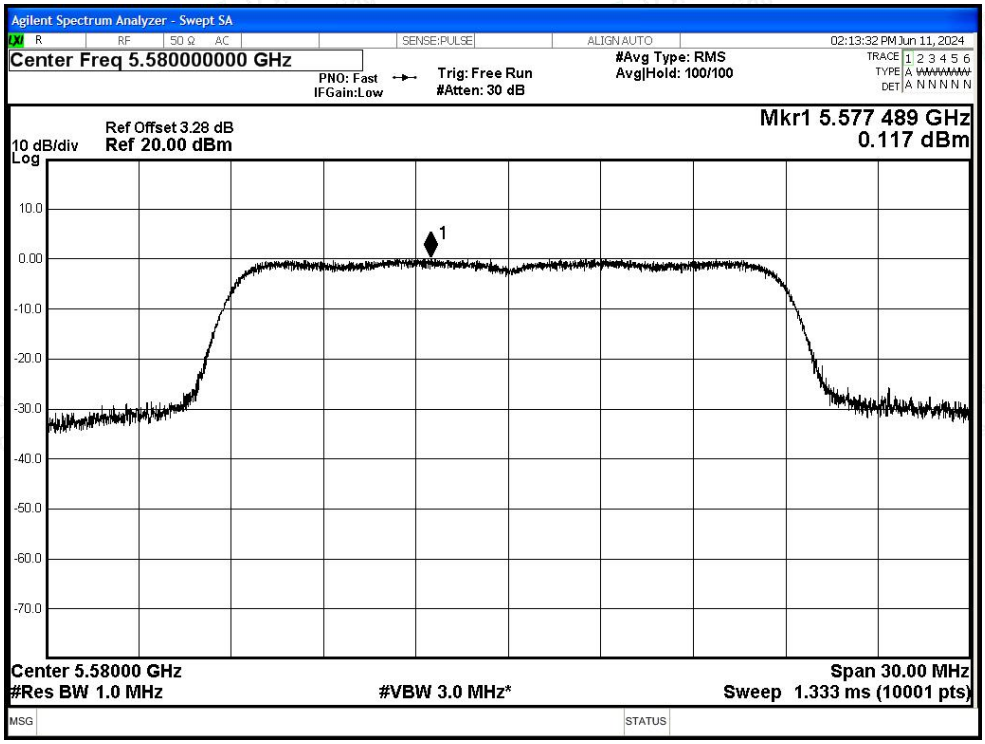

PSD NVNT n20 5700MHz Ant1

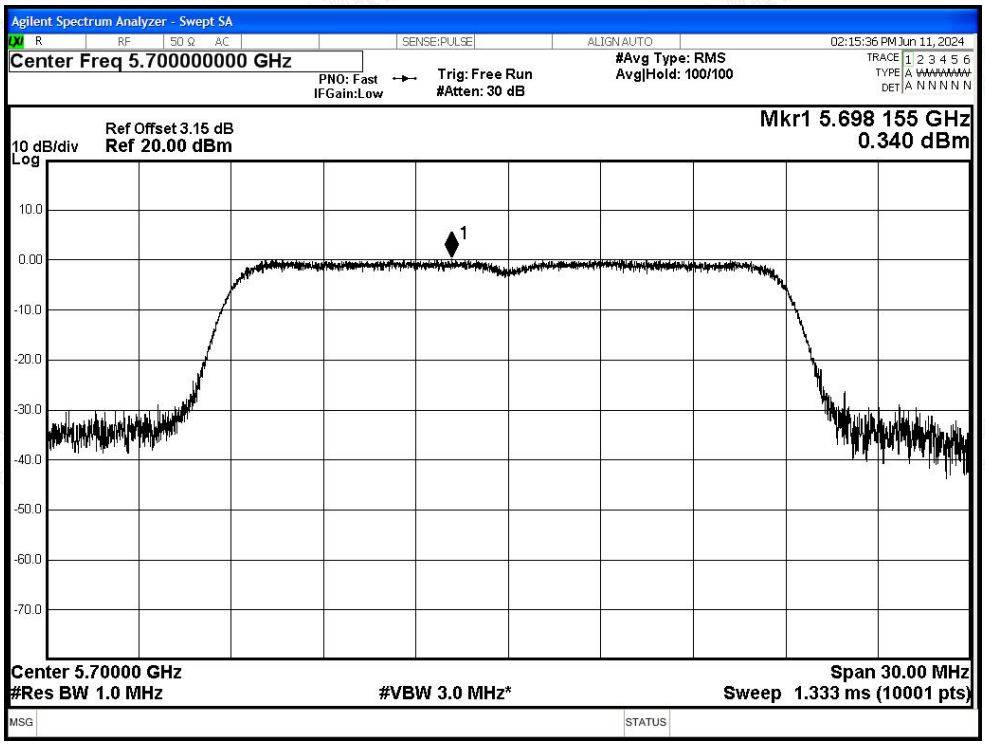

PSD NVNT n40 5510MHz Ant1

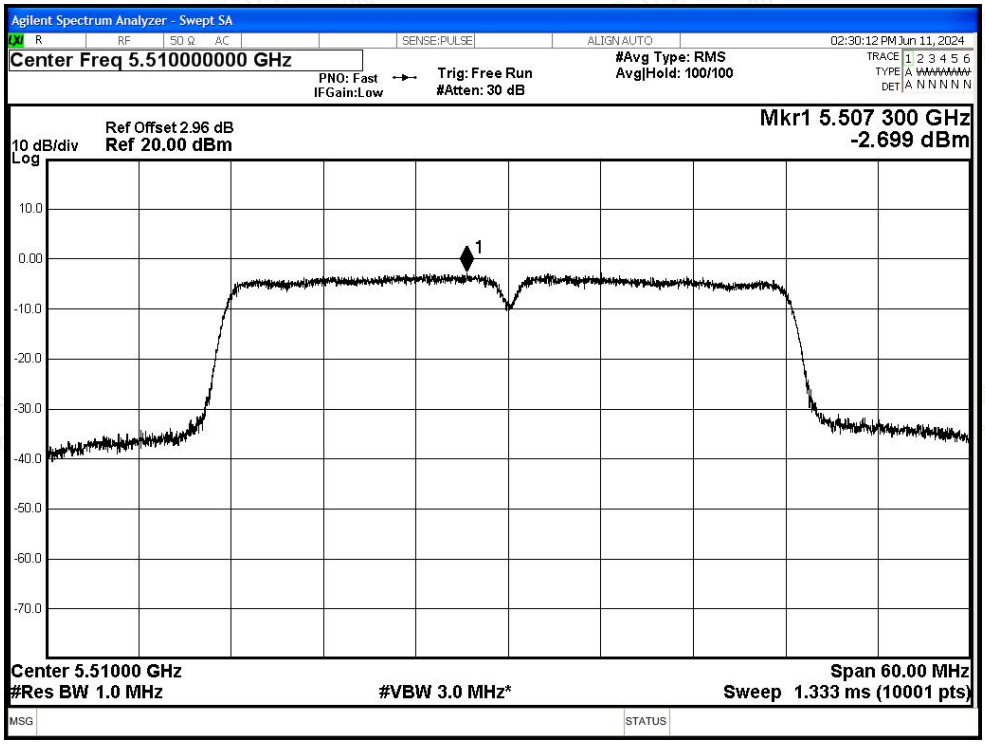

PSD NVNT n40 5550MHz Ant1

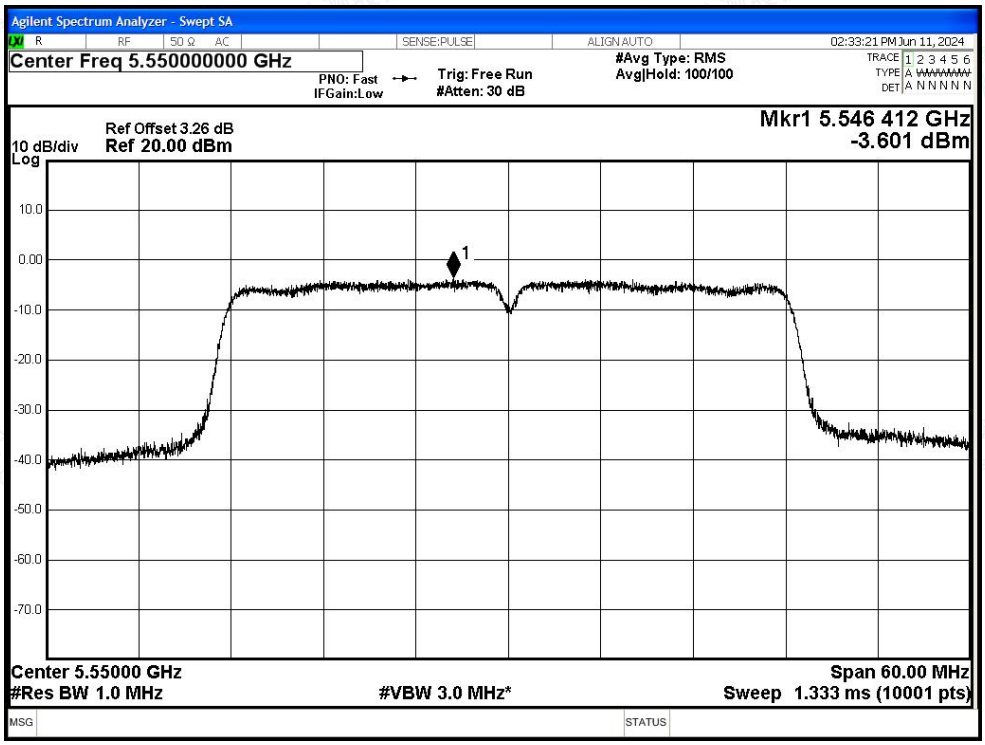

PSD NVNT n40 5670MHz Ant1

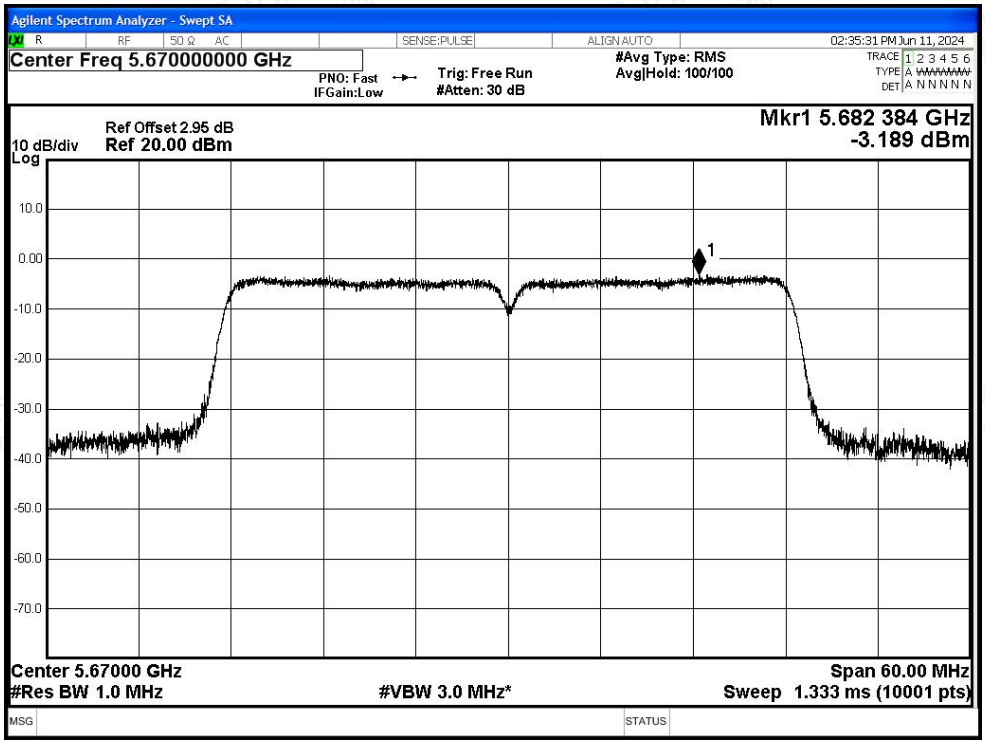

PSD NVNT ac20 5500MHz Ant1

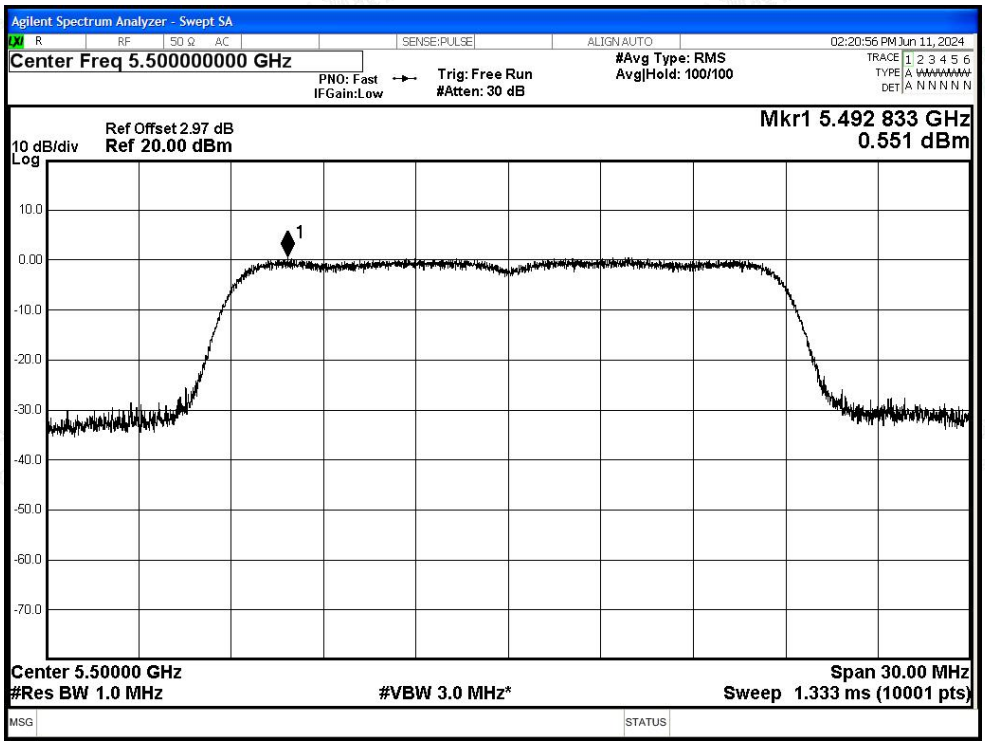

PSD NVNT ac20 5580MHz Ant1

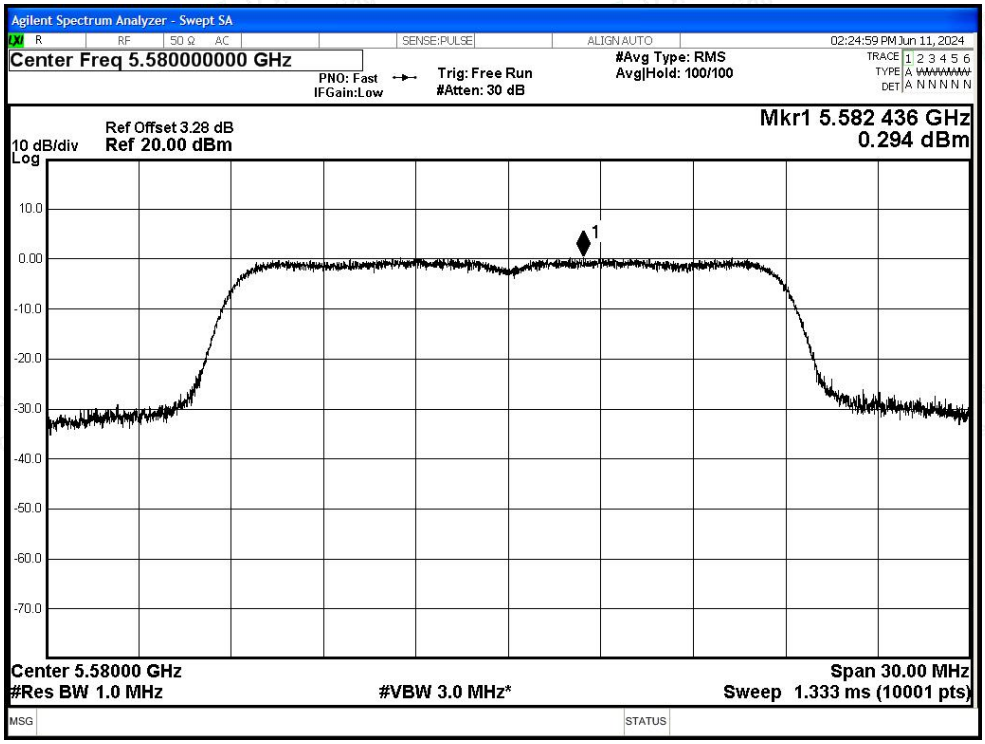

PSD NVNT ac20 5700MHz Ant1

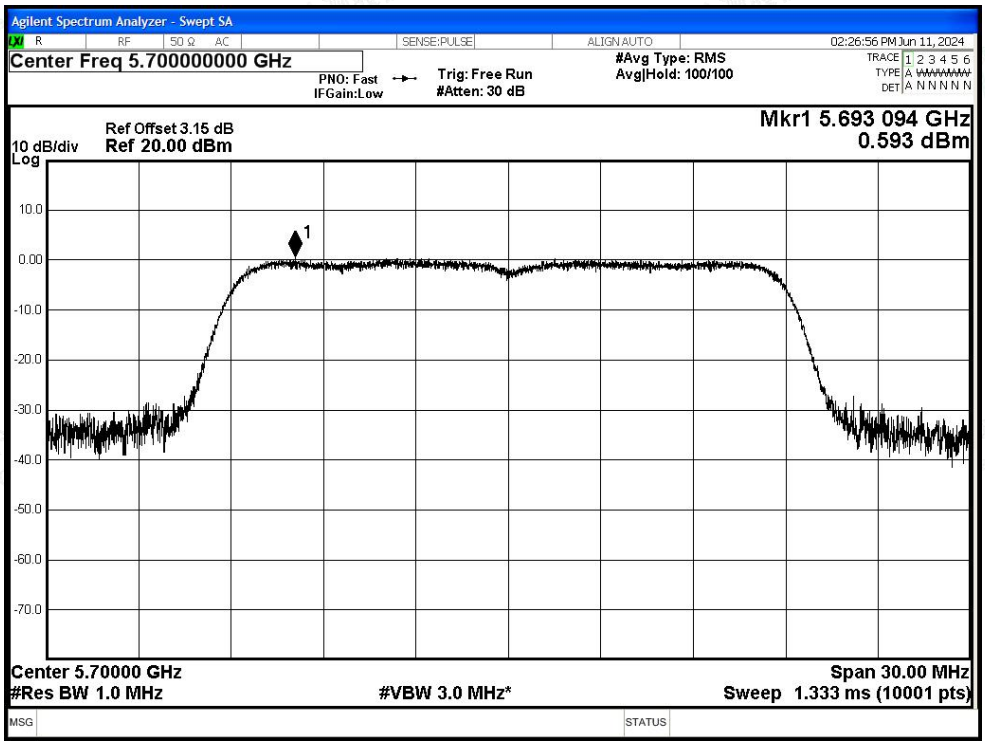

PSD NVNT ac40 5510MHz Ant1

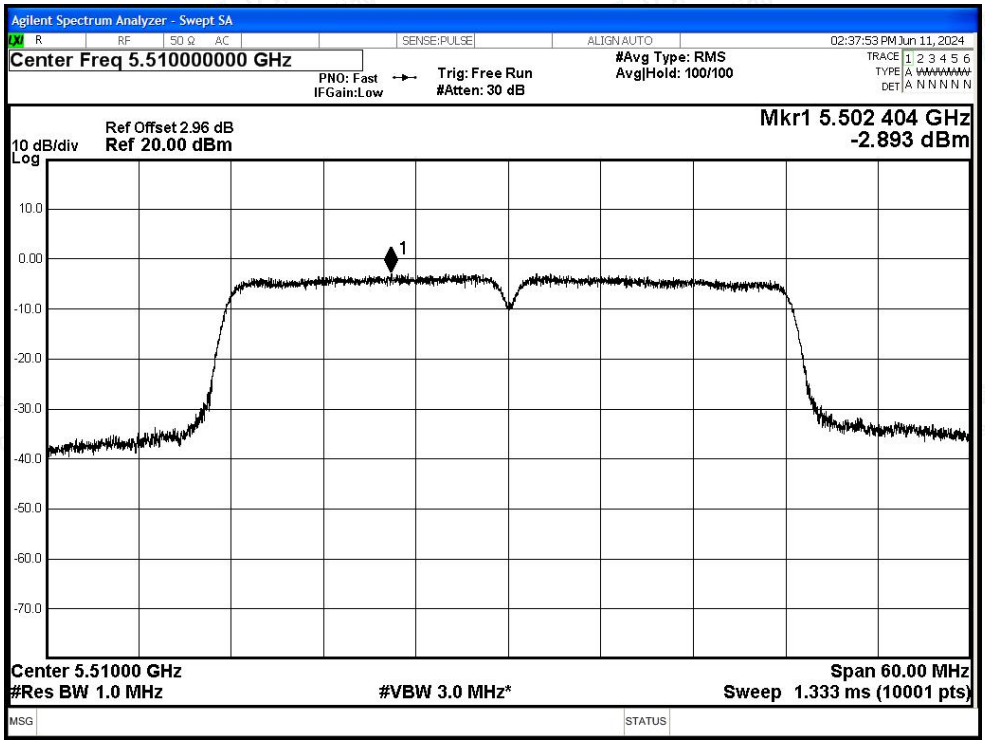

PSD NVNT ac40 5550MHz Ant1

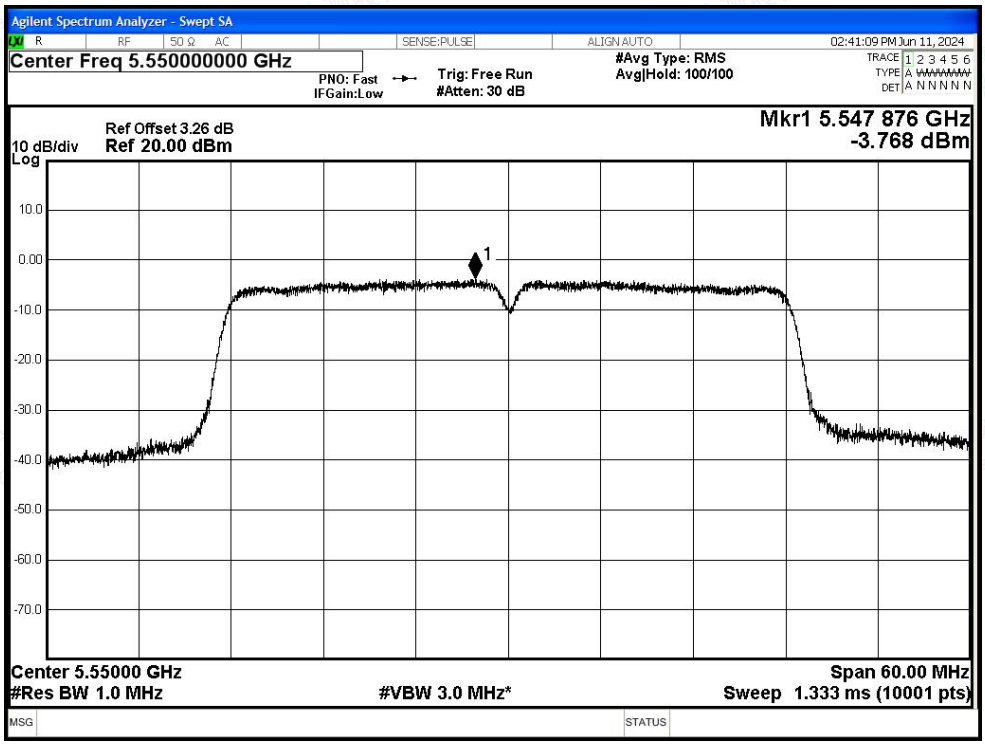

PSD NVNT ac40 5670MHz Ant1

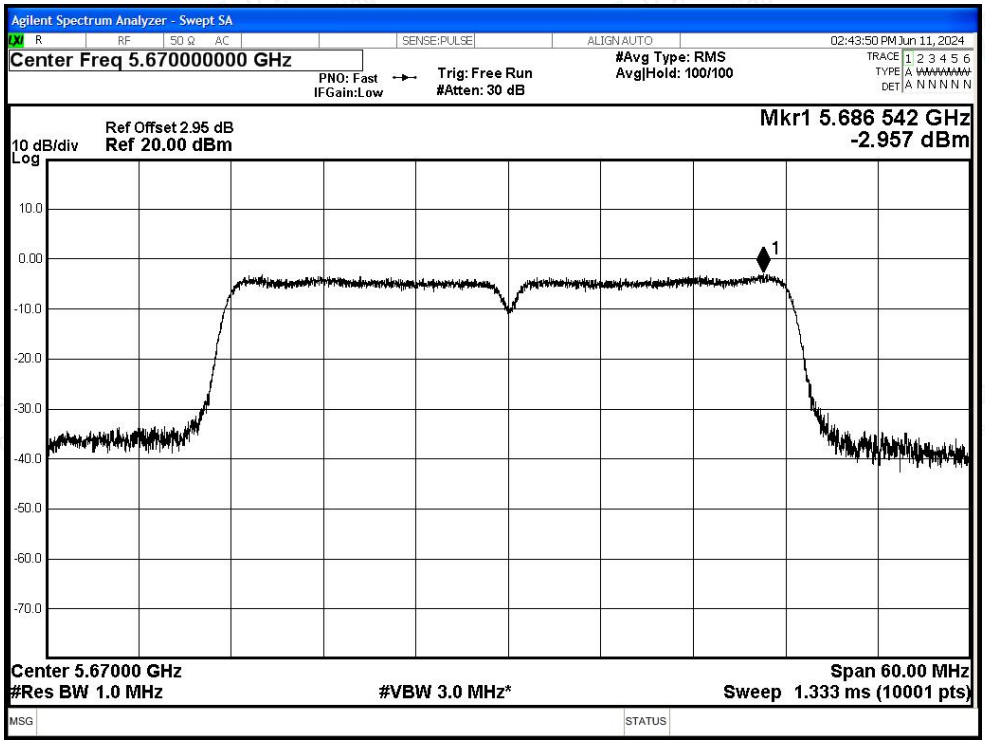

PSD NVNT ac80 5530MHz Ant1

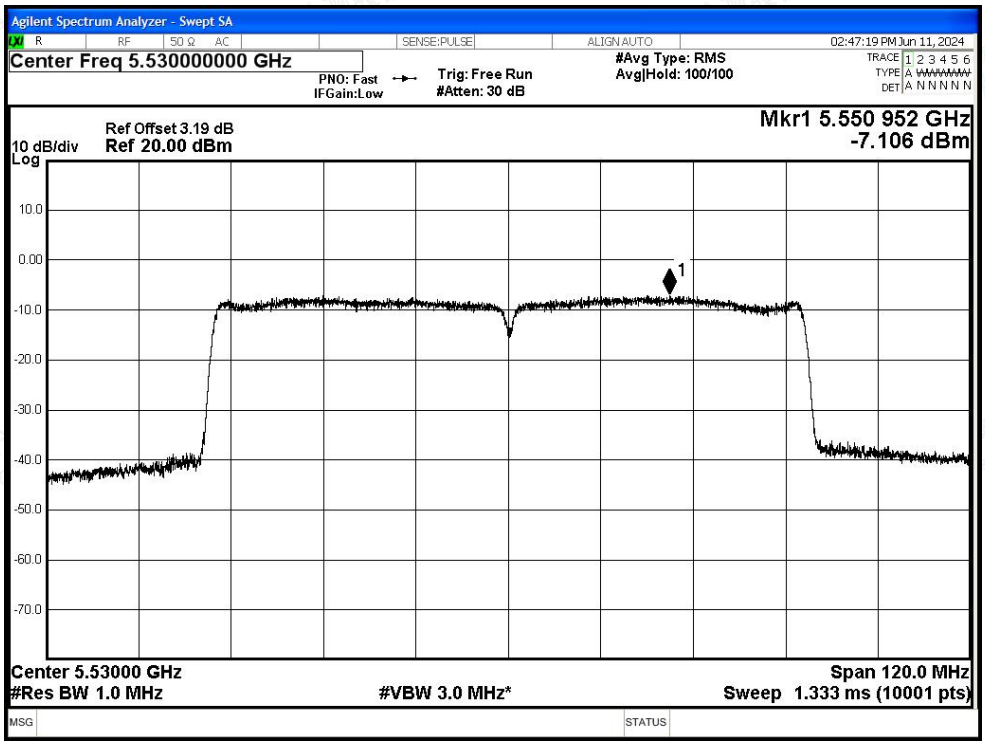

PSD NVNT ac80 5610MHz Ant1

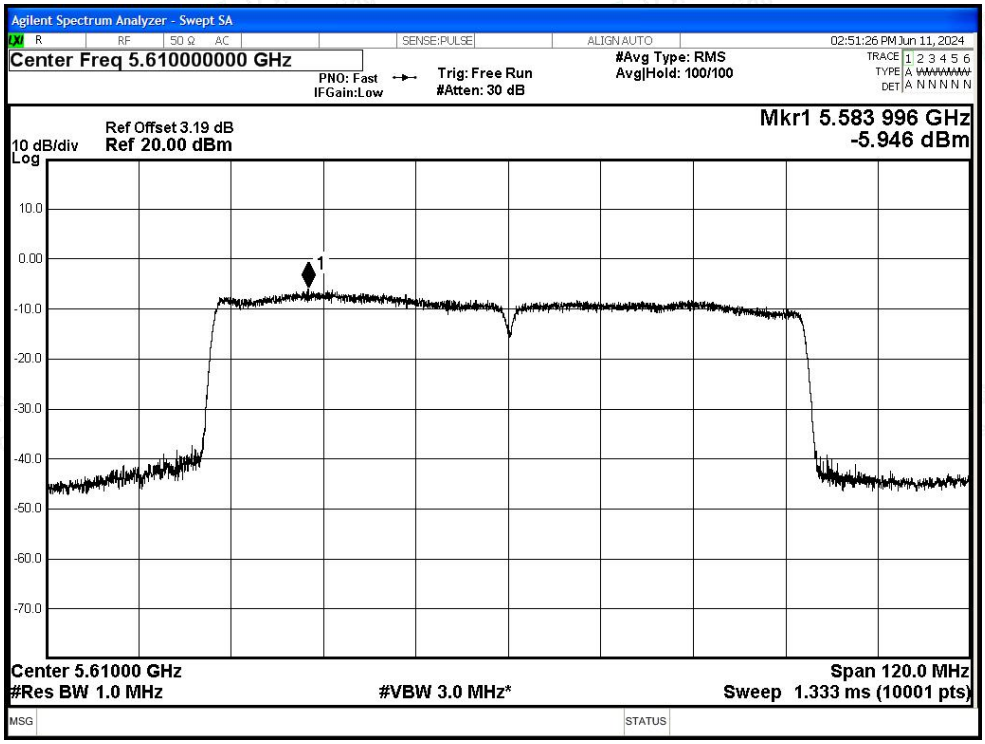

F.4 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	a	5500	Ant1	5460	-49.61	2.68	-	48.30	Peak	68.2	Pass
NVNT	a	5500	Ant1	5460	-57.62	2.68	0.24	40.29	Average	54	Pass
NVNT	a	5500	Ant1	5470	-41.56	2.68	-	56.35	Peak	68.2	Pass
NVNT	a	5500	Ant1	5469.6	-53.67	2.68	0.24	44.24	Average	54	Pass
NVNT	a	5500	Ant1	5470	-54.82	2.68	0.24	43.09	Average	54	Pass
NVNT	a	5700	Ant1	5725	-42.13	2.68	-	55.78	Peak	68.2	Pass
NVNT	a	5700	Ant1	5725	-53.74	2.68	0.24	44.17	Average	54	Pass
NVNT	a	5700	Ant1	5725.6	-40.55	2.68	-	57.36	Peak	68.2	Pass
NVNT	a	5700	Ant1	5725.2	-53.4	2.68	0.24	44.51	Average	54	Pass
NVNT	a	5700	Ant1	5735	-50.41	2.68	-	47.50	Peak	68.2	Pass
NVNT	a	5700	Ant1	5735	-57.12	2.68	0.24	40.79	Average	54	Pass
NVNT	n20	5500	Ant1	5460	-50.28	2.68	-	47.63	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5460	-57.52	2.68	0.28	40.39	Average	54	Pass
NVNT	n20	5500	Ant1	5468.6	-42.1	2.68	-	55.81	Peak	68.2	Pass
NVNT	n20	5500	Ant1	5470	-54.84	2.68	0.28	43.07	Average	54	Pass
NVNT	n20	5500	Ant1	5470	-44.62	2.68	-	53.29	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5725	-37.49	2.68	-	60.42	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5725	-52.46	2.68	0.28	45.45	Average	54	Pass
NVNT	n20	5700	Ant1	5725.4	-52.42	2.68	0.28	45.49	Average	54	Pass
NVNT	n20	5700	Ant1	5735	-47.11	2.68	-	50.80	Peak	68.2	Pass
NVNT	n20	5700	Ant1	5735	-57.18	2.68	0.28	40.73	Average	54	Pass
NVNT	n40	5510	Ant1	5460	-47.15	2.68	-	50.76	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5460	-57.09	2.68	0.44	40.82	Average	54	Pass
NVNT	n40	5510	Ant1	5465.2	-38.08	2.68	-	59.83	Peak	68.2	Pass
NVNT	n40	5510	Ant1	5470	-54.72	2.68	0.44	43.19	Average	54	Pass
NVNT	n40	5510	Ant1	5470	-43.38	2.68	-	54.53	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5725	-43.52	2.68	-	54.39	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5725	-52.87	2.68	0.45	45.04	Average	54	Pass
NVNT	n40	5670	Ant1	5726.6	-38.3	2.68	-	59.61	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5726.2	-52.55	2.68	0.45	45.36	Average	54	Pass
NVNT	n40	5670	Ant1	5735	-44.29	2.68	-	53.62	Peak	68.2	Pass
NVNT	n40	5670	Ant1	5735	-55.26	2.68	0.45	42.65	Average	54	Pass
NVNT	ac20	5500	Ant1	5460	-50.39	2.68	-	47.52	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5460	-57.31	2.68	0.28	40.60	Average	54	Pass
NVNT	ac20	5500	Ant1	5469.4	-38.76	2.68	-	59.15	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5469.8	-54	2.68	0.28	43.91	Average	54	Pass

NVNT	ac20	5500	Ant1	5470	-45.54	2.68	-	52.37	Peak	68.2	Pass
NVNT	ac20	5500	Ant1	5470	-54.38	2.68	0.28	43.53	Average	54	Pass
NVNT	ac20	5700	Ant1	5725	-41.8	2.68	-	56.11	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5725	-52.08	2.68	0.28	45.83	Average	54	Pass
NVNT	ac20	5700	Ant1	5725.4	-38.88	2.68	-	59.03	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5735	-47.96	2.68	-	49.95	Peak	68.2	Pass
NVNT	ac20	5700	Ant1	5735	-57.62	2.68	0.28	40.29	Average	54	Pass
NVNT	ac40	5510	Ant1	5460	-48.41	2.68	-	49.50	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5460	-56.93	2.68	0.45	40.98	Average	54	Pass
NVNT	ac40	5510	Ant1	5469	-40.18	2.68	-	57.73	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5469.6	-54.29	2.68	0.45	43.62	Average	54	Pass
NVNT	ac40	5510	Ant1	5470	-42.64	2.68	-	55.27	Peak	68.2	Pass
NVNT	ac40	5510	Ant1	5470	-54.56	2.68	0.45	43.35	Average	54	Pass
NVNT	ac40	5670	Ant1	5725	-48.63	2.68	-	49.28	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5725	-57.41	2.68	0.44	40.50	Average	54	Pass
NVNT	ac40	5670	Ant1	5733.8	-47.45	2.68	-	50.46	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5726.6	-57.07	2.68	0.44	40.84	Average	54	Pass
NVNT	ac40	5670	Ant1	5735	-49.77	2.68	-	48.14	Peak	68.2	Pass
NVNT	ac40	5670	Ant1	5735	-57.84	2.68	0.44	40.07	Average	54	Pass
NVNT	ac80	5530	Ant1	5460	-43.42	2.68	-	54.49	Peak	68.2	Pass
NVNT	ac80	5530	Ant1	5460	-53.86	2.68	0.52	44.05	Average	54	Pass
NVNT	ac80	5530	Ant1	5468.8	-41.76	2.68	-	56.15	Peak	68.2	Pass
NVNT	ac80	5530	Ant1	5467.2	-53.42	2.68	0.52	44.49	Average	54	Pass
NVNT	ac80	5530	Ant1	5470	-44.27	2.68	-	53.64	Peak	68.2	Pass
NVNT	ac80	5530	Ant1	5470	-53.98	2.68	0.52	43.93	Average	54	Pass
NVNT	ac80	5610	Ant1	5725	-45.72	2.68	-	52.19	Peak	68.2	Pass
NVNT	ac80	5610	Ant1	5725	-54.73	2.68	0.53	43.18	Average	54	Pass
NVNT	ac80	5610	Ant1	5725.16	-42.71	2.68	-	55.20	Peak	68.2	Pass
NVNT	ac80	5610	Ant1	5727.62	-54.57	2.68	0.53	43.34	Average	54	Pass
NVNT	ac80	5610	Ant1	5735	-46.03	2.68	-	51.88	Peak	68.2	Pass
NVNT	ac80	5610	Ant1	5735	-55.62	2.68	0.53	42.29	Average	54	Pass

Test Graphs

Restrict Band NVNT a 5500MHz Ant1 Peak

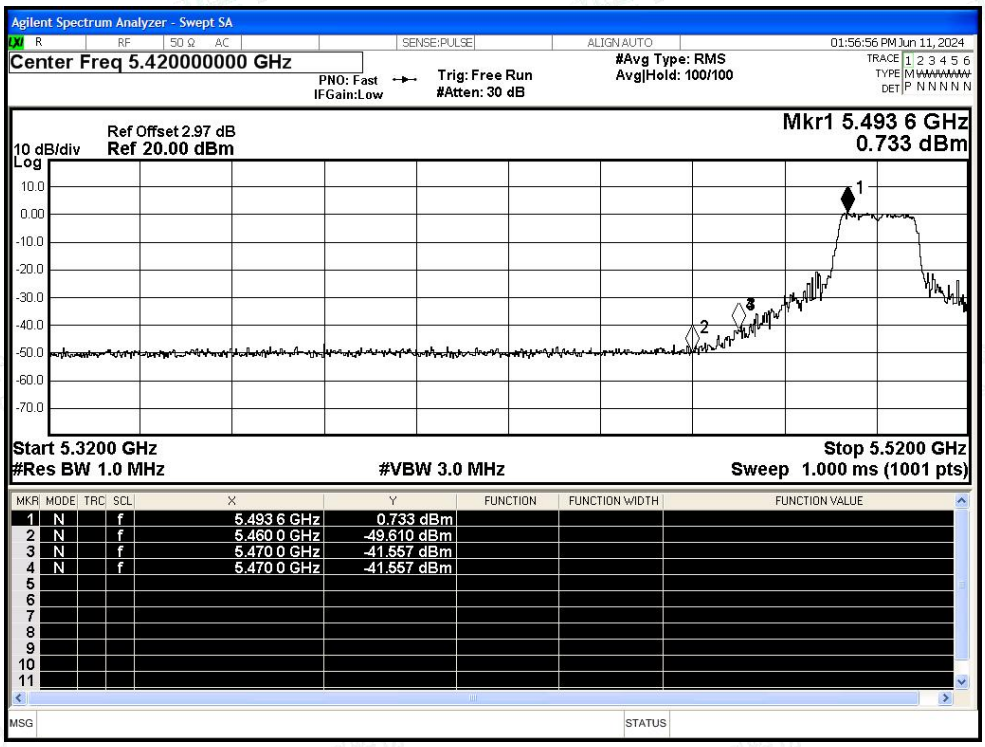

Restrict Band NVNT a 5500MHz Ant1 Average

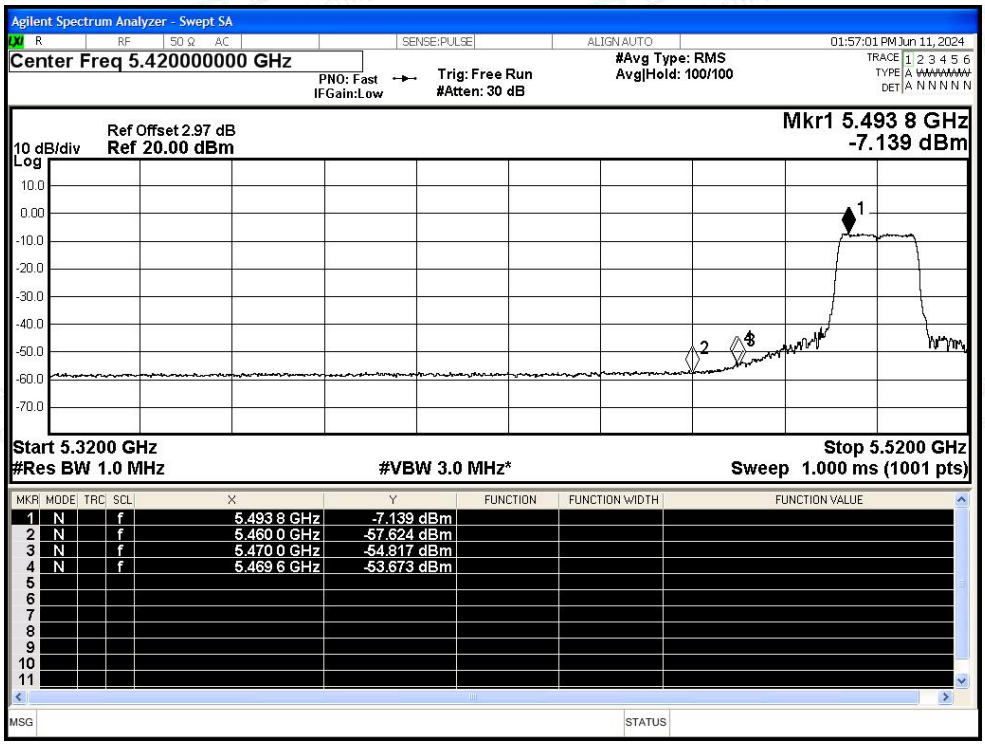

Restrict Band NVNT a 5700MHz Ant1 Peak

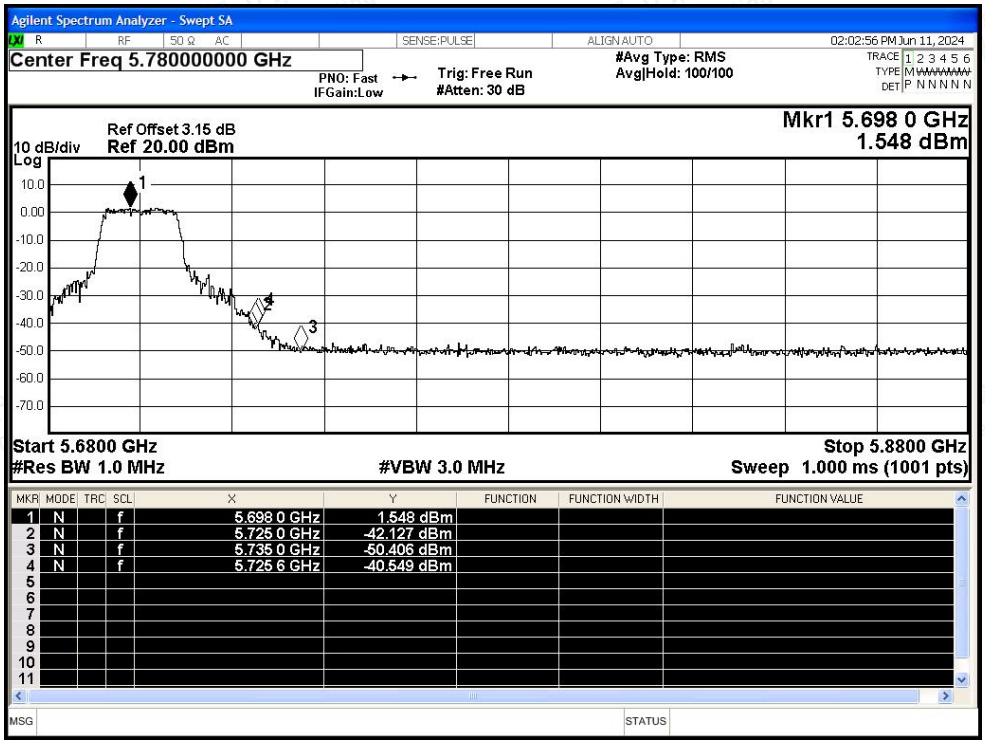

Restrict Band NVNT a 5700MHz Ant1 Average

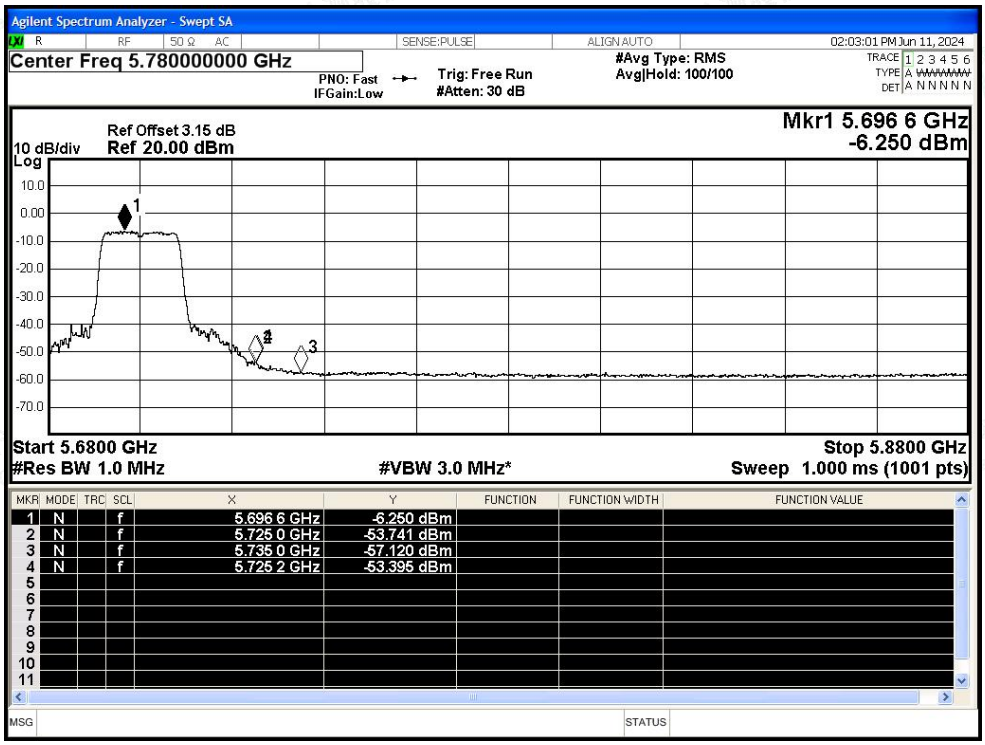

Restrict Band NVNT n20 5500MHz Ant1 Peak

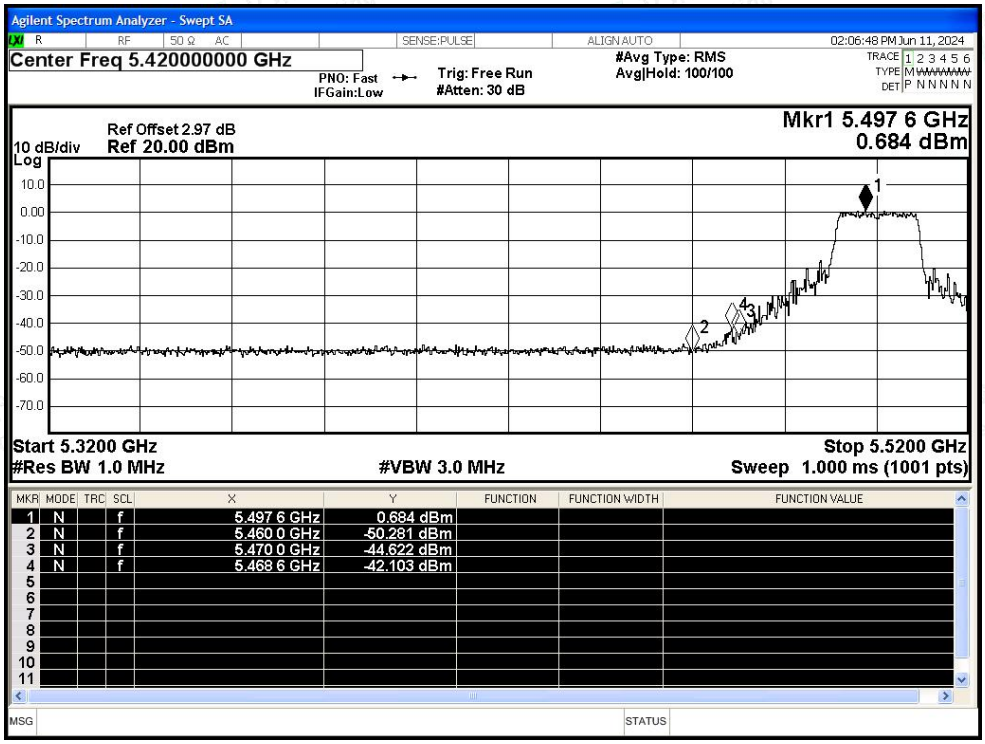

Restrict Band NVNT n20 5500MHz Ant1 Average

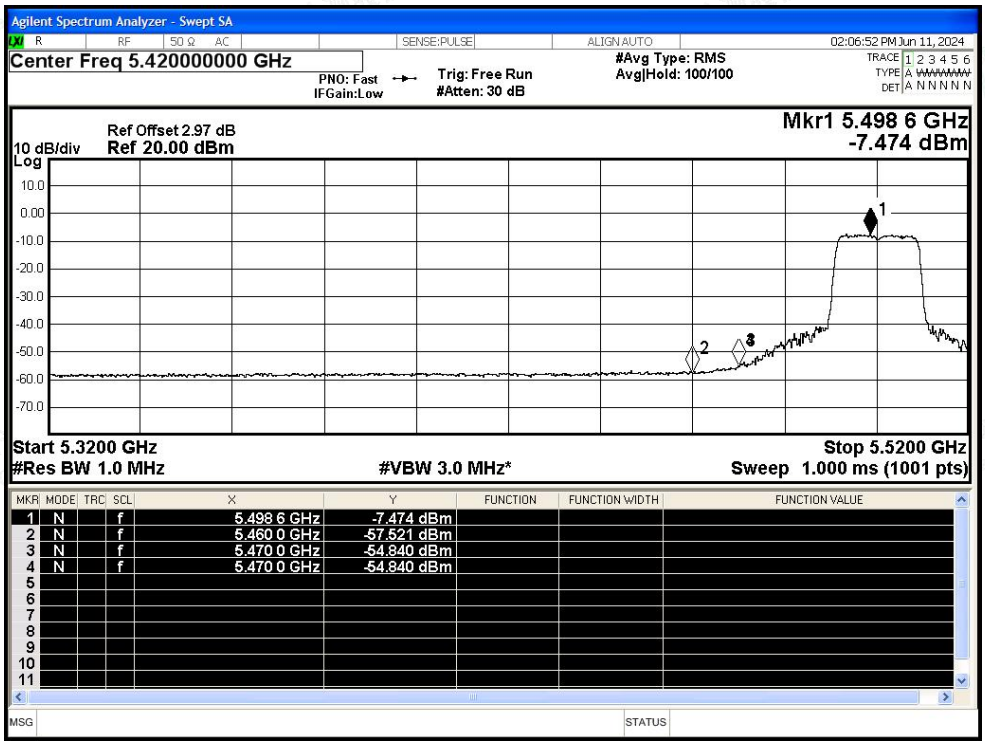

Restrict Band NVNT n20 5700MHz Ant1 Peak

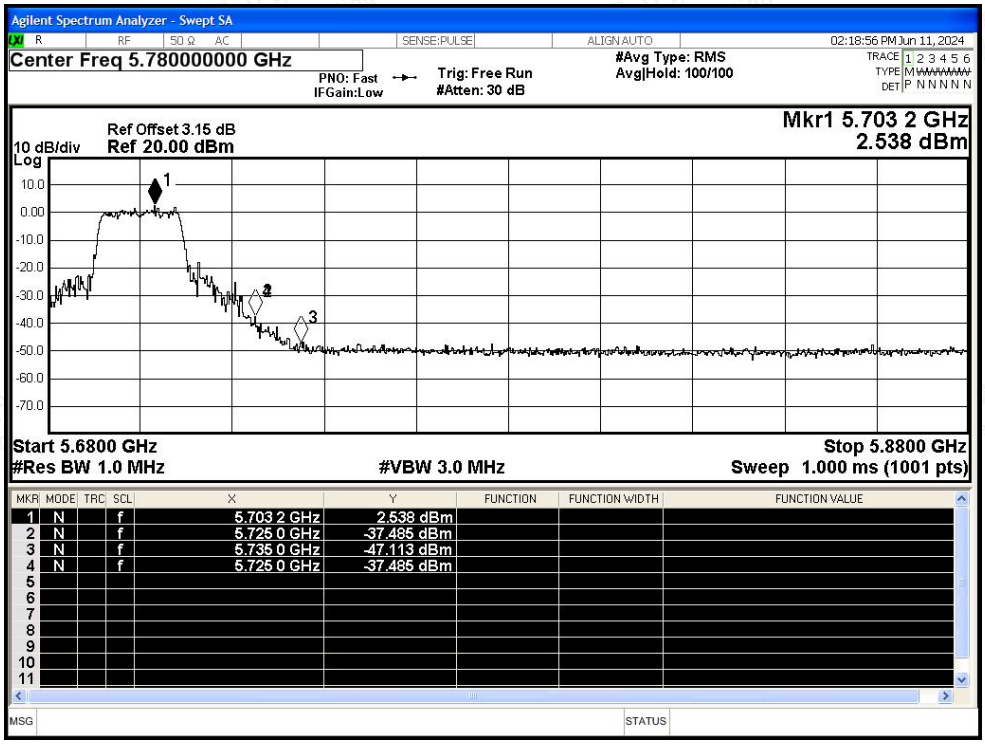

Restrict Band NVNT n20 5700MHz Ant1 Average

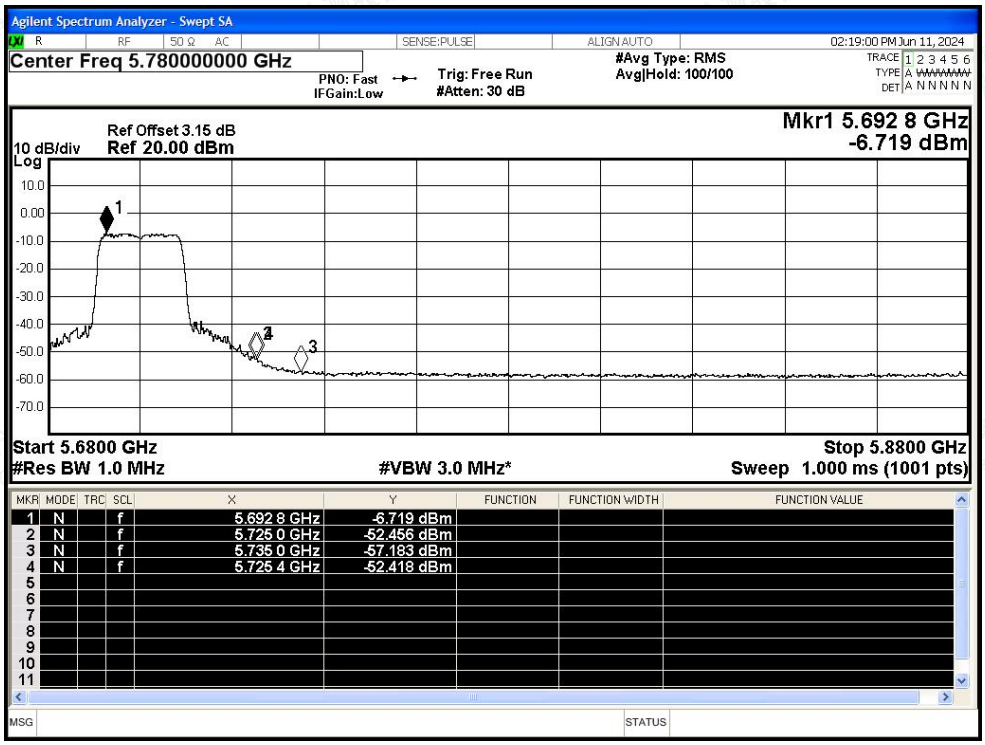

Restrict Band NVNT n40 5510MHz Ant1 Peak

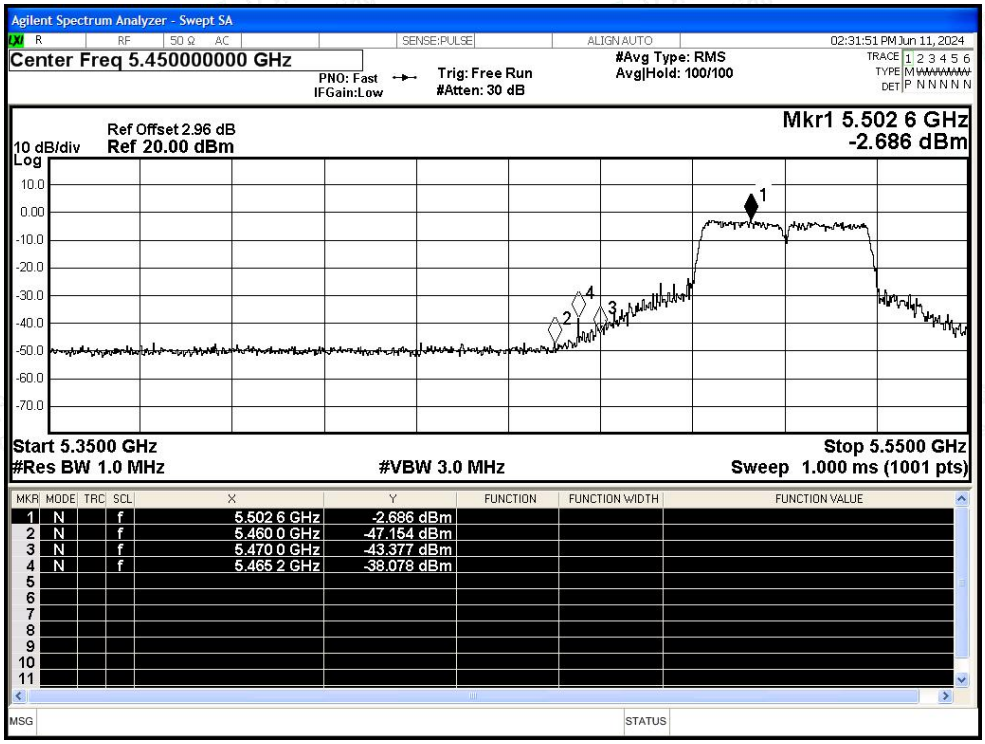

Restrict Band NVNT n40 5510MHz Ant1 Average

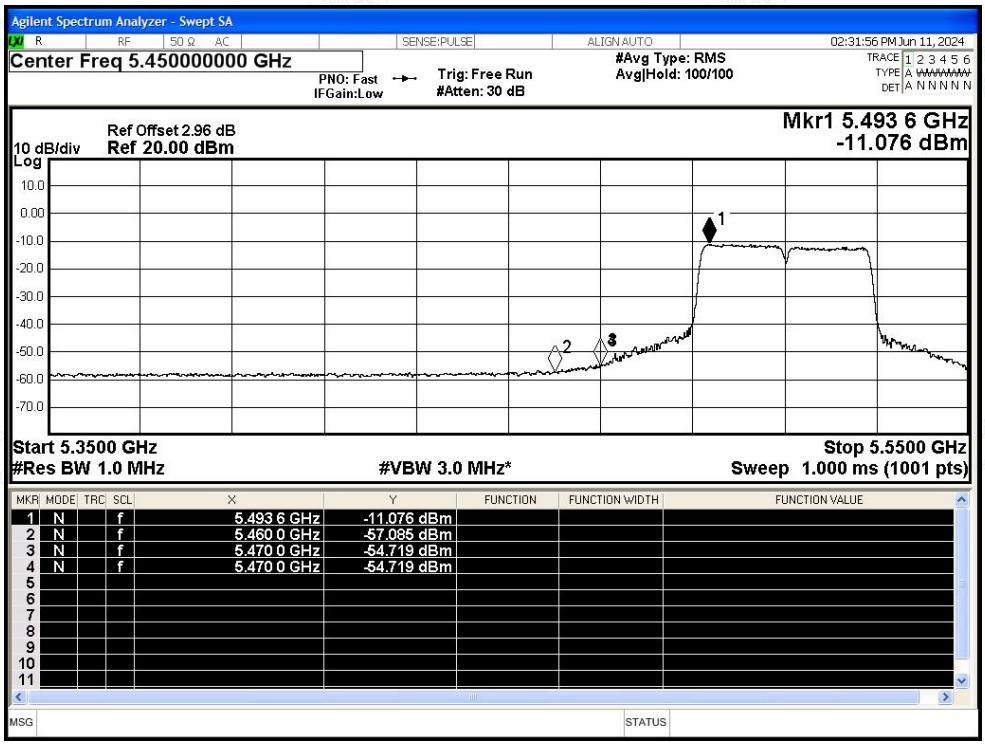

Restrict Band NVNT n40 5670MHz Ant1 Peak

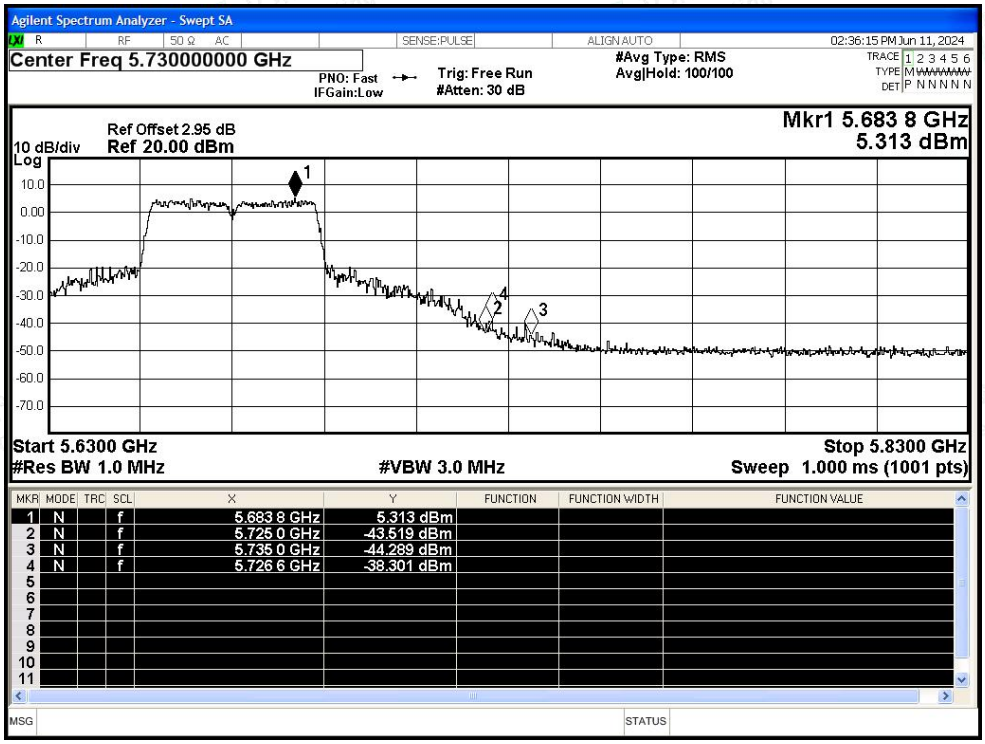
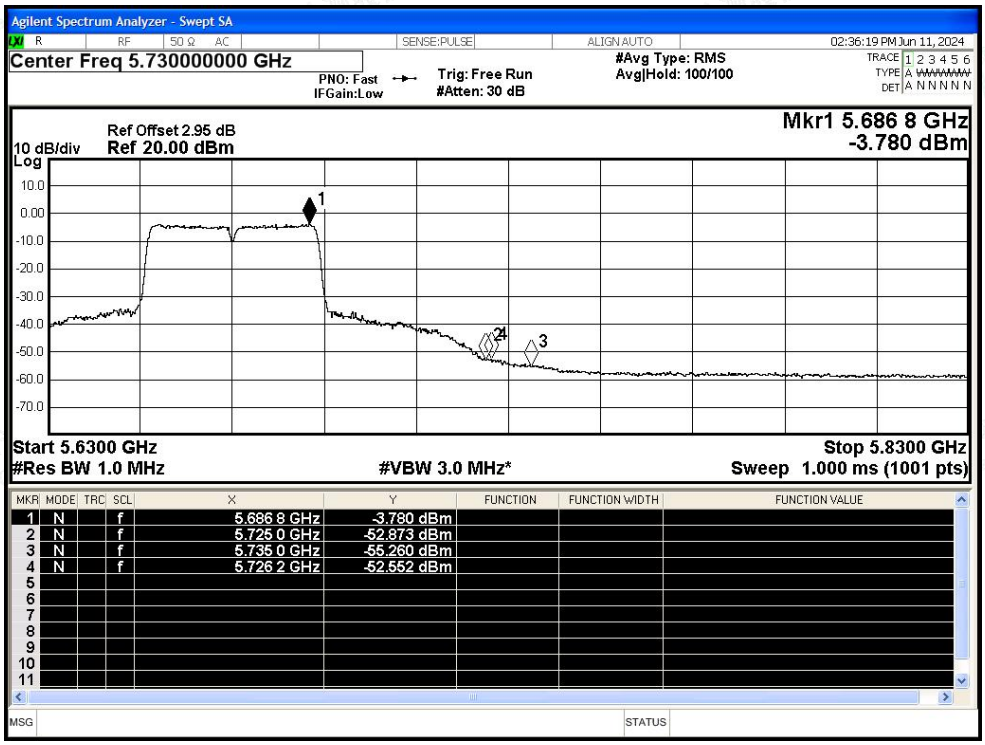
Restrict Band NVNT n40 5670MHz Ant1 Average