



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: D-ROBOTICS HOLDING LIMITED

Address: SUITE 603, 6/F LAWS COMM PLAZA 788 CHEUNG SHA WAN RD
KLN HONG KONG

FCC ID: 2BGUG-RDKS600

Product Name: RDK S600 64GB,RDK S600 32GB

Standard(s): 47 CFR Part 15, Subpart E(15.407)
ANSI C63.10-2020
KDB 789033 D02 General U-NII Test Procedures New
Rules v02r01

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2603T61540E-RF-00D

Date Of Issue: 2026-08-03

Reviewed By: Calvin Chen

Title: RF Test Supervisor

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

Room 101 & 201, Building 2, 256 Pingdong Road, Dalang Town, Dongguan
City, Guangdong, China

Tel: +86-769-83085888

www.ccttt.com.cn

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the Room 101 & 201, Building 2, 256 Pingdong Road, Dalang Town, Dongguan City, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

CONTENTS

CONTENTS.....	3
DOCUMENT REVISION HISTORY.....	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.1.1 General.....	6
1.1.2 Operation Frequency Detail	6
1.1.3 Antenna Information Detail [▲]	7
1.1.4 Accessory Information.....	7
1.2 DESCRIPTION OF TEST CONFIGURATION.....	8
1.2.1 EUT Operation Condition	8
1.2.2 Support Equipment List and Details	9
1.2.3 Support Cable List and Details	9
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	13
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	16
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	17
3.2.4 Test Procedure	18
3.2.5 Corrected Amplitude & Margin Calculation.....	18
3.3 EMISSION BANDWIDTH.....	19
3.3.1 Applicable Standard.....	19
3.3.2 EUT Setup.....	19
3.3.3 Test Procedure	19
3.4 MAXIMUM CONDUCTED OUTPUT POWER	21
3.4.1 Applicable Standard.....	21
3.4.2 EUT Setup.....	21
3.4.3 Test Procedure	21
3.5 MAXIMUM POWER SPECTRAL DENSITY	23
3.5.1 Applicable Standard.....	23
3.5.2 EUT Setup.....	23
3.5.3 Test Procedure	24
3.6 DUTY CYCLE	25
3.6.1 EUT Setup.....	25
3.6.2 Test Procedure	25
3.7 ANTENNA REQUIREMENT.....	26
3.7.1 Applicable Standard.....	26
3.7.2 Judgment.....	26

4. Test DATA AND RESULTS 27

4.1 AC LINE CONDUCTED EMISSIONS..... 27

4.2 RADIATION SPURIOUS EMISSIONS 30

 4.2.1 9 kHz – 1 GHz 30

 4.2.2 1 GHz – 40 GHz 47

4.3 RF CONDUCTED DATA 178

5. EUT PHOTOGRAPHS 179

6. TEST SETUP PHOTOGRAPHS 180

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2603T61540E-RF-00D	Original Report	2026-08-03

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General

EUT Name:	RDK S600 64GB, RDK S600 32GB
Trade Name:	D-Robotics
EUT Model:	KS6X064256C
Multiple Model:	KS6X032064C
Operation Frequency:	Band 1: 5180-5240 MHz (802.11a/n ht20/ac vht20/ax hew20) 5190-5230 MHz (802.11n ht40/ac vht40/ax hew40) 5210 MHz (802.11ac vht80/ax hew80) Band 4: 5745-5825 MHz (802.11a/n ht20/ac vht20/ax hew20) 5755-5795 MHz (802.11n ht40/ac vht40/ax hew40) 5775 MHz (802.11ac vht80/ax hew80)
Maximum Average Conducted Output Power:	11.86dBm in 5150-5250 MHz Band 12.38dBm in 5725-5850 MHz Band
Modulation Type:	802.11a/n/ac: OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM 802.11ax: OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Rated Input Voltage:	DC 24V from adapter
Sample Number:	KS6X064256C: 3N1Z-2 (for RF Conducted Test) KS6X032064C: 3N1Z-4 (for Conducted emissions & Radiated Spurious Emissions Test)
EUT Received Date:	2026.6.13
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.1.2 Operation Frequency Detail

For 802.11a/n ht20/ac vht20/ax hew20:

5150-5250MHz Band		5725-5850MHz Band	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	149	5745
40	5200	153	5765
44	5220	157	5785
48	5240	161	5805
/	/	165	5825

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)	
	5150-5250 MHz	5725-5850 MHz
Lowest	5180	5745
Middle	5200	5785
Highest	5240	5825

For 802.11n ht40/ac vht40/ax hew40:

5150-5250MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	151	5755
46	5230	159	5795

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)	
	5150-5250 MHz	5725-5850 MHz
Lowest	5190	5755
Middle	/	/
Highest	5230	5795

For 802.11ac vht80/ax hew80:

5150-5250MHz		5725-5850MHz	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	155	5775

Per section 15.31(m), the below channels were performed the test as below:

Test Channel	Test Frequency (MHz)	
	5150-5250 MHz	5725-5850 MHz
Lowest	/	/
Middle	5210	5775
Highest	/	/

1.1.3 Antenna Information Detail[▲]

Antenna	Antenna Type	Input Impedance (Ohm)	Frequency Range	Antenna Gain (dBi)
Chain 0	FPC	50	5.15~5.25 GHz	2.7
			5.725~5.85 GHz	3.91
Chain 1	FPC	50	5.15~5.25 GHz	2.7
			5.725~5.85 GHz	3.91

Note:

The system supports 2T2R MIMO CDD modes at 802.11n/ac/ax modes.

Per KDB 662911 D01 Multiple Transmitter Output v02r01:

For power measurements:

Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$;

5150-5250 MHz Band directional gain = 2.7dBi + 0dB = 2.7 dBi < 6dBi;

5725-5850 MHz Band directional gain = 3.91dBi + 0dB = 3.91 dBi < 6dBi;

So, the maximum output power limit does not need to be reduced.

For power spectral density (PSD) measurements:

Array Gain = $10 \log(N_{ANT}/N_{SS})$ dB.

5150-5250 MHz Band directional gain = 2.7 dBi + 3dB = 5.7 dBi < 6dBi;

5725-5850 MHz Band directional gain = 3.91dBi + 3dB = 6.91 dBi > 6dBi;

For 5150-5250 MHz Band, the Power Spectral Density (PSD) limit does not need to be reduced.

For 5725-5850MHz Band, the MIMO transmitting Power Spectral Density (PSD) limit should be reduced:

$6.91 - 6 = 0.91$ dB for 5725-5850MHz.

The Method of §15.203 Compliance:

- ☒ Antenna was permanently attached to the unit.
- ☐ Antenna uses a unique type of connector to attach to the EUT.
- ☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
DC Cable	/	/	Unshielded without ferrite core, 0.1m
SWITCHING ADAPTER	SHENZHEN HONOR ELECTRONIC CO., LTD	ADS-210NL-19-3 240192E	Input:100-240V~50/60Hz 3.0A Max Output:24.0-8.0A 192.0W

1.2 Description of Test Configuration

1.2.1 EUT Operation Condition

EUT Operation Mode:		The system was configured for testing in Engineering Mode, which was provided by the manufacturer. Per 15B report test, conducted emission test and radiated emissions below 1GHz test for KS6X032064C model was the worst.			
Equipment Modifications:		No			
EUT Exercise Software:		MobXterm.exe			
The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲:					
5150-5250 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data Rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5180	6Mbps	16	16
	Middle	5200	6Mbps	16	16
	Highest	5240	6Mbps	16	16
802.11ac vht20	Lowest	5180	MCS0	16	16
	Middle	5200	MCS0	16	16
	Highest	5240	MCS0	16	16
802.11ac vht40	Lowest	5190	MCS0	16	16
	Highest	5230	MCS0	16	16
802.11ac vht80	Middle	5210	MCS0	16	16
802.11ax hew20	Lowest	5180	MCS0	16	16
	Middle	5200	MCS0	16	16
	Highest	5240	MCS0	16	16
802.11ax hew40	Lowest	5190	MCS0	16	16
	Highest	5230	MCS0	16	16
802.11ax hew80	Middle	5210	MCS0	16	16
5725-5850 MHz Band:					
Test Modes	Test Channels	Test Frequency (MHz)	Data Rate	Power Level Setting	
				Chain 0	Chain 1
802.11a	Lowest	5745	6Mbps	20	20
	Middle	5785	6Mbps	20	20
	Highest	5825	6Mbps	20	20
802.11ac vht20	Lowest	5745	MCS0	20	20
	Middle	5785	MCS0	20	20
	Highest	5825	MCS0	20	20
802.11ac vht40	Lowest	5755	MCS0	20	20
	Highest	5795	MCS0	20	20
802.11ac vht80	Middle	5775	MCS0	20	20
802.11ax hew20	Lowest	5745	MCS0	20	20
	Middle	5785	MCS0	20	20
	Highest	5825	MCS0	20	20
802.11ax hew40	Lowest	5755	MCS0	20	20
	Highest	5795	MCS0	20	20
802.11ax hew80	Middle	5775	MCS0	20	20
Note:					
1. The system support 802.11a/n ht20/n ht40/ac vht20/vht40/vht80/ax hew20/hew40/hew80, the ht20/ht40 were reduced since the identical parameters with 802.11ac vht20/vht40.					
2. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the average power and PSD across all data rates, bandwidths, and modulations.					
3. The device supports SISO in all modes and MIMO in 802.11n/ac/ax modes, per pretest, MIMO mode was the worst mode and reported for 802.11n/ac/ax modes.					
4. 802.11ax mode only support full RU configuration.					

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
iFoved	3D Optical Mouse	SPT6393	SWD2414HR10K04
Unknown	Keyboard	SPT6334	SWB2310HD50K02
Lenovo	Computer	T4610S	00331-10000-00001-AA729
Tenda	Wireless Router	RX12 Pro	ED331010215000033
Unknown	U Disk	32G	20260126
Dell	Display	SE2416Hc	S252FV2551633
D-Robotics	Camera board	Unknown	Unknown

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	0.5	Adapter	LISN1/AC Mains
Mouse Cable	No	No	1.2	Mouse	EUT
Keyboard Cable	No	No	1.2	Keyboard	EUT
HDMI Cable	Yes	Yes	1.5	EUT	Display
Network Cable	No	No	10	EUT	Router
Network Cable	Yes	Yes	1	EUT	EUT
Power Cable	Yes	Yes	1.5	Display	LISN2/AC Mains

1.2.4 Block Diagram of Test Setup

AC line conducted emissions:

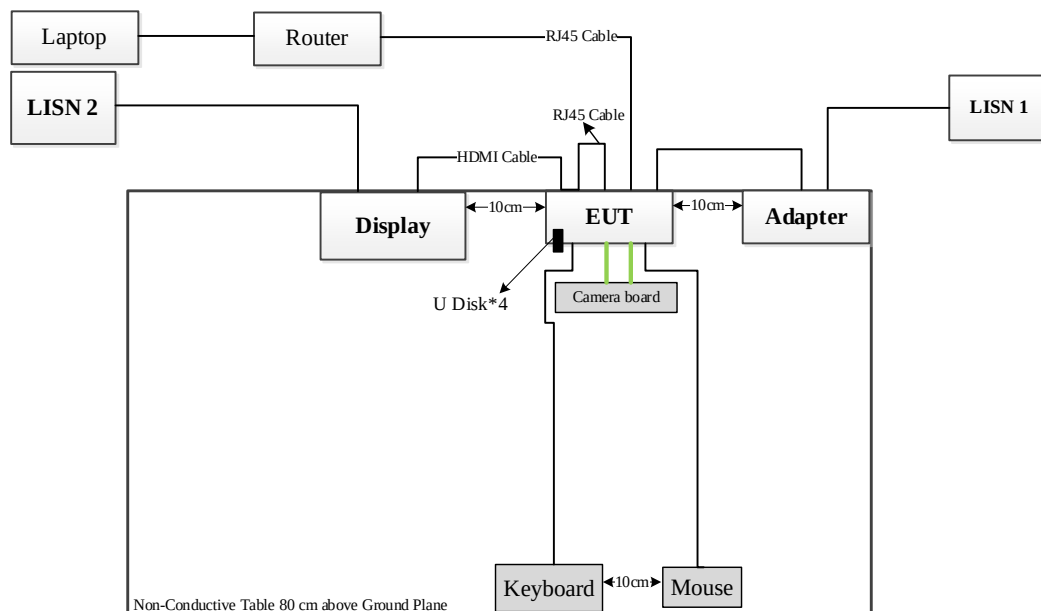

Spurious Emissions:

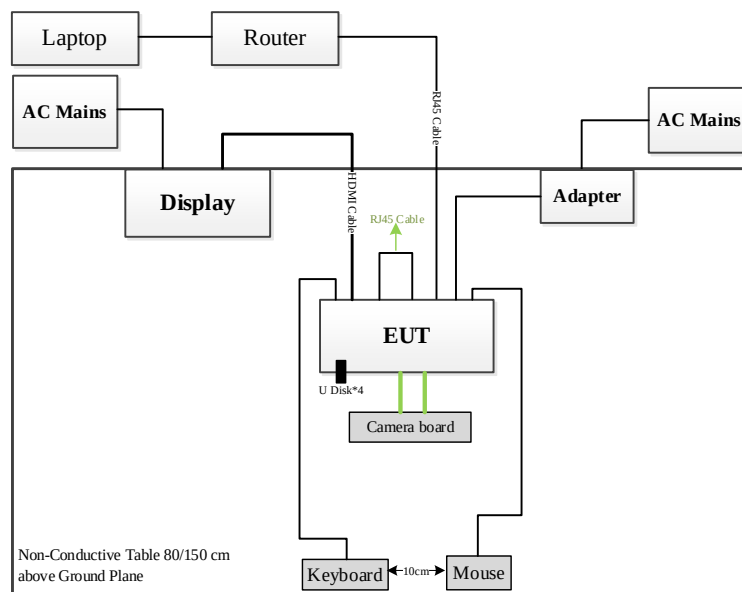

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF Output Power, Conducted	±0.61dB
Power Spectral Density, Conducted	±0.61 dB
Unwanted Emissions, Radiated	9k~30MHz: 4.12 dB, 30M~200MHz: 3.89 dB, 200M~1GHz: 5.09 dB, 1G~6GHz: 5.12 dB, 6G~18GHz: 5.73 dB, 18G~26.5G: 5.47 dB, 26.5G~40G: 5.63 dB
Unwanted Emissions, Conducted	±1.26 dB
Temperature	±1℃
Humidity	±5%
DC And Low Frequency Voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.407(b)	Undesirable Emission& Restricted Bands	Compliant
FCC §15.407(a) (e)	Emission Bandwidth	Compliant
FCC §15.407 (a)	Maximum Conducted Output Power	Compliant
FCC §15.407 (a)	Power Spectral Density	Compliant
C63.10 §12.2	Duty Cycle	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

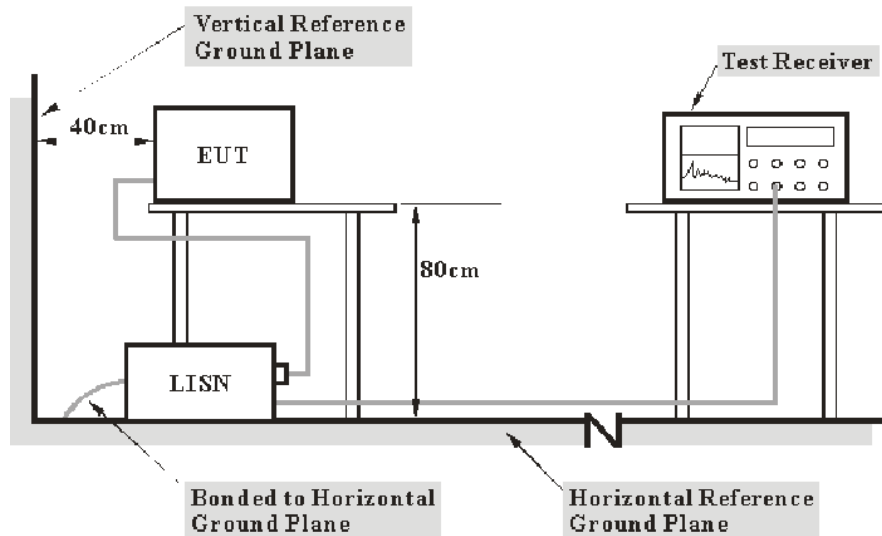

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

The adapter or EUT was connected to the main LISN with a 120 V/60 Hz AC power source.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each

of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions

3.2.1 Applicable Standard


FCC §15.407 (b)

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:


- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating solely in the 5.725-5.850 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.
 - (ii) Devices certified before March 2, 2017 with antenna gain greater than 10 dBi may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease by March 2, 2018. Devices certified before March 2, 2018 with antenna gain of 10 dBi or less may demonstrate compliance with the emission limits in § 15.247(d), but manufacturing, marketing and importing of devices certified under this alternative must cease before March 2, 2020.
- (8) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (9) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in § 15.209. Further, any U-NII devices using an AC power line are required to comply also with the conducted limits set forth in § 15.207.
- (10) The provisions of § 15.205 apply to intentional radiators operating under this section.
- (11) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.
- (c) The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

3.2.2 EUT Setup


9kHz - 30MHz:

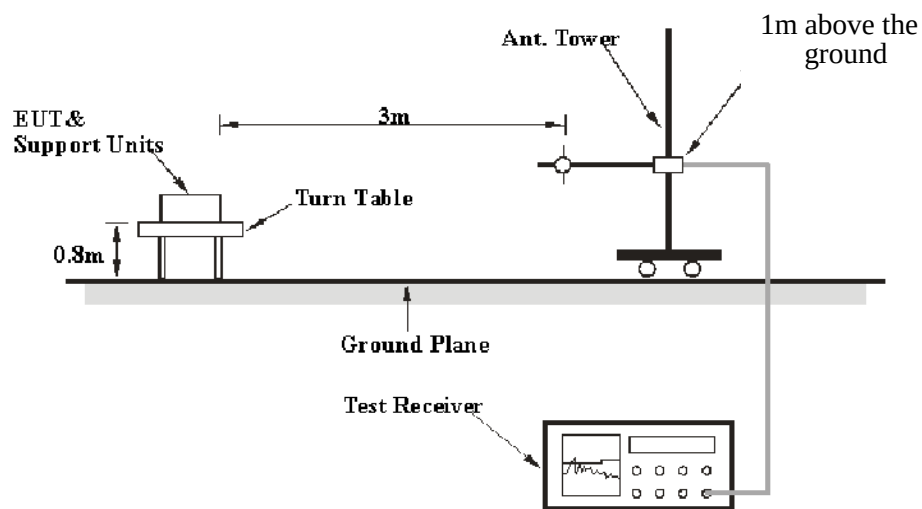


30MHz - 1GHz:

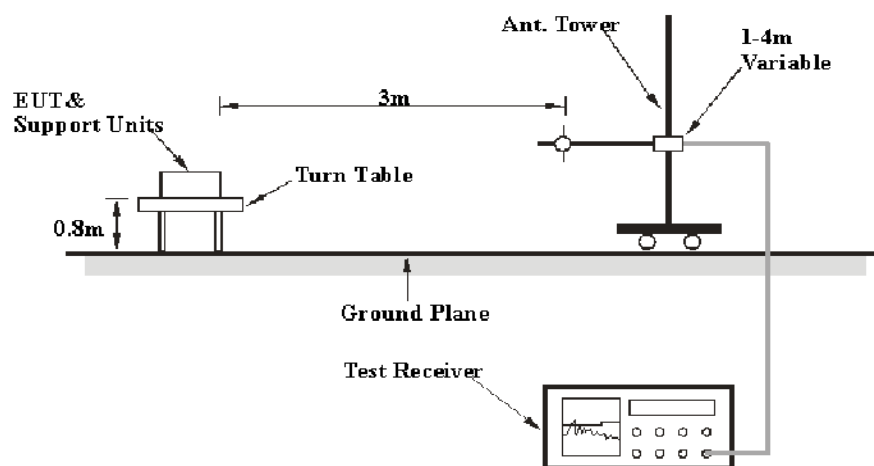

1GHz - 26.5GHz:

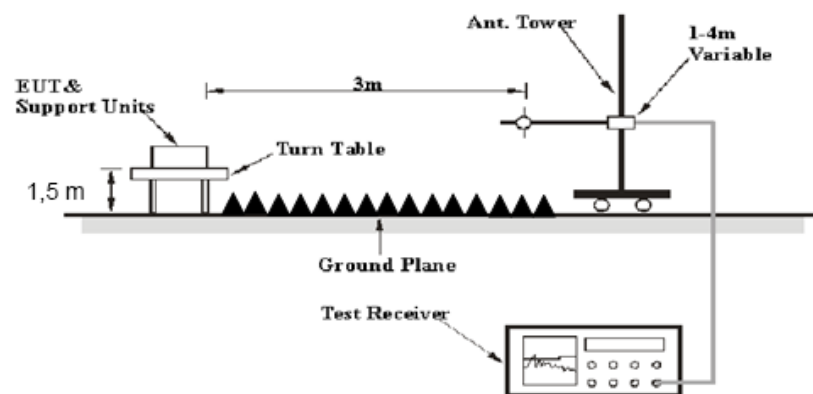

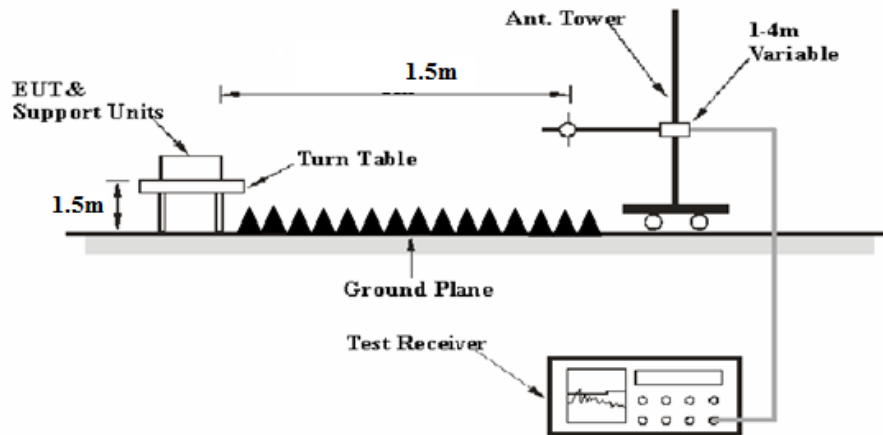26.5GHz - 40 GHz:

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2020. The specification used was FCC 15.209, FCC 15.407 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 40 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	/	Peak	PK
	/	/	200 Hz	Quasi Peak/ Average	QP/AV
150 kHz – 30 MHz	9 kHz	30 kHz	/	Peak	PK
	/	/	9 kHz	Quasi Peak/ Average	QP/AV
30MHz – 1000 MHz	120 kHz	500 kHz	/	Peak	PK
	/	/	120kHz	Quasi Peak	QP

1GHz- 40GHz:

Pre-scan:

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
Ave.	>98%	1MHz	5 kHz	Peak
	<98%	1MHz	$\geq 1/T$, not less than 5 kHz	Peak

Note: T is minimum transmission duration

Final measurement for emission identified during the pre-scan:

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
Ave.	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	$\geq 1/T$	Peak

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9–90 kHz, 110–490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, emission shall be computed as: $E [dB\mu V/m] = EIRP [dBm] + 95.2$, for $d = 3$ meters.

According to C63.10, the above 1G test result shall be extrapolated to the specified distance using an extrapolation Factor of 20dB/decade from 3m to 1.5m

Distance extrapolation Factor = $20 \log (\text{specific distance } [3m] / \text{test distance } [1.5m])$ dB = 6.02 dB

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

For 9kHz-26.5GHz:

Factor = Antenna Factor + Cable Loss- Amplifier Gain

For 26.5GHz-40GHz

Factor = Antenna Factor + Cable Loss- Amplifier Gain -Distance extrapolation Factor

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.3 Emission Bandwidth

3.3.1 Applicable Standard


FCC §15.407 (a), (h)

(h)(2) Radar Detection Function of Dynamic Frequency Selection (DFS). U-NII devices operating with any part of its 26 dB emission bandwidth in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

FCC §15.407 (e)

Within the 5.725-5.850 GHz and 5.850-5.895 GHz bands, the minimum 6 dB bandwidth of U-NII devices shall be at least 500 kHz.

3.3.2 EUT Setup

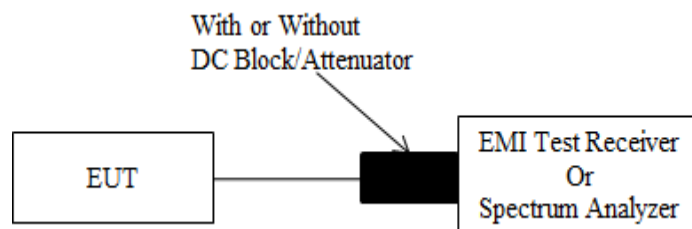

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.3.3 Test Procedure

26dB Emission Bandwidth:

According to ANSI C63.10-2020 Section 12.5.2

- Set RBW = shall be in the range of 1% to 5% of the emission bandwidth.
- Set the VBW > RBW.
- Detector = peak.
- Trace mode = max-hold.
- Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the instrument. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is in the range of 1% to 5%.

6 dB emission bandwidth:

According to ANSI C63.10-2020 Section 12.5.1

- Set RBW = 100 kHz.
- Set the video bandwidth (VBW) $\geq 3 \times$ RBW.
- Detector = Peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 Db relative to the maximum level measured in the fundamental emission.

99% Occupied Bandwidth:

According to ANSI C63.10-2020 Section 12.5.3&6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).

3.4 Maximum Conducted Output Power

3.4.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.4.2 EUT Setup

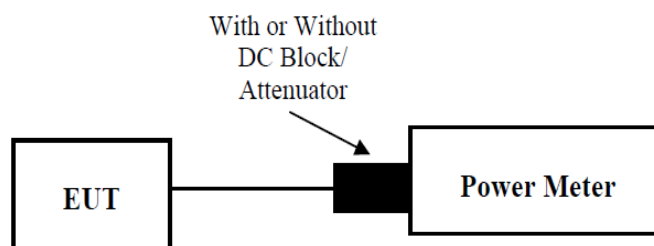

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.4.3 Test Procedure

According to ANSI C63.10-2020 Section 12.4.3.2

Method PM-G is measurement using a gated RF average power meter.

Measurements may be performed using a wideband gated RF power meter provided that the gate

parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.5 Maximum Power Spectral Density

3.5.1 Applicable Standard

FCC §15.407(a) (1)(iv)

For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.


FCC §15.407(a) (2)

For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or $11 \text{ dBm} + 10 \log B$, where B is the 26 dB emission bandwidth in megahertz. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

FCC §15.407(a) (3)(i)

For the band 5.725-5.850 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. In addition, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. However, fixed point-to-point U-NII devices operating in this band may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted power. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

3.5.2 EUT Setup

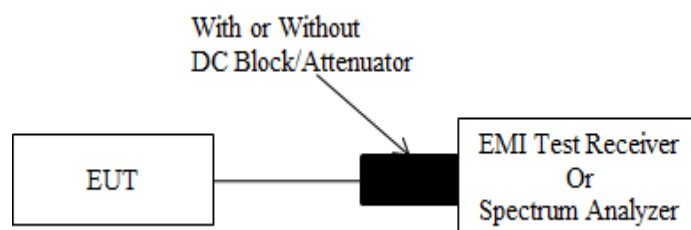

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.5.3 Test Procedure

According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Duty cycle $\geq 98\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-1 should be applied.

Duty cycle $< 98\%$, duty cycle variations are less than $\pm 2\%$


KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-2 should be applied.

Duty cycle $< 98\%$, duty cycle variations exceed $\pm 2\%$

KDB 789033 D02 General UNII Test Procedures New Rules v02r01 Method SA-3 should be applied.

3.6 Duty Cycle

3.6.1 EUT Setup

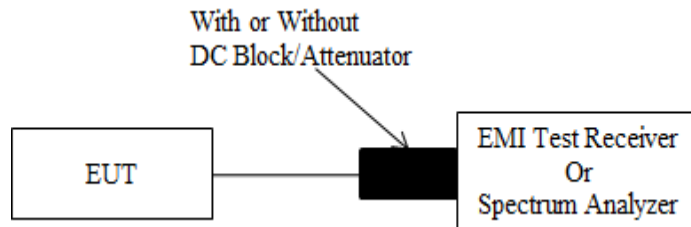

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.6.2 Test Procedure

According to ANSI C63.10-2020 Section 12.2

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- i) Set the center frequency of the instrument to the center frequency of the transmission.
- ii) Set $RBW \geq EBW$ if possible; otherwise, set RBW to the largest available value.
- iii) Set $VBW \geq RBW$.
- iv) Set detector = peak.
- v) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in item a1) of 12.2, and the number of sweep points across duration T exceeds 100. For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7\mu s$.

3.7 Antenna Requirement

3.7.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.7.2 Judgment

Result: Compliant. Please refer to the Antenna Information detail in Section 1.

4. Test DATA AND RESULTS

4.1 AC Line Conducted Emissions

Sample Number:	3N1Z-4	Test Date:	2026/6/29
Test Site:	CE	Test Mode:	Transmitting (maximum conducted output power mode, Band 4, 802.11ac80 5775MHz)
Tester:	Ella Huang	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	25.7	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2025/9/26	2026/9/25
R&S	LISN	ENV216	101132	2025/9/26	2026/9/25
R&S	EMI Test Receiver	ESR3	103104	2026/5/8	2027/5/7
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2025/11/10	2026/11/9
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).


Project No.: 2603T61540E-RF
 Tester: Ella Huang
 Port: Line
 Condition: RBW:9kHz
 Test Mode: M1
 Note: 32G

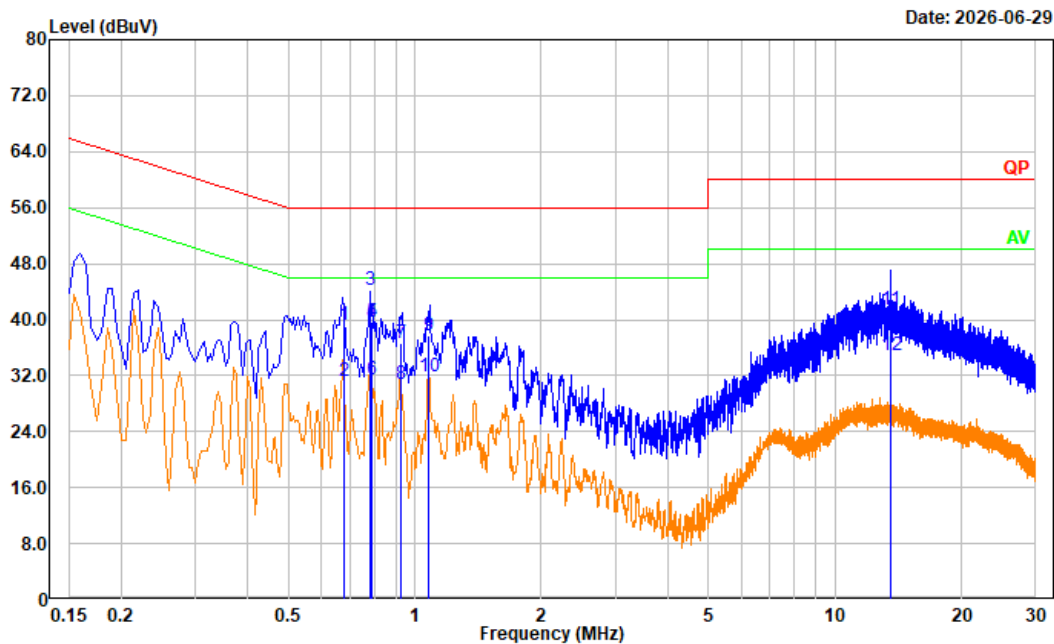

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector

1	0.679	28.88	10.32	39.20	56.00	16.80	QP
2	0.679	20.89	10.32	31.21	46.00	14.79	Average
3	0.786	33.93	10.37	44.30	56.00	11.70	Average
4	0.788	29.20	10.37	39.57	56.00	16.43	QP
5	0.788	29.40	10.37	39.77	56.00	16.23	QP
6	0.788	21.01	10.37	31.38	46.00	14.62	Average
7	0.929	26.14	10.47	36.61	56.00	19.39	QP
8	0.929	20.41	10.47	30.88	46.00	15.12	Average
9	1.082	27.18	10.48	37.66	56.00	18.34	QP
10	1.082	21.33	10.48	31.81	46.00	14.19	Average
11	13.559	31.20	10.17	41.37	60.00	18.63	QP
12	13.559	24.68	10.17	34.85	50.00	15.15	Average

Project No.: 2603T61540E-RF
 Tester: Ella Huang
 Port: neutral
 Condition: RBW:9kHz
 Test Mode: M1
 Note: 32G

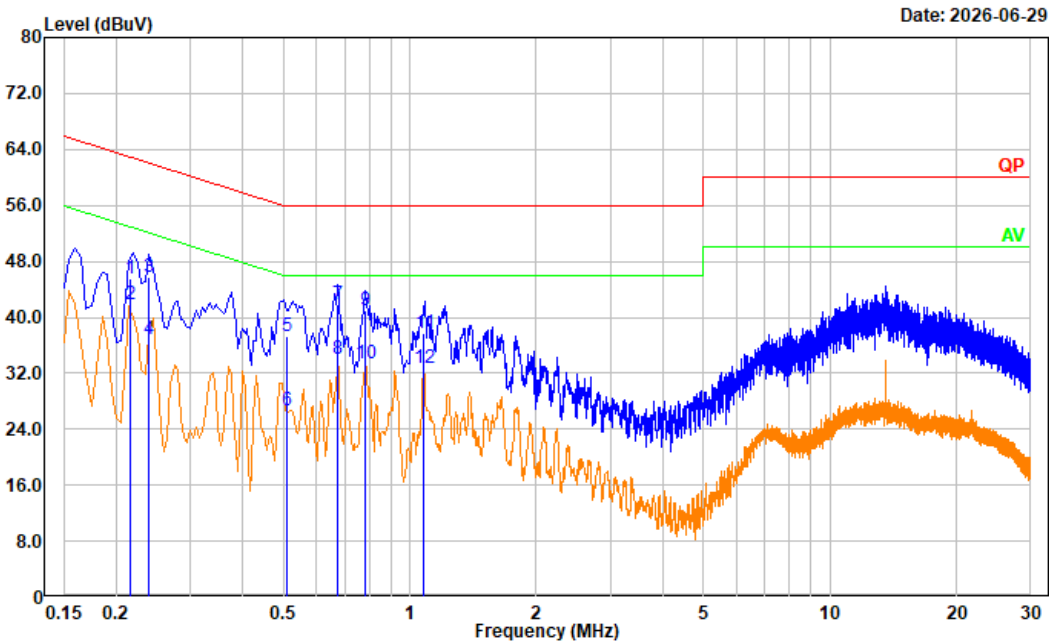

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.216	34.96	10.49	45.45	62.95	17.50	QP
2	0.216	31.28	10.49	41.77	52.95	11.18	Average
3	0.240	35.19	10.46	45.65	62.11	16.46	QP
4	0.240	26.45	10.46	36.91	52.11	15.20	Average
5	0.508	27.11	10.11	37.22	56.00	18.78	QP
6	0.508	16.49	10.11	26.60	46.00	19.40	Average
7	0.674	31.62	10.20	41.82	56.00	14.18	QP
8	0.674	23.79	10.20	33.99	46.00	12.01	Average
9	0.785	30.81	10.24	41.05	56.00	14.95	QP
10	0.785	23.18	10.24	33.42	46.00	12.58	Average
11	1.081	27.49	10.34	37.83	56.00	18.17	QP
12	1.081	22.31	10.34	32.65	46.00	13.35	Average

4.2 Radiation Spurious Emissions

4.2.1 9 kHz – 1 GHz

Sample Number:	3N1Z-4	Test Date:	2026/7/27
Test Site:	966-1	Test Mode:	Transmitting (maximum conducted output power mode, Band 1, 802.11ac80 5210MHz; Band 4, 802.11ac80 5775MHz)
Tester:	Jin He	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.2	Relative Humidity: (%)	64	ATM Pressure: (kPa)	99.7
----------------------	------	---------------------------	----	------------------------	------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
GLOBAL	Loop Antenna	1313-1A	3110611	2026/1/29	2029/1/28
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2025/11/10	2026/11/9
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2025/11/10	2026/11/9
R&S	EMI Test Receiver	ESR3	102724	2026/2/27	2027/2/26
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2025/11/10	2026/11/9
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2025/11/10	2026/11/9
XQY	Coaxial Cable	XQY-CMR400UF-NJ-NJ-7M	24056379	2026/5/21	2027/5/20
Sonoma	Amplifier	310N	186165	2025/11/10	2026/11/9
Audix	Test Software	E3	191218 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case(Z) is referred to plots.


Project No.: 2603T61540E-RF

Tester: Jin He

Condition: RBW:0.2 kHz VBW:1 kHz


Polarization: Parallel

Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

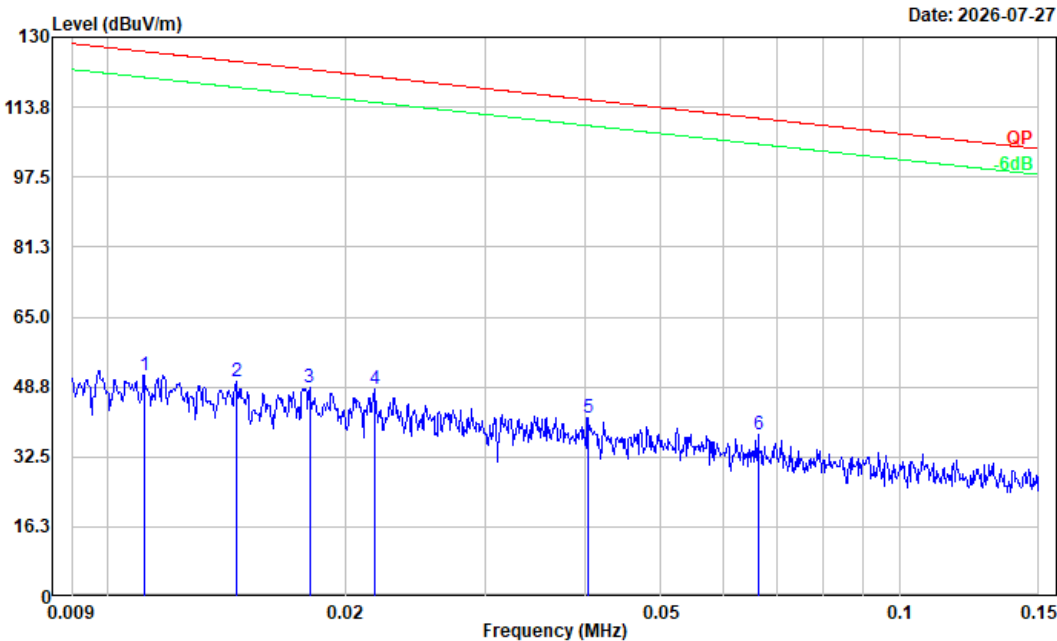


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.011	17.65	33.80	51.45	126.69	75.24	Peak
2	0.015	17.89	32.20	50.09	124.37	74.28	Peak
3	0.018	17.90	30.58	48.48	122.51	74.03	Peak
4	0.022	19.52	28.83	48.35	120.87	72.52	Peak
5	0.040	18.87	22.70	41.57	115.47	73.90	Peak
6	0.066	19.32	18.24	37.56	111.17	73.61	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Parallel
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

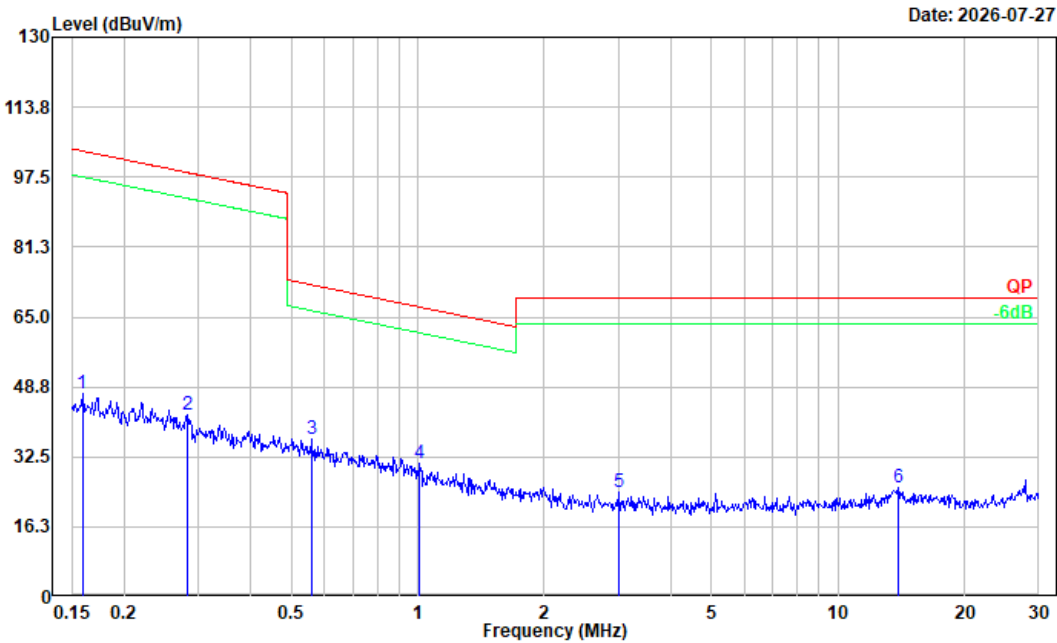


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.159	35.51	11.60	47.11	103.58	56.47	Peak
2	0.283	36.35	5.82	42.17	98.56	56.39	Peak
3	0.558	36.43	0.23	36.66	72.65	35.99	Peak
4	1.010	35.43	-4.51	30.92	67.38	36.46	Peak
5	3.009	32.60	-8.23	24.37	69.54	45.17	Peak
6	13.915	33.25	-8.02	25.23	69.54	44.31	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Perpendicular
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

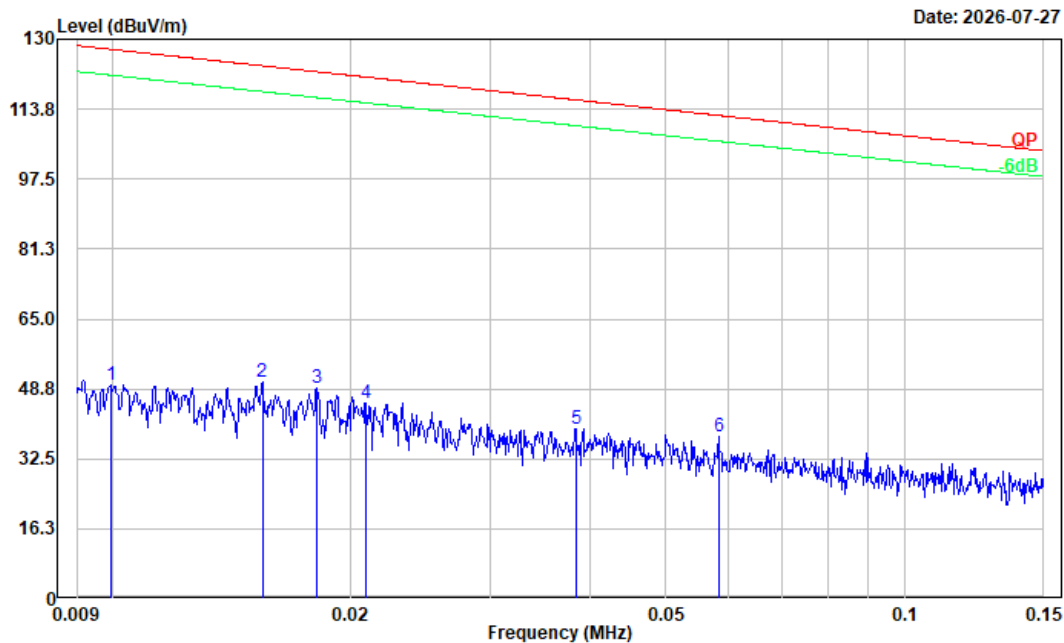


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.010	15.95	33.80	49.75	127.66	77.91	Peak
2	0.015	19.41	30.91	50.32	123.83	73.51	Peak
3	0.018	19.32	29.57	48.89	122.46	73.57	Peak
4	0.021	17.26	28.13	45.39	121.21	75.82	Peak
5	0.038	17.82	21.75	39.57	115.91	76.34	Peak
6	0.058	19.25	18.28	37.53	112.29	74.76	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Perpendicular
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

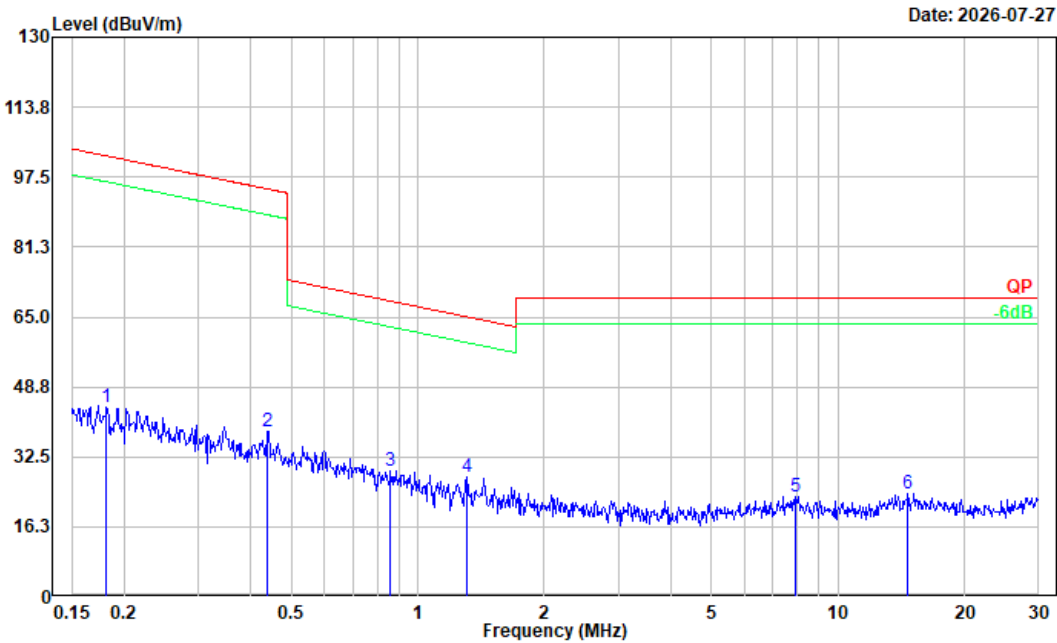


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	0.182	34.16	9.83	43.99	102.43	58.44	Peak
2	0.440	37.03	1.32	38.35	94.74	56.39	Peak
3	0.862	33.43	-4.12	29.31	68.79	39.48	Peak
4	1.303	34.14	-6.40	27.74	65.13	37.39	Peak
5	7.893	32.86	-9.53	23.33	69.54	46.21	Peak
6	14.672	32.38	-8.45	23.93	69.54	45.61	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Ground-Parallel
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

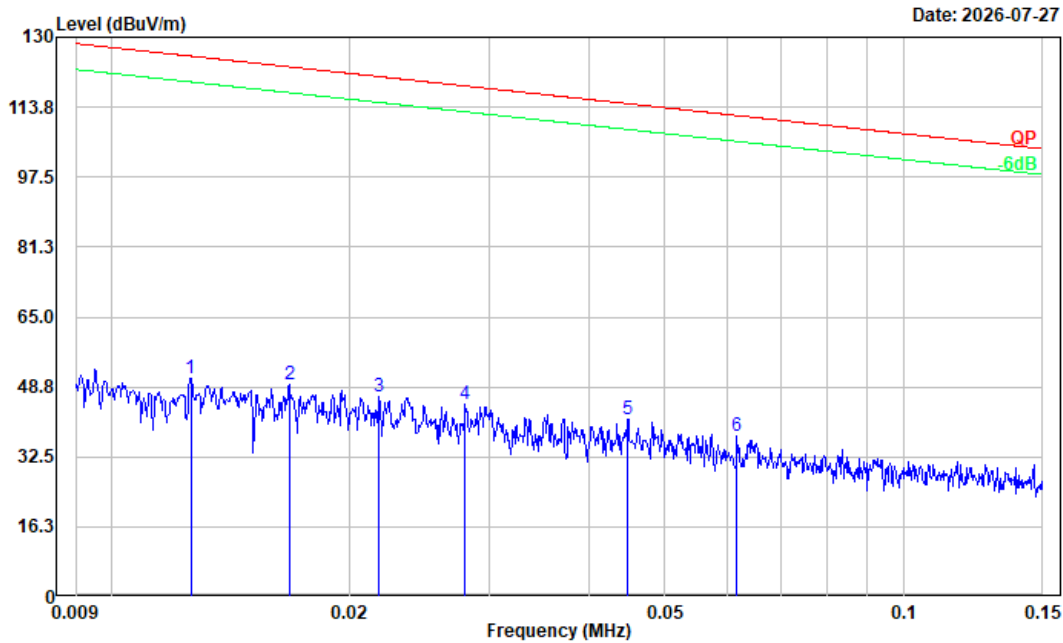


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.013	17.53	33.11	50.64	125.61	74.97	Peak
2	0.017	18.28	31.14	49.42	123.12	73.70	Peak
3	0.022	17.86	28.80	46.66	120.85	74.19	Peak
4	0.028	18.85	25.89	44.74	118.67	73.93	Peak
5	0.045	19.62	21.74	41.36	114.57	73.21	Peak
6	0.062	18.40	18.93	37.33	111.80	74.47	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Ground-Parallel
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

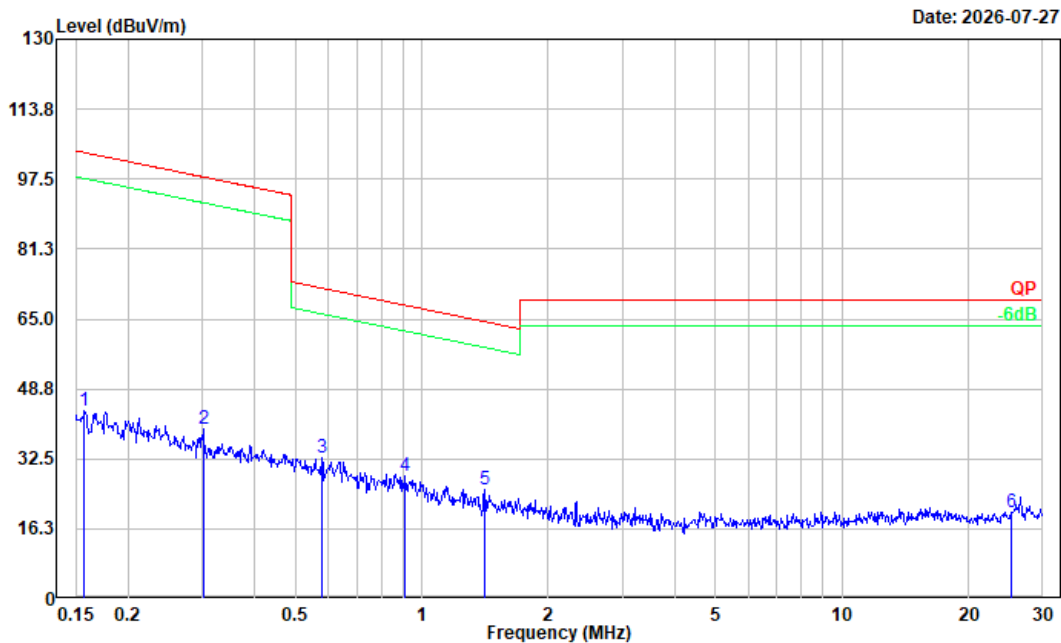


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.157	31.90	11.67	43.57	103.67	60.10	Peak
2	0.302	34.30	5.01	39.31	98.01	58.70	Peak
3	0.576	32.61	0.03	32.64	72.36	39.72	Peak
4	0.914	32.19	-3.57	28.62	68.27	39.65	Peak
5	1.411	30.93	-5.72	25.21	64.42	39.21	Peak
6	25.188	28.04	-7.86	20.18	69.54	49.36	Peak


Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:120 kHz VBW:500 kHz
Polarization: horizontal
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

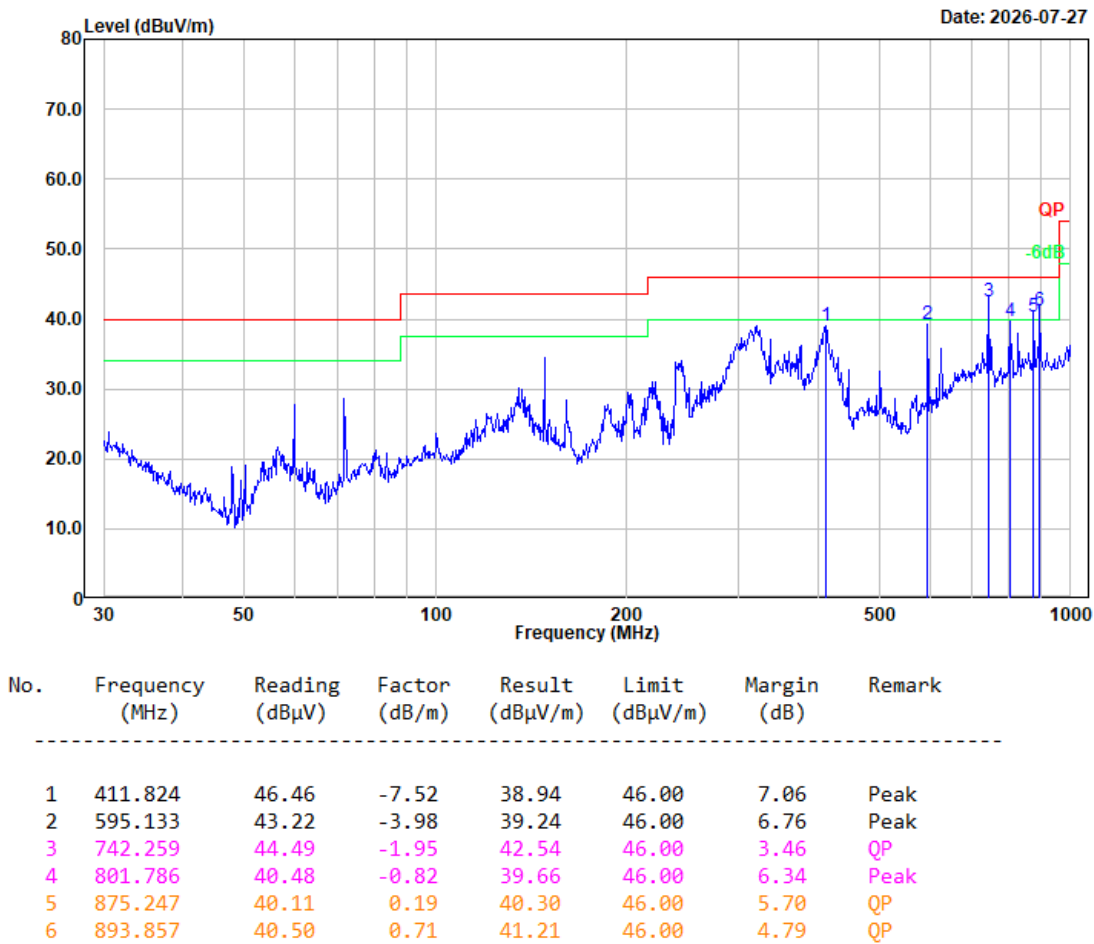

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:120 kHz VBW:500 kHz
Polarization: vertical
Note: Transmitting Part 15.407_5G Wifi Band 1 802.11ac80 5210MHz

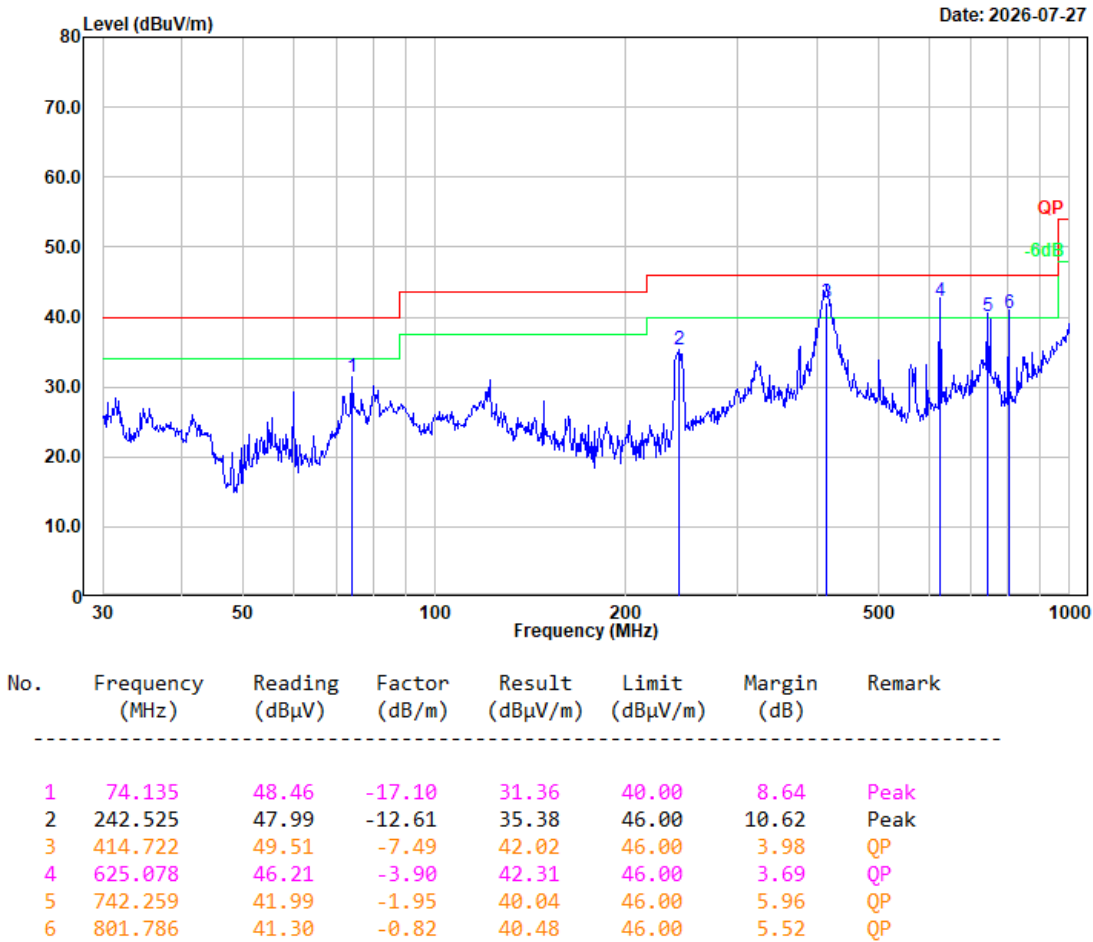


Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Parallel
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

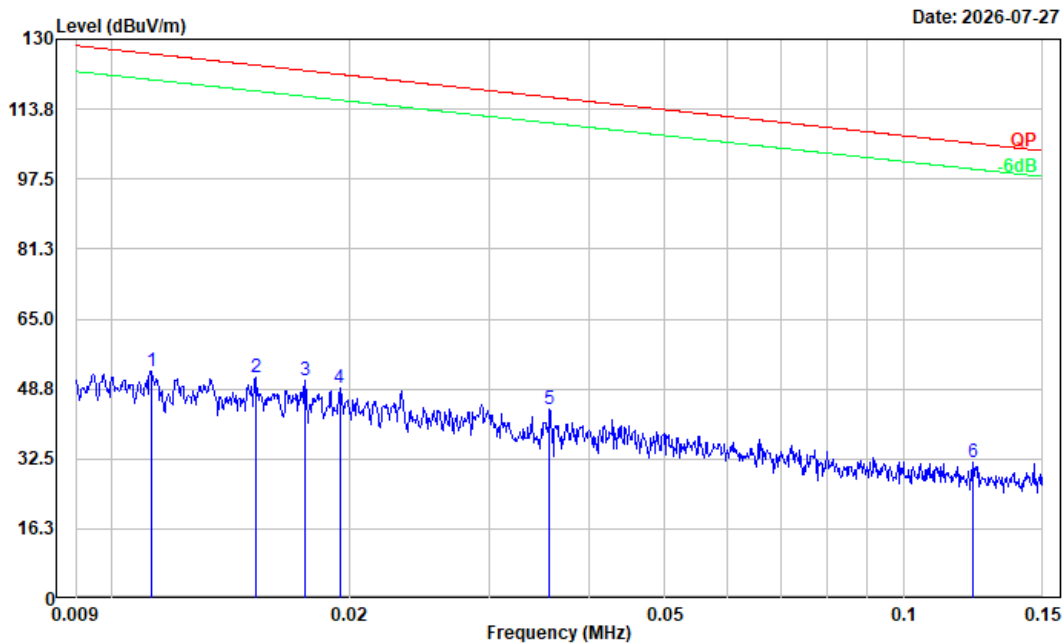


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.011	19.25	33.75	53.00	126.61	73.61	Peak
2	0.015	19.51	31.88	51.39	123.97	72.58	Peak
3	0.018	20.10	30.79	50.89	122.73	71.84	Peak
4	0.019	19.09	29.91	49.00	121.85	72.85	Peak
5	0.036	20.49	23.70	44.19	116.55	72.36	Peak
6	0.122	18.33	13.29	31.62	105.84	74.22	Peak

Project No.: 2603T61540E-RF
 Tester: Jin He
 Condition: RBW:9 kHz VBW:30 kHz
 Polarization: Parallel
 Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

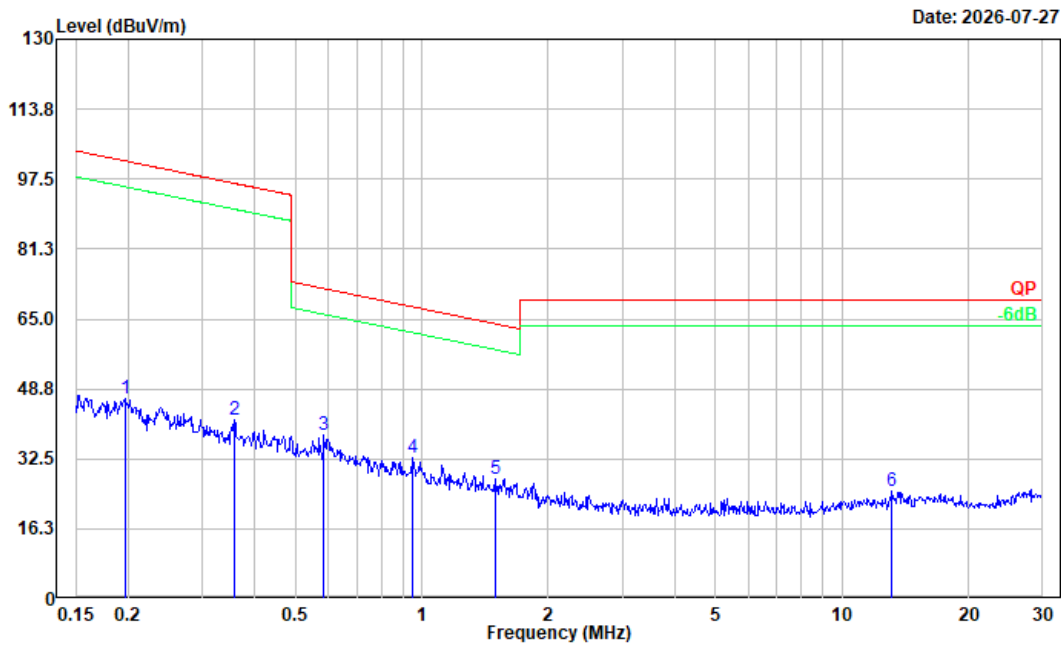


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.197	36.49	9.85	46.34	101.74	55.40	Peak
2	0.358	37.85	3.84	41.69	96.53	54.84	Peak
3	0.585	38.14	-0.07	38.07	72.22	34.15	Peak
4	0.953	36.80	-3.99	32.81	67.90	35.09	Peak
5	1.495	33.98	-5.98	28.00	63.90	35.90	Peak
6	13.127	32.90	-7.92	24.98	69.54	44.56	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Perpendicular
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

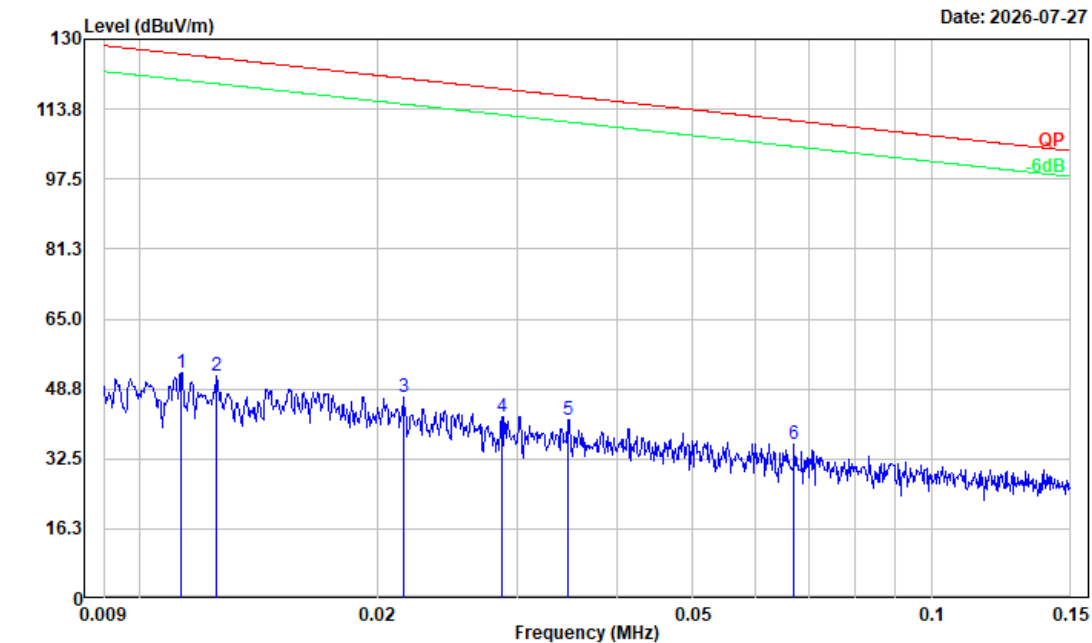


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.011	19.46	33.07	52.53	126.56	74.03	Peak
2	0.013	19.34	32.43	51.77	125.66	73.89	Peak
3	0.022	18.93	27.79	46.72	120.94	74.22	Peak
4	0.029	18.07	24.11	42.18	118.45	76.27	Peak
5	0.035	19.15	22.48	41.63	116.79	75.16	Peak
6	0.067	18.86	17.05	35.91	111.07	75.16	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Perpendicular
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

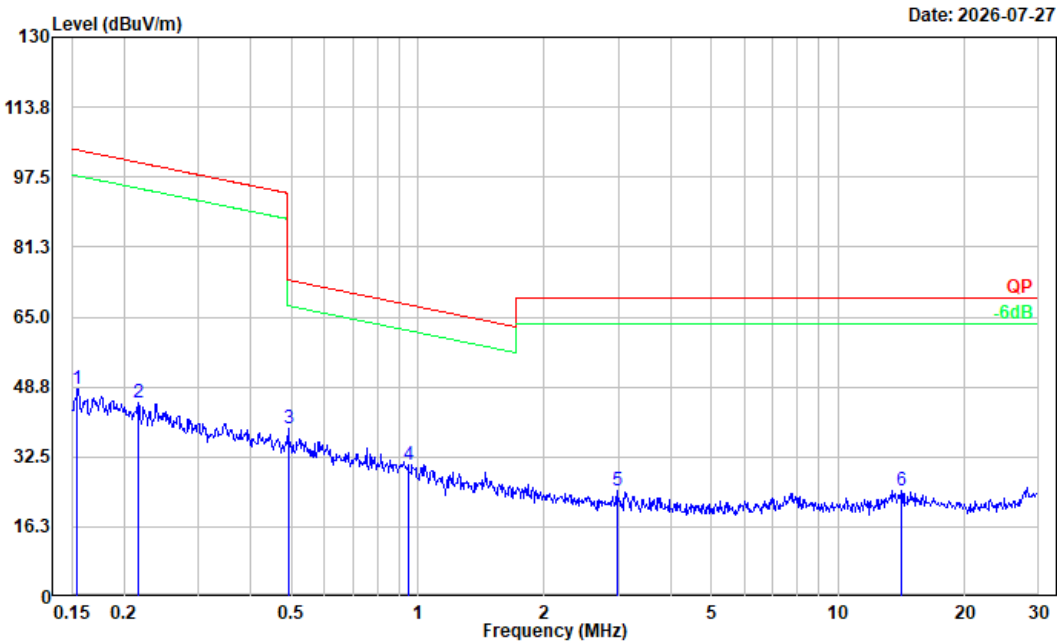


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.155	37.28	11.04	48.32	103.81	55.49	Peak
2	0.216	36.97	8.25	45.22	100.91	55.69	Peak
3	0.491	38.90	0.15	39.05	73.77	34.72	Peak
4	0.948	35.77	-4.96	30.81	67.95	37.14	Peak
5	2.978	34.11	-9.35	24.76	69.54	44.78	Peak
6	14.138	33.27	-8.44	24.83	69.54	44.71	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Ground-Parallel
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

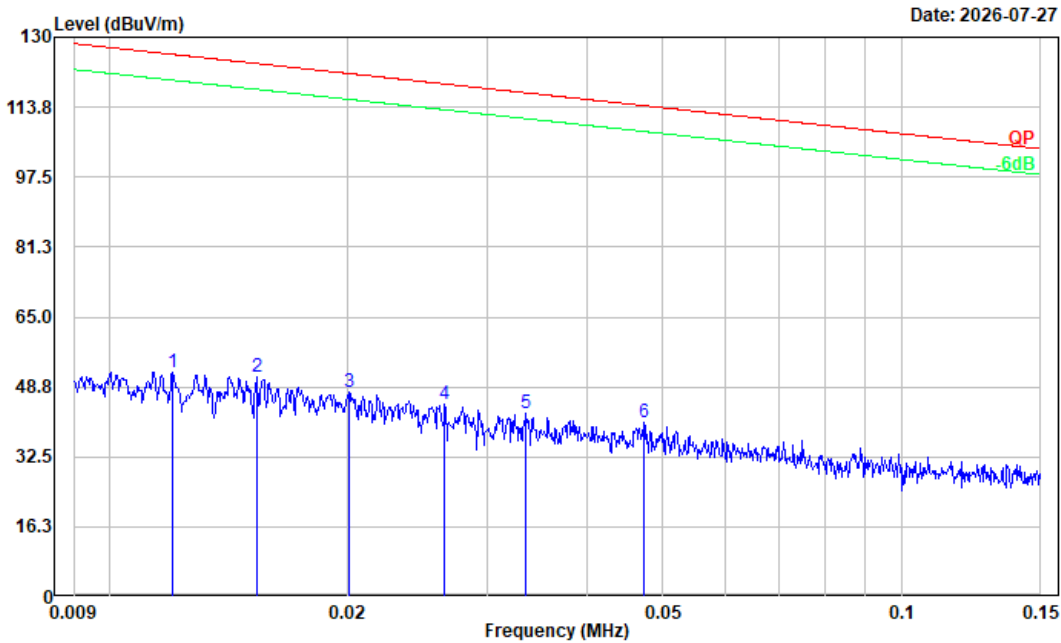


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.012	18.83	33.38	52.21	126.03	73.82	Peak
2	0.015	19.15	31.82	50.97	123.90	72.93	Peak
3	0.020	18.02	29.60	47.62	121.56	73.94	Peak
4	0.027	18.19	26.57	44.76	119.14	74.38	Peak
5	0.034	18.46	24.16	42.62	117.08	74.46	Peak
6	0.047	19.24	21.24	40.48	114.13	73.65	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Ground-Parallel
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

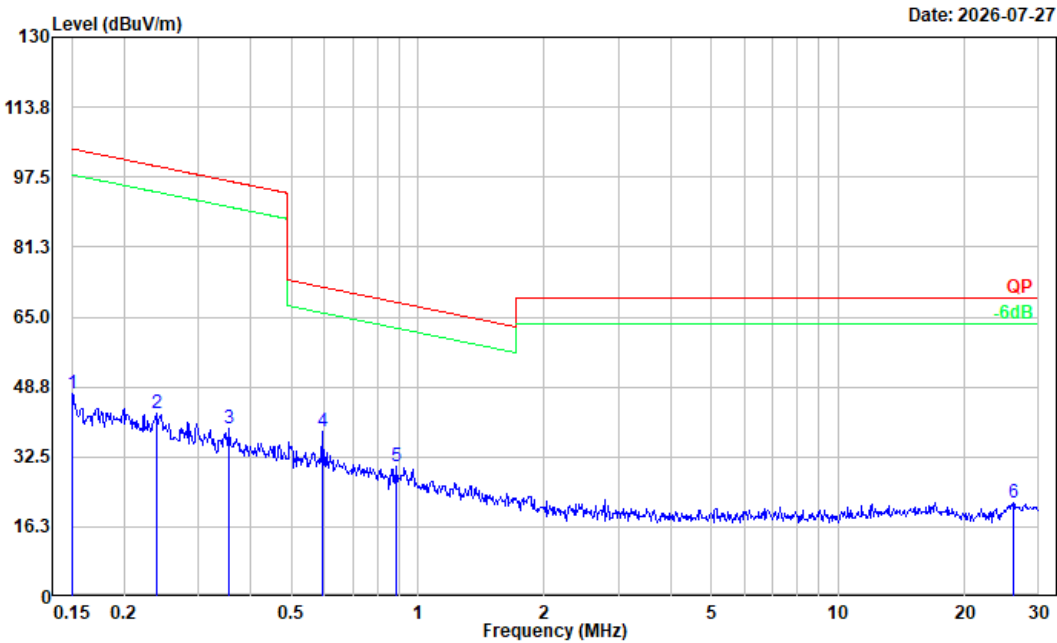


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.151	35.20	11.98	47.18	104.04	56.86	Peak
2	0.239	34.66	7.87	42.53	100.03	57.50	Peak
3	0.354	35.17	3.92	39.09	96.63	57.54	Peak
4	0.592	38.41	-0.14	38.27	72.13	33.86	Peak
5	0.885	33.56	-3.28	30.28	68.56	38.28	Peak
6	26.139	29.43	-7.58	21.85	69.54	47.69	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:120 kHz VBW:500 kHz
Polarization: horizontal
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

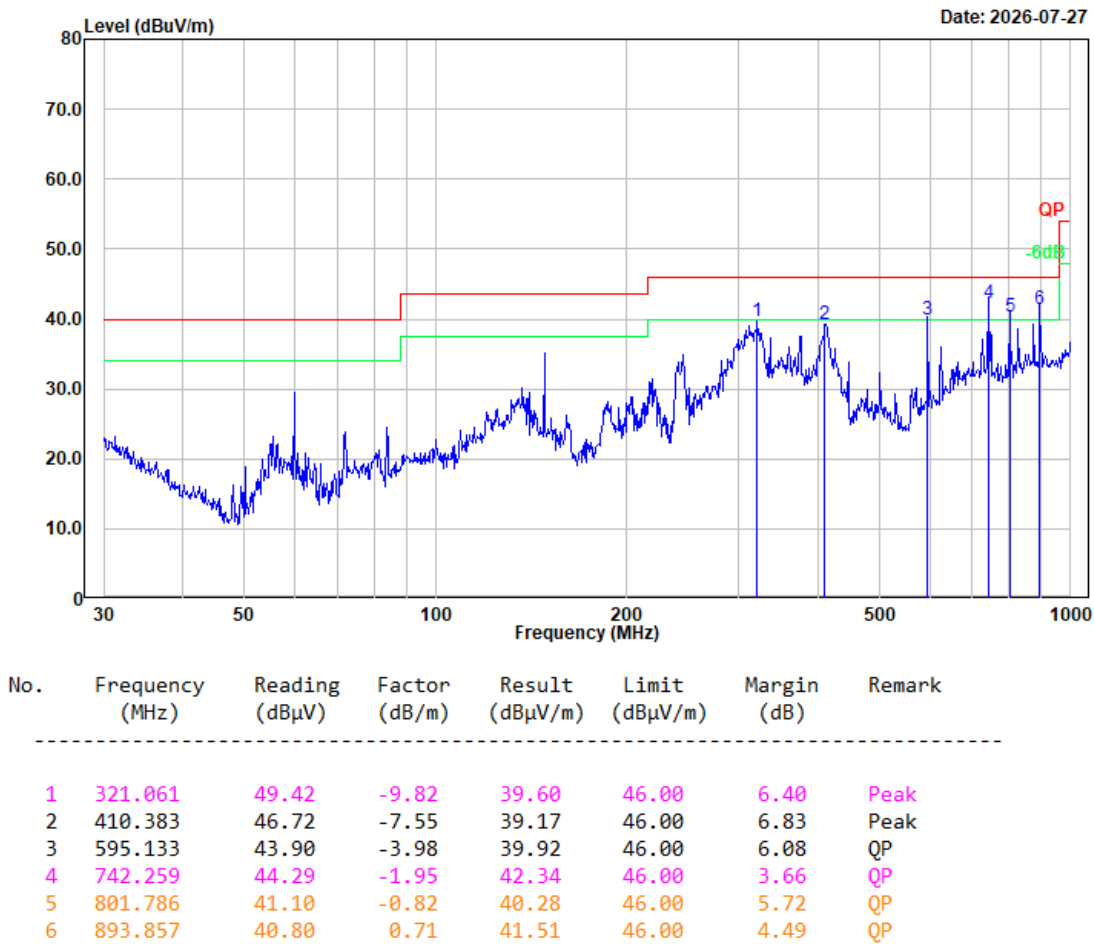

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:120 kHz VBW:500 kHz
Polarization: vertical
Note: Transmitting Part 15.407_5G Wifi Band 4 802.11ac80 5775MHz

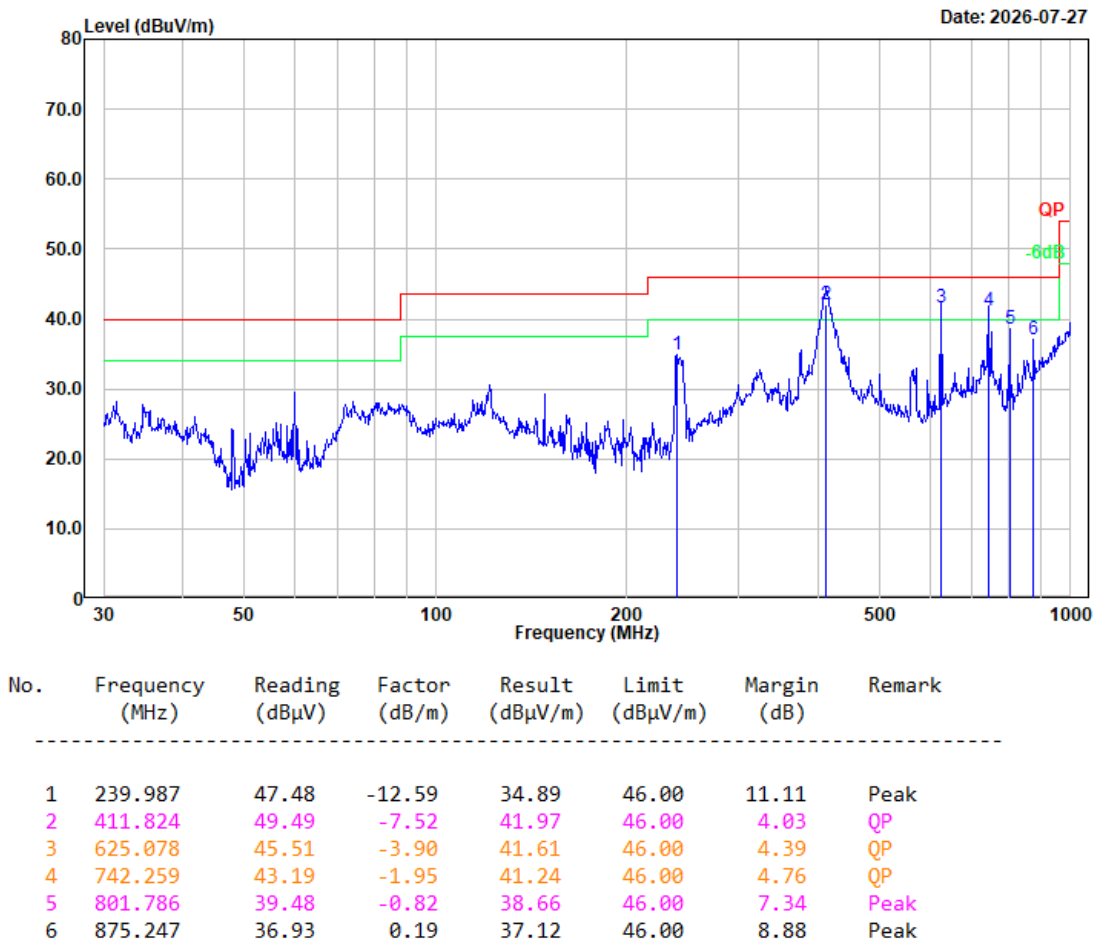

4.2.2 1 GHz – 40 GHz

Sample Number	3N1Z-4	Test Date:	2026/7/21
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Hua Yuan Miao	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	24.2	Relative Humidity: (%)	60	ATM Pressure: (kPa)	100.1
----------------------	------	---------------------------	----	------------------------	-------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2026/2/27	2027/2/26
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2025/11/10	2026/11/9
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2025/11/10	2026/11/9
A.H	Pre-amplifier	PAM-0118P	628	2025/11/10	2026/11/9
Audix	Test Software	E3	191218 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2024/2/4	2027/2/3
PASTERNAK	Horn Antenna	PE9850/2F-20	072001	2024/2/4	2027/2/3
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2025/11/10	2026/11/9
Decentest	Multiplex Switch Test Control Set	DT7220SCU	DQ77925	2025/8/4	2026/8/3
Decentest	Filter Switch Unit	DT7220FSU	DQ77928	2025/8/4	2026/8/3

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case (Z axis) is below:

5150-5250MHz:**802.11a Mode Chain 0:**

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	37.35	PK	H	13.26	50.61	68.20	17.59
10360.000	35.74	PK	V	13.26	49.00	68.20	19.20
15540.000	36.27	PK	H	13.48	49.75	74.00	24.25
15540.000	27.96	AV	H	13.48	41.44	54.00	12.56
15540.000	36.89	PK	V	13.48	50.37	74.00	23.63
15540.000	27.41	AV	V	13.48	40.89	54.00	13.11
Middle Channel:				5200	MHz		
10400.000	36.87	PK	H	13.28	50.15	68.20	18.05
10400.000	36.98	PK	V	13.28	50.26	68.20	17.94
15600.000	36.11	PK	H	13.38	49.49	74.00	24.51
15600.000	26.78	AV	H	13.38	40.16	54.00	13.84
15600.000	36.47	PK	V	13.38	49.85	74.00	24.15
15600.000	26.81	AV	V	13.38	40.19	54.00	13.81
High Channel:				5240	MHz		
10480.000	36.95	PK	H	13.38	50.33	68.20	17.87
10480.000	37.44	PK	V	13.38	50.82	68.20	17.38
15720.000	36.81	PK	H	13.30	50.11	74.00	23.89
15720.000	26.98	AV	H	13.30	40.28	54.00	13.72
15720.000	36.71	PK	V	13.30	50.01	74.00	23.99
15720.000	27.15	AV	V	13.30	40.45	54.00	13.55

802.11a Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	36.94	PK	H	13.26	50.20	68.20	18.00
10360.000	35.69	PK	V	13.26	48.95	68.20	19.25
15540.000	35.95	PK	H	13.48	49.43	74.00	24.57
15540.000	27.59	AV	H	13.48	41.07	54.00	12.93
15540.000	36.82	PK	V	13.48	50.30	74.00	23.70
15540.000	27.37	AV	V	13.48	40.85	54.00	13.15
Middle Channel:				5200	MHz		
10400.000	36.45	PK	H	13.28	49.73	68.20	18.47
10400.000	36.95	PK	V	13.28	50.23	68.20	17.97
15600.000	36.79	PK	H	13.38	50.17	74.00	23.83
15600.000	26.11	AV	H	13.38	39.49	54.00	14.51
15600.000	36.85	PK	V	13.38	50.23	74.00	23.77
15600.000	26.37	AV	V	13.38	39.75	54.00	14.25
High Channel:				5240	MHz		
10480.000	37.15	PK	H	13.38	50.53	68.20	17.67
10480.000	37.92	PK	V	13.38	51.30	68.20	16.90
15720.000	36.94	PK	H	13.30	50.24	74.00	23.76
15720.000	26.78	AV	H	13.30	40.08	54.00	13.92
15720.000	37.13	PK	V	13.30	50.43	74.00	23.57
15720.000	27.11	AV	V	13.30	40.41	54.00	13.59

802.11ac20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	36.39	PK	H	13.26	49.65	68.20	18.55
10360.000	36.69	PK	V	13.26	49.95	68.20	18.25
15540.000	36.25	PK	H	13.48	49.73	74.00	24.27
15540.000	27.55	AV	H	13.48	41.03	54.00	12.97
15540.000	36.92	PK	V	13.48	50.40	74.00	23.60
15540.000	27.78	AV	V	13.48	41.26	54.00	12.74
Middle Channel:				5200	MHz		
10400.000	37.52	PK	H	13.28	50.80	68.20	17.40
10400.000	37.11	PK	V	13.28	50.39	68.20	17.81
15600.000	36.94	PK	H	13.38	50.32	74.00	23.68
15600.000	26.89	AV	H	13.38	40.27	54.00	13.73
15600.000	36.15	PK	V	13.38	49.53	74.00	24.47
15600.000	26.47	AV	V	13.38	39.85	54.00	14.15
High Channel:				5240	MHz		
10480.000	36.48	PK	H	13.38	49.86	68.20	18.34
10480.000	36.97	PK	V	13.38	50.35	68.20	17.85
15720.000	36.35	PK	H	13.30	49.65	74.00	24.35
15720.000	26.77	AV	H	13.30	40.07	54.00	13.93
15720.000	37.13	PK	V	13.30	50.43	74.00	23.57
15720.000	27.41	AV	V	13.30	40.71	54.00	13.29

802.11ac40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5190	MHz		
10380.000	36.99	PK	H	13.27	50.26	68.20	17.94
10380.000	37.46	PK	V	13.27	50.73	68.20	17.47
15570.000	37.16	PK	H	13.43	50.59	74.00	23.41
15570.000	27.51	AV	H	13.43	40.94	54.00	13.06
15570.000	36.64	PK	V	13.43	50.07	74.00	23.93
15570.000	28.11	AV	V	13.43	41.54	54.00	12.46
High Channel:				5230	MHz		
10460.000	35.78	PK	H	13.35	49.13	68.20	19.07
10460.000	34.87	PK	V	13.35	48.22	68.20	19.98
15690.000	39.50	PK	H	13.33	52.83	74.00	21.17
15690.000	28.78	AV	H	13.33	42.11	54.00	11.89
15690.000	39.48	PK	V	13.33	52.81	74.00	21.19
15690.000	28.29	AV	V	13.33	41.62	54.00	12.38

802.11ac80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5210	MHz		
10420.000	36.52	PK	H	13.30	49.82	68.20	18.38
10420.000	37.23	PK	V	13.30	50.53	68.20	17.67
15630.000	39.49	PK	H	13.36	52.85	74.00	21.15
15630.000	27.87	AV	H	13.36	41.23	54.00	12.77
15630.000	38.27	PK	V	13.36	51.63	74.00	22.37
15630.000	28.67	AV	V	13.36	42.03	54.00	11.97

802.11ax20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5180	MHz		
10360.000	35.71	PK	H	13.26	48.97	68.20	19.23
10360.000	35.64	PK	V	13.26	48.90	68.20	19.30
15540.000	36.59	PK	H	13.48	50.07	74.00	23.93
15540.000	28.35	AV	H	13.48	41.83	54.00	12.17
15540.000	35.97	PK	V	13.48	49.45	74.00	24.55
15540.000	28.23	AV	V	13.48	41.71	54.00	12.29
Middle Channel:				5200	MHz		
10400.000	36.58	PK	H	13.28	49.86	68.20	18.34
10400.000	37.16	PK	V	13.28	50.44	68.20	17.76
15600.000	35.28	PK	H	13.38	48.66	74.00	25.34
15600.000	26.34	AV	H	13.38	39.72	54.00	14.28
15600.000	36.99	PK	V	13.38	50.37	74.00	23.63
15600.000	27.11	AV	V	13.38	40.49	54.00	13.51
High Channel:				5240	MHz		
10480.000	36.44	PK	H	13.38	49.82	68.20	18.38
10480.000	37.81	PK	V	13.38	51.19	68.20	17.01
15720.000	36.89	PK	H	13.30	50.19	74.00	23.81
15720.000	26.37	AV	H	13.30	39.67	54.00	14.33
15720.000	37.48	PK	V	13.30	50.78	74.00	23.22
15720.000	27.95	AV	V	13.30	41.25	54.00	12.75

802.11ax40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5190	MHz		
10380.000	36.17	PK	H	13.27	49.44	68.20	18.76
10380.000	36.14	PK	V	13.27	49.41	68.20	18.79
15570.000	36.79	PK	H	13.43	50.22	74.00	23.78
15570.000	28.44	AV	H	13.43	41.87	54.00	12.13
15570.000	36.27	PK	V	13.43	49.70	74.00	24.30
15570.000	28.68	AV	V	13.43	42.11	54.00	11.89
High Channel:				5230	MHz		
10460.000	36.59	PK	H	13.35	49.94	68.20	18.26
10460.000	36.85	PK	V	13.35	50.20	68.20	18.00
15690.000	36.31	PK	H	13.33	49.64	74.00	24.36
15690.000	26.39	AV	H	13.33	39.72	54.00	14.28
15690.000	36.44	PK	V	13.33	49.77	74.00	24.23
15690.000	27.31	AV	V	13.33	40.64	54.00	13.36

802.11ax80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5210	MHz		
10420.000	36.30	PK	H	13.30	49.60	68.20	18.60
10420.000	37.77	PK	V	13.30	51.07	68.20	17.13
15630.000	38.97	PK	H	13.36	52.33	74.00	21.67
15630.000	28.75	AV	H	13.36	42.11	54.00	11.89
15630.000	39.34	PK	V	13.36	52.70	74.00	21.30
15630.000	28.77	AV	V	13.36	42.13	54.00	11.87

5725-5850MHz

802.11a Mode Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	37.56	PK	H	13.97	51.53	74.00	22.47
11490.000	26.54	AV	H	13.97	40.51	54.00	13.49
11490.000	36.74	PK	V	13.97	50.71	74.00	23.29
11490.000	25.26	AV	V	13.97	39.23	54.00	14.77
17235.000	36.88	PK	H	16.99	53.87	68.20	14.33
17235.000	36.13	PK	V	16.99	53.12	68.20	15.08
Middle Channel:				5785	MHz		
11570.000	36.95	PK	H	14.33	51.28	74.00	22.72
11570.000	25.64	AV	H	14.33	39.97	54.00	14.03
11570.000	36.39	PK	V	14.33	50.72	74.00	23.28
11570.000	26.31	AV	V	14.33	40.64	54.00	13.36
17355.000	36.85	PK	H	17.98	54.83	68.20	13.37
17355.000	36.77	PK	V	17.98	54.75	68.20	13.45
High Channel:				5825	MHz		
11650.000	37.25	PK	H	14.49	51.74	74.00	22.26
11650.000	25.29	AV	H	14.49	39.78	54.00	14.22
11650.000	37.09	PK	V	14.49	51.58	74.00	22.42
11650.000	25.37	AV	V	14.49	39.86	54.00	14.14
17475.000	37.59	PK	H	18.94	56.53	68.20	11.67
17475.000	36.24	PK	V	18.94	55.18	68.20	13.02

802.11a Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	37.02	PK	H	13.97	50.99	74.00	23.01
11490.000	25.08	AV	H	13.97	39.05	54.00	14.95
11490.000	35.51	PK	V	13.97	49.48	74.00	24.52
11490.000	25.37	AV	V	13.97	39.34	54.00	14.66
17235.000	37.95	PK	H	16.99	54.94	68.20	13.26
17235.000	36.34	PK	V	16.99	53.33	68.20	14.87
Middle Channel:				5785	MHz		
11570.000	36.11	PK	H	14.33	50.44	74.00	23.56
11570.000	25.11	AV	H	14.33	39.44	54.00	14.56
11570.000	35.16	PK	V	14.33	49.49	74.00	24.51
11570.000	25.31	AV	V	14.33	39.64	54.00	14.36
17355.000	36.44	PK	H	17.98	54.42	68.20	13.78
17355.000	36.31	PK	V	17.98	54.29	68.20	13.91
High Channel:				5825	MHz		
11650.000	36.59	PK	H	14.49	51.08	74.00	22.92
11650.000	25.41	AV	H	14.49	39.90	54.00	14.10
11650.000	36.22	PK	V	14.49	50.71	74.00	23.29
11650.000	25.03	AV	V	14.49	39.52	54.00	14.48
17475.000	35.87	PK	H	18.94	54.81	68.20	13.39
17475.000	35.03	PK	V	18.94	53.97	68.20	14.23

802.11ac20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	35.52	PK	H	13.97	49.49	74.00	24.51
11490.000	25.47	AV	H	13.97	39.44	54.00	14.56
11490.000	35.07	PK	V	13.97	49.04	74.00	24.96
11490.000	25.13	AV	V	13.97	39.10	54.00	14.90
17235.000	37.85	PK	H	16.99	54.84	68.20	13.36
17235.000	36.24	PK	V	16.99	53.23	68.20	14.97
Middle Channel:				5785	MHz		
11570.000	36.23	PK	H	14.33	50.56	74.00	23.44
11570.000	25.31	AV	H	14.33	39.64	54.00	14.36
11570.000	36.78	PK	V	14.33	51.11	74.00	22.89
11570.000	25.14	AV	V	14.33	39.47	54.00	14.53
17355.000	36.31	PK	H	17.98	54.29	68.20	13.91
17355.000	36.22	PK	V	17.98	54.20	68.20	14.00
High Channel:				5825	MHz		
11650.000	36.45	PK	H	14.49	50.94	74.00	23.06
11650.000	25.03	AV	H	14.49	39.52	54.00	14.48
11650.000	36.85	PK	V	14.49	51.34	74.00	22.66
11650.000	25.45	AV	V	14.49	39.94	54.00	14.06
17475.000	35.75	PK	H	18.94	54.69	68.20	13.51
17475.000	35.23	PK	V	18.94	54.17	68.20	14.03

802.11ac40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5755	MHz		
11510.000	35.67	PK	H	14.05	49.72	74.00	24.28
11510.000	25.36	AV	H	14.05	39.41	54.00	14.59
11510.000	35.20	PK	V	14.05	49.25	74.00	24.75
11510.000	25.47	AV	V	14.05	39.52	54.00	14.48
17265.000	37.71	PK	H	17.22	54.93	68.20	13.27
17265.000	36.82	PK	V	17.22	54.04	68.20	14.16
High Channel:				5795	MHz		
11590.000	35.68	PK	H	14.43	50.11	74.00	23.89
11590.000	25.64	AV	H	14.43	40.07	54.00	13.93
11590.000	35.99	PK	V	14.43	50.42	74.00	23.58
11590.000	25.37	AV	V	14.43	39.80	54.00	14.20
17385.000	36.11	PK	H	18.26	54.37	68.20	13.83
17385.000	36.21	PK	V	18.26	54.47	68.20	13.73

802.11ac80 Mode:

COMPARISON MODE:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5775	MHz		
11550.000	35.30	PK	H	14.24	49.54	74.00	24.46
11550.000	24.87	AV	H	14.24	39.11	54.00	14.89
11550.000	36.05	PK	V	14.24	50.29	74.00	23.71
11550.000	25.39	AV	V	14.24	39.63	54.00	14.37
17325.000	36.99	PK	H	17.70	54.69	68.20	13.51
17325.000	36.45	PK	V	17.70	54.15	68.20	14.05

802.11ax20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5745	MHz		
11490.000	34.99	PK	H	13.97	48.96	74.00	25.04
11490.000	25.34	AV	H	13.97	39.31	54.00	14.69
11490.000	35.64	PK	V	13.97	49.61	74.00	24.39
11490.000	25.54	AV	V	13.97	39.51	54.00	14.49
17235.000	37.26	PK	H	16.99	54.25	68.20	13.95
17235.000	37.86	PK	V	16.99	54.85	68.20	13.35
Middle Channel:				5785	MHz		
11570.000	35.85	PK	H	14.33	50.18	74.00	23.82
11570.000	25.32	AV	H	14.33	39.65	54.00	14.35
11570.000	36.11	PK	V	14.33	50.44	74.00	23.56
11570.000	25.13	AV	V	14.33	39.46	54.00	14.54
17355.000	35.98	PK	H	17.98	53.96	68.20	14.24
17355.000	36.12	PK	V	17.98	54.10	68.20	14.10
High Channel:				5825	MHz		
11650.000	36.14	PK	H	14.49	50.63	74.00	23.37
11650.000	25.45	AV	H	14.49	39.94	54.00	14.06
11650.000	36.35	PK	V	14.49	50.84	74.00	23.16
11650.000	25.36	AV	V	14.49	39.85	54.00	14.15
17475.000	35.68	PK	H	18.94	54.62	68.20	13.58
17475.000	35.87	PK	V	18.94	54.81	68.20	13.39

802.11ax40 Mode:


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				5755	MHz		
11510.000	35.65	PK	H	14.05	49.70	74.00	24.30
11510.000	25.07	AV	H	14.05	39.12	54.00	14.88
11510.000	37.21	PK	V	14.05	51.26	74.00	22.74
11510.000	24.97	AV	V	14.05	39.02	54.00	14.98
17265.000	37.26	PK	H	17.22	54.48	68.20	13.72
17265.000	36.21	PK	V	17.22	53.43	68.20	14.77
High Channel:				5795	MHz		
11590.000	36.11	PK	H	14.43	50.54	74.00	23.46
11590.000	25.10	AV	H	14.43	39.53	54.00	14.47
11590.000	35.34	PK	V	14.43	49.77	74.00	24.23
11590.000	25.34	AV	V	14.43	39.77	54.00	14.23
17385.000	35.86	PK	H	18.26	54.12	68.20	14.08
17385.000	36.01	PK	V	18.26	54.27	68.20	13.93

802.11ax80 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Middle Channel:				5775	MHz		
11550.000	36.80	PK	H	14.24	51.04	74.00	22.96
11550.000	25.63	AV	H	14.24	39.87	54.00	14.13
11550.000	35.42	PK	V	14.24	49.66	74.00	24.34
11550.000	25.37	AV	V	14.24	39.61	54.00	14.39
17325.000	36.74	PK	H	17.70	54.44	68.20	13.76
17325.000	36.87	PK	V	17.70	54.57	68.20	13.63


Worst Radiation Spurious Emissions Margin Test Plots for Each Mode
Test Plots for 1GHz ~ 18GHz:

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: horizontal
 Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 0

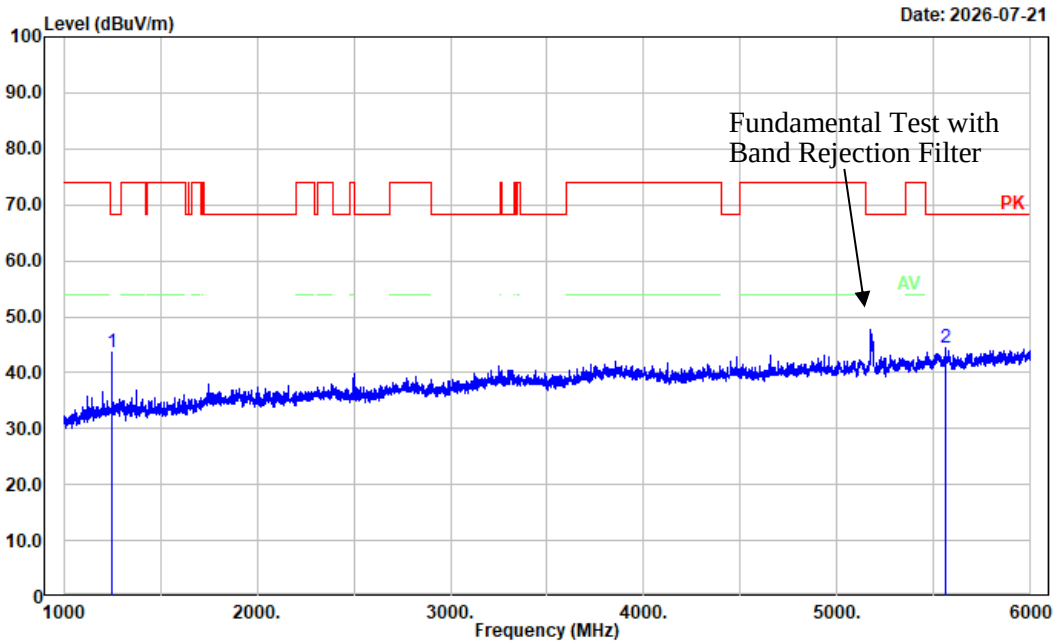


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	48.65	-4.99	43.66	68.20	24.54	Peak
2	5561.000	37.44	7.00	44.44	68.20	23.76	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 0

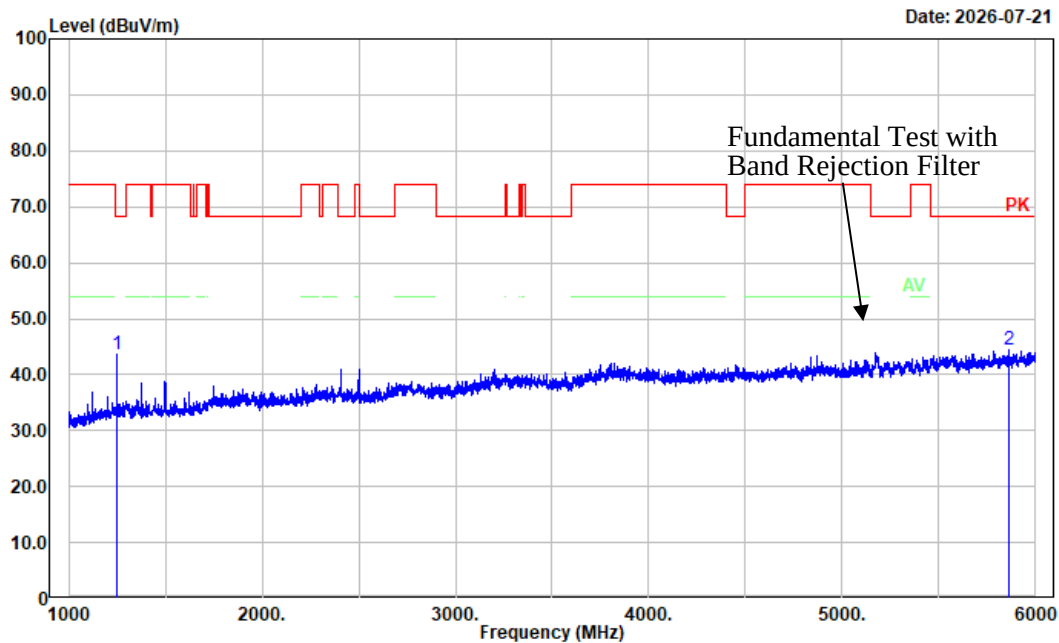


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1249.000	48.71	-4.99	43.72	68.20	24.48	Peak
2	5863.000	37.44	6.97	44.41	68.20	23.79	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 0

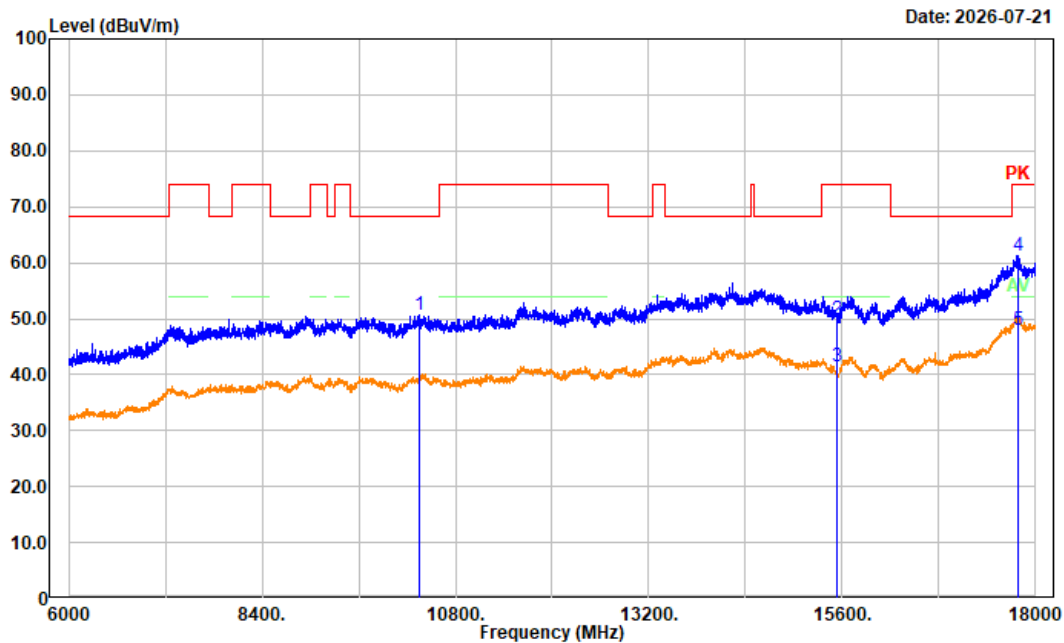


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	37.35	13.26	50.61	68.20	17.59	Peak
2	15540.000	36.27	13.48	49.75	74.00	24.25	Peak
3	15540.000	27.96	13.48	41.44	54.00	12.56	Average
4	17784.000	40.02	21.29	61.31	74.00	12.69	Peak
5	17784.000	26.55	21.29	47.84	54.00	6.16	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 0

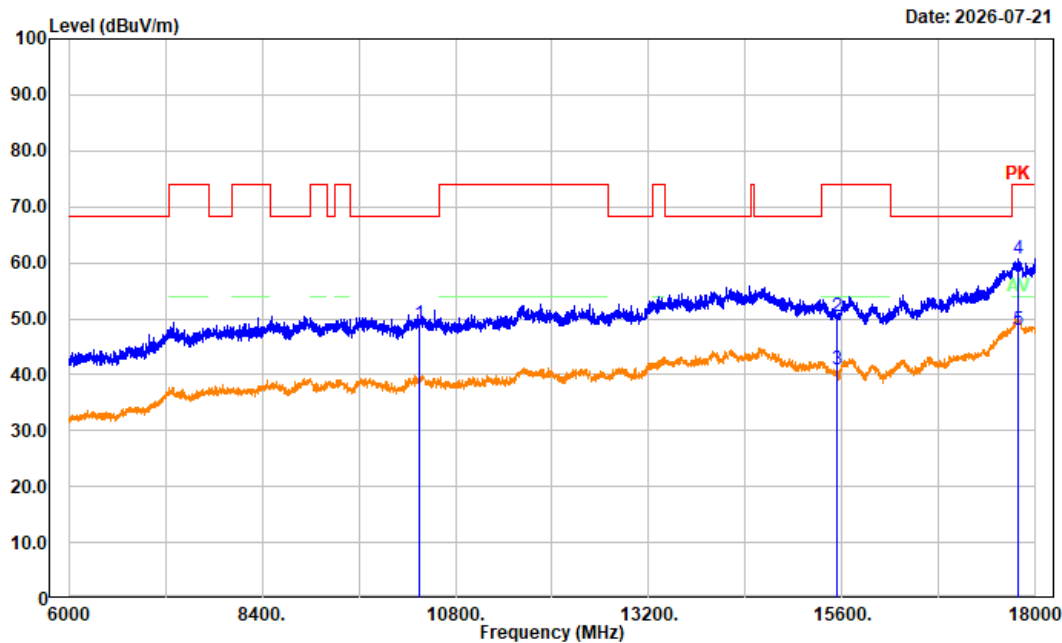


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	35.74	13.26	49.00	68.20	19.20	Peak
2	15540.000	36.89	13.48	50.37	74.00	23.63	Peak
3	15540.000	27.41	13.48	40.89	54.00	13.11	Average
4	17779.200	39.37	21.28	60.65	74.00	13.35	Peak
5	17779.200	26.57	21.28	47.85	54.00	6.15	Average

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: horizontal
 Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 1

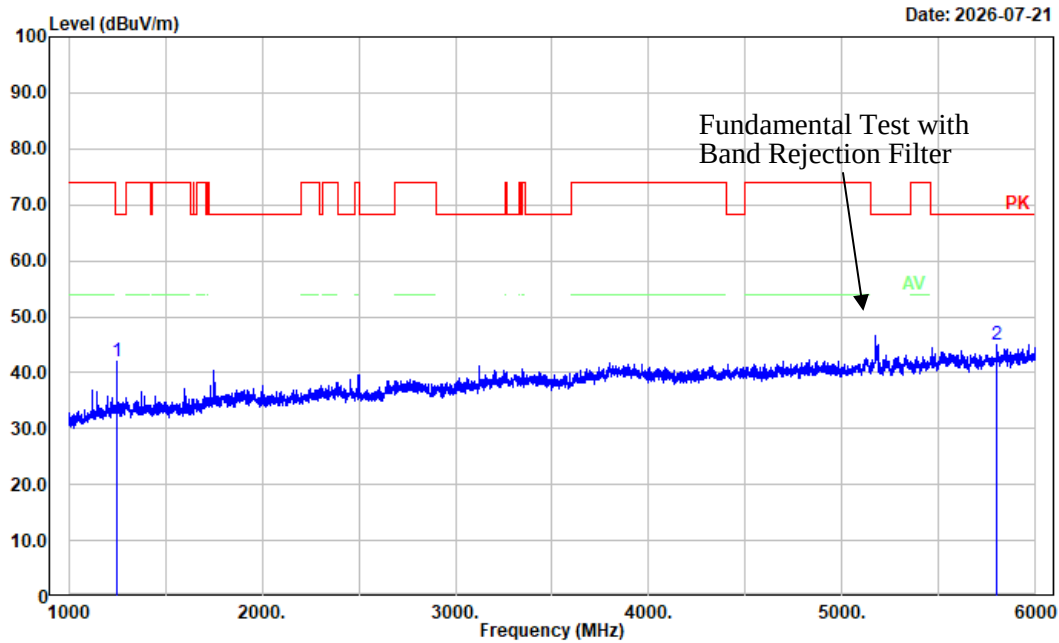


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1249.000	46.88	-4.99	41.89	68.20	26.31	Peak
2	5798.000	38.18	6.85	45.03	68.20	23.17	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 1

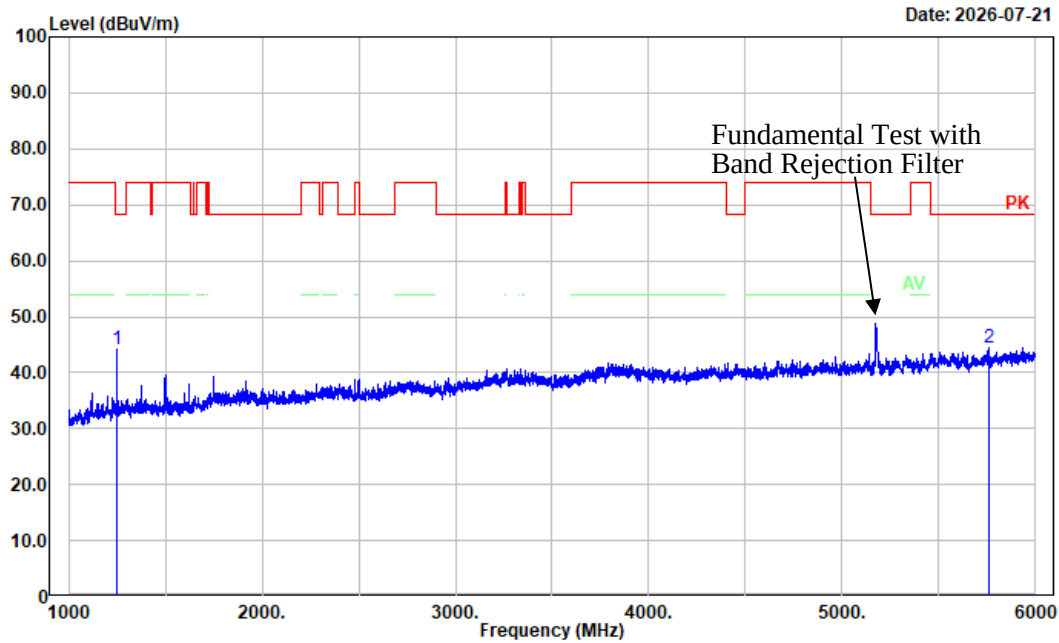


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	49.03	-4.99	44.04	68.20	24.16	Peak
2	5759.000	37.52	6.86	44.38	68.20	23.82	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 1

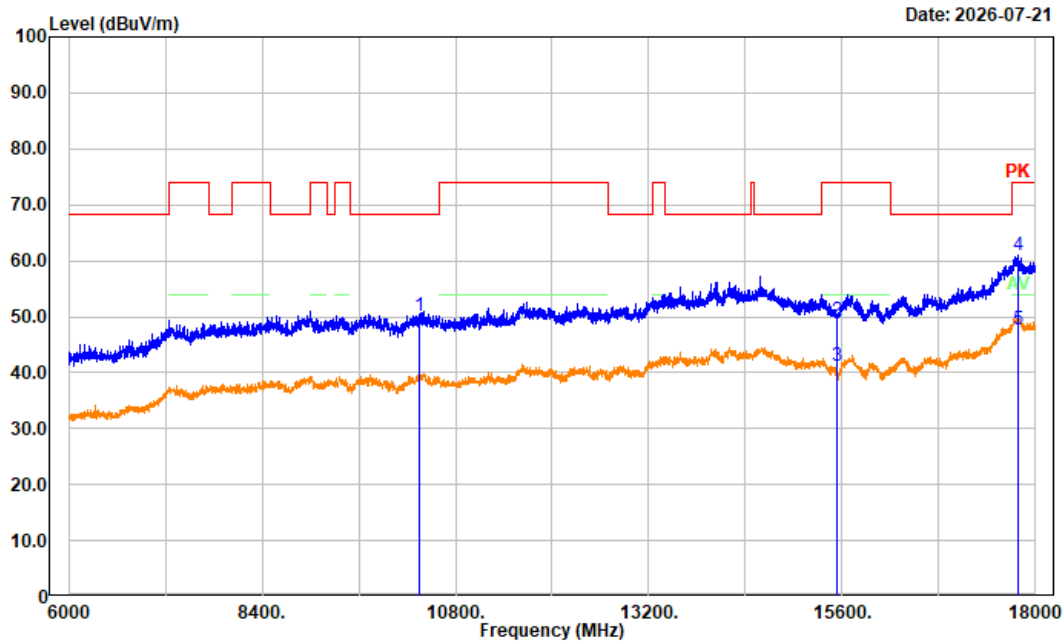


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	36.94	13.26	50.20	68.20	18.00	Peak
2	15540.000	35.95	13.48	49.43	74.00	24.57	Peak
3	15540.000	27.59	13.48	41.07	54.00	12.93	Average
4	17786.400	39.61	21.30	60.91	74.00	13.09	Peak
5	17786.400	26.52	21.30	47.82	54.00	6.18	Average

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: vertical
 Note: 5G WiFi B1 a Mode Low Channel 5180MHz Chain 1

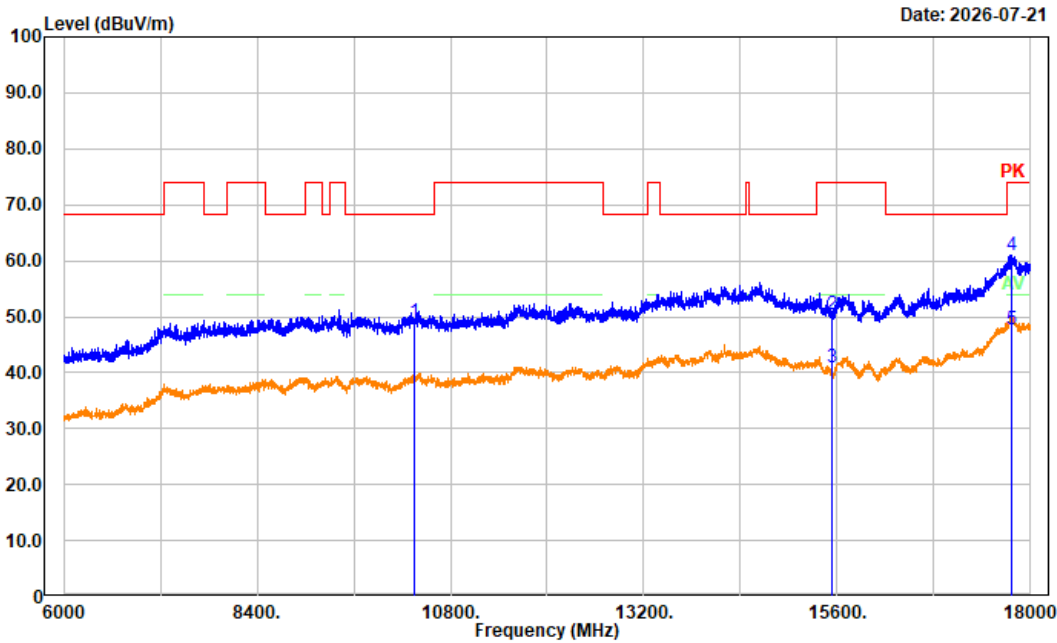


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	35.69	13.26	48.95	68.20	19.25	Peak
2	15540.000	36.82	13.48	50.30	74.00	23.70	Peak
3	15540.000	27.37	13.48	40.85	54.00	13.15	Average
4	17772.000	39.63	21.26	60.89	74.00	13.11	Peak
5	17772.000	26.54	21.26	47.80	54.00	6.20	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B1 ac20 Mode Low Channel 5180MHz

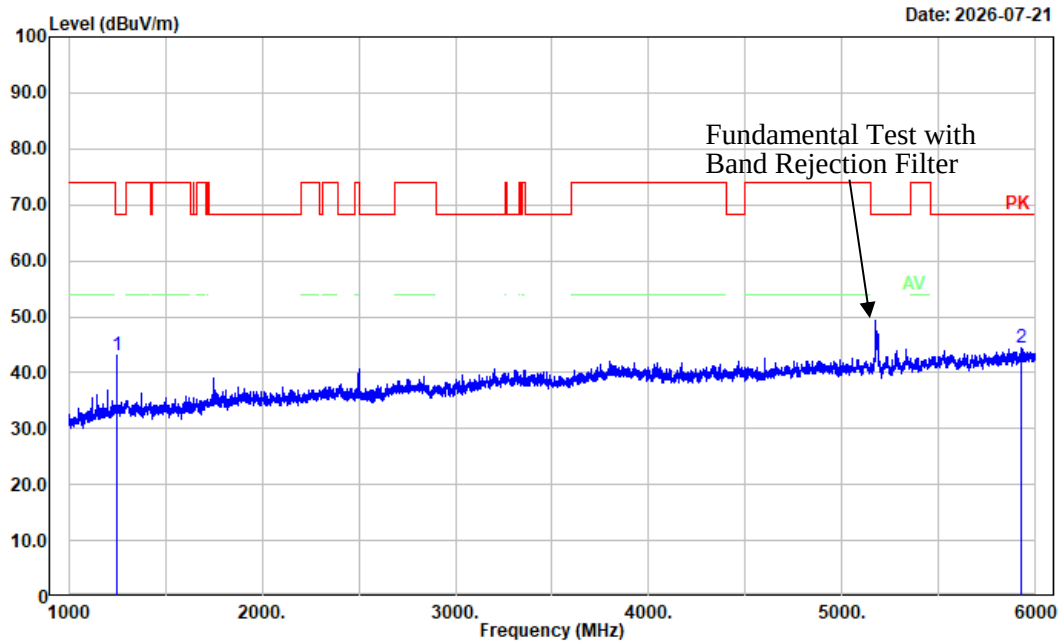


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	48.17	-4.99	43.18	68.20	25.02	Peak
2	5926.000	37.18	7.17	44.35	68.20	23.85	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 ac20 Mode Low Channel 5180MHz

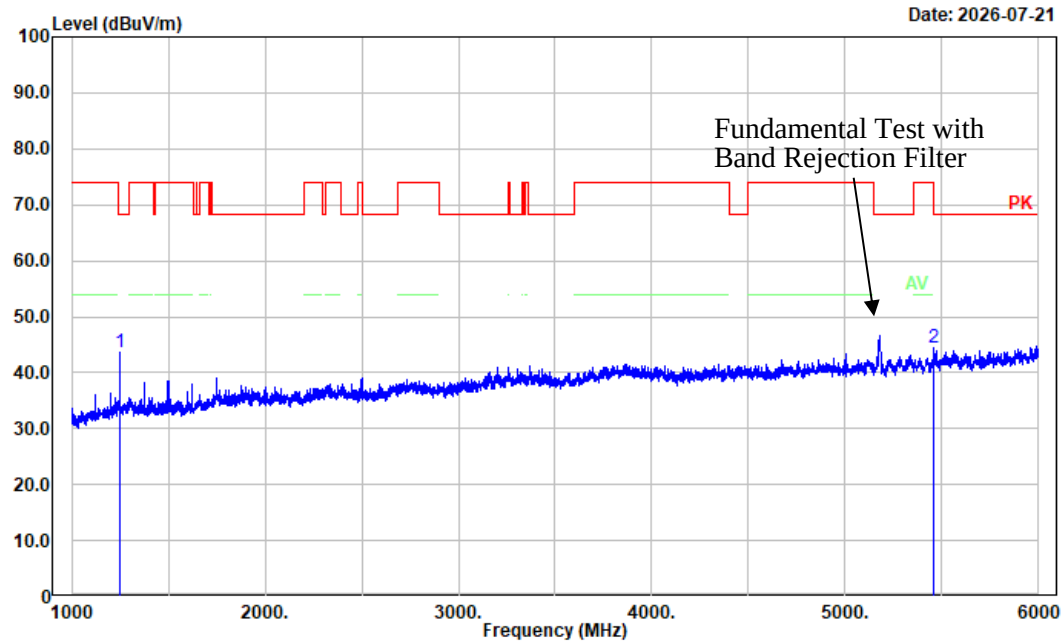


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	48.54	-4.99	43.55	68.20	24.65	Peak
2	5454.000	37.64	6.68	44.32	74.00	29.68	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 ac20 Mode Low Channel 5180MHz

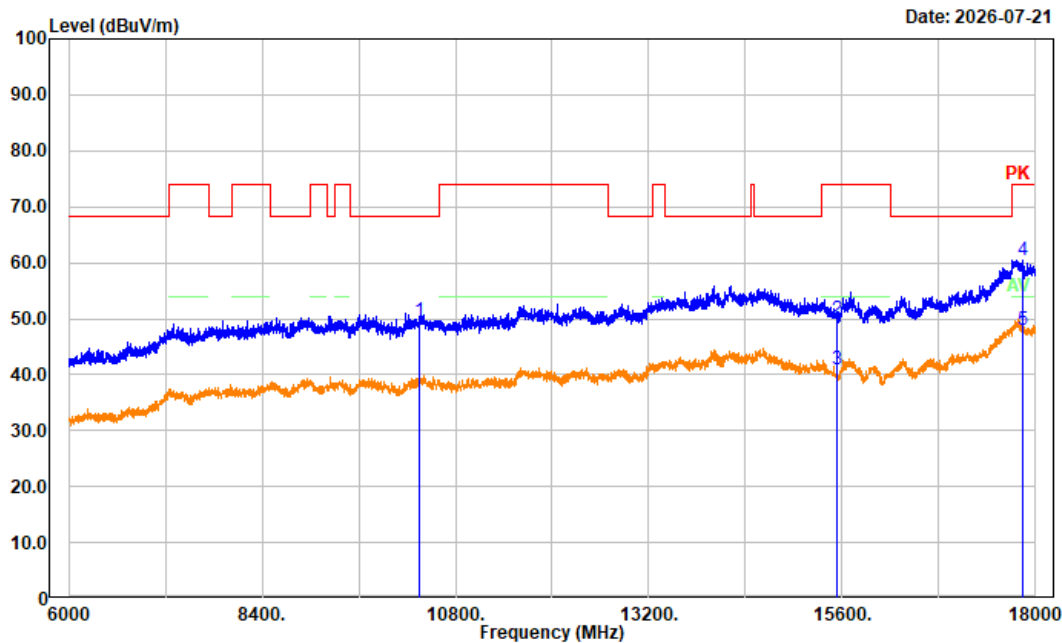


No.	Frequency (MHz)	Reading (dBuV)	Factor (dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	10360.000	36.39	13.26	49.65	68.20	18.55	Peak
2	15540.000	36.25	13.48	49.73	74.00	24.27	Peak
3	15540.000	27.55	13.48	41.03	54.00	12.97	Average
4	17841.600	39.04	21.42	60.46	74.00	13.54	Peak
5	17841.600	26.42	21.42	47.84	54.00	6.16	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B1 ac20 Mode Low Channel 5180MHz

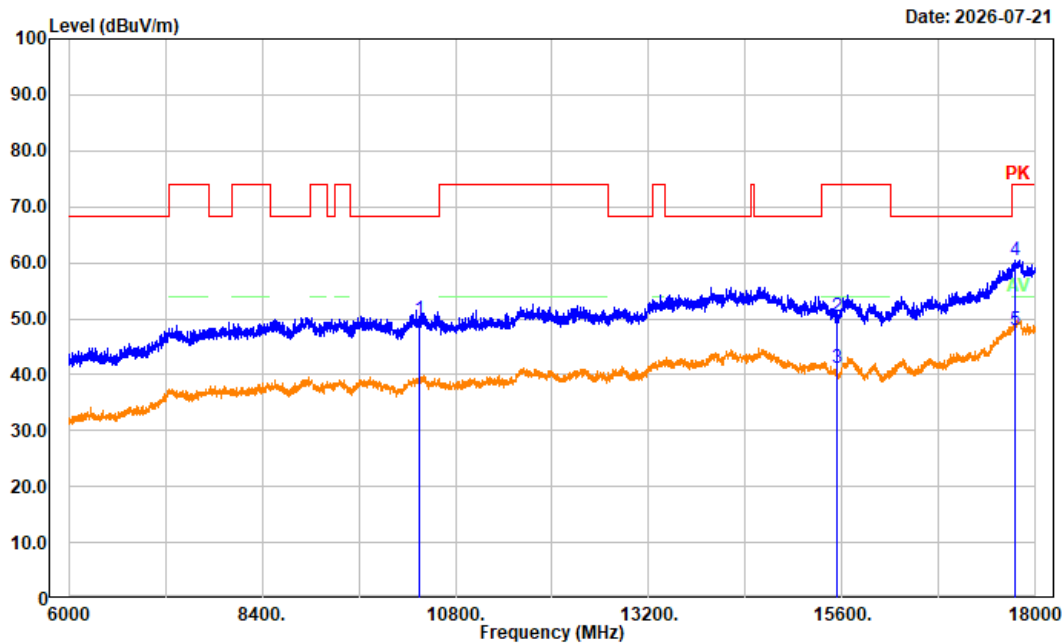


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	36.69	13.26	49.95	68.20	18.25	Peak
2	15540.000	36.92	13.48	50.40	74.00	23.60	Peak
3	15540.000	27.78	13.48	41.26	54.00	12.74	Average
4	17736.000	39.37	21.13	60.50	74.00	13.50	Peak
5	17736.000	26.74	21.13	47.87	54.00	6.13	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B1 ac40 Mode High Channel 5230MHz

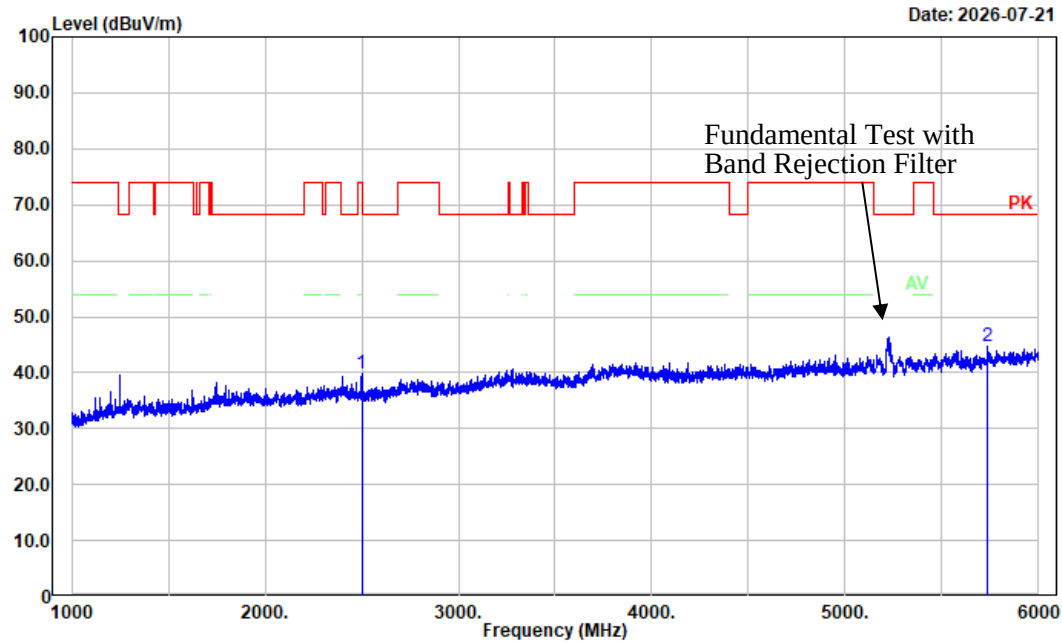


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	41.88	-2.10	39.78	68.20	28.42	Peak
2	5734.000	37.75	6.84	44.59	68.20	23.61	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 ac40 Mode High Channel 5230MHz

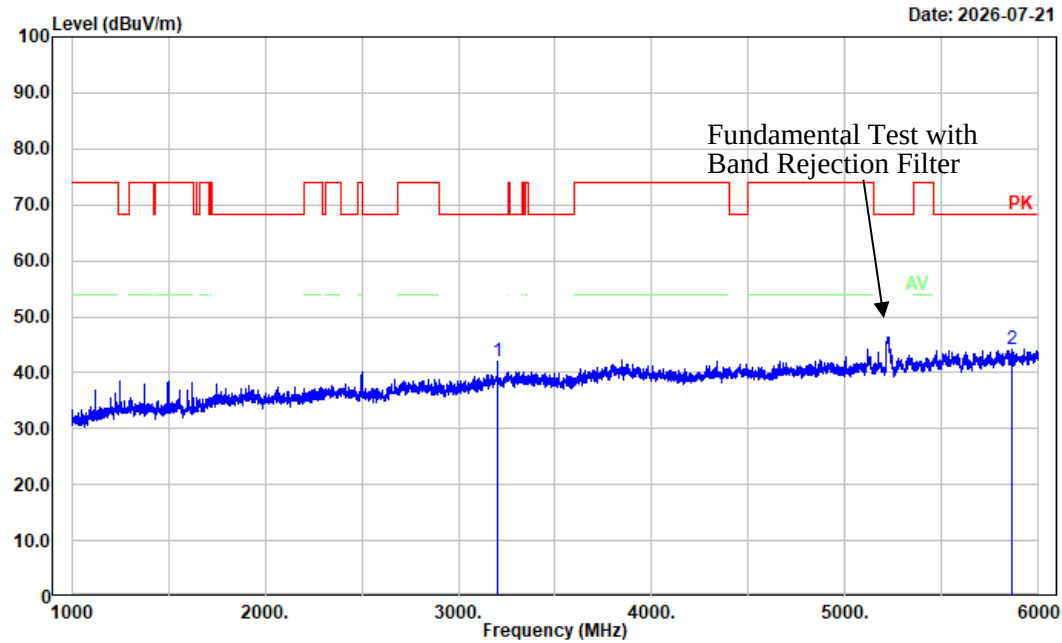


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3200.000	41.02	1.06	42.08	68.20	26.12	Peak
2	5859.000	37.26	6.96	44.22	68.20	23.98	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 ac40 Mode High Channel 5230MHz

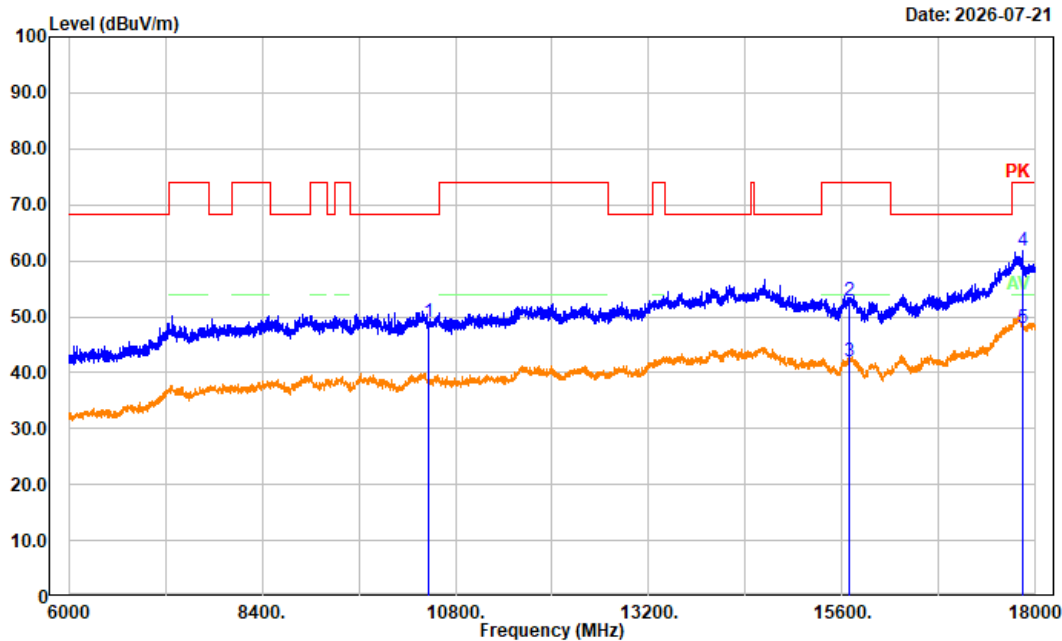


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10460.000	35.78	13.35	49.13	68.20	19.07	Peak
2	15690.000	39.50	13.33	52.83	74.00	21.17	Peak
3	15690.000	28.78	13.33	42.11	54.00	11.89	Average
4	17832.000	40.44	21.40	61.84	74.00	12.16	Peak
5	17832.000	26.46	21.40	47.86	54.00	6.14	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B1 ac40 Mode High Channel 5230MHz

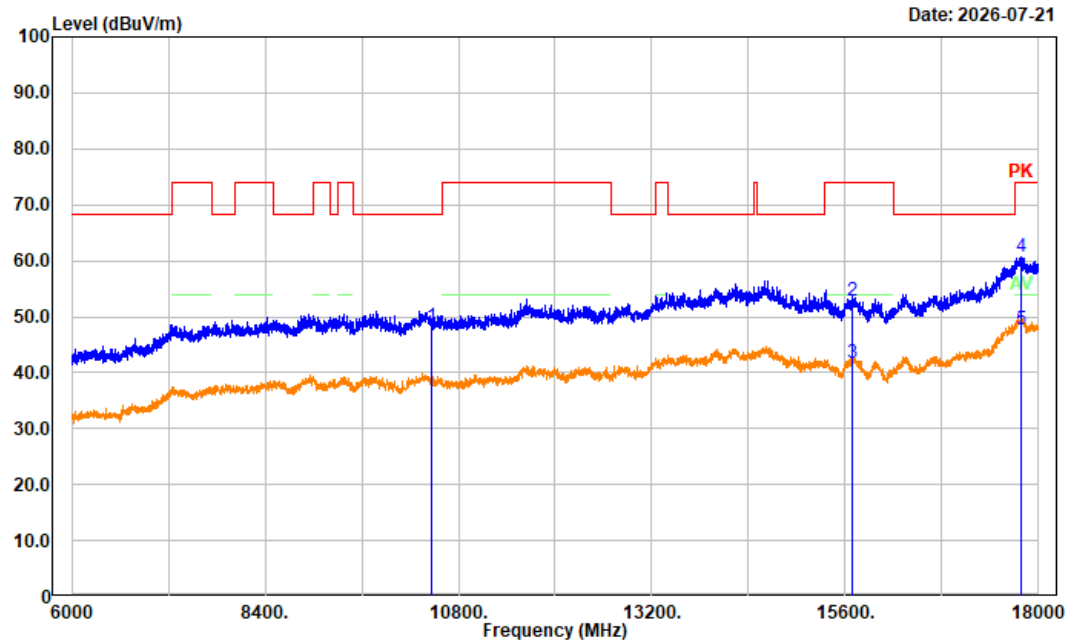


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10460.000	34.87	13.35	48.22	68.20	19.98	Peak
2	15690.000	39.48	13.33	52.81	74.00	21.19	Peak
3	15690.000	28.29	13.33	41.62	54.00	12.38	Average
4	17786.400	39.33	21.30	60.63	74.00	13.37	Peak
5	17786.400	26.52	21.30	47.82	54.00	6.18	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B1 ac80 Mode Middle Channel 5210MHz

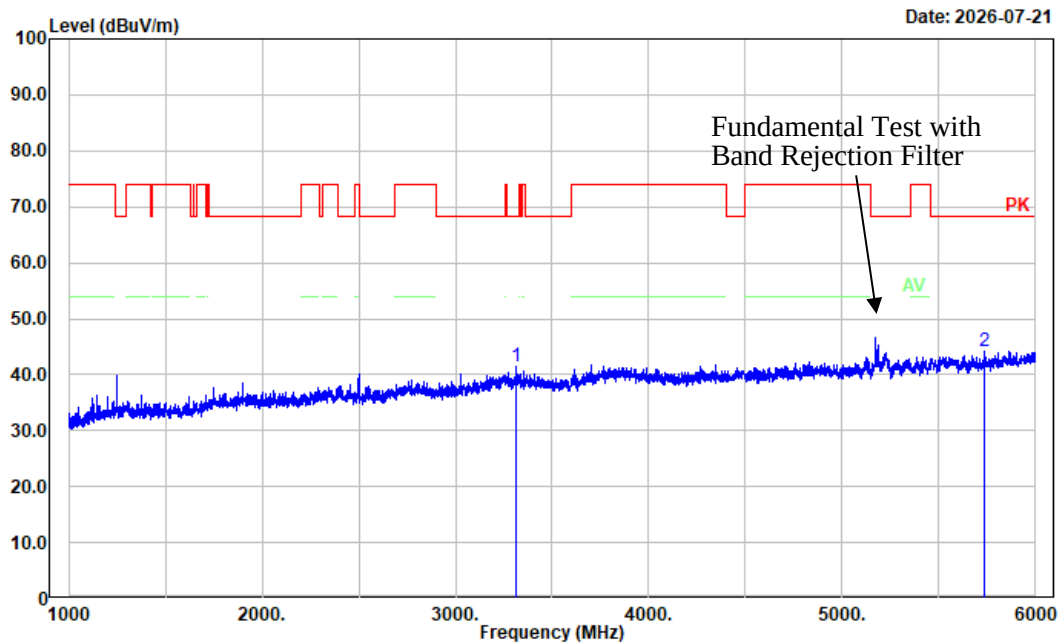


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3312.000	40.18	1.24	41.42	68.20	26.78	Peak
2	5734.000	37.45	6.84	44.29	68.20	23.91	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 ac80 Mode Middle Channel 5210MHz

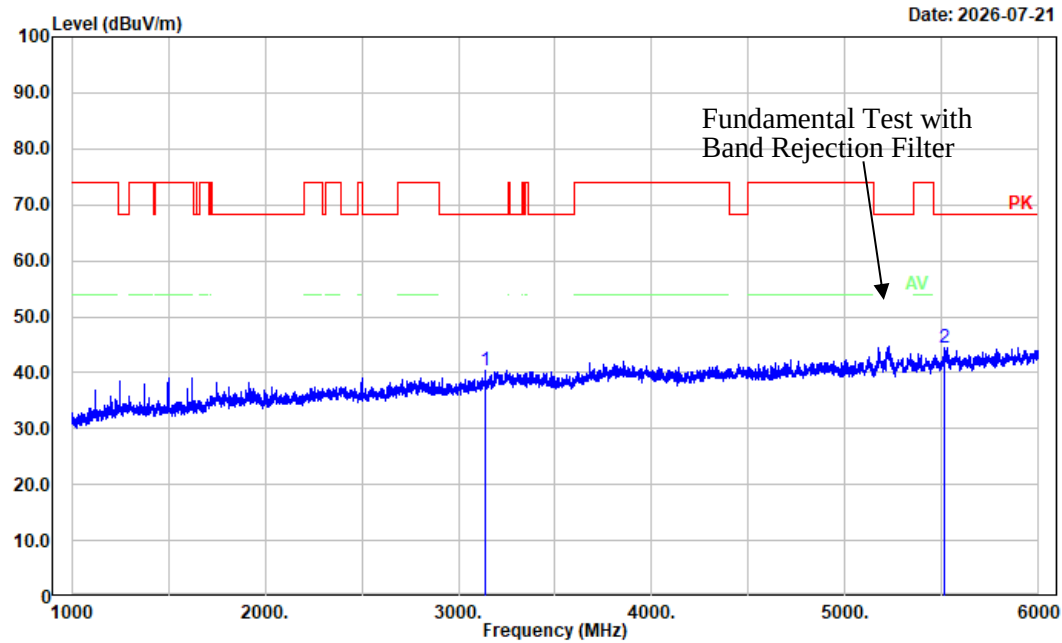


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3138.000	39.48	0.86	40.34	68.20	27.86	Peak
2	5513.000	37.68	6.81	44.49	68.20	23.71	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 ac80 Mode Middle Channel 5210MHz

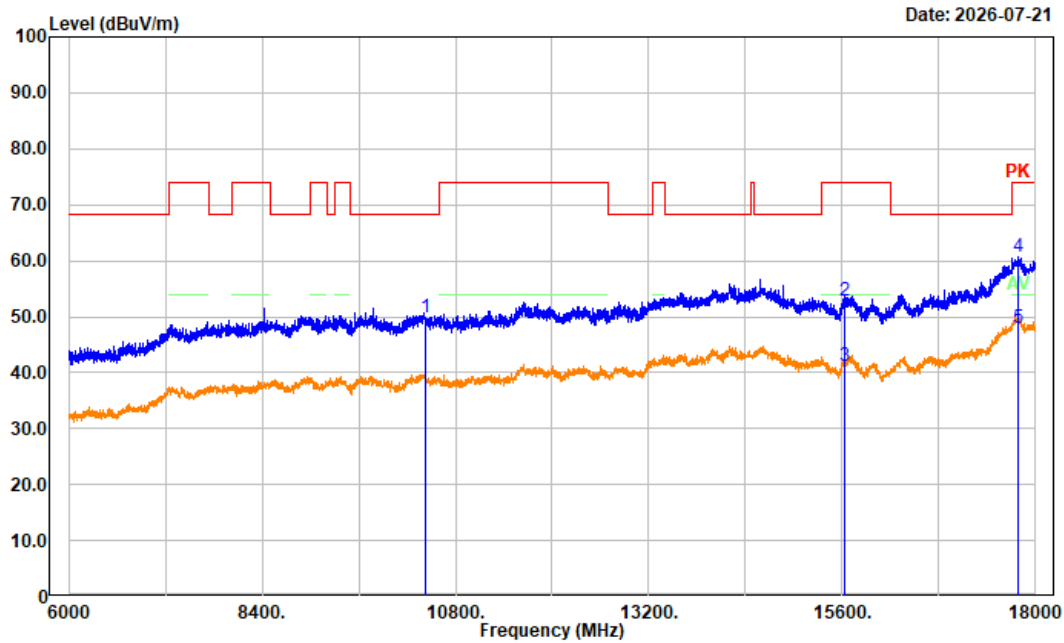


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	36.52	13.30	49.82	68.20	18.38	Peak
2	15630.000	39.49	13.36	52.85	74.00	21.15	Peak
3	15630.000	27.87	13.36	41.23	54.00	12.77	Average
4	17776.800	39.42	21.27	60.69	74.00	13.31	Peak
5	17776.800	26.61	21.27	47.88	54.00	6.12	Average

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: vertical
 Note: 5G WiFi B1 ac80 Mode Middle Channel 5210MHz

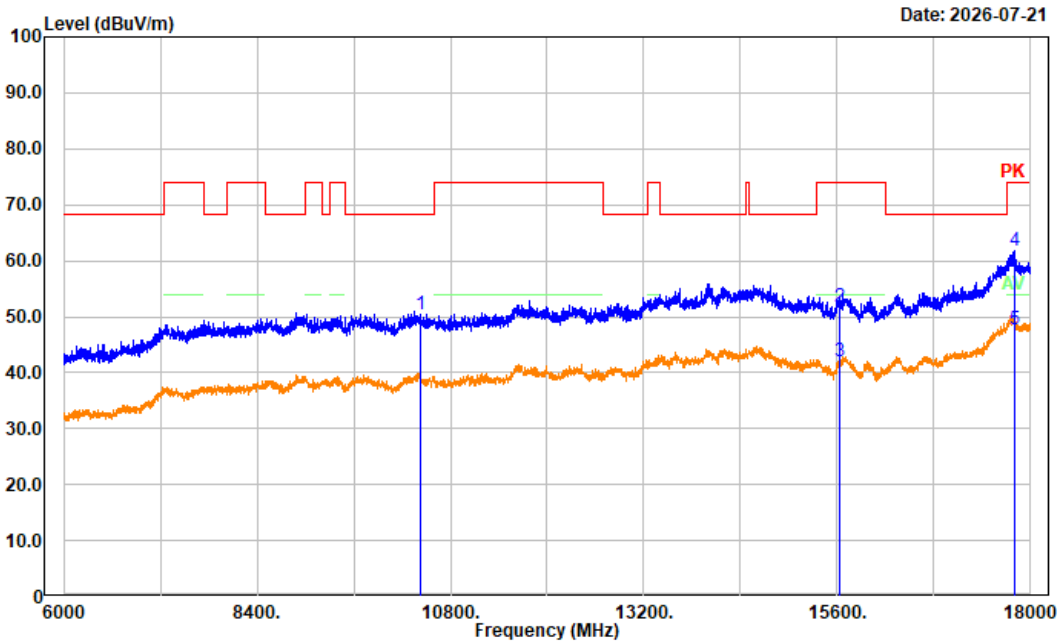


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	37.23	13.30	50.53	68.20	17.67	Peak
2	15630.000	38.27	13.36	51.63	74.00	22.37	Peak
3	15630.000	28.67	13.36	42.03	54.00	11.97	Average
4	17800.800	40.40	21.35	61.75	74.00	12.25	Peak
5	17800.800	26.45	21.35	47.80	54.00	6.20	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B1 ax20 Mode Low Channel 5180MHz

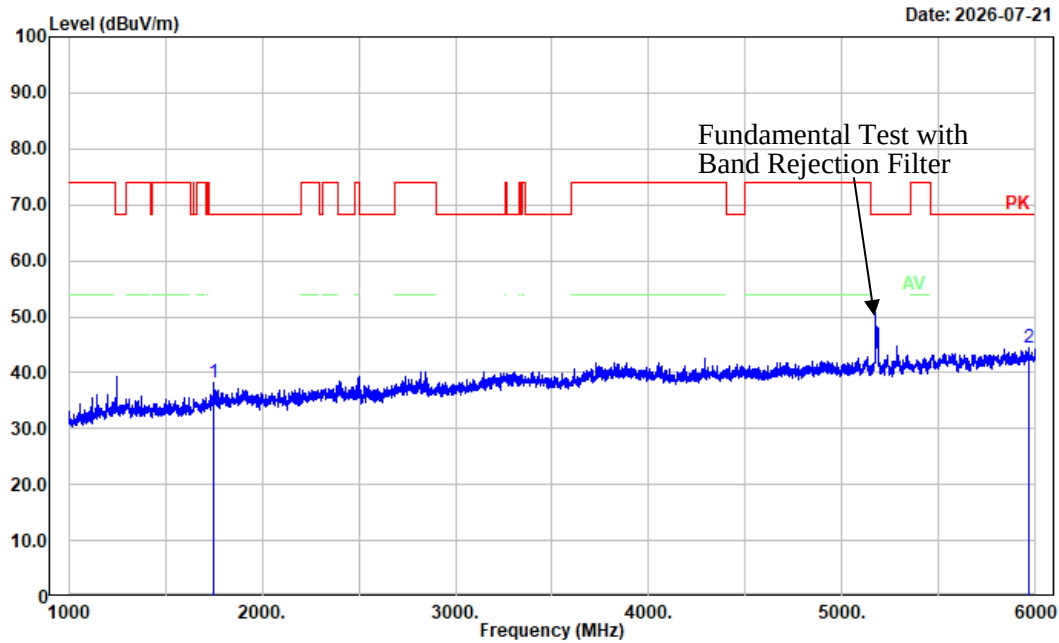


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1750.000	41.88	-3.72	38.16	68.20	30.04	Peak
2	5968.000	36.97	7.42	44.39	68.20	23.81	Peak

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: vertical
 Note: 5G WiFi B1 ax20 Mode Low Channel 5180MHz

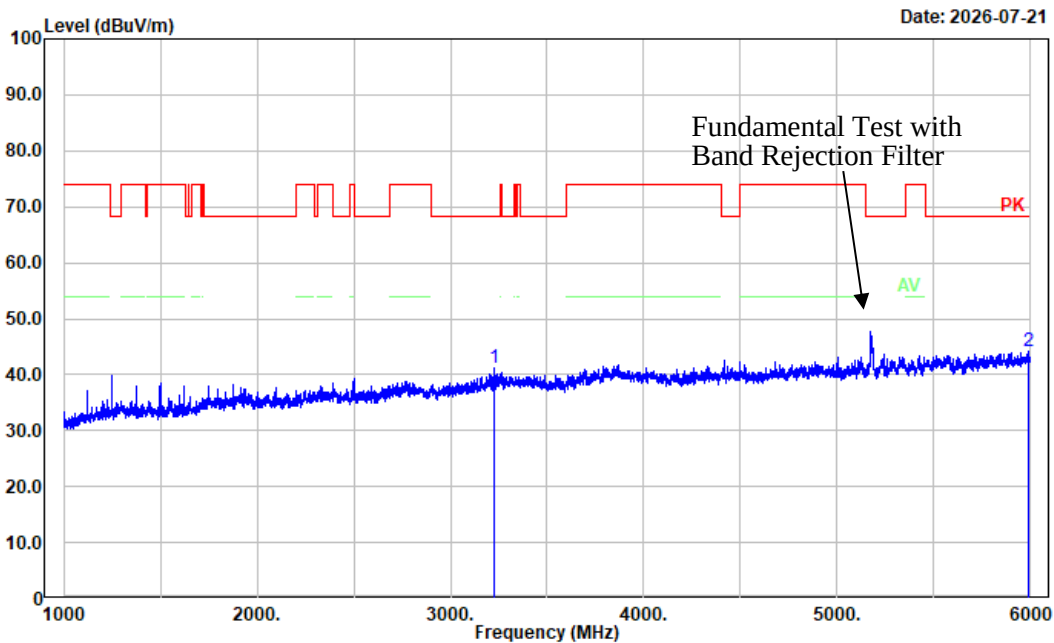


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3227.000	39.93	1.20	41.13	68.20	27.07	Peak
2	5992.000	36.40	7.65	44.05	68.20	24.15	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 ax20 Mode Low Channel 5180MHz

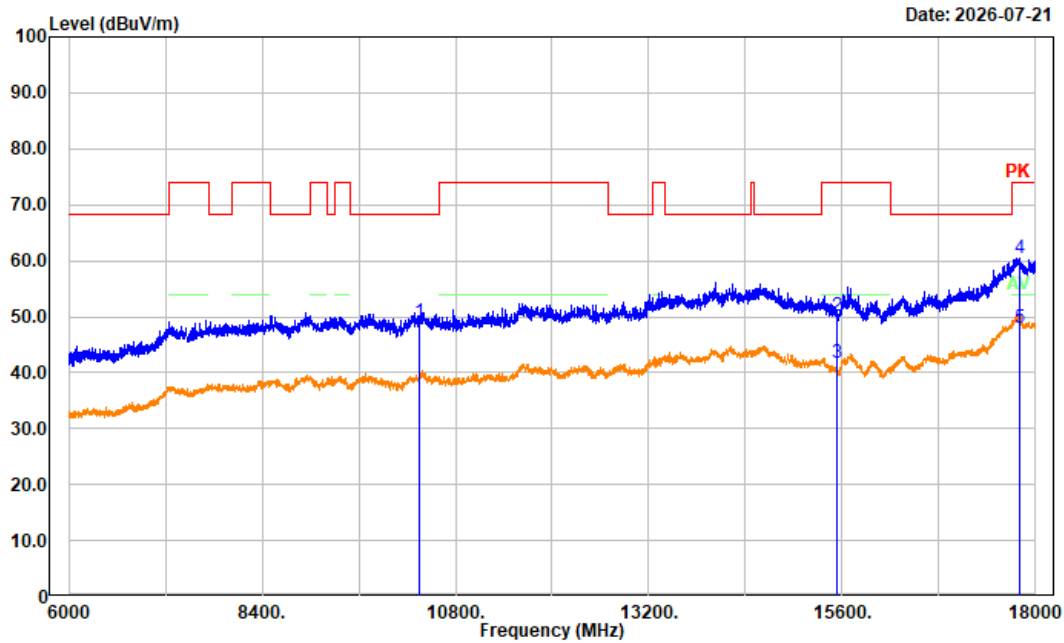


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	35.71	13.26	48.97	68.20	19.23	Peak
2	15540.000	36.59	13.48	50.07	74.00	23.93	Peak
3	15540.000	28.35	13.48	41.83	54.00	12.17	Average
4	17798.400	39.21	21.35	60.56	74.00	13.44	Peak
5	17798.400	26.50	21.35	47.85	54.00	6.15	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B1 ax20 Mode Low Channel 5180MHz

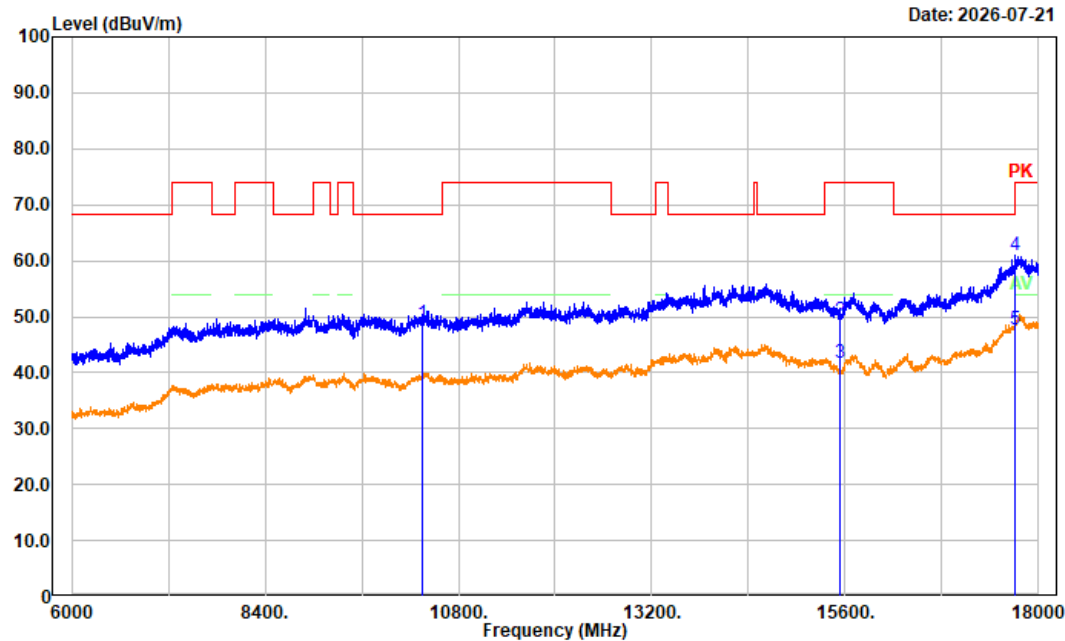


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10360.000	35.64	13.26	48.90	68.20	19.30	Peak
2	15540.000	35.97	13.48	49.45	74.00	24.55	Peak
3	15540.000	28.23	13.48	41.71	54.00	12.29	Average
4	17707.200	39.89	21.03	60.92	74.00	13.08	Peak
5	17707.200	26.76	21.03	47.79	54.00	6.21	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B1 ax40 Mode Low Channel 5190MHz

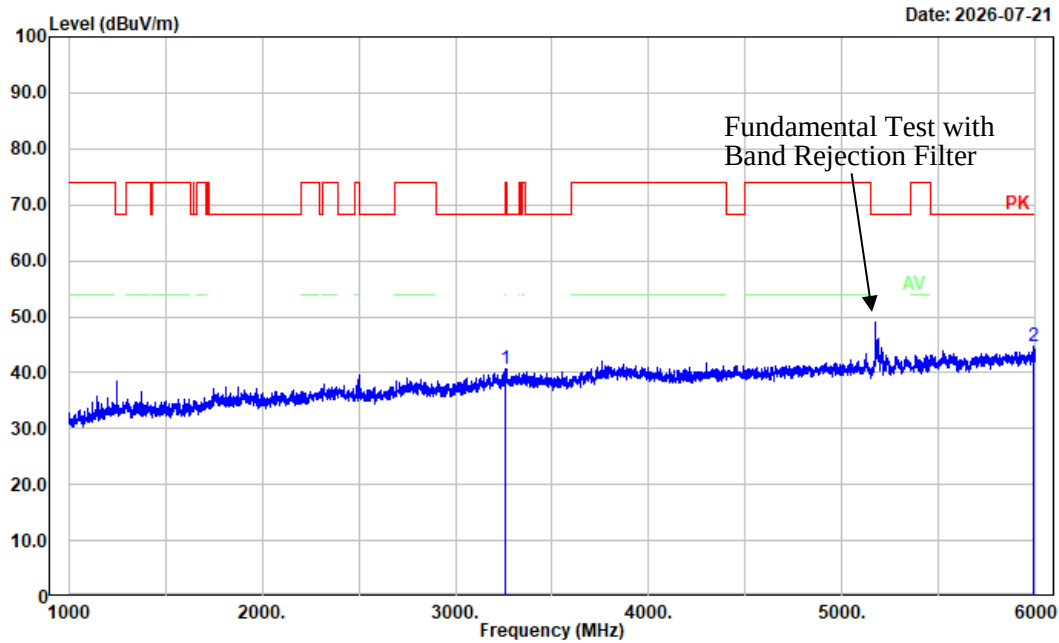


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3257.000	39.39	1.30	40.69	68.20	27.51	Peak
2	5992.000	36.97	7.65	44.62	68.20	23.58	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 ax40 Mode Low Channel 5190MHz

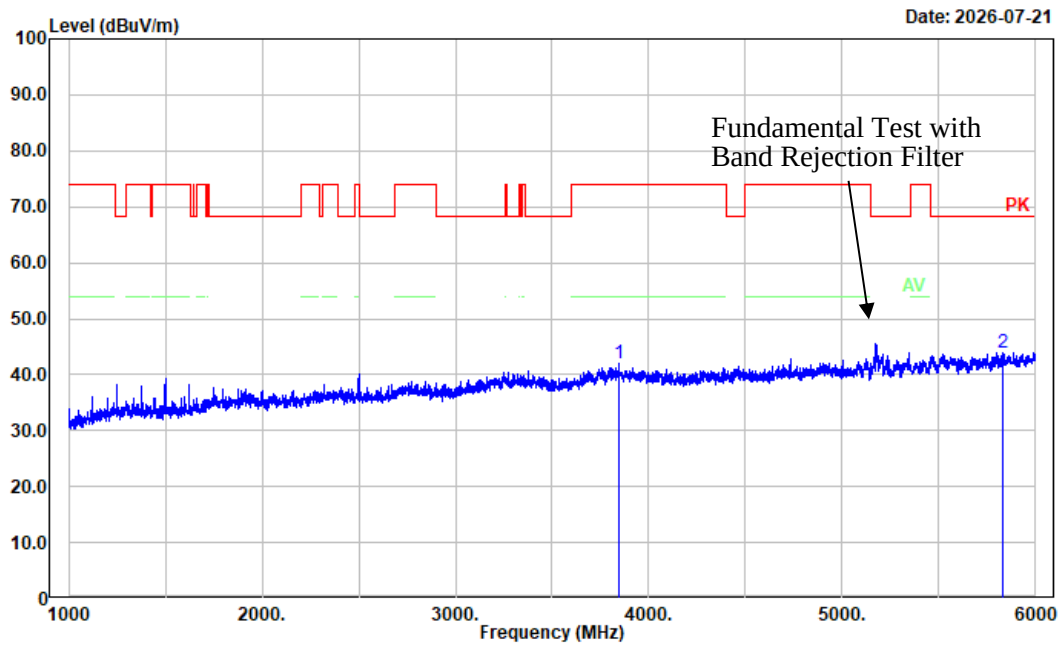


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3843.000	38.58	3.39	41.97	74.00	32.03	Peak
2	5830.000	36.96	6.89	43.85	68.20	24.35	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 ax40 Mode Low Channel 5190MHz

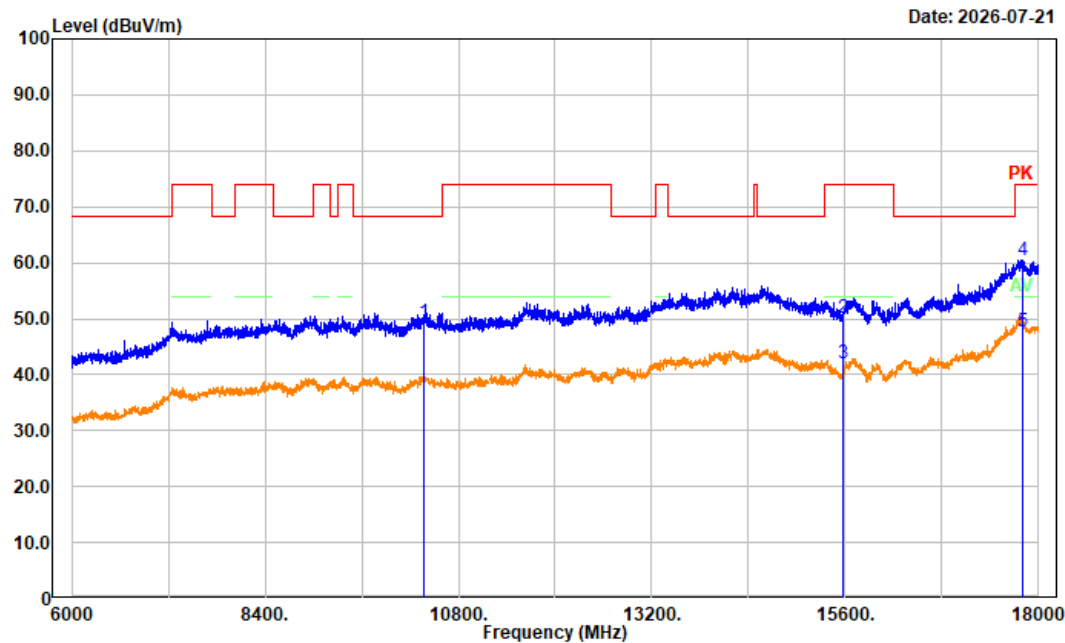


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10380.000	36.17	13.27	49.44	68.20	18.76	Peak
2	15570.000	36.79	13.43	50.22	74.00	23.78	Peak
3	15570.000	28.44	13.43	41.87	54.00	12.13	Average
4	17808.000	39.10	21.37	60.47	74.00	13.53	Peak
5	17808.000	26.45	21.37	47.82	54.00	6.18	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B1 ax40 Mode Low Channel 5190MHz

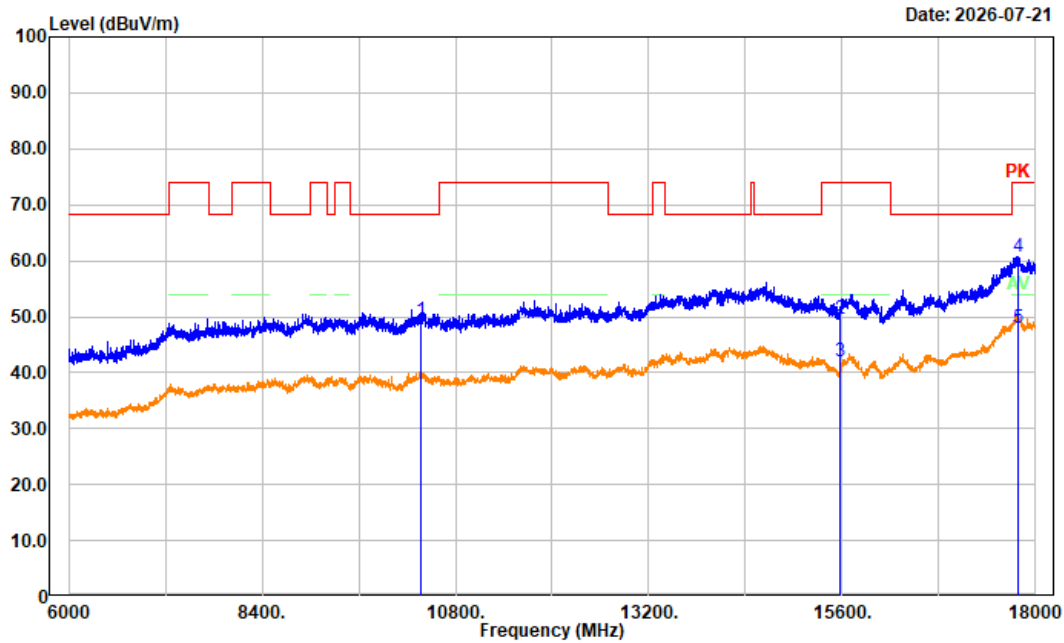


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10380.000	36.14	13.27	49.41	68.20	18.79	Peak
2	15570.000	36.27	13.43	49.70	74.00	24.30	Peak
3	15570.000	28.68	13.43	42.11	54.00	11.89	Average
4	17779.200	39.38	21.28	60.66	74.00	13.34	Peak
5	17779.200	26.63	21.28	47.91	54.00	6.09	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B1 ax80 Mode Middle Channel 5210MHz

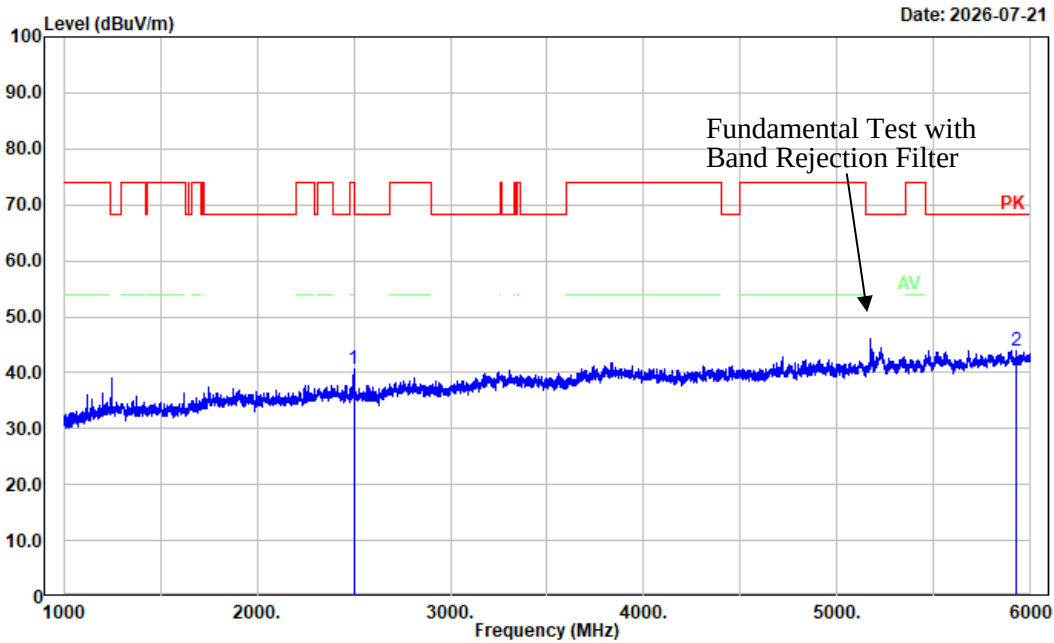


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	42.71	-2.10	40.61	68.20	27.59	Peak
2	5928.000	36.68	7.18	43.86	68.20	24.34	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B1 ax80 Mode Middle Channel 5210MHz

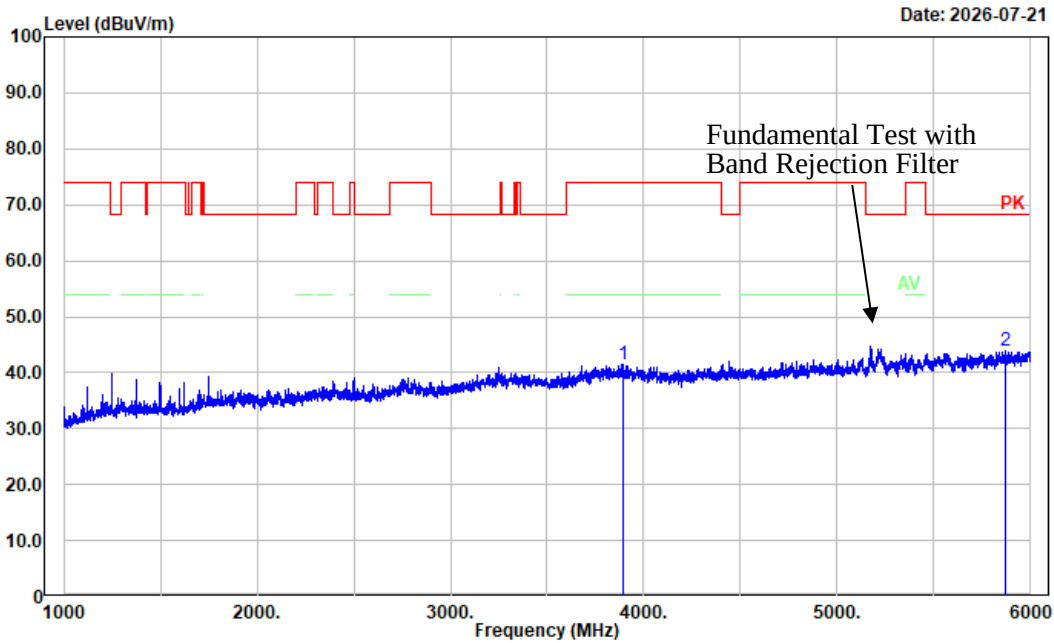


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3896.000	38.22	3.35	41.57	74.00	32.43	Peak
2	5867.000	36.94	6.98	43.92	68.20	24.28	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B1 ax80 Mode Middle Channel 5210MHz

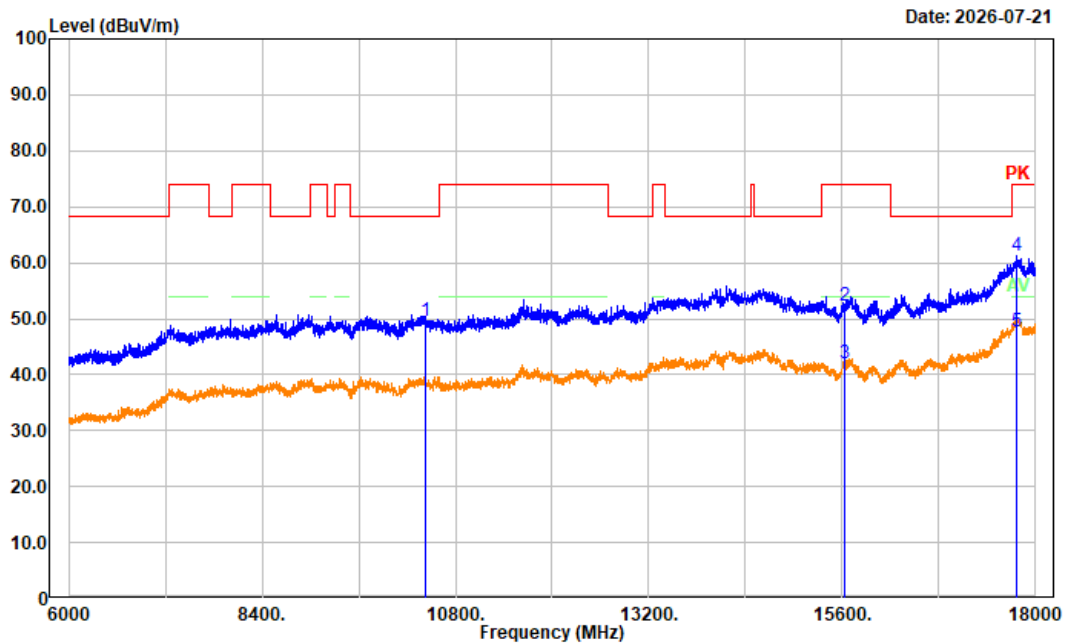


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	36.30	13.30	49.60	68.20	18.60	Peak
2	15630.000	38.97	13.36	52.33	74.00	21.67	Peak
3	15630.000	28.75	13.36	42.11	54.00	11.89	Average
4	17769.600	40.02	21.25	61.27	74.00	12.73	Peak
5	17769.600	26.52	21.25	47.77	54.00	6.23	Average

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: vertical
 Note: 5G WiFi B1 ax80 Mode Middle Channel 5210MHz

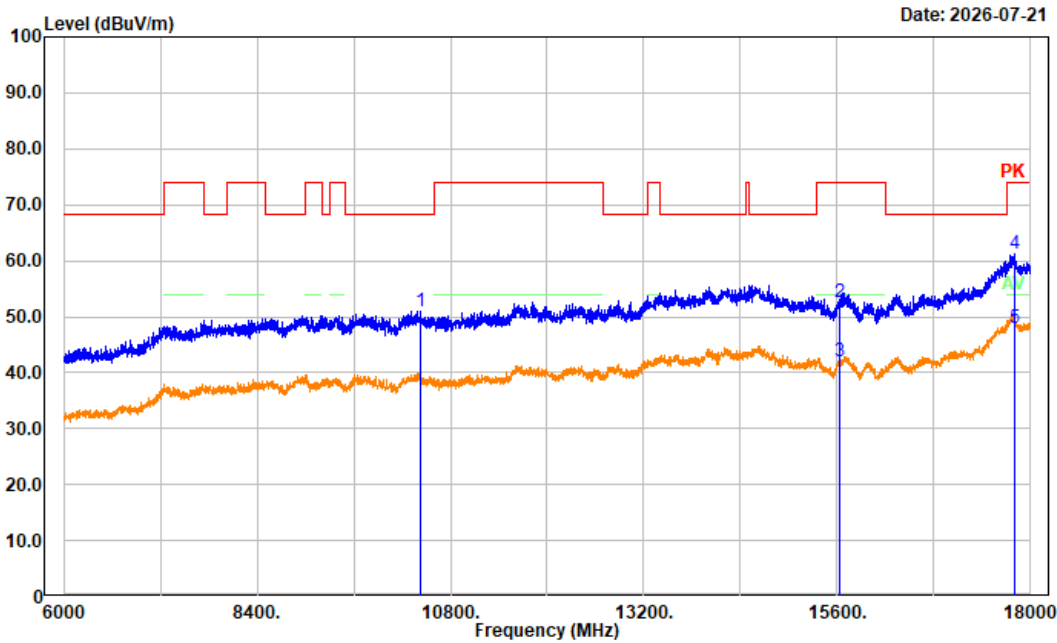


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	10420.000	37.77	13.30	51.07	68.20	17.13	Peak
2	15630.000	39.34	13.36	52.70	74.00	21.30	Peak
3	15630.000	28.77	13.36	42.13	54.00	11.87	Average
4	17798.400	39.81	21.35	61.16	74.00	12.84	Peak
5	17798.400	26.54	21.35	47.89	54.00	6.11	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 a Mode High Channel 5825MHz Chain 0

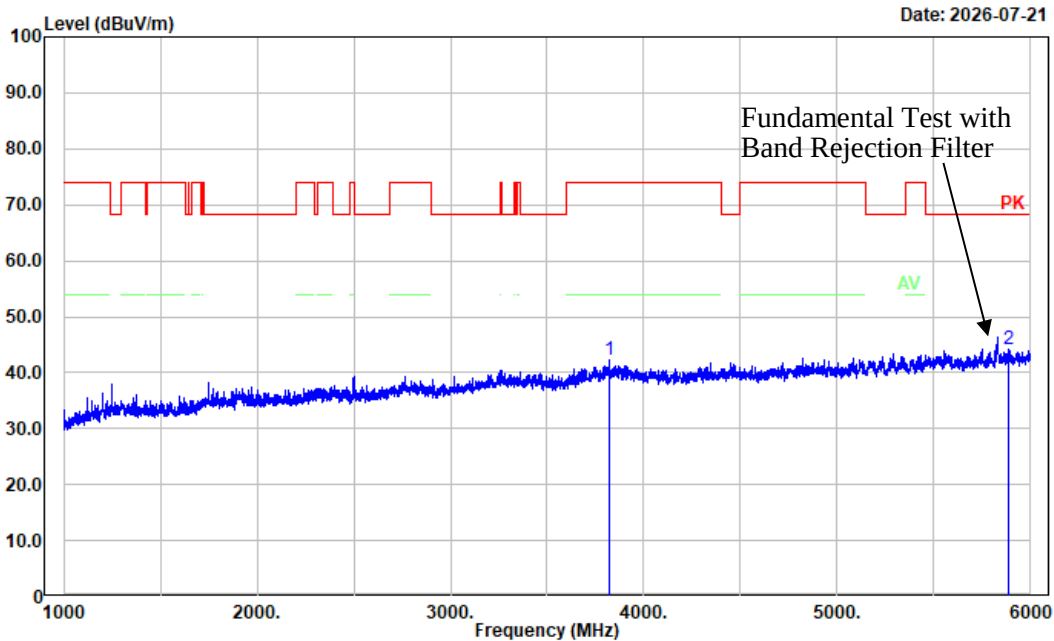


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3824.000	38.94	3.35	42.29	74.00	31.71	Peak
2	5889.000	37.15	7.07	44.22	68.20	23.98	Peak

Project No: 2603T61540E-RF
 Tester: Hua Yuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: vertical
 Note: 5G WiFi B4 a Mode High Channel 5825MHz Chain 0

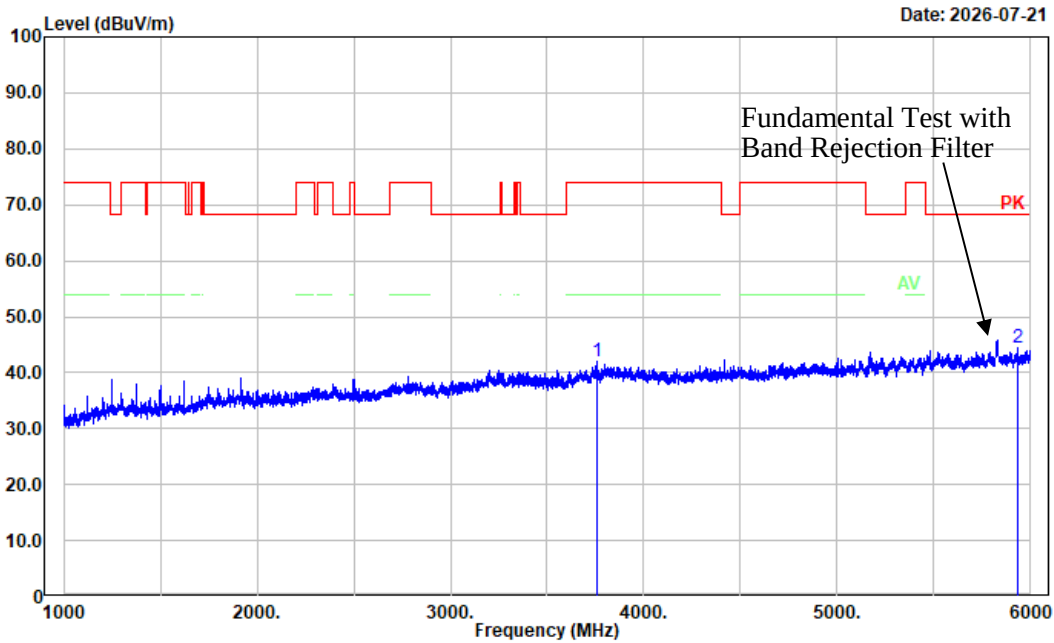


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3757.000	38.99	3.00	41.99	74.00	32.01	Peak
2	5933.000	37.32	7.20	44.52	68.20	23.68	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 a Mode High Channel 5825MHz Chain 0

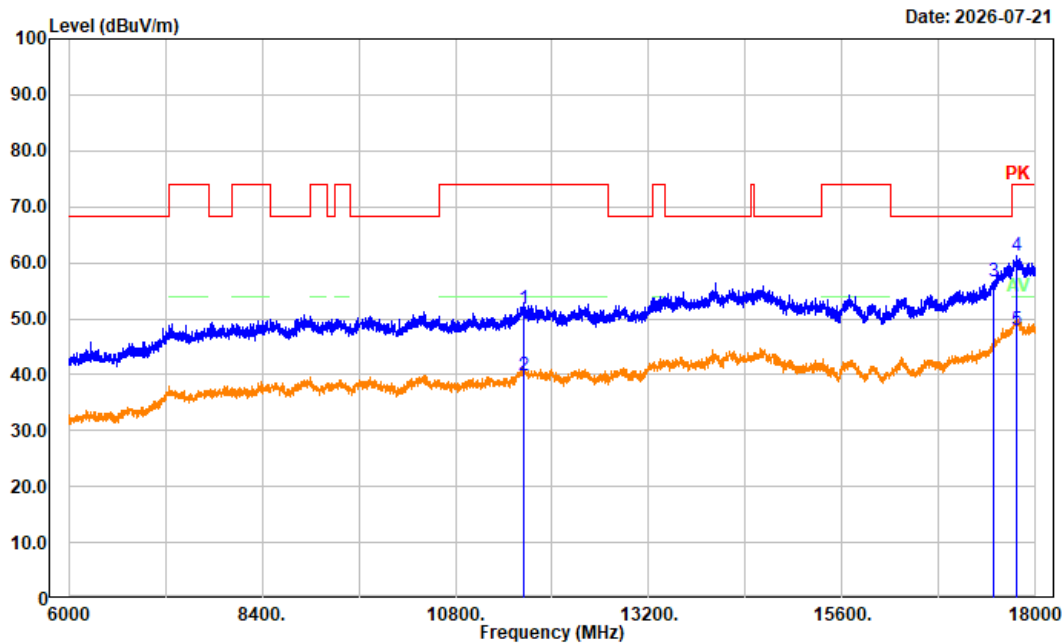


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	37.25	14.49	51.74	74.00	22.26	Peak
2	11650.000	25.29	14.49	39.78	54.00	14.22	Average
3	17475.000	37.59	18.94	56.53	68.20	11.67	Peak
4	17764.800	40.15	21.23	61.38	74.00	12.62	Peak
5	17764.800	26.64	21.23	47.87	54.00	6.13	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 a Mode High Channel 5825MHz Chain 0

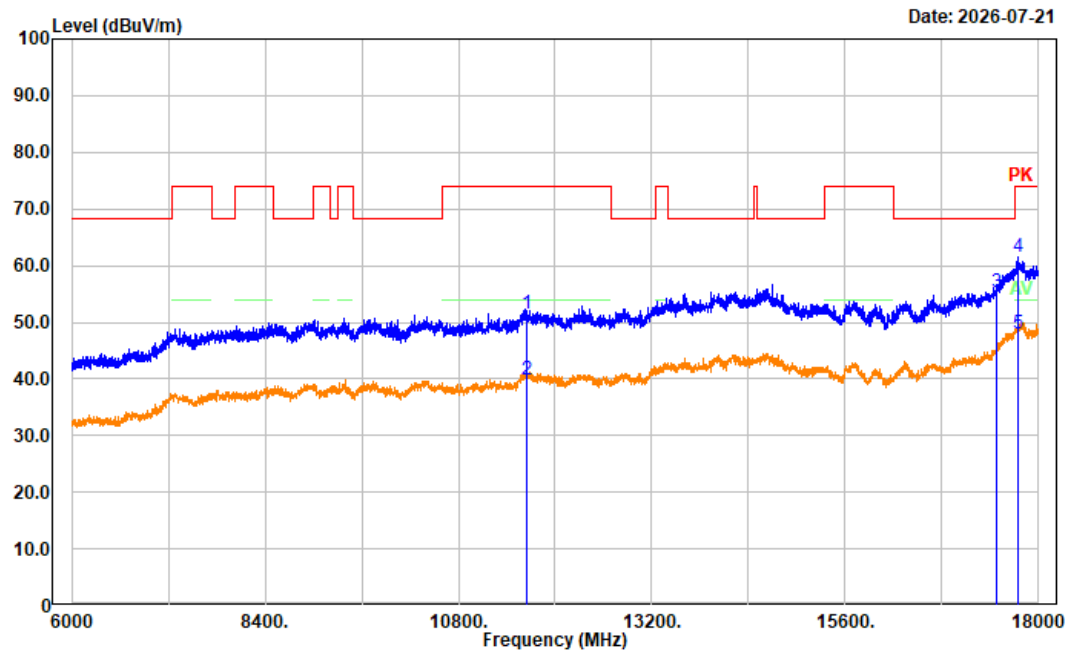


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11650.000	37.09	14.49	51.58	74.00	22.42	Peak
2	11650.000	25.37	14.49	39.86	54.00	14.14	Average
3	17475.000	36.24	18.94	55.18	68.20	13.02	Peak
4	17736.000	40.50	21.13	61.63	74.00	12.37	Peak
5	17736.000	26.71	21.13	47.84	54.00	6.16	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 a Mode Low Channel 5745MHz Chain 1

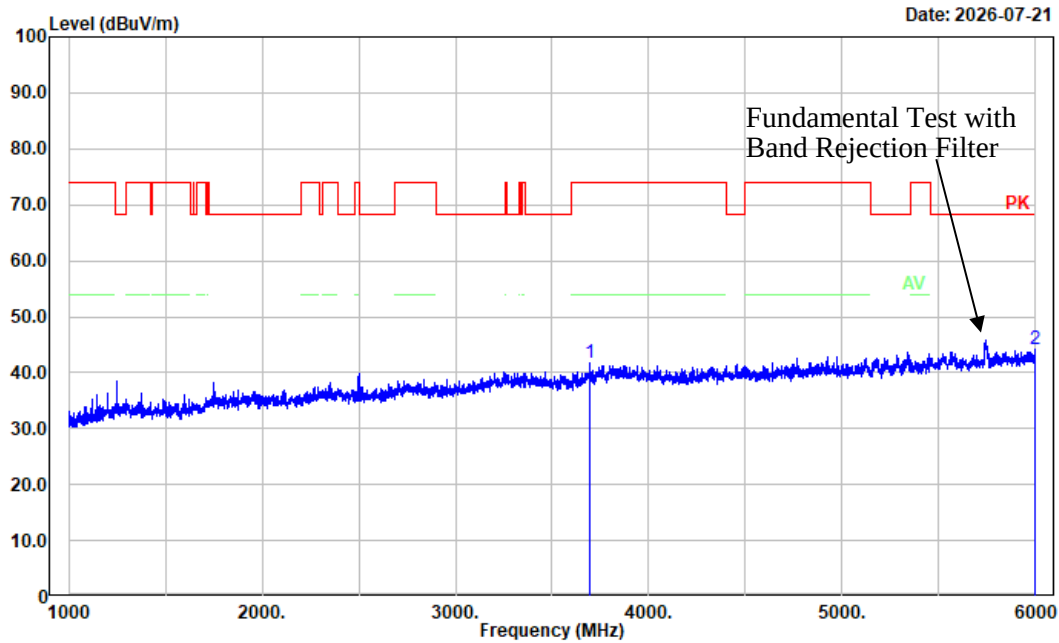


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3693.000	39.40	2.41	41.81	74.00	32.19	Peak
2	5998.000	36.53	7.71	44.24	68.20	23.96	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 a Mode Low Channel 5745MHz Chain 1

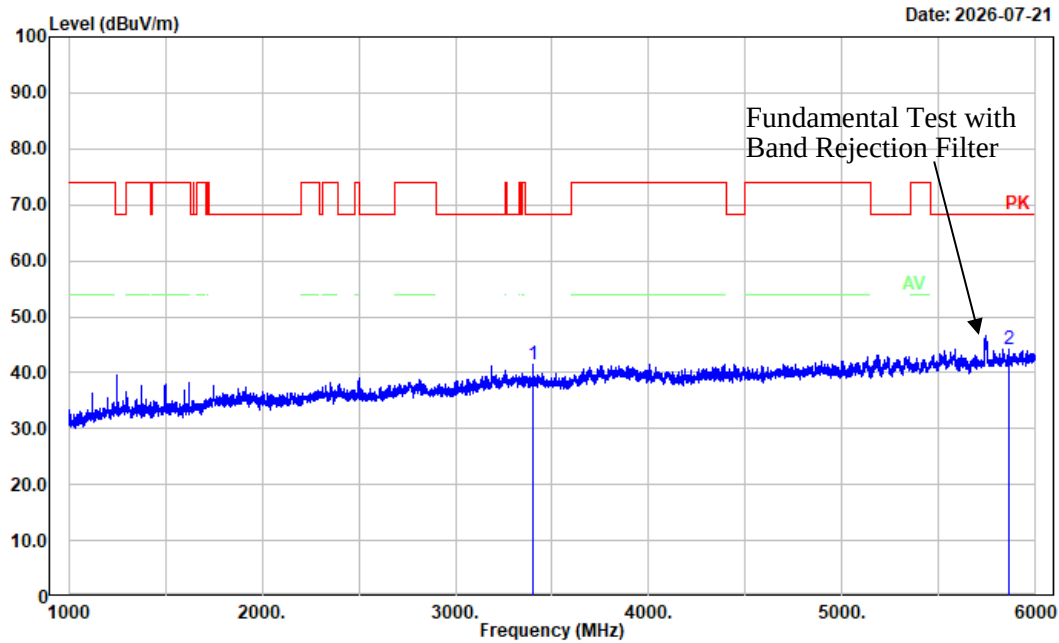


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3402.000	39.82	1.53	41.35	68.20	26.85	Peak
2	5863.000	37.21	6.97	44.18	68.20	24.02	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 a Mode Low Channel 5745MHz Chain 1

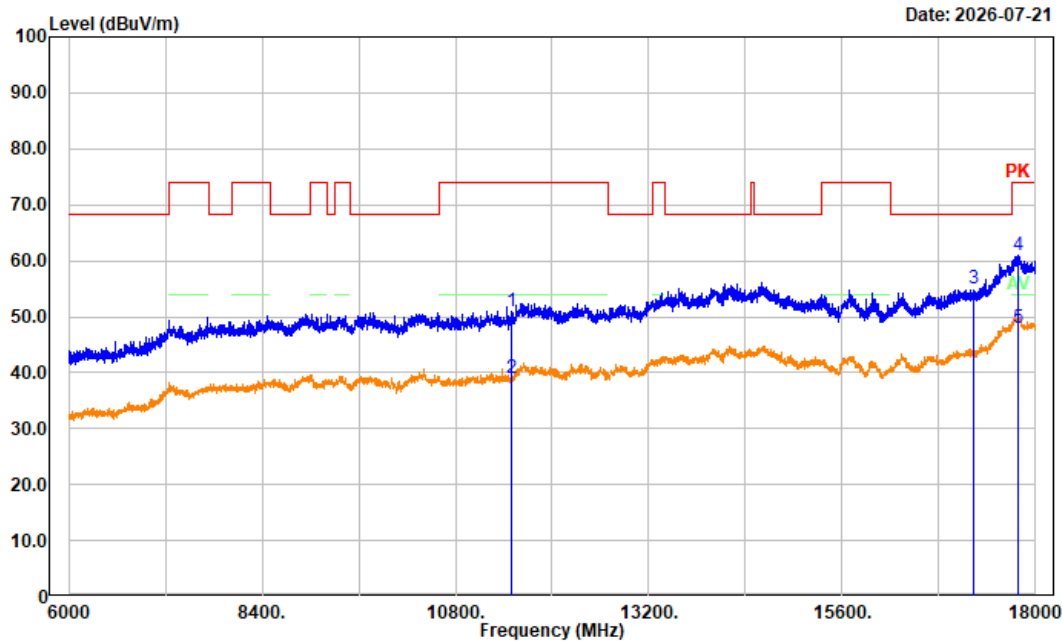


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11490.000	37.02	13.97	50.99	74.00	23.01	Peak
2	11490.000	25.08	13.97	39.05	54.00	14.95	Average
3	17235.000	37.95	16.99	54.94	68.20	13.26	Peak
4	17791.200	39.60	21.32	60.92	74.00	13.08	Peak
5	17791.200	26.52	21.32	47.84	54.00	6.16	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 a Mode Low Channel 5745MHz Chain 1

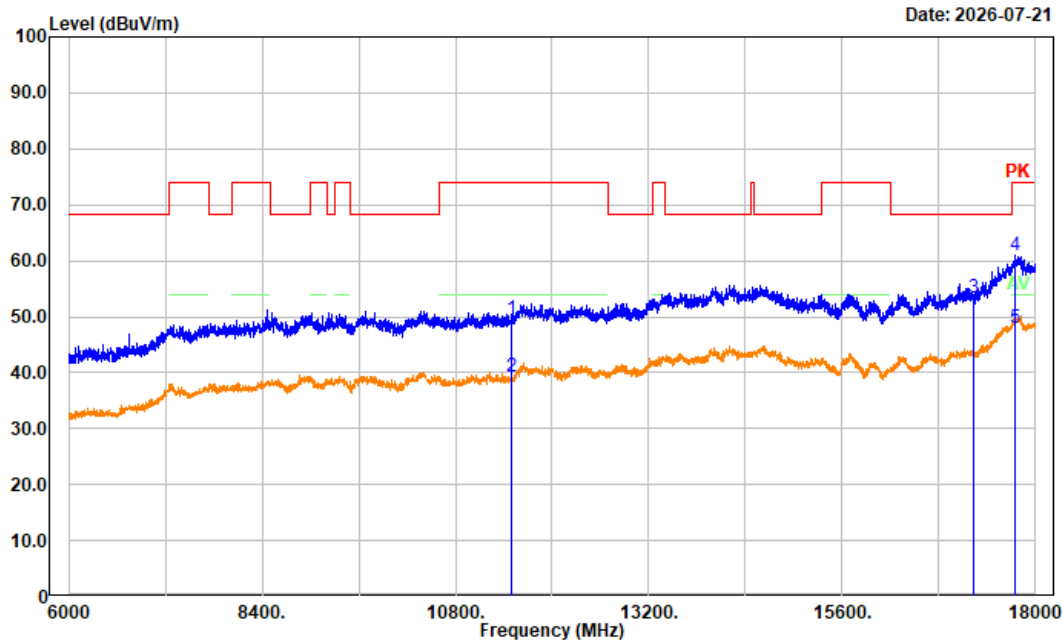


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11490.000	35.51	13.97	49.48	74.00	24.52	Peak
2	11490.000	25.37	13.97	39.34	54.00	14.66	Average
3	17235.000	36.34	16.99	53.33	68.20	14.87	Peak
4	17738.400	39.70	21.15	60.85	74.00	13.15	Peak
5	17738.400	26.71	21.15	47.86	54.00	6.14	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 ac20 Mode Low Channel 5745MHz

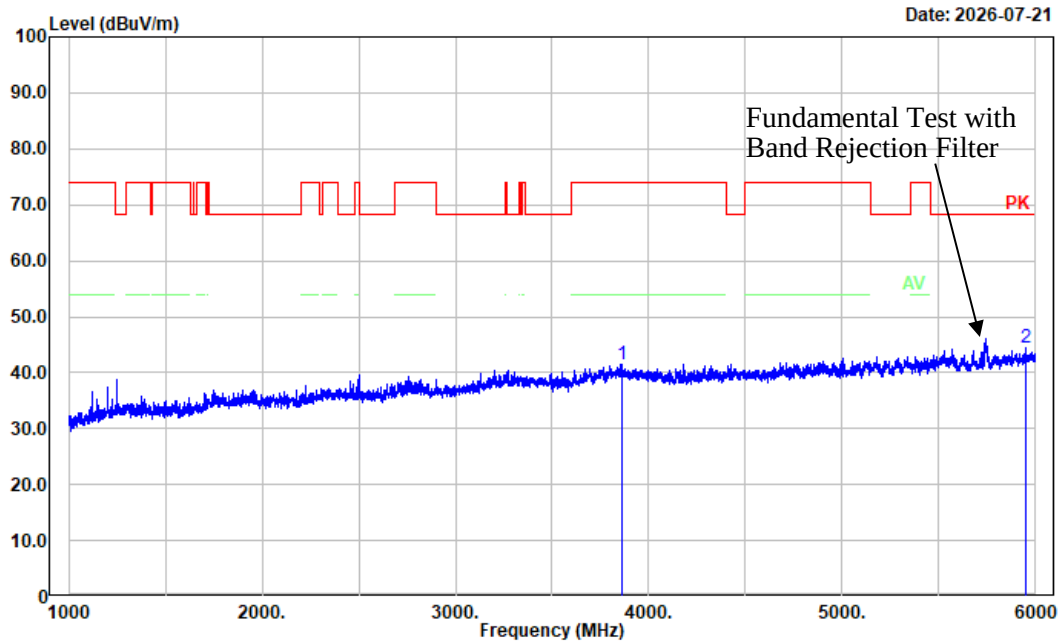


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3865.000	38.14	3.39	41.53	74.00	32.47	Peak
2	5953.000	37.16	7.27	44.43	68.20	23.77	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 ac20 Mode Low Channel 5745MHz

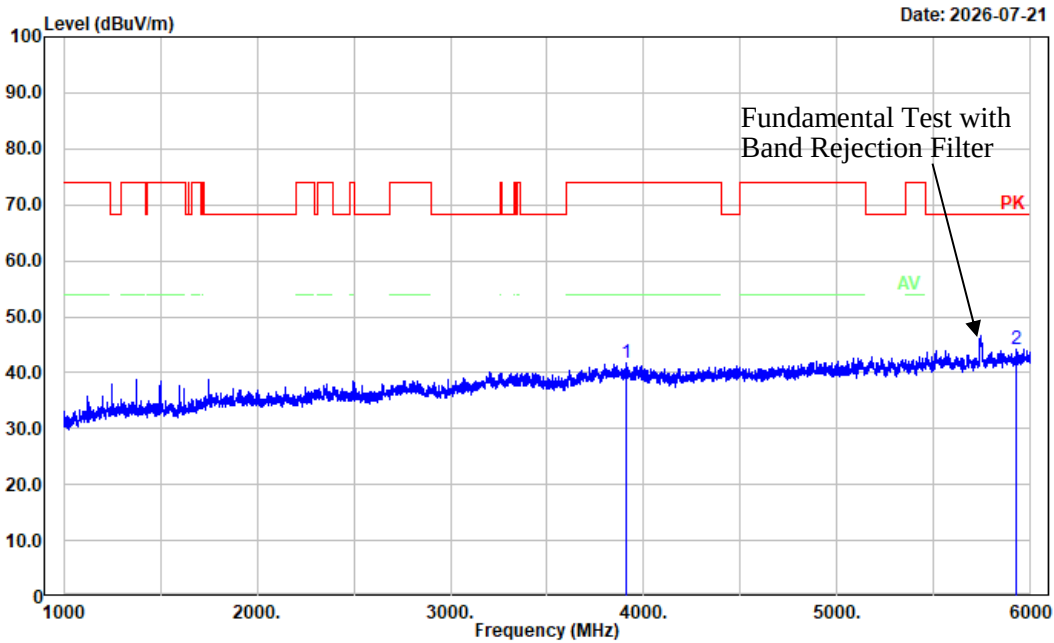


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3909.000	38.48	3.34	41.82	74.00	32.18	Peak
2	5928.000	37.06	7.18	44.24	68.20	23.96	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 ac20 Mode Low Channel 5745MHz

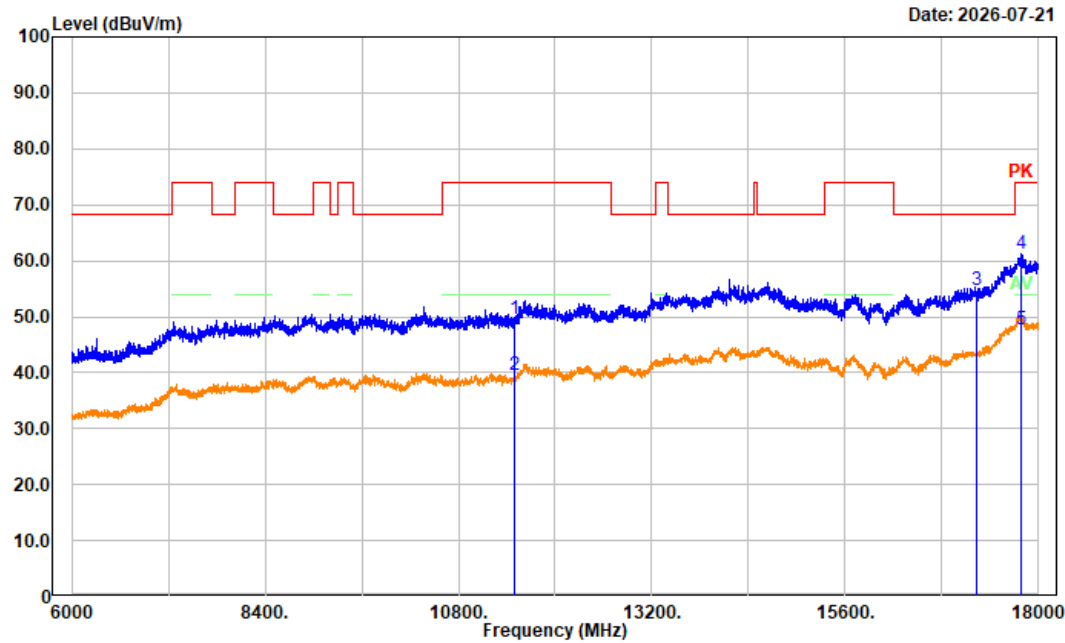


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11490.000	35.52	13.97	49.49	74.00	24.51	Peak
2	11490.000	25.47	13.97	39.44	54.00	14.56	Average
3	17235.000	37.85	16.99	54.84	68.20	13.36	Peak
4	17786.400	39.83	21.30	61.13	74.00	12.87	Peak
5	17786.400	26.53	21.30	47.83	54.00	6.17	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 ac20 Mode Low Channel 5745MHz

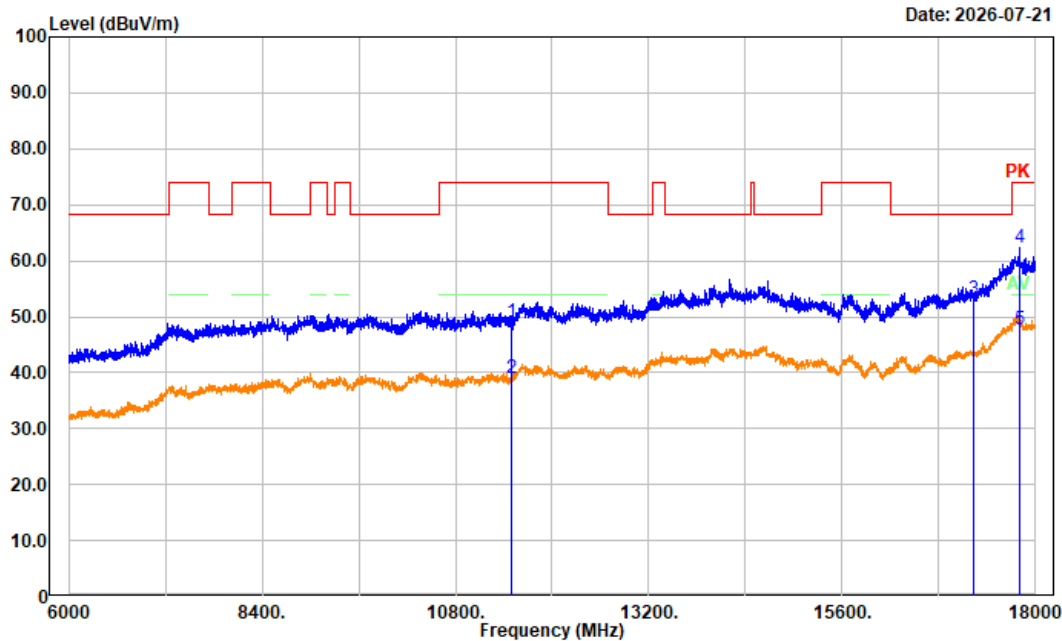


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11490.000	35.07	13.97	49.04	74.00	24.96	Peak
2	11490.000	25.13	13.97	39.10	54.00	14.90	Average
3	17235.000	36.24	16.99	53.23	68.20	14.97	Peak
4	17803.200	41.03	21.36	62.39	74.00	11.61	Peak
5	17803.200	26.45	21.36	47.81	54.00	6.19	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 ac40 Mode Low Channel 5755MHz

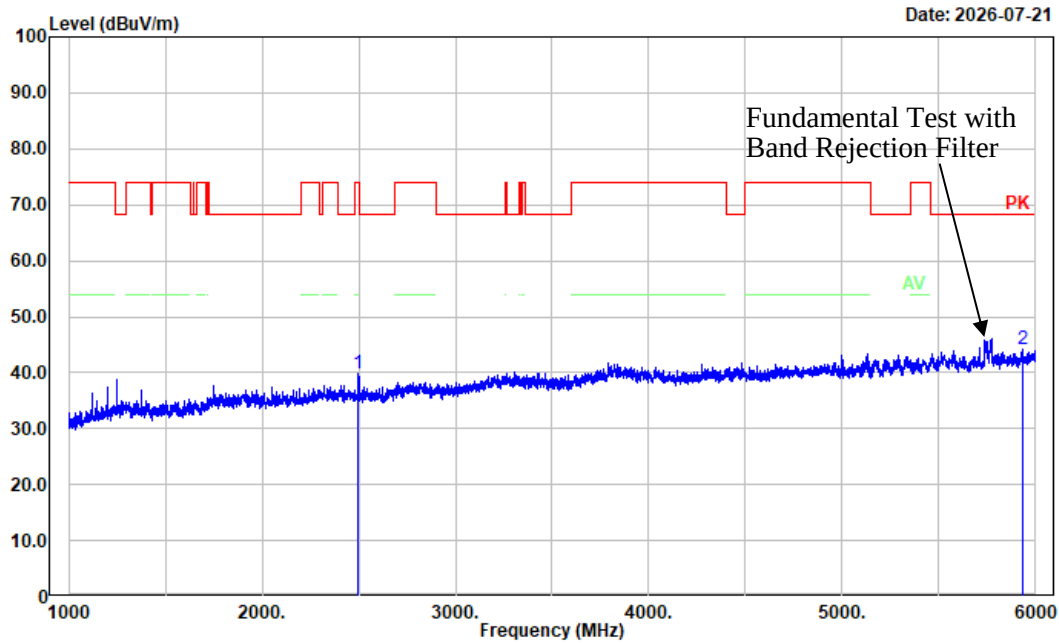


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2499.000	41.89	-2.10	39.79	74.00	34.21	Peak
2	5934.000	36.98	7.21	44.19	68.20	24.01	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 ac40 Mode Low Channel 5755MHz

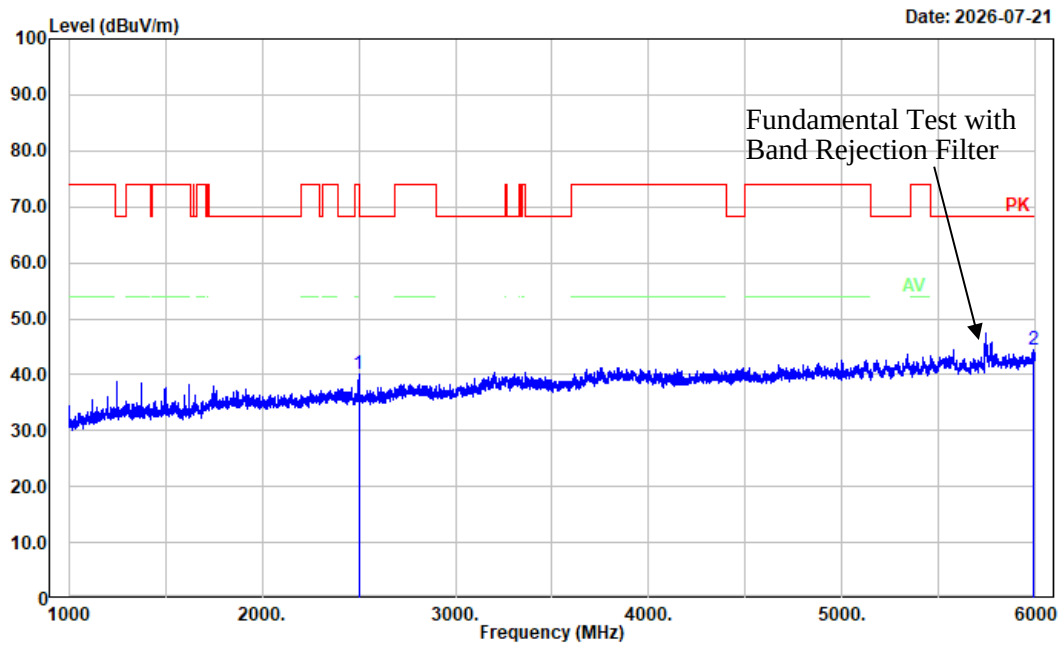


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	42.27	-2.10	40.17	68.20	28.03	Peak
2	5991.000	36.87	7.64	44.51	68.20	23.69	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 ac40 Mode Low Channel 5755MHz

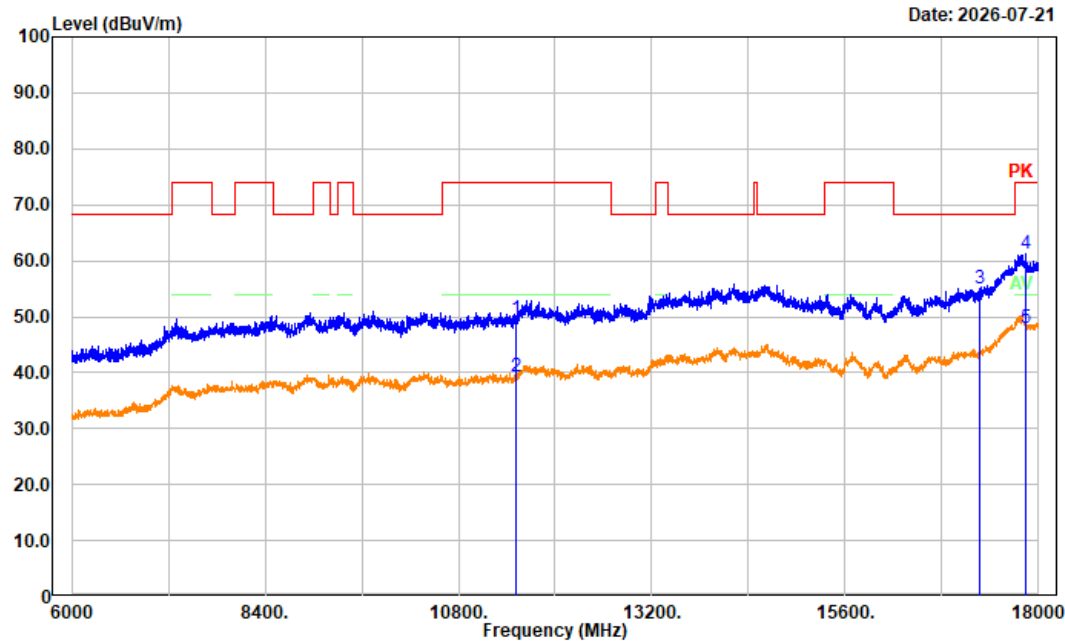


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11510.000	35.67	14.05	49.72	74.00	24.28	Peak
2	11510.000	25.36	14.05	39.41	54.00	14.59	Average
3	17265.000	37.71	17.22	54.93	68.20	13.27	Peak
4	17832.000	39.77	21.40	61.17	74.00	12.83	Peak
5	17832.000	26.50	21.40	47.90	54.00	6.10	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 ac40 Mode Low Channel 5755MHz

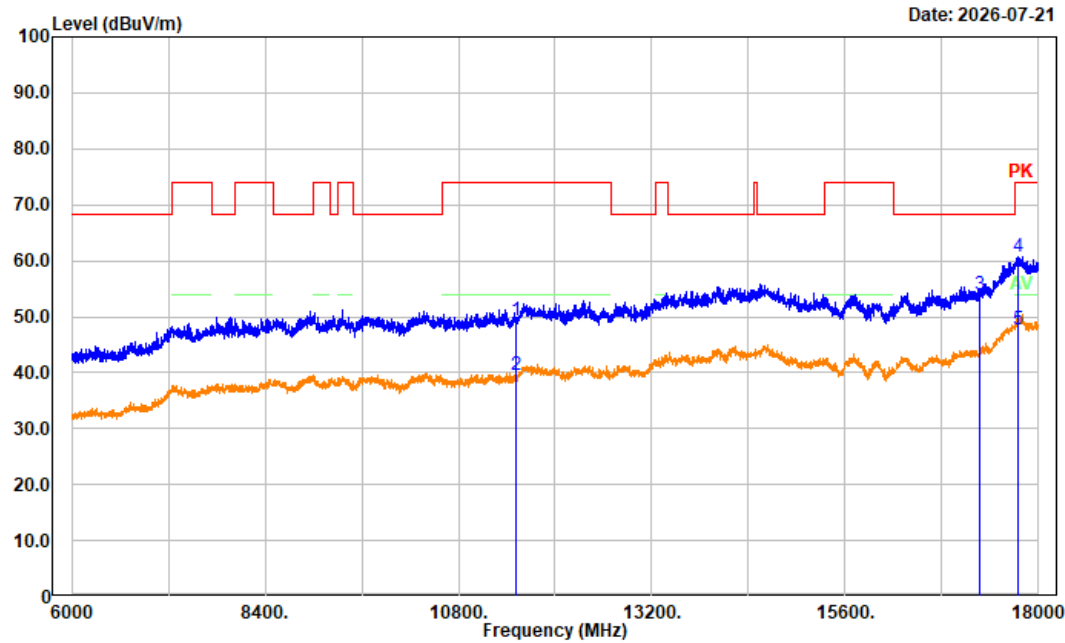


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11510.000	35.20	14.05	49.25	74.00	24.75	Peak
2	11510.000	25.47	14.05	39.52	54.00	14.48	Average
3	17265.000	36.82	17.22	54.04	68.20	14.16	Peak
4	17750.400	39.40	21.18	60.58	74.00	13.42	Peak
5	17750.400	26.50	21.18	47.68	54.00	6.32	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

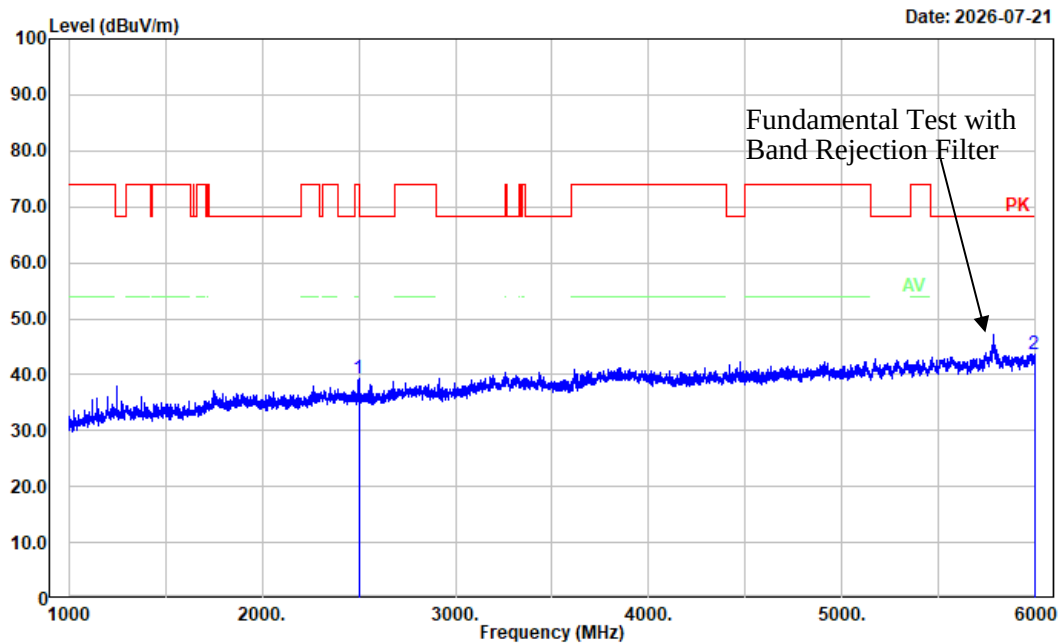


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	41.37	-2.10	39.27	68.20	28.93	Peak
2	5993.000	36.03	7.66	43.69	68.20	24.51	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

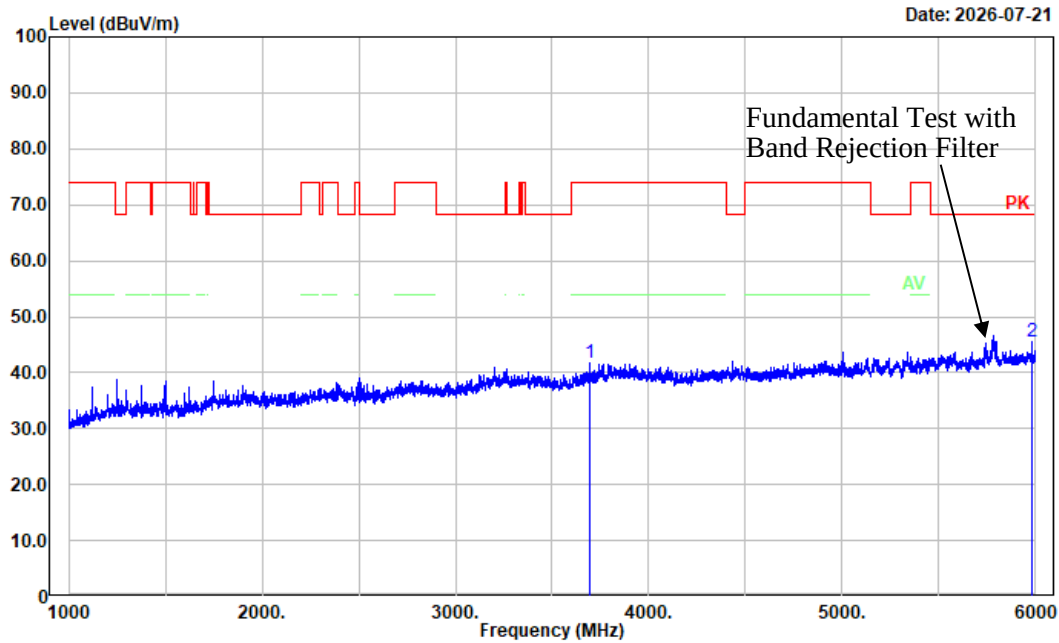


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3696.000	39.33	2.43	41.76	74.00	32.24	Peak
2	5981.000	38.07	7.54	45.61	68.20	22.59	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

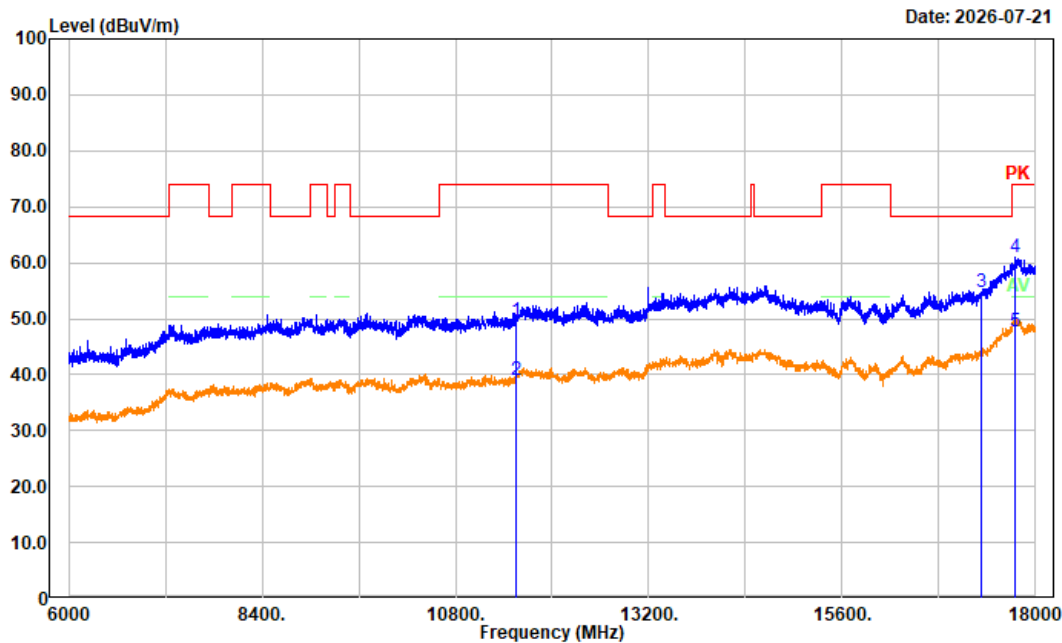


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	35.30	14.24	49.54	74.00	24.46	Peak
2	11550.000	24.87	14.24	39.11	54.00	14.89	Average
3	17325.000	36.99	17.70	54.69	68.20	13.51	Peak
4	17743.200	39.80	21.16	60.96	74.00	13.04	Peak
5	17743.200	26.62	21.16	47.78	54.00	6.22	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

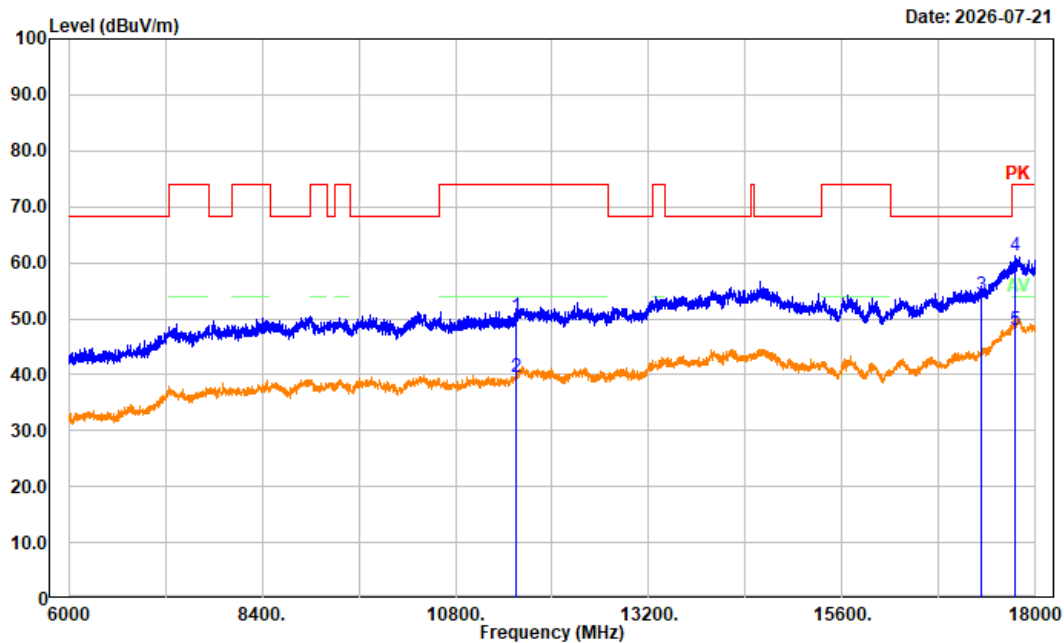


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	36.05	14.24	50.29	74.00	23.71	Peak
2	11550.000	25.39	14.24	39.63	54.00	14.37	Average
3	17325.000	36.45	17.70	54.15	68.20	14.05	Peak
4	17748.000	39.98	21.17	61.15	74.00	12.85	Peak
5	17748.000	26.71	21.17	47.88	54.00	6.12	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 ax20 Mode Low Channel 5745MHz

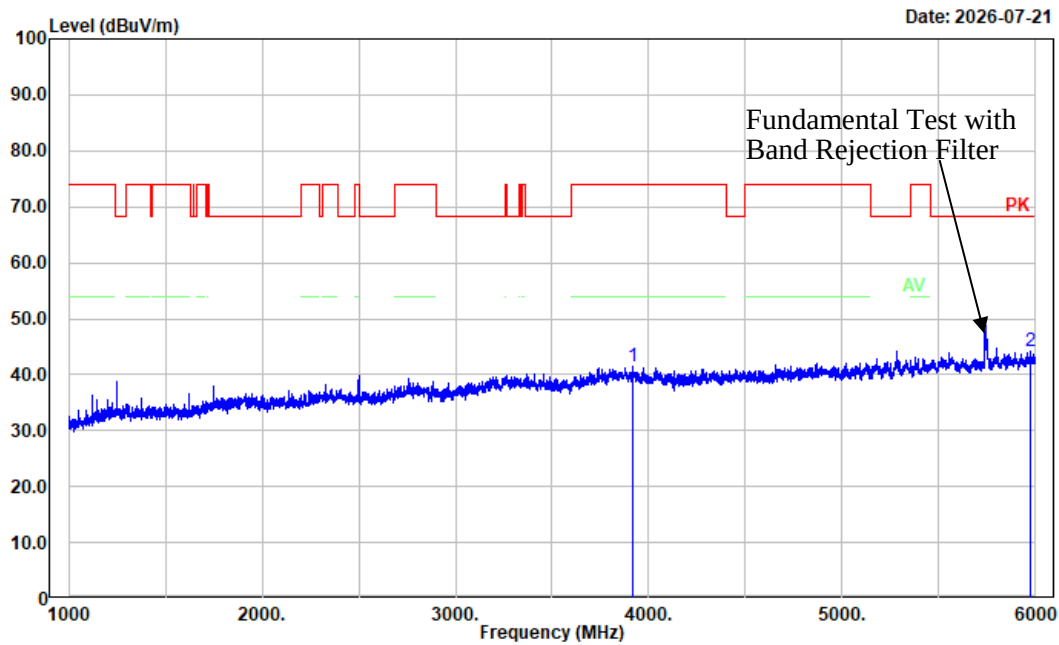


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3917.000	38.04	3.33	41.37	74.00	32.63	Peak
2	5970.000	36.67	7.43	44.10	68.20	24.10	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 ax20 Mode Low Channel 5745MHz

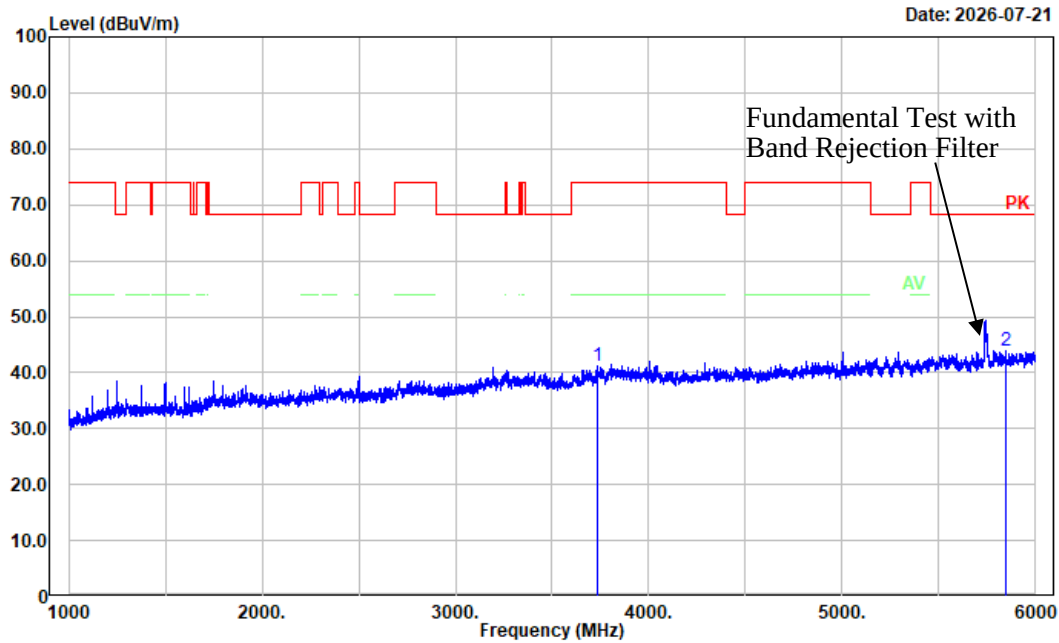


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	3737.000	38.30	2.83	41.13	74.00	32.87	Peak
2	5845.000	36.99	6.91	43.90	68.20	24.30	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 ax20 Mode Low Channel 5745MHz

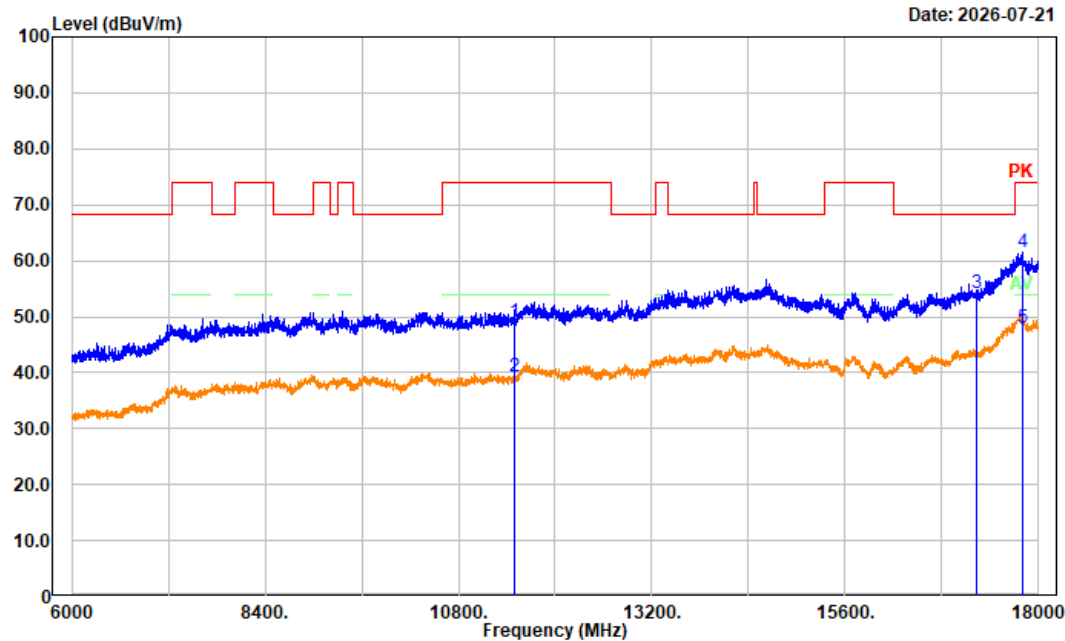


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11490.000	34.99	13.97	48.96	74.00	25.04	Peak
2	11490.000	25.34	13.97	39.31	54.00	14.69	Average
3	17235.000	37.26	16.99	54.25	68.20	13.95	Peak
4	17800.800	40.25	21.35	61.60	74.00	12.40	Peak
5	17800.800	26.53	21.35	47.88	54.00	6.12	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 ax20 Mode Low Channel 5745MHz

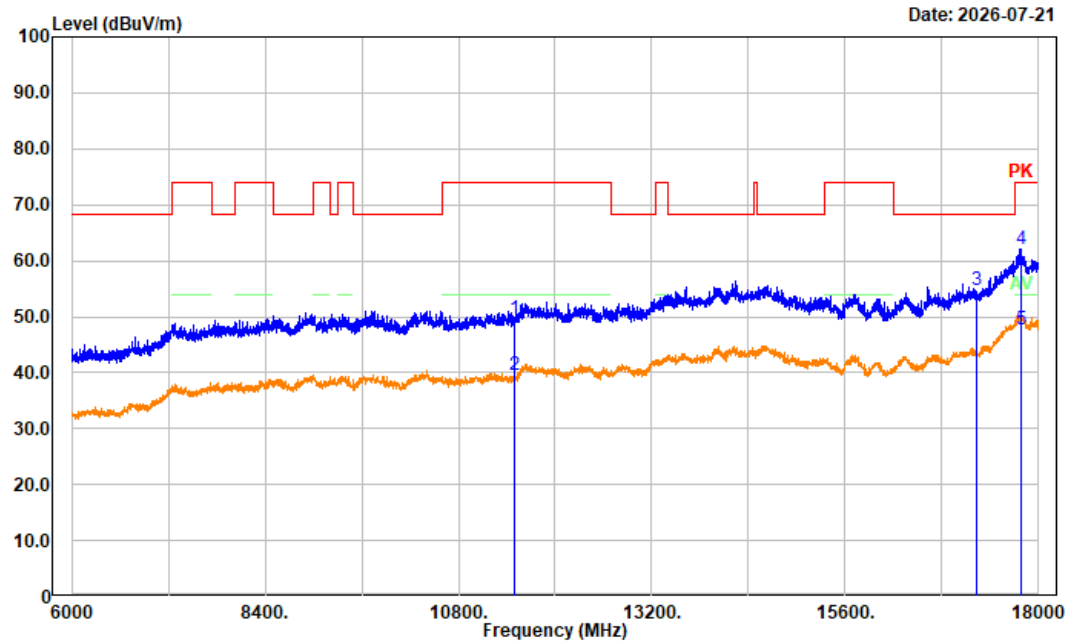


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11490.000	35.64	13.97	49.61	74.00	24.39	Peak
2	11490.000	25.54	13.97	39.51	54.00	14.49	Average
3	17235.000	37.86	16.99	54.85	68.20	13.35	Peak
4	17788.800	40.74	21.32	62.06	74.00	11.94	Peak
5	17788.800	26.47	21.32	47.79	54.00	6.21	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 ax40 Mode Low Channel 5755MHz

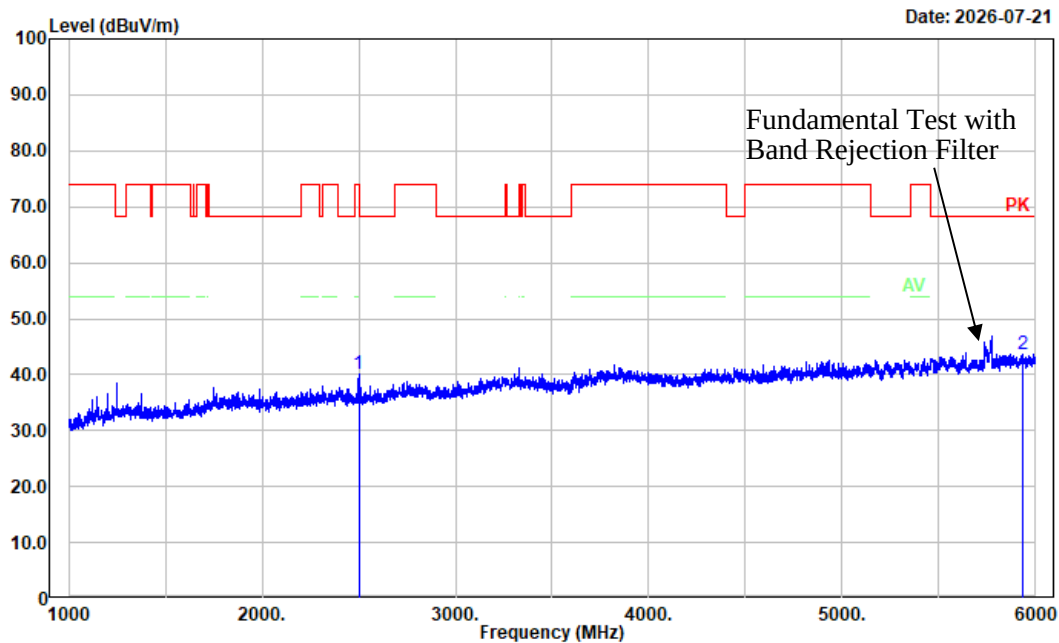


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	42.12	-2.10	40.02	68.20	28.18	Peak
2	5932.000	36.35	7.20	43.55	68.20	24.65	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 ax40 Mode Low Channel 5755MHz

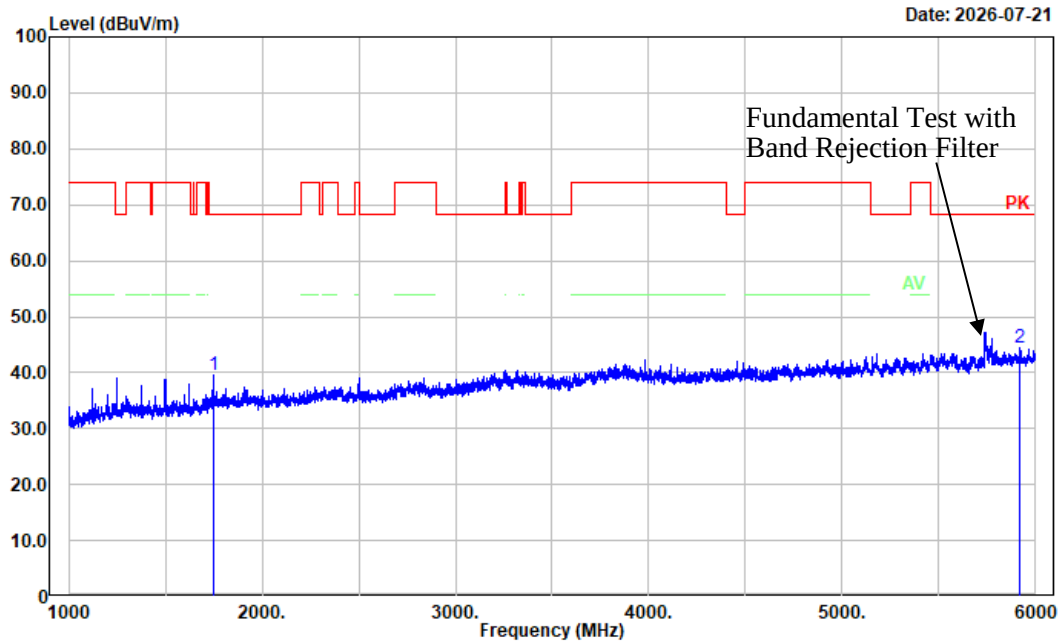


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1750.000	43.29	-3.72	39.57	68.20	28.63	Peak
2	5920.000	37.24	7.17	44.41	68.20	23.79	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 ax40 Mode Low Channel 5755MHz

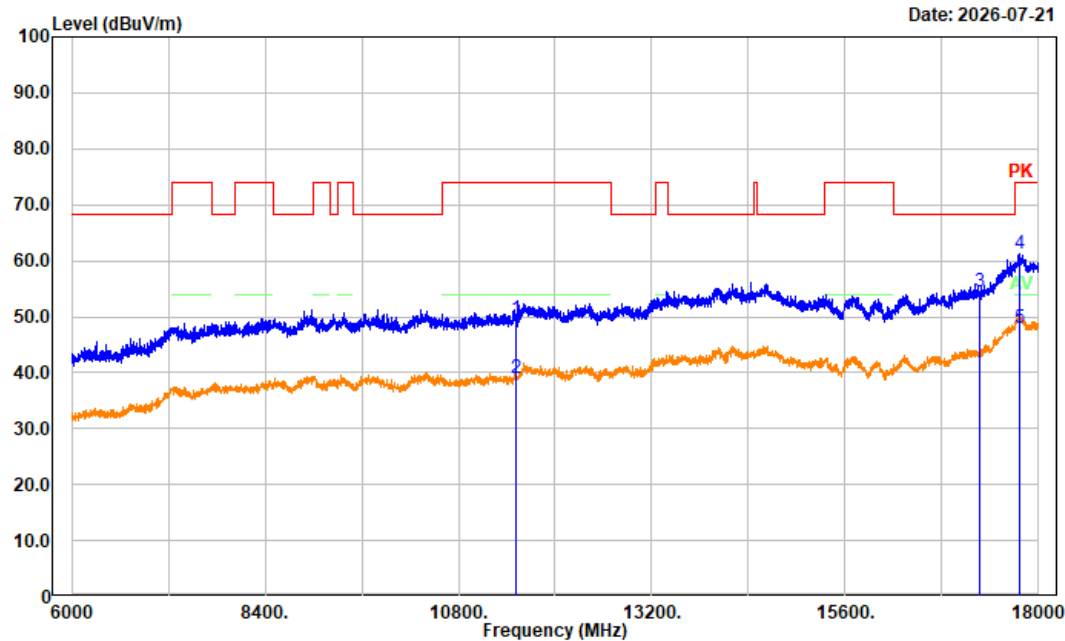


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11510.000	35.65	14.05	49.70	74.00	24.30	Peak
2	11510.000	25.07	14.05	39.12	54.00	14.88	Average
3	17265.000	37.26	17.22	54.48	68.20	13.72	Peak
4	17755.200	40.07	21.20	61.27	74.00	12.73	Peak
5	17755.200	26.69	21.20	47.89	54.00	6.11	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 ax40 Mode Low Channel 5755MHz

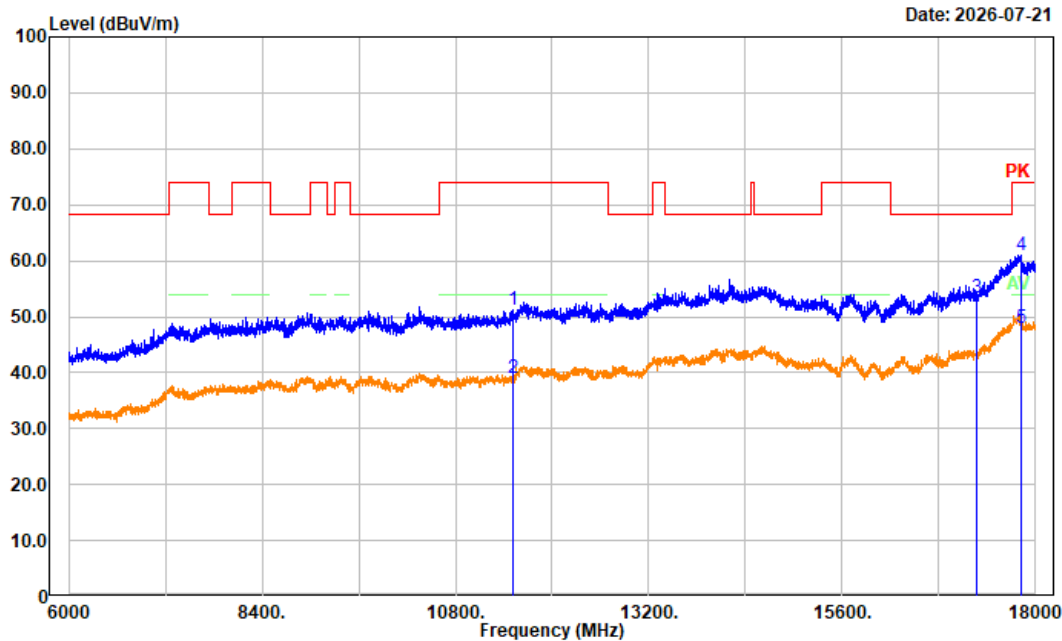


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11510.000	37.21	14.05	51.26	74.00	22.74	Peak
2	11510.000	24.97	14.05	39.02	54.00	14.98	Average
3	17265.000	36.21	17.22	53.43	68.20	14.77	Peak
4	17812.800	39.70	21.37	61.07	74.00	12.93	Peak
5	17812.800	26.48	21.37	47.85	54.00	6.15	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 5G WiFi B4 ax80 Mode Middle Channel 5775MHz

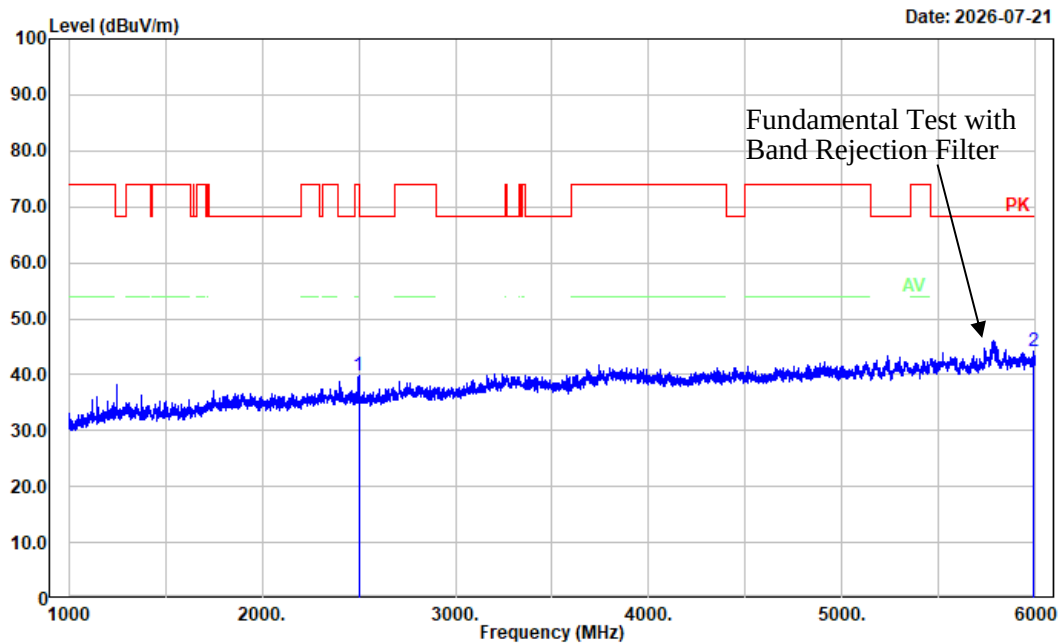


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	41.97	-2.10	39.87	68.20	28.33	Peak
2	5987.000	36.45	7.60	44.05	68.20	24.15	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 5G WiFi B4 ax80 Mode Middle Channel 5775MHz

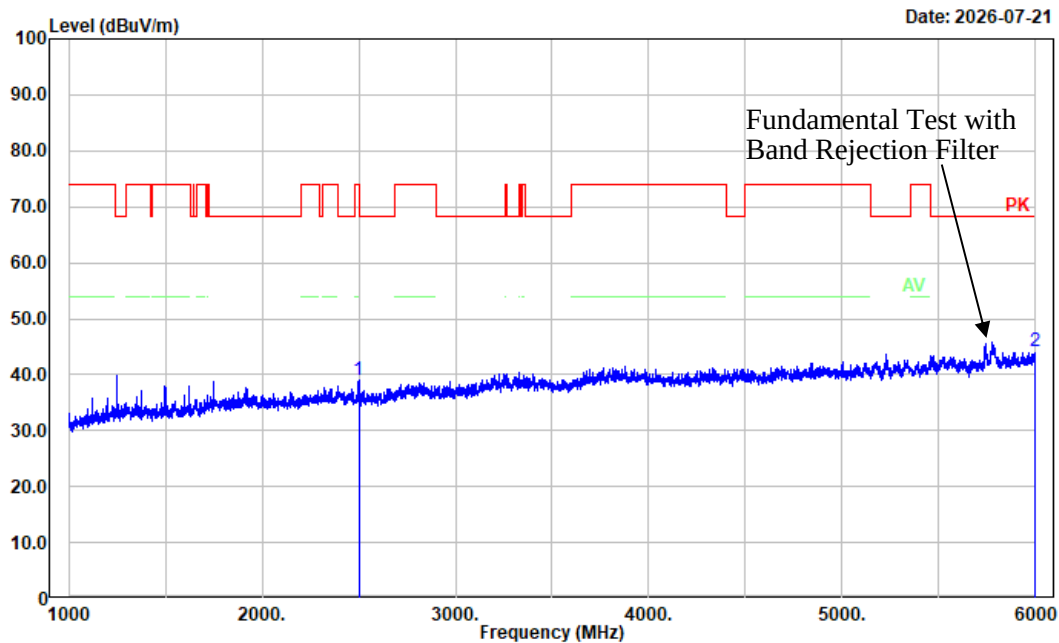


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2500.000	41.09	-2.10	38.99	68.20	29.21	Peak
2	6000.000	36.32	7.73	44.05	68.20	24.15	Peak

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 5G WiFi B4 ax80 Mode Middle Channel 5775MHz

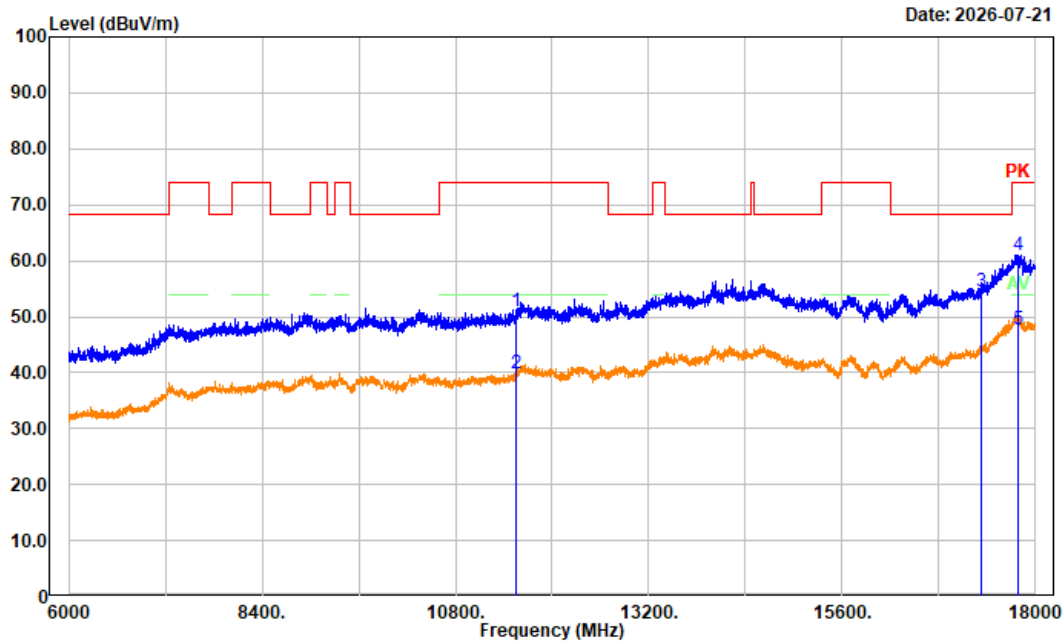

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	36.80	14.24	51.04	74.00	22.96	Peak
2	11550.000	25.63	14.24	39.87	54.00	14.13	Average
3	17325.000	36.74	17.70	54.44	68.20	13.76	Peak
4	17791.200	39.75	21.32	61.07	74.00	12.93	Peak
5	17791.200	26.37	21.32	47.69	54.00	6.31	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B4 ax80 Mode Middle Channel 5775MHz

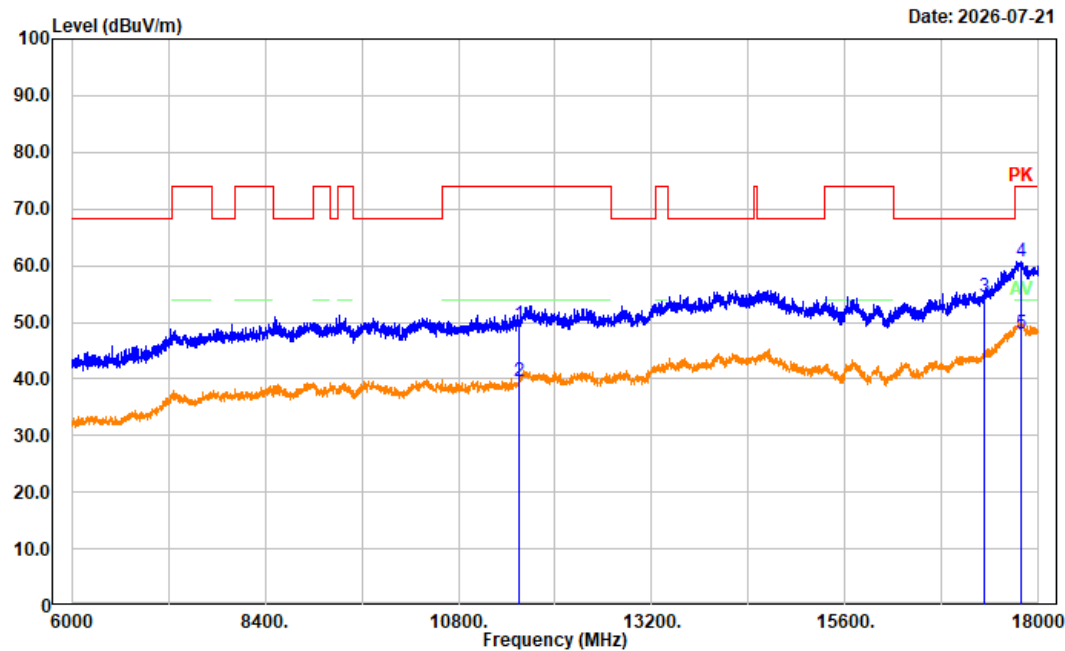


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	11550.000	35.42	14.24	49.66	74.00	24.34	Peak
2	11550.000	25.37	14.24	39.61	54.00	14.39	Average
3	17325.000	36.87	17.70	54.57	68.20	13.63	Peak
4	17776.800	39.44	21.27	60.71	74.00	13.29	Peak
5	17776.800	26.60	21.27	47.87	54.00	6.13	Average

Test plots for 18GHz~40GHz:


Note: The test was performed under the Maximum Conducted Output Power mode and channel (802.11ac80 mode Middle Channel 5775MHz).

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

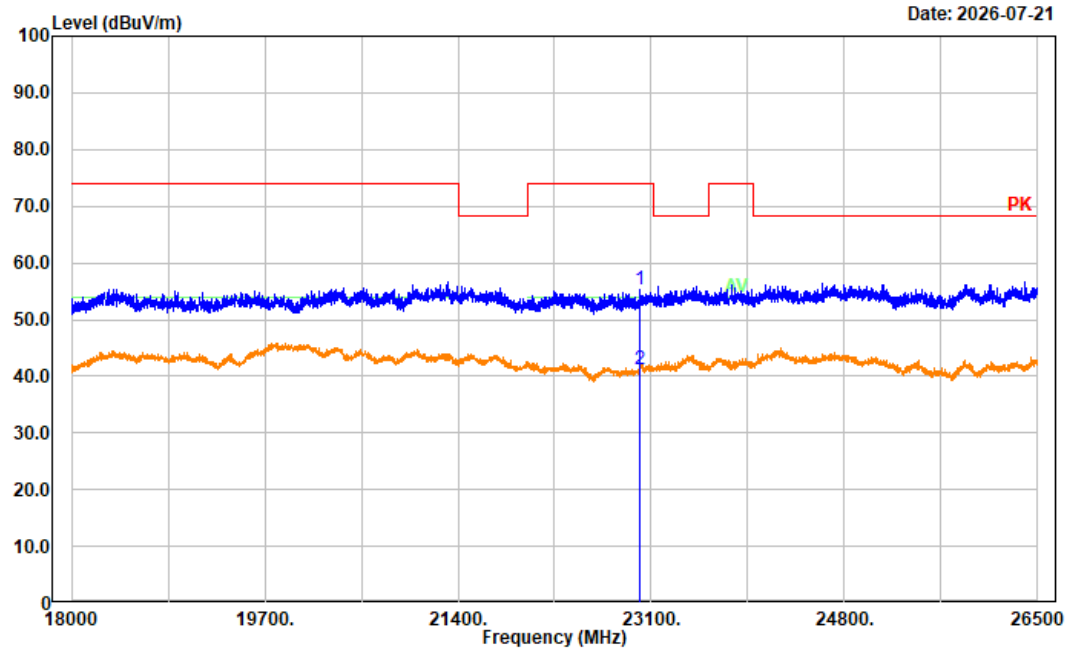


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	23001.400	50.09	5.10	55.19	74.00	18.81	Peak
2	23001.400	36.00	5.10	41.10	54.00	12.90	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

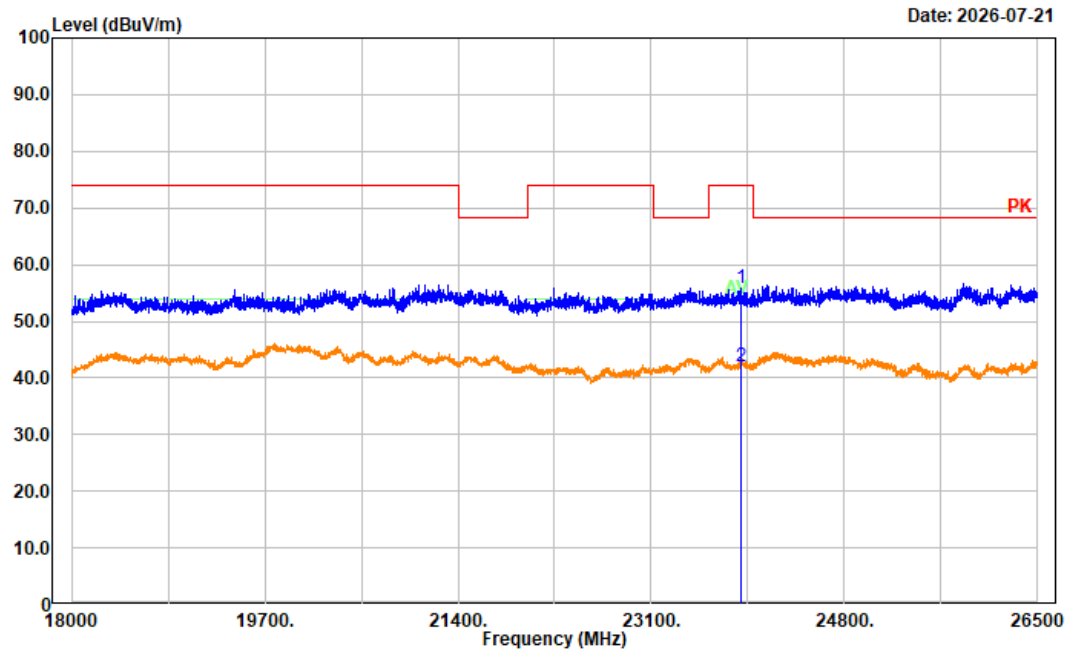


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	23883.700	48.73	7.20	55.93	74.00	18.07	Peak
2	23883.700	34.93	7.20	42.13	54.00	11.87	Average

Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

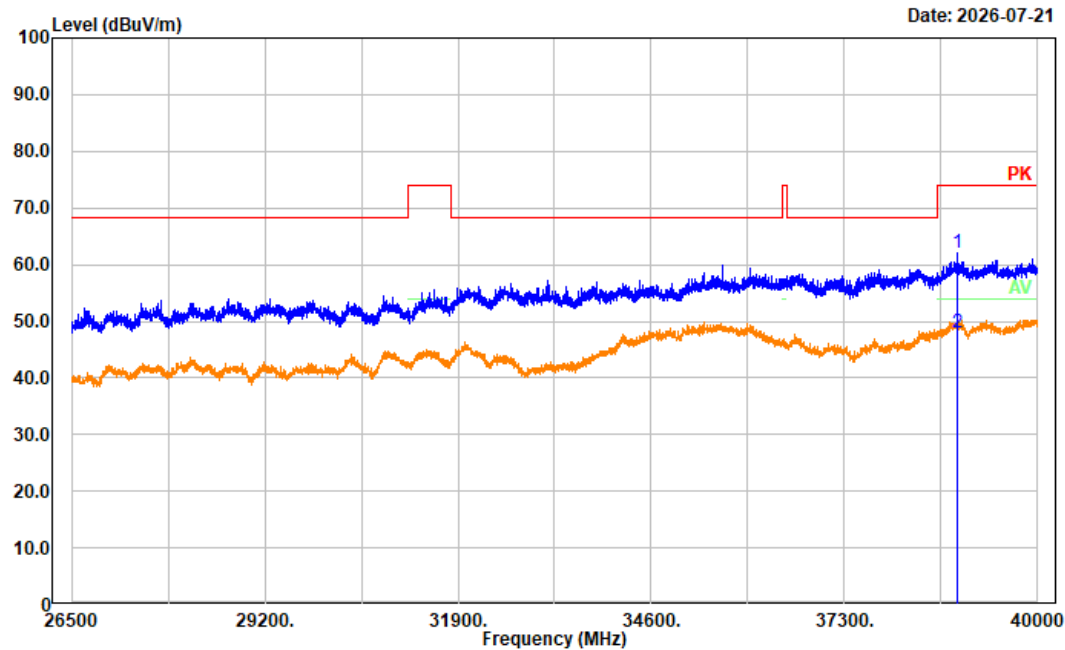

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	38868.700	52.51	9.45	61.96	74.00	12.04	Peak
2	38868.700	38.40	9.45	47.85	54.00	6.15	Average


Project No: 2603T61540E-RF
Tester: Hua Yuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B4 ac80 Mode Middle Channel 5775MHz

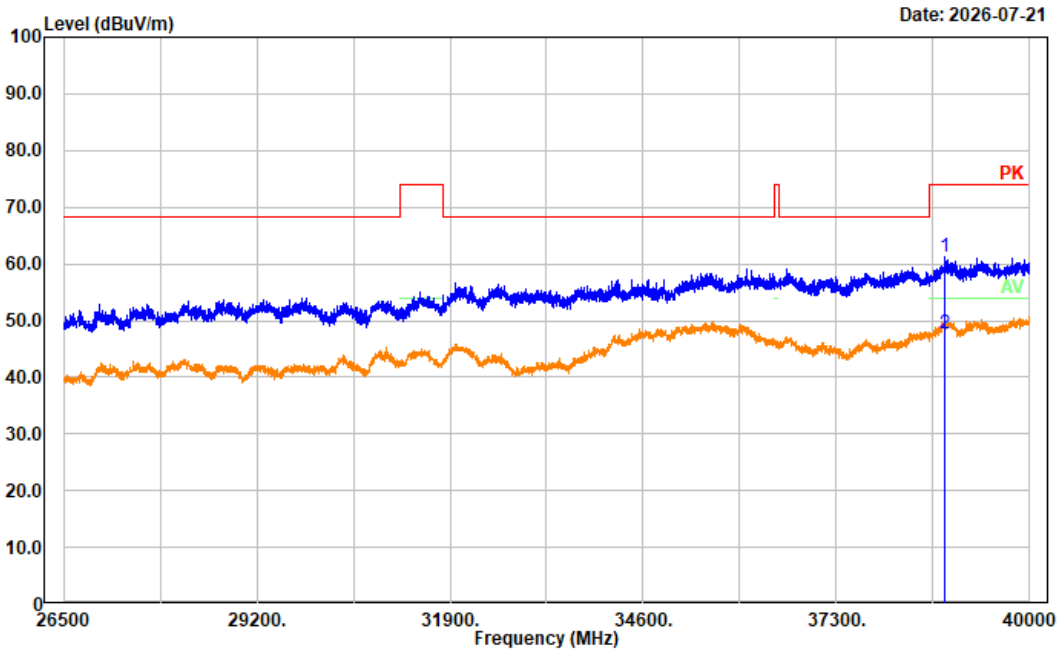

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	38822.800	52.48	8.64	61.12	74.00	12.88	Peak
2	38822.800	39.05	8.64	47.69	54.00	6.31	Average


Band Edge Test Plots

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 a Mode Low Channel 5180 MHz Chain 0

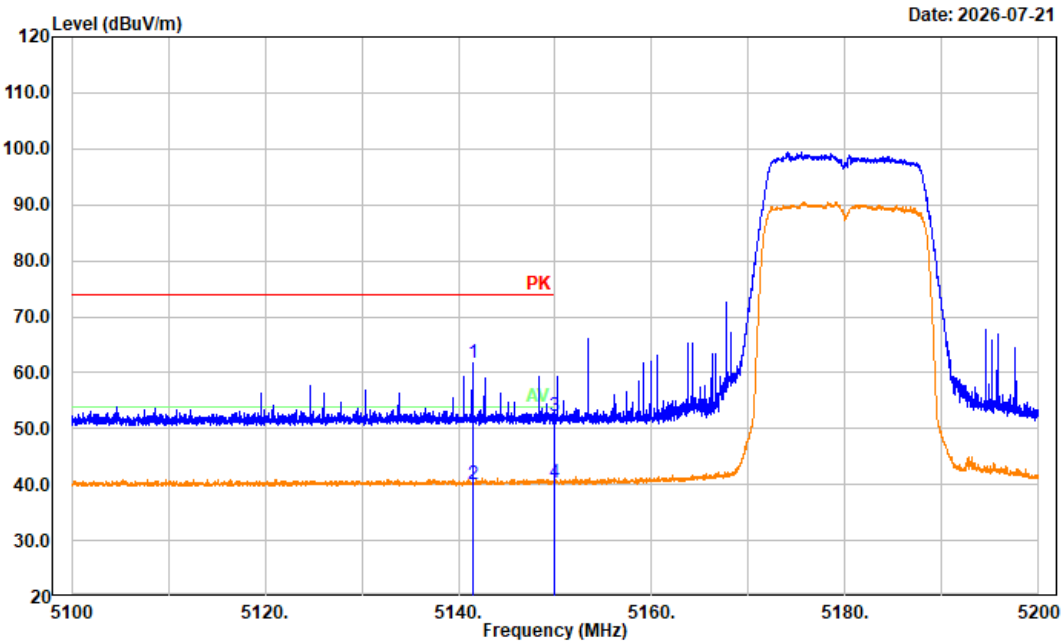


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5141.440	55.86	5.80	61.66	74.00	12.34	Peak
2	5141.440	34.36	5.80	40.16	54.00	13.84	Average
3	5150.000	46.35	5.83	52.18	74.00	21.82	Peak
4	5150.000	34.59	5.83	40.42	54.00	13.58	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 5G WiFi B1 a Mode Low Channel 5180 MHz Chain 0

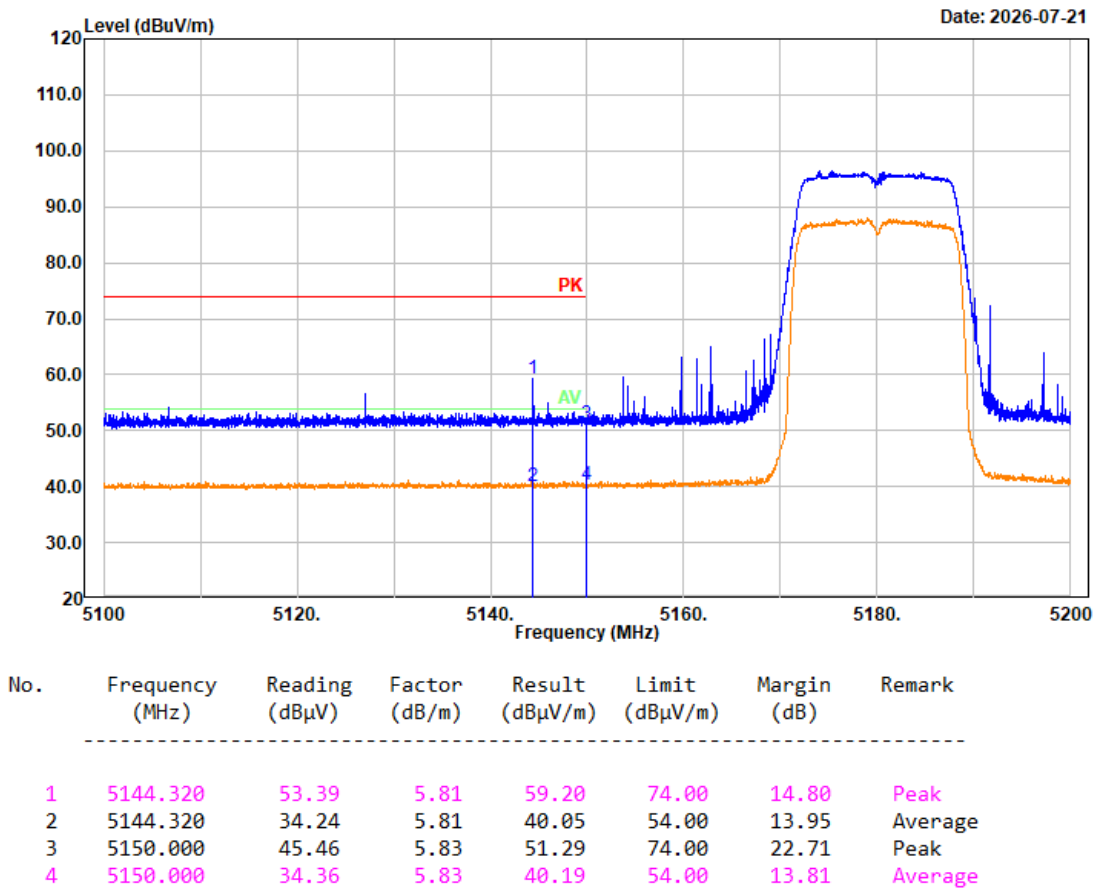


Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 a Mode High Channel 5240 MHz Chain 0

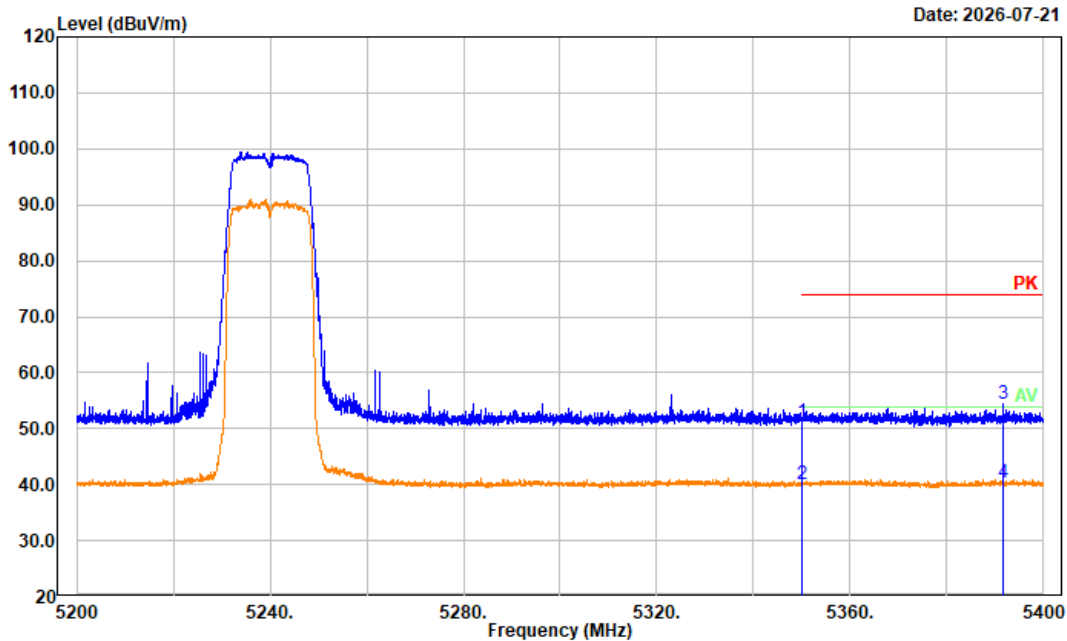


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.86	6.43	51.29	74.00	22.71	Peak
2	5350.000	33.64	6.43	40.07	54.00	13.93	Average
3	5391.640	47.97	6.44	54.41	74.00	19.59	Peak
4	5391.640	33.77	6.44	40.21	54.00	13.79	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 a Mode High Channel 5240 MHz Chain 0

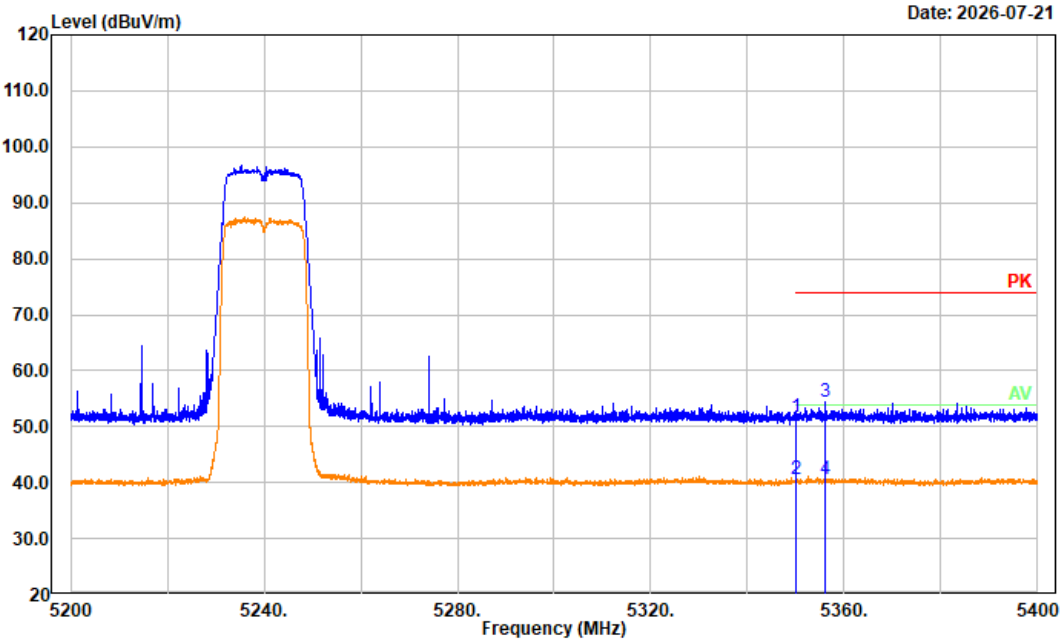


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.17	6.43	51.60	74.00	22.40	Peak
2	5350.000	34.28	6.43	40.71	54.00	13.29	Average
3	5356.080	47.92	6.43	54.35	74.00	19.65	Peak
4	5356.080	34.10	6.43	40.53	54.00	13.47	Average


Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 a Mode Low Channel 5180 MHz Chain 1

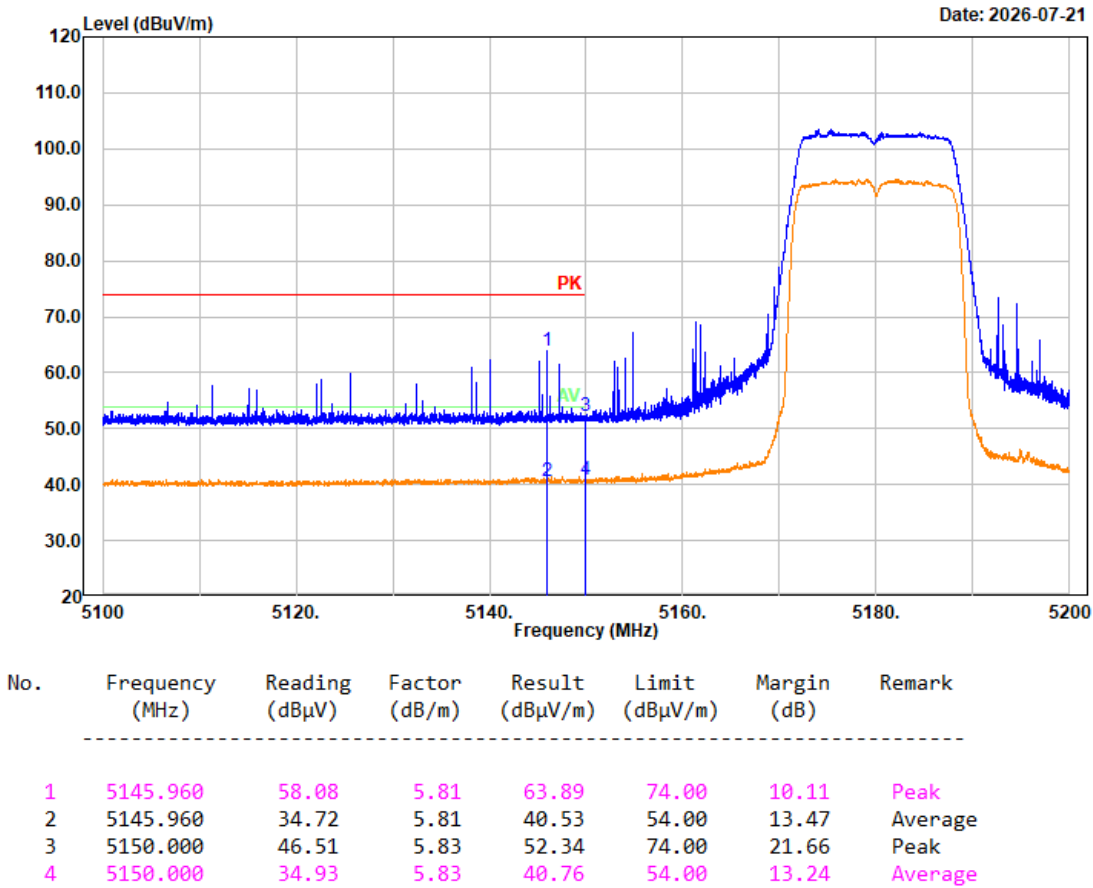

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 a Mode Low Channel 5180 MHz Chain 1

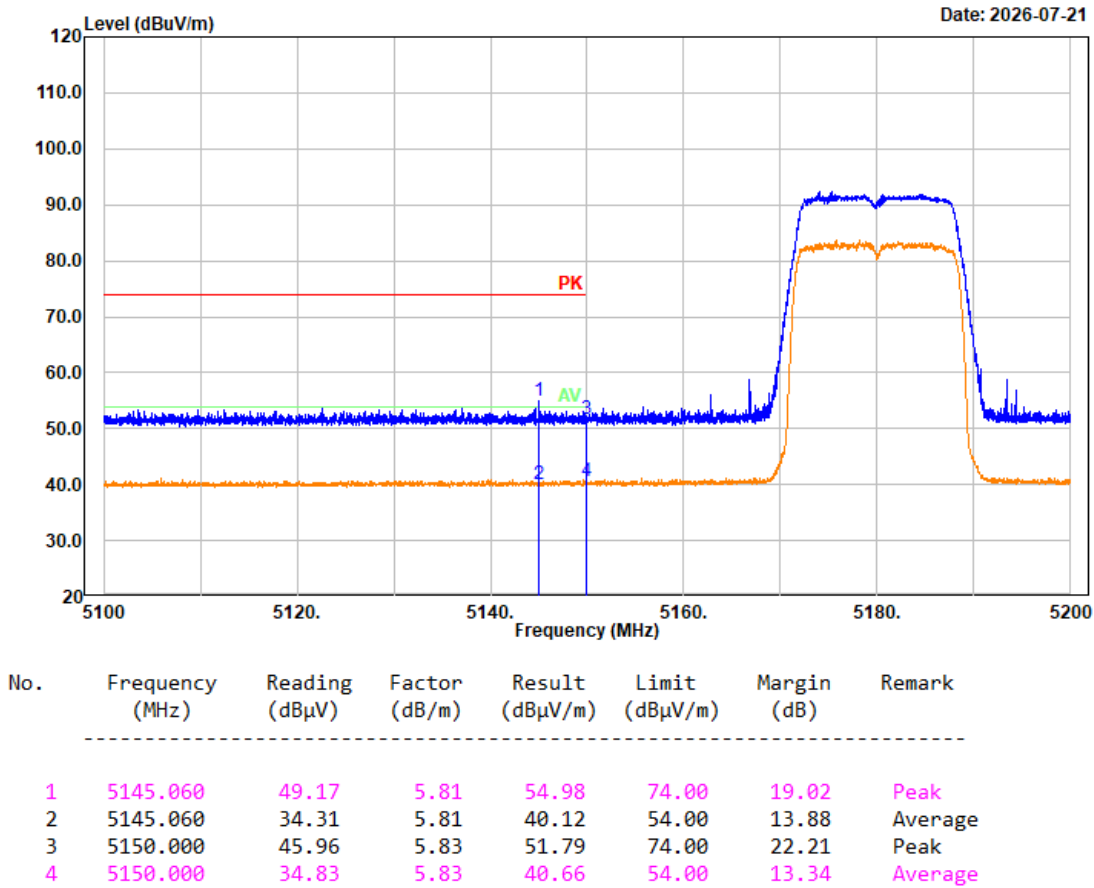


Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B1 a Mode High Channel 5240 MHz Chain 1

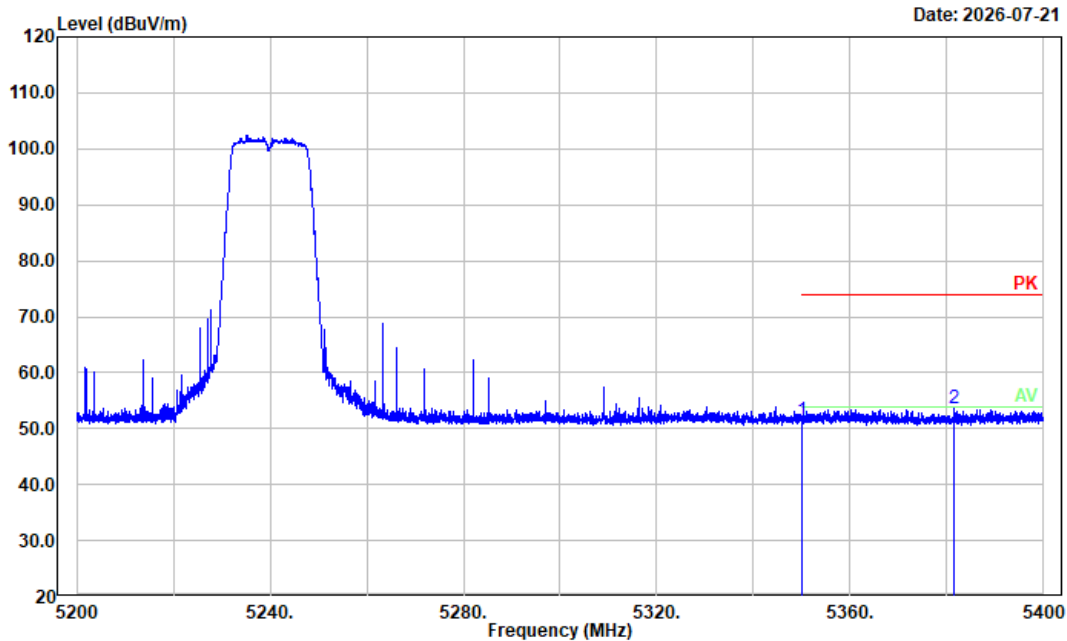


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.03	6.43	51.46	74.00	22.54	Peak
2	5381.440	47.14	6.44	53.58	74.00	20.42	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 a Mode High Channel 5240 MHz Chain 1

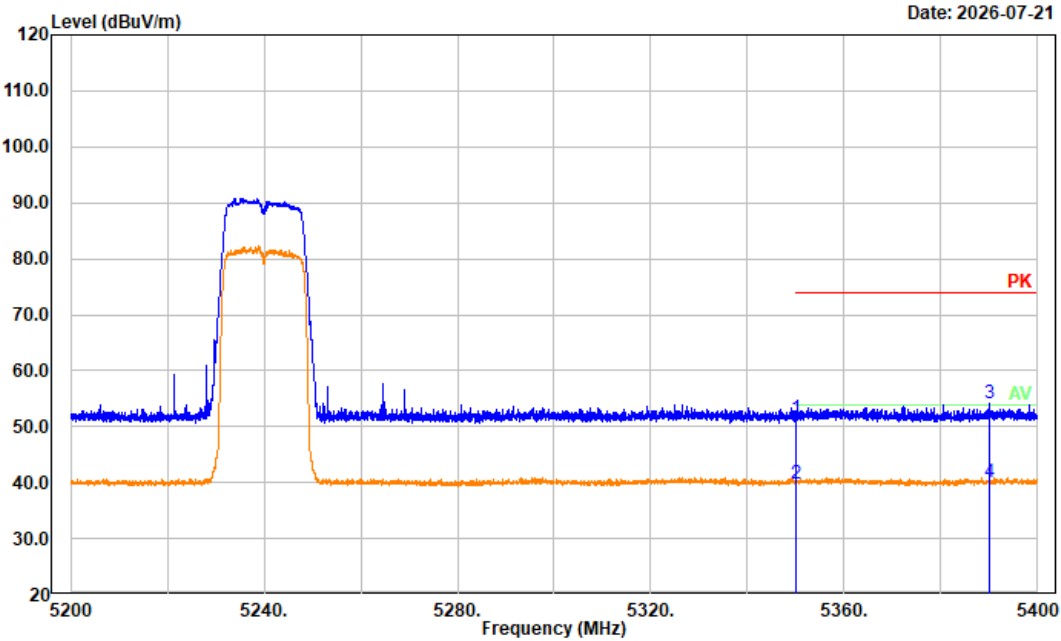


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.03	6.43	51.46	74.00	22.54	Peak
2	5350.000	33.33	6.43	39.76	54.00	14.24	Average
3	5390.160	47.60	6.44	54.04	74.00	19.96	Peak
4	5390.160	33.58	6.44	40.02	54.00	13.98	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ac20 Mode Low Channel 5180 MHz

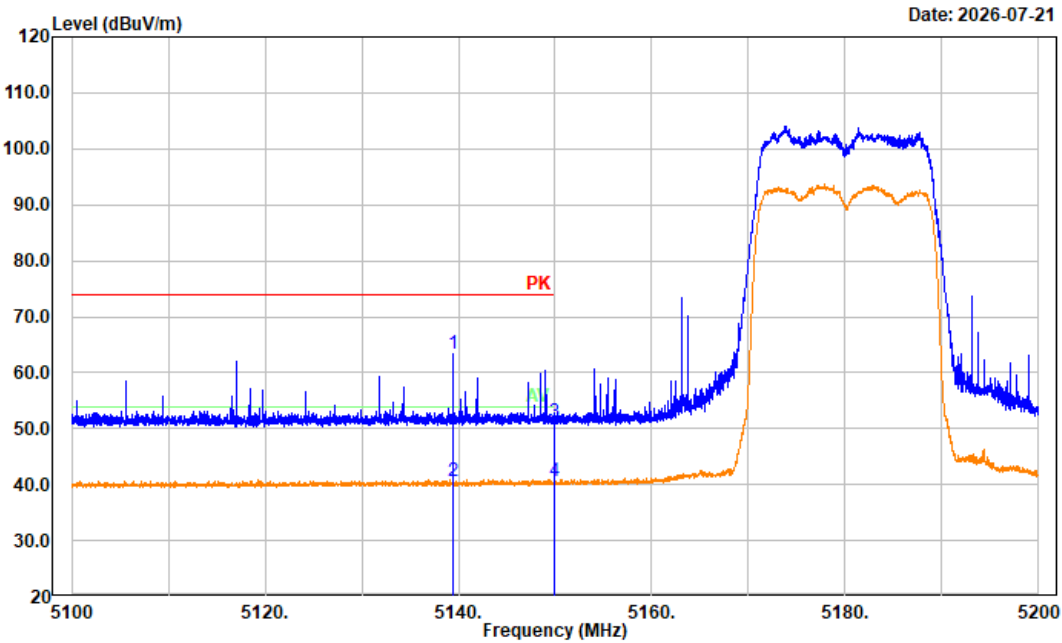


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5139.420	57.47	5.79	63.26	74.00	10.74	Peak
2	5139.420	34.72	5.79	40.51	54.00	13.49	Average
3	5150.000	45.42	5.83	51.25	74.00	22.75	Peak
4	5150.000	34.82	5.83	40.65	54.00	13.35	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 ac20 Mode Low Channel 5180 MHz

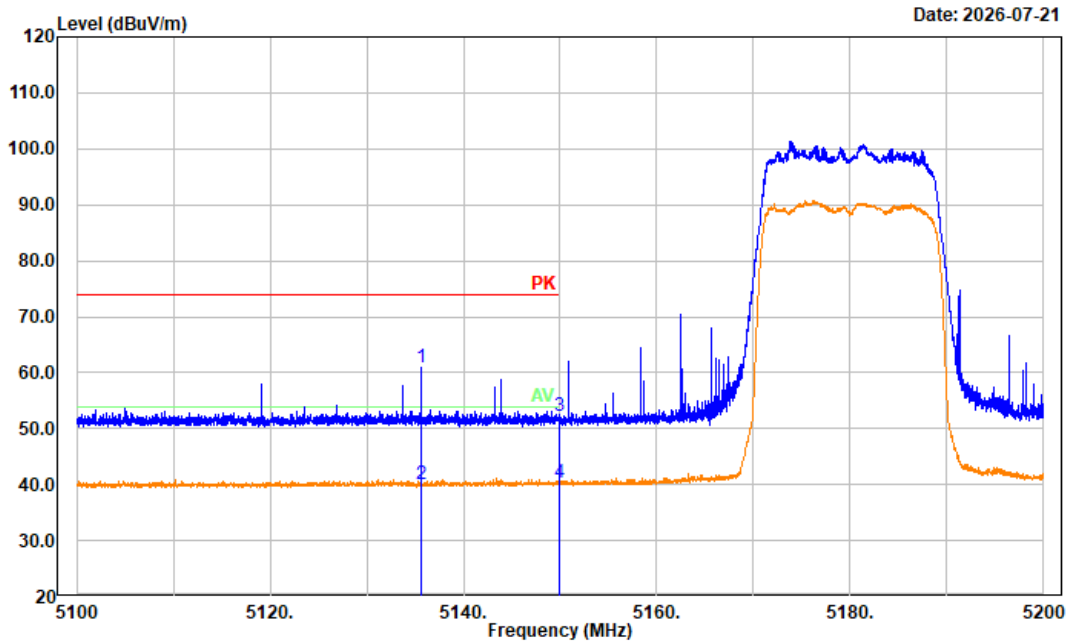


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5135.680	55.19	5.77	60.96	74.00	13.04	Peak
2	5135.680	34.35	5.77	40.12	54.00	13.88	Average
3	5150.000	46.35	5.83	52.18	74.00	21.82	Peak
4	5150.000	34.53	5.83	40.36	54.00	13.64	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ac20 Mode High Channel 5240 MHz

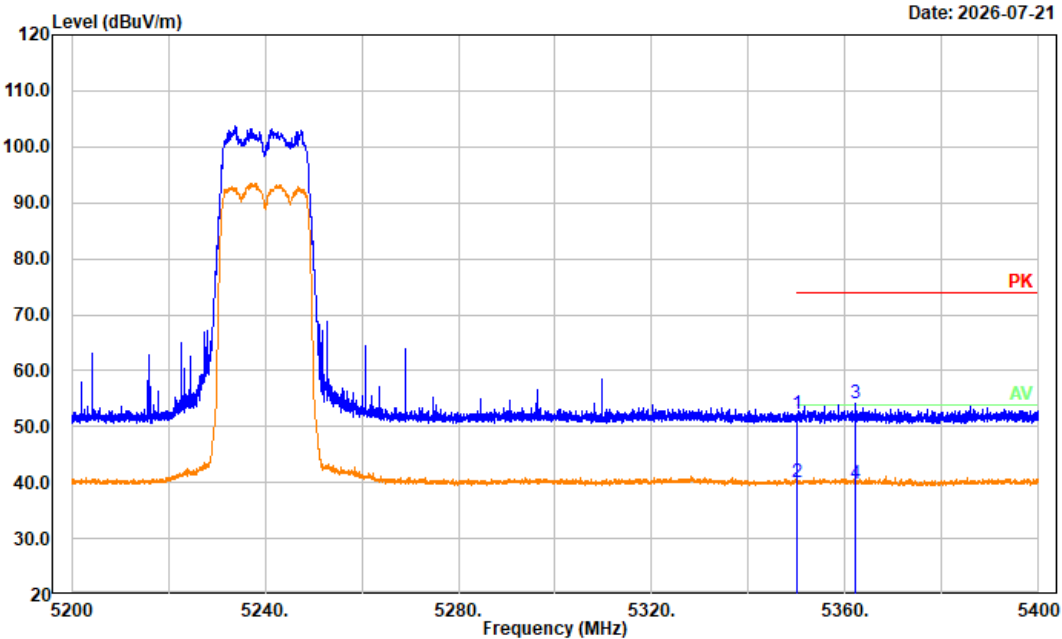


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.88	6.43	52.31	74.00	21.69	Peak
2	5350.000	33.58	6.43	40.01	54.00	13.99	Average
3	5362.200	47.69	6.43	54.12	74.00	19.88	Peak
4	5362.200	33.43	6.43	39.86	54.00	14.14	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B1 ac20 Mode High Channel 5240 MHz

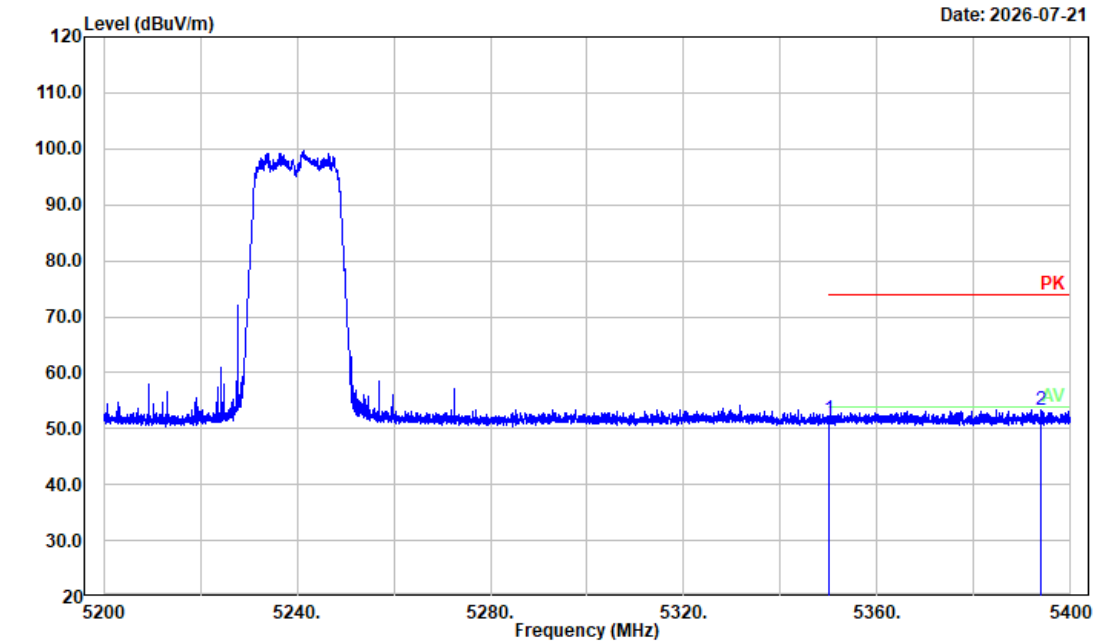


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.28	6.43	51.71	74.00	22.29	Peak
2	5393.920	46.95	6.45	53.40	74.00	20.60	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ac40 Mode Low Channel 5190 MHz

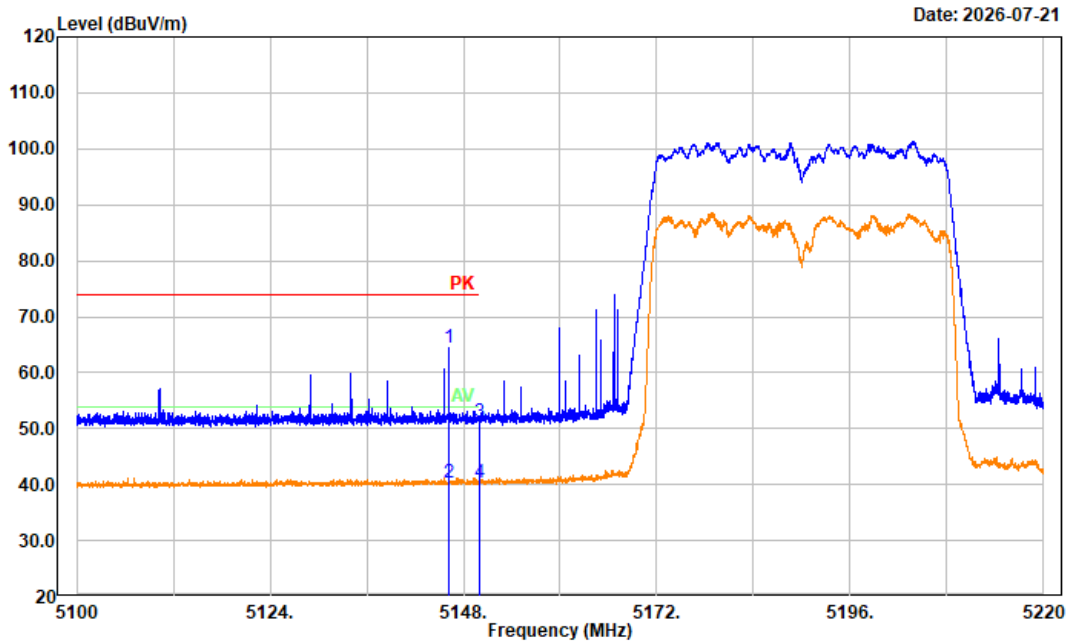


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5146.176	58.72	5.81	64.53	74.00	9.47	Peak
2	5146.176	34.58	5.81	40.39	54.00	13.61	Average
3	5149.992	45.47	5.83	51.30	74.00	22.70	Peak
4	5149.992	34.43	5.83	40.26	54.00	13.74	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 ac40 Mode Low Channel 5190 MHz

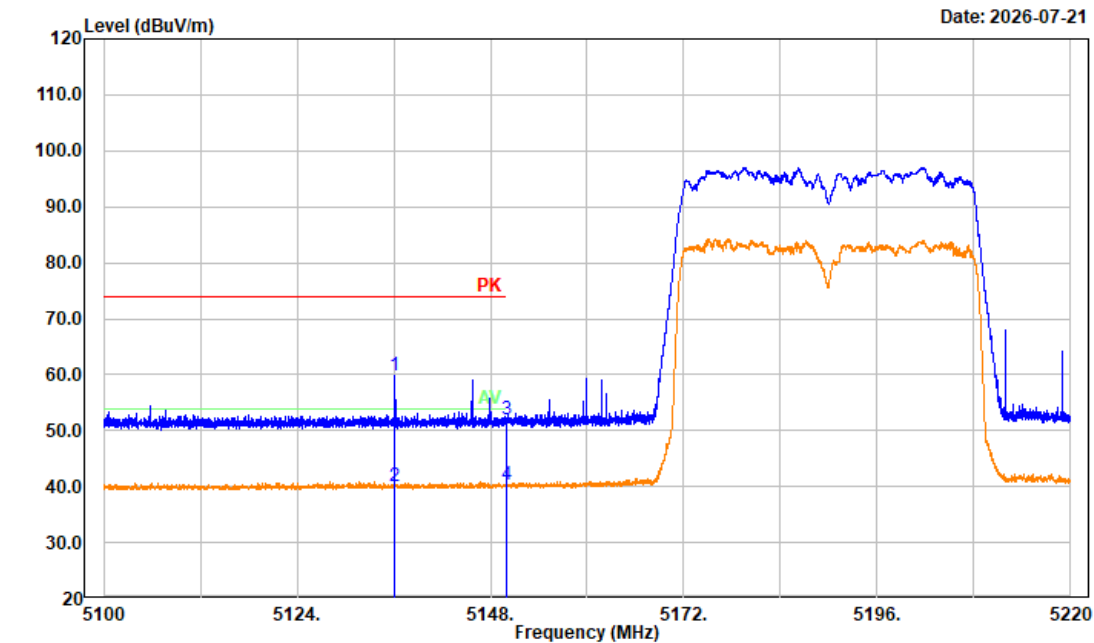


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5136.168	54.00	5.77	59.77	74.00	14.23	Peak
2	5136.168	34.39	5.77	40.16	54.00	13.84	Average
3	5150.000	46.17	5.83	52.00	74.00	22.00	Peak
4	5150.000	34.38	5.83	40.21	54.00	13.79	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B1 ac40 Mode High Channel 5230 MHz

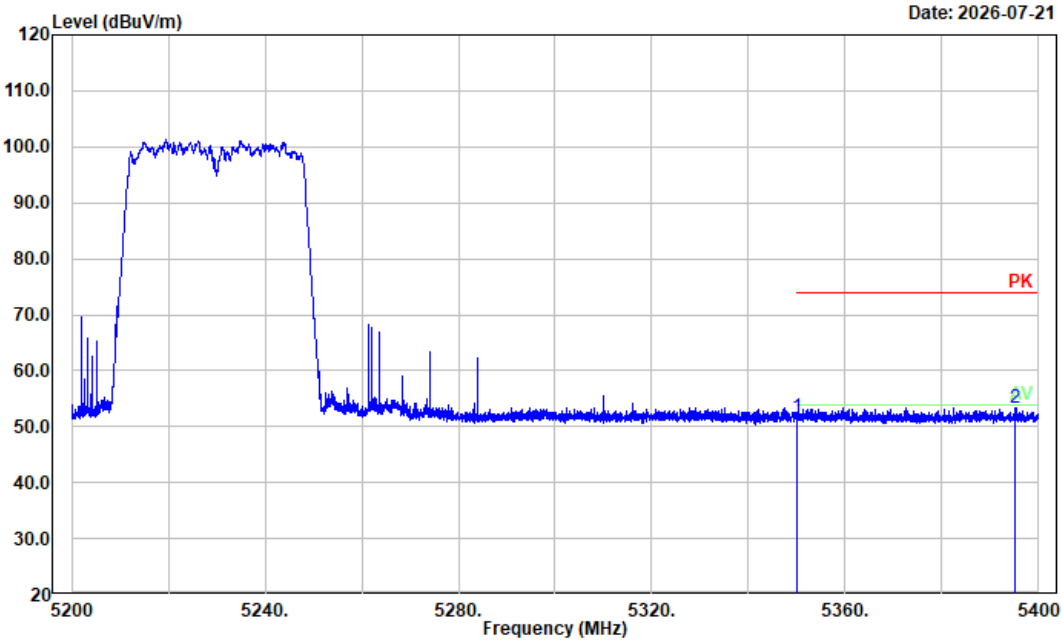


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.20	6.43	51.63	74.00	22.37	Peak
2	5395.200	47.02	6.45	53.47	74.00	20.53	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B1 ac40 Mode High Channel 5230 MHz

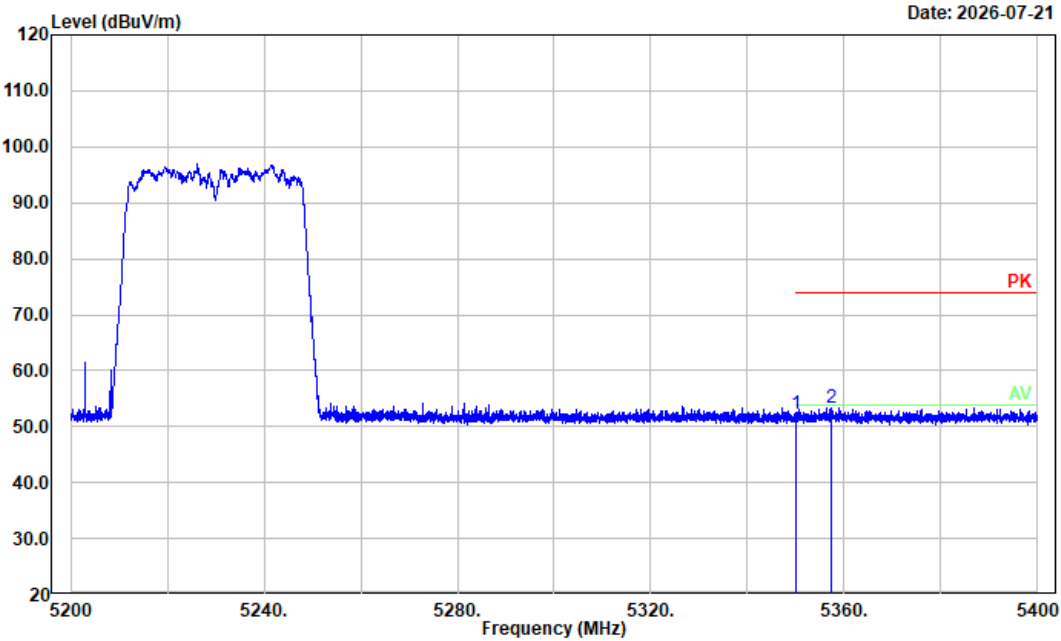


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.69	6.43	52.12	74.00	21.88	Peak
2	5357.440	46.97	6.42	53.39	74.00	20.61	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ac80 Mode Middle Channel 5210 MHz

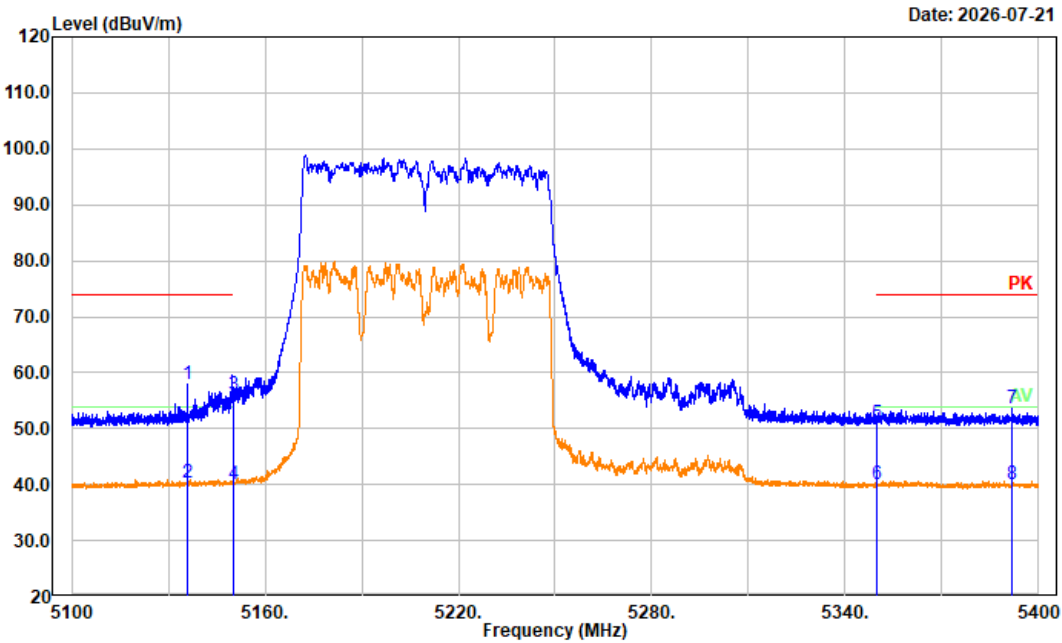


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5135.940	52.14	5.77	57.91	74.00	16.09	Peak
2	5135.940	34.49	5.77	40.26	54.00	13.74	Average
3	5150.000	50.21	5.83	56.04	74.00	17.96	Peak
4	5150.000	34.29	5.83	40.12	54.00	13.88	Average
5	5350.000	44.38	6.43	50.81	74.00	23.19	Peak
6	5350.000	33.51	6.43	39.94	54.00	14.06	Average
7	5391.840	47.17	6.45	53.62	74.00	20.38	Peak
8	5391.840	33.60	6.45	40.05	54.00	13.95	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 ac80 Mode Middle Channel 5210 MHz

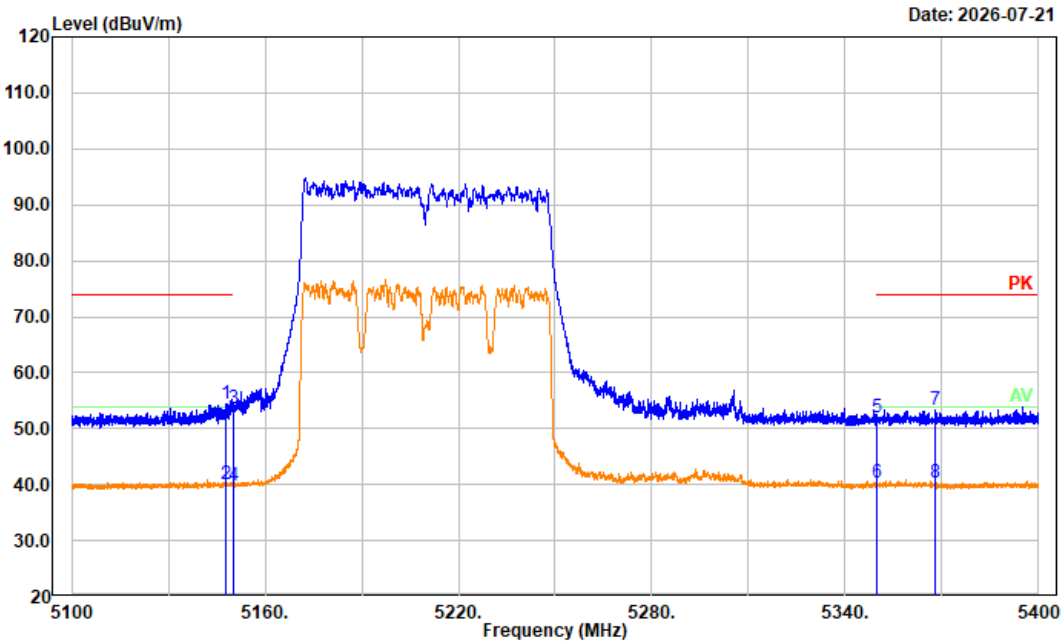


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5147.640	48.61	5.82	54.43	74.00	19.57	Peak
2	5147.640	34.27	5.82	40.09	54.00	13.91	Average
3	5150.000	47.65	5.83	53.48	74.00	20.52	Peak
4	5150.000	34.02	5.83	39.85	54.00	14.15	Average
5	5350.000	45.52	6.43	51.95	74.00	22.05	Peak
6	5350.000	33.81	6.43	40.24	54.00	13.76	Average
7	5367.900	46.92	6.44	53.36	74.00	20.64	Peak
8	5367.900	33.94	6.44	40.38	54.00	13.62	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ax20 Mode Low Channel 5180 MHz

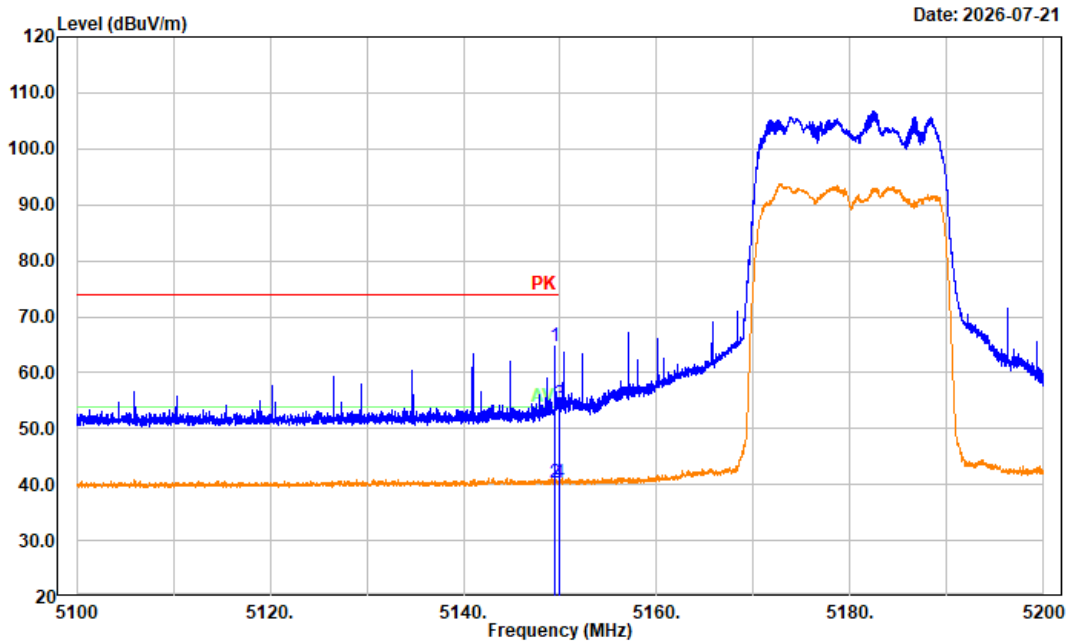


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5149.420	58.87	5.83	64.70	74.00	9.30	Peak
2	5149.420	34.45	5.83	40.28	54.00	13.72	Average
3	5150.000	48.58	5.83	54.41	74.00	19.59	Peak
4	5150.000	34.51	5.83	40.34	54.00	13.66	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 ax20 Mode Low Channel 5180 MHz

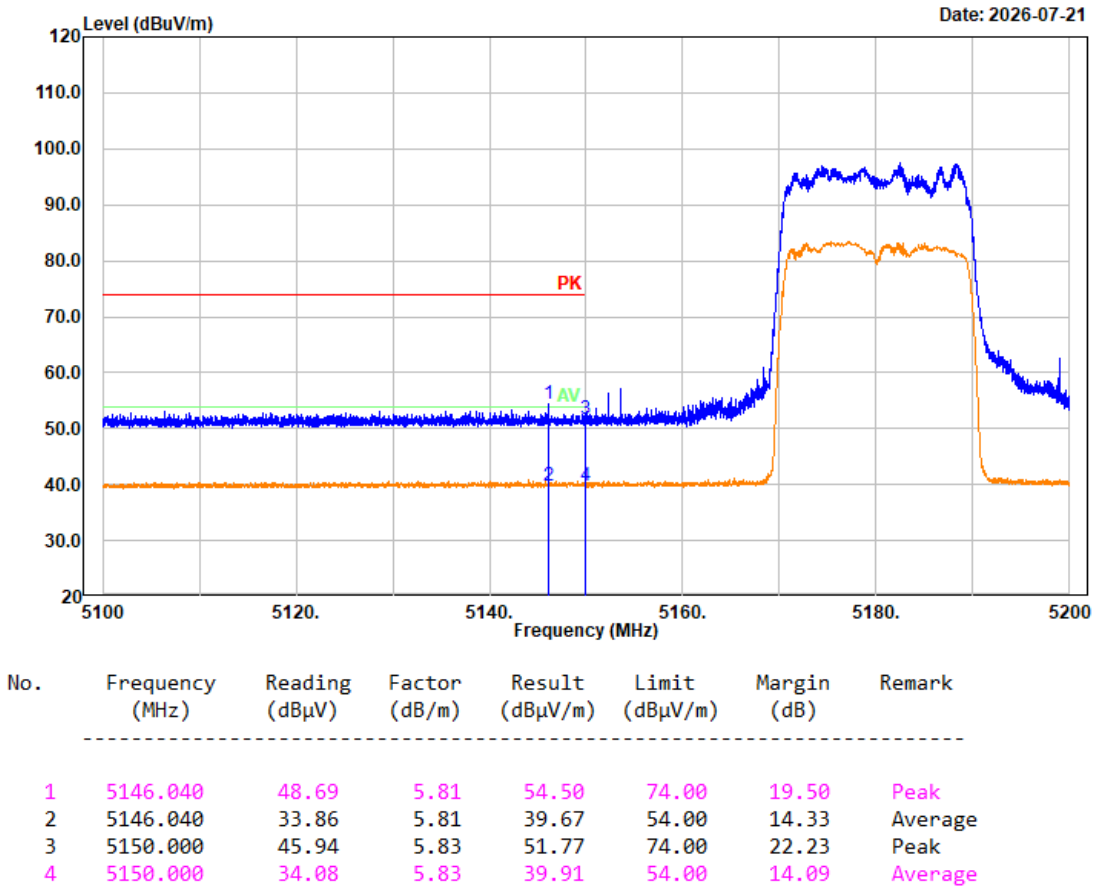


Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ax20 Mode High Channel 5240 MHz

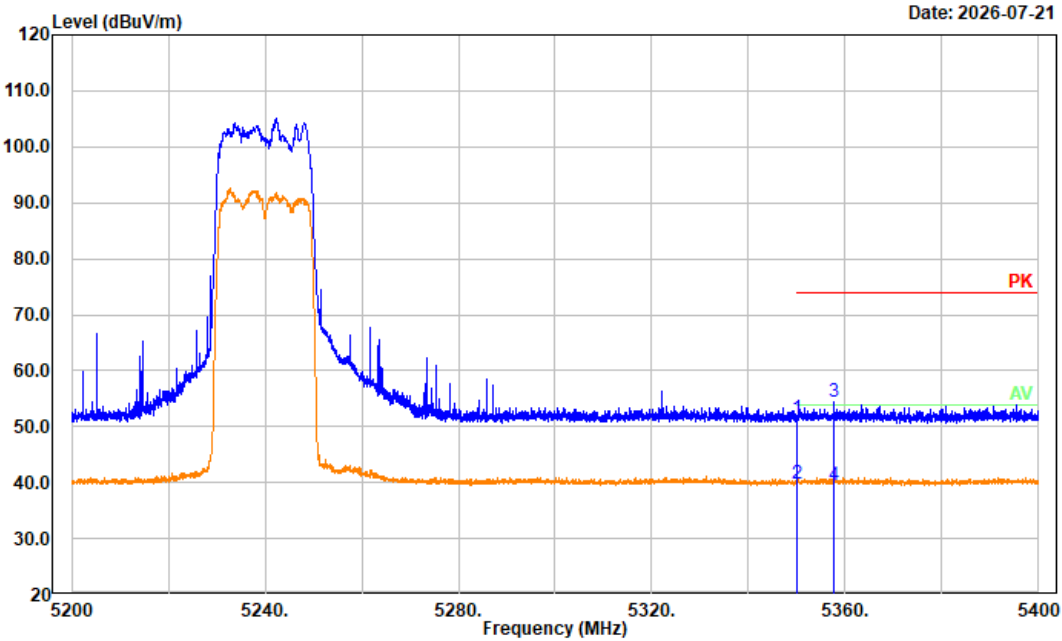


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.12	6.43	51.55	74.00	22.45	Peak
2	5350.000	33.25	6.43	39.68	54.00	14.32	Average
3	5357.680	47.90	6.43	54.33	74.00	19.67	Peak
4	5357.680	33.10	6.43	39.53	54.00	14.47	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B1 ax20 Mode High Channel 5240 MHz

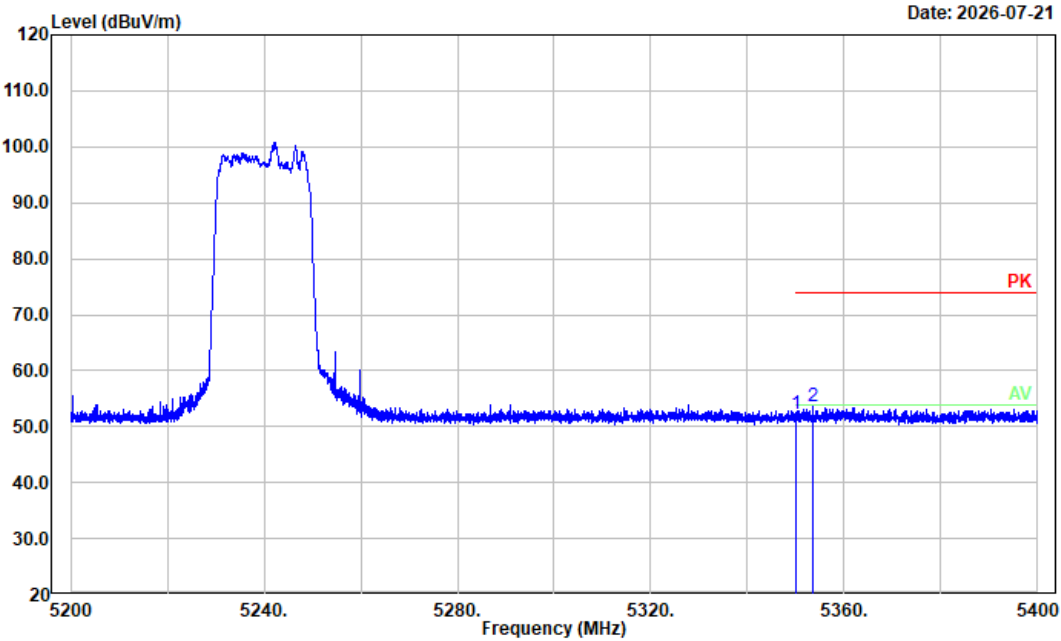


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.88	6.43	52.31	74.00	21.69	Peak
2	5353.440	47.22	6.43	53.65	74.00	20.35	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ax40 Mode Low Channel 5190 MHz

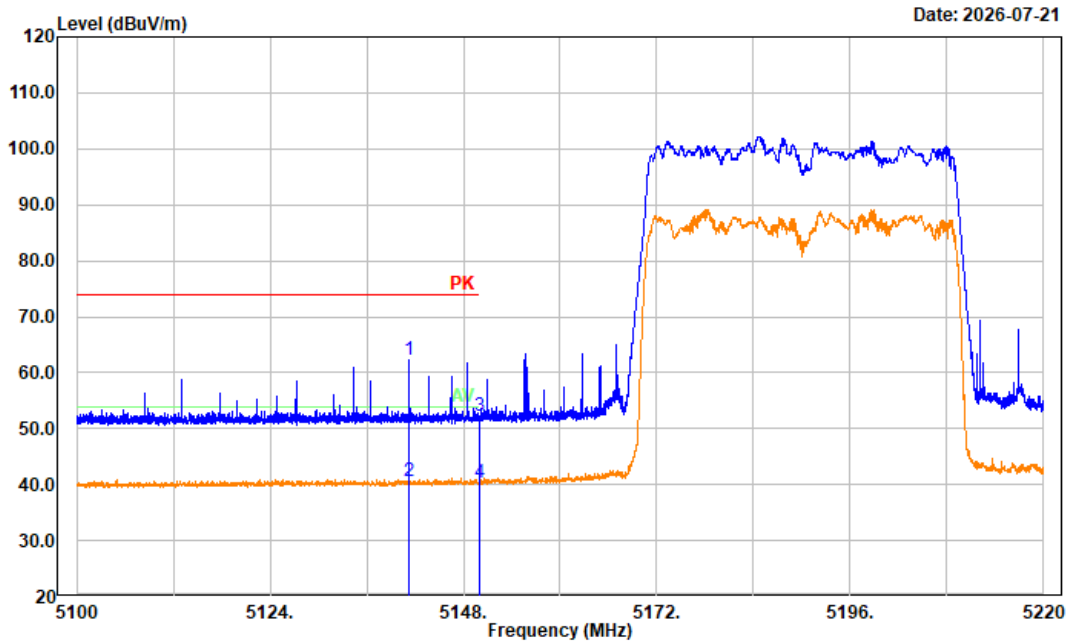


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5141.280	56.39	5.80	62.19	74.00	11.81	Peak
2	5141.280	34.85	5.80	40.65	54.00	13.35	Average
3	5150.000	46.41	5.83	52.24	74.00	21.76	Peak
4	5150.000	34.59	5.83	40.42	54.00	13.58	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 ax40 Mode Low Channel 5190 MHz

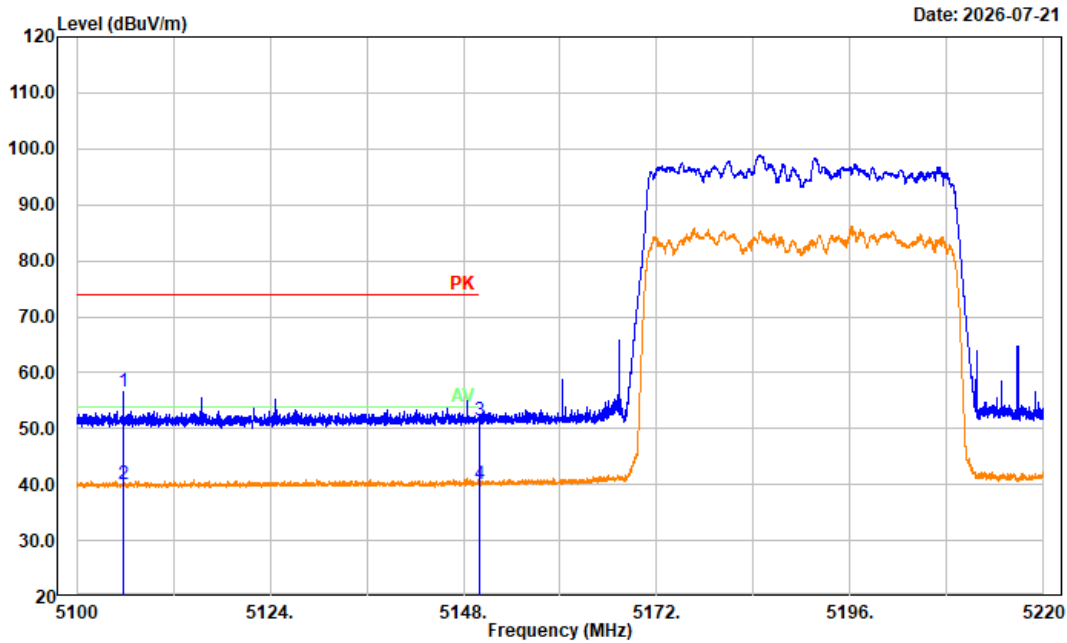


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5105.832	50.91	5.64	56.55	74.00	17.45	Peak
2	5105.832	34.34	5.64	39.98	54.00	14.02	Average
3	5150.000	45.58	5.83	51.41	74.00	22.59	Peak
4	5150.000	34.34	5.83	40.17	54.00	13.83	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Horizontal
Note: 5G WiFi B1 ax40 Mode High Channel 5230 MHz

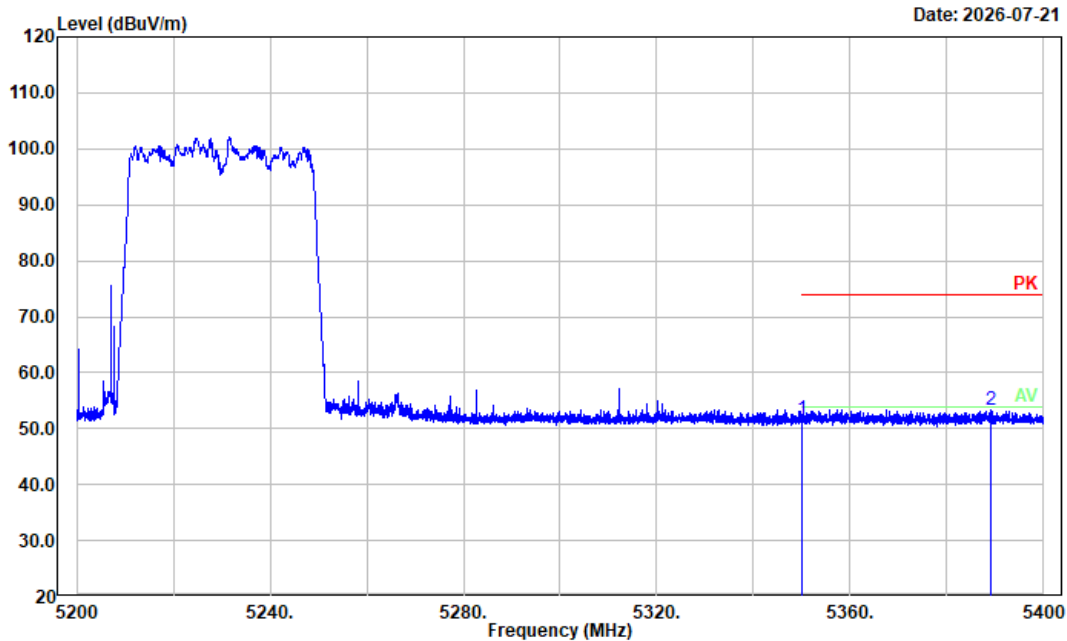


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	45.17	6.43	51.60	74.00	22.40	Peak
2	5389.120	46.86	6.44	53.30	74.00	20.70	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz;
Polarization: Vertical
Note: 5G WiFi B1 ax40 Mode High Channel 5230 MHz

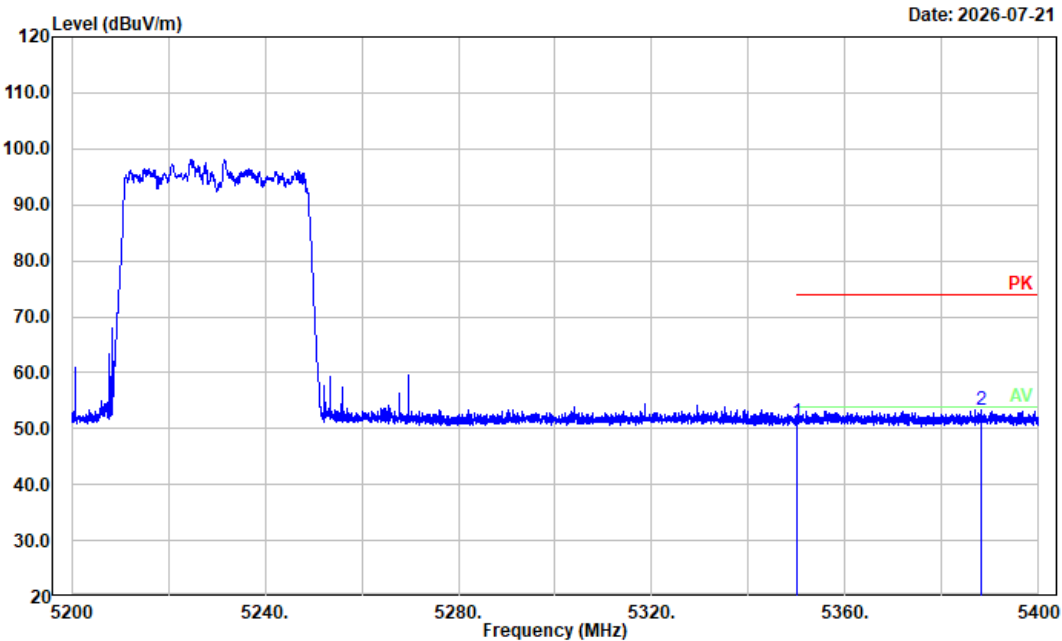


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5350.000	44.83	6.43	51.26	74.00	22.74	Peak
2	5388.160	46.85	6.45	53.30	74.00	20.70	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 5G WiFi B1 ax80 Mode Middle Channel 5210 MHz

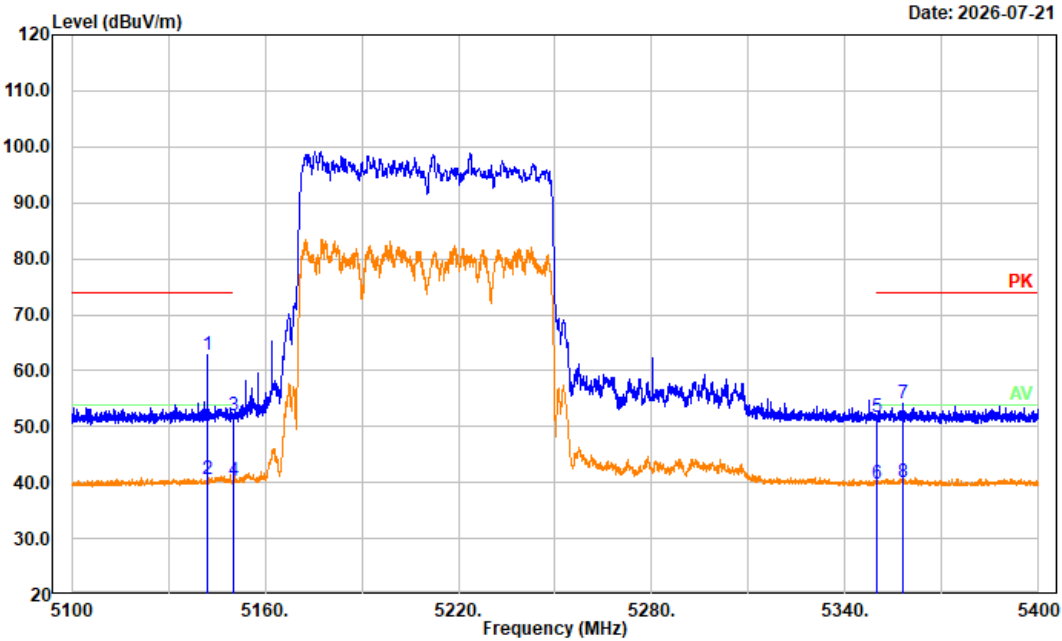


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5141.940	57.04	5.80	62.84	74.00	11.16	Peak
2	5141.940	34.78	5.80	40.58	54.00	13.42	Average
3	5150.000	46.09	5.83	51.92	74.00	22.08	Peak
4	5150.000	34.62	5.83	40.45	54.00	13.55	Average
5	5350.000	45.32	6.43	51.75	74.00	22.25	Peak
6	5350.000	33.39	6.43	39.82	54.00	14.18	Average
7	5357.700	47.63	6.43	54.06	74.00	19.94	Peak
8	5357.700	33.51	6.43	39.94	54.00	14.06	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 5G WiFi B1 ax80 Mode Middle Channel 5210 MHz

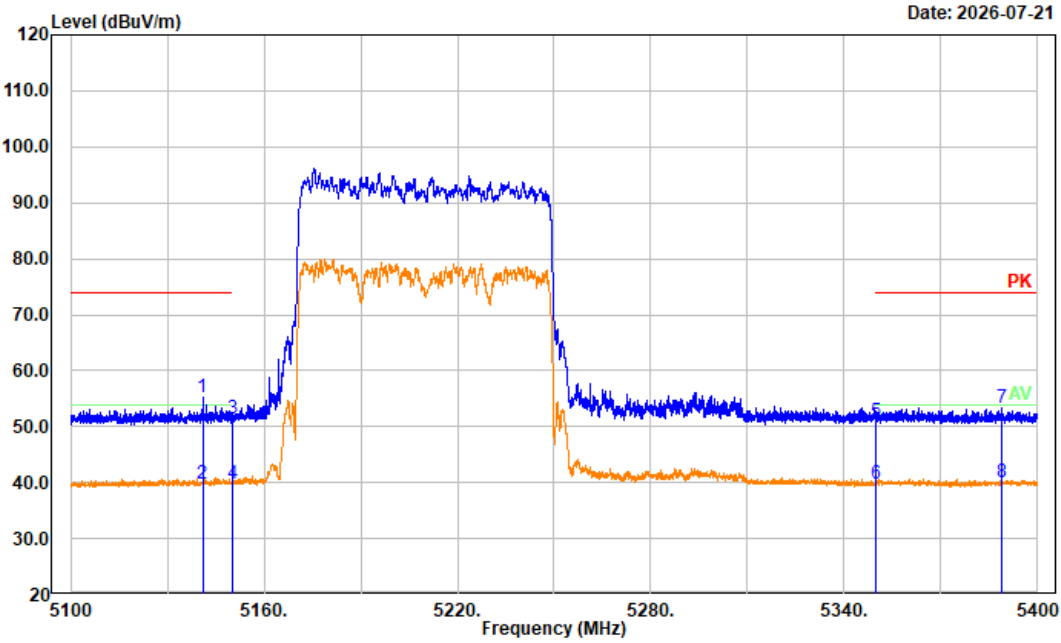


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5140.920	49.44	5.79	55.23	74.00	18.77	Peak
2	5140.920	33.92	5.79	39.71	54.00	14.29	Average
3	5150.000	45.62	5.83	51.45	74.00	22.55	Peak
4	5150.000	33.83	5.83	39.66	54.00	14.34	Average
5	5350.000	44.56	6.43	50.99	74.00	23.01	Peak
6	5350.000	33.47	6.43	39.90	54.00	14.10	Average
7	5389.080	46.83	6.44	53.27	74.00	20.73	Peak
8	5389.080	33.59	6.44	40.03	54.00	13.97	Average

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 0

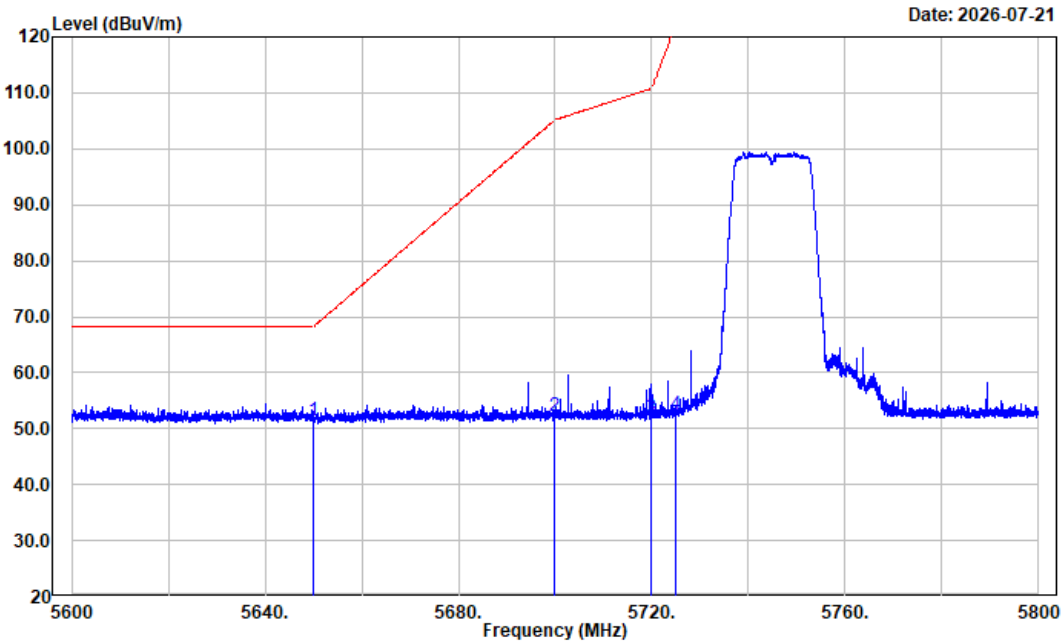


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	44.62	6.83	51.45	68.20	16.75	Peak
2	5700.000	45.53	6.81	52.34	105.20	52.86	Peak
3	5720.000	45.06	6.83	51.89	110.80	58.91	Peak
4	5725.000	45.81	6.83	52.64	122.20	69.56	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 0

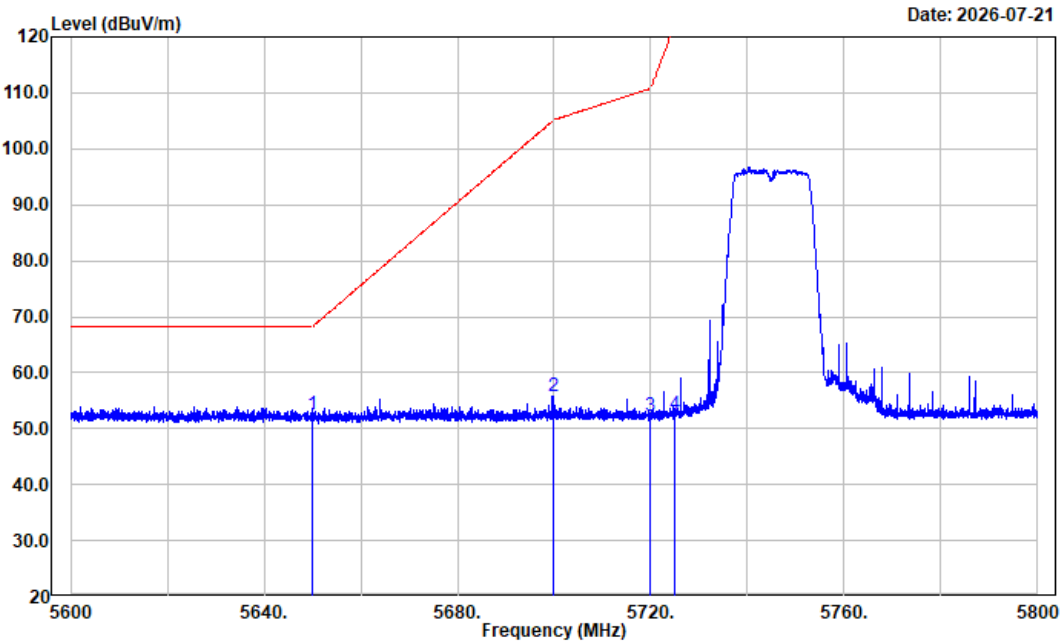


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.69	6.83	52.52	68.20	15.68	Peak
2	5700.000	49.00	6.81	55.81	105.20	49.39	Peak
3	5720.000	45.46	6.83	52.29	110.80	58.51	Peak
4	5725.000	45.77	6.83	52.60	122.20	69.60	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 0

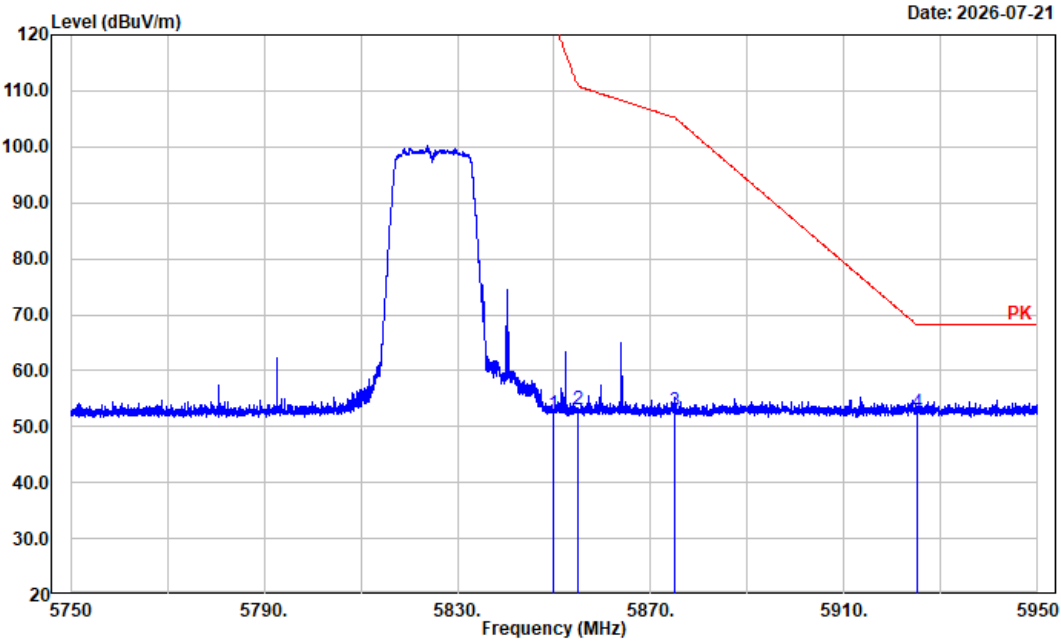


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.31	6.92	52.23	122.20	69.97	Peak
2	5855.000	46.10	6.94	53.04	110.80	57.76	Peak
3	5875.000	45.91	7.02	52.93	105.20	52.27	Peak
4	5925.000	45.35	7.17	52.52	68.20	15.68	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 0

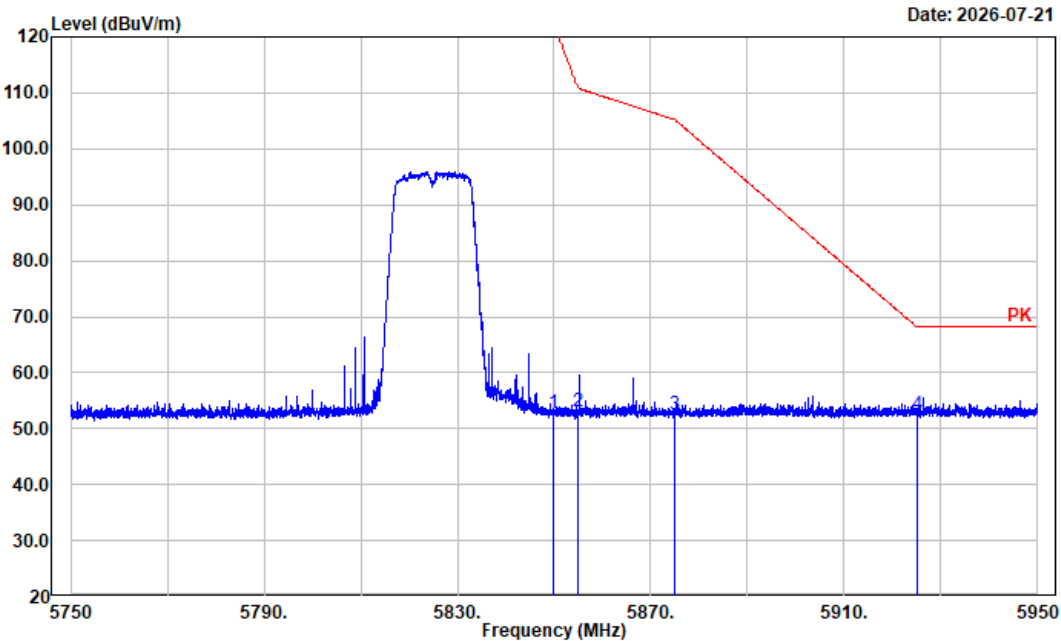


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.99	6.92	52.91	122.20	69.29	Peak
2	5855.000	46.06	6.94	53.00	110.80	57.80	Peak
3	5875.000	45.37	7.02	52.39	105.20	52.81	Peak
4	5925.000	45.25	7.17	52.42	68.20	15.78	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 1

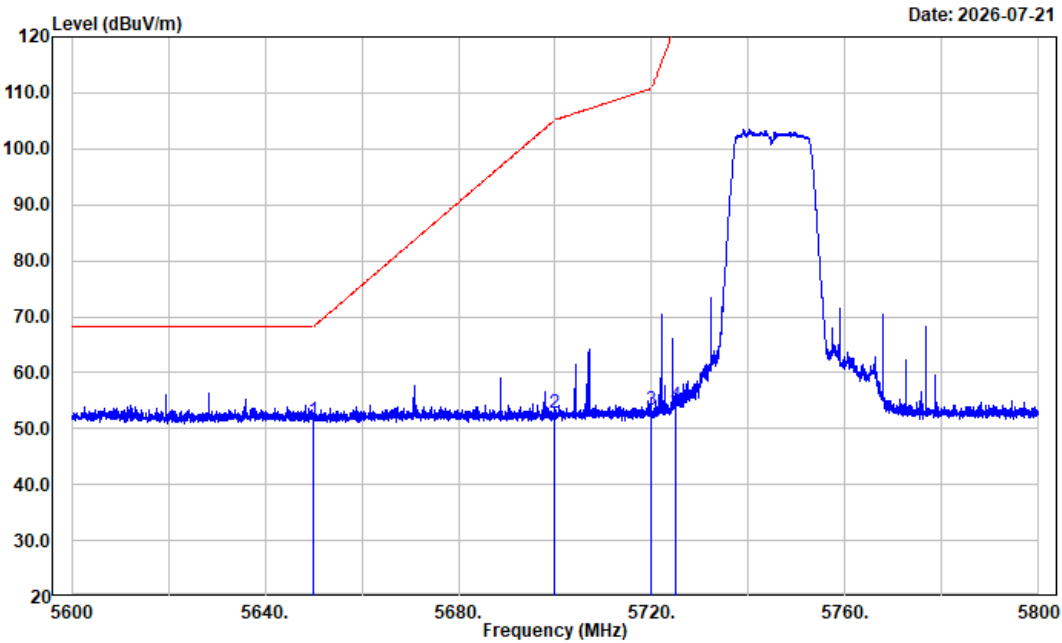


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	44.60	6.83	51.43	68.20	16.77	Peak
2	5700.000	45.92	6.81	52.73	105.20	52.47	Peak
3	5720.000	46.57	6.83	53.40	110.80	57.40	Peak
4	5725.000	47.26	6.83	54.09	122.20	68.11	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 a Mode Low Channel 5745 MHz Chain 1

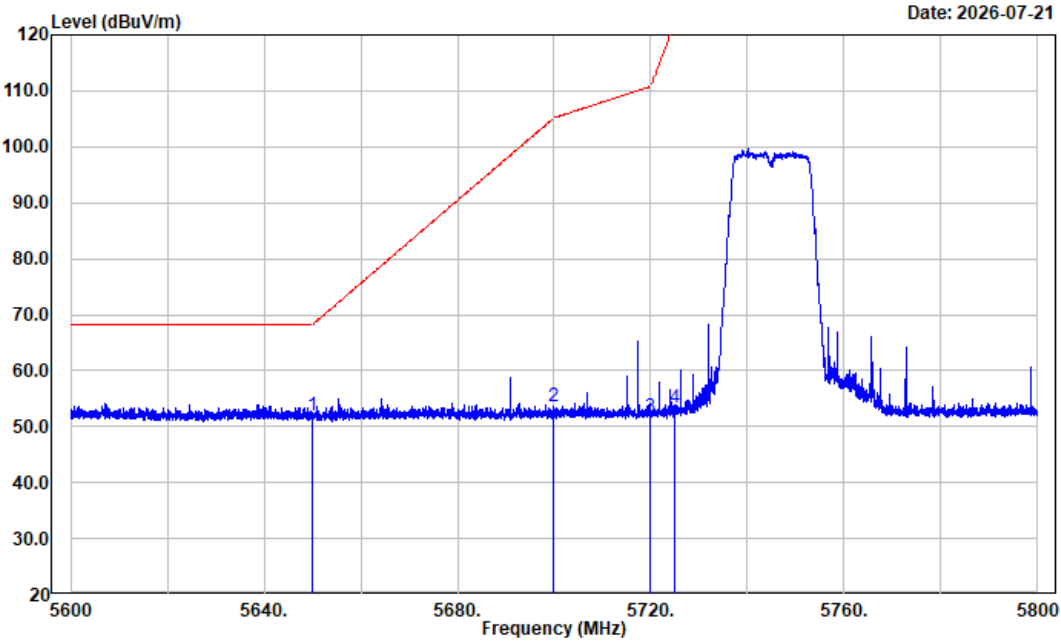


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.28	6.83	52.11	68.20	16.09	Peak
2	5700.000	46.68	6.81	53.49	105.20	51.71	Peak
3	5720.000	44.77	6.83	51.60	110.80	59.20	Peak
4	5725.000	46.41	6.83	53.24	122.20	68.96	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 1

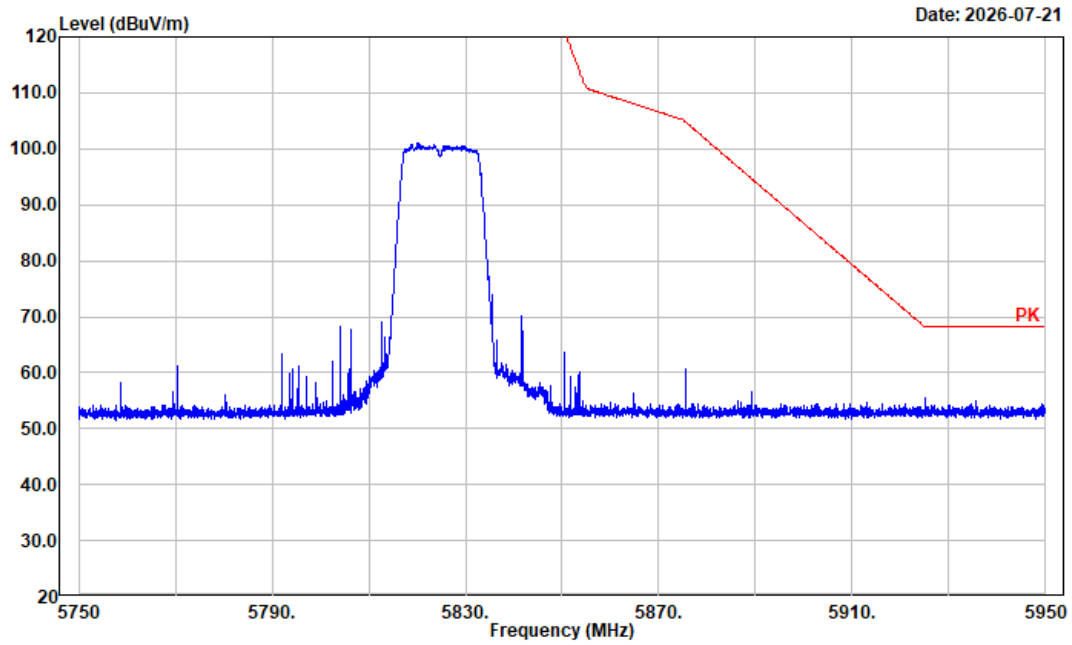


Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 a Mode High Channel 5825 MHz Chain 1

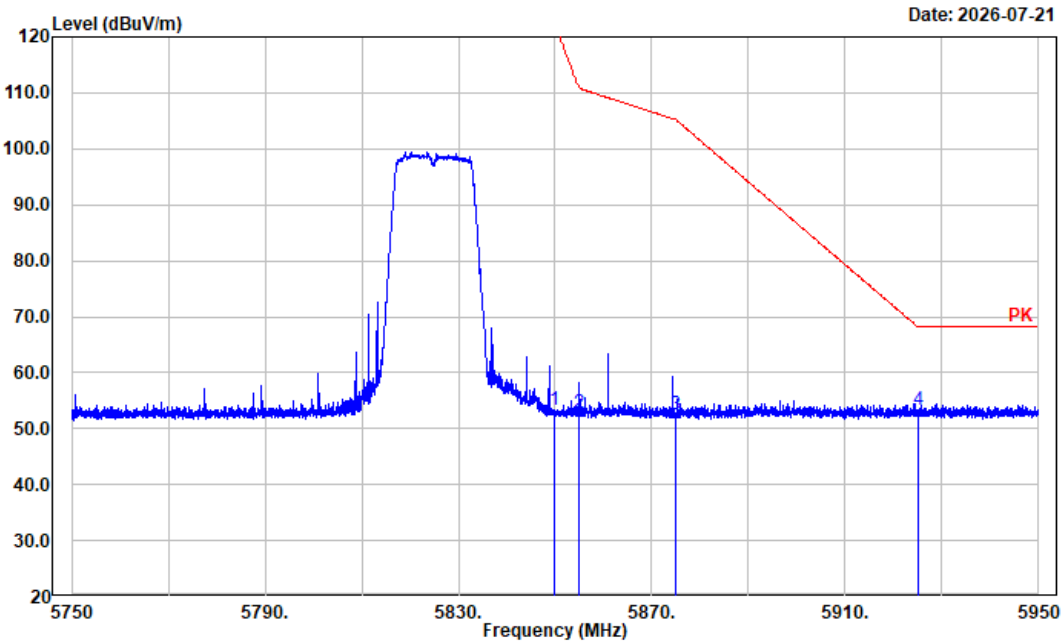


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.41	6.92	53.33	122.20	68.87	Peak
2	5855.000	45.79	6.94	52.73	110.80	58.07	Peak
3	5875.000	45.54	7.02	52.56	105.20	52.64	Peak
4	5925.000	46.23	7.17	53.40	68.20	14.80	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ac20 Mode Low Channel 5745 MHz

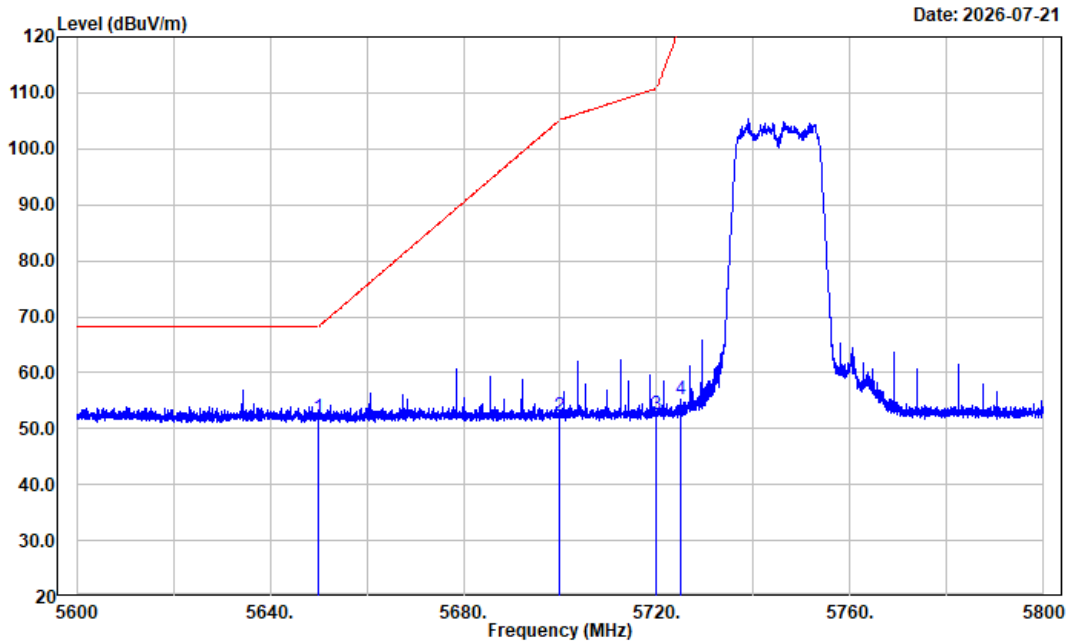


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.04	6.83	51.87	68.20	16.33	Peak
2	5700.000	45.38	6.81	52.19	105.20	53.01	Peak
3	5720.000	45.81	6.83	52.64	110.80	58.16	Peak
4	5725.000	48.41	6.83	55.24	122.20	66.96	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ac20 Mode Low Channel 5745 MHz

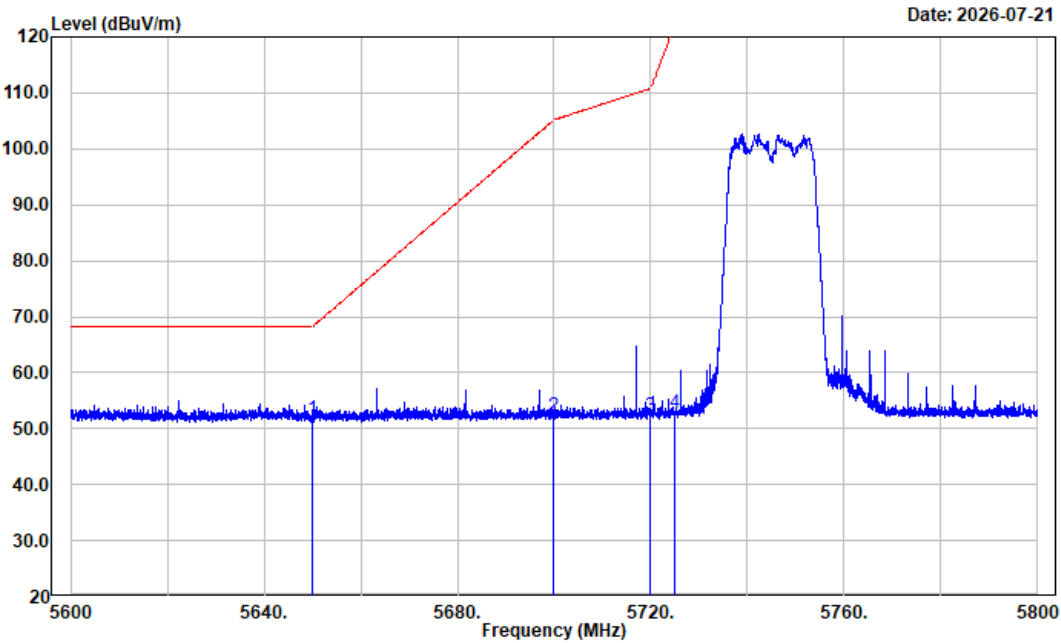


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	44.96	6.83	51.79	68.20	16.41	Peak
2	5700.000	45.51	6.81	52.32	105.20	52.88	Peak
3	5720.000	45.44	6.83	52.27	110.80	58.53	Peak
4	5725.000	46.05	6.83	52.88	122.20	69.32	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ac20 Mode High Channel 5825 MHz

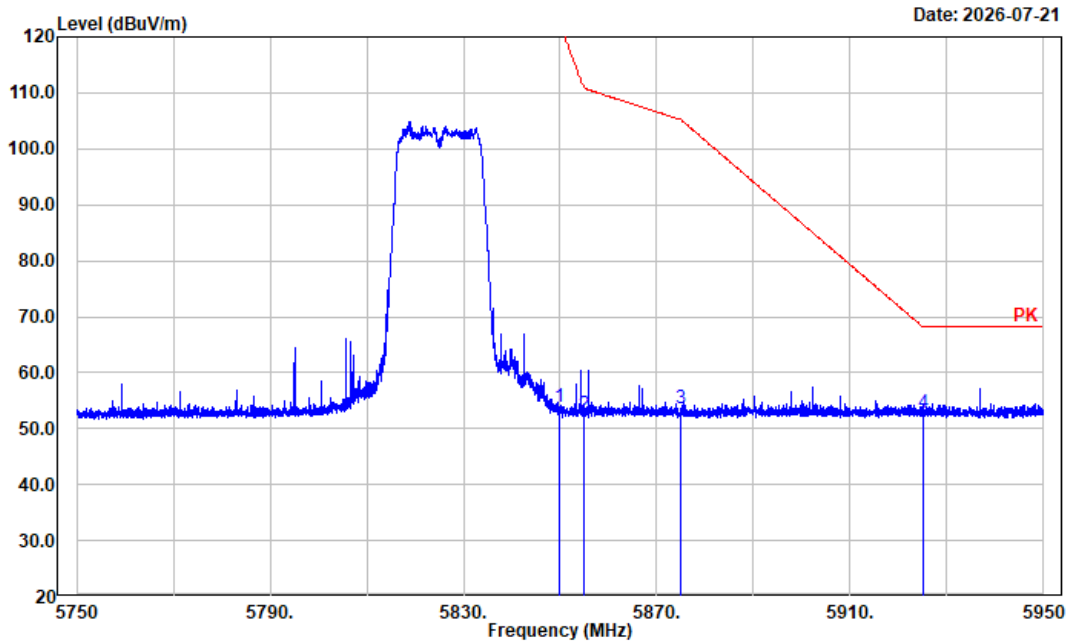


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.93	6.92	53.85	122.20	68.35	Peak
2	5855.000	45.70	6.94	52.64	110.80	58.16	Peak
3	5875.000	46.65	7.02	53.67	105.20	51.53	Peak
4	5925.000	45.51	7.17	52.68	68.20	15.52	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ac20 Mode High Channel 5825 MHz

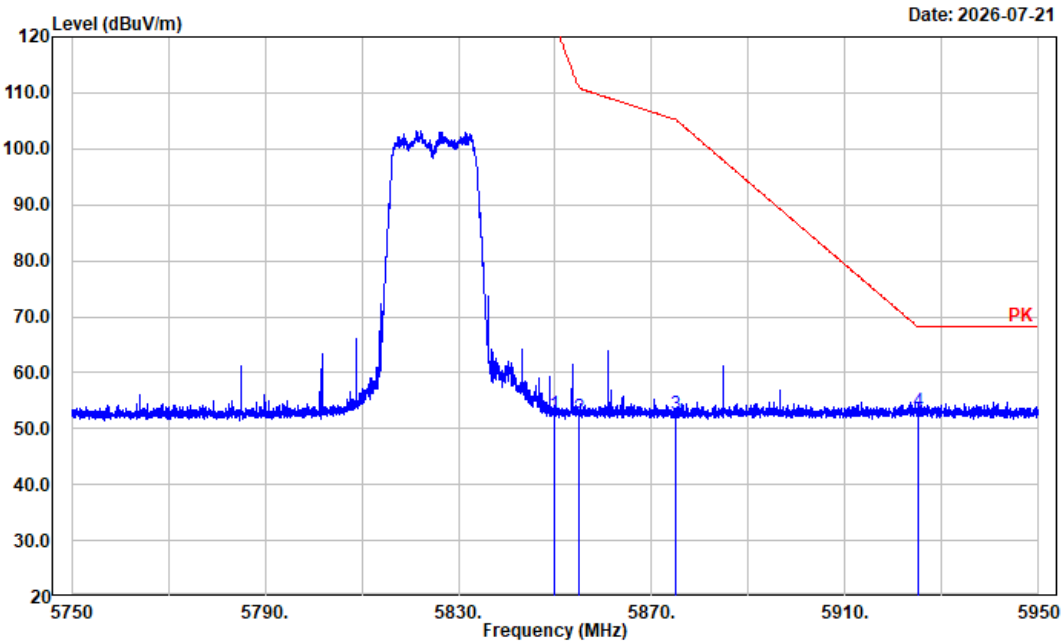


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.53	6.92	52.45	122.20	69.75	Peak
2	5855.000	45.11	6.94	52.05	110.80	58.75	Peak
3	5875.000	45.61	7.02	52.63	105.20	52.57	Peak
4	5925.000	45.87	7.17	53.04	68.20	15.16	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ac40 Mode Low Channel 5755 MHz

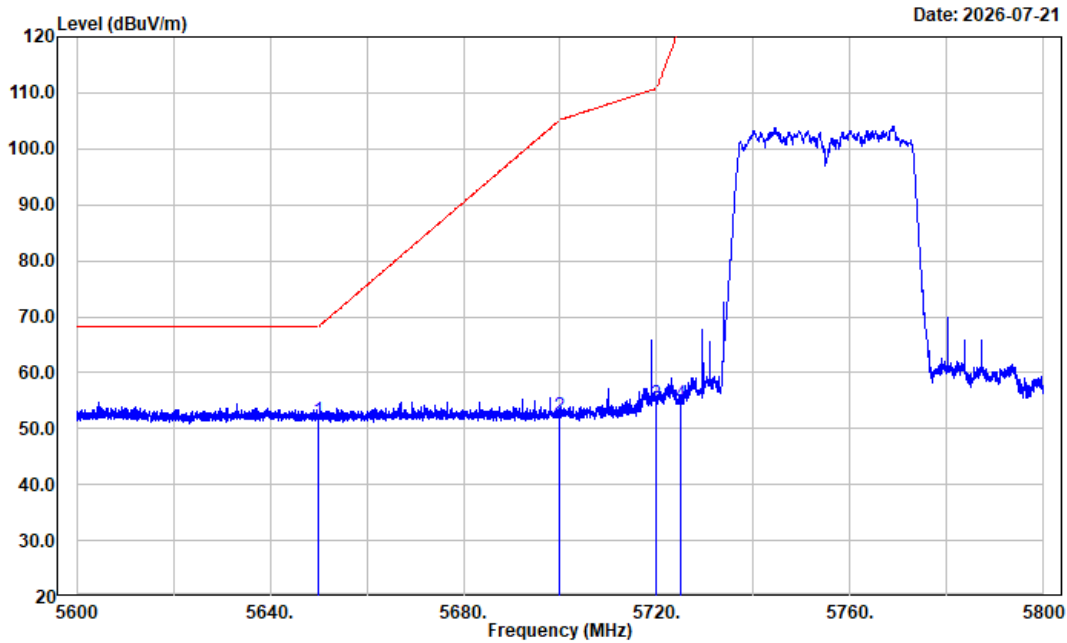


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	44.49	6.83	51.32	68.20	16.88	Peak
2	5700.000	45.46	6.81	52.27	105.20	52.93	Peak
3	5720.000	47.55	6.83	54.38	110.80	56.42	Peak
4	5725.000	47.64	6.83	54.47	122.20	67.73	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ac40 Mode Low Channel 5755 MHz

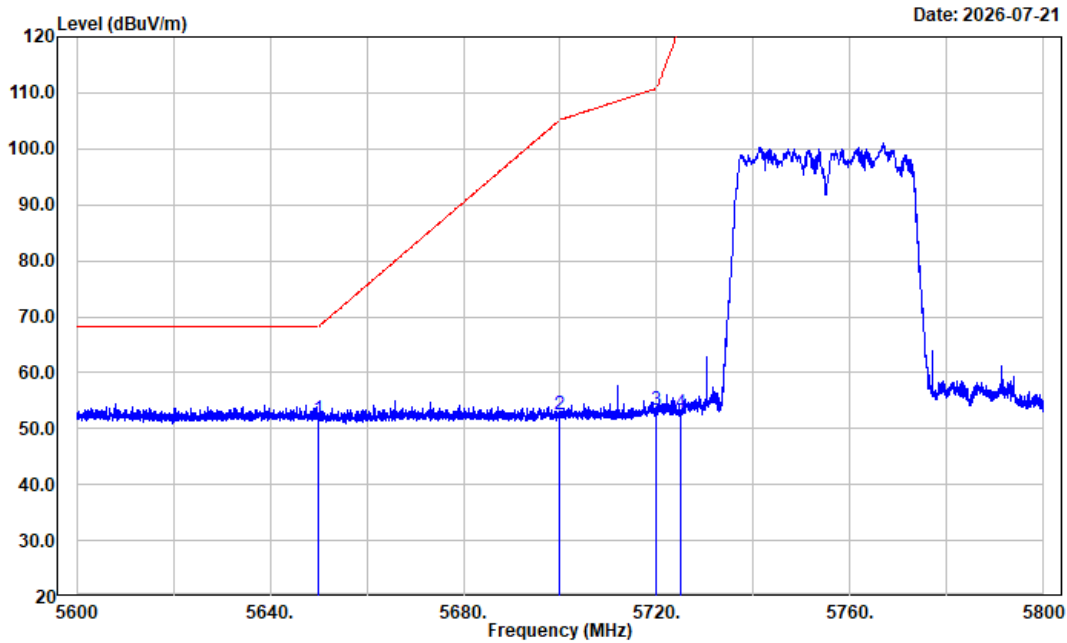


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	44.76	6.83	51.59	68.20	16.61	Peak
2	5700.000	45.65	6.81	52.46	105.20	52.74	Peak
3	5720.000	46.43	6.83	53.26	110.80	57.54	Peak
4	5725.000	45.85	6.83	52.68	122.20	69.52	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ac40 Mode High Channel 5795 MHz

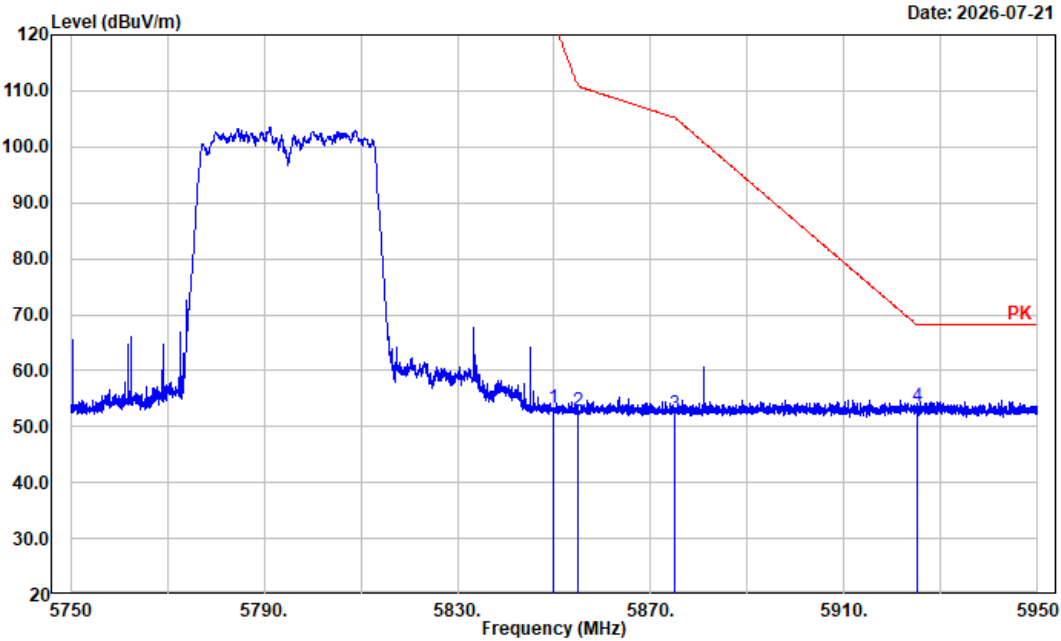


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.41	6.92	53.33	122.20	68.87	Peak
2	5855.000	45.91	6.94	52.85	110.80	57.95	Peak
3	5875.000	45.26	7.02	52.28	105.20	52.92	Peak
4	5925.000	46.33	7.17	53.50	68.20	14.70	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ac40 Mode High Channel 5795 MHz

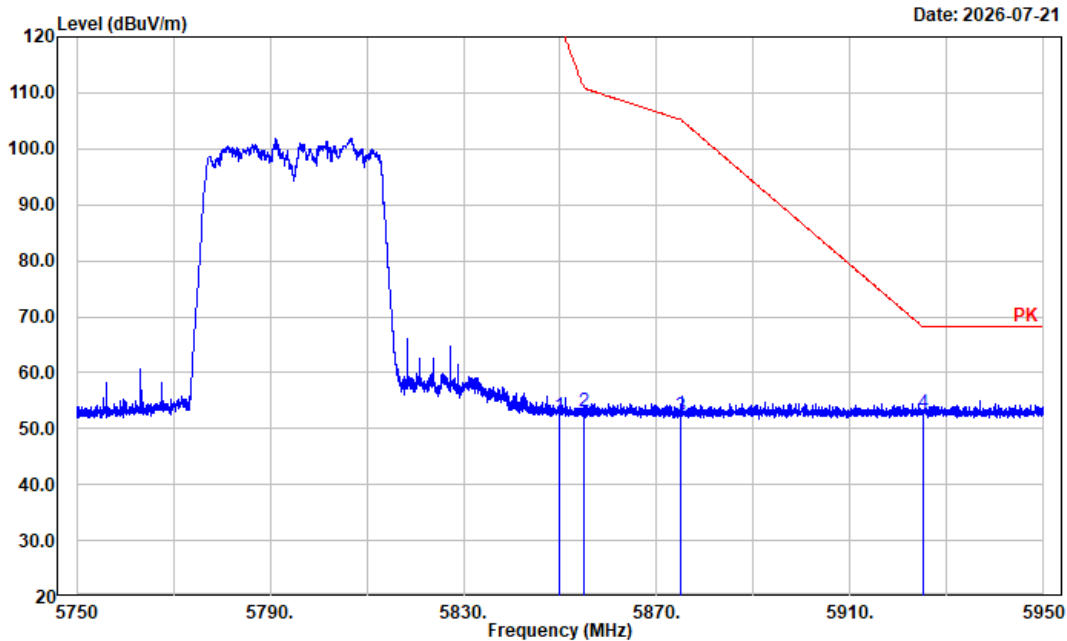


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.45	6.92	52.37	122.20	69.83	Peak
2	5855.000	46.10	6.94	53.04	110.80	57.76	Peak
3	5875.000	45.22	7.02	52.24	105.20	52.96	Peak
4	5925.000	45.56	7.17	52.73	68.20	15.47	Peak

Project No: 2603T61540E-RF
 Tester: HuaYuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: Horizontal
 Note: 5G WiFi B4 ac80 Mode Middle Channel 5775 MHz

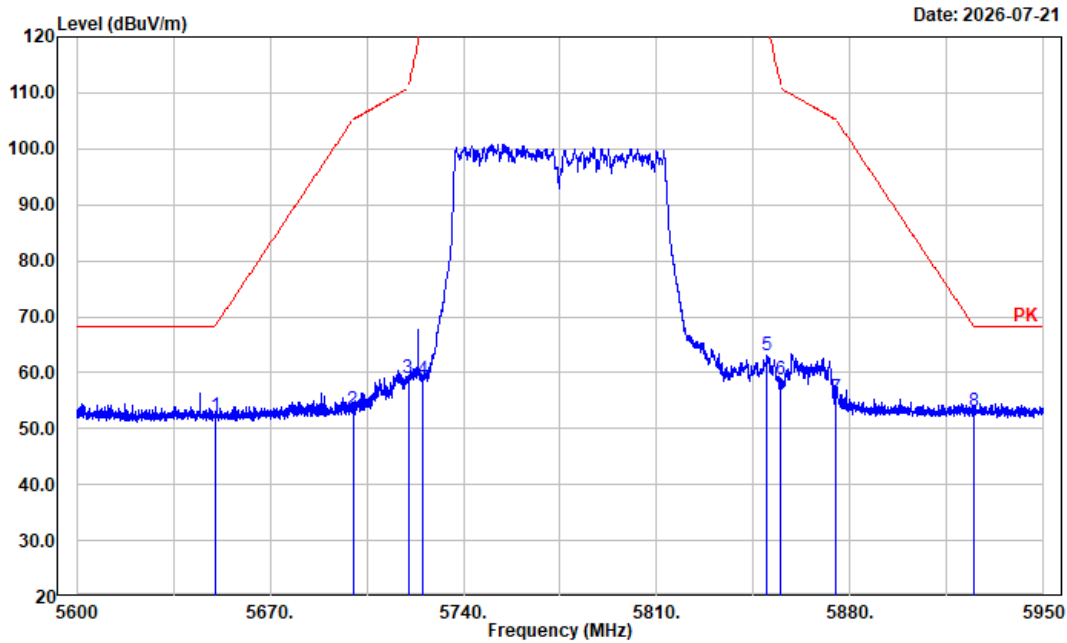


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.33	6.83	52.16	68.20	16.04	Peak
2	5700.000	46.44	6.81	53.25	105.20	51.95	Peak
3	5720.000	52.24	6.83	59.07	110.80	51.73	Peak
4	5725.020	51.85	6.84	58.69	-----	-----	Peak
5	5850.000	56.03	6.92	62.95	122.20	59.25	Peak
6	5855.000	51.92	6.94	58.86	110.80	51.94	Peak
7	5875.000	48.50	7.02	55.52	105.20	49.68	Peak
8	5925.000	45.99	7.17	53.16	68.20	15.04	Peak

Project No: 2603T61540E-RF
 Tester: HuaYuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: Vertical
 Note: 5G WiFi B4 ac80 Mode Middle Channel 5775 MHz

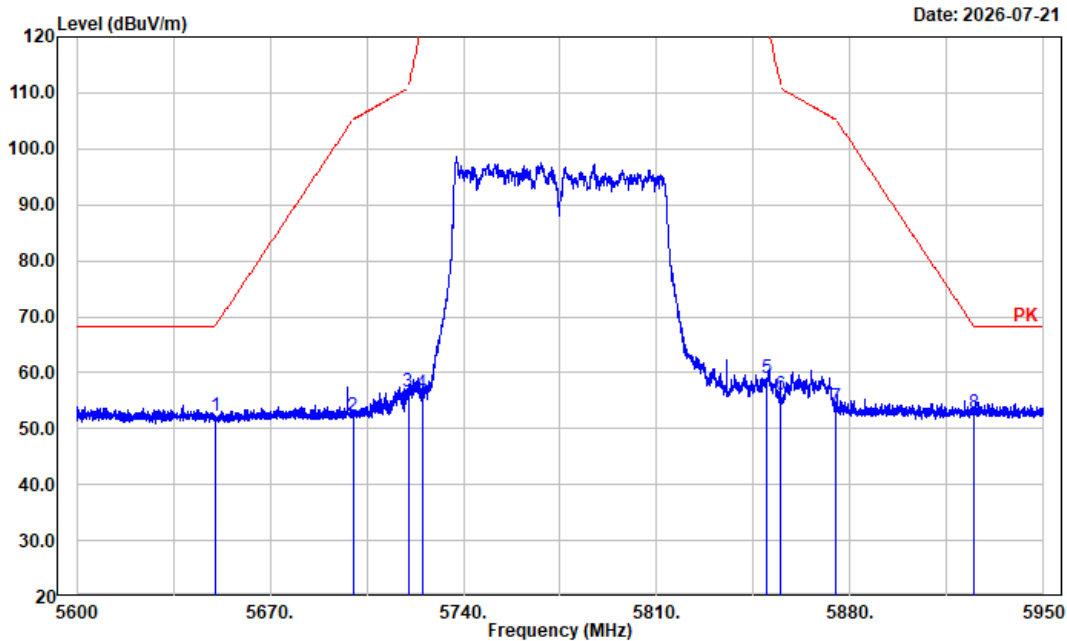


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.47	6.83	52.30	68.20	15.90	Peak
2	5700.000	45.54	6.81	52.35	105.20	52.85	Peak
3	5720.000	49.72	6.83	56.55	110.80	54.25	Peak
4	5725.000	49.55	6.83	56.38	122.20	65.82	Peak
5	5850.000	52.07	6.92	58.99	122.20	63.21	Peak
6	5855.010	49.04	6.94	55.98	110.80	54.82	Peak
7	5875.000	46.75	7.02	53.77	105.20	51.43	Peak
8	5925.000	45.58	7.17	52.75	68.20	15.45	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ax20 Mode Low Channel 5745 MHz

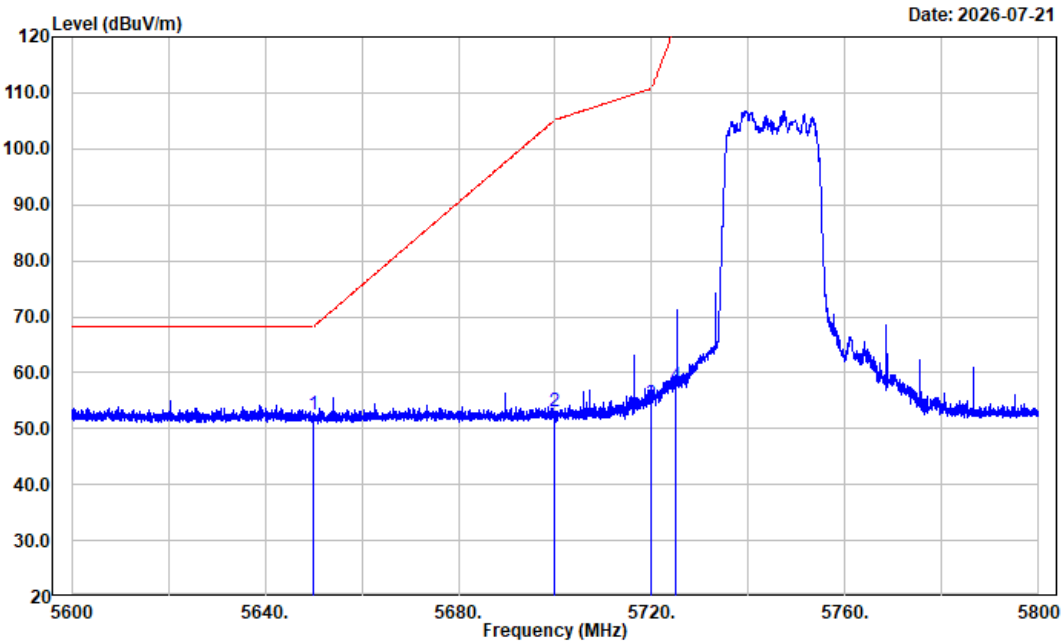


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.71	6.83	52.54	68.20	15.66	Peak
2	5700.000	46.32	6.81	53.13	105.20	52.07	Peak
3	5720.000	47.55	6.83	54.38	110.80	56.42	Peak
4	5725.000	50.82	6.83	57.65	122.20	64.55	Peak

Project No: 2603T61540E-RF
 Tester: HuaYuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: Vertical
 Note: 5G WiFi B4 ax20 Mode Low Channel 5745 MHz

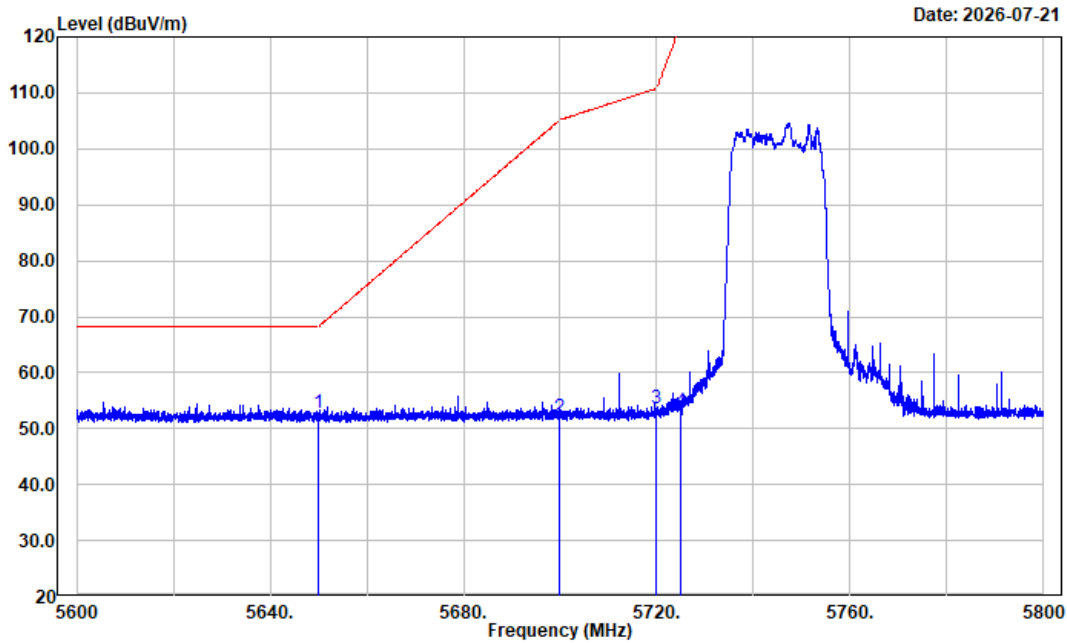


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	46.00	6.83	52.83	68.20	15.37	Peak
2	5700.000	45.20	6.81	52.01	105.20	53.19	Peak
3	5720.000	46.91	6.83	53.74	110.80	57.06	Peak
4	5725.000	46.20	6.83	53.03	122.20	69.17	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ax20 Mode High Channel 5825 MHz

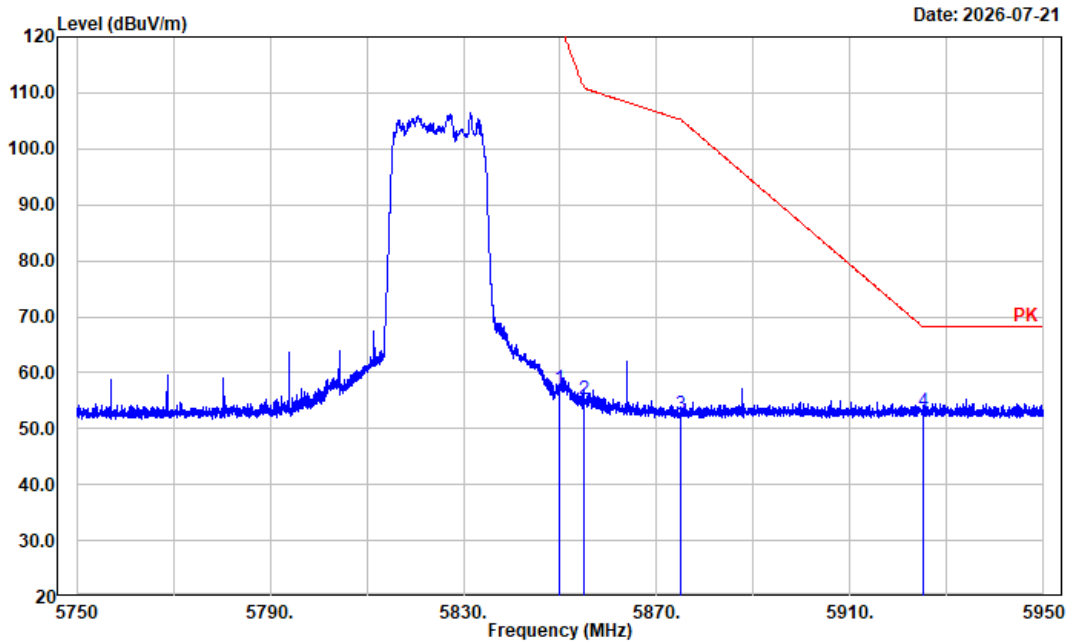


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	50.15	6.92	57.07	122.20	65.13	Peak
2	5855.000	48.24	6.94	55.18	110.80	55.62	Peak
3	5875.000	45.47	7.02	52.49	105.20	52.71	Peak
4	5925.000	45.84	7.17	53.01	68.20	15.19	Peak

Project No: 2603T61540E-RF
 Tester: HuaYuan Miao
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: Vertical
 Note: 5G WiFi B4 ax20 Mode High Channel 5825 MHz

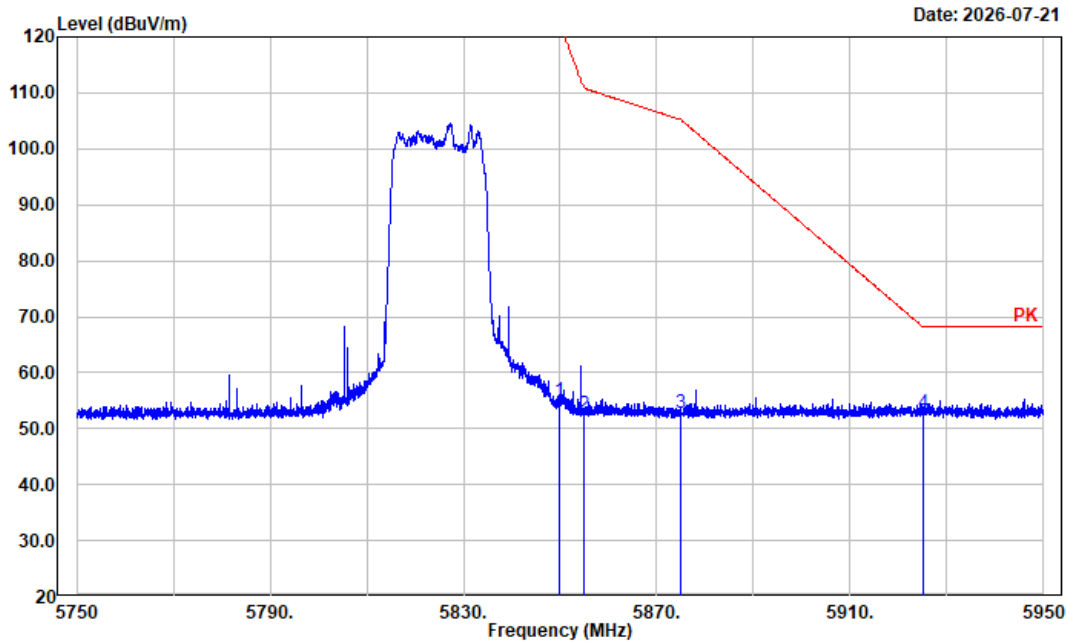


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	48.12	6.92	55.04	122.20	67.16	Peak
2	5855.000	45.69	6.94	52.63	110.80	58.17	Peak
3	5875.000	45.85	7.02	52.87	105.20	52.33	Peak
4	5925.000	45.58	7.17	52.75	68.20	15.45	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ax40 Mode Low Channel 5755 MHz

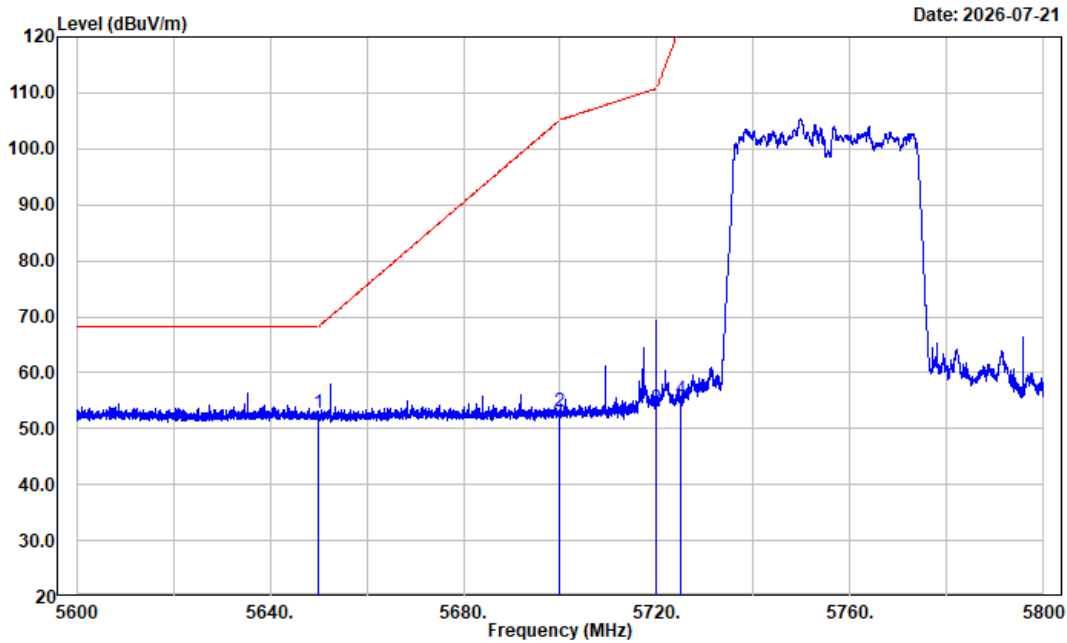


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	46.01	6.83	52.84	68.20	15.36	Peak
2	5700.000	46.12	6.81	52.93	105.20	52.27	Peak
3	5720.000	46.78	6.83	53.61	110.80	57.19	Peak
4	5725.000	48.46	6.83	55.29	122.20	66.91	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ax40 Mode Low Channel 5755 MHz

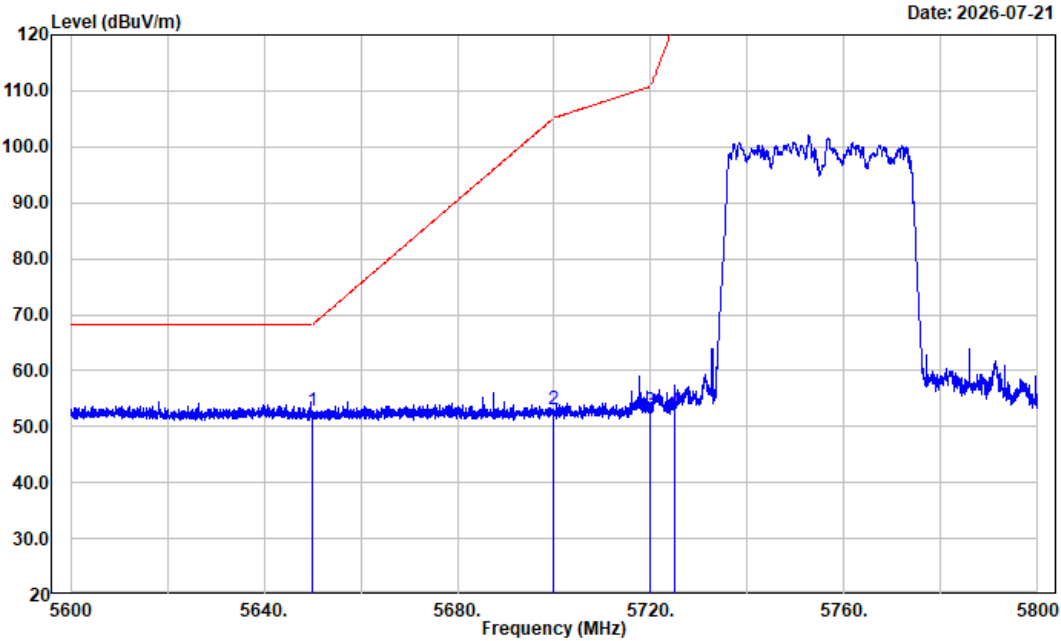


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	45.88	6.83	52.71	68.20	15.49	Peak
2	5700.000	46.23	6.81	53.04	105.20	52.16	Peak
3	5720.000	46.09	6.83	52.92	110.80	57.88	Peak
4	5725.000	46.02	6.83	52.85	122.20	69.35	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ax40 Mode High Channel 5795 MHz

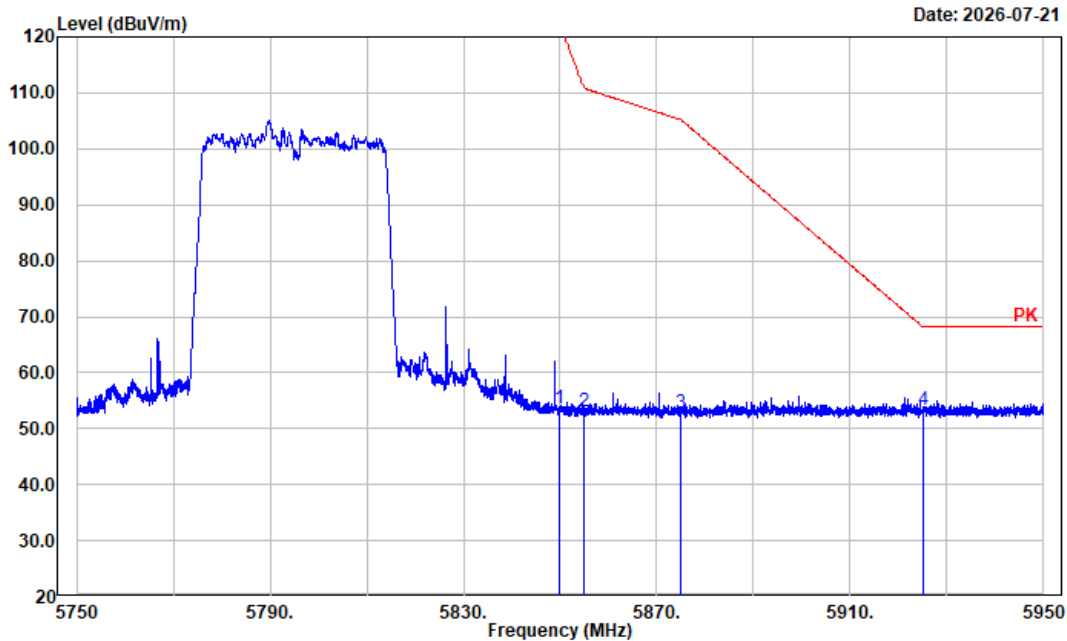


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	46.81	6.92	53.73	122.20	68.47	Peak
2	5855.000	46.06	6.94	53.00	110.80	57.80	Peak
3	5875.000	45.88	7.02	52.90	105.20	52.30	Peak
4	5925.000	46.29	7.17	53.46	68.20	14.74	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ax40 Mode High Channel 5795 MHz

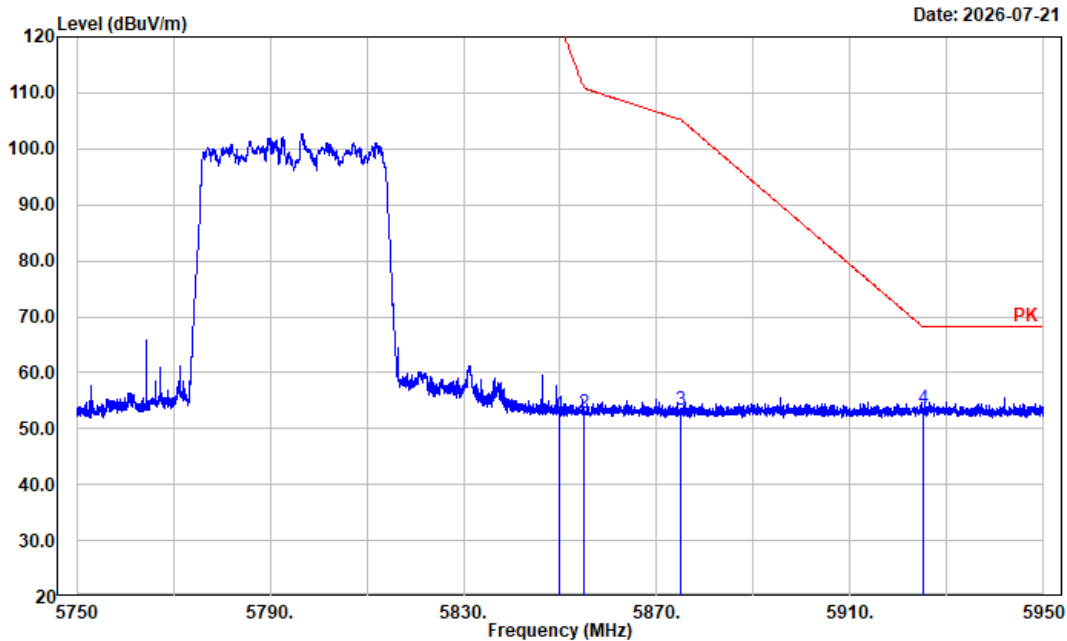


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5850.000	45.63	6.92	52.55	122.20	69.65	Peak
2	5855.000	45.94	6.94	52.88	110.80	57.92	Peak
3	5875.000	46.18	7.02	53.20	105.20	52.00	Peak
4	5925.000	46.37	7.17	53.54	68.20	14.66	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Horizontal
Note: 5G WiFi B4 ax80 Mode Middle Channel 5775 MHz

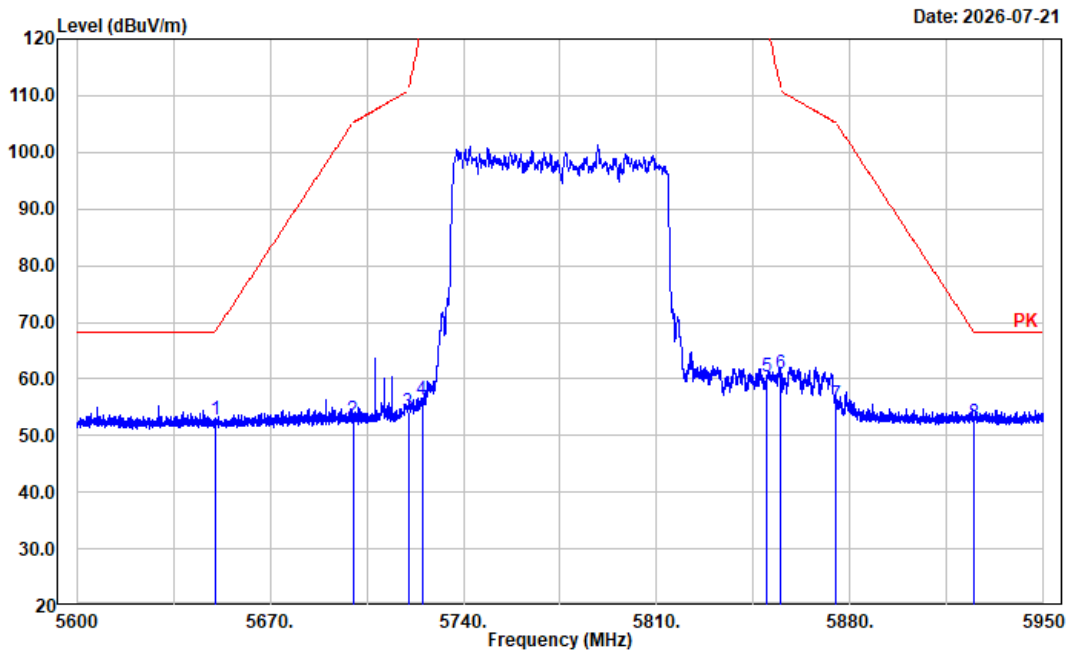

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBUV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	46.04	6.83	52.87	68.20	15.33	Peak
2	5700.000	46.00	6.81	52.81	105.20	52.39	Peak
3	5720.000	47.45	6.83	54.28	110.80	56.52	Peak
4	5725.000	49.41	6.83	56.24	122.20	65.96	Peak
5	5850.000	53.48	6.92	60.40	122.20	61.80	Peak
6	5855.000	53.88	6.94	60.82	110.80	49.98	Peak
7	5875.000	48.55	7.02	55.57	105.20	49.63	Peak
8	5925.000	45.01	7.17	52.18	68.20	16.02	Peak

Project No: 2603T61540E-RF
Tester: HuaYuan Miao
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: Vertical
Note: 5G WiFi B4 ax80 Mode Middle Channel 5775 MHz

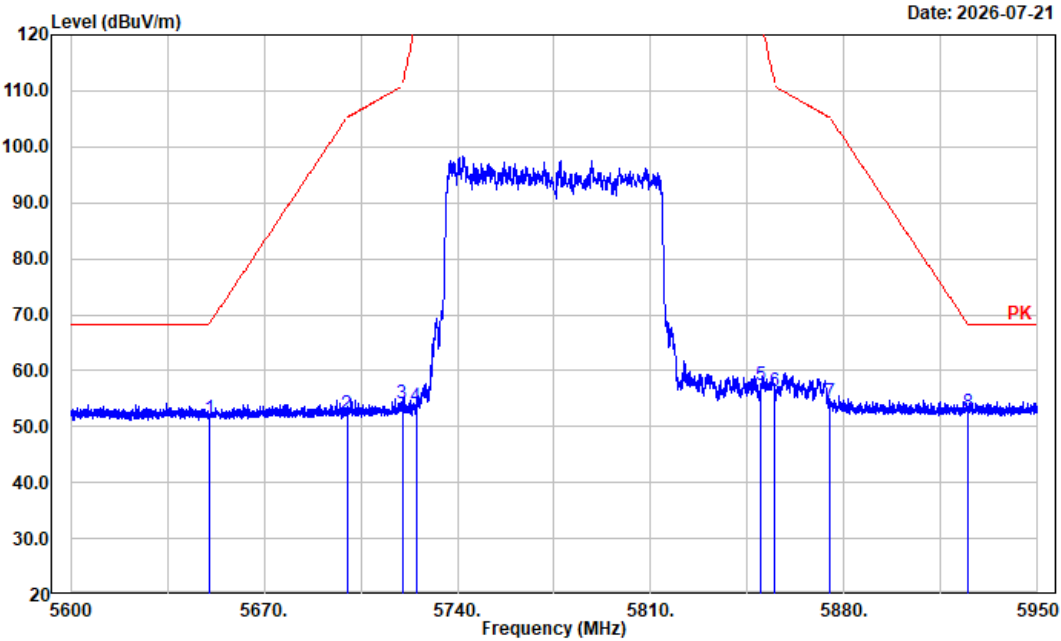

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	5650.000	44.62	6.83	51.45	68.20	16.75	Peak
2	5700.000	45.41	6.81	52.22	105.20	52.98	Peak
3	5720.000	47.39	6.83	54.22	110.80	56.58	Peak
4	5725.000	46.69	6.83	53.52	122.20	68.68	Peak
5	5850.000	50.41	6.92	57.33	122.20	64.87	Peak
6	5855.010	49.29	6.94	56.23	110.80	54.57	Peak
7	5875.000	47.27	7.02	54.29	105.20	50.91	Peak
8	5925.000	45.33	7.17	52.50	68.20	15.70	Peak

4.3 RF Conducted Data

Please refer to Annex "2603T61540E-RF-00D_Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2603T61540E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2603T61540E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2603T61540E-RF-00D-TSP TEST SETUP PHOTOGRAPHS.

===== END OF REPORT =====