



中认信通

CHINA CERTIFICATION ICT CO., LTD (DONGGUAN)



TEST REPORT

Applicant: D-ROBOTICS HOLDING LIMITED

Address: SUITE 603, 6/F LAWS COMM PLAZA 788 CHEUNG SHA WAN RD
KLN HONG KONG

FCC ID: 2BGUG-RDKS600

Product Name: RDK S600 64GB, RDK S600 32GB

Standard(s): 47 CFR Part 15, Subpart C (15.247)

ANSI C63.10-2020

KDB 558074 D01 15.247 Meas Guidance v05r02

The above device has been tested and found compliant with the requirement of the relative standards by China Certification ICT Co., Ltd (Dongguan)

Report Number: 2603T61540E-RF-00C

Date Of Issue: 2026-08-03

Reviewed By: Calvin Chen

Title: RF Test Supervisor

Approved By: Sun Zhong

Title: Manager

Test Laboratory: China Certification ICT Co., Ltd (Dongguan)

Room 101 & 201, Building 2, 256 Pingdong Road, Dalang Town, Dongguan
City, Guangdong, China

Tel: +86-769-83085888

www.ccttt.com.cn

Test Facility

The Test site used by China Certification ICT Co., Ltd (Dongguan) to collect test data is located on the Room 101 & 201, Building 2, 256 Pingdong Road, Dalang Town, Dongguan City, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 442868, the FCC Designation No. : CN1314.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0123.

Declarations

China Certification ICT Co., Ltd (Dongguan) is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

Each test item follows the test standard(s) without deviation.

CONTENTS

CONTENTS.....	3
DOCUMENT REVISION HISTORY.....	5
1. GENERAL INFORMATION.....	6
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	6
1.1.1 General.....	6
1.1.2 Operation Frequency Detail	6
1.1.3 Antenna Information Detail [▲]	7
1.1.4 Accessory Information.....	7
1.2 DESCRIPTION OF TEST CONFIGURATION.....	7
1.2.1 EUT Operation Condition:.....	7
1.2.2 Support Equipment List and Details	8
1.2.3 Support Cable List and Details	8
1.2.4 Block Diagram of Test Setup.....	9
1.3 MEASUREMENT UNCERTAINTY	10
2. SUMMARY OF TEST RESULTS	11
3. REQUIREMENTS AND TEST PROCEDURES.....	12
3.1 AC LINE CONDUCTED EMISSIONS.....	12
3.1.1 Applicable Standard.....	12
3.1.2 EUT Setup.....	13
3.1.3 EMI Test Receiver Setup	13
3.1.4 Test Procedure	14
3.1.5 Corrected Amplitude & Margin Calculation.....	14
3.2 RADIATION SPURIOUS EMISSIONS	15
3.2.1 Applicable Standard.....	15
3.2.2 EUT Setup.....	15
3.2.3 EMI Test Receiver & Spectrum Analyzer Setup	16
3.2.4 Test Procedure	17
3.2.5 Corrected Amplitude & Margin Calculation.....	17
3.3 MINIMUM 6 DB EMISSION BANDWIDTH	18
3.3.1 Applicable Standard.....	18
3.3.2 EUT Setup.....	18
3.3.3 Test Procedure	18
3.4 99% OCCUPIED BANDWIDTH.....	19
3.4.1 Applicable Standard.....	19
3.4.2 EUT Setup.....	19
3.4.3 Test Procedure	19
3.5 MAXIMUM CONDUCTED OUTPUT POWER	20
3.5.1 Applicable Standard.....	20
3.5.2 EUT Setup.....	20
3.5.3 Test Procedure	20
3.6 MAXIMUM POWER SPECTRAL DENSITY	21
3.6.1 Applicable Standard.....	21
3.6.2 EUT Setup.....	21
3.6.3 Test Procedure	21
3.7 CONDUCTED SPURIOUS EMISSION.....	22
3.7.1 Applicable Standard.....	22

3.7.2 EUT Setup.....	22
3.7.3 Test Procedure	22
3.8 DUTY CYCLE	23
3.8.1 EUT Setup.....	23
3.8.2 Test Procedure	23
3.9 ANTENNA REQUIREMENT.....	24
3.9.1 Applicable Standard.....	24
3.9.2 Judgment.....	24
4. TEST DATA AND RESULTS	25
4.1 AC LINE CONDUCTED EMISSIONS.....	25
4.2 RADIATION SPURIOUS EMISSIONS	28
4.2.1 9 kHz – 1 GHz	28
4.2.2 1 GHz – 25 GHz	37
4.3 RF CONDUCTED DATA	108
5. EUT PHOTOGRAPHS	109
6. TEST SETUP PHOTOGRAPHS	110

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
1.0	2603T61540E-RF-00C	Original Report	2026-08-03

1. GENERAL INFORMATION

1.1 Product Description for Equipment under Test (EUT)

1.1.1 General

EUT Name:	RDK S600 64GB, RDK S600 32GB
Trade Name:	D-Robotics
EUT Model:	KS6X064256C
Multiple Model:	KS6X032064C
Operation Frequency:	2412-2462 MHz (802.11b/g/n ht20/ax hew20) 2422-2452 MHz (802.11n ht40/ax hew40)
Maximum Peak Output Power (Conducted):	26.10 dBm
Modulation Type:	802.11b: DSSS-DBPSK, DQPSK, CCK 802.11g/n: OFDM-BPSK, QPSK, 16QAM, 64QAM 802.11ax: OFDMA-BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Rated Input Voltage:	DC 24V from adapter
Sample Number:	KS6X064256C: 3N1Z-2 (for RF Conducted Test) KS6X032064C: 3N1Z-4 (for Conducted emissions & Radiated Spurious Emissions Test)
EUT Received Date:	2026.6.13
EUT Received Status:	Good
Note: The multiple models are electrically identical with the test model. Please refer to the declaration letter for more detail, which was provided by manufacturer.	

1.1.2 Operation Frequency Detail

For 802.11b/g/n ht20/ax hew20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
1	2412	7	2442
2	2417	8	2447
3	2422	9	2452
4	2427	10	2457
5	2432	11	2462
6	2437	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2412
Middle	2437
Highest	2462

For 802.11n ht40/ax hew20:

Channel	Frequency (MHz)	Channel	Frequency (MHz)
3	2422	7	2442
4	2427	8	2447
5	2432	9	2452
6	2437	/	/

Per section 15.31(m), the below frequencies were performed the test as below:

Test Channel	Frequency (MHz)
Lowest	2422
Middle	2437
Highest	2452

1.1.3 Antenna Information Detail[▲]

Antenna	Antenna Type	input impedance (Ohm)	Frequency Range (MHz)	Antenna Gain (dBi)
Chain 0	FPC	50	2400-2500	2.89
Chain 1	FPC	50	2400-2500	2.89

Note:
The system supports 2T2R MIMO CDD modes at 802.11n/ax modes.
Per KDB 662911 D01 Multiple Transmitter Output v02r01:

For power measurements:
Array Gain = 0 dB (i.e., no array gain) for $N_{ANT} \leq 4$
directional gain = 2.89dBi + 0dB = 2.89 dBi < 6dBi

For power spectral density (PSD) measurements:
Array Gain = 10 log(N_{ANT}/N_{SS}) dB.
directional gain = 2.89 dBi + 3dB = 5.89 dBi < 6dBi

So, the maximum output power limit does not need to be reduced.

The Method of §15.203 Compliance either:

☒ Antenna was permanently attached to the unit.
☐ Antenna use a unique type of connector to attach to the EUT.
☐ Unit was professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

1.1.4 Accessory Information

Accessory Description	Manufacturer	Model	Parameters
DC Cable	/	/	Unshielded without ferrite core, 0.1m
SWITCHING ADAPTER	SHENZHEN HONOR ELECTRONIC CO., LTD	ADS-210NL-19-3 240192E	Input: 100-240V~50/60Hz 3.0A Max Output: 24.0-8.0A 192.0W

1.2 Description of Test Configuration**1.2.1 EUT Operation Condition:**

EUT Operation Mode:	The system was configured for testing in Engineering Mode, which was provided by the manufacturer. Per 15B report test, conducted emission test and radiated emissions below 1GHz test for KS6X032064C model was the worst.			
Equipment Modifications:	No			
EUT Exercise Software:	MobaXterm.exe			

The software was provided by manufacturer. The maximum power was configured as below, that was provided by the manufacturer ▲ :

Test Modes	Test Frequency (MHz)	Data rate	Power Level Setting	
			Chain 0	Chain 1
802.11b	2412	1Mbps	16	16
	2437	1Mbps	16	16
	2462	1Mbps	16	16
802.11g	2412	6Mbps	16	16
	2437	6Mbps	16	16
	2462	6Mbps	16	16
802.11n ht20	2412	MCS0	16	16
	2437	MCS0	16	16
	2462	MCS0	16	16
802.11n ht40	2422	MCS0	16	16
	2437	MCS0	16	16
	2452	MCS0	16	16

802.11ax hew20	2412	MCS0	16	16
	2437	MCS0	16	16
	2462	MCS0	16	16
802.11ax hew40	2422	MCS0	16	16
	2437	MCS0	16	16
	2452	MCS0	16	16

Note:

1. The above are the worst-case data rates, which are determined for each mode based upon investigations by measuring the power and PSD across all data rates, bandwidths, and modulations.
2. The device supports SISO in all modes and 2T2R MIMO in 802.11n/ax modes, per pretest, MIMO mode was the worst mode and reported.
3. For 802.11 ax mode, only support full RU.

1.2.2 Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
iFoved	3D Optical Mouse	SPT6393	SWD2414HR10K04
Unknown	Keyboard	SPT6334	SWB2310HD50K02
Lenovo	Computer	T4610S	00331-10000-00001-AA729
Tenda	Wireless Router	RX12 Pro	ED331010215000033
Unknown	U Disk	32G	20260126
Dell	Display	SE2416Hc	S252FV2551633
D-Robotics	Camera board	Unknown	Unknown

1.2.3 Support Cable List and Details


Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
Power Cable	No	No	0.5	Adapter	LISN1/AC Mains
Mouse Cable	No	No	1.2	Mouse	EUT
Keyboard Cable	No	No	1.2	Keyboard	EUT
HDMI Cable	Yes	Yes	1.5	EUT	Display
Network Cable	No	No	10	EUT	Router
Network Cable	Yes	Yes	1	EUT	EUT
Power Cable	Yes	Yes	1.5	Display	LISN2/AC Mains

1.2.4 Block Diagram of Test Setup

AC Line Conducted Emissions:

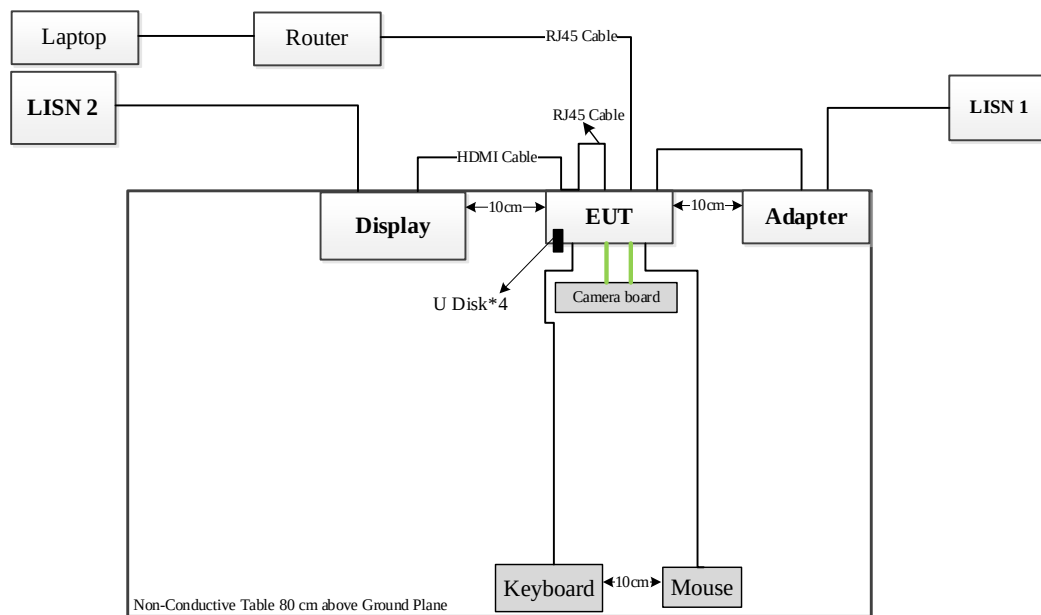

Spurious Emissions:

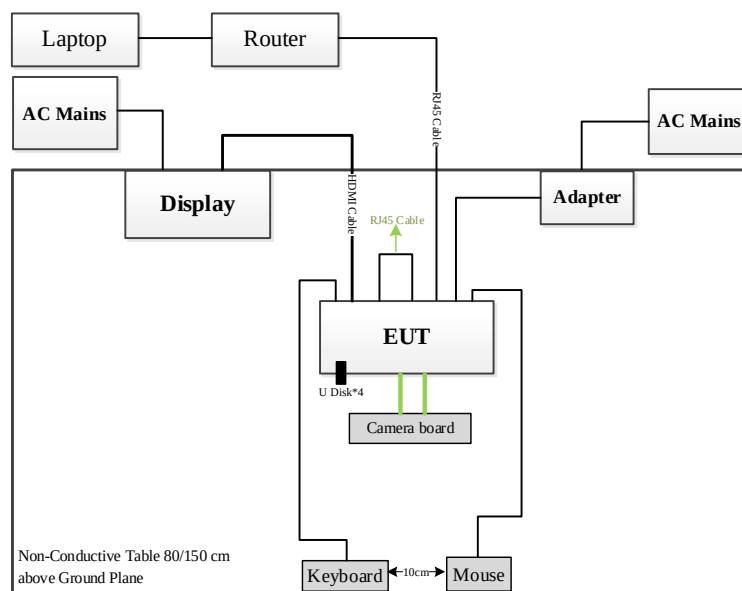

1.3 Measurement Uncertainty

Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.

Parameter	Measurement Uncertainty
Occupied Channel Bandwidth	±5 %
RF Output Power, Conducted	±0.61dB
Power Spectral Density, Conducted	±0.61 dB
Unwanted Emissions, Radiated	9k~30MHz: 4.12dB, 30M~200MHz: 3.89 dB, 200M~1GHz: 5.09 dB, 1G~6GHz: 5.12 dB, 6G~18GHz: 5.73 dB, 18G~26.5G:5.47 dB, 26.5G~40G:5.63 dB
Unwanted Emissions, Conducted	±1.26 dB
Temperature	±1 °C
Humidity	±5%
DC And Low Frequency Voltages	±0.4%
Duty Cycle	1%
AC Power Lines Conducted Emission	2.8 dB (150 kHz to 30 MHz)

2. SUMMARY OF TEST RESULTS

Standard Rules	Description of Test	Result
FCC §15.203	Antenna Requirement	Compliant
FCC §15.207(a)	AC Line Conducted Emissions	Compliant
FCC §15.205, §15.209, §15.247(d)	Radiated Spurious Emission	Compliant
FCC §15.207(a)(2)	6dB Emission Bandwidth & 99% Occupied Bandwidth	Compliant
FCC §15.247(b)(1)	Maximum Conducted Output Power	Compliant
FCC §15.247(d)	Conducted Spurious Emission	Compliant
FCC §15.247(e)	Power Spectral Density	Compliant
C63.10 §11.6	Duty Cycle	Compliant

3. REQUIREMENTS AND TEST PROCEDURES

3.1 AC Line Conducted Emissions

3.1.1 Applicable Standard

FCC §15.207(a).

(a) Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.

(b) The limit shown in paragraph (a) of this section shall not apply to carrier current systems operating as intentional radiators on frequencies below 30 MHz. In lieu thereof, these carrier current systems shall be subject to the following standards:


(1) For carrier current system containing their fundamental emission within the frequency band 535-1705 kHz and intended to be received using a standard AM broadcast receiver: no limit on conducted emissions.

(2) For all other carrier current systems: 1000 μ V within the frequency band 535-1705 kHz, as measured using a 50 μ H/50 ohms LISN.

(3) Carrier current systems operating below 30 MHz are also subject to the radiated emission limits in §15.205, §15.209, §15.221, §15.223, or §15.227, as appropriate.

(c) Measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines. Devices that include, or make provisions for, the use of battery chargers which permit operating while charging, AC adapters or battery eliminators or that connect to the AC power lines indirectly, obtaining their power through another device which is connected to the AC power lines, shall be tested to demonstrate compliance with the conducted limits.

3.1.2 EUT Setup

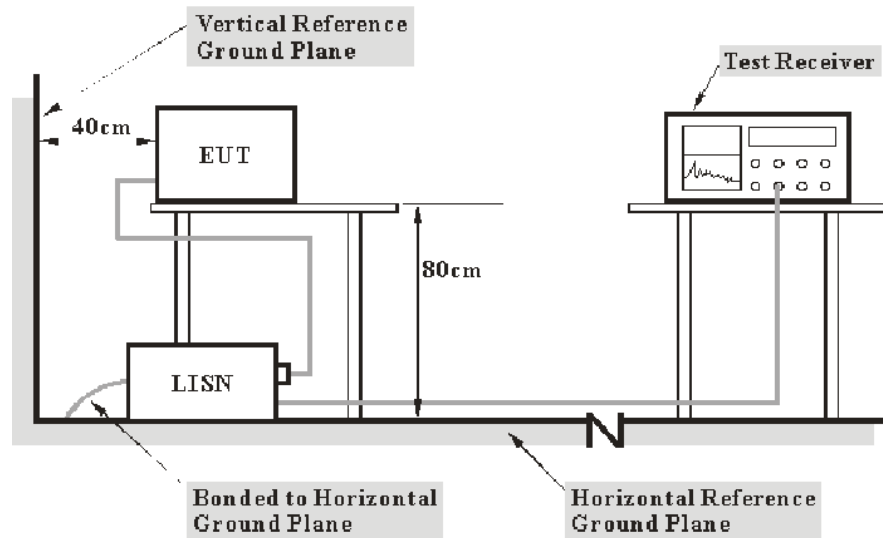

Note: 1. Support units were connected to second LISN.
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2020 measurement procedure. The specification used was with the FCC Part 15.207 limits.

The spacing between the peripherals was 10 cm.

3.1.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

3.1.4 Test Procedure

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

3.1.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = attenuation caused by cable loss + voltage division factor of AMN

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result

3.2 Radiation Spurious Emissions


3.2.1 Applicable Standard

FCC §15.247 (d);


In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).


3.2.2 EUT Setup

9kHz - 30MHz:

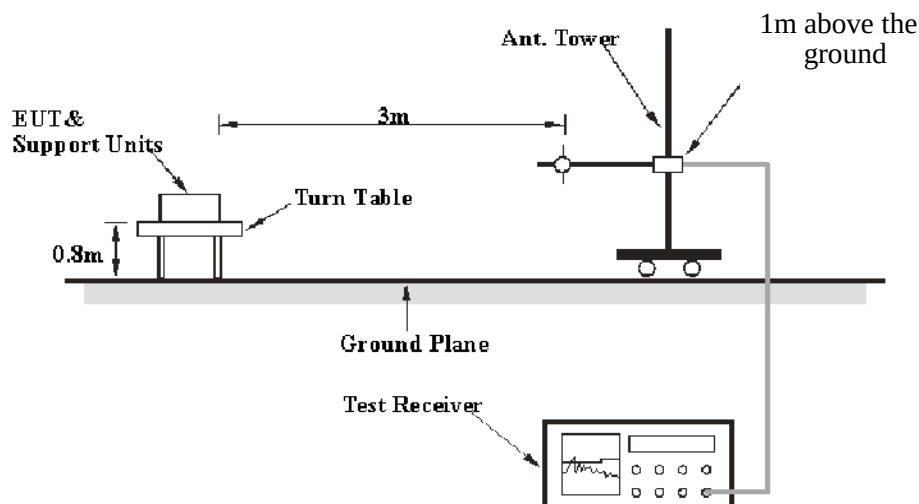

30M~1GHz:

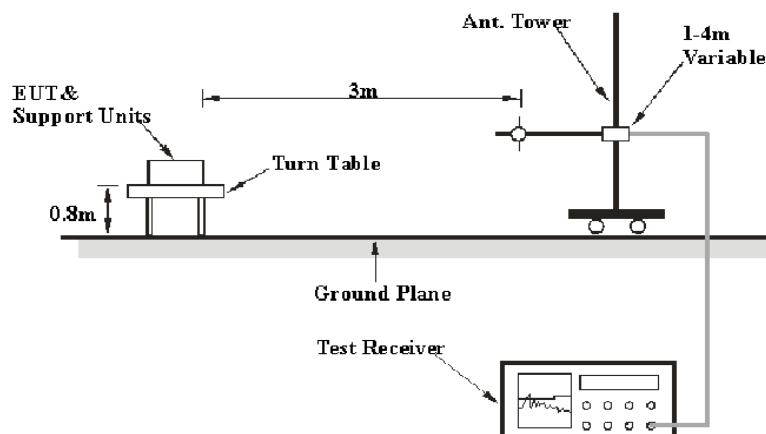

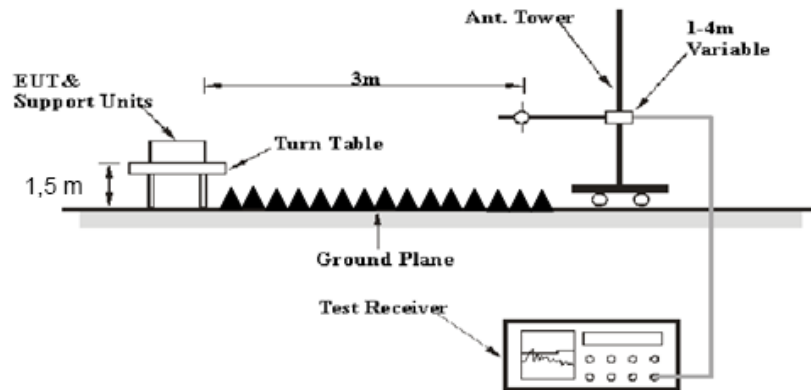Above 1GHz:

The radiated emissions were performed in the 3 meters distance, using the setup accordance with the ANSI C63.10-2020. The specification used was the FCC 15.209, and FCC 15.247 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

For 9kHz-30MHz test, the lowest height of the magnetic antenna shall be 1 m above the ground and three antenna orientations (parallel, perpendicular, and ground-parallel) shall be measured.

3.2.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 9 kHz to 25 GHz.

During the radiated emission test, the EMI test receiver & Spectrum Analyzer Setup were set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Detector	Measurement
9 kHz – 150 kHz	200 Hz	1 kHz	/	Peak	PK
	/	/	200 Hz	Quasi Peak/ Average	QP/AV
150 kHz – 30 MHz	9 kHz	30 kHz	/	Peak	PK
	/	/	9 kHz	Quasi Peak/ Average	QP/AV
30MHz – 1000 MHz	120 kHz	500 kHz	/	Peak	PK
	/	/	120kHz	Quasi Peak	QP

1GHz- 25GHz:

Pre-scan:

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
Ave.	>98%	1MHz	5 kHz	Peak
	<98%	1MHz	$\geq 1/T$, not less than 5 kHz	Peak

Note: T is minimum transmission duration

Final measurement for emission identified during the pre-scan:

Measurement	Duty cycle	RBW	Video B/W	Detector
PK	Any	1MHz	3 MHz	Peak
Ave.	>98%	1MHz	10 Hz	Peak
	<98%	1MHz	$\geq 1/T$	Peak

Note: T is minimum transmission duration

If the maximized peak measured value complies with under the QP/Average limit more than 6dB, then it is unnecessary to perform an QP/Average measurement.

3.2.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

Data was recorded in Quasi-peak detection mode for frequency range of 9 kHz-1 GHz except 9–90 kHz, 110–490 kHz, employing an average detector, peak and Average detection modes for frequencies above 1 GHz.

All emissions under the average limit and under the noise floor have not recorded in the report.

3.2.5 Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Reading + Factor

Factor = Antenna Factor + Cable Loss- Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. The equation for margin calculation is as follows:

Margin = Limit – Result


3.3 Minimum 6 dB Emission Bandwidth

3.3.1 Applicable Standard

FCC §15.247 (a)(2)

Systems using digital modulation techniques may operate in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

3.3.2 EUT Setup

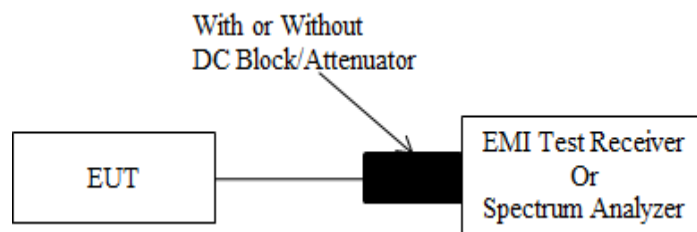

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.3.3 Test Procedure


According to ANSI C63.10-2020 Section 11.8

- Set RBW = shall be in the range of 1% to 5% of the OBW but not less than 100 kHz.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Trace mode = max-hold.
- Sweep = No faster than coupled (auto) time.
- Allow the trace to stabilize.
- Measure the maximum width of the emission by placing two markers, one at the lowest frequency and the other at the highest frequency of the envelope of the spectral display, such that each marker is at or slightly below the “-6 dB down amplitude”. If a marker is below this “-6 dB down amplitude” value, then it shall be as close as possible to this value.

3.4 99% Occupied Bandwidth

3.4.1 Applicable Standard

3.4.2 EUT Setup

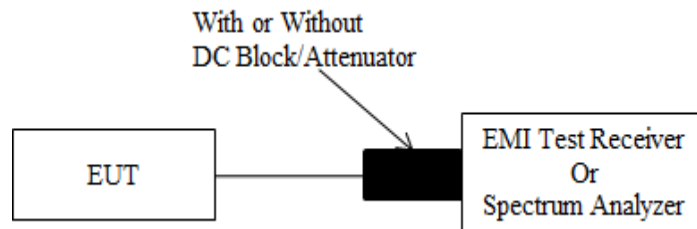

A short RF cable with low cable loss connected to the EUT antenna port, The insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.4.3 Test Procedure

According to ANSI C63.10-2020 Section 6.9.3

The occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. The following procedure shall be used for measuring 99% power bandwidth:

- a) The instrument center frequency is set to the nominal EUT channel center frequency. The frequency span for the spectrum analyzer shall be between 1.5 times and 5.0 times the OBW.
- b) The nominal IF filter bandwidth (3 dB RBW) shall be in the range of 1% to 5% of the OBW, and VBW shall be at least three times the RBW, unless otherwise specified by the applicable requirement.
- c) Set the reference level of the instrument as required, keeping the signal from exceeding the maximum input mixer level for linear operation. In general, the peak of the spectral envelope shall be more than $[10 \log (OBW/RBW)]$ below the reference level. Specific guidance is given in 4.1.6.2.
- d) Step a) through step c) might require iteration to adjust within the specified range.
- e) Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max-hold mode (until the trace stabilizes) shall be used.
- f) Use the 99% power bandwidth function of the instrument (if available) and report the measured bandwidth.
- g) If the instrument does not have a 99% power bandwidth function, then the trace data points are recovered and directly summed in linear power terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached; that frequency is recorded as the lower frequency. The process is repeated until 99.5% of the total is reached; that frequency is recorded as the upper frequency. The 99% power bandwidth is the difference between these two frequencies.
- h) The occupied bandwidth shall be reported by providing spectral plot(s) of the measuring instrument display; the plot axes and the scale units per division shall be clearly labeled. Tabular data may be reported in addition to the plot(s).


3.5 Maximum Conducted Output Power

3.5.1 Applicable Standard

FCC §15.247 (b)(3)

For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

3.5.2 EUT Setup

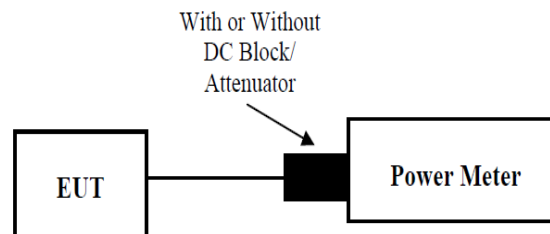

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.5.3 Test Procedure

According to ANSI C63.10-2020 Section 11.9.1.2

The maximum peak conducted output power may be measured using a broadband peak RF power meter. The power meter shall have a video bandwidth that is greater than or equal to the DTS bandwidth and shall use a fast responding diode detector.

- a) Set the EUT in transmitting mode.
- b) Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to test equipment.
- c) Add a correction factor to the display.
- d) Set the power meter to test peak output power, record the result.

According to ANSI C63.10-2020 Section 11.9.2.3.2

Method AVGPM-G is a measurement using a gated RF average power meter.

Alternatively, measurements may be performed using a wideband gated RF power meter provided that the gate parameters are adjusted such that the power is measured only when the EUT is transmitting at its maximum power control level. Because the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.


3.6 Maximum Power Spectral Density

3.6.1 Applicable Standard

FCC §15.247 (e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

3.6.2 EUT Setup

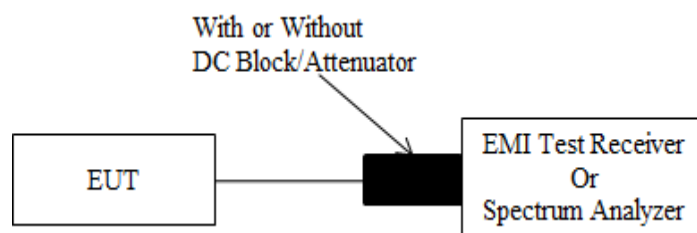

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.6.3 Test Procedure

According to ANSI C63.10-2020 Section 11.10.2

- Set analyzer center frequency to DTS channel center frequency.
- Set the span >1.5 times the DTS bandwidth.
- Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- Set the VBW $\geq [3 \times \text{RBW}]$.
- Detector = peak.
- Sweep time = No faster than coupled (auto) time.
- Trace mode = max-hold.
- Allow trace to fully stabilize.
- Use the peak marker function to determine the maximum amplitude level within the RBW.
- If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat.


3.7 Conducted Spurious Emission

3.7.1 Applicable Standard

FCC §15.247 (d)

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

3.7.2 EUT Setup

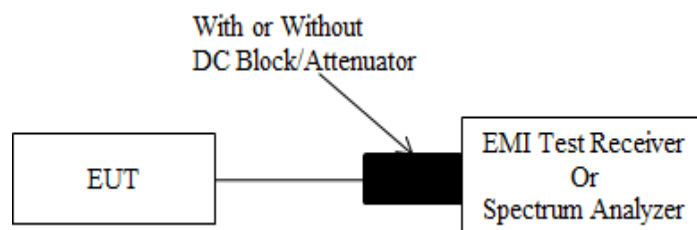

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.7.3 Test Procedure

According to ANSI C63.10-2020 Section 11.11

a) Set the center frequency and span to encompass frequency range to be measured. Note that the frequency range might need to be divided into multiple frequency ranges to retain frequency resolution.

NOTE—the number of points can also be increased for large spans to retain frequency resolution

b) Set the RBW = 100 kHz.

c) Set the VBW $\geq [3 \times \text{RBW}]$.

d) Detector = peak.

e) Sweep time = No faster than coupled (auto) time.

f) Trace mode = max-hold.


g) Allow trace to fully stabilize.

h) Use the peak marker function to determine the maximum amplitude level.

Ensure that the amplitude of all unwanted emissions outside of the authorized frequency band (excluding restricted frequency bands) is attenuated by at least the minimum requirements specified in 11.11. Report the three highest emissions relative to the limit.

3.8 Duty Cycle

3.8.1 EUT Setup

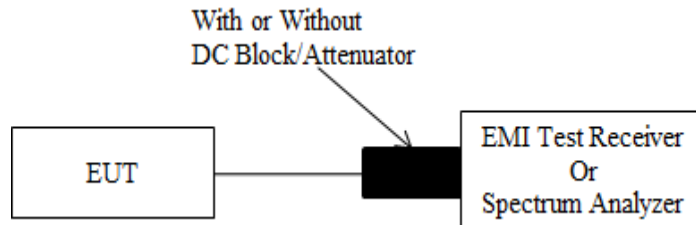

A short RF cable with low cable loss connected to the EUT antenna port, the insert loss of this RF cable/attenuator was offset into the setting of test equipment.

3.8.2 Test Procedure

According to ANSI C63.10-2020 Section 11.6

The zero-span mode on a spectrum analyzer or EMI receiver if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the ON and OFF times of the transmitted signal:

- 1) Set the center frequency of the instrument to the center frequency of the transmission.
- 2) Set $RBW \geq OBW$ if possible; otherwise, set RBW to the largest available value.
- 3) Set $VBW \geq RBW$. Set detector = peak or average.
- 4) The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$ and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring the duty cycle shall not be used if $T \leq 16.7 \mu s$.)

3.9 Antenna Requirement

3.9.1 Applicable Standard

FCC §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of §§15.211, 15.213, 15.217, 15.219, 15.221, or §15.236. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with §15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this part are not exceeded.

3.9.2 Judgment

Compliant. Please refer to the Antenna Information detail in Section 1.

4. TEST DATA AND RESULTS

4.1 AC Line Conducted Emissions

Sample Number:	3N1Z-4	Test Date:	2026/6/29
Test Site:	CE	Test Mode:	Transmitting (maximum conducted output power mode, 802.11ax40 low channel)
Tester:	Ella Huang	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	25.7	Relative Humidity: (%)	53	ATM Pressure: (kPa)	100
----------------------	------	---------------------------	----	------------------------	-----

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
R&S	LISN	ENV216	101134	2025/9/26	2026/9/25
R&S	LISN	ENV216	101132	2025/9/26	2026/9/25
R&S	EMI Test Receiver	ESR3	103104	2026/5/8	2027/5/7
MICRO-COAX	Coaxial Cable	UTIFLEX	C-0200-01	2025/11/10	2026/11/9
Audix	Test Software	E3	190306 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Project No.: 2603T61540E-RF


Tester: Ella Huang

Port: Line

Condition: RBW:9kHz

Test Mode: M1

Note: 32G

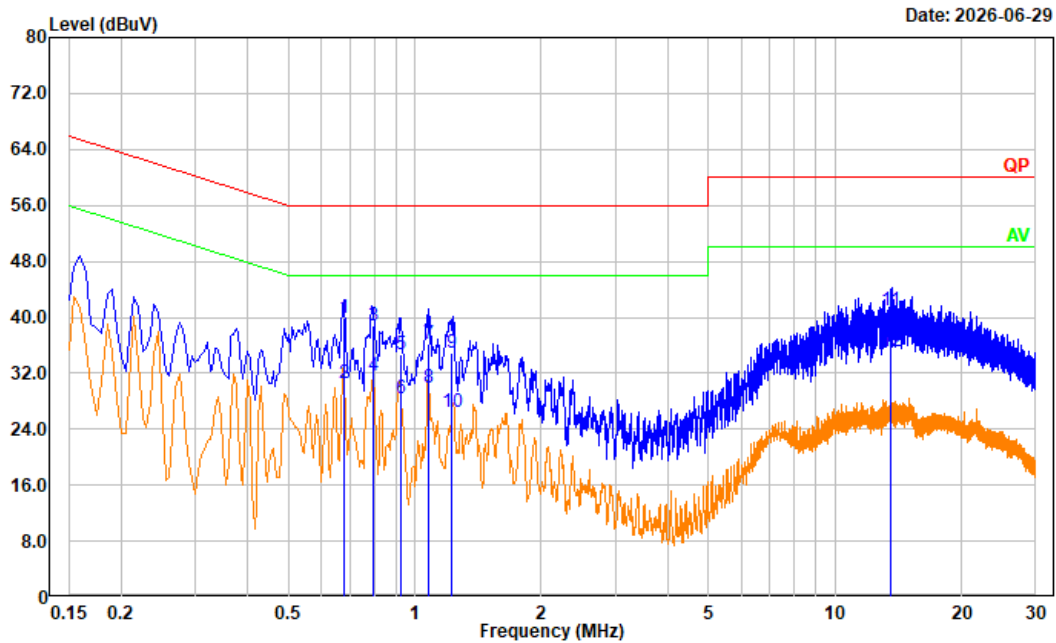

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.681	29.65	10.32	39.97	56.00	16.03	QP
2	0.681	20.19	10.32	30.51	46.00	15.49	Average
3	0.793	28.51	10.37	38.88	56.00	17.12	QP
4	0.793	21.29	10.37	31.66	46.00	14.34	Average
5	0.930	24.18	10.47	34.65	56.00	21.35	QP
6	0.930	17.82	10.47	28.29	46.00	17.71	Average
7	1.082	25.74	10.48	36.22	56.00	19.78	QP
8	1.082	19.53	10.48	30.01	46.00	15.99	Average
9	1.222	24.58	10.41	34.99	56.00	21.01	QP
10	1.222	16.06	10.41	26.47	46.00	19.53	Average
11	13.560	30.90	10.17	41.07	60.00	18.93	QP
12	13.560	24.95	10.17	35.12	50.00	14.88	Average

Project No.: 2603T61540E-RF


Tester: Ella Huang

Port: neutral

Condition: RBW:9kHz

Test Mode: M1

Note: 32G

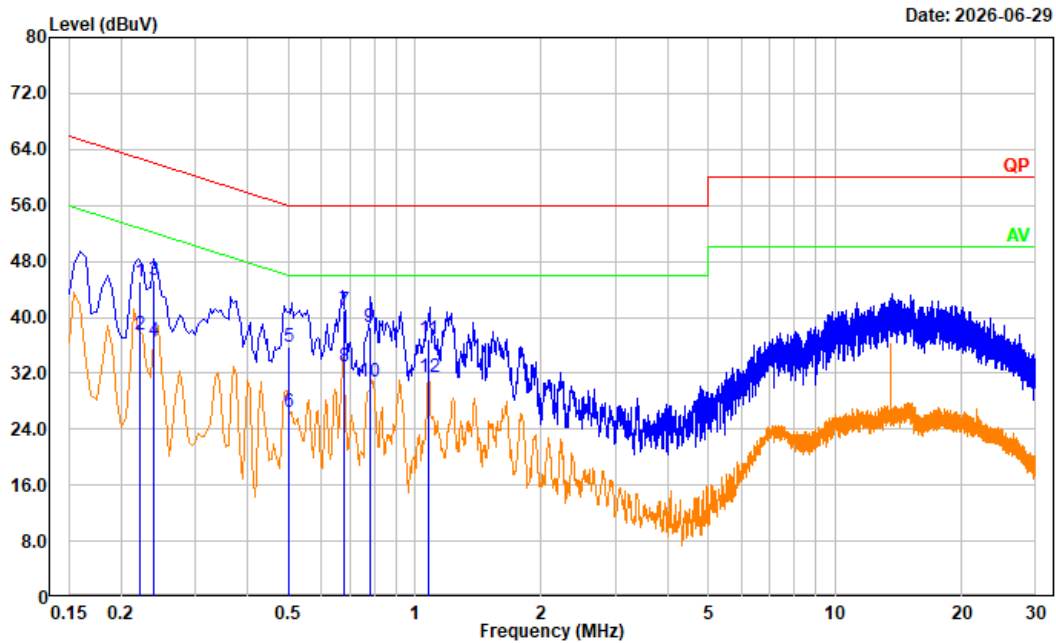

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Detector
1	0.221	34.66	10.48	45.14	62.79	17.65	QP
2	0.221	27.10	10.48	37.58	52.79	15.21	Average
3	0.240	34.92	10.46	45.38	62.10	16.72	QP
4	0.240	26.23	10.46	36.69	52.10	15.41	Average
5	0.503	25.63	10.11	35.74	56.00	20.26	QP
6	0.503	16.34	10.11	26.45	46.00	19.55	Average
7	0.676	30.72	10.20	40.92	56.00	15.08	QP
8	0.676	22.79	10.20	32.99	46.00	13.01	Average
9	0.780	28.40	10.24	38.64	56.00	17.36	QP
10	0.780	20.46	10.24	30.70	46.00	15.30	Average
11	1.079	26.44	10.34	36.78	56.00	19.22	QP
12	1.079	21.15	10.34	31.49	46.00	14.51	Average

4.2 Radiation Spurious Emissions

4.2.1 9 kHz – 1 GHz

Sample Number:	3N1Z-4	Test Date:	2026/7/27
Test Site:	966-1	Test Mode:	Transmitting (maximum conducted output power mode, 802.11ax40 low channel)
Tester:	Jin He	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	23.2	Relative Humidity: (%)	64	ATM Pressure: (kPa)	99.7
----------------------	------	---------------------------	----	------------------------	------

Test Equipment List and Details:


Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Sunol Sciences	Antenna	JB6	A082520-5	2023/12/1	2026/11/30
GLOBAL	Loop Antenna	1313-1A	3110611	2026/1/29	2029/1/28
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0300-01	2025/11/10	2026/11/9
Daruikang	Coaxial Cable	BNC-JJ-RG58	C-0500-01	2025/11/10	2026/11/9
R&S	EMI Test Receiver	ESR3	102724	2026/2/27	2027/2/26
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0100-03	2025/11/10	2026/11/9
TIMES MICROWAVE	Coaxial Cable	LMR-600-UltraFlex	C-0370-01	2025/11/10	2026/11/9
XQY	Coaxial Cable	XQY-CMR400UF -NJ-NJ-7M	24056379	2026/5/21	2027/5/20
Sonoma	Amplifier	310N	186165	2025/11/10	2026/11/9
Audix	Test Software	E3	191218 (V9)	N/A	N/A

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:


After pre-scan in the X, Y and Z axes of orientation, the worst case(Z) is referred to plots.

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Parallel
Note: Transmitting Part 15.247_2.4G Wifi

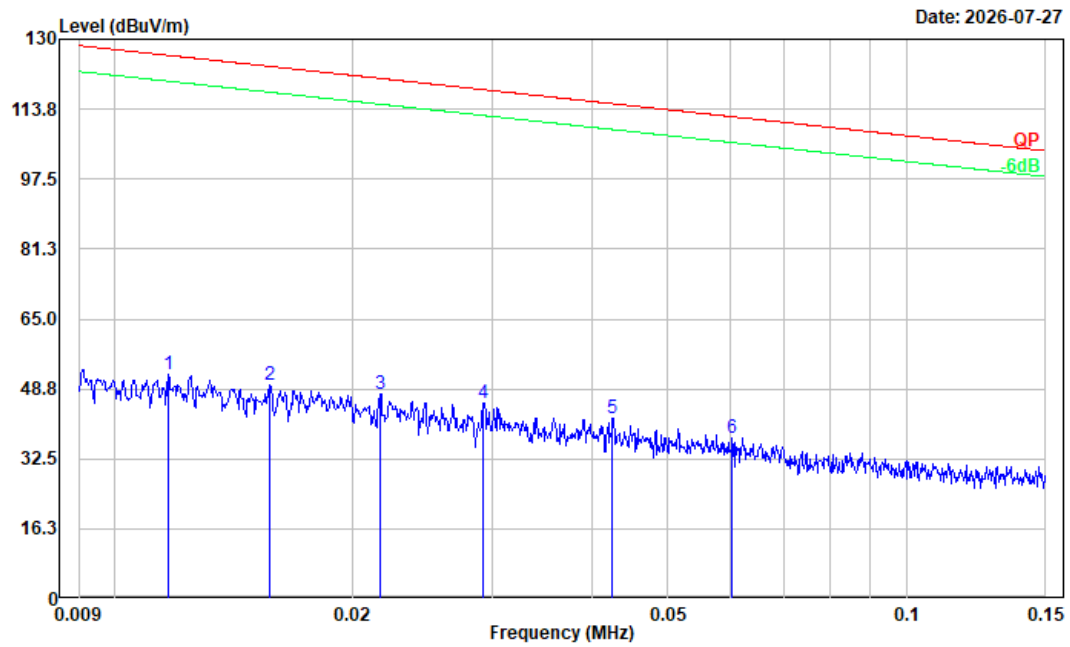


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.012	18.69	33.52	52.21	126.25	74.04	Peak
2	0.016	17.89	31.64	49.53	123.68	74.15	Peak
3	0.022	18.64	28.85	47.49	120.90	73.41	Peak
4	0.029	20.23	25.32	45.55	118.31	72.76	Peak
5	0.043	19.53	22.25	41.78	115.03	73.25	Peak
6	0.060	18.37	19.13	37.50	112.00	74.50	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Parallel
Note: Transmitting Part 15.247_2.4G Wifi

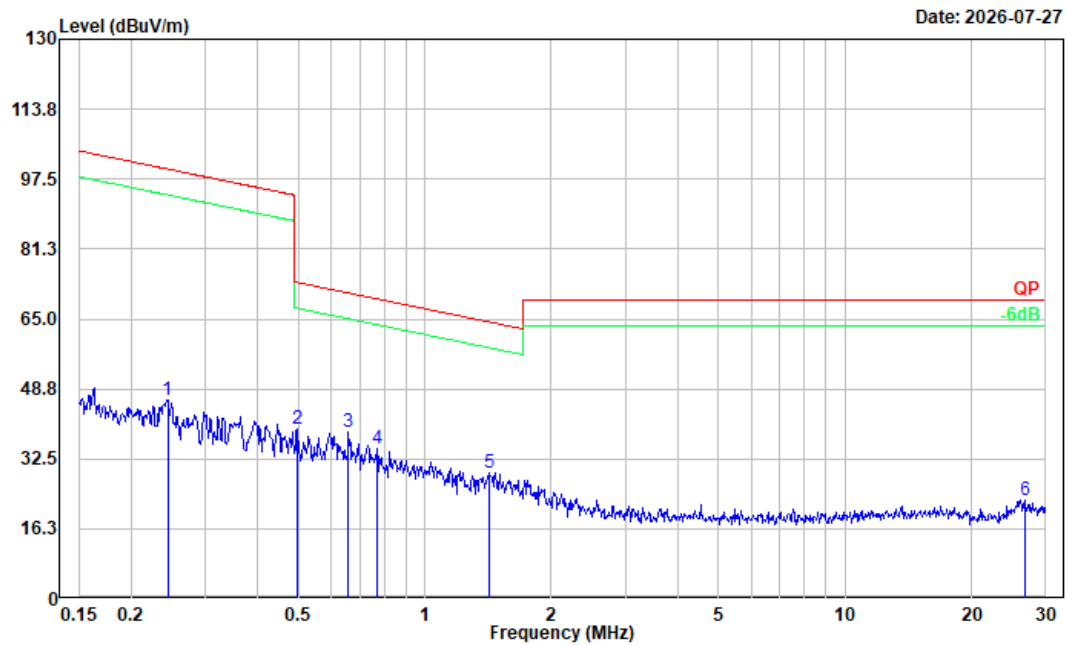


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.244	38.50	7.63	46.13	99.85	53.72	Peak
2	0.497	38.42	0.93	39.35	73.68	34.33	Peak
3	0.658	39.78	-0.87	38.91	71.19	32.28	Peak
4	0.771	37.07	-2.09	34.98	69.78	34.80	Peak
5	1.426	35.17	-5.77	29.40	64.33	34.93	Peak
6	26.699	30.51	-7.57	22.94	69.54	46.60	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Perpendicular
Note: Transmitting Part 15.247_2.4G Wifi

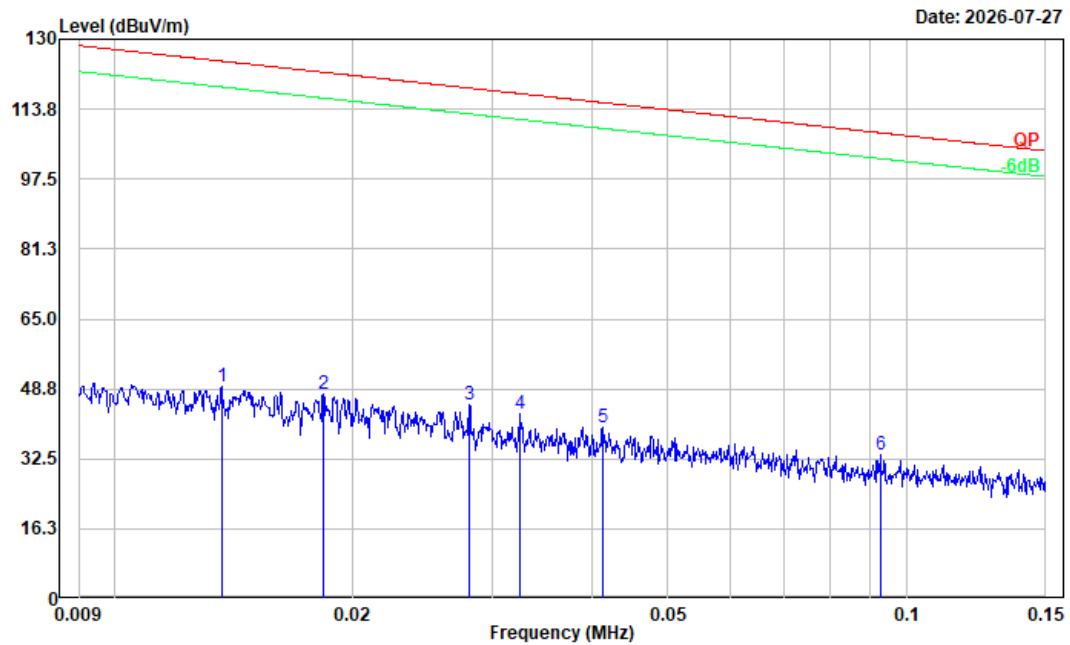


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.014	17.46	31.84	49.30	124.90	75.60	Peak
2	0.018	18.21	29.44	47.65	122.34	74.69	Peak
3	0.028	20.77	24.44	45.21	118.65	73.44	Peak
4	0.033	20.06	22.92	42.98	117.35	74.37	Peak
5	0.041	18.67	21.17	39.84	115.27	75.43	Peak
6	0.093	19.16	14.16	33.32	108.26	74.94	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Perpendicular
Note: Transmitting Part 15.247_2.4G Wifi

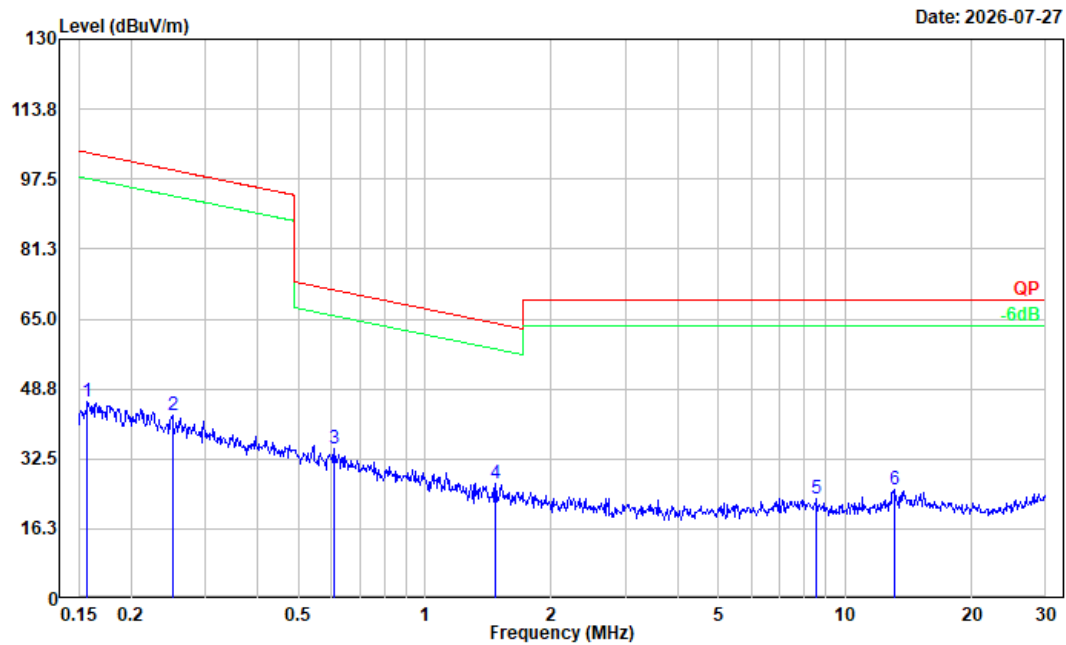


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.157	35.01	10.93	45.94	103.67	57.73	Peak
2	0.251	35.96	6.68	42.64	99.62	56.98	Peak
3	0.611	36.11	-1.32	34.79	71.85	37.06	Peak
4	1.472	33.82	-6.90	26.92	64.04	37.12	Peak
5	8.546	32.49	-9.40	23.09	69.54	46.45	Peak
6	13.127	33.95	-8.71	25.24	69.54	44.30	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:0.2 kHz VBW:1 kHz
Polarization: Ground-Parallel
Note: Transmitting Part 15.247_2.4G Wifi

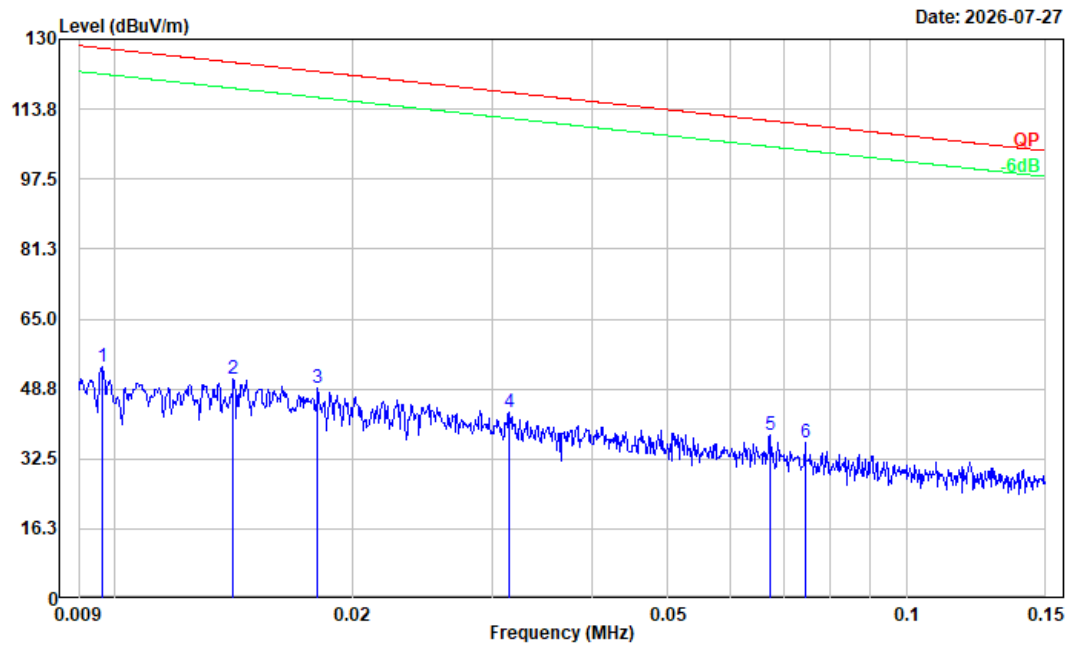


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.010	19.16	34.80	53.96	127.93	73.97	Peak
2	0.014	18.58	32.39	50.97	124.61	73.64	Peak
3	0.018	18.32	30.56	48.88	122.48	73.60	Peak
4	0.032	18.74	24.59	43.33	117.62	74.29	Peak
5	0.067	19.90	18.11	38.01	111.05	73.04	Peak
6	0.074	19.18	17.05	36.23	110.17	73.94	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:9 kHz VBW:30 kHz
Polarization: Ground-Parallel
Note: Transmitting Part 15.247_2.4G Wifi

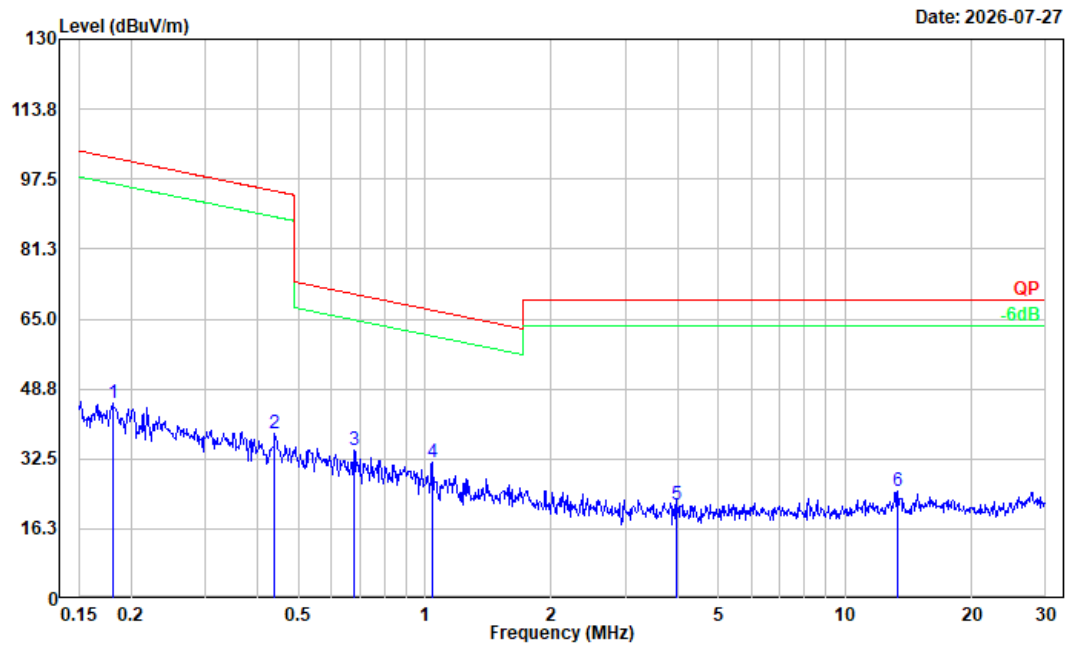


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	0.181	34.87	10.59	45.46	102.47	57.01	Peak
2	0.440	36.36	2.13	38.49	94.74	56.25	Peak
3	0.679	35.47	-1.10	34.37	70.91	36.54	Peak
4	1.043	36.19	-4.61	31.58	67.10	35.52	Peak
5	3.985	30.85	-8.88	21.97	69.54	47.57	Peak
6	13.337	32.99	-7.94	25.05	69.54	44.49	Peak

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:120 kHz VBW:500 kHz
Polarization: horizontal
Note: Transmitting Part 15.247_2.4G Wifi

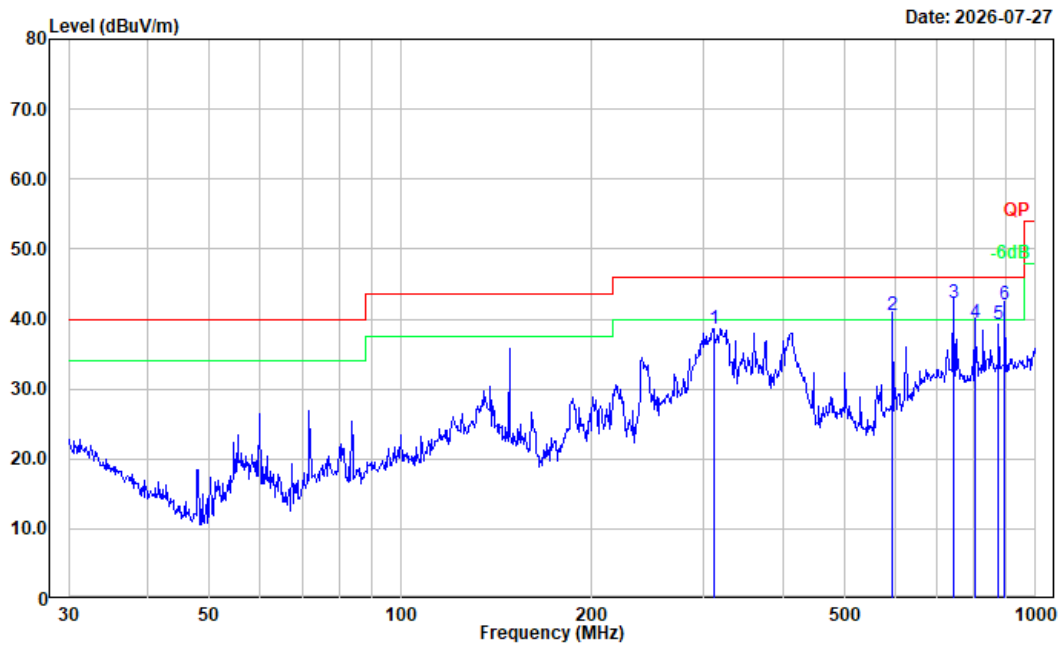

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	311.087	48.56	-9.94	38.62	46.00	7.38	Peak
2	595.133	44.60	-3.98	40.62	46.00	5.38	QP
3	742.259	44.19	-1.95	42.24	46.00	3.76	QP
4	801.786	40.30	-0.82	39.48	46.00	6.52	QP
5	875.247	39.04	0.19	39.23	46.00	6.77	Peak
6	893.857	41.30	0.71	42.01	46.00	3.99	QP

Project No.: 2603T61540E-RF
Tester: Jin He
Condition: RBW:120 kHz VBW:500 kHz
Polarization: vertical
Note: Transmitting Part 15.247_2.4G Wifi

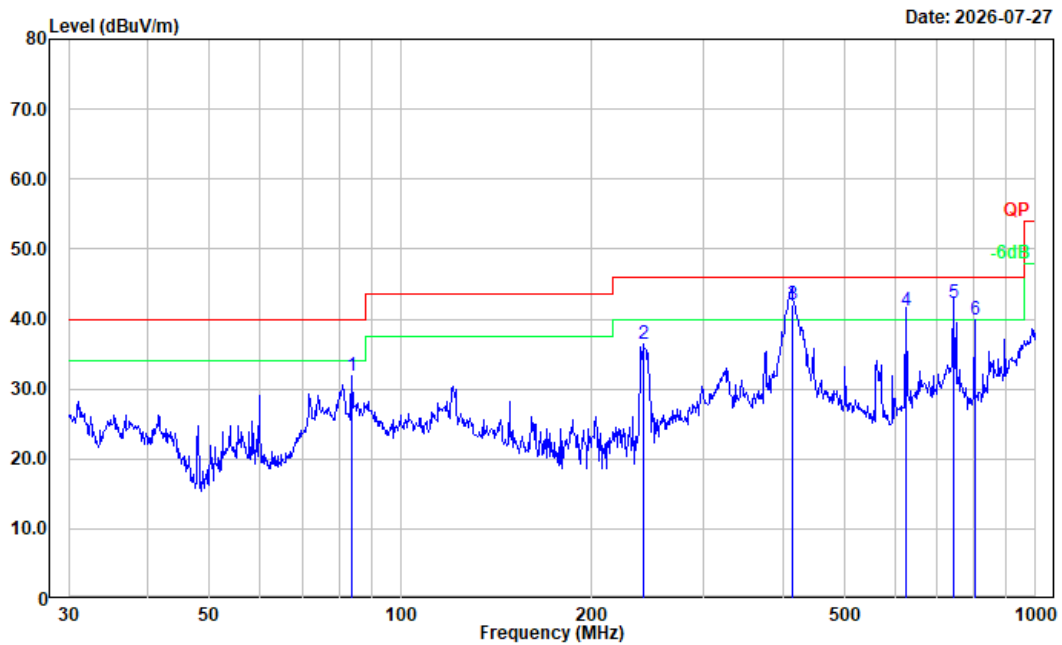

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	83.816	49.02	-17.14	31.88	40.00	8.12	Peak
2	240.830	49.03	-12.61	36.42	46.00	9.58	Peak
3	413.271	49.60	-7.51	42.09	46.00	3.91	QP
4	625.078	45.01	-3.90	41.11	46.00	4.89	QP
5	742.259	44.19	-1.95	42.24	46.00	3.76	QP
6	801.786	40.72	-0.82	39.90	46.00	6.10	Peak

4.2.2 1 GHz – 25 GHz

Sample Number	3N1Z-4	Test Date:	2026/7/20-7/21
Test Site:	966-2	Test Mode:	Transmitting
Tester:	Peter Rong	Test Result:	Pass

Environmental Conditions:

Temperature: (°C)	22.3-24.2	Relative Humidity: (%)	60-66	ATM Pressure: (kPa)	100.1-100.5
----------------------	-----------	---------------------------	-------	------------------------	-------------

Test Equipment List and Details:

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
ETS-Lindgren	Horn Antenna	3115	9912-5985	2023/12/6	2026/12/5
R&S	Spectrum Analyzer	FSV40	101591	2026/2/27	2027/2/26
MICRO-COAX	Coaxial Cable	UFA210A-1-1200-70U300	217423-008	2025/11/10	2026/11/9
MICRO-COAX	Coaxial Cable	UFA210A-1-2362-300300	235780-001	2025/11/10	2026/11/9
A.H	Pre-amplifier	PAM-0118P	628	2025/11/10	2026/11/9
Audix	Test Software	E3	191218 (V9)	N/A	N/A
PASTERNAK	Horn Antenna	PE9852/2F-20	112002	2024/2/4	2027/2/3
Quinstar	Preamplifier	QLW-18405536-JO	15964001005	2025/11/10	2026/11/9
MICRO-COAX	Coaxial Cable	UFB142A-1-2362-200200	235772-001	2025/11/10	2026/11/9
Decentest	Multiplex Switch Test Control Set	DT7220SCU	DQ77925	2025/8/4	2026/8/3
Decentest	Filter Switch Unit	DT7220FSU	DQ77928	2025/8/4	2026/8/3

* Statement of Traceability: China Certification ICT Co., Ltd (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

Test Data:

After pre-scan in the X, Y and Z axes of orientation, the worst case (Z axis) is below:

802.11b Mode Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				2412	MHz		
4824.000	37.75	PK	H	4.69	42.44	74.00	31.56
4824.000	35.57	PK	V	4.69	40.26	74.00	33.74
7236.000	36.38	PK	H	10.12	46.50	74.00	27.50
7236.000	26.85	AV	H	10.12	36.97	54.00	17.03
7236.000	36.41	PK	V	10.12	46.53	74.00	27.47
7236.000	27.09	AV	V	10.12	37.21	54.00	16.79
Middle Channel:				2437	MHz		
4874.000	36.11	PK	H	4.85	40.96	74.00	33.04
4874.000	35.87	PK	V	4.85	40.72	74.00	33.28
7311.000	36.26	PK	H	10.55	46.81	74.00	27.19
7311.000	25.87	AV	H	10.55	36.42	54.00	17.58
7311.000	36.74	PK	V	10.55	47.29	74.00	26.71
7311.000	25.94	AV	V	10.55	36.49	54.00	17.51
High Channel:				2462	MHz		
4924.000	36.79	PK	H	4.90	41.69	74.00	32.31
4924.000	36.03	PK	V	4.90	40.93	74.00	33.07
7386.000	36.14	PK	H	10.75	46.89	74.00	27.11
7386.000	25.85	AV	H	10.75	36.60	54.00	17.40
7386.000	36.34	PK	V	10.75	47.09	74.00	26.91
7386.000	25.64	AV	V	10.75	36.39	54.00	17.61

802.11b Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				2412	MHz		
4824.000	36.77	PK	H	4.69	41.46	74.00	32.54
4824.000	37.15	PK	V	4.69	41.84	74.00	32.16
7236.000	36.95	PK	H	10.12	47.07	74.00	26.93
7236.000	26.03	AV	H	10.12	36.15	54.00	17.85
7236.000	36.47	PK	V	10.12	46.59	74.00	27.41
7236.000	26.14	AV	V	10.12	36.26	54.00	17.74
Middle Channel:				2437	MHz		
4874.000	37.27	PK	H	4.85	42.12	74.00	31.88
4874.000	36.20	PK	V	4.85	41.05	74.00	32.95
7311.000	36.69	PK	H	10.55	47.24	74.00	26.76
7311.000	26.43	AV	H	10.55	36.98	54.00	17.02
7311.000	35.71	PK	V	10.55	46.26	74.00	27.74
7311.000	26.20	AV	V	10.55	36.75	54.00	17.25
High Channel:				2462	MHz		
4924.000	36.74	PK	H	4.90	41.64	74.00	32.36
4924.000	35.88	PK	V	4.90	40.78	74.00	33.22
7386.000	36.44	PK	H	10.75	47.19	74.00	26.81
7386.000	25.68	AV	H	10.75	36.43	54.00	17.57
7386.000	36.39	PK	V	10.75	47.14	74.00	26.86
7386.000	25.81	AV	V	10.75	36.56	54.00	17.44

802.11g Mode Chain 0:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				2412	MHz		
4824.000	37.06	PK	H	4.69	41.75	74.00	32.25
4824.000	35.00	PK	V	4.69	39.69	74.00	34.31
7236.000	38.38	PK	H	10.12	48.50	74.00	25.50
7236.000	26.73	AV	H	10.12	36.85	54.00	17.15
7236.000	36.99	PK	V	10.12	47.11	74.00	26.89
7236.000	26.90	AV	V	10.12	37.02	54.00	16.98
Middle Channel:				2437	MHz		
4874.000	36.75	PK	H	4.85	41.60	74.00	32.40
4874.000	37.95	PK	V	4.85	42.80	74.00	31.20
7311.000	36.69	PK	H	10.55	47.24	74.00	26.76
7311.000	25.48	AV	H	10.55	36.03	54.00	17.97
7311.000	36.83	PK	V	10.55	47.38	74.00	26.62
7311.000	25.38	AV	V	10.55	35.93	54.00	18.07
High Channel:				2462	MHz		
4924.000	36.70	PK	H	4.90	41.60	74.00	32.40
4924.000	35.49	PK	V	4.90	40.39	74.00	33.61
7386.000	36.94	PK	H	10.75	47.69	74.00	26.31
7386.000	26.13	AV	H	10.75	36.88	54.00	17.12
7386.000	36.58	PK	V	10.75	47.33	74.00	26.67
7386.000	25.77	AV	V	10.75	36.52	54.00	17.48

802.11g Mode Chain 1:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				2412	MHz		
4824.000	36.12	PK	H	4.69	40.81	74.00	33.19
4824.000	36.37	PK	V	4.69	41.06	74.00	32.94
7236.000	36.93	PK	H	10.12	47.05	74.00	26.95
7236.000	26.67	AV	H	10.12	36.79	54.00	17.21
7236.000	37.04	PK	V	10.12	47.16	74.00	26.84
7236.000	26.87	AV	V	10.12	36.99	54.00	17.01
Middle Channel:				2437	MHz		
4874.000	36.03	PK	H	4.85	40.88	74.00	33.12
4874.000	36.28	PK	V	4.85	41.13	74.00	32.87
7311.000	36.41	PK	H	10.55	46.96	74.00	27.04
7311.000	25.37	AV	H	10.55	35.92	54.00	18.08
7311.000	36.48	PK	V	10.55	47.03	74.00	26.97
7311.000	26.05	AV	V	10.55	36.60	54.00	17.40
High Channel:				2462	MHz		
4924.000	36.79	PK	H	4.90	41.69	74.00	32.31
4924.000	36.84	PK	V	4.90	41.74	74.00	32.26
7386.000	36.86	PK	H	10.75	47.61	74.00	26.39
7386.000	25.47	AV	H	10.75	36.22	54.00	17.78
7386.000	36.29	PK	V	10.75	47.04	74.00	26.96
7386.000	26.10	AV	V	10.75	36.85	54.00	17.15

802.11n ht20 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				2412	MHz		
4824.000	34.64	PK	H	4.69	39.33	74.00	34.67
4824.000	34.56	PK	V	4.69	39.25	74.00	34.75
7236.000	36.56	PK	H	10.12	46.68	74.00	27.32
7236.000	26.66	AV	H	10.12	36.78	54.00	17.22
7236.000	36.55	PK	V	10.12	46.67	74.00	27.33
7236.000	26.80	AV	V	10.12	36.92	54.00	17.08
Middle Channel:				2437	MHz		
4874.000	36.73	PK	H	4.85	41.58	74.00	32.42
4874.000	37.49	PK	V	4.85	42.34	74.00	31.66
7311.000	36.28	PK	H	10.55	46.83	74.00	27.17
7311.000	25.69	AV	H	10.55	36.24	54.00	17.76
7311.000	37.15	PK	V	10.55	47.70	74.00	26.30
7311.000	25.99	AV	V	10.55	36.54	54.00	17.46
High Channel:				2462	MHz		
4924.000	36.55	PK	H	4.90	41.45	74.00	32.55
4924.000	35.96	PK	V	4.90	40.86	74.00	33.14
7386.000	36.79	PK	H	10.75	47.54	74.00	26.46
7386.000	25.49	AV	H	10.75	36.24	54.00	17.76
7386.000	36.67	PK	V	10.75	47.42	74.00	26.58
7386.000	25.78	AV	V	10.75	36.53	54.00	17.47

802.11n ht40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel:				2422	MHz		
4844.000	36.96	PK	H	4.74	41.70	74.00	32.30
4844.000	35.42	PK	V	4.74	40.16	74.00	33.84
7266.000	36.63	PK	H	10.35	46.98	74.00	27.02
7266.000	26.86	AV	H	10.35	37.21	54.00	16.79
7266.000	37.80	PK	V	10.35	48.15	74.00	25.85
7266.000	26.52	AV	V	10.35	36.87	54.00	17.13
Middle Channel:				2437	MHz		
4874.000	36.85	PK	H	4.85	41.70	74.00	32.30
4874.000	36.13	PK	V	4.85	40.98	74.00	33.02
7311.000	35.77	PK	H	10.55	46.32	74.00	27.68
7311.000	25.01	AV	H	10.55	35.56	54.00	18.44
7311.000	36.99	PK	V	10.55	47.54	74.00	26.46
7311.000	26.11	AV	V	10.55	36.66	54.00	17.34
High Channel:				2452	MHz		
4904.000	36.48	PK	H	4.95	41.43	74.00	32.57
4904.000	36.44	PK	V	4.95	41.39	74.00	32.61
7356.000	36.56	PK	H	10.65	47.21	74.00	26.79
7356.000	25.77	AV	H	10.65	36.42	54.00	17.58
7356.000	36.62	PK	V	10.65	47.27	74.00	26.73
7356.000	26.38	AV	V	10.65	37.03	54.00	16.97

802.11ax20 Mode:


Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel: 2412 MHz							
4824.000	36.03	PK	H	4.69	40.72	74.00	33.28
4824.000	36.00	PK	V	4.69	40.69	74.00	33.31
7236.000	37.55	PK	H	10.12	47.67	74.00	26.33
7236.000	27.44	AV	H	10.12	37.56	54.00	16.44
7236.000	37.30	PK	V	10.12	47.42	74.00	26.58
7236.000	26.89	AV	V	10.12	37.01	54.00	16.99
Middle Channel: 2437 MHz							
4874.000	36.52	PK	H	4.85	41.37	74.00	32.63
4874.000	36.49	PK	V	4.85	41.34	74.00	32.66
7311.000	36.77	PK	H	10.55	47.32	74.00	26.68
7311.000	25.88	AV	H	10.55	36.43	54.00	17.57
7311.000	36.49	PK	V	10.55	47.04	74.00	26.96
7311.000	26.31	AV	V	10.55	36.86	54.00	17.14
High Channel: 2462 MHz							
4924.000	36.47	PK	H	4.90	41.37	74.00	32.63
4924.000	37.19	PK	V	4.90	42.09	74.00	31.91
7386.000	37.25	PK	H	10.75	48.00	74.00	26.00
7386.000	26.44	AV	H	10.75	37.19	54.00	16.81
7386.000	36.80	PK	V	10.75	47.55	74.00	26.45
7386.000	25.97	AV	V	10.75	36.72	54.00	17.28

802.11ax40 Mode:

Frequency (MHz)	Receiver		Polar (H/V)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)
	Reading (dBμV)	Remark					
Low Channel: 2422 MHz							
4844.000	35.81	PK	H	4.74	40.55	74.00	33.45
4844.000	34.92	PK	V	4.74	39.66	74.00	34.34
7266.000	37.18	PK	H	10.35	47.53	74.00	26.47
7266.000	26.77	AV	H	10.35	37.12	54.00	16.88
7266.000	36.80	PK	V	10.35	47.15	74.00	26.85
7266.000	26.63	AV	V	10.35	36.98	54.00	17.02
Middle Channel: 2437 MHz							
4874.000	36.35	PK	H	4.85	41.20	74.00	32.80
4874.000	35.49	PK	V	4.85	40.34	74.00	33.66
7311.000	36.29	PK	H	10.55	46.84	74.00	27.16
7311.000	25.82	AV	H	10.55	36.37	54.00	17.63
7311.000	36.34	PK	V	10.55	46.89	74.00	27.11
7311.000	25.66	AV	V	10.55	36.21	54.00	17.79
High Channel: 2452 MHz							
4904.000	36.84	PK	H	4.95	41.79	74.00	32.21
4904.000	37.96	PK	V	4.95	42.91	74.00	31.09
7356.000	36.13	PK	H	10.65	46.78	74.00	27.22
7356.000	25.87	AV	H	10.65	36.52	54.00	17.48
7356.000	37.15	PK	V	10.65	47.80	74.00	26.20
7356.000	26.14	AV	V	10.65	36.79	54.00	17.21


Worst radiation spurious emissions margin test plots for each mode**Test Plots for 1GHz~18GHz:**

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 2.4G WiFi b Low Channel 2412MHz Chain 0

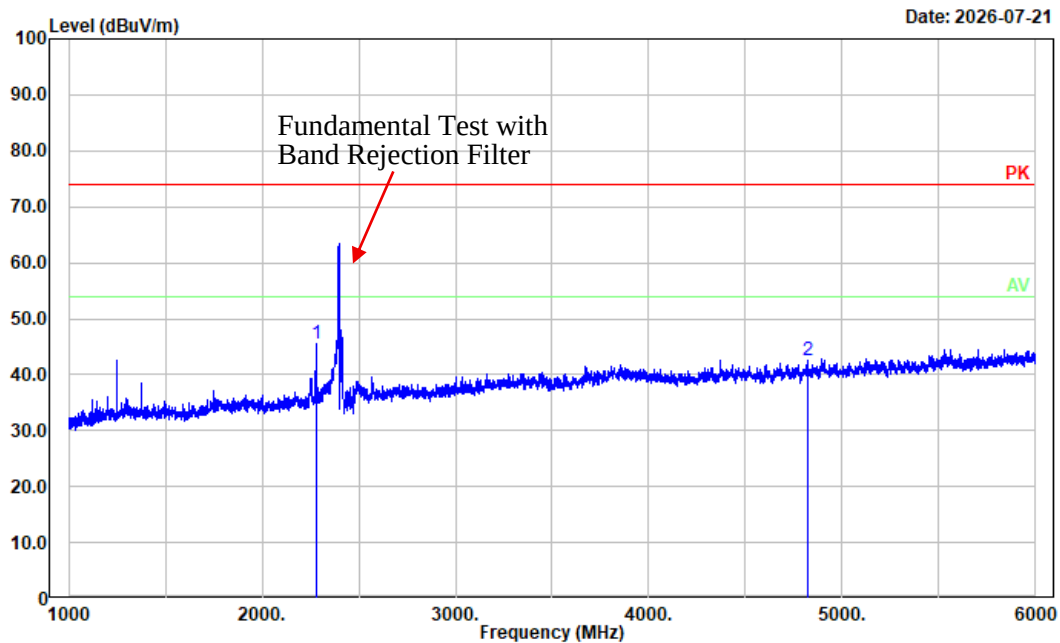


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2278.000	48.04	-2.63	45.41	74.00	28.59	Peak
2	4824.000	37.75	4.69	42.44	74.00	31.56	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi b Low Channel 2412MHz Chain 0

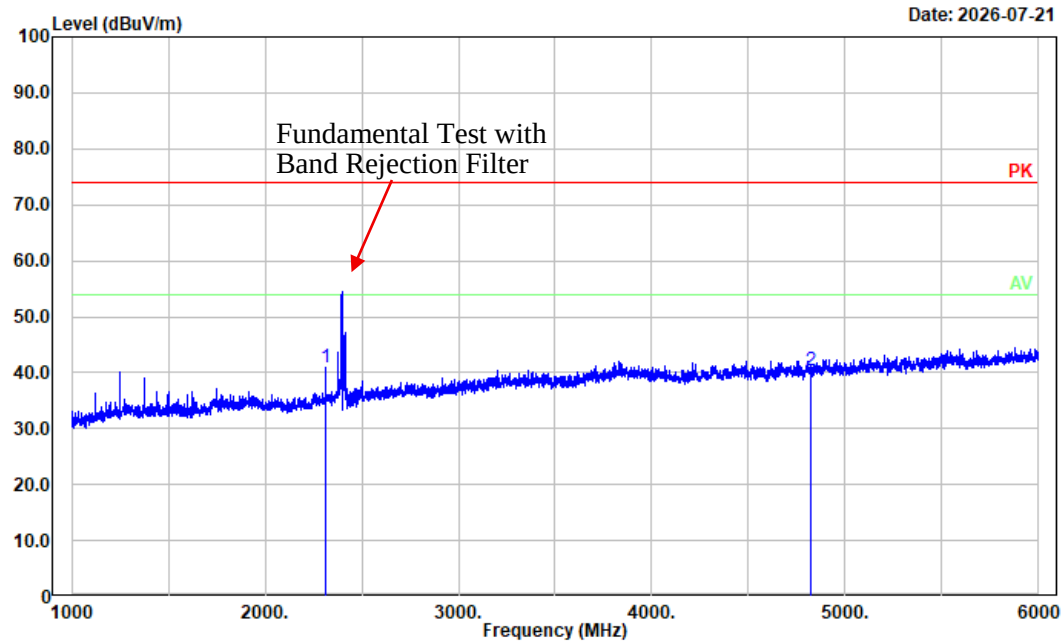


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2315.000	43.53	-2.48	41.05	74.00	32.95	Peak
2	4824.000	35.57	4.69	40.26	74.00	33.74	Peak

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: horizontal
 Note: 2.4G WiFi b Low Channel 2412MHz Chain 0

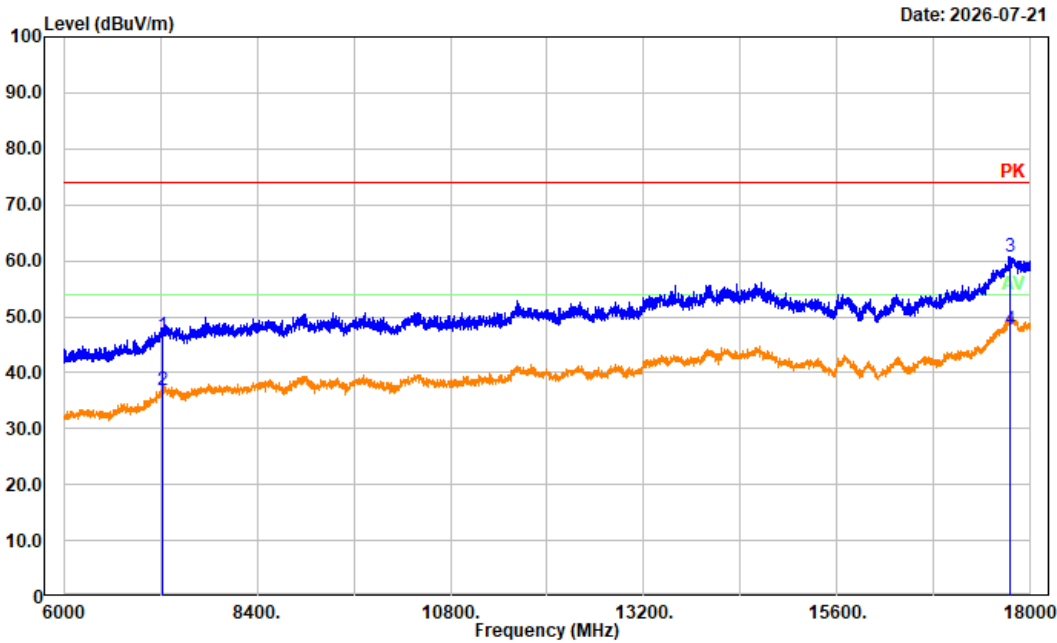


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	36.38	10.12	46.50	74.00	27.50	Peak
2	7236.000	26.85	10.12	36.97	54.00	17.03	Average
3	17750.400	39.60	21.18	60.78	74.00	13.22	Peak
4	17750.400	26.62	21.18	47.80	54.00	6.20	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 2.4G WiFi b Low Channel 2412MHz Chain 0

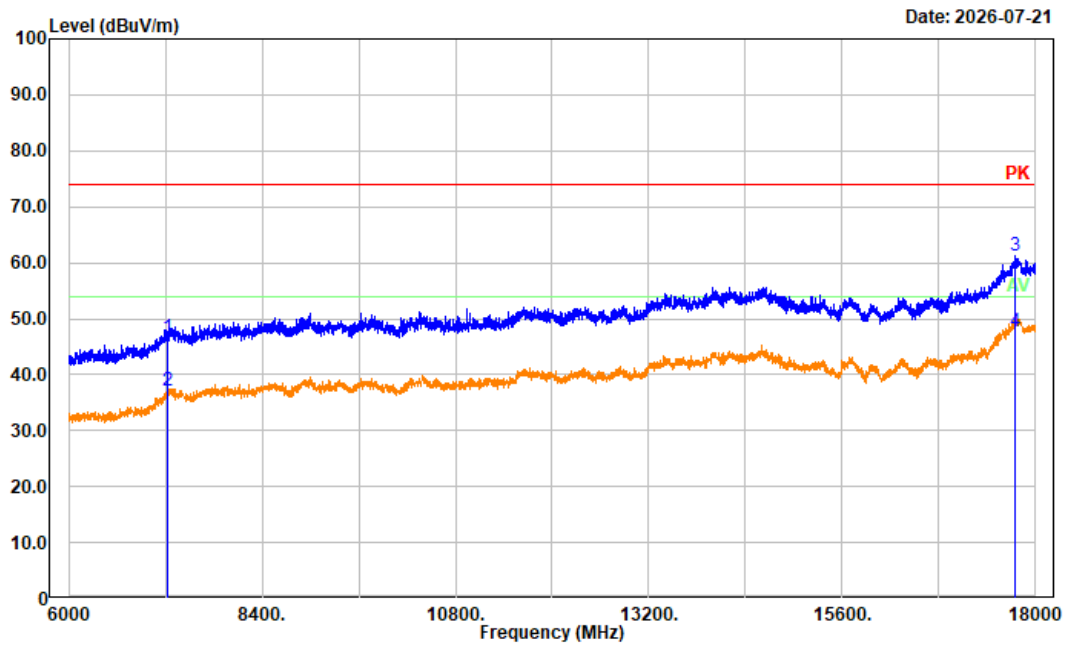


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	36.41	10.12	46.53	74.00	27.47	Peak
2	7236.000	27.09	10.12	37.21	54.00	16.79	Average
3	17752.800	40.01	21.19	61.20	74.00	12.80	Peak
4	17752.800	26.62	21.19	47.81	54.00	6.19	Average

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: horizontal
 Note: 2.4G WiFi b Middle Channel 2437MHz Chain 1

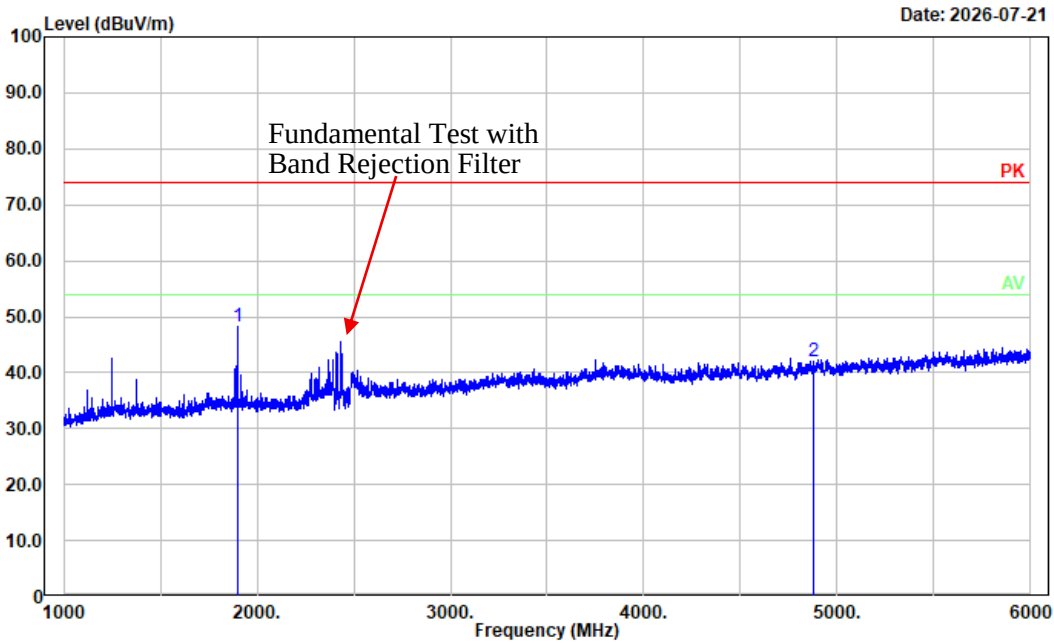


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1899.000	51.56	-3.21	48.35	74.00	25.65	Peak
2	4874.000	37.27	4.85	42.12	74.00	31.88	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi b Middle Channel 2437MHz Chain 1

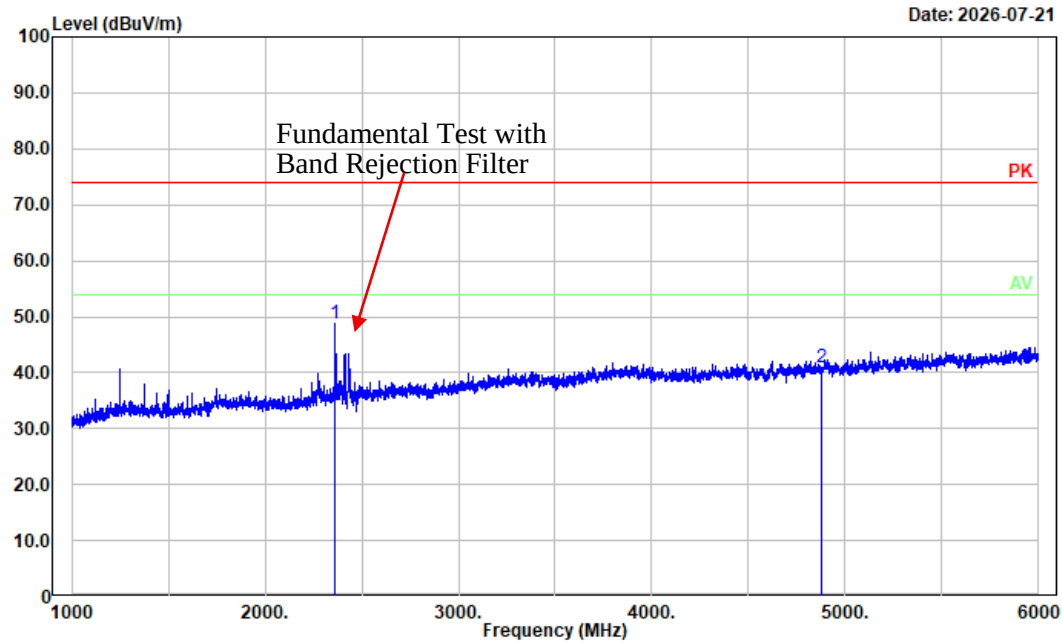


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2363.000	51.16	-2.27	48.89	74.00	25.11	Peak
2	4874.000	36.20	4.85	41.05	74.00	32.95	Peak

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: horizontal
 Note: 2.4G WiFi b Middle Channel 2437MHz Chain 1

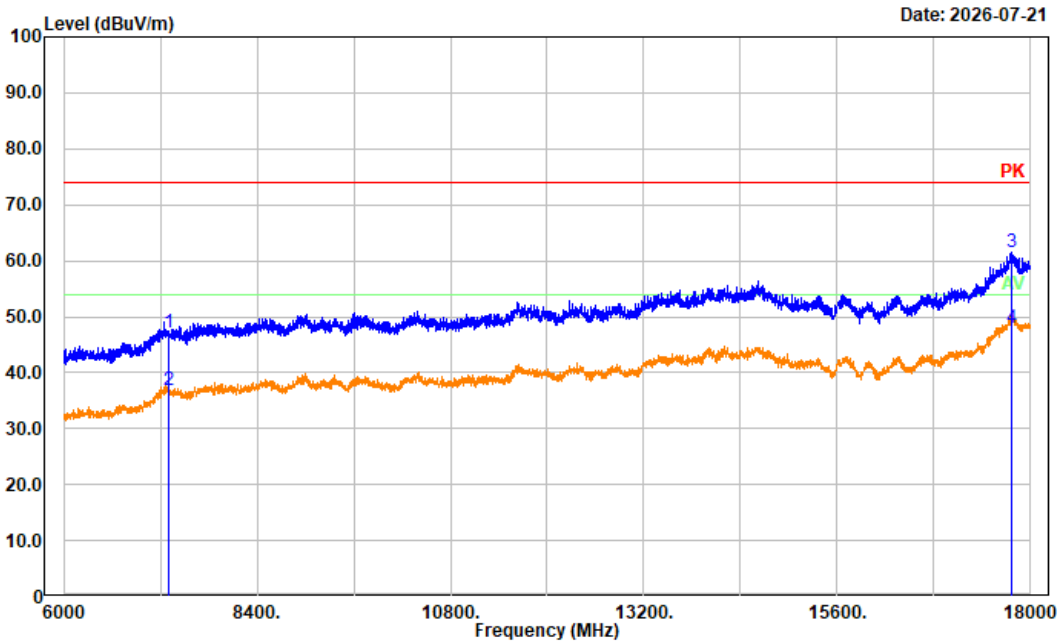


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7311.000	36.69	10.55	47.24	74.00	26.76	Peak
2	7311.000	26.43	10.55	36.98	54.00	17.02	Average
3	17755.200	40.40	21.20	61.60	74.00	12.40	Peak
4	17755.200	26.66	21.20	47.86	54.00	6.14	Average

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: vertical
 Note: 2.4G WiFi b Middle Channel 2437MHz Chain 1

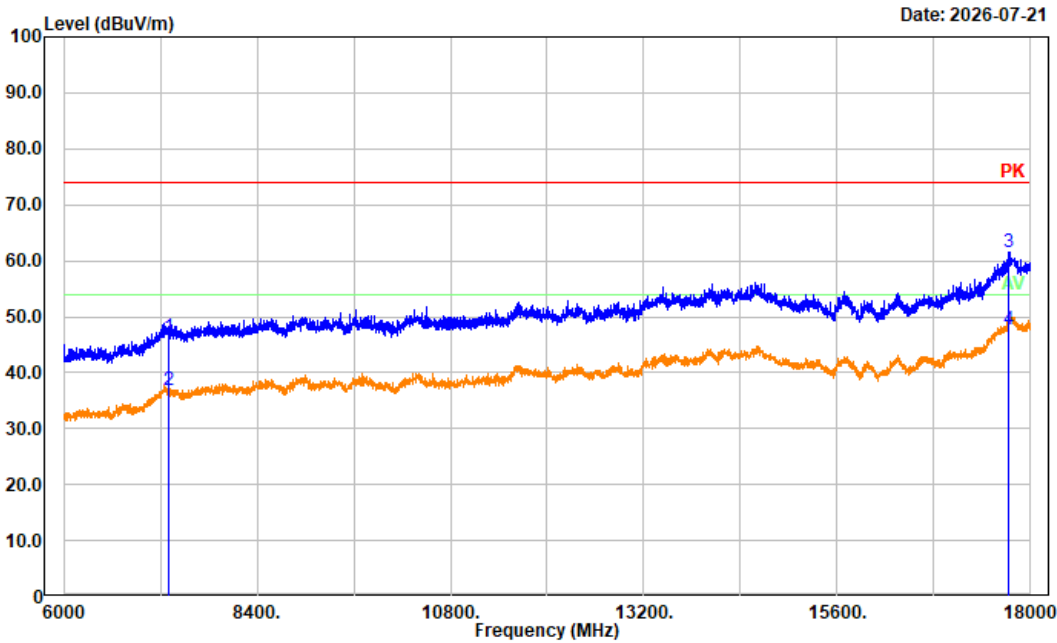


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7311.000	35.71	10.55	46.26	74.00	27.74	Peak
2	7311.000	26.20	10.55	36.75	54.00	17.25	Average
3	17733.600	40.31	21.12	61.43	74.00	12.57	Peak
4	17733.600	26.62	21.12	47.74	54.00	6.26	Average

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: horizontal
 Note: 2.4G WiFi g Low Channel 2412MHz Chain 0

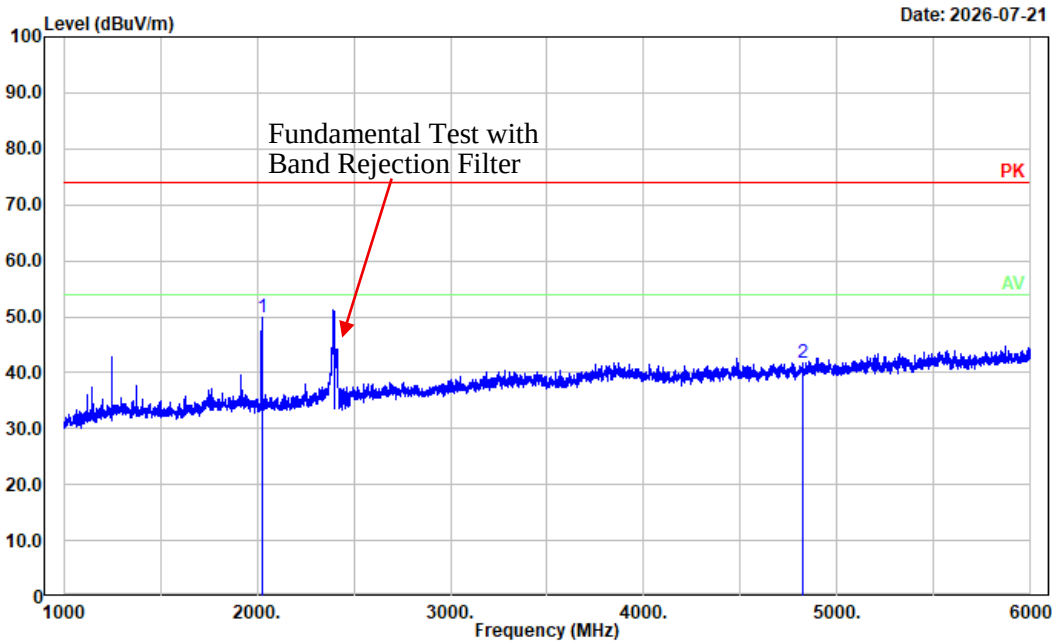


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2024.000	52.84	-3.07	49.77	74.00	24.23	Peak
2	4824.000	37.06	4.69	41.75	74.00	32.25	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi g Low Channel 2412MHz Chain 0

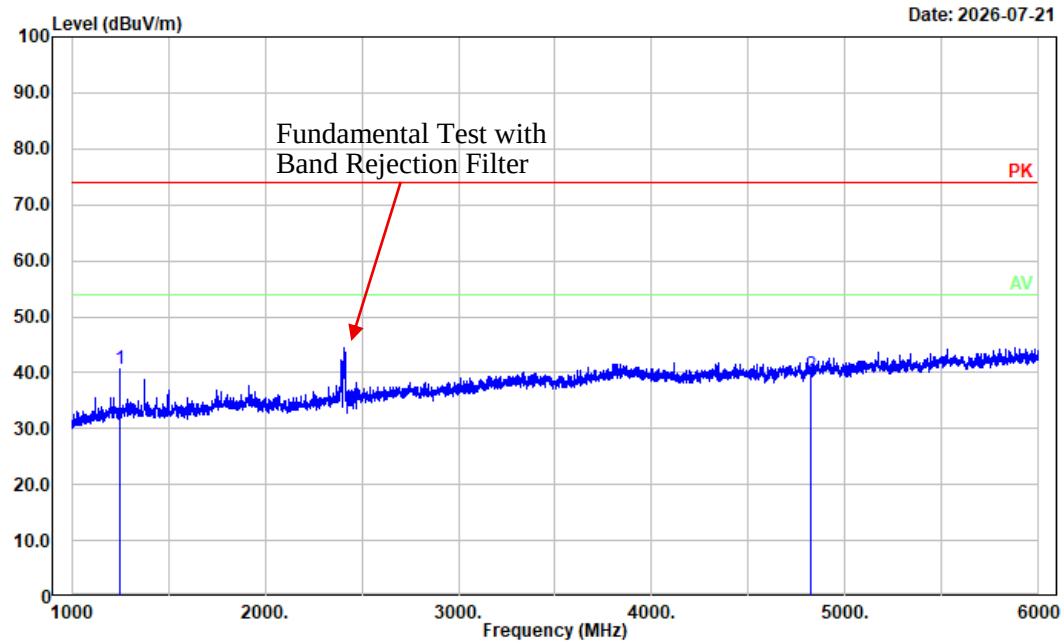


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	45.54	-4.99	40.55	74.00	33.45	Peak
2	4824.000	35.00	4.69	39.69	74.00	34.31	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 2.4G WiFi g Low Channel 2412MHz Chain 0

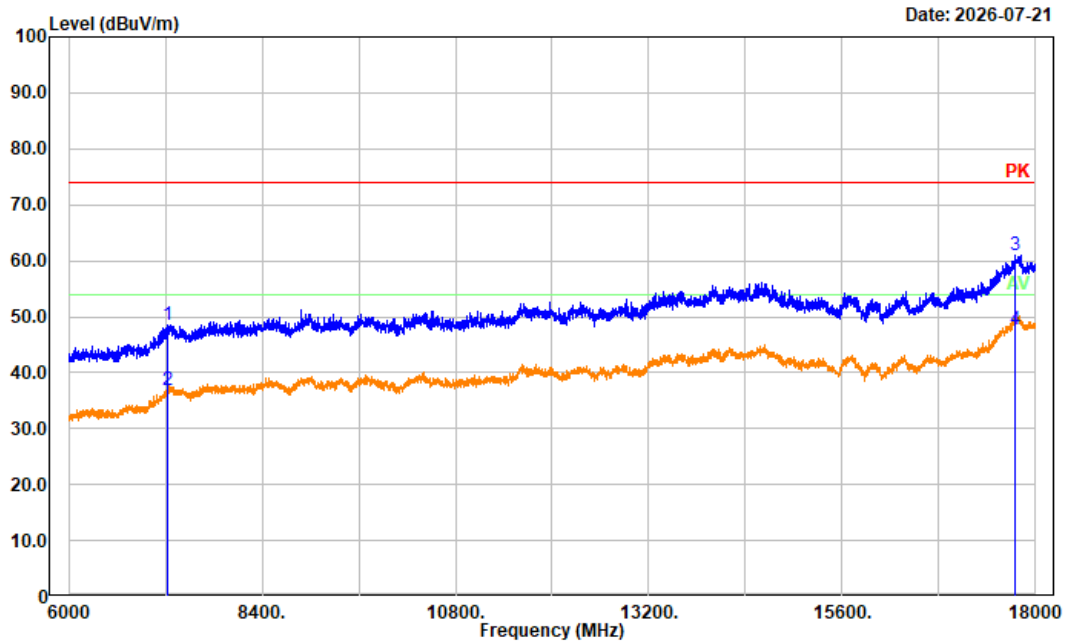


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	38.38	10.12	48.50	74.00	25.50	Peak
2	7236.000	26.73	10.12	36.85	54.00	17.15	Average
3	17745.600	39.92	21.17	61.09	74.00	12.91	Peak
4	17745.600	26.66	21.17	47.83	54.00	6.17	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 2.4G WiFi g Low Channel 2412MHz Chain 0

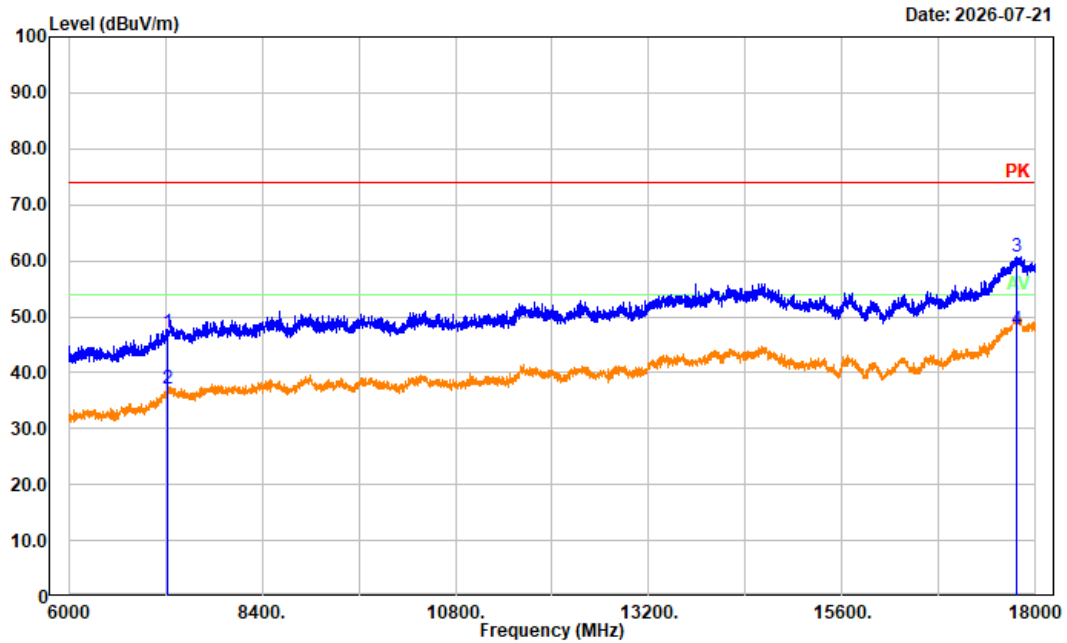


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	36.99	10.12	47.11	74.00	26.89	Peak
2	7236.000	26.90	10.12	37.02	54.00	16.98	Average
3	17767.200	39.37	21.24	60.61	74.00	13.39	Peak
4	17767.200	26.55	21.24	47.79	54.00	6.21	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 2.4G WiFi g Low Channel 2412MHz Chain 1

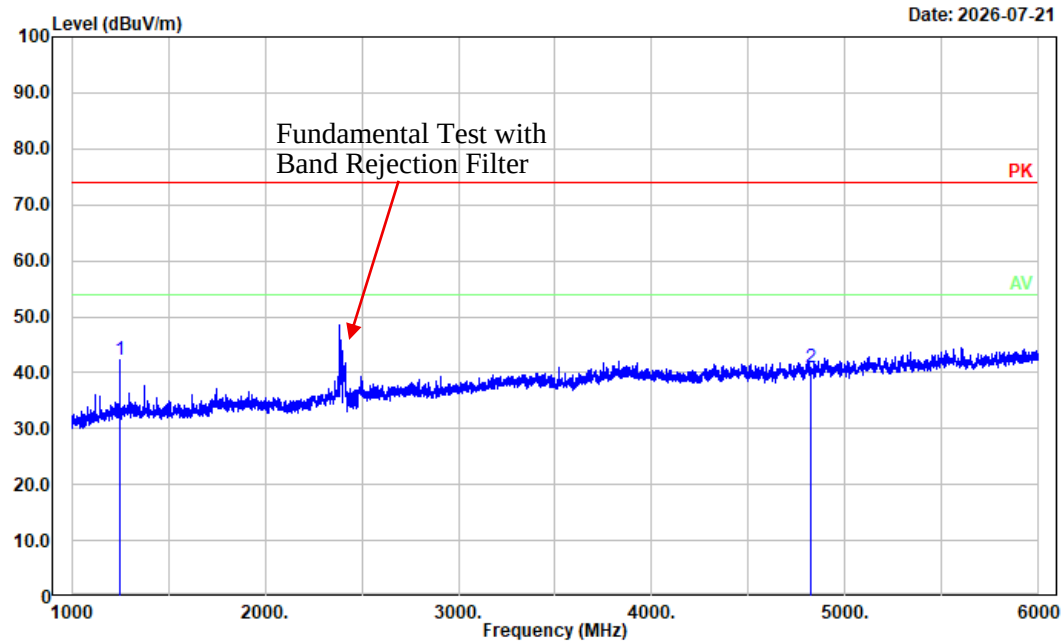


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	47.15	-4.99	42.16	74.00	31.84	Peak
2	4824.000	36.12	4.69	40.81	74.00	33.19	Peak

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: vertical
 Note: 2.4G WiFi g Low Channel 2412MHz Chain 1

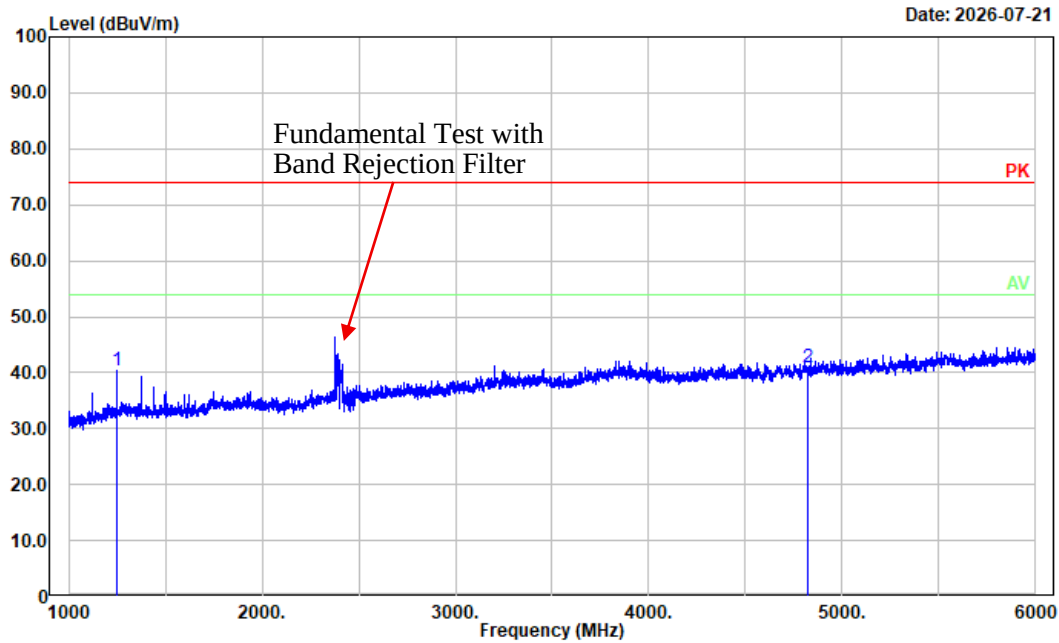


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	45.38	-4.99	40.39	74.00	33.61	Peak
2	4824.000	36.37	4.69	41.06	74.00	32.94	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 2.4G WiFi g Low Channel 2412MHz Chain 1

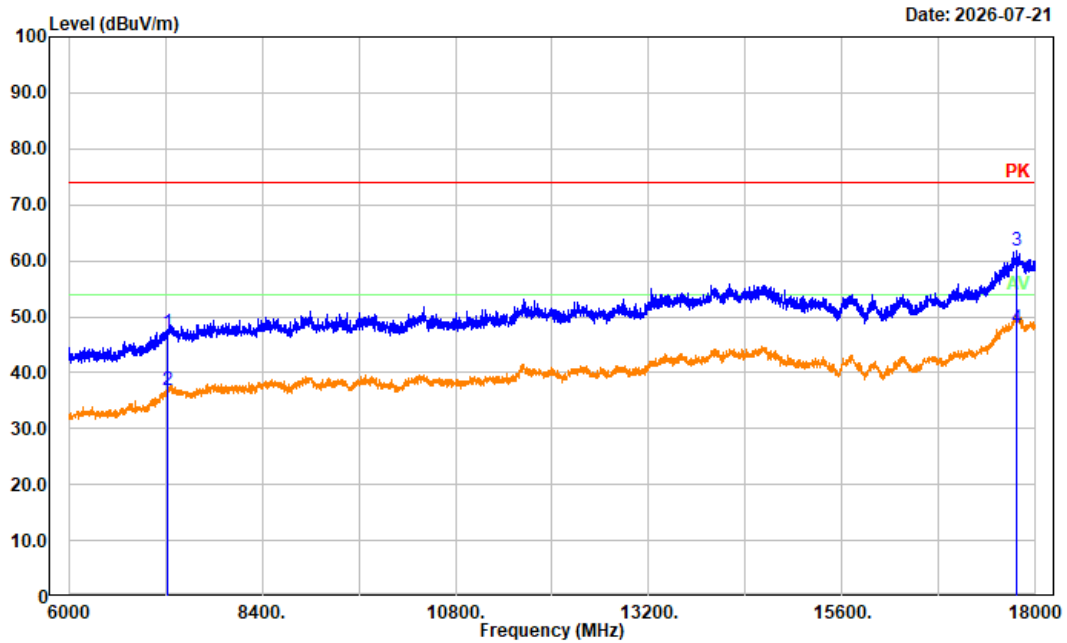


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	36.93	10.12	47.05	74.00	26.95	Peak
2	7236.000	26.67	10.12	36.79	54.00	17.21	Average
3	17757.600	40.61	21.20	61.81	74.00	12.19	Peak
4	17757.600	26.67	21.20	47.87	54.00	6.13	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 2.4G WiFi g Low Channel 2412MHz Chain 1

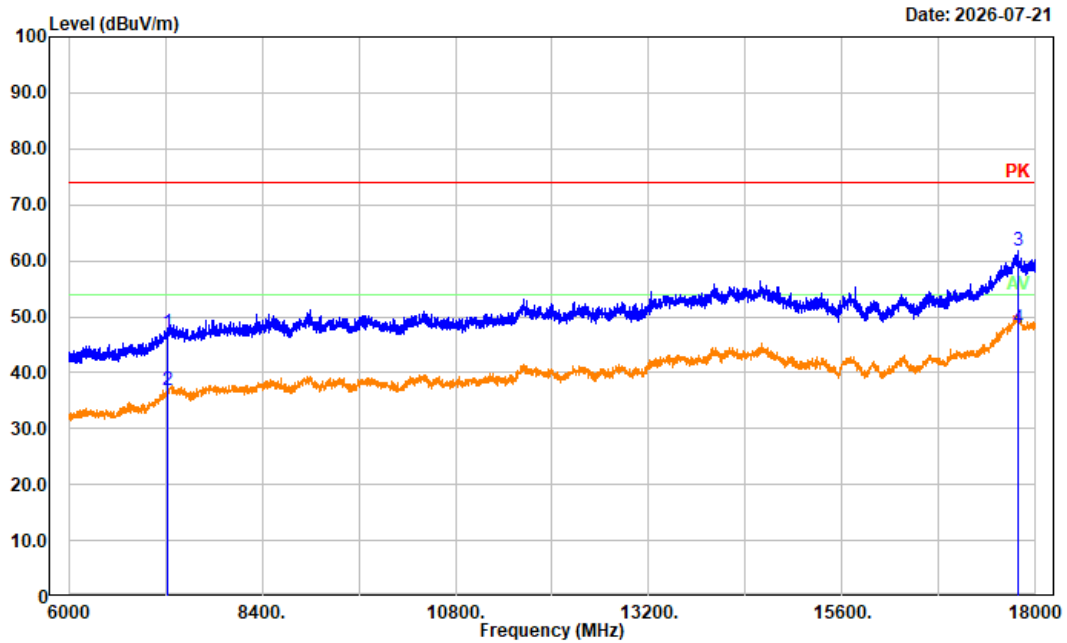


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	37.04	10.12	47.16	74.00	26.84	Peak
2	7236.000	26.87	10.12	36.99	54.00	17.01	Average
3	17786.400	40.56	21.30	61.86	74.00	12.14	Peak
4	17786.400	26.57	21.30	47.87	54.00	6.13	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 2.4G WiFi n20 Low Channel 2412MHz

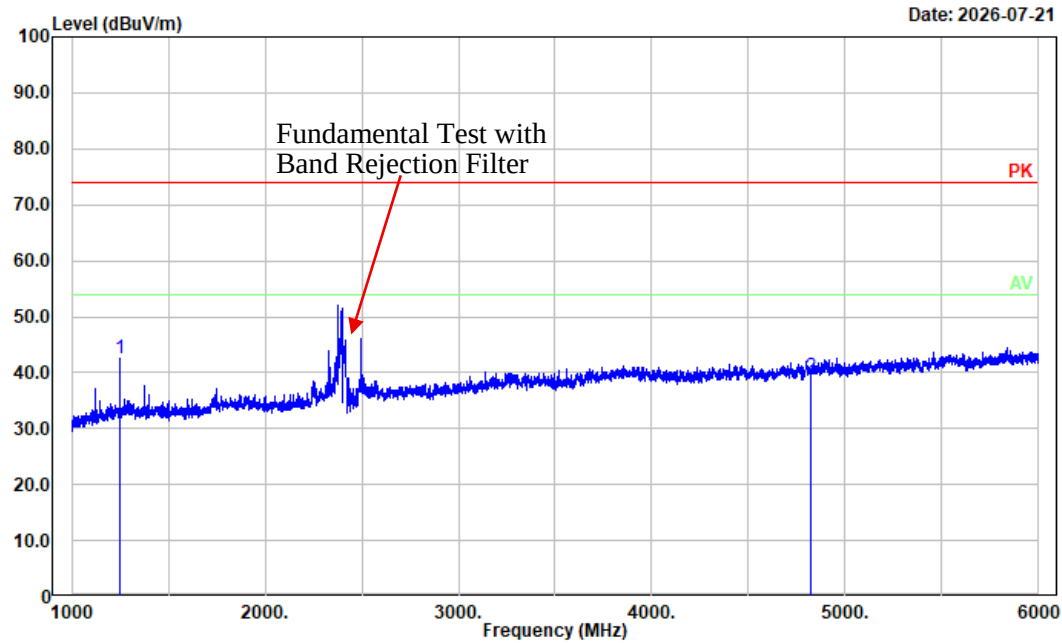


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	47.65	-4.99	42.66	74.00	31.34	Peak
2	4824.000	34.64	4.69	39.33	74.00	34.67	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi n20 Low Channel 2412MHz

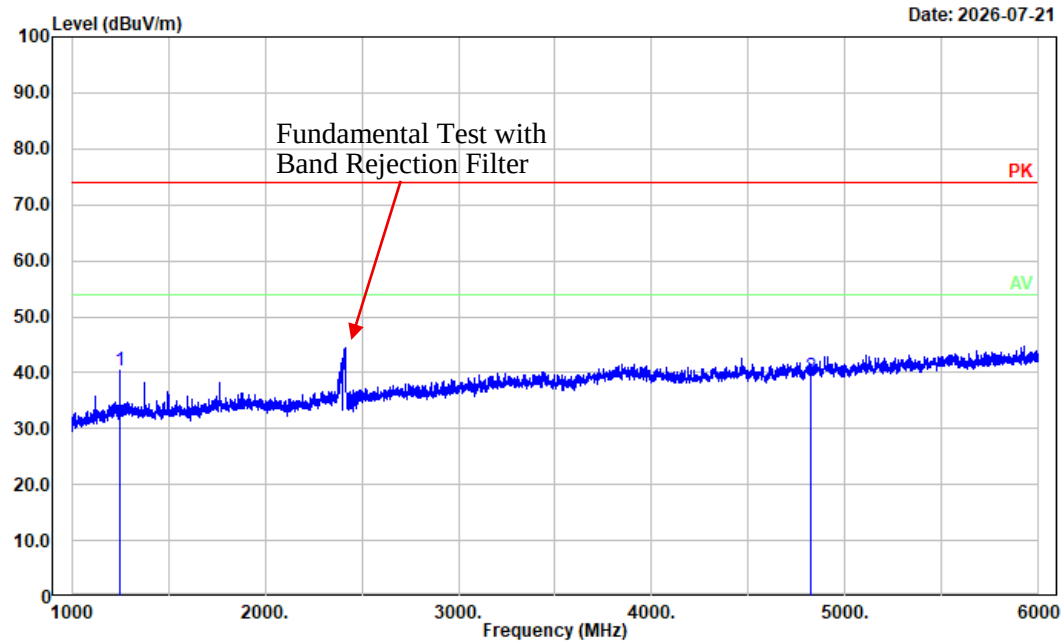


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	45.44	-4.99	40.45	74.00	33.55	Peak
2	4824.000	34.56	4.69	39.25	74.00	34.75	Peak

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
 Polarization: horizontal
 Note: 2.4G WiFi n20 Low Channel 2412MHz

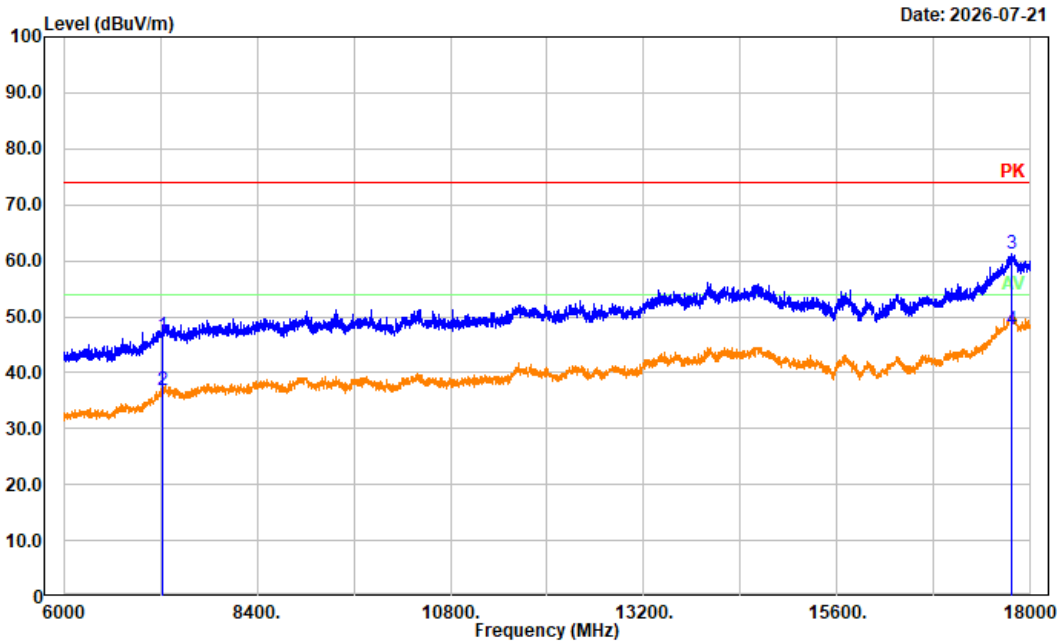


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	36.56	10.12	46.68	74.00	27.32	Peak
2	7236.000	26.66	10.12	36.78	54.00	17.22	Average
3	17757.600	40.11	21.20	61.31	74.00	12.69	Peak
4	17757.600	26.62	21.20	47.82	54.00	6.18	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 2.4G WiFi n20 Low Channel 2412MHz

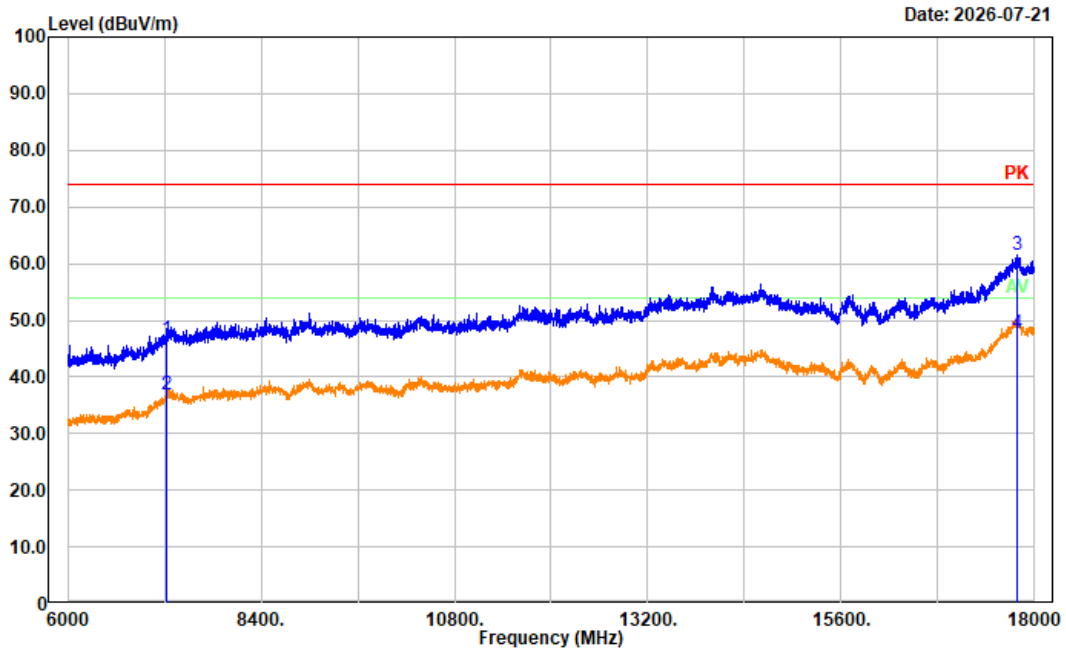


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	36.55	10.12	46.67	74.00	27.33	Peak
2	7236.000	26.80	10.12	36.92	54.00	17.08	Average
3	17784.000	40.30	21.29	61.59	74.00	12.41	Peak
4	17784.000	26.38	21.29	47.67	54.00	6.33	Average

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz
 Polarization: horizontal
 Note: 2.4G WiFi n40 Low Channel 2422MHz

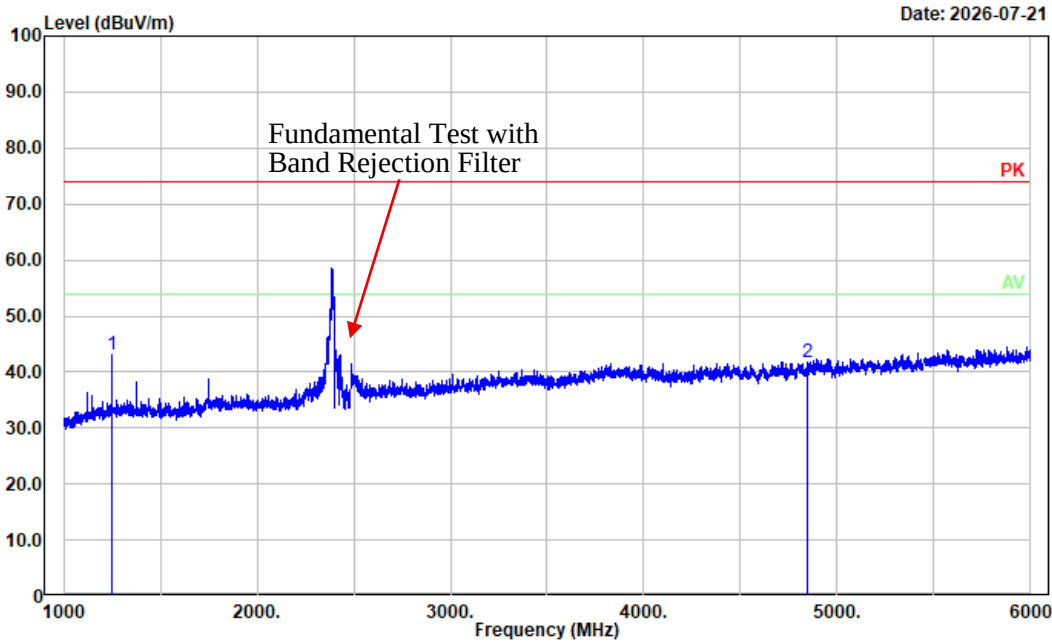


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	48.11	-4.99	43.12	74.00	30.88	Peak
2	4844.000	36.96	4.74	41.70	74.00	32.30	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi n40 Low Channel 2422MHz

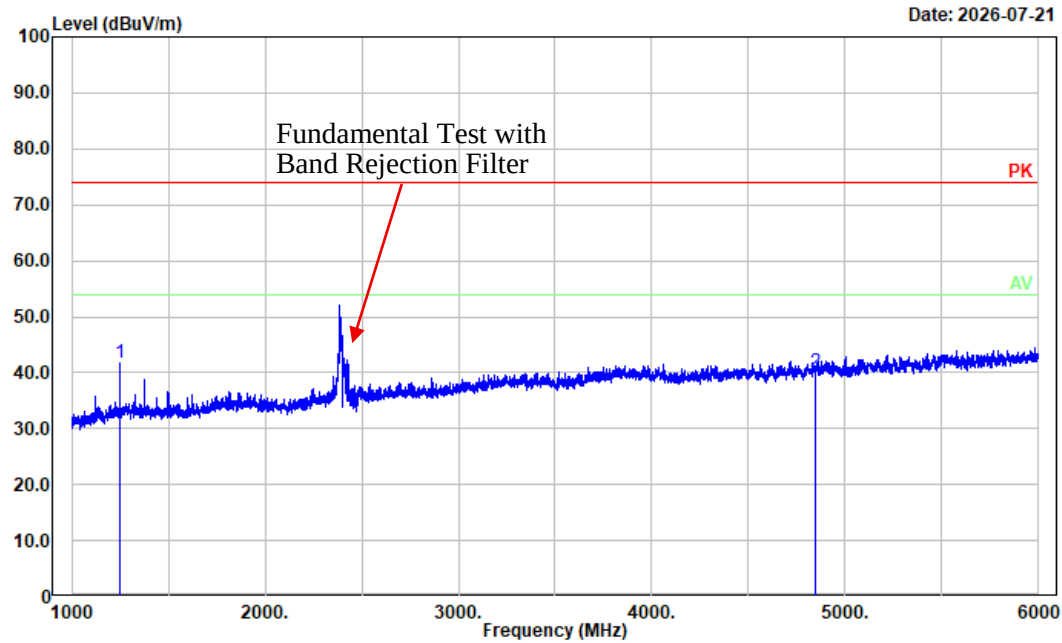


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	46.75	-4.99	41.76	74.00	32.24	Peak
2	4844.000	35.42	4.74	40.16	74.00	33.84	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: horizontal
Note: 2.4G WiFi n40 Low Channel 2422MHz

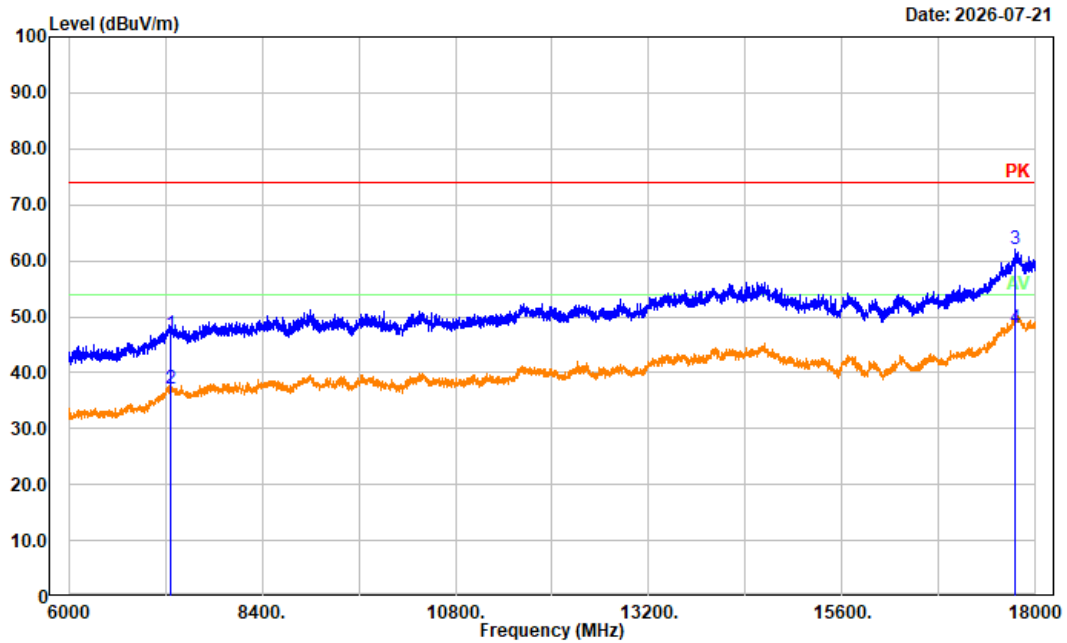


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7266.000	36.63	10.35	46.98	74.00	27.02	Peak
2	7266.000	26.86	10.35	37.21	54.00	16.79	Average
3	17748.000	40.92	21.17	62.09	74.00	11.91	Peak
4	17748.000	26.72	21.17	47.89	54.00	6.11	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: vertical
Note: 2.4G WiFi n40 Low Channel 2422MHz

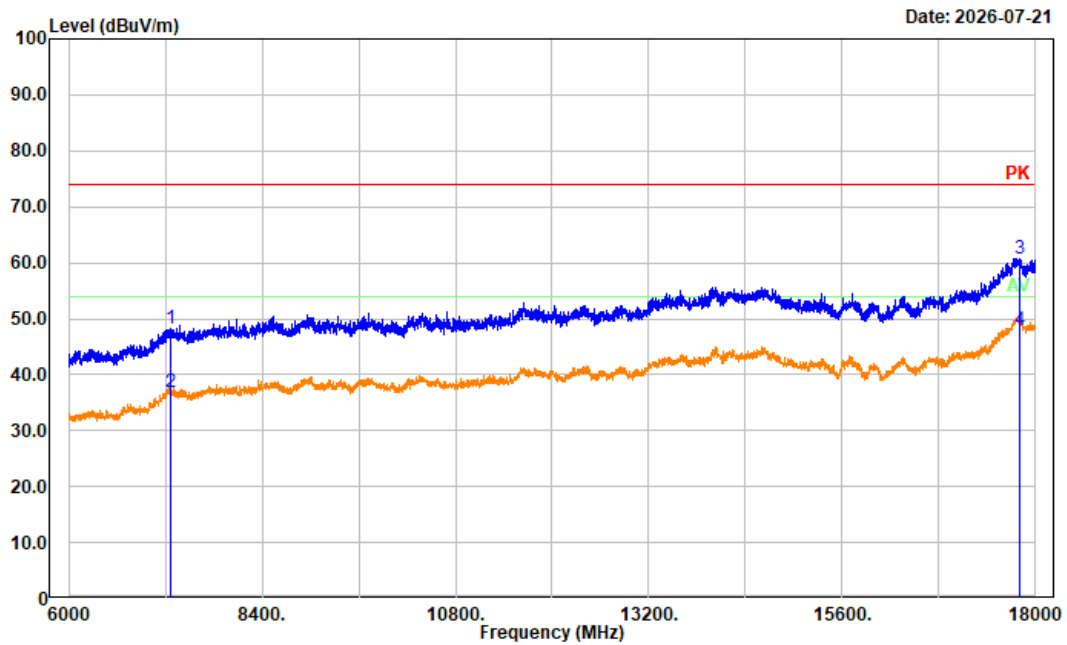


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7266.000	37.80	10.35	48.15	74.00	25.85	Peak
2	7266.000	26.52	10.35	36.87	54.00	17.13	Average
3	17803.200	39.39	21.36	60.75	74.00	13.25	Peak
4	17803.200	26.48	21.36	47.84	54.00	6.16	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 2.4G WiFi ax20 Low Channel 2412MHz

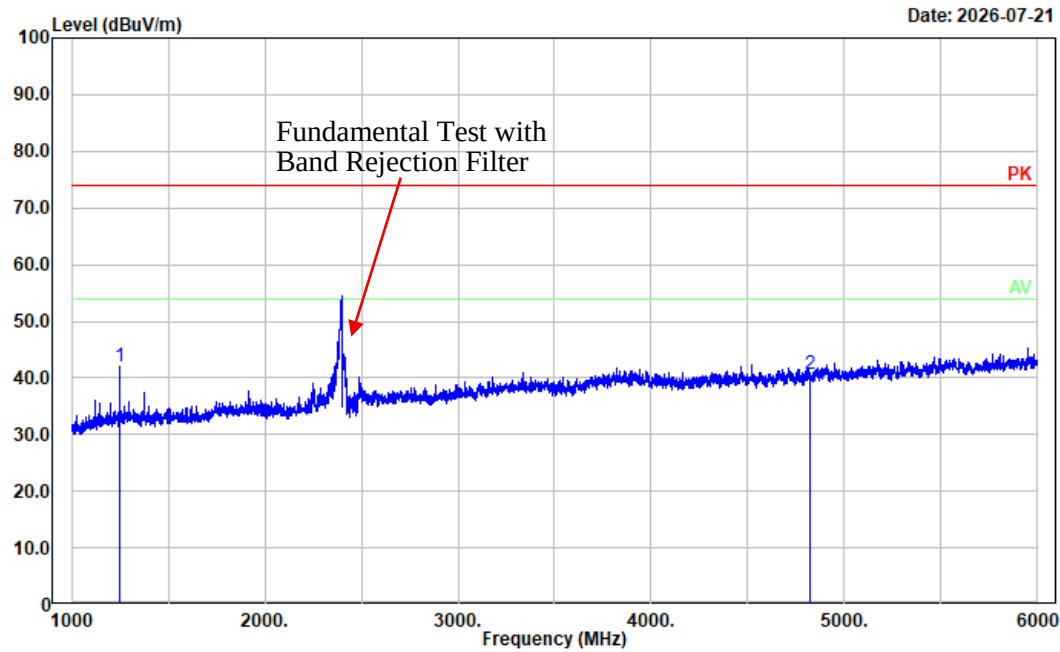


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	47.03	-4.99	42.04	74.00	31.96	Peak
2	4824.000	36.03	4.69	40.72	74.00	33.28	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi ax20 Low Channel 2412MHz

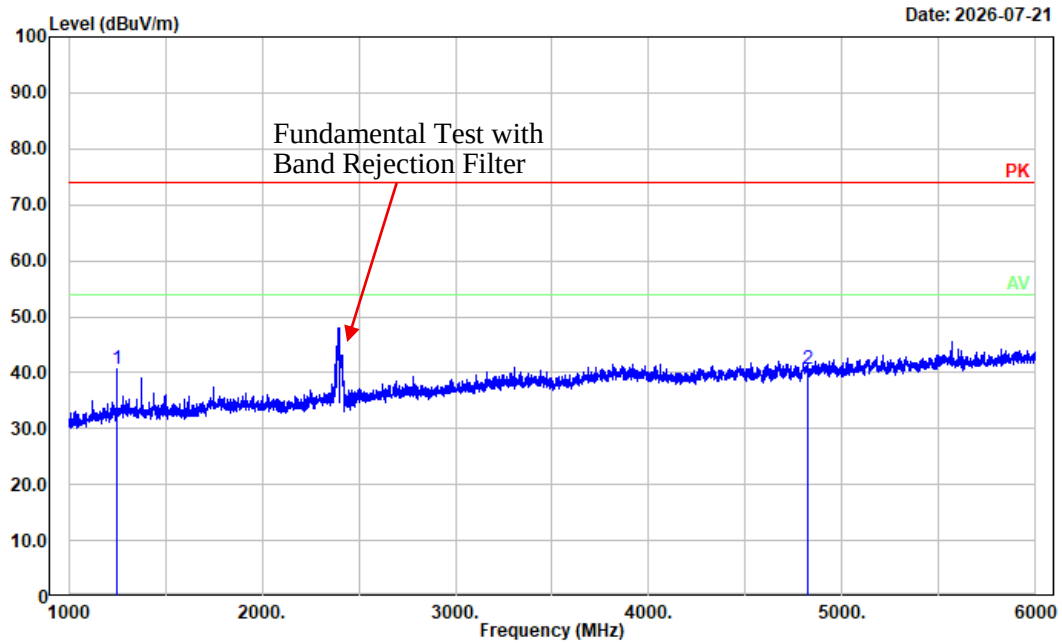


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	45.69	-4.99	40.70	74.00	33.30	Peak
2	4824.000	36.00	4.69	40.69	74.00	33.31	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: horizontal
Note: 2.4G WiFi ax20 Low Channel 2412MHz

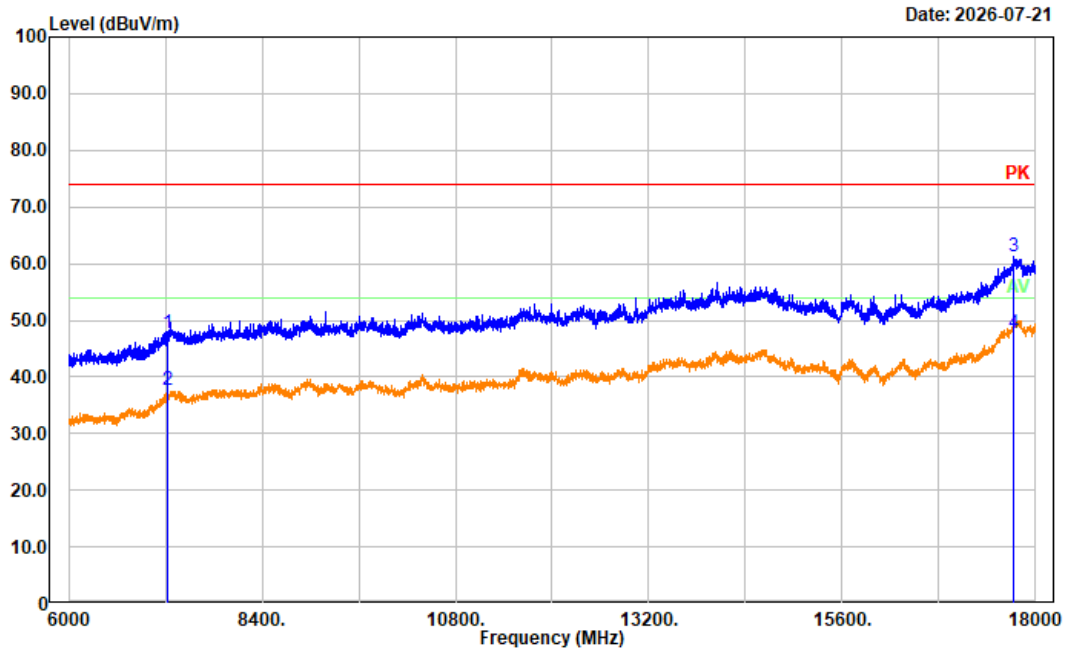


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	37.55	10.12	47.67	74.00	26.33	Peak
2	7236.000	27.44	10.12	37.56	54.00	16.44	Average
3	17733.600	40.24	21.12	61.36	74.00	12.64	Peak
4	17733.600	26.57	21.12	47.69	54.00	6.31	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: vertical
Note: 2.4G WiFi ax20 Low Channel 2412MHz

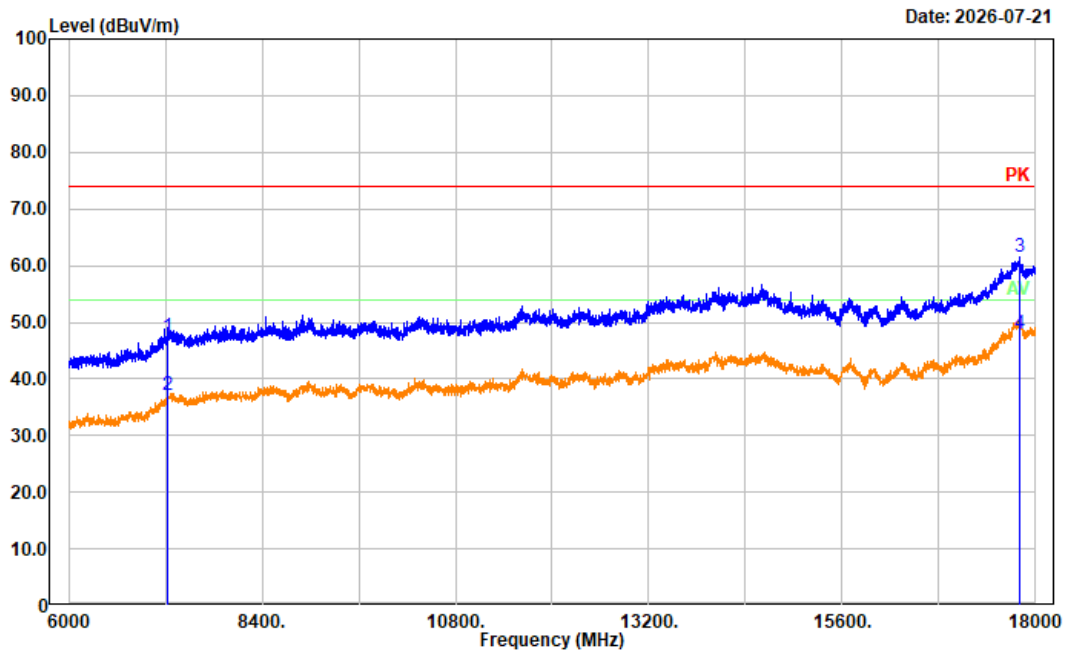


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7236.000	37.30	10.12	47.42	74.00	26.58	Peak
2	7236.000	26.89	10.12	37.01	54.00	16.99	Average
3	17798.400	40.25	21.35	61.60	74.00	12.40	Peak
4	17798.400	26.50	21.35	47.85	54.00	6.15	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: horizontal
Note: 2.4G WiFi ax40 Low Channel 2422MHz

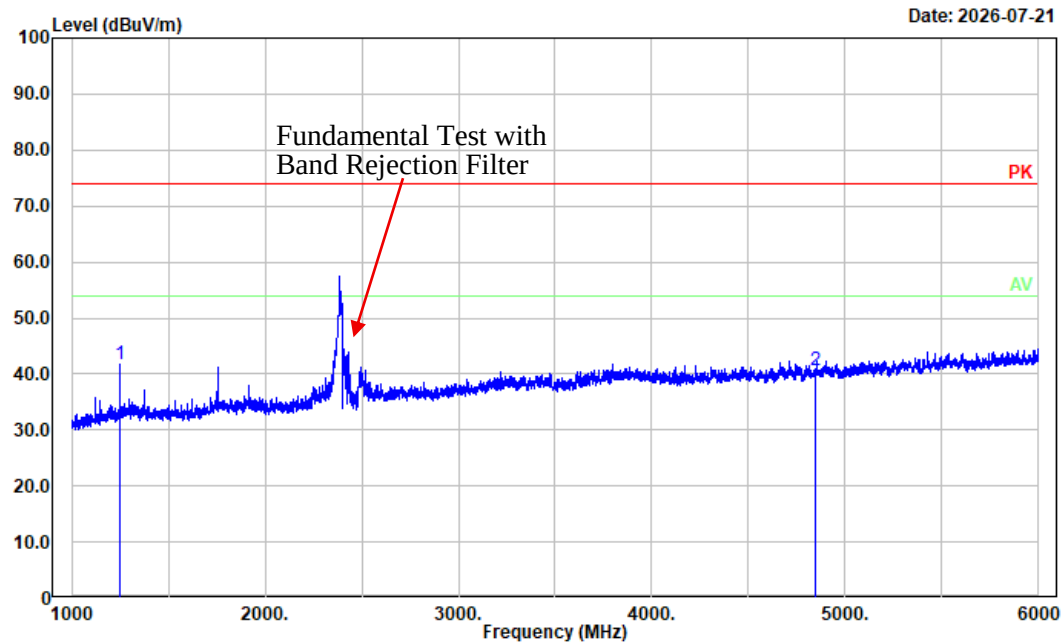


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	46.82	-4.99	41.83	74.00	32.17	Peak
2	4844.000	35.81	4.74	40.55	74.00	33.45	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz
Polarization: vertical
Note: 2.4G WiFi ax40 Low Channel 2422MHz

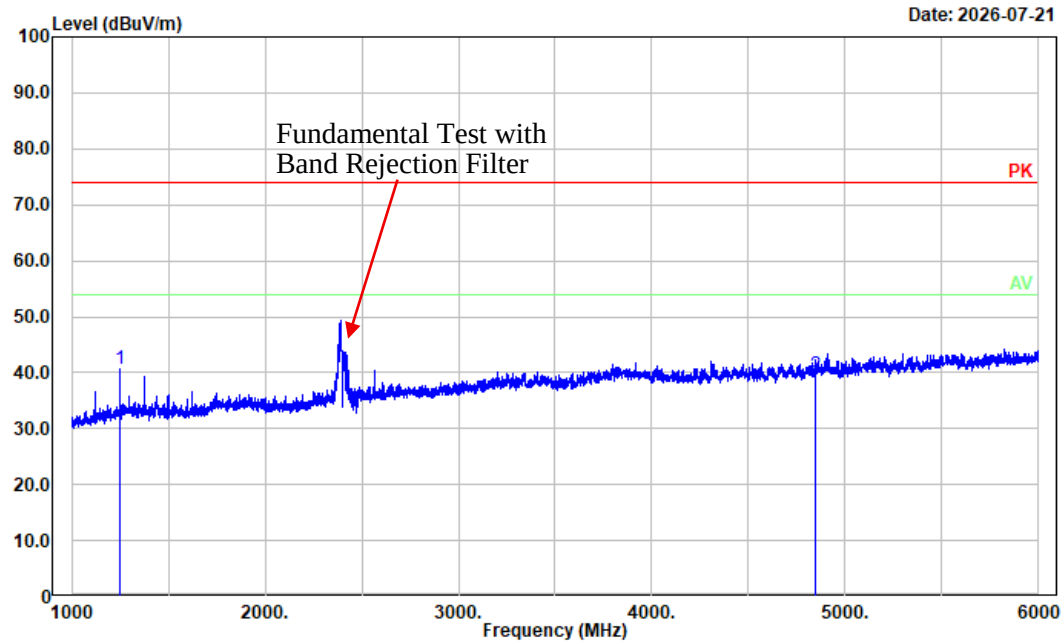


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	1250.000	45.56	-4.99	40.57	74.00	33.43	Peak
2	4844.000	34.92	4.74	39.66	74.00	34.34	Peak

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: vertical
Note: 2.4G WiFi ax40 Low Channel 2422MHz

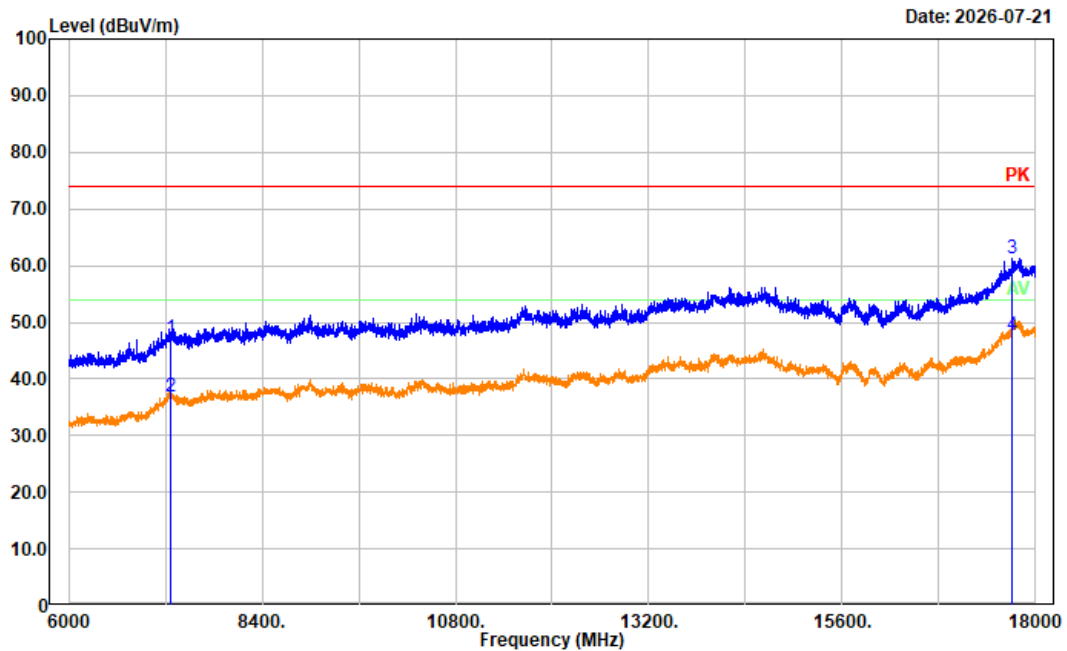

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7266.000	36.80	10.35	47.15	74.00	26.85	Peak
2	7266.000	26.63	10.35	36.98	54.00	17.02	Average
3	17704.800	40.15	21.02	61.17	74.00	12.83	Peak
4	17704.800	26.66	21.02	47.68	54.00	6.32	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: horizontal
Note: 2.4G WiFi ax40 Low Channel 2422MHz

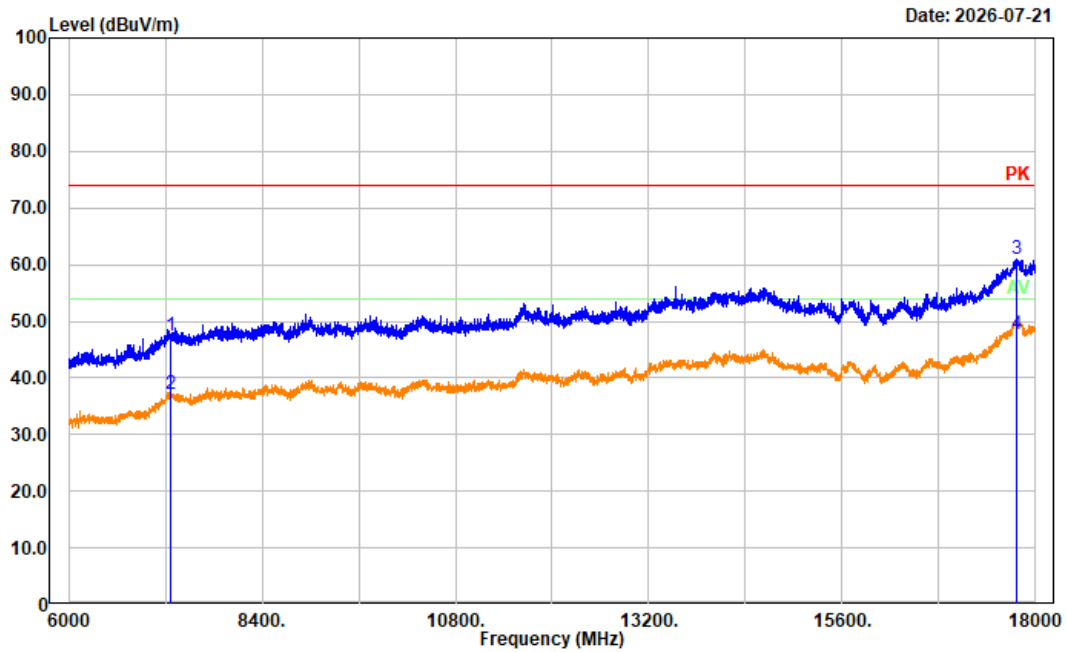


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	7266.000	37.18	10.35	47.53	74.00	26.47	Peak
2	7266.000	26.77	10.35	37.12	54.00	16.88	Average
3	17757.600	39.66	21.20	60.86	74.00	13.14	Peak
4	17757.600	26.51	21.20	47.71	54.00	6.29	Average

Test Plots for 18GHz~25GHz:


Note: The test was performed under the worst-case emission mode (802.11ax20 mode Low Channel) identified in the 1–18 GHz radiated spurious emissions test.

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Horizontal
Note: 2.4G WiFi ax20 Low Channel 2412MHz

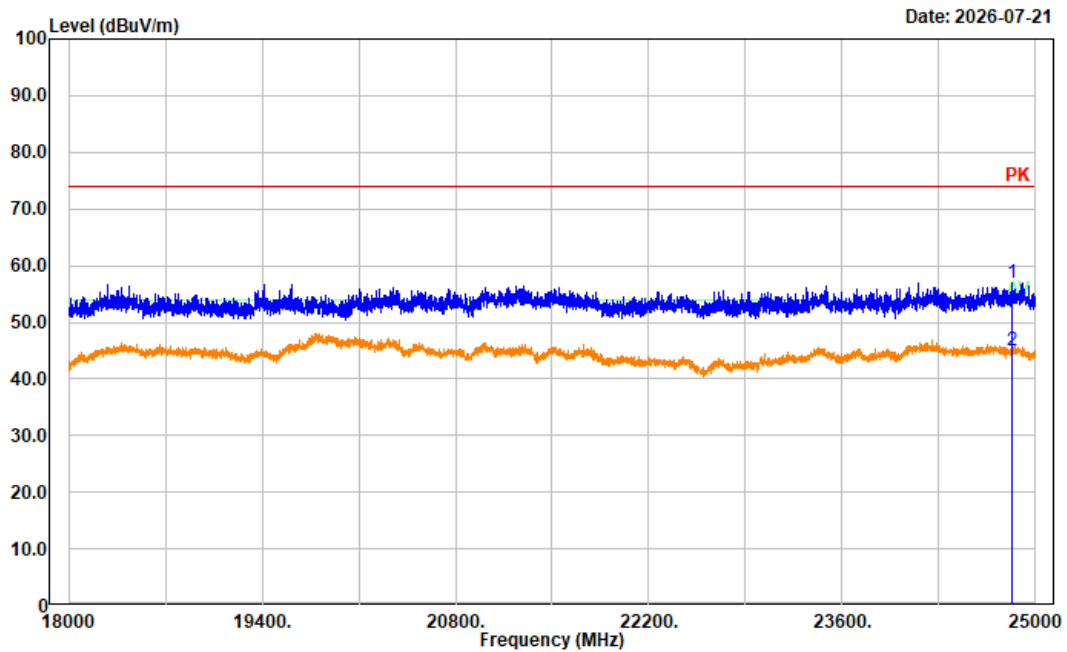

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	24833.400	51.16	5.85	57.01	74.00	16.99	Peak
2	24833.400	39.18	5.85	45.03	54.00	8.97	Average


Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Vertical
Note: 2.4G WiFi ax20 Low Channel 2412MHz

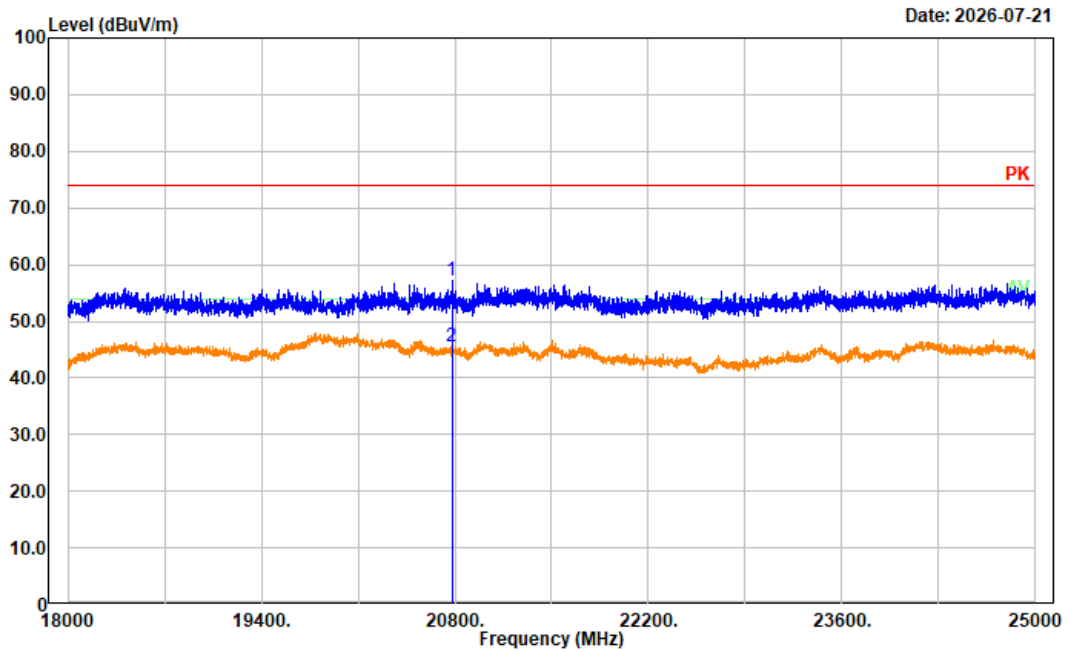

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	20777.600	50.53	6.70	57.23	74.00	16.77	Peak
2	20777.600	38.82	6.70	45.52	54.00	8.48	Average


Band Edge Test Plots

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi b Low Channel 2412MHz Chain 0

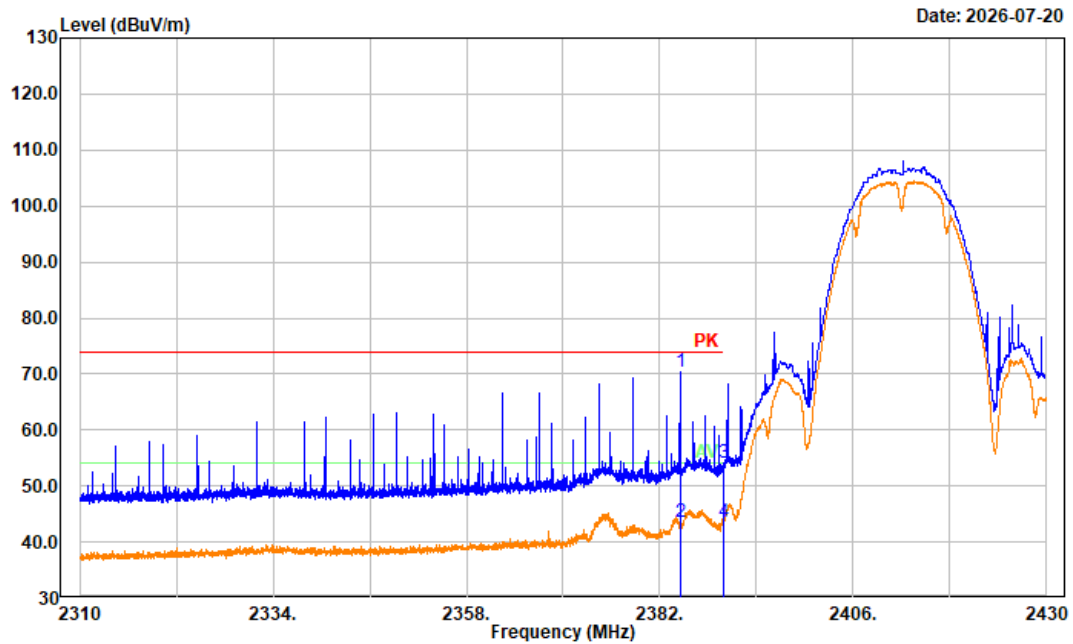


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2384.496	72.62	-2.16	70.46	74.00	3.54	Peak
2	2384.496	45.74	-2.16	43.58	54.00	10.42	Average
3	2390.000	56.36	-2.13	54.23	74.00	19.77	Peak
4	2390.000	45.69	-2.13	43.56	54.00	10.44	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi b Low Channel 2412MHz Chain 0

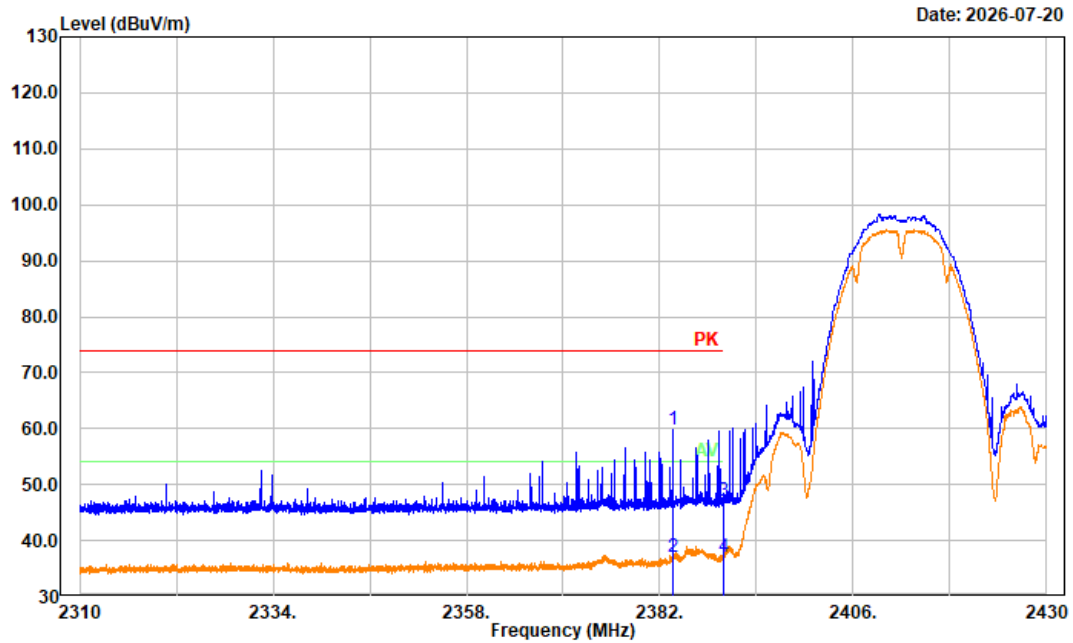


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2383.680	61.96	-2.17	59.79	74.00	14.21	Peak
2	2383.680	39.19	-2.17	37.02	54.00	16.98	Average
3	2390.000	49.14	-2.13	47.01	74.00	26.99	Peak
4	2390.000	39.29	-2.13	37.16	54.00	16.84	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi b High Channel 2462MHz Chain 0

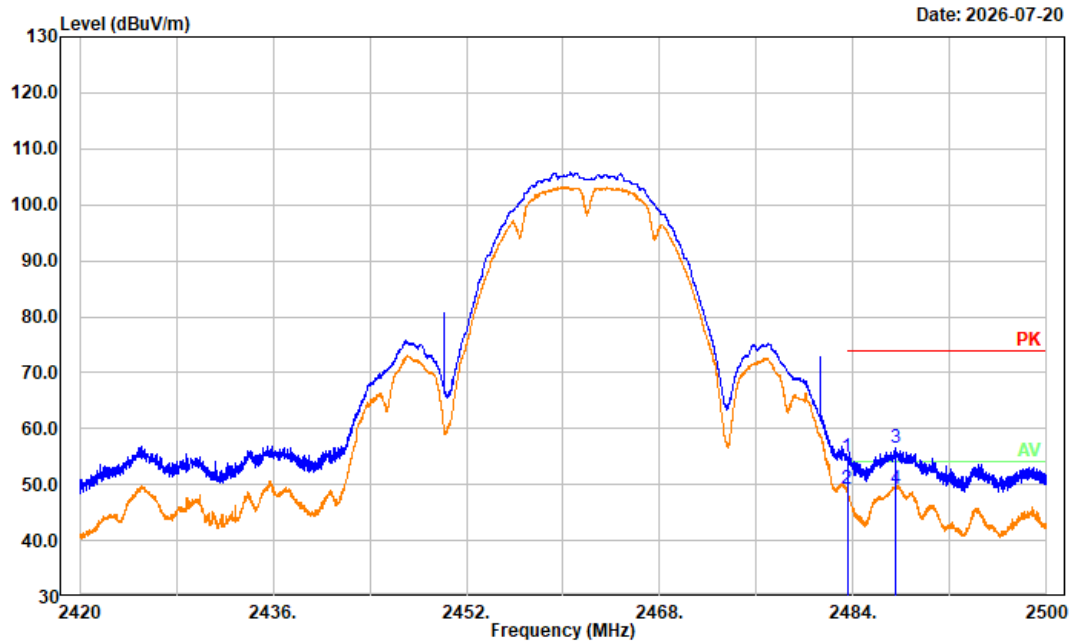


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	57.15	-2.17	54.98	74.00	19.02	Peak
2	2483.500	51.40	-2.17	49.23	54.00	4.77	Average
3	2487.504	58.61	-2.14	56.47	74.00	17.53	Peak
4	2487.504	51.50	-2.14	49.36	54.00	4.64	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi b High Channel 2462MHz Chain 0

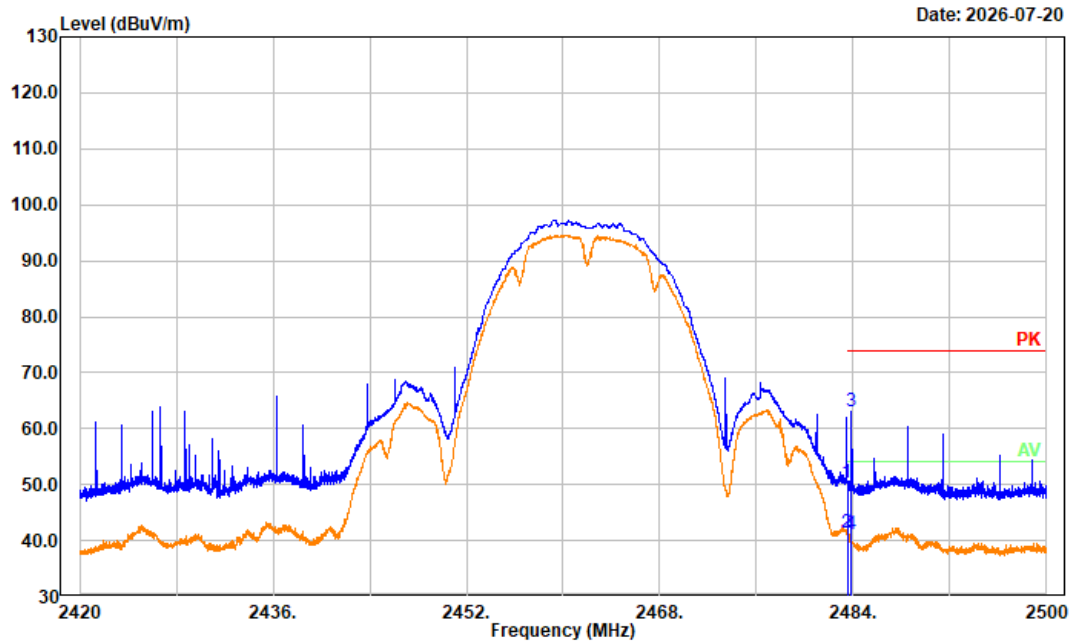


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	52.45	-2.17	50.28	74.00	23.72	Peak
2	2483.500	43.43	-2.17	41.26	54.00	12.74	Average
3	2483.872	65.29	-2.17	63.12	74.00	10.88	Peak
4	2483.872	43.20	-2.17	41.03	54.00	12.97	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi b Low Channel 2412MHz Chain 1

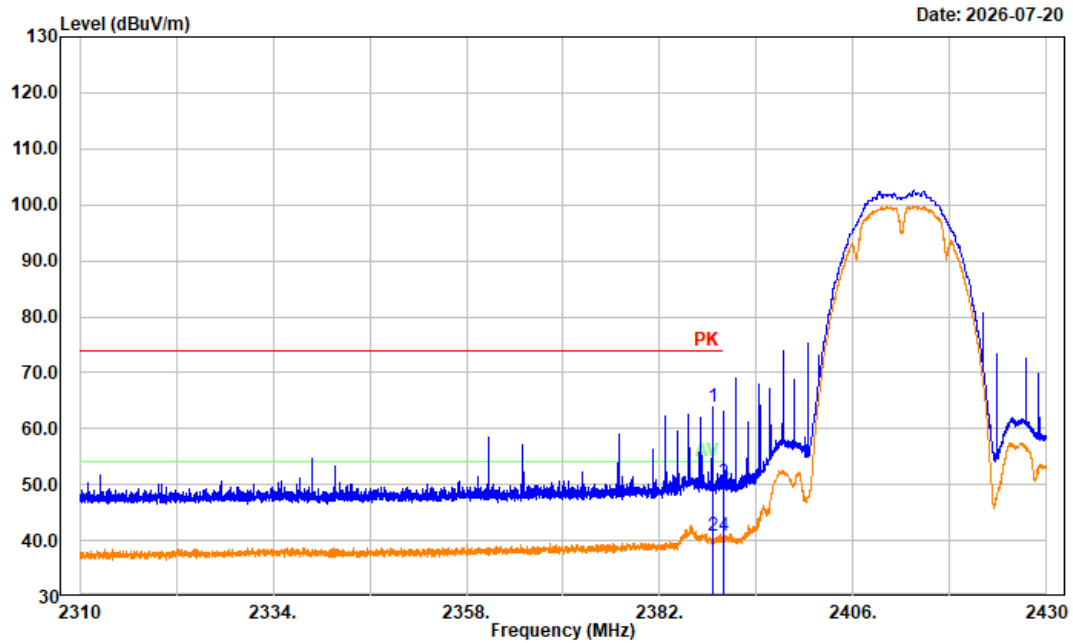


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.528	65.95	-2.14	63.81	74.00	10.19	Peak
2	2388.528	43.01	-2.14	40.87	54.00	13.13	Average
3	2390.000	52.45	-2.13	50.32	74.00	23.68	Peak
4	2390.000	42.92	-2.13	40.79	54.00	13.21	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi b Low Channel 2412MHz Chain 1

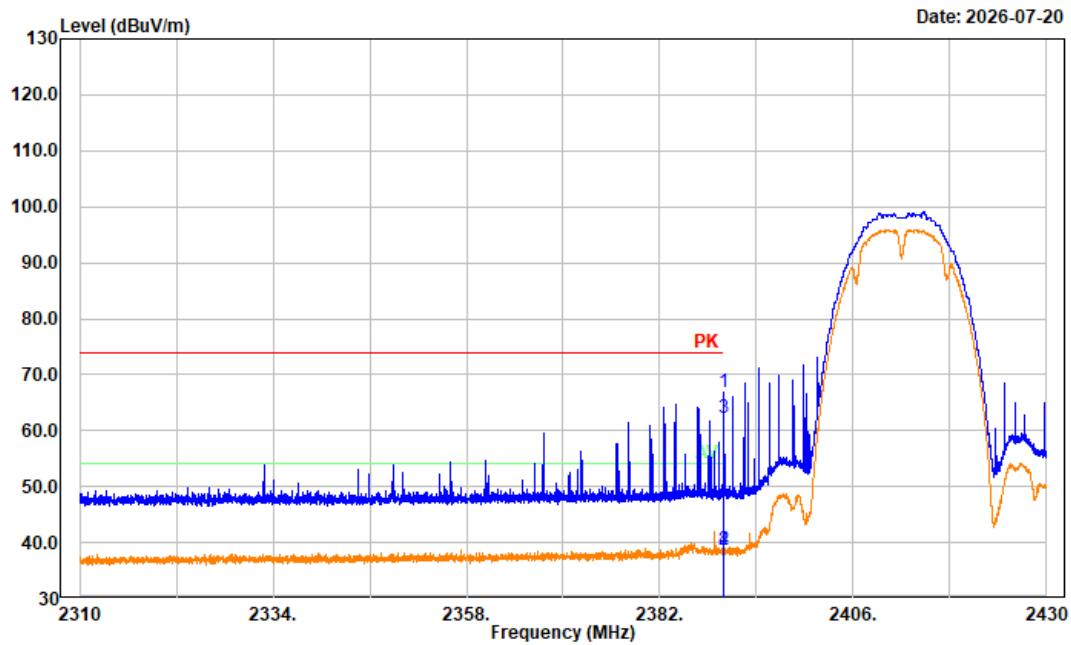


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.944	69.05	-2.13	66.92	74.00	7.08	Peak
2	2389.944	40.81	-2.13	38.68	54.00	15.32	Average
3	2390.000	64.28	-2.13	62.15	74.00	11.85	Peak
4	2390.000	40.90	-2.13	38.77	54.00	15.23	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi b High Channel 2462MHz Chain 1

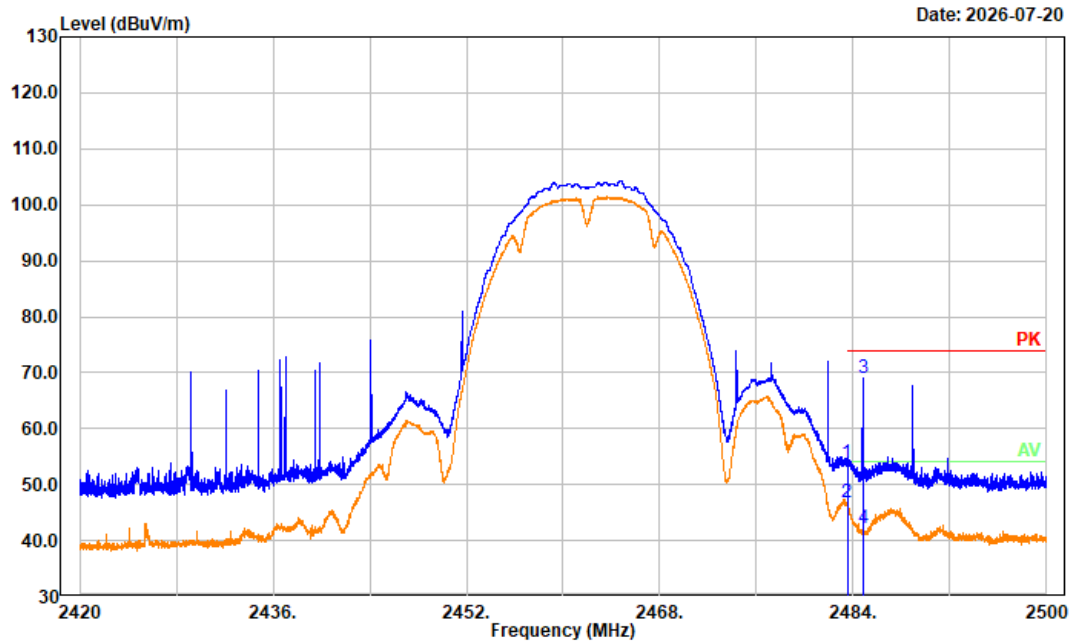


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	56.04	-2.17	53.87	74.00	20.13	Peak
2	2483.500	48.94	-2.17	46.77	54.00	7.23	Average
3	2484.784	71.21	-2.17	69.04	74.00	4.96	Peak
4	2484.784	44.27	-2.17	42.10	54.00	11.90	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi b High Channel 2462MHz Chain 1

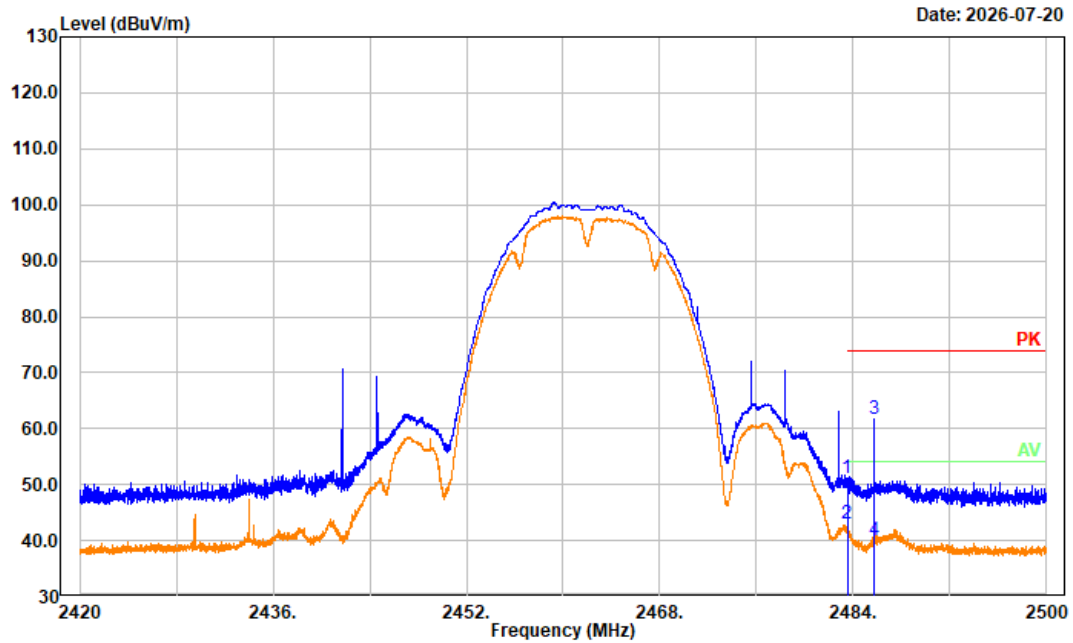


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	53.43	-2.17	51.26	74.00	22.74	Peak
2	2483.500	45.06	-2.17	42.89	54.00	11.11	Average
3	2485.696	63.97	-2.15	61.82	74.00	12.18	Peak
4	2485.696	42.26	-2.15	40.11	54.00	13.89	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi g Low Channel 2412MHz Chain 0

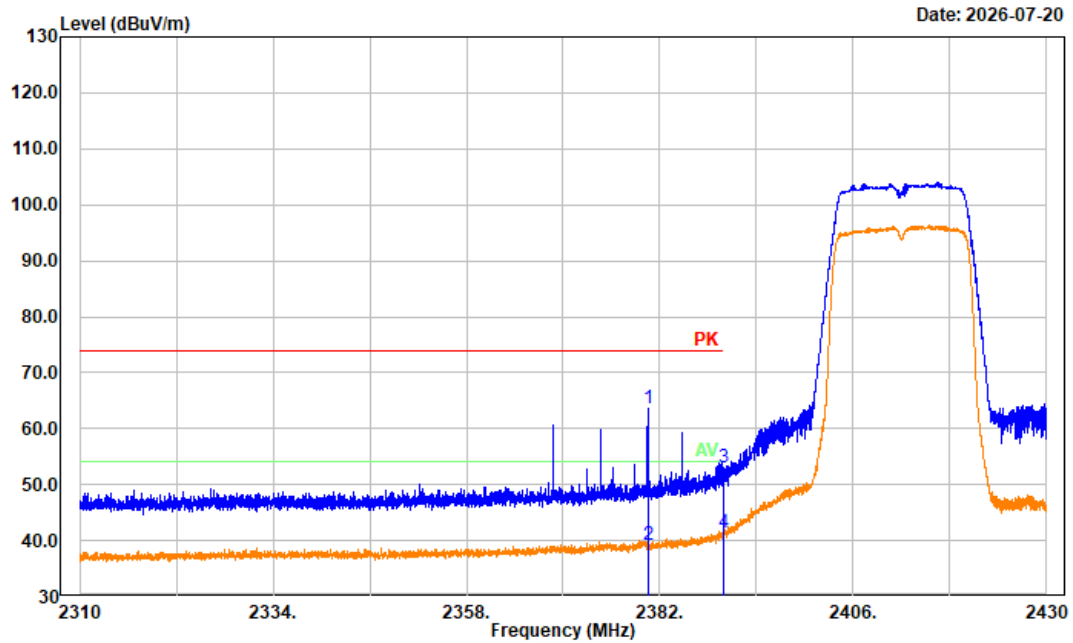


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2380.512	65.90	-2.18	63.72	74.00	10.28	Peak
2	2380.512	41.44	-2.18	39.26	54.00	14.74	Average
3	2390.000	55.28	-2.13	53.15	74.00	20.85	Peak
4	2390.000	43.60	-2.13	41.47	54.00	12.53	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi g Low Channel 2412MHz Chain 0

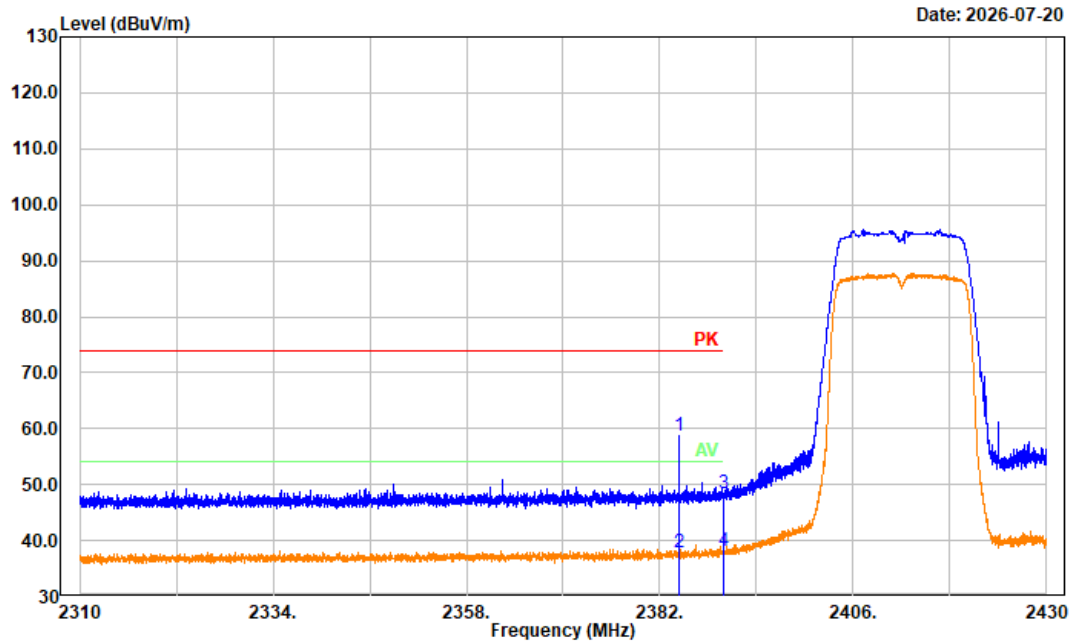


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2384.376	60.82	-2.16	58.66	74.00	15.34	Peak
2	2384.376	40.00	-2.16	37.84	54.00	16.16	Average
3	2390.000	50.66	-2.13	48.53	74.00	25.47	Peak
4	2390.000	40.36	-2.13	38.23	54.00	15.77	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi g High Channel 2462MHz Chain 0

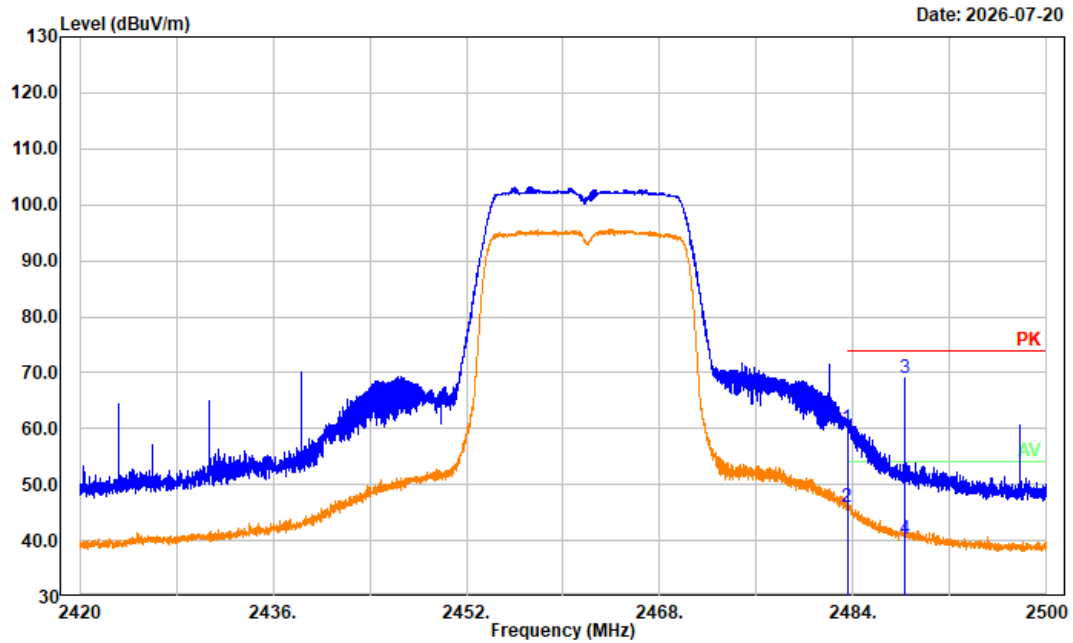


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	62.12	-2.17	59.95	74.00	14.05	Peak
2	2483.500	48.28	-2.17	46.11	54.00	7.89	Average
3	2488.304	71.11	-2.14	68.97	74.00	5.03	Peak
4	2488.304	42.32	-2.14	40.18	54.00	13.82	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi g High Channel 2462MHz Chain 0

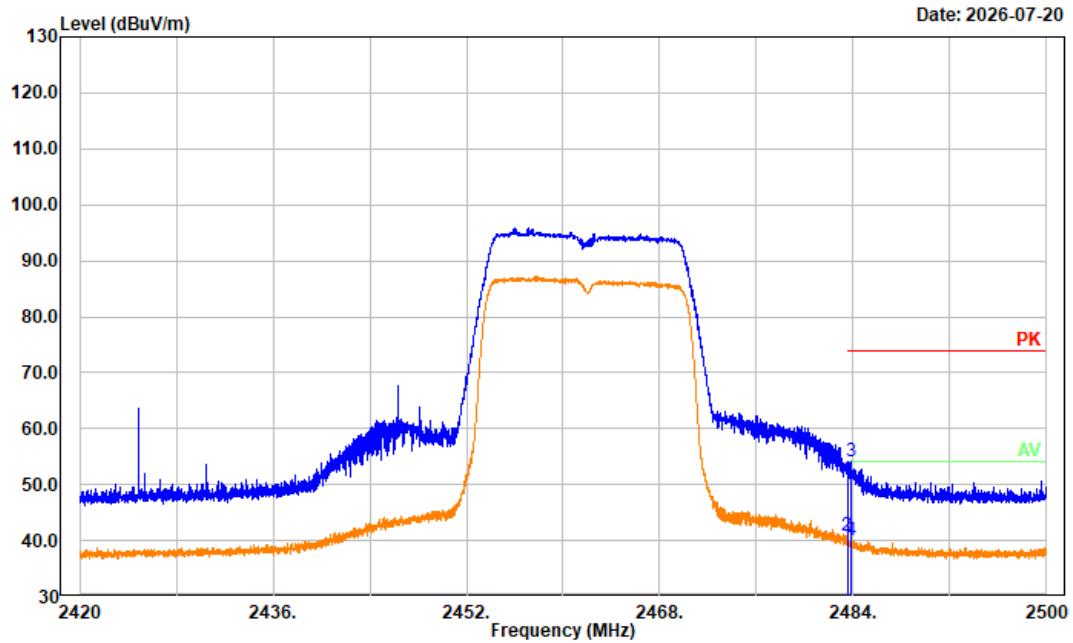


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	52.94	-2.17	50.77	74.00	23.23	Peak
2	2483.500	42.88	-2.17	40.71	54.00	13.29	Average
3	2483.776	56.21	-2.17	54.04	74.00	19.96	Peak
4	2483.776	42.30	-2.17	40.13	54.00	13.87	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi g Low Channel 2412MHz Chain 1

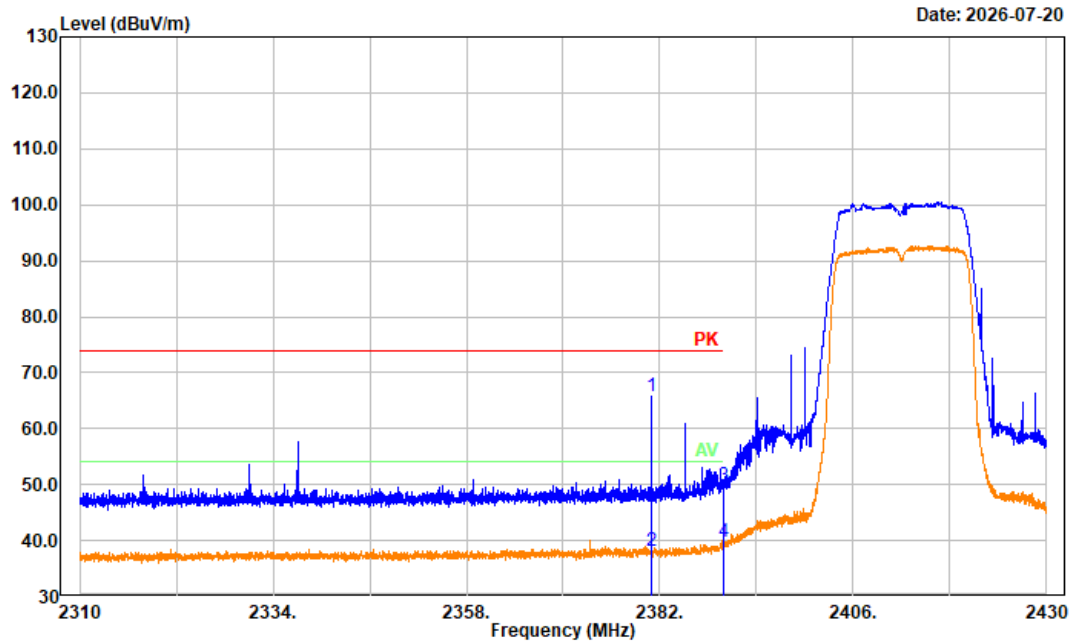


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2380.920	67.84	-2.18	65.66	74.00	8.34	Peak
2	2380.920	40.30	-2.18	38.12	54.00	15.88	Average
3	2390.000	51.93	-2.13	49.80	74.00	24.20	Peak
4	2390.000	41.91	-2.13	39.78	54.00	14.22	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi g Low Channel 2412MHz Chain 1

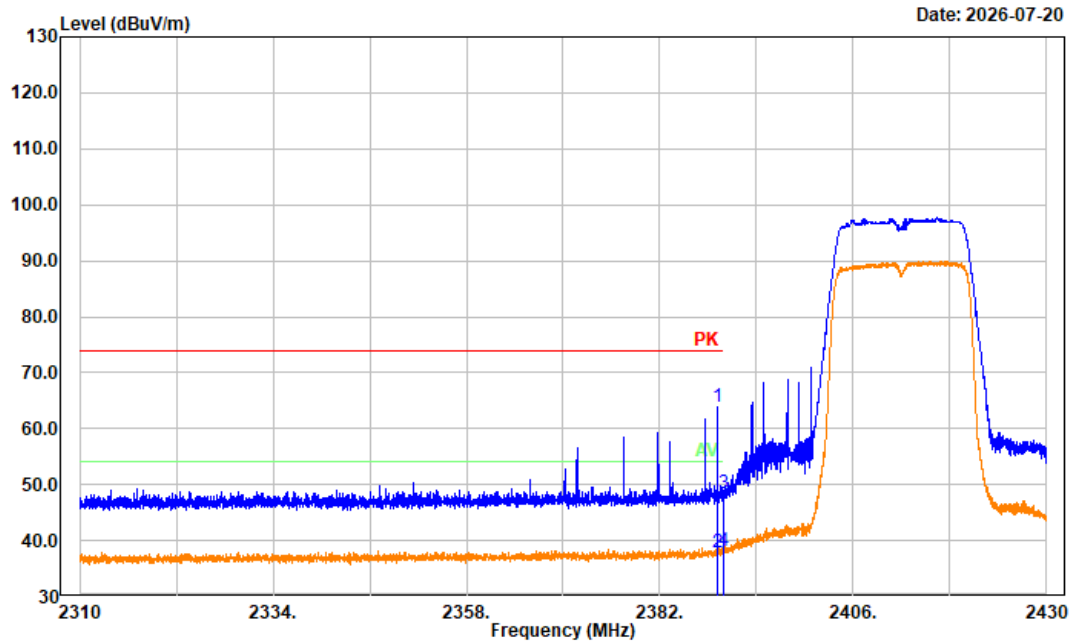


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2389.080	65.99	-2.13	63.86	74.00	10.14	Peak
2	2389.080	39.92	-2.13	37.79	54.00	16.21	Average
3	2390.000	50.64	-2.13	48.51	74.00	25.49	Peak
4	2390.000	40.24	-2.13	38.11	54.00	15.89	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi g High Channel 2462MHz Chain 1

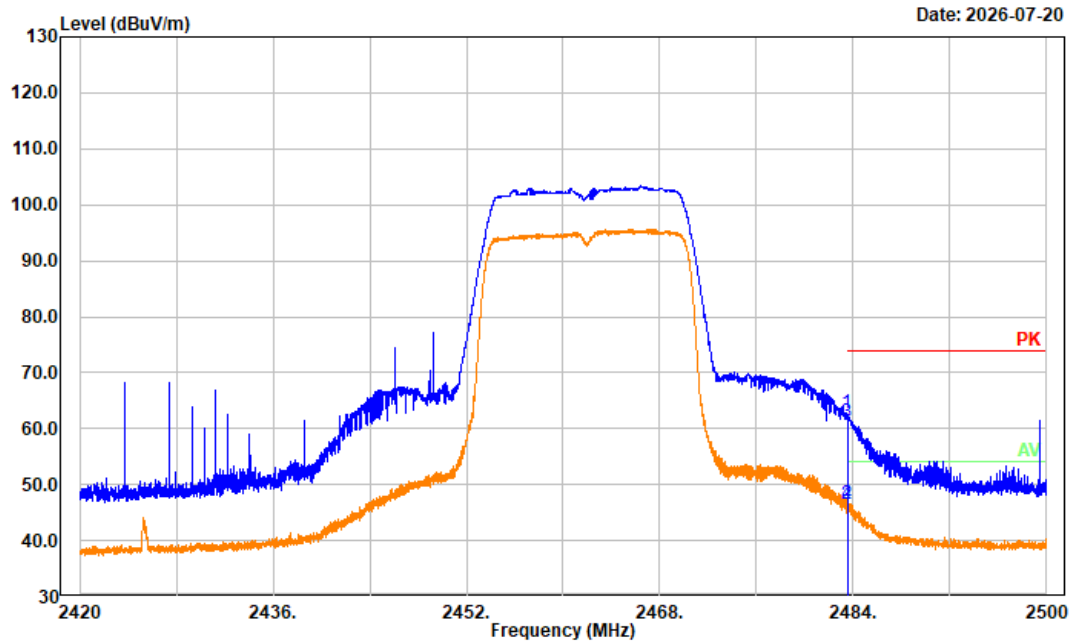


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	64.85	-2.17	62.68	74.00	11.32	Peak
2	2483.500	48.68	-2.17	46.51	54.00	7.49	Average
3	2483.504	63.28	-2.17	61.11	74.00	12.89	Peak
4	2483.504	48.58	-2.17	46.41	54.00	7.59	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi g High Channel 2462MHz Chain 1

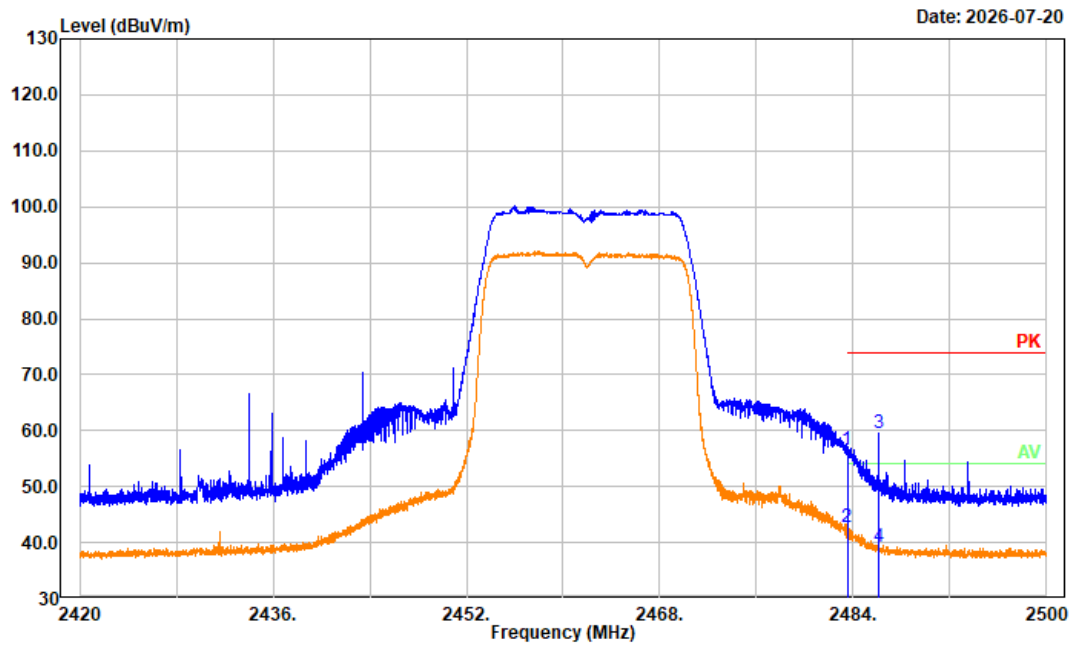


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	58.83	-2.17	56.66	74.00	17.34	Peak
2	2483.500	44.78	-2.17	42.61	54.00	11.39	Average
3	2486.080	61.60	-2.15	59.45	74.00	14.55	Peak
4	2486.080	41.26	-2.15	39.11	54.00	14.89	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi n20 Low Channel 2412MHz

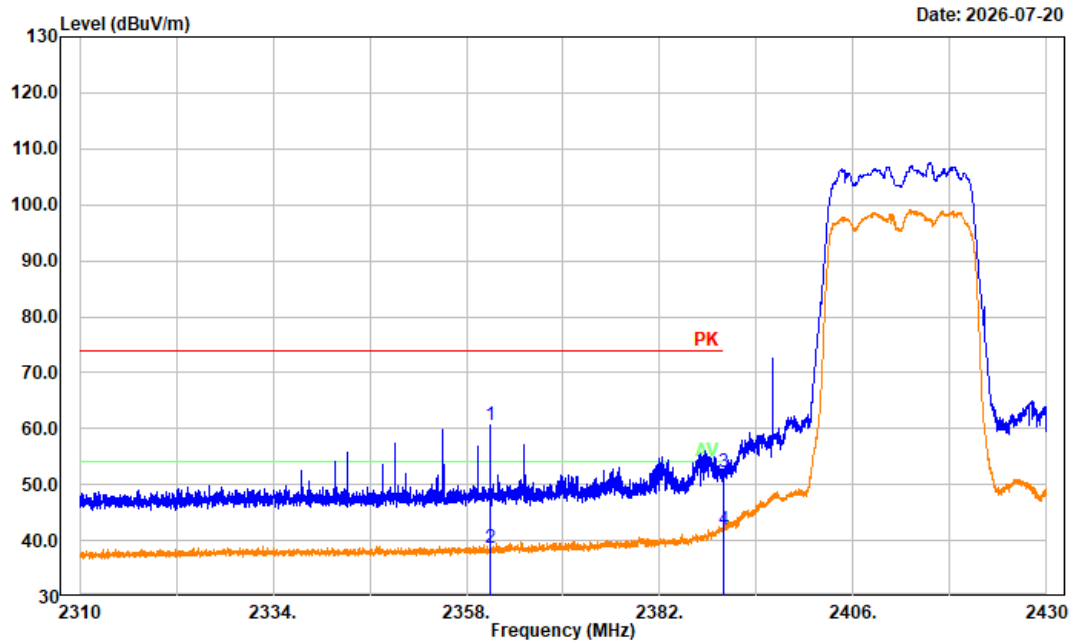


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2360.976	62.87	-2.29	60.58	74.00	13.42	Peak
2	2360.976	41.08	-2.29	38.79	54.00	15.21	Average
3	2390.000	54.31	-2.13	52.18	74.00	21.82	Peak
4	2390.000	44.00	-2.13	41.87	54.00	12.13	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi n20 Low Channel 2412MHz

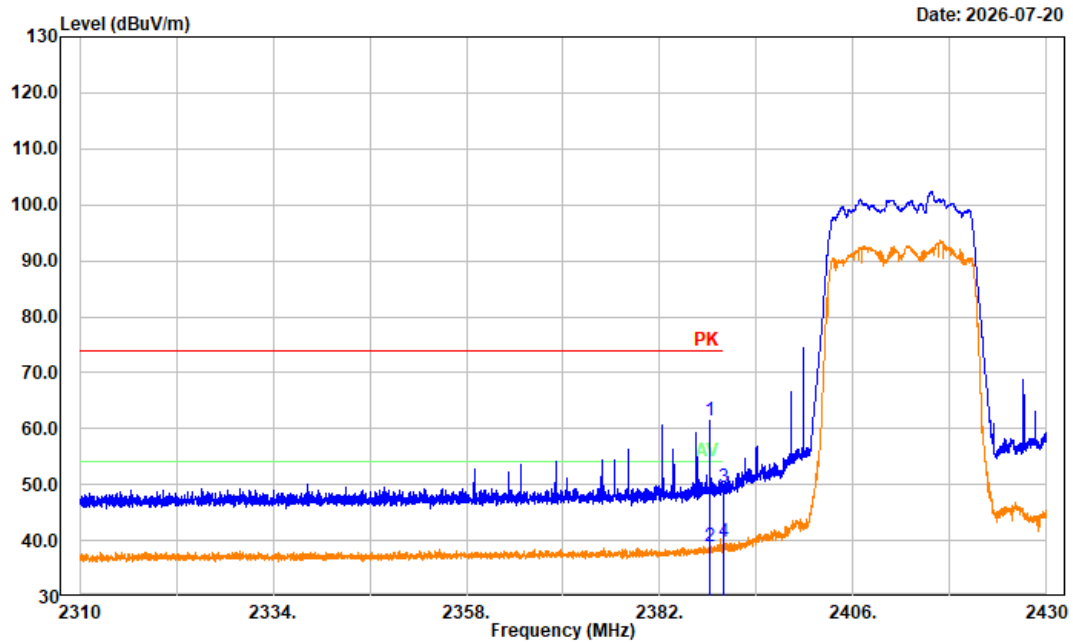


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.192	63.64	-2.14	61.50	74.00	12.50	Peak
2	2388.192	41.03	-2.14	38.89	54.00	15.11	Average
3	2390.000	51.53	-2.13	49.40	74.00	24.60	Peak
4	2390.000	41.77	-2.13	39.64	54.00	14.36	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi n20 High Channel 2462MHz

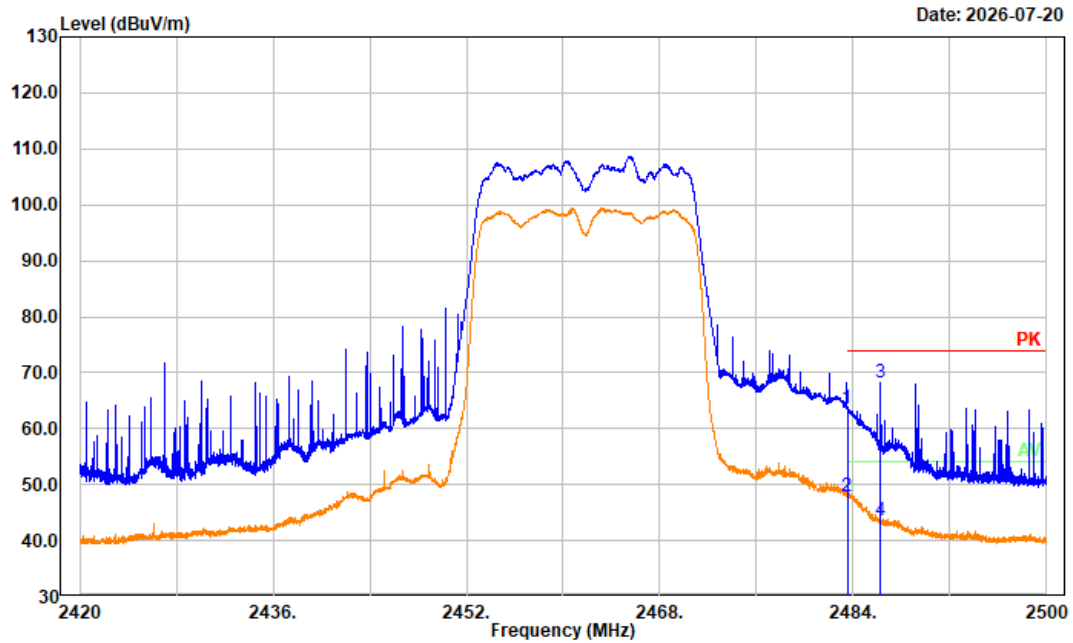


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	65.81	-2.17	63.64	74.00	10.36	Peak
2	2483.500	50.04	-2.17	47.87	54.00	6.13	Average
3	2486.272	70.47	-2.15	68.32	74.00	5.68	Peak
4	2486.272	45.73	-2.15	43.58	54.00	10.42	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi n20 High Channel 2462MHz

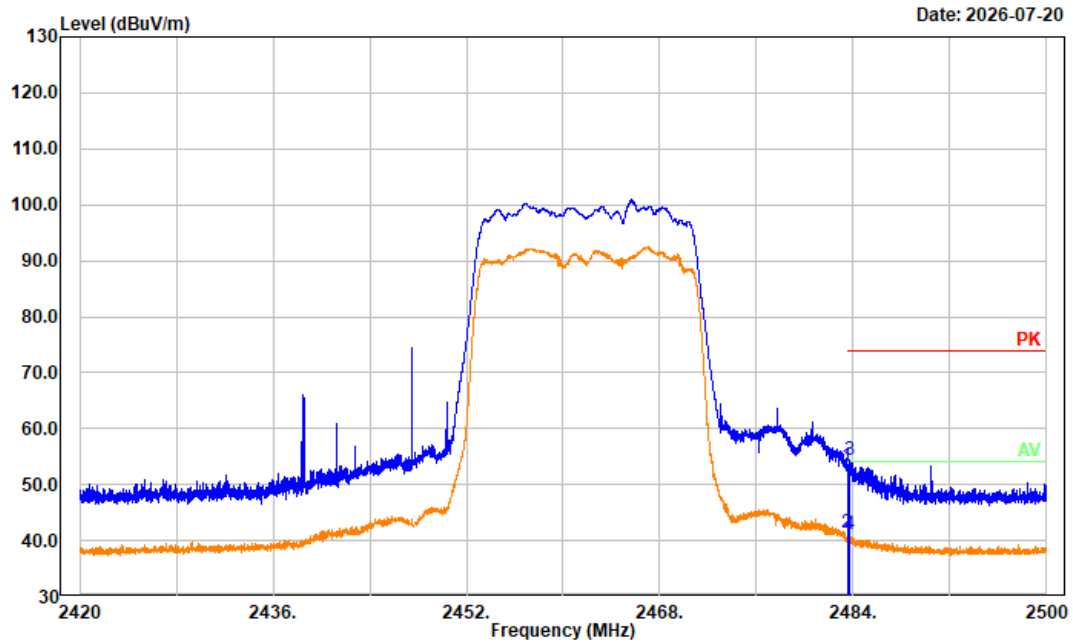


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	55.56	-2.17	53.39	74.00	20.61	Peak
2	2483.500	43.43	-2.17	41.26	54.00	12.74	Average
3	2483.664	56.67	-2.17	54.50	74.00	19.50	Peak
4	2483.664	43.37	-2.17	41.20	54.00	12.80	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi n40 Low Channel 2422MHz

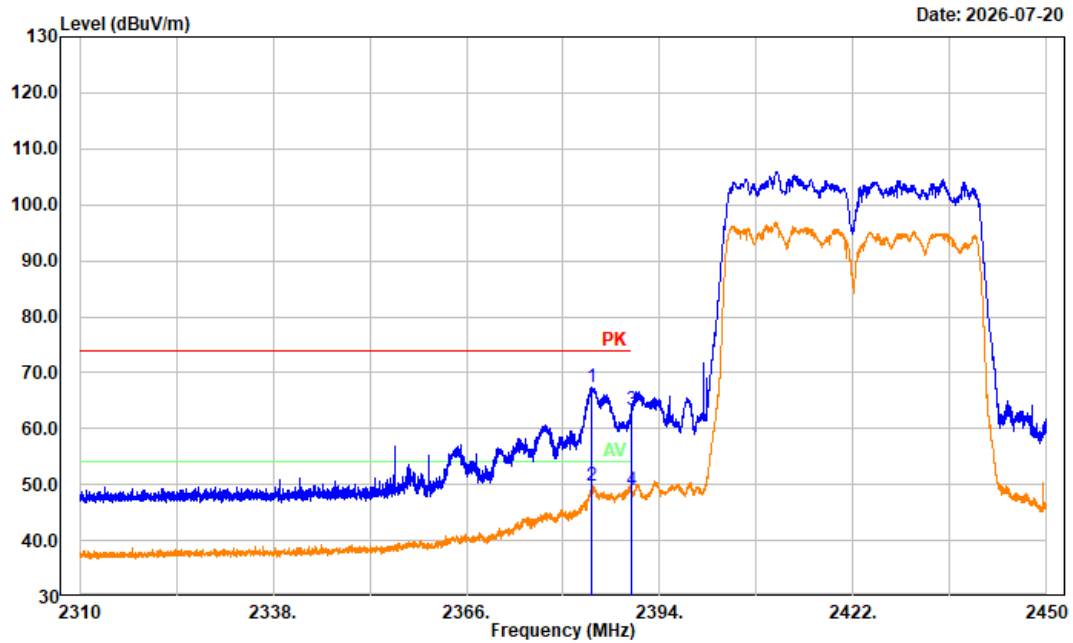


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2384.060	69.50	-2.16	67.34	74.00	6.66	Peak
2	2384.060	51.90	-2.16	49.74	54.00	4.26	Average
3	2390.000	65.39	-2.13	63.26	74.00	10.74	Peak
4	2390.000	51.11	-2.13	48.98	54.00	5.02	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi n40 Low Channel 2422MHz

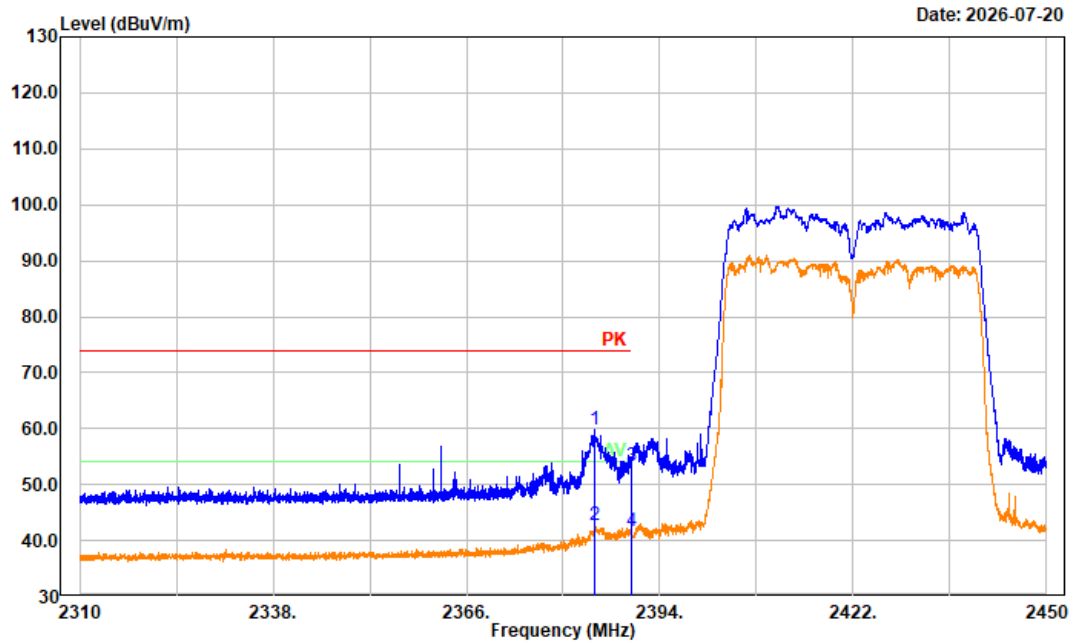


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2384.564	61.86	-2.16	59.70	74.00	14.30	Peak
2	2384.564	44.81	-2.16	42.65	54.00	11.35	Average
3	2390.000	55.57	-2.13	53.44	74.00	20.56	Peak
4	2390.000	43.90	-2.13	41.77	54.00	12.23	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi n40 High Channel 2452MHz

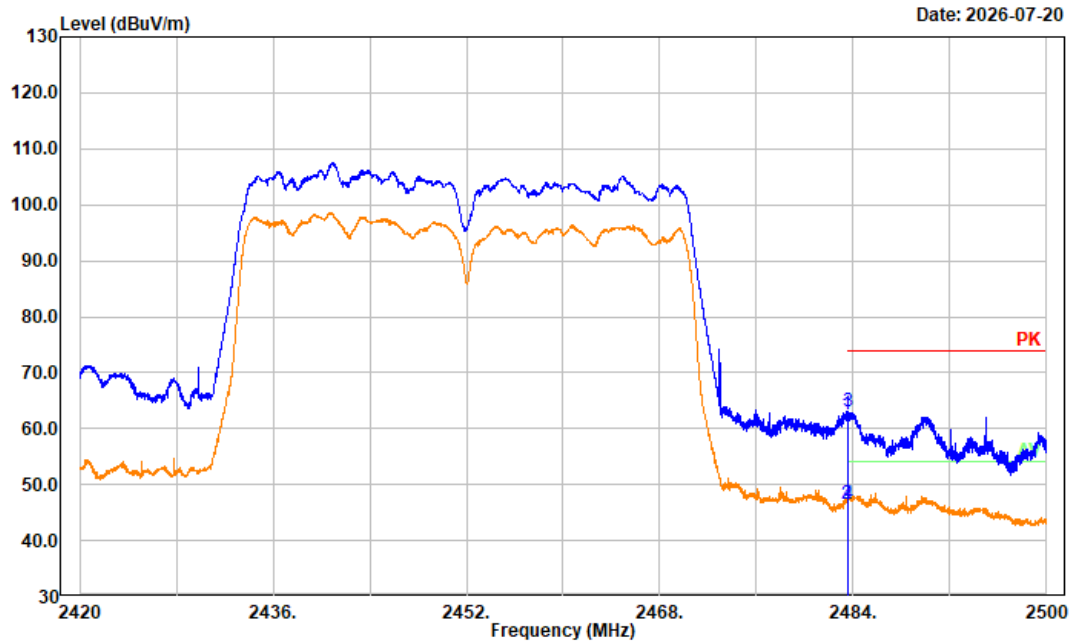


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	64.79	-2.17	62.62	74.00	11.38	Peak
2	2483.500	48.70	-2.17	46.53	54.00	7.47	Average
3	2483.568	65.33	-2.17	63.16	74.00	10.84	Peak
4	2483.568	48.64	-2.17	46.47	54.00	7.53	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Vertical
Note: 2.4G WiFi n40 High Channel 2452MHz

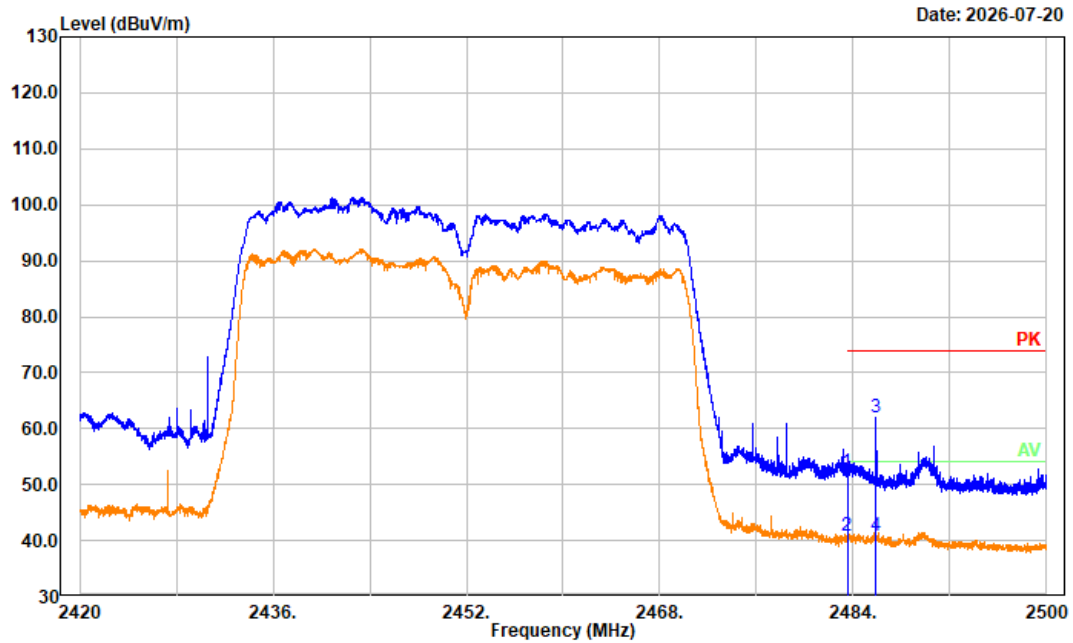


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	54.46	-2.17	52.29	74.00	21.71	Peak
2	2483.500	43.04	-2.17	40.87	54.00	13.13	Average
3	2485.904	64.10	-2.15	61.95	74.00	12.05	Peak
4	2485.904	42.94	-2.15	40.79	54.00	13.21	Average

Project No: 2603T61540E-RF
 Tester: Peter Rong
 Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
 Polarization: Horizontal
 Note: 2.4G WiFi ax20 Low Channel 2412MHz

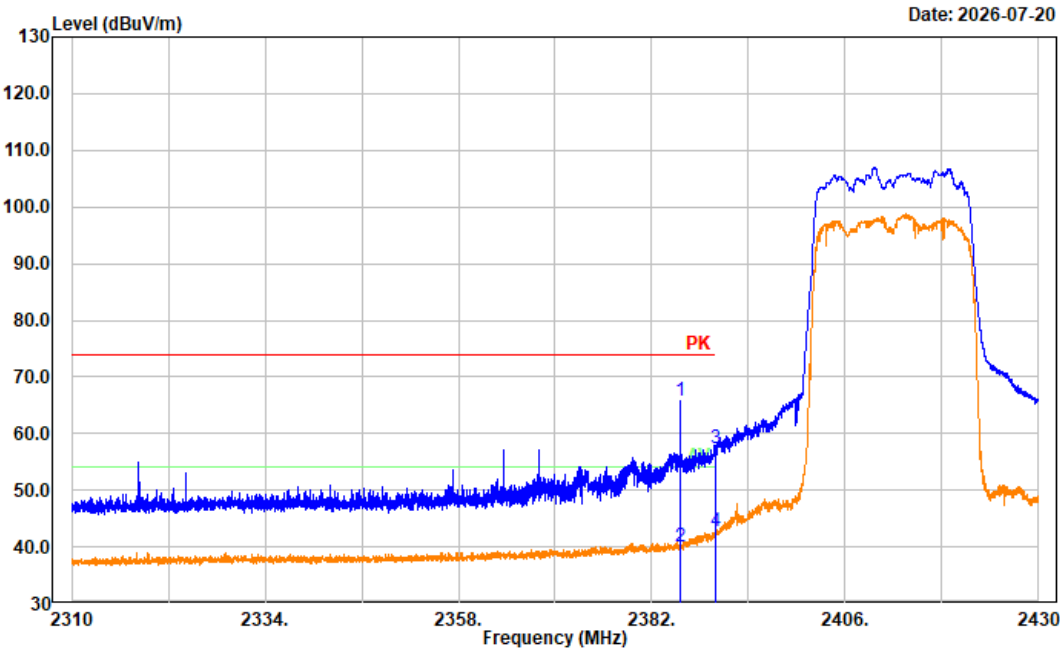


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2385.504	67.84	-2.16	65.68	74.00	8.32	Peak
2	2385.504	42.27	-2.16	40.11	54.00	13.89	Average
3	2390.000	59.53	-2.13	57.40	74.00	16.60	Peak
4	2390.000	44.90	-2.13	42.77	54.00	11.23	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Vertical
Note: 2.4G WiFi ax20 Low Channel 2412MHz

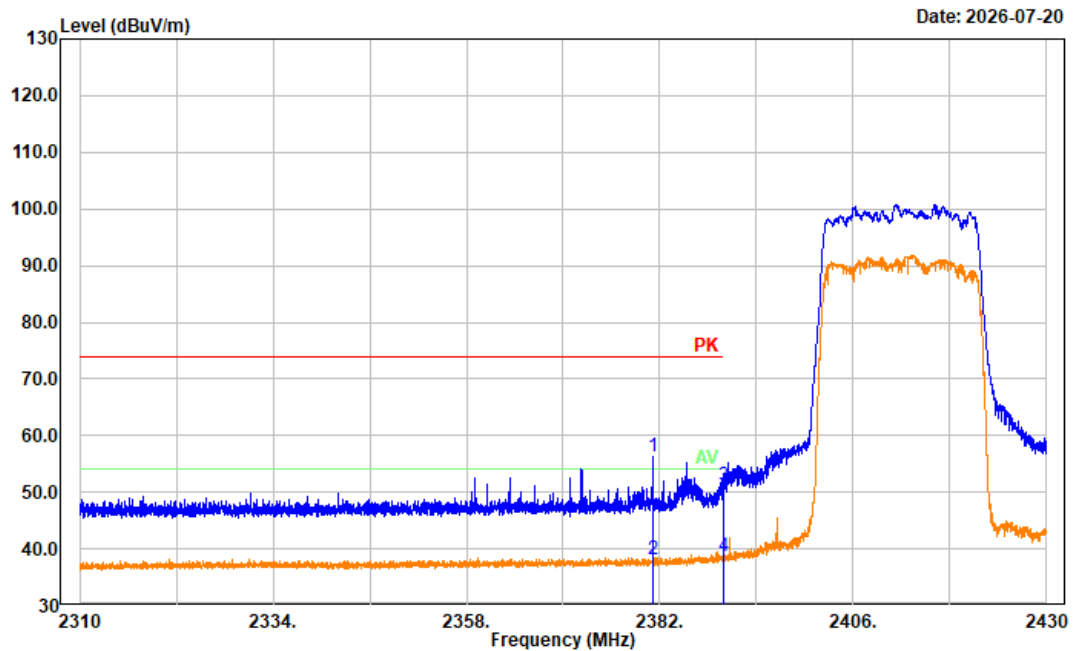


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2381.088	58.58	-2.18	56.40	74.00	17.60	Peak
2	2381.088	40.39	-2.18	38.21	54.00	15.79	Average
3	2390.000	53.30	-2.13	51.17	74.00	22.83	Peak
4	2390.000	40.90	-2.13	38.77	54.00	15.23	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Horizontal
Note: 2.4G WiFi ax20 High Channel 2462MHz

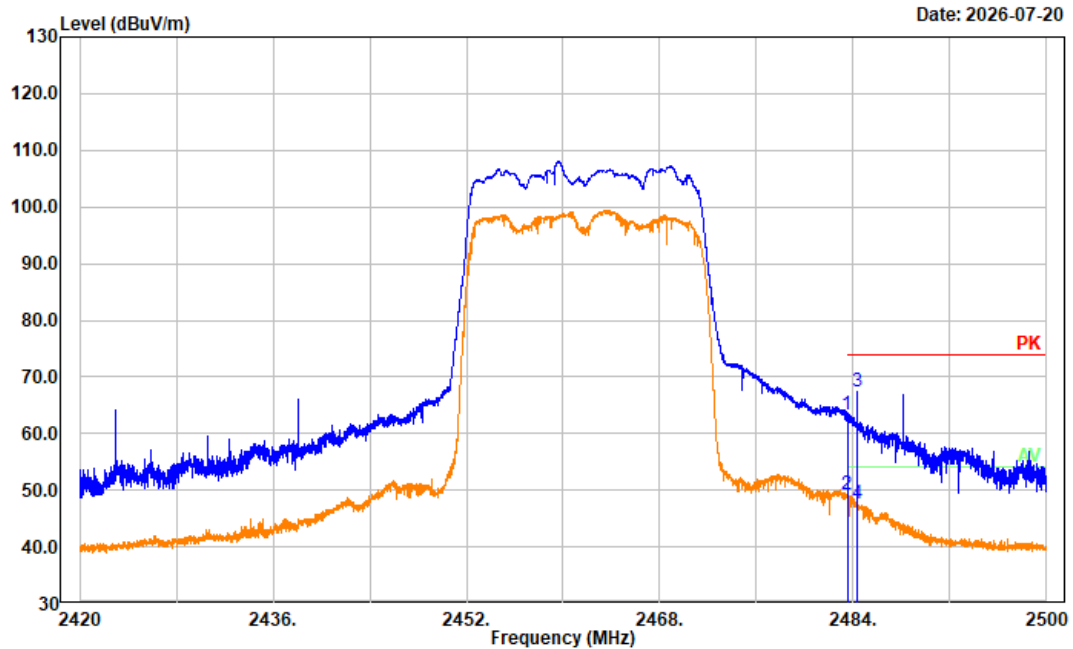


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	65.39	-2.17	63.22	74.00	10.78	Peak
2	2483.500	51.38	-2.17	49.21	54.00	4.79	Average
3	2484.304	69.67	-2.17	67.50	74.00	6.50	Peak
4	2484.304	49.82	-2.17	47.65	54.00	6.35	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Vertical
Note: 2.4G WiFi ax20 High Channel 2462MHz

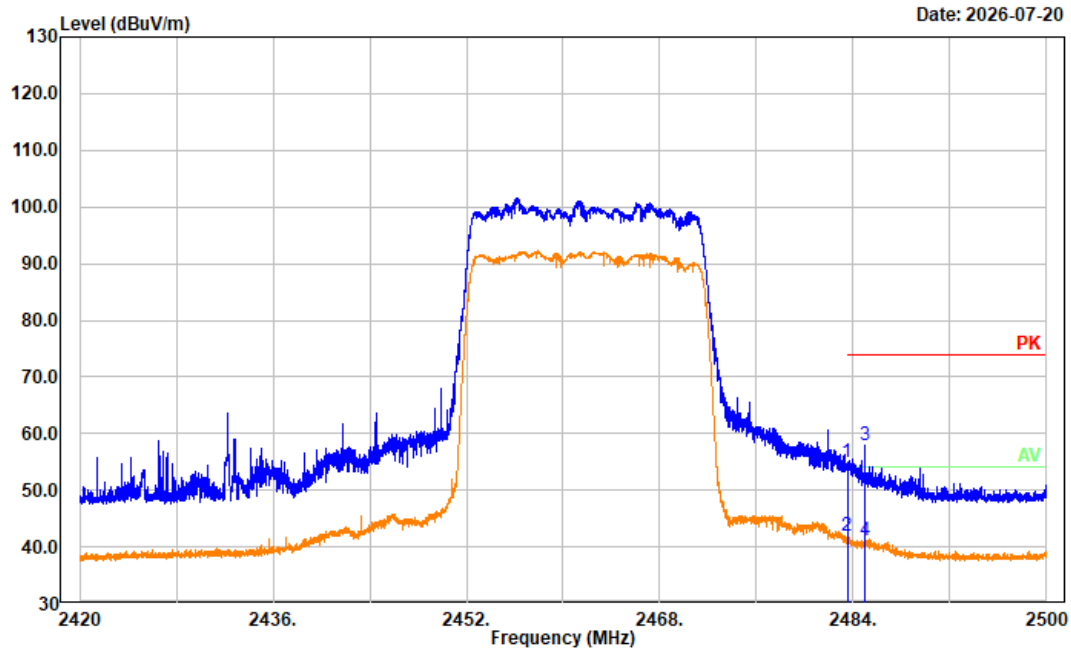


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	57.09	-2.17	54.92	74.00	19.08	Peak
2	2483.500	44.04	-2.17	41.87	54.00	12.13	Average
3	2484.976	59.96	-2.17	57.79	74.00	16.21	Peak
4	2484.976	43.20	-2.17	41.03	54.00	12.97	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Horizontal
Note: 2.4G WiFi ax40 Low Channel 2422MHz

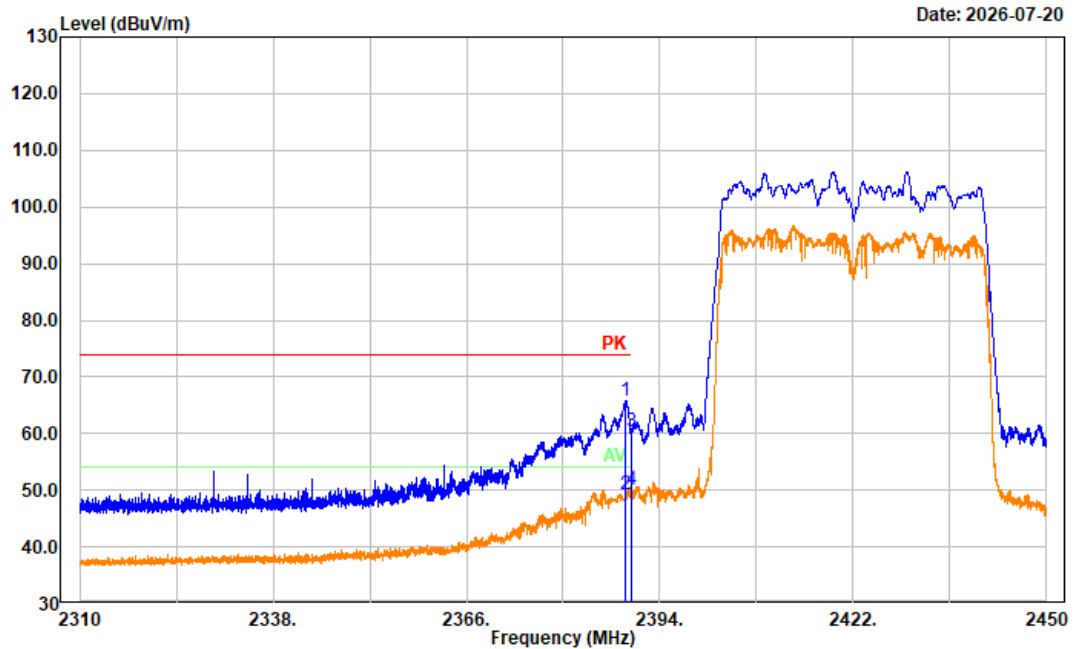


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2388.932	67.96	-2.13	65.83	74.00	8.17	Peak
2	2388.932	51.40	-2.13	49.27	54.00	4.73	Average
3	2390.000	62.49	-2.13	60.36	74.00	13.64	Peak
4	2390.000	52.25	-2.13	50.12	54.00	3.88	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Vertical
Note: 2.4G WiFi ax40 Low Channel 2422MHz

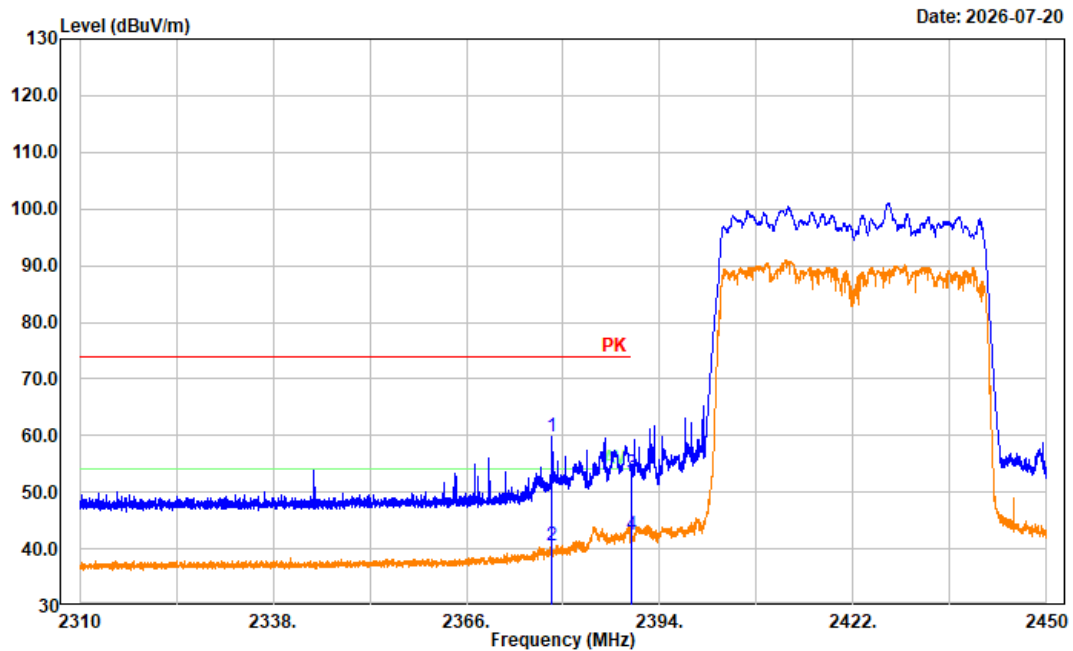


No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2378.432	62.00	-2.20	59.80	74.00	14.20	Peak
2	2378.432	42.71	-2.20	40.51	54.00	13.49	Average
3	2390.000	55.41	-2.13	53.28	74.00	20.72	Peak
4	2390.000	44.70	-2.13	42.57	54.00	11.43	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:5kHz
Polarization: Horizontal
Note: 2.4G WiFi ax40 High Channel 2452MHz

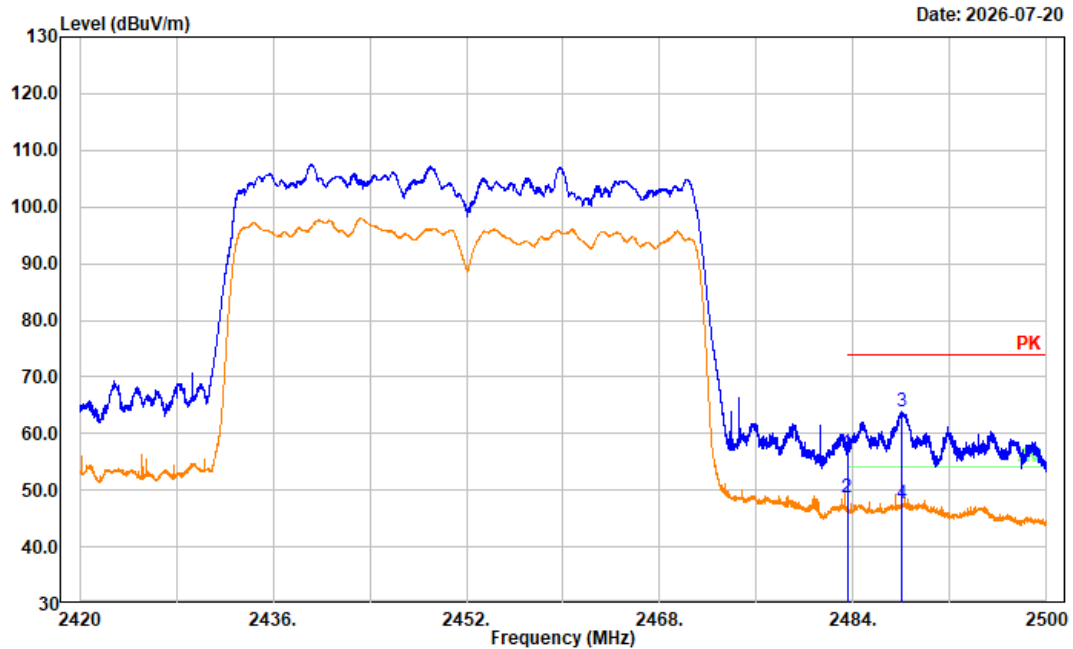

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	58.79	-2.17	56.62	74.00	17.38	Peak
2	2483.500	50.91	-2.17	48.74	54.00	5.26	Average
3	2487.952	66.07	-2.14	63.93	74.00	10.07	Peak
4	2487.952	49.72	-2.14	47.58	54.00	6.42	Average

Project No: 2603T61540E-RF
Tester: Peter Rong
Condition: PK trace RBW:1MHz; VBW:3MHz; AV trace RBW:1MHz; VBW:10kHz
Polarization: Vertical
Note: 2.4G WiFi ax40 High Channel 2452MHz

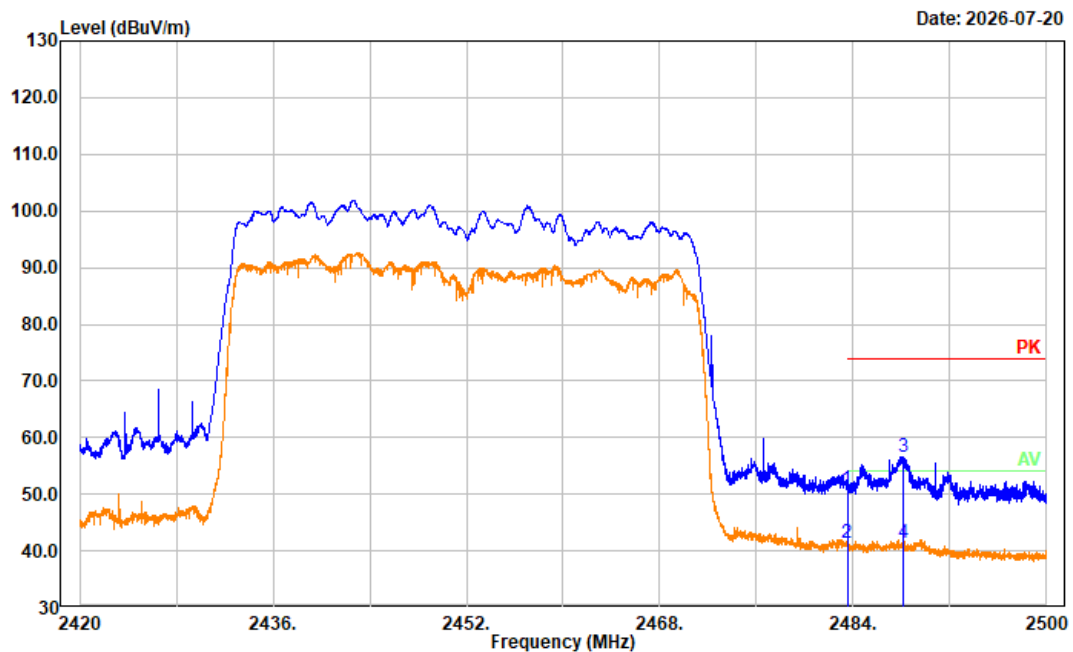

No.	Frequency (MHz)	Reading (dBμV)	Factor (dB/m)	Result (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Remark
1	2483.500	53.06	-2.17	50.89	74.00	23.11	Peak
2	2483.500	43.52	-2.17	41.35	54.00	12.65	Average
3	2488.080	58.78	-2.14	56.64	74.00	17.36	Peak
4	2488.080	43.40	-2.14	41.26	54.00	12.74	Average

4.3 RF Conducted Data

Please refer to Annex "2603T61540E-RF-00C_Appendix A" for detail test data.

5. EUT PHOTOGRAPHS

Please refer to the attachment 2603T61540E-RF-EXP EUT EXTERNAL PHOTOGRAPHS and 2603T61540E-RF-INP EUT INTERNAL PHOTOGRAPHS

6. TEST SETUP PHOTOGRAPHS

Please refer to the attachment 2603T61540E-RF-00C-TSP TEST SETUP PHOTOGRAPHS.

==== END OF REPORT ====