



深圳市立诚兴科技有限公司
Shenzhen Lichengxing Technology Co., Ltd.

承 认 书

SPECIFICATION FOR APPROVAL

客 户:	
CUSTOMER:	Shenzhen Sidawei Technology Co., Ltd. (KH178)
客 户 料 号:	
CUST P/N:	D2
内 部 料 号 :	
LCX P/N:	LCX-KH178017
产 品 型 号:	
DESC:	Φ 14.5*21-0.08*24P-13TS-6-23NMJ
日 期:	
DATE:	2026/1/5
版 本:	
Version:	A.0

制作 PREPARED BY	审核 CHECKED BY	批准 APPROVED BY	客户承认 CUSTOMER APPROVE
杨文俊 2026/1/5	高应洪 2026/1/5		


site: No. 365, Xinqu Road, Niuhe Community, Guanlan Street, Longhua District,
Shenzhen City

phone: 13828741697

E-mail: 467317369@qq.com

产品规格书 SPECIFICATION							版本 A/0	制作：杨文俊 2026/1/5	审核：高应洪 2026/1/5				
图纸编号：LCX-GCQP0001349							页码：3/4	客户代码：CUST	KH178				
规格型号 $\Phi 14.5 \times 21-0.08 \times 24P-13TS-6-23NMJ$							客户料号：CUST P/N		D2				
							内部料号：IN P/N		LCX-KH178017				
A	B	C	E	F	H	H1	H2	---	---	---	---	---	---
14.5 ± 0.3	20-21	23 ± 0.3	6 ± 1	3 ± 1	0.9 ± 0.15	0.17 ± 0.03	1.1 ± 0.15	---	---	---	---	---	---

I. Dimensions (in mm): Winding mold: Diameter: 14.5 mm; Coil weight: 0.96 kg

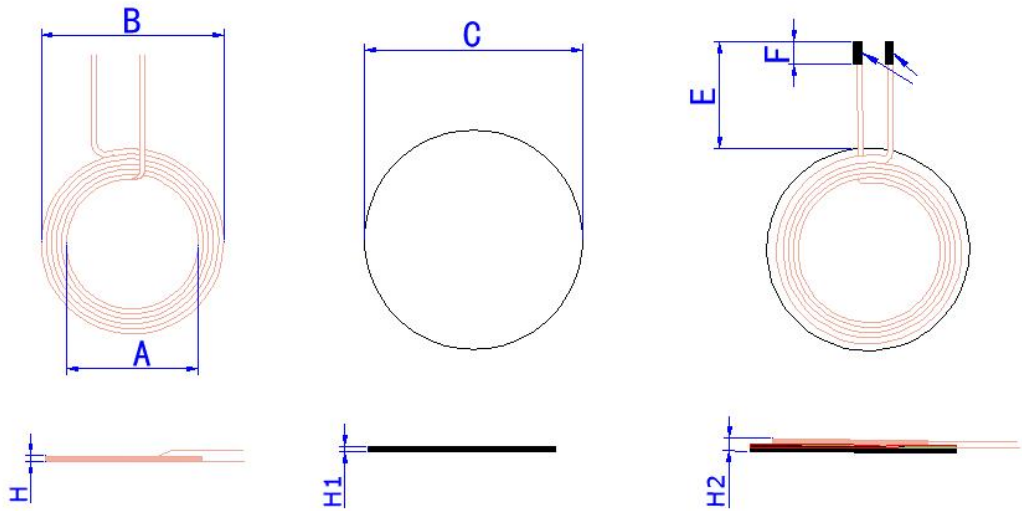

二、原理图 SCHEMATIC DIAGRAM:



三、绕线参数 Winding Specification:

序号 NO	端子 TERMINAL		线径 WIRE	线材分解温度 Temperature	圈数 Turns	绕线方向 Winding Direction
L1	S	F	Multi-strand enameled wire 0.08 * 24P	180-250	13TS	anticlockwise

四、电气特性 ELECTRICAL CHARACTERISTIC: :

温度 TEMPERATURE:25 $\pm 10^{\circ}\text{C}$, 湿度 RELATIVE HUMIDITY:65 $\pm 20\%$

序号 NO	磁片材质 Disk material	电感量 LS	阻抗 DCR	测试条件 TEST FREQUENCY	测试仪器 TEST EQUIPMENTS
L1		4.3uH $\pm 10\%$	115m $\Omega \pm 10\%$	100KHz/1.0V	U2832
L2	Hard magnetic sheet	6.9uH $\pm 5\%$	115m $\Omega \pm 10\%$	100KHz/1.0V	U2832