


GSM Rugged 'Puck' Antenna IP67



Test Report E2500

Far-field amplitude of E.nsi

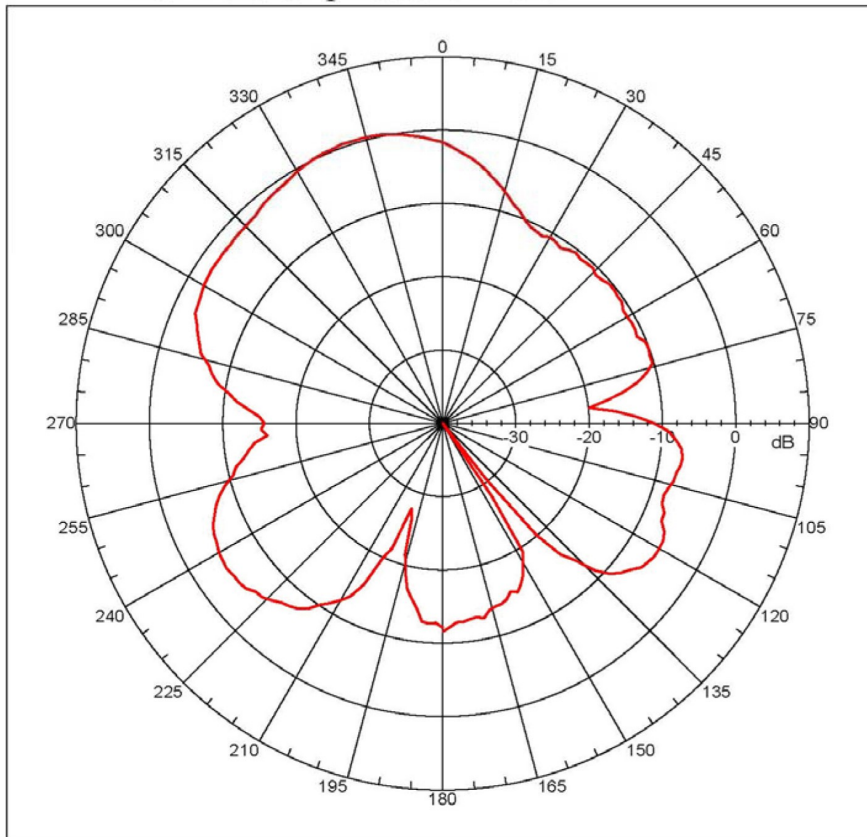

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
Gain = 0.45901 dBi
Max far-field (global) = -49.67698 dB, Max far-field (plot) =
-49.67698 dB
Normalization: Reference, Network offset = 0.000 dB
Hpeak at: -20.00001 deg, Vpeak at: 0.000 deg
Plot centering: On

NSI2000 V4.0.124, Filename: C:\Documents and Settings\NSI\Desktop\20

Measurement date/time: 5/9/2013 1:10:59 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -7.364 dB

-3. dB beam width: 63.89 deg

-6. dB beam width: 84.82 deg

-10. dB beam width: 102.12 deg

Left Sidelobe: -4.95 dB at -123.687 deg

Right Sidelobe: -10.56 dB at 71.397 deg

Far-field display setup

Azimuth (deg)

Span = 360.00001 deg, Center = 0.000 deg, #pts = 181

Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 2.000

deg

Elevation (deg)


Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 12

Beam	Frequency	Azimuth	Elevation	Pol
11	2.500 GHz	Azimuth	Elevation	Single-pol

Test Report E2600

Far-field amplitude of E.nsi

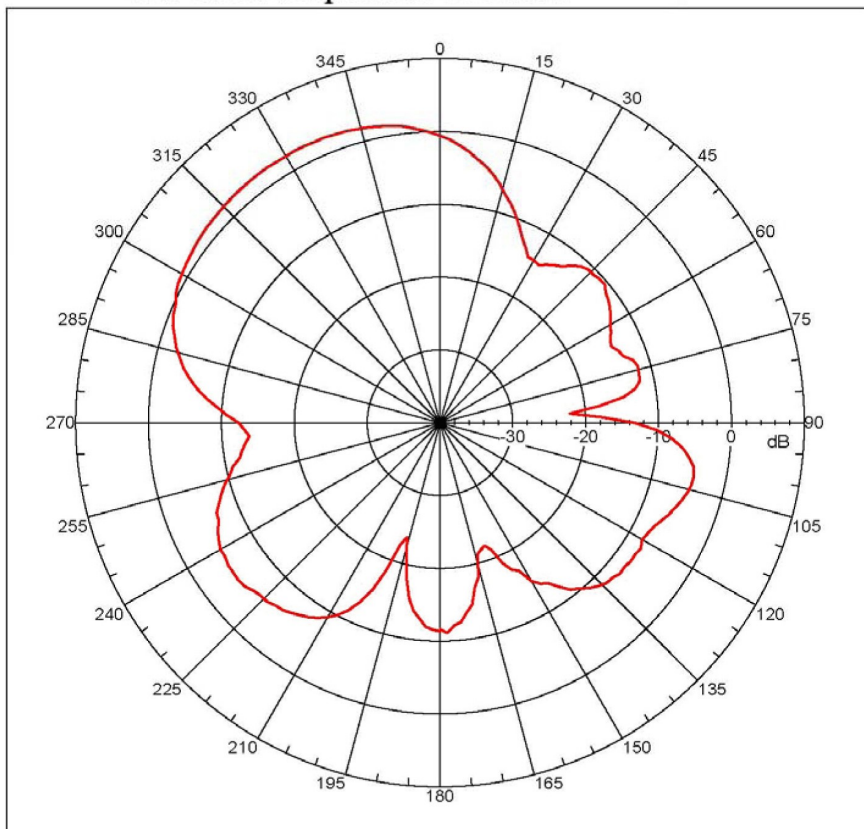

Far-field amplitude, Eprincipal: Linear, Tau = 0.000 deg
Gain = 2.33806 dBi
Max far-field (global) = -47.97873 dB, Max far-field (plot) =
-47.97873 dB
Normalization: Reference, Network offset = 0.000 dB
Hpeak at: -20.00001 deg, Vpeak at: 0.000 deg
Plot centering: On

NSI2000 V4.0.124, Filename: C:\Documents and Settings\NSI\Desktop\20

Measurement date/time: 5/9/2013 1:10:59 PM, Filetype: NSI-97

Far-field Cut Analysis:

Avg value: -5.878 dB

-3. dB beam width: 69.09 deg

-6. dB beam width: 86.26 deg

-10. dB beam width: 100.88 deg

Left Sidelobe: -7.55 dB at -119.665 deg

Right Sidelobe: -12.82 dB at 51.285 deg

Far-field display setup

Azimuth (deg)

Span = 360.00001 deg, Center = 0.000 deg, #pts = 181

Start = -180.00001 deg, Stop = 180.00001 deg, Delta = 2.000

deg

Elevation (deg)

Center = 0.000 deg, #pts = 1

Selected beam(s) 1 of 12

Beam	Frequency	Azimuth	Elevation	Pol
12	2.600 GHz	Azimuth	Elevation	Single-pol

GSM Rugged 'Puck' Antenna IP67



RF Solutions Ltd. Recycling Notice Meets the following EC Directives:

DO NOT

Discard with normal waste, please recycle.

ROHS Directive 2002/95/EC

Specifies certain limits for hazardous substances.

WEEE Directive 2002/96/EC

Waste electrical & electronic equipment. This product must be disposed of through a licensed WEEE collection point. RF Solutions Ltd., fulfills its WEEE obligations by membership of an approved compliance scheme.

www.rfsolutions.co.uk

RF Solutions Ltd

William Alexander House, William Way, Burgess Hill, West Sussex, RH15 9AG
Sales: +44(0)1444 227 910 Tech Support: +44(0)1444 227909

