

Appendix A

RF Test Data for BT LE (Conducted Measurement)

Product Name: Khronos Lite Control Handle with Magnetic Mount Kit for iPhone

Test Model: TKL-CHK-B

Environmental Conditions


Temperature:	23.9° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Suichao Lai
Supervised by:	Fengliu Tang

A.1 -6dB Bandwidth


Condition	Mode	Frequency (MHz)	Antenna	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	Ant1	0.658	≥ 0.5	Pass
NVNT	BLE 1M	2440	Ant1	0.655	≥ 0.5	Pass
NVNT	BLE 1M	2480	Ant1	0.657	≥ 0.5	Pass


Test Graphs

-6dB Bandwidth NVNT BLE 1M 2402MHz Ant1

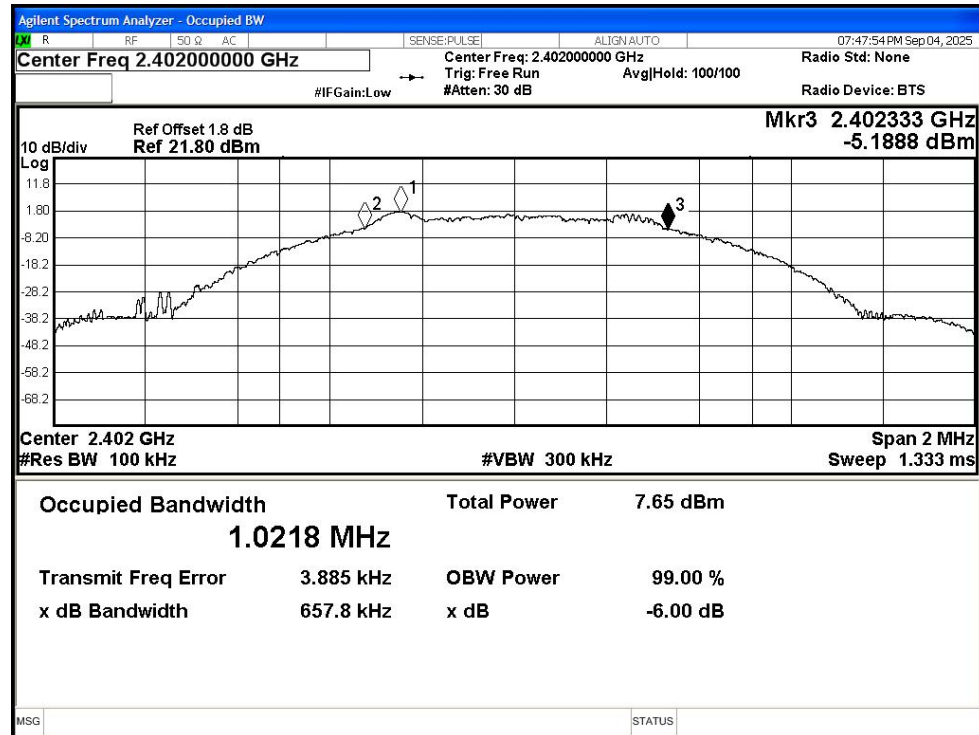

-6dB Bandwidth NVNT BLE 1M 2440MHz Ant1

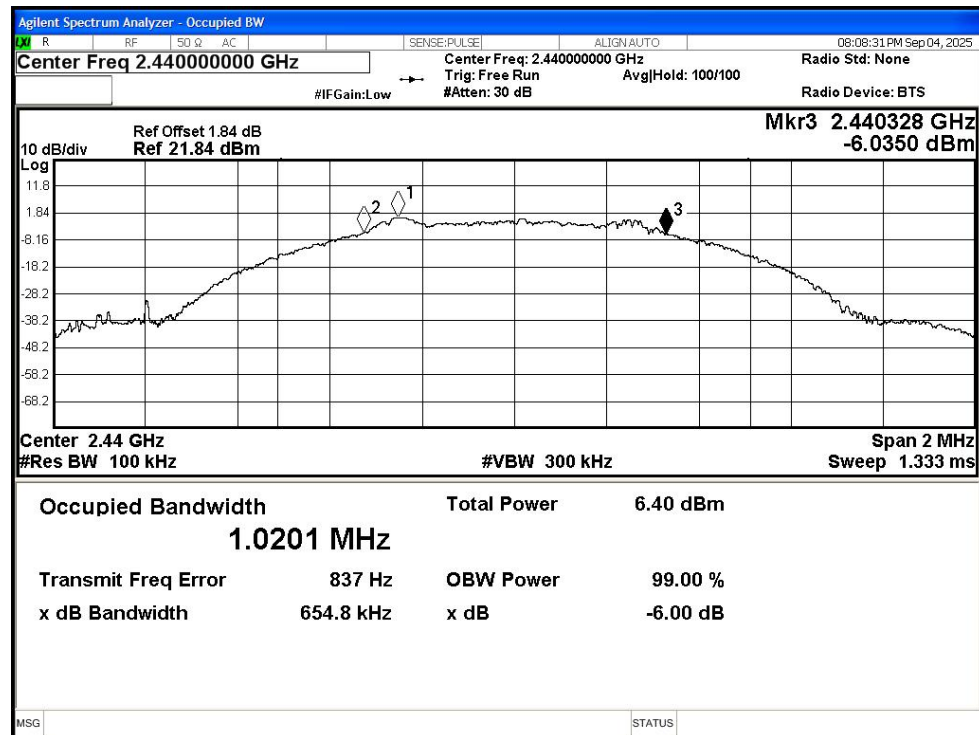

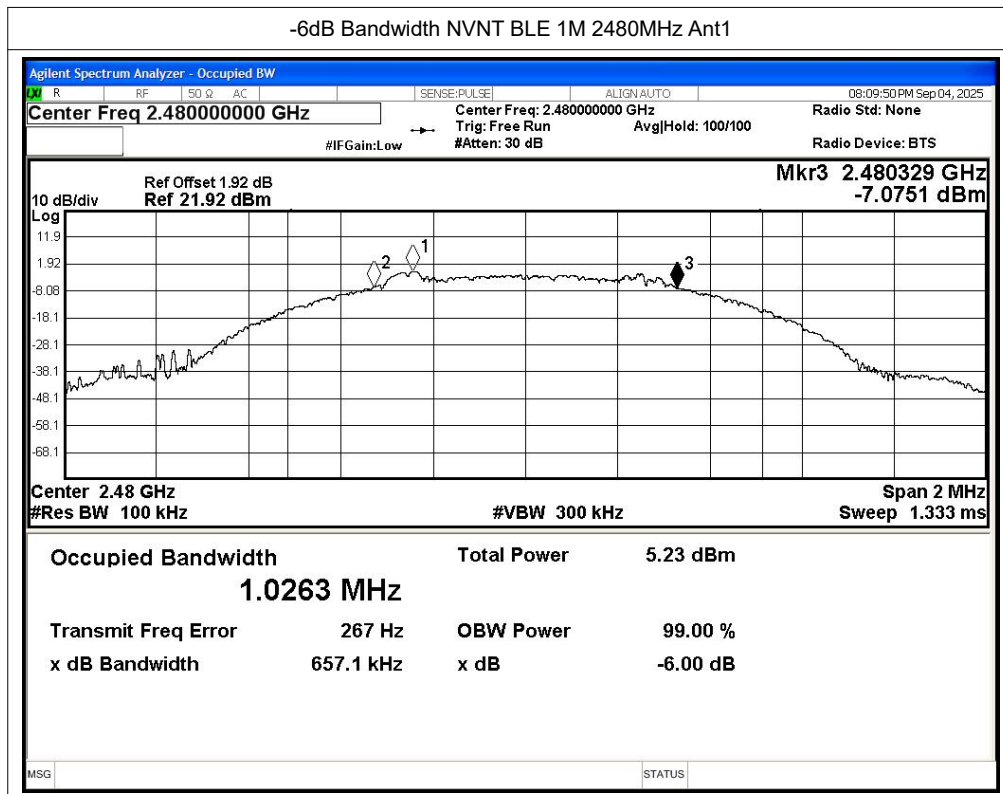


A.2 Maximum Peak Conducted Output Power


Condition	Mode	Frequency (MHz)	Antenna	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	Ant1	1.78	30	Pass
NVNT	BLE 1M	2440	Ant1	0.52	30	Pass
NVNT	BLE 1M	2480	Ant1	-0.54	30	Pass


Test Graphs

Power NVNT BLE 1M 2402MHz Ant1

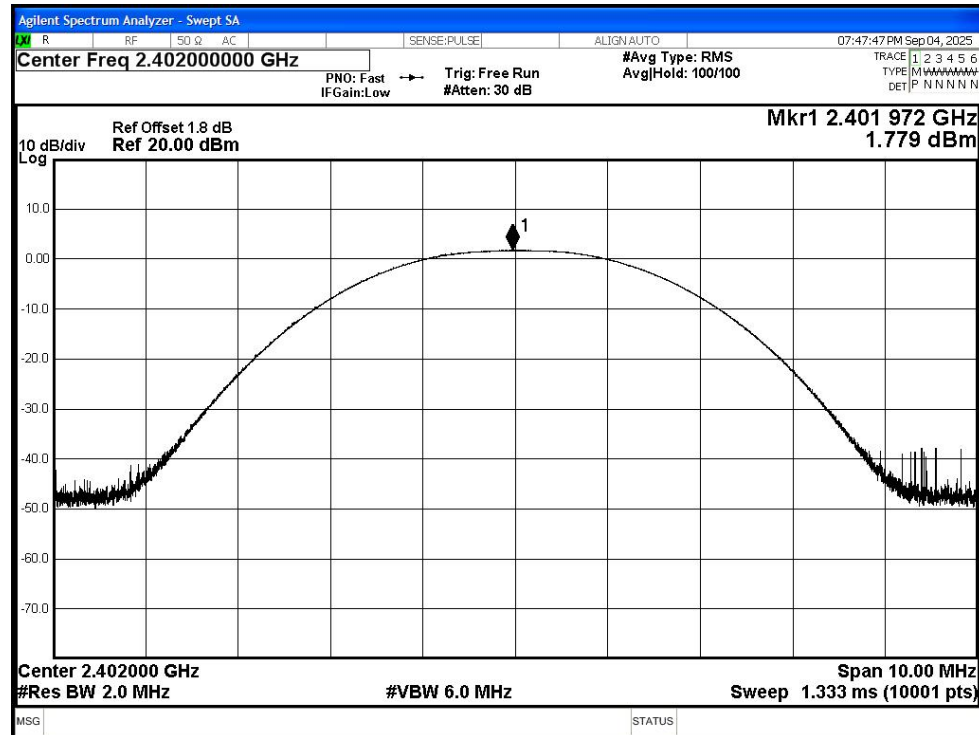

Power NVNT BLE 1M 2440MHz Ant1

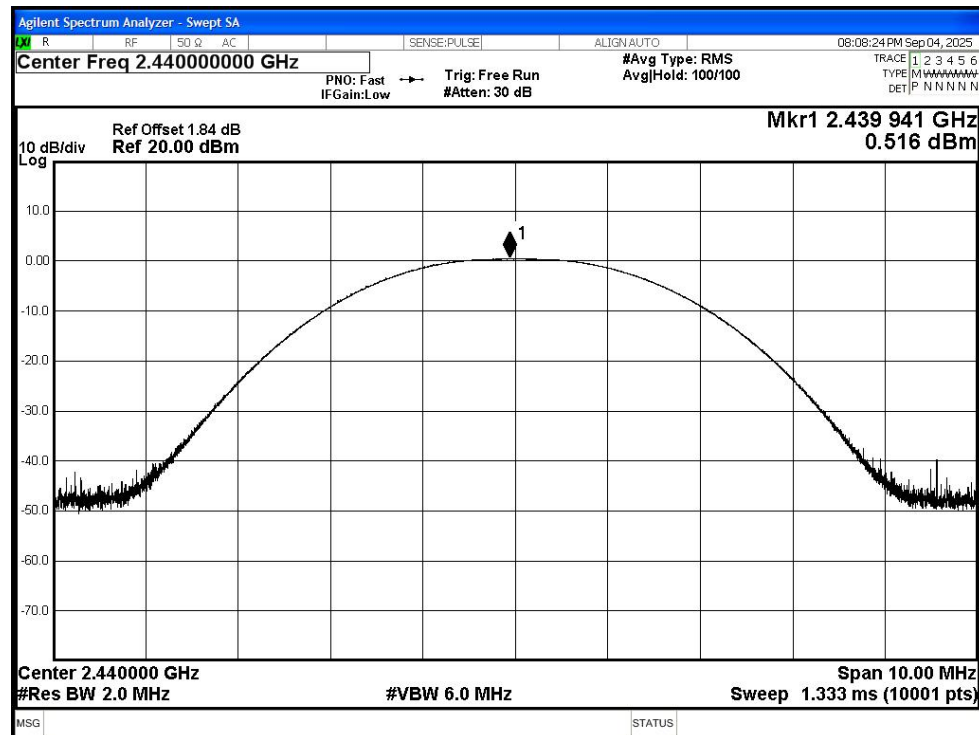

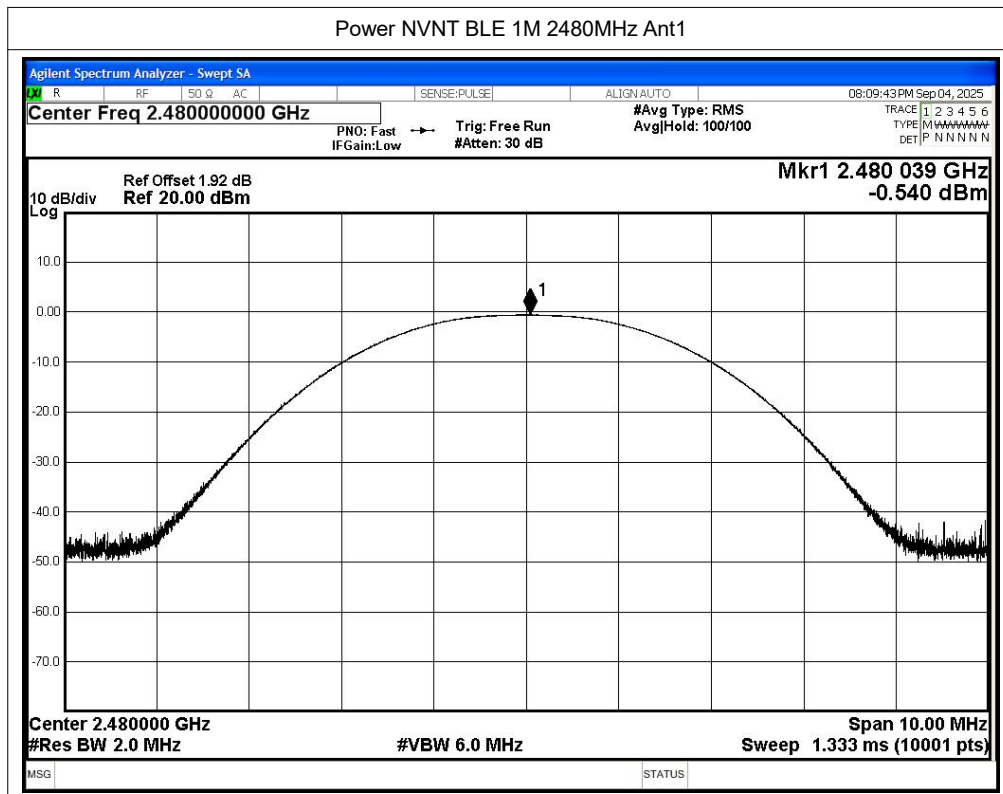


A.3 Maximum Power Spectral Density Level


Condition	Mode	Frequency (MHz)	Antenna	Total PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	Ant1	-14.86	8	Pass
NVNT	BLE 1M	2440	Ant1	-15.95	8	Pass
NVNT	BLE 1M	2480	Ant1	-17.05	8	Pass

Test Graphs


PSD NVNT BLE 1M 2402MHz Ant1

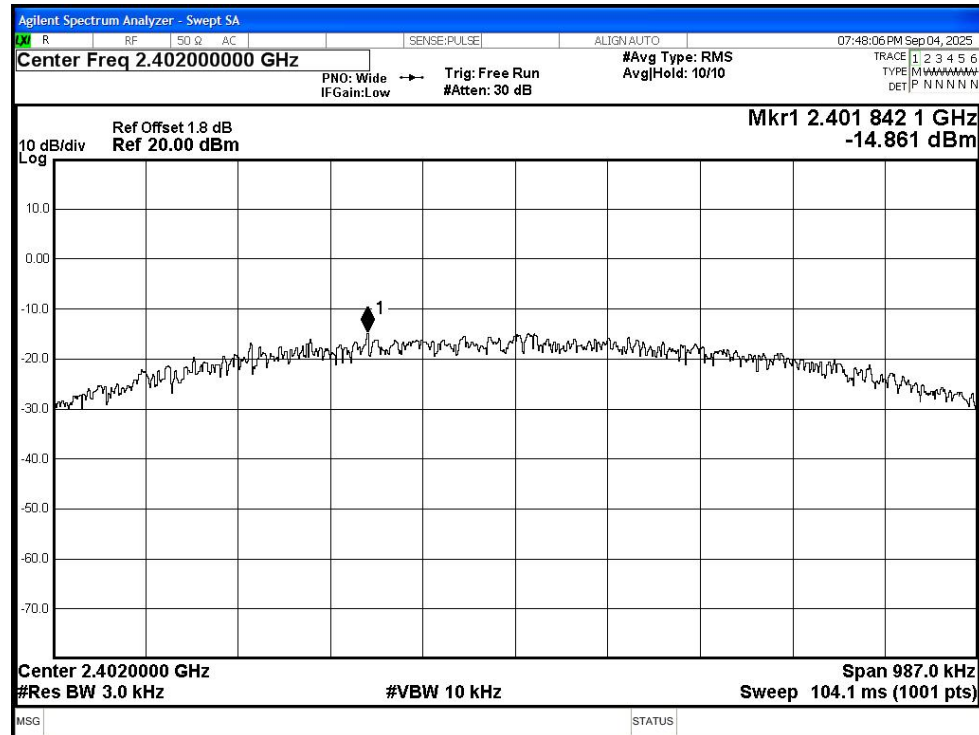

PSD NVNT BLE 1M 2440MHz Ant1

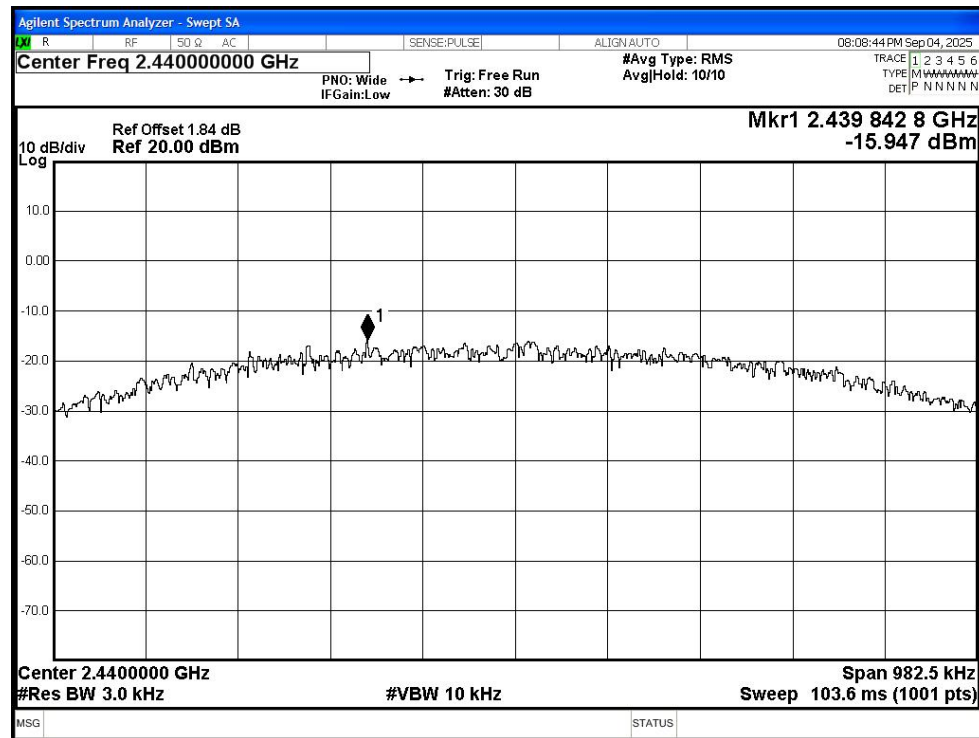

LCSC09035004EA

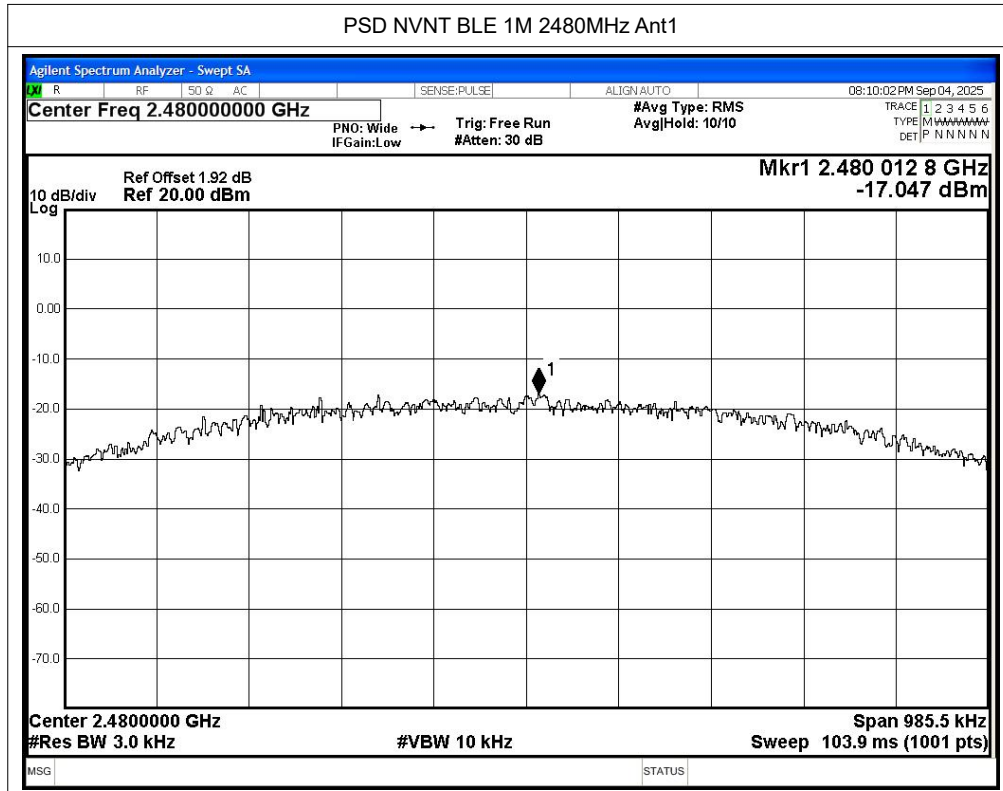


A.4 Band Edge

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-58.51	-20	Pass
NVNT	BLE 1M	2480	Ant1	-55.73	-20	Pass


LCSC09035004EA

Test Graphs


Band Edge NVNT BLE 1M 2402MHz Ant1 Ref

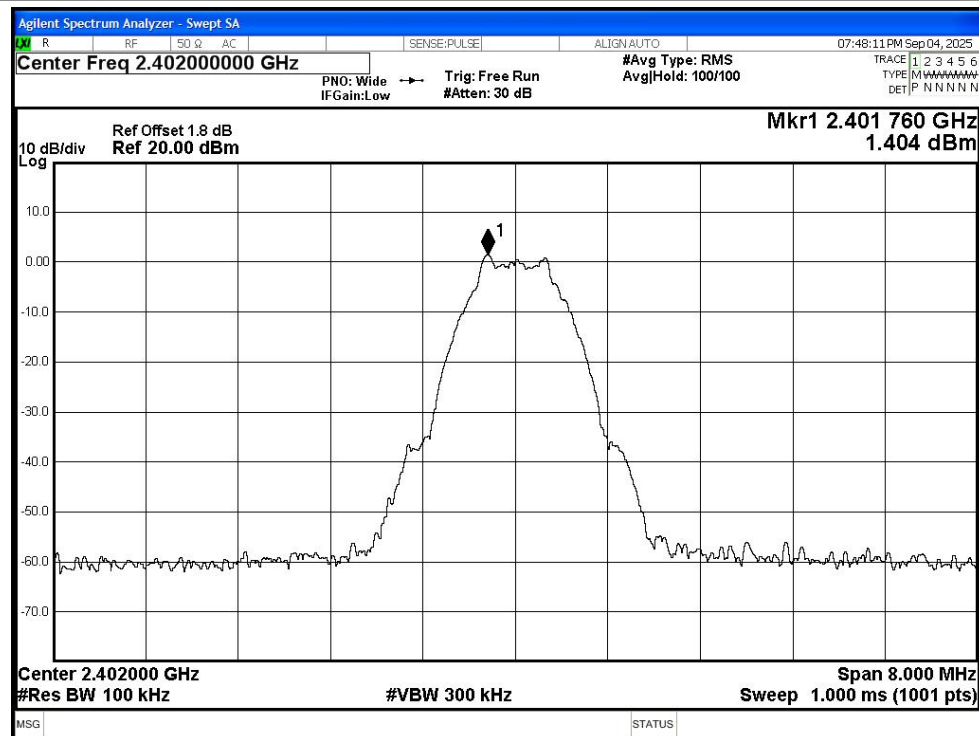

Band Edge NVNT BLE 1M 2402MHz Ant1 Emission

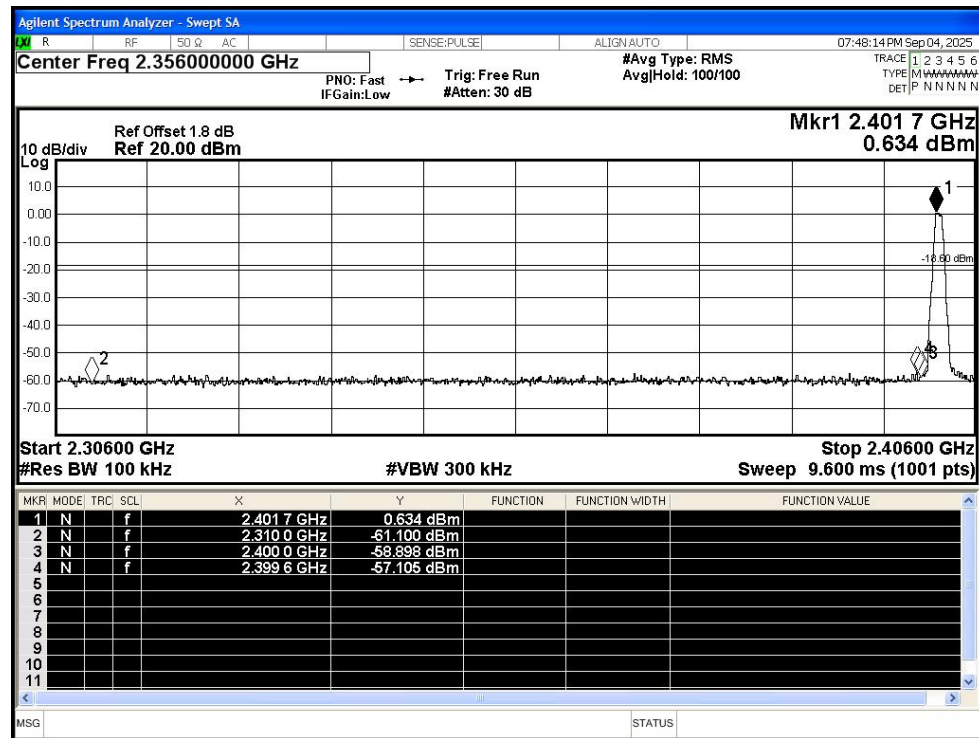

LCSC09035004EA

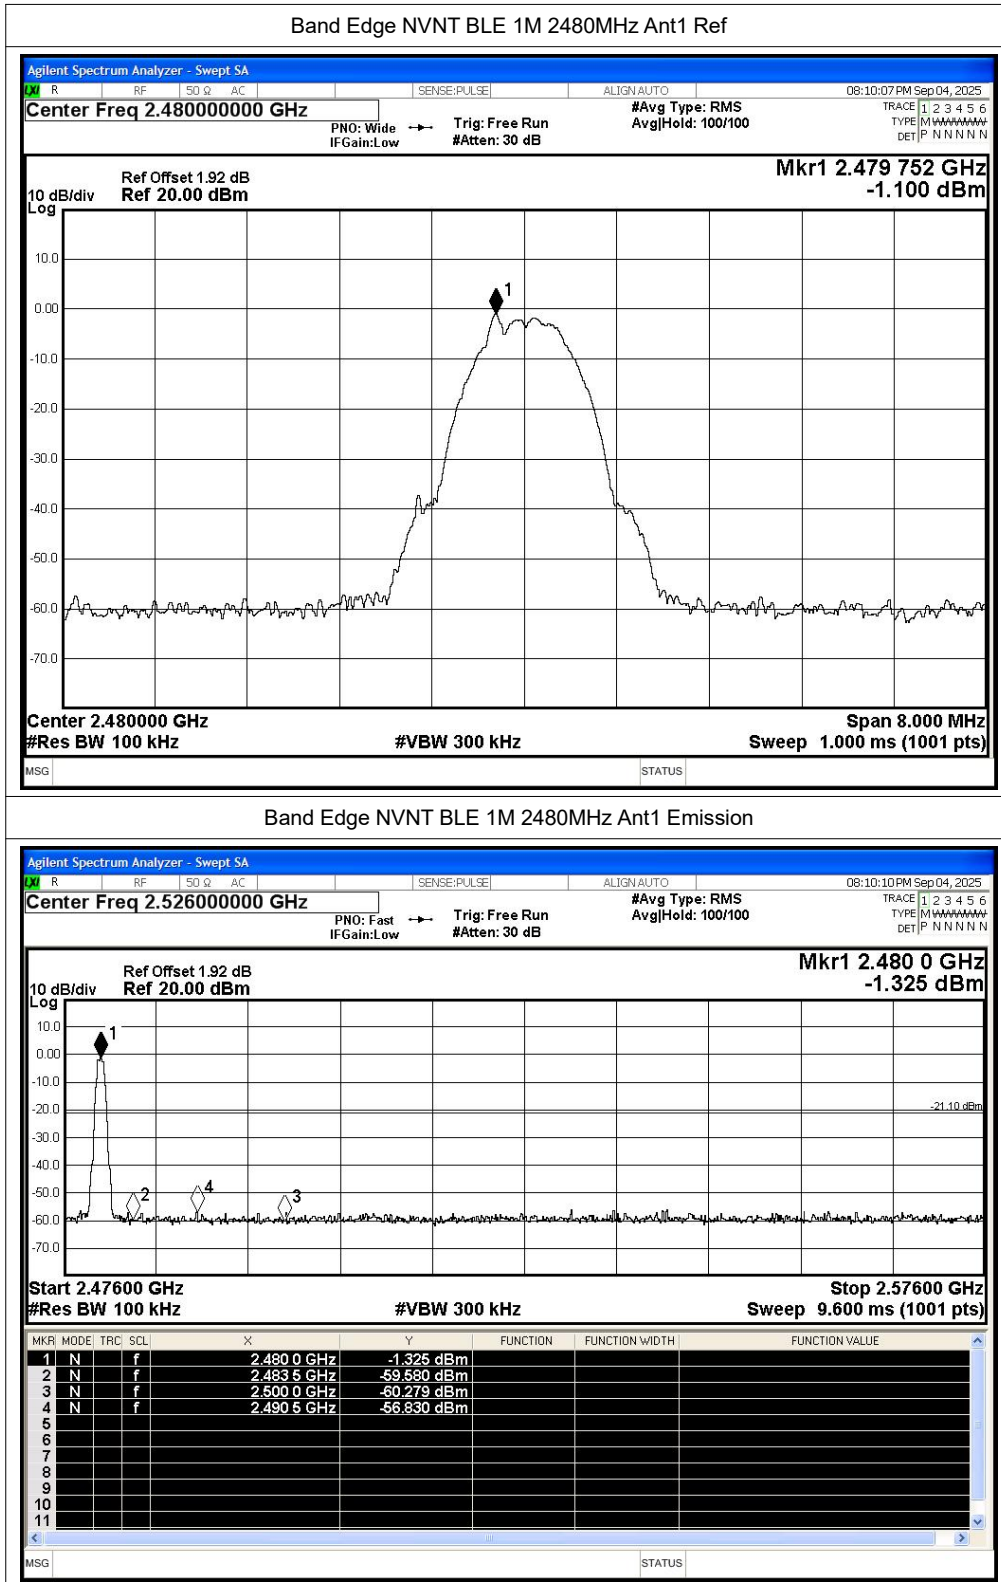


A.5 Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Antenna	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	Ant1	-56.13	-20	Pass
NVNT	BLE 1M	2440	Ant1	-54.56	-20	Pass
NVNT	BLE 1M	2480	Ant1	-54.45	-20	Pass


LCSC09035004EA

Test Graphs


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Ref

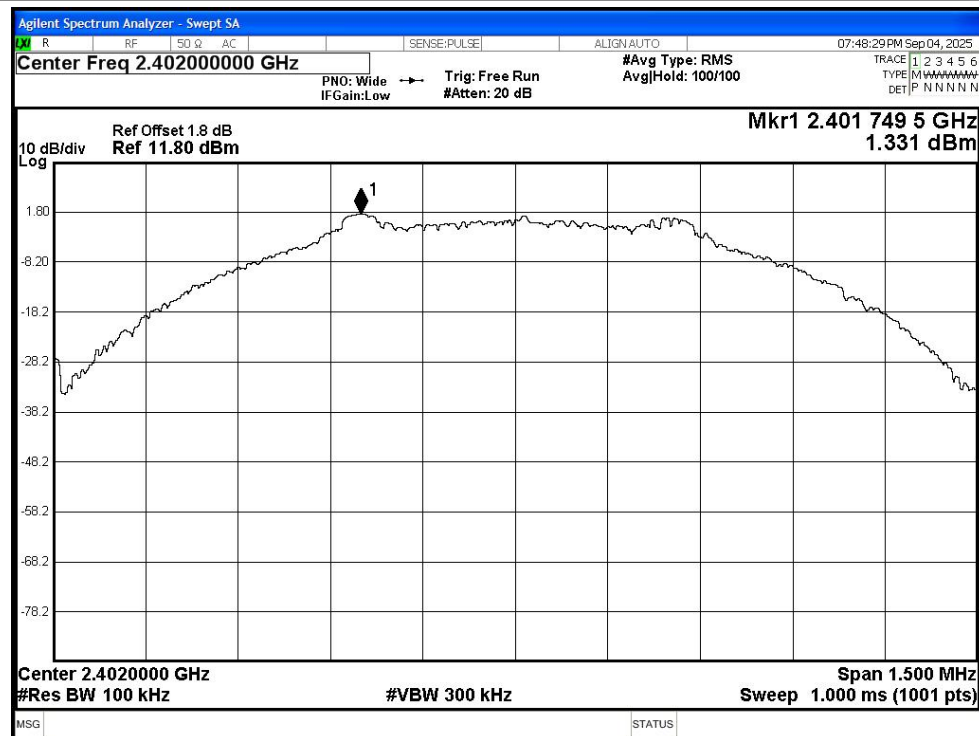


Tx. Spurious NVNT BLE 1M 2402MHz Ant1 Emission

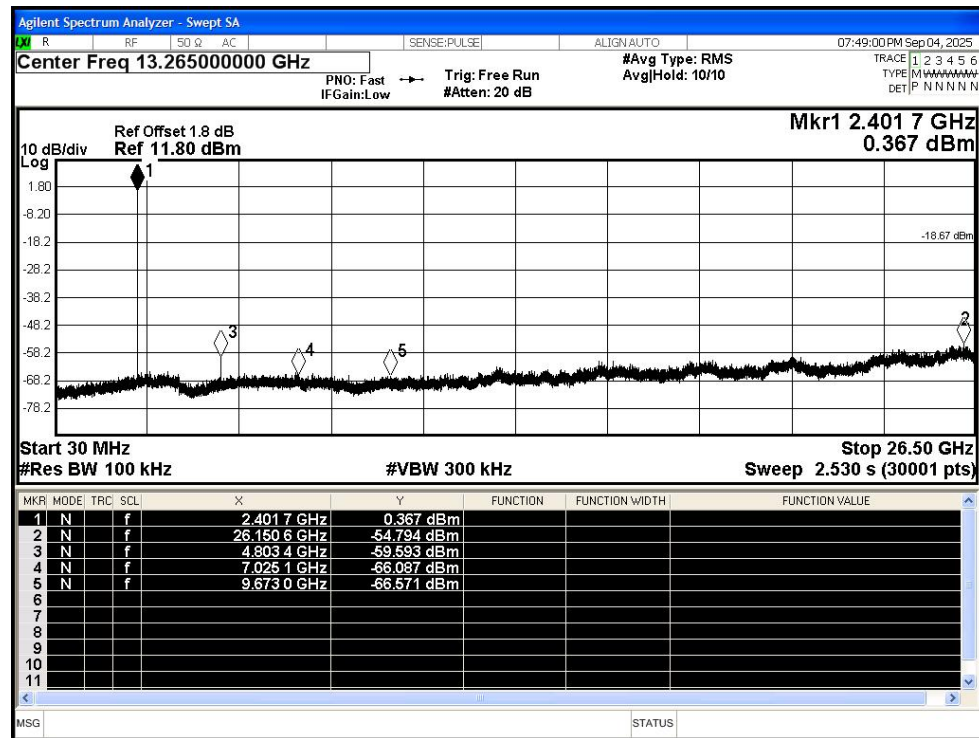

LCSC09035004EA

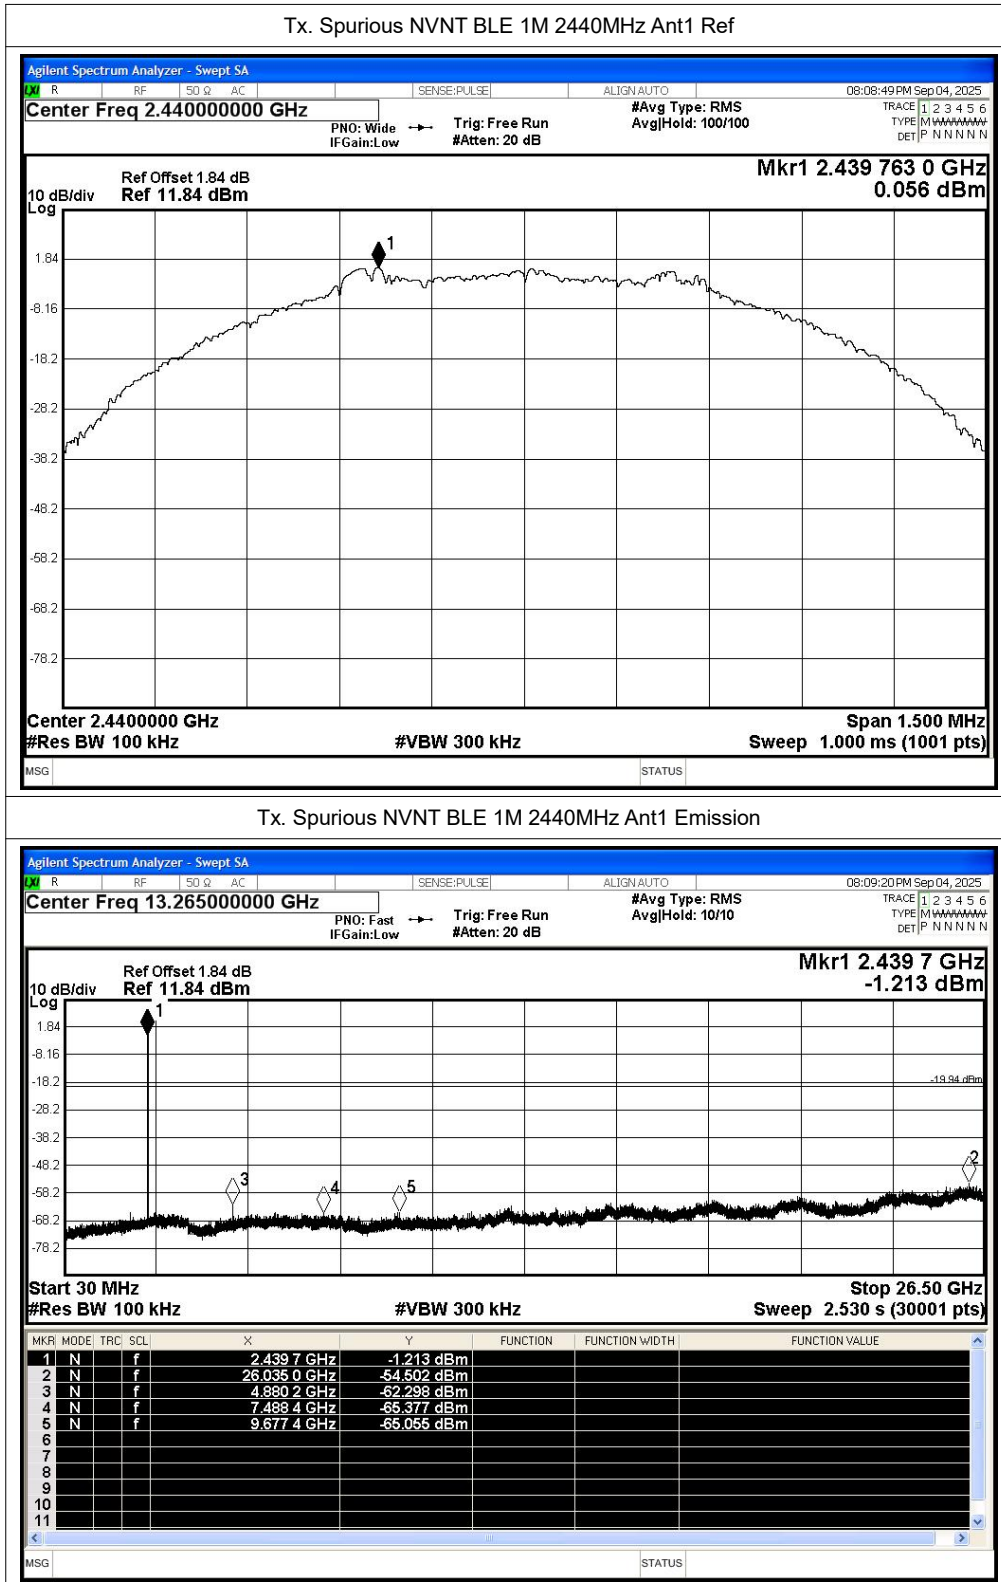

LCSC09035004EA

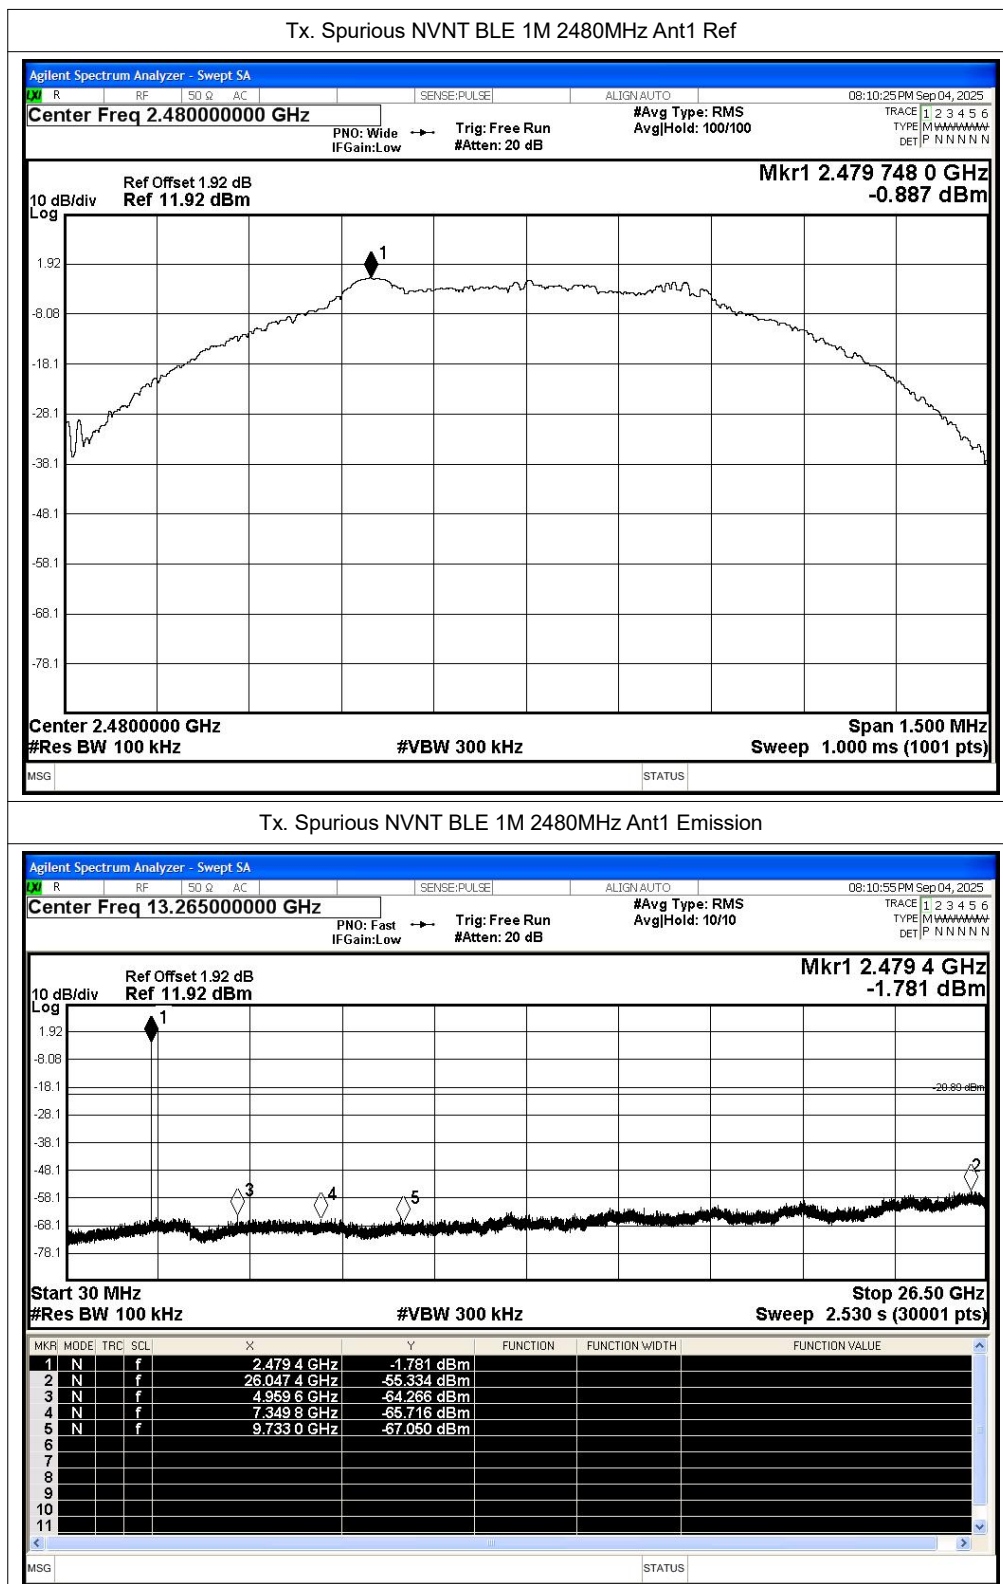


A.6 Duty Cycle

Condition	Mode	Frequency (MHz)	Antenna	Duty Cycle (%)	Correction Factor (dB)	1/T (kHz)
NVNT	BLE 1M	2402	Ant1	87.41	0.58	0.61
NVNT	BLE 1M	2440	Ant1	87.39	0.59	0.61
NVNT	BLE 1M	2480	Ant1	87.39	0.59	0.61


LCSC09035004EA


Test Graphs

Duty Cycle NVNT BLE 1M 2402MHz Ant1

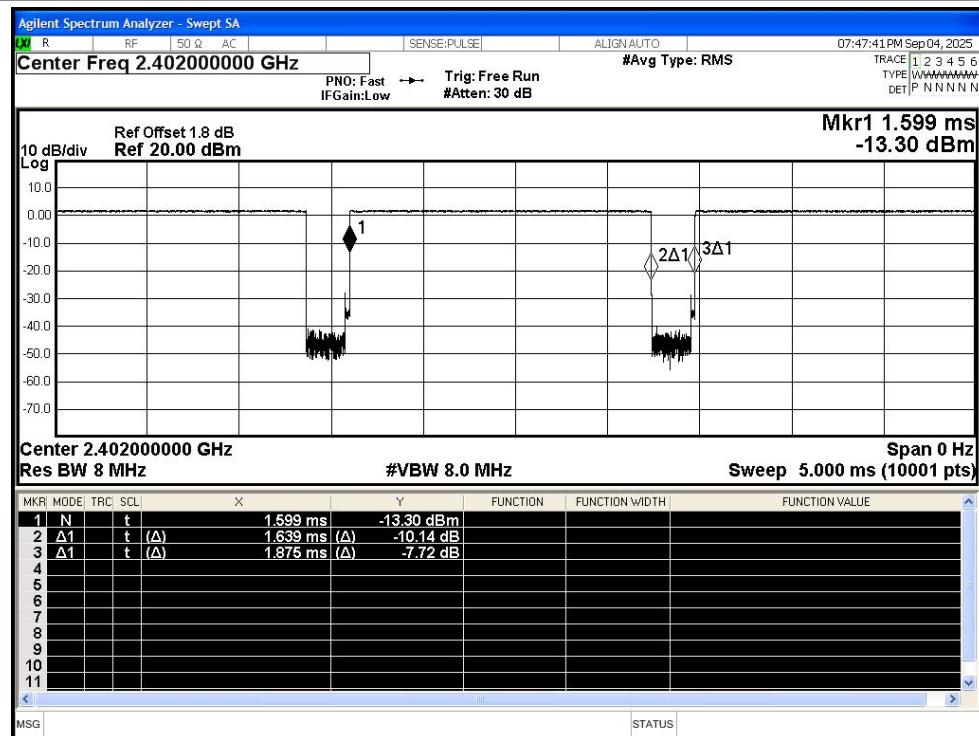

Duty Cycle NVNT BLE 1M 2440MHz Ant1

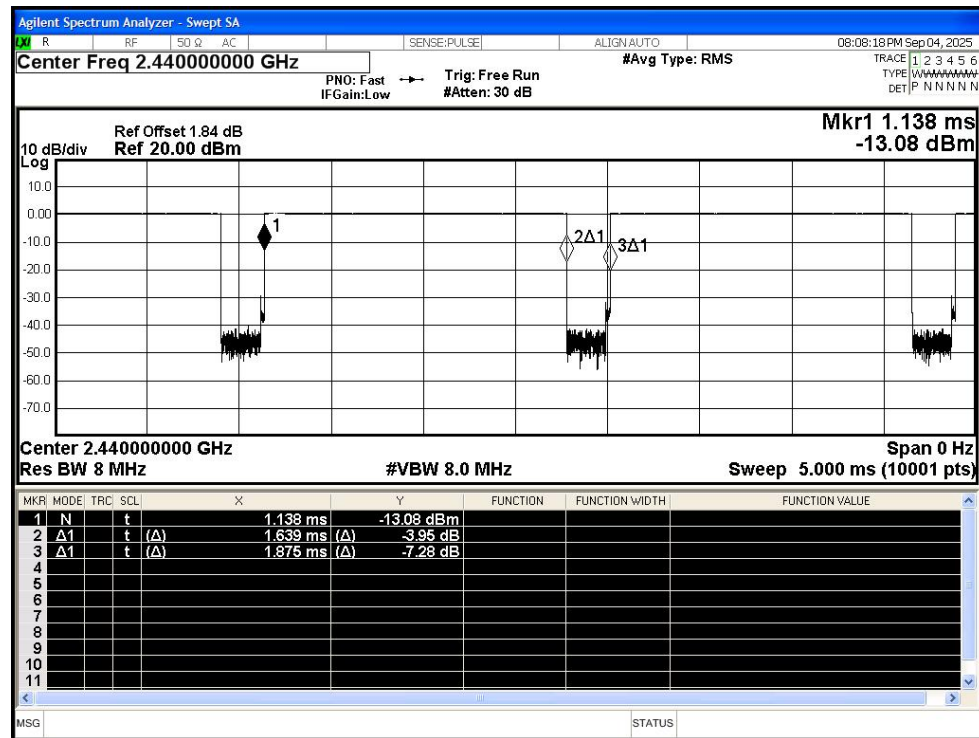

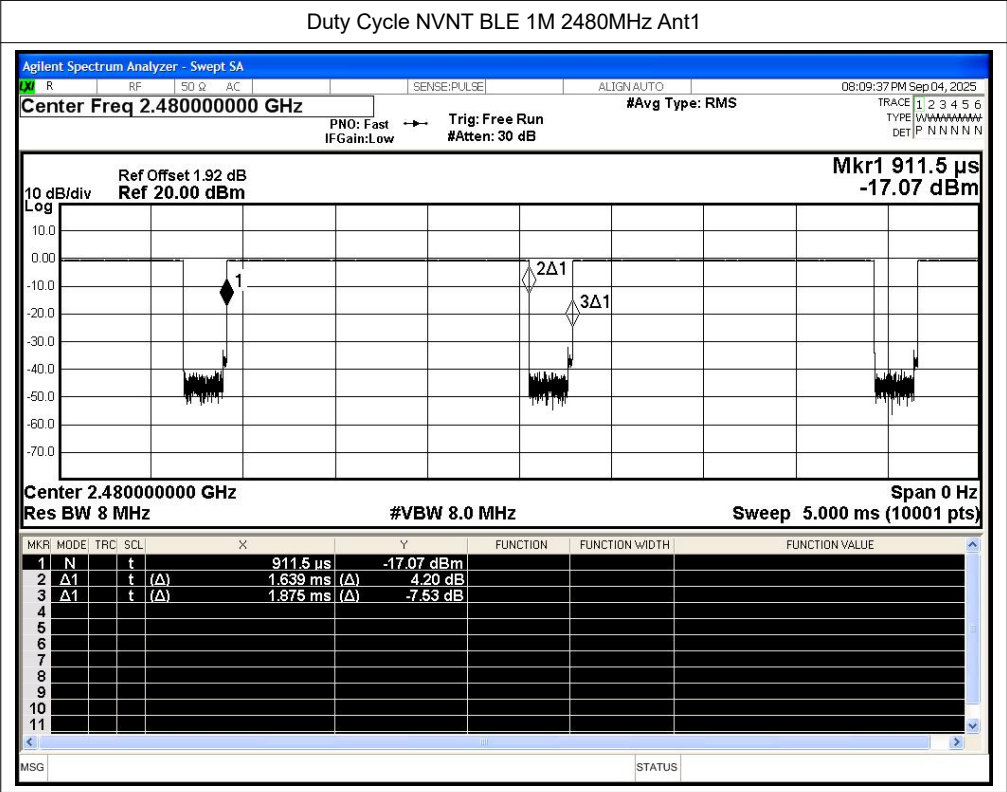


LCSC09035004EA

A.7 Restrict Band

Condition	Mode	Frequency (MHz)	Antenna	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor (dB)	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
NVNT	BLE 1M	2402	Ant1	2310	-49.77	2	-	47.49	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2310	-58.77	2	0.58	39.07	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2380.08	-47.31	2	-	49.95	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2387.568	-58.33	2	0.58	39.51	Average	54	Pass
NVNT	BLE 1M	2402	Ant1	2390	-50.3	2	-	46.96	Peak	74	Pass
NVNT	BLE 1M	2402	Ant1	2390	-58.52	2	0.58	39.32	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-50.11	2	-	47.15	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.5	-57.61	2	0.59	40.24	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2483.68	-45.9	2	-	51.36	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2483.752	-57.49	2	0.59	40.36	Average	54	Pass
NVNT	BLE 1M	2480	Ant1	2500	-50.6	2	-	46.66	Peak	74	Pass
NVNT	BLE 1M	2480	Ant1	2500	-57.97	2	0.59	39.88	Average	54	Pass

LCSC09035004EA

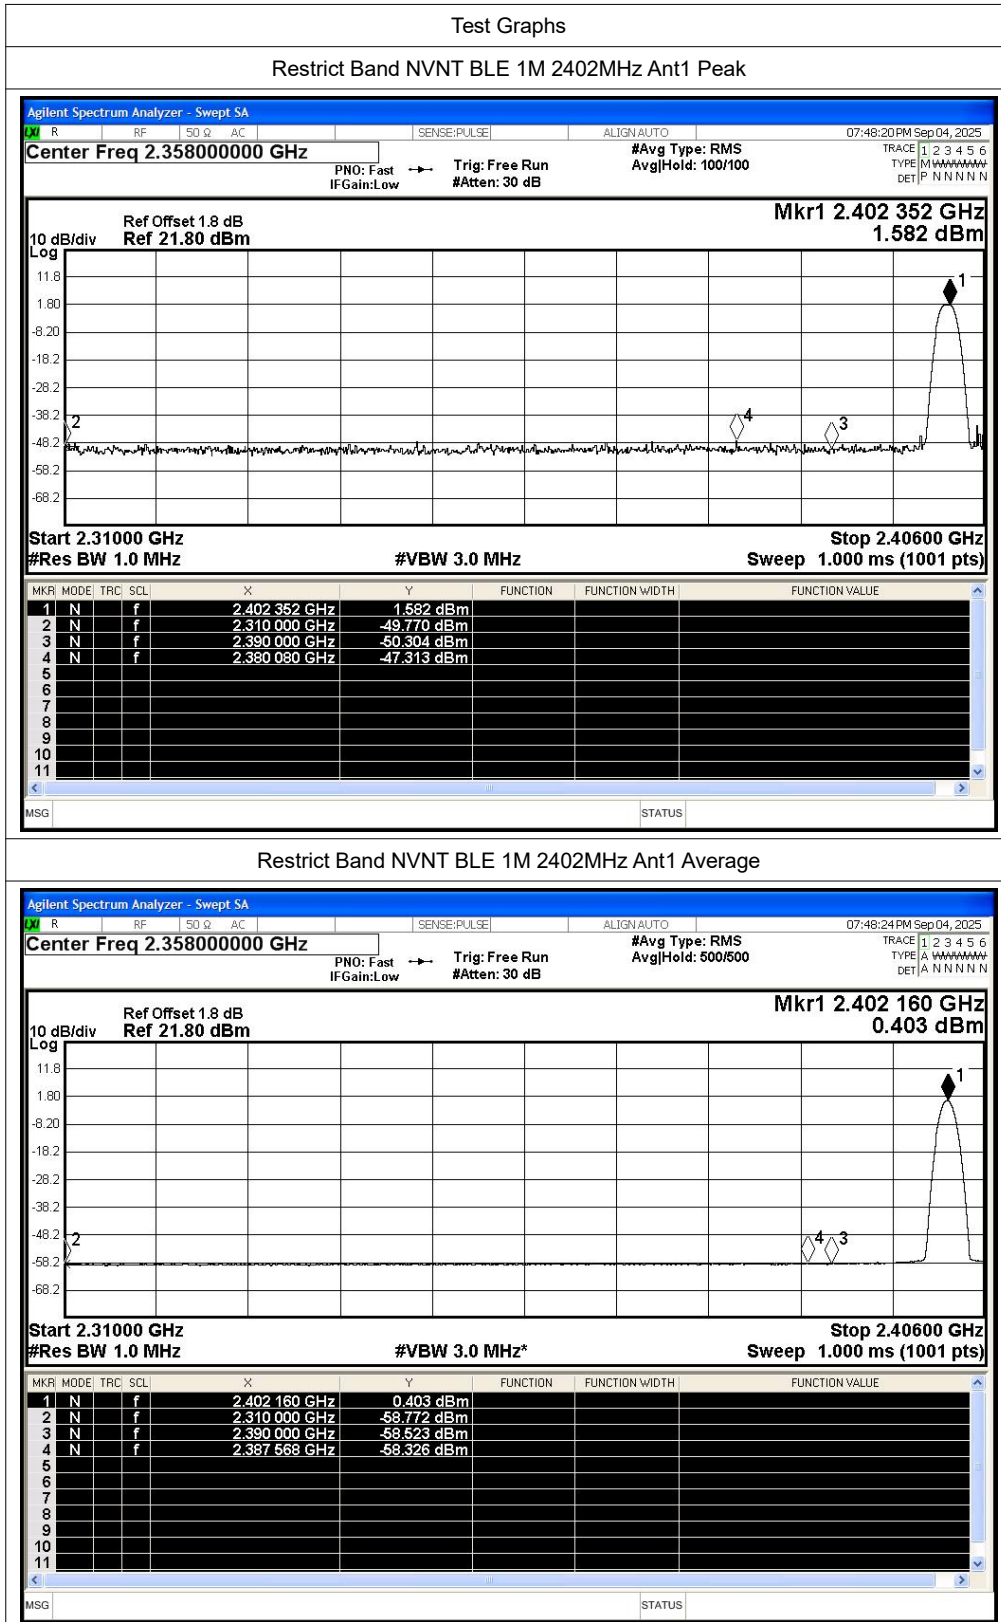

LCSC09035004EA

