

2BH5B-KRF-REPEATER



Extend the transmission distance up to 30m from transmitter(s) to receiver(s).

Place the Signal Repeater in the middle of the transmitter and receiver.

Monitors the received signal strength to assess the quality of the wireless connection.

When the receiver receives a valid signal from the transmitter, the LCD symbol will flash, and then the receiver will receive the signal from the repeater.

Warning:

- Specifications:
- Power: USB TYPE-C (5V/1A)
- Operating frequency: 915 MHz
- Working distance up to: 30 m.



1.Changes or modifications to this unit not expressly approved by the party responsible for compliance could void the user authority to operate the equipment.

2.To comply with FCC RF exposure compliance requirements, a separation distance of at least 20 cm must be maintained between the antenna of this device and all persons.

3.This Transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

4.This device complies with Part 15 of theFCC Rules.

Operation is subject to the following twoconditions:(1) this device may not causeharmful interference, and (2) this devicemust accept any interference received,including interference that may causeundesired operation.

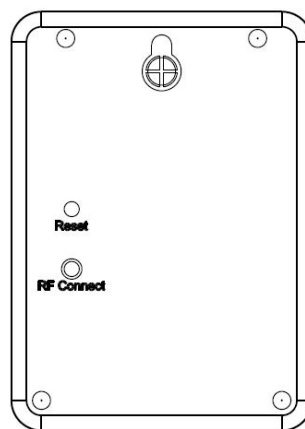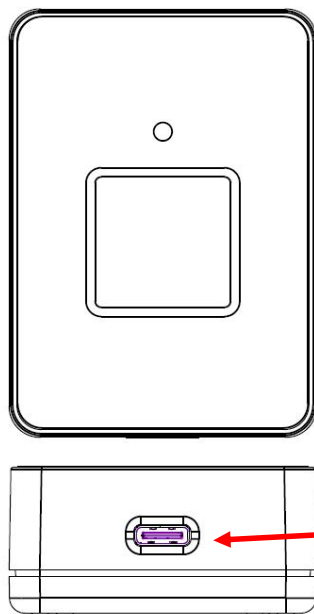

Power: USB TYPE-C (5V/1A)