


|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 144_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

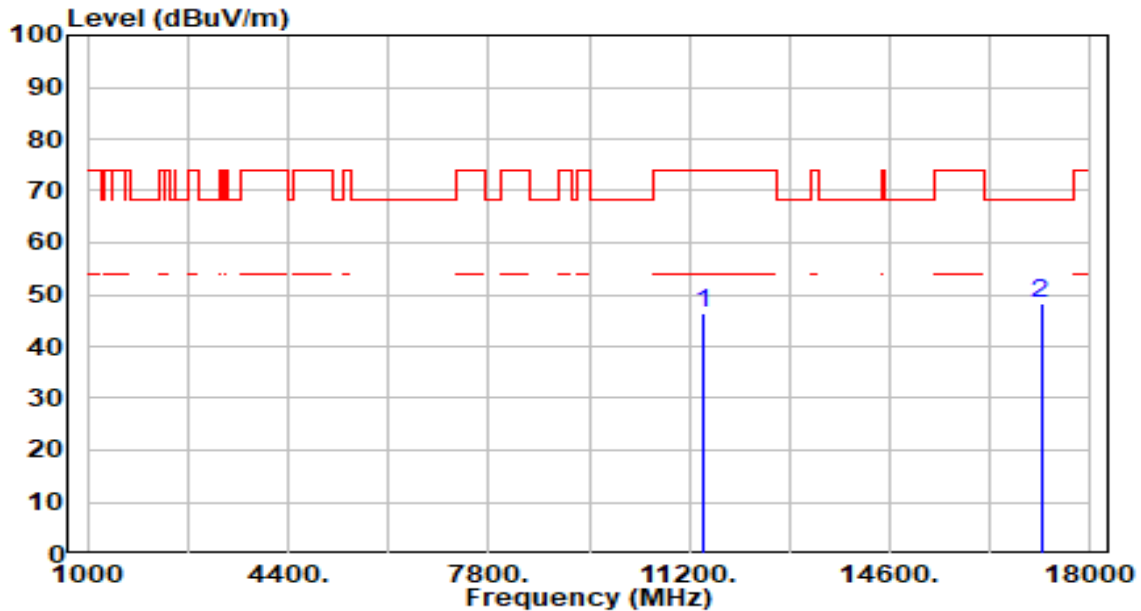


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 41.21          | 5.24       | 46.45                | -27.55      | 74.00          | 100         | 304         | Peak              |
| 2  | * 17160.000     | 42.81          | 5.41       | 48.22                | -19.98      | 68.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band3_CH 144_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

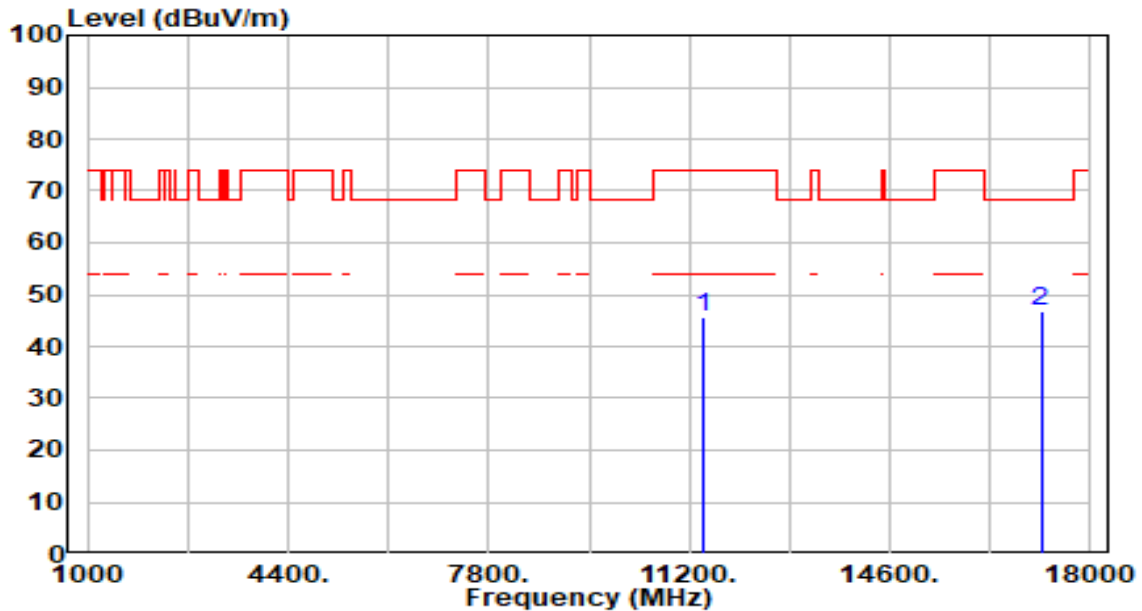


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 40.53          | 5.24       | 45.77                | -28.23      | 74.00          | 100         | 360         | Peak              |
| 2  | * 17160.000     | 41.36          | 5.41       | 46.77                | -21.43      | 68.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 149_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

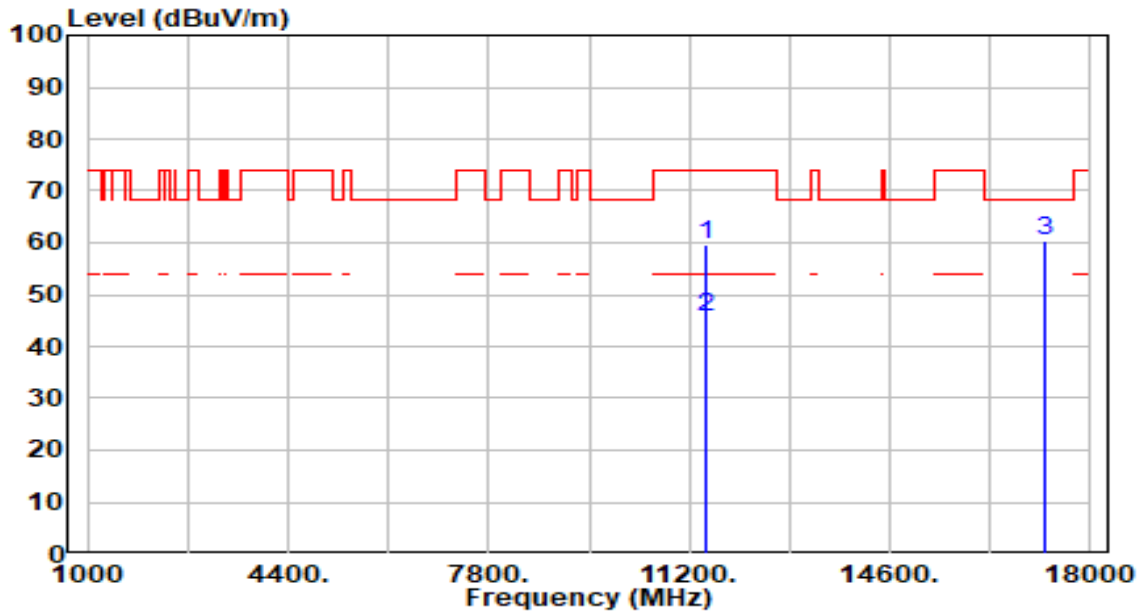


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 54.32          | 5.28       | 59.60                | -14.40      | 74.00          | 190         | 157         | Peak              |
| 2  | 11490.000       | 40.48          | 5.28       | 45.76                | -8.24       | 54.00          | 190         | 157         | Average           |
| 3  | * 17235.000     | 55.04          | 5.25       | 60.28                | -7.92       | 68.20          | 300         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 149_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

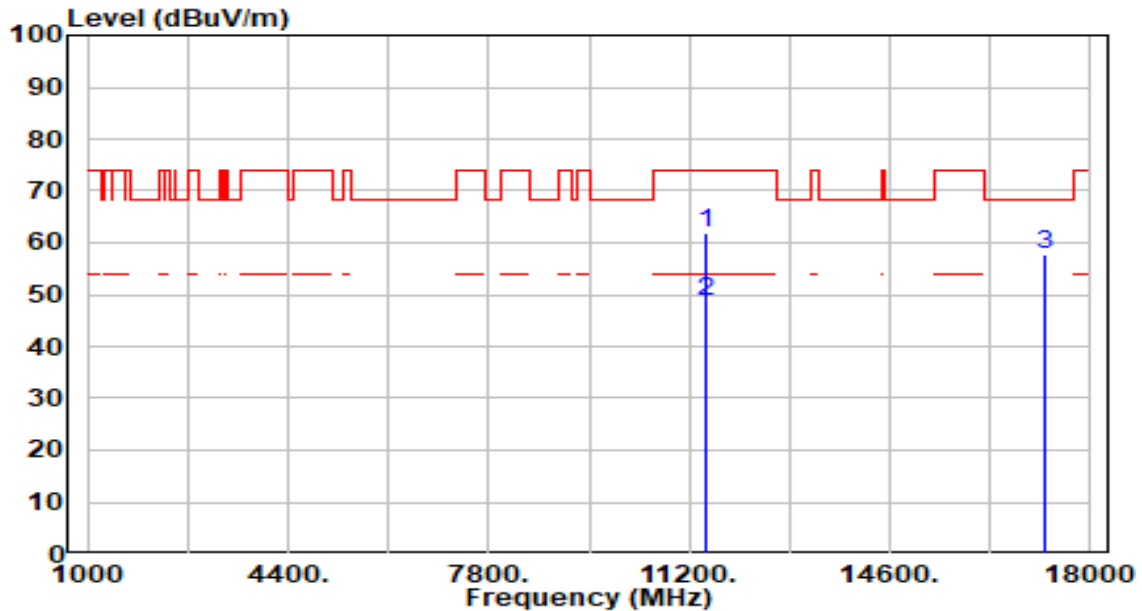


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 56.65          | 5.28       | 61.93                | -12.07      | 74.00          | 190         | 134         | Peak              |
| 2  | * 11490.000     | 43.33          | 5.28       | 48.61                | -5.39       | 54.00          | 190         | 134         | Average           |
| 3  | 17235.000       | 52.67          | 5.25       | 57.92                | -10.28      | 68.20          | 300         | 35          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 157_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

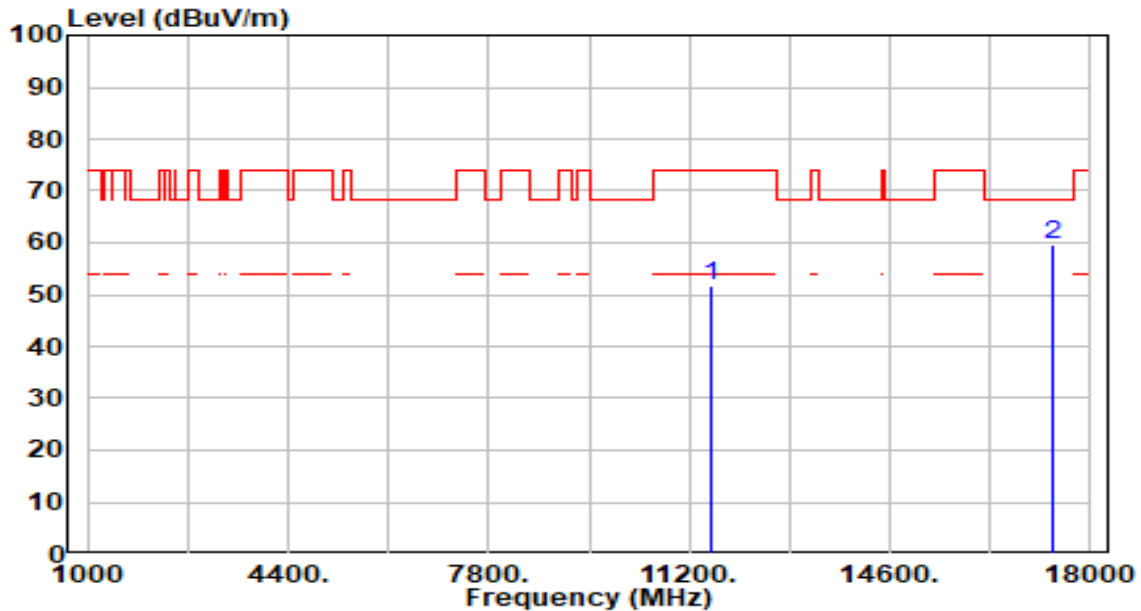


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 46.30          | 5.35       | 51.65                | -22.35      | 74.00          | 200         | 158         | Peak              |
| 2  | * 17355.000     | 54.57          | 4.99       | 59.56                | -8.64       | 68.20          | 200         | 161         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 157_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

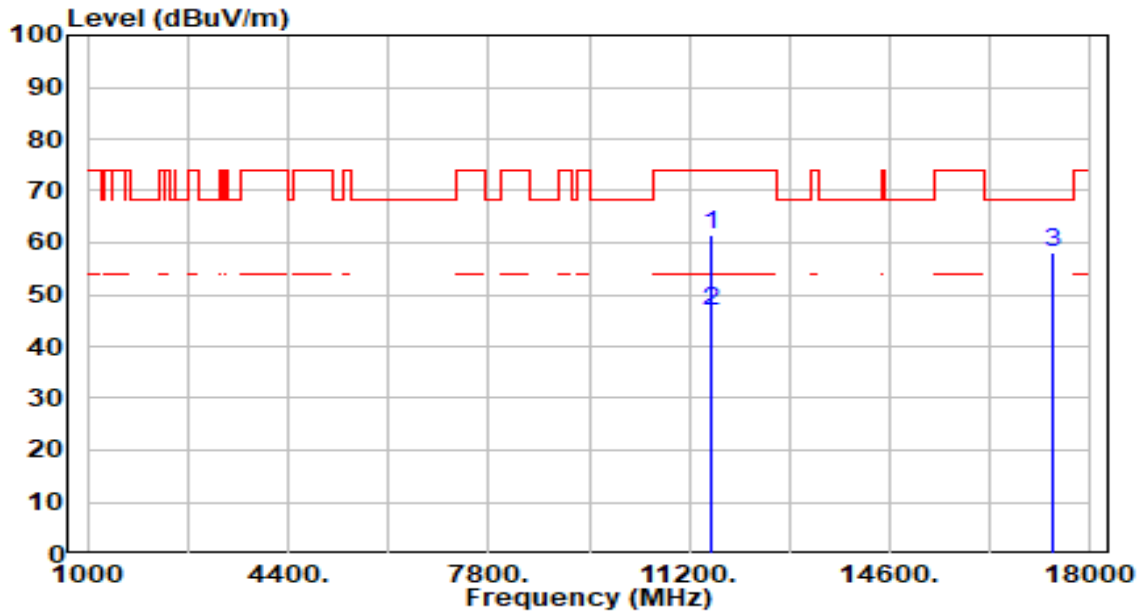


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11570.000       | 56.10          | 5.35       | 61.45                | -12.55      | 74.00          | 190         | 132         | Peak              |
| 2  | * 11570.000     | 41.57          | 5.35       | 46.92                | -7.08       | 54.00          | 190         | 132         | Average           |
| 3  | 17355.000       | 53.27          | 4.99       | 58.25                | -9.95       | 68.20          | 300         | 34          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 165_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

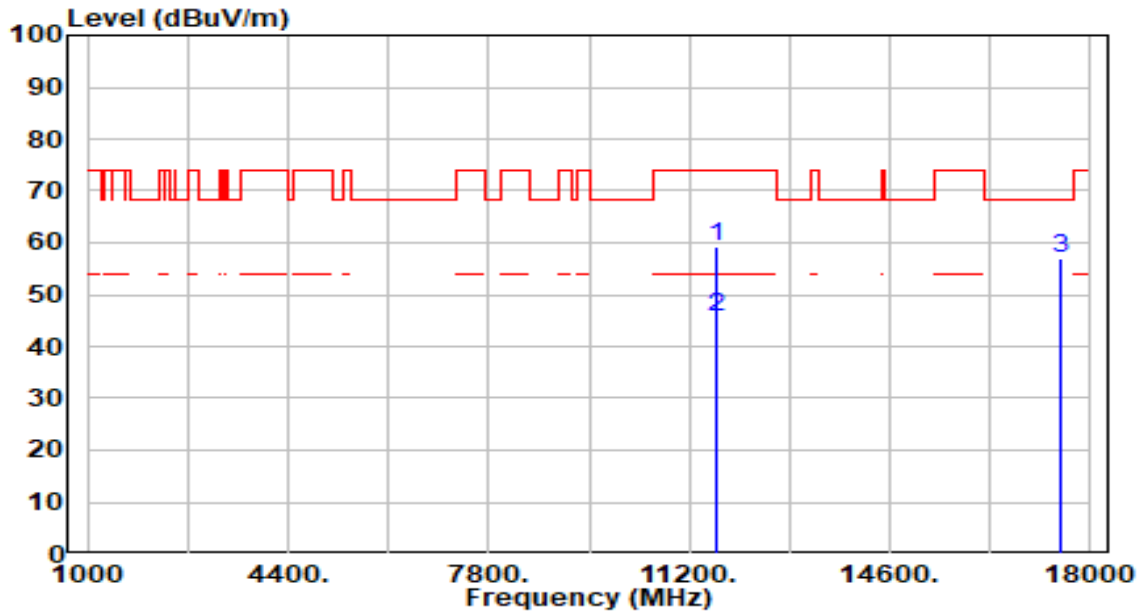


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11650.000       | 54.02          | 5.37       | 59.39                | -14.61      | 74.00          | 190         | 117         | Peak              |
| 2  | * | 11650.000       | 40.17          | 5.37       | 45.55                | -8.45       | 54.00          | 190         | 117         | Average           |
| 3  |   | 17475.000       | 51.92          | 5.02       | 56.94                | -11.26      | 68.20          | 200         | 67          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-20MHz_TX_Band4_CH 165_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

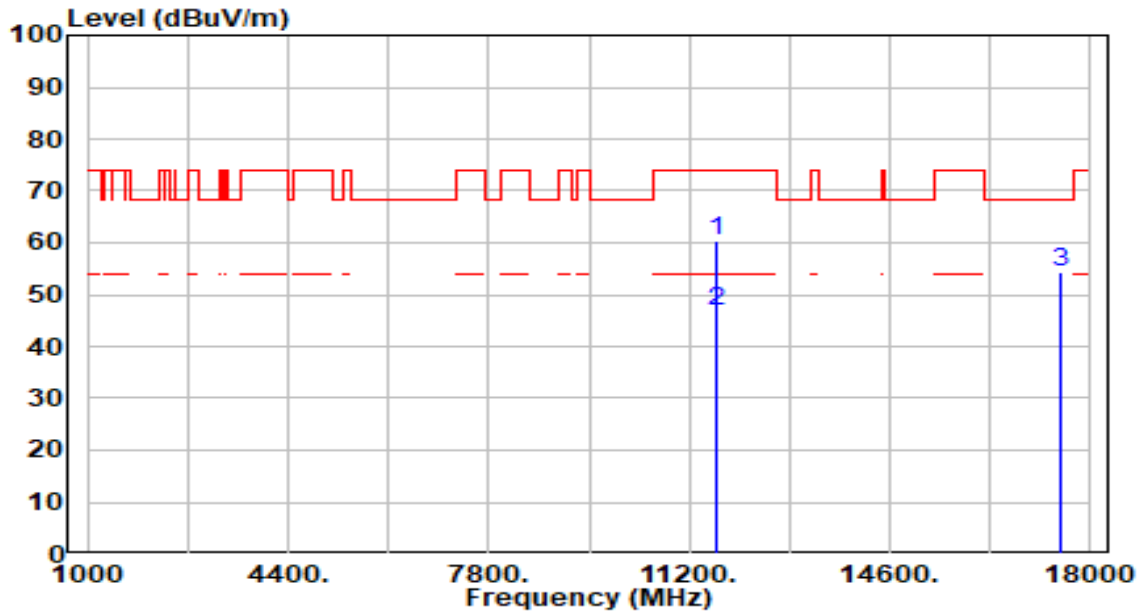


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11650.000       | 55.08          | 5.37       | 60.45                | -13.55      | 74.00          | 179         | 133         | Peak              |
| 2  | * | 11650.000       | 41.29          | 5.37       | 46.66                | -7.34       | 54.00          | 179         | 133         | Average           |
| 3  |   | 17475.000       | 49.18          | 5.02       | 54.20                | -14.00      | 68.20          | 300         | 29          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

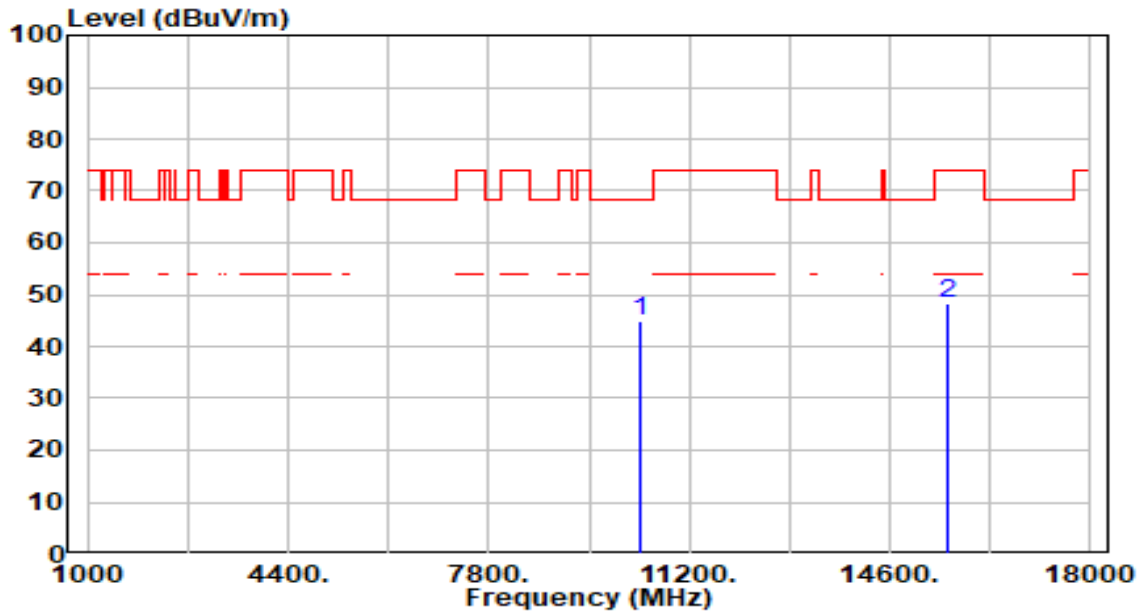


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10380.000       | 40.18          | 4.79       | 44.98                | -23.22      | 68.20          | 200         | 26          | Peak              |
| 2  |   | 15570.000       | 42.17          | 6.24       | 48.41                | -25.59      | 74.00          | 200         | 231         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 38_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

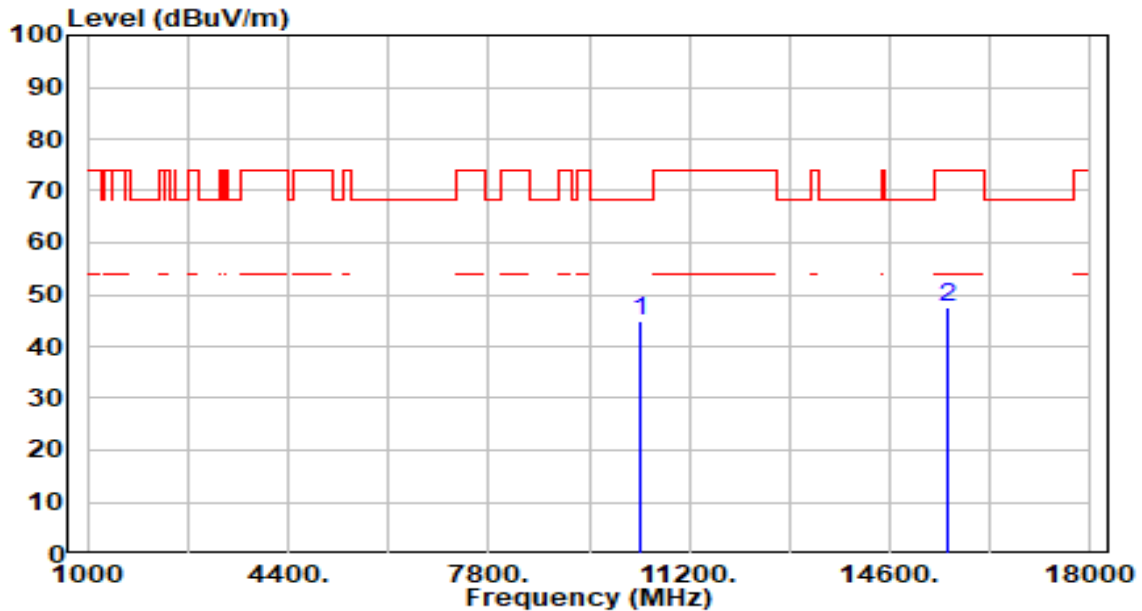


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10380.000       | 40.11          | 4.79       | 44.90                | -23.30      | 68.20          | 200         | 166         | Peak              |
| 2  |   | 15570.000       | 41.29          | 6.24       | 47.53                | -26.47      | 74.00          | 200         | 181         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 46_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

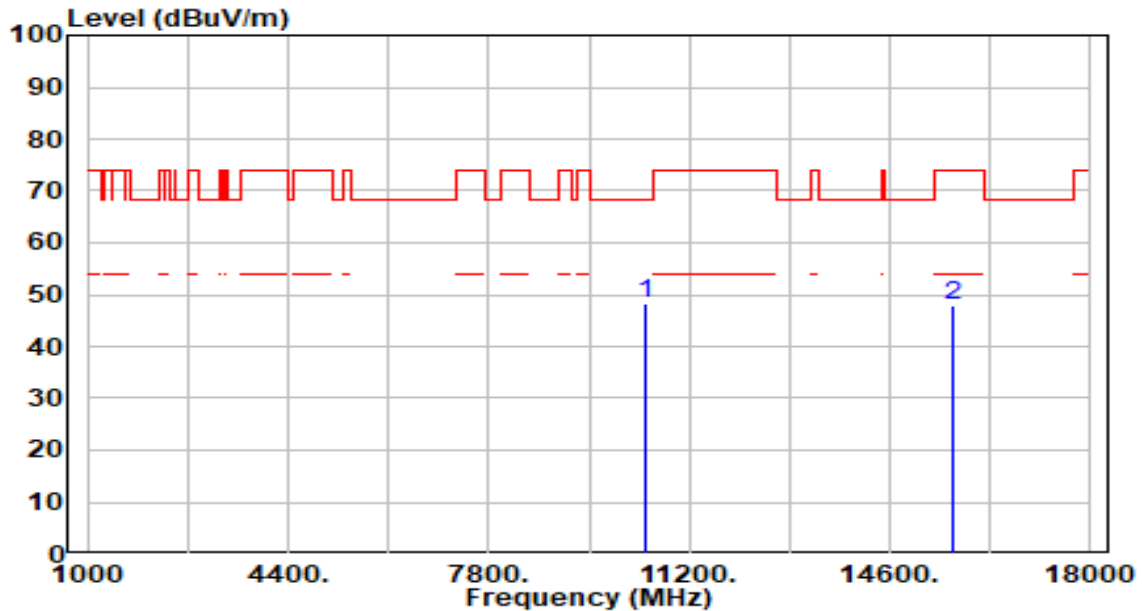


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10460.000       | 43.53          | 4.68       | 48.21                | -19.99      | 68.20          | 200         | 129         | Peak              |
| 2  |   | 15690.000       | 41.73          | 6.37       | 48.11                | -25.89      | 74.00          | 254         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band1_CH 46_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

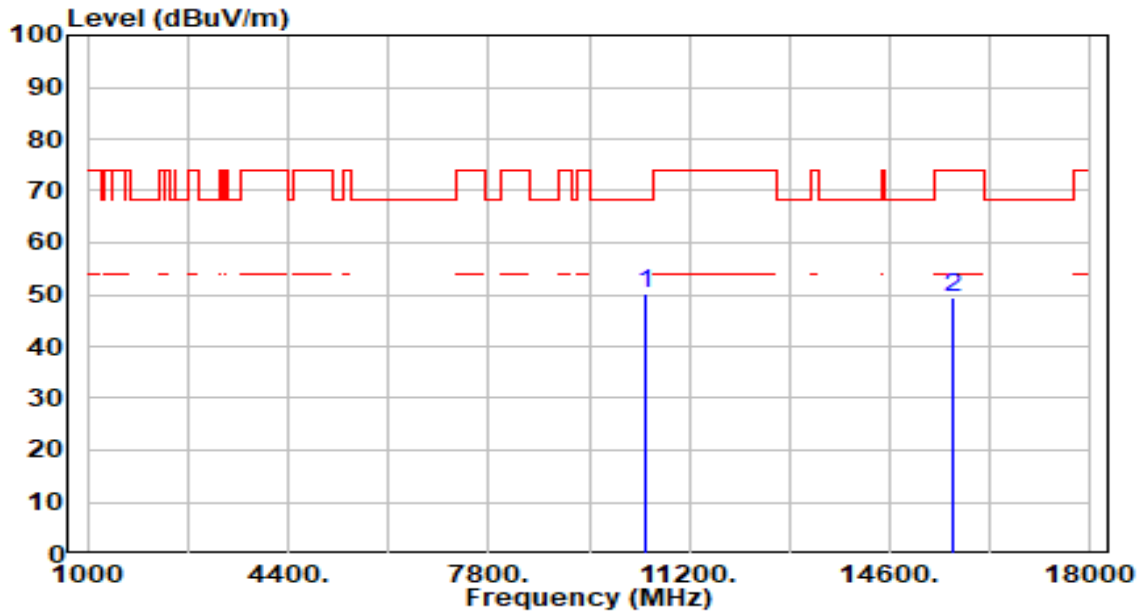


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10460.000       | 45.41          | 4.68       | 50.09                | -18.11      | 68.20          | 100         | 129         | Peak              |
| 2  |   | 15690.000       | 42.88          | 6.37       | 49.25                | -24.75      | 74.00          | 100         | 274         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 54_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

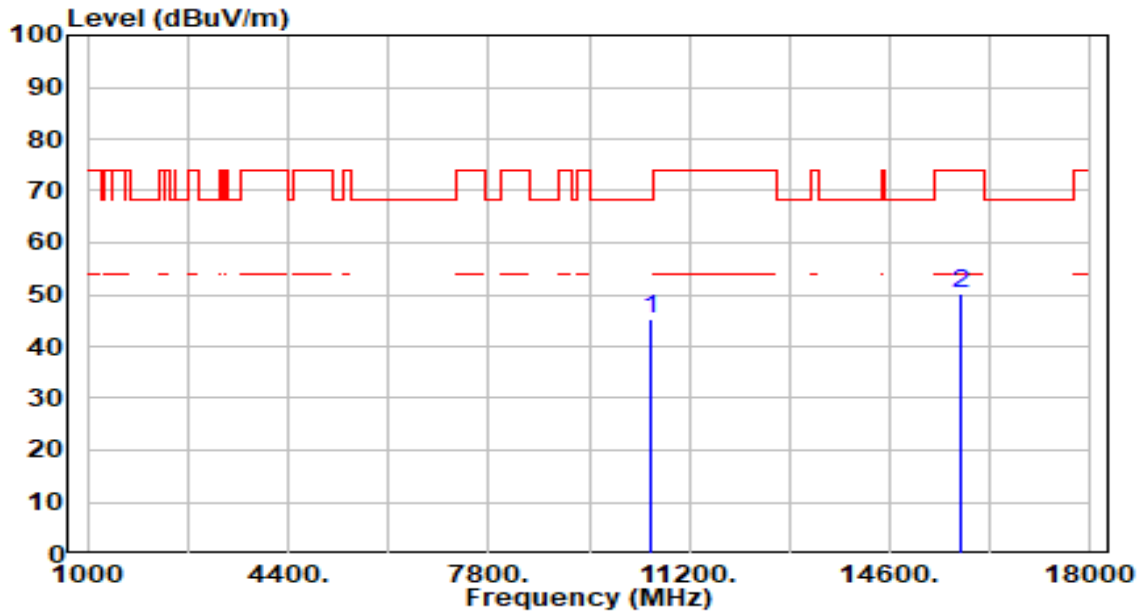


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10540.000       | 40.70          | 4.59       | 45.30                | -22.90      | 68.20          | 100         | 141         | Peak              |
| 2  |   | 15810.000       | 43.56          | 6.60       | 50.15                | -23.85      | 74.00          | 100         | 183         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 54_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

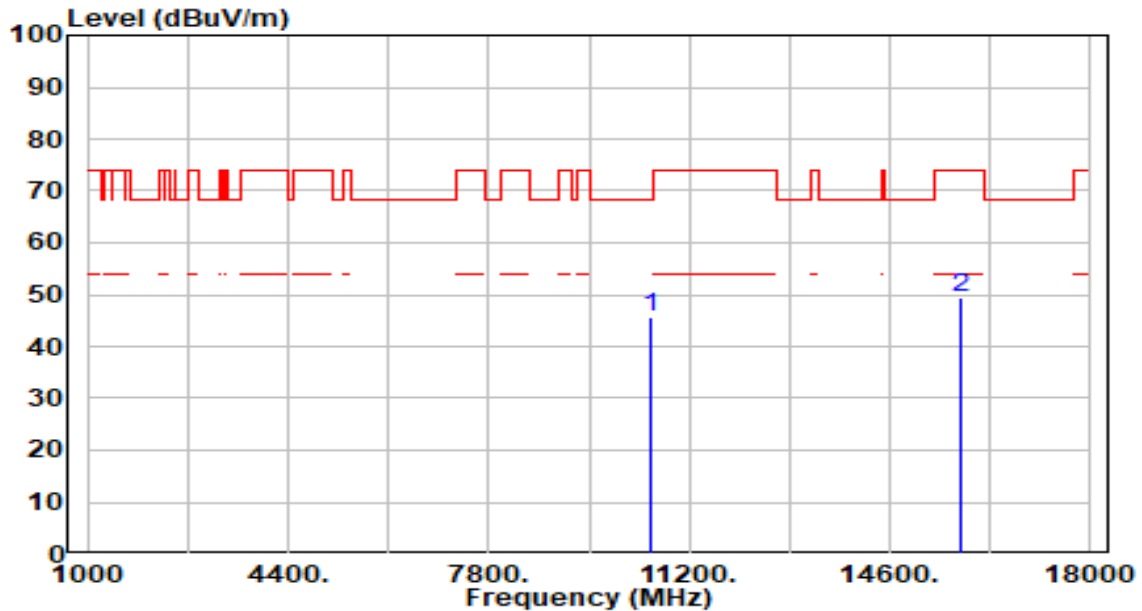


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10540.000       | 41.20          | 4.59       | 45.80                | -22.40      | 68.20          | 100         | 51          | Peak              |
| 2  |   | 15810.000       | 42.77          | 6.60       | 49.36                | -24.64      | 74.00          | 100         | 303         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

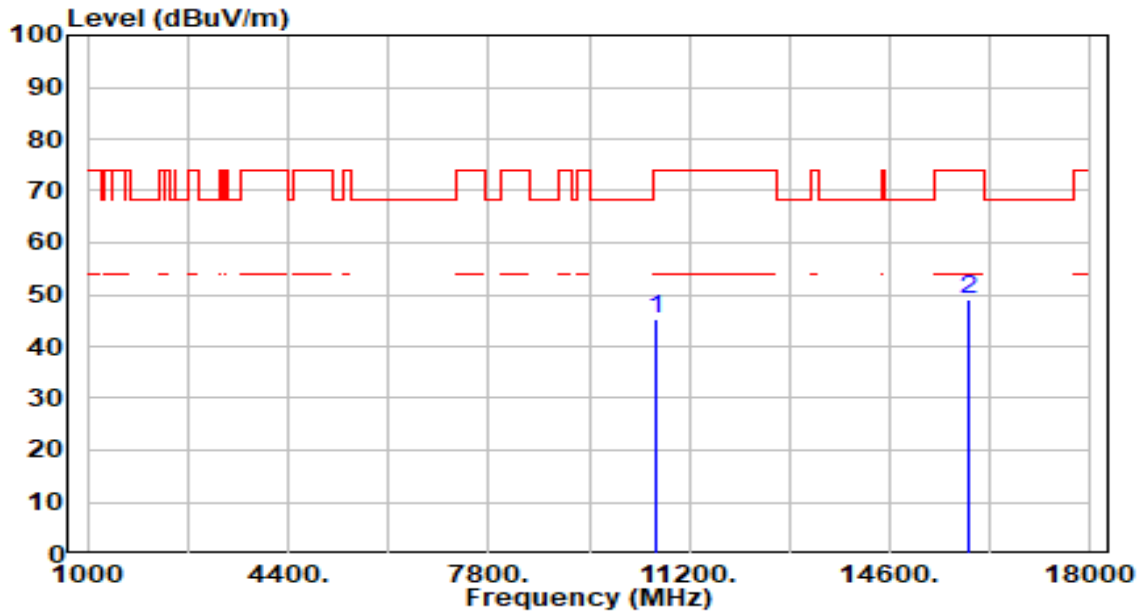


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 40.79          | 4.56       | 45.35                | -28.65      | 74.00          | 100         | 161         | Peak              |
| 2  | * 15930.000     | 42.43          | 6.66       | 49.09                | -24.91      | 74.00          | 100         | 221         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band2_CH 62_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

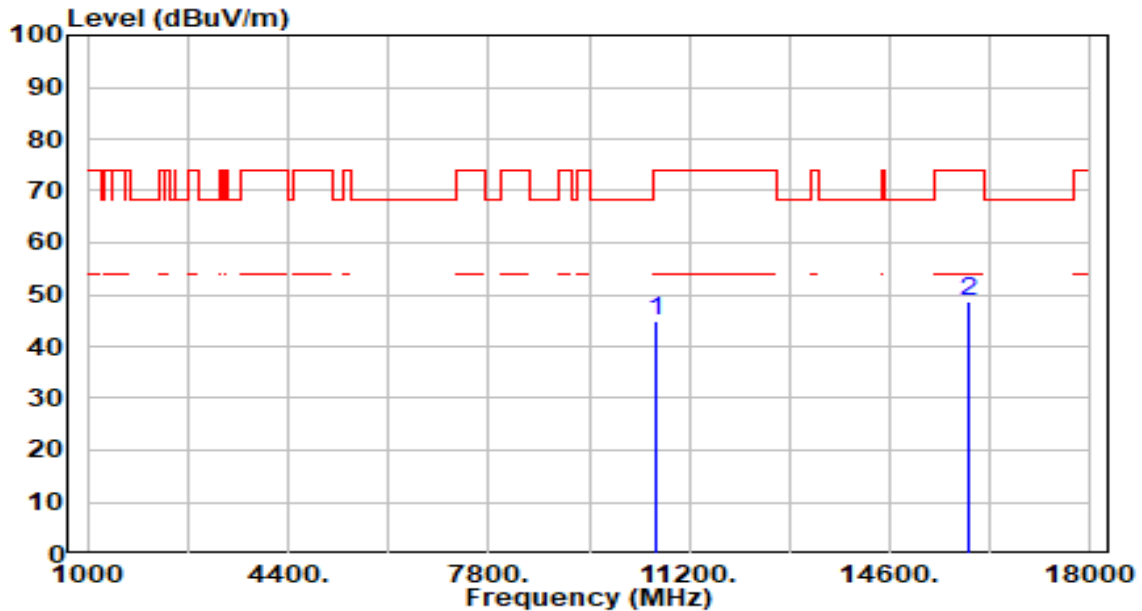


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 40.34          | 4.56       | 44.90                | -29.10      | 74.00          | 100         | 290         | Peak              |
| 2  | * 15930.000     | 42.08          | 6.66       | 48.73                | -25.27      | 74.00          | 100         | 105         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

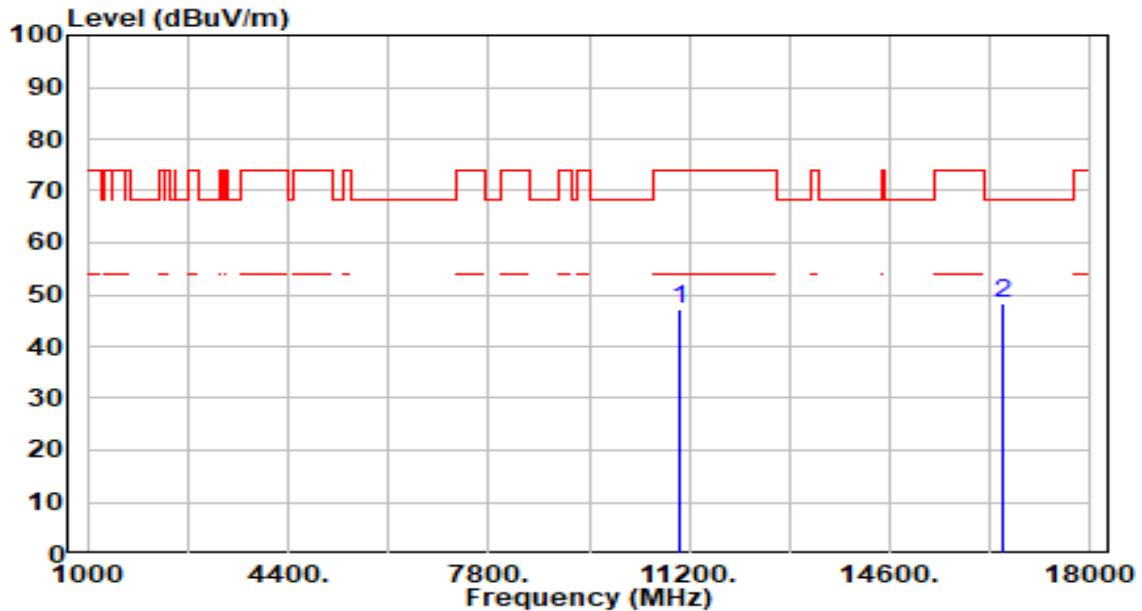


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11020.000       | 42.74          | 4.49       | 47.23                | -26.77      | 74.00          | 100         | 0           | Peak              |
| 2  | * | 16530.000       | 42.28          | 6.05       | 48.33                | -19.87      | 68.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 102_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

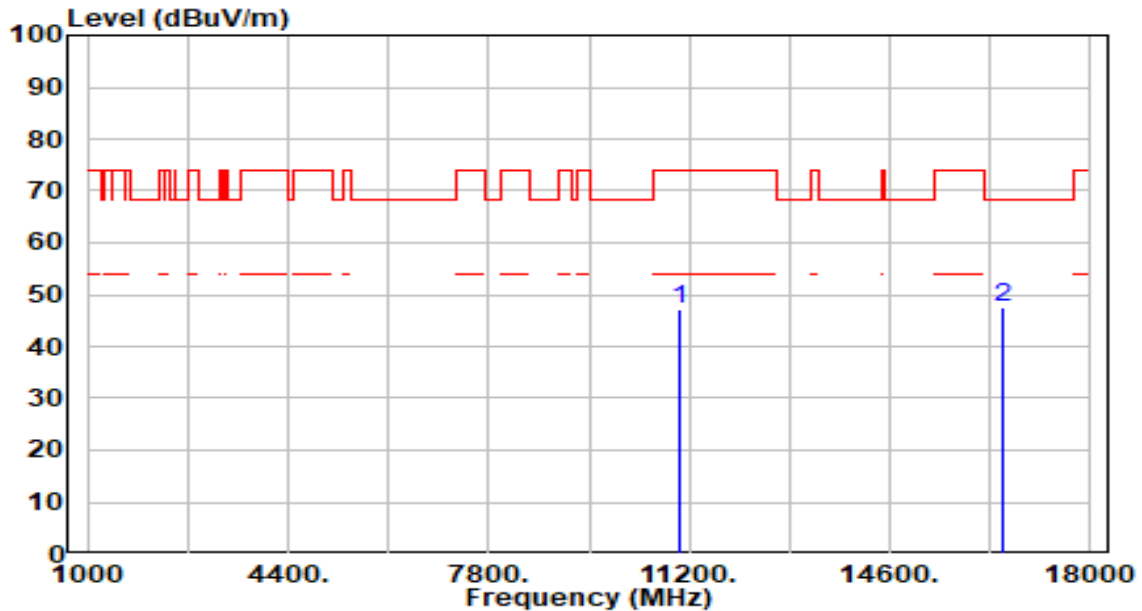


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11020.000       | 42.78          | 4.49       | 47.27                | -26.73      | 74.00          | 100         | 133         | Peak              |
| 2  | * 16530.000     | 41.67          | 6.05       | 47.72                | -20.48      | 68.20          | 100         | 169         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 110_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

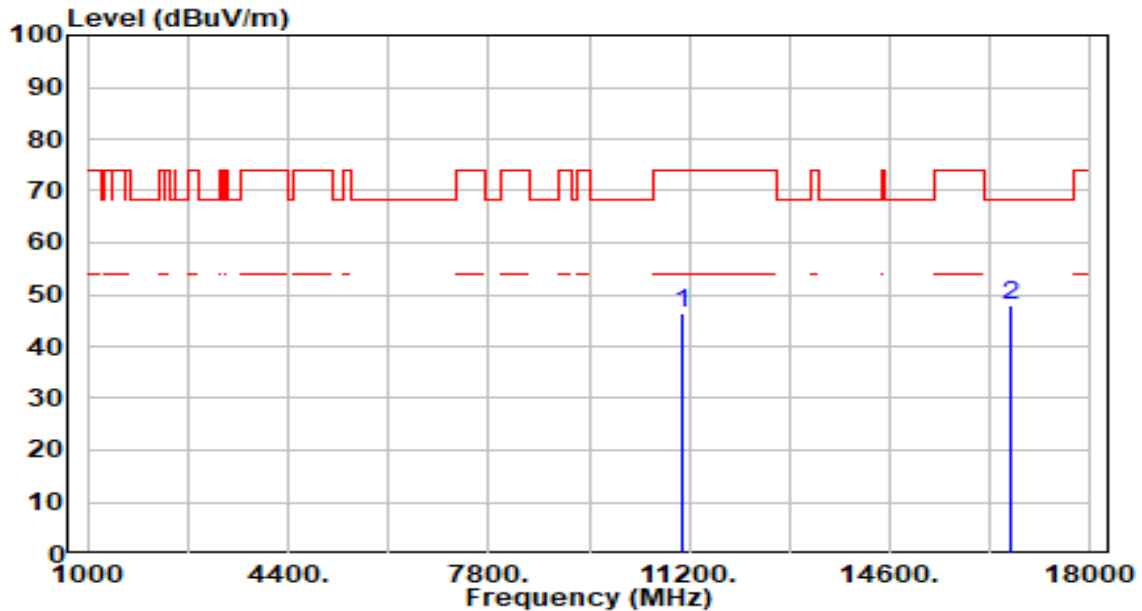


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 41.80          | 4.71       | 46.51                | -27.49      | 74.00          | 100         | 123         | Peak              |
| 2  | * 16650.000     | 41.84          | 6.00       | 47.84                | -20.36      | 68.20          | 100         | 359         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 110_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

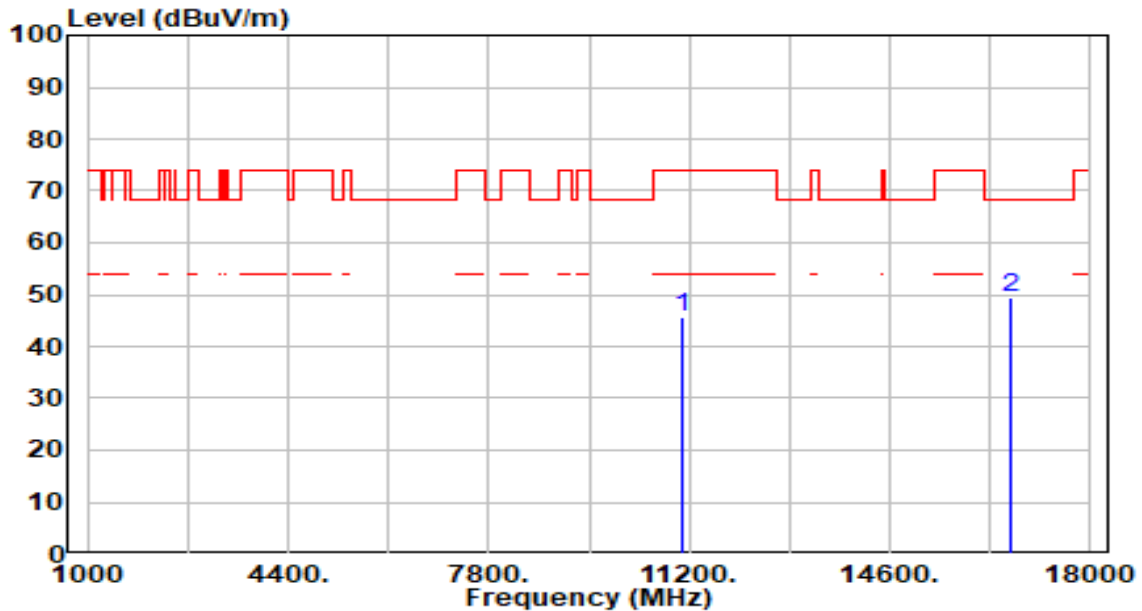


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 41.06          | 4.71       | 45.77                | -28.23      | 74.00          | 100         | 308         | Peak              |
| 2  | * 16650.000     | 43.35          | 6.00       | 49.35                | -18.85      | 68.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 134_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

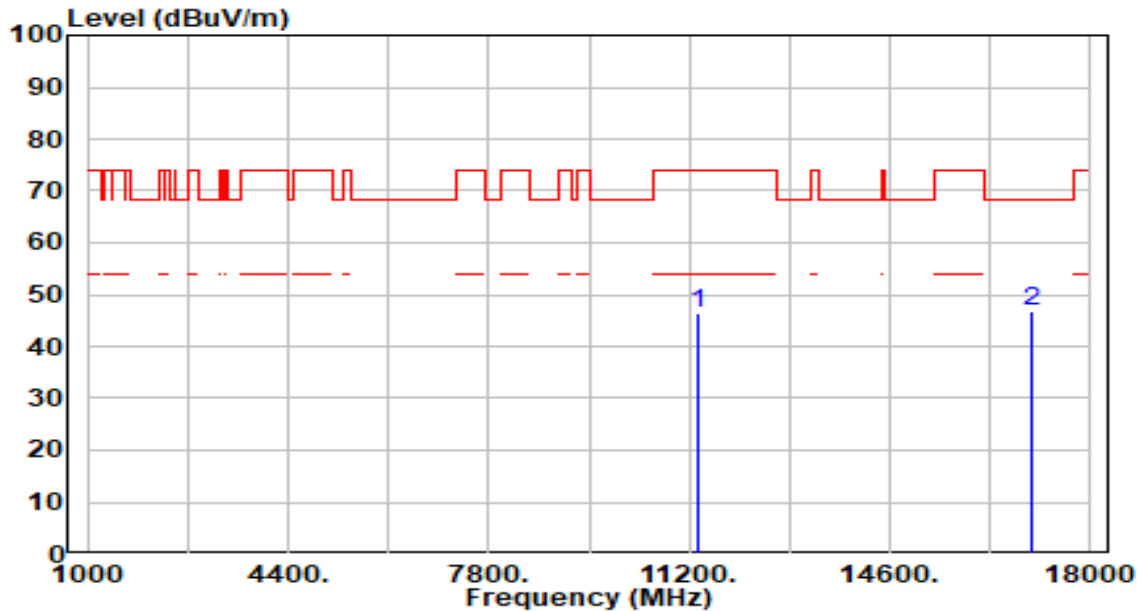


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 41.17          | 5.14       | 46.32                | -27.68      | 74.00          | 100         | 361         | Peak              |
| 2  | * 17010.000     | 41.07          | 5.74       | 46.81                | -21.39      | 68.20          | 100         | 184         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 134_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

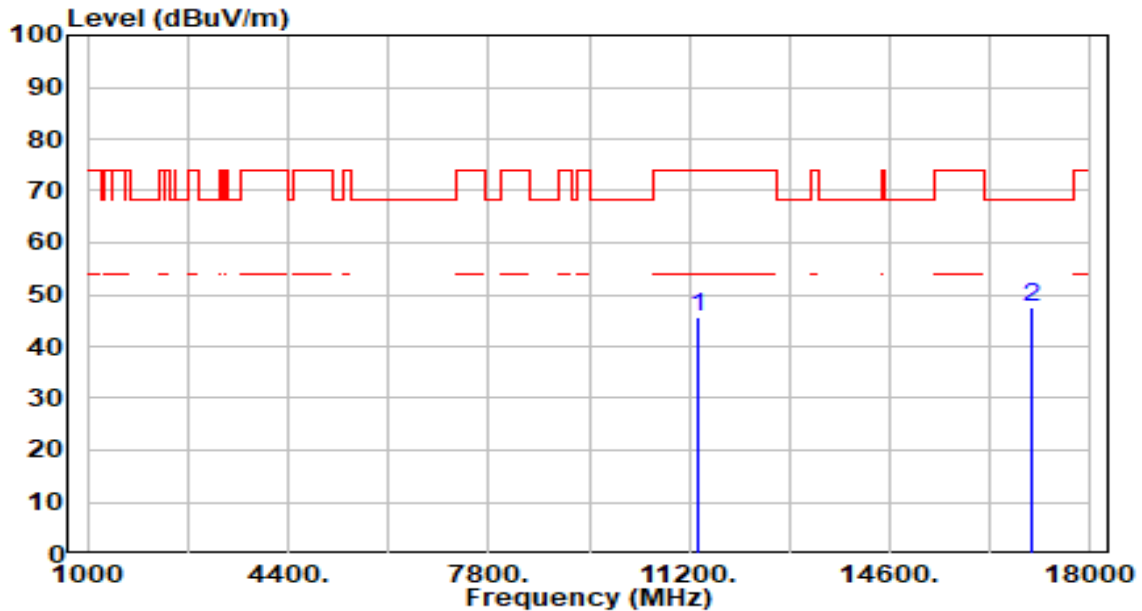


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11340.000       | 40.59          | 5.14       | 45.73                | -28.27      | 74.00          | 100         | 36          | Peak              |
| 2  | * | 17010.000       | 41.72          | 5.74       | 47.46                | -20.74      | 68.20          | 100         | 344         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 142_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

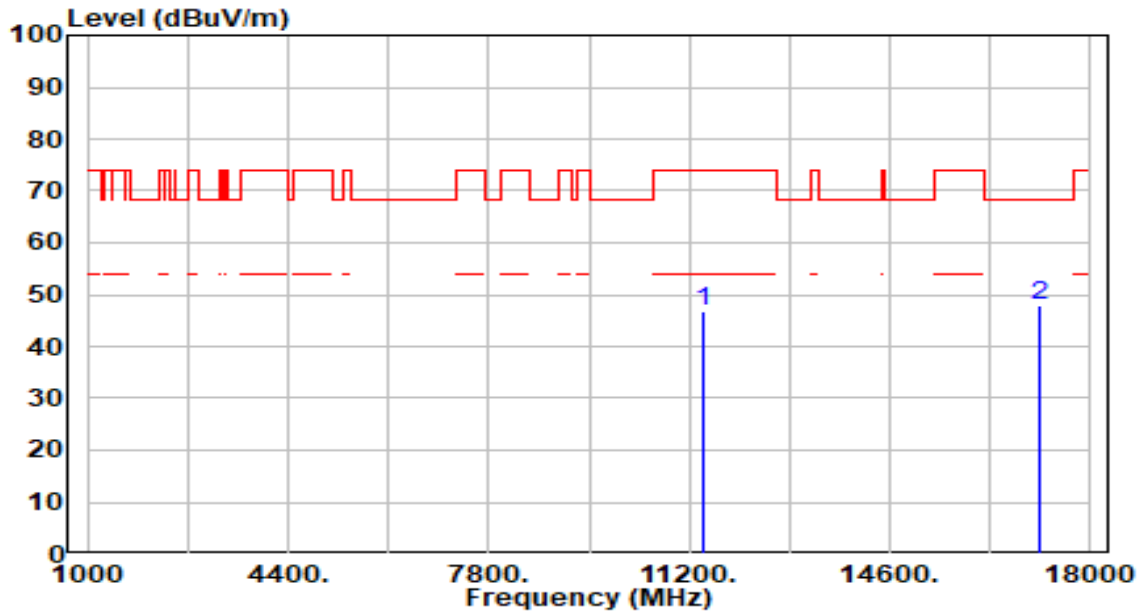


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11420.000       | 41.46          | 5.23       | 46.69                | -27.31      | 74.00          | 100         | 298         | Peak              |
| 2  | * | 17130.000       | 42.63          | 5.48       | 48.10                | -20.10      | 68.20          | 100         | 348         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band3_CH 142_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

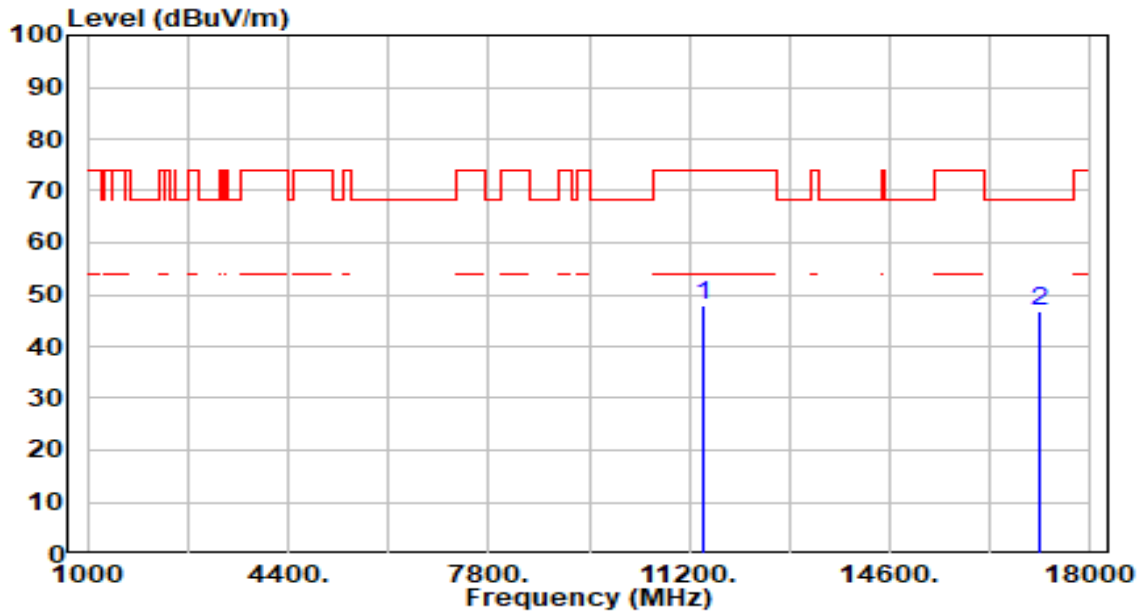


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11420.000       | 42.81          | 5.23       | 48.04                | -25.96      | 74.00          | 100         | 136         | Peak              |
| 2  | * | 17130.000       | 41.24          | 5.48       | 46.72                | -21.48      | 68.20          | 100         | 339         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 151_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

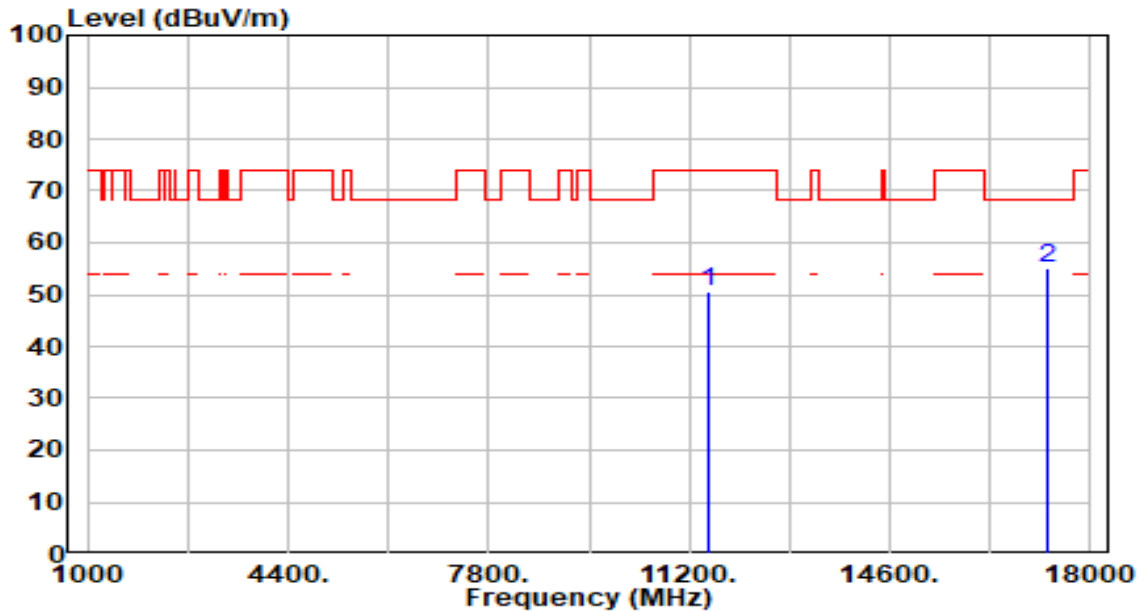


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11510.000       | 45.11          | 5.29       | 50.40                | -23.60      | 74.00          | 200         | 153         | Peak              |
| 2  | * | 17265.000       | 50.07          | 5.18       | 55.25                | -12.95      | 68.20          | 200         | 156         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 151_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

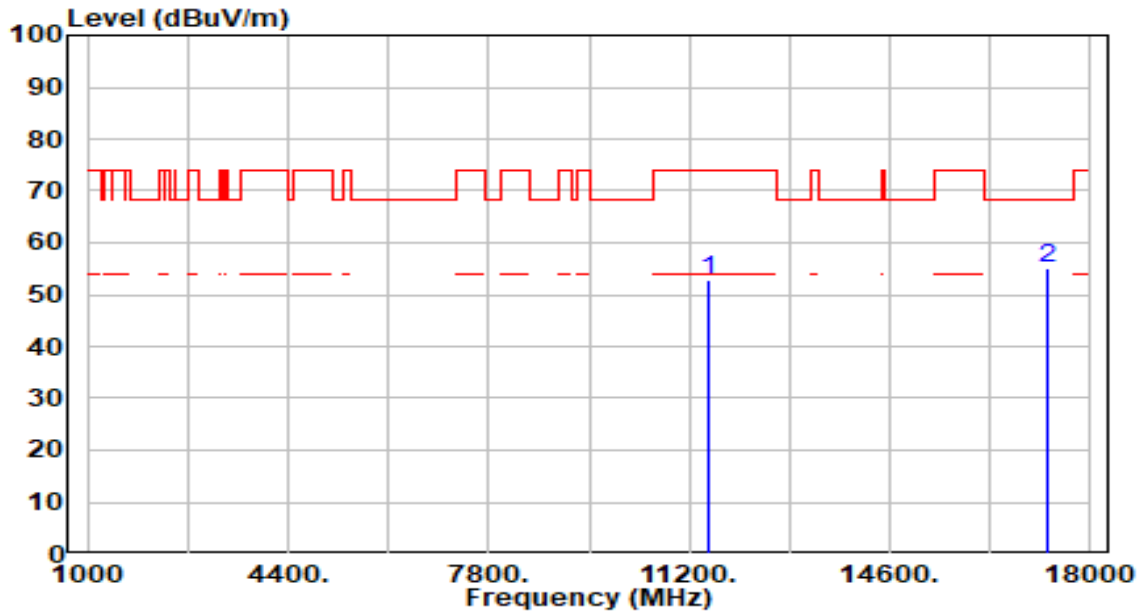


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11510.000       | 47.61          | 5.29       | 52.90                | -21.10      | 74.00          | 100         | 134         | Peak              |
| 2  | * | 17265.000       | 49.83          | 5.18       | 55.01                | -13.19      | 68.20          | 100         | 92          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 159_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

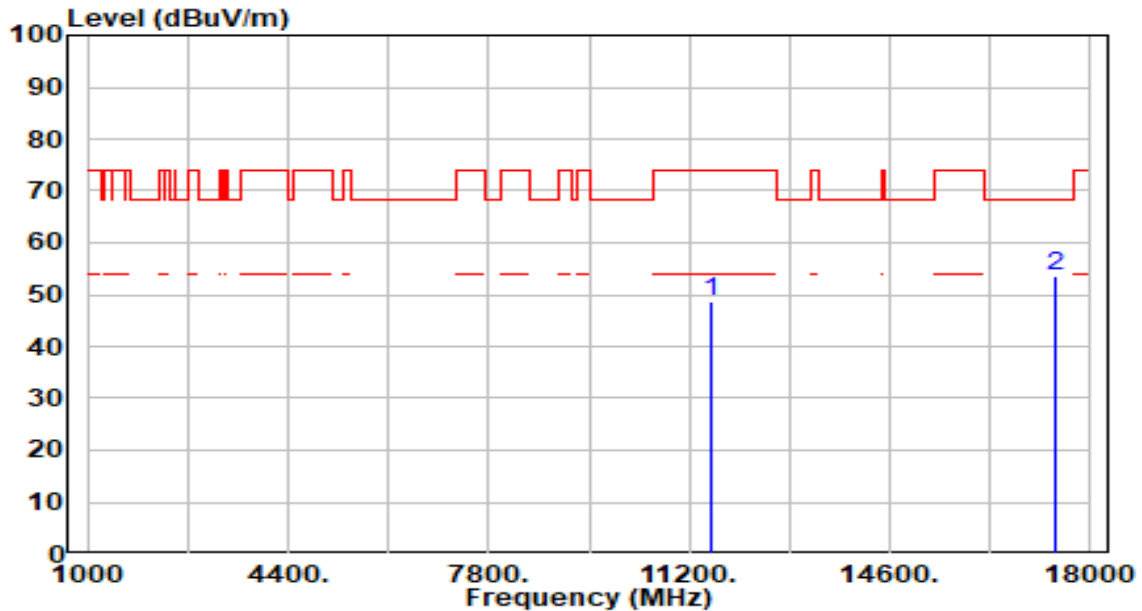


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11590.000       | 43.26          | 5.37       | 48.63                | -25.37      | 74.00          | 200         | 5           | Peak              |
| 2  | * 17385.000     | 48.78          | 4.92       | 53.70                | -14.50      | 68.20          | 200         | 65          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |              |
|-----------|---------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11   |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Owen   |
| Test Mode | 802.11ax-40MHz_TX_Band4_CH 159_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

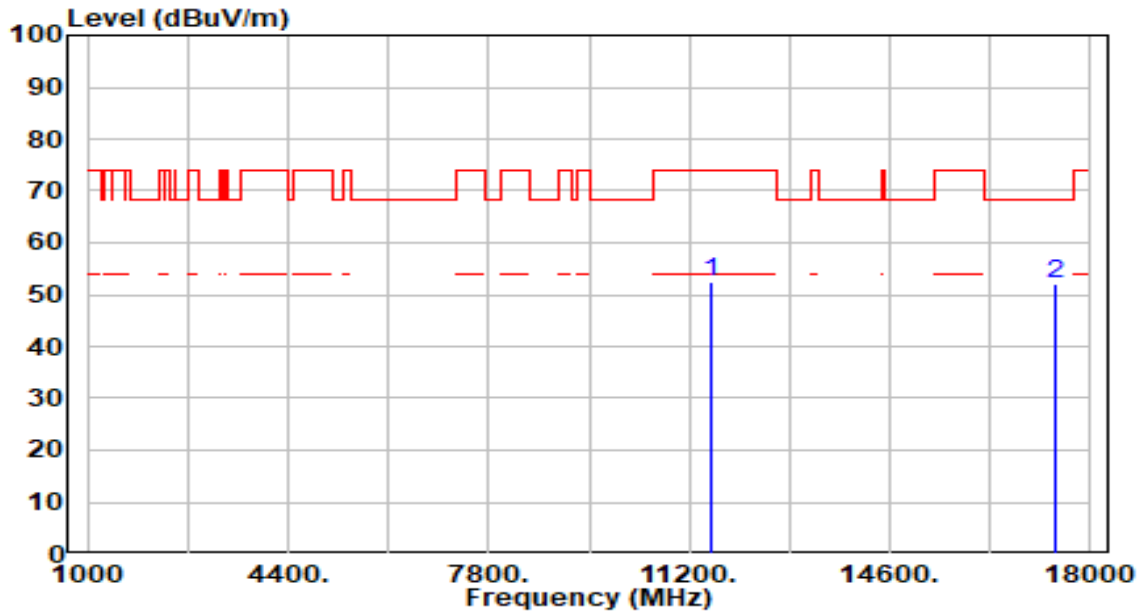


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11590.000       | 47.03          | 5.37       | 52.40                | -21.60      | 74.00          | 200         | 128         | Peak              |
| 2  | * | 17385.000       | 47.30          | 4.92       | 52.22                | -15.98      | 68.20          | 100         | 83          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band1_CH 42_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

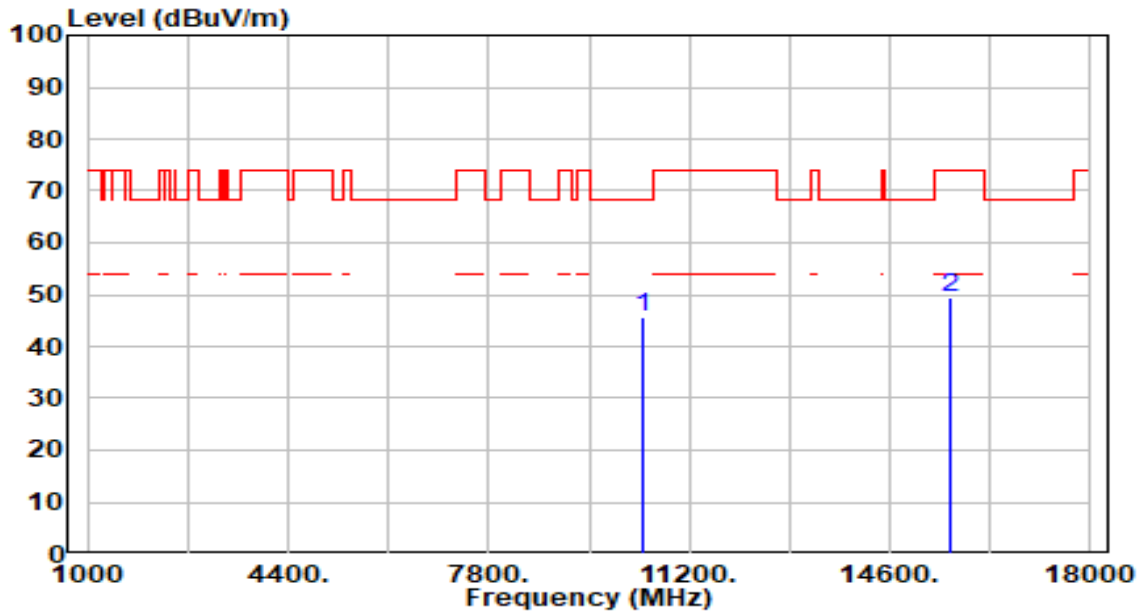


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10420.000       | 40.84          | 4.74       | 45.59                | -22.62      | 68.20          | 100         | 343         | Peak              |
| 2  |   | 15630.000       | 43.36          | 6.25       | 49.61                | -24.39      | 74.00          | 100         | 326         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band1_CH 42_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

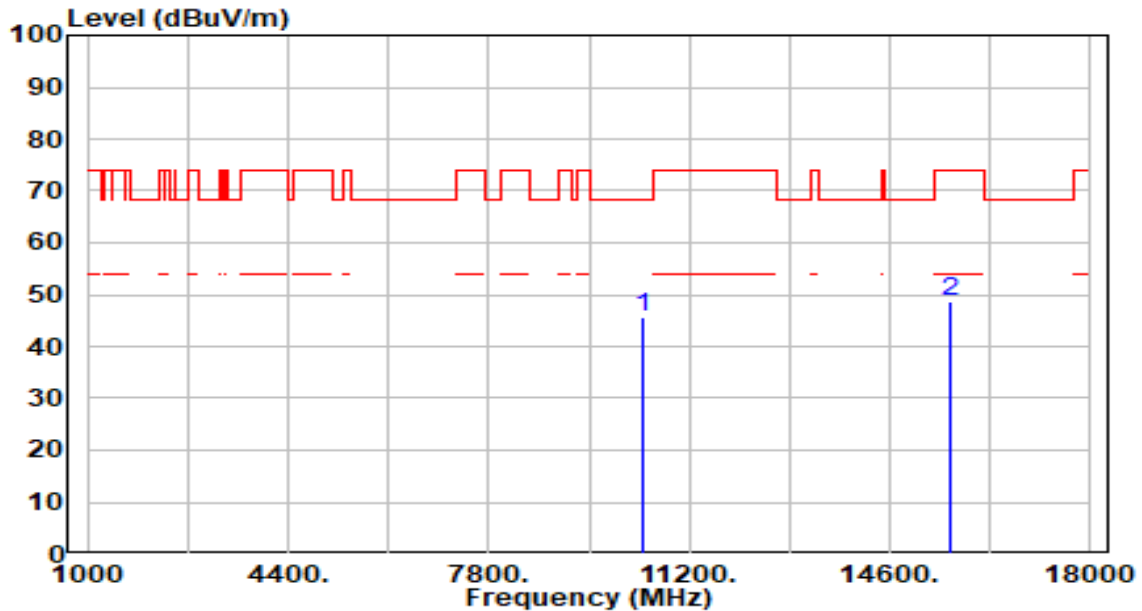


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10420.000       | 40.91          | 4.74       | 45.65                | -22.55      | 68.20          | 100         | 102         | Peak              |
| 2  |   | 15630.000       | 42.56          | 6.25       | 48.82                | -25.18      | 74.00          | 100         | 11          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band2_CH 58_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

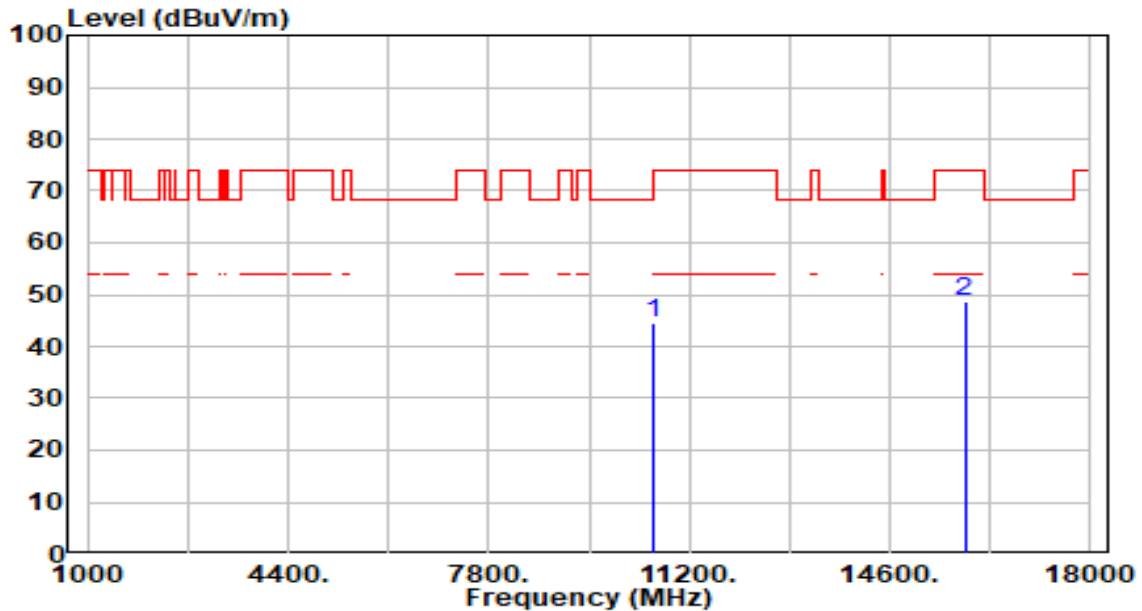


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10580.000       | 40.10          | 4.56       | 44.66                | -23.54      | 68.20          | 100         | 0           | Peak              |
| 2  |   | 15870.000       | 42.17          | 6.63       | 48.79                | -25.21      | 74.00          | 100         | 135         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band2_CH 58_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

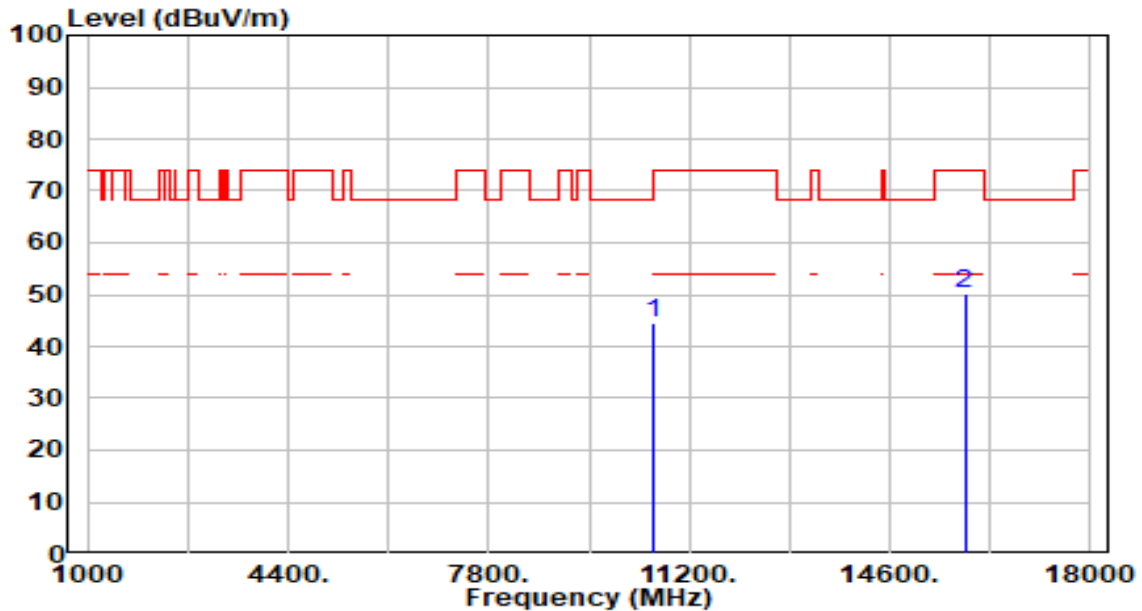


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10580.000       | 40.01          | 4.56       | 44.57                | -23.63      | 68.20          | 100         | 114         | Peak              |
| 2  |   | 15870.000       | 43.49          | 6.63       | 50.12                | -23.88      | 74.00          | 100         | 126         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 106_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

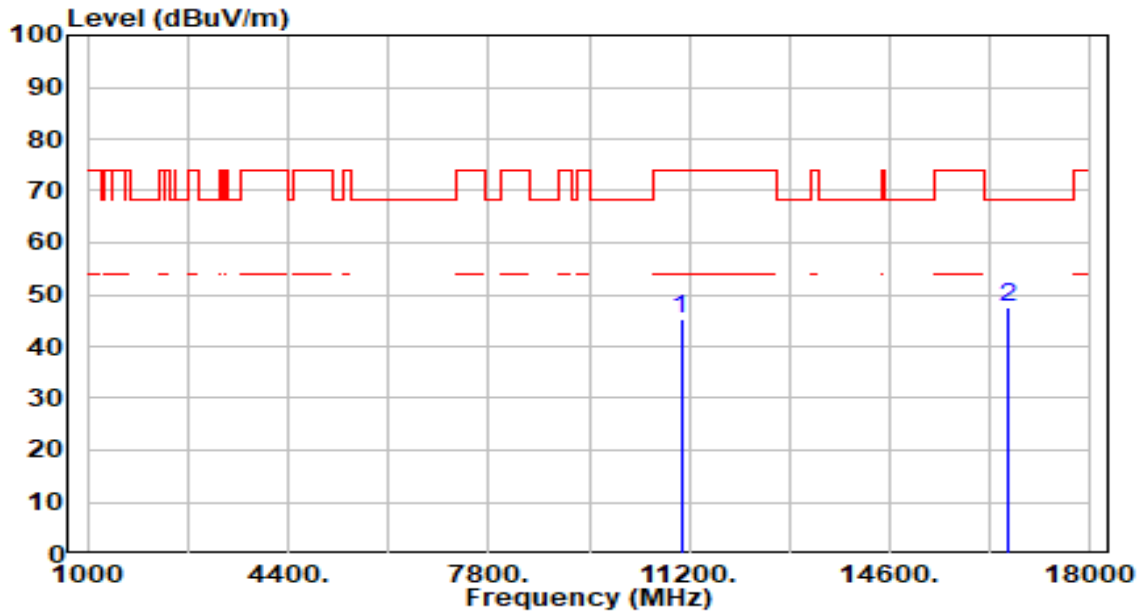


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11060.000       | 40.50          | 4.60       | 45.10                | -28.90      | 74.00          | 100         | 309         | Peak              |
| 2  | * | 16590.000       | 41.60          | 6.00       | 47.59                | -20.61      | 68.20          | 100         | 44          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 106_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

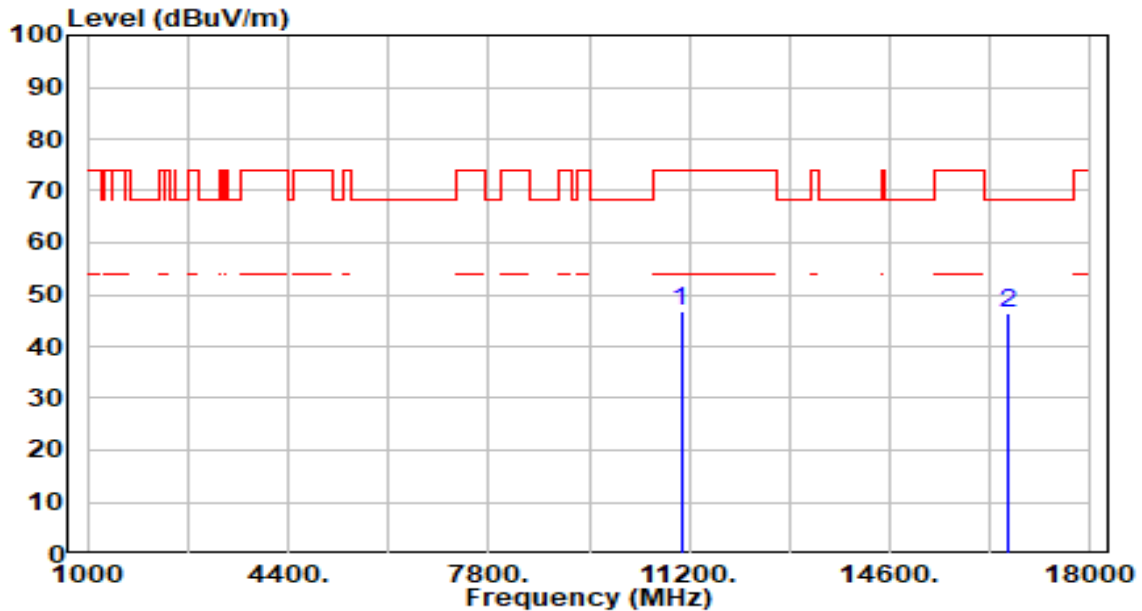


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11060.000       | 42.14          | 4.60       | 46.75                | -27.25      | 74.00          | 100         | 63          | Peak              |
| 2  | * 16590.000     | 40.50          | 6.00       | 46.50                | -21.70      | 68.20          | 100         | 19          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 122_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

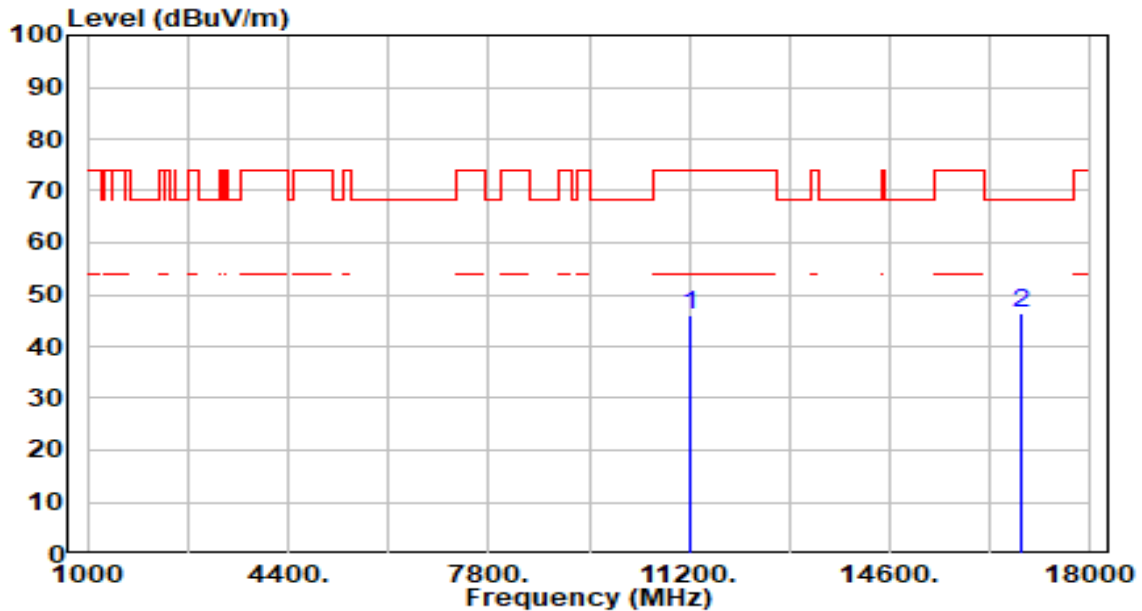


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11220.000       | 41.09          | 5.00       | 46.09                | -27.91      | 74.00          | 100         | 307         | Peak              |
| 2  | * | 16830.000       | 40.60          | 5.98       | 46.58                | -21.62      | 68.20          | 100         | 80          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 122_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

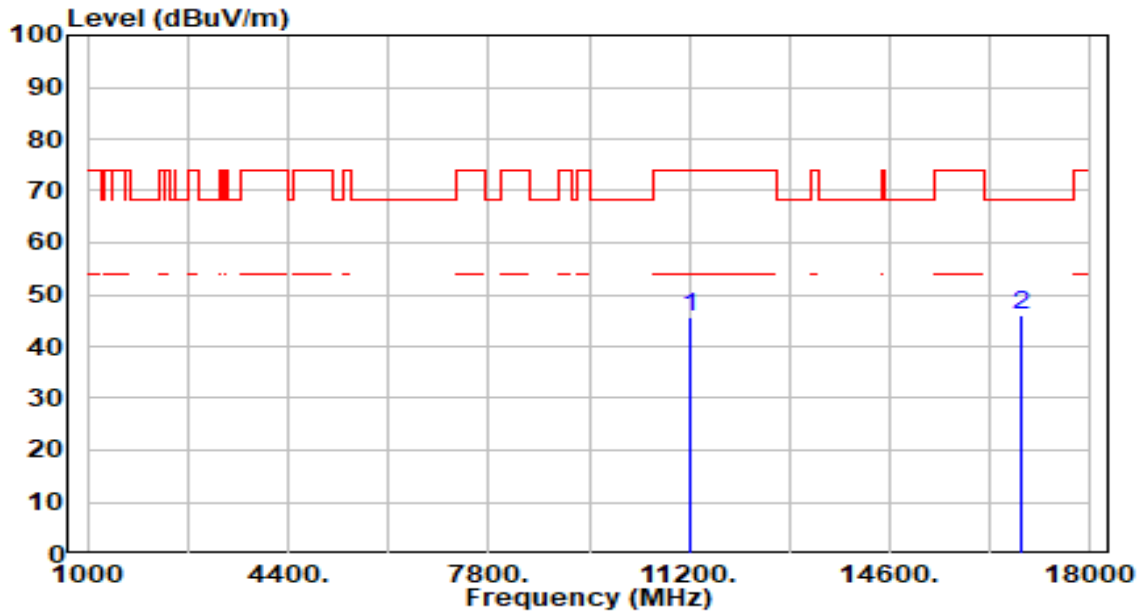


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11220.000       | 40.61          | 5.00       | 45.62                | -28.38      | 74.00          | 100         | 184         | Peak              |
| 2  | * 16830.000     | 40.11          | 5.98       | 46.10                | -22.10      | 68.20          | 100         | 322         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 138_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

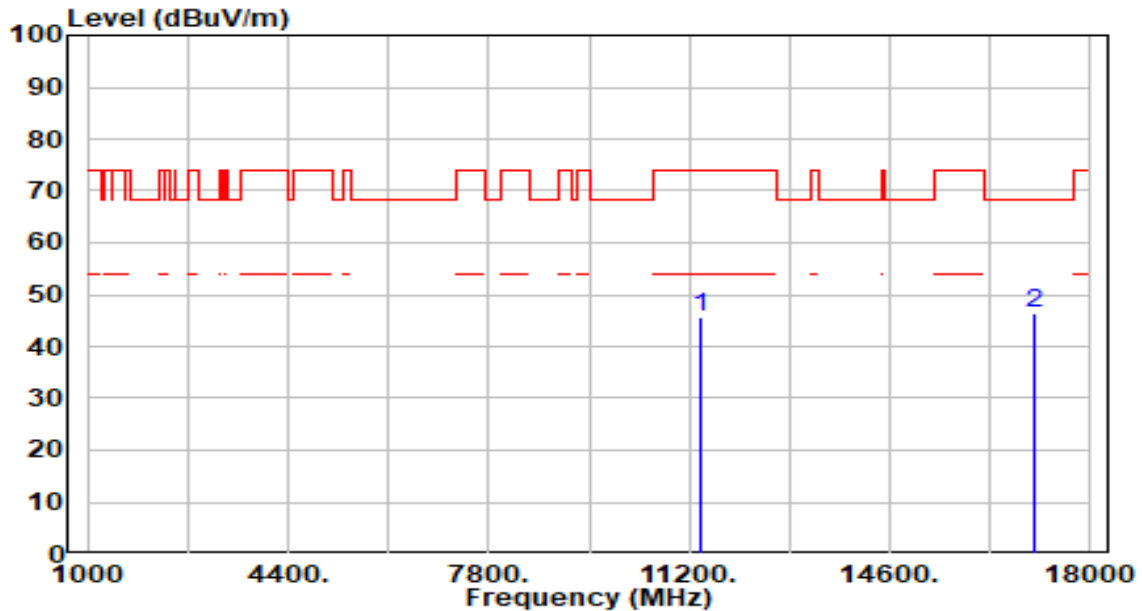


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11380.000       | 40.34          | 5.19       | 45.53                | -28.47      | 74.00          | 100         | 0           | Peak              |
| 2  | * | 17070.000       | 40.87          | 5.61       | 46.48                | -21.72      | 68.20          | 100         | 103         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band3_CH 138_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

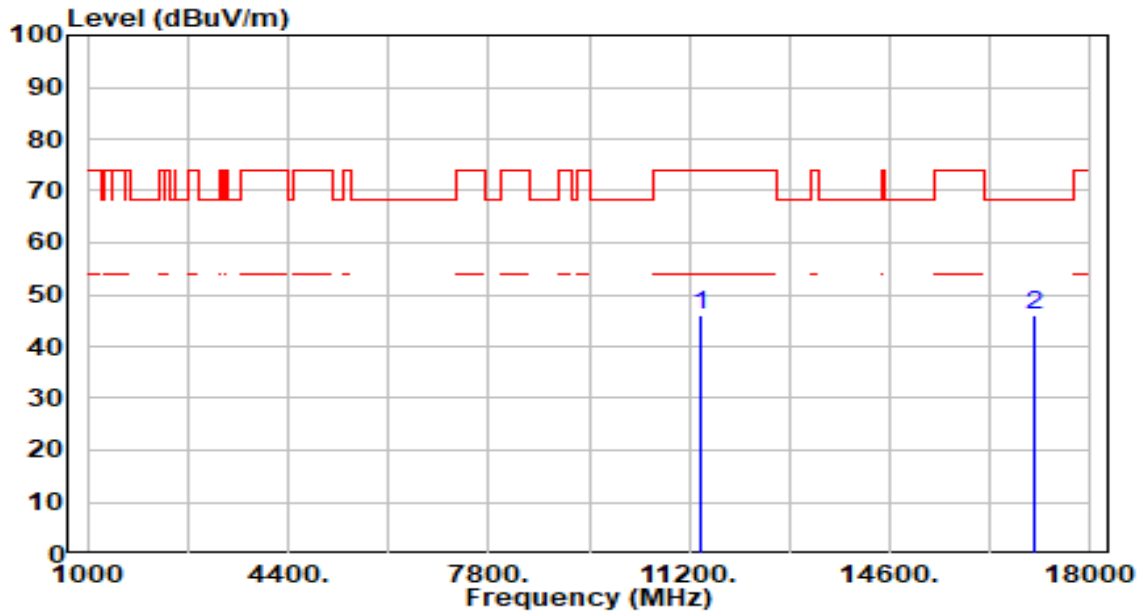


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11380.000       | 40.68          | 5.19       | 45.88                | -28.12      | 74.00          | 100         | 62          | Peak              |
| 2  | * | 17070.000       | 40.46          | 5.61       | 46.07                | -22.13      | 68.20          | 100         | 118         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band4_CH 155_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

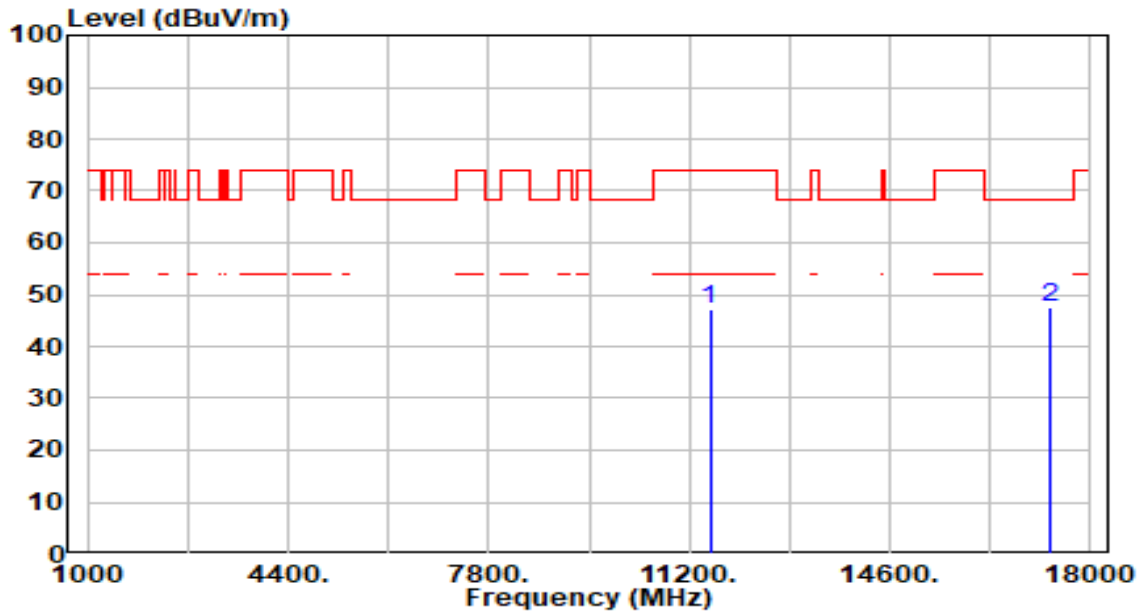


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 41.99          | 5.33       | 47.32                | -26.68      | 74.00          | 200         | 0           | Peak              |
| 2  | * 17325.000     | 42.54          | 5.05       | 47.60                | -20.60      | 68.20          | 200         | 165         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-80MHz_TX_Band4_CH 155_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

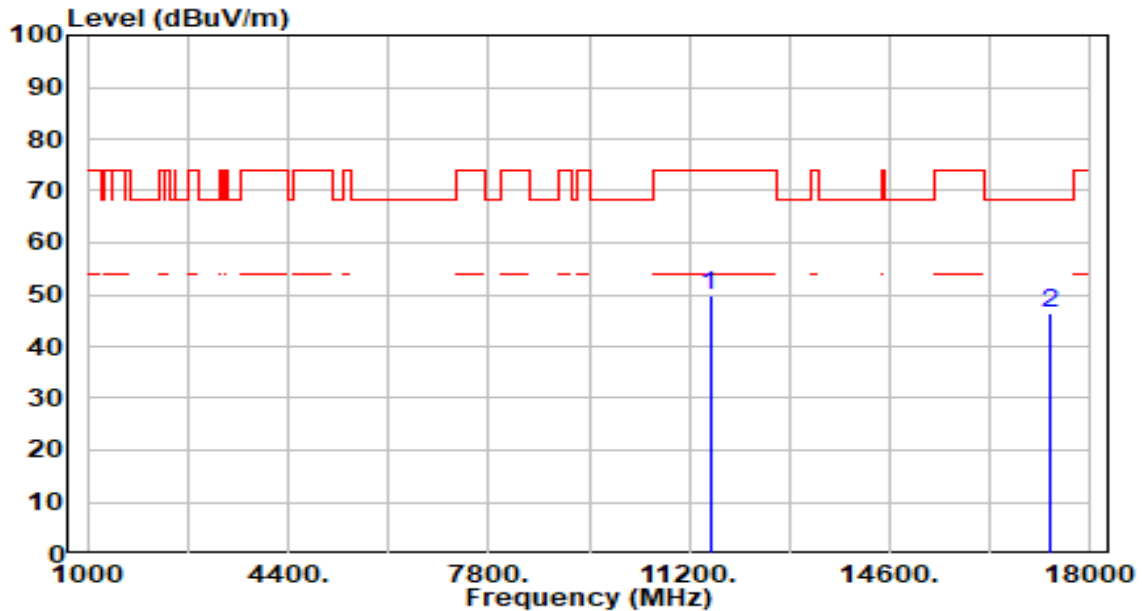


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11550.000       | 44.58          | 5.33       | 49.91                | -24.09      | 74.00          | 200         | 137         | Peak              |
| 2  | * | 17325.000       | 41.50          | 5.05       | 46.55                | -21.65      | 68.20          | 200         | 93          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |               |
|-----------|-----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System        | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-160MHz_TX_Band1,2_CH 50_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

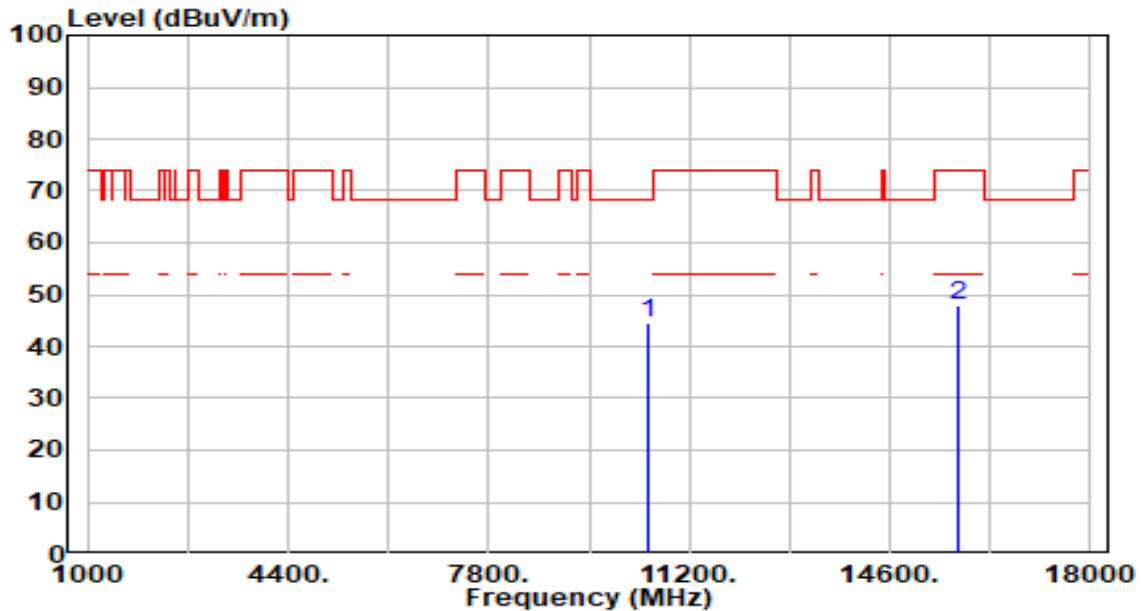


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10500.000       | 39.98          | 4.62       | 44.61                | -23.59      | 68.20          | 100         | 237         | Peak              |
| 2  |   | 15750.000       | 41.34          | 6.49       | 47.83                | -26.17      | 74.00          | 100         | 313         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |               |
|-----------|-----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System        | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-160MHz_TX_Band1,2_CH 50_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

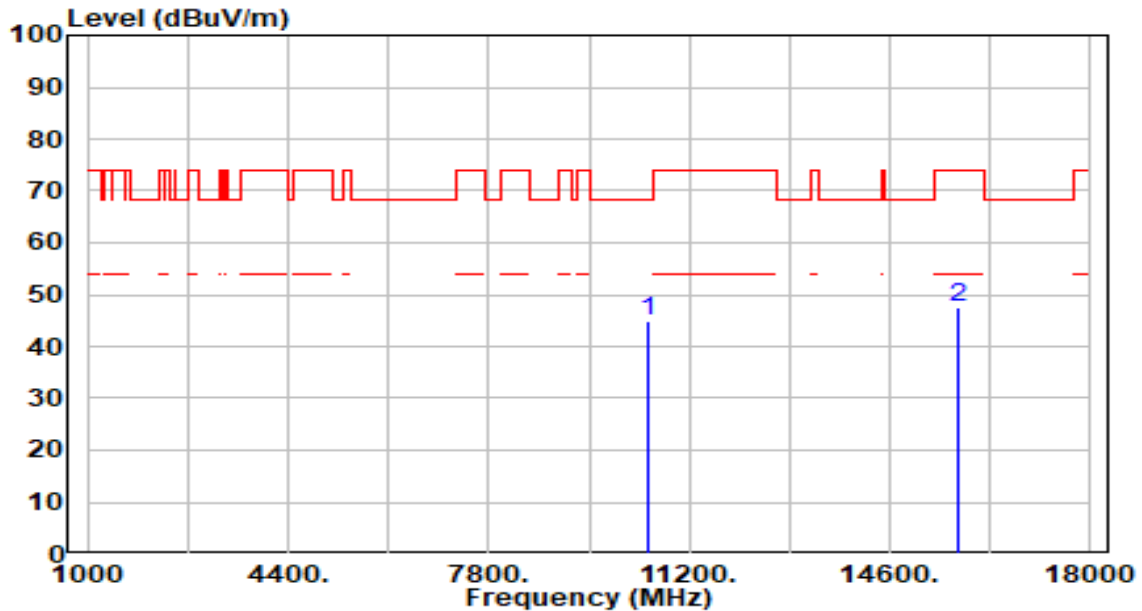


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10500.000       | 40.20          | 4.62       | 44.82                | -23.38      | 68.20          | 100         | 307         | Peak              |
| 2  |   | 15750.000       | 40.92          | 6.49       | 47.42                | -26.58      | 74.00          | 100         | 307         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System       | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-160MHz_TX_Band3_CH 114_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

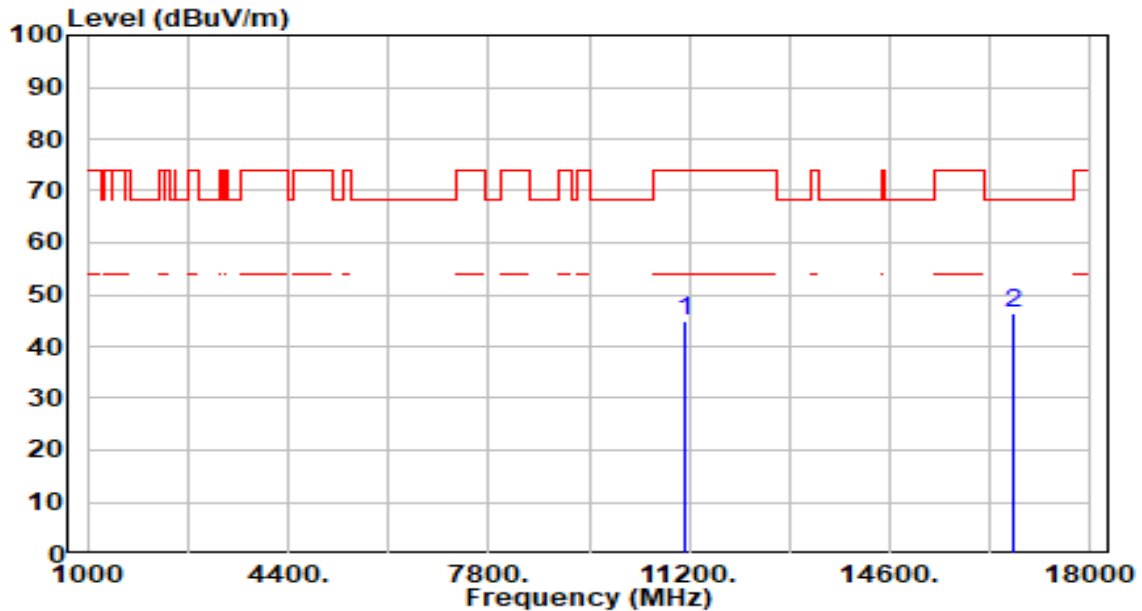


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11140.000       | 40.18          | 4.82       | 45.00                | -29.00      | 74.00          | 100         | 311         | Peak              |
| 2  | * 16710.000     | 40.39          | 6.01       | 46.40                | -21.80      | 68.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System       | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11ax-160MHz_TX_Band3_CH 114_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

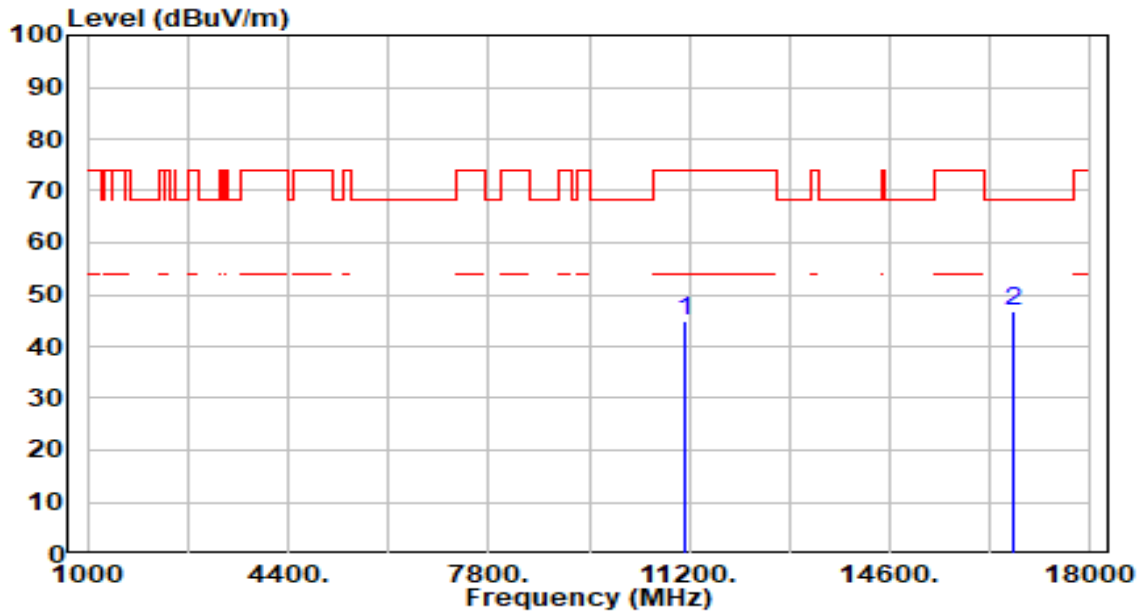


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11140.000       | 39.97          | 4.82       | 44.78                | -29.22      | 74.00          | 100         | 360         | Peak              |
| 2  | * | 16710.000       | 40.72          | 6.01       | 46.73                | -21.47      | 68.20          | 100         | 196         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band1_CH 36_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

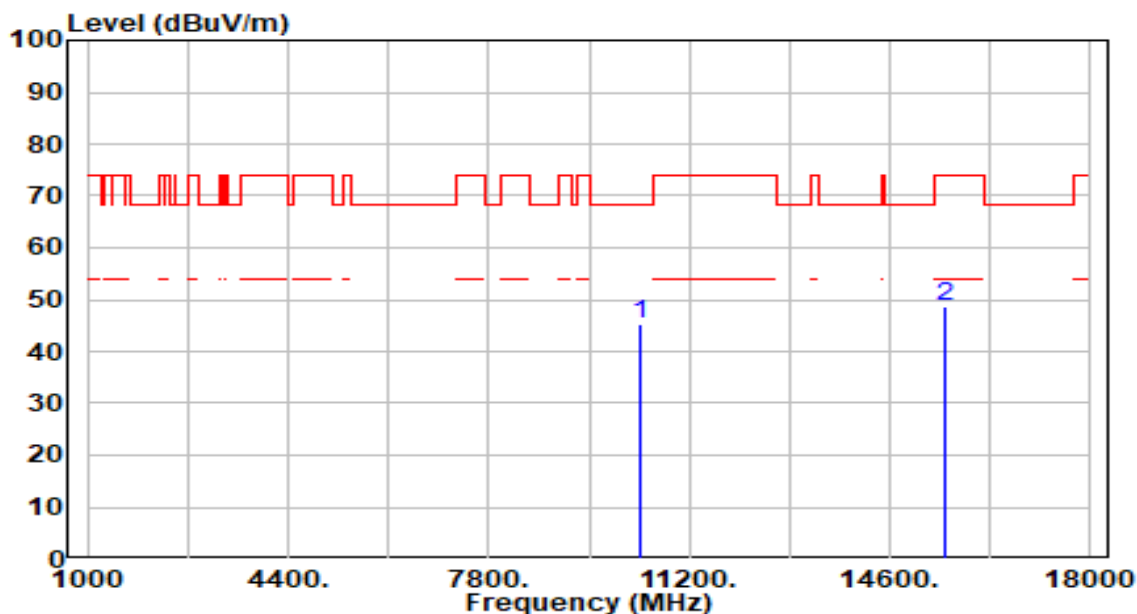


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10360.000       | 40.54          | 4.81       | 45.35                | -22.85      | 68.20          | 100         | 321         | Peak              |
| 2  |   | 15540.000       | 42.32          | 6.28       | 48.60                | -25.40      | 74.00          | 100         | 269         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band1_CH 36_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

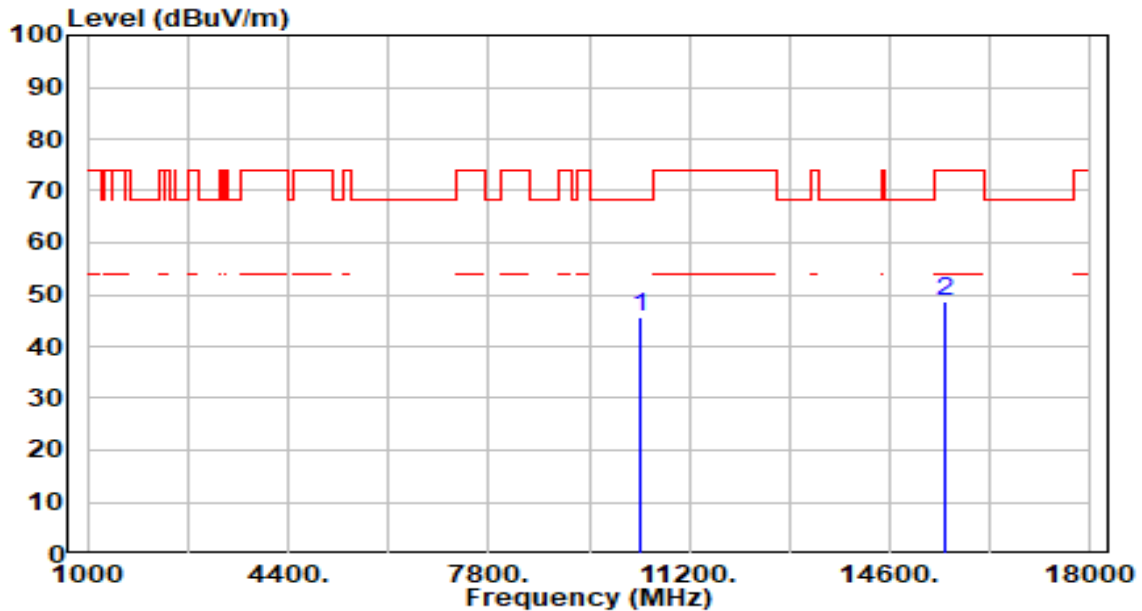


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10360.000       | 40.92          | 4.81       | 45.74                | -22.46      | 68.20          | 100         | 134         | Peak              |
| 2  |   | 15540.000       | 42.42          | 6.28       | 48.70                | -25.30      | 74.00          | 100         | 251         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band1_CH 40_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

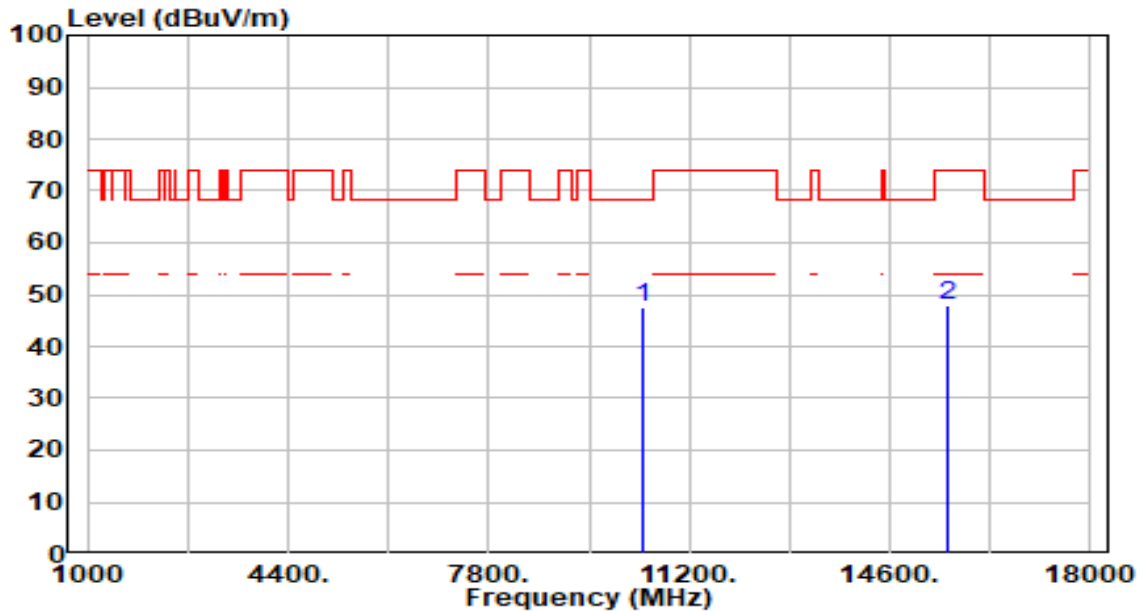


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10400.000       | 42.83          | 4.77       | 47.60                | -20.60      | 68.20          | 100         | 61          | Peak              |
| 2  |   | 15600.000       | 41.73          | 6.19       | 47.92                | -26.08      | 74.00          | 100         | 170         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band1_CH 40_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

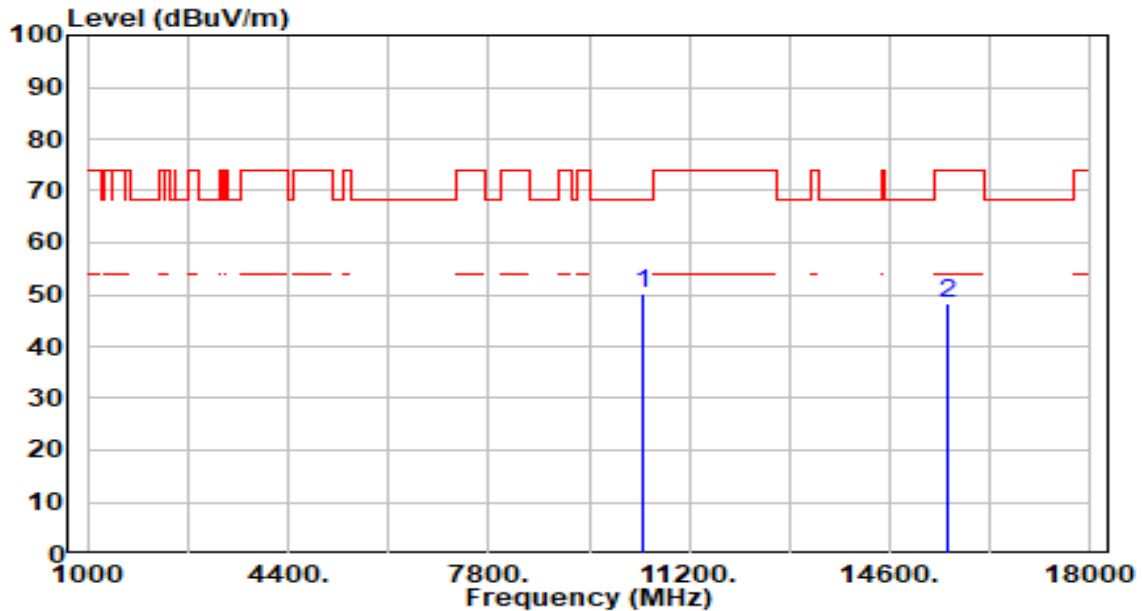


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10400.000       | 45.24          | 4.77       | 50.01                | -18.19      | 68.20          | 100         | 119         | Peak              |
| 2  |   | 15600.000       | 42.29          | 6.19       | 48.48                | -25.52      | 74.00          | 100         | 181         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band1_CH 48_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

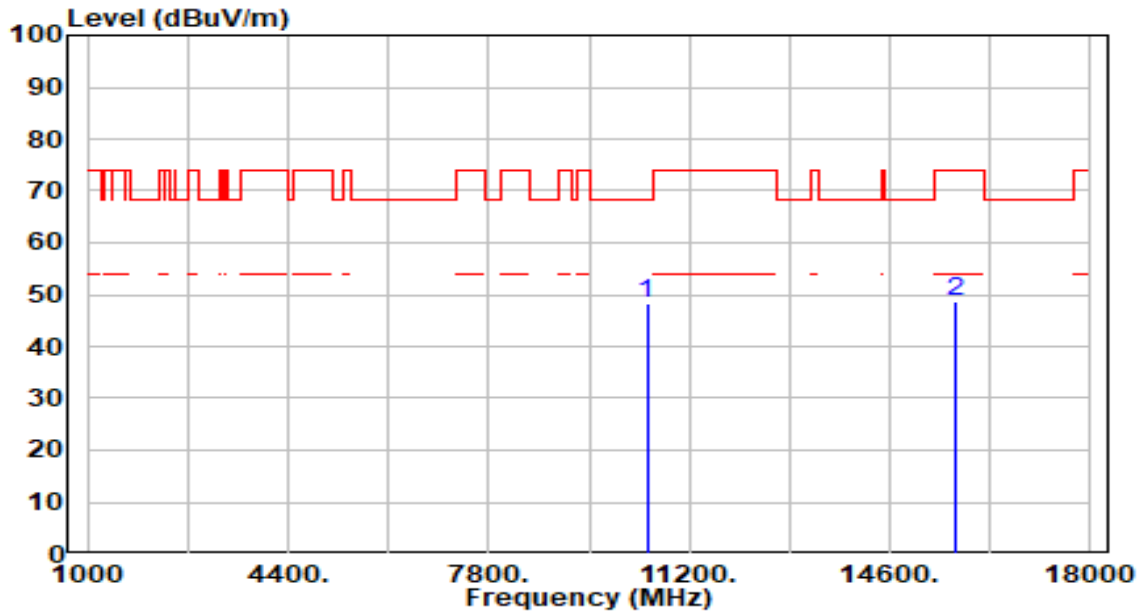


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10480.000       | 43.57          | 4.65       | 48.23                | -19.97      | 68.20          | 100         | 62          | Peak              |
| 2  |   | 15720.000       | 42.09          | 6.43       | 48.52                | -25.48      | 74.00          | 100         | 218         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band1_CH 48_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

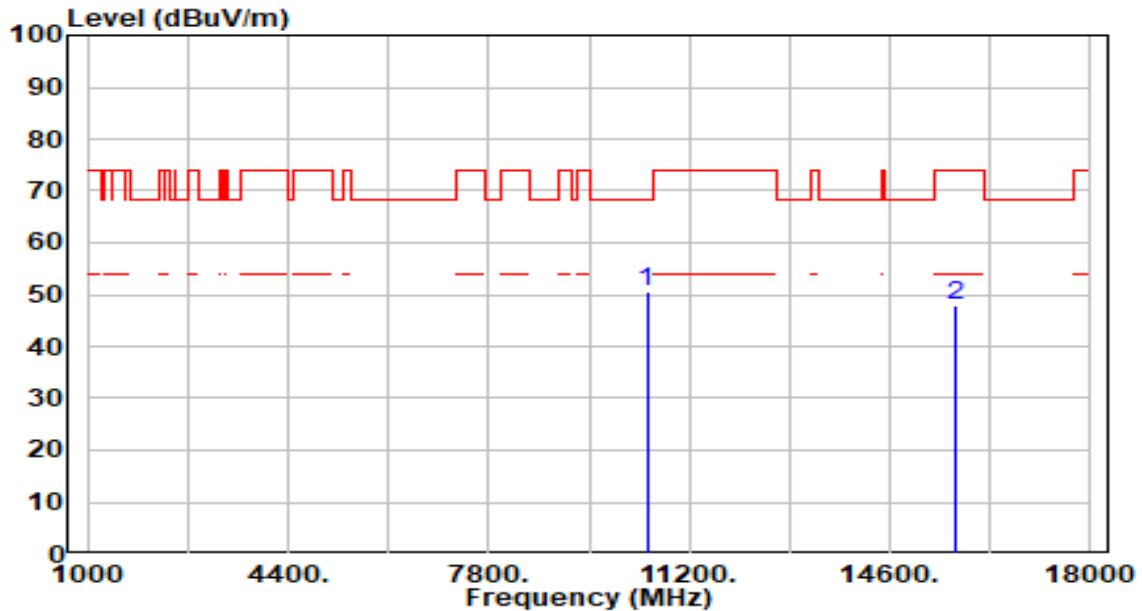


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10480.000       | 45.78          | 4.65       | 50.44                | -17.76      | 68.20          | 100         | 116         | Peak              |
| 2  |   | 15720.000       | 41.57          | 6.43       | 48.00                | -26.00      | 74.00          | 100         | 16          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band2_CH 52_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

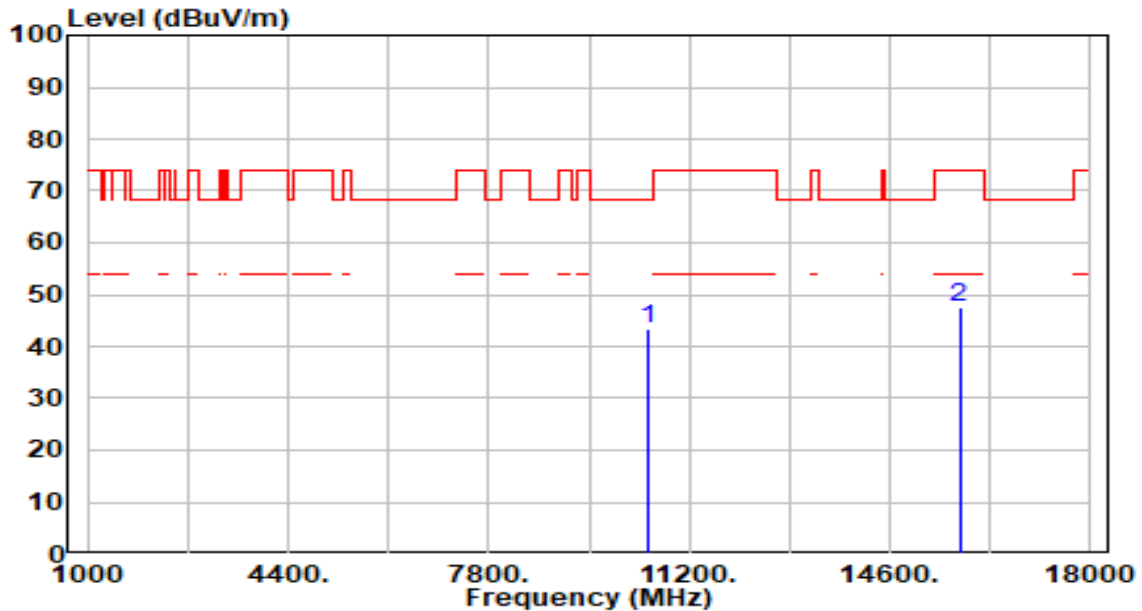


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10520.000       | 38.93          | 4.61       | 43.54                | -24.66      | 68.20          | 100         | 171         | Peak              |
| 2  |   | 15780.000       | 41.14          | 6.55       | 47.69                | -26.31      | 74.00          | 100         | 30          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band2_CH 52_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

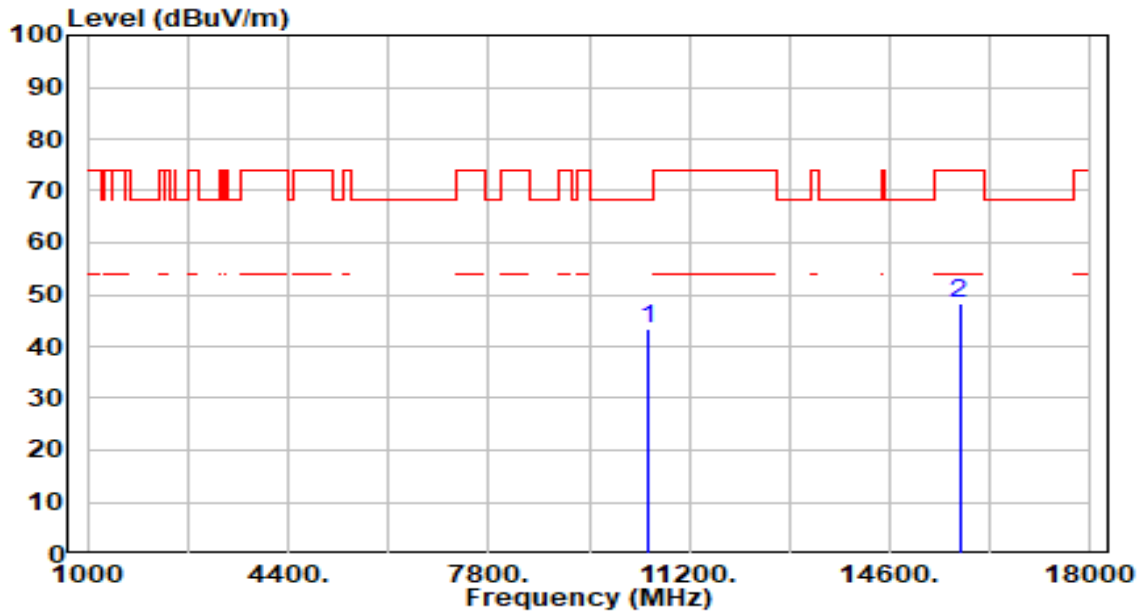


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10520.000       | 38.86          | 4.61       | 43.47                | -24.73      | 68.20          | 100         | 25          | Peak              |
| 2  |   | 15780.000       | 41.88          | 6.55       | 48.43                | -25.57      | 74.00          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band2_CH 60_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

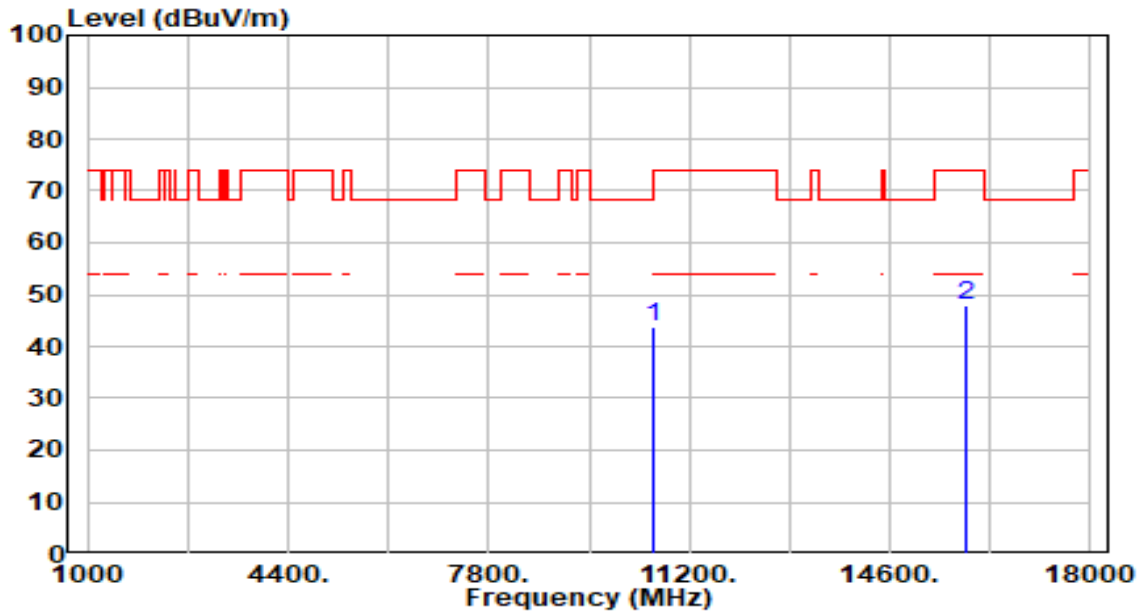


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10600.000       | 39.23          | 4.55       | 43.78                | -24.42      | 68.20          | 100         | 227         | Peak              |
| 2  |   | 15900.000       | 41.16          | 6.64       | 47.80                | -26.20      | 74.00          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band2_CH 60_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

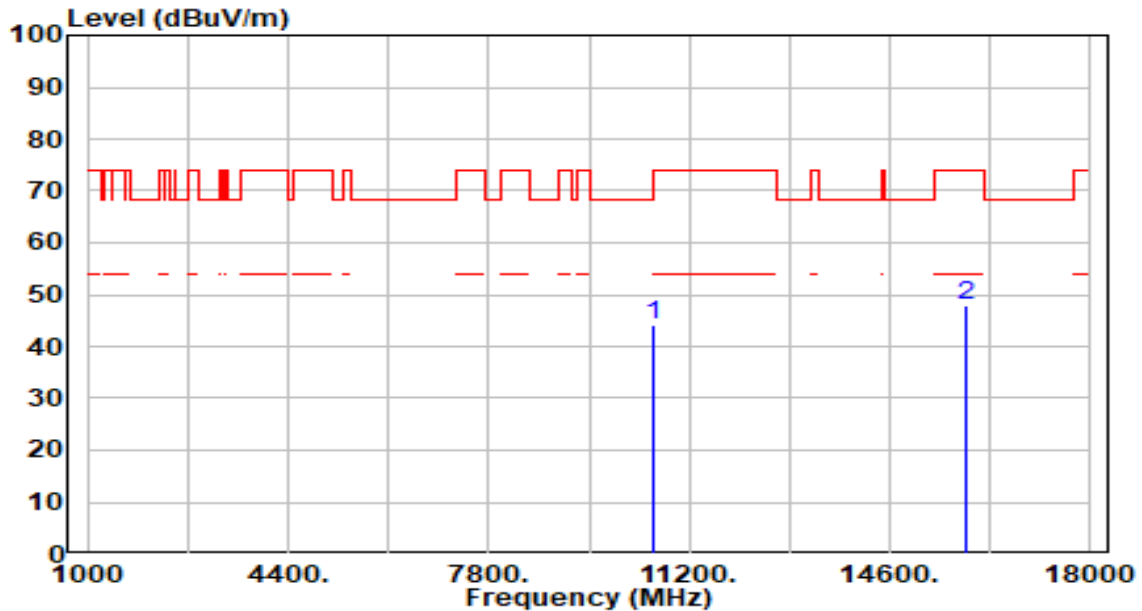


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10600.000       | 39.58          | 4.55       | 44.13                | -24.07      | 68.20          | 100         | 2           | Peak              |
| 2  |   | 15900.000       | 41.34          | 6.64       | 47.98                | -26.02      | 74.00          | 100         | 13          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band2_CH 64_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

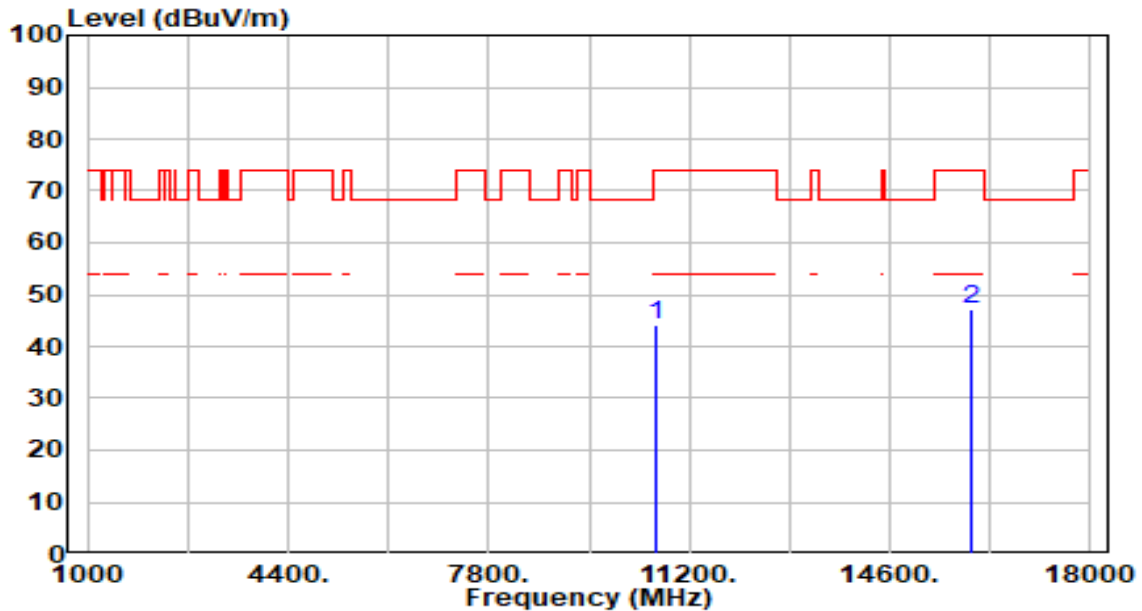


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 10640.000       | 39.71          | 4.58       | 44.29                | -29.71      | 74.00          | 100         | 338         | Peak              |
| 2  | * | 15960.000       | 40.47          | 6.67       | 47.14                | -26.86      | 74.00          | 100         | 106         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band2_CH 64_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

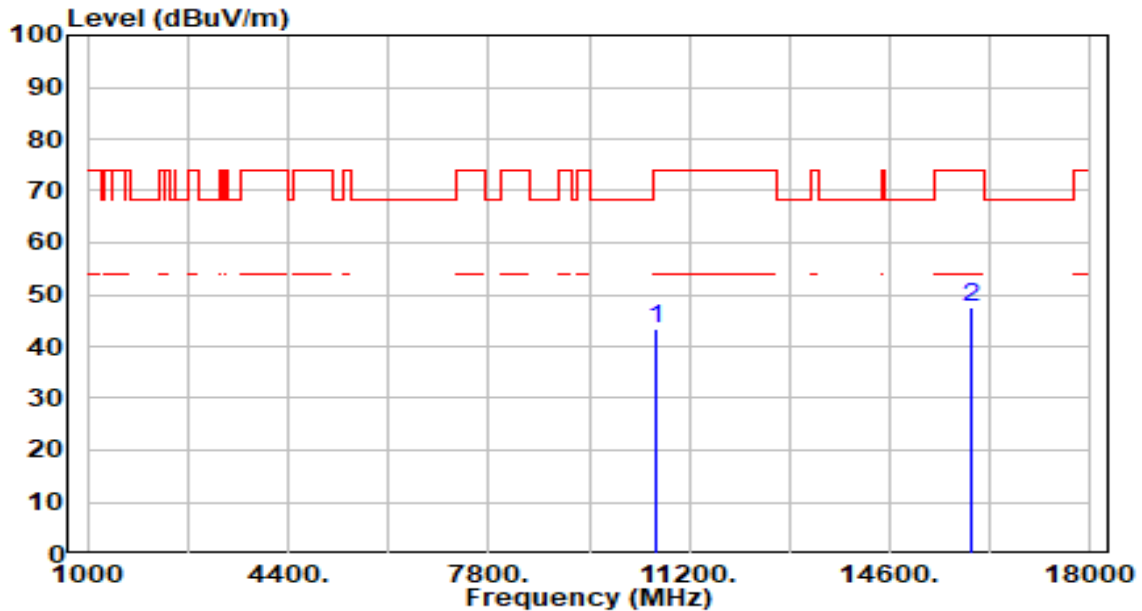


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 10640.000       | 38.74          | 4.58       | 43.31                | -30.69      | 74.00          | 100         | 107         | Peak              |
| 2  | * | 15960.000       | 40.76          | 6.67       | 47.43                | -26.57      | 74.00          | 100         | 72          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 100_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

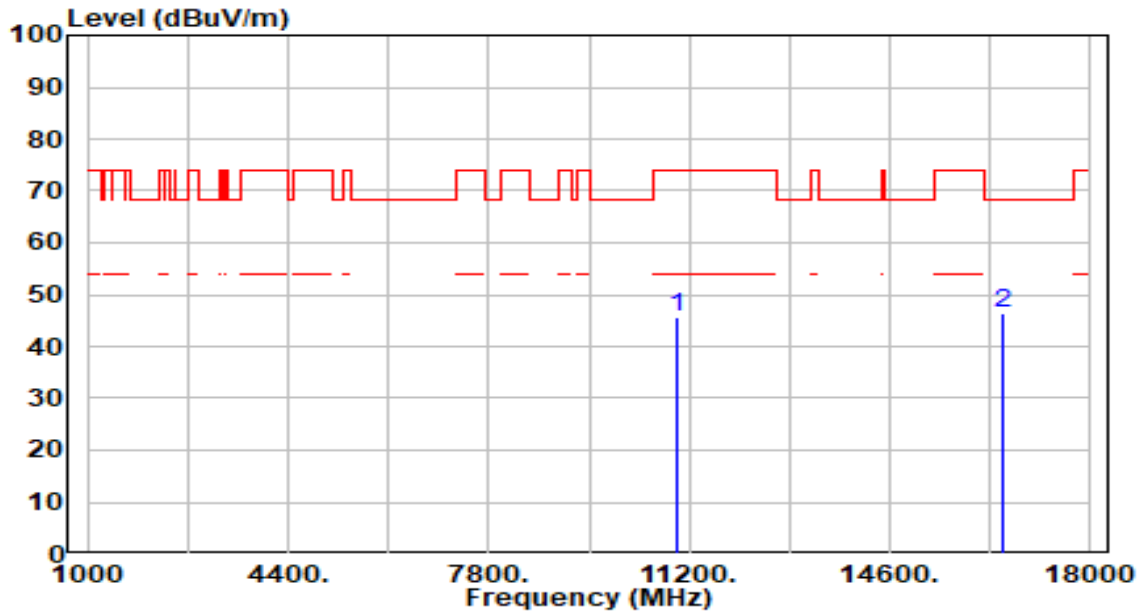


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11000.000       | 41.18          | 4.44       | 45.62                | -28.38      | 74.00          | 100         | 246         | Peak              |
| 2  | * | 16500.000       | 40.21          | 6.07       | 46.28                | -21.92      | 68.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 100_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

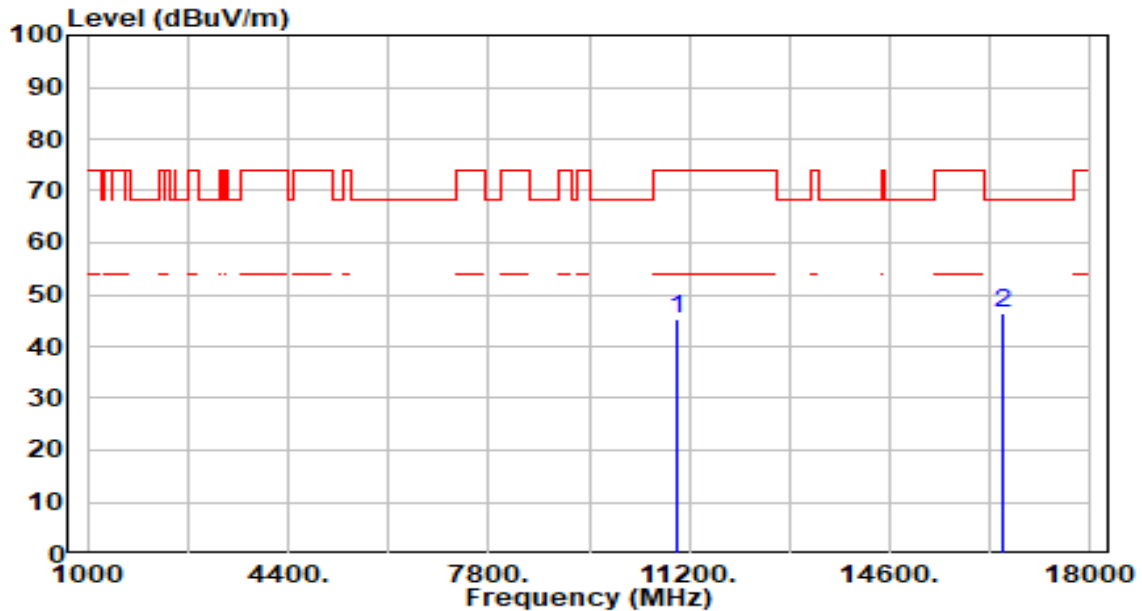


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11000.000       | 40.67          | 4.44       | 45.11                | -28.89      | 74.00          | 100         | 161         | Peak              |
| 2  | * | 16500.000       | 40.39          | 6.07       | 46.46                | -21.74      | 68.20          | 100         | 255         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 116_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

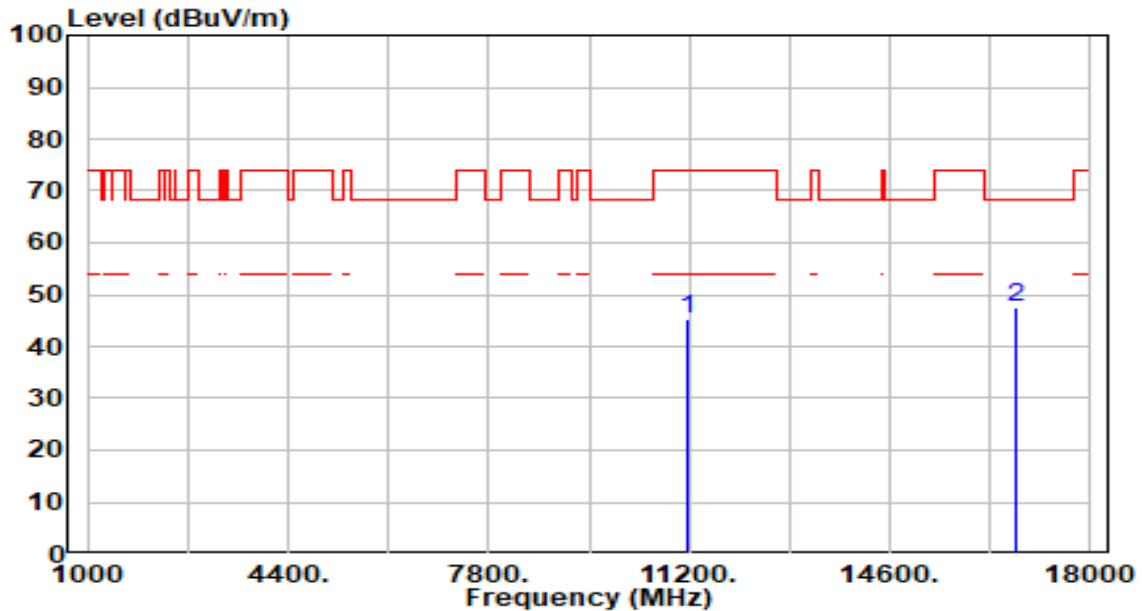


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11160.000       | 40.32          | 4.87       | 45.19                | -28.81      | 74.00          | 100         | 0           | Peak              |
| 2  | * | 16740.000       | 41.57          | 6.01       | 47.58                | -20.62      | 68.20          | 100         | 117         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 116_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

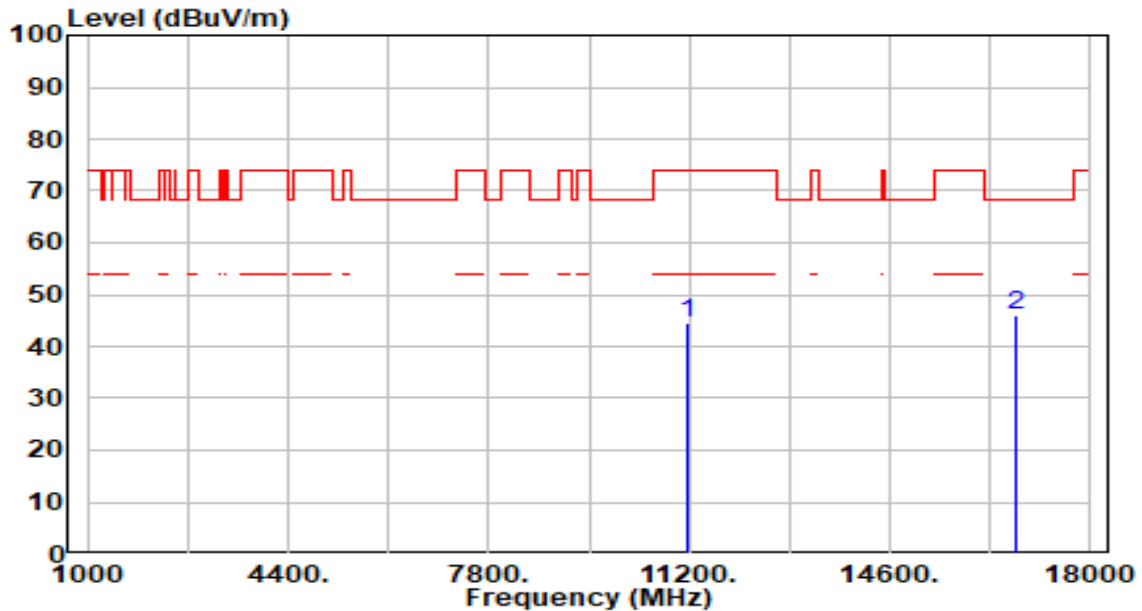


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11160.000       | 39.63          | 4.87       | 44.50                | -29.50      | 74.00          | 100         | 120         | Peak              |
| 2  | * 16740.000     | 39.98          | 6.01       | 46.00                | -22.20      | 68.20          | 100         | 220         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 140_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

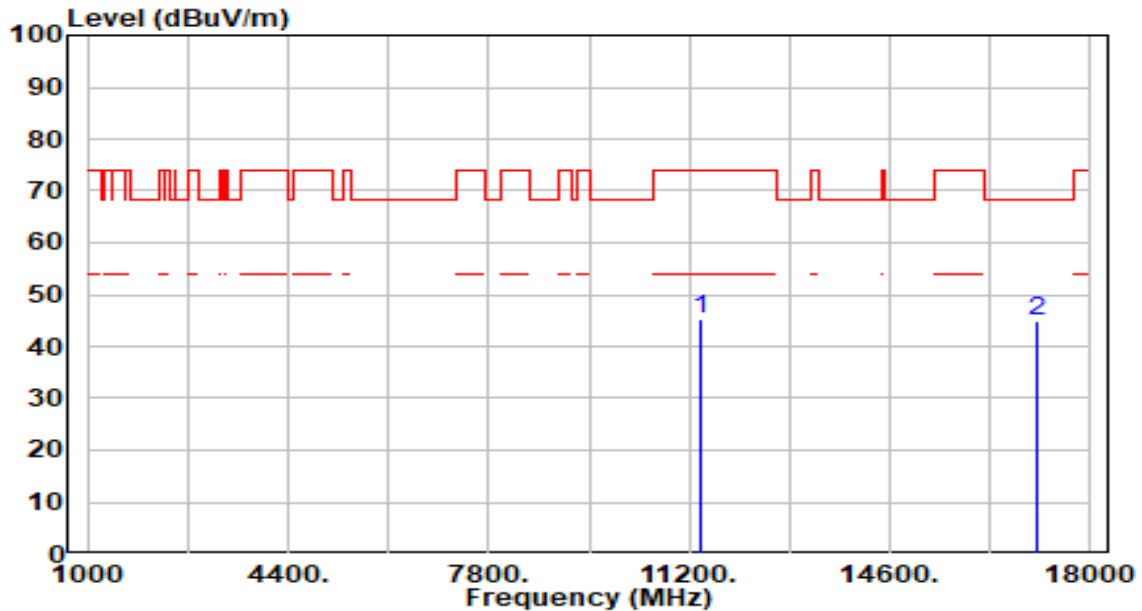


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11400.000       | 39.93          | 5.22       | 45.15                | -28.85      | 74.00          | 100         | 156         | Peak              |
| 2  | * | 17100.000       | 39.50          | 5.54       | 45.04                | -23.16      | 68.20          | 100         | 109         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 140_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

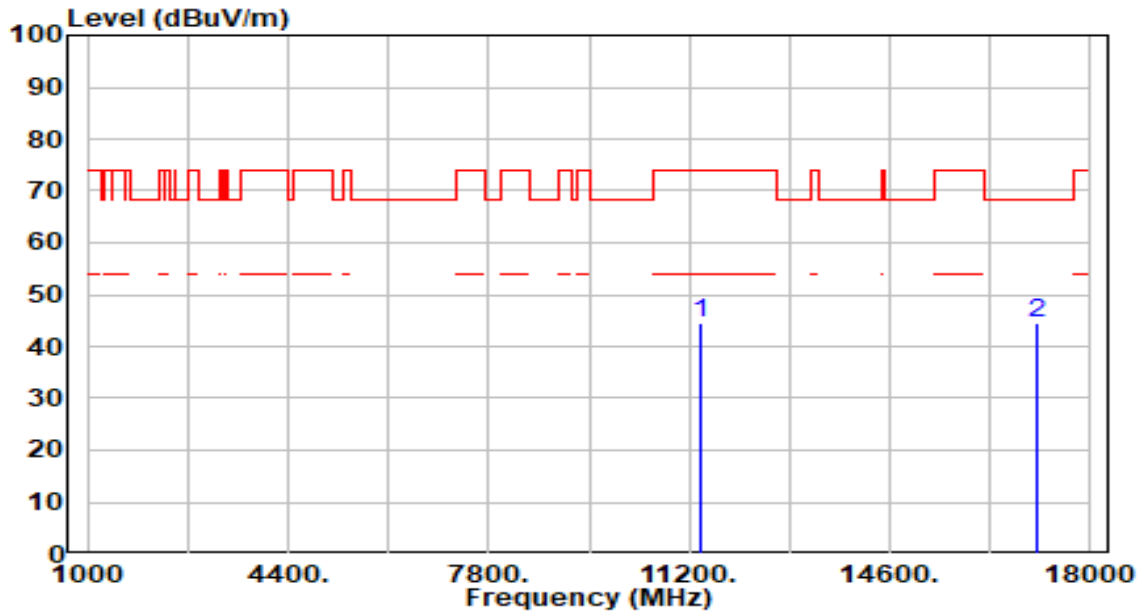


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11400.000       | 39.47          | 5.22       | 44.69                | -29.31      | 74.00          | 100         | 313         | Peak              |
| 2  | * 17100.000     | 38.98          | 5.54       | 44.52                | -23.68      | 68.20          | 100         | 331         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 144_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

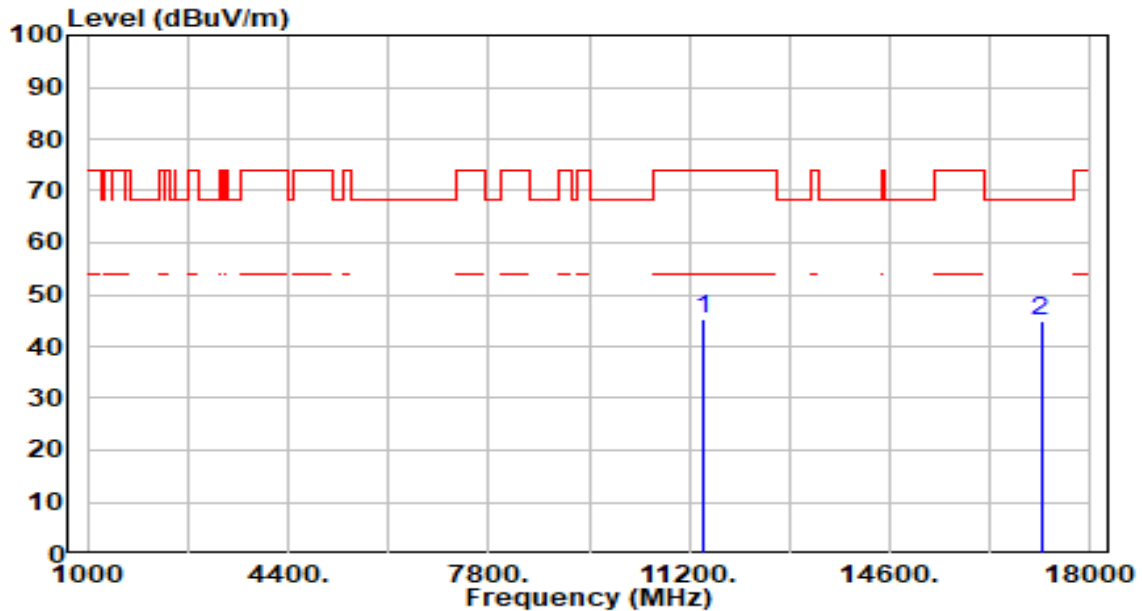


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11440.000       | 40.05          | 5.24       | 45.30                | -28.70      | 74.00          | 100         | 0           | Peak              |
| 2  | * 17160.000     | 39.38          | 5.41       | 44.79                | -23.41      | 68.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band3_CH 144_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

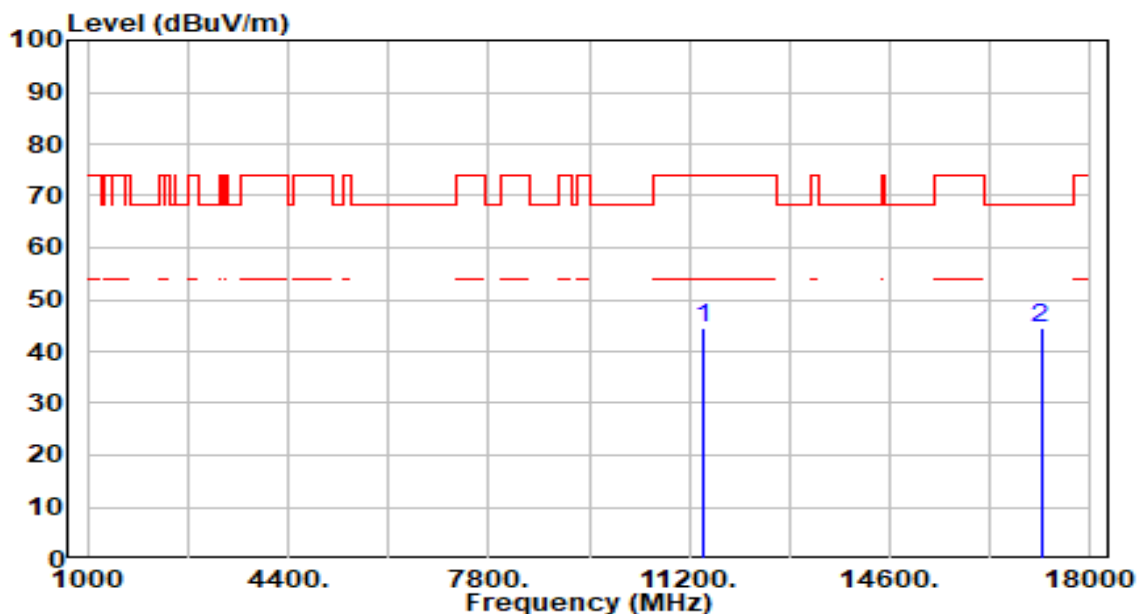


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11440.000       | 39.15          | 5.24       | 44.39                | -29.61      | 74.00          | 100         | 228         | Peak              |
| 2  | * | 17160.000       | 39.00          | 5.41       | 44.42                | -23.78      | 68.20          | 100         | 292         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band4_CH 149_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

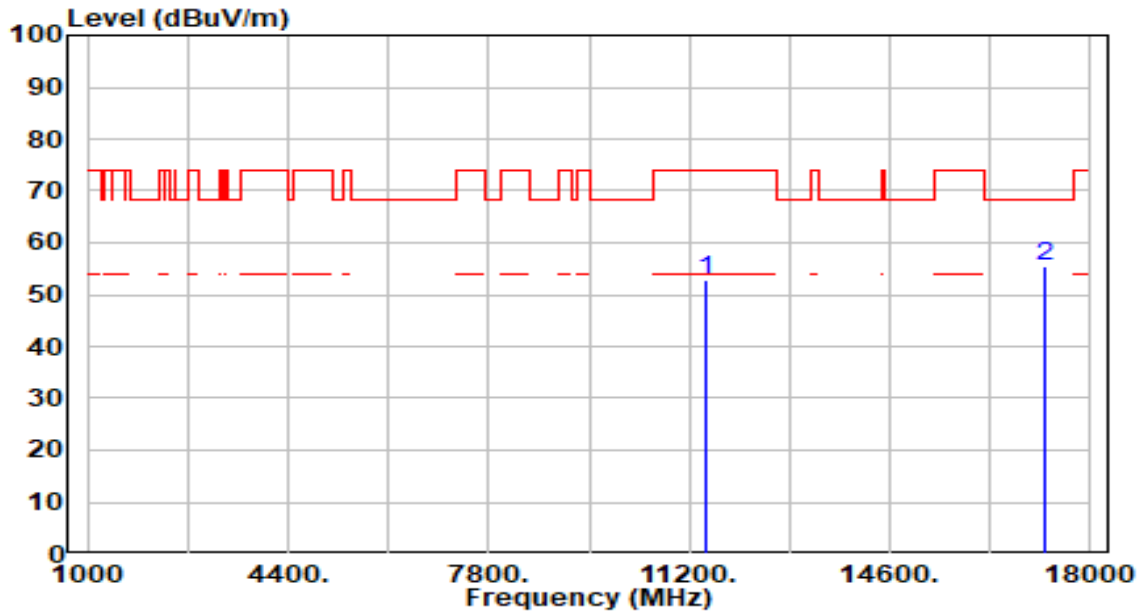


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11490.000       | 47.63          | 5.28       | 52.91                | -21.09      | 74.00          | 200         | 153         | Peak              |
| 2  | * 17235.000     | 50.22          | 5.25       | 55.47                | -12.73      | 68.20          | 200         | 162         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band4_CH 149_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

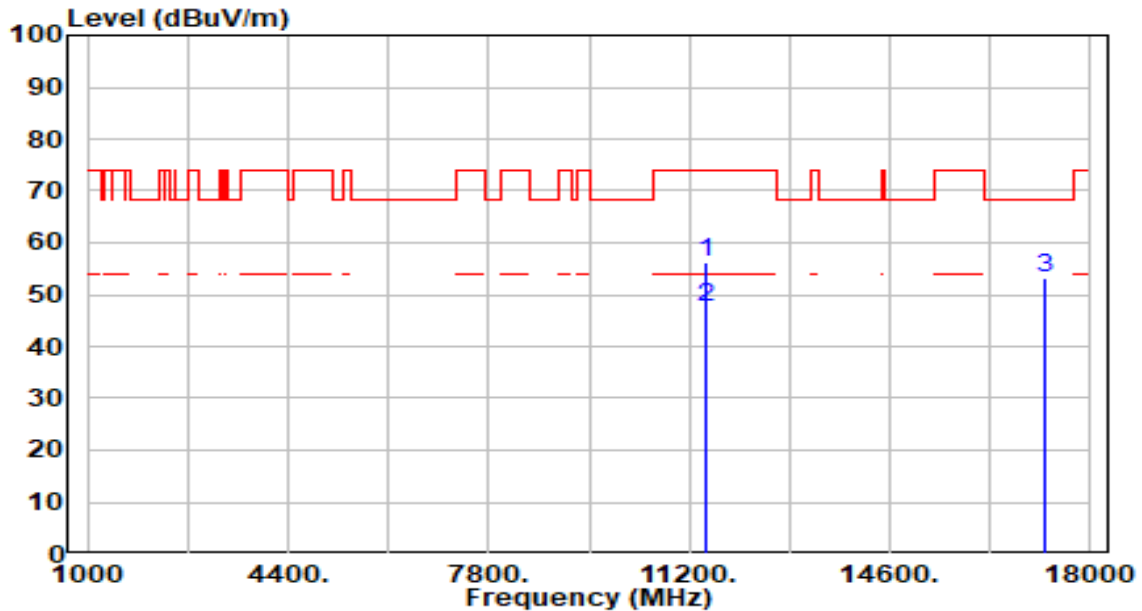


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11490.000       | 51.07          | 5.28       | 56.35                | -17.65      | 74.00          | 200         | 139         | Peak              |
| 2  | * | 11490.000       | 42.40          | 5.28       | 47.68                | -6.32       | 54.00          | 200         | 139         | Average           |
| 3  |   | 17235.000       | 47.80          | 5.25       | 53.04                | -15.16      | 68.20          | 200         | 92          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band4_CH 157_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

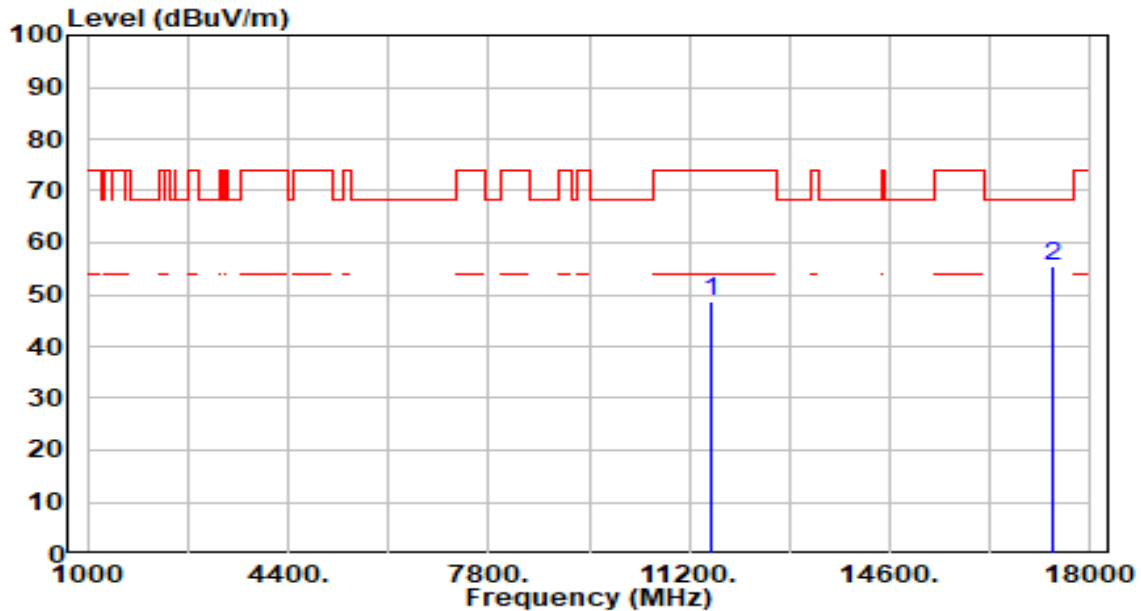


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11570.000       | 43.16          | 5.35       | 48.51                | -25.49      | 74.00          | 200         | 0           | Peak              |
| 2  | * | 17355.000       | 50.47          | 4.99       | 55.45                | -12.75      | 68.20          | 200         | 165         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band4_CH 157_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

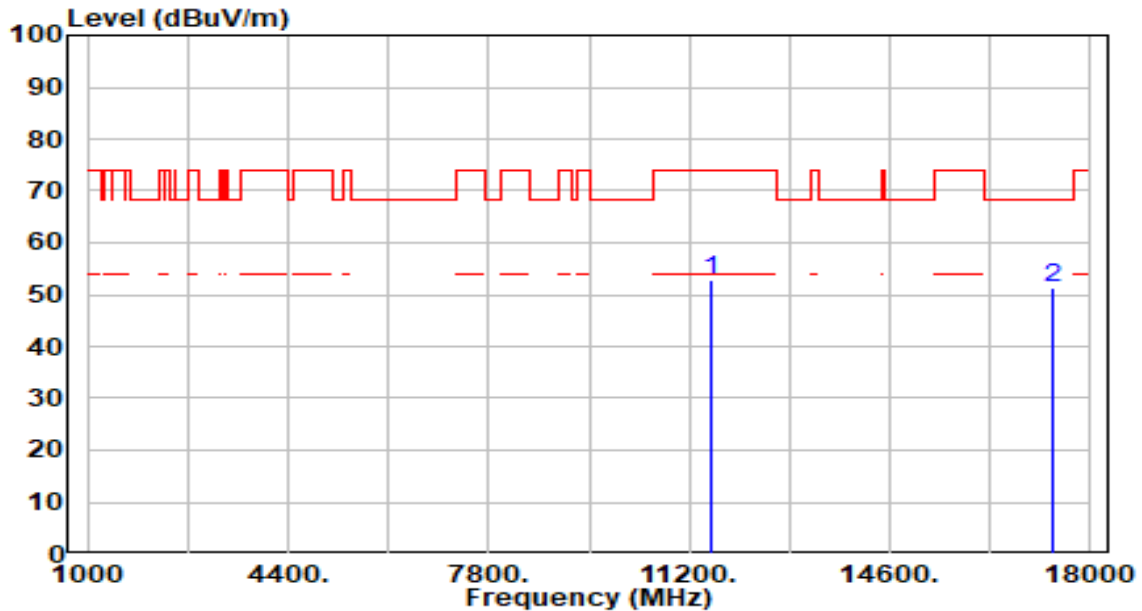


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11570.000       | 47.56          | 5.35       | 52.90                | -21.10      | 74.00          | 200         | 124         | Peak              |
| 2  | * | 17355.000       | 46.16          | 4.99       | 51.14                | -17.06      | 68.20          | 200         | 101         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band4_CH 165_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

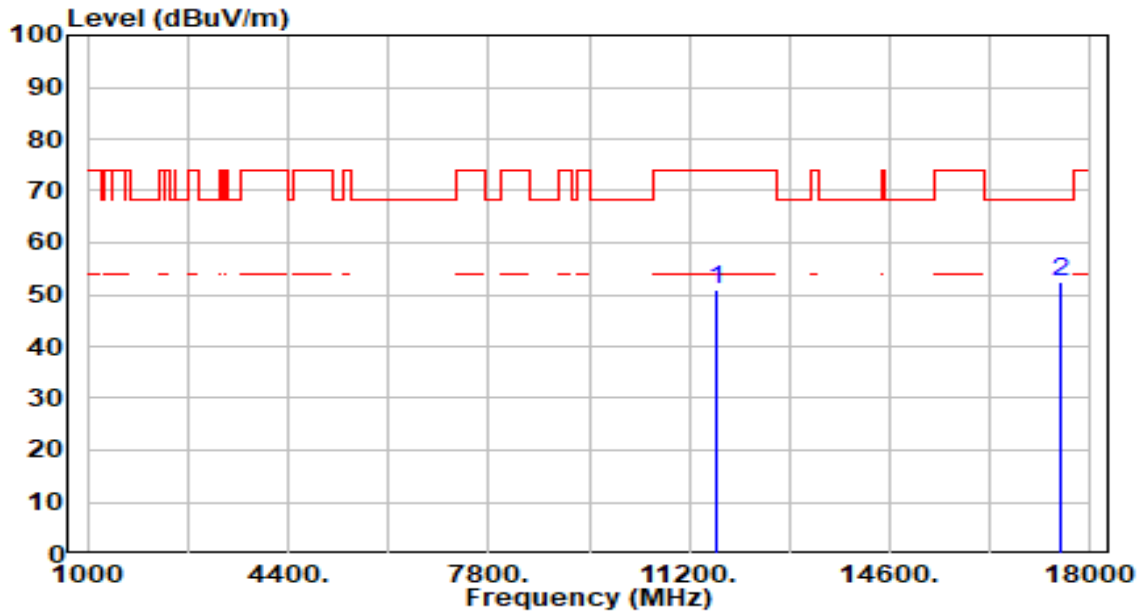


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 45.65          | 5.37       | 51.02                | -22.98      | 74.00          | 200         | 153         | Peak              |
| 2  | * 17475.000     | 47.49          | 5.02       | 52.52                | -15.68      | 68.20          | 200         | 53          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-20MHz_TX_Band4_CH 165_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

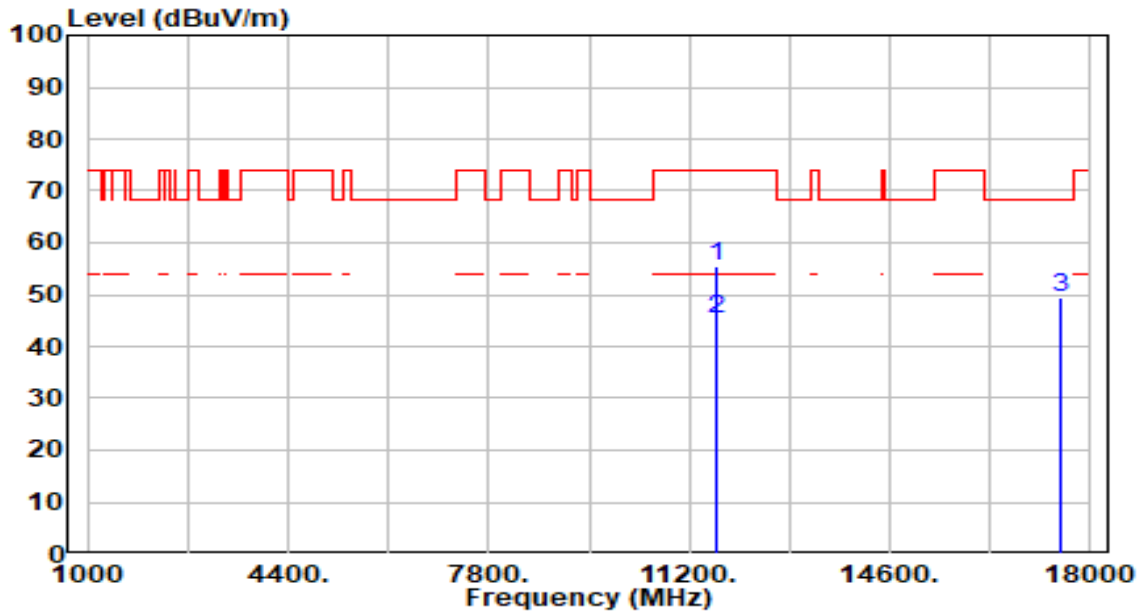


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11650.000       | 50.06          | 5.37       | 55.44                | -18.56      | 74.00          | 200         | 134         | Peak              |
| 2  | * 11650.000     | 40.06          | 5.37       | 45.44                | -8.56       | 54.00          | 200         | 134         | Average           |
| 3  | 17475.000       | 44.35          | 5.02       | 49.37                | -18.83      | 68.20          | 200         | 81          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band1_CH 38_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

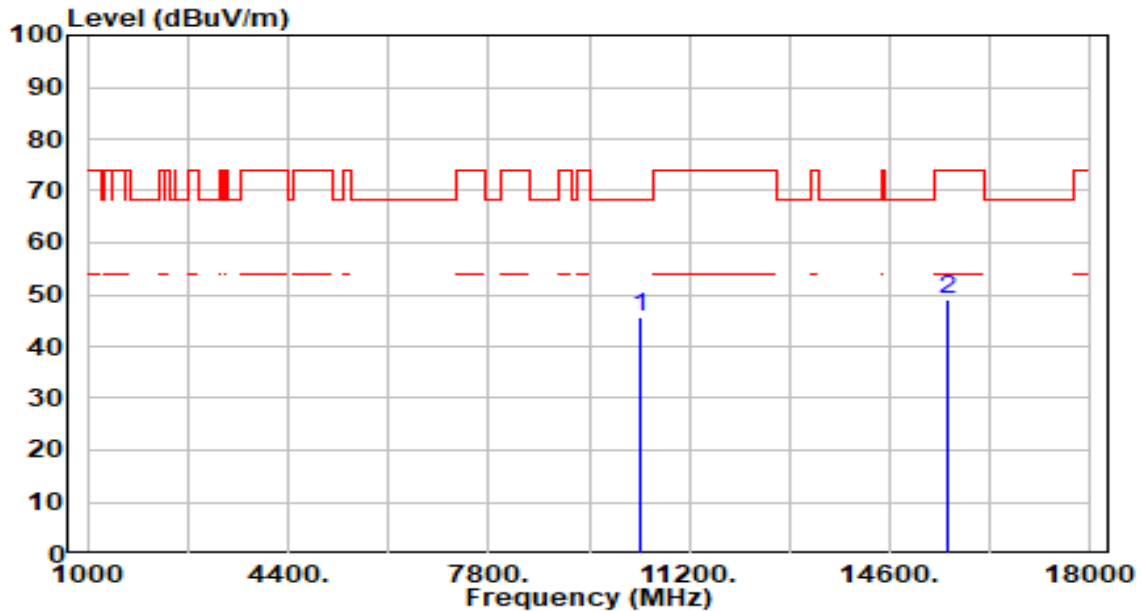


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10380.000       | 41.00          | 4.79       | 45.79                | -22.41      | 68.20          | 100         | 14          | Peak              |
| 2  |   | 15570.000       | 42.64          | 6.24       | 48.88                | -25.12      | 74.00          | 100         | 72          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band1_CH 38_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

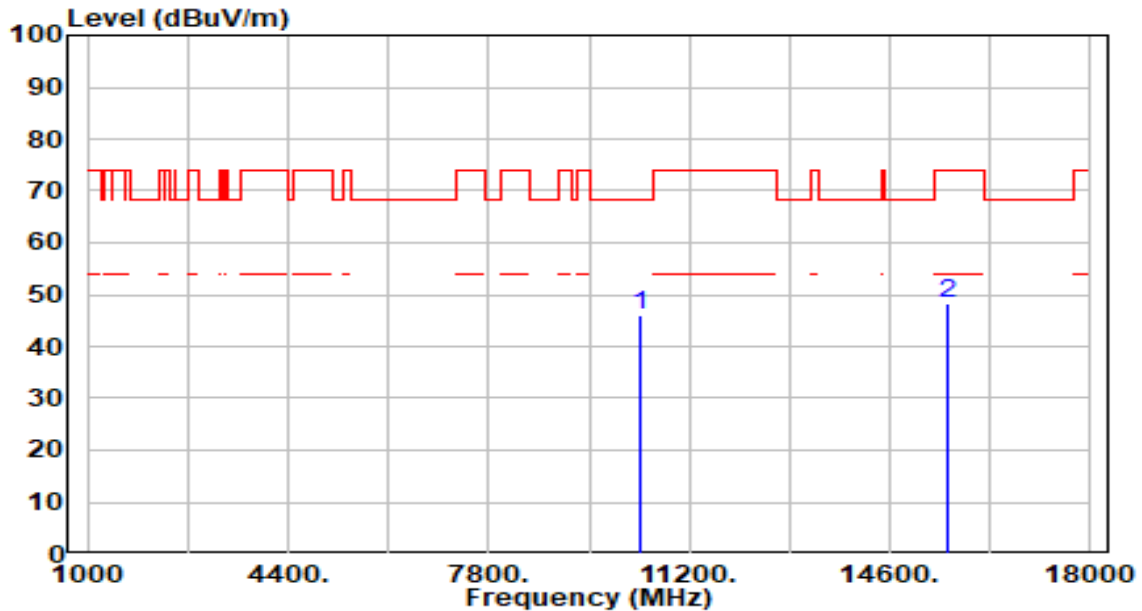


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10380.000       | 41.30          | 4.79       | 46.10                | -22.10      | 68.20          | 100         | 100         | Peak              |
| 2  |   | 15570.000       | 41.93          | 6.24       | 48.17                | -25.83      | 74.00          | 100         | 20          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band1_CH 46_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

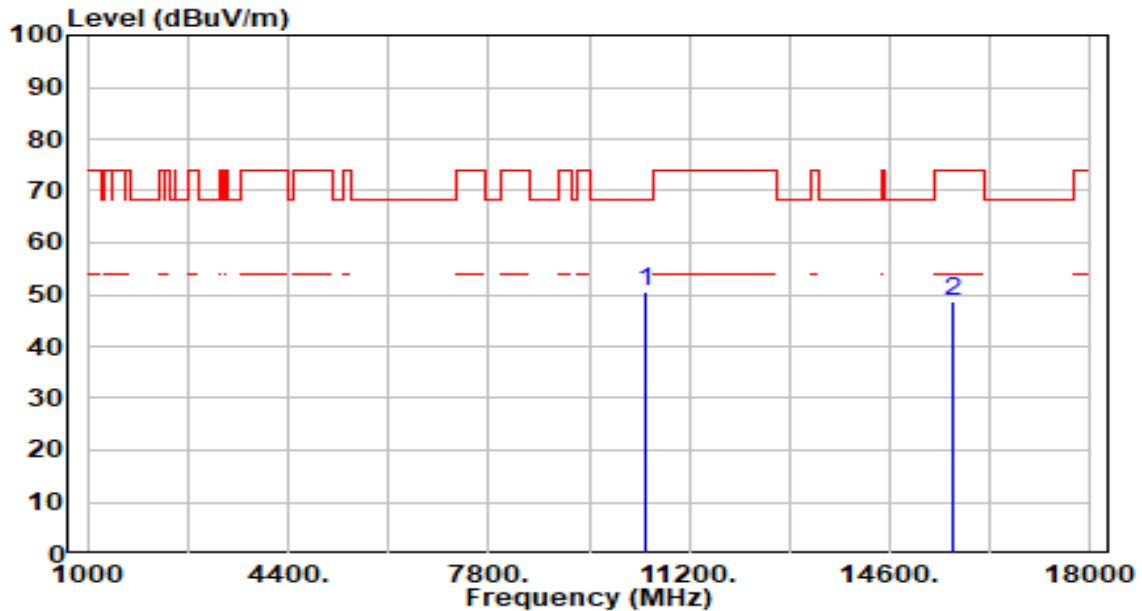


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10460.000       | 46.00          | 4.68       | 50.69                | -17.51      | 68.20          | 100         | 69          | Peak              |
| 2  |   | 15690.000       | 42.21          | 6.37       | 48.58                | -25.42      | 74.00          | 100         | 297         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band1_CH 46_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

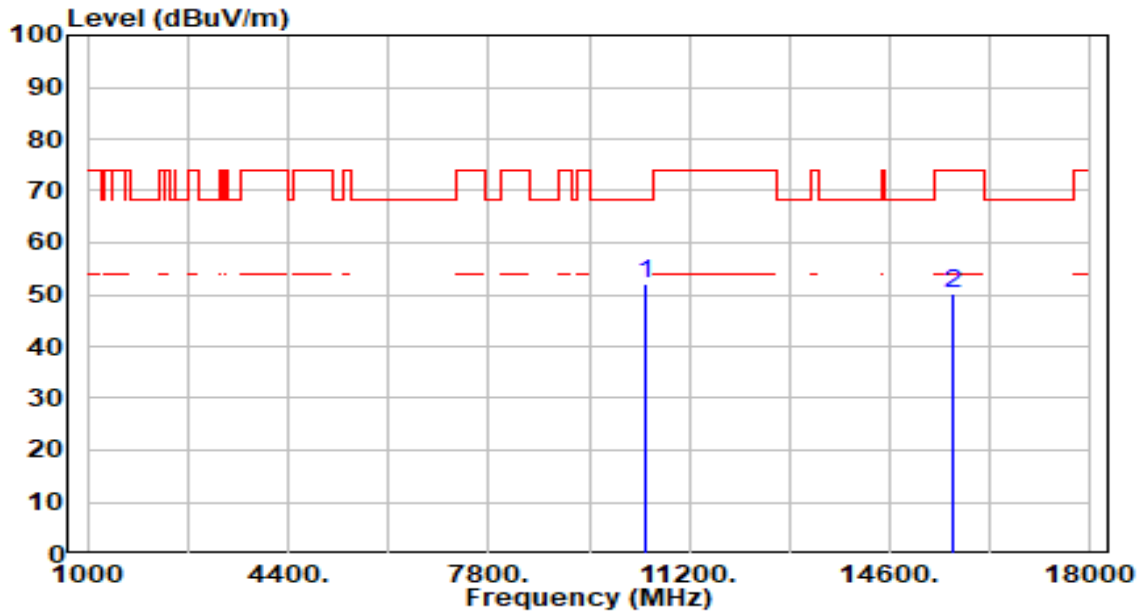


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10460.000       | 47.42          | 4.68       | 52.11                | -16.09      | 68.20          | 100         | 126         | Peak              |
| 2  |   | 15690.000       | 43.88          | 6.37       | 50.25                | -23.75      | 74.00          | 100         | 245         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band2_CH 54_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

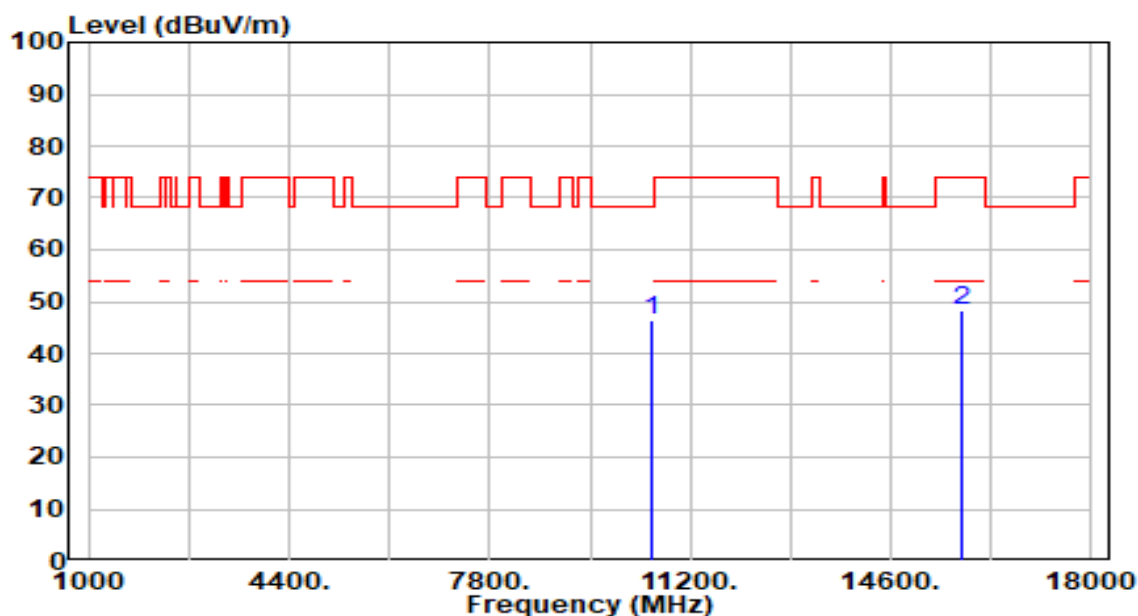


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10540.000       | 41.97          | 4.59       | 46.56                | -21.64      | 68.20          | 100         | 358         | Peak              |
| 2  |   | 15810.000       | 41.87          | 6.60       | 48.46                | -25.54      | 74.00          | 100         | 359         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band2_CH 54_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

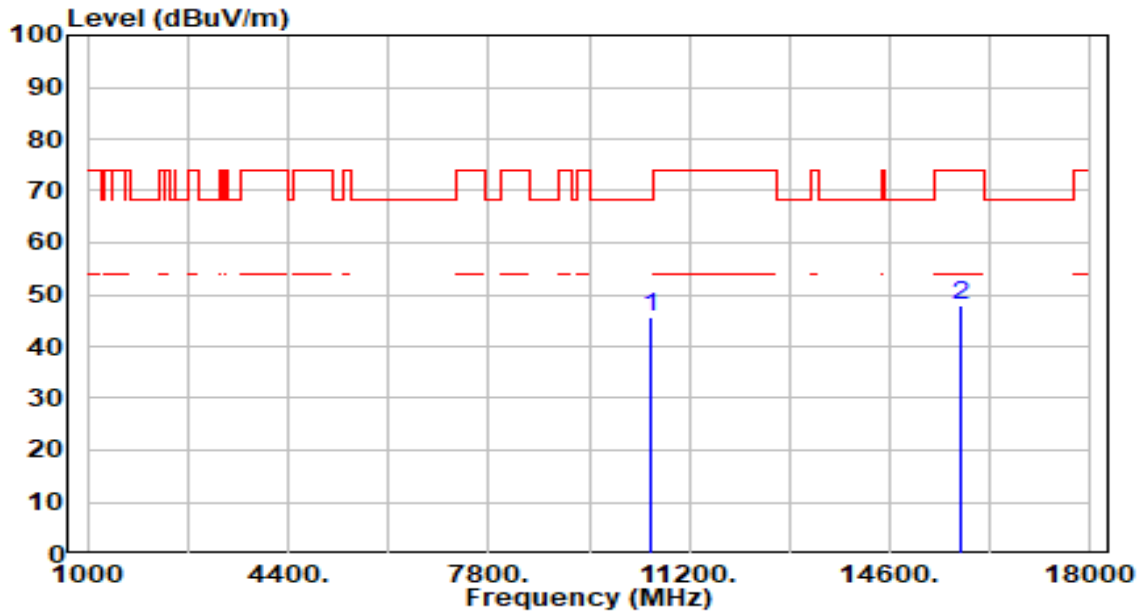


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10540.000       | 41.10          | 4.59       | 45.69                | -22.51      | 68.20          | 100         | 127         | Peak              |
| 2  |   | 15810.000       | 41.48          | 6.60       | 48.08                | -25.92      | 74.00          | 100         | 147         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band2_CH 62_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

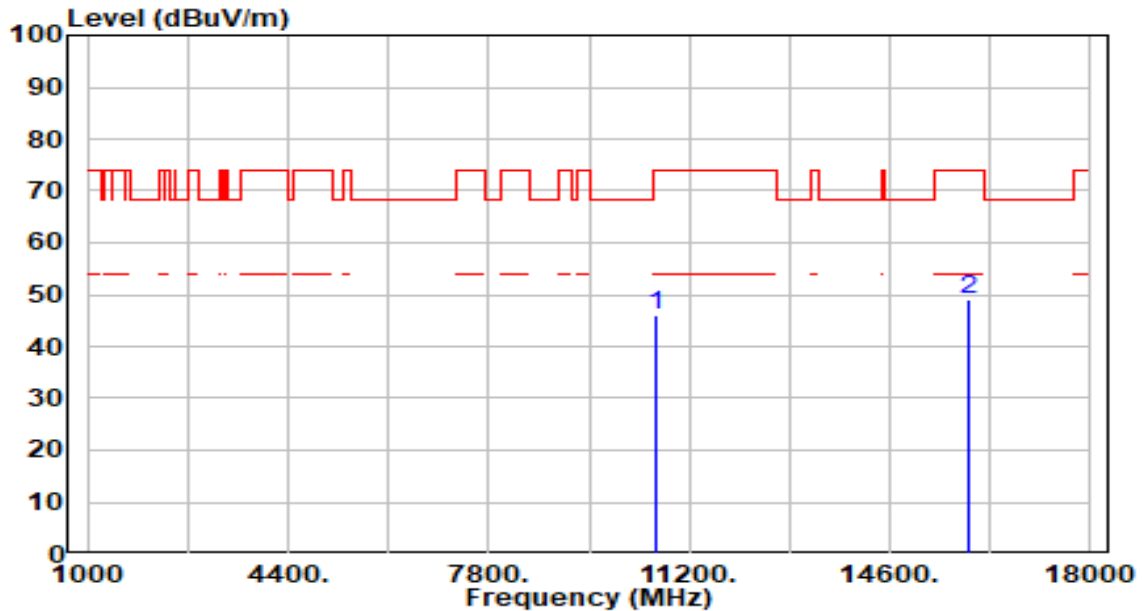


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 10620.000       | 41.32          | 4.56       | 45.88                | -28.12      | 74.00          | 100         | 337         | Peak              |
| 2  | * | 15930.000       | 42.54          | 6.66       | 49.20                | -24.80      | 74.00          | 100         | 146         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band2_CH 62_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

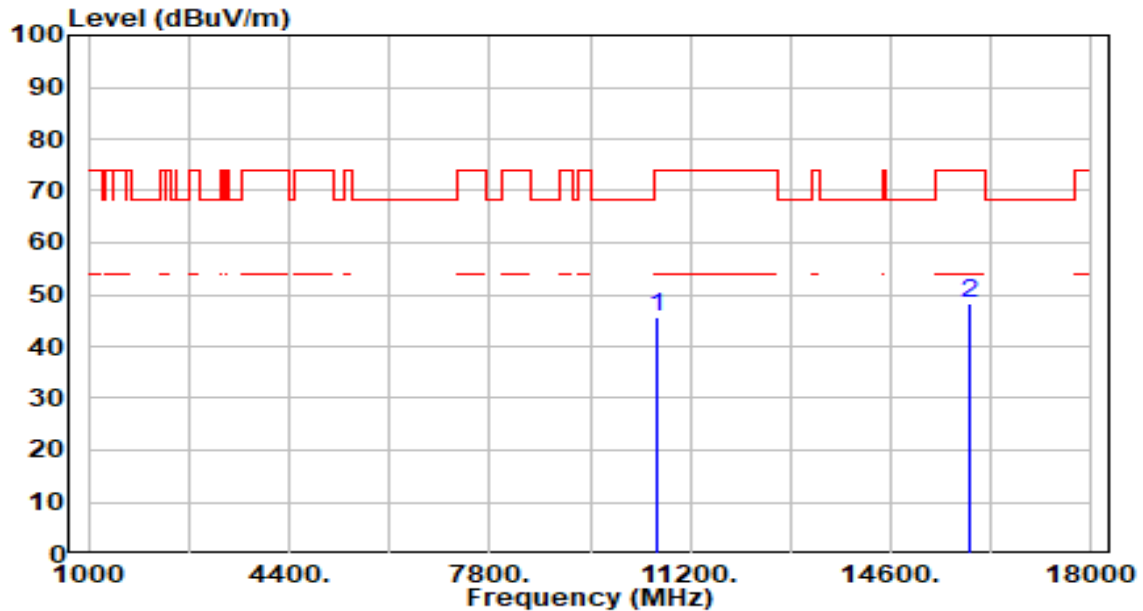


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 10620.000       | 41.11          | 4.56       | 45.67                | -28.33      | 74.00          | 100         | 260         | Peak              |
| 2  | * 15930.000     | 41.66          | 6.66       | 48.32                | -25.68      | 74.00          | 100         | 72          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 102_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

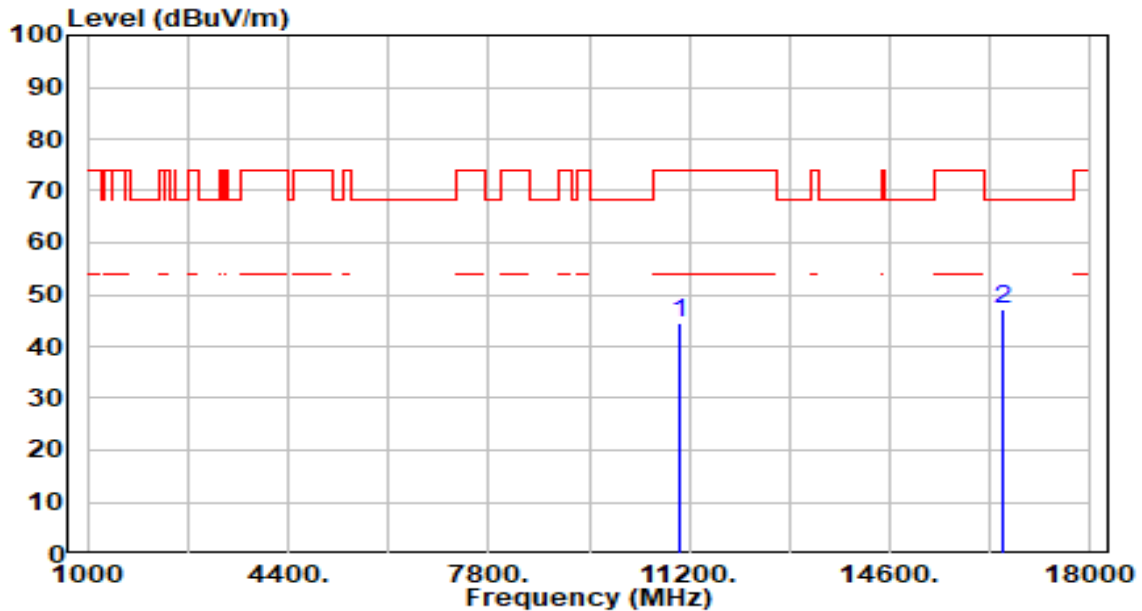


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11020.000       | 40.06          | 4.49       | 44.55                | -29.45      | 74.00          | 100         | 360         | Peak              |
| 2  | * | 16530.000       | 41.16          | 6.05       | 47.20                | -21.00      | 68.20          | 100         | 294         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 102_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

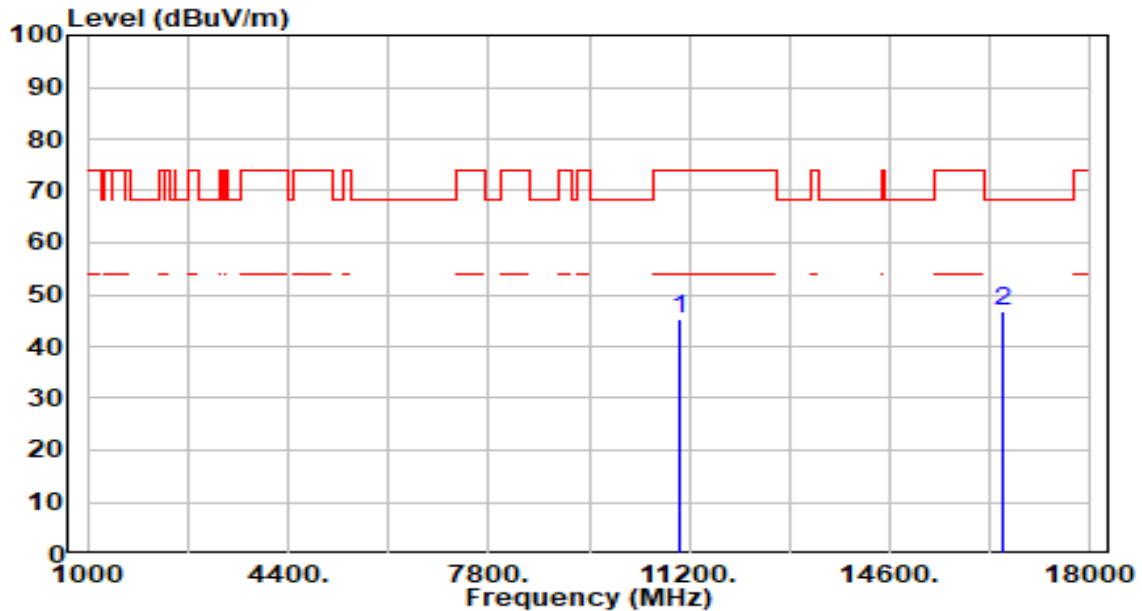


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11020.000       | 40.65          | 4.49       | 45.15                | -28.85      | 74.00          | 100         | 0           | Peak              |
| 2  | * | 16530.000       | 40.77          | 6.05       | 46.82                | -21.38      | 68.20          | 100         | 150         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 110_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

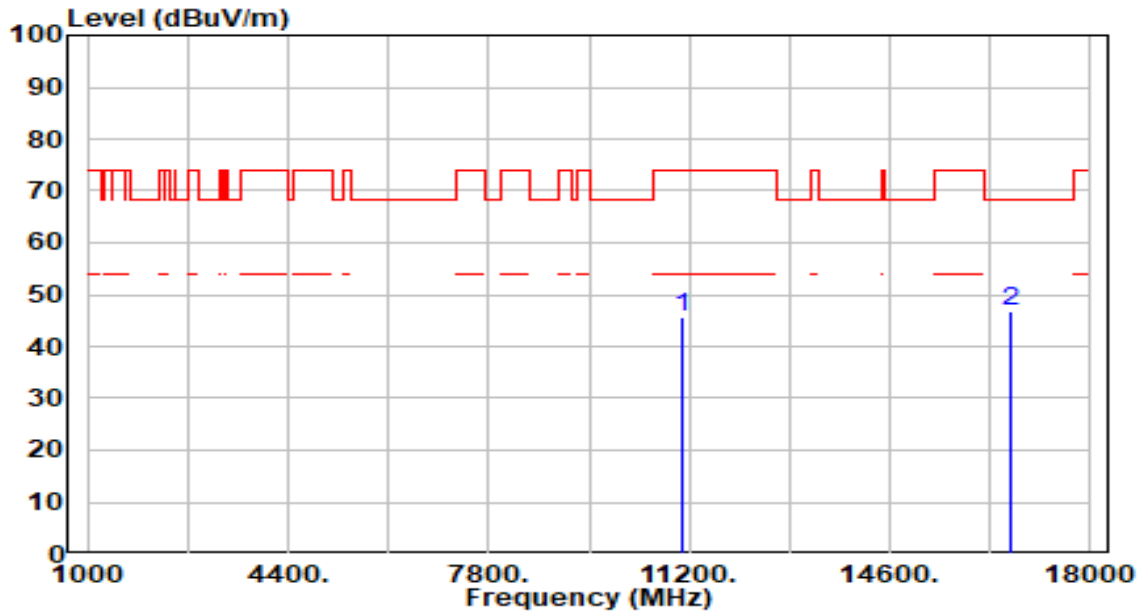


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11100.000       | 41.01          | 4.71       | 45.72                | -28.28      | 74.00          | 100         | 151         | Peak              |
| 2  | * 16650.000     | 40.72          | 6.00       | 46.72                | -21.48      | 68.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 110_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

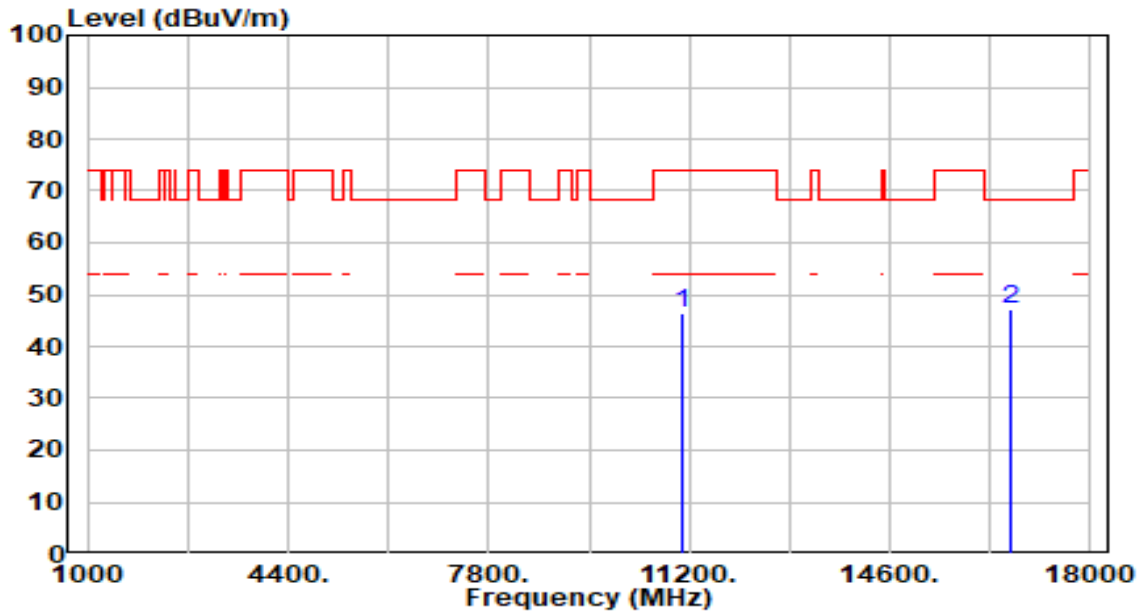


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11100.000       | 41.68          | 4.71       | 46.39                | -27.61      | 74.00          | 100         | 360         | Peak              |
| 2  | * | 16650.000       | 41.04          | 6.00       | 47.04                | -21.16      | 68.20          | 100         | 0           | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 134_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

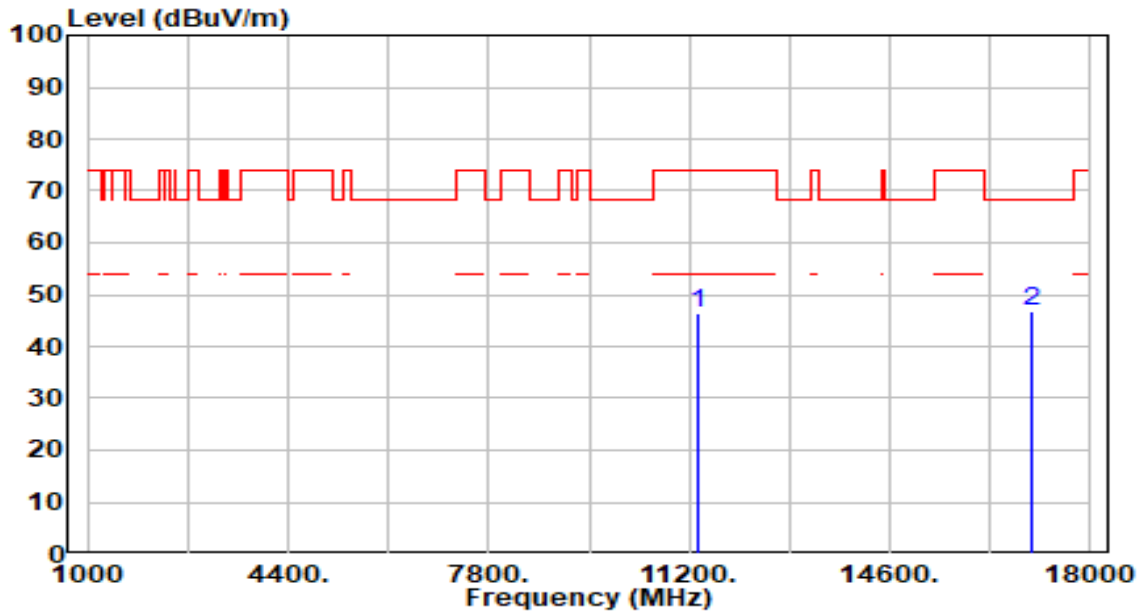


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 41.45          | 5.14       | 46.60                | -27.40      | 74.00          | 100         | 358         | Peak              |
| 2  | * 17010.000     | 41.15          | 5.74       | 46.89                | -21.31      | 68.20          | 100         | 358         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 134_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

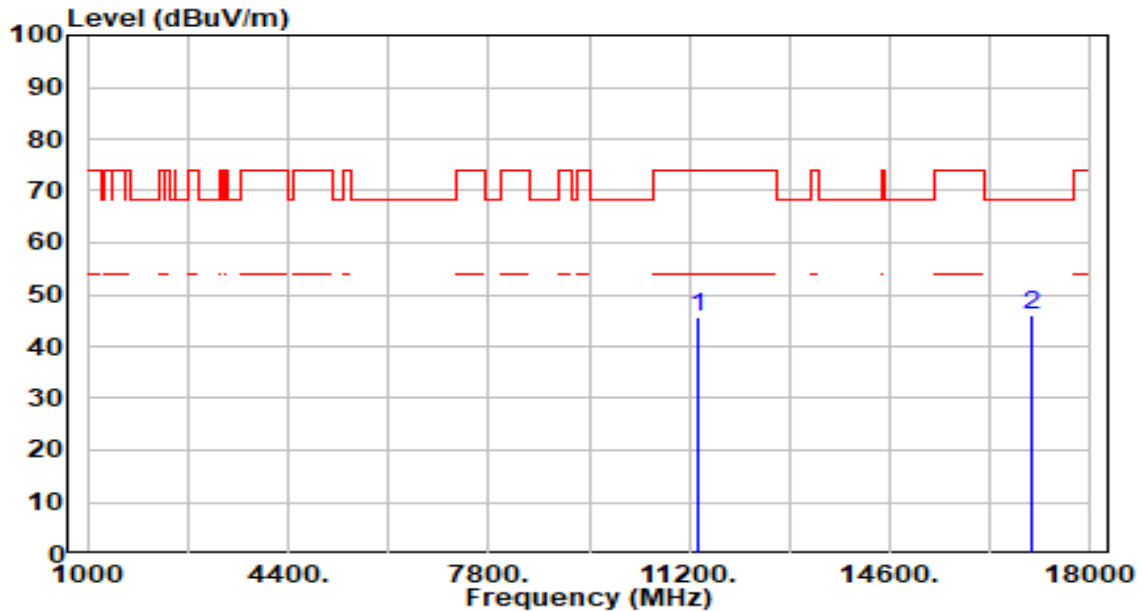


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11340.000       | 40.64          | 5.14       | 45.79                | -28.21      | 74.00          | 100         | 297         | Peak              |
| 2  | * 17010.000     | 40.29          | 5.74       | 46.03                | -22.17      | 68.20          | 100         | 248         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 142_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

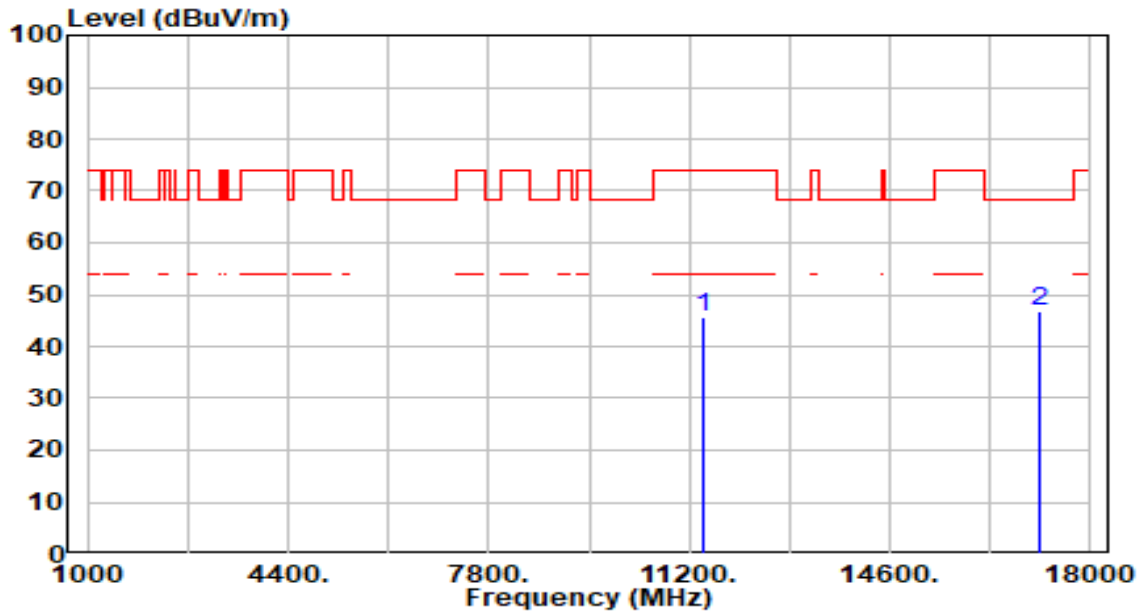


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11420.000       | 40.39          | 5.23       | 45.62                | -28.38      | 74.00          | 100         | 295         | Peak              |
| 2  | * | 17130.000       | 41.50          | 5.48       | 46.98                | -21.22      | 68.20          | 100         | 87          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band3_CH 142_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

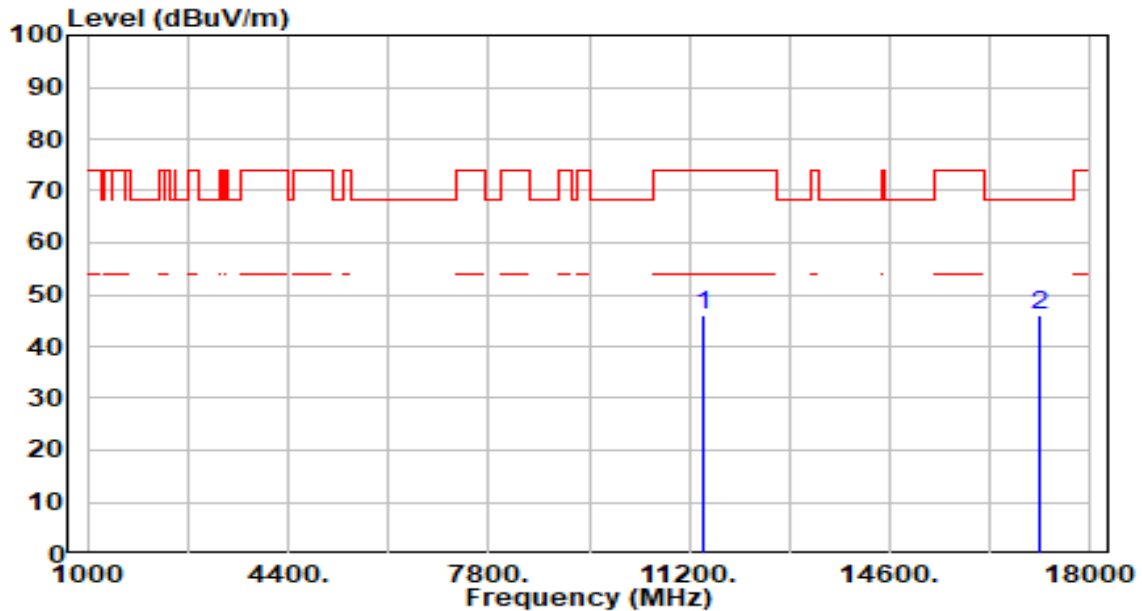


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11420.000       | 40.82          | 5.23       | 46.05                | -27.95      | 74.00          | 100         | 216         | Peak              |
| 2  | * | 17130.000       | 40.54          | 5.48       | 46.02                | -22.18      | 68.20          | 100         | 181         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band4_CH 151_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

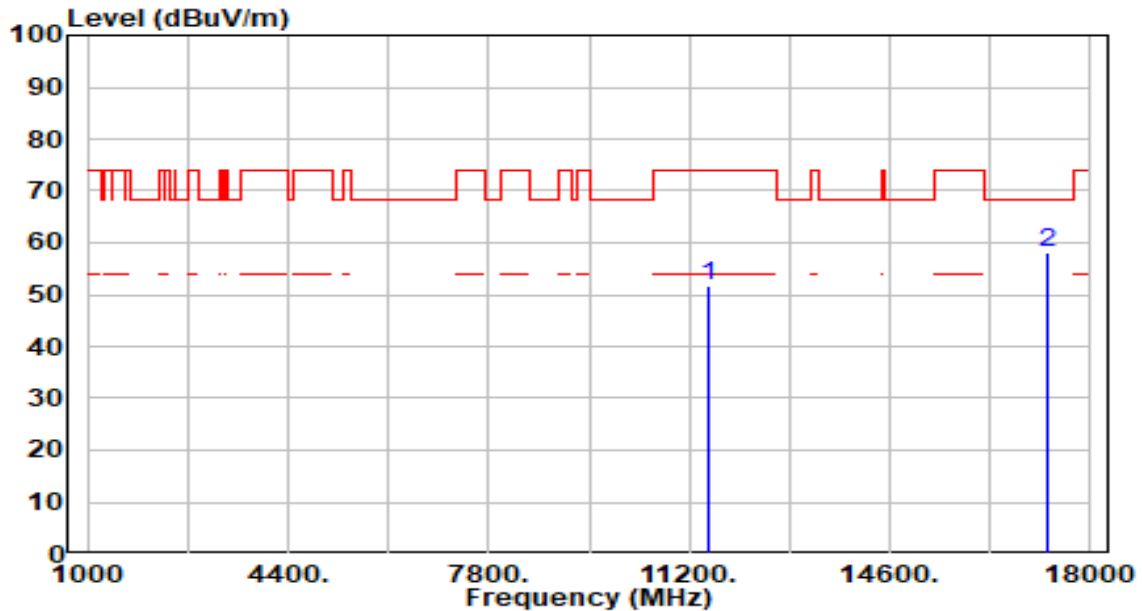


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11510.000       | 46.37          | 5.29       | 51.66                | -22.34      | 74.00          | 200         | 156         | Peak              |
| 2  | * | 17265.000       | 52.77          | 5.18       | 57.95                | -10.25      | 68.20          | 200         | 159         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band4_CH 151_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

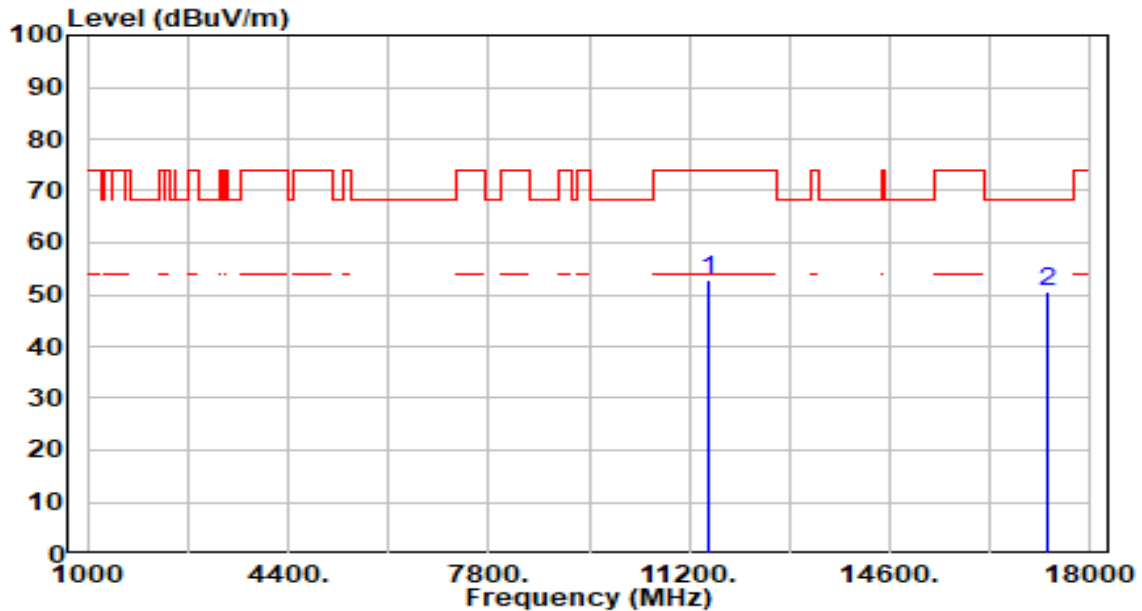


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11510.000       | 47.68          | 5.29       | 52.98                | -21.02      | 74.00          | 200         | 132         | Peak              |
| 2  | * | 17265.000       | 45.57          | 5.18       | 50.75                | -17.45      | 68.20          | 200         | 103         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band4_CH 159_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

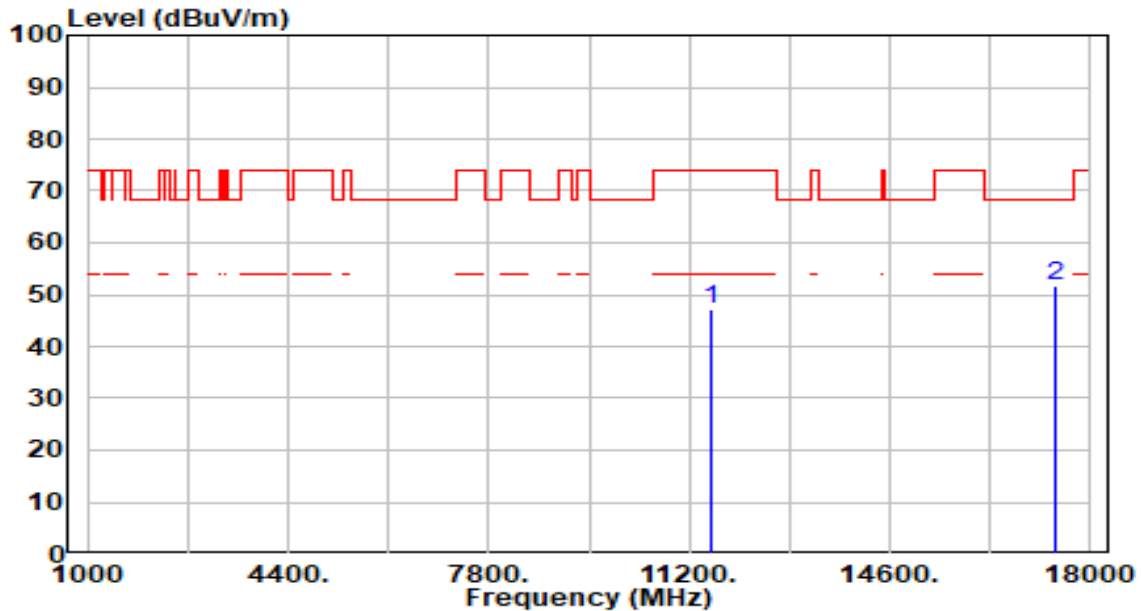


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  |   | 11590.000          | 41.81             | 5.37          | 47.17                   | -26.83         | 74.00             | 200            | 357            | Peak                 |
| 2  | * | 17385.000          | 46.79             | 4.92          | 51.71                   | -16.49         | 68.20             | 200            | 66             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-40MHz_TX_Band4_CH 159_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

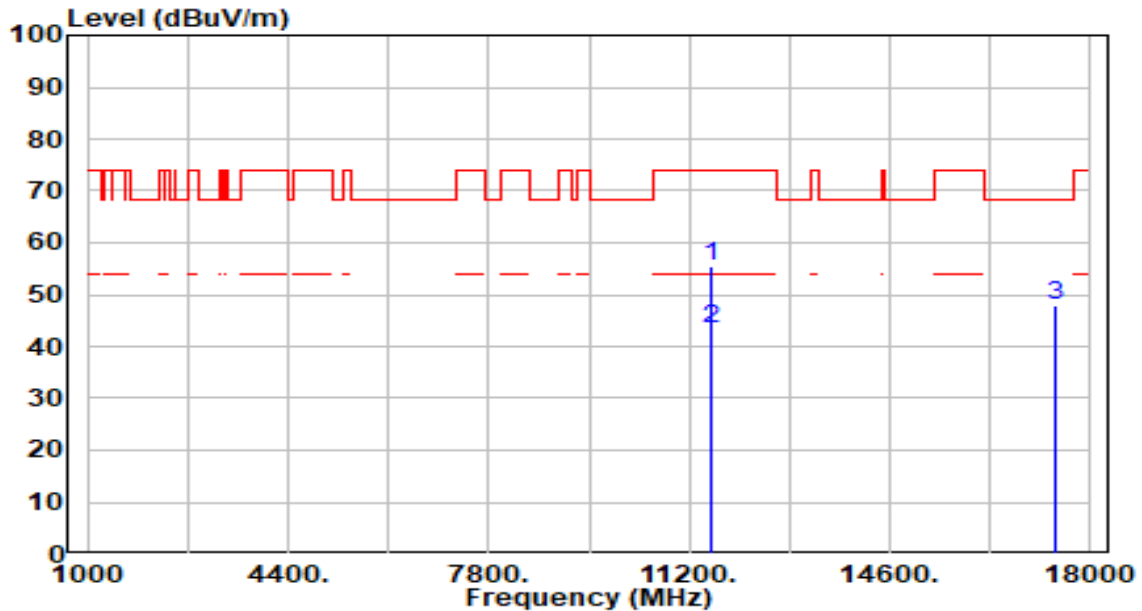


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11590.000       | 50.01          | 5.37       | 55.38                | -18.62      | 74.00          | 200         | 129         | Peak              |
| 2  | * | 11590.000       | 38.01          | 5.37       | 43.38                | -10.62      | 54.00          | 200         | 129         | Average           |
| 3  |   | 17385.000       | 42.91          | 4.92       | 47.83                | -20.37      | 68.20          | 200         | 112         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band1_CH 42_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

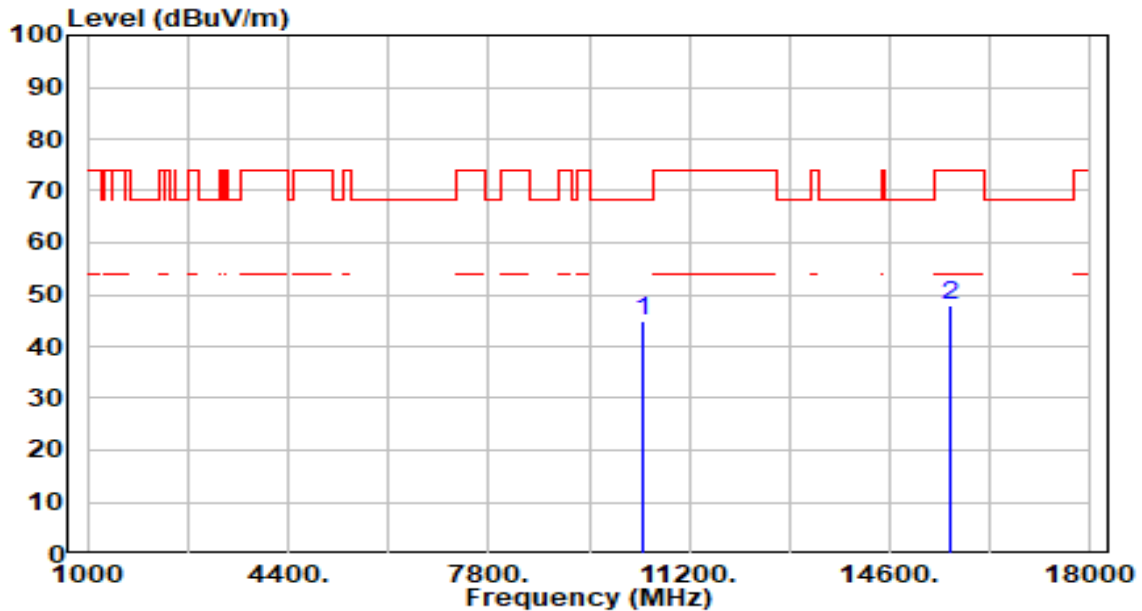


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10420.000       | 40.16          | 4.74       | 44.91                | -23.29      | 68.20          | 200         | 69          | Peak              |
| 2  |   | 15630.000       | 41.65          | 6.25       | 47.90                | -26.10      | 74.00          | 200         | 357         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band1_CH 42_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

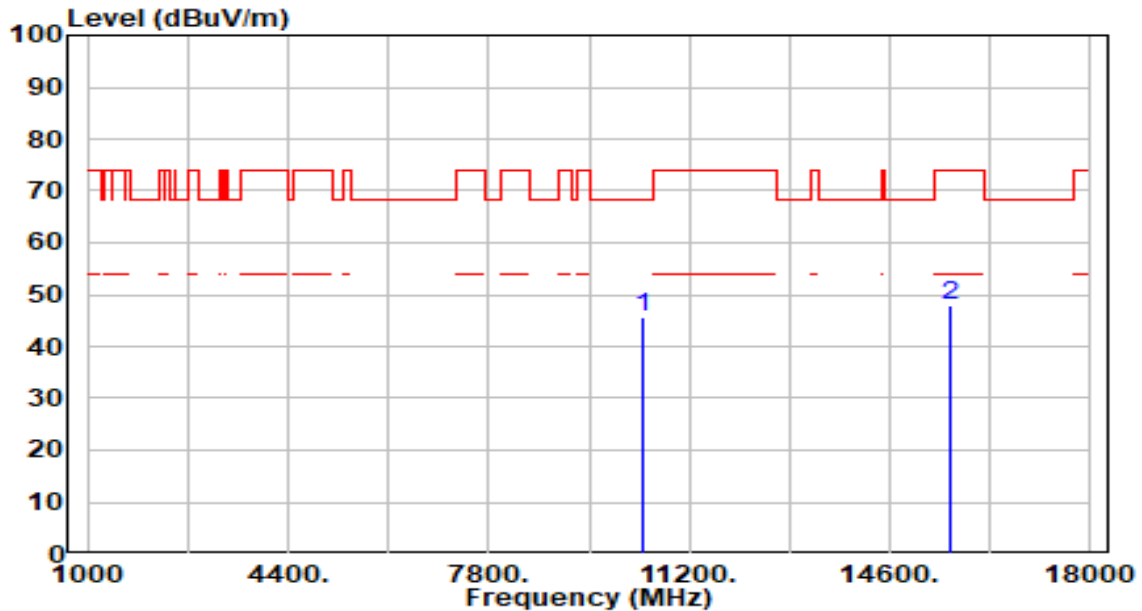


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10420.000       | 40.83          | 4.74       | 45.58                | -22.62      | 68.20          | 200         | 187         | Peak              |
| 2  |   | 15630.000       | 41.74          | 6.25       | 47.99                | -26.01      | 74.00          | 200         | 167         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band2_CH 58_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

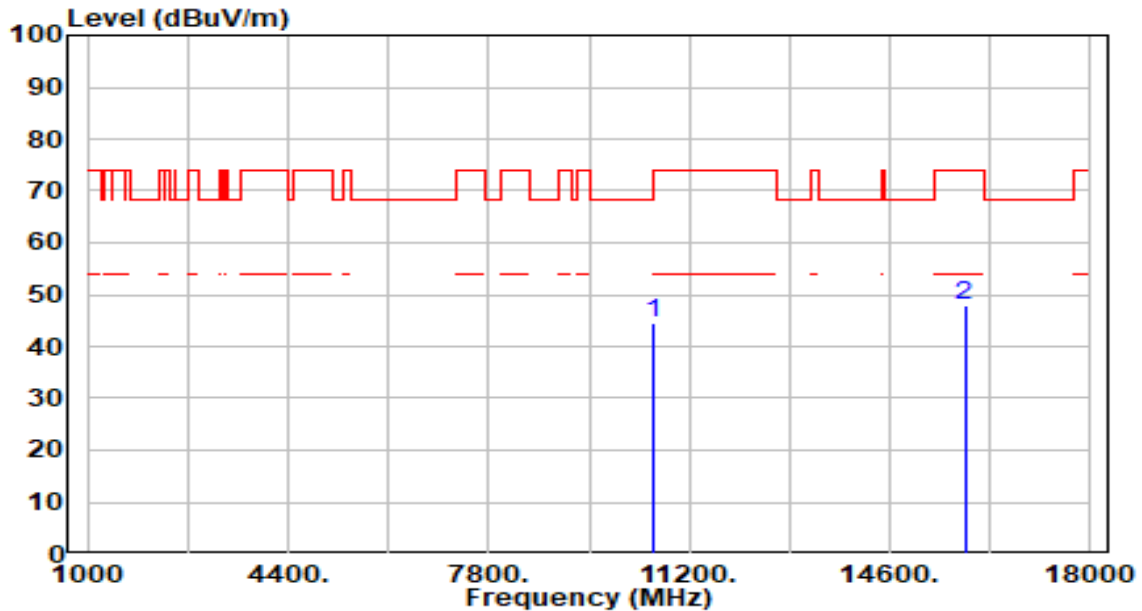


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10580.000       | 39.84          | 4.56       | 44.40                | -23.80      | 68.20          | 200         | 20          | Peak              |
| 2  |   | 15870.000       | 41.41          | 6.63       | 48.04                | -25.96      | 74.00          | 200         | 60          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |               |
|-----------|--------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                    | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band2_CH 58_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

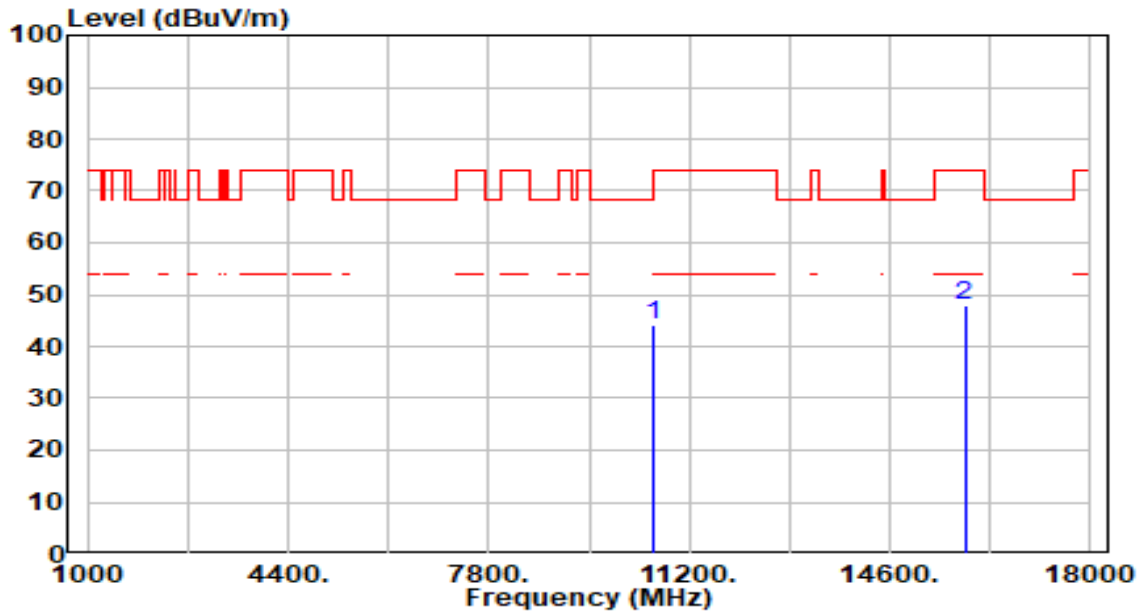


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10580.000       | 39.43          | 4.56       | 43.99                | -24.21      | 68.20          | 200         | 256         | Peak              |
| 2  |   | 15870.000       | 41.13          | 6.63       | 47.76                | -26.24      | 74.00          | 200         | 56          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band3_CH 106_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

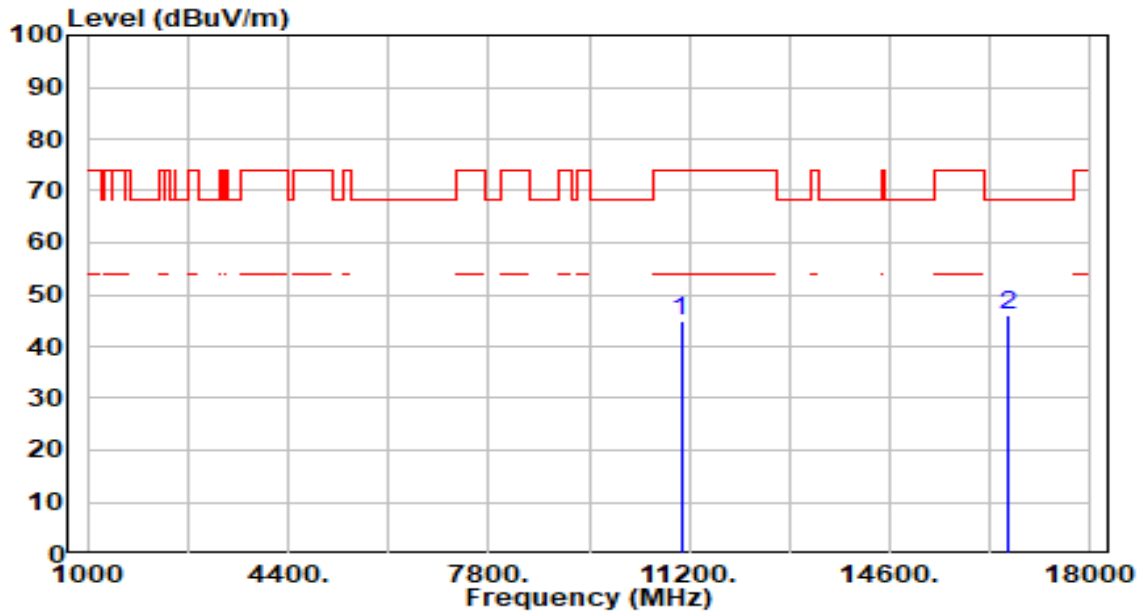


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11060.000       | 40.39          | 4.60       | 44.99                | -29.01      | 74.00          | 200         | 345         | Peak              |
| 2  | * 16590.000     | 39.89          | 6.00       | 45.88                | -22.32      | 68.20          | 200         | 81          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band3_CH 106_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

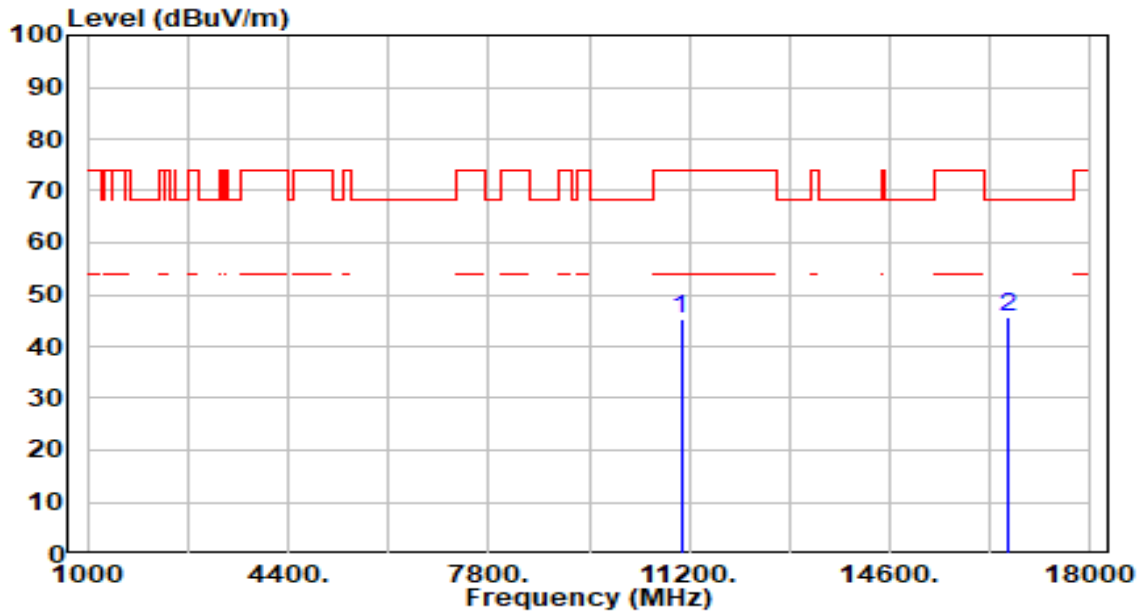


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11060.000       | 40.67          | 4.60       | 45.27                | -28.73      | 74.00          | 200         | 303         | Peak              |
| 2  | * | 16590.000       | 39.76          | 6.00       | 45.76                | -22.44      | 68.20          | 200         | 271         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band3_CH 122_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

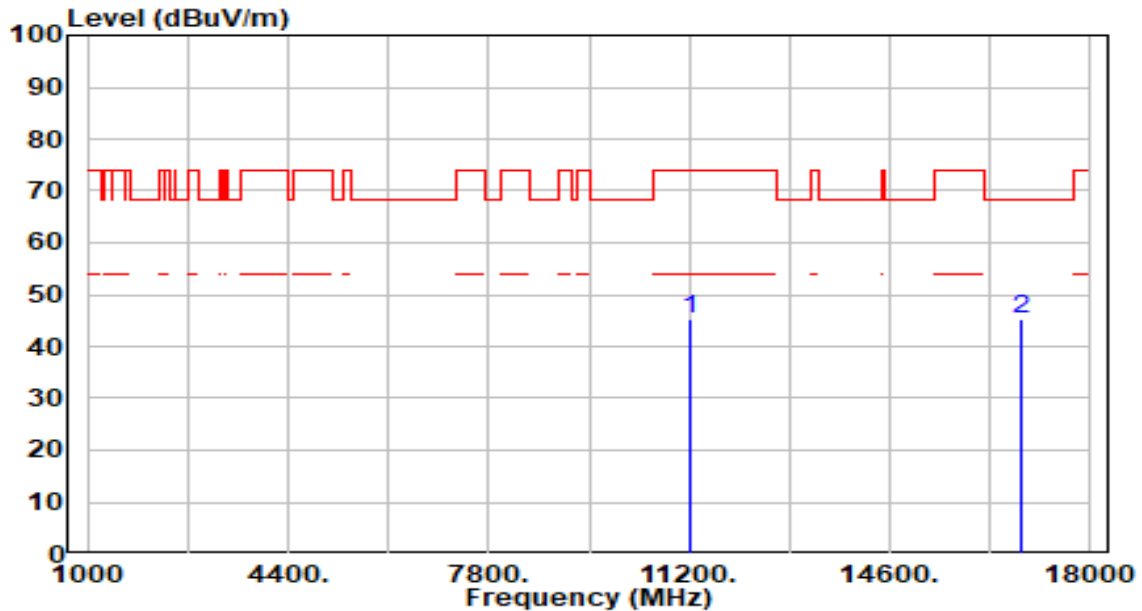


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11220.000       | 40.31          | 5.00       | 45.31                | -28.69      | 74.00          | 200         | 110         | Peak              |
| 2  | * 16830.000     | 39.19          | 5.98       | 45.17                | -23.03      | 68.20          | 200         | 223         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band3_CH 122_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

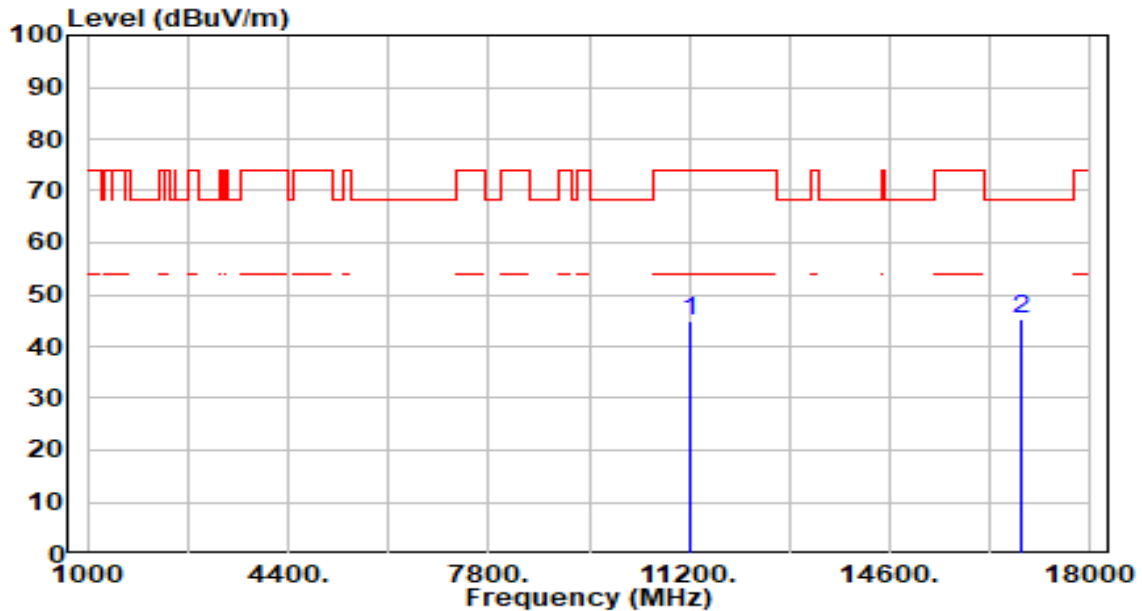


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11220.000       | 39.73          | 5.00       | 44.73                | -29.27      | 74.00          | 200         | 308         | Peak              |
| 2  | * | 16830.000       | 39.22          | 5.98       | 45.21                | -22.99      | 68.20          | 200         | 163         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band3_CH 138_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

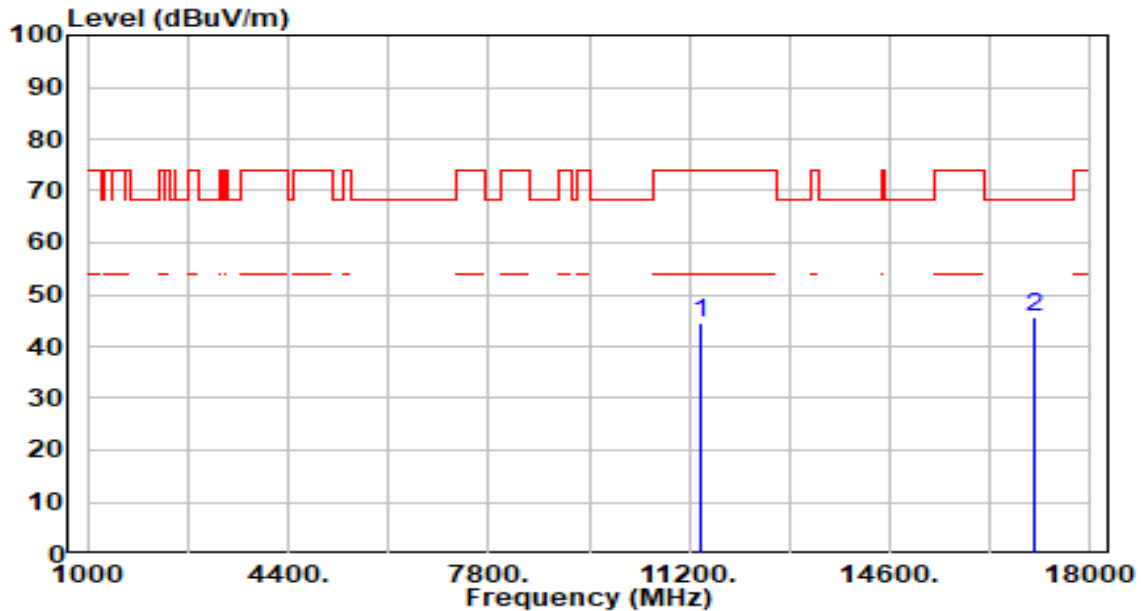


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11380.000       | 39.36          | 5.19       | 44.56                | -29.45      | 74.00          | 200         | 275         | Peak              |
| 2  | * | 17070.000       | 40.11          | 5.61       | 45.72                | -22.48      | 68.20          | 200         | 342         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band3_CH 138_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

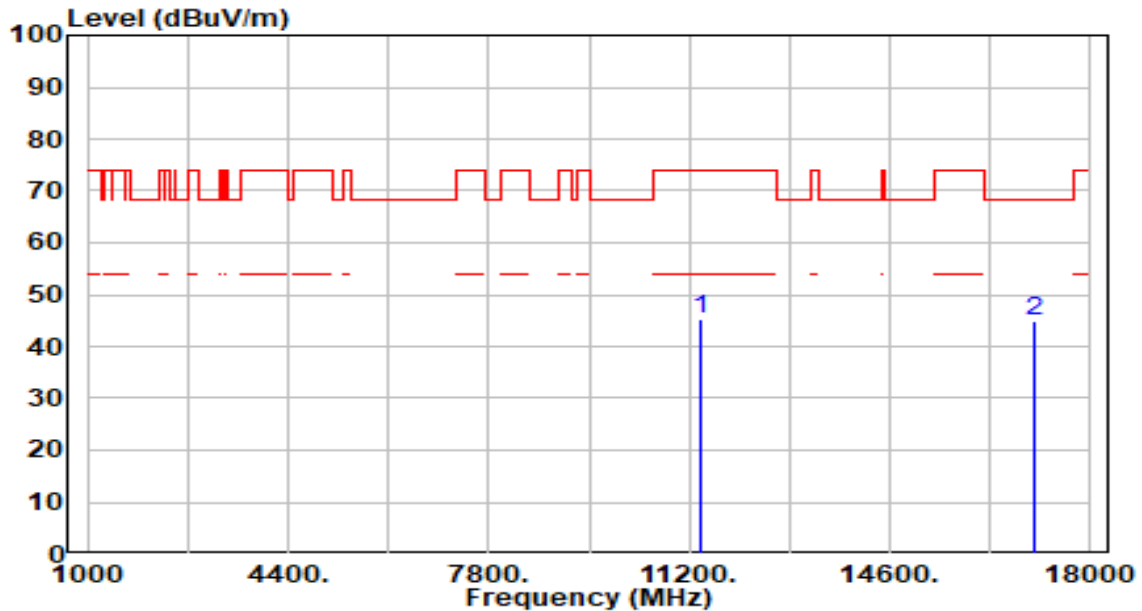


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 11380.000       | 39.93          | 5.19       | 45.13                | -28.87      | 74.00          | 200         | 103         | Peak              |
| 2  | * | 17070.000       | 39.34          | 5.61       | 44.95                | -23.25      | 68.20          | 200         | 88          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                  | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band4_CH 155_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

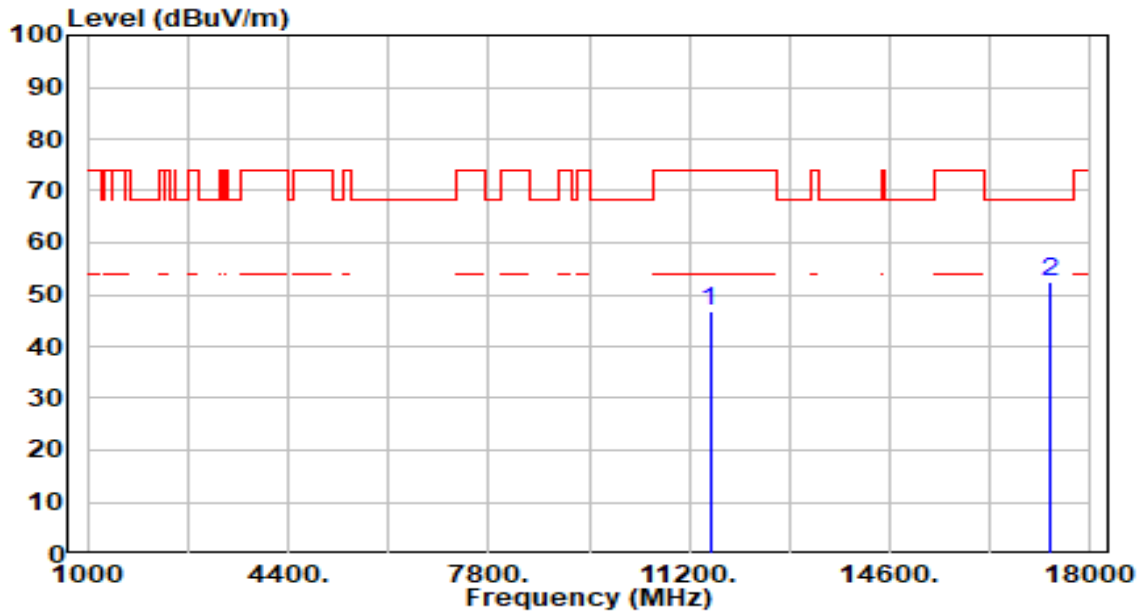


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 41.40          | 5.33       | 46.73                | -27.27      | 74.00          | 200         | 63          | Peak              |
| 2  | * 17325.000     | 47.44          | 5.05       | 52.50                | -15.70      | 68.20          | 200         | 162         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                             |                      |               |
|-----------|---------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System      | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                     | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-80MHz_TX_Band4_CH 155_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

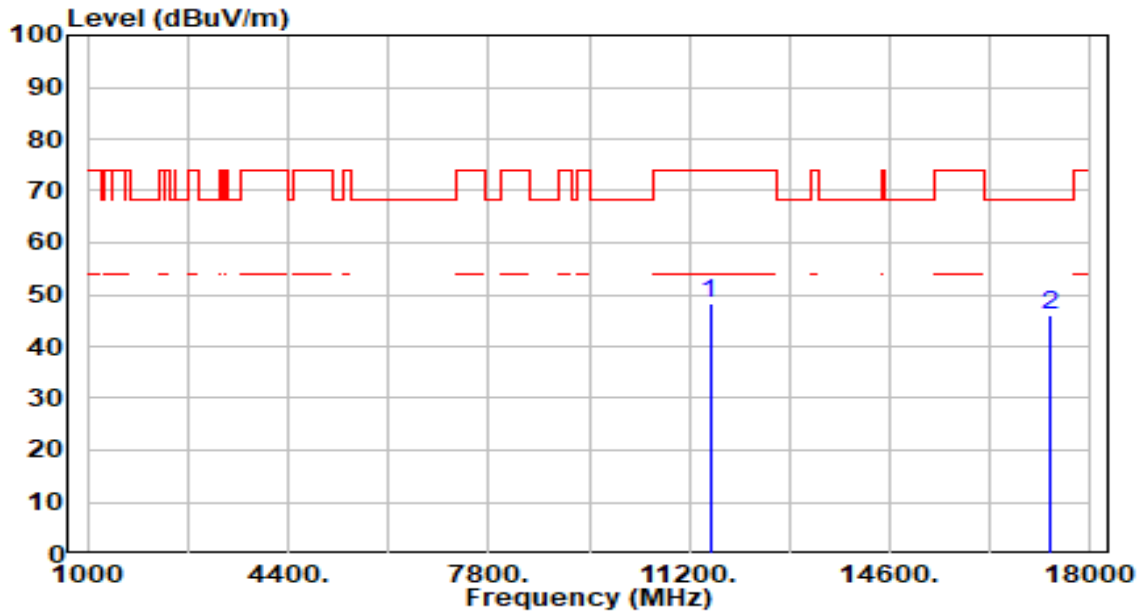


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11550.000       | 42.95          | 5.33       | 48.28                | -25.72      | 74.00          | 200         | 128         | Peak              |
| 2  | * 17325.000     | 40.82          | 5.05       | 45.87                | -22.33      | 68.20          | 200         | 93          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |               |
|-----------|-----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System        | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                    | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-160MHz_TX_Band1,2_CH 50_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

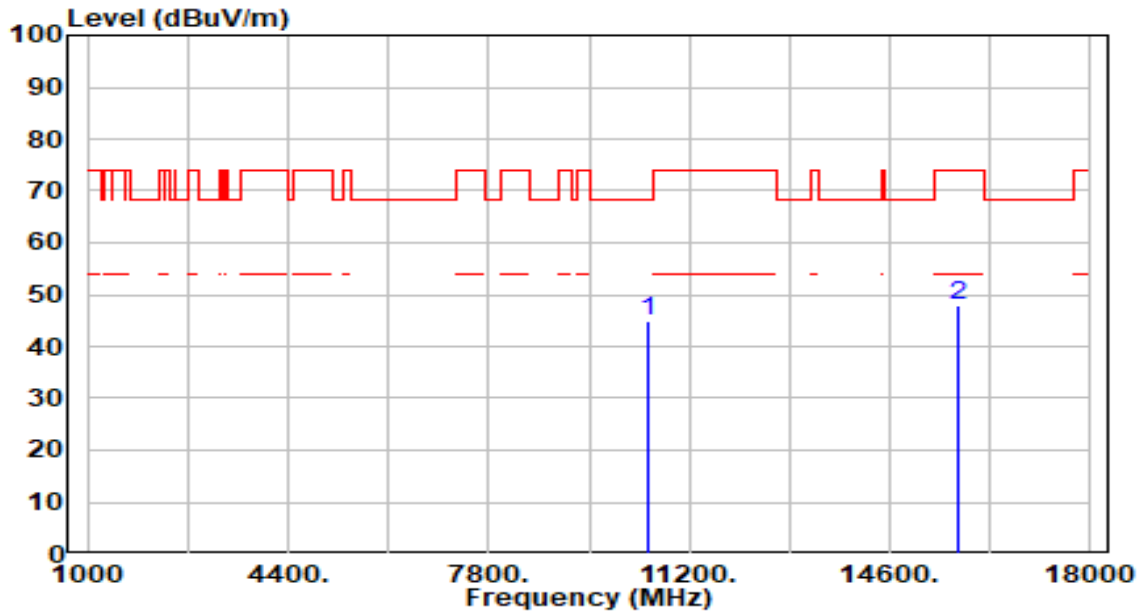


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10500.000       | 40.24          | 4.62       | 44.87                | -23.33      | 68.20          | 100         | 312         | Peak              |
| 2  |   | 15750.000       | 41.50          | 6.49       | 48.00                | -26.00      | 74.00          | 100         | 152         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                               |                      |               |
|-----------|-----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System        | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                       | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                      | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-160MHz_TX_Band1,2_CH 50_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

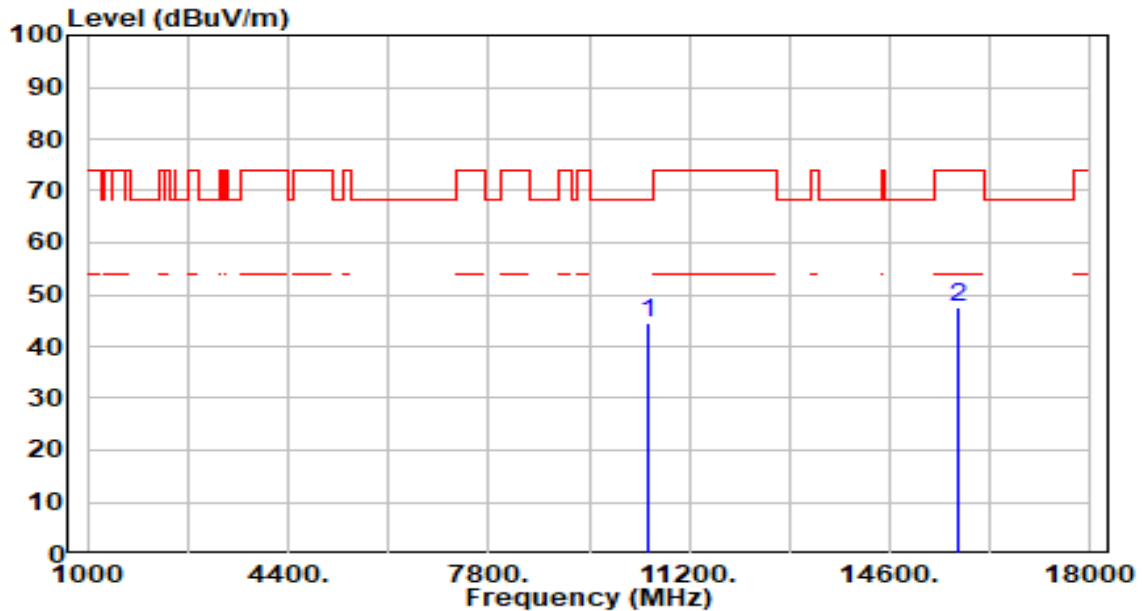


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 10500.000       | 40.07          | 4.62       | 44.70                | -23.50      | 68.20          | 100         | 245         | Peak              |
| 2  |   | 15750.000       | 41.21          | 6.49       | 47.70                | -26.30      | 74.00          | 100         | 72          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System       | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Horizontal                                   | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-160MHz_TX_Band3_CH 114_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

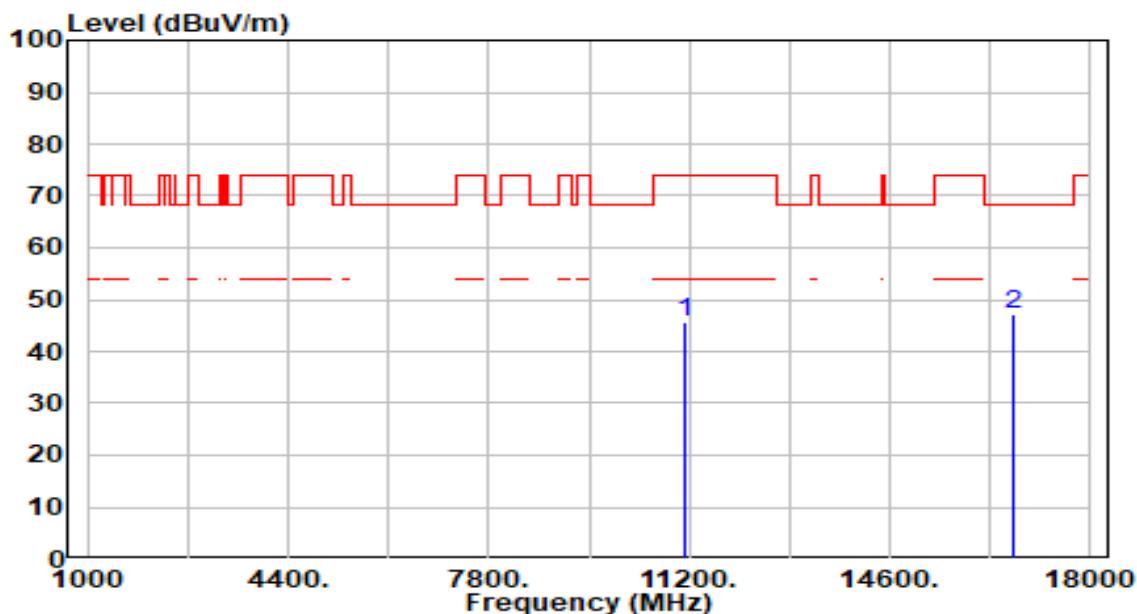


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11140.000       | 40.96          | 4.82       | 45.78                | -28.22      | 74.00          | 100         | 0           | Peak              |
| 2  | * 16710.000     | 41.08          | 6.01       | 47.09                | -21.11      | 68.20          | 100         | 300         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                              |                      |               |
|-----------|----------------------------------------------|----------------------|---------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System       | Date of Test         | 2025-02-11    |
| Factor    | DRH18-E                                      | Temp. / Humidity     | 21°C /62%     |
| Polarity  | Vertical                                     | Site / Test Engineer | AC2 / Stanley |
| Test Mode | 802.11be-160MHz_TX_Band3_CH 114_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz  |

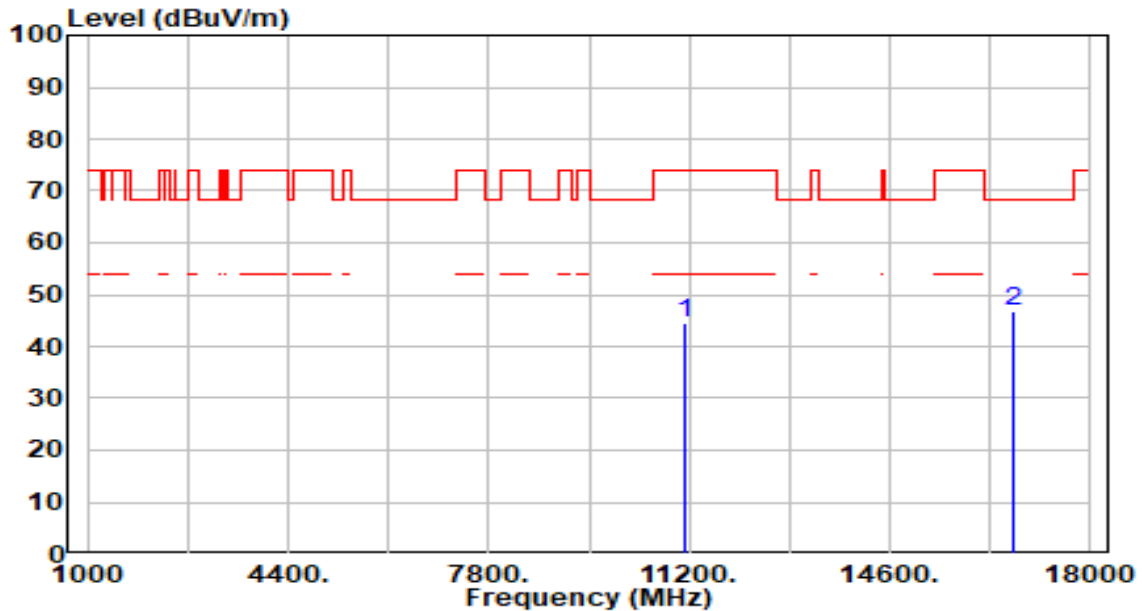


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 11140.000       | 39.63          | 4.82       | 44.44                | -29.56      | 74.00          | 100         | 0           | Peak              |
| 2  | * 16710.000     | 40.79          | 6.01       | 46.80                | -21.40      | 68.20          | 100         | 360         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-01-13   |
| Factor    | BBHA 9170                                  | Temp. / Humidity     | 21°C /45%    |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 40_ANT<br>0+1+2 | Test Voltage         | AC 120V/60Hz |

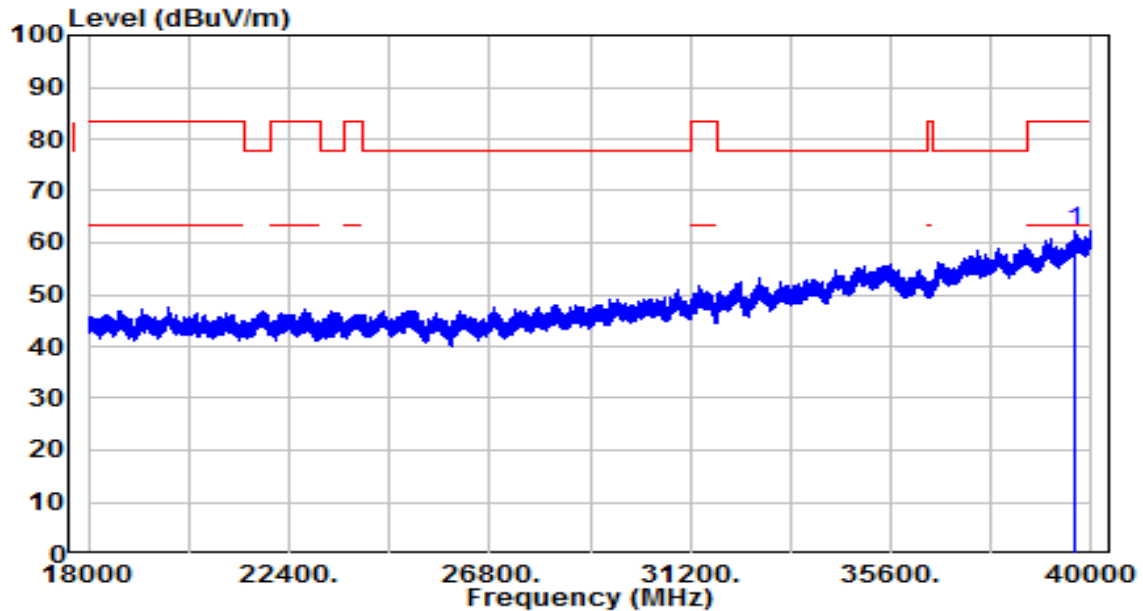


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 39634.940          | 36.20             | 25.89         | 62.10                   | -21.40         | 83.50             | 150            | 30             | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-01-13   |
| Factor    | BBHA 9170                                  | Temp. / Humidity     | 21°C /45%    |
| Polarity  | Vertical                                   | Site / Test Engineer | AC1 / Todd   |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 40_ANT<br>0+1+2 | Test Voltage         | AC 120V/60Hz |

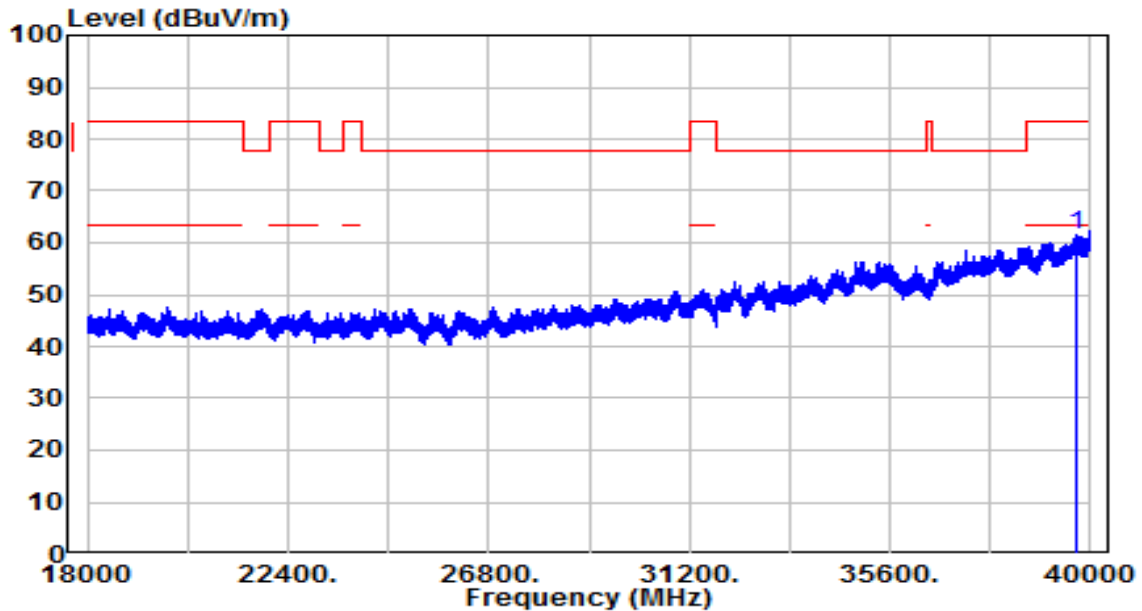


| No |   | Frequency<br>(MHz) | Reading<br>(dBuV) | C.F<br>(dB/m) | Measurement<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) | Height<br>(cm) | Angle<br>(deg) | Remark<br>(QP/PK/AV) |
|----|---|--------------------|-------------------|---------------|-------------------------|----------------|-------------------|----------------|----------------|----------------------|
| 1  | * | 39694.750          | 35.54             | 26.01         | 61.55                   | -21.95         | 83.50             | 150            | 128            | Peak                 |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-17   |
| Factor    | BBHA 9170                                  | Temp. / Humidity     | 22°C /52%    |
| Polarity  | Horizontal                                 | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 40_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

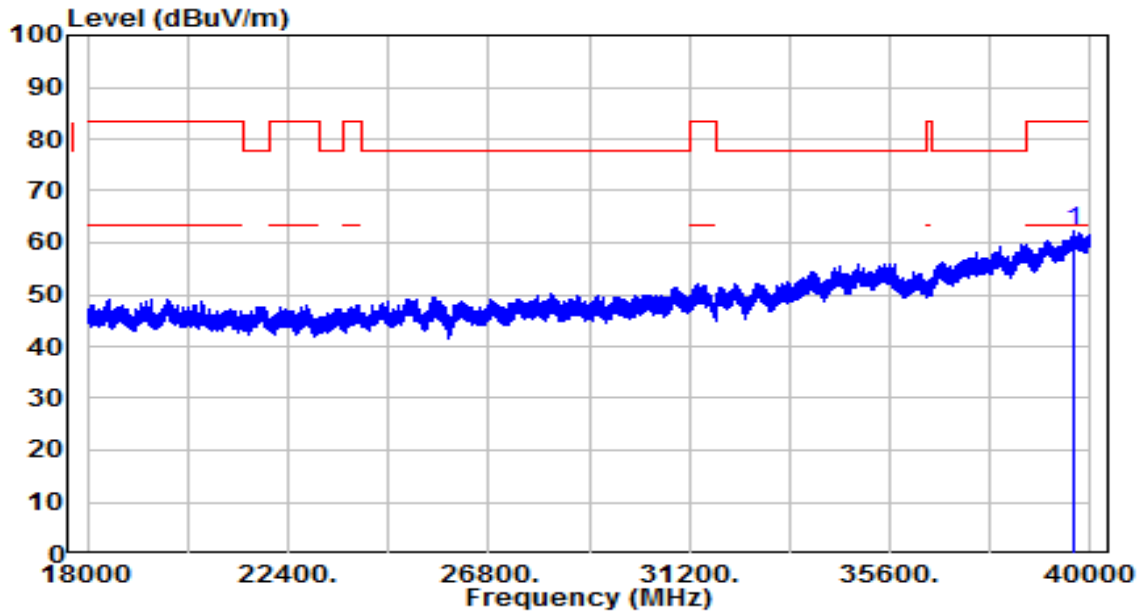


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 39609.500       | 35.92          | 26.23      | 62.15                | -21.35      | 83.50          | 150         | 336         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                            |                      |              |
|-----------|--------------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System     | Date of Test         | 2025-02-17   |
| Factor    | BBHA 9170                                  | Temp. / Humidity     | 22°C /52%    |
| Polarity  | Vertical                                   | Site / Test Engineer | AC1 / Kaunaz |
| Test Mode | 802.11ac-20MHz_TX_Band1_CH 40_ANT<br>0+1+3 | Test Voltage         | AC 120V/60Hz |

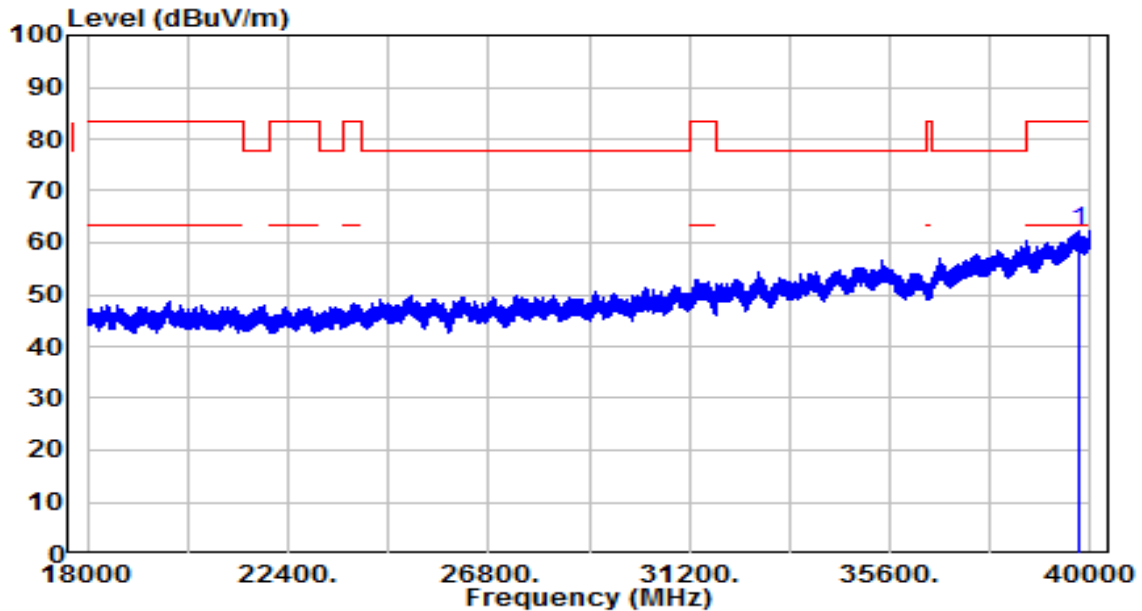

| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 39748.380       | 35.80          | 26.45      | 62.25                | -21.25      | 83.50          | 150         | 241         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB).
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

## 7.9. Radiated Restricted Band Edge Measurement

### 7.9.1. Test Limit

#### For 15.205 requirement:

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a) of FCC part 15, must also comply with the radiated emission limits specified in Section 15.209(a).

| Frequency<br>(MHz)         | Frequency<br>(MHz) | Frequency<br>(MHz) | Frequency<br>(GHz) |
|----------------------------|--------------------|--------------------|--------------------|
| 0.090 - 0.110              | 16.42-16.423       | 399.9 - 410        | 4.5-5.15           |
| <sup>1</sup> 0.495 - 0.505 | 16.69475-16.69525  | 608 - 614          | 5.35-5.46          |
| 2.1735-2.1905              | 16.80425-16.80475  | 960 - 1240         | 7.25-7.75          |
| 4.125-4.128                | 25.5 -25.67        | 1300 - 1427        | 8.025 - 8.5        |
| 4.17725-4.17775            | 37.5-38.25         | 1435-1626.5        | 9.0-9.2            |
| 4.20725-4.20775            | 73-74.6            | 1645.5-1646.5      | 9.3-9.5            |
| 6.215-6.218                | 74.8-75.2          | 1660 - 1710        | 10.6-12.7          |
| 6.26775-6.26825            | 108-121.94         | 1718.8-1722.2      | 13.25-13.4         |
| 6.31175-6.31225            | 123 - 138          | 2200 - 2300        | 14.47-14.5         |
| 8.291-8.294                | 149.9-150.05       | 2310 - 2390        | 15.35-16.2         |
| 8.362-8.366                | 156.52475-156.525  | 2483.5 - 2500      | 17.7-21.4          |
| 8.37625-8.38675            | 156.7-156.9        | 2690 - 2900        | 22.01-23.12        |
| 8.41425-8.41475            | 162.0125-167.17    | 3260 - 3267        | 23.6-24.0          |
| 12.29-12.293               | 167.72-173.2       | 3332 - 3339        | 31.2-31.8          |
| 12.51975-12.52025          | 240 - 285          | 3345.8 - 3358      | 36.43-36.5         |
| 12.57675-12.57725          | 322-335.4          | 3600 - 4400        | ( <sup>2</sup> )   |
| 13.36-13.41                | --                 | --                 | --                 |

#### For 15.407(b) requirement:

For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge

increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Refer to KDB 789033 D02v02r01 G)2)c), as specified in § 15.407(b), emissions above 1000 MHz that are outside of the restricted bands are subject to a maximum emission limit of -27 dBm/MHz (or -17 dBm/MHz as specified in § 15.407(b)(4)). However, an out-of-band emission that complies with both the peak and average limits of § 15.209 is not required to satisfy the -27 dBm/MHz or -17 dBm/MHz maximum emission limit.

All out of band emissions appearing in a restricted band as specified in Section 15.205 of the Title 47CFR must not exceed the limits shown in Table per Section 15.209.

| FCC Part 15 Subpart C Paragraph 15.209 |                          |                               |
|----------------------------------------|--------------------------|-------------------------------|
| Frequency<br>[MHz]                     | Field Strength<br>[uV/m] | Measured Distance<br>[Meters] |
| 0.009 - 0.490                          | 2400/F (kHz)             | 300                           |
| 0.490 - 1.705                          | 24000/F (kHz)            | 30                            |
| 1.705 - 30                             | 30                       | 30                            |
| 30 - 88                                | 100                      | 3                             |
| 88 - 216                               | 150                      | 3                             |
| 216 - 960                              | 200                      | 3                             |
| Above 960                              | 500                      | 3                             |

### 7.9.2. Test Procedure Used

KDB 789033 D02v02r01- Section G

### 7.9.3. Test Setting


#### Peak Measurements above 1GHz

1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW = 3MHz
4. Detector = peak
5. Sweep time = auto couple
6. Trace mode = max hold
7. Trace was allowed to stabilize

### Average Measurements above 1GHz (Method VB)


1. Analyzer center frequency was set to the frequency of the radiated spurious emission of interest
2. RBW = 1MHz
3. VBW If the EUT is configured to transmit with duty cycle  $\geq 98\%$ , set VBW  $\leq$  RBW/100 (i.e., 10 kHz) but not less than 10 Hz. If the EUT duty cycle is  $< 98\%$ , set VBW  $\geq 1/T$ .
4. Detector = Peak
5. Sweep time = auto
6. Allow max hold to run for at least 50 traces if the transmitted signal is continuous or has at least 98% duty cycle. For lower duty cycles, increase the minimum number of traces by a factor of  $1/x$ , where  $x$  is the duty cycle.

### 7.9.4. Test Setup

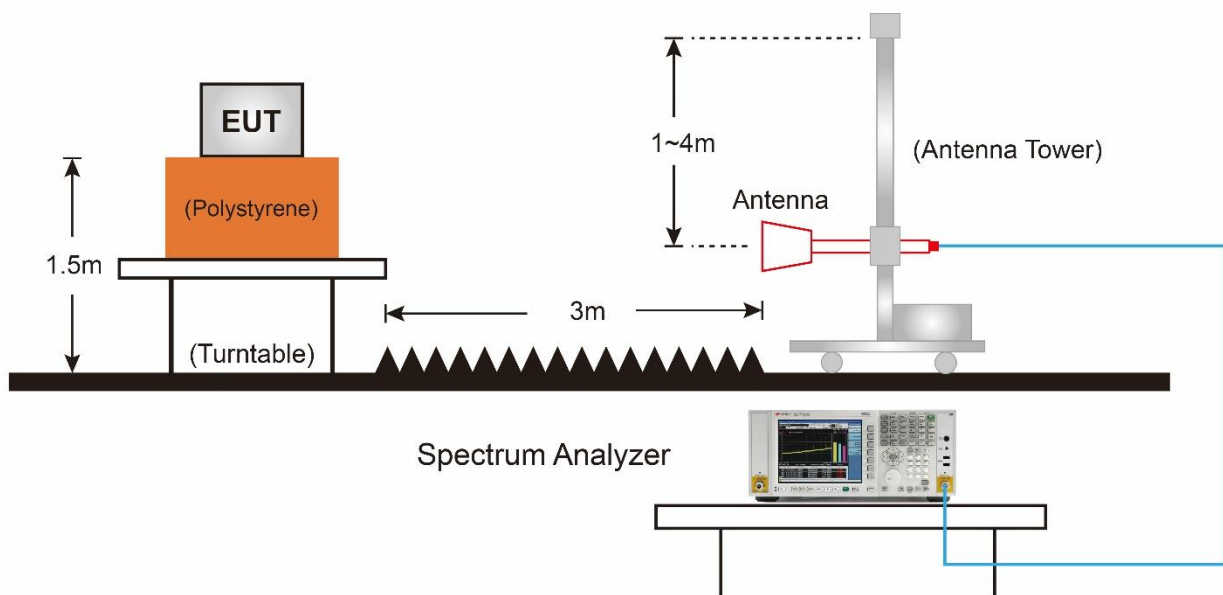

### 7.9.5. Test Result

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

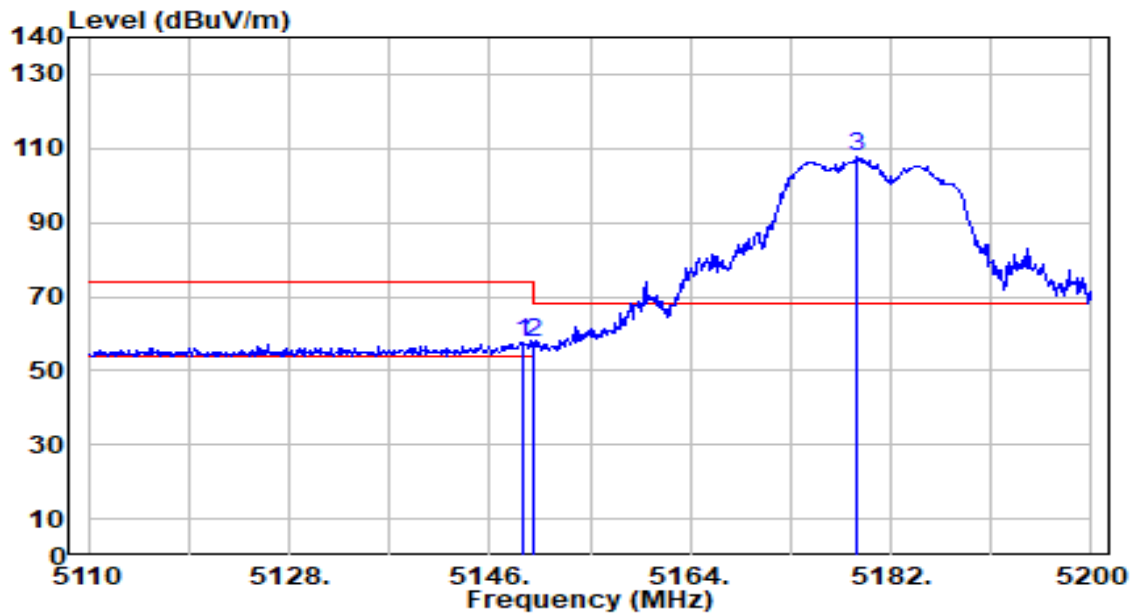


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5149.060        | 57.09          | 0.65       | 57.74                | -16.26      | 74.00          | 318         | 197         | Peak              |
| 2  |   | 5150.000        | 56.69          | 0.65       | 57.35                | -16.65      | 74.00          | 318         | 197         | Peak              |
| 3  |   | 5179.030        | 107.19         | 0.68       | 107.87               | N/A         | N/A            | 318         | 197         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

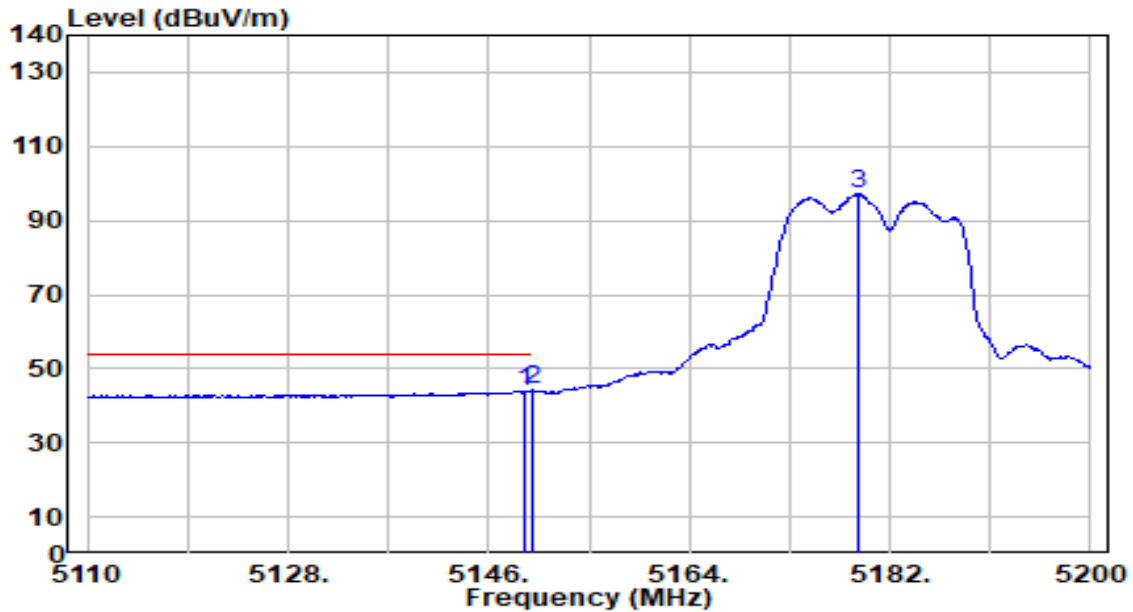


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  |   | 5149.150        | 43.33          | 0.65       | 43.99                | -10.01      | 54.00          | 318         | 197         | Average           |
| 2  | * | 5150.000        | 43.65          | 0.65       | 44.31                | -9.69       | 54.00          | 318         | 197         | Average           |
| 3  |   | 5179.210        | 96.57          | 0.68       | 97.25                | N/A         | N/A            | 318         | 197         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

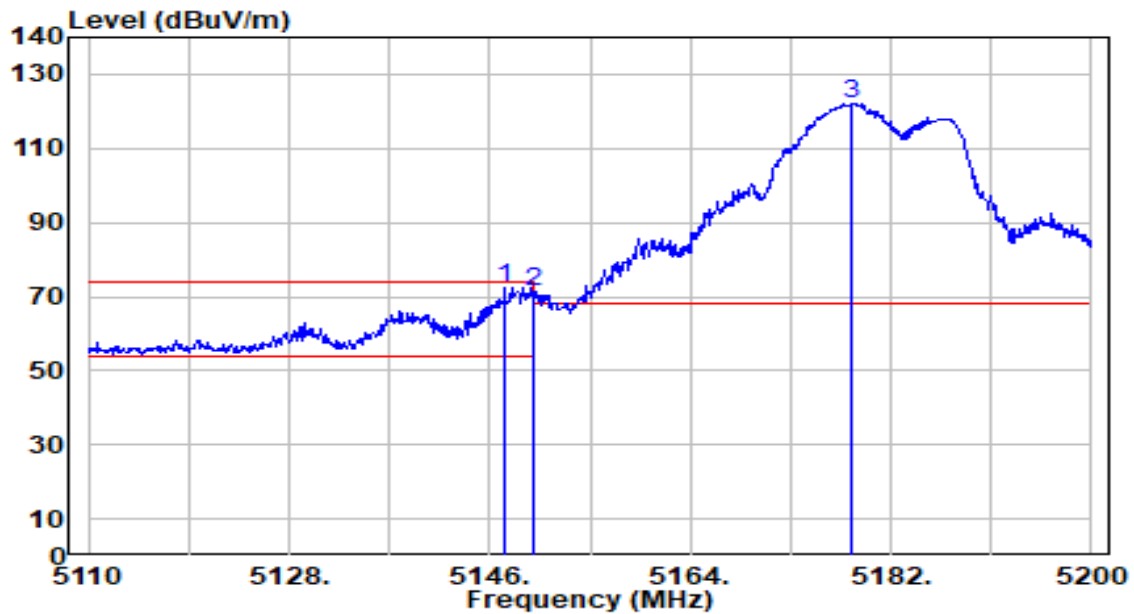


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5147.350        | 71.92          | 0.65       | 72.57                | -1.43       | 74.00          | 200         | 286         | Peak              |
| 2  |   | 5150.000        | 70.83          | 0.65       | 71.48                | -2.52       | 74.00          | 200         | 286         | Peak              |
| 3  |   | 5178.490        | 121.36         | 0.68       | 122.04               | N/A         | N/A            | 200         | 286         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band1_CH 36_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

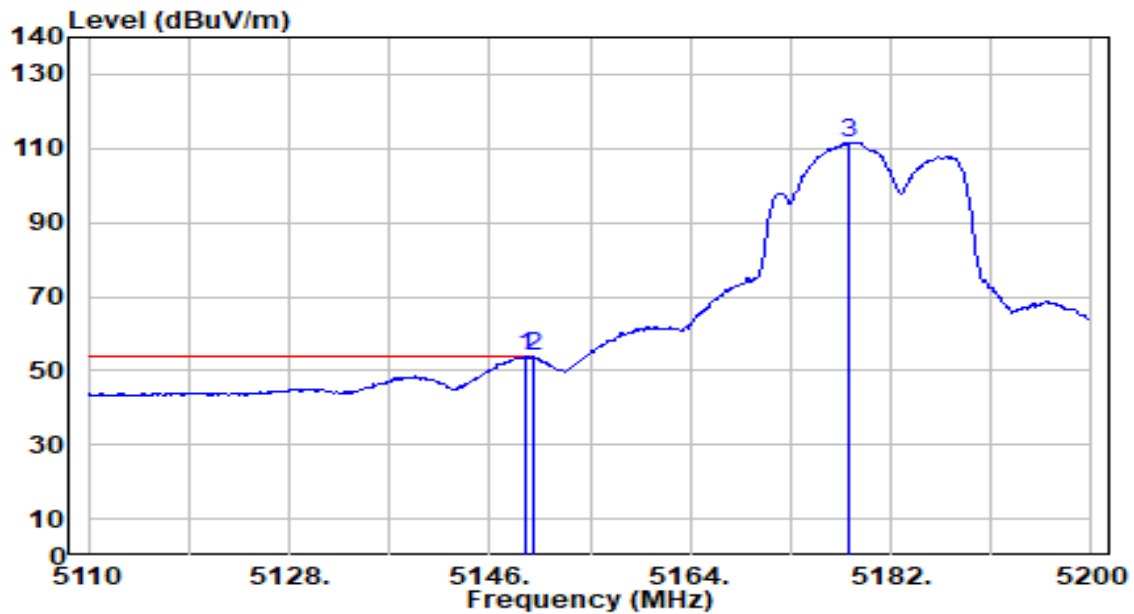


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5149.330        | 53.15          | 0.65       | 53.80                | -0.20       | 54.00          | 200         | 286         | Average           |
| 2  |   | 5150.000        | 52.97          | 0.65       | 53.63                | -0.37       | 54.00          | 200         | 286         | Average           |
| 3  |   | 5178.310        | 111.00         | 0.68       | 111.68               | N/A         | N/A            | 200         | 286         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

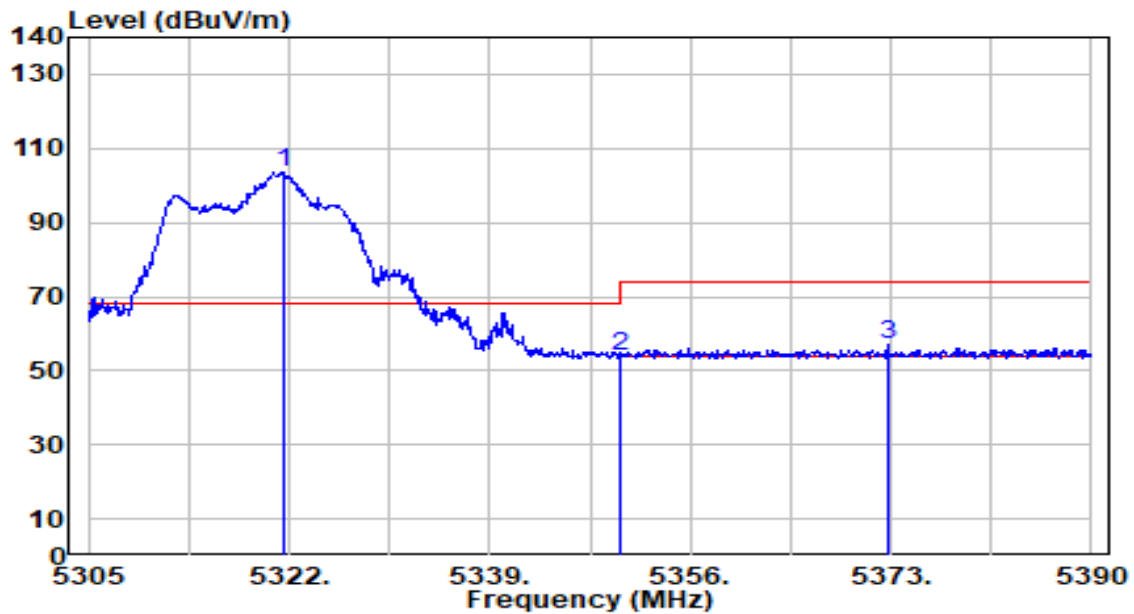


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.490        | 102.88         | 0.51       | 103.39               | N/A         | N/A            | 304         | 200         | Peak              |
| 2  | 5350.000        | 53.43          | 0.47       | 53.90                | -20.10      | 74.00          | 304         | 200         | Peak              |
| 3  | * 5372.745      | 56.79          | 0.44       | 57.22                | -16.78      | 74.00          | 304         | 200         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

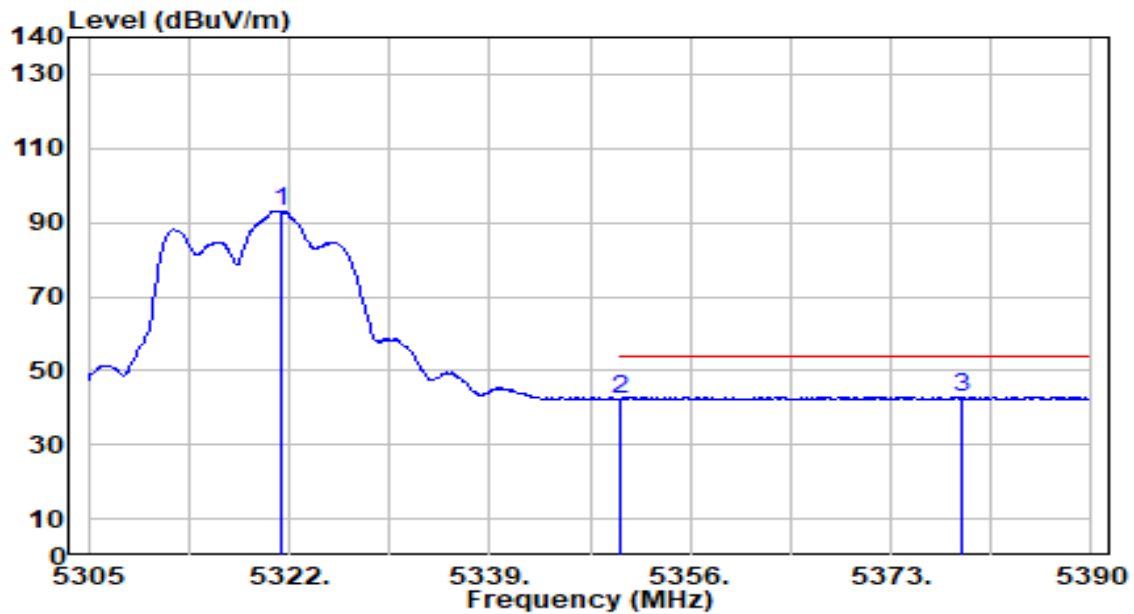


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5321.235        | 92.67          | 0.52       | 93.18                | N/A         | N/A            | 304         | 200         | Average           |
| 2  | 5350.000        | 41.86          | 0.47       | 42.33                | -11.67      | 54.00          | 304         | 200         | Average           |
| 3  | * 5378.950      | 42.44          | 0.43       | 42.86                | -11.14      | 54.00          | 304         | 200         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

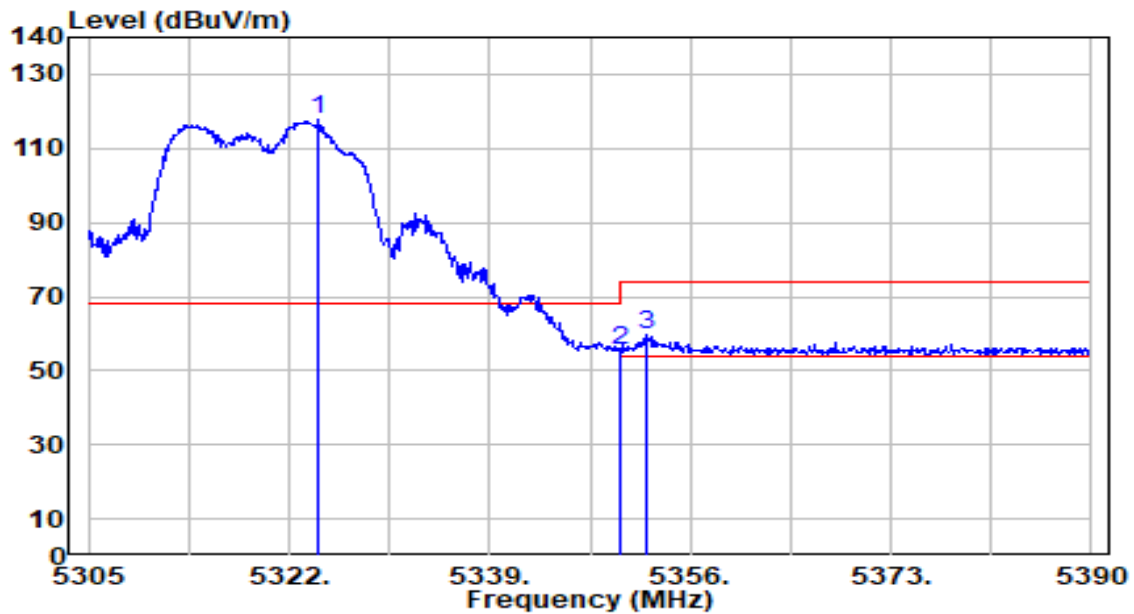


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5324.465        | 117.06         | 0.51       | 117.57               | N/A         | N/A            | 190         | 155         | Peak              |
| 2  | 5350.000        | 54.97          | 0.47       | 55.45                | -18.55      | 74.00          | 190         | 155         | Peak              |
| 3  | * 5352.260      | 59.03          | 0.47       | 59.50                | -14.50      | 74.00          | 190         | 155         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band2_CH 64_ANT 0+1+2       | Test Voltage         | AC 120V/60Hz |

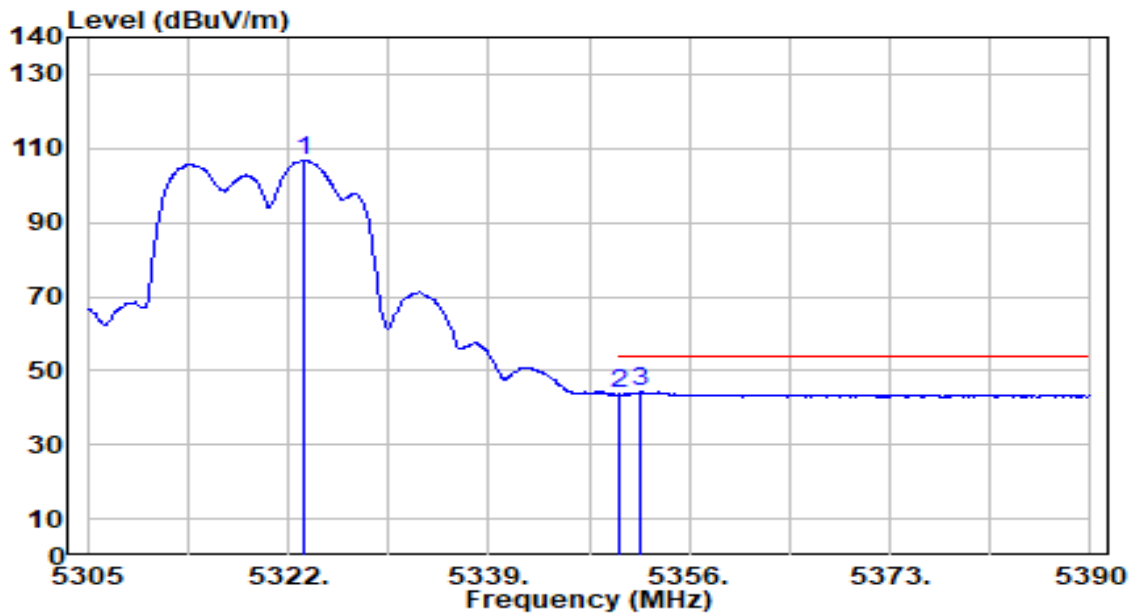


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5323.360        | 106.13         | 0.51       | 106.64               | N/A         | N/A            | 190         | 155         | Average           |
| 2  | 5350.000        | 43.13          | 0.47       | 43.60                | -10.40      | 54.00          | 190         | 155         | Average           |
| 3  | * 5351.920      | 43.74          | 0.47       | 44.21                | -9.79       | 54.00          | 190         | 155         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

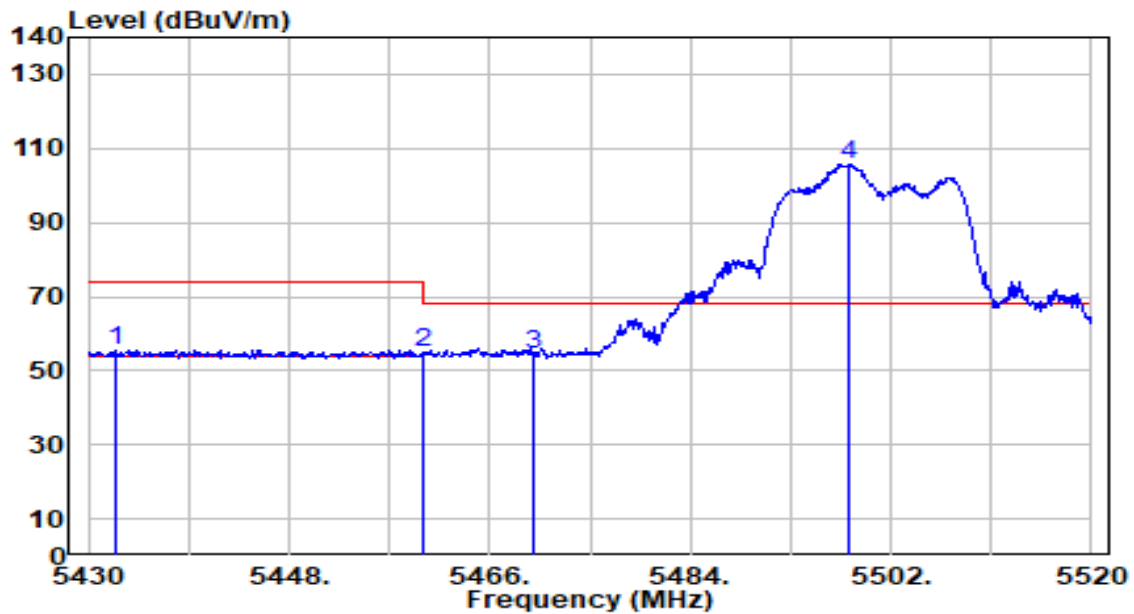


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5432.430        | 55.09          | 0.54       | 55.63                | -18.37      | 74.00          | 248         | 178         | Peak              |
| 2  | 5460.000        | 54.15          | 0.66       | 54.82                | -19.18      | 74.00          | 248         | 178         | Peak              |
| 3  | * 5470.000      | 53.51          | 0.71       | 54.22                | -13.98      | 68.20          | 248         | 178         | Peak              |
| 4  | 5498.310        | 105.07         | 0.83       | 105.90               | N/A         | N/A            | 248         | 178         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

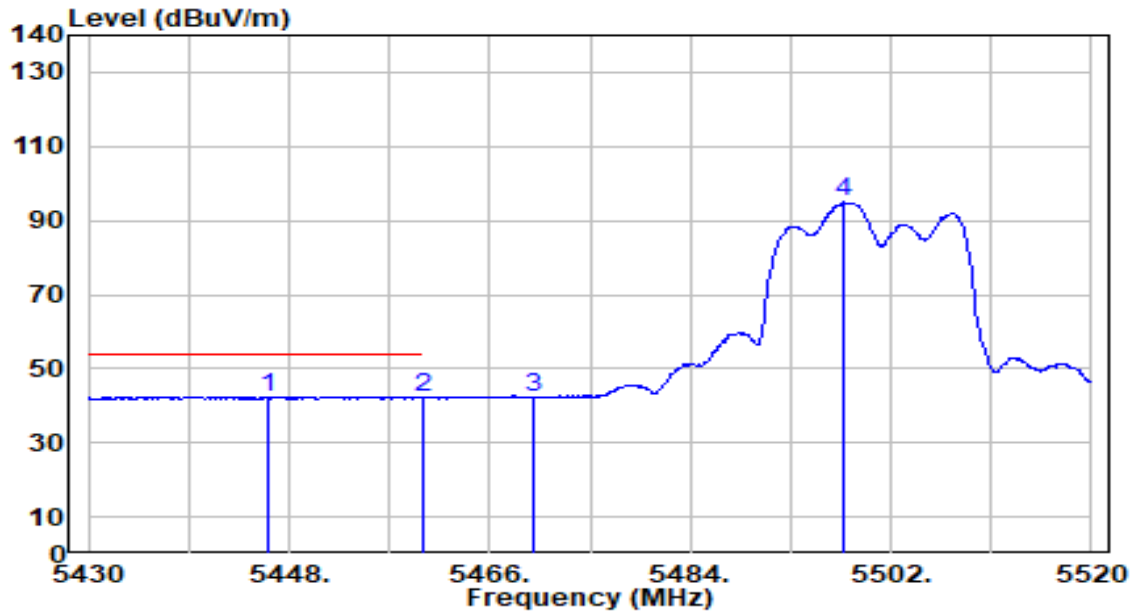


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5446.020        | 41.90          | 0.60       | 42.50                | -11.50      | 54.00          | 248         | 178         | Average           |
| 2  |   | 5460.000        | 41.56          | 0.66       | 42.22                | -11.78      | 54.00          | 248         | 178         | Average           |
| 3  |   | 5470.000        | 41.41          | 0.71       | 42.12                | N/A         | N/A            | 248         | 178         | Average           |
| 4  |   | 5497.860        | 94.05          | 0.83       | 94.88                | N/A         | N/A            | 248         | 178         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

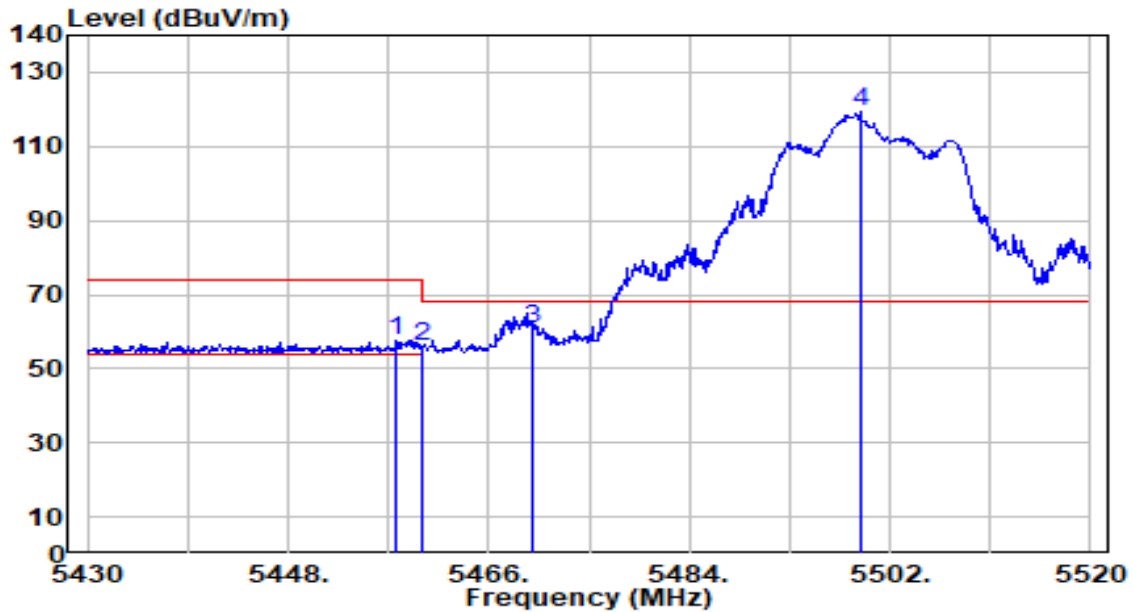


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5457.720        | 57.17          | 0.65       | 57.83                | -16.17      | 74.00          | 189         | 192         | Peak              |
| 2  | 5460.000        | 55.36          | 0.66       | 56.02                | -17.98      | 74.00          | 189         | 192         | Peak              |
| 3  | * 5470.000      | 60.26          | 0.71       | 60.97                | -7.23       | 68.20          | 189         | 192         | Peak              |
| 4  | 5499.390        | 118.38         | 0.84       | 119.21               | N/A         | N/A            | 189         | 192         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band3_CH 100_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

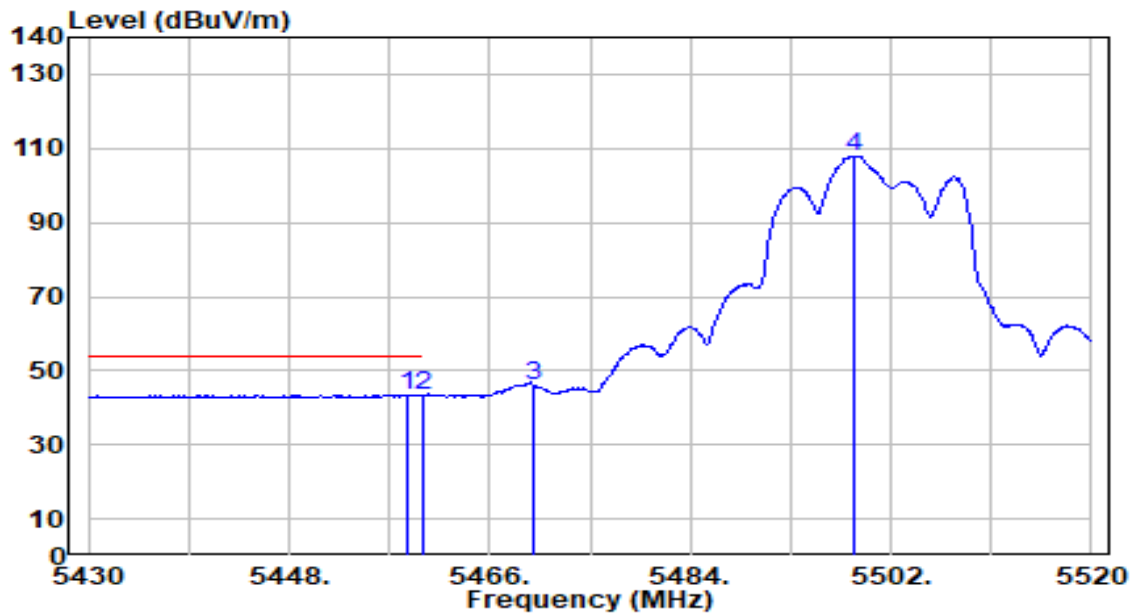


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5458.530        | 42.91          | 0.66       | 43.57                | -10.43      | 54.00          | 189         | 192         | Average           |
| 2  |   | 5460.000        | 42.90          | 0.66       | 43.56                | -10.44      | 54.00          | 189         | 192         | Average           |
| 3  |   | 5470.000        | 45.19          | 0.71       | 45.89                | N/A         | N/A            | 189         | 192         | Average           |
| 4  |   | 5498.760        | 107.08         | 0.83       | 107.91               | N/A         | N/A            | 189         | 192         | Average           |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

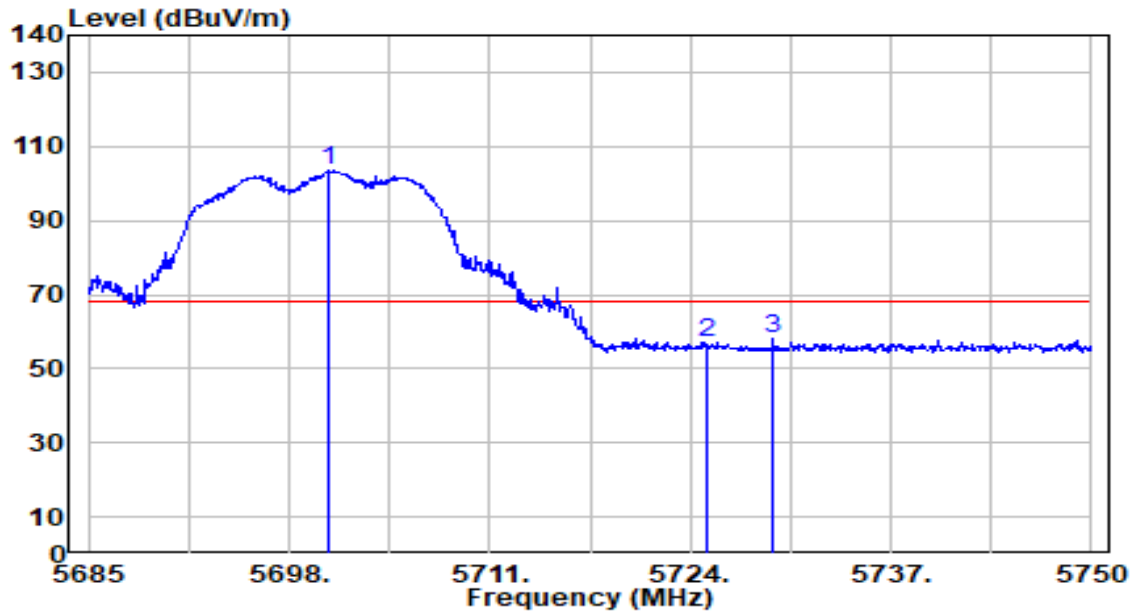


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5700.535        | 101.85         | 1.78       | 103.63               | N/A         | N/A            | 200         | 85          | Peak              |
| 2  | 5725.000        | 54.94          | 1.89       | 56.83                | -11.37      | 68.20          | 200         | 85          | Peak              |
| 3  | * 5729.395      | 56.08          | 1.91       | 57.99                | -10.21      | 68.20          | 200         | 85          | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band3_CH 140_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

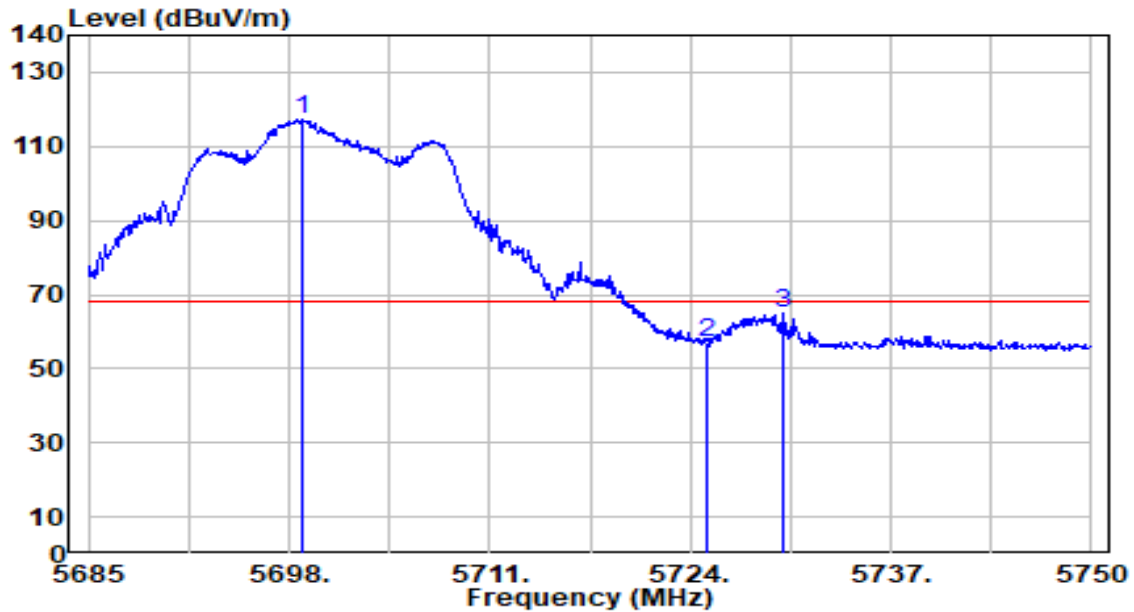


| No | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5698.910        | 115.44         | 1.77       | 117.21               | N/A         | N/A            | 196         | 188         | Peak              |
| 2  | 5725.000        | 55.11          | 1.89       | 57.00                | -11.20      | 68.20          | 196         | 188         | Peak              |
| 3  | * 5729.980      | 63.14          | 1.92       | 65.06                | -3.14       | 68.20          | 196         | 188         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

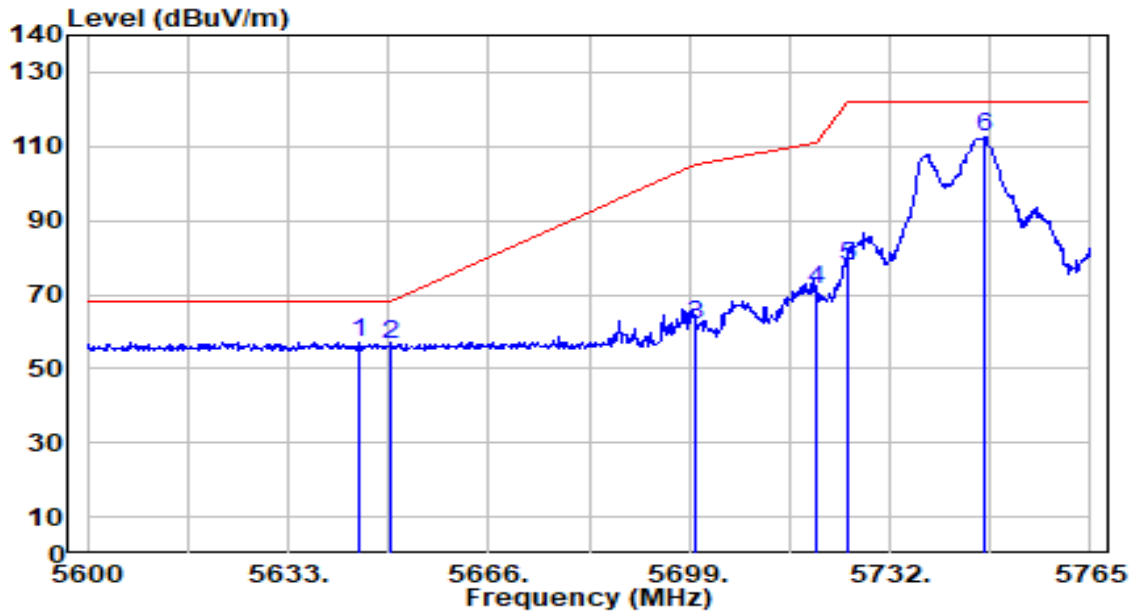


| No |   | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5644.880        | 55.62          | 1.52       | 57.14                | -11.06      | 68.20          | 182         | 154         | Peak              |
| 2  |   | 5650.000        | 54.96          | 1.54       | 56.50                | -11.70      | 68.20          | 182         | 154         | Peak              |
| 3  |   | 5700.000        | 60.04          | 1.78       | 61.82                | -43.38      | 105.20         | 182         | 154         | Peak              |
| 4  |   | 5720.000        | 69.42          | 1.87       | 71.29                | -39.51      | 110.80         | 182         | 154         | Peak              |
| 5  |   | 5725.000        | 75.72          | 1.89       | 77.61                | -44.59      | 122.20         | 182         | 154         | Peak              |
| 6  |   | 5747.675        | 110.64         | 2.00       | 112.64               | N/A         | N/A            | 182         | 154         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band4_CH 149_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

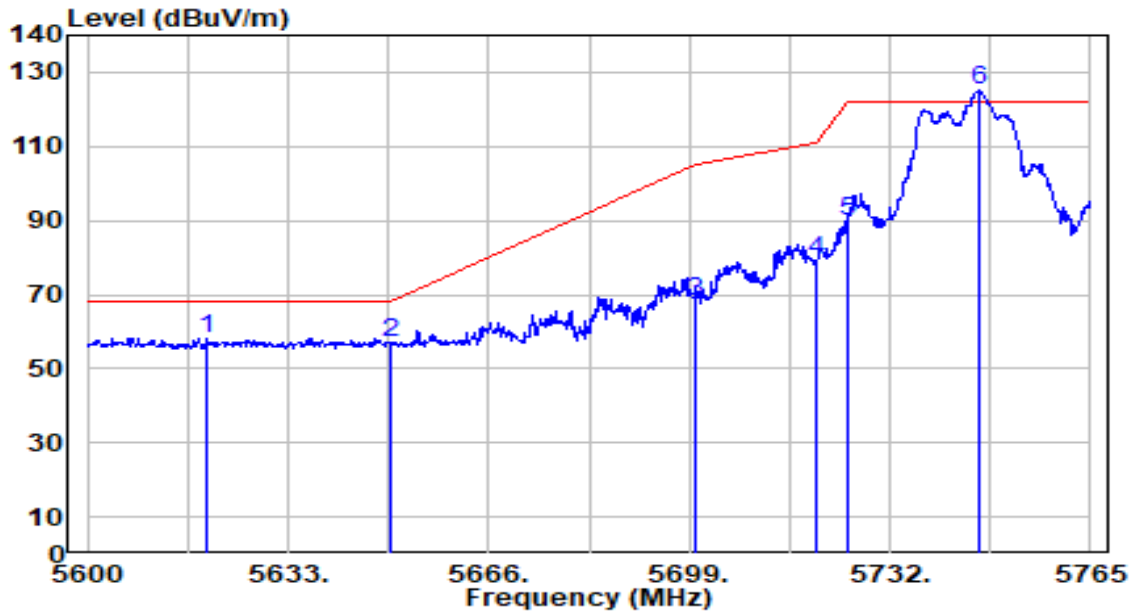


| No |   | Frequency (MHz) | Reading (dBuV) | C.F (dB/m) | Measurement (dBuV/m) | Margin (dB) | Limit (dBuV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|---|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | * | 5619.470        | 56.96          | 1.40       | 58.36                | -9.84       | 68.20          | 186         | 146         | Peak              |
| 2  |   | 5650.000        | 55.46          | 1.54       | 57.01                | -11.19      | 68.20          | 186         | 146         | Peak              |
| 3  |   | 5700.000        | 66.57          | 1.78       | 68.34                | -36.86      | 105.20         | 186         | 146         | Peak              |
| 4  |   | 5720.000        | 77.16          | 1.87       | 79.02                | -31.78      | 110.80         | 186         | 146         | Peak              |
| 5  |   | 5725.000        | 88.04          | 1.89       | 89.93                | -32.27      | 122.20         | 186         | 146         | Peak              |
| 6  |   | 5746.685        | 123.08         | 1.99       | 125.08               | N/A         | N/A            | 186         | 146         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Horizontal                             | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

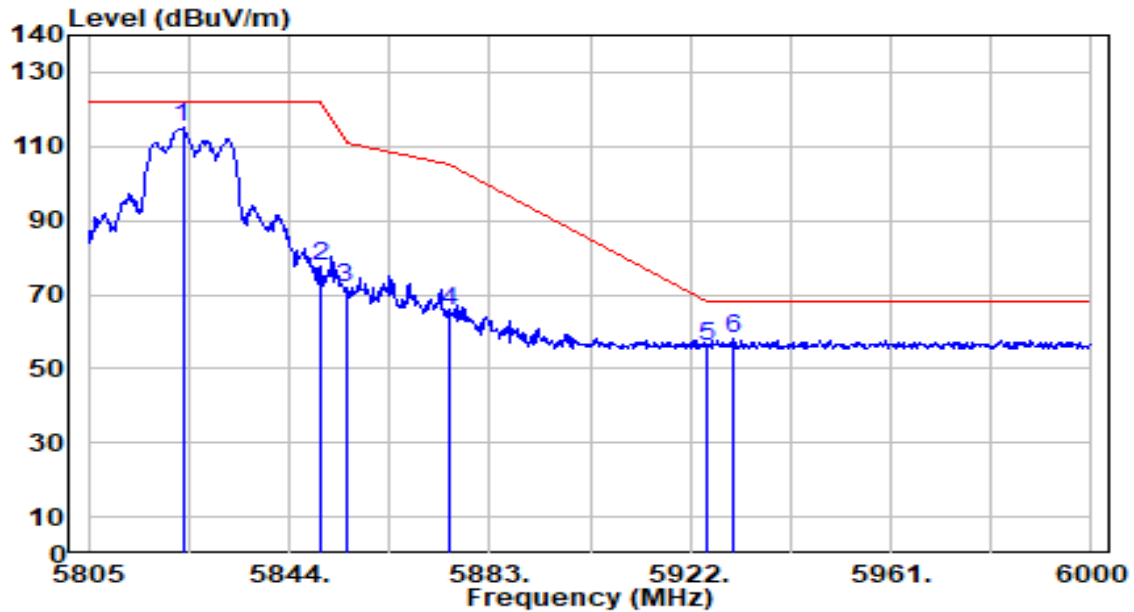


| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5823.330        | 112.79         | 2.25       | 115.04               | N/A         | N/A            | 315         | 140         | Peak              |
| 2  | 5850.000        | 75.53          | 2.25       | 77.78                | -44.42      | 122.20         | 315         | 140         | Peak              |
| 3  | 5855.000        | 69.61          | 2.25       | 71.87                | -38.93      | 110.80         | 315         | 140         | Peak              |
| 4  | 5875.000        | 63.31          | 2.26       | 65.57                | -39.63      | 105.20         | 315         | 140         | Peak              |
| 5  | 5925.000        | 53.72          | 2.27       | 55.98                | -12.22      | 68.20          | 315         | 140         | Peak              |
| 6  | * 5930.190      | 55.82          | 2.27       | 58.09                | -10.11      | 68.20          | 315         | 140         | Peak              |

Note:

- "\*", means this data is the worst emission level.
- C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
- Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
- The emission levels of other frequencies are very lower than the limit and not show in test report.

|           |                                        |                      |              |
|-----------|----------------------------------------|----------------------|--------------|
| EUT       | BE14000 Whole Home Mesh Wi-Fi 7 System | Date of Test         | 2025-02-05   |
| Factor    | DRH18-E                                | Temp. / Humidity     | 21°C /62%    |
| Polarity  | Vertical                               | Site / Test Engineer | AC2 / Yang   |
| Test Mode | 802.11a_TX_Band4_CH 165_ANT 0+1+2      | Test Voltage         | AC 120V/60Hz |

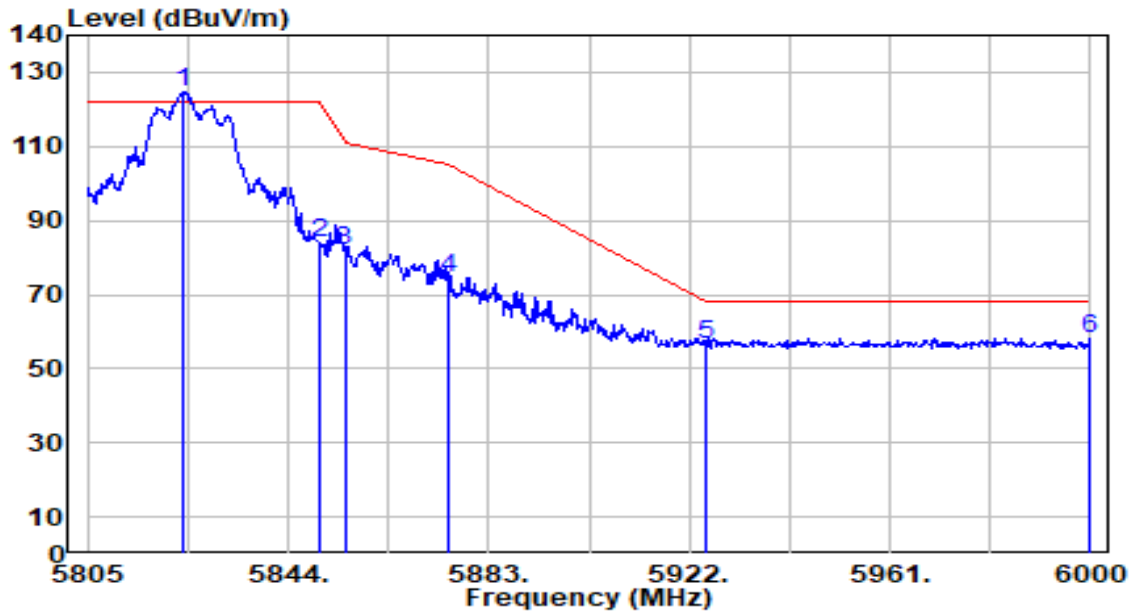

| No | Frequency (MHz) | Reading (dBUV) | C.F (dB/m) | Measurement (dBUV/m) | Margin (dB) | Limit (dBUV/m) | Height (cm) | Angle (deg) | Remark (QP/PK/AV) |
|----|-----------------|----------------|------------|----------------------|-------------|----------------|-------------|-------------|-------------------|
| 1  | 5823.720        | 122.49         | 2.25       | 124.74               | N/A         | N/A            | 120         | 146         | Peak              |
| 2  | 5850.000        | 81.91          | 2.25       | 84.16                | -38.04      | 122.20         | 120         | 146         | Peak              |
| 3  | 5855.000        | 79.67          | 2.25       | 81.93                | -28.87      | 110.80         | 120         | 146         | Peak              |
| 4  | 5875.000        | 72.18          | 2.26       | 74.44                | -30.76      | 105.20         | 120         | 146         | Peak              |
| 5  | 5925.000        | 54.28          | 2.27       | 56.54                | -11.66      | 68.20          | 120         | 146         | Peak              |
| 6  | * 5999.805      | 56.01          | 2.28       | 58.29                | -9.91       | 68.20          | 120         | 146         | Peak              |

Note:

1. " \*", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m)+ Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.