

FCC Radio Test Report

FCC ID: 2BH7FC630

Report No. : BTL-FCCP-2-2508C385
Equipment : Battery-Powered Pan/Tilt Security Camera
Model Name : Tapo C630
Brand Name : tp-link, tapo
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618

Radio Function : WLAN 2.4GHz

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement : ANSI C63.10-2020
Procedure(s)

Date of Receipt : 2025/9/3
Date of Test : 2025/9/3 ~ 2025/9/8
Issued Date : 2025/9/25

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Poken Huang
 Poken Huang, Engineer

Approved by : Peter Chen
 Peter Chen, Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	10
2.4 DUTY CYCLE	11
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	12
2.6 SUPPORT UNITS	12
3 . AC POWER LINE CONDUCTED EMISSIONS	13
3.1 LIMIT	13
3.2 TEST PROCEDURE	13
3.3 DEVIATION FROM TEST STANDARD	13
3.4 TEST SETUP	14
3.5 EUT OPERATION CONDITIONS	14
3.6 TEST RESULTS	14
4 . RADIATED EMISSIONS	15
4.1 LIMIT	15
4.2 TEST PROCEDURE	16
4.3 DEVIATION FROM TEST STANDARD	17
4.4 TEST SETUP	17
4.5 EUT OPERATION CONDITIONS	19
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	19
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	19
4.8 TEST RESULTS - ABOVE 1000 MHZ	19
5 . BANDWIDTH	20
5.1 LIMIT	20
5.2 TEST PROCEDURE	20
5.3 DEVIATION FROM STANDARD	20
5.4 TEST SETUP	20

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	20
5.6 TEST RESULTS	20
6 . OUTPUT POWER	21
6.1 LIMIT	21
6.2 TEST PROCEDURE	21
6.3 DEVIATION FROM STANDARD	21
6.4 TEST SETUP	21
6.5 EUT OPERATION CONDITIONS	21
6.6 TEST RESULTS	21
7 . CONDUCTED SPURIOUS EMISSIONS	22
7.1 LIMIT	22
7.2 TEST PROCEDURE	22
7.3 DEVIATION FROM STANDARD	22
7.4 TEST SETUP	22
7.5 EUT OPERATION CONDITIONS	22
7.6 TEST RESULTS	22
8 . POWER SPECTRAL DENSITY	23
8.1 LIMIT	23
8.2 TEST PROCEDURE	23
8.3 DEVIATION FROM STANDARD	23
8.4 TEST SETUP	23
8.5 EUT OPERATION CONDITIONS	23
8.6 TEST RESULTS	23
9 . MEASUREMENT INSTRUMENTS LIST	24
10 . EUT TEST PHOTO	26
11 . EUT PHOTOS	26
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	27
APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	30
APPENDIX C - RADIATED EMISSION- ABOVE 1000 MHZ	33
APPENDIX D - BANDWIDTH	50
APPENDIX E - OUTPUT POWER	54
APPENDIX F - CONDUCTED SPURIOUS EMISSIONS	56

Table of Contents	Page
APPENDIX G - POWER SPECTRAL DENSITY	60

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2508C385	R00	Original Report.	2025/9/25	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX D	PASS	-----
15.247(b)(3)	Output Power	APPENDIX E	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX F	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX G	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test facilities used to collect the test data in this report:

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☒ CB20 ☒ C01

No. 68-1, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☒ SR06

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range (GHz)	U (dB)
CB20 (3m)	0.03~0.2	4.01
	0.02~1	4.64
	1 ~ 6	5.91
	6 ~ 18	6.24
	18 ~ 26	3.93
	26 ~ 40	4.06

C. Other Measurement:

Test Item	U
Occupied Bandwidth	86 %
Output power	0.8412 dB
Power Spectral Density	0.8602 dB
Conducted Spurious emissions	1.8304 dB
Conducted Band edges	1.8338 dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	Please refer to test data		DC 5V	Ken Lu
Radiated Emissions-30MHz to 1000MHz	Please refer to test data		DC 5V	Benny Cao
Radiated Emissions-Above 1000MHz	Please refer to test data		DC 5V	Benny Cao
Bandwidth	25°C	50%	DC 5V	Cheng Tsai
Output Power	25°C	60%	DC 5V	Cheng Tsai
Conducted Spurious Emissions	25°C	50%	DC 5V	Cheng Tsai
Power Spectral Density	25°C	50%	DC 5V	Cheng Tsai

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Battery-Powered Pan/Tilt Security Camera
Brand Name	tp-link, tapo
Test Model	Tapo C630
Model Name	Tapo C630
Model Difference(s)	N/A
Hardware Version	1.0
Software Version	1.X
Power Source	1# Supplied from Type-C port. 2# Supplied from Battery. Model: CMICR18650F9
Power Rating	1#5V  2A 2#3.6V
Operation Frequency	2412 MHz ~ 2462 MHz
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 72.2 Mbps
Maximum Output Power	IEEE 802.11n(HT20): 20.92 dBm (0.1236 W)

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Antenna Specification:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	TP-Link Systems Inc.	Tapo C630 KIT_Ant1	Monopole	N/A	0
2	TP-Link Systems Inc.	Tapo C630 KIT_Ant2	Monopole	N/A	0

Note: Smart antenna system with two transmit/receive chains, but operating in a mode where only one transmit/receive chain is used. The worst case is Ant. 2 and recorded in this report.

4. The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 DESCRIPTION OF TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11n(HT20)	06	-
Transmitter Radiated Emissions (1GHz to 18GHz)	IEEE 802.11b	01/11	Bandedge
	IEEE 802.11g		
	IEEE 802.11n(HT20)		
	IEEE 802.11b	01/06/11	Harmonic
	IEEE 802.11g		
	IEEE 802.11n(HT20)		
Transmitter Radiated Emissions (above 18GHz)	IEEE 802.11n(HT20)	06	-
Bandwidth & Output Power & Power Spectral Density & Conducted Spurious Emission	IEEE 802.11b	01/06/11	-
	IEEE 802.11g		
	IEEE 802.11n(HT20)		

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) The electric field intensity signal emitted at 9 kHz - 30 MHz is too weak (20 dB below the limit), so the measured value is not recorded in this report.
- (3) For radiated emission below 1 GHz test, the TX IEEE 802.11n(HT20) Mode Channel 06 is found to be the worst case and recorded.
- (4) For radiated emission Harmonic above 18GHz test, only tested the worst case and recorded.
- (5) For radiated emission above 1GHz test, both Vertical and Horizontal are evaluated, but only the worst case (Horizontal) is recorded.


2.3 PARAMETERS OF TEST SOFTWARE

Test Software Version	AmebaDPlus_MP_tool_1V4		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	103	106	104
IEEE 802.11g	90	112	100
IEEE 802.11n(HT20)	95	114	110

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

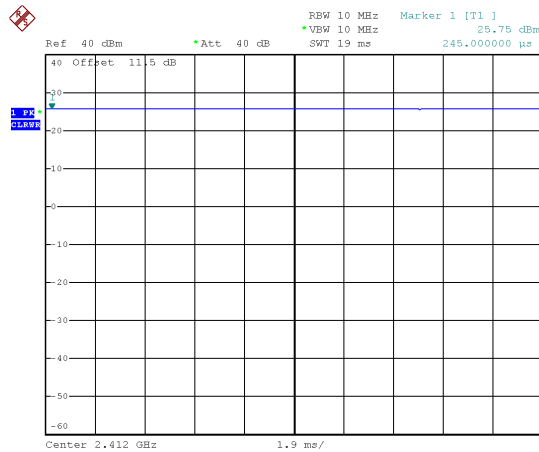

Date: 4.SEP.2025 17:46:59

Duty cycle = 0.245 ms / 0.245 ms = 100%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11g

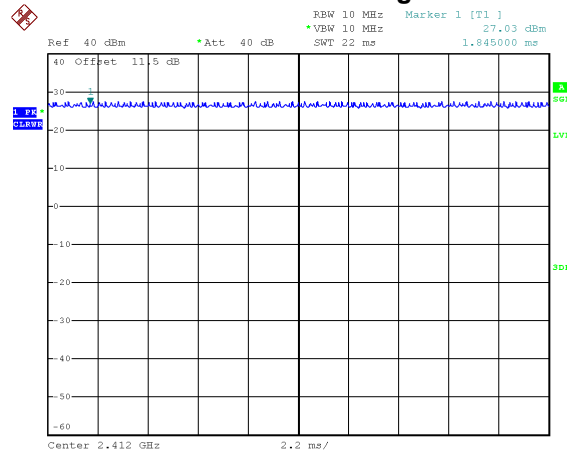

Date: 4.SEP.2025 17:47:36

Duty cycle = 1.845 ms / 1.845 ms = 100%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

IEEE 802.11n(HT20)

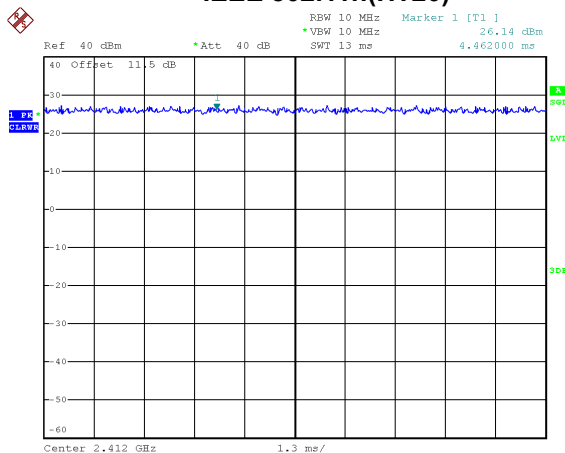

Date: 4.SEP.2025 17:48:11

Duty cycle = 4.462 ms / 4.462 ms = 100%
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.


For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

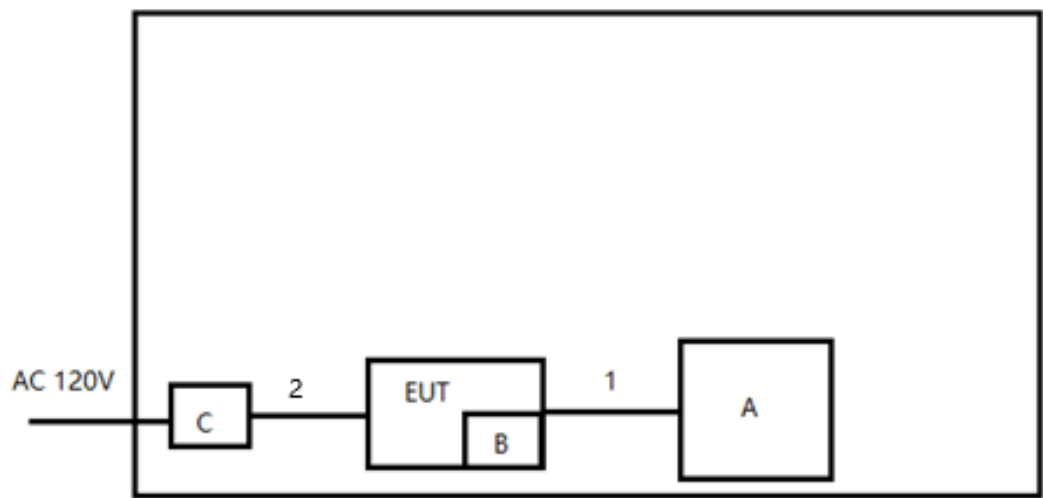

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Notebook	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab
B	SD Card	SanDisk	32GB	N/A	Furnished by test lab
C	Adapter	DVE	DSA-10PF06-05 FUS 050200	N/A	Furnished by test requestor

Item	Cable Type	Shielded	Ferrite Core	Length	Remarks
1	Test Fixture	NO	NO	1m	Furnished by test lab
2	USB Cable	NO	NO	0.5m	Furnished by test requestor

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB)		Measurement Value (dBuV)
38.22	+	3.45	=	41.67

Measurement Value (dBuV)		Limit Value (dBuV)		Margin Level (dB)
41.67	-	60	=	-18.33

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

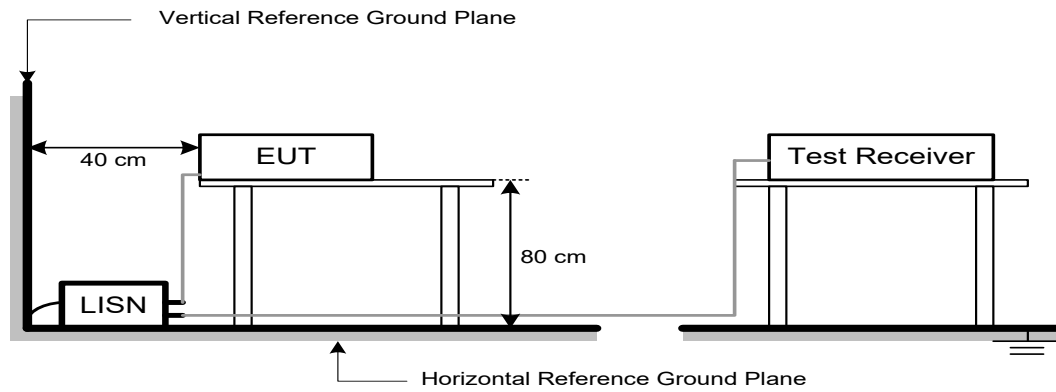

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBuV/m)		Harmonic at 1m (dBuV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

NOTE:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB/m)		Measurement Value (dBuV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBuV/m)		Limit Value (dBuV/m)		Margin Level (dB)
21.22	-	54	=	-32.78

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$20\log(d_{\text{limit}}/d_{\text{measure}})=20\log(3/1)=9.5\text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1 GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz


Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value

Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector


4.3 DEVIATION FROM TEST STANDARD
 No deviation.

4.4 TEST SETUP


9 kHz to 30 MHz

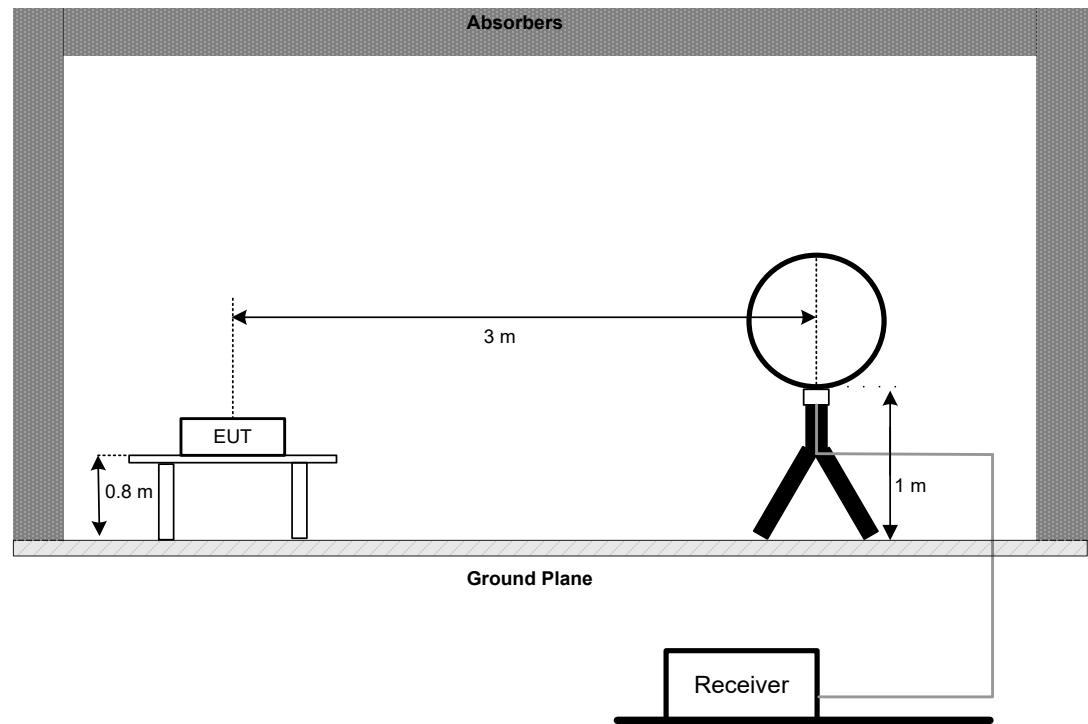


30 MHz to 1 GHz

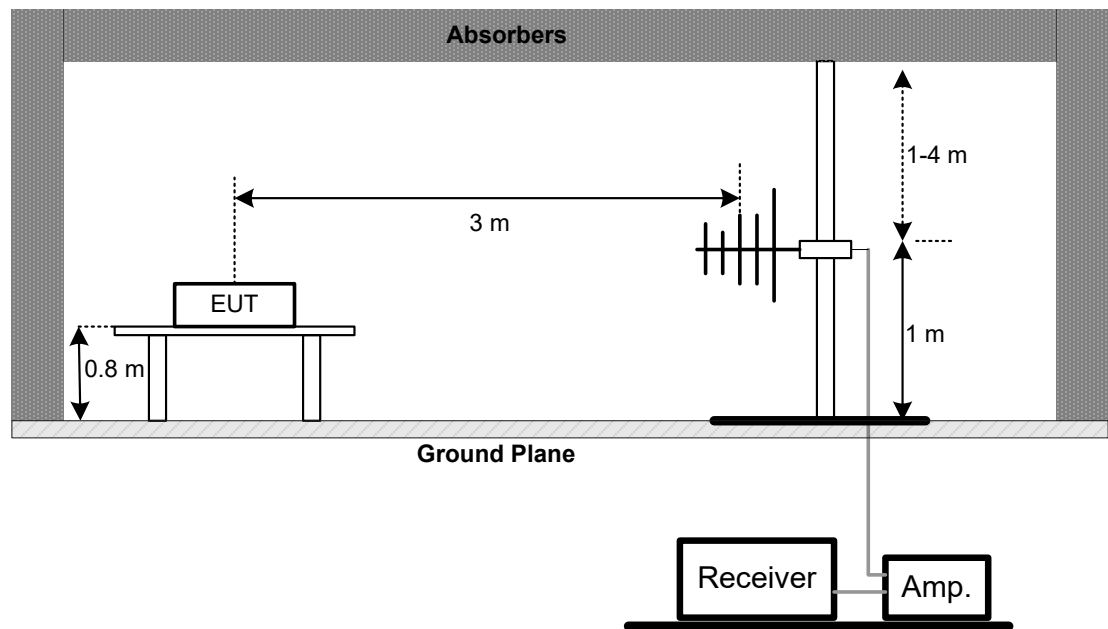

**Above 1 GHz
Band edge & Harmonic(1 GHz to 18 GHz)**

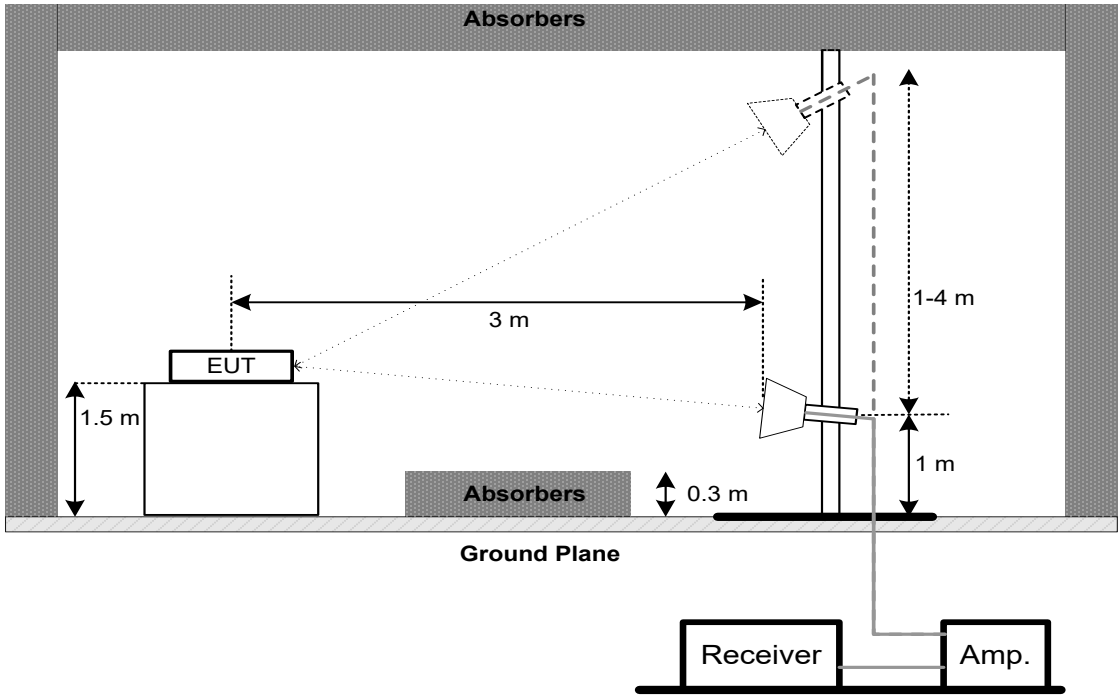

Harmonic(18 GHz to 26.5 GHz)

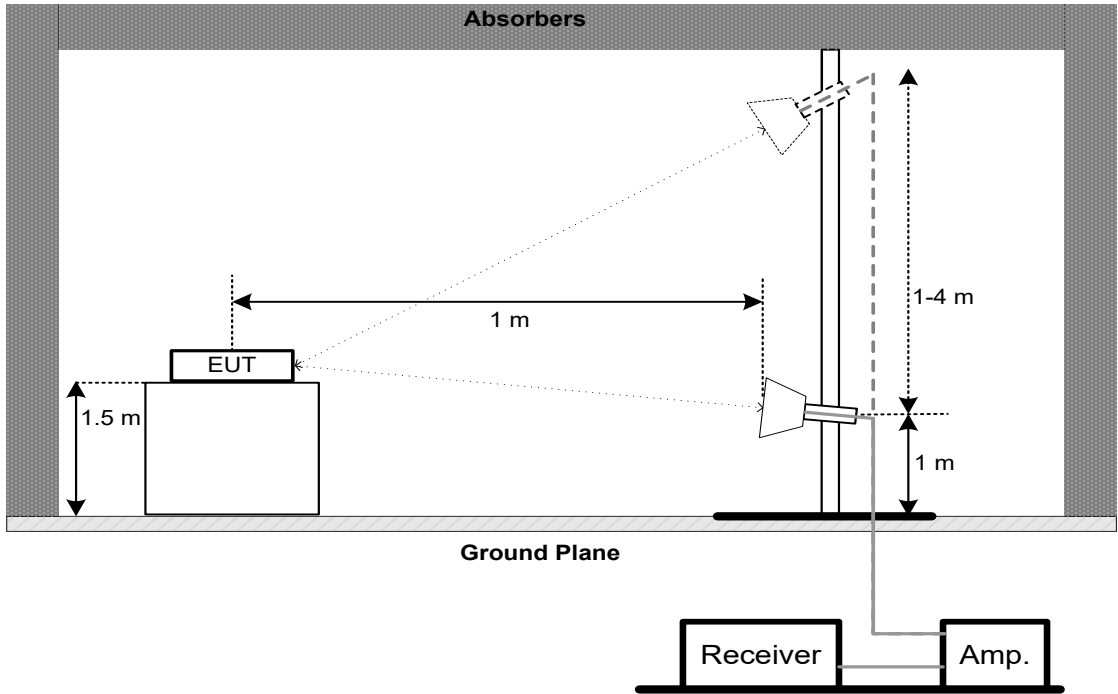

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX B.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX C.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto


For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz
VBW	1 MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP

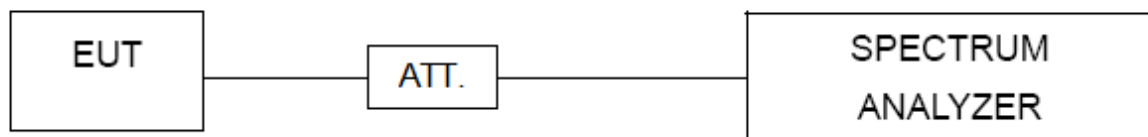

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX D.

6. OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


6.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 of ANSI C63.10-2013 and FCC KDB 662911 D01 v02r01 Multiple Transmitter Output.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

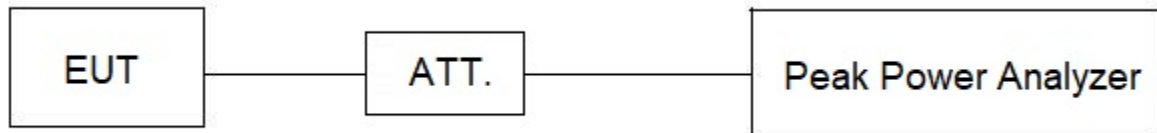

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX E.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP

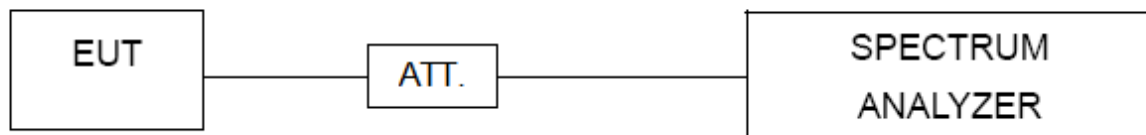

7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX F.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	25 MHz
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP

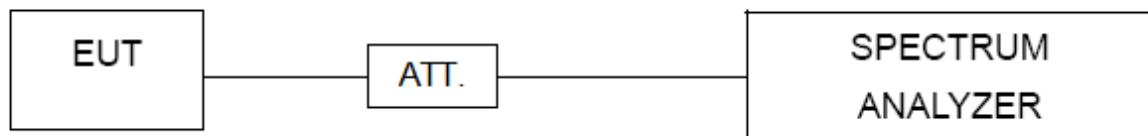

8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX G.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2025/6/26	2026/6/25
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2024/12/10	2025/12/9
3	EMC Receiver	Keysight	N9038A	MY54130009	2025/6/27	2026/6/26
4	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - Below 1GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2024/12/4	2025/12/3
2	EMC Receiver	Keysight	N9038A	MY54130009	2025/6/25	2026/6/24
3	Pre-Amplifier	EMCI	EMC001330-202 01222	980807	2024/12/9	2025/12/8
4	Test Cable	EMCI	EMC-8D-NM-NM -5000	150106	2024/12/9	2025/12/8
5	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2024/12/9	2025/12/8
6	Test Cable	EMCI	EMC-CFD-400-N M-NM-3300	200343	2024/12/9	2025/12/8
7	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - 1GHz to 18GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2025/1/14	2026/1/13
2	Pre-Amplifier	EMCI	EMC118A45SE	981030	2024/12/10	2025/12/9
3	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2024/12/10	2025/12/9
5	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2024/12/10	2025/12/9
6	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2024/11/24	2025/11/23
7	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - Above 18GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2024/12/10	2025/12/9
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2025/6/27	2026/6/26
3	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC101G-KM-KM-3000	220330	2024/12/10	2025/12/9
5	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth & Conducted Spurious Emission & Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2025/6/27	2026/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	BTL-Conducted Test	BTL	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12589	2024/10/25	2025/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer (Ver1.1.0.0)	N/A	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

10. EUT TEST PHOTO


Please refer to document Appendix No.: TP-2508C385-1 (APPENDIX-TEST PHOTOS).

11. EUT PHOTOS

Please refer to document Appendix No.: EP-2508C385-1 (APPENDIX-EUT PHOTOS).

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Test Date	2025/9/5
Test Frequency	-	Phase	Line
Temperature	25°C	Humidity	45%

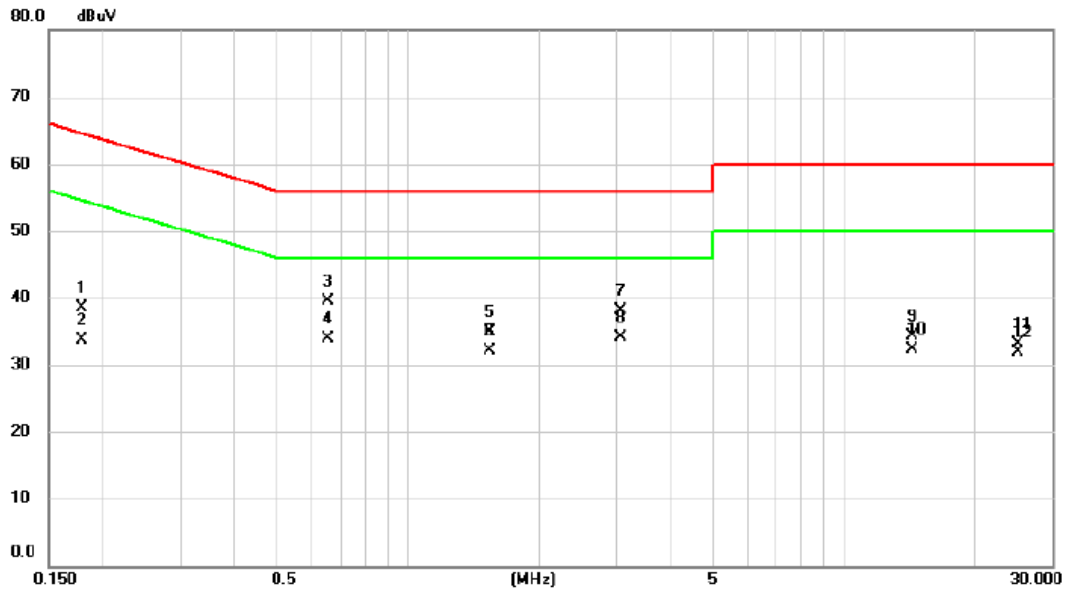


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1780	28.98	9.51	38.49	64.58	-26.09	QP	
2		0.1780	24.14	9.51	33.65	54.58	-20.93	AVG	
3		0.6530	29.99	9.53	39.52	56.00	-16.48	QP	
4		0.6530	24.44	9.53	33.97	46.00	-12.03	AVG	
5		1.5394	25.30	9.59	34.89	56.00	-21.11	QP	
6		1.5394	22.47	9.59	32.06	46.00	-13.94	AVG	
7		3.0830	28.46	9.66	38.12	56.00	-17.88	QP	
8	*	3.0830	24.53	9.66	34.19	46.00	-11.81	AVG	
9		14.3250	24.38	9.97	34.35	60.00	-25.65	QP	
10		14.3250	22.43	9.97	32.40	50.00	-17.60	AVG	
11		25.0000	23.00	10.12	33.12	60.00	-26.88	QP	
12		25.0000	21.84	10.12	31.96	50.00	-18.04	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Test Date	2025/9/5
Test Frequency	-	Phase	Neutral
Temperature	25°C	Humidity	45%

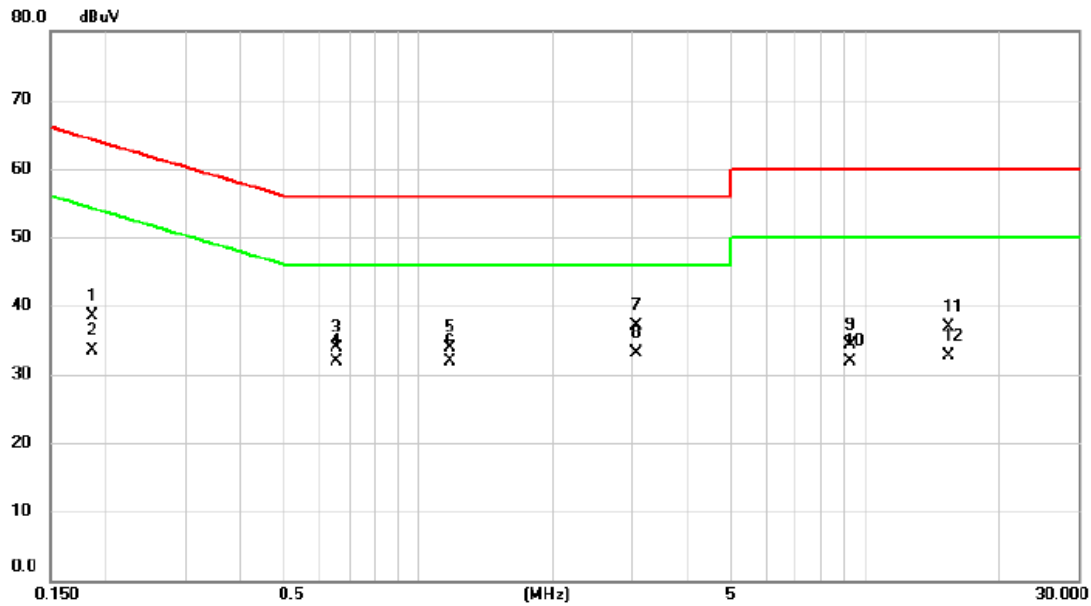


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1867	28.93	9.56	38.49	64.18	-25.69	QP	
2		0.1867	23.87	9.56	33.43	54.18	-20.75	AVG	
3		0.6530	24.35	9.57	33.92	56.00	-22.08	QP	
4		0.6530	22.36	9.57	31.93	46.00	-14.07	AVG	
5		1.1795	24.26	9.57	33.83	56.00	-22.17	QP	
6		1.1795	22.39	9.57	31.96	46.00	-14.04	AVG	
7		3.0830	27.44	9.68	37.12	56.00	-18.88	QP	
8	*	3.0830	23.48	9.68	33.16	46.00	-12.84	AVG	
9		9.2500	24.43	9.87	34.30	60.00	-25.70	QP	
10		9.2500	22.05	9.87	31.92	50.00	-18.08	AVG	
11		15.4000	26.85	10.08	36.93	60.00	-23.07	QP	
12		15.4000	22.71	10.08	32.79	50.00	-17.21	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2437MHz	Polarization	Vertical
Temperature	25°C	Humidity	65%

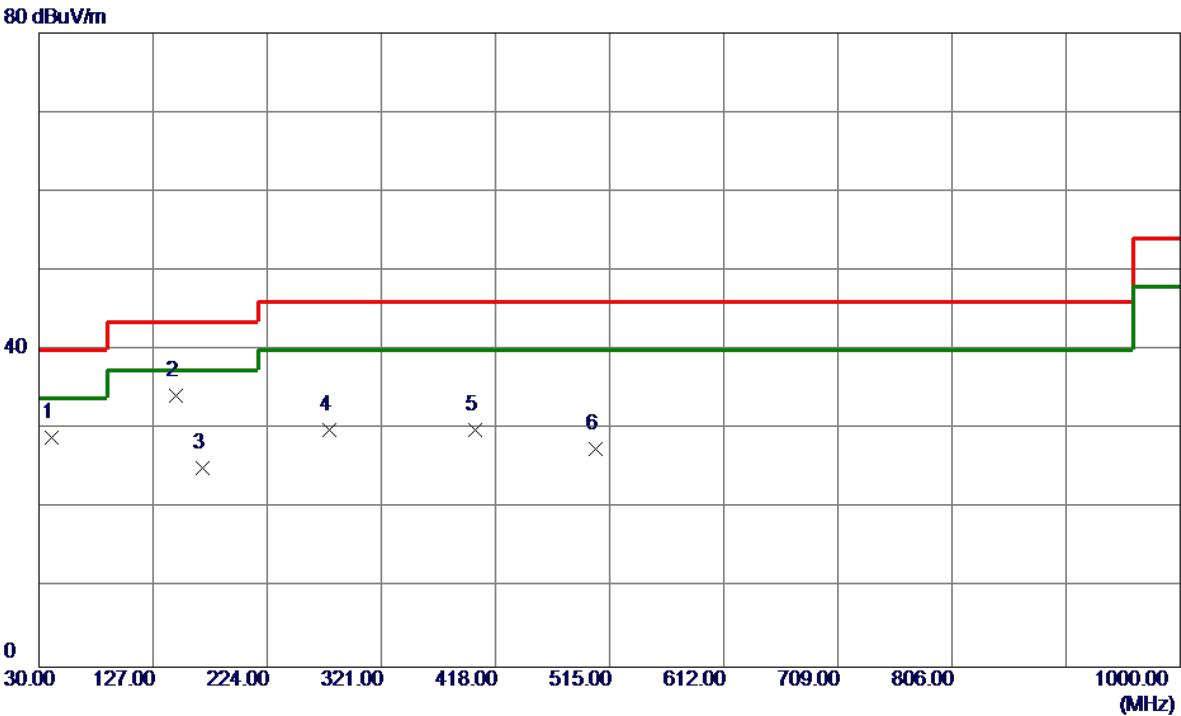


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	40.6699	40.86	-11.83	29.03	40.00	-10.97	Peak	
2 *	146.4000	45.54	-11.32	34.22	43.50	-9.28	Peak	
3	168.7100	36.73	-11.65	25.08	43.50	-18.42	Peak	
4	276.3800	40.59	-10.62	29.97	46.00	-16.03	Peak	
5	400.5400	36.87	-6.98	29.89	46.00	-16.11	Peak	
6	503.3600	32.32	-4.87	27.45	46.00	-18.55	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2437MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

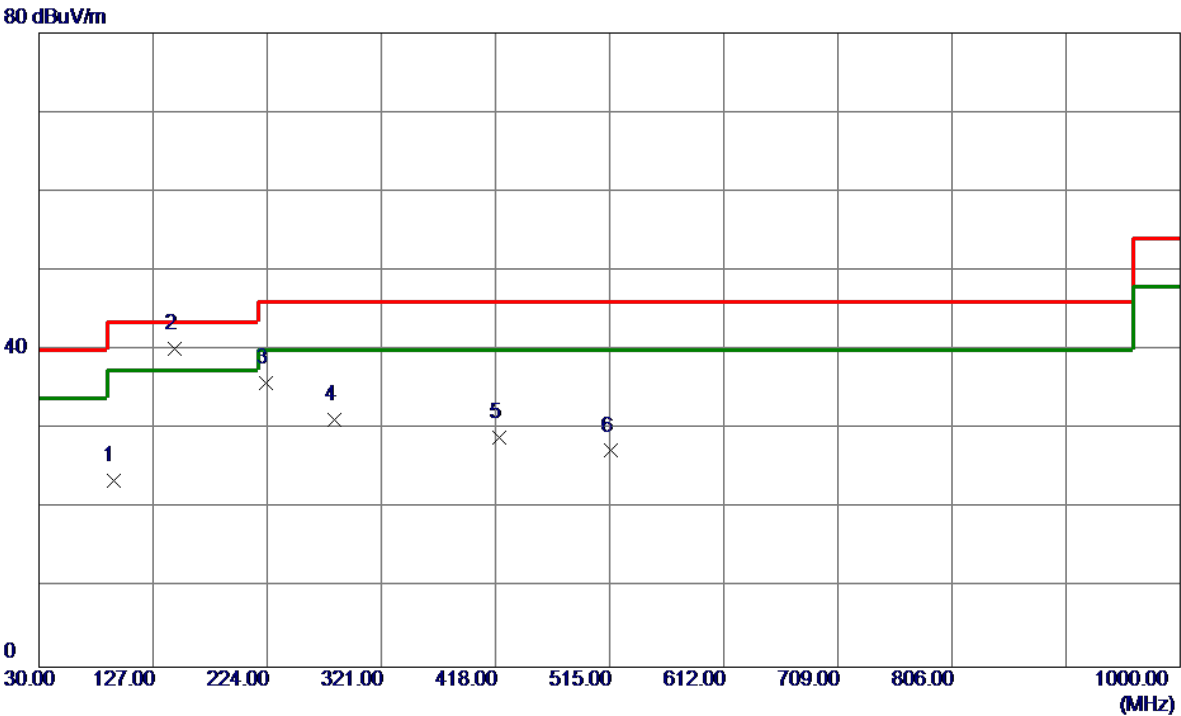


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	93.0500	40.25	-16.78	23.47	43.50	-20.03	Peak	
2 *	145.4299	51.55	-11.41	40.14	43.50	-3.36	Peak	
3	223.0300	49.57	-13.73	35.84	46.00	-10.16	Peak	
4	281.2300	41.59	-10.42	31.17	46.00	-14.83	Peak	
5	420.9100	35.37	-6.39	28.98	46.00	-17.02	Peak	
6	515.9699	31.92	-4.64	27.28	46.00	-18.72	Peak	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION- ABOVE 1000 MHZ

Bandedge


Test Mode	IEEE 802.11b	Test Date	2025/9/5
Test Frequency	2412MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

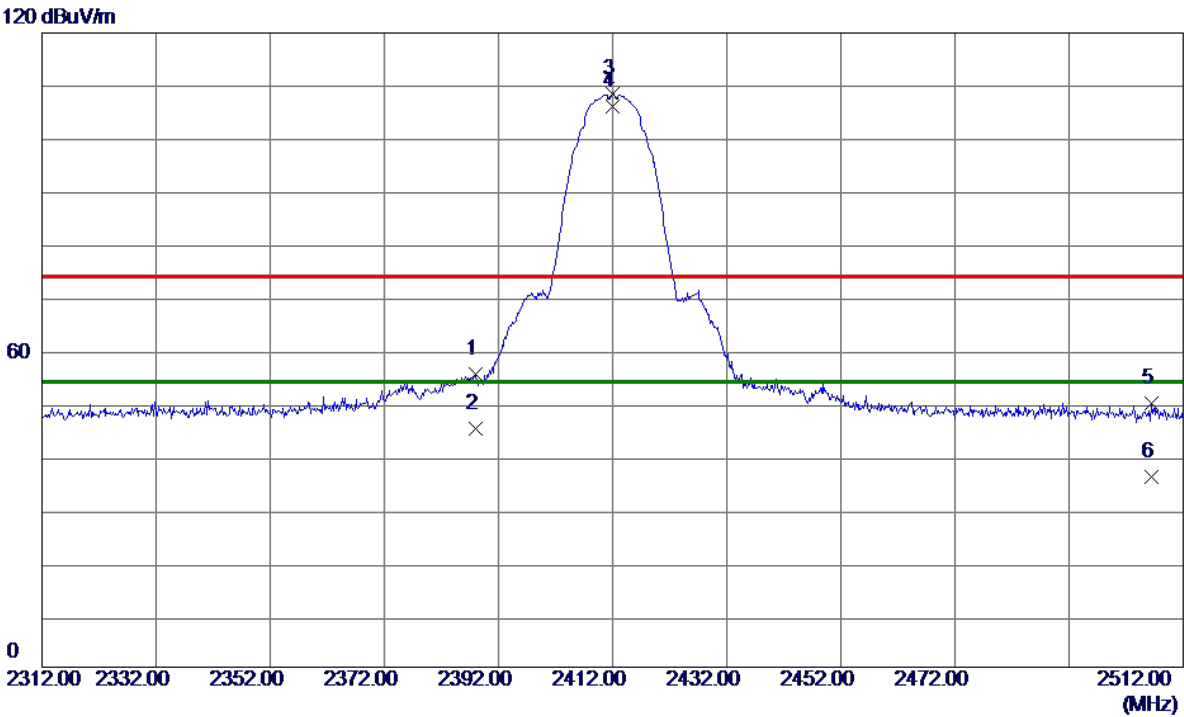

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.0000	50.09	5.24	55.33	74.00	-18.67	Peak	
2	2388.0000	39.91	5.24	45.15	54.00	-8.85	AVG	
3	2412.0000	103.11	5.28	108.39	74.00	34.39	Peak	No Limit
4 *	2412.0000	100.79	5.28	106.07	54.00	52.07	AVG	No Limit
5	2506.4000	44.49	5.47	49.96	74.00	-24.04	Peak	
6	2506.4000	30.61	5.47	36.08	54.00	-17.92	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11b	Test Date	2025/9/5
Test Frequency	2462MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

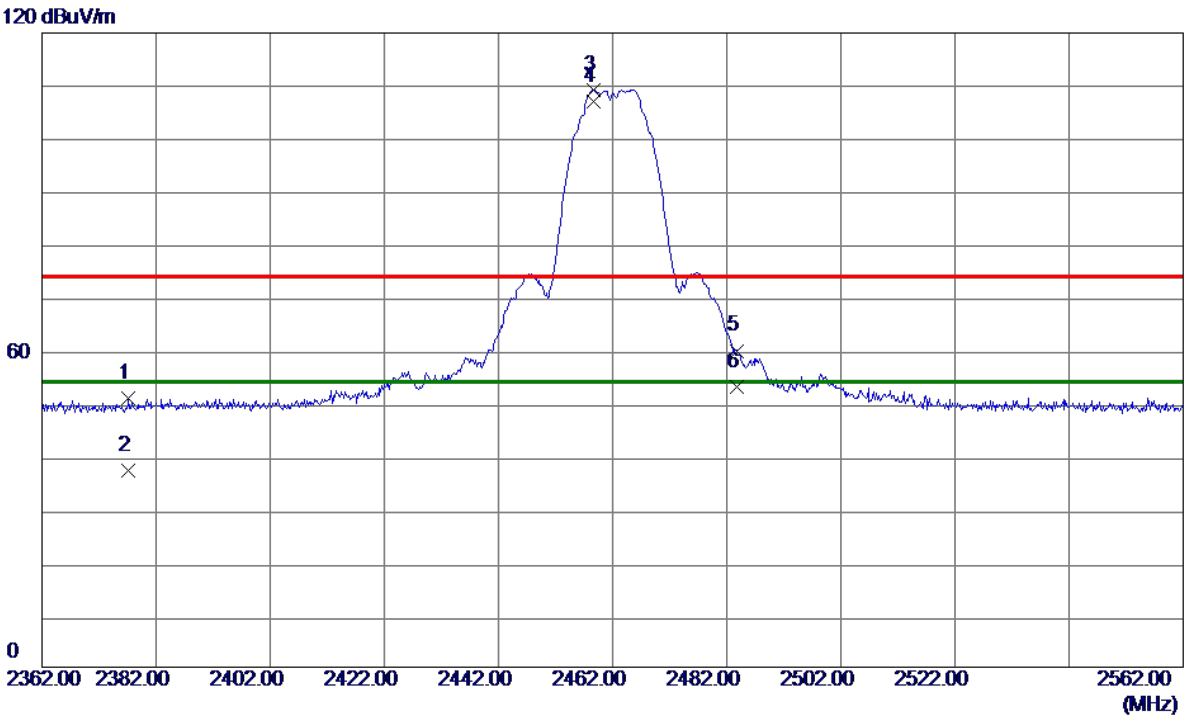

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2377.2000	45.58	5.22	50.80	74.00	-23.20	Peak	
2	2377.2000	32.02	5.22	37.24	54.00	-16.76	AVG	
3	2458.6000	103.85	5.37	109.22	74.00	35.22	Peak	No Limit
4 *	2458.6000	101.69	5.37	107.06	54.00	53.06	AVG	No Limit
5	2483.8000	54.47	5.41	59.88	74.00	-14.12	Peak	
6	2483.8000	47.66	5.41	53.07	54.00	-0.93	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11g	Test Date	2025/9/5
Test Frequency	2412MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

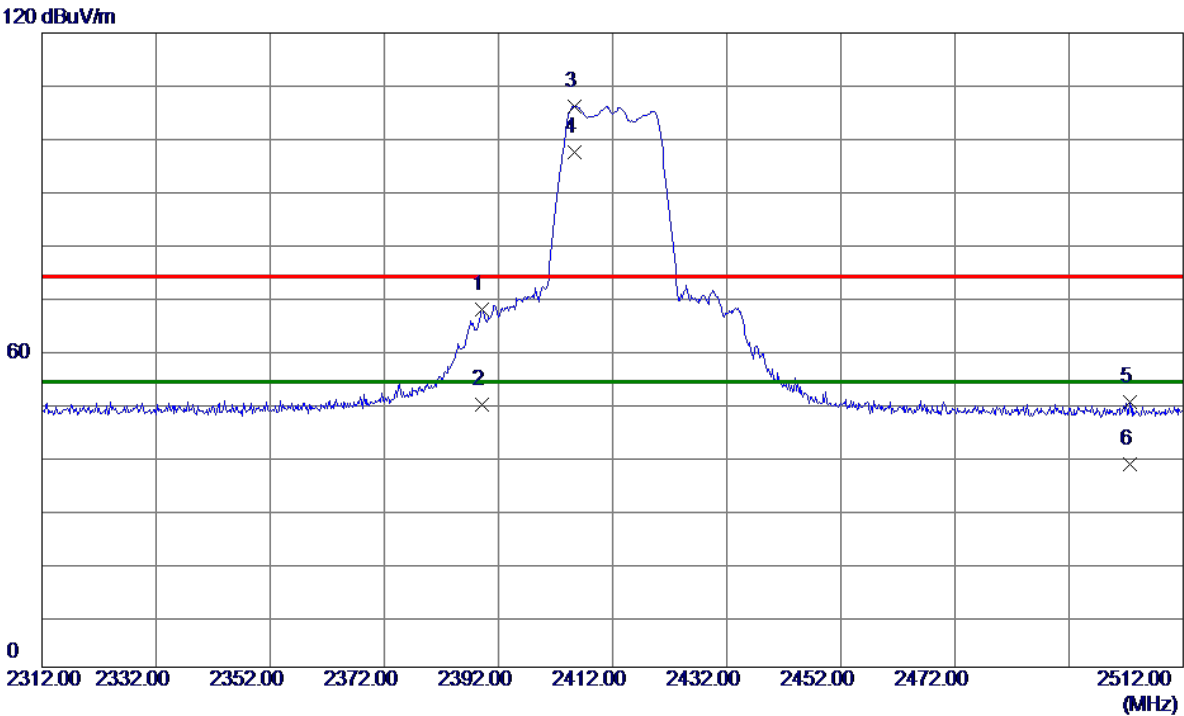

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	62.50	5.24	67.74	74.00	-6.26	Peak	
2	2389.2000	44.39	5.24	49.63	54.00	-4.37	AVG	
3	2405.4000	100.87	5.27	106.14	74.00	32.14	Peak	No Limit
4 *	2405.4000	92.18	5.27	97.45	54.00	43.45	AVG	No Limit
5	2502.6000	44.75	5.45	50.20	74.00	-23.80	Peak	
6	2502.6000	33.05	5.45	38.50	54.00	-15.50	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11g	Test Date	2025/9/5
Test Frequency	2462MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

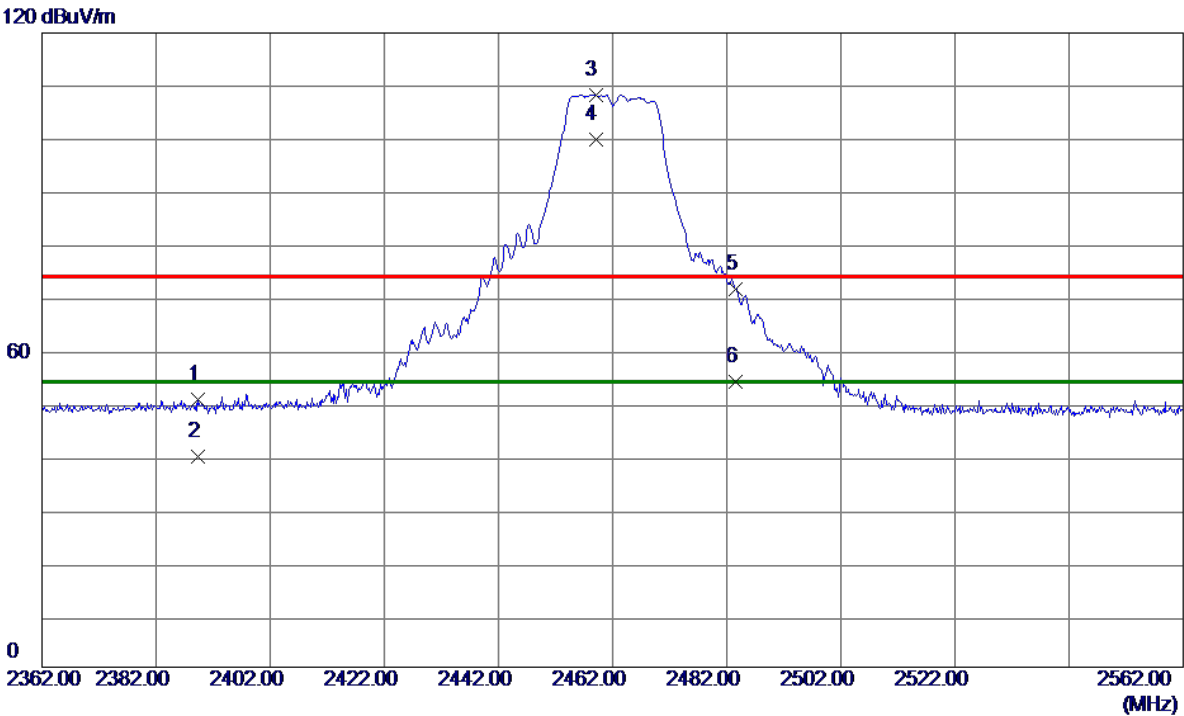

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	45.52	5.24	50.76	74.00	-23.24	Peak	
2	2389.4000	34.52	5.24	39.76	54.00	-14.24	AVG	
3	2459.0000	102.86	5.37	108.23	74.00	34.23	Peak	No Limit
4 *	2459.0000	94.38	5.37	99.75	54.00	45.75	AVG	No Limit
5	2483.6000	66.22	5.41	71.63	74.00	-2.37	Peak	
6	2483.6000	48.48	5.41	53.89	54.00	-0.11	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.


Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2412MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

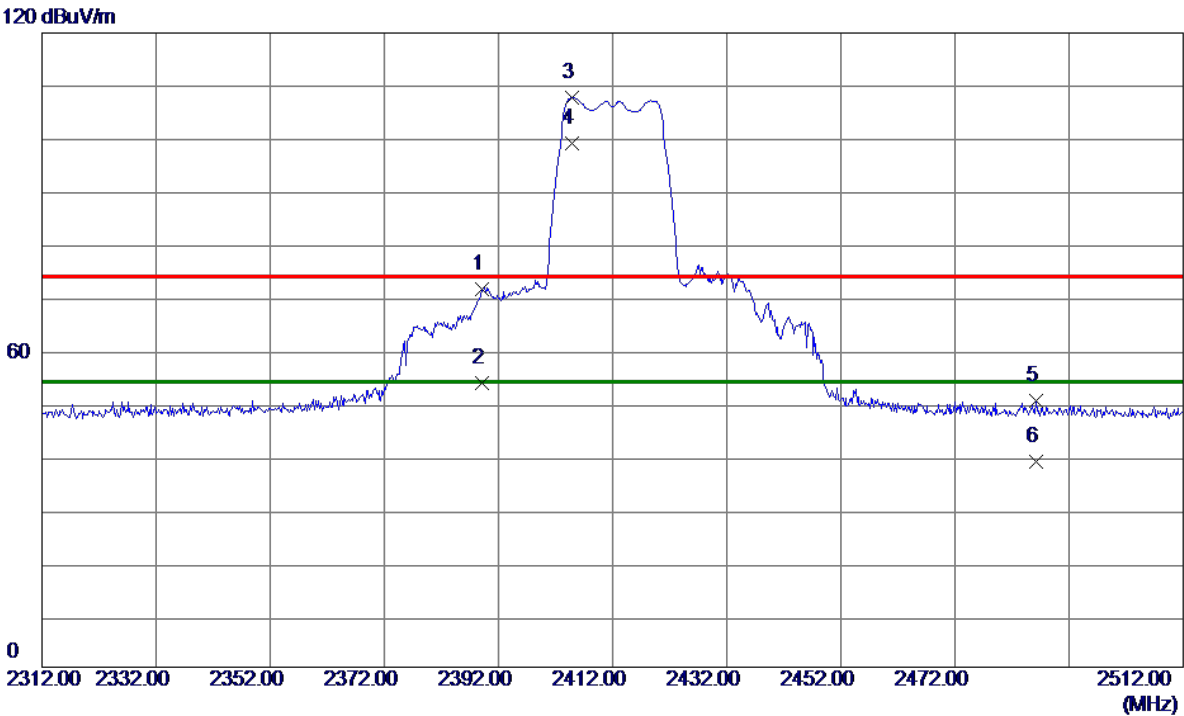

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	66.18	5.24	71.42	74.00	-2.58	Peak	
2	2389.2000	48.52	5.24	53.76	54.00	-0.24	AVG	
3	2404.8000	102.53	5.27	107.80	74.00	33.80	Peak	No Limit
4 *	2404.8000	93.91	5.27	99.18	54.00	45.18	AVG	No Limit
5	2486.2000	45.00	5.42	50.42	74.00	-23.58	Peak	
6	2486.2000	33.56	5.42	38.98	54.00	-15.02	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2462MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

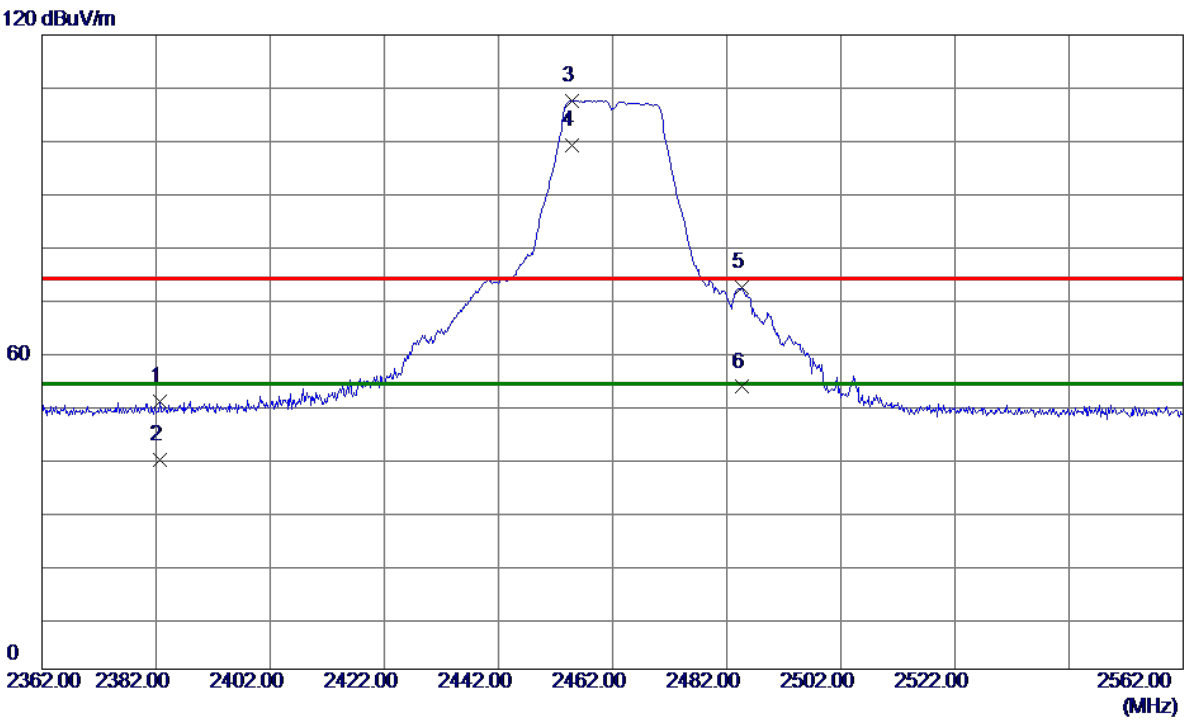


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2382.6000	45.39	5.23	50.62	74.00	-23.38	Peak	
2	2382.6000	34.32	5.23	39.55	54.00	-14.45	AVG	
3	2454.8000	102.17	5.36	107.53	74.00	33.53	Peak	No Limit
4 *	2454.8000	93.72	5.36	99.08	54.00	45.08	AVG	No Limit
5	2484.6000	66.71	5.41	72.12	74.00	-1.88	Peak	
6	2484.6000	47.99	5.41	53.40	54.00	-0.60	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Harmonic

Test Mode	IEEE 802.11b	Test Date	2025/9/5
Test Frequency	2412MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

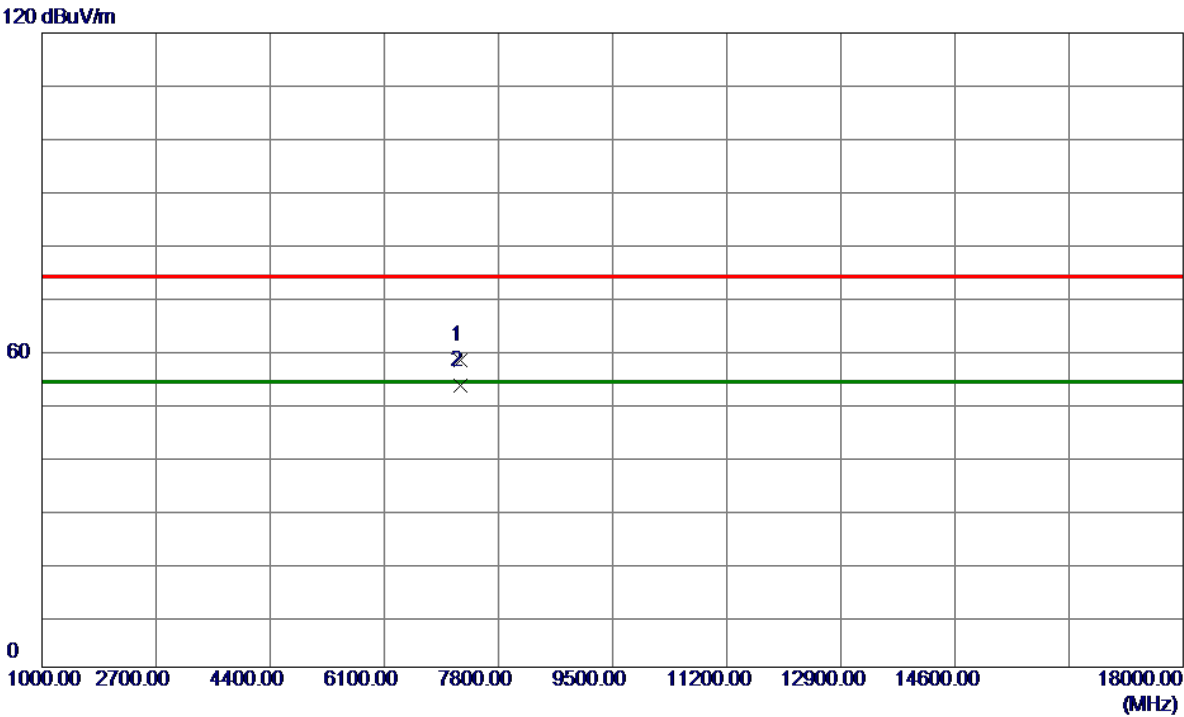


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7236.0000	51.61	6.40	58.01	74.00	-15.99	Peak	
2 *	7236.0000	46.88	6.40	53.28	54.00	-0.72	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/9/5
Test Frequency	2437MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

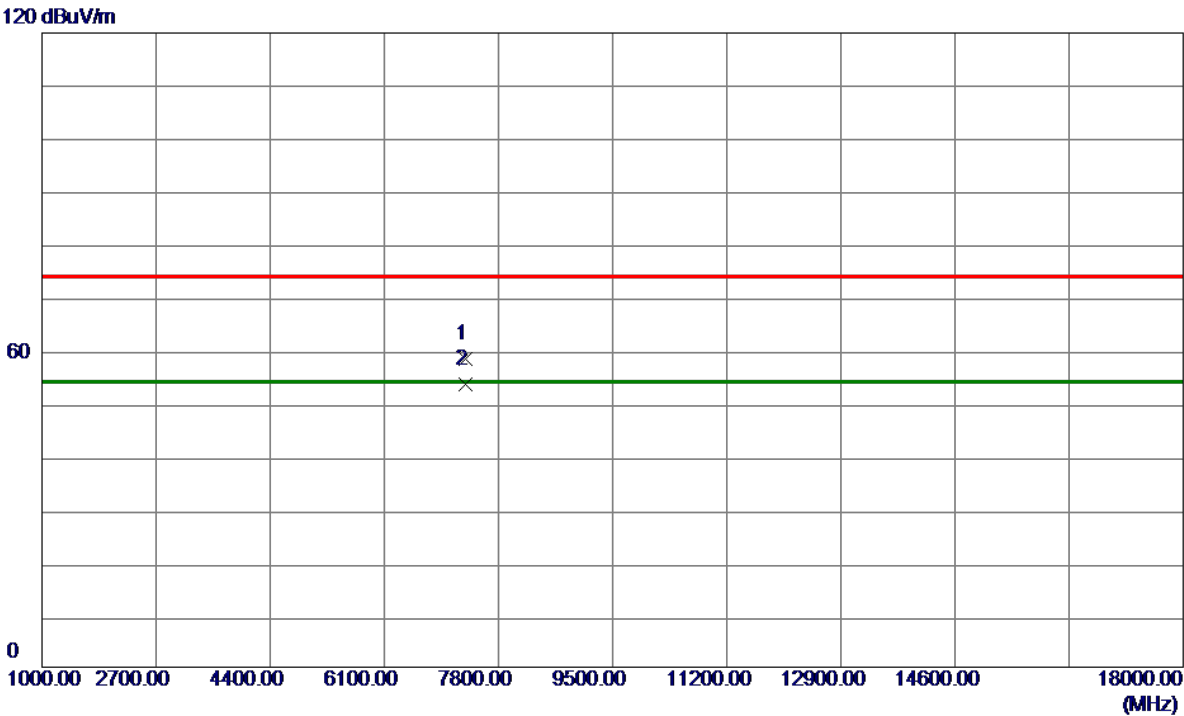


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.0000	51.81	6.41	58.22	74.00	-15.78	Peak	
2 *	7311.0000	47.02	6.41	53.43	54.00	-0.57	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11b	Test Date	2025/9/5
Test Frequency	2462MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

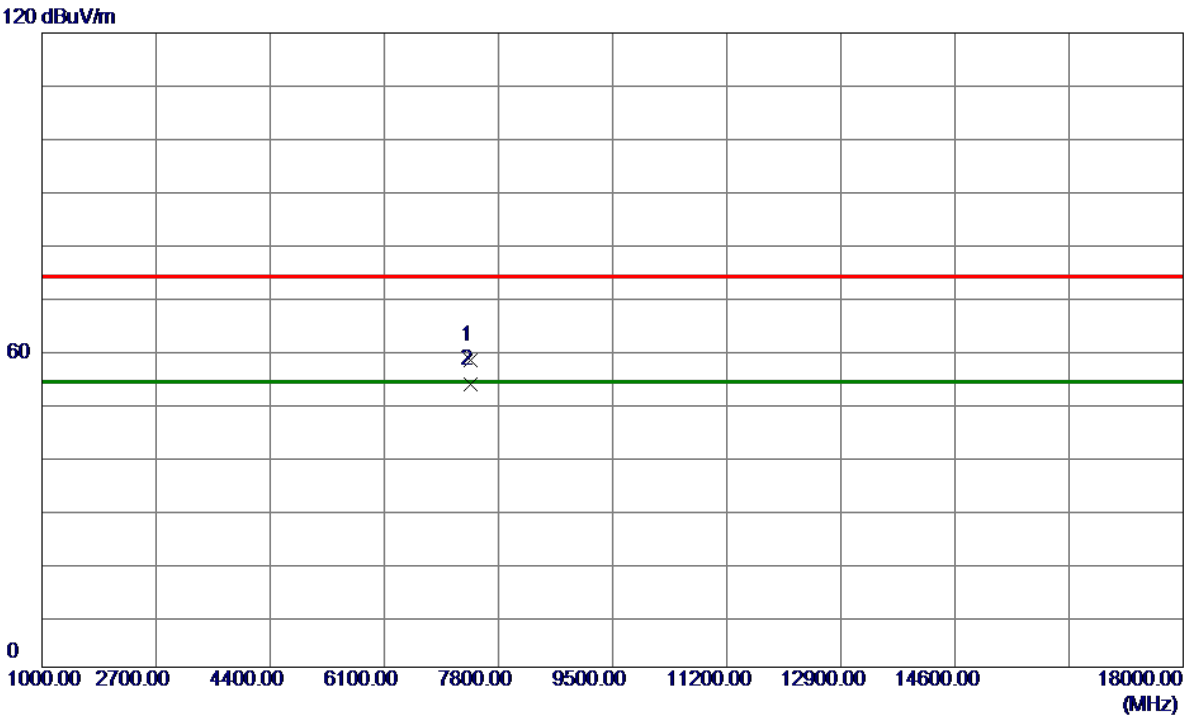


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	51.75	6.42	58.17	74.00	-15.83	Peak	
2 *	7386.0000	47.07	6.42	53.49	54.00	-0.51	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/9/5
Test Frequency	2412MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

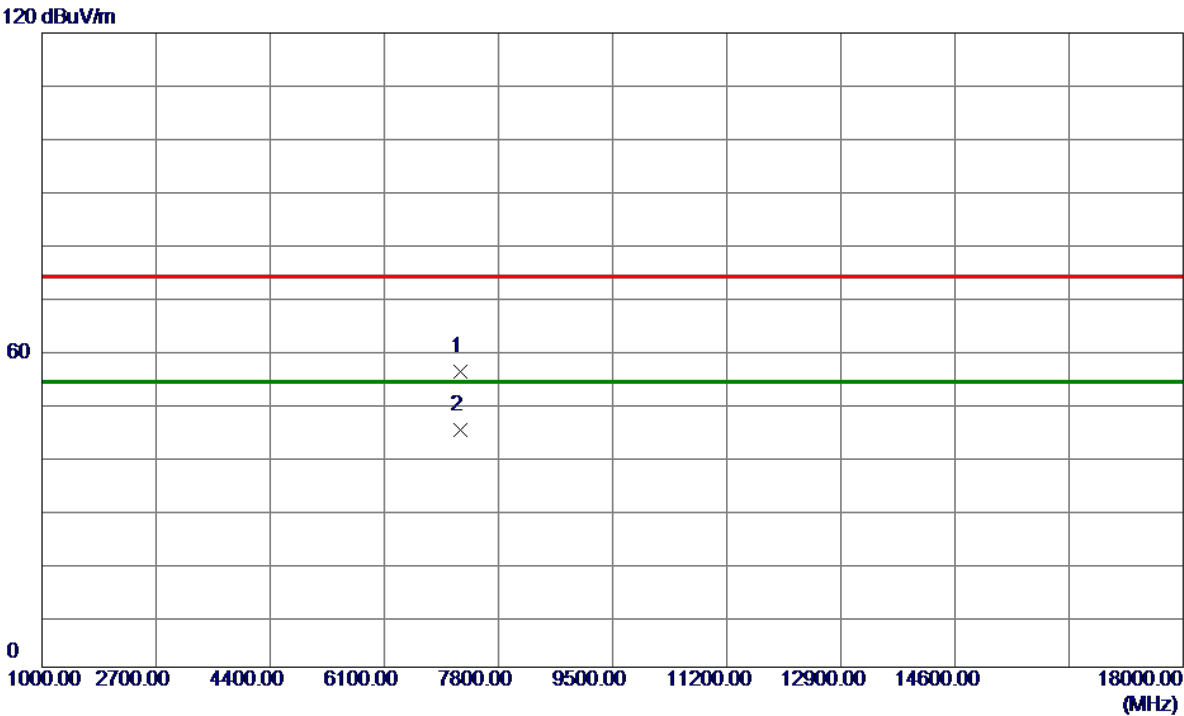


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7236.0000	49.53	6.40	55.93	74.00	-18.07	Peak	
2 *	7236.0000	38.37	6.40	44.77	54.00	-9.23	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/9/5
Test Frequency	2437MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

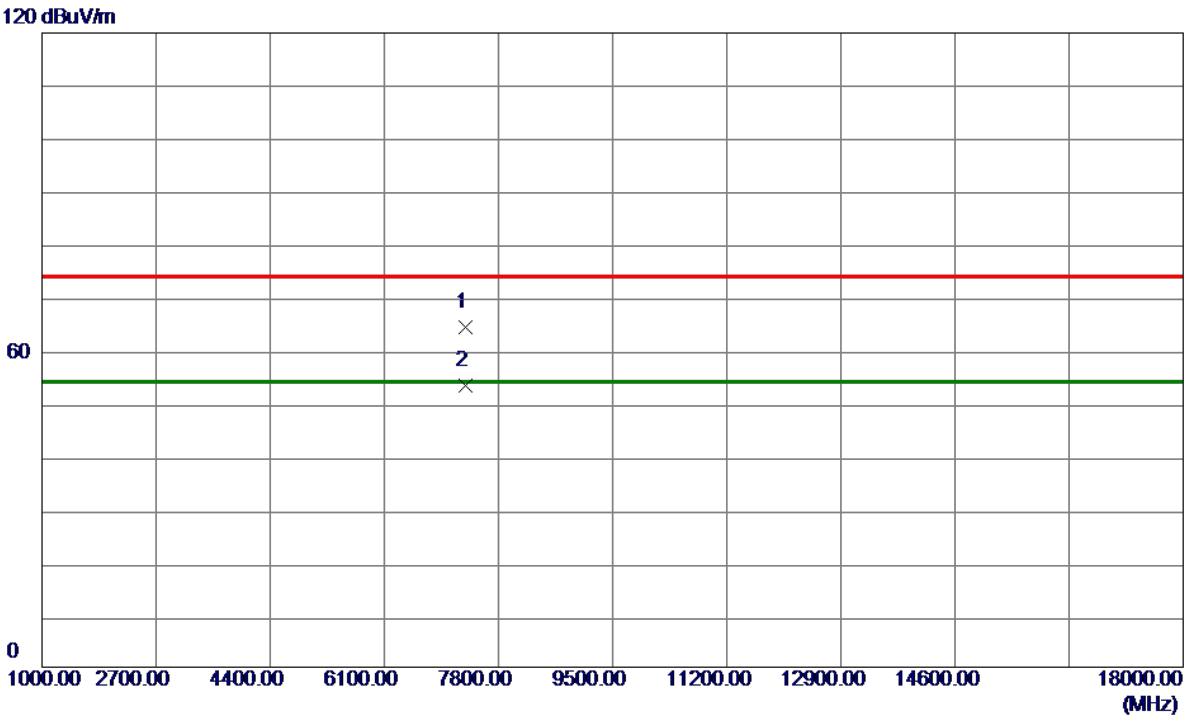


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.0000	57.83	6.41	64.24	74.00	-9.76	Peak	
2 *	7311.0000	46.77	6.41	53.18	54.00	-0.82	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11g	Test Date	2025/9/5
Test Frequency	2462MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

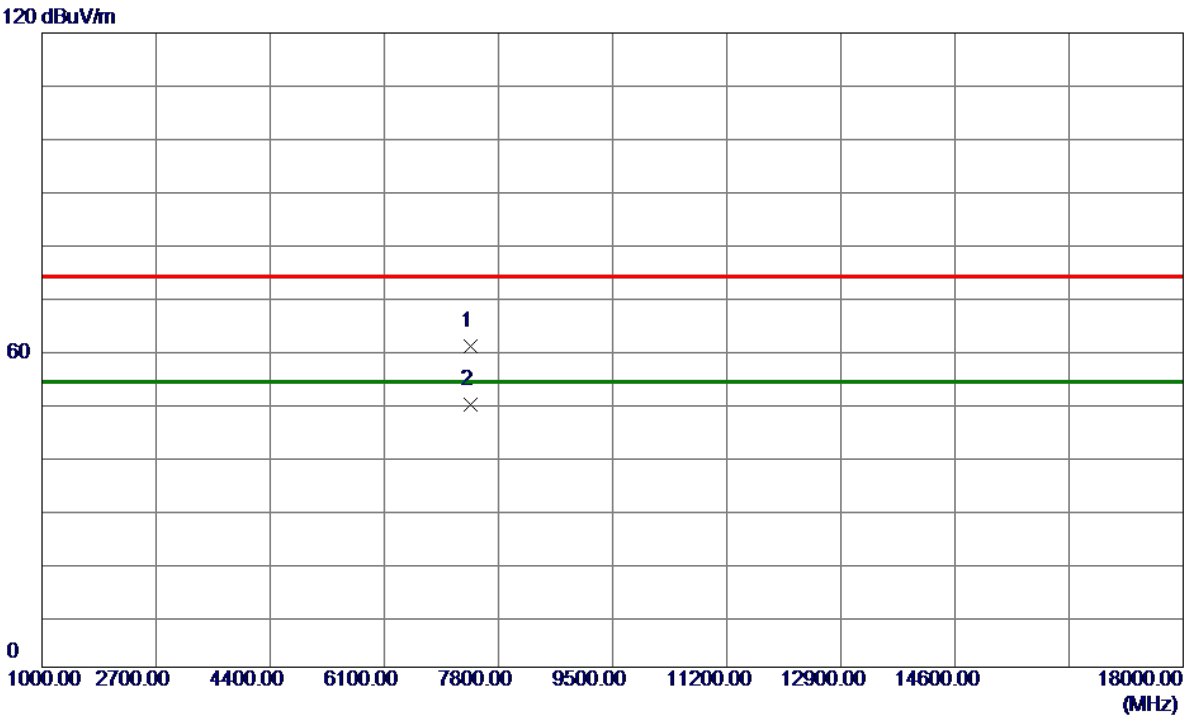


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	54.39	6.42	60.81	74.00	-13.19	Peak	
2 *	7386.0000	43.34	6.42	49.76	54.00	-4.24	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2412MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

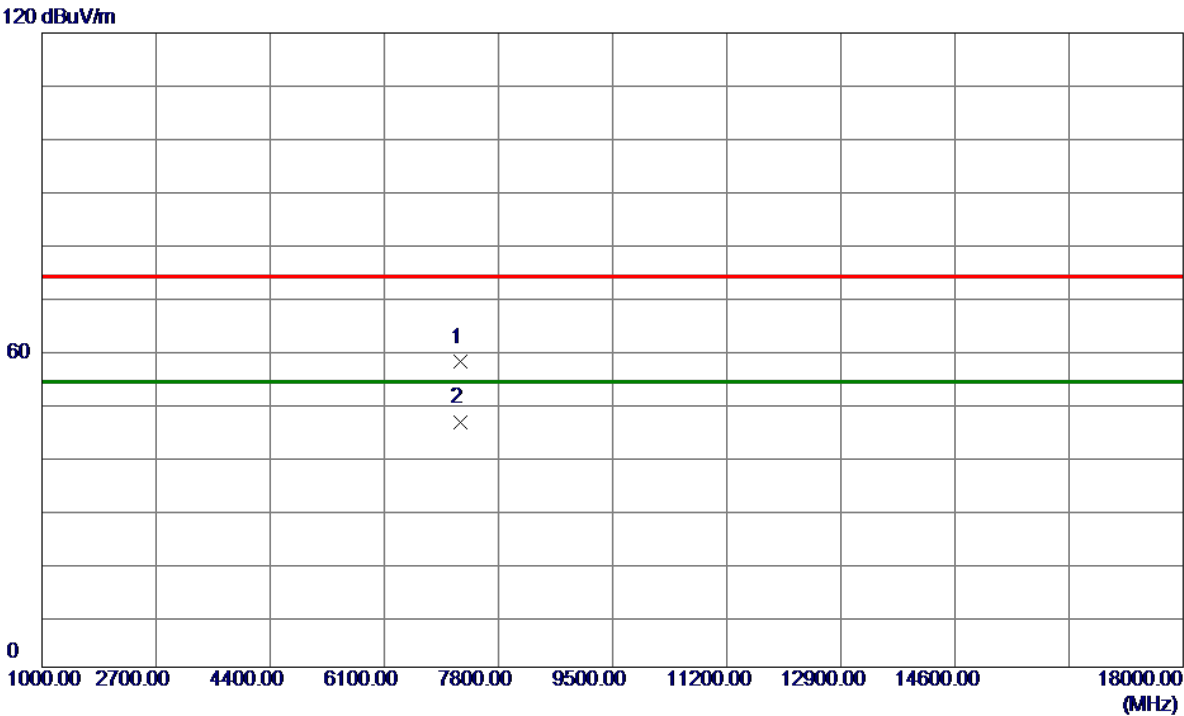


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7236.0000	51.32	6.40	57.72	74.00	-16.28	Peak	
2 *	7236.0000	40.00	6.40	46.40	54.00	-7.60	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2437MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

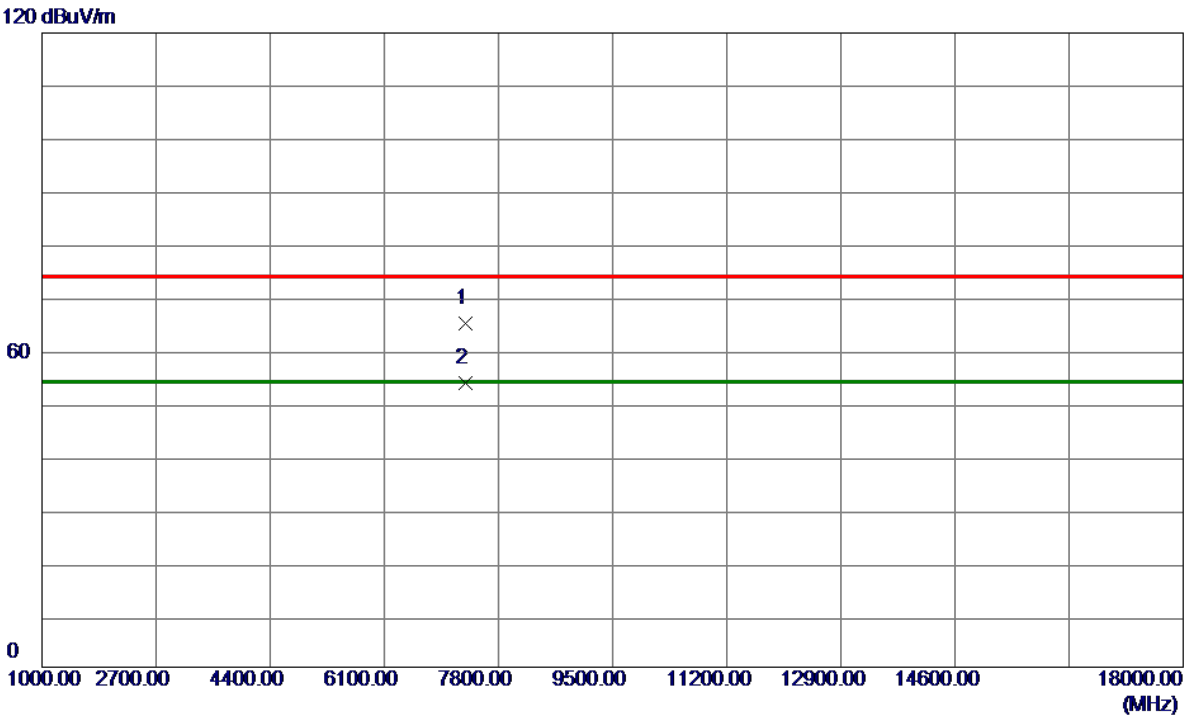


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.0000	58.66	6.41	65.07	74.00	-8.93	Peak	
2 *	7311.0000	47.37	6.41	53.78	54.00	-0.22	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2462MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

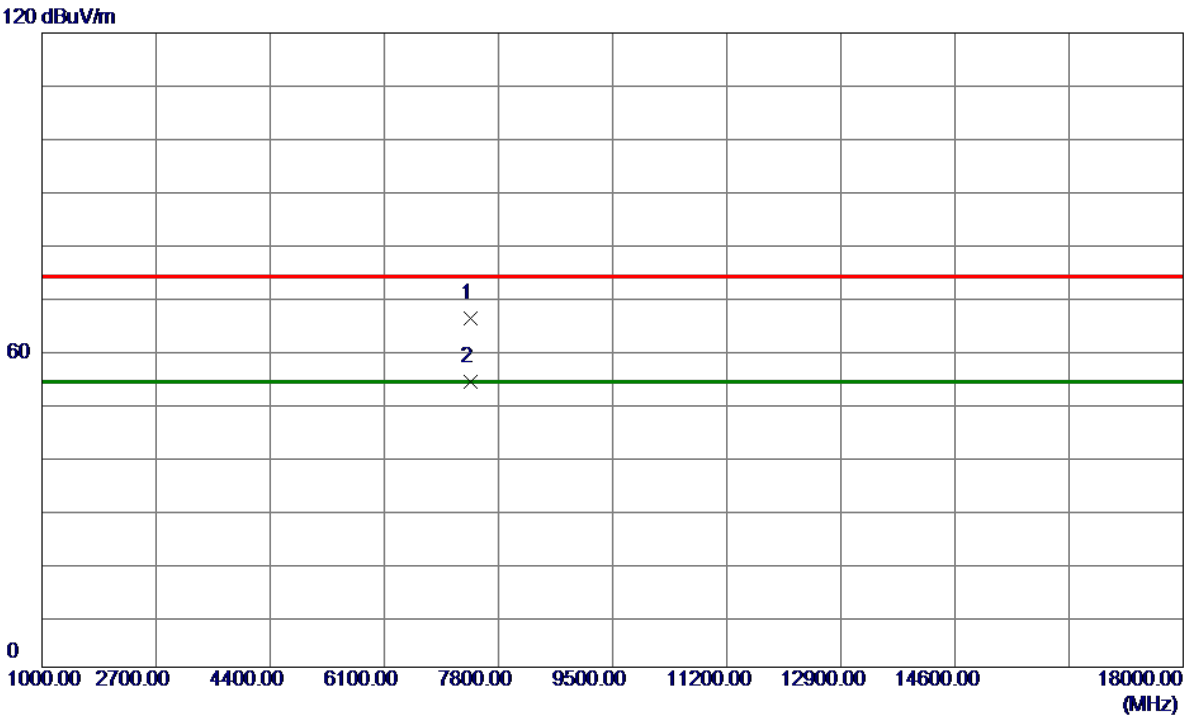


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	59.63	6.42	66.05	74.00	-7.95	Peak	
2 *	7386.0000	47.49	6.42	53.91	54.00	-0.09	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11n (HT20)	Test Date	2025/9/5
Test Frequency	2437MHz	Polarization	Horizontal
Temperature	25°C	Humidity	65%

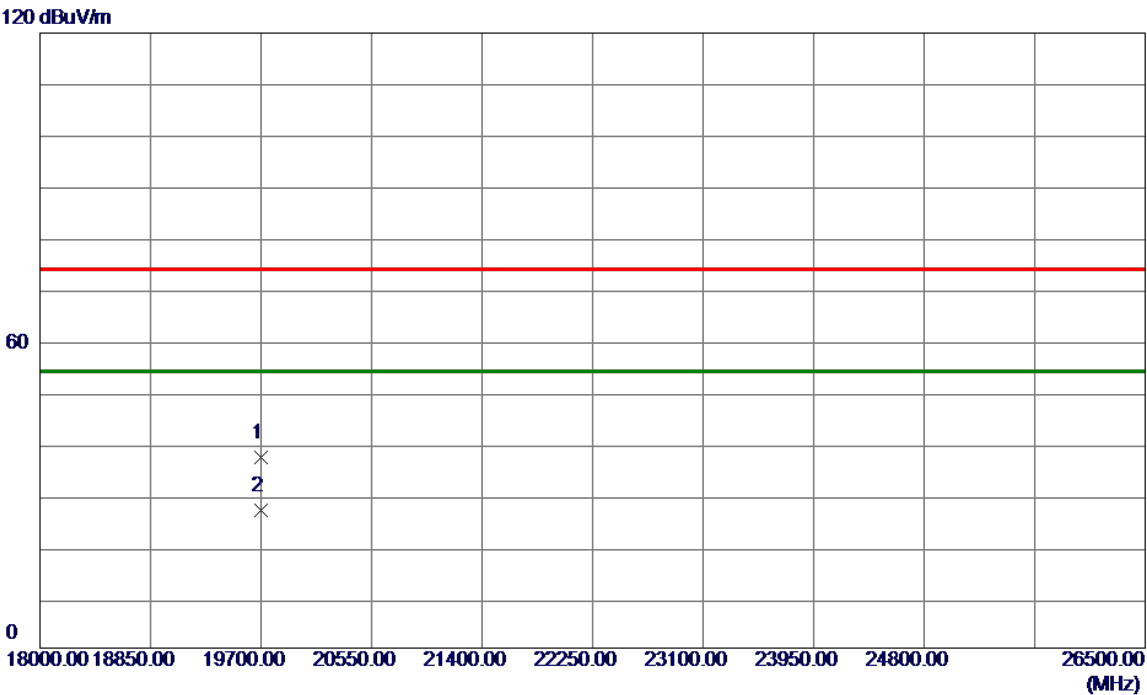

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	19696.0000	47.08	-9.87	37.21	74.00	-36.79	Peak	
2 *	19696.0000	36.75	-9.87	26.88	54.00	-27.12	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	9.130	14.000	0.5	Complies
06	2437	9.609	13.920	0.5	Complies
11	2462	9.590	13.760	0.5	Complies

CH01

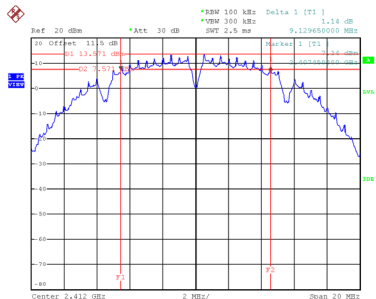


Date: 4.SEP.2025 17:49:41

CH06
6 dB Bandwidth

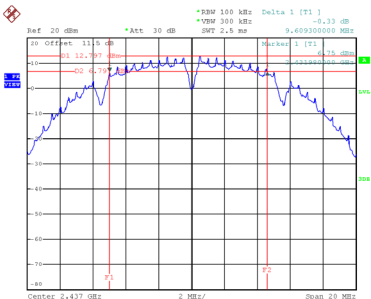


Date: 4.SEP.2025 17:51:25

CH11

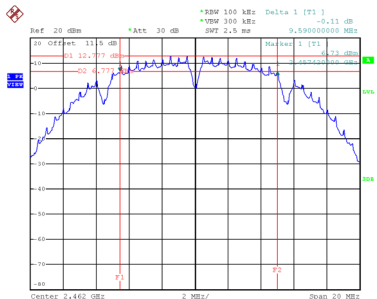


Date: 4.SEP.2025 17:53:09


99 % Occupied Bandwidth

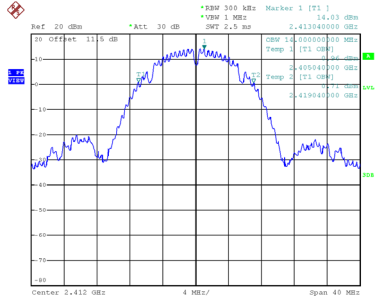

Date: 4.SEP.2025 17:49:49

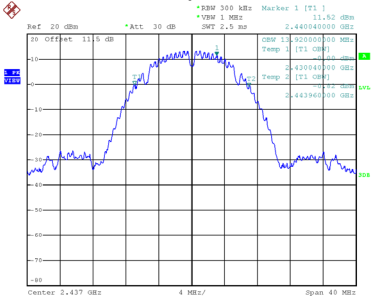

Date: 4.SEP.2025 17:51:33

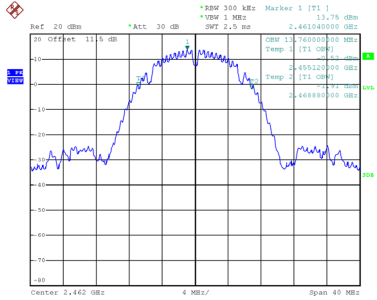


Date: 4.SEP.2025 17:53:18


Test Mode	TX G Mode
-----------	-----------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	16.580	23.280	0.5	Complies
06	2437	16.590	19.360	0.5	Complies
11	2462	16.590	21.120	0.5	Complies


CH01

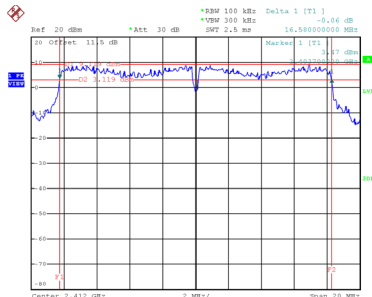




CH06
6 dB Bandwidth

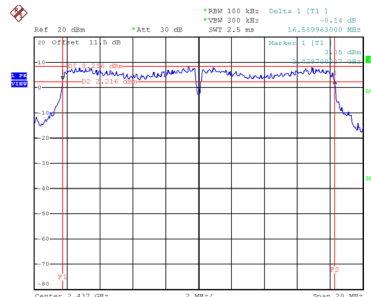

CH11

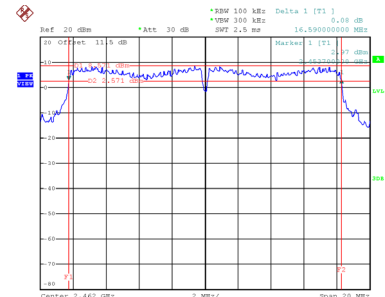


99 % Occupied Bandwidth

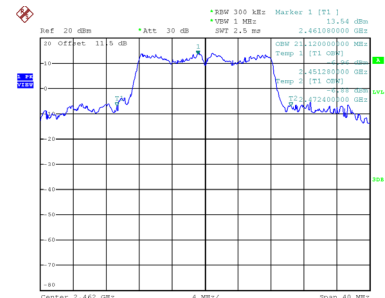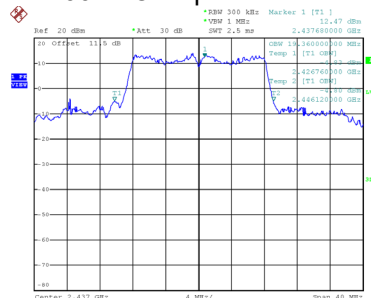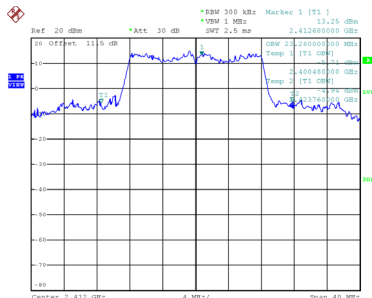

Test Mode	TX N(HT20) Mode
-----------	-----------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	17.740	25.200	0.5	Complies
06	2437	17.720	20.800	0.5	Complies
11	2462	17.770	23.040	0.5	Complies


CH01

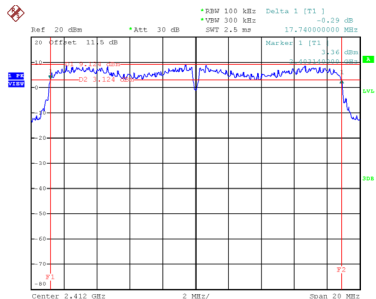

Date: 4.SEP.2025 17:59:36


CH06

6 dB Bandwidth

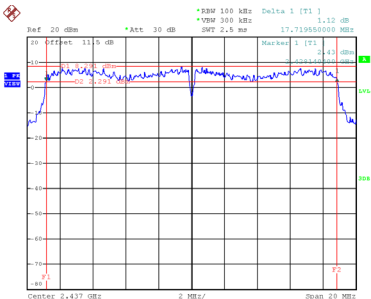


Date: 4.SEP.2025 18:01:16

CH11

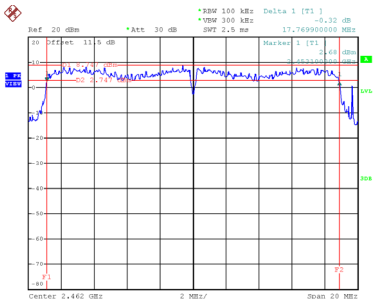


Date: 4.SEP.2025 18:02:40


99 % Occupied Bandwidth

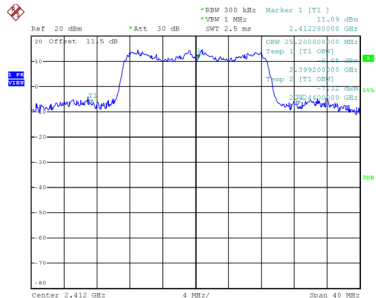

Date: 4.SEP.2025 17:59:44

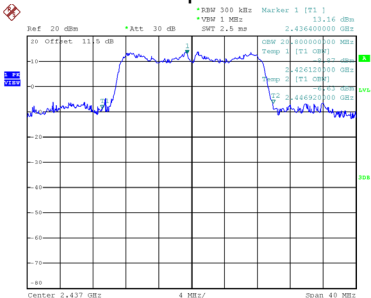

Date: 4.SEP.2025 18:01:25

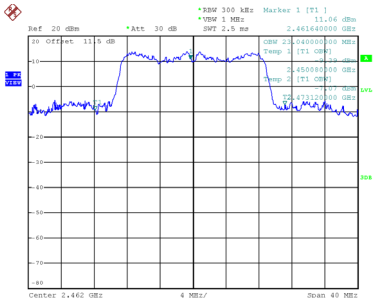

Date: 4.SEP.2025 18:02:49

APPENDIX E - OUTPUT POWER

Test Mode	TX B Mode
Test Date	2025/9/4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	19.78	0.00	19.78	30.00	1.0000	Complies
06	2437	19.66	0.00	19.66	30.00	1.0000	Complies
11	2462	19.93	0.00	19.93	30.00	1.0000	Complies

Test Mode	TX G Mode
Test Date	2025/9/4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	15.45	0.00	15.45	30.00	1.0000	Complies
06	2437	20.62	0.00	20.62	30.00	1.0000	Complies
11	2462	18.98	0.00	18.98	30.00	1.0000	Complies


Test Mode	TX N(HT20) Mode
Test Date	2025/9/4

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.22	0.00	18.22	30.00	1.0000	Complies
06	2437	20.92	0.00	20.92	30.00	1.0000	Complies
11	2462	20.55	0.00	20.55	30.00	1.0000	Complies

APPENDIX F - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode

Bandedge-CH01

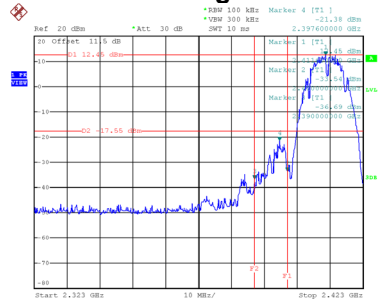


Date: 4.SEP.2025 17:49:59

Bandedge-CH11

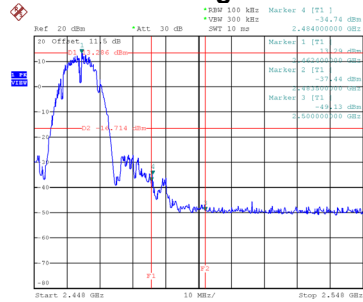


Date: 4.SEP.2025 17:53:27


CH01 – 10th Harmonic of the fundamental frequency

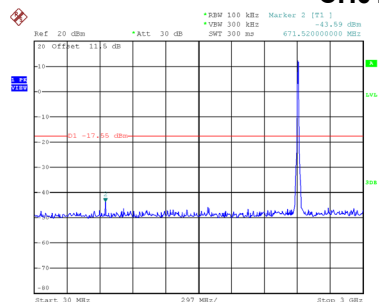

Date: 4.SEP.2025 17:50:14

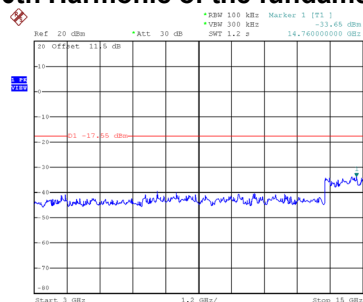


Date: 4.SEP.2025 17:50:23

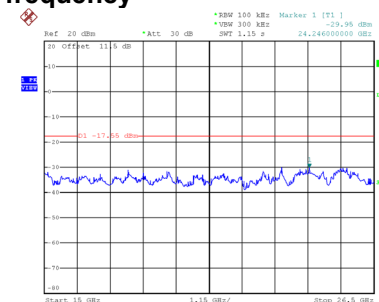


Date: 4.SEP.2025 17:50:32


CH06 – 10th Harmonic of the fundamental frequency

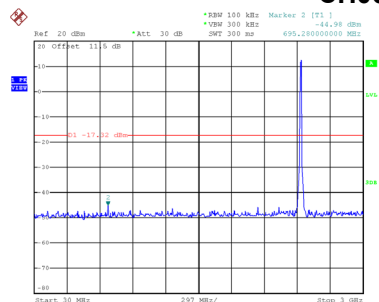

Date: 4.SEP.2025 17:51:58

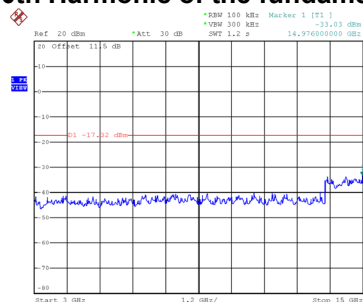


Date: 4.SEP.2025 17:52:07

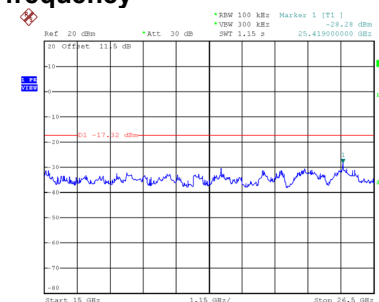


Date: 4.SEP.2025 17:52:16


CH11 – 10th Harmonic of the fundamental frequency

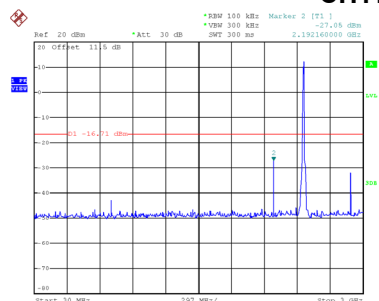

Date: 4.SEP.2025 17:53:42

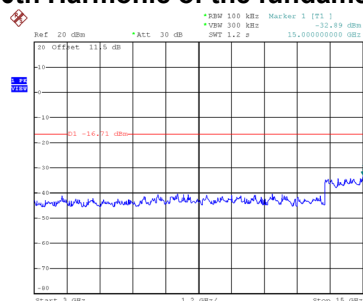


Date: 4.SEP.2025 17:53:51

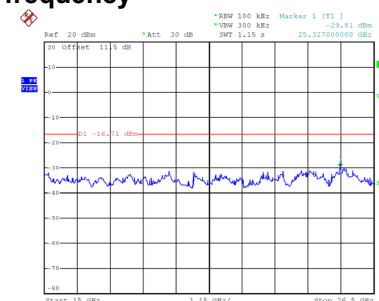

Date: 4.SEP.2025 17:54:00


Test Mode TX G Mode

Bandedge-CH01

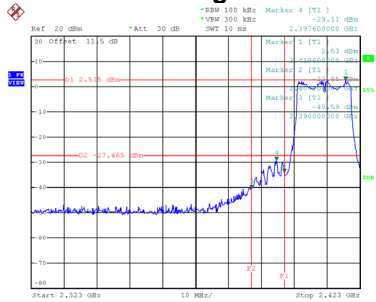


Date: 4.SEP.2025 18:05:58

Bandedge-CH11

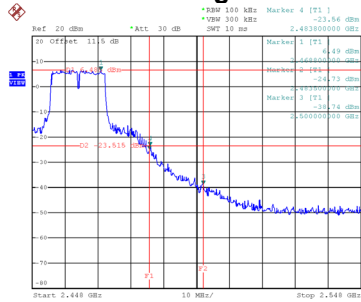


Date: 4.SEP.2025 18:07:02


CH01 – 10th Harmonic of the fundamental frequency

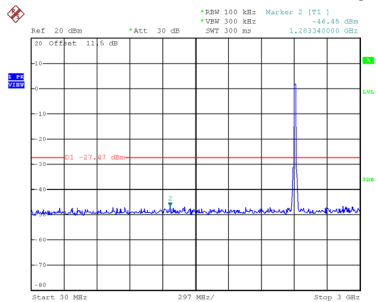

Date: 4.SEP.2025 18:06:13

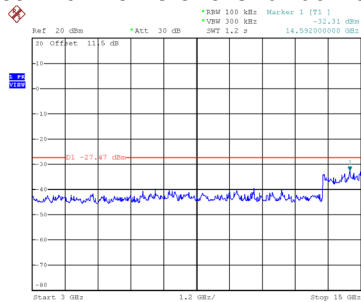


Date: 4.SEP.2025 18:06:22

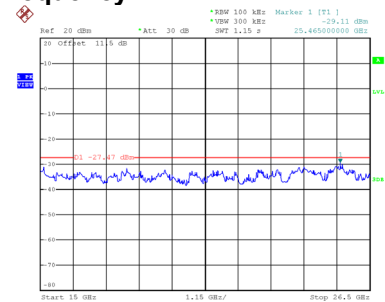


Date: 4.SEP.2025 18:06:31


CH06 – 10th Harmonic of the fundamental frequency

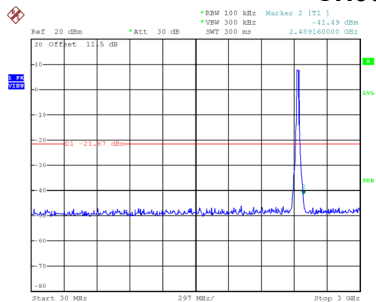

Date: 4.SEP.2025 17:56:47

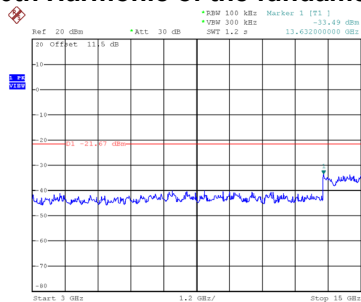


Date: 4.SEP.2025 17:56:56

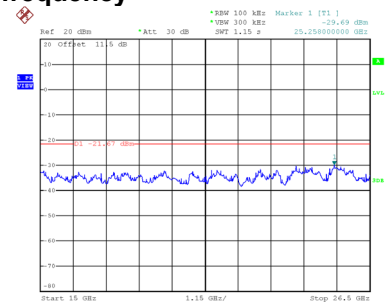


Date: 4.SEP.2025 17:57:05


CH11 – 10th Harmonic of the fundamental frequency

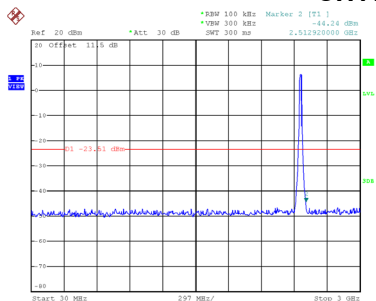

Date: 4.SEP.2025 18:07:17

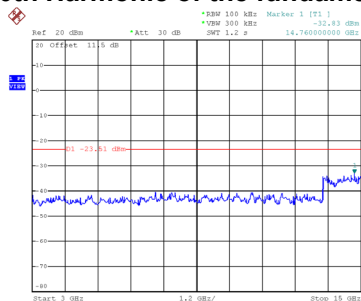


Date: 4.SEP.2025 18:07:26

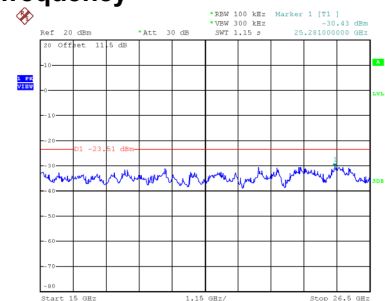

Date: 4.SEP.2025 18:07:35


Test Mode	TX N(HT20) Mode
-----------	-----------------

Bandedge-CH01

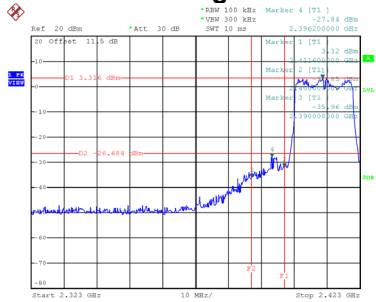


Date: 4.SEP.2025 18:08:29

Bandedge-CH11

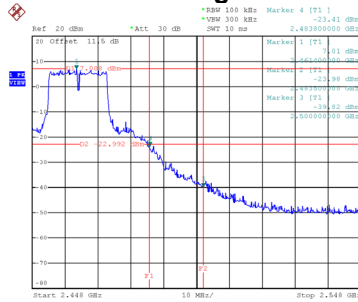


Date: 4.SEP.2025 18:09:21


CH01 – 10th Harmonic of the fundamental frequency

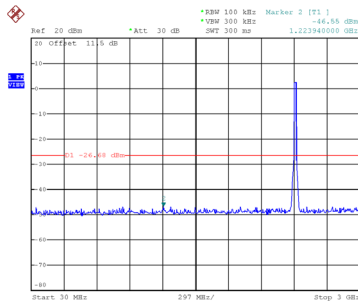

Date: 4.SEP.2025 18:08:44

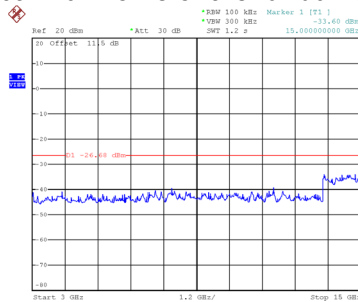


Date: 4.SEP.2025 18:08:53

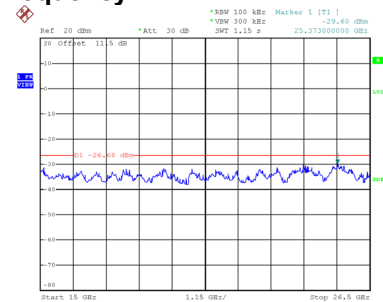


Date: 4.SEP.2025 18:09:02


CH06 – 10th Harmonic of the fundamental frequency

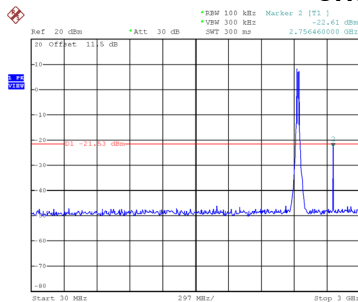

Date: 4.SEP.2025 18:01:49

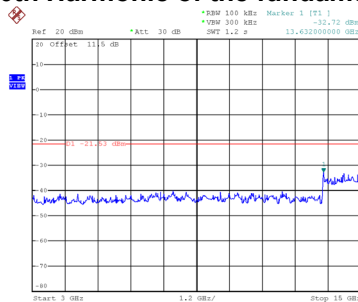


Date: 4.SEP.2025 18:01:58

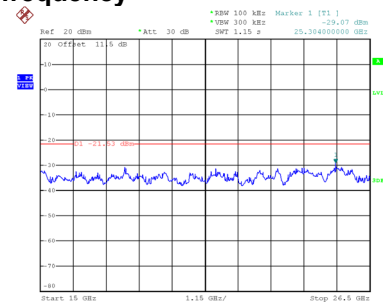


Date: 4.SEP.2025 18:02:07


CH11 – 10th Harmonic of the fundamental frequency

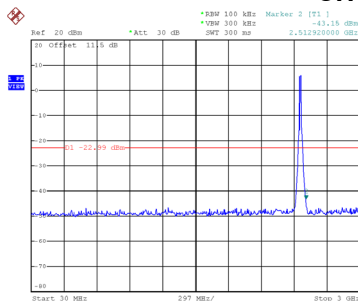

Date: 4.SEP.2025 18:09:36

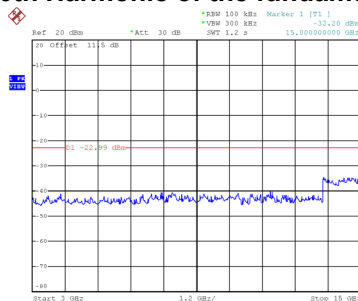

Date: 4.SEP.2025 18:09:45

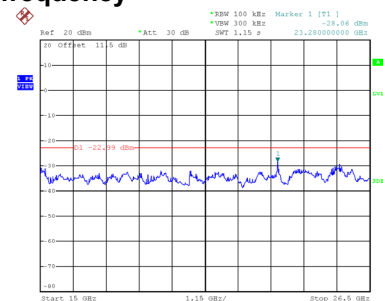


Date: 4.SEP.2025 18:09:55


APPENDIX G - POWER SPECTRAL DENSITY

Test Mode	TX B Mode
-----------	-----------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-3.55	8.00	Complies
06	2437	-4.19	8.00	Complies
11	2462	-3.98	8.00	Complies

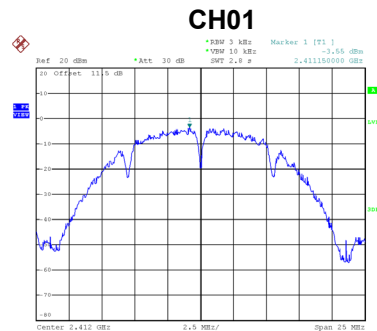

Date: 4.SEP.2025 17:50:43

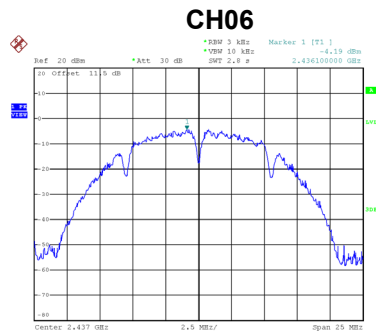


Date: 4.SEP.2025 17:52:26

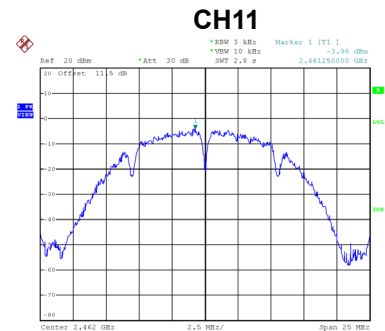


Date: 4.SEP.2025 17:54:11

Test Mode	TX G Mode
-----------	-----------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-5.20	8.00	Complies
06	2437	-6.04	8.00	Complies
11	2462	-6.13	8.00	Complies

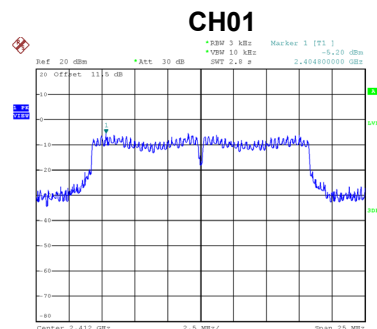

Date: 4.SEP.2025 17:55:43

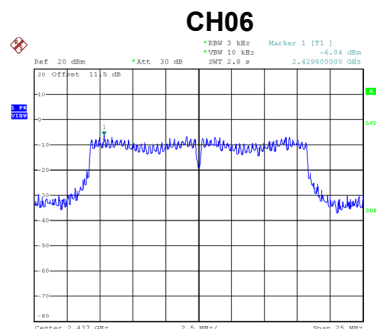


Date: 4.SEP.2025 17:57:16

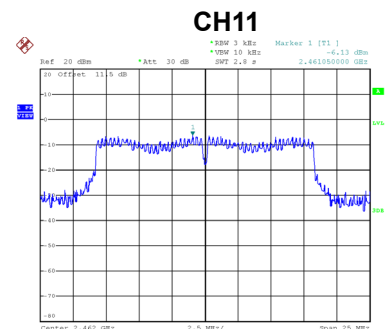


Date: 4.SEP.2025 17:58:46

Test Mode	TX N(HT20) Mode
-----------	-----------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.66	8.00	Complies
06	2437	-5.97	8.00	Complies
11	2462	-5.90	8.00	Complies

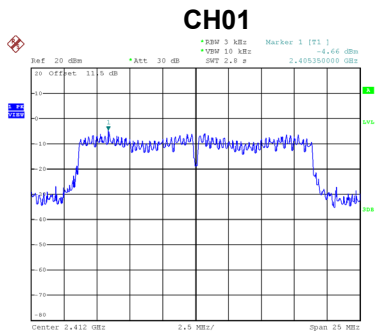

Date: 4.SEP.2025 18:00:38

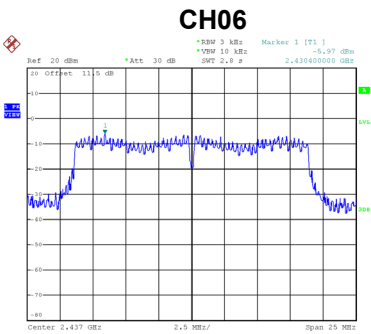

Date: 4.SEP.2025 18:02:18

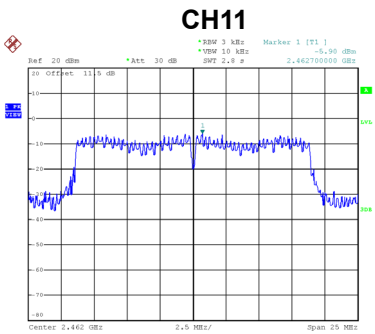

Date: 4.SEP.2025 18:03:42