

FCC Radio Test Report

FCC ID: 2BH7FC710

Report No. : BTL-FCCP-2-2508C414
Equipment : Outdoor Pan/Tilt Security Floodlight Camera
Model Name : Tapo C710, TC54
Brand Name : Tapo
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618

Radio Function : WLAN 2.4GHz

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart C (15.247)
Measurement : ANSI C63.10-2013
Procedure(s)

Date of Receipt : 2025/8/27
Date of Test : 2025/8/27-2025/9/1
Issued Date : 2025/10/20

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by :

Poken Huang

Poken Huang, Engineer

Approved by :

Peter Chen

Peter Chen, Manager



BTL Inc.

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	6
1 . SUMMARY OF TEST RESULTS	7
1.1 TEST FACILITY	8
1.2 MEASUREMENT UNCERTAINTY	8
1.3 TEST ENVIRONMENT CONDITIONS	8
2 . GENERAL INFORMATION	9
2.1 GENERAL DESCRIPTION OF EUT	9
2.2 DESCRIPTION OF TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	11
2.4 DUTY CYCLE	12
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	14
2.6 SUPPORT UNITS	14
3 . AC POWER LINE CONDUCTED EMISSIONS	15
3.1 LIMIT	15
3.2 TEST PROCEDURE	15
3.3 DEVIATION FROM TEST STANDARD	15
3.4 TEST SETUP	16
3.5 EUT OPERATION CONDITIONS	16
3.6 TEST RESULTS	16
4 . RADIATED EMISSIONS	17
4.1 LIMIT	17
4.2 TEST PROCEDURE	18
4.3 DEVIATION FROM TEST STANDARD	19
4.4 TEST SETUP	19
4.5 EUT OPERATION CONDITIONS	21
4.6 TEST RESULTS - 9 KHZ TO 30 MHZ	21
4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	21
4.8 TEST RESULTS - ABOVE 1000 MHZ	21
5 . BANDWIDTH	22
5.1 LIMIT	22
5.2 TEST PROCEDURE	22
5.3 DEVIATION FROM STANDARD	22
5.4 TEST SETUP	22

Table of Contents	Page
5.5 EUT OPERATION CONDITIONS	22
5.6 TEST RESULTS	22
6 . MAXIMUM OUTPUT POWER	23
6.1 LIMIT	23
6.2 TEST PROCEDURE	23
6.3 DEVIATION FROM STANDARD	23
6.4 TEST SETUP	23
6.5 EUT OPERATION CONDITIONS	23
6.6 TEST RESULTS	23
7 . CONDUCTED SPURIOUS EMISSIONS	24
7.1 LIMIT	24
7.2 TEST PROCEDURE	24
7.3 DEVIATION FROM STANDARD	24
7.4 TEST SETUP	24
7.5 EUT OPERATION CONDITIONS	24
7.6 TEST RESULTS	24
8 . POWER SPECTRAL DENSITY	25
8.1 LIMIT	25
8.2 TEST PROCEDURE	25
8.3 DEVIATION FROM STANDARD	25
8.4 TEST SETUP	25
8.5 EUT OPERATION CONDITIONS	25
8.6 TEST RESULTS	25
9 . MEASUREMENT INSTRUMENTS LIST	26
10 . EUT TEST PHOTO	28
11 . EUT PHOTOS	28
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	29
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	34
APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ	39
APPENDIX E - BANDWIDTH	82
APPENDIX F - MAXIMUM OUTPUT POWER	87
APPENDIX G - CONDUCTED SPURIOUS EMISSIONS	90

Table of Contents**Page****APPENDIX H - POWER SPECTRAL DENSITY****95**

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2508C414	R00	Original Report.	2025/10/10	Invalid
BTL-FCCP-2-2508C414	R01	This report revised the description in section 2.2 Note (5). It is a revision of the report BTL-FCCP-2-2508C414 R00. This is a newly released report. replacing the BTL-FCCP-2-2508C414 R00 report.	2025/10/20	Valid

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.247(d) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.247(a)(2)	Bandwidth	APPENDIX E	PASS	-----
15.247(b)(3)	Maximum Output Power	APPENDIX F	PASS	-----
15.247(d)	Conducted Spurious Emissions	APPENDIX G	PASS	-----
15.247(e)	Power Spectral Density	APPENDIX H	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No. 64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (FCC DN: TW0659)

☒ C01 ☒ CB20

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (FCC DN: TW0659)

☒ SR06

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor (k=2))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range (GHz)	U (dB)
CB20 (3m)	0.03~0.2	4.01
	0.02~1	4.64
	1 ~ 6	5.91
	6 ~ 18	6.24
	18 ~ 26	3.93
	26 ~ 40	4.06

C. Other Measurement:

Test Item	U
Occupied Bandwidth	86 %
Output power	0.8412 dB
Power Spectral Density	0.8602 dB
Conducted Spurious emissions	1.8304 dB
Conducted Band edges	1.8338 dB

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Environment Condition	Test Voltage	Tested By
AC Power Line Conducted Emissions	25°C, 45%	AC 120V/60Hz	Ken Lu
Radiated Emissions-30 MHz to 1000 MHz	25°C, 65%	AC 120V/60Hz	Benny Cao
Radiated Emissions-Above 1000 MHz	25°C, 65%	AC 120V/60Hz	Benny Cao
Bandwidth	25°C, 50%	AC 120V/60Hz	Cheng Tsai
Maximum Output Power	25°C, 50%	AC 120V/60Hz	Cheng Tsai
Conducted Spurious Emission	25°C, 50%	AC 120V/60Hz	Cheng Tsai
Power Spectral Density	25°C, 50%	AC 120V/60Hz	Cheng Tsai

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	Outdoor Pan/Tilt Security Floodlight Camera	
Brand Name	Tapo	
Model Name	Tapo C710, TC54	
Test Model	Tapo C710	
Model Difference(s)	Only differ in model name.	
Power Source	AC Mains.	
Power Rating	100-240V 50-60Hz 0.16A	
Operation Frequency Band	2400 MHz ~ 2483.5 MHz	
Operation Frequency	2412 MHz ~ 2462 MHz	
Modulation Type	IEEE 802.11b: DSSS IEEE 802.11g: OFDM IEEE 802.11n: OFDM IEEE 802.11ax: OFDMA	
Bit Rate of Transmitter	IEEE 802.11b: 11/5.5/2/1 Mbps IEEE 802.11g: 54/48/36/24/18/12/9/6 Mbps IEEE 802.11n: up to 72.2 Mbps IEEE 802.11ax: up to 143.4 Mbps	
Max. Output Power	Ant.1	IEEE 802.11g: 18.97 dBm (0.0789 W)
	Ant.2	IEEE 802.11g: 18.97 dBm (0.0789 W)

Note:

- The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

CH01 - CH11 for IEEE 802.11b, IEEE 802.11g, IEEE 802.11n(HT20), IEEE 802.11ax(HE20)							
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
01	2412	04	2427	07	2442	10	2457
02	2417	05	2432	08	2447	11	2462
03	2422	06	2437	09	2452		

3. Table for Filed Antenna:

Ant.	Manufacturer	P/N	Antenna Type	Connector	Gain (dBi)
1	TP-Link Systems Inc.	Tapo C710+ANT1	Dipole	N/A	2.35
2	TP-Link Systems Inc.	6035500079	PIFA	N/A	1.90

Note:

- Smart antenna system with two transmit/receive chains, but operating in a mode where only one transmit/receive chain is used.
- The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

2.2 DESCRIPTION OF TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	IEEE 802.11g	01	-
Transmitter Radiated Emissions (above 1GHz)	IEEE 802.11b	01/11	Bandedge
	IEEE 802.11g		
	IEEE 802.11n(HT20)		
	IEEE 802.11ax(HE20)		
	IEEE 802.11b	01/06/11	Harmonic
	IEEE 802.11g		
	IEEE 802.11n(HT20)		
	IEEE 802.11ax(HE20)		
Transmitter Radiated Emissions (above 18GHz)	IEEE 802.11g	01	-
Bandwidth & Output Power & Power Spectral Density & Conducted Spurious Emission	IEEE 802.11b	01/06/11	-
	IEEE 802.11g		
	IEEE 802.11n(HT20)		
	IEEE 802.11ax(HE20)		

NOTE:

- (1) All the bit rate of transmitter have been tested and found the lowest rate is found to be the worst case and recorded.
- (2) For AC power line conducted emissions and radiated emission below 1 GHz test, the IEEE 802.11g Mode Channel 01 is found to be the worst case and recorded.
- (3) For radiated emission Harmonic 18-26.5GHz test, only tested the worst case and recorded.
- (4) For radiated emission above 1GHz test, both Vertical and Horizontal are evaluated, only the worst polarization is recorded.
- (5) Both Ant.1 and Ant.2 were tested the Output Power, AC power line conducted emissions and radiated emissions and recorded, Ant.1 was found to be the worst case. So, Bandwidth, Conducted Spurious Emission and Power Spectral Density only tested Ant.1 and recorded.

2.3 PARAMETERS OF TEST SOFTWARE


Ant. 1			
Test Software Version	AltobeamWLANFacility_V1.0.55		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	18.25	21.25	20.75
IEEE 802.11g	21	20.75	20.75
IEEE 802.11n(HT20)	20.25	20.75	20.5
IEEE 802.11ax(HE20)	20	20.75	20.25

Ant. 2			
Test Software Version	AltobeamWLANFacility_V1.0.55		
Frequency (MHz)	2412	2437	2462
IEEE 802.11b	21	21.25	20
IEEE 802.11g	21	20.75	19.5
IEEE 802.11n(HT20)	21	20.75	19.5
IEEE 802.11ax(HE20)	20.5	20.75	19.5

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11b

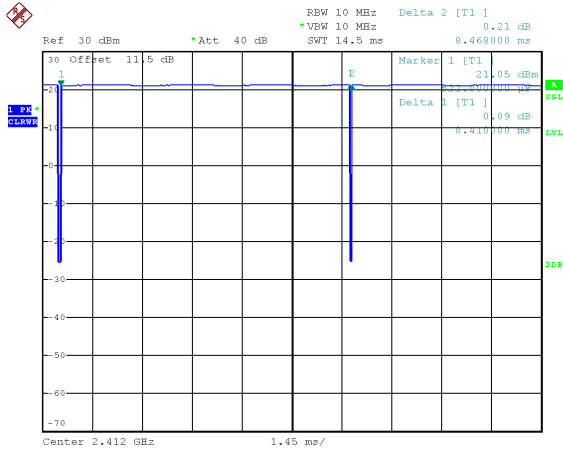

Date: 27.AUG.2025 22:21:30

Duty cycle = $8.410 \text{ ms} / 8.468 \text{ ms} = 99.32\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11g

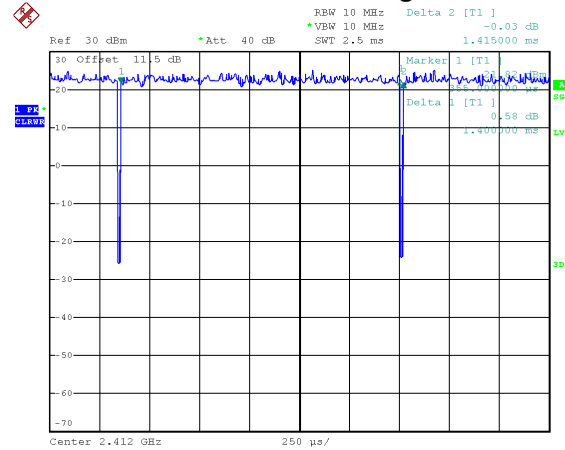

Date: 27.AUG.2025 22:22:34

Duty cycle = $1.400 \text{ ms} / 1.415 \text{ ms} = 98.94\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$


IEEE 802.11n(HT20)

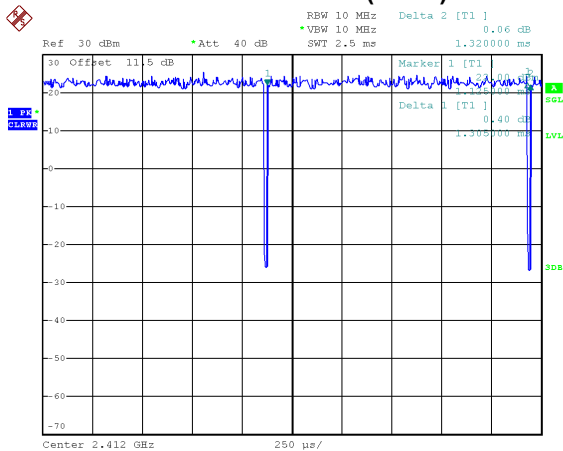

Date: 27.AUG.2025 22:22:05

Duty cycle = $1.305 \text{ ms} / 1.320 \text{ ms} = 98.86\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

IEEE 802.11ax(HE20)

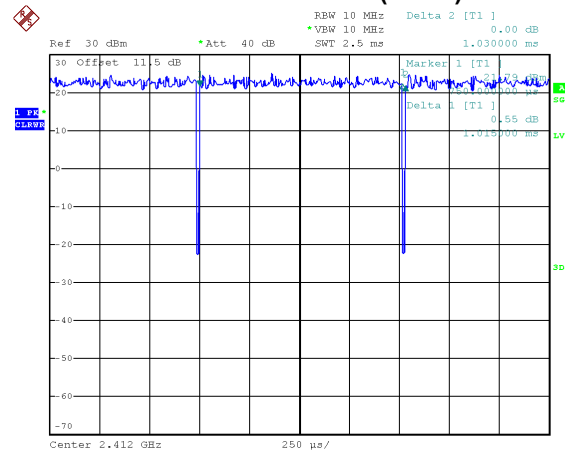

Date: 27.AUG.2025 22:21:52

Duty cycle = $1.015 \text{ ms} / 1.030 \text{ ms} = 98.54\%$
 Duty Factor = $10 \log(1/\text{Duty cycle}) = 0.00$

NOTE:

For IEEE 802.11b:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11g:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11n(HT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11n(HT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz.


For IEEE 802.11ax(HE20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1 kHz.

For IEEE 802.11ax(HE40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2 kHz.

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

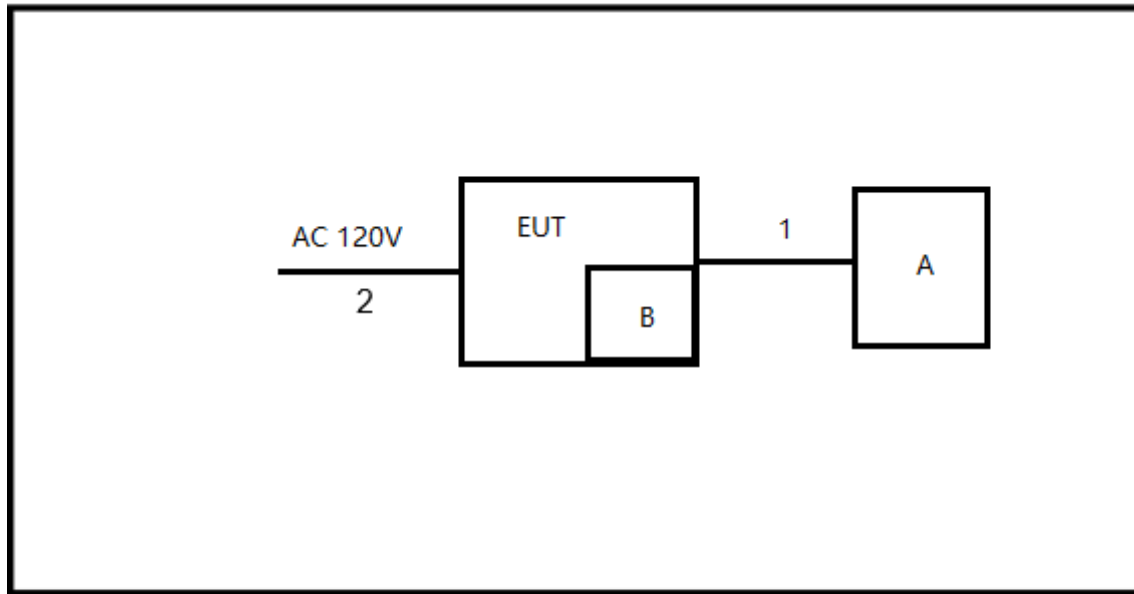

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Notebook	Lenovo	ThinkBook 14 G4 IAP	MP28KHAH	Furnished by test lab
B	SD Card	SanDisk	32GB	N/A	Furnished by test lab

Item	Cable Type	Shielded	Ferrite Core	Length	Remarks
1	Test Fixture Cable	NO	NO	1m	Furnished by test lab
2	AC Cable	NO	NO	1m	Furnished by test requester

3. AC POWER LINE CONDUCTED EMISSIONS

3.1 LIMIT

Frequency of Emission (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.


The following table is the setting of the receiver:

Receiver Parameters	Setting
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

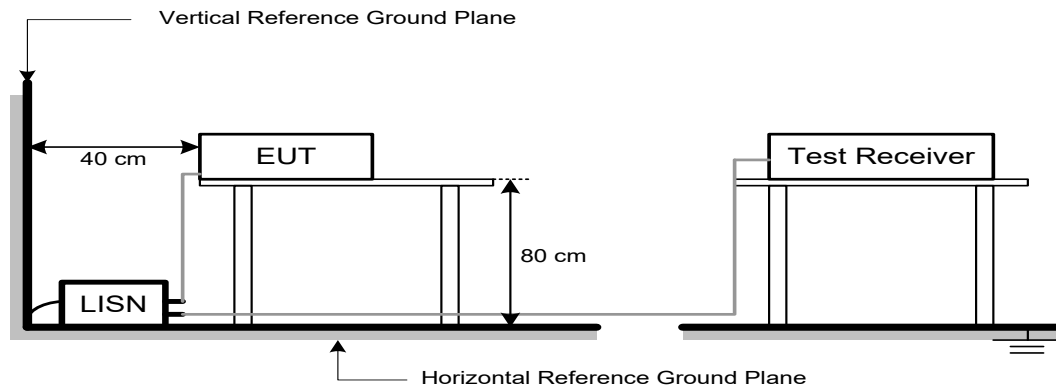

3.5 EUT OPERATION CONDITIONS

EUT was programmed to be in continuously transmitting mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT (9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000 MHz)

Frequency (MHz)	Band edge/ Harmonic at 3m (dBμV/m)		Harmonic at 1m (dBμV/m)	
	Peak	Average	Peak	Average
Above 1000	74	54	83.5 (Note 5)	63.5 (Note 5)

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).
- (4) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBuV)		Correct Factor (dB/m)		Measurement Value (dBuV/m)
19.11	+	2.11	=	21.22

Measurement Value (dBuV/m)		Limit Value (dBuV/m)		Margin Level (dB)
21.22	-	54	=	-32.78

(5)

$$FS_{\text{limit}} = FS_{\text{max}} - 20 \log \left(\frac{d_{\text{limit}}}{d_{\text{measure}}} \right)$$

$20 \log (d_{\text{limit}}/d_{\text{measure}}) = 20 \log (3/1) = 9.5 \text{ dB}$.

FS_{limit} : Harmonic at 3m Peak and Average limit.

FS_{max} : Harmonic at 1m Peak and Average Maximum value.

d_{limit} : Harmonic at 3m test distance.

d_{measure} : Harmonic Actual test distance.

4.2 TEST PROCEDURE

- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- The measuring distance of 3 m or 1m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- For the actual test configuration, please refer to the related Item -EUT Test Photos.

The following table is the setting of the receiver:

Spectrum Parameters	Setting
Start ~ Stop Frequency	9 kHz~150 kHz for RBW 200 Hz
Start ~ Stop Frequency	0.15 MHz~30 MHz for RBW 9 kHz
Start ~ Stop Frequency	30 MHz~1000 MHz for RBW 100 kHz

Spectrum Parameters	Setting
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1 MHz / 3 MHz for PK value 1 MHz / 1/T Hz for AVG value


Receiver Parameters	Setting
Start ~ Stop Frequency	9 kHz~90 kHz for PK/AVG detector
Start ~ Stop Frequency	90 kHz~110 kHz for QP detector
Start ~ Stop Frequency	110 kHz~490 kHz for PK/AVG detector
Start ~ Stop Frequency	490 kHz~30 MHz for QP detector
Start ~ Stop Frequency	30 MHz~1000 MHz for QP detector
Start ~ Stop Frequency	1 GHz~26.5 GHz for PK/AVG detector

4.3 DEVIATION FROM TEST STANDARD


No deviation.

4.4 TEST SETUP

9 kHz to 30 MHz

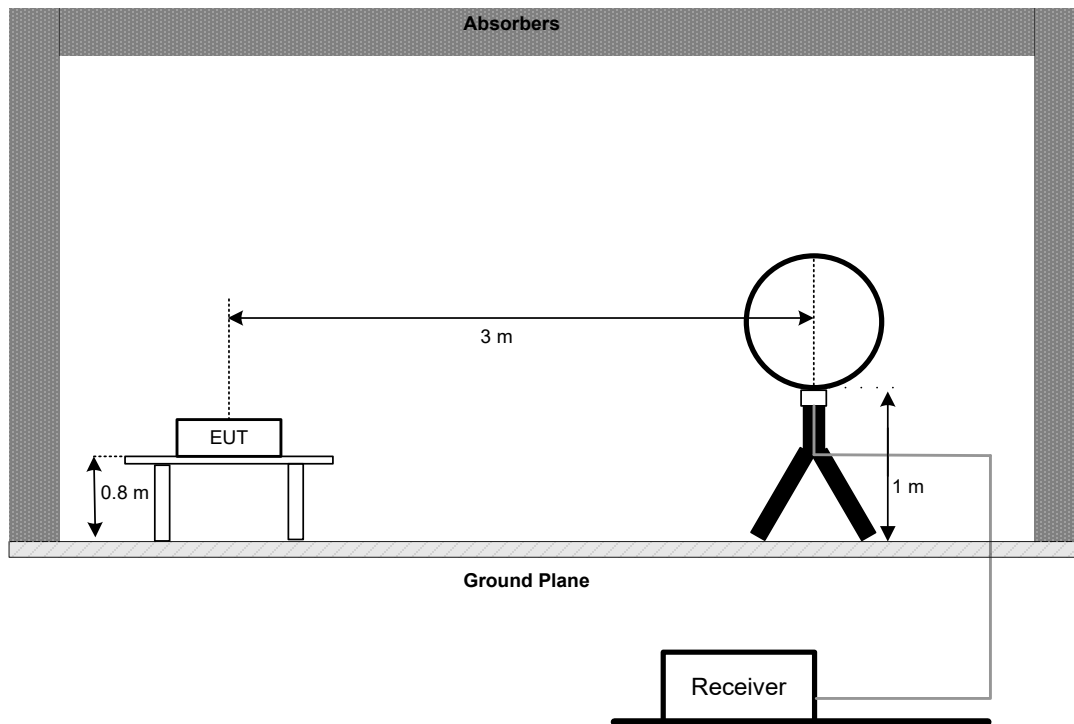


30 MHz to 1 GHz

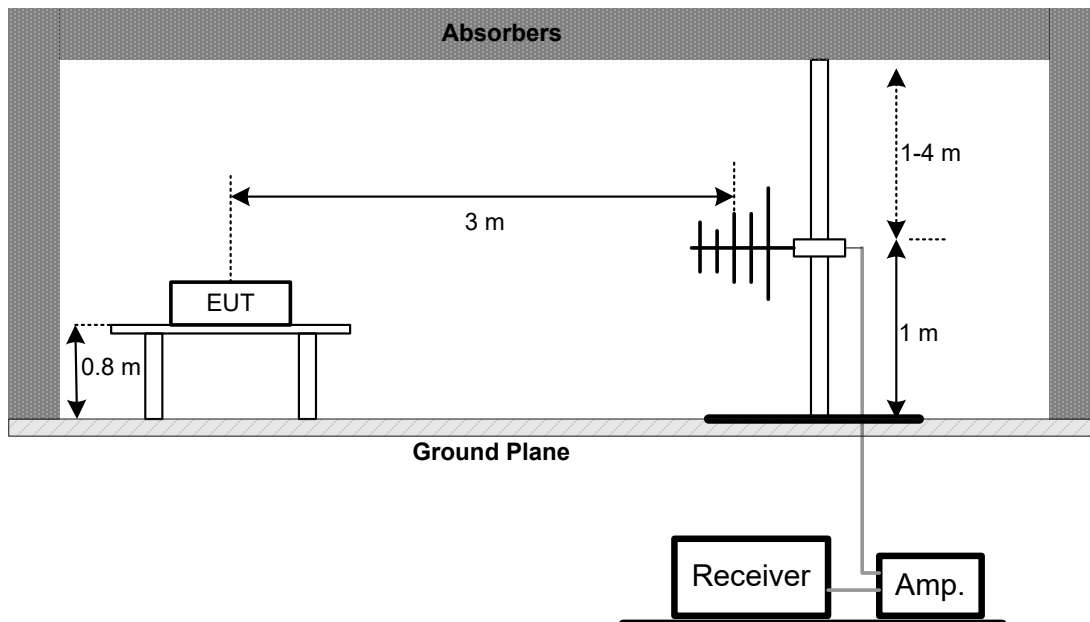


Harmonic(1 GHz to 18 GHz)

Above 1 GHz Band edge & Harmonic(1 GHz to 18 GHz)

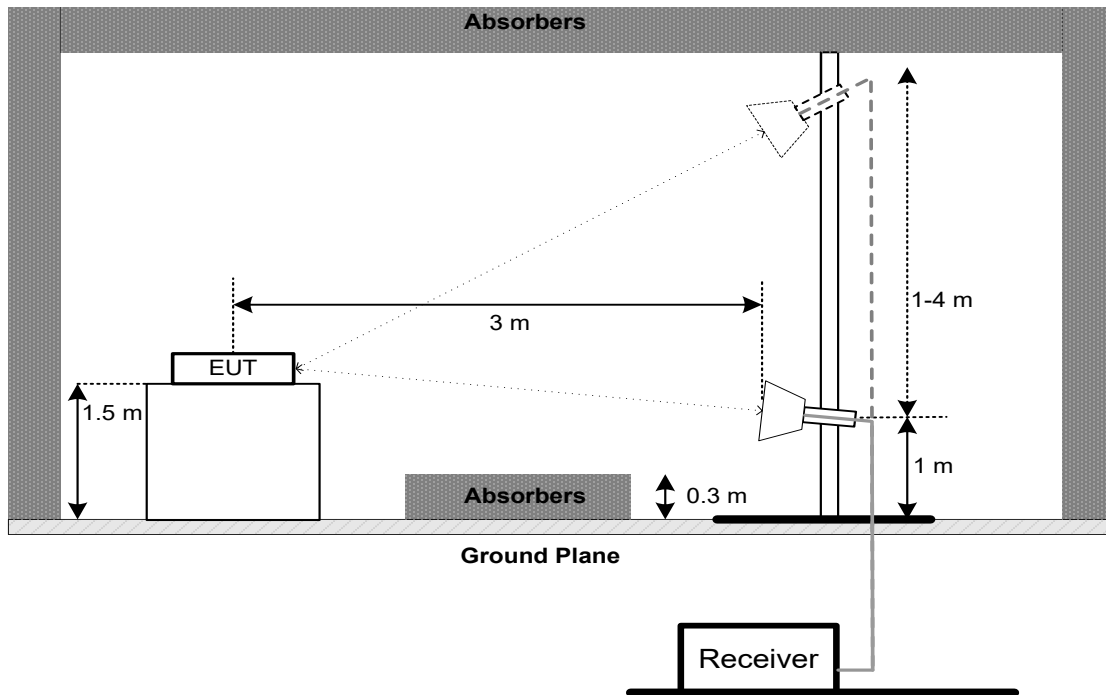

Harmonic(18 GHz to 26.5 GHz)

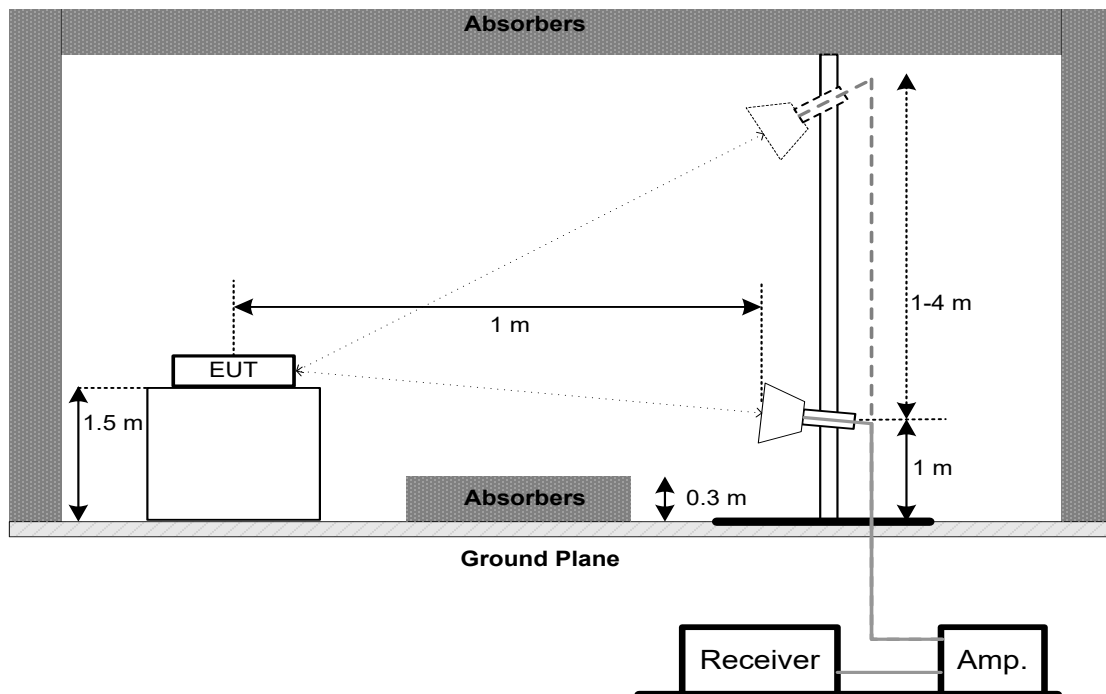

4.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULTS - 9 KHZ TO 30 MHZ

Please refer to the APPENDIX B.

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHZ

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH

5.1 LIMIT

Section	Test Item	Limit
FCC 15.247(a)(2)	6 dB Bandwidth	Minimum 500 kHz
	99% Emission Bandwidth	-

5.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

For 6 dB Bandwidth:

Spectrum Parameters	Setting
Span Frequency	> Measurement Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For 99% Emission Bandwidth:

Spectrum Parameters	Setting
Span Frequency	Between 1.5 times and 5.0 times the OBW
RBW	300 kHz For 20MHz 1 MHz For 40MHz
VBW	1 MHz For 20MHz 3 MHz For 40MHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM STANDARD

No deviation.

5.4 TEST SETUP



5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER

6.1 LIMIT

Section	Test Item	Limit
FCC 15.247(b)(3)	Maximum Output Power	1.0000 Watt or 30.00 dBm


6.2 TEST PROCEDURE

- The EUT was directly connected to the peak power analyzer and antenna output port as show in the block diagram below.
- The maximum conducted output power was performed in accordance with method 11.9.2.3.1 (for AVG power) of ANSI C63.10-2013.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

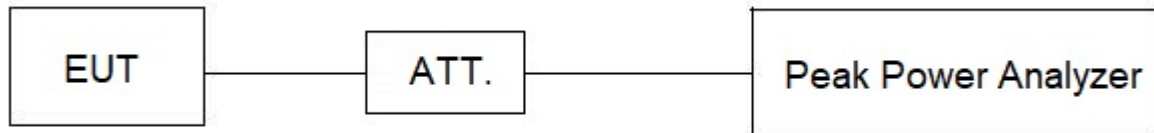

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. CONDUCTED SPURIOUS EMISSIONS

7.1 LIMIT

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak Output Power limits. If the transmitter complies with the Output Power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in Section 15.209(a) is not required.

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Start Frequency	30 MHz
Stop Frequency	26.5 GHz
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. POWER SPECTRAL DENSITY

8.1 LIMIT

Section	Test Item	Limit
FCC 15.247(e)	Power Spectral Density	8 dBm (in any 3 kHz)

8.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer:

Spectrum Parameters	Setting
Span Frequency	25 MHz (20 MHz) / 60 MHz (40 MHz)
RBW	3 kHz
VBW	10 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

8.3 DEVIATION FROM STANDARD

No deviation.

8.4 TEST SETUP



8.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

8.6 TEST RESULTS

Please refer to the APPENDIX H.

9. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Two-Line V-Network	R&S	ENV216	101051	2025/6/26	2026/6/25
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2024/12/10	2025/12/9
3	EMC Receiver	Keysight	N9038A	MY54130009	2025/6/27	2026/6/26
4	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - Below 1GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01207	2024/12/4	2025/12/3
2	EMC Receiver	Keysight	N9038A	MY54130009	2025/6/25	2026/6/24
3	Pre-Amplifier	EMCI	EMC001330-202 01222	980807	2024/12/9	2025/12/8
4	Test Cable	EMCI	EMC-8D-NM-NM -5000	150106	2024/12/9	2025/12/8
5	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200348	2024/12/9	2025/12/8
6	Test Cable	EMCI	EMC-CFD-400-N M-NM-3300	200343	2024/12/9	2025/12/8
7	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - Above 1GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2025/1/14	2026/1/13
2	Pre-Amplifier	EMCI	EMC118A45SE	981030	2024/12/10	2025/12/9
3	Test Cable	EMCI	EMC105-SM-SM-1000	210119	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC105-SM-SM-3000	210118	2024/12/10	2025/12/9
5	Test Cable	EMCI	EMC105-SM-SM-7000	210117	2024/12/10	2025/12/9
6	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2024/11/24	2025/11/23
7	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions - Above 18GHz						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2024/12/10	2025/12/9
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2025/6/27	2026/6/26
3	Test Cable	EMCI	EMC102-KM-KM-1000	220328	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC101G-KM-KM-3000	220330	2024/12/10	2025/12/9
5	Measurement Software	Farad	EZ EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth & Conducted Spurious Emissions & Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2025/6/27	2026/6/26
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	BTL-Conducted Test	BTL	1247788684	N/A	N/A	N/A

Maximum Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12589	2024/10/25	2025/10/24
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer(Ver1.1.0.0)	N/A	N/A	N/A

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

10. EUT TEST PHOTO

Please refer to document Appendix No.: TP-2508C414-1 (APPENDIX-TEST PHOTOS).


11. EUT PHOTOS

Please refer to document Appendix No.: EP-2508C414-1 (APPENDIX-EUT PHOTOS).

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Ant.1

Test Mode	Normal	Tested Date	2025/8/29
Test Frequency	-	Phase	Line

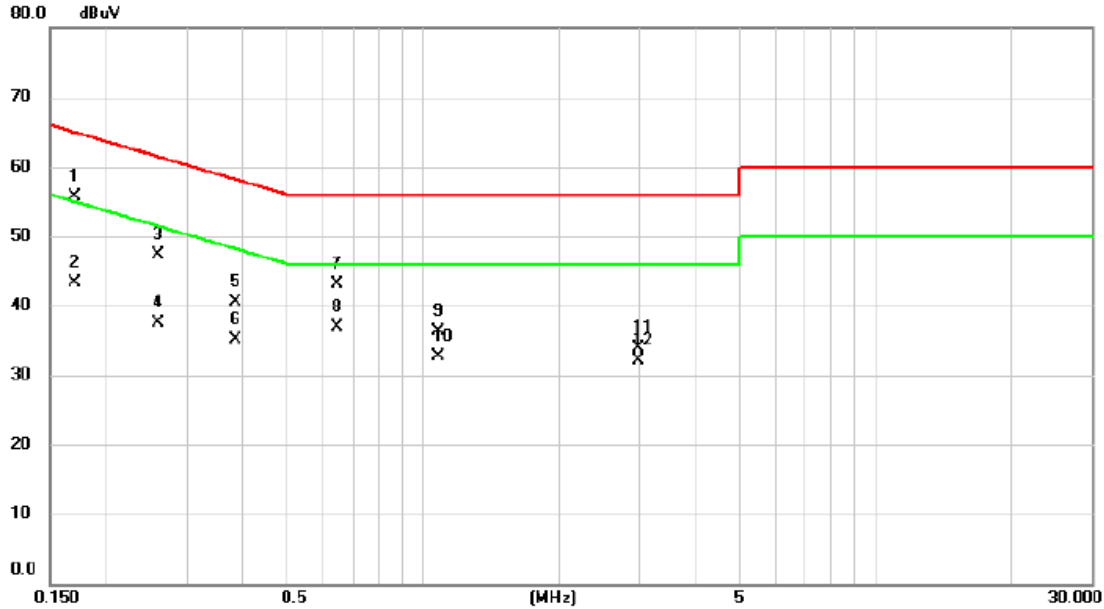


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1692	46.24	9.50	55.74	65.00	-9.26	QP	
2		0.1692	33.83	9.50	43.33	55.00	-11.67	AVG	
3		0.2587	37.73	9.51	47.24	61.47	-14.23	QP	
4		0.2587	27.92	9.51	37.43	51.47	-14.04	AVG	
5		0.3842	31.06	9.52	40.58	58.19	-17.61	QP	
6		0.3842	25.53	9.52	35.05	48.19	-13.14	AVG	
7		0.6440	33.55	9.53	43.08	56.00	-12.92	QP	
8	*	0.6440	27.47	9.53	37.00	46.00	-9.00	AVG	
9		1.0805	26.68	9.54	36.22	56.00	-19.78	QP	
10		1.0805	23.16	9.54	32.70	46.00	-13.30	AVG	
11		2.9930	24.17	9.66	33.83	56.00	-22.17	QP	
12		2.9930	22.38	9.66	32.04	46.00	-13.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/8/29
Test Frequency	-	Phase	Neutral

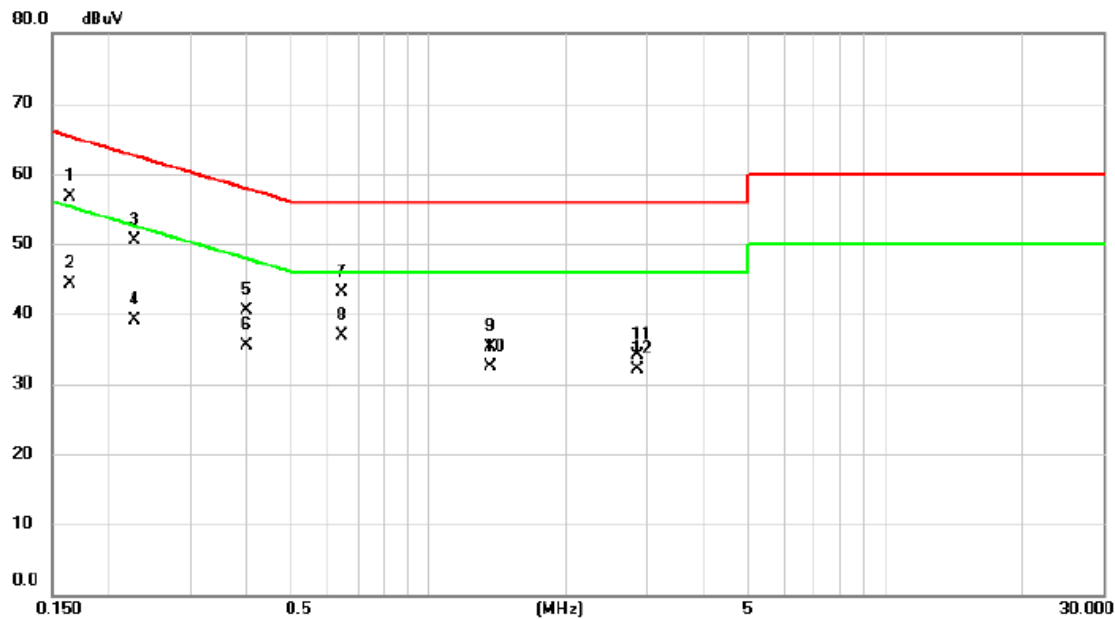

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1633	47.18	9.55	56.73	65.29	-8.56	QP	
2		0.1633	34.73	9.55	44.28	55.29	-11.01	AVG	
3		0.2270	40.92	9.56	50.48	62.56	-12.08	QP	
4		0.2270	29.62	9.56	39.18	52.56	-13.38	AVG	
5		0.3978	30.96	9.57	40.53	57.90	-17.37	QP	
6		0.3978	25.87	9.57	35.44	47.90	-12.46	AVG	
7		0.6440	33.50	9.57	43.07	56.00	-12.93	QP	
8		0.6440	27.43	9.57	37.00	46.00	-9.00	AVG	
9		1.3685	25.71	9.59	35.30	56.00	-20.70	QP	
10		1.3685	22.86	9.59	32.45	46.00	-13.55	AVG	
11		2.8670	24.43	9.67	34.10	56.00	-21.90	QP	
12		2.8670	22.42	9.67	32.09	46.00	-13.91	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Ant.2

Test Mode	Normal	Tested Date	2025/8/29
Test Frequency	-	Phase	Line

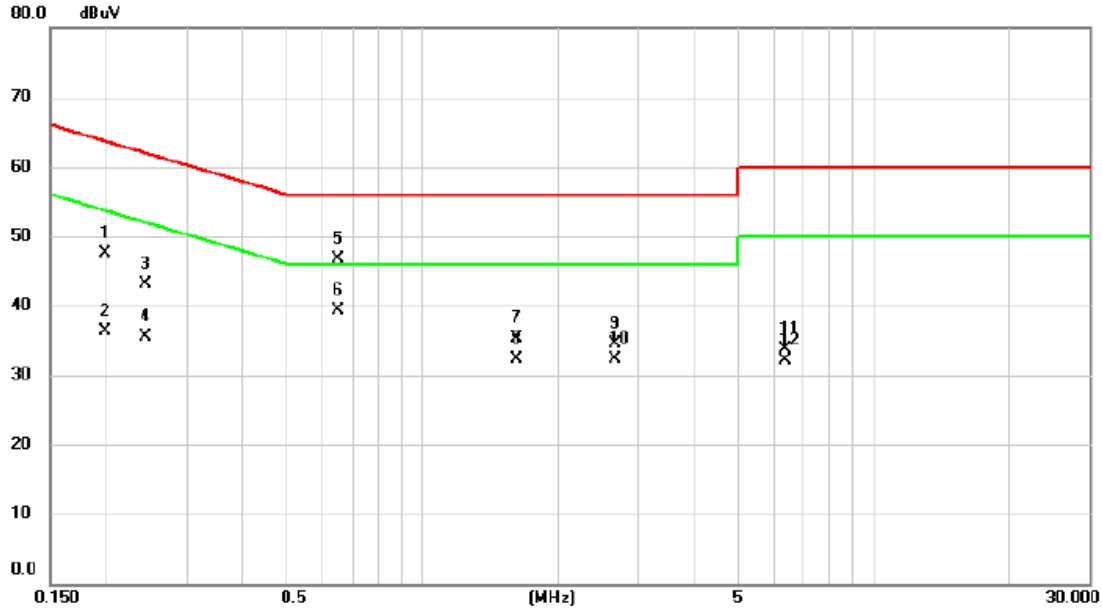


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
		MHz	dBuV	dB	dBuV	dBuV	dB		
1		0.1980	37.94	9.51	47.45	63.69	-16.24	QP	
2		0.1980	26.81	9.51	36.32	53.69	-17.37	AVG	
3		0.2431	33.64	9.51	43.15	61.99	-18.84	QP	
4		0.2431	25.94	9.51	35.45	51.99	-16.54	AVG	
5		0.6485	37.10	9.53	46.63	56.00	-9.37	QP	
6	*	0.6485	29.87	9.53	39.40	46.00	-6.60	AVG	
7		1.6205	25.77	9.60	35.37	56.00	-20.63	QP	
8		1.6205	22.71	9.60	32.31	46.00	-13.69	AVG	
9		2.6780	24.77	9.65	34.42	56.00	-21.58	QP	
10		2.6780	22.61	9.65	32.26	46.00	-13.74	AVG	
11		6.3750	23.97	9.75	33.72	60.00	-26.28	QP	
12		6.3750	22.38	9.75	32.13	50.00	-17.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/8/29
Test Frequency	-	Phase	Neutral

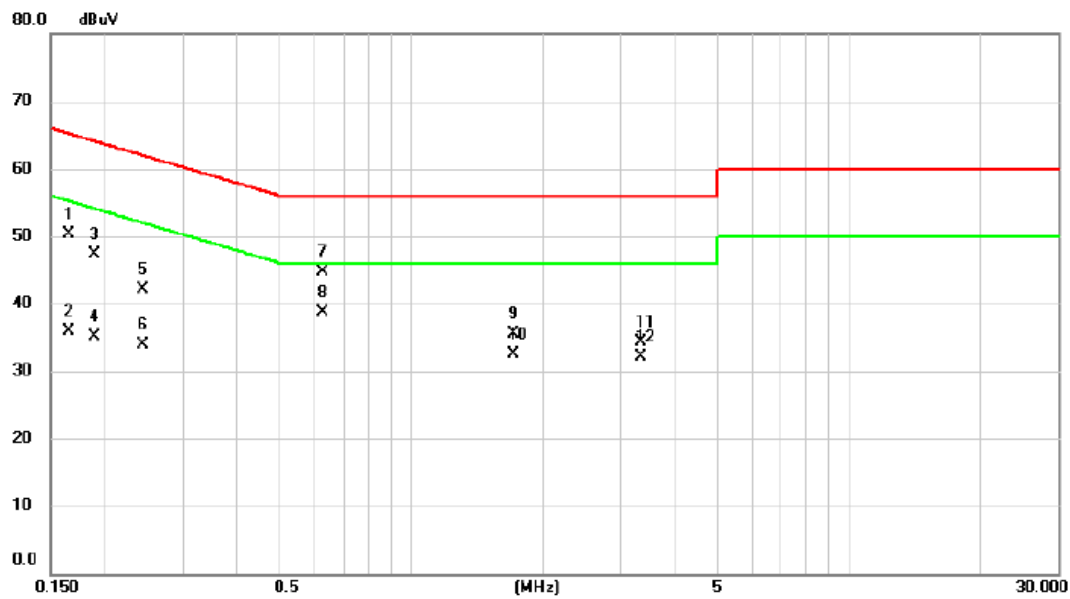

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1		0.1654	40.73	9.55	50.28	65.19	-14.91	QP	
2		0.1654	26.45	9.55	36.00	55.19	-19.19	AVG	
3		0.1888	37.79	9.56	47.35	64.09	-16.74	QP	
4		0.1888	25.63	9.56	35.19	54.09	-18.90	AVG	
5		0.2431	32.60	9.56	42.16	61.99	-19.83	QP	
6		0.2431	24.37	9.56	33.93	51.99	-18.06	AVG	
7		0.6260	35.12	9.57	44.69	56.00	-11.31	QP	
8	*	0.6260	29.08	9.57	38.65	46.00	-7.35	AVG	
9		1.7060	25.98	9.62	35.60	56.00	-20.40	QP	
10		1.7060	22.87	9.62	32.49	46.00	-13.51	AVG	
11		3.3485	24.72	9.68	34.40	56.00	-21.60	QP	
12		3.3485	22.40	9.68	32.08	46.00	-13.92	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Ant.1

Test Mode	TX G Mode	Test Date	2025/9/2
Test Frequency	2402 MHz	Polarization	Vertical

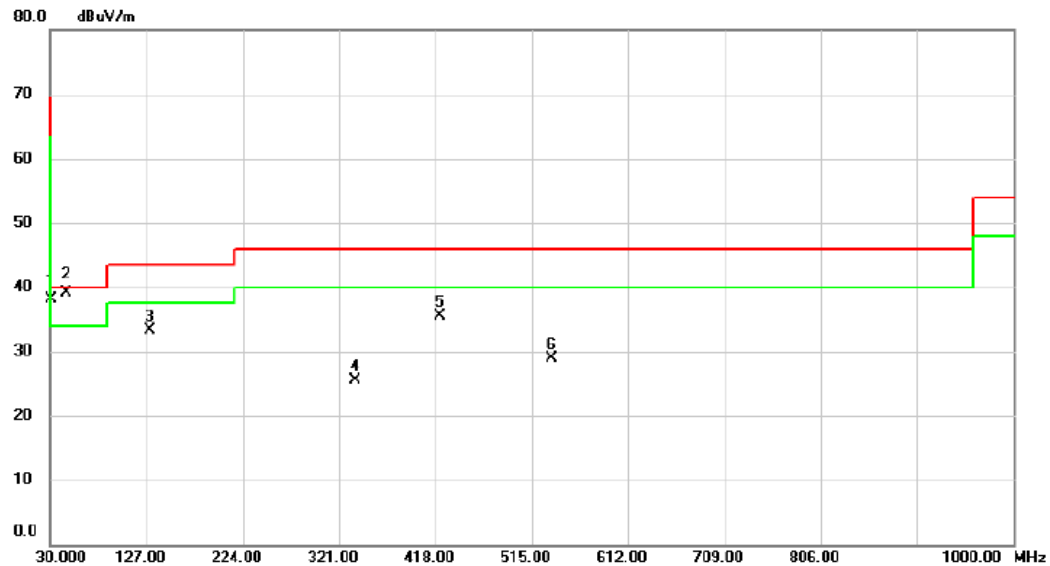


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		30.0000	52.10	-13.93	38.17	40.00	-1.83	QP	
2	*	45.5200	50.58	-11.43	39.15	40.00	-0.85	QP	
3		129.9100	46.36	-13.02	33.34	43.50	-10.16	peak	
4		336.5200	34.51	-9.05	25.46	46.00	-20.54	peak	
5		422.8500	41.86	-6.35	35.51	46.00	-10.49	peak	
6		534.4000	33.14	-4.28	28.86	46.00	-17.14	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/9/2
Test Frequency	2402 MHz	Polarization	Horizontal

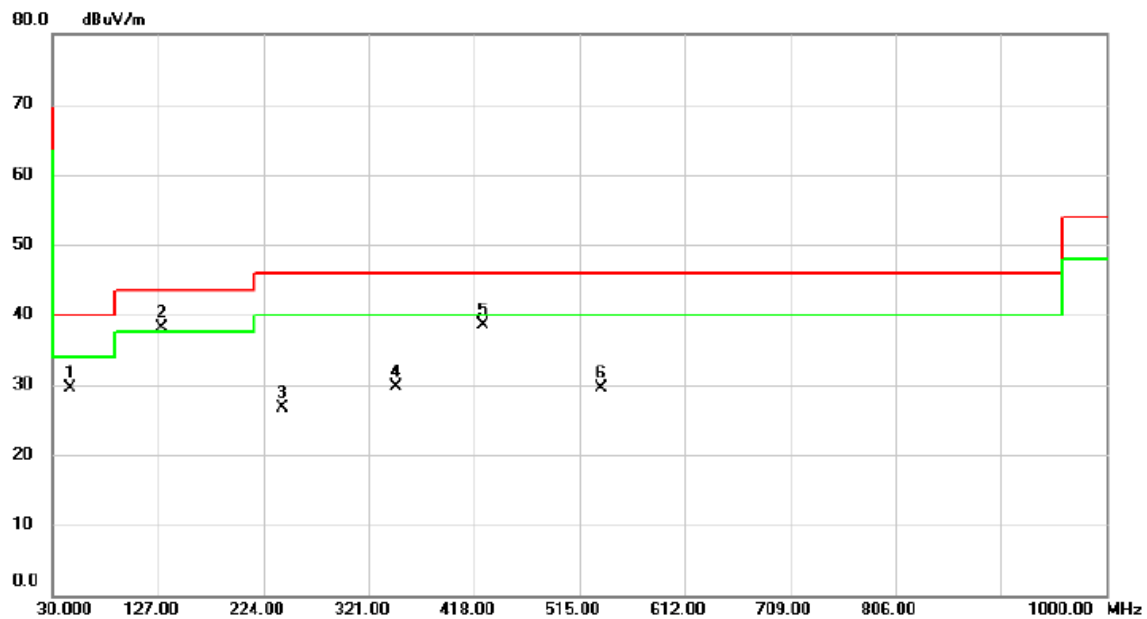

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		45.5200	40.97	-11.43	29.54	40.00	-10.46	peak	
2	*	129.9100	51.18	-13.02	38.16	43.50	-5.34	peak	
3		241.4600	38.86	-12.11	26.75	46.00	-19.25	peak	
4		346.2200	38.59	-8.81	29.78	46.00	-16.22	peak	
5		426.7300	44.85	-6.26	38.59	46.00	-7.41	peak	
6		534.4000	33.73	-4.28	29.45	46.00	-16.55	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Ant.2

Test Mode	TX G Mode	Test Date	2025/9/2
Test Frequency	2402 MHz	Polarization	Vertical

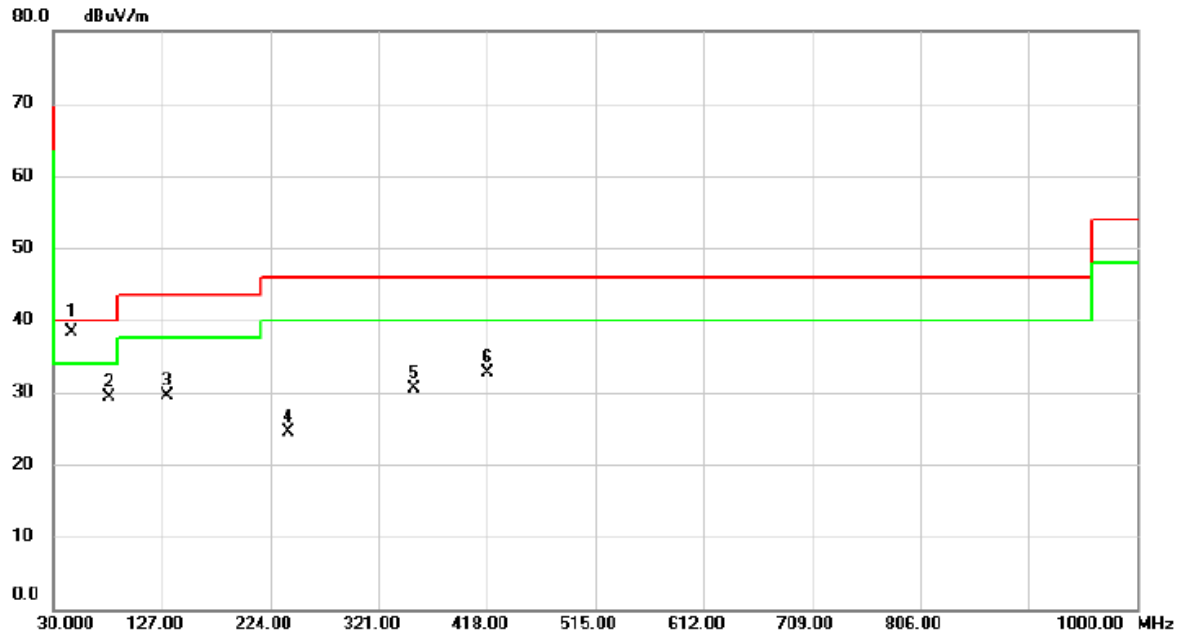


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	45.5200	49.64	-11.43	38.21	40.00	-1.79	QP	
2		79.4700	45.13	-15.88	29.25	40.00	-10.75	peak	
3		131.8500	42.36	-12.82	29.54	43.50	-13.96	peak	
4		240.4900	36.57	-12.15	24.42	46.00	-21.58	peak	
5		353.0100	39.06	-8.62	30.44	46.00	-15.56	peak	
6		418.0000	39.14	-6.48	32.66	46.00	-13.34	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/9/2
Test Frequency	2402 MHz	Polarization	Horizontal

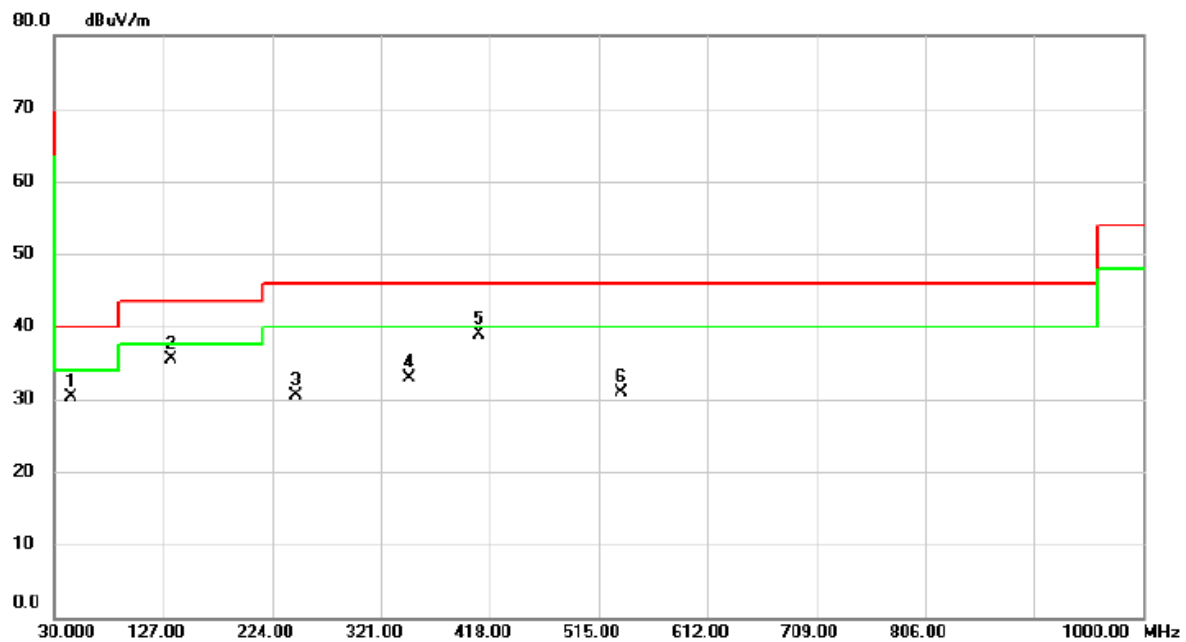

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		44.5500	41.74	-11.47	30.27	40.00	-9.73	peak	
2		133.7900	48.01	-12.60	35.41	43.50	-8.09	peak	
3		245.3400	42.46	-11.94	30.52	46.00	-15.48	peak	
4		346.2200	41.66	-8.81	32.85	46.00	-13.15	peak	
5	*	408.3000	45.68	-6.76	38.92	46.00	-7.08	peak	
6		534.4000	35.17	-4.28	30.89	46.00	-15.11	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Ant.1

Test Mode	TX B Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

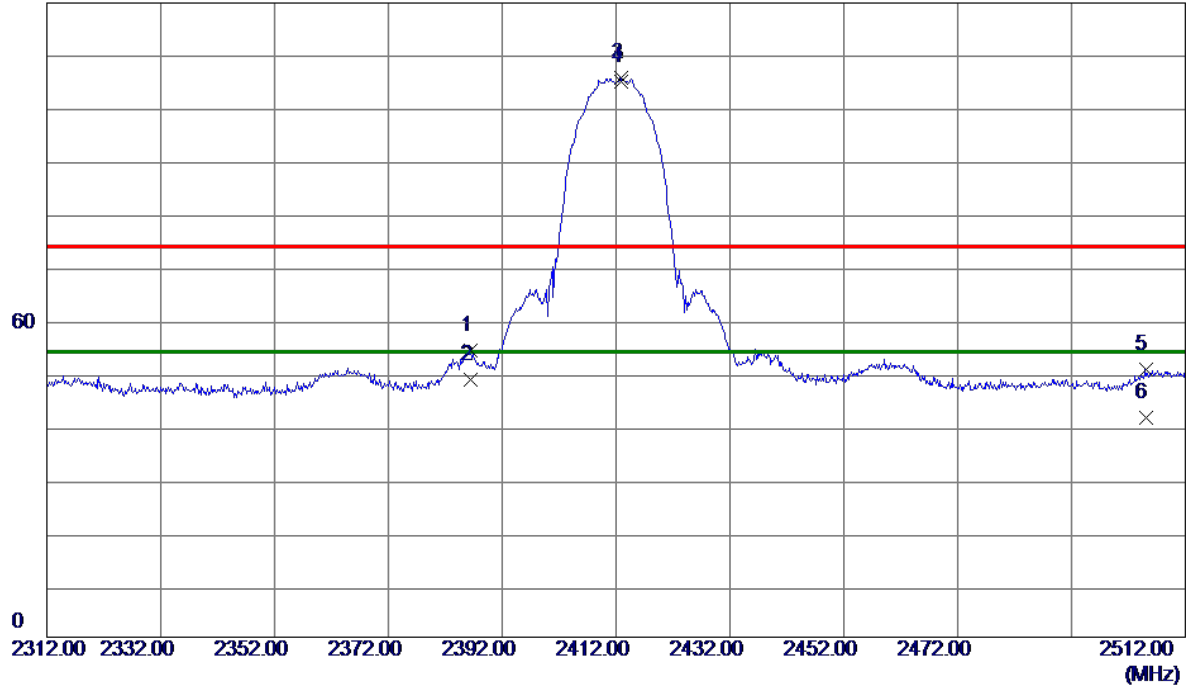


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.4000	48.99	5.24	54.23	74.00	-19.77	Peak	
2	2386.4000	43.37	5.24	48.61	54.00	-5.39	AVG	
3	2412.8000	100.56	5.28	105.84	74.00	31.84	Peak	No Limit
4 *	2412.8000	99.85	5.28	105.13	54.00	51.13	AVG	No Limit
5	2505.0000	45.14	5.46	50.60	74.00	-23.40	Peak	
6	2505.0000	35.95	5.46	41.41	54.00	-12.59	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/9/4
Test Frequency	2412 MHz	Polarization	Vertical

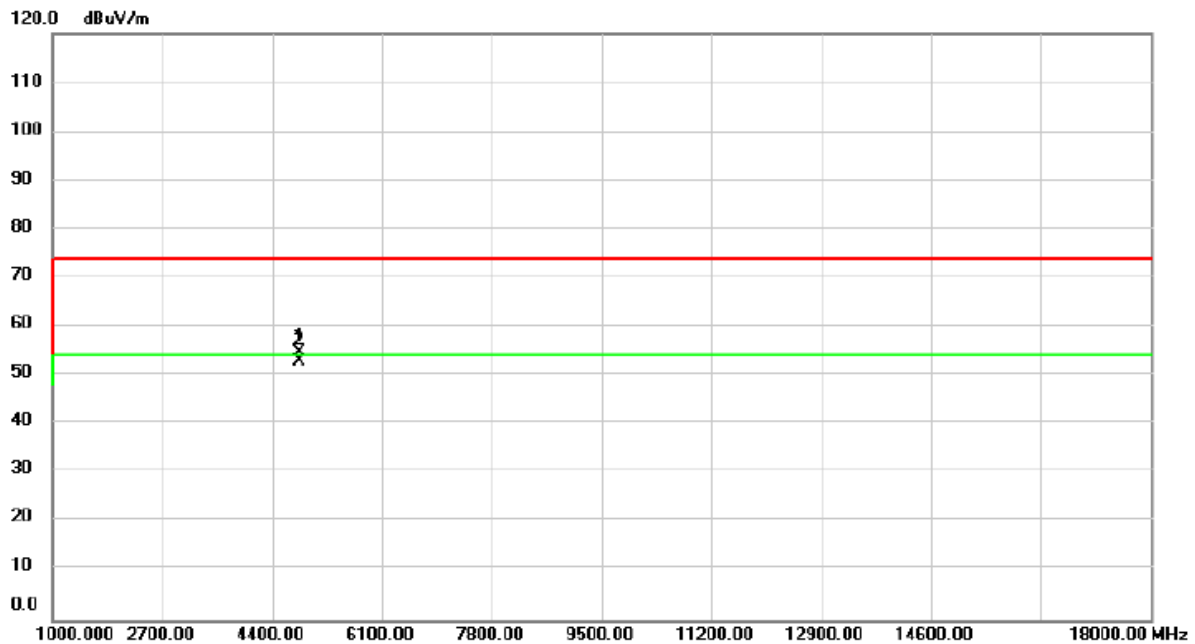


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	52.96	1.79	54.75	74.00	-19.25	peak	
2	*	4824.000	51.29	1.79	53.08	54.00	-0.92	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/9/4
Test Frequency	2437 MHz	Polarization	Vertical

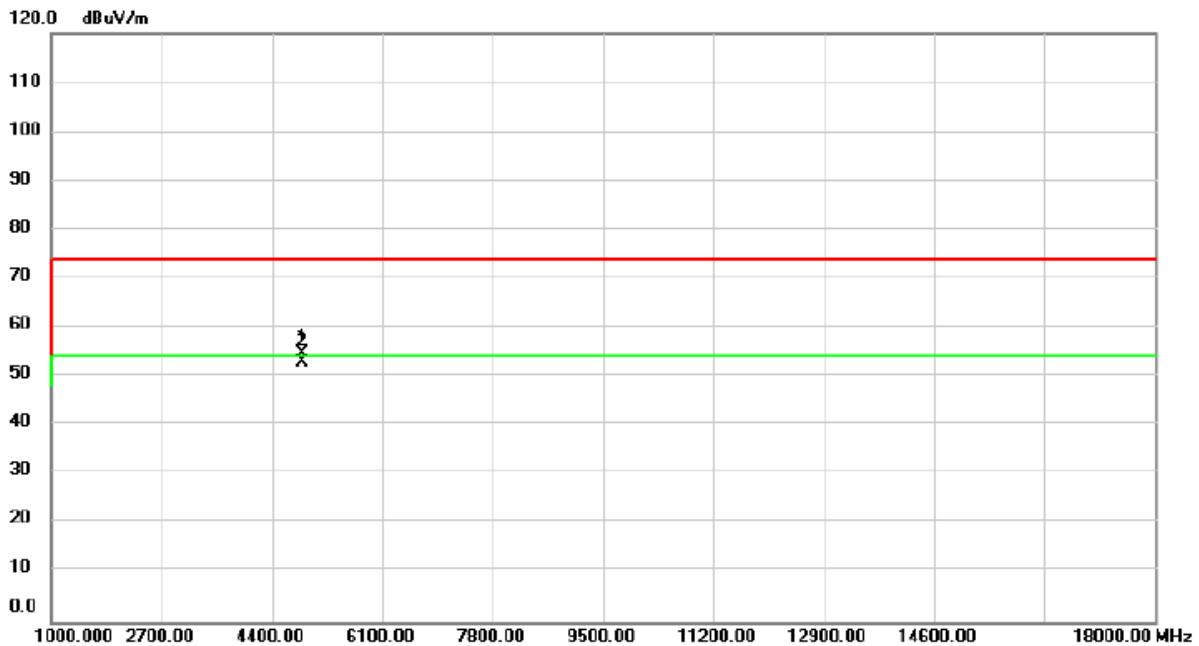


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	52.81	1.88	54.69	74.00	-19.31	peak	
2	*	4874.000	50.98	1.88	52.86	54.00	-1.14	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

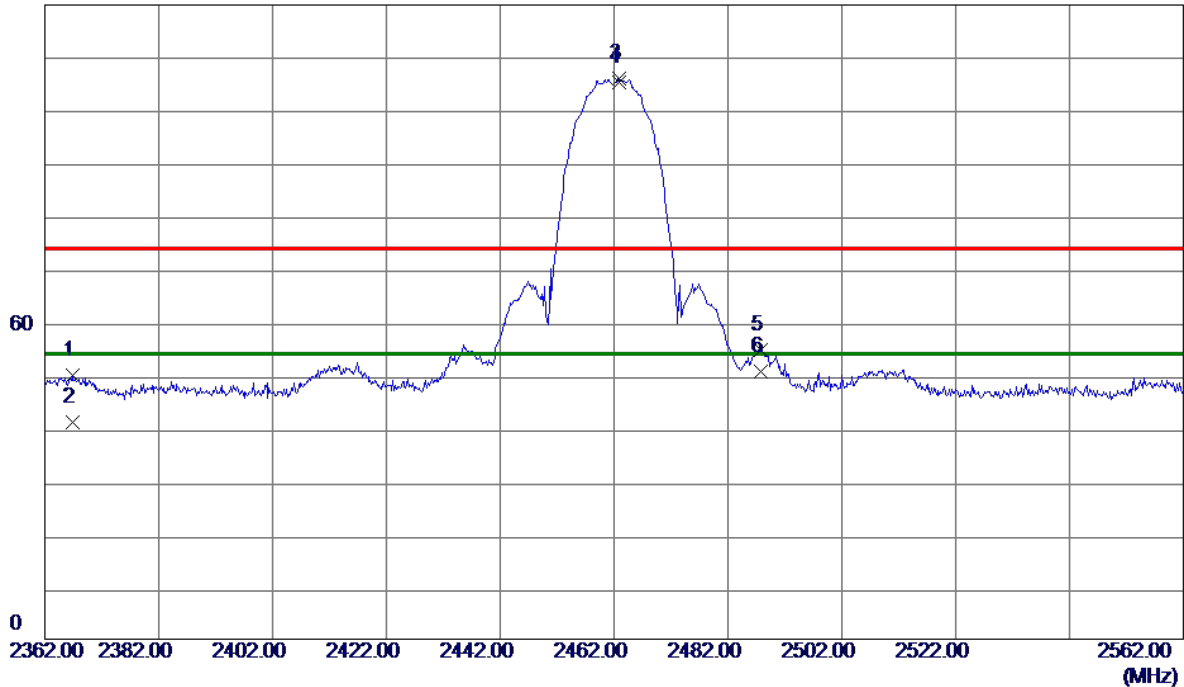


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2366.8000	44.79	5.20	49.99	74.00	-24.01	Peak	
2	2366.8000	35.85	5.20	41.05	54.00	-12.95	AVG	
3	2462.8000	100.68	5.37	106.05	74.00	32.05	Peak	No Limit
4 *	2462.8000	100.01	5.37	105.38	54.00	51.38	AVG	No Limit
5	2487.8000	49.34	5.42	54.76	74.00	-19.24	Peak	
6	2487.8000	45.23	5.42	50.65	54.00	-3.35	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/9/4
Test Frequency	2462 MHz	Polarization	Vertical

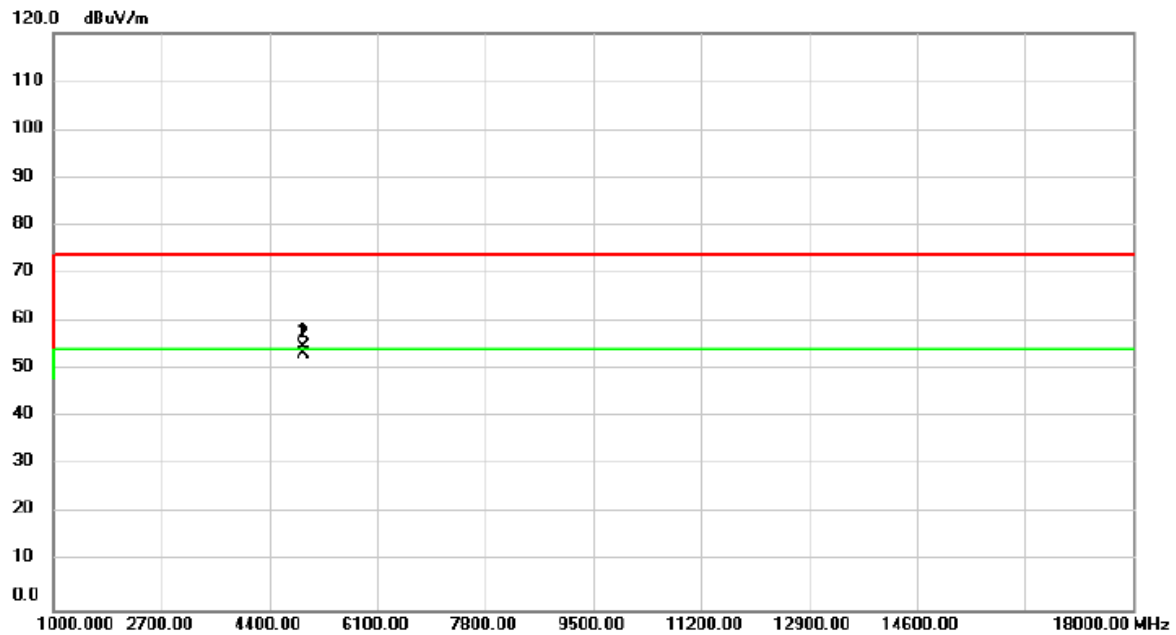


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4924.000	52.65	1.96	54.61	74.00	-19.39	peak	
2	*	4924.000	51.18	1.96	53.14	54.00	-0.86	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

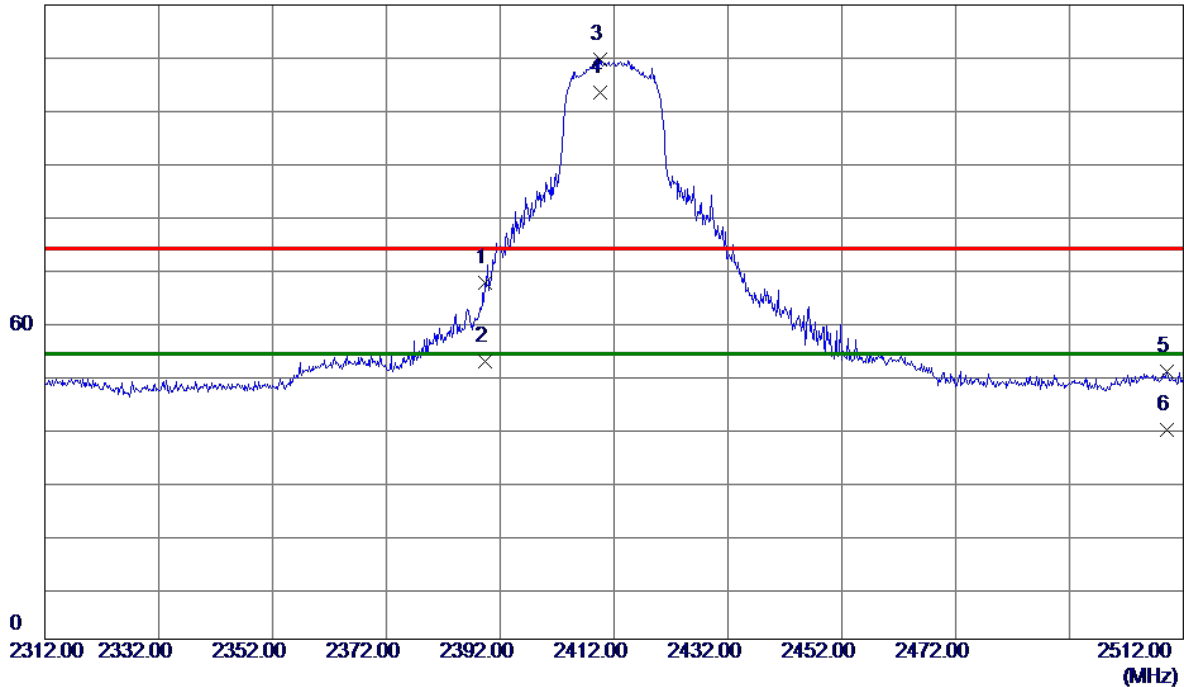


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	62.23	5.24	67.47	74.00	-6.53	Peak	
2	2389.4000	47.24	5.24	52.48	54.00	-1.52	AVG	
3	2409.6000	104.45	5.28	109.73	74.00	35.73	Peak	No Limit
4 *	2409.6000	98.18	5.28	103.46	54.00	49.46	AVG	No Limit
5	2509.2000	45.25	5.48	50.73	74.00	-23.27	Peak	
6	2509.2000	34.15	5.48	39.63	54.00	-14.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

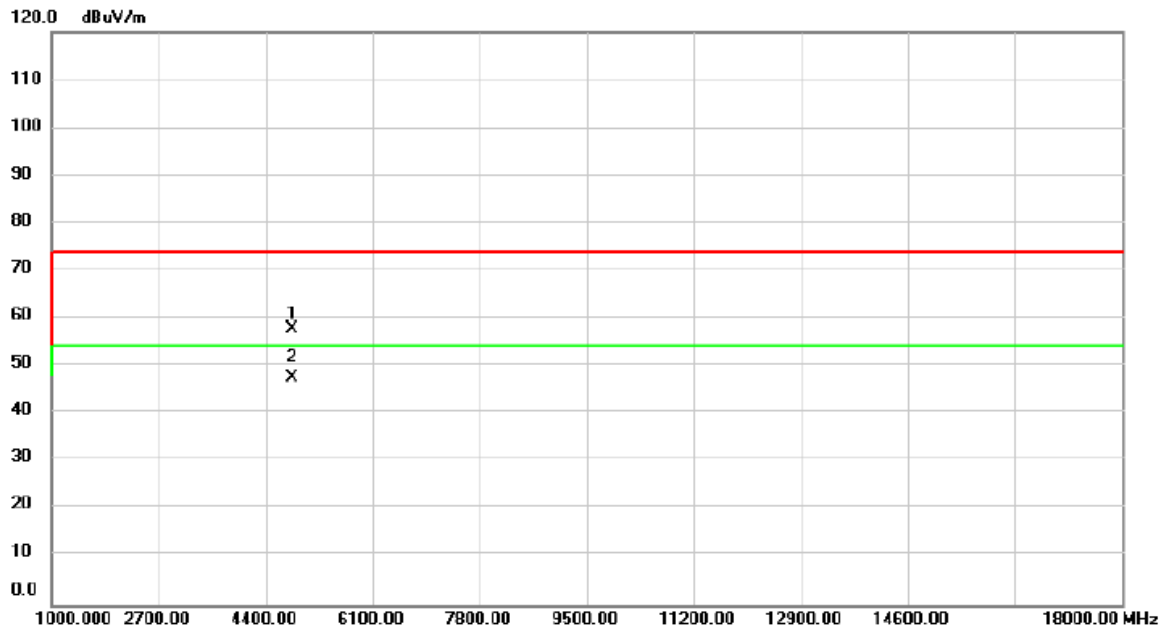


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		4824.000	56.03	1.79	57.82	74.00	-16.18	peak	
2	*	4824.000	45.71	1.79	47.50	54.00	-6.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/28
Test Frequency	2437 MHz	Polarization	Vertical

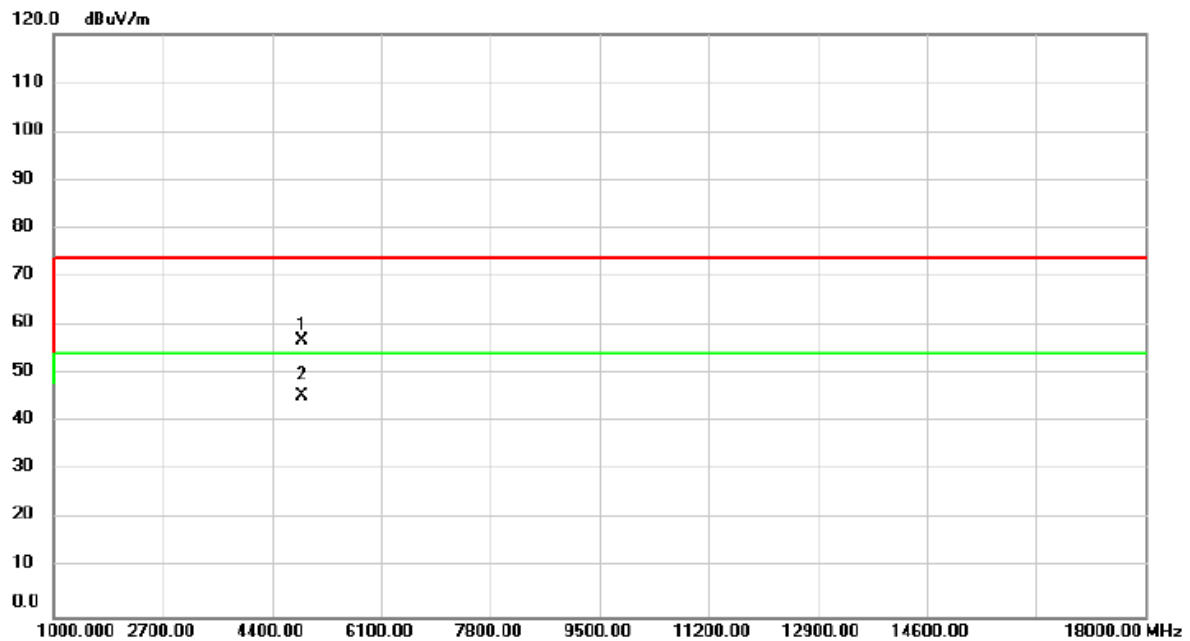


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	55.08	1.88	56.96	74.00	-17.04	peak	
2	*	4874.000	43.56	1.88	45.44	54.00	-8.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

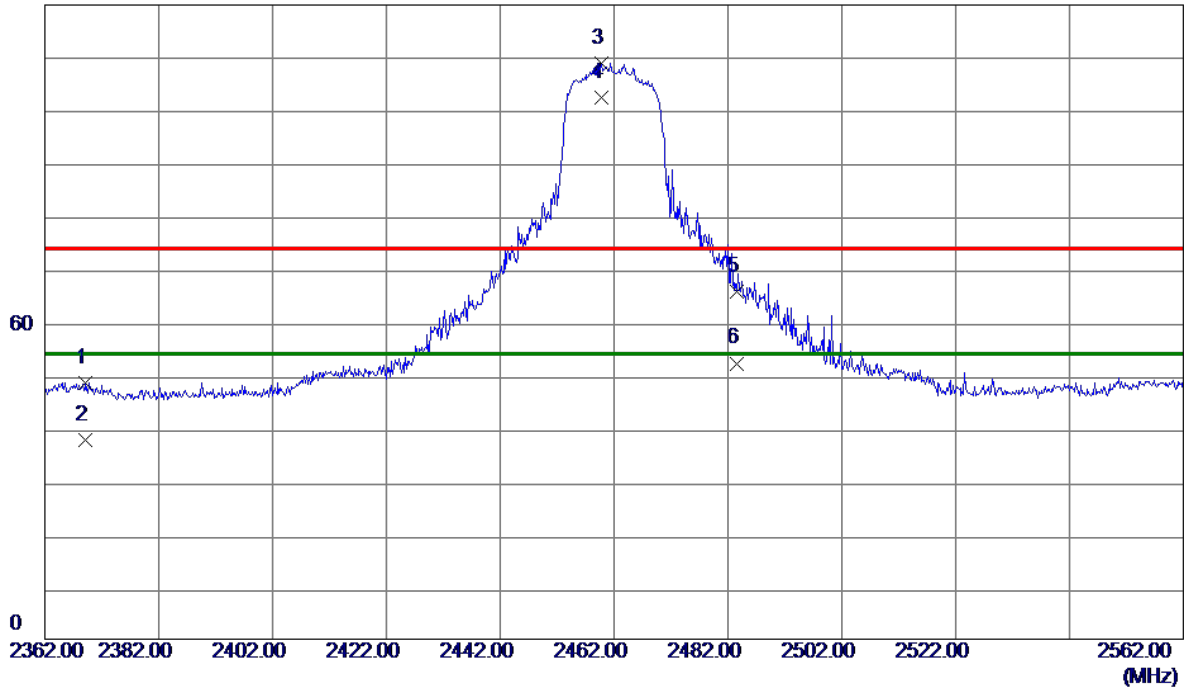


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2369.2000	43.35	5.20	48.55	74.00	-25.45	Peak	
2	2369.2000	32.38	5.20	37.58	54.00	-16.42	AVG	
3	2459.8000	103.61	5.37	108.98	74.00	34.98	Peak	No Limit
4 *	2459.8000	97.16	5.37	102.53	54.00	48.53	AVG	No Limit
5	2483.5000	60.30	5.41	65.71	74.00	-8.29	Peak	
6	2483.5000	46.79	5.41	52.20	54.00	-1.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

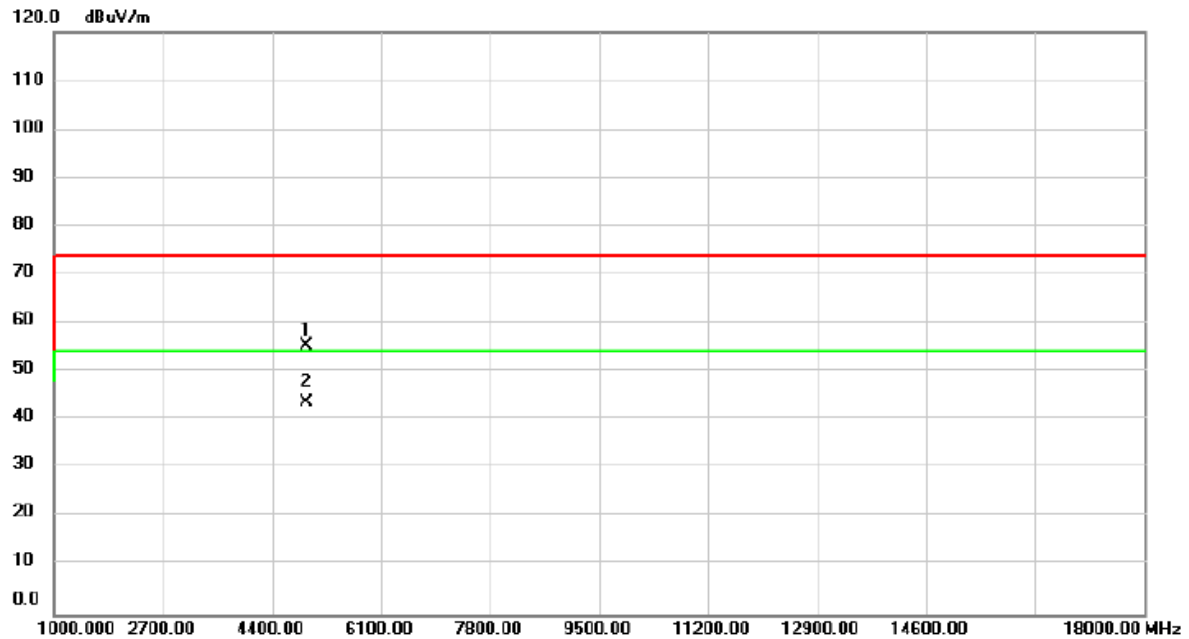


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	53.50	1.96	55.46	74.00	-18.54	peak	
2	*	4924.000	41.71	1.96	43.67	54.00	-10.33	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

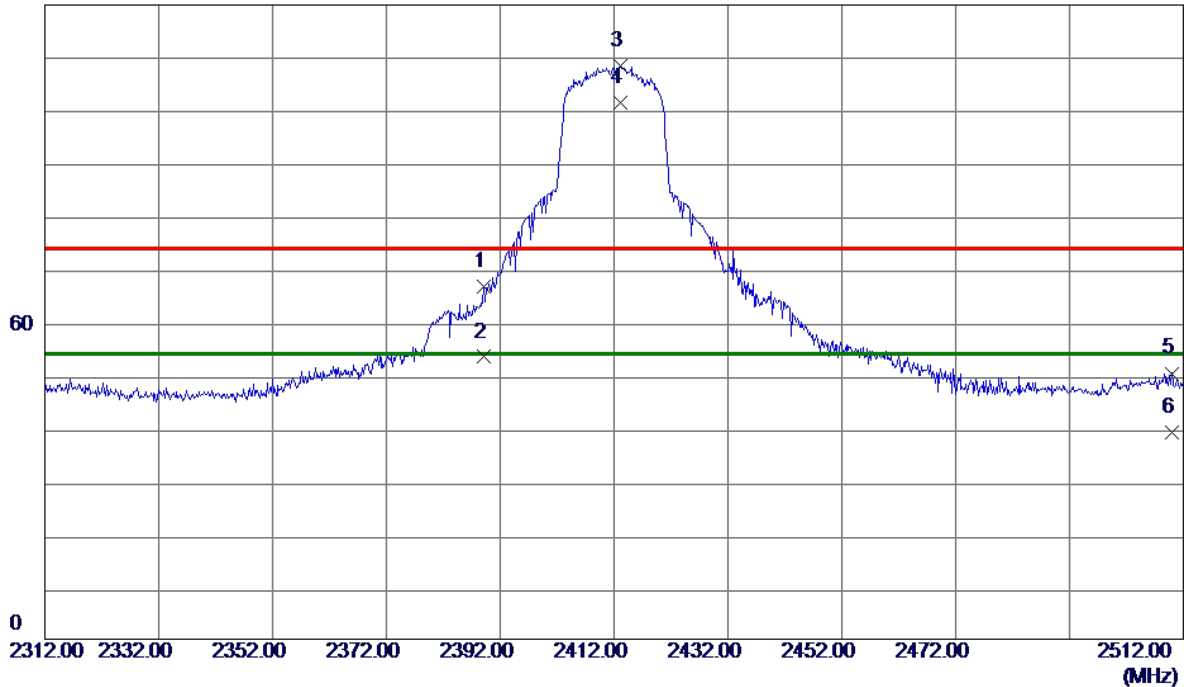


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	61.48	5.24	66.72	74.00	-7.28	Peak	
2	2389.2000	48.16	5.24	53.40	54.00	-0.60	AVG	
3	2413.2000	103.08	5.28	108.36	74.00	34.36	Peak	No Limit
4 *	2413.2000	96.21	5.28	101.49	54.00	47.49	AVG	No Limit
5	2510.0000	44.80	5.48	50.28	74.00	-23.72	Peak	
6	2510.0000	33.72	5.48	39.20	54.00	-14.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

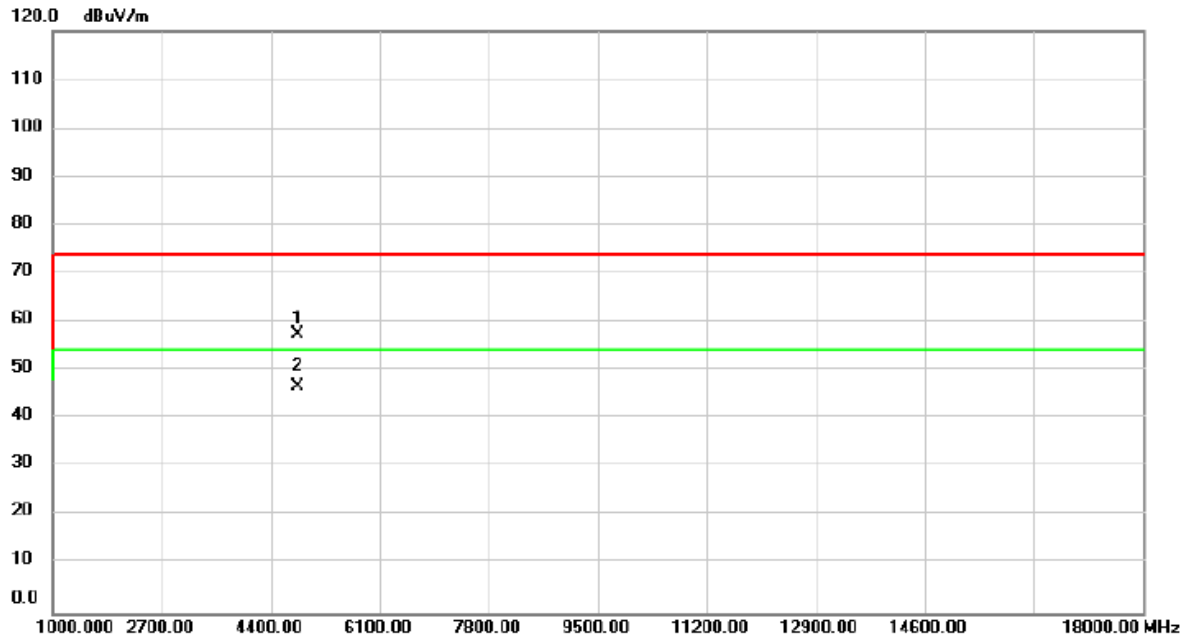


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	55.57	1.79	57.36	74.00	-16.64	peak	
2	*	4824.000	44.87	1.79	46.66	54.00	-7.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/28
Test Frequency	2437 MHz	Polarization	Vertical

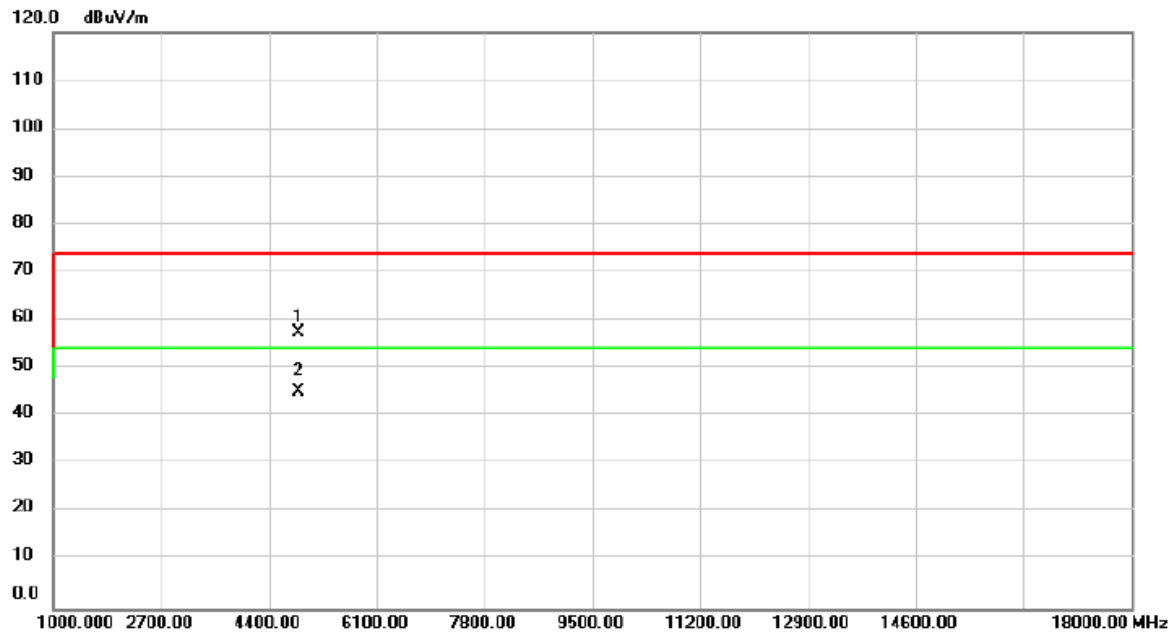


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	55.61	1.88	57.49	74.00	-16.51	peak	
2	*	4874.000	43.15	1.88	45.03	54.00	-8.97	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

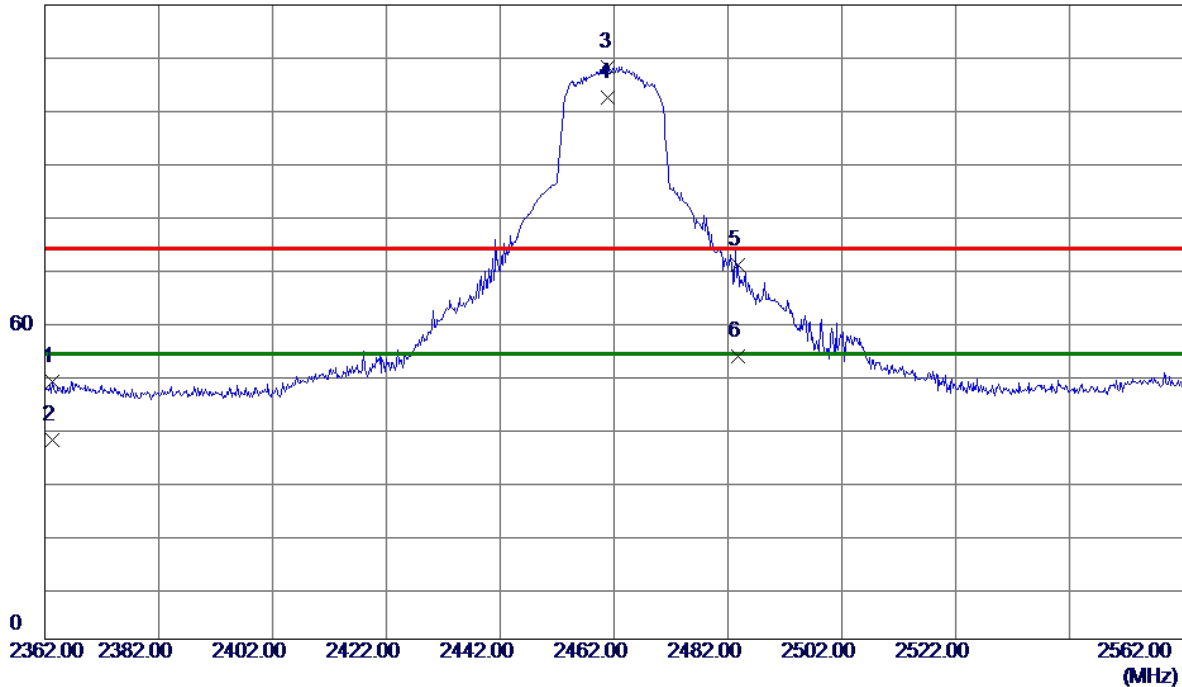


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2363.4000	43.61	5.19	48.80	74.00	-25.20	Peak	
2	2363.4000	32.43	5.19	37.62	54.00	-16.38	AVG	
3	2461.0000	102.96	5.37	108.33	74.00	34.33	Peak	No Limit
4 *	2461.0000	96.99	5.37	102.36	54.00	48.36	AVG	No Limit
5	2483.8000	65.37	5.41	70.78	74.00	-3.22	Peak	
6	2483.8000	48.03	5.41	53.44	54.00	-0.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

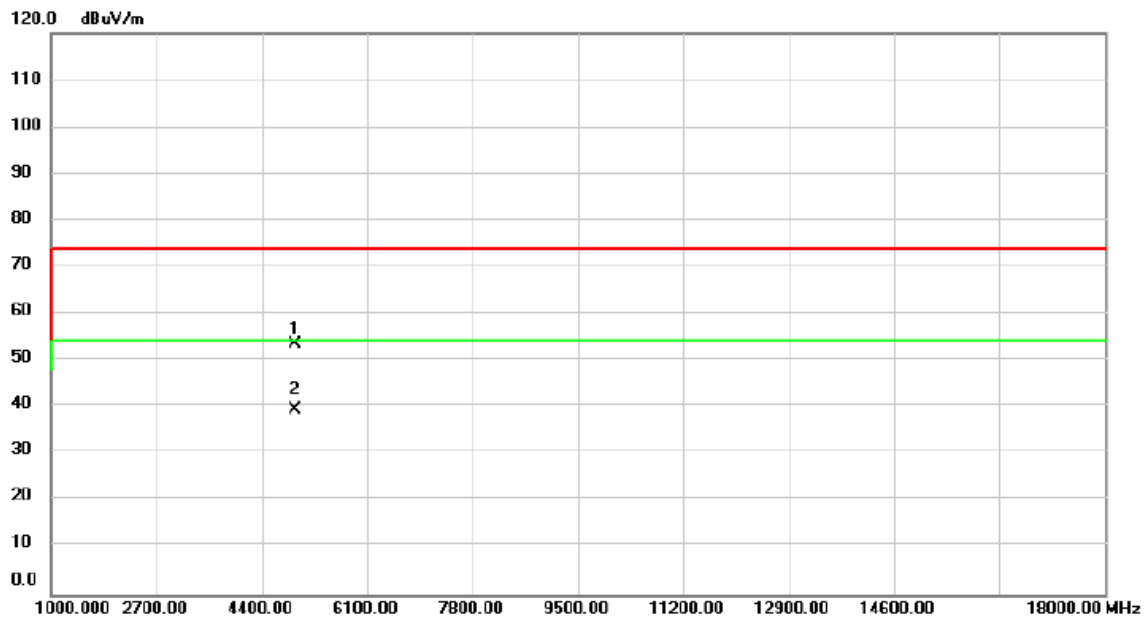


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	51.68	1.96	53.64	74.00	-20.36	peak	
2	*	4924.000	37.50	1.96	39.46	54.00	-14.54	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

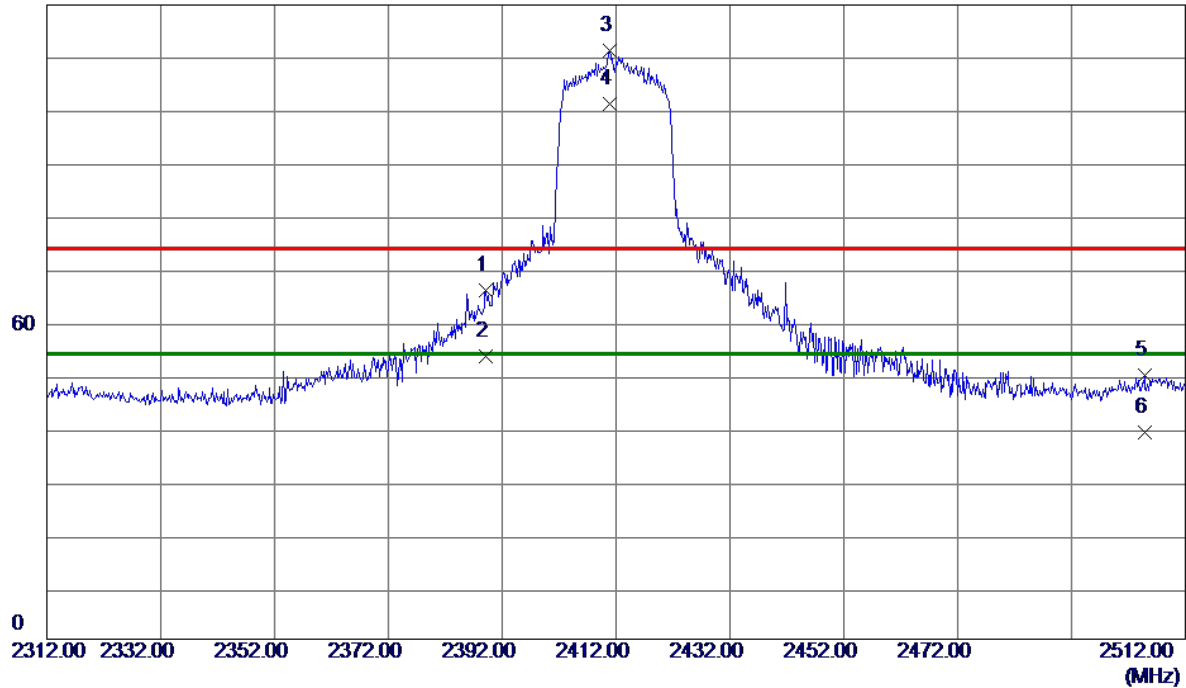


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	60.70	5.24	65.94	74.00	-8.06	Peak	
2	2389.2000	48.20	5.24	53.44	54.00	-0.56	AVG	
3	2410.8000	106.09	5.28	111.37	74.00	37.37	Peak	No Limit
4 *	2410.8000	95.95	5.28	101.23	54.00	47.23	AVG	No Limit
5	2504.8000	44.56	5.46	50.02	74.00	-23.98	Peak	
6	2504.8000	33.75	5.46	39.21	54.00	-14.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

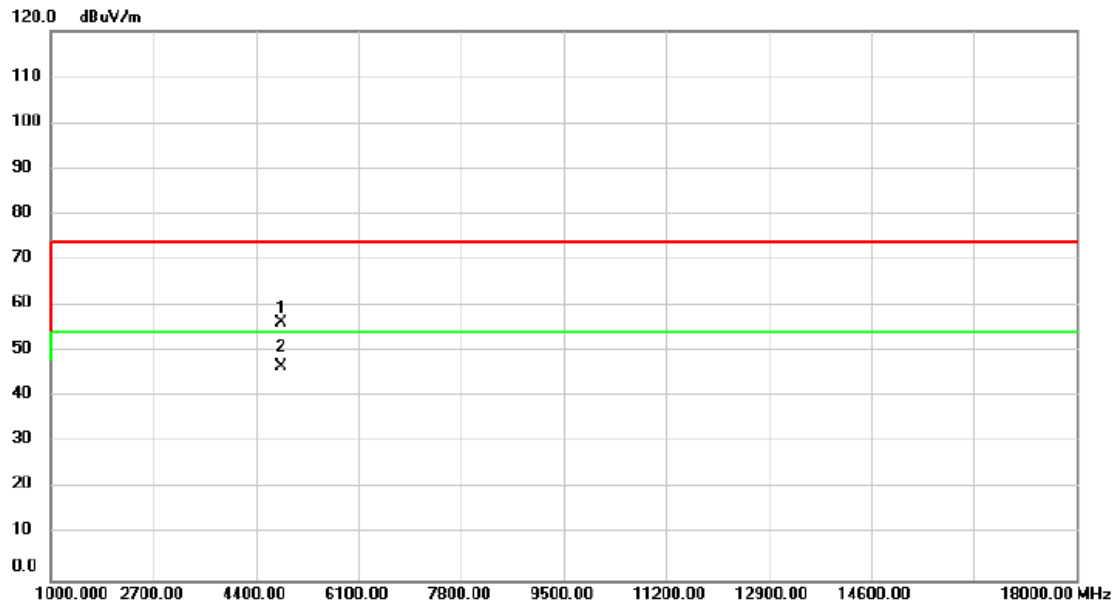


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4824.000	54.44	1.79	56.23	74.00	-17.77	peak	
2	*	4824.000	44.76	1.79	46.55	54.00	-7.45	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/28
Test Frequency	2437 MHz	Polarization	Vertical

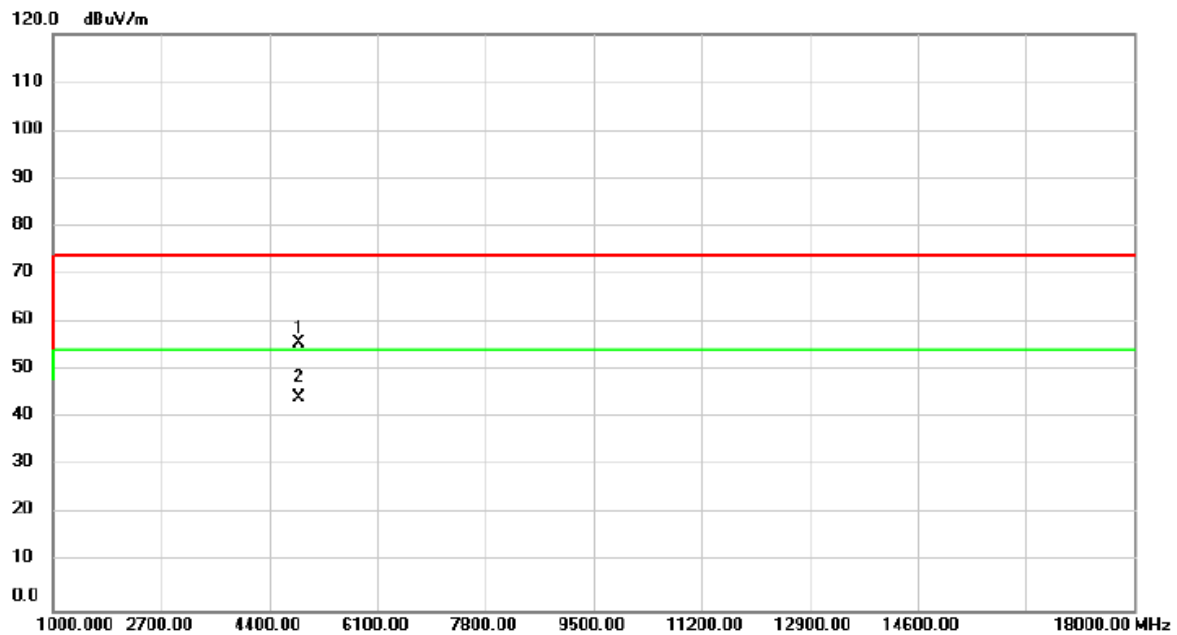


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4874.000	53.88	1.88	55.76	74.00	-18.24	peak	
2	*	4874.000	42.49	1.88	44.37	54.00	-9.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

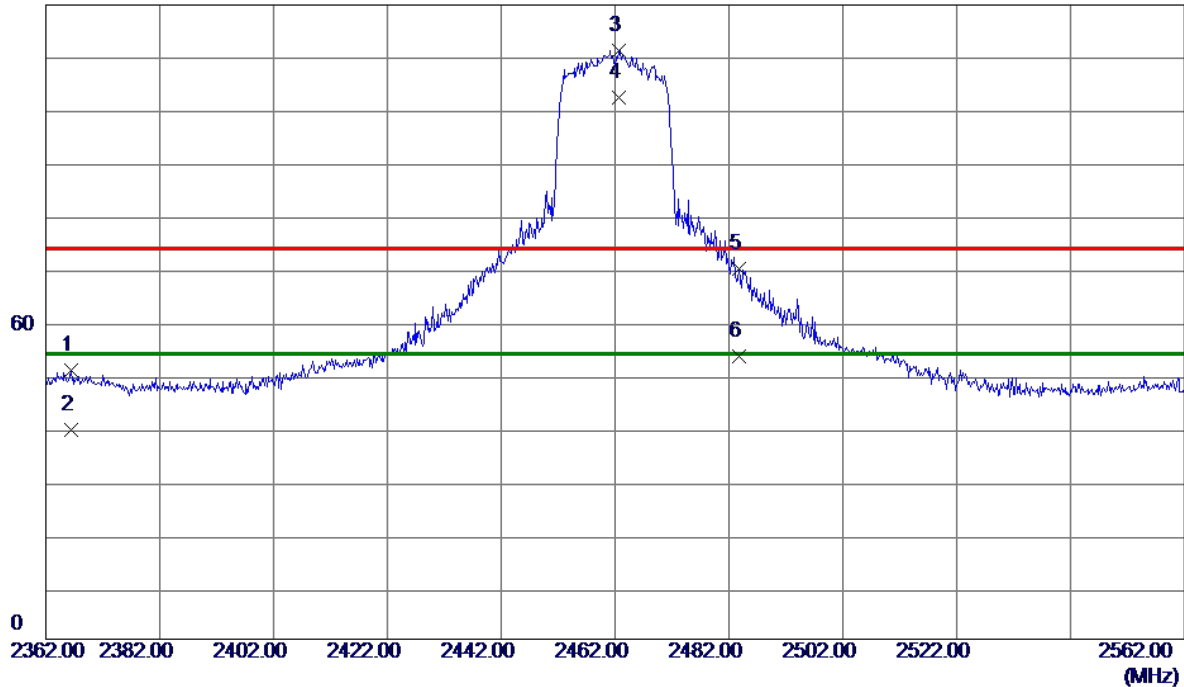


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2366.4000	45.60	5.20	50.80	74.00	-23.20	Peak	
2	2366.4000	34.37	5.20	39.57	54.00	-14.43	AVG	
3	2462.6000	106.03	5.37	111.40	74.00	37.40	Peak	No Limit
4 *	2462.6000	97.04	5.37	102.41	54.00	48.41	AVG	No Limit
5	2483.8000	64.67	5.41	70.08	74.00	-3.92	Peak	
6	2483.8000	48.03	5.41	53.44	54.00	-0.56	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/28
Test Frequency	2462 MHz	Polarization	Vertical

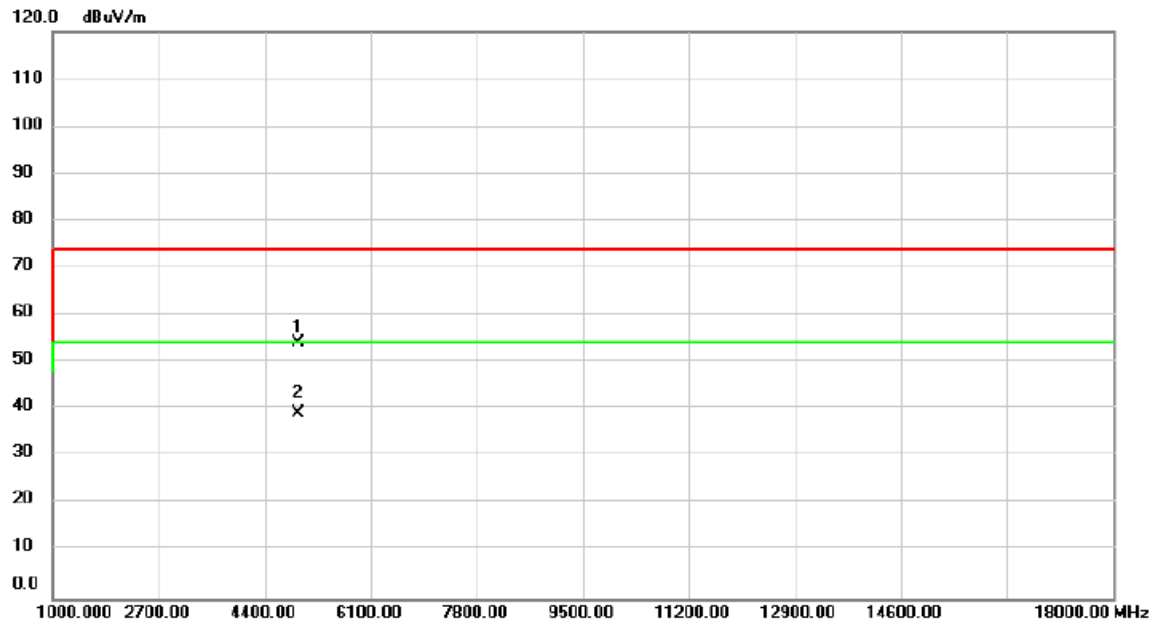


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		4924.000	52.19	1.96	54.15	74.00	-19.85	peak	
2	*	4924.000	37.08	1.96	39.04	54.00	-14.96	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/28
Test Frequency	2412 MHz	Polarization	Vertical

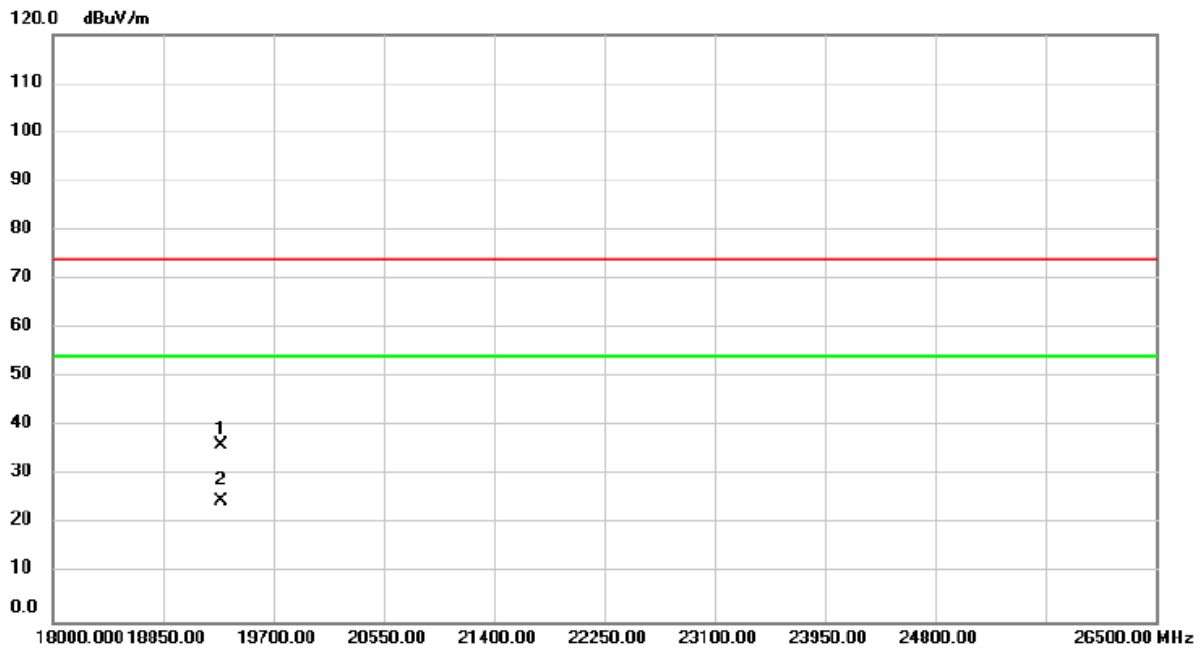


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		19296.00	46.02	-9.85	36.17	74.00	-37.83	peak	
2	*	19296.00	34.53	-9.85	24.68	54.00	-29.32	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Ant.2

Test Mode	TX B Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

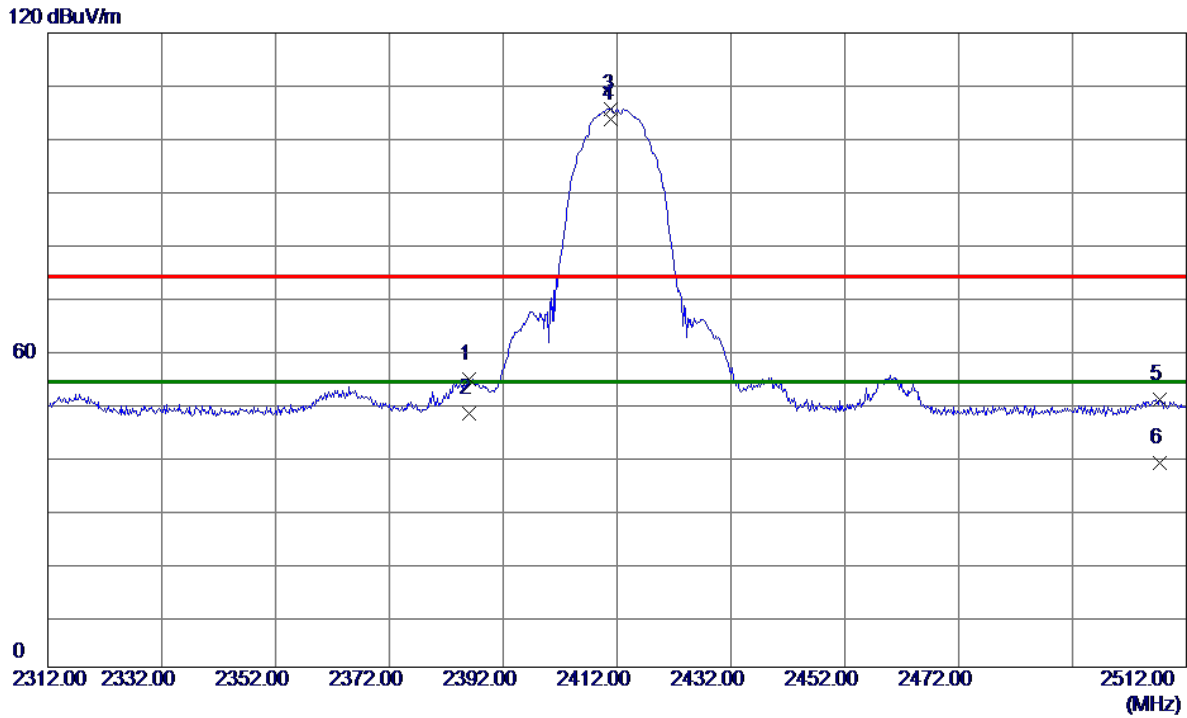


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.0000	49.17	5.23	54.40	74.00	-19.60	Peak	
2	2386.0000	42.70	5.23	47.93	54.00	-6.07	AVG	
3	2411.0000	100.42	5.28	105.70	74.00	31.70	Peak	No Limit
4 *	2411.0000	98.47	5.28	103.75	54.00	49.75	AVG	No Limit
5	2507.4000	45.25	5.47	50.72	74.00	-23.28	Peak	
6	2507.4000	33.19	5.47	38.66	54.00	-15.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

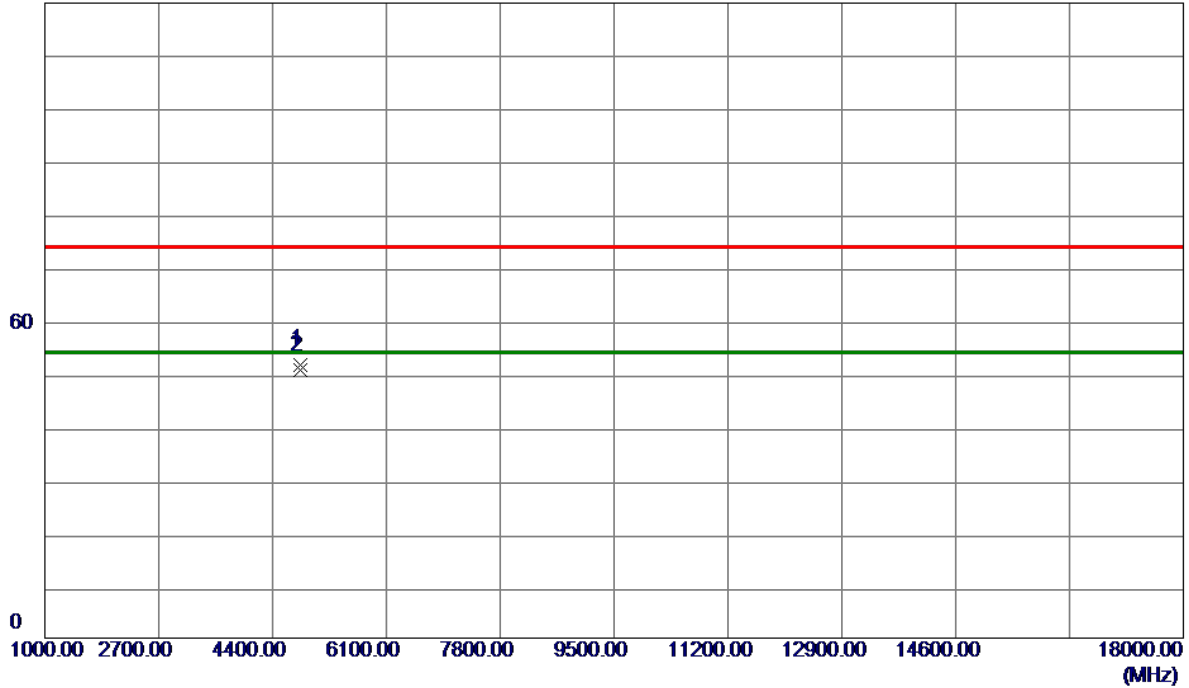


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4824.0000	49.93	1.79	51.72	74.00	-22.28	Peak	
2 *	4824.0000	48.87	1.79	50.66	54.00	-3.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/8/29
Test Frequency	2437 MHz	Polarization	Vertical

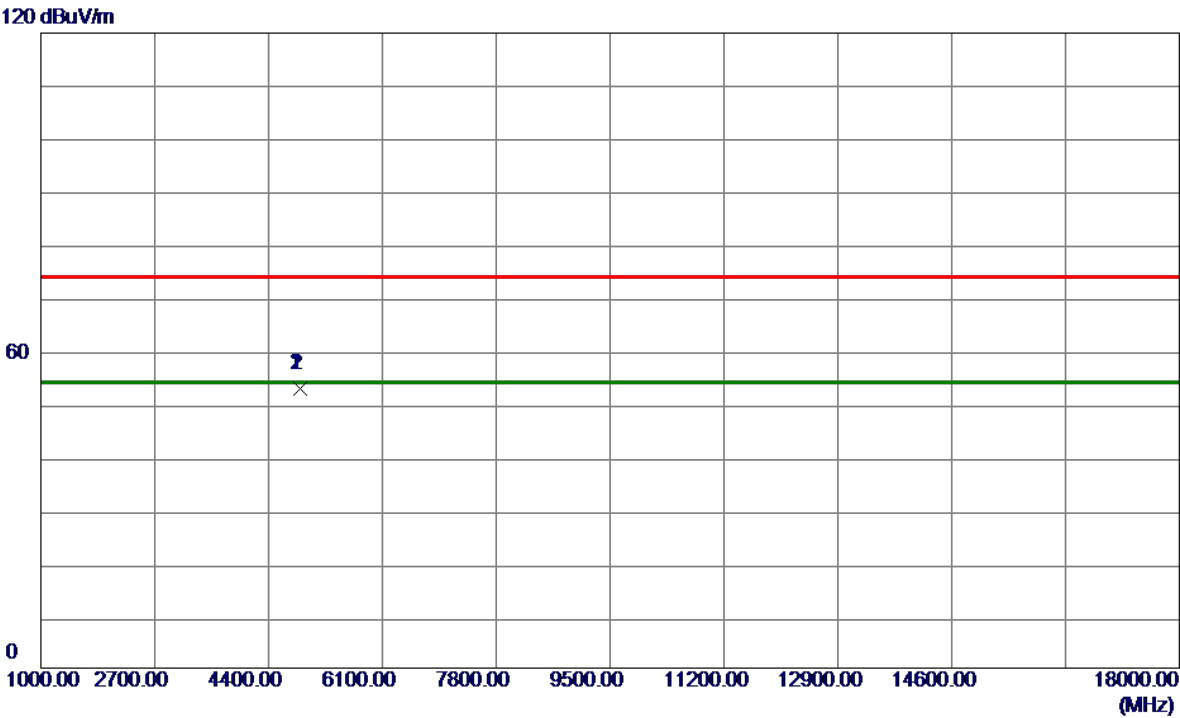


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4874.0000	51.00	1.87	52.87	74.00	-21.13	Peak	
2 *	4874.0000	50.95	1.87	52.82	54.00	-1.18	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

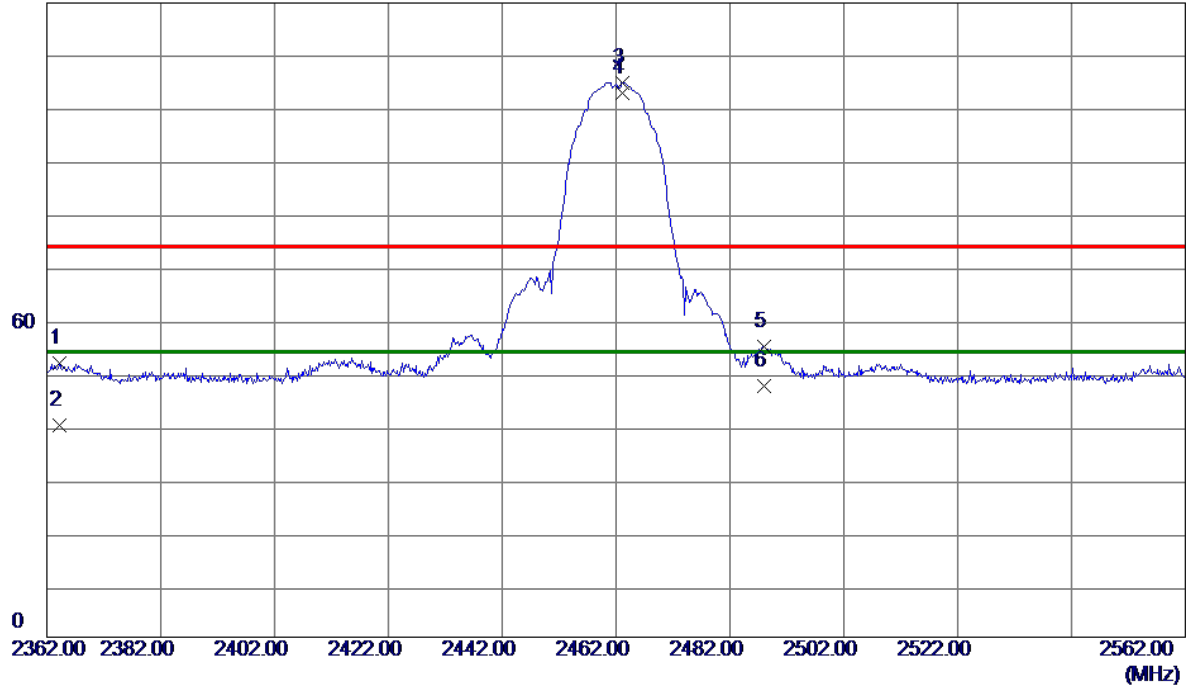


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2364.2000	46.68	5.20	51.88	74.00	-22.12	Peak	
2	2364.2000	34.91	5.20	40.11	54.00	-13.89	AVG	
3	2463.2000	99.60	5.37	104.97	74.00	30.97	Peak	No Limit
4 *	2463.2000	97.50	5.37	102.87	54.00	48.87	AVG	No Limit
5	2488.0000	49.50	5.42	54.92	74.00	-19.08	Peak	
6	2488.0000	42.01	5.42	47.43	54.00	-6.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

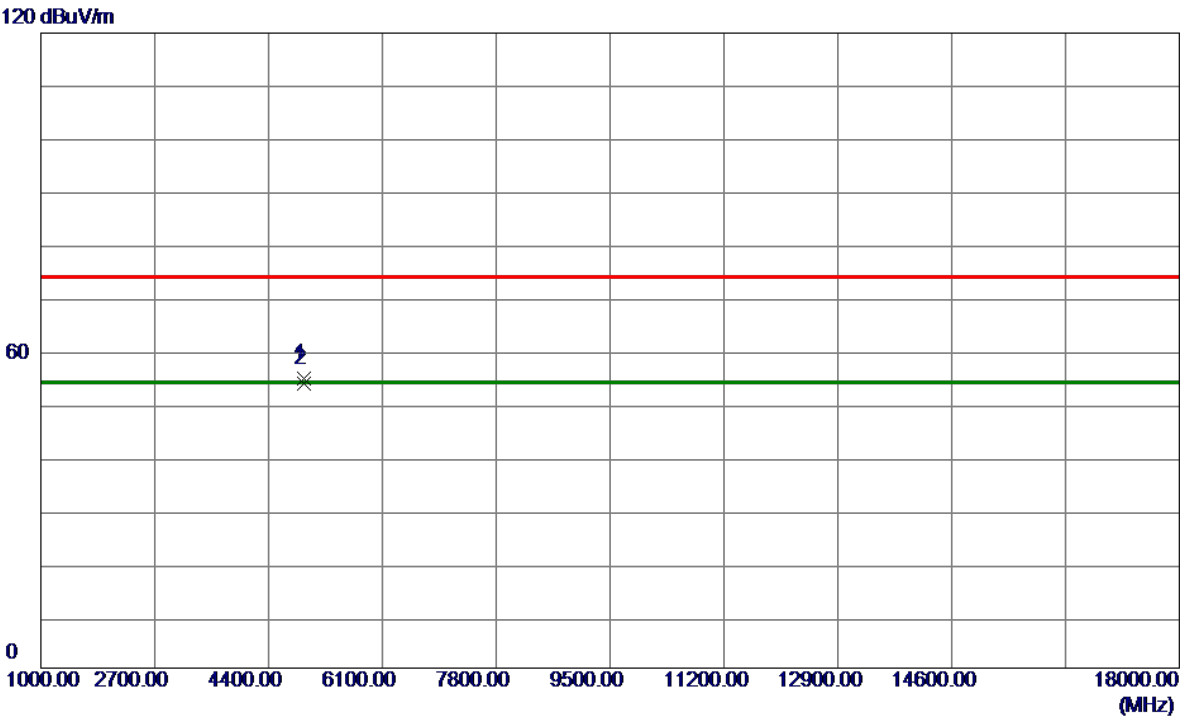

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	4924.0000	52.84	1.96	54.80	74.00	-19.20	Peak	
2 *	4924.0000	51.80	1.96	53.76	54.00	-0.24	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

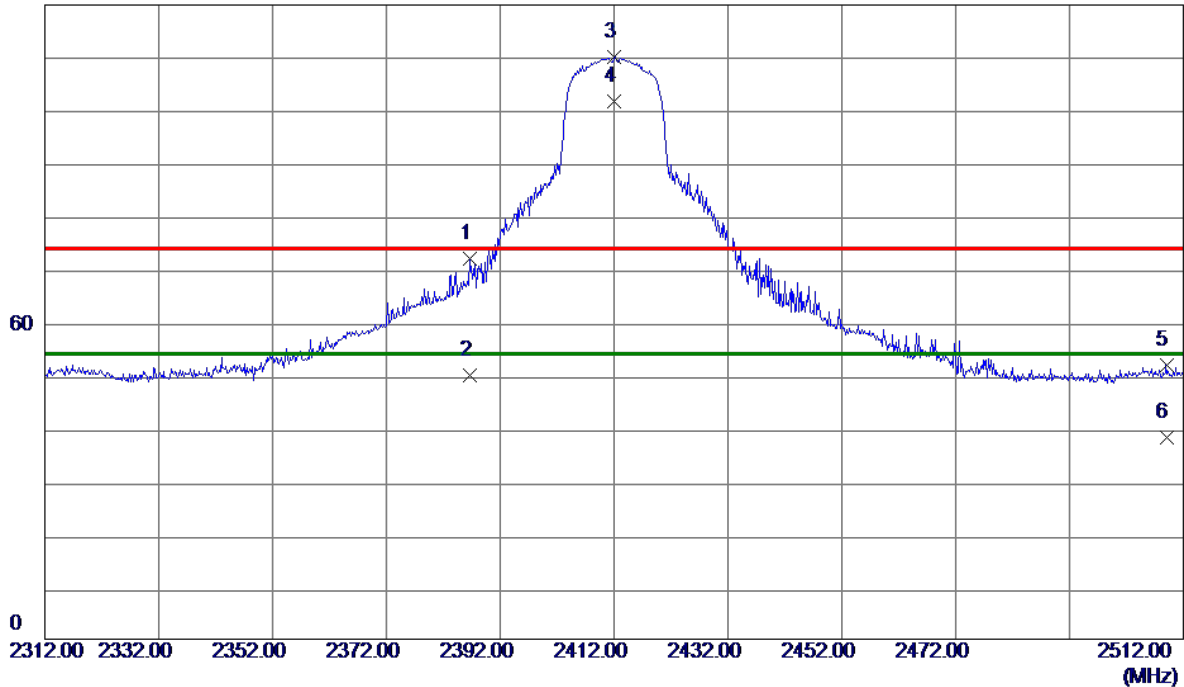


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.6000	66.77	5.24	72.01	74.00	-1.99	Peak	
2	2386.6000	44.78	5.24	50.02	54.00	-3.98	AVG	
3	2412.0000	104.77	5.28	110.05	74.00	36.05	Peak	No Limit
4 *	2412.0000	96.50	5.28	101.78	54.00	47.78	AVG	No Limit
5	2509.0000	46.38	5.48	51.86	74.00	-22.14	Peak	
6	2509.0000	32.74	5.48	38.22	54.00	-15.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

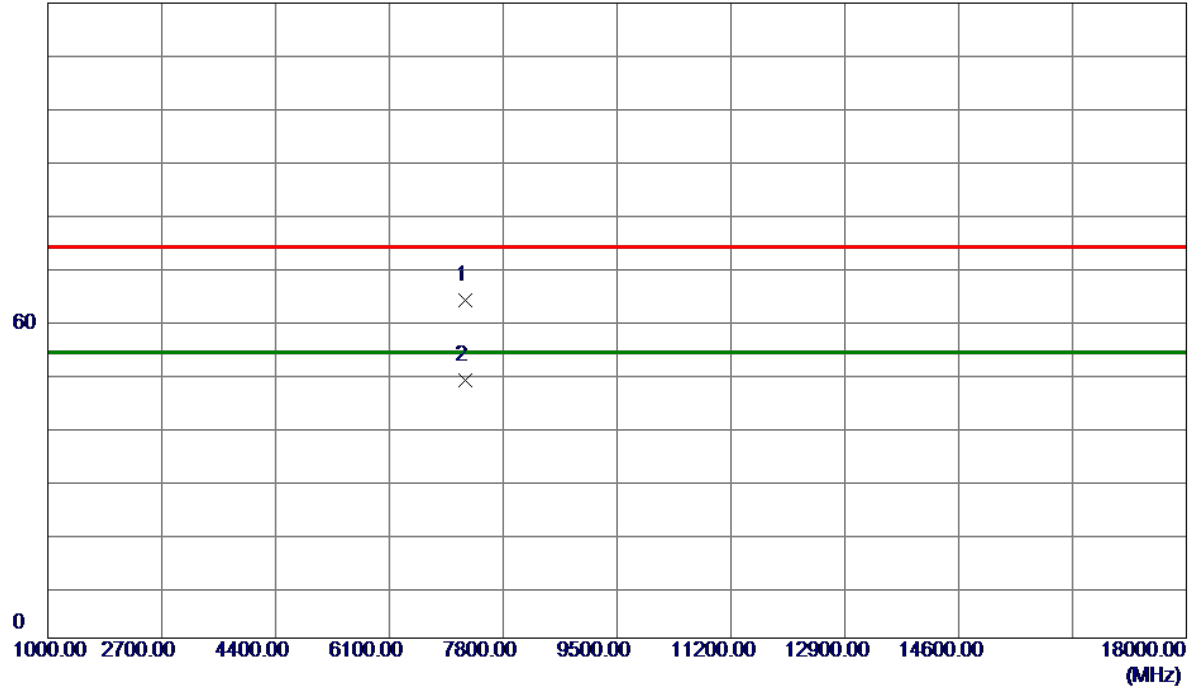


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7236.0000	57.52	6.40	63.92	74.00	-10.08	Peak	
2 *	7236.0000	42.36	6.40	48.76	54.00	-5.24	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/29
Test Frequency	2437 MHz	Polarization	Vertical

120 dBuV/m

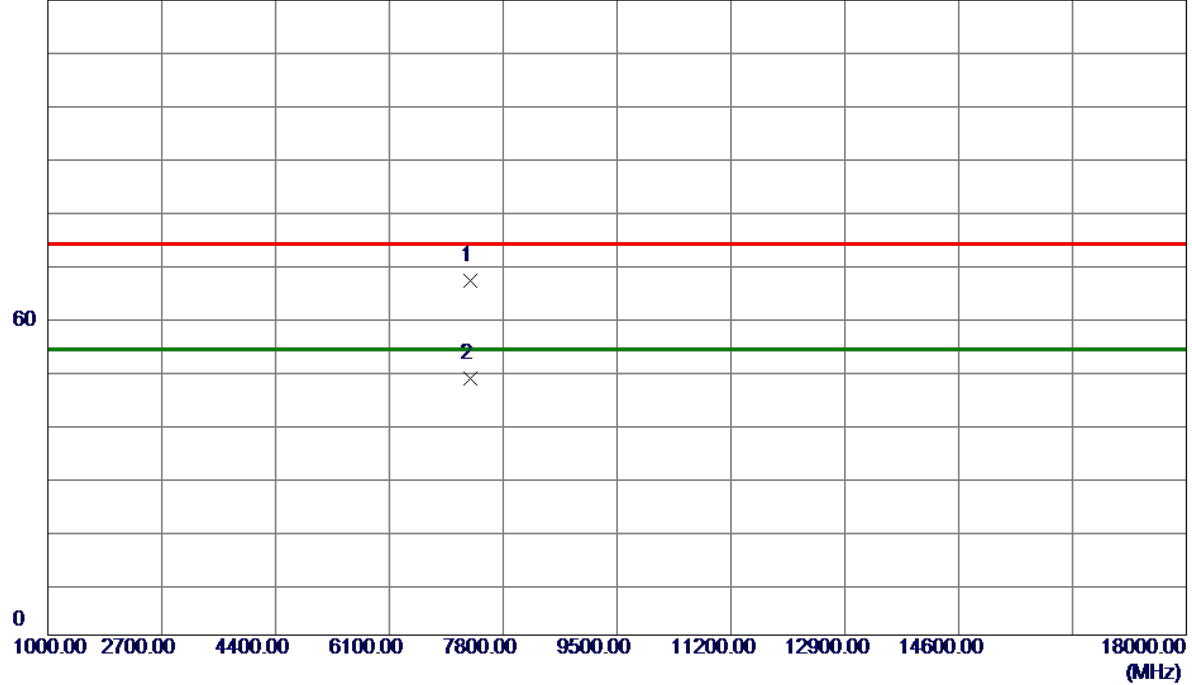


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.0000	60.55	6.41	66.96	74.00	-7.04	Peak	
2 *	7311.0000	42.11	6.41	48.52	54.00	-5.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

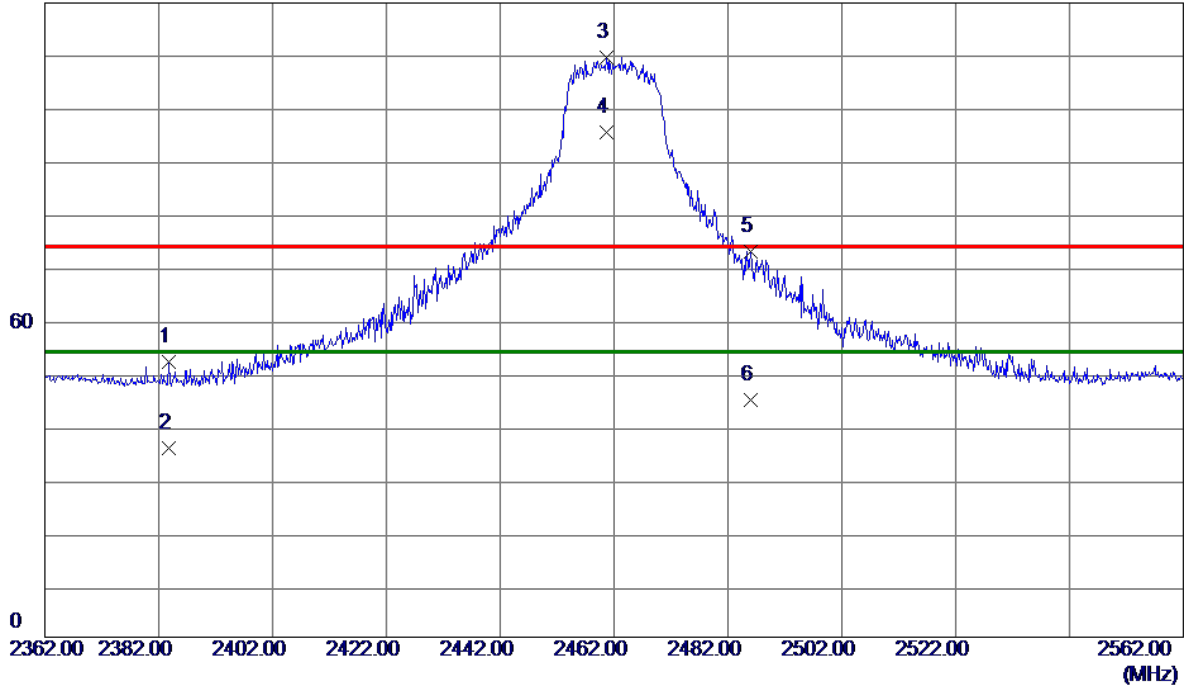


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2383.8000	46.74	5.23	51.97	74.00	-22.03	Peak	
2	2383.8000	30.55	5.23	35.78	54.00	-18.22	AVG	
3	2460.6000	104.33	5.37	109.70	74.00	35.70	Peak	No Limit
4 *	2460.6000	90.12	5.37	95.49	54.00	41.49	AVG	No Limit
5	2486.0000	67.52	5.41	72.93	74.00	-1.07	Peak	
6	2486.0000	39.44	5.41	44.85	54.00	-9.15	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

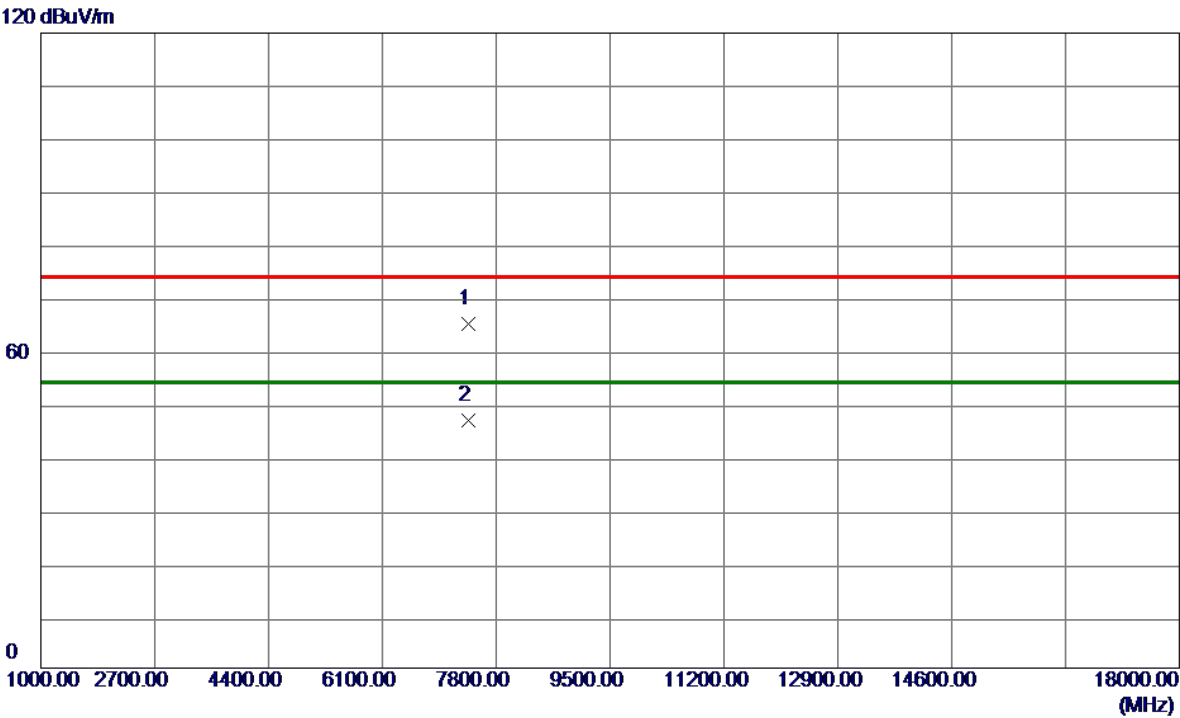


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	58.62	6.42	65.04	74.00	-8.96	Peak	
2 *	7386.0000	40.39	6.42	46.81	54.00	-7.19	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

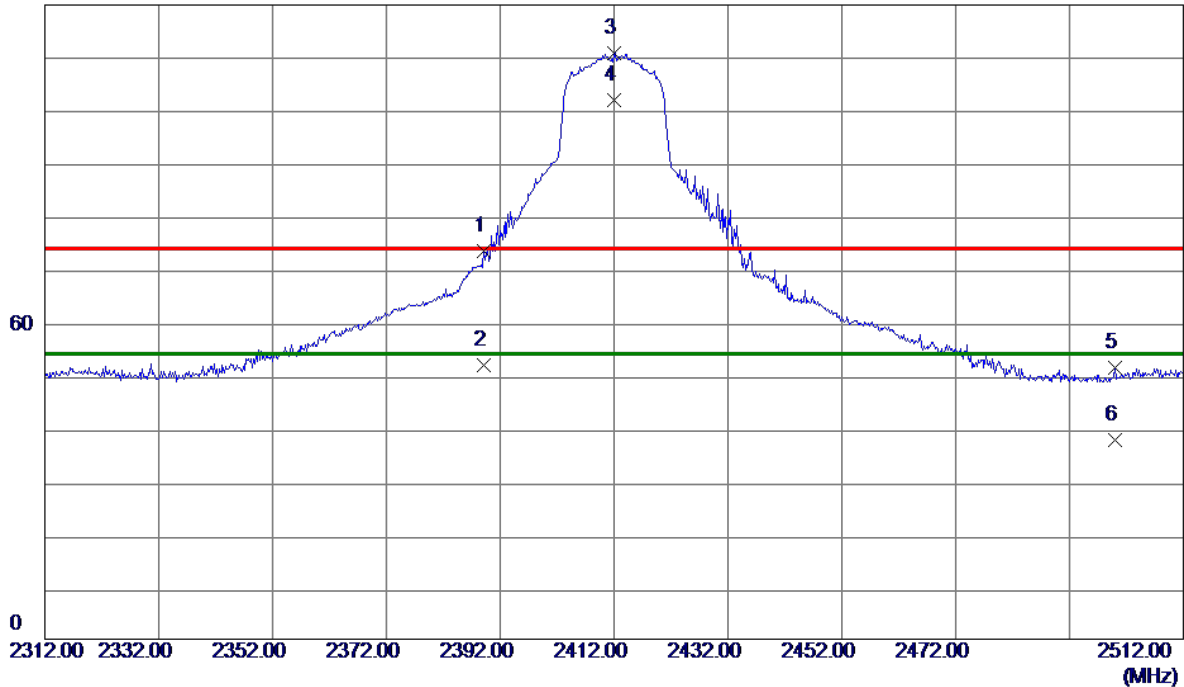


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.2000	68.25	5.24	73.49	74.00	-0.51	Peak	
2	2389.2000	46.59	5.24	51.83	54.00	-2.17	AVG	
3	2412.0000	105.60	5.28	110.88	74.00	36.88	Peak	No Limit
4 *	2412.0000	96.60	5.28	101.88	54.00	47.88	AVG	No Limit
5	2500.0000	45.85	5.44	51.29	74.00	-22.71	Peak	
6	2500.0000	32.19	5.44	37.63	54.00	-16.37	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.


Test Mode	TX N(HT20) Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

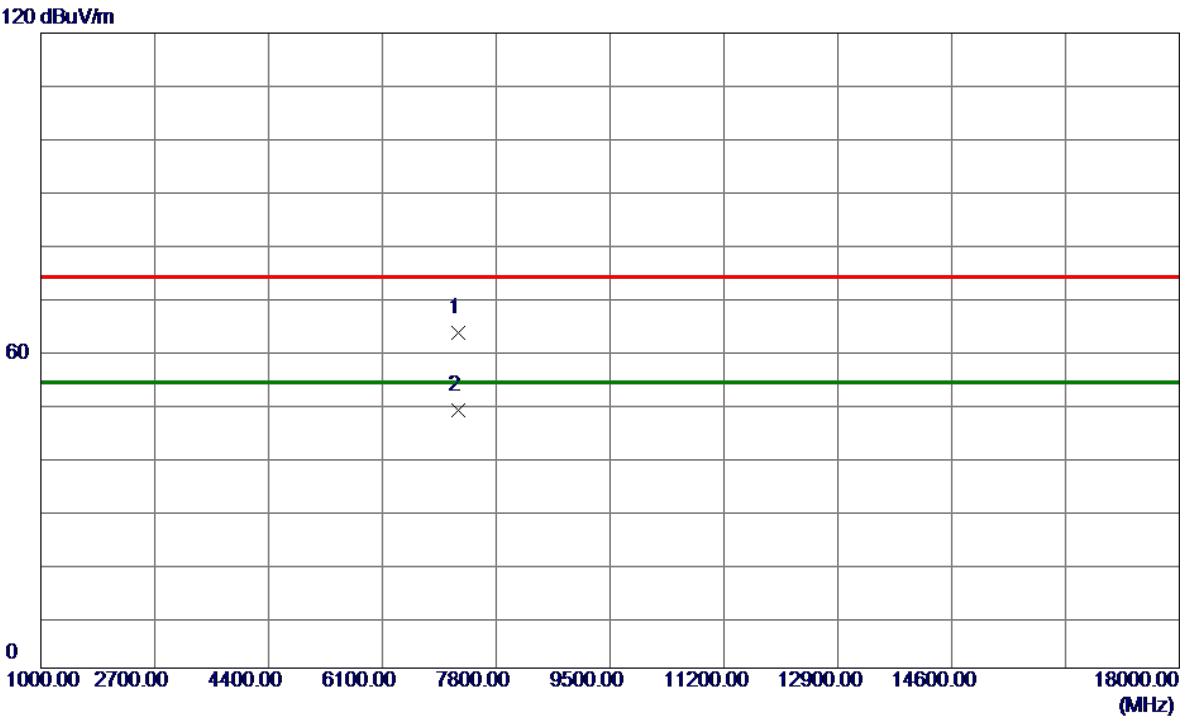

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7236.0000	56.93	6.40	63.33	74.00	-10.67	Peak	
2 *	7236.0000	42.36	6.40	48.76	54.00	-5.24	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/29
Test Frequency	2437 MHz	Polarization	Vertical

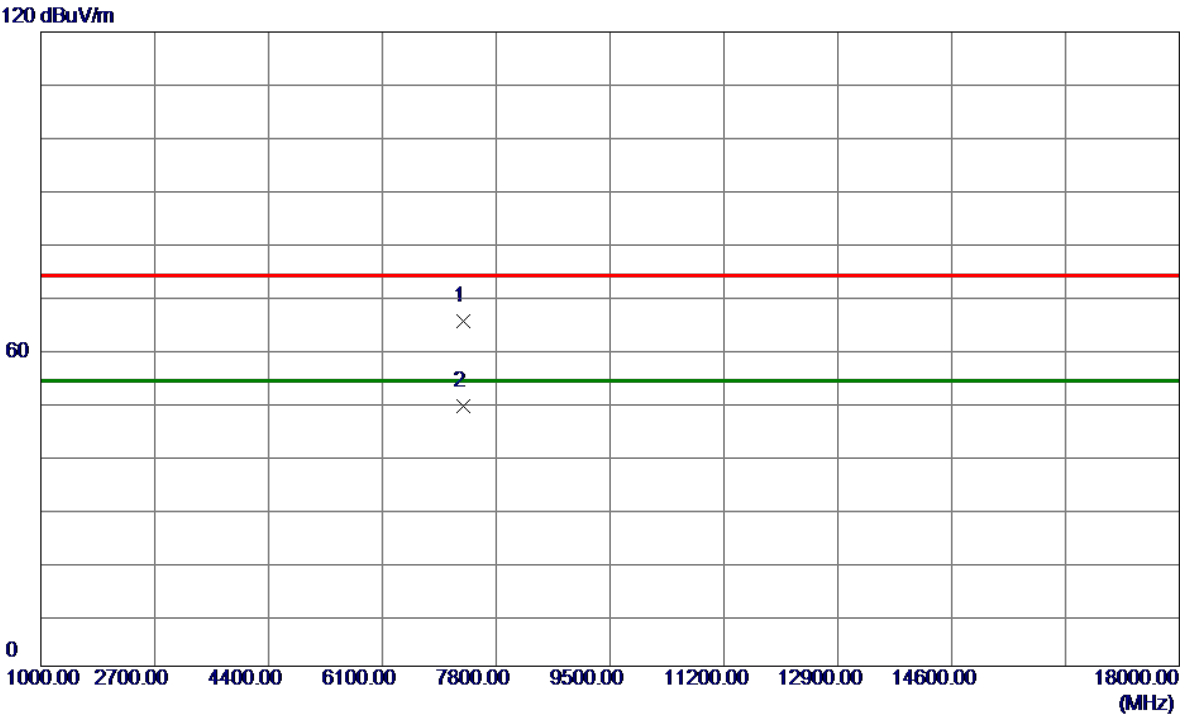

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.0000	58.85	6.41	65.26	74.00	-8.74	Peak	
2 *	7311.0000	42.79	6.41	49.20	54.00	-4.80	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

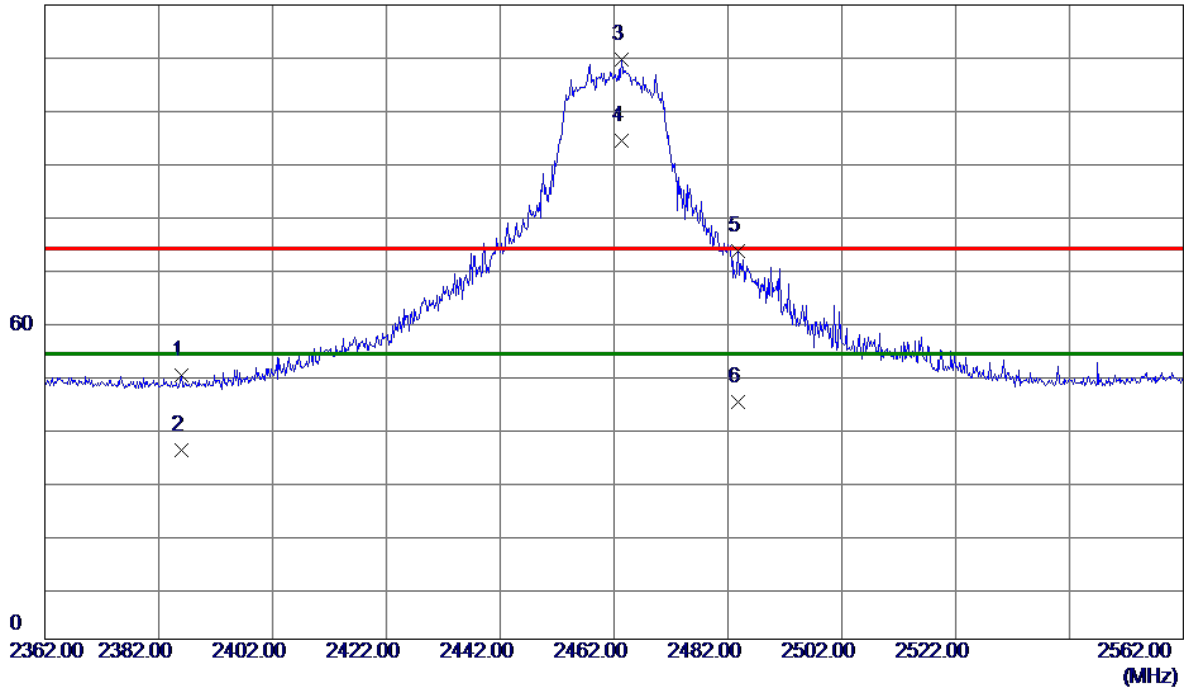


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2386.0000	44.58	5.23	49.81	74.00	-24.19	Peak	
2	2386.0000	30.56	5.23	35.79	54.00	-18.21	AVG	
3	2463.4000	104.31	5.37	109.68	74.00	35.68	Peak	No Limit
4 *	2463.4000	88.99	5.37	94.36	54.00	40.36	AVG	No Limit
5	2483.8000	67.99	5.41	73.40	74.00	-0.60	Peak	
6	2483.8000	39.39	5.41	44.80	54.00	-9.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX N(HT20) Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

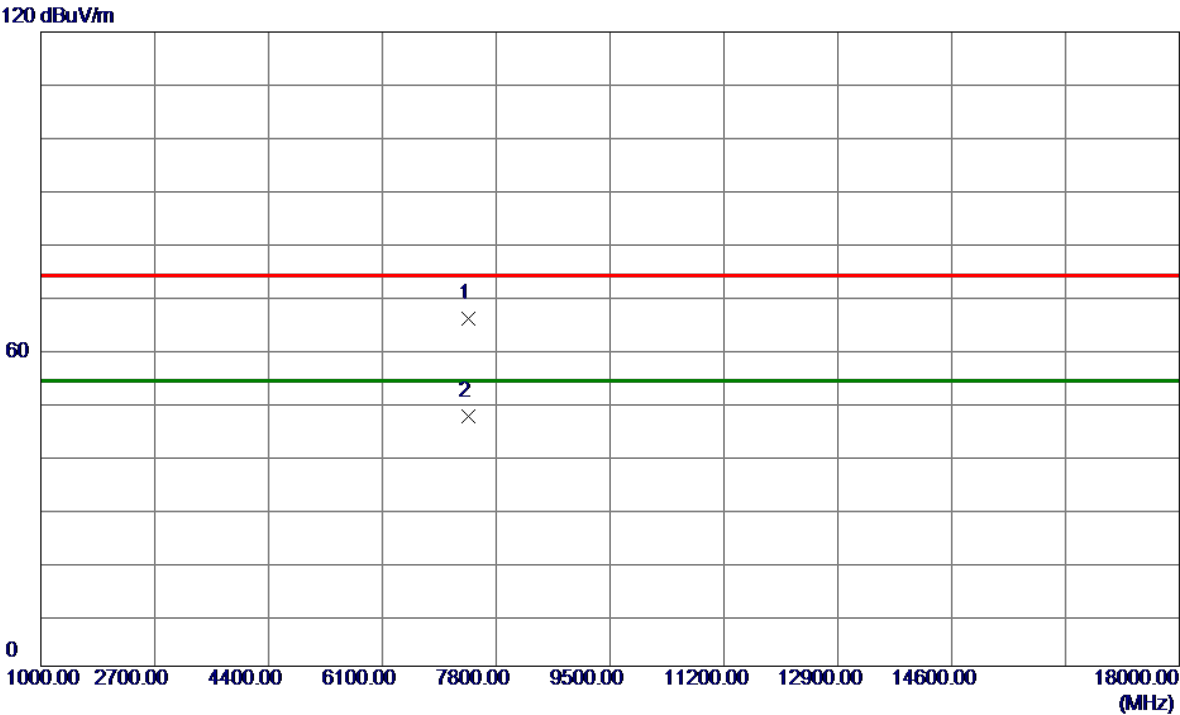


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	59.28	6.42	65.70	74.00	-8.30	Peak	
2 *	7386.0000	40.87	6.42	47.29	54.00	-6.71	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

120 dBuV/m

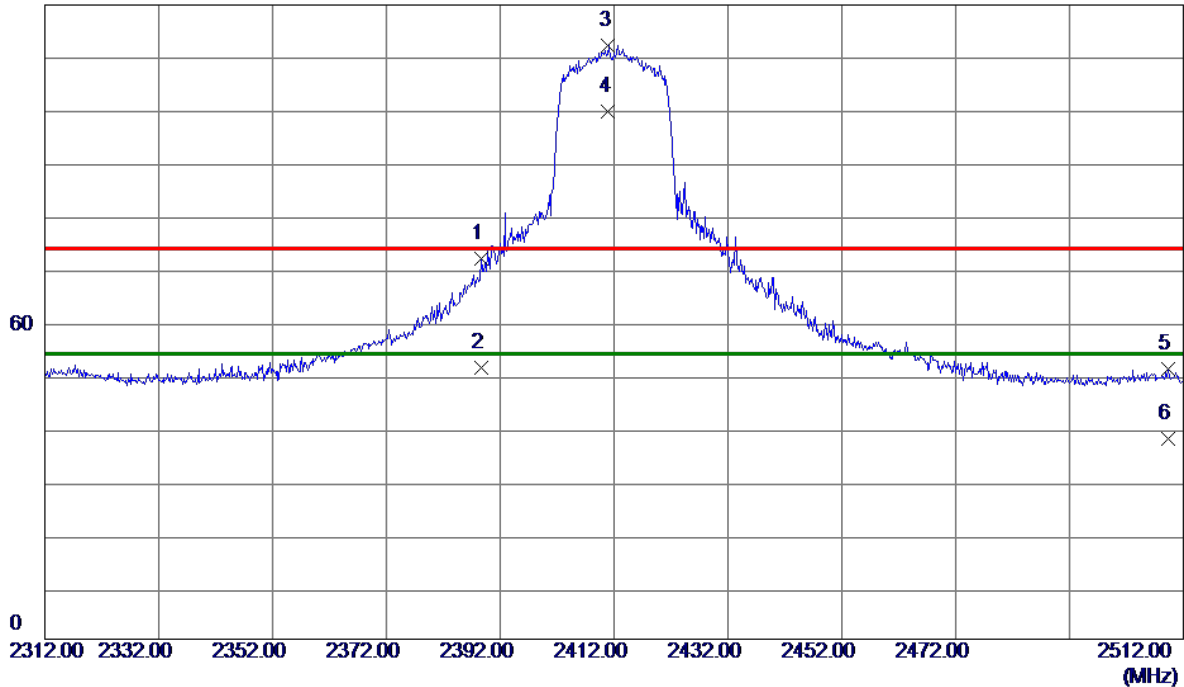


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.6000	66.80	5.24	72.04	74.00	-1.96	Peak	
2	2388.6000	46.10	5.24	51.34	54.00	-2.66	AVG	
3	2411.0000	106.99	5.28	112.27	74.00	38.27	Peak	No Limit
4 *	2411.0000	94.46	5.28	99.74	54.00	45.74	AVG	No Limit
5	2509.4000	45.68	5.48	51.16	74.00	-22.84	Peak	
6	2509.4000	32.35	5.48	37.83	54.00	-16.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.


Test Mode	TX AX(HE20) Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

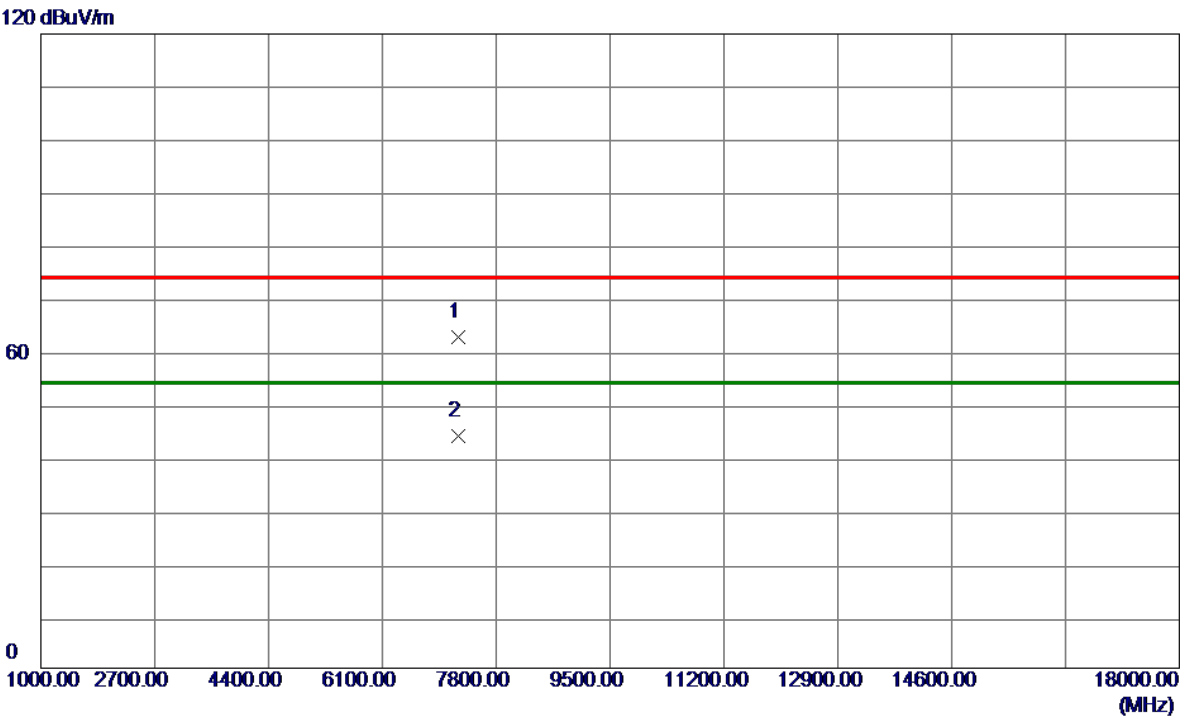

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7236.0000	56.19	6.40	62.59	74.00	-11.41	Peak	
2 *	7236.0000	37.56	6.40	43.96	54.00	-10.04	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/29
Test Frequency	2437 MHz	Polarization	Vertical

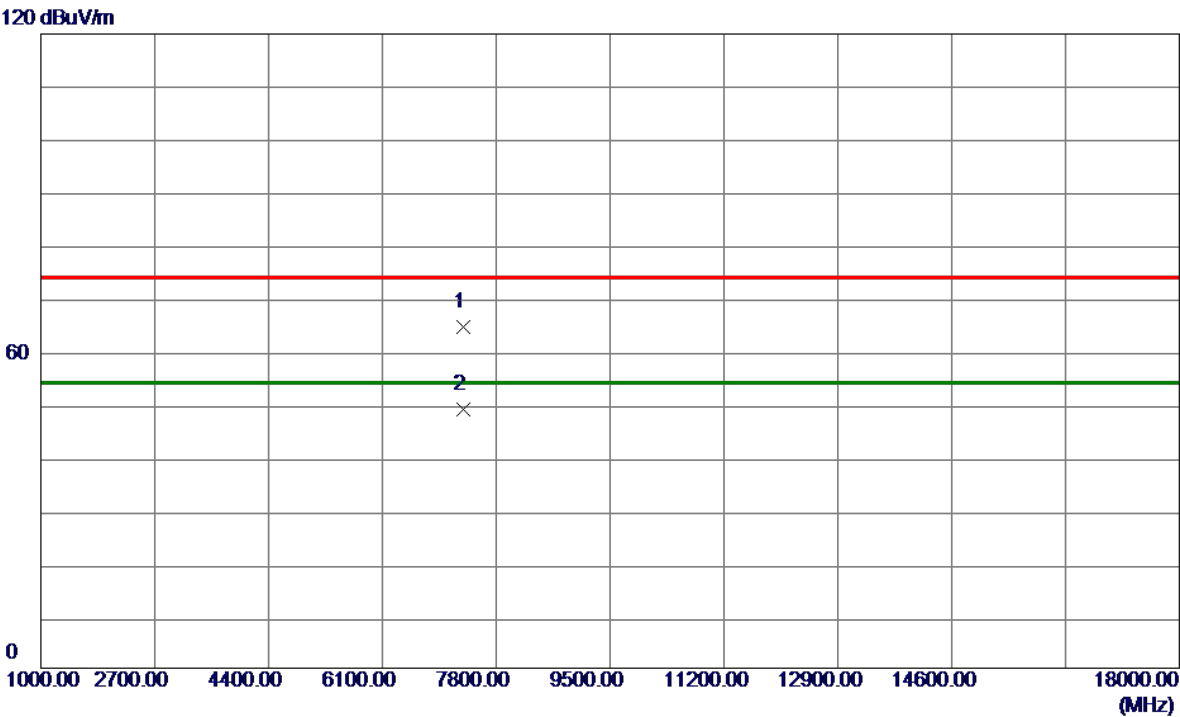


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7311.0000	58.15	6.41	64.56	74.00	-9.44	Peak	
2 *	7311.0000	42.66	6.41	49.07	54.00	-4.93	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX AX(HE20) Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

120 dBuV/m

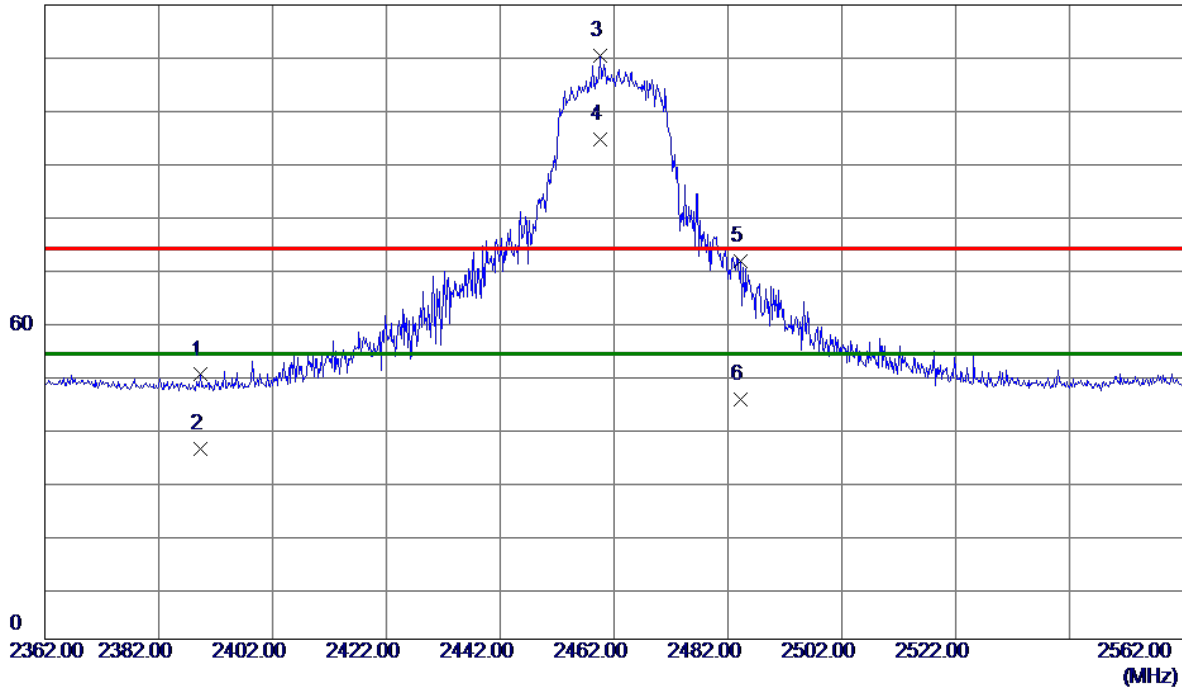


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2389.4000	44.80	5.24	50.04	74.00	-23.96	Peak	
2	2389.4000	30.72	5.24	35.96	54.00	-18.04	AVG	
3	2459.6000	105.02	5.37	110.39	74.00	36.39	Peak	No Limit
4 *	2459.6000	89.09	5.37	94.46	54.00	40.46	AVG	No Limit
5	2484.2000	66.09	5.41	71.50	74.00	-2.50	Peak	
6	2484.2000	40.01	5.41	45.42	54.00	-8.58	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.


Test Mode	TX AX(HE20) Mode	Test Date	2025/8/29
Test Frequency	2462 MHz	Polarization	Vertical

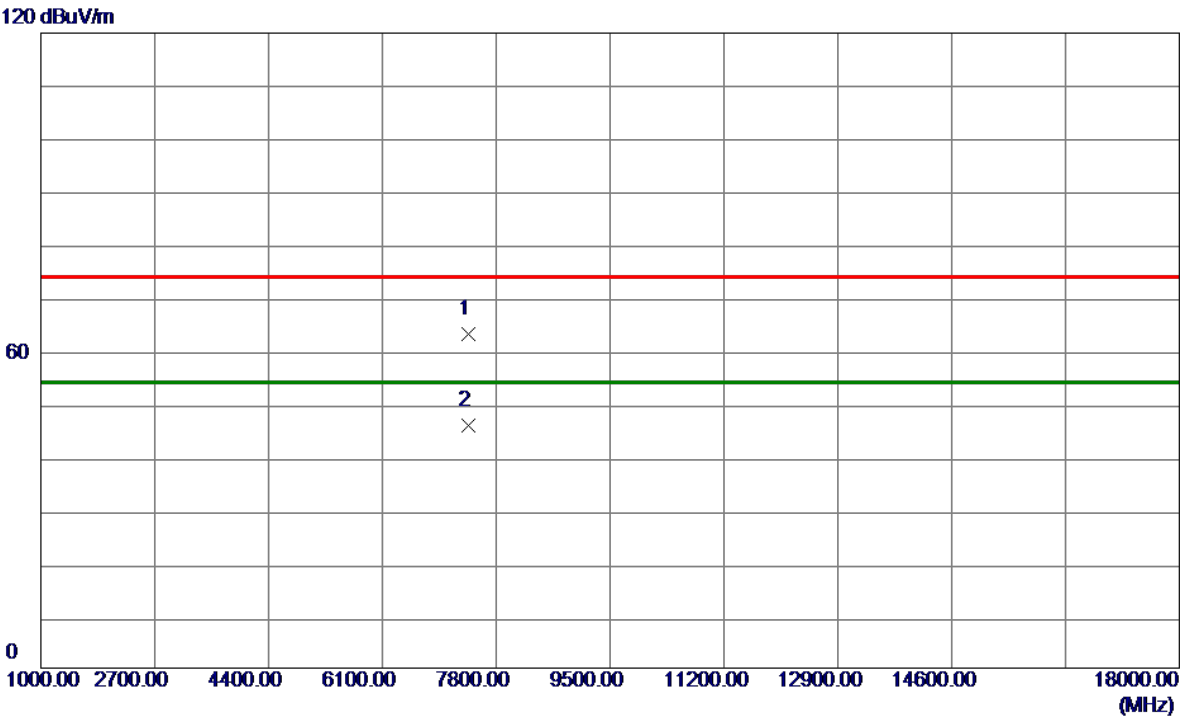

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	7386.0000	56.59	6.42	63.01	74.00	-10.99	Peak	
2 *	7386.0000	39.50	6.42	45.92	54.00	-8.08	AVG	

REMARKS:
 (1) Measurement Value = Reading Level + Correct Factor.
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode	Test Date	2025/8/29
Test Frequency	2412 MHz	Polarization	Vertical

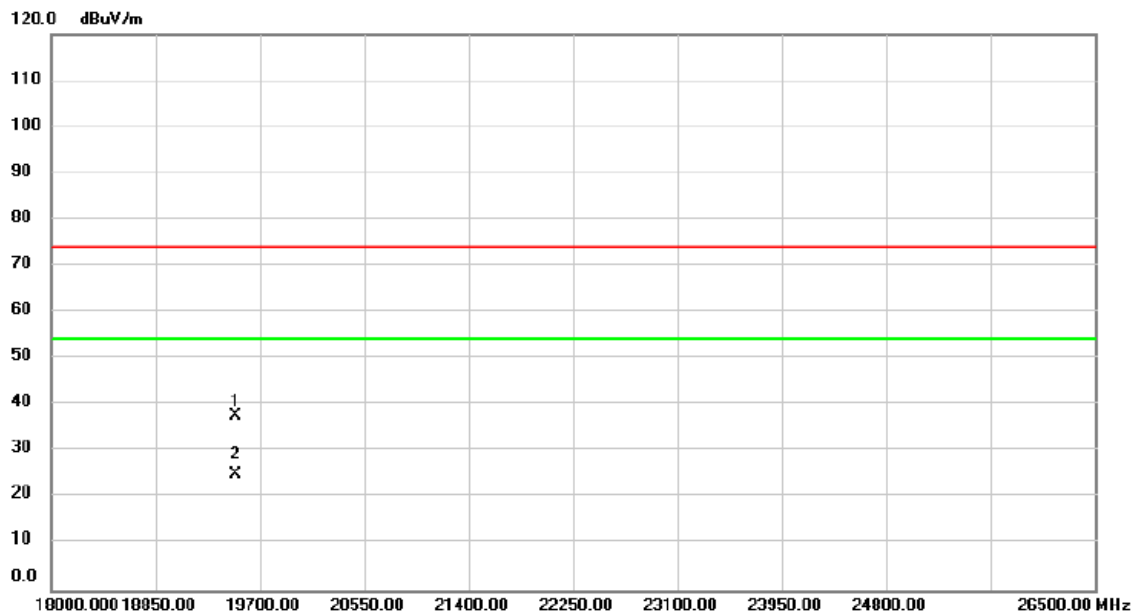

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		19496.00	47.25	-9.69	37.56	74.00	-36.44	peak	
2	*	19496.00	34.87	-9.69	25.18	54.00	-28.82	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH

Test Mode	TX B Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	11.120	14.960	0.5	Complies
06	2437	11.100	15.040	0.5	Complies
11	2462	10.159	14.960	0.5	Complies

CH01

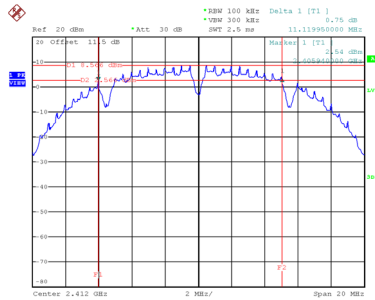


Date: 27.AUG.2025 22:23:46

CH06
6 dB Bandwidth

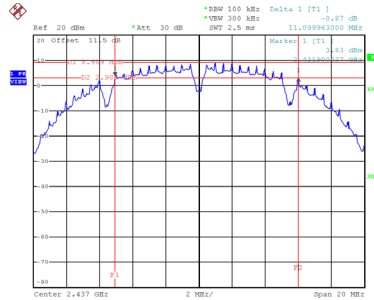


Date: 27.AUG.2025 22:25:33

CH11

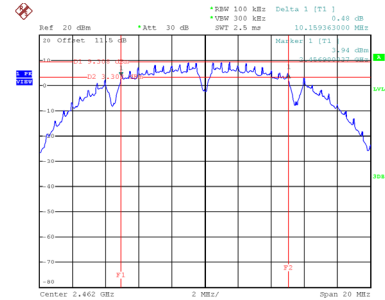


Date: 27.AUG.2025 22:27:12


99 % Occupied Bandwidth

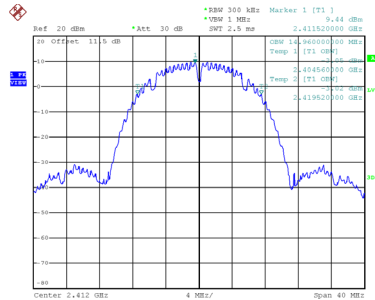

Date: 27.AUG.2025 22:23:54

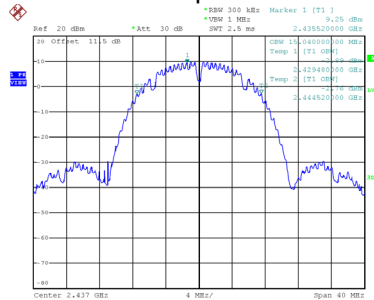

Date: 27.AUG.2025 22:25:42

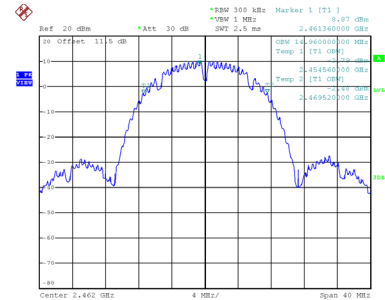


Date: 27.AUG.2025 22:27:21

Test Mode	TX G Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.100	16.480	0.5	Complies
06	2437	15.360	16.480	0.5	Complies
11	2462	14.079	16.560	0.5	Complies

CH01

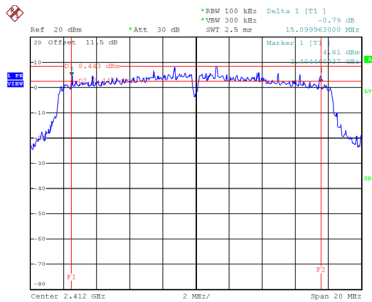


Date: 27.AUG.2025 22:29:04

CH06
6 dB Bandwidth

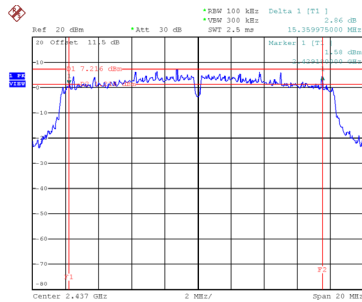


Date: 27.AUG.2025 22:32:04

CH11

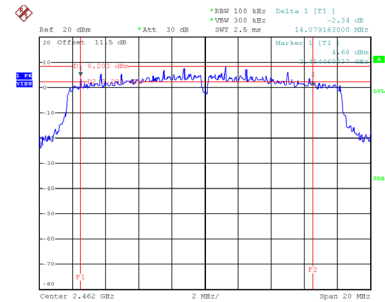


Date: 27.AUG.2025 22:33:38


99 % Occupied Bandwidth

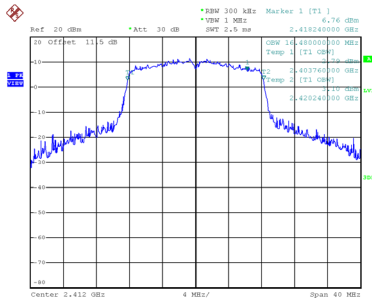

Date: 27.AUG.2025 22:29:13

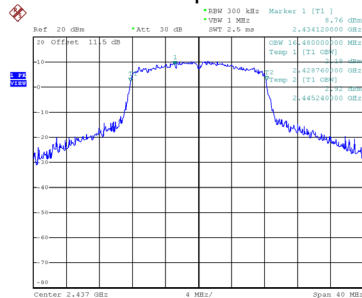

Date: 27.AUG.2025 22:32:13

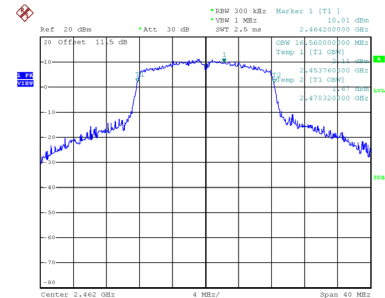


Date: 27.AUG.2025 22:33:47

Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.069	17.520	0.5	Complies
06	2437	15.100	17.600	0.5	Complies
11	2462	15.140	17.680	0.5	Complies

CH01

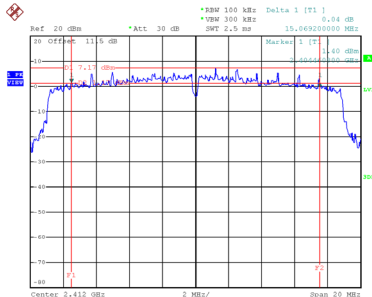


Date: 27.AUG.2025 22:35:25

CH06
6 dB Bandwidth

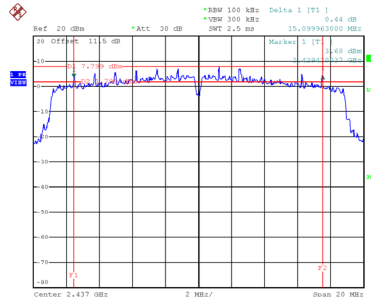


Date: 27.AUG.2025 22:37:39

CH11

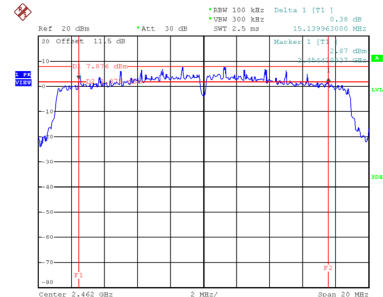


Date: 27.AUG.2025 22:39:29


99 % Occupied Bandwidth

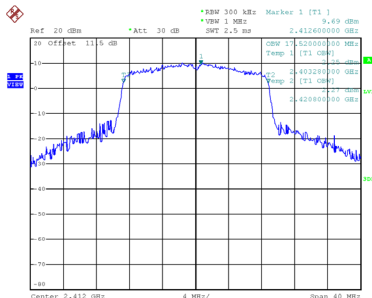

Date: 27.AUG.2025 22:35:34

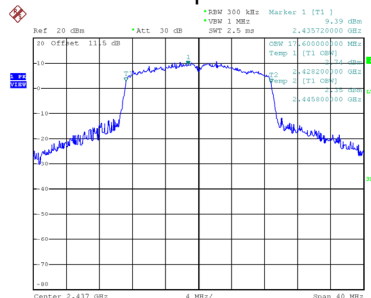

Date: 27.AUG.2025 22:37:48

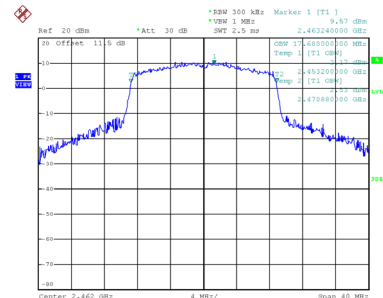


Date: 27.AUG.2025 22:39:38

Test Mode	TX AX(HE20) Mode_Ant. 1
-----------	-------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)	6 dB Bandwidth Min. Limit (MHz)	Result
01	2412	15.160	18.800	0.5	Complies
06	2437	15.400	18.800	0.5	Complies
11	2462	15.130	18.880	0.5	Complies

CH01

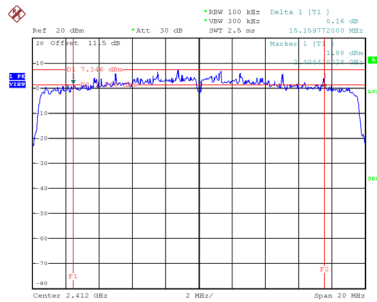


Date: 27.AUG.2025 22:43:23

CH06
6 dB Bandwidth

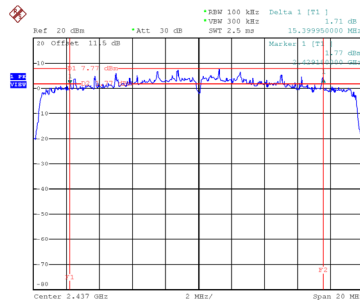


Date: 27.AUG.2025 22:44:01

CH11

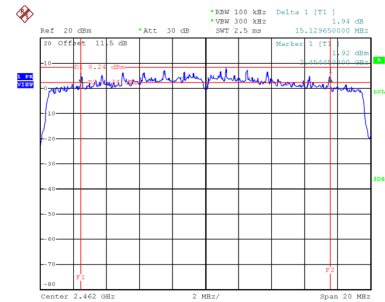


Date: 27.AUG.2025 22:45:30


99 % Occupied Bandwidth

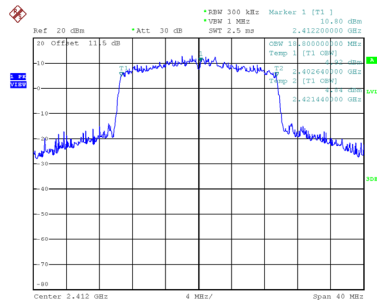

Date: 27.AUG.2025 22:41:10

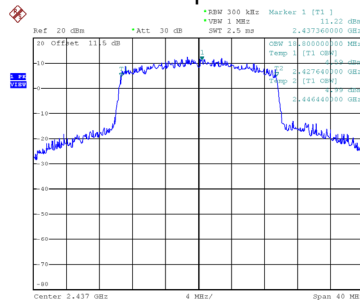

Date: 27.AUG.2025 22:44:10

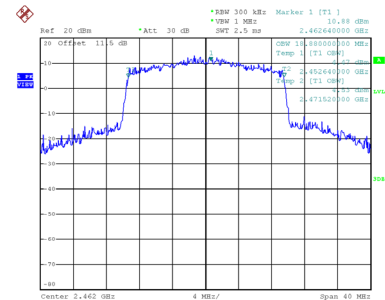

Date: 27.AUG.2025 22:45:39

APPENDIX F - MAXIMUM OUTPUT POWER

Test Mode	TX B Mode_Ant. 1
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	16.66	0.00	16.66	30.00	1.0000	Complies
06	2437	18.86	0.00	18.86	30.00	1.0000	Complies
11	2462	18.75	0.00	18.75	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 1
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.97	0.00	18.97	30.00	1.0000	Complies
06	2437	18.95	0.00	18.95	30.00	1.0000	Complies
11	2462	18.91	0.00	18.91	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 1
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.52	0.00	17.52	30.00	1.0000	Complies
06	2437	18.72	0.00	18.72	30.00	1.0000	Complies
11	2462	17.88	0.00	17.88	30.00	1.0000	Complies

Test Mode	TX AX(HE20) Mode_Ant. 1
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.14	0.00	17.14	30.00	1.0000	Complies
06	2437	18.80	0.00	18.80	30.00	1.0000	Complies
11	2462	17.53	0.00	17.53	30.00	1.0000	Complies

Test Mode	TX B Mode_Ant. 2
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.81	0.00	18.81	30.00	1.0000	Complies
06	2437	18.86	0.00	18.86	30.00	1.0000	Complies
11	2462	18.43	0.00	18.43	30.00	1.0000	Complies

Test Mode	TX G Mode_Ant. 2
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.97	0.00	18.97	30.00	1.0000	Complies
06	2437	18.95	0.00	18.95	30.00	1.0000	Complies
11	2462	17.08	0.00	17.08	30.00	1.0000	Complies

Test Mode	TX N(HT20) Mode_Ant. 2
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	18.79	0.00	18.79	30.00	1.0000	Complies
06	2437	18.72	0.00	18.72	30.00	1.0000	Complies
11	2462	16.96	0.00	16.96	30.00	1.0000	Complies


Test Mode	TX AX(HE20) Mode_Ant. 2
Test Date	2025/8/27

Channel	Frequency (MHz)	Output Power (dBm)	Duty Factor	Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	17.66	0.00	17.66	30.00	1.0000	Complies
06	2437	18.80	0.00	18.80	30.00	1.0000	Complies
11	2462	16.89	0.00	16.89	30.00	1.0000	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS


Test Mode TX B Mode_Ant. 1

Bandedge-CH01

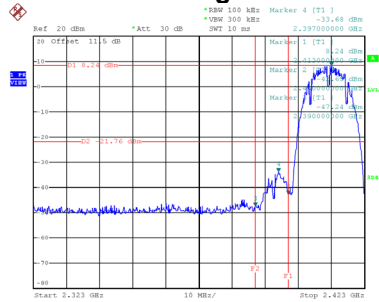


Date: 27.AUG.2025 22:24:04

Bandedge-CH11

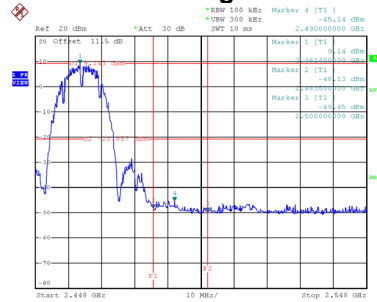


Date: 27.AUG.2025 22:27:30


CH01 – 10th Harmonic of the fundamental frequency

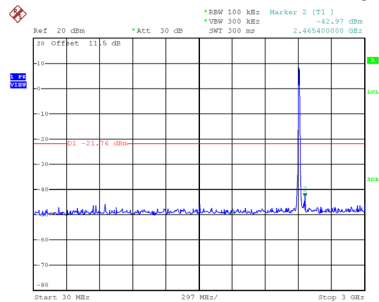

Date: 27.AUG.2025 22:24:19

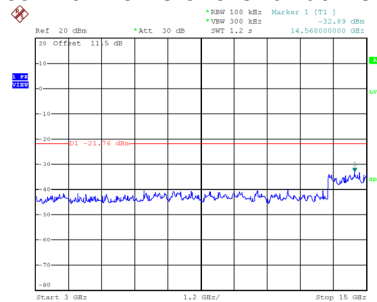


Date: 27.AUG.2025 22:24:28

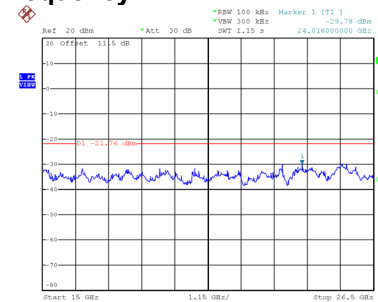


Date: 27.AUG.2025 22:24:37


CH06 – 10th Harmonic of the fundamental frequency

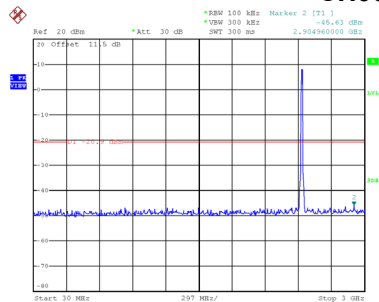

Date: 27.AUG.2025 22:26:06

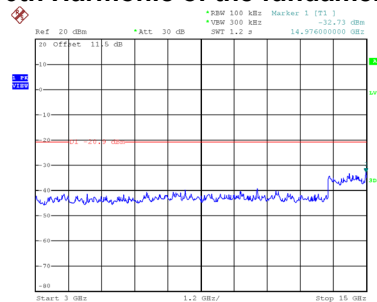


Date: 27.AUG.2025 22:26:16

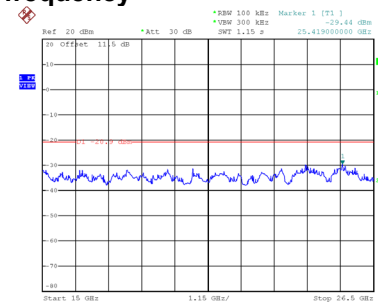


Date: 27.AUG.2025 22:26:25


CH11 – 10th Harmonic of the fundamental frequency

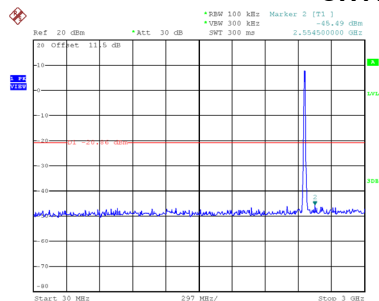

Date: 27.AUG.2025 22:27:46

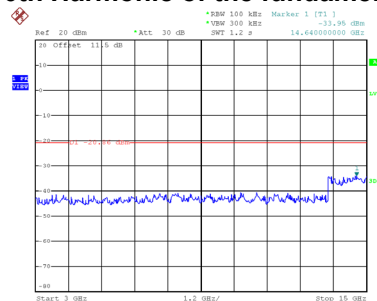


Date: 27.AUG.2025 22:27:55

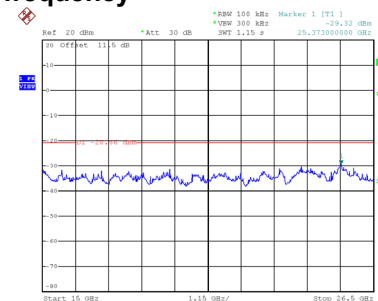

Date: 27.AUG.2025 22:28:04


Test Mode TX G Mode_Ant. 1

Bandedge-CH01

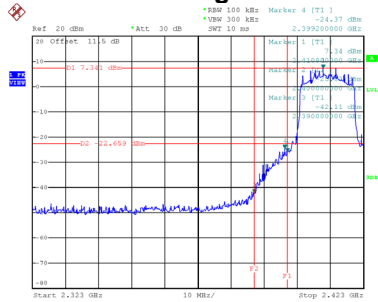


Date: 27.AUG.2025 22:30:53

Bandedge-CH11

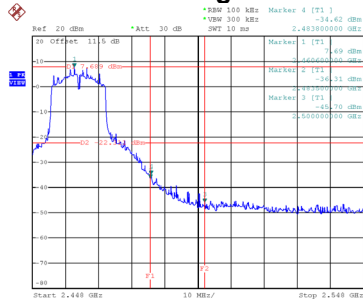


Date: 27.AUG.2025 22:33:56


CH01 – 10th Harmonic of the fundamental frequency

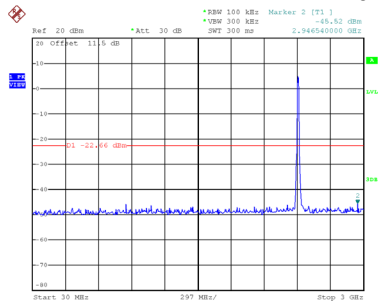

Date: 27.AUG.2025 22:31:08

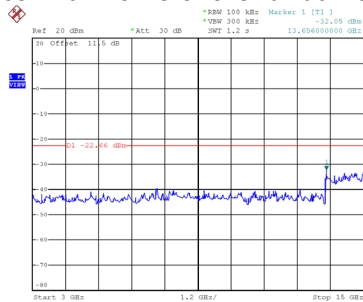


Date: 27.AUG.2025 22:31:17

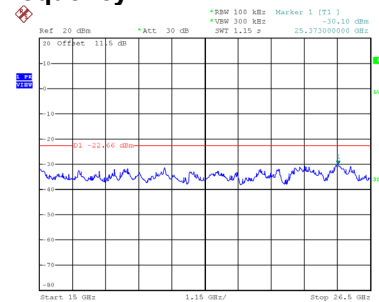


Date: 27.AUG.2025 22:31:26


CH06 – 10th Harmonic of the fundamental frequency

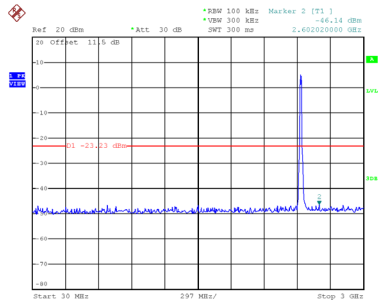

Date: 27.AUG.2025 22:32:37

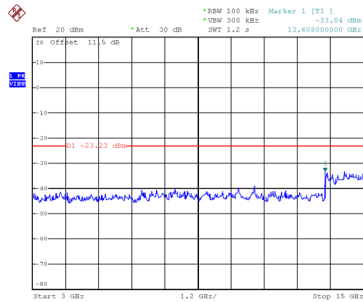


Date: 27.AUG.2025 22:32:46

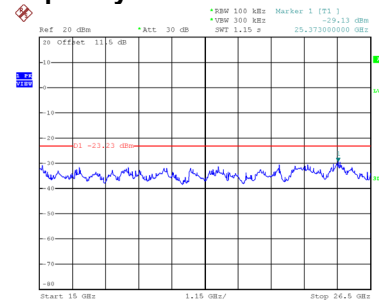


Date: 27.AUG.2025 22:32:55


CH11 – 10th Harmonic of the fundamental frequency

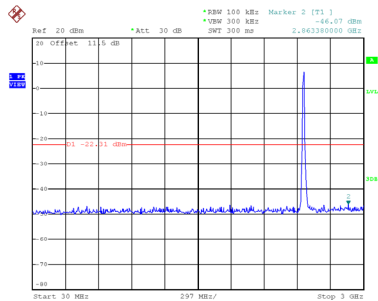

Date: 27.AUG.2025 22:34:11

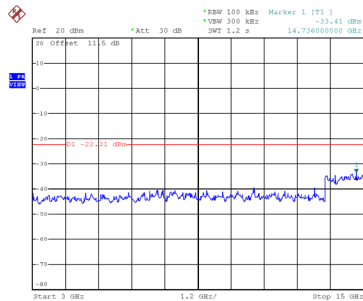


Date: 27.AUG.2025 22:34:20

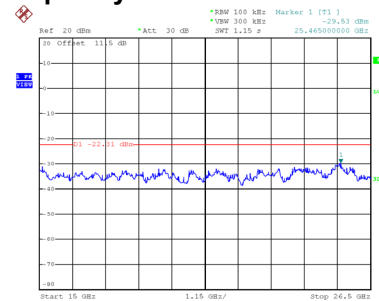

Date: 27.AUG.2025 22:34:29


Test Mode TX N(HT20) Mode_Ant. 1

Bandedge-CH01

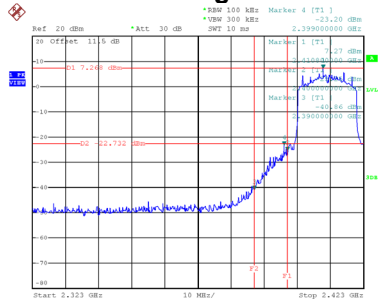


Date: 27.AUG.2025 22:35:43

Bandedge-CH11

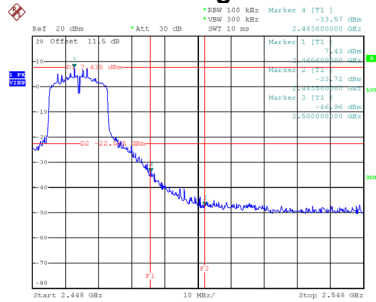


Date: 27.AUG.2025 22:39:47


CH01 – 10th Harmonic of the fundamental frequency

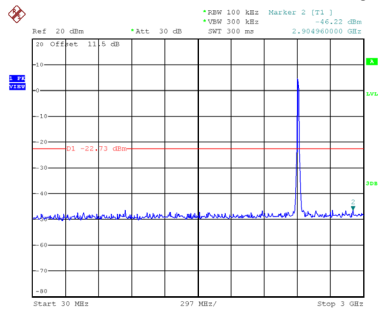

Date: 27.AUG.2025 22:35:58

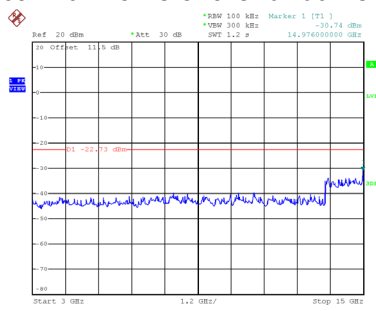


Date: 27.AUG.2025 22:36:07

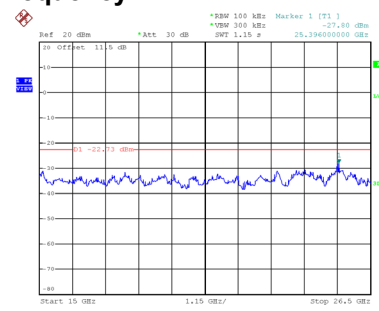


Date: 27.AUG.2025 22:36:16


CH06 – 10th Harmonic of the fundamental frequency

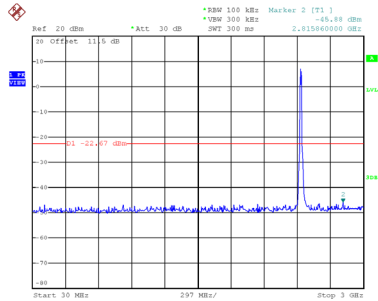

Date: 27.AUG.2025 22:38:12

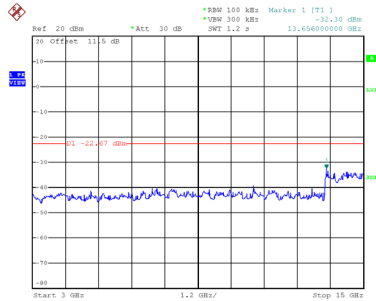


Date: 27.AUG.2025 22:38:21

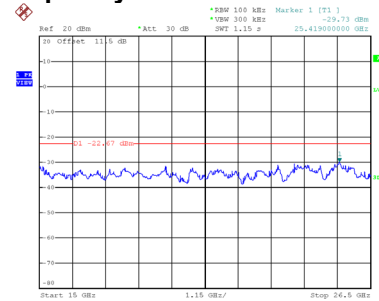


Date: 27.AUG.2025 22:38:30


CH11 – 10th Harmonic of the fundamental frequency

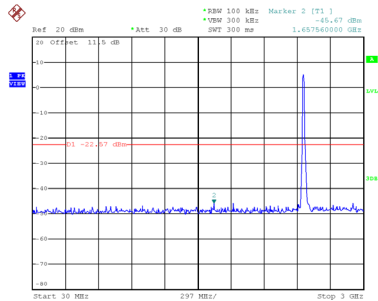

Date: 27.AUG.2025 22:40:02

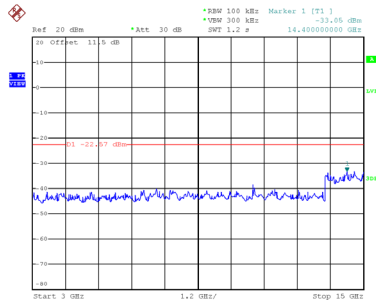


Date: 27.AUG.2025 22:40:12

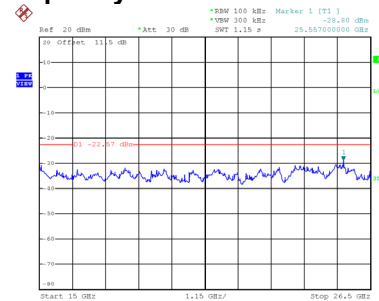

Date: 27.AUG.2025 22:40:21


Test Mode TX AX(HE20) Mode_Ant. 1

Bandedge-CH01

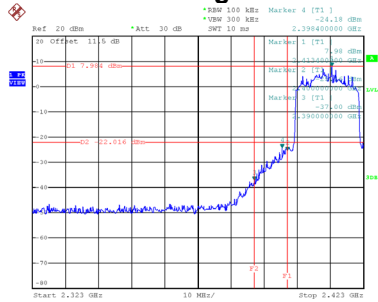


Date: 27.AUG.2025 22:41:19

Bandedge-CH11

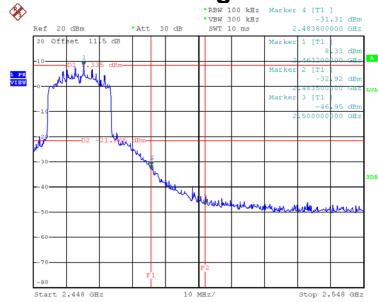


Date: 27.AUG.2025 22:45:48


CH01 – 10th Harmonic of the fundamental frequency

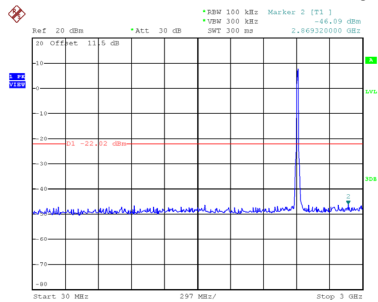

Date: 27.AUG.2025 22:41:34

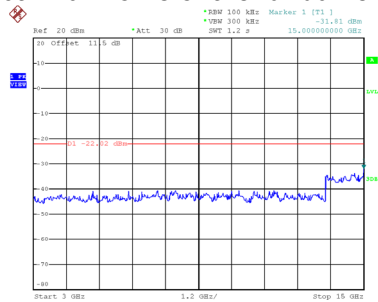


Date: 27.AUG.2025 22:41:43

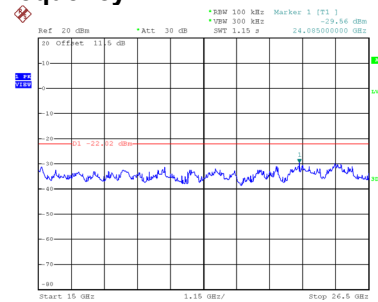


Date: 27.AUG.2025 22:41:52


CH06 – 10th Harmonic of the fundamental frequency

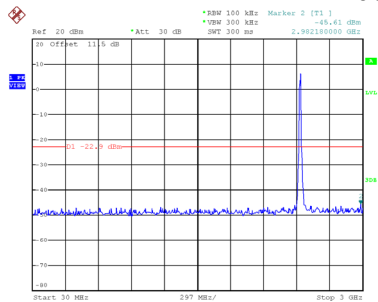

Date: 27.AUG.2025 22:44:34

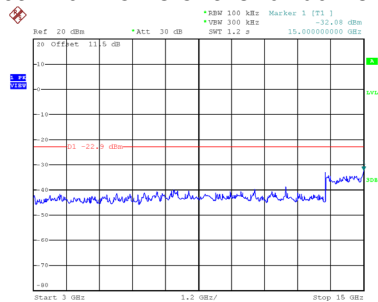


Date: 27.AUG.2025 22:44:44

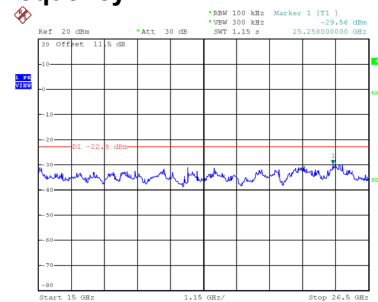


Date: 27.AUG.2025 22:44:53


CH11 – 10th Harmonic of the fundamental frequency

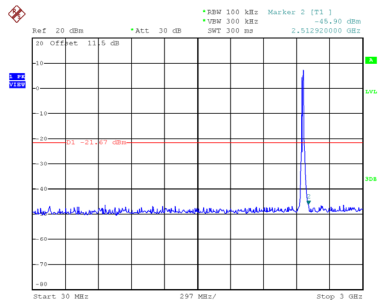

Date: 27.AUG.2025 22:46:03

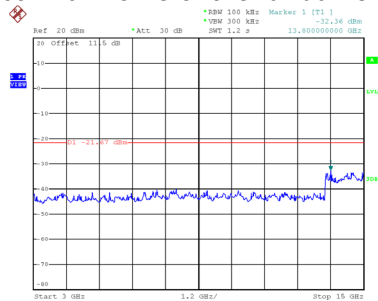

Date: 27.AUG.2025 22:46:12

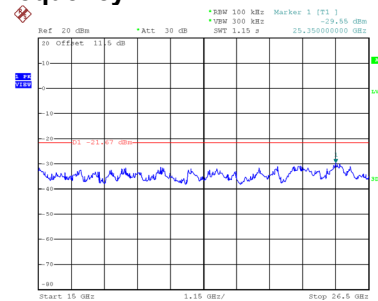


Date: 27.AUG.2025 22:46:21


APPENDIX H - POWER SPECTRAL DENSITY

Test Mode	TX B Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.60	8.00	Complies
06	2437	-5.95	8.00	Complies
11	2462	-5.94	8.00	Complies

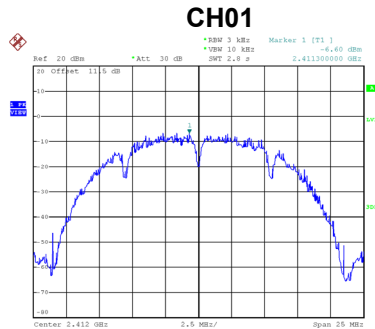

Date: 27.AUG.2025 22:24:48

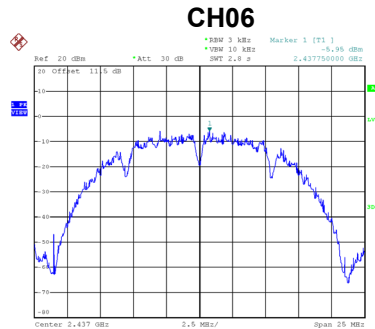


Date: 27.AUG.2025 22:26:35

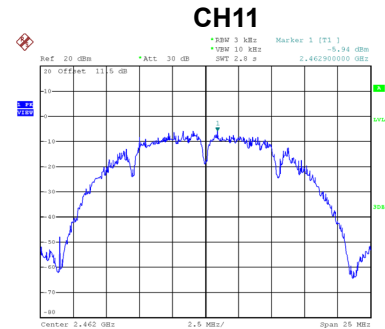


Date: 27.AUG.2025 22:28:14

Test Mode	TX G Mode_Ant. 1
-----------	------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-3.99	8.00	Complies
06	2437	-6.68	8.00	Complies
11	2462	-6.38	8.00	Complies

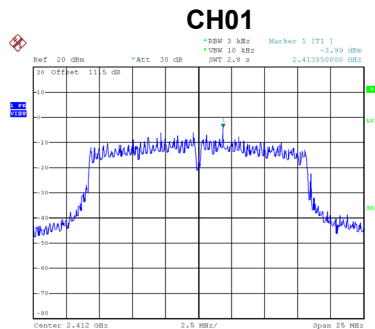

Date: 27.AUG.2025 22:31:37

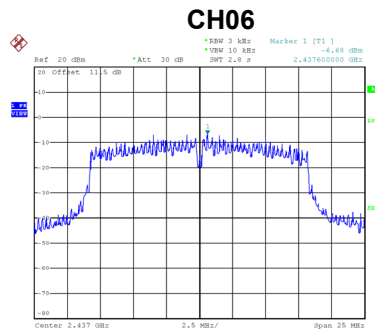


Date: 27.AUG.2025 22:33:06

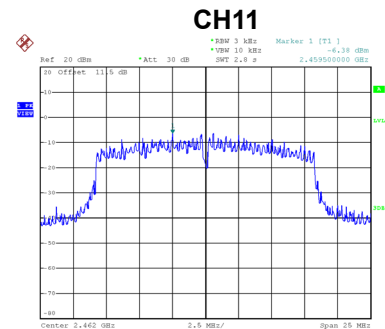


Date: 27.AUG.2025 22:34:40

Test Mode	TX N(HT20) Mode_Ant. 1
-----------	------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.16	8.00	Complies
06	2437	-6.04	8.00	Complies
11	2462	-5.30	8.00	Complies

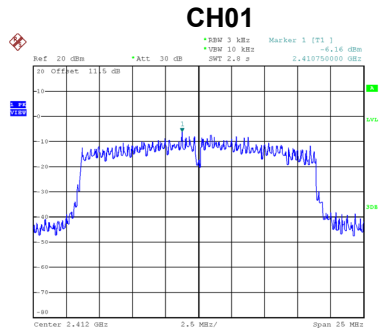

Date: 27.AUG.2025 22:16:27

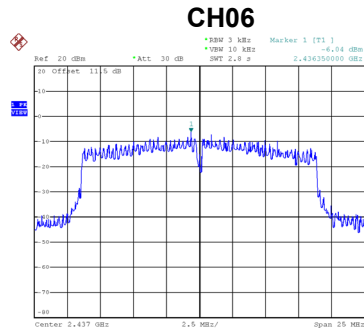


Date: 27.AUG.2025 22:18:41

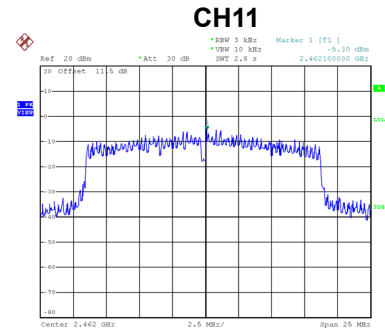


Date: 27.AUG.2025 22:19:27

Test Mode	TX AX(HE20) Mode_Ant. 1
-----------	-------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-6.63	8.00	Complies
06	2437	-8.06	8.00	Complies
11	2462	-7.32	8.00	Complies

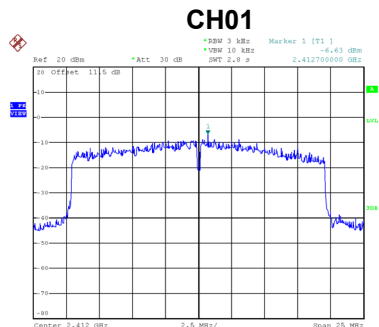

Date: 27.AUG.2025 22:14:03

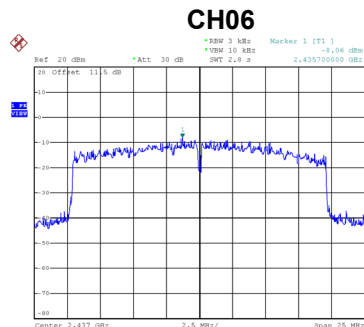

Date: 27.AUG.2025 22:14:03

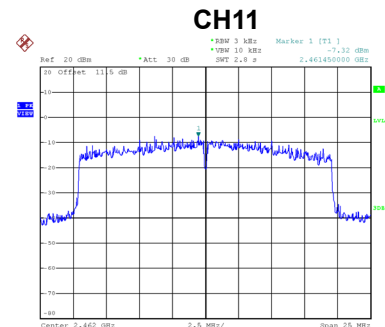

Date: 27.AUG.2025 22:14:32

End of Test Report