


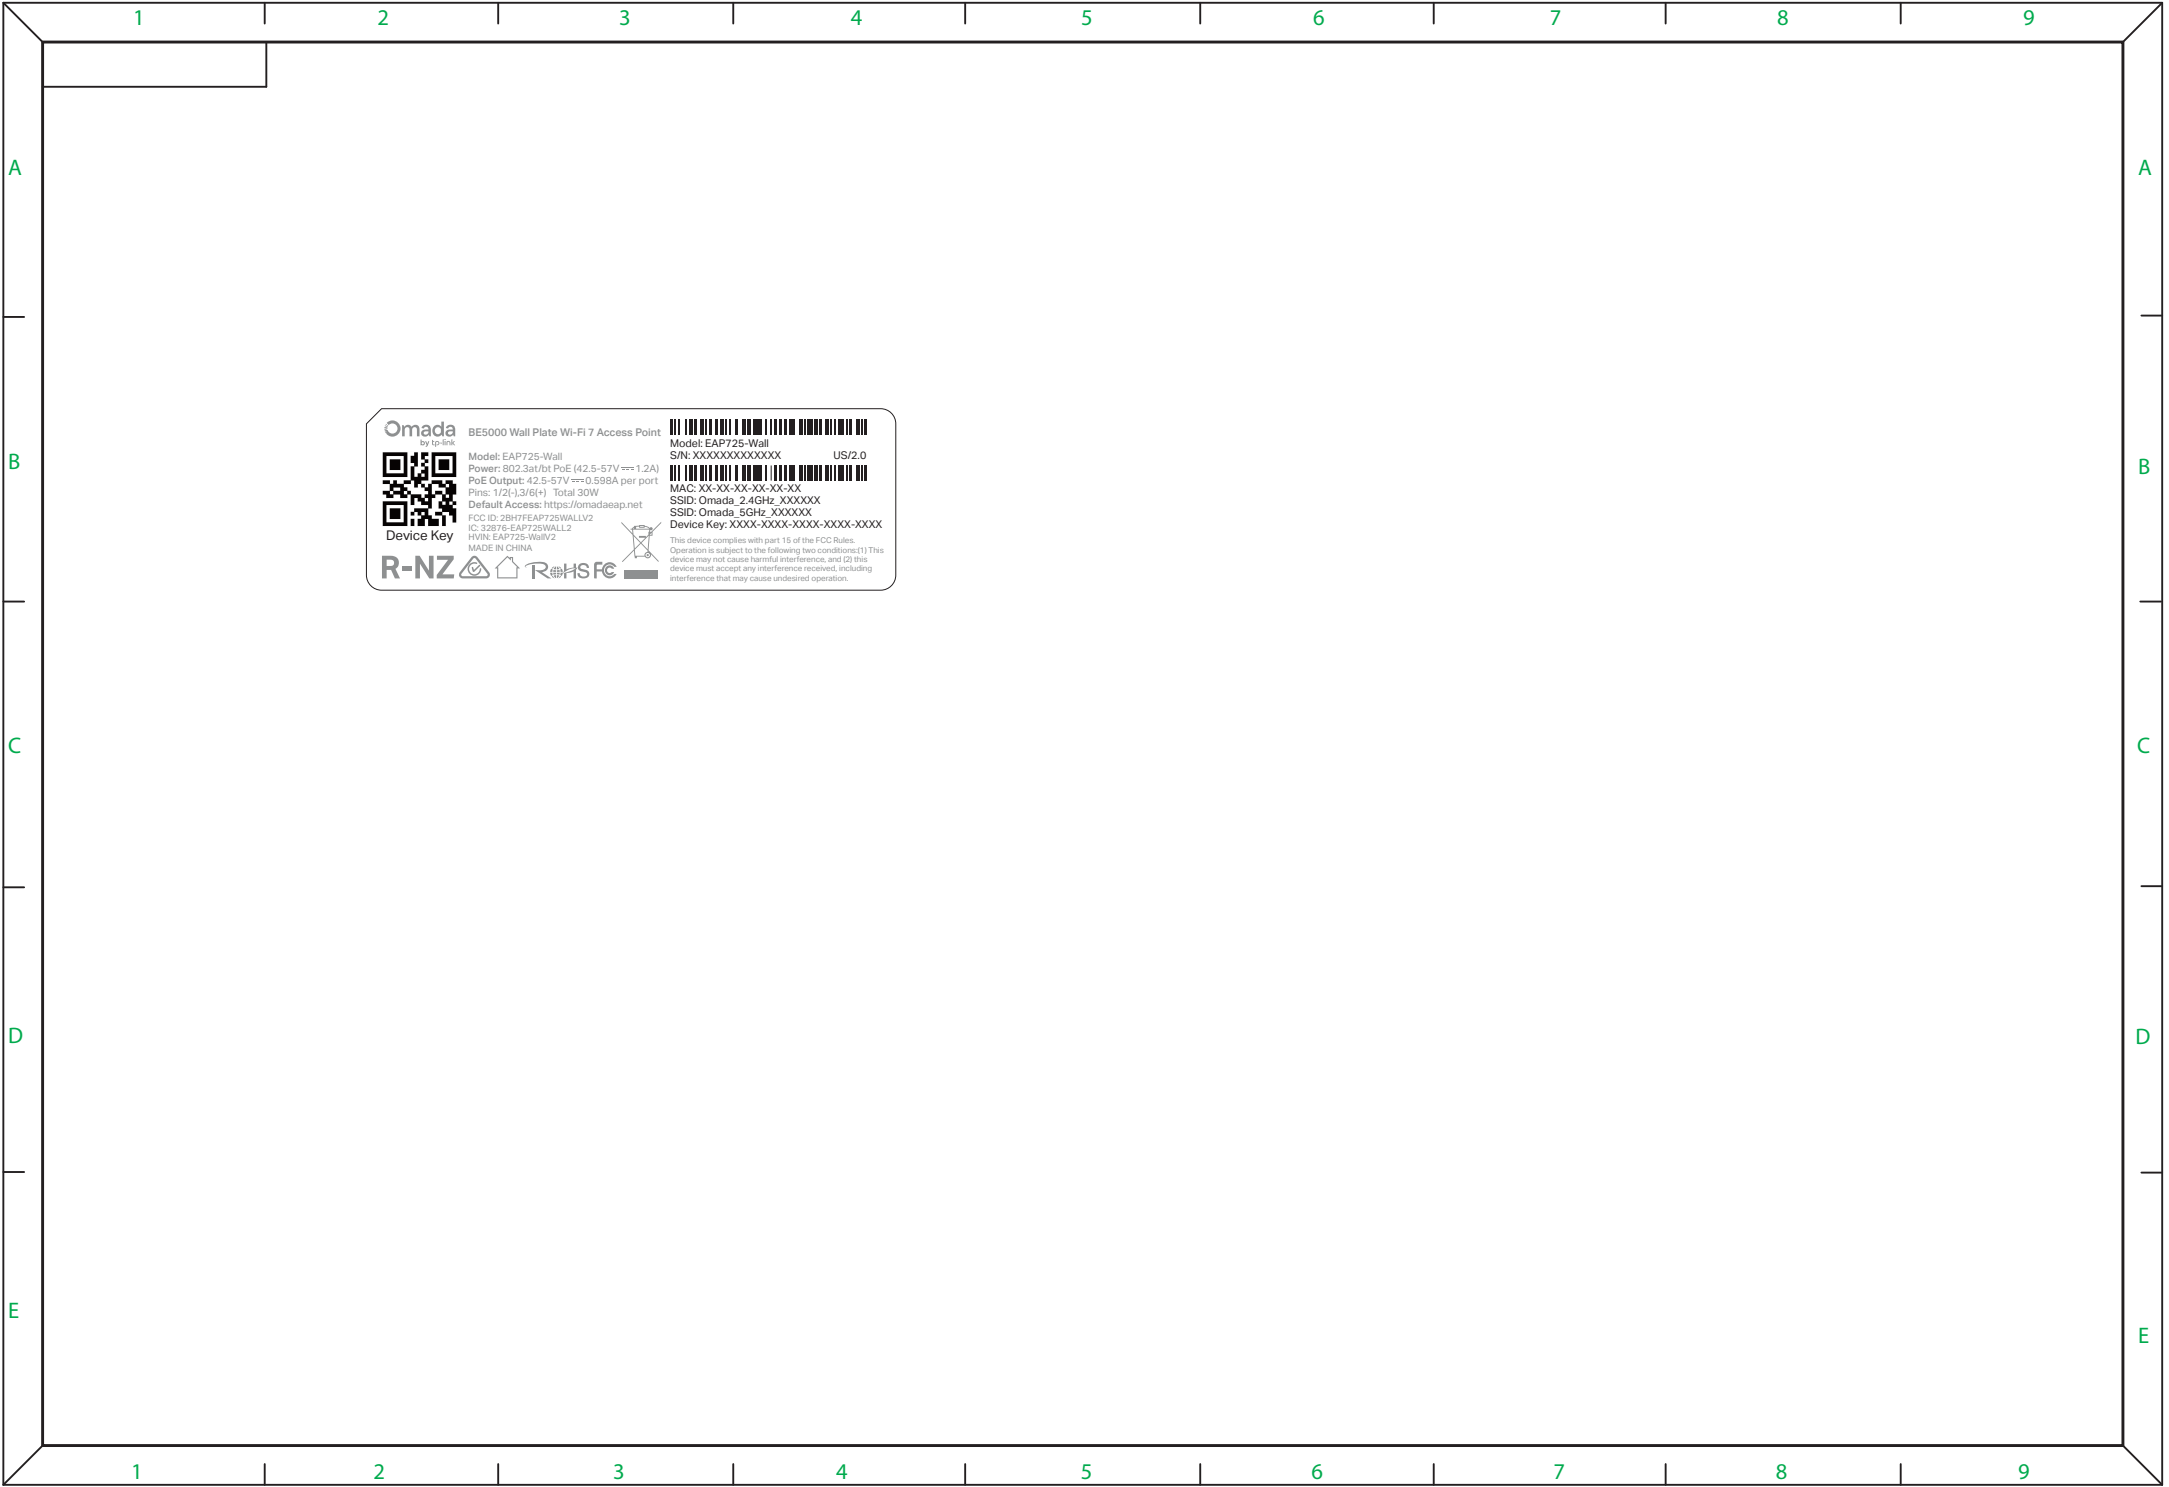


by tp-link


Device Key

BE5000 Wall Plate Wi-Fi 7 Access Point

Model: EAP725-Wall
Power: 802.3at/bt PoE (42.5-57V ~ 1.2A)
PoE Output: 42.5-57V ~ 0.598A per port
Ports: 1/2(-), 3/6(+) Total 30W
Default Access: <https://omadaeap.net>
FCC ID: 28H77EAP725WALLV2
IC: 32876-EAP725WALL2
HVIN: EAP725-WallV2
MADE IN CHINA




Model: EAP725-Wall
S/N: XXXXXXXXXXXX US/2.0

MAC: XX-XX-XX-XX-XX-XX
SSID: Omada_2.4GHz_XXXXXX
SSID: Omada_5GHz_XXXXXX
Device Key: XXXX-XXXX-XXXX-XXXX-XXXX
This device complies with part 15 of the FCC Rules.
Operation is subject to the following two conditions: (1) This device must accept any interference received, including interference that may cause undesired operation.

Proposed Location of Label on EUT

