

802.11ax-HE20 Power Spectral Density - Ant 1


Channel 100 (5500 MHz)



Channel 116 (5580 MHz)




Channel 140 (5700 MHz)

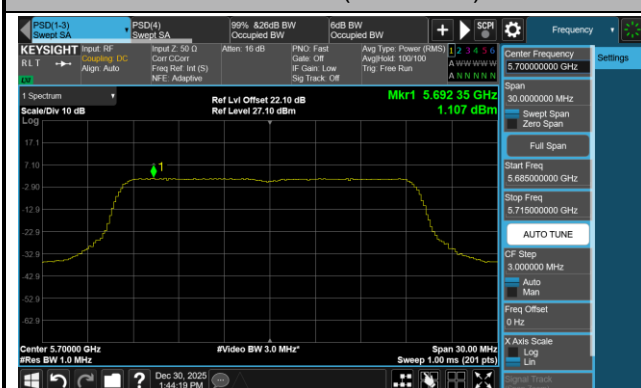

Channel 144 (5720 MHz)



Channel 149 (5745 MHz)

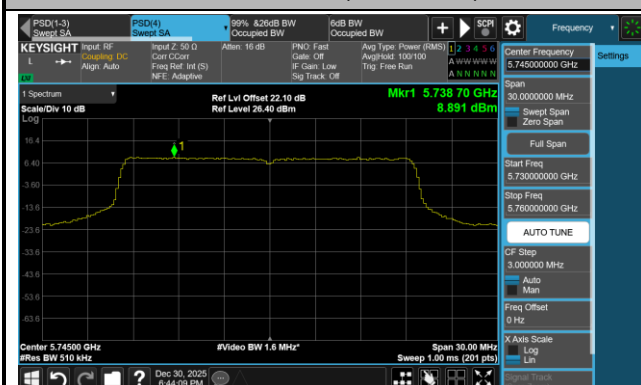

Channel 157 (5785 MHz)




Channel 165 (5825 MHz)



802.11ax-HE40 Power Spectral Density - Ant 1


Channel 38 (5190 MHz)

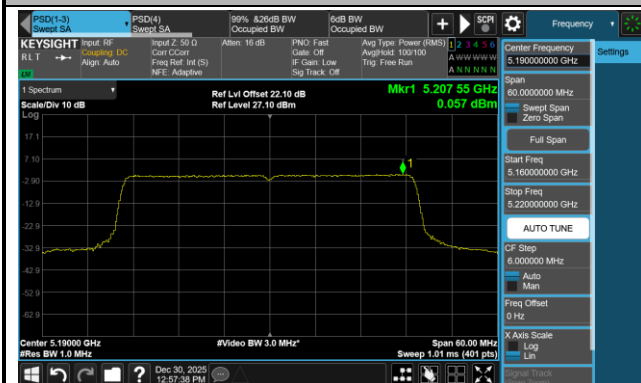


Channel 46 (5230 MHz)




Channel 54 (5270 MHz)

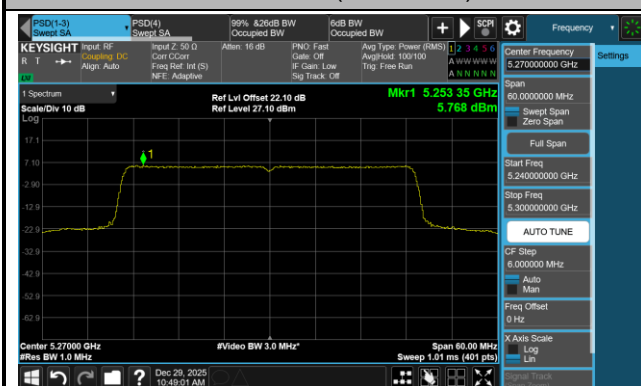


Channel 62 (5310 MHz)

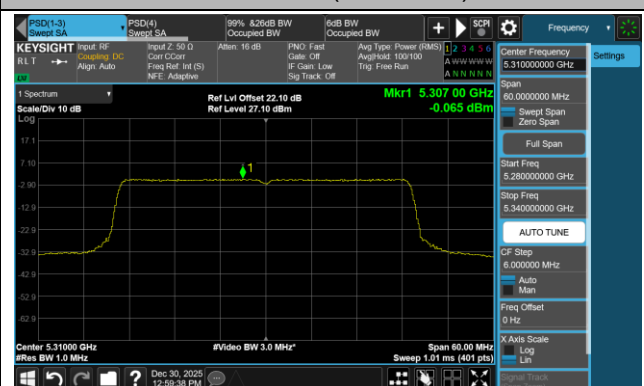

Channel 102 (5510 MHz)

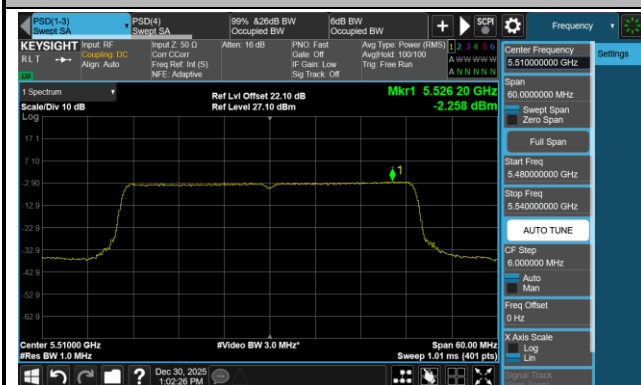


Channel 110 (5550 MHz)

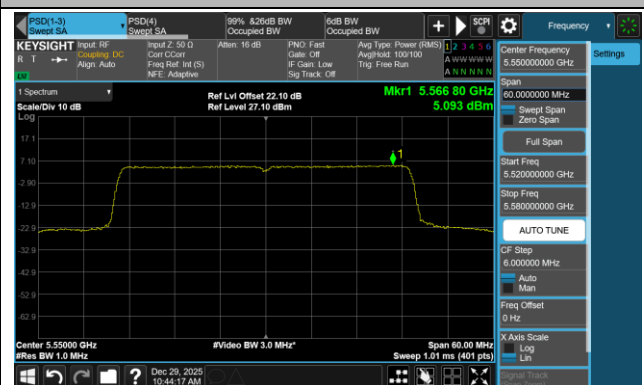


802.11ax-HE40 Power Spectral Density - Ant 1

Channel 134 (5670 MHz)

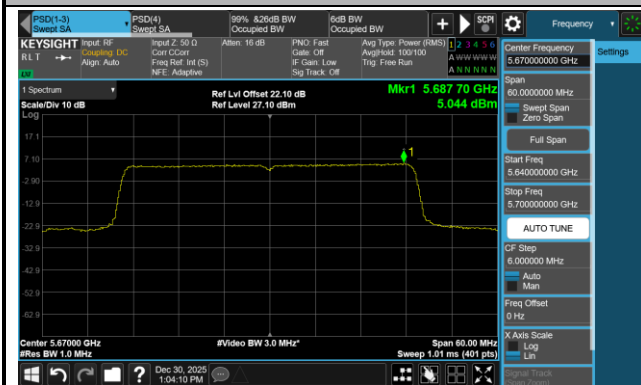

Channel 142 (5710 MHz)

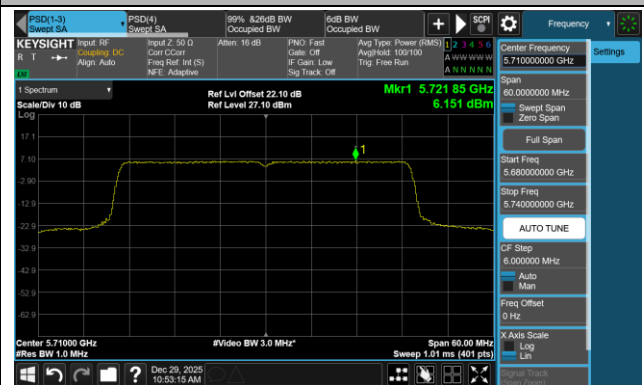

Channel 151 (5755 MHz)




Channel 159 (5795 MHz)




802.11ax-HE80 Power Spectral Density - Ant 1


Channel 42 (5210 MHz)

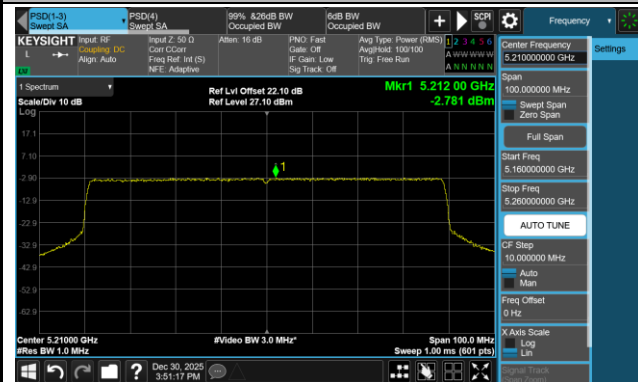


Channel 58 (5290 MHz)

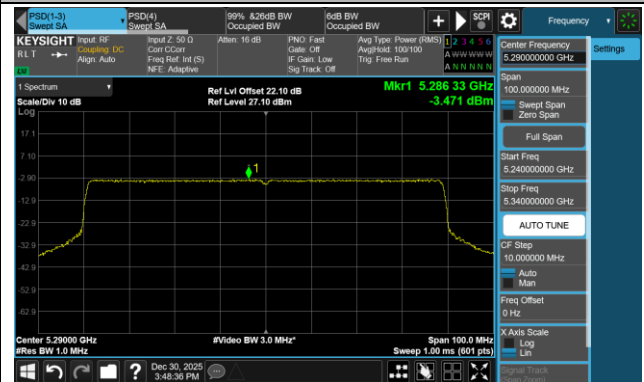


Channel 106 (5530 MHz)

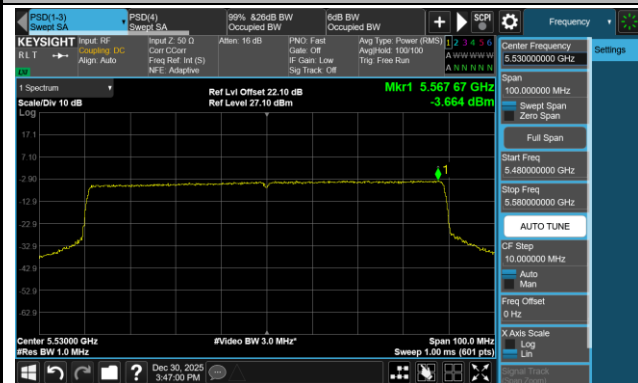


Channel 122 (5610 MHz)

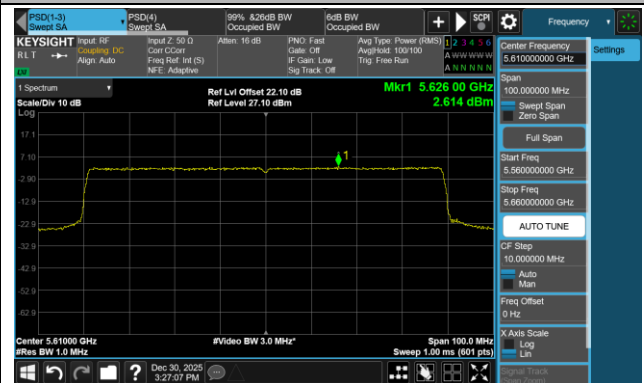

Channel 138 (5690 MHz)

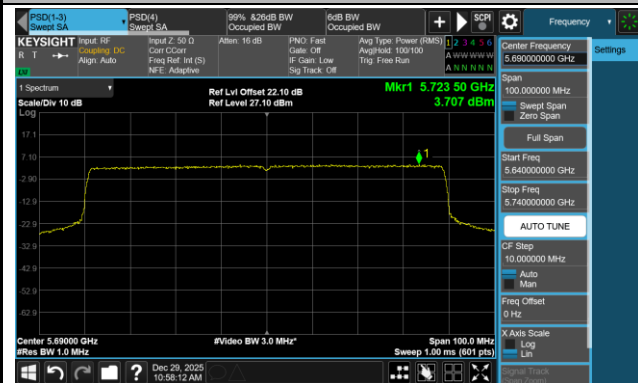


Channel 155 (5775 MHz)

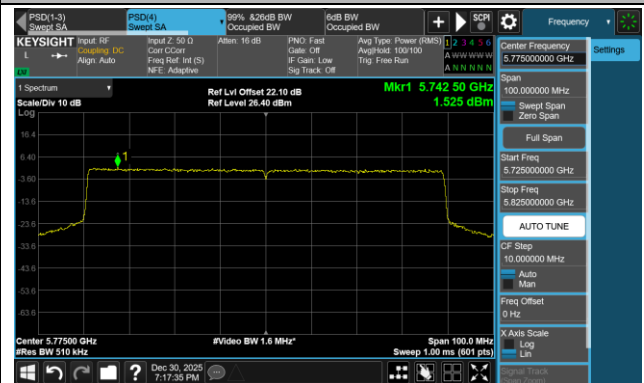


802.11ax-HE160 Power Spectral Density - Ant 1

Channel 50 (5250 MHz)

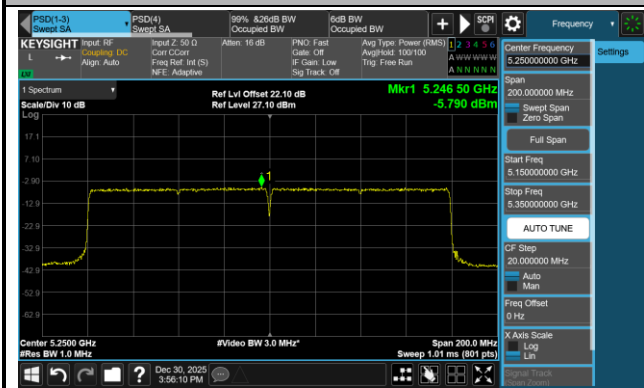


Channel 114 (5570 MHz)

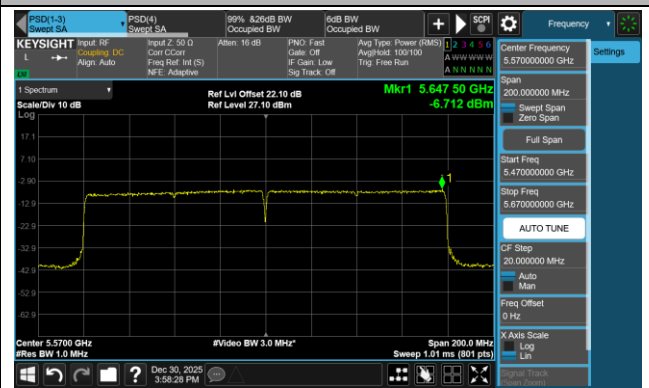


802.11be-EHT20 Power Spectral Density - Ant 1


Channel 36 (5180 MHz)

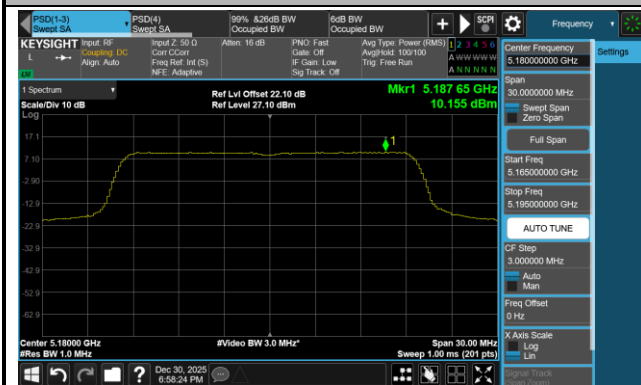

Channel 44 (5220 MHz)

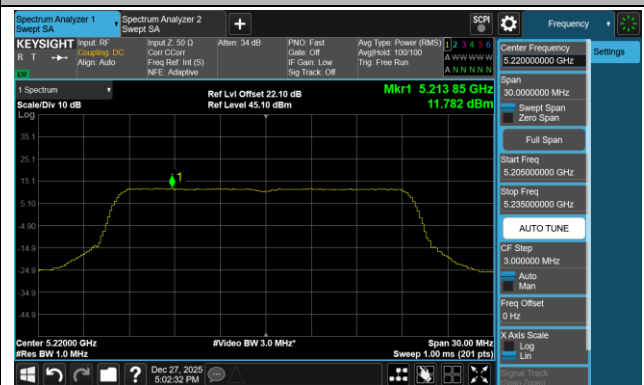

Channel 48 (5240 MHz)

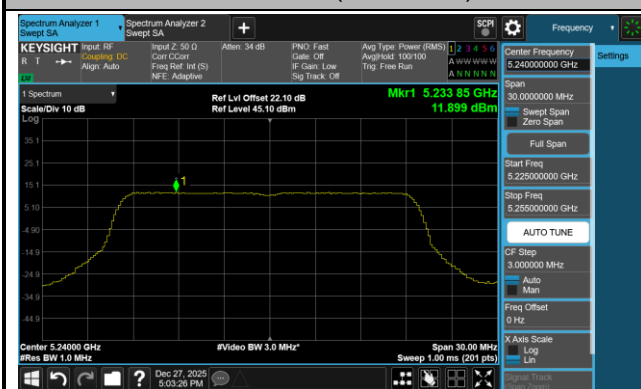

Channel 52 (5260 MHz)



Channel 60 (5300 MHz)




Channel 64 (5320 MHz)




802.11be-EHT20 Power Spectral Density - Ant 1


Channel 100 (5500 MHz)

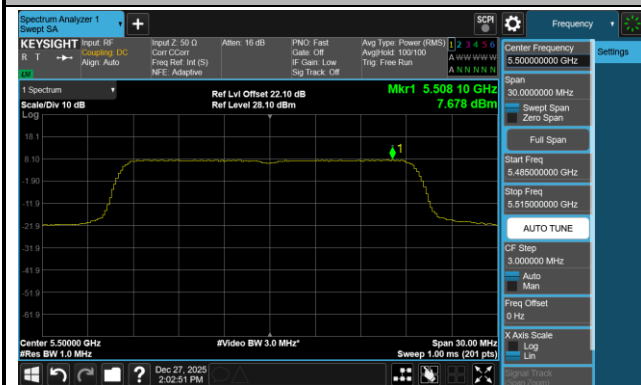

Channel 116 (5580 MHz)

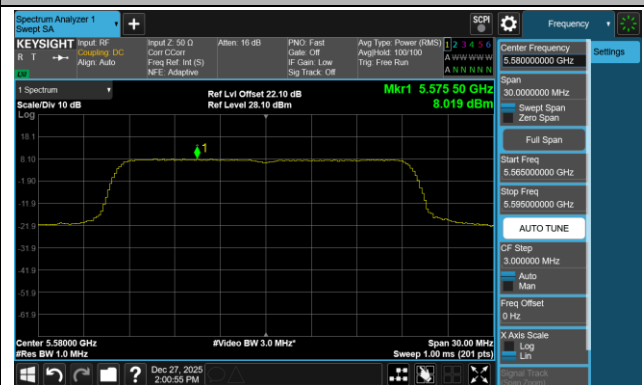


Channel 140 (5700 MHz)

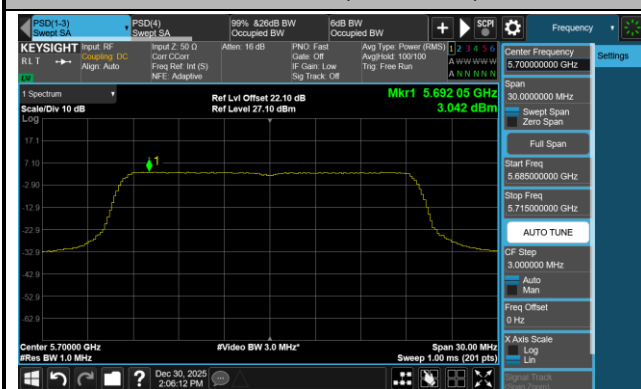

Channel 144 (5720 MHz)




Channel 149 (5745 MHz)

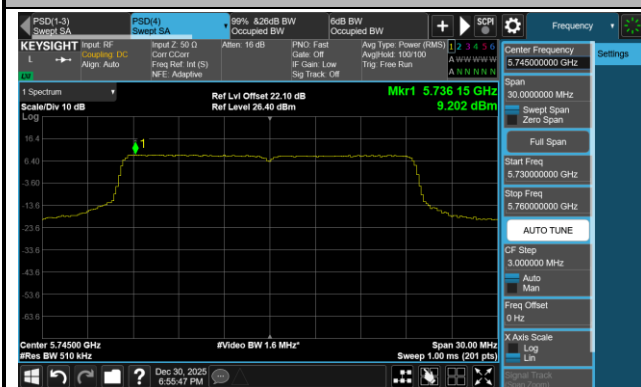

Channel 157 (5785 MHz)




Channel 165 (5825 MHz)

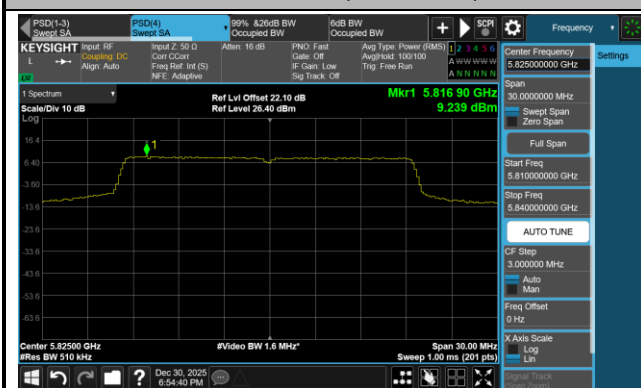


802.11be-EHT40 Power Spectral Density - Ant 1


Channel 38 (5190 MHz)

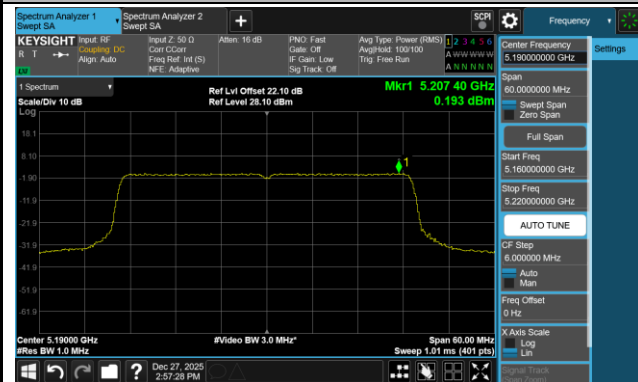


Channel 46 (5230 MHz)

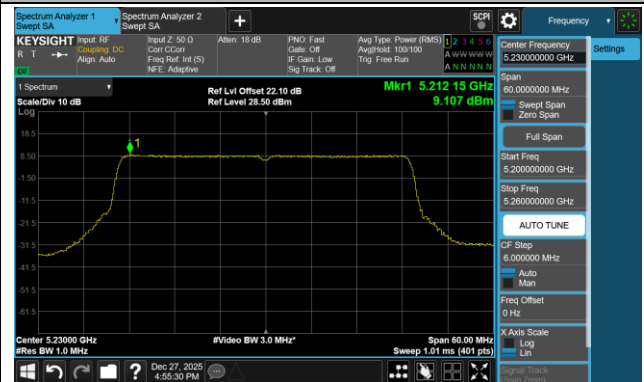


Channel 54 (5270 MHz)

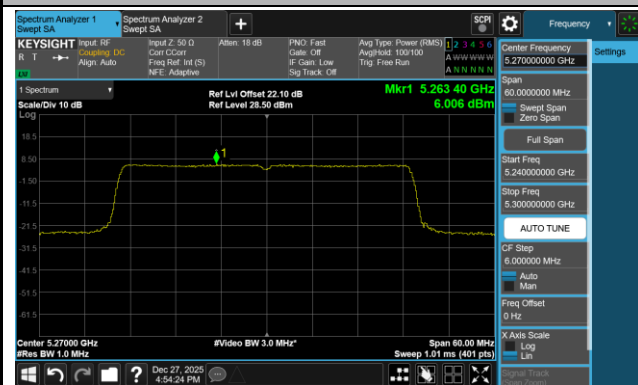


Channel 62 (5310 MHz)

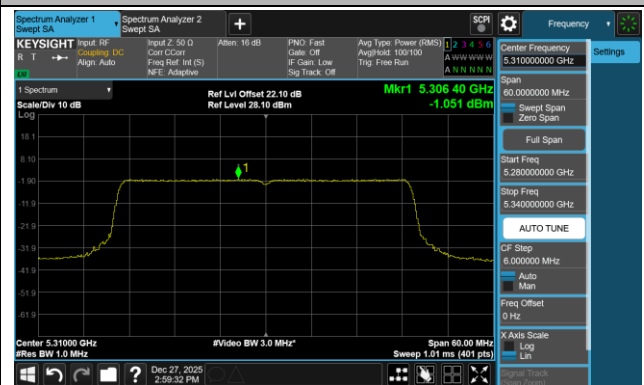

Channel 102 (5510 MHz)

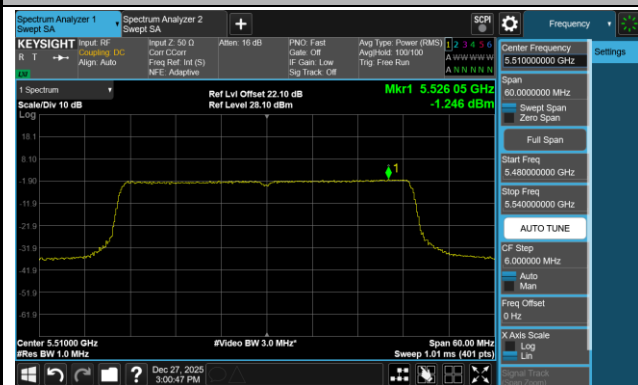


Channel 110 (5550 MHz)

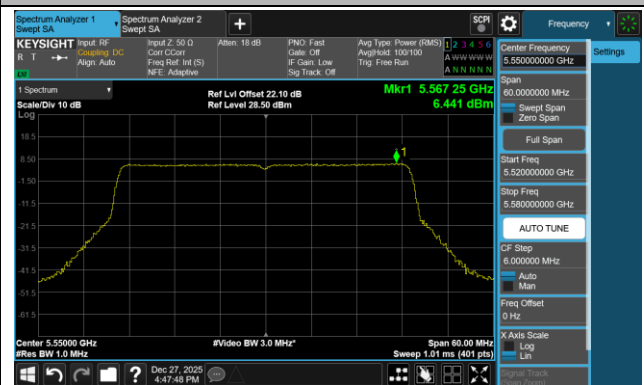


802.11be-EHT40 Power Spectral Density - Ant 1


Channel 134 (5670 MHz)

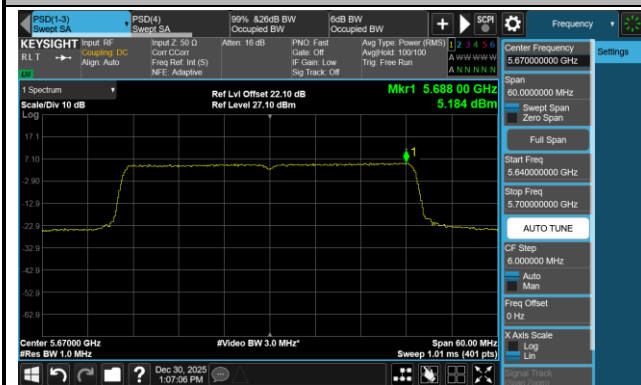


Channel 142 (5710 MHz)

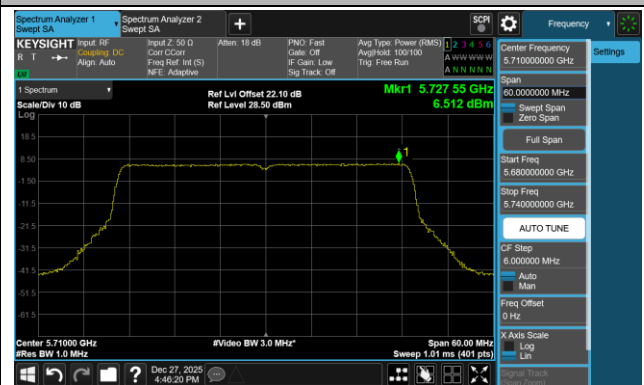

Channel 151 (5755 MHz)

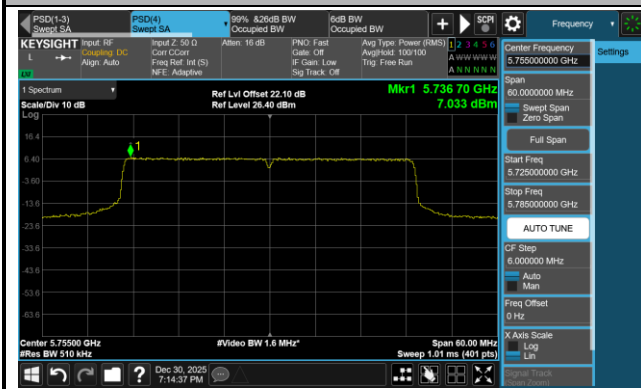


Channel 159 (5795 MHz)

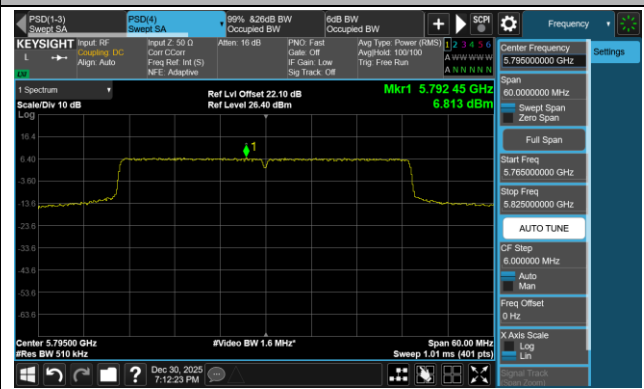


802.11be-EHT80 Power Spectral Density - Ant 1


Channel 42 (5210 MHz)

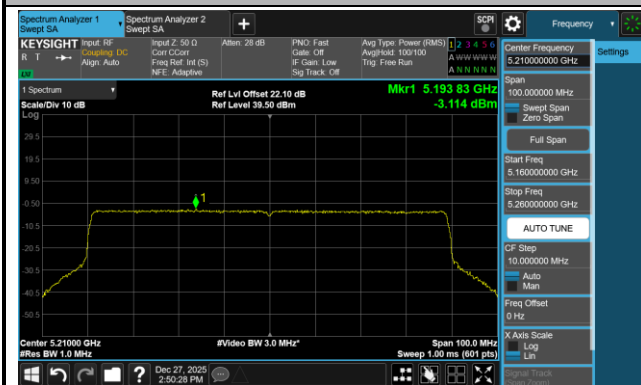


Channel 58 (5290 MHz)

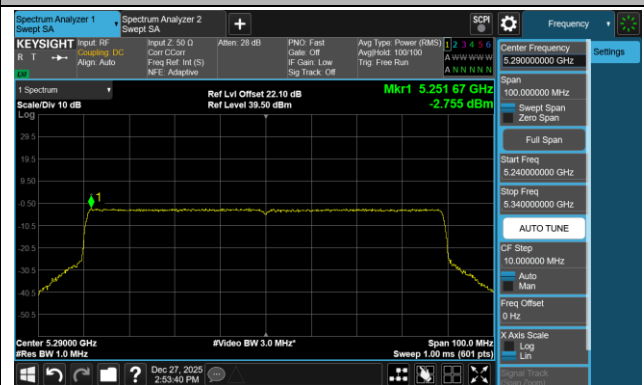


Channel 106 (5530 MHz)

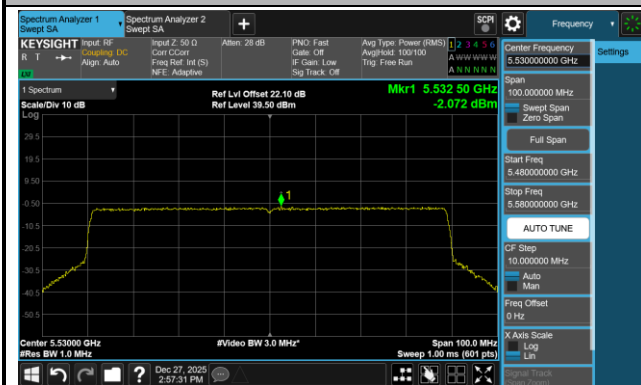


Channel 122 (5610 MHz)

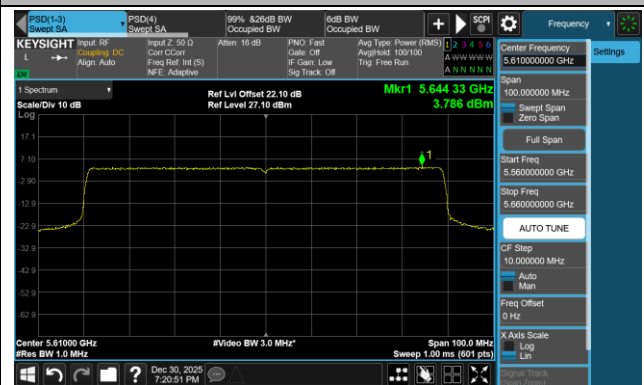

Channel 138 (5690 MHz)

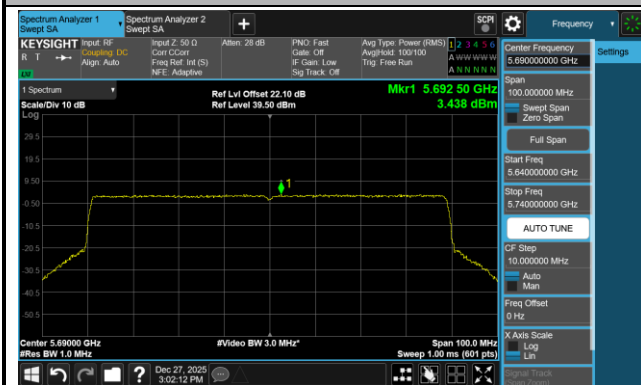


Channel 155 (5775 MHz)

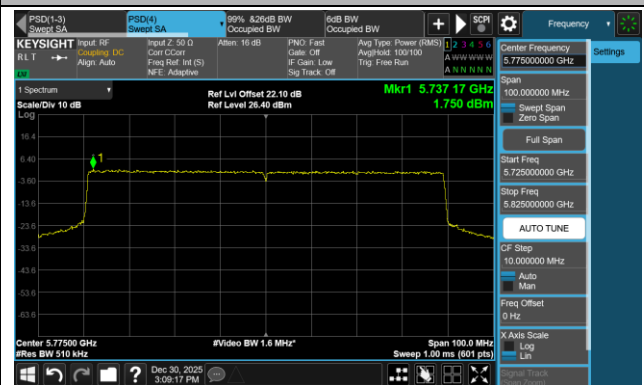


802.11be-EHT160 Power Spectral Density - Ant 1

Channel 50 (5250 MHz)

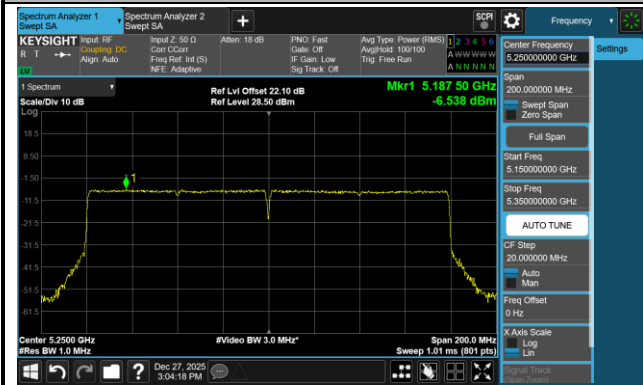


Channel 114 (5570 MHz)

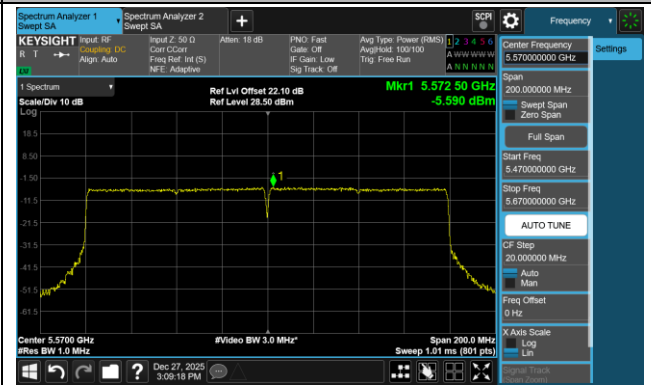

802.11be-EHT240 Power Spectral Density - Ant 1

Channel 122 (5610 MHz)

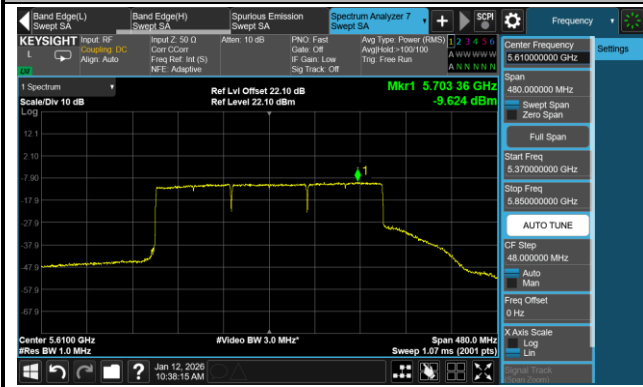

A.6 Frequency Stability Test Result

Test Site	WJ-TR1	Test Engineer	Layla Gui
Test Date	2026-01-16	Test Mode	5180 MHz (Carrier Mode)

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100%	120	- 30	18.46	18.48	16.75	18.49
		- 20	18.09	18.09	18.09	18.10
		- 10	17.78	17.74	17.71	17.69
		0	14.58	14.55	14.54	14.52
		+ 10	8.82	8.54	8.36	8.22
		+ 20	6.23	5.83	5.69	5.54
		+ 30	1.38	1.31	1.25	1.18
		+ 40	-2.82	-3.08	-3.29	-3.34
		+ 50	-4.20	-4.24	-4.27	-4.30
115%	138	+ 20	-0.39	-0.68	-0.80	-0.89
85%	102	+ 20	-0.91	-1.26	-1.35	-1.39

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Radiated Spurious Emissions Test Result

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8678.90	28.12	15.33	43.45	68.20	-24.75	Peak	Horizontal
*	10042.30	26.72	17.79	44.51	68.20	-23.69	Peak	Horizontal
	11176.20	27.40	18.97	46.37	74.00	-27.63	Peak	Horizontal
	17915.00	17.17	29.67	46.84	54.00	-7.16	Average	Horizontal
	17915.00	27.92	29.67	57.59	74.00	-16.41	Peak	Horizontal
*	8954.30	27.65	15.64	43.29	68.20	-24.91	Peak	Vertical
*	10069.50	28.06	18.09	46.15	68.20	-22.05	Peak	Vertical
	11351.30	26.65	19.30	45.95	74.00	-28.05	Peak	Vertical
	17867.40	17.16	30.20	47.36	54.00	-6.64	Average	Vertical
	17867.40	26.81	30.20	57.01	74.00	-16.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10147.70	26.93	17.89	44.82	68.20	-23.38	Peak	Horizontal
	11030.00	28.19	18.94	47.13	74.00	-26.87	Peak	Horizontal
*	13695.60	27.28	21.93	49.21	68.20	-18.99	Peak	Horizontal
	17775.60	17.13	29.96	47.09	54.00	-6.91	Average	Horizontal
	17775.60	26.50	29.96	56.46	74.00	-17.54	Peak	Horizontal
*	9267.10	28.67	16.05	44.72	68.20	-23.48	Peak	Vertical
*	10123.90	29.09	18.13	47.22	68.20	-20.98	Peak	Vertical
	12237.00	28.01	21.31	49.32	74.00	-24.68	Peak	Vertical
	17899.70	17.13	29.19	46.32	54.00	-7.68	Average	Vertical
	17899.70	29.28	29.19	58.47	74.00	-15.53	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8884.60	28.10	15.71	43.81	68.20	-24.39	Peak	Horizontal
*	10497.90	28.07	18.47	46.54	68.20	-21.66	Peak	Horizontal
	12403.60	28.33	21.61	49.94	74.00	-24.06	Peak	Horizontal
	17867.40	17.20	30.20	47.40	54.00	-6.60	Average	Horizontal
	17867.40	27.57	30.20	57.77	74.00	-16.23	Peak	Horizontal
*	9287.50	26.65	16.05	42.70	68.20	-25.50	Peak	Vertical
*	10361.90	27.33	18.21	45.54	68.20	-22.66	Peak	Vertical
	11835.80	28.06	20.25	48.31	74.00	-25.69	Peak	Vertical
	17915.00	17.16	29.67	46.83	54.00	-7.17	Average	Vertical
	17915.00	26.27	29.67	55.94	74.00	-18.06	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9885.90	27.81	17.25	45.06	68.20	-23.14	Peak	Horizontal
*	10552.30	28.06	18.54	46.60	68.20	-21.60	Peak	Horizontal
	12243.80	27.00	21.37	48.37	74.00	-25.63	Peak	Horizontal
	17867.40	17.26	30.20	47.46	54.00	-6.54	Average	Horizontal
	17867.40	27.36	30.20	57.56	74.00	-16.44	Peak	Horizontal
*	9263.70	27.82	16.03	43.85	68.20	-24.35	Peak	Vertical
*	10361.90	27.44	18.21	45.65	68.20	-22.55	Peak	Vertical
	12021.10	27.04	20.79	47.83	74.00	-26.17	Peak	Vertical
	17867.40	17.31	30.20	47.51	54.00	-6.49	Average	Vertical
	17867.40	26.38	30.20	56.58	74.00	-17.42	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9263.70	26.89	16.03	42.92	68.20	-25.28	Peak	Horizontal
*	9758.40	29.54	16.94	46.48	68.20	-21.72	Peak	Horizontal
	12339.00	26.90	21.54	48.44	74.00	-25.56	Peak	Horizontal
	17915.00	17.35	29.67	47.02	54.00	-6.98	Average	Horizontal
	17915.00	27.36	29.67	57.03	74.00	-16.97	Peak	Horizontal
*	9263.70	27.23	16.03	43.26	68.20	-24.94	Peak	Vertical
*	10280.30	27.83	18.22	46.05	68.20	-22.15	Peak	Vertical
	12371.30	26.91	21.72	48.63	74.00	-25.37	Peak	Vertical
	17960.90	17.25	29.51	46.76	54.00	-7.24	Average	Vertical
	17960.90	27.05	29.51	56.56	74.00	-17.44	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9263.70	27.38	16.03	43.41	68.20	-24.79	Peak	Horizontal
*	10200.40	27.60	18.05	45.65	68.20	-22.55	Peak	Horizontal
	12211.50	27.81	21.21	49.02	74.00	-24.98	Peak	Horizontal
	17867.40	16.99	30.20	47.19	54.00	-6.81	Average	Horizontal
	17867.40	27.73	30.20	57.93	74.00	-16.07	Peak	Horizontal
*	9860.40	27.56	17.35	44.91	68.20	-23.29	Peak	Vertical
*	10443.50	29.08	18.33	47.41	68.20	-20.79	Peak	Vertical
	12274.40	27.92	21.37	49.29	74.00	-24.71	Peak	Vertical
	17867.40	17.10	30.20	47.30	54.00	-6.70	Average	Vertical
	17867.40	27.50	30.20	57.70	74.00	-16.30	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9263.70	27.07	16.03	43.10	68.20	-25.10	Peak	Horizontal
*	10280.30	27.31	18.22	45.53	68.20	-22.67	Peak	Horizontal
	12148.60	27.57	21.19	48.76	74.00	-25.24	Peak	Horizontal
	17915.00	17.42	29.67	47.09	54.00	-6.91	Average	Horizontal
	17915.00	27.37	29.67	57.04	74.00	-16.96	Peak	Horizontal
*	9834.90	28.29	17.18	45.47	68.20	-22.73	Peak	Vertical
*	10361.90	28.17	18.21	46.38	68.20	-21.82	Peak	Vertical
	11772.90	27.82	20.06	47.88	74.00	-26.12	Peak	Vertical
	17915.00	17.11	29.67	46.78	54.00	-7.22	Average	Vertical
	17915.00	28.12	29.67	57.79	74.00	-16.21	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9287.50	28.05	16.05	44.10	68.20	-24.10	Peak	Horizontal
*	10147.70	27.15	17.89	45.04	68.20	-23.16	Peak	Horizontal
	12339.00	26.77	21.54	48.31	74.00	-25.69	Peak	Horizontal
	17915.00	17.44	29.67	47.11	54.00	-6.89	Average	Horizontal
	17915.00	28.19	29.67	57.86	74.00	-16.14	Peak	Horizontal
*	9681.90	28.11	16.74	44.85	68.20	-23.35	Peak	Vertical
*	10254.80	27.78	18.04	45.82	68.20	-22.38	Peak	Vertical
	12500.50	27.78	21.89	49.67	74.00	-24.33	Peak	Vertical
	17915.00	17.15	29.67	46.82	54.00	-7.18	Average	Vertical
	17915.00	27.18	29.67	56.85	74.00	-17.15	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9681.90	28.59	16.74	45.33	68.20	-22.87	Peak	Horizontal
*	10334.70	27.55	18.32	45.87	68.20	-22.33	Peak	Horizontal
	12211.50	26.32	21.21	47.53	74.00	-26.47	Peak	Horizontal
	17960.90	17.22	29.51	46.73	54.00	-7.27	Average	Horizontal
	17960.90	27.67	29.51	57.18	74.00	-16.82	Peak	Horizontal
*	9263.70	26.57	16.03	42.60	68.20	-25.60	Peak	Vertical
*	10147.70	28.23	17.89	46.12	68.20	-22.08	Peak	Vertical
	12339.00	27.27	21.54	48.81	74.00	-25.19	Peak	Vertical
	17821.50	17.12	30.22	47.34	54.00	-6.66	Average	Vertical
	17821.50	27.76	30.22	57.98	74.00	-16.02	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9732.90	27.95	16.83	44.78	68.20	-23.42	Peak	Horizontal
*	10227.60	26.72	18.16	44.88	68.20	-23.32	Peak	Horizontal
	11835.80	26.27	20.25	46.52	74.00	-27.48	Peak	Horizontal
	17867.40	16.99	30.20	47.19	54.00	-6.81	Average	Horizontal
	17867.40	27.13	30.20	57.33	74.00	-16.67	Peak	Horizontal
*	9681.90	27.46	16.74	44.20	68.20	-24.00	Peak	Vertical
*	10389.10	27.93	18.37	46.30	68.20	-21.90	Peak	Vertical
	11441.40	27.53	19.49	47.02	74.00	-26.98	Peak	Vertical
	17867.40	17.54	30.20	47.74	54.00	-6.26	Average	Vertical
	17867.40	26.88	30.20	57.08	74.00	-16.92	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9263.70	27.42	16.03	43.45	68.20	-24.75	Peak	Horizontal
*	10200.40	29.35	18.05	47.40	68.20	-20.80	Peak	Horizontal
	11470.30	27.40	19.37	46.77	74.00	-27.23	Peak	Horizontal
	17821.50	17.62	30.22	47.84	54.00	-6.16	Average	Horizontal
	17821.50	27.19	30.22	57.41	74.00	-16.59	Peak	Horizontal
*	9263.70	27.43	16.03	43.46	68.20	-24.74	Peak	Vertical
*	10042.30	26.52	17.79	44.31	68.20	-23.89	Peak	Vertical
	12274.40	27.10	21.37	48.47	74.00	-25.53	Peak	Vertical
	17867.40	17.37	30.20	47.57	54.00	-6.43	Average	Vertical
	17867.40	26.36	30.20	56.56	74.00	-17.44	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9263.70	27.52	16.03	43.55	68.20	-24.65	Peak	Horizontal
*	10147.70	28.01	17.89	45.90	68.20	-22.30	Peak	Horizontal
	11560.40	28.40	19.76	48.16	74.00	-25.84	Peak	Horizontal
	17821.50	17.44	30.22	47.66	54.00	-6.34	Average	Horizontal
	17821.50	27.14	30.22	57.36	74.00	-16.64	Peak	Horizontal
*	9758.40	28.05	16.94	44.99	68.20	-23.21	Peak	Vertical
*	10095.00	26.63	17.82	44.45	68.20	-23.75	Peak	Vertical
	12211.50	26.83	21.21	48.04	74.00	-25.96	Peak	Vertical
	17867.40	17.22	30.20	47.42	54.00	-6.58	Average	Vertical
	17867.40	27.50	30.20	57.70	74.00	-16.30	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11a - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9263.70	26.88	16.03	42.91	68.20	-25.29	Peak	Horizontal
*	10147.70	27.99	17.89	45.88	68.20	-22.32	Peak	Horizontal
	12179.20	27.29	21.17	48.46	74.00	-25.54	Peak	Horizontal
	17867.40	16.95	30.20	47.15	54.00	-6.85	Average	Horizontal
	17867.40	27.62	30.20	57.82	74.00	-16.18	Peak	Horizontal
*	9263.70	26.87	16.03	42.90	68.20	-25.30	Peak	Vertical
*	10389.10	28.10	18.37	46.47	68.20	-21.73	Peak	Vertical
	12306.70	26.95	21.42	48.37	74.00	-25.63	Peak	Vertical
	17867.40	17.14	30.20	47.34	54.00	-6.66	Average	Vertical
	17867.40	26.84	30.20	57.04	74.00	-16.96	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9868.90	27.24	17.28	44.52	68.20	-23.68	Peak	Horizontal
	10633.90	26.98	18.45	45.43	74.00	-28.57	Peak	Horizontal
	12376.40	27.09	21.71	48.80	74.00	-25.20	Peak	Horizontal
	17882.70	17.12	30.05	47.17	54.00	-6.83	Average	Horizontal
	17882.70	28.04	30.05	58.09	74.00	-15.91	Peak	Horizontal
*	9692.10	28.44	16.83	45.27	68.20	-22.93	Peak	Vertical
*	10336.40	26.42	18.33	44.75	68.20	-23.45	Peak	Vertical
	12473.30	26.59	21.85	48.44	74.00	-25.56	Peak	Vertical
	17836.80	17.21	29.36	46.57	54.00	-7.43	Average	Vertical
	17836.80	26.85	29.36	56.21	74.00	-17.79	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9766.90	28.39	16.92	45.31	68.20	-22.89	Peak	Horizontal
*	10309.20	28.17	18.12	46.29	68.20	-21.91	Peak	Horizontal
	12473.30	27.25	21.85	49.10	74.00	-24.90	Peak	Horizontal
	17882.70	17.15	30.05	47.20	54.00	-6.80	Average	Horizontal
	17882.70	27.18	30.05	57.23	74.00	-16.77	Peak	Horizontal
*	9792.40	28.16	16.99	45.15	68.20	-23.05	Peak	Vertical
*	10470.70	26.94	18.35	45.29	68.20	-22.91	Peak	Vertical
	12281.20	27.00	21.39	48.39	74.00	-25.61	Peak	Vertical
	17928.60	17.34	30.13	47.47	54.00	-6.53	Average	Vertical
	17928.60	26.57	30.13	56.70	74.00	-17.30	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9741.40	27.01	16.91	43.92	68.20	-24.28	Peak	Horizontal
*	10523.40	27.44	18.46	45.90	68.20	-22.30	Peak	Horizontal
	12281.20	26.37	21.39	47.76	74.00	-26.24	Peak	Horizontal
	17836.80	17.22	29.36	46.58	54.00	-7.42	Average	Horizontal
	17836.80	26.96	29.36	56.32	74.00	-17.68	Peak	Horizontal
*	9642.80	27.85	16.62	44.47	68.20	-23.73	Peak	Vertical
*	10443.50	27.18	18.33	45.51	68.20	-22.69	Peak	Vertical
	12281.20	27.18	21.39	48.57	74.00	-25.43	Peak	Vertical
	17882.70	17.45	30.05	47.50	54.00	-6.50	Average	Vertical
	17882.70	26.84	30.05	56.89	74.00	-17.11	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9741.40	27.15	16.91	44.06	68.20	-24.14	Peak	Horizontal
*	10470.70	26.79	18.35	45.14	68.20	-23.06	Peak	Horizontal
	12634.80	26.53	22.31	48.84	74.00	-25.16	Peak	Horizontal
	17928.60	17.32	30.13	47.45	54.00	-6.55	Average	Horizontal
	17928.60	26.63	30.13	56.76	74.00	-17.24	Peak	Horizontal
*	9692.10	28.30	16.83	45.13	68.20	-23.07	Peak	Vertical
*	10231.00	27.47	18.18	45.65	68.20	-22.55	Peak	Vertical
	12408.70	26.95	21.64	48.59	74.00	-25.41	Peak	Vertical
	17882.70	17.40	30.05	47.45	54.00	-6.55	Average	Vertical
	17882.70	26.49	30.05	56.54	74.00	-17.46	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	28.33	16.55	44.88	68.20	-23.32	Peak	Horizontal
*	10336.40	28.04	18.33	46.37	68.20	-21.83	Peak	Horizontal
	12441.00	27.81	21.73	49.54	74.00	-24.46	Peak	Horizontal
	17882.70	17.59	30.05	47.64	54.00	-6.36	Average	Horizontal
	17882.70	26.59	30.05	56.64	74.00	-17.36	Peak	Horizontal
*	9741.40	27.39	16.91	44.30	68.20	-23.90	Peak	Vertical
*	10443.50	27.67	18.33	46.00	68.20	-22.20	Peak	Vertical
	11907.20	26.41	20.46	46.87	74.00	-27.13	Peak	Vertical
	17882.70	17.45	30.05	47.50	54.00	-6.50	Average	Vertical
	17882.70	27.02	30.05	57.07	74.00	-16.93	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9741.40	28.11	16.91	45.02	68.20	-23.18	Peak	Horizontal
*	10443.50	29.02	18.33	47.35	68.20	-20.85	Peak	Horizontal
	12281.20	28.30	21.39	49.69	74.00	-24.31	Peak	Horizontal
	17974.50	17.00	30.21	47.21	54.00	-6.79	Average	Horizontal
	17974.50	27.50	30.21	57.71	74.00	-16.29	Peak	Horizontal
*	9717.60	28.37	16.76	45.13	68.20	-23.07	Peak	Vertical
*	10523.40	29.11	18.46	47.57	68.20	-20.63	Peak	Vertical
	12344.10	26.42	21.58	48.00	74.00	-26.00	Peak	Vertical
	17928.60	17.13	30.13	47.26	54.00	-6.74	Average	Vertical
	17928.60	27.69	30.13	57.82	74.00	-16.18	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9766.90	28.49	16.92	45.41	68.20	-22.79	Peak	Horizontal
*	10389.10	27.04	18.37	45.41	68.20	-22.79	Peak	Horizontal
	12376.40	26.35	21.71	48.06	74.00	-25.94	Peak	Horizontal
	17974.50	17.34	30.21	47.55	54.00	-6.45	Average	Horizontal
	17974.50	26.43	30.21	56.64	74.00	-17.36	Peak	Horizontal
*	9666.60	28.92	16.55	45.47	68.20	-22.73	Peak	Vertical
*	10416.30	26.39	18.14	44.53	68.20	-23.67	Peak	Vertical
	12634.80	27.48	22.31	49.79	74.00	-24.21	Peak	Vertical
	17882.70	17.43	30.05	47.48	54.00	-6.52	Average	Vertical
	17882.70	26.95	30.05	57.00	74.00	-17.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9617.30	28.69	16.49	45.18	68.20	-23.02	Peak	Horizontal
*	10523.40	27.62	18.46	46.08	68.20	-22.12	Peak	Horizontal
	12281.20	26.73	21.39	48.12	74.00	-25.88	Peak	Horizontal
	17882.70	17.11	30.05	47.16	54.00	-6.84	Average	Horizontal
	17882.70	26.37	30.05	56.42	74.00	-17.58	Peak	Horizontal
*	9617.30	27.59	16.49	44.08	68.20	-24.12	Peak	Vertical
*	10283.70	27.55	18.26	45.81	68.20	-22.39	Peak	Vertical
	12634.80	26.25	22.31	48.56	74.00	-25.44	Peak	Vertical
	17882.70	17.23	30.05	47.28	54.00	-6.72	Average	Vertical
	17882.70	26.93	30.05	56.98	74.00	-17.02	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9642.80	28.28	16.62	44.90	68.20	-23.30	Peak	Horizontal
*	10470.70	27.84	18.35	46.19	68.20	-22.01	Peak	Horizontal
	12344.10	26.73	21.58	48.31	74.00	-25.69	Peak	Horizontal
	17928.60	17.40	30.13	47.53	54.00	-6.47	Average	Horizontal
	17928.60	27.13	30.13	57.26	74.00	-16.74	Peak	Horizontal
*	9666.60	28.25	16.55	44.80	68.20	-23.40	Peak	Vertical
*	10256.50	26.32	18.03	44.35	68.20	-23.85	Peak	Vertical
	12344.10	26.52	21.58	48.10	74.00	-25.90	Peak	Vertical
	17928.60	17.55	30.13	47.68	54.00	-6.32	Average	Vertical
	17928.60	26.87	30.13	57.00	74.00	-17.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	28.37	16.55	44.92	68.20	-23.28	Peak	Horizontal
*	10336.40	27.52	18.33	45.85	68.20	-22.35	Peak	Horizontal
	12376.40	27.28	21.71	48.99	74.00	-25.01	Peak	Horizontal
	17928.60	17.26	30.13	47.39	54.00	-6.61	Average	Horizontal
	17928.60	26.14	30.13	56.27	74.00	-17.73	Peak	Horizontal
*	9666.60	27.73	16.55	44.28	68.20	-23.92	Peak	Vertical
*	10283.70	27.93	18.26	46.19	68.20	-22.01	Peak	Vertical
	12441.00	26.18	21.73	47.91	74.00	-26.09	Peak	Vertical
	17882.70	17.77	30.05	47.82	54.00	-6.18	Average	Vertical
	17882.70	26.95	30.05	57.00	74.00	-17.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9544.20	28.65	16.35	45.00	68.20	-23.20	Peak	Horizontal
*	10363.60	26.40	18.18	44.58	68.20	-23.62	Peak	Horizontal
	12441.00	26.93	21.73	48.66	74.00	-25.34	Peak	Horizontal
	17882.70	17.52	30.05	47.57	54.00	-6.43	Average	Horizontal
	17882.70	27.12	30.05	57.17	74.00	-16.83	Peak	Horizontal
*	9843.40	26.63	17.29	43.92	68.20	-24.28	Peak	Vertical
*	10336.40	28.27	18.33	46.60	68.20	-21.60	Peak	Vertical
	11755.90	26.67	20.00	46.67	74.00	-27.33	Peak	Vertical
	17882.70	17.49	30.05	47.54	54.00	-6.46	Average	Vertical
	17882.70	26.41	30.05	56.46	74.00	-17.54	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	28.50	16.55	45.05	68.20	-23.15	Peak	Horizontal
*	10470.70	26.93	18.35	45.28	68.20	-22.92	Peak	Horizontal
	12250.60	26.69	21.38	48.07	74.00	-25.93	Peak	Horizontal
	17882.70	17.23	30.05	47.28	54.00	-6.72	Average	Horizontal
	17882.70	26.81	30.05	56.86	74.00	-17.14	Peak	Horizontal
*	9692.10	28.20	16.83	45.03	68.20	-23.17	Peak	Vertical
*	10523.40	27.69	18.46	46.15	68.20	-22.05	Peak	Vertical
	11694.70	26.84	19.93	46.77	74.00	-27.23	Peak	Vertical
	17928.60	17.16	30.13	47.29	54.00	-6.71	Average	Vertical
	17928.60	27.20	30.13	57.33	74.00	-16.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10231.00	28.35	18.18	46.53	68.20	-21.67	Peak	Horizontal
	12250.60	28.04	21.38	49.42	74.00	-24.58	Peak	Horizontal
*	17466.20	31.44	28.76	60.20	68.20	-8.00	Peak	Horizontal
	17882.70	17.26	30.05	47.31	54.00	-6.69	Average	Horizontal
	17882.70	27.09	30.05	57.14	74.00	-16.86	Peak	Horizontal
*	9666.60	27.83	16.55	44.38	68.20	-23.82	Peak	Vertical
*	10151.10	27.02	17.88	44.90	68.20	-23.30	Peak	Vertical
	12473.30	26.41	21.85	48.26	74.00	-25.74	Peak	Vertical
	17882.70	17.37	30.05	47.42	54.00	-6.58	Average	Vertical
	17882.70	26.55	30.05	56.60	74.00	-17.40	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9518.70	27.40	16.40	43.80	68.20	-24.40	Peak	Horizontal
*	10336.40	28.39	18.33	46.72	68.20	-21.48	Peak	Horizontal
	12218.30	26.16	21.21	47.37	74.00	-26.63	Peak	Horizontal
	17974.50	17.45	30.21	47.66	54.00	-6.34	Average	Horizontal
	17974.50	27.90	30.21	58.11	74.00	-15.89	Peak	Horizontal
*	9692.10	27.69	16.83	44.52	68.20	-23.68	Peak	Vertical
*	10389.10	28.52	18.37	46.89	68.20	-21.31	Peak	Vertical
	12092.50	25.97	20.97	46.94	74.00	-27.06	Peak	Vertical
	17882.70	17.41	30.05	47.46	54.00	-6.54	Average	Vertical
	17882.70	26.17	30.05	56.22	74.00	-17.78	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9617.30	28.05	16.49	44.54	68.20	-23.66	Peak	Horizontal
*	10336.40	27.38	18.33	45.71	68.20	-22.49	Peak	Horizontal
	12473.30	27.19	21.85	49.04	74.00	-24.96	Peak	Horizontal
	17928.60	17.34	30.13	47.47	54.00	-6.53	Average	Horizontal
	17928.60	28.59	30.13	58.72	74.00	-15.28	Peak	Horizontal
*	9717.60	27.82	16.76	44.58	68.20	-23.62	Peak	Vertical
*	10497.90	27.51	18.47	45.98	68.20	-22.22	Peak	Vertical
	12281.20	27.67	21.39	49.06	74.00	-24.94	Peak	Vertical
	17790.90	17.29	28.84	46.13	54.00	-7.87	Average	Vertical
	17790.90	27.63	28.84	56.47	74.00	-17.53	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9741.40	28.43	16.91	45.34	68.20	-22.86	Peak	Horizontal
*	10443.50	28.55	18.33	46.88	68.20	-21.32	Peak	Horizontal
	12408.70	27.31	21.64	48.95	74.00	-25.05	Peak	Horizontal
	17928.60	17.54	30.13	47.67	54.00	-6.33	Average	Horizontal
	17928.60	26.40	30.13	56.53	74.00	-17.47	Peak	Horizontal
*	9666.60	27.44	16.55	43.99	68.20	-24.21	Peak	Vertical
*	10389.10	28.27	18.37	46.64	68.20	-21.56	Peak	Vertical
	12124.80	27.05	21.06	48.11	74.00	-25.89	Peak	Vertical
	18000.00	17.55	29.26	46.81	54.00	-7.19	Average	Vertical
	18000.00	26.85	29.26	56.11	74.00	-17.89	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9717.60	27.69	16.76	44.45	68.20	-23.75	Peak	Horizontal
*	10363.60	29.39	18.18	47.57	68.20	-20.63	Peak	Horizontal
	12441.00	26.90	21.73	48.63	74.00	-25.37	Peak	Horizontal
	17836.80	17.37	29.36	46.73	54.00	-7.27	Average	Horizontal
	17836.80	28.56	29.36	57.92	74.00	-16.08	Peak	Horizontal
*	9741.40	29.31	16.91	46.22	68.20	-21.98	Peak	Vertical
*	10523.40	26.98	18.46	45.44	68.20	-22.76	Peak	Vertical
	12473.30	27.23	21.85	49.08	74.00	-24.92	Peak	Vertical
	17928.60	17.23	30.13	47.36	54.00	-6.64	Average	Vertical
	17928.60	27.04	30.13	57.17	74.00	-16.83	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9642.80	28.15	16.62	44.77	68.20	-23.43	Peak	Horizontal
*	10523.40	27.72	18.46	46.18	68.20	-22.02	Peak	Horizontal
	12473.30	26.14	21.85	47.99	74.00	-26.01	Peak	Horizontal
	17836.80	17.15	29.36	46.51	54.00	-7.49	Average	Horizontal
	17836.80	27.70	29.36	57.06	74.00	-16.94	Peak	Horizontal
*	9666.60	30.83	16.55	47.38	68.20	-20.82	Peak	Vertical
*	10363.60	27.23	18.18	45.41	68.20	-22.79	Peak	Vertical
	12473.30	27.02	21.85	48.87	74.00	-25.13	Peak	Vertical
	17836.80	17.23	29.36	46.59	54.00	-7.41	Average	Vertical
	17836.80	28.12	29.36	57.48	74.00	-16.52	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9792.40	27.83	16.99	44.82	68.20	-23.38	Peak	Horizontal
*	10497.90	27.23	18.47	45.70	68.20	-22.50	Peak	Horizontal
	12568.50	27.01	22.07	49.08	74.00	-24.92	Peak	Horizontal
	17928.60	17.55	30.13	47.68	54.00	-6.32	Average	Horizontal
	17928.60	27.54	30.13	57.67	74.00	-16.33	Peak	Horizontal
*	9741.40	28.30	16.91	45.21	68.20	-22.99	Peak	Vertical
*	10443.50	27.99	18.33	46.32	68.20	-21.88	Peak	Vertical
	12503.90	25.73	21.89	47.62	74.00	-26.38	Peak	Vertical
	17928.60	17.52	30.13	47.65	54.00	-6.35	Average	Vertical
	17928.60	27.53	30.13	57.66	74.00	-16.34	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9692.10	30.55	16.83	47.38	68.20	-20.82	Peak	Horizontal
*	10497.90	27.34	18.47	45.81	68.20	-22.39	Peak	Horizontal
	12473.30	26.43	21.85	48.28	74.00	-25.72	Peak	Horizontal
	17882.70	17.75	30.05	47.80	54.00	-6.20	Average	Horizontal
	17882.70	26.67	30.05	56.72	74.00	-17.28	Peak	Horizontal
*	9717.60	28.72	16.76	45.48	68.20	-22.72	Peak	Vertical
*	10577.80	28.33	18.37	46.70	68.20	-21.50	Peak	Vertical
	11907.20	27.89	20.46	48.35	74.00	-25.65	Peak	Vertical
	17882.70	17.66	30.05	47.71	54.00	-6.29	Average	Vertical
	17882.70	27.14	30.05	57.19	74.00	-16.81	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	28.67	16.55	45.22	68.20	-22.98	Peak	Horizontal
*	10309.20	27.15	18.12	45.27	68.20	-22.93	Peak	Horizontal
	12281.20	27.69	21.39	49.08	74.00	-24.92	Peak	Horizontal
	17928.60	17.22	30.13	47.35	54.00	-6.65	Average	Horizontal
	17928.60	26.57	30.13	56.70	74.00	-17.30	Peak	Horizontal
*	9792.40	27.26	16.99	44.25	68.20	-23.95	Peak	Vertical
*	10309.20	26.93	18.12	45.05	68.20	-23.15	Peak	Vertical
	12218.30	26.91	21.21	48.12	74.00	-25.88	Peak	Vertical
	17974.50	17.00	30.21	47.21	54.00	-6.79	Average	Vertical
	17974.50	26.69	30.21	56.90	74.00	-17.10	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9593.50	27.16	16.50	43.66	68.20	-24.54	Peak	Horizontal
*	10389.10	28.18	18.37	46.55	68.20	-21.65	Peak	Horizontal
	12568.50	26.28	22.07	48.35	74.00	-25.65	Peak	Horizontal
	17882.70	17.75	30.05	47.80	54.00	-6.20	Average	Horizontal
	17882.70	28.67	30.05	58.72	74.00	-15.28	Peak	Horizontal
*	9666.60	27.65	16.55	44.20	68.20	-24.00	Peak	Vertical
*	10470.70	27.46	18.35	45.81	68.20	-22.39	Peak	Vertical
	12473.30	26.66	21.85	48.51	74.00	-25.49	Peak	Vertical
	17882.70	17.70	30.05	47.75	54.00	-6.25	Average	Vertical
	17882.70	28.82	30.05	58.87	74.00	-15.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9766.90	27.77	16.92	44.69	68.20	-23.51	Peak	Horizontal
*	10389.10	27.25	18.37	45.62	68.20	-22.58	Peak	Horizontal
	12600.80	27.02	22.23	49.25	74.00	-24.75	Peak	Horizontal
	17882.70	17.36	30.05	47.41	54.00	-6.59	Average	Horizontal
	17882.70	27.15	30.05	57.20	74.00	-16.80	Peak	Horizontal
*	9741.40	29.19	16.91	46.10	68.20	-22.10	Peak	Vertical
*	10497.90	28.39	18.47	46.86	68.20	-21.34	Peak	Vertical
	12313.50	26.83	21.40	48.23	74.00	-25.77	Peak	Vertical
	17928.60	17.15	30.13	47.28	54.00	-6.72	Average	Vertical
	17928.60	27.81	30.13	57.94	74.00	-16.06	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9692.10	27.98	16.83	44.81	68.20	-23.39	Peak	Horizontal
*	10470.70	27.11	18.35	45.46	68.20	-22.74	Peak	Horizontal
	12536.20	25.81	21.98	47.79	74.00	-26.21	Peak	Horizontal
	17928.60	17.45	30.13	47.58	54.00	-6.42	Average	Horizontal
	17928.60	26.45	30.13	56.58	74.00	-17.42	Peak	Horizontal
*	9792.40	27.79	16.99	44.78	68.20	-23.42	Peak	Vertical
*	10497.90	27.33	18.47	45.80	68.20	-22.40	Peak	Vertical
	12473.30	26.78	21.85	48.63	74.00	-25.37	Peak	Vertical
	17836.80	17.56	29.36	46.92	54.00	-7.08	Average	Vertical
	17836.80	26.65	29.36	56.01	74.00	-17.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT80 - Channel 58
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9792.40	27.83	16.99	44.82	68.20	-23.38	Peak	Horizontal
*	10497.90	28.10	18.47	46.57	68.20	-21.63	Peak	Horizontal
	12376.40	26.79	21.71	48.50	74.00	-25.50	Peak	Horizontal
	17882.70	17.80	30.05	47.85	54.00	-6.15	Average	Horizontal
	17882.70	28.02	30.05	58.07	74.00	-15.93	Peak	Horizontal
*	9868.90	28.71	17.28	45.99	68.20	-22.21	Peak	Vertical
*	10336.40	26.02	18.33	44.35	68.20	-23.85	Peak	Vertical
	12218.30	26.47	21.21	47.68	74.00	-26.32	Peak	Vertical
	17882.70	17.26	30.05	47.31	54.00	-6.69	Average	Vertical
	17882.70	26.88	30.05	56.93	74.00	-17.07	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT80 - Channel 106
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9792.40	28.87	16.99	45.86	68.20	-22.34	Peak	Horizontal
*	10550.60	28.04	18.52	46.56	68.20	-21.64	Peak	Horizontal
	12250.60	26.90	21.38	48.28	74.00	-25.72	Peak	Horizontal
	17869.10	17.86	30.26	48.12	54.00	-5.88	Average	Horizontal
	17869.10	29.54	30.26	59.80	74.00	-14.20	Peak	Horizontal
*	9666.60	28.51	16.55	45.06	68.20	-23.14	Peak	Vertical
*	10203.80	27.61	18.04	45.65	68.20	-22.55	Peak	Vertical
	12291.40	30.21	21.50	51.71	74.00	-22.29	Peak	Vertical
	17928.60	17.73	30.13	47.86	54.00	-6.14	Average	Vertical
	17928.60	27.54	30.13	57.67	74.00	-16.33	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9692.10	28.33	16.83	45.16	68.20	-23.04	Peak	Horizontal
*	10497.90	28.49	18.47	46.96	68.20	-21.24	Peak	Horizontal
	12473.30	26.93	21.85	48.78	74.00	-25.22	Peak	Horizontal
	17882.70	17.67	30.05	47.72	54.00	-6.28	Average	Horizontal
	17882.70	27.04	30.05	57.09	74.00	-16.91	Peak	Horizontal
*	9692.10	27.71	16.83	44.54	68.20	-23.66	Peak	Vertical
*	10416.30	26.12	18.14	44.26	68.20	-23.94	Peak	Vertical
	12536.20	26.55	21.98	48.53	74.00	-25.47	Peak	Vertical
	17928.60	17.48	30.13	47.61	54.00	-6.39	Average	Vertical
	17928.60	27.12	30.13	57.25	74.00	-16.75	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	27.51	16.55	44.06	68.20	-24.14	Peak	Horizontal
*	10389.10	26.32	18.37	44.69	68.20	-23.51	Peak	Horizontal
	12503.90	26.78	21.89	48.67	74.00	-25.33	Peak	Horizontal
	17928.60	17.74	30.13	47.87	54.00	-6.13	Average	Horizontal
	17928.60	26.84	30.13	56.97	74.00	-17.03	Peak	Horizontal
*	9692.10	28.80	16.83	45.63	68.20	-22.57	Peak	Vertical
*	10309.20	26.06	18.12	44.18	68.20	-24.02	Peak	Vertical
	12699.40	27.73	22.50	50.23	74.00	-23.77	Peak	Vertical
	17882.70	17.37	30.05	47.42	54.00	-6.58	Average	Vertical
	17882.70	26.96	30.05	57.01	74.00	-16.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9792.40	27.10	16.99	44.09	68.20	-24.11	Peak	Horizontal
*	10470.70	27.16	18.35	45.51	68.20	-22.69	Peak	Horizontal
	12344.10	27.00	21.58	48.58	74.00	-25.42	Peak	Horizontal
	17928.60	17.66	30.13	47.79	54.00	-6.21	Average	Horizontal
	17928.60	26.41	30.13	56.54	74.00	-17.46	Peak	Horizontal
*	9792.40	27.75	16.99	44.74	68.20	-23.46	Peak	Vertical
*	10523.40	28.02	18.46	46.48	68.20	-21.72	Peak	Vertical
	12568.50	25.41	22.07	47.48	74.00	-26.52	Peak	Vertical
	17882.70	17.88	30.05	47.93	54.00	-6.07	Average	Vertical
	17882.70	26.95	30.05	57.00	74.00	-17.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9717.60	28.61	16.76	45.37	68.20	-22.83	Peak	Horizontal
*	10523.40	27.41	18.46	45.87	68.20	-22.33	Peak	Horizontal
	12218.30	26.95	21.21	48.16	74.00	-25.84	Peak	Horizontal
	17882.70	17.75	30.05	47.80	54.00	-6.20	Average	Horizontal
	17882.70	26.79	30.05	56.84	74.00	-17.16	Peak	Horizontal
*	9692.10	27.93	16.83	44.76	68.20	-23.44	Peak	Vertical
*	10416.30	27.68	18.14	45.82	68.20	-22.38	Peak	Vertical
	12281.20	26.54	21.39	47.93	74.00	-26.07	Peak	Vertical
	17928.60	17.55	30.13	47.68	54.00	-6.32	Average	Vertical
	17928.60	26.61	30.13	56.74	74.00	-17.26	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ac-VHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9766.90	27.79	16.92	44.71	68.20	-23.49	Peak	Horizontal
	10688.30	26.96	18.56	45.52	74.00	-28.48	Peak	Horizontal
	12313.50	26.73	21.40	48.13	74.00	-25.87	Peak	Horizontal
	17974.50	17.78	30.21	47.99	54.00	-6.01	Average	Horizontal
	17974.50	26.34	30.21	56.55	74.00	-17.45	Peak	Horizontal
*	9766.90	29.75	16.92	46.67	68.20	-21.53	Peak	Vertical
*	10497.90	27.99	18.47	46.46	68.20	-21.74	Peak	Vertical
	12473.30	27.77	21.85	49.62	74.00	-24.38	Peak	Vertical
	17882.70	17.49	30.05	47.54	54.00	-6.46	Average	Vertical
	17882.70	27.68	30.05	57.73	74.00	-16.27	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9642.80	28.55	16.62	45.17	68.20	-23.03	Peak	Horizontal
*	10231.00	27.46	18.18	45.64	68.20	-22.56	Peak	Horizontal
	11876.60	28.02	20.32	48.34	74.00	-25.66	Peak	Horizontal
	17928.60	17.89	30.13	48.02	54.00	-5.98	Average	Horizontal
	17928.60	27.91	30.13	58.04	74.00	-15.96	Peak	Horizontal
*	9666.60	28.28	16.55	44.83	68.20	-23.37	Peak	Vertical
*	10363.60	28.12	18.18	46.30	68.20	-21.90	Peak	Vertical
	12344.10	26.54	21.58	48.12	74.00	-25.88	Peak	Vertical
	17928.60	17.37	30.13	47.50	54.00	-6.50	Average	Vertical
	17928.60	27.03	30.13	57.16	74.00	-16.84	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	27.20	16.55	43.75	68.20	-24.45	Peak	Horizontal
*	10443.50	27.11	18.33	45.44	68.20	-22.76	Peak	Horizontal
	12376.40	27.88	21.71	49.59	74.00	-24.41	Peak	Horizontal
	17974.50	17.75	30.21	47.96	54.00	-6.04	Average	Horizontal
	17974.50	25.77	30.21	55.98	74.00	-18.02	Peak	Horizontal
*	9593.50	28.53	16.50	45.03	68.20	-23.17	Peak	Vertical
*	10470.70	27.13	18.35	45.48	68.20	-22.72	Peak	Vertical
	12313.50	27.01	21.40	48.41	74.00	-25.59	Peak	Vertical
	18000.00	17.48	29.26	46.74	54.00	-7.26	Average	Vertical
	18000.00	27.63	29.26	56.89	74.00	-17.11	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9617.30	27.66	16.49	44.15	68.20	-24.05	Peak	Horizontal
*	10470.70	27.67	18.35	46.02	68.20	-22.18	Peak	Horizontal
	11456.70	27.71	19.45	47.16	74.00	-26.84	Peak	Horizontal
	17882.70	17.26	30.05	47.31	54.00	-6.69	Average	Horizontal
	17882.70	26.84	30.05	56.89	74.00	-17.11	Peak	Horizontal
*	9717.60	28.56	16.76	45.32	68.20	-22.88	Peak	Vertical
*	10523.40	27.26	18.46	45.72	68.20	-22.48	Peak	Vertical
	12600.80	26.26	22.23	48.49	74.00	-25.51	Peak	Vertical
	17882.70	17.33	30.05	47.38	54.00	-6.62	Average	Vertical
	17882.70	26.83	30.05	56.88	74.00	-17.12	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9642.80	27.97	16.62	44.59	68.20	-23.61	Peak	Horizontal
*	10363.60	28.05	18.18	46.23	68.20	-21.97	Peak	Horizontal
	12473.30	26.83	21.85	48.68	74.00	-25.32	Peak	Horizontal
	17882.70	17.78	30.05	47.83	54.00	-6.17	Average	Horizontal
	17882.70	27.82	30.05	57.87	74.00	-16.13	Peak	Horizontal
*	9666.60	27.94	16.55	44.49	68.20	-23.71	Peak	Vertical
*	10497.90	28.63	18.47	47.10	68.20	-21.10	Peak	Vertical
	11876.60	27.39	20.32	47.71	74.00	-26.29	Peak	Vertical
	17882.70	17.69	30.05	47.74	54.00	-6.26	Average	Vertical
	17882.70	27.04	30.05	57.09	74.00	-16.91	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9666.60	28.27	16.55	44.82	68.20	-23.38	Peak	Horizontal
*	10389.10	27.49	18.37	45.86	68.20	-22.34	Peak	Horizontal
	12634.80	27.41	22.31	49.72	74.00	-24.28	Peak	Horizontal
	17882.70	17.76	30.05	47.81	54.00	-6.19	Average	Horizontal
	17882.70	28.33	30.05	58.38	74.00	-15.62	Peak	Horizontal
*	9766.90	28.63	16.92	45.55	68.20	-22.65	Peak	Vertical
*	10443.50	27.72	18.33	46.05	68.20	-22.15	Peak	Vertical
	12187.70	26.67	21.20	47.87	74.00	-26.13	Peak	Vertical
	17882.70	17.58	30.05	47.63	54.00	-6.37	Average	Vertical
	17882.70	26.70	30.05	56.75	74.00	-17.25	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9593.50	27.38	16.50	43.88	68.20	-24.32	Peak	Horizontal
*	10470.70	27.74	18.35	46.09	68.20	-22.11	Peak	Horizontal
	12441.00	26.80	21.73	48.53	74.00	-25.47	Peak	Horizontal
	17882.70	17.36	30.05	47.41	54.00	-6.59	Average	Horizontal
	17882.70	27.80	30.05	57.85	74.00	-16.15	Peak	Horizontal
*	9741.40	28.22	16.91	45.13	68.20	-23.07	Peak	Vertical
*	10470.70	28.72	18.35	47.07	68.20	-21.13	Peak	Vertical
	12218.30	27.58	21.21	48.79	74.00	-25.21	Peak	Vertical
	17882.70	17.47	30.05	47.52	54.00	-6.48	Average	Vertical
	17882.70	27.13	30.05	57.18	74.00	-16.82	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9741.40	27.38	16.91	44.29	68.20	-23.91	Peak	Horizontal
*	10470.70	27.70	18.35	46.05	68.20	-22.15	Peak	Horizontal
	12503.90	26.09	21.89	47.98	74.00	-26.02	Peak	Horizontal
	17882.70	17.74	30.05	47.79	54.00	-6.21	Average	Horizontal
	17882.70	26.37	30.05	56.42	74.00	-17.58	Peak	Horizontal
*	9945.40	27.51	17.61	45.12	68.20	-23.08	Peak	Vertical
*	10443.50	26.84	18.33	45.17	68.20	-23.03	Peak	Vertical
	12536.20	25.58	21.98	47.56	74.00	-26.44	Peak	Vertical
	17928.60	17.33	30.13	47.46	54.00	-6.54	Average	Vertical
	17928.60	27.18	30.13	57.31	74.00	-16.69	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9741.40	27.86	16.91	44.77	68.20	-23.43	Peak	Horizontal
*	10523.40	29.92	18.46	48.38	68.20	-19.82	Peak	Horizontal
	12218.30	27.79	21.21	49.00	74.00	-25.00	Peak	Horizontal
	17928.60	17.86	30.13	47.99	54.00	-6.01	Average	Horizontal
	17928.60	28.01	30.13	58.14	74.00	-15.86	Peak	Horizontal
*	9666.60	30.32	16.55	46.87	68.20	-21.33	Peak	Vertical
*	10125.60	27.31	18.14	45.45	68.20	-22.75	Peak	Vertical
	12503.90	27.45	21.89	49.34	74.00	-24.66	Peak	Vertical
	17882.70	17.79	30.05	47.84	54.00	-6.16	Average	Vertical
	17882.70	27.23	30.05	57.28	74.00	-16.72	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9717.60	28.31	16.76	45.07	68.20	-23.13	Peak	Horizontal
*	10497.90	27.87	18.47	46.34	68.20	-21.86	Peak	Horizontal
	12473.30	25.82	21.85	47.67	74.00	-26.33	Peak	Horizontal
	17882.70	17.47	30.05	47.52	54.00	-6.48	Average	Horizontal
	17882.70	27.94	30.05	57.99	74.00	-16.01	Peak	Horizontal
*	9792.40	29.24	16.99	46.23	68.20	-21.97	Peak	Vertical
*	10497.90	29.61	18.47	48.08	68.20	-20.12	Peak	Vertical
	12408.70	26.73	21.64	48.37	74.00	-25.63	Peak	Vertical
	17836.80	17.56	29.36	46.92	54.00	-7.08	Average	Vertical
	17836.80	27.35	29.36	56.71	74.00	-17.29	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9642.80	27.90	16.62	44.52	68.20	-23.68	Peak	Horizontal
*	10523.40	27.14	18.46	45.60	68.20	-22.60	Peak	Horizontal
	11846.00	26.59	20.26	46.85	74.00	-27.15	Peak	Horizontal
	17882.70	17.43	30.05	47.48	54.00	-6.52	Average	Horizontal
	17882.70	26.54	30.05	56.59	74.00	-17.41	Peak	Horizontal
*	9792.40	28.91	16.99	45.90	68.20	-22.30	Peak	Vertical
*	10523.40	27.98	18.46	46.44	68.20	-21.76	Peak	Vertical
	12250.60	26.74	21.38	48.12	74.00	-25.88	Peak	Vertical
	17882.70	17.25	30.05	47.30	54.00	-6.70	Average	Vertical
	17882.70	26.50	30.05	56.55	74.00	-17.45	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9692.10	27.95	16.83	44.78	68.20	-23.42	Peak	Horizontal
*	10416.30	28.50	18.14	46.64	68.20	-21.56	Peak	Horizontal
	12313.50	27.75	21.40	49.15	74.00	-24.85	Peak	Horizontal
	17882.70	17.88	30.05	47.93	54.00	-6.07	Average	Horizontal
	17882.70	26.79	30.05	56.84	74.00	-17.16	Peak	Horizontal
*	9792.40	29.82	16.99	46.81	68.20	-21.39	Peak	Vertical
*	10550.60	26.95	18.52	45.47	68.20	-22.73	Peak	Vertical
	12503.90	25.73	21.89	47.62	74.00	-26.38	Peak	Vertical
	17882.70	17.62	30.05	47.67	54.00	-6.33	Average	Vertical
	17882.70	26.32	30.05	56.37	74.00	-17.63	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9642.80	27.34	16.62	43.96	68.20	-24.24	Peak	Horizontal
*	10497.90	28.23	18.47	46.70	68.20	-21.50	Peak	Horizontal
	11579.10	19.97	19.63	39.60	54.00	-14.40	Average	Horizontal
	11579.10	32.95	19.63	52.58	74.00	-21.42	Peak	Horizontal
	17928.60	17.66	30.13	47.79	54.00	-6.21	Average	Horizontal
	17928.60	26.74	30.13	56.87	74.00	-17.13	Peak	Horizontal
*	9717.60	28.10	16.76	44.86	68.20	-23.34	Peak	Vertical
*	10443.50	26.92	18.33	45.25	68.20	-22.95	Peak	Vertical
	12441.00	26.83	21.73	48.56	74.00	-25.44	Peak	Vertical
	17882.70	17.36	30.05	47.41	54.00	-6.59	Average	Vertical
	17882.70	27.66	30.05	57.71	74.00	-16.29	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9766.90	27.79	16.92	44.71	68.20	-23.49	Peak	Horizontal
*	10389.10	26.94	18.37	45.31	68.20	-22.89	Peak	Horizontal
	12344.10	26.51	21.58	48.09	74.00	-25.91	Peak	Horizontal
	17882.70	17.45	30.05	47.50	54.00	-6.50	Average	Horizontal
	17882.70	26.91	30.05	56.96	74.00	-17.04	Peak	Horizontal
*	9843.40	27.34	17.29	44.63	68.20	-23.57	Peak	Vertical
*	10309.20	26.96	18.12	45.08	68.20	-23.12	Peak	Vertical
	12503.90	25.69	21.89	47.58	74.00	-26.42	Peak	Vertical
	17836.80	17.67	29.36	47.03	54.00	-6.97	Average	Vertical
	17836.80	26.91	29.36	56.27	74.00	-17.73	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11235.70	27.08	19.15	46.23	74.00	-27.77	Peak	Horizontal
*	14006.70	26.28	22.29	48.57	68.20	-19.63	Peak	Horizontal
*	15047.10	26.38	23.19	49.57	68.20	-18.63	Peak	Horizontal
	17899.70	16.78	29.19	45.97	54.00	-8.03	Average	Horizontal
	17899.70	25.21	29.19	54.40	74.00	-19.60	Peak	Horizontal
	11648.80	27.56	19.82	47.38	74.00	-26.62	Peak	Vertical
*	13940.40	27.11	22.34	49.45	68.20	-18.75	Peak	Vertical
*	14968.90	27.65	22.95	50.60	68.20	-17.60	Peak	Vertical
	17911.60	16.80	29.57	46.37	54.00	-7.63	Average	Vertical
	17911.60	25.56	29.57	55.13	74.00	-18.87	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11169.40	26.83	18.94	45.77	74.00	-28.23	Peak	Horizontal
*	13955.70	28.37	22.28	50.65	68.20	-17.55	Peak	Horizontal
*	17015.70	26.50	28.66	55.16	68.20	-13.04	Peak	Horizontal
	17916.70	16.54	29.73	46.27	54.00	-7.73	Average	Horizontal
	17916.70	27.47	29.73	57.20	74.00	-16.80	Peak	Horizontal
	11415.90	28.14	19.28	47.42	74.00	-26.58	Peak	Vertical
*	14895.80	29.43	23.08	52.51	68.20	-15.69	Peak	Vertical
*	17061.60	25.55	28.75	54.30	68.20	-13.90	Peak	Vertical
	17916.70	16.48	29.73	46.21	54.00	-7.79	Average	Vertical
	17916.70	27.12	29.73	56.85	74.00	-17.15	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11602.90	27.62	19.63	47.25	74.00	-26.75	Peak	Horizontal
*	12855.80	29.38	22.53	51.91	68.20	-16.29	Peak	Horizontal
*	17342.10	26.45	28.86	55.31	68.20	-12.89	Peak	Horizontal
	17916.70	16.92	29.73	46.65	54.00	-7.35	Average	Horizontal
	17916.70	26.80	29.73	56.53	74.00	-17.47	Peak	Horizontal
	11383.60	26.82	19.27	46.09	74.00	-27.91	Peak	Vertical
*	14815.90	29.98	23.23	53.21	68.20	-14.99	Peak	Vertical
*	17107.50	26.07	28.58	54.65	68.20	-13.55	Peak	Vertical
	17916.70	16.85	29.73	46.58	54.00	-7.42	Average	Vertical
	17916.70	27.94	29.73	57.67	74.00	-16.33	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11509.40	26.69	19.53	46.22	74.00	-27.78	Peak	Horizontal
*	13918.30	27.61	22.05	49.66	68.20	-18.54	Peak	Horizontal
*	17034.40	29.27	28.51	57.78	68.20	-10.42	Peak	Horizontal
	17916.70	16.79	29.73	46.52	54.00	-7.48	Average	Horizontal
	17916.70	26.26	29.73	55.99	74.00	-18.01	Peak	Horizontal
	11383.60	27.72	19.27	46.99	74.00	-27.01	Peak	Vertical
*	13918.30	27.79	22.05	49.84	68.20	-18.36	Peak	Vertical
*	17061.60	26.43	28.75	55.18	68.20	-13.02	Peak	Vertical
	17916.70	16.71	29.73	46.44	54.00	-7.56	Average	Vertical
	17916.70	26.14	29.73	55.87	74.00	-18.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11665.80	27.77	19.99	47.76	74.00	-26.24	Peak	Horizontal
*	14936.60	26.73	23.21	49.94	68.20	-18.26	Peak	Horizontal
*	16878.00	25.02	28.52	53.54	68.20	-14.66	Peak	Horizontal
	17916.70	16.49	29.73	46.22	54.00	-7.78	Average	Horizontal
	17916.70	28.34	29.73	58.07	74.00	-15.93	Peak	Horizontal
	11446.50	28.62	19.48	48.10	74.00	-25.90	Peak	Horizontal
*	14069.60	27.97	22.18	50.15	68.20	-18.05	Peak	Vertical
*	16923.90	25.67	28.65	54.32	68.20	-13.88	Peak	Vertical
	17916.70	16.55	29.73	46.28	54.00	-7.72	Average	Vertical
	17916.70	26.70	29.73	56.43	74.00	-17.57	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11446.50	27.47	19.48	46.95	74.00	-27.05	Peak	Horizontal
*	13880.90	26.73	22.36	49.09	68.20	-19.11	Peak	Horizontal
*	16832.10	26.28	28.58	54.86	68.20	-13.34	Peak	Horizontal
	17916.70	17.02	29.73	46.75	54.00	-7.25	Average	Horizontal
	17916.70	28.82	29.73	58.55	74.00	-15.45	Peak	Horizontal
	11261.20	27.95	19.05	47.00	74.00	-27.00	Peak	Vertical
*	13955.70	27.94	22.28	50.22	68.20	-17.98	Peak	Vertical
*	14815.90	27.79	23.23	51.02	68.20	-17.18	Peak	Vertical
	17916.70	16.94	29.73	46.67	54.00	-7.33	Average	Vertical
	17916.70	27.39	29.73	57.12	74.00	-16.88	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11890.20	27.47	20.49	47.96	74.00	-26.04	Peak	Horizontal
*	14977.40	28.25	22.95	51.20	68.20	-17.00	Peak	Horizontal
*	17061.60	26.88	28.75	55.63	68.20	-12.57	Peak	Horizontal
	17916.70	16.57	29.73	46.30	54.00	-7.70	Average	Horizontal
	17916.70	26.71	29.73	56.44	74.00	-17.56	Peak	Horizontal
	9071.60	32.71	15.65	48.36	74.00	-25.64	Peak	Vertical
*	12969.70	25.45	22.73	48.18	68.20	-20.02	Peak	Vertical
*	15059.00	28.03	23.22	51.25	68.20	-16.95	Peak	Vertical
	17966.00	16.82	29.75	46.57	54.00	-7.43	Average	Vertical
	17966.00	27.15	29.75	56.90	74.00	-17.10	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	9136.20	32.43	15.79	48.22	74.00	-25.78	Peak	Horizontal
*	13880.90	27.81	22.36	50.17	68.20	-18.03	Peak	Horizontal
*	16969.80	27.96	28.95	56.91	68.20	-11.29	Peak	Horizontal
	17867.40	17.12	30.20	47.32	54.00	-6.68	Average	Horizontal
	17867.40	27.04	30.20	57.24	74.00	-16.76	Peak	Horizontal
	11477.10	27.47	19.37	46.84	74.00	-27.16	Peak	Vertical
*	14358.60	31.03	22.81	53.84	68.20	-14.36	Peak	Vertical
*	16694.40	26.05	28.33	54.38	68.20	-13.82	Peak	Vertical
	17916.70	16.88	29.73	46.61	54.00	-7.39	Average	Vertical
	17916.70	27.78	29.73	57.51	74.00	-16.49	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11019.80	27.58	19.00	46.58	74.00	-27.42	Peak	Horizontal
*	14032.20	29.77	22.22	51.99	68.20	-16.21	Peak	Horizontal
*	16923.90	27.06	28.65	55.71	68.20	-12.49	Peak	Horizontal
	17916.70	16.64	29.73	46.37	54.00	-7.63	Average	Horizontal
	17916.70	26.96	29.73	56.69	74.00	-17.31	Peak	Horizontal
	11415.90	27.63	19.28	46.91	74.00	-27.09	Peak	Vertical
*	13955.70	27.40	22.28	49.68	68.20	-18.52	Peak	Vertical
*	16969.80	25.90	28.95	54.85	68.20	-13.35	Peak	Vertical
	17916.70	16.75	29.73	46.48	54.00	-7.52	Average	Vertical
	17916.70	26.64	29.73	56.37	74.00	-17.63	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11322.40	26.75	19.29	46.04	74.00	-27.96	Peak	Horizontal
*	13955.70	29.67	22.28	51.95	68.20	-16.25	Peak	Horizontal
*	16923.90	26.88	28.65	55.53	68.20	-12.67	Peak	Horizontal
	17916.70	16.99	29.73	46.72	54.00	-7.28	Average	Horizontal
	17916.70	28.06	29.73	57.79	74.00	-16.21	Peak	Horizontal
	11261.20	25.71	19.05	44.76	74.00	-29.24	Peak	Vertical
*	13993.10	27.88	22.43	50.31	68.20	-17.89	Peak	Vertical
*	16878.00	25.88	28.52	54.40	68.20	-13.80	Peak	Vertical
	17867.40	16.51	30.20	46.71	54.00	-7.29	Average	Vertical
	17867.40	26.40	30.20	56.60	74.00	-17.40	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11635.20	26.56	19.78	46.34	74.00	-27.66	Peak	Horizontal
*	13993.10	27.40	22.43	49.83	68.20	-18.37	Peak	Horizontal
*	16786.20	25.90	28.30	54.20	68.20	-14.00	Peak	Horizontal
	17916.70	17.01	29.73	46.74	54.00	-7.26	Average	Horizontal
	17916.70	26.32	29.73	56.05	74.00	-17.95	Peak	Horizontal
	11857.90	26.54	20.19	46.73	74.00	-27.27	Peak	Vertical
*	14069.60	28.48	22.18	50.66	68.20	-17.54	Peak	Vertical
*	15099.80	27.59	23.03	50.62	68.20	-17.58	Peak	Vertical
	17916.70	16.87	29.73	46.60	54.00	-7.40	Average	Vertical
	17916.70	26.76	29.73	56.49	74.00	-17.51	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE80 - Channel 58
Remark	Average measurement was not performed if peak level lower than average limit. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11230.60	27.14	19.14	46.28	74.00	-27.72	Peak	Horizontal
*	13918.30	27.83	22.05	49.88	68.20	-18.32	Peak	Horizontal
*	17061.60	26.49	28.75	55.24	68.20	-12.96	Peak	Horizontal
	17916.70	16.73	29.73	46.46	54.00	-7.54	Average	Horizontal
	17916.70	28.31	29.73	58.04	74.00	-15.96	Peak	Horizontal
	11291.80	26.29	19.06	45.35	74.00	-28.65	Peak	Vertical
*	14815.90	28.71	23.23	51.94	68.20	-16.26	Peak	Vertical
*	16878.00	27.25	28.52	55.77	68.20	-12.43	Peak	Vertical
	17916.70	16.95	29.73	46.68	54.00	-7.32	Average	Vertical
	17916.70	27.82	29.73	57.55	74.00	-16.45	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE80 - Channel 106
Remark	Average measurement was not performed if peak level lower than average limit. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11230.60	28.67	19.14	47.81	74.00	-26.19	Peak	Horizontal
*	14815.90	28.46	23.23	51.69	68.20	-16.51	Peak	Horizontal
*	17061.60	26.58	28.75	55.33	68.20	-12.87	Peak	Horizontal
	17966.00	17.10	29.75	46.85	54.00	-7.15	Average	Horizontal
	17966.00	28.62	29.75	58.37	74.00	-15.63	Peak	Horizontal
	11322.40	26.94	19.29	46.23	74.00	-27.77	Peak	Vertical
*	14895.80	27.49	23.08	50.57	68.20	-17.63	Peak	Vertical
*	17061.60	25.72	28.75	54.47	68.20	-13.73	Peak	Vertical
	17916.70	17.06	29.73	46.79	54.00	-7.21	Average	Vertical
	17916.70	26.38	29.73	56.11	74.00	-17.89	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	8976.40	32.54	15.60	48.14	68.20	-20.06	Peak	Horizontal
	11635.20	27.93	19.78	47.71	74.00	-26.29	Peak	Horizontal
*	16923.90	26.49	28.65	55.14	68.20	-13.06	Peak	Horizontal
	17966.00	16.59	29.75	46.34	54.00	-7.66	Average	Horizontal
	17966.00	26.95	29.75	56.70	74.00	-17.30	Peak	Horizontal
	11477.10	28.61	19.37	47.98	74.00	-26.02	Peak	Vertical
*	13955.70	27.09	22.28	49.37	68.20	-18.83	Peak	Vertical
*	17015.70	26.10	28.66	54.76	68.20	-13.44	Peak	Vertical
	17867.40	16.79	30.20	46.99	54.00	-7.01	Average	Vertical
	17867.40	27.08	30.20	57.28	74.00	-16.72	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11353.00	27.82	19.30	47.12	74.00	-26.88	Peak	Horizontal
*	14108.70	28.27	22.52	50.79	68.20	-17.41	Peak	Horizontal
*	16923.90	27.00	28.65	55.65	68.20	-12.55	Peak	Horizontal
	17916.70	16.85	29.73	46.58	54.00	-7.42	Average	Horizontal
	17916.70	26.59	29.73	56.32	74.00	-17.68	Peak	Horizontal
	11291.80	27.06	19.06	46.12	74.00	-27.88	Peak	Vertical
*	13880.90	27.68	22.36	50.04	68.20	-18.16	Peak	Vertical
*	16923.90	25.92	28.65	54.57	68.20	-13.63	Peak	Vertical
	17867.40	16.81	30.20	47.01	54.00	-6.99	Average	Vertical
	17867.40	28.59	30.20	58.79	74.00	-15.21	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Date	2026-01-05	Test Mode	802.11ax-HE80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11468.60	27.71	19.38	47.09	74.00	-26.91	Peak	Horizontal
*	13831.60	28.15	22.42	50.57	68.20	-17.63	Peak	Horizontal
*	17042.90	26.79	28.52	55.31	68.20	-12.89	Peak	Horizontal
	17836.80	16.85	29.36	46.21	54.00	-7.79	Average	Horizontal
	17836.80	26.25	29.36	55.61	74.00	-18.39	Peak	Horizontal
	11315.60	26.28	19.30	45.58	74.00	-28.42	Peak	Vertical
*	13981.20	27.26	22.26	49.52	68.20	-18.68	Peak	Vertical
*	16952.80	26.90	28.71	55.61	68.20	-12.59	Peak	Vertical
	17932.00	16.94	30.04	46.98	54.00	-7.02	Average	Vertical
	17932.00	27.01	30.04	57.05	74.00	-16.95	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11ax-HE160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.20	-3.32	46.88	54.00	-7.12	Average	Horizontal
	8153.60	52.22	-3.32	48.90	74.00	-25.10	Peak	Horizontal
	12230.20	46.20	-0.66	45.54	54.00	-8.46	Average	Horizontal
	12230.20	48.52	-0.66	47.86	74.00	-26.14	Peak	Horizontal
*	14101.90	45.37	2.82	48.19	68.20	-20.01	Peak	Horizontal
*	17433.90	45.16	8.13	53.29	68.20	-14.91	Peak	Horizontal
	8153.60	51.00	-3.32	47.68	54.00	-6.32	Average	Vertical
	8153.60	53.05	-3.32	49.73	74.00	-24.27	Peak	Vertical
	8400.10	49.20	-2.80	46.40	54.00	-7.60	Average	Vertical
	8400.10	51.24	-2.80	48.44	74.00	-25.56	Peak	Vertical
*	14081.50	45.88	2.78	48.66	68.20	-19.54	Peak	Vertical
*	16954.50	44.61	7.57	52.18	68.20	-16.02	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11ax-HE160 - Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	48.50	-3.32	45.18	54.00	-8.82	Average	Horizontal
	8153.60	50.80	-3.32	47.48	74.00	-26.52	Peak	Horizontal
*	8911.80	50.73	-2.22	48.51	68.20	-19.69	Peak	Horizontal
	12313.50	47.39	-0.52	46.87	74.00	-27.13	Peak	Horizontal
*	13954.00	45.82	2.55	48.37	68.20	-19.83	Peak	Horizontal
	12286.30	35.44	-0.41	35.03	54.00	-18.97	Average	Vertical
	12286.30	47.80	-0.41	47.39	74.00	-26.61	Peak	Vertical
*	14096.80	45.70	2.89	48.59	68.20	-19.61	Peak	Vertical
	15829.10	32.60	5.50	38.10	54.00	-15.90	Average	Vertical
	15829.10	44.82	5.50	50.32	74.00	-23.68	Peak	Vertical
*	17187.40	44.65	7.74	52.39	68.20	-15.81	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 36
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.20	-3.32	46.88	74.00	-27.12	Peak	Horizontal
	12124.80	35.60	-0.43	35.17	54.00	-18.83	Average	Horizontal
	12124.80	47.68	-0.43	47.25	74.00	-26.75	Peak	Horizontal
*	13999.90	45.55	2.59	48.14	68.20	-20.06	Peak	Horizontal
*	16940.90	44.15	7.48	51.63	68.20	-16.57	Peak	Horizontal
	8153.60	50.14	-3.32	46.82	74.00	-27.18	Peak	Vertical
	12240.40	40.19	-0.45	39.74	54.00	-14.26	Average	Vertical
	12240.40	47.81	-0.45	47.36	74.00	-26.64	Peak	Vertical
*	13952.30	45.74	2.49	48.23	68.20	-19.97	Peak	Vertical
*	16833.80	43.97	7.32	51.29	68.20	-16.91	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 44
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.20	-3.32	45.88	54.00	-8.12	Average	Horizontal
	8153.60	51.37	-3.32	48.05	74.00	-25.95	Peak	Horizontal
	11735.50	47.49	-0.87	46.62	74.00	-27.38	Peak	Horizontal
*	13989.70	44.91	3.12	48.03	68.20	-20.17	Peak	Horizontal
*	16823.60	44.13	7.19	51.32	68.20	-16.88	Peak	Horizontal
	8153.60	49.97	-3.32	46.65	74.00	-27.35	Peak	Vertical
	10730.80	40.50	-0.78	39.72	54.00	-14.28	Average	Vertical
	10730.80	48.62	-0.78	47.84	74.00	-26.16	Peak	Vertical
*	14821.00	44.82	4.69	49.51	68.20	-18.69	Peak	Vertical
*	16840.60	44.73	7.29	52.02	68.20	-16.18	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 48
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.00	-3.32	45.68	54.00	-8.32	Average	Horizontal
	8153.60	51.03	-3.32	47.71	74.00	-26.29	Peak	Horizontal
	11512.80	47.91	-1.12	46.79	74.00	-27.21	Peak	Horizontal
*	14596.60	44.55	3.87	48.42	68.20	-19.78	Peak	Horizontal
*	17484.90	43.86	8.59	52.45	68.20	-15.75	Peak	Horizontal
	8153.60	48.80	-3.32	45.48	54.00	-8.52	Average	Vertical
	8153.60	50.93	-3.32	47.61	74.00	-26.39	Peak	Vertical
	12335.60	35.60	-0.60	35.00	54.00	-19.00	Average	Vertical
	12335.60	47.96	-0.60	47.36	74.00	-26.64	Peak	Vertical
*	14980.80	44.41	4.25	48.66	68.20	-19.54	Peak	Vertical
*	17048.00	44.15	7.66	51.81	68.20	-16.39	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 52
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.00	-3.32	45.68	54.00	-8.32	Average	Horizontal
	8153.60	51.01	-3.32	47.69	74.00	-26.31	Peak	Horizontal
	12141.80	47.36	-0.40	46.96	74.00	-27.04	Peak	Horizontal
*	14917.90	44.74	4.16	48.90	68.20	-19.30	Peak	Horizontal
*	17258.80	43.66	8.05	51.71	68.20	-16.49	Peak	Horizontal
	8153.60	50.14	-3.32	46.82	74.00	-27.18	Peak	Vertical
	11116.70	40.10	-0.80	39.30	54.00	-14.70	Average	Vertical
	11116.70	48.05	-0.80	47.25	74.00	-26.75	Peak	Vertical
*	13889.40	46.43	2.30	48.73	68.20	-19.47	Peak	Vertical
*	17041.20	44.74	7.45	52.19	68.20	-16.01	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 60
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	48.20	-3.32	44.88	54.00	-9.12	Average	Horizontal
	8153.60	50.36	-3.32	47.04	74.00	-26.96	Peak	Horizontal
	12260.80	47.35	-0.37	46.98	74.00	-27.02	Peak	Horizontal
*	14861.80	45.07	3.77	48.84	68.20	-19.36	Peak	Horizontal
*	17255.40	43.46	8.09	51.55	68.20	-16.65	Peak	Horizontal
	8153.60	50.05	-3.32	46.73	74.00	-27.27	Peak	Vertical
	11827.30	47.75	-0.77	46.98	74.00	-27.02	Peak	Vertical
*	14108.70	46.36	2.69	49.05	68.20	-19.15	Peak	Vertical
*	16728.40	45.49	6.87	52.36	68.20	-15.84	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 64
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.30	-3.32	45.98	54.00	-8.02	Average	Horizontal
	8153.60	51.59	-3.32	48.27	74.00	-25.73	Peak	Horizontal
	12145.20	47.19	-0.37	46.82	74.00	-27.18	Peak	Horizontal
*	14416.40	44.95	3.94	48.89	68.20	-19.31	Peak	Horizontal
*	16400.30	45.71	6.70	52.41	68.20	-15.79	Peak	Horizontal
	8153.60	48.30	-3.32	44.98	54.00	-9.02	Average	Vertical
	8153.60	50.38	-3.32	47.06	74.00	-26.94	Peak	Vertical
	12136.70	35.60	-0.45	35.15	54.00	-18.85	Average	Vertical
	12136.70	47.59	-0.45	47.14	74.00	-26.86	Peak	Vertical
*	14107.00	46.06	2.75	48.81	68.20	-19.39	Peak	Vertical
*	16249.00	45.07	6.37	51.44	68.20	-16.76	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 100
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	48.20	-3.32	44.88	54.00	-9.12	Average	Horizontal
	8153.60	50.41	-3.32	47.09	74.00	-26.91	Peak	Horizontal
*	8799.60	50.51	-2.16	48.35	68.20	-19.85	Peak	Horizontal
	11604.60	47.99	-1.02	46.97	74.00	-27.03	Peak	Horizontal
*	15259.60	43.41	5.18	48.59	68.20	-19.61	Peak	Horizontal
	8153.60	50.21	-3.32	46.89	74.00	-27.11	Peak	Vertical
	11978.60	47.49	-0.67	46.82	74.00	-27.18	Peak	Vertical
*	14413.00	46.41	4.06	50.47	68.20	-17.73	Peak	Vertical
*	16961.30	44.23	7.57	51.80	68.20	-16.40	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 116
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	48.30	-3.32	44.98	54.00	-9.02	Average	Horizontal
	8153.60	50.53	-3.32	47.21	74.00	-26.79	Peak	Horizontal
*	8928.80	51.85	-2.16	49.69	68.20	-18.51	Peak	Horizontal
	11512.80	40.20	-1.12	39.08	54.00	-14.92	Average	Horizontal
	11512.80	48.37	-1.12	47.25	74.00	-26.75	Peak	Horizontal
*	16738.60	47.24	6.61	53.85	68.20	-14.35	Peak	Horizontal
	8153.60	49.30	-3.32	45.98	54.00	-8.02	Average	Vertical
	8153.60	51.24	-3.32	47.92	74.00	-26.08	Peak	Vertical
	12163.90	47.03	-0.51	46.52	74.00	-27.48	Peak	Vertical
*	14418.10	44.92	3.88	48.80	68.20	-19.40	Peak	Vertical
*	16733.50	45.97	6.74	52.71	68.20	-15.49	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 140
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.24	-3.32	46.92	74.00	-27.08	Peak	Horizontal
	11880.00	35.50	-0.78	34.72	54.00	-19.28	Average	Horizontal
	11880.00	47.78	-0.78	47.00	74.00	-27.00	Peak	Horizontal
*	14749.60	44.59	3.96	48.55	68.20	-19.65	Peak	Horizontal
*	16905.20	44.85	6.54	51.39	68.20	-16.81	Peak	Horizontal
	8153.60	50.02	-3.32	46.70	74.00	-27.30	Peak	Vertical
	9119.20	47.50	-2.10	45.40	54.00	-8.60	Average	Vertical
	9119.20	49.72	-2.10	47.62	74.00	-26.38	Peak	Vertical
*	13982.90	44.86	3.14	48.00	68.20	-20.20	Peak	Vertical
*	17398.20	43.21	8.34	51.55	68.20	-16.65	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 144
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.00	-3.32	45.68	54.00	-8.32	Average	Horizontal
	8153.60	51.27	-3.32	47.95	74.00	-26.05	Peak	Horizontal
	9151.50	47.00	-1.97	45.03	54.00	-8.97	Average	Horizontal
	9151.50	49.36	-1.97	47.39	74.00	-26.61	Peak	Horizontal
*	15011.40	44.48	4.26	48.74	68.20	-19.46	Peak	Horizontal
*	17146.60	44.74	7.67	52.41	68.20	-15.79	Peak	Horizontal
	8153.60	48.40	-3.32	45.08	54.00	-8.92	Average	Vertical
	8153.60	50.47	-3.32	47.15	74.00	-26.85	Peak	Vertical
	9151.50	47.00	-1.97	45.03	54.00	-8.97	Average	Vertical
	9151.50	49.98	-1.97	48.01	74.00	-25.99	Peak	Vertical
*	13911.50	46.54	2.02	48.56	68.20	-19.64	Peak	Vertical
*	16774.30	44.92	6.91	51.83	68.20	-16.37	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	51.10	-3.32	47.78	54.00	-6.22	Average	Horizontal
	8153.60	53.19	-3.32	49.87	74.00	-24.13	Peak	Horizontal
	11497.50	42.00	-1.21	40.79	54.00	-13.21	Average	Horizontal
	11497.50	50.38	-1.21	49.17	74.00	-24.83	Peak	Horizontal
*	13986.30	45.58	3.19	48.77	68.20	-19.43	Peak	Horizontal
*	17233.30	44.93	7.53	52.46	68.20	-15.74	Peak	Horizontal
	8153.60	51.60	-3.32	48.28	54.00	-5.72	Average	Vertical
	8153.60	53.59	-3.32	50.27	74.00	-23.73	Peak	Vertical
	12187.70	40.20	-0.76	39.44	54.00	-14.56	Average	Vertical
	12187.70	48.06	-0.76	47.30	74.00	-26.70	Peak	Vertical
*	14219.20	46.43	2.89	49.32	68.20	-18.88	Peak	Vertical
*	17384.60	45.32	8.15	53.47	68.20	-14.73	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 157
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	51.00	-3.32	47.68	54.00	-6.32	Average	Horizontal
	8153.60	53.05	-3.32	49.73	74.00	-24.27	Peak	Horizontal
*	9255.20	49.63	-1.71	47.92	68.20	-20.28	Peak	Horizontal
	11563.80	43.00	-1.11	41.89	54.00	-12.11	Average	Horizontal
	11563.80	50.39	-1.11	49.28	74.00	-24.72	Peak	Horizontal
*	13989.70	46.29	3.12	49.41	68.20	-18.79	Peak	Horizontal
	8153.60	51.10	-3.32	47.78	54.00	-6.22	Average	Vertical
	8153.60	53.09	-3.32	49.77	74.00	-24.23	Peak	Vertical
	11562.10	42.80	-1.13	41.67	54.00	-12.33	Average	Vertical
	11562.10	49.21	-1.13	48.08	74.00	-25.92	Peak	Vertical
*	14001.60	45.25	2.51	47.76	68.20	-20.44	Peak	Vertical
*	16531.20	44.88	7.05	51.93	68.20	-16.27	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT20 - Channel 165
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.50	-3.32	46.18	54.00	-7.82	Average	Horizontal
	8153.60	51.97	-3.32	48.65	74.00	-25.35	Peak	Horizontal
	11650.50	43.40	-1.19	42.21	54.00	-11.79	Average	Horizontal
	11650.50	50.57	-1.19	49.38	74.00	-24.62	Peak	Horizontal
*	14270.20	45.50	2.94	48.44	68.20	-19.76	Peak	Horizontal
*	17464.50	50.20	8.62	58.82	68.20	-9.38	Peak	Horizontal
	8153.60	50.80	-3.32	47.48	54.00	-6.52	Average	Vertical
	8153.60	52.89	-3.32	49.57	74.00	-24.43	Peak	Vertical
	9319.80	48.40	-1.89	46.51	54.00	-7.49	Average	Vertical
	9319.80	50.56	-1.89	48.67	74.00	-25.33	Peak	Vertical
*	14934.90	45.01	4.35	49.36	68.20	-18.84	Peak	Vertical
*	17476.40	50.36	8.58	58.94	68.20	-9.26	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 38
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	51.20	-3.32	47.88	54.00	-6.12	Average	Horizontal
	8153.60	53.48	-3.32	50.16	74.00	-23.84	Peak	Horizontal
	12230.20	35.70	-0.66	35.04	54.00	-18.96	Average	Horizontal
	12230.20	47.91	-0.66	47.25	74.00	-26.75	Peak	Horizontal
*	14414.70	45.11	4.00	49.11	68.20	-19.09	Peak	Horizontal
*	16804.90	44.85	6.67	51.52	68.20	-16.68	Peak	Horizontal
	8180.80	48.67	-3.29	45.38	74.00	-28.62	Peak	Vertical
	11715.10	35.80	-0.79	35.01	54.00	-18.99	Average	Vertical
	11715.10	47.89	-0.79	47.10	74.00	-26.90	Peak	Vertical
*	13894.50	47.35	2.26	49.61	68.20	-18.59	Peak	Vertical
*	16828.70	45.06	7.33	52.39	68.20	-15.81	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 46
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.80	-3.32	47.48	54.00	-6.52	Average	Horizontal
	8153.60	52.80	-3.32	49.48	74.00	-24.52	Peak	Horizontal
	12230.20	40.90	-0.66	40.24	54.00	-13.76	Average	Horizontal
	12230.20	49.50	-0.66	48.84	74.00	-25.16	Peak	Horizontal
*	14214.10	44.82	2.89	47.71	68.20	-20.49	Peak	Horizontal
*	17286.00	44.23	7.83	52.06	68.20	-16.14	Peak	Horizontal
	8153.60	51.10	-3.32	47.78	54.00	-6.22	Average	Vertical
	8153.60	53.14	-3.32	49.82	74.00	-24.18	Peak	Vertical
	11827.30	47.25	-0.77	46.48	74.00	-27.52	Peak	Vertical
*	14307.60	45.37	3.02	48.39	68.20	-19.81	Peak	Vertical
*	17015.70	44.83	6.94	51.77	68.20	-16.43	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 54
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	51.70	-3.32	48.38	54.00	-5.62	Average	Horizontal
	8153.60	53.72	-3.32	50.40	74.00	-23.60	Peak	Horizontal
	8432.40	48.00	-2.87	45.13	54.00	-8.87	Average	Horizontal
	8432.40	50.14	-2.87	47.27	74.00	-26.73	Peak	Horizontal
*	9522.10	47.60	-1.52	46.08	68.20	-22.12	Peak	Horizontal
*	13729.60	46.96	1.51	48.47	68.20	-19.73	Peak	Horizontal
	8153.60	51.50	-3.32	48.18	54.00	-5.82	Average	Vertical
	8153.60	53.51	-3.32	50.19	74.00	-23.81	Peak	Vertical
	8432.40	48.00	-2.87	45.13	54.00	-8.87	Average	Vertical
	8432.40	50.17	-2.87	47.30	74.00	-26.70	Peak	Vertical
*	13986.30	44.70	3.19	47.89	68.20	-20.31	Peak	Vertical
*	16835.50	44.10	7.31	51.41	68.20	-16.79	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 62
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.70	-3.32	47.38	54.00	-6.62	Average	Horizontal
	8153.60	52.75	-3.32	49.43	74.00	-24.57	Peak	Horizontal
	8495.30	49.00	-2.85	46.15	54.00	-7.85	Average	Horizontal
	8495.30	51.10	-2.85	48.25	74.00	-25.75	Peak	Horizontal
*	14411.30	44.96	4.00	48.96	68.20	-19.24	Peak	Horizontal
*	17031.00	44.93	7.13	52.06	68.20	-16.14	Peak	Horizontal
	8153.60	51.70	-3.32	48.38	54.00	-5.62	Average	Vertical
	8153.60	53.68	-3.32	50.36	74.00	-23.64	Peak	Vertical
	12044.90	47.64	-0.70	46.94	74.00	-27.06	Peak	Vertical
*	14807.40	44.50	4.18	48.68	68.20	-19.52	Peak	Vertical
*	17269.00	44.06	7.93	51.99	68.20	-16.21	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 102
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	51.36	-3.32	48.04	54.00	-5.96	Average	Horizontal
	8153.60	53.30	-3.32	49.98	74.00	-24.02	Peak	Horizontal
*	8816.60	51.12	-2.17	48.95	68.20	-19.25	Peak	Horizontal
	12230.20	40.60	-0.66	39.94	54.00	-14.06	Average	Horizontal
	12230.20	48.08	-0.66	47.42	74.00	-26.58	Peak	Horizontal
*	14513.30	44.30	3.84	48.14	68.20	-20.06	Peak	Horizontal
	8153.60	50.44	-3.32	47.12	54.00	-6.88	Average	Vertical
	8153.60	52.80	-3.32	49.48	74.00	-24.52	Peak	Vertical
*	8816.60	51.82	-2.17	49.65	68.20	-18.55	Peak	Vertical
	12119.70	47.19	-0.42	46.77	74.00	-27.23	Peak	Vertical
*	14936.60	44.26	4.38	48.64	68.20	-19.56	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 110
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.40	-3.32	47.08	54.00	-6.92	Average	Horizontal
	8153.60	52.70	-3.32	49.38	74.00	-24.62	Peak	Horizontal
*	8879.50	52.92	-2.14	50.78	68.20	-17.42	Peak	Horizontal
	12230.20	40.80	-0.66	40.14	54.00	-13.86	Average	Horizontal
	12230.20	48.34	-0.66	47.68	74.00	-26.32	Peak	Horizontal
*	13986.30	46.01	3.19	49.20	68.20	-19.00	Peak	Horizontal
	8153.60	51.60	-3.32	48.28	54.00	-5.72	Average	Vertical
	8153.60	53.10	-3.32	49.78	74.00	-24.22	Peak	Vertical
*	8879.50	52.59	-2.14	50.45	68.20	-17.75	Peak	Vertical
	11698.10	47.53	-0.89	46.64	74.00	-27.36	Peak	Vertical
*	14511.60	44.73	3.82	48.55	68.20	-19.65	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 134
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.50	-3.32	46.18	54.00	-7.82	Average	Horizontal
	8153.60	51.59	-3.32	48.27	74.00	-25.73	Peak	Horizontal
	9071.60	48.30	-2.04	46.26	54.00	-7.74	Average	Horizontal
	9071.60	50.64	-2.04	48.60	74.00	-25.40	Peak	Horizontal
*	14217.50	46.14	2.89	49.03	68.20	-19.17	Peak	Horizontal
*	16939.20	44.52	7.45	51.97	68.20	-16.23	Peak	Horizontal
	8153.60	49.58	-3.32	46.26	54.00	-7.74	Average	Vertical
	8153.60	51.81	-3.32	48.49	74.00	-25.51	Peak	Vertical
	9071.60	48.10	-2.04	46.06	54.00	-7.94	Average	Vertical
	9071.60	50.34	-2.04	48.30	74.00	-25.70	Peak	Vertical
*	14834.60	44.30	4.19	48.49	68.20	-19.71	Peak	Vertical
*	16869.50	43.85	7.18	51.03	68.20	-17.17	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 142
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.50	-3.32	46.18	54.00	-7.82	Average	Horizontal
	8153.60	51.83	-3.32	48.51	74.00	-25.49	Peak	Horizontal
	9136.20	48.60	-2.01	46.59	54.00	-7.41	Average	Horizontal
	9136.20	51.00	-2.01	48.99	74.00	-25.01	Peak	Horizontal
*	14688.40	44.43	3.72	48.15	68.20	-20.05	Peak	Horizontal
*	16621.30	44.01	6.30	50.31	68.20	-17.89	Peak	Horizontal
	8153.60	50.30	-3.32	46.98	54.00	-7.02	Average	Vertical
	8153.60	52.31	-3.32	48.99	74.00	-25.01	Peak	Vertical
	9136.20	49.20	-2.01	47.19	54.00	-6.81	Average	Vertical
	9136.20	51.22	-2.01	49.21	74.00	-24.79	Peak	Vertical
*	14103.60	45.72	2.79	48.51	68.20	-19.69	Peak	Vertical
*	16811.70	44.04	6.65	50.69	68.20	-17.51	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.40	-3.32	47.08	54.00	-6.92	Average	Horizontal
	8153.60	52.42	-3.32	49.10	74.00	-24.90	Peak	Horizontal
*	9207.60	49.25	-2.01	47.24	68.20	-20.96	Peak	Horizontal
	11531.50	40.60	-1.08	39.52	54.00	-14.48	Average	Horizontal
	11531.50	49.13	-1.08	48.05	74.00	-25.95	Peak	Horizontal
*	14095.10	45.37	2.91	48.28	68.20	-19.92	Peak	Horizontal
	8153.60	49.36	-3.32	46.04	54.00	-7.96	Average	Vertical
	8153.60	51.74	-3.32	48.42	74.00	-25.58	Peak	Vertical
*	9207.60	50.90	-2.01	48.89	68.20	-19.31	Peak	Vertical
	11524.70	47.56	-1.10	46.46	74.00	-27.54	Peak	Vertical
*	14195.40	45.67	2.80	48.47	68.20	-19.73	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT40 - Channel 159
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.00	-3.32	45.68	54.00	-8.32	Average	Horizontal
	8153.60	51.03	-3.32	47.71	74.00	-26.29	Peak	Horizontal
*	9272.20	49.32	-1.61	47.71	68.20	-20.49	Peak	Horizontal
	11592.70	40.50	-1.09	39.41	54.00	-14.59	Average	Horizontal
	11592.70	49.79	-1.09	48.70	74.00	-25.30	Peak	Horizontal
*	13988.00	44.84	3.21	48.05	68.20	-20.15	Peak	Horizontal
	8153.60	51.10	-3.32	47.78	54.00	-6.22	Average	Vertical
	8153.60	53.15	-3.32	49.83	74.00	-24.17	Peak	Vertical
*	9272.20	50.92	-1.61	49.31	68.20	-18.89	Peak	Vertical
	11584.20	35.80	-1.07	34.73	54.00	-19.27	Average	Vertical
	11584.20	48.20	-1.07	47.13	74.00	-26.87	Peak	Vertical
*	13999.90	45.55	2.59	48.14	68.20	-20.06	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT80 - Channel 42
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	51.20	-3.32	47.88	54.00	-6.12	Average	Horizontal
	8153.60	53.15	-3.32	49.83	74.00	-24.17	Peak	Horizontal
*	9272.20	50.92	-1.61	49.31	68.20	-18.89	Peak	Horizontal
	11584.20	36.30	-1.07	35.23	54.00	-18.77	Average	Horizontal
	11584.20	48.20	-1.07	47.13	74.00	-26.87	Peak	Horizontal
*	13999.90	45.55	2.59	48.14	68.20	-20.06	Peak	Horizontal
	8153.60	49.60	-3.32	46.28	54.00	-7.72	Average	Vertical
	8153.60	51.67	-3.32	48.35	74.00	-25.65	Peak	Vertical
	11635.20	47.80	-1.07	46.73	74.00	-27.27	Peak	Vertical
*	13852.00	45.84	1.96	47.80	68.20	-20.40	Peak	Vertical
*	16850.80	44.51	7.24	51.75	68.20	-16.45	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT80 - Channel 58
Remark	Average measurement was not performed if peak level lower than average limit. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.55	-3.32	46.23	54.00	-7.77	Average	Horizontal
	8153.60	51.64	-3.32	48.32	74.00	-25.68	Peak	Horizontal
	8464.70	48.10	-2.92	45.18	54.00	-8.82	Average	Horizontal
	8464.70	50.54	-2.92	47.62	74.00	-26.38	Peak	Horizontal
*	9984.50	46.48	-0.78	45.70	68.20	-22.50	Peak	Horizontal
*	13809.50	46.71	1.81	48.52	68.20	-19.68	Peak	Horizontal
	8153.60	49.19	-3.32	45.87	54.00	-8.13	Average	Vertical
	8153.60	51.19	-3.32	47.87	74.00	-26.13	Peak	Vertical
*	9959.00	46.52	-0.79	45.73	68.20	-22.47	Peak	Vertical
	12359.40	47.27	-0.49	46.78	74.00	-27.22	Peak	Vertical
*	13870.70	46.77	2.33	49.10	68.20	-19.10	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT80 - Channel 106
Remark	Average measurement was not performed if peak level lower than average limit. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	48.50	-3.32	45.18	54.00	-8.82	Average	Horizontal
	8153.60	51.43	-3.32	48.11	74.00	-25.89	Peak	Horizontal
*	8848.90	49.15	-2.00	47.15	68.20	-21.05	Peak	Horizontal
	12174.10	47.64	-0.64	47.00	74.00	-27.00	Peak	Horizontal
*	14317.80	45.63	3.24	48.87	68.20	-19.33	Peak	Horizontal
	8153.60	49.11	-3.32	45.79	54.00	-8.21	Average	Vertical
	8153.60	51.26	-3.32	47.94	74.00	-26.06	Peak	Vertical
*	8848.90	48.34	-2.00	46.34	68.20	-21.86	Peak	Vertical
	11098.00	47.21	-1.12	46.09	74.00	-27.91	Peak	Vertical
*	14421.50	44.87	3.76	48.63	68.20	-19.57	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT80 - Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.77	-3.32	46.45	54.00	-7.55	Average	Horizontal
	8153.60	51.84	-3.32	48.52	74.00	-25.48	Peak	Horizontal
*	8976.40	50.54	-2.05	48.49	68.20	-19.71	Peak	Horizontal
	11019.80	47.02	-0.70	46.32	74.00	-27.68	Peak	Horizontal
*	13886.00	45.68	2.32	48.00	68.20	-20.20	Peak	Horizontal
	8153.60	49.20	-3.32	45.88	54.00	-8.12	Average	Vertical
	8153.60	51.31	-3.32	47.99	74.00	-26.01	Peak	Vertical
*	8976.40	49.91	-2.05	47.86	68.20	-20.34	Peak	Vertical
	11699.80	47.34	-0.88	46.46	74.00	-27.54	Peak	Vertical
*	14810.80	44.24	4.31	48.55	68.20	-19.65	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT80 - Channel 138
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.00	-3.32	45.68	54.00	-8.32	Average	Horizontal
	8153.60	51.20	-3.32	47.88	74.00	-26.12	Peak	Horizontal
	9103.90	49.20	-2.18	47.02	54.00	-6.98	Average	Horizontal
	9103.90	51.25	-2.18	49.07	74.00	-24.93	Peak	Horizontal
*	10416.30	47.26	-0.67	46.59	68.20	-21.61	Peak	Horizontal
*	14016.90	46.16	2.12	48.28	68.20	-19.92	Peak	Horizontal
	8153.60	50.00	-3.32	46.68	54.00	-7.32	Average	Vertical
	8153.60	52.08	-3.32	48.76	74.00	-25.24	Peak	Vertical
	9103.90	48.40	-2.18	46.22	54.00	-7.78	Average	Vertical
	9103.90	50.76	-2.18	48.58	74.00	-25.42	Peak	Vertical
*	10152.80	46.89	-0.59	46.30	68.20	-21.90	Peak	Vertical
*	14424.90	45.48	3.64	49.12	68.20	-19.08	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT80 - Channel 155
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.44	-3.32	46.12	54.00	-7.88	Average	Horizontal
	8153.60	51.51	-3.32	48.19	74.00	-25.81	Peak	Horizontal
*	9239.90	50.37	-1.88	48.49	68.20	-19.71	Peak	Horizontal
	12339.00	47.15	-0.60	46.55	74.00	-27.45	Peak	Horizontal
*	16522.70	45.48	7.02	52.50	68.20	-15.70	Peak	Horizontal
	8153.60	49.68	-3.32	46.36	54.00	-7.64	Average	Vertical
	8153.60	51.86	-3.32	48.54	74.00	-25.46	Peak	Vertical
*	9239.90	52.71	-1.88	50.83	68.20	-17.37	Peak	Vertical
	11655.60	47.72	-1.26	46.46	74.00	-27.54	Peak	Vertical
*	13853.70	45.46	2.00	47.46	68.20	-20.74	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT160 - Channel 50
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.70	-3.32	46.38	54.00	-7.62	Average	Horizontal
	8153.60	51.86	-3.32	48.54	74.00	-25.46	Peak	Horizontal
*	10137.50	48.07	-0.65	47.42	68.20	-20.78	Peak	Horizontal
	12112.90	47.10	-0.47	46.63	74.00	-27.37	Peak	Horizontal
*	14821.00	43.50	4.69	48.19	68.20	-20.01	Peak	Horizontal
	8153.60	50.22	-3.32	46.90	54.00	-7.10	Average	Vertical
	8153.60	52.10	-3.32	48.78	74.00	-25.22	Peak	Vertical
*	9636.00	47.00	-1.54	45.46	68.20	-22.74	Peak	Vertical
	12097.60	47.09	-0.64	46.45	74.00	-27.55	Peak	Vertical
*	14178.40	45.64	2.80	48.44	68.20	-19.76	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT160-Channel 114
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	49.30	-3.32	45.98	54.00	-8.02	Average	Horizontal
	8153.60	51.60	-3.32	48.28	74.00	-25.72	Peak	Horizontal
*	8911.80	49.68	-2.22	47.46	68.20	-20.74	Peak	Horizontal
*	9617.30	48.47	-1.71	46.76	68.20	-21.44	Peak	Horizontal
	12393.40	35.40	-0.22	35.18	54.00	-18.82	Average	Horizontal
	12393.40	47.49	-0.22	47.27	74.00	-26.73	Peak	Horizontal
	8153.60	50.70	-3.32	47.38	54.00	-6.62	Average	Vertical
	8153.60	53.00	-3.32	49.68	74.00	-24.32	Peak	Vertical
*	10171.50	46.45	-0.70	45.75	68.20	-22.45	Peak	Vertical
	12274.40	47.18	-0.35	46.83	74.00	-27.17	Peak	Vertical
*	14338.20	45.54	2.96	48.50	68.20	-19.70	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	SIP-AC3	Test Engineer	Fusco Pan
Test Date	2026-01-14	Test Mode	802.11be-EHT240-Channel 122
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	8153.60	50.60	-3.32	47.28	54.00	-6.72	Average	Horizontal
	8153.60	52.60	-3.32	49.28	74.00	-24.72	Peak	Horizontal
	9039.30	49.10	-2.31	46.79	54.00	-7.21	Average	Horizontal
	9039.30	51.12	-2.31	48.81	74.00	-25.19	Peak	Horizontal
*	9702.30	46.91	-1.27	45.64	68.20	-22.56	Peak	Horizontal
*	14787.00	45.77	4.22	49.99	68.20	-18.21	Peak	Horizontal
	8153.60	50.10	-3.32	46.78	54.00	-7.22	Average	Vertical
	8153.60	52.17	-3.32	48.85	74.00	-25.15	Peak	Vertical
	9039.30	48.50	-2.31	46.19	54.00	-7.81	Average	Vertical
	9039.30	50.47	-2.31	48.16	74.00	-25.84	Peak	Vertical
*	10370.40	46.90	-0.73	46.17	68.20	-22.03	Peak	Vertical
*	16951.10	47.04	7.57	54.61	68.20	-13.59	Peak	Vertical


Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the EIRP limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission 9 kHz ~ 30 MHz:

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9°C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

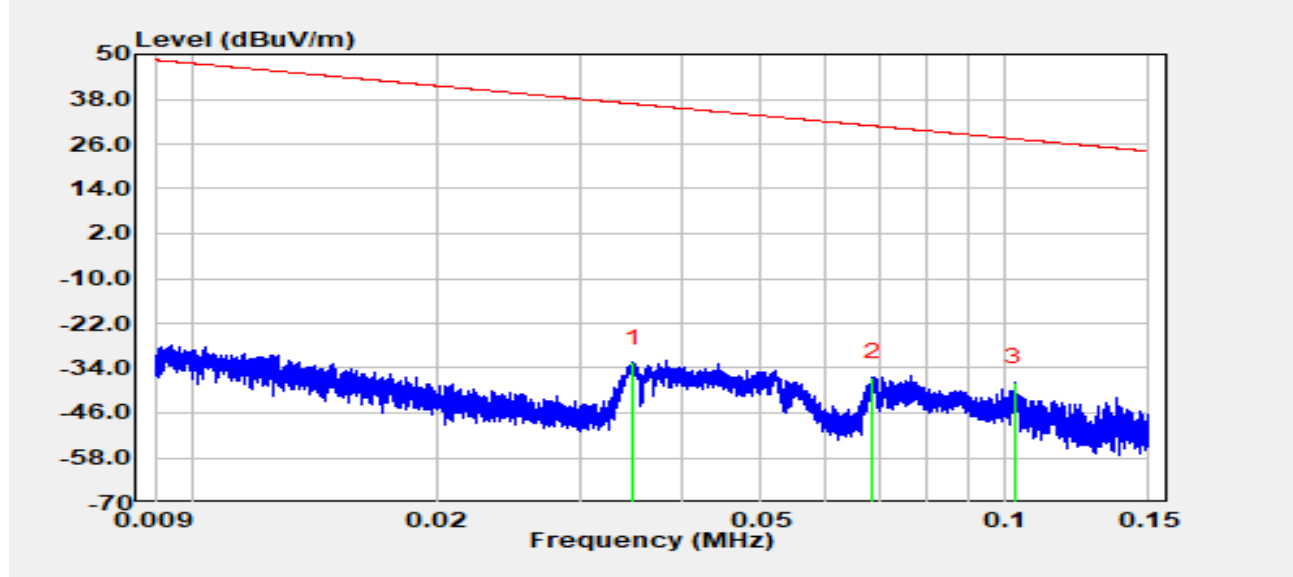


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.03	27.61	-60.11	-32.50	-69.26	36.76	Peak
2		0.07	23.75	-60.19	-36.44	-67.31	30.87	Peak
3	*	0.10	22.41	-60.23	-37.82	-65.19	27.37	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9°C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

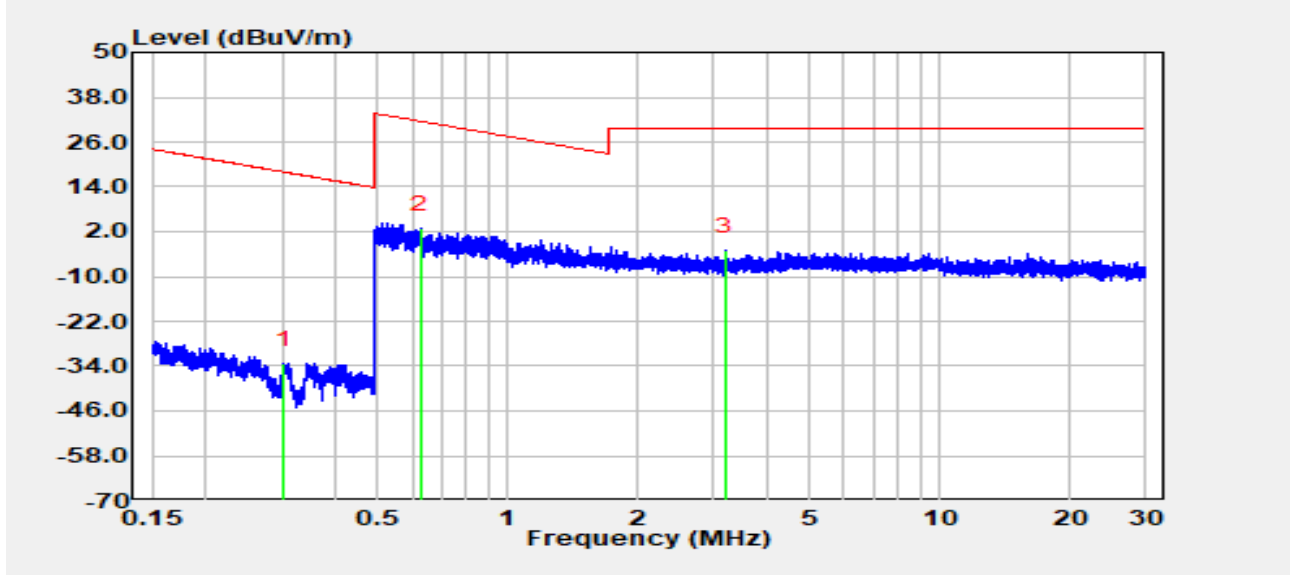


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.30	26.88	-60.31	-33.44	-51.40	17.97	Peak
2	*	0.63	23.24	-20.35	2.89	-28.79	31.69	Peak
3		3.19	17.39	-20.39	-3.00	-32.50	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9°C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

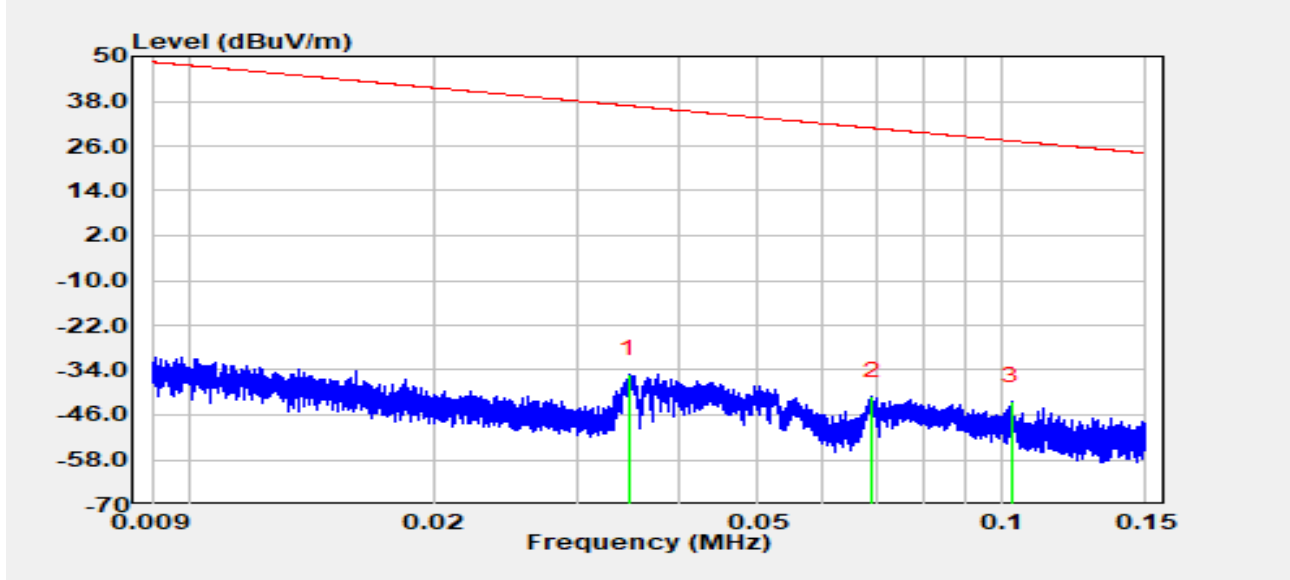


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.03	25.15	-60.11	-34.96	-71.75	36.79	Peak
2		0.07	19.18	-60.19	-41.01	-71.82	30.81	Peak
3	*	0.10	18.02	-60.23	-42.21	-69.58	27.38	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + $40\log(d1/d2)$ (dB), $d1 = 3$ m, $d2 = 300$ m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9°C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

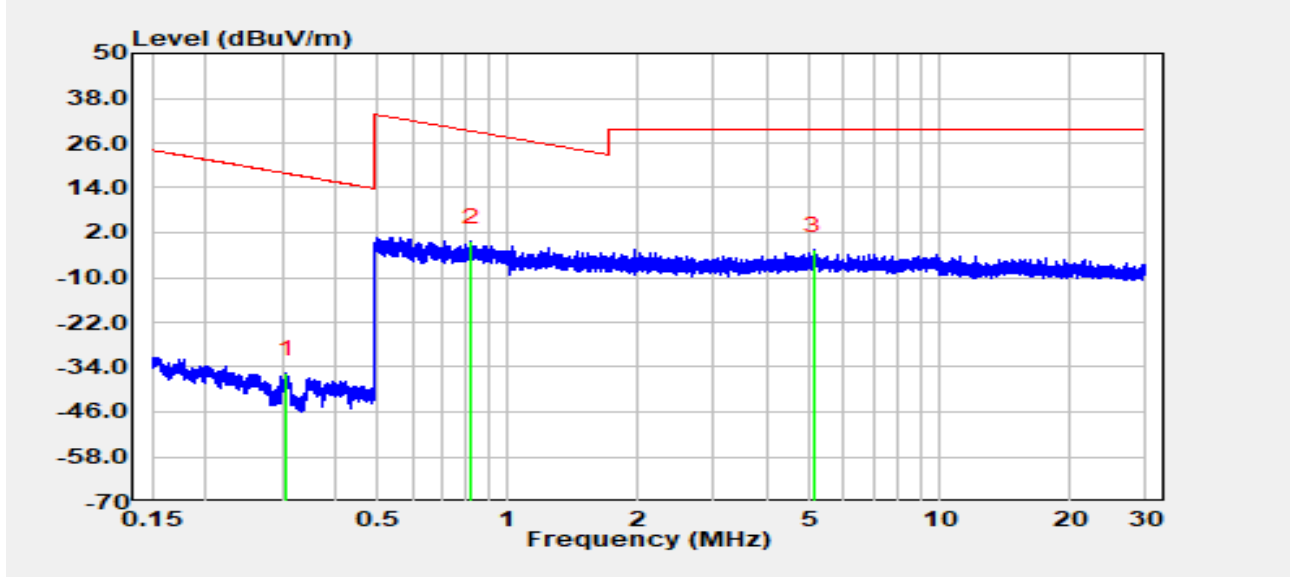


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.31	24.65	-60.31	-35.66	-53.54	17.88	Peak
2	*	0.83	19.92	-20.37	-0.45	-29.73	29.29	Peak
3		5.10	17.89	-20.45	-2.56	-32.06	29.50	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission 30 MHz ~ 1 GHz:

Site	WJ-AC1	Test Date	2026-01-04
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

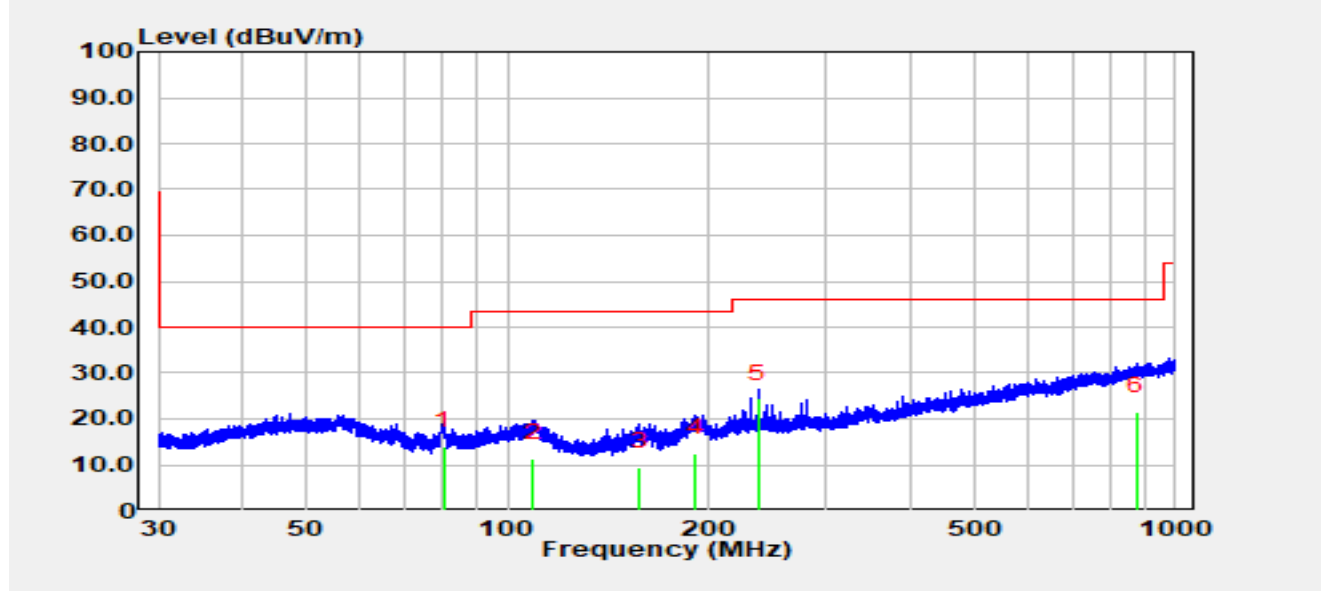


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		80.22	0.60	13.52	14.12	-25.88	40.00	QP
2		109.37	-6.80	18.14	11.34	-32.16	43.50	QP
3		157.78	-5.70	15.23	9.53	-33.97	43.50	QP
4		191.34	-5.60	18.06	12.46	-31.04	43.50	QP
5	*	237.48	4.80	19.55	24.35	-21.65	46.00	QP
6		876.17	-9.30	30.91	21.61	-24.39	46.00	QP

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-04
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

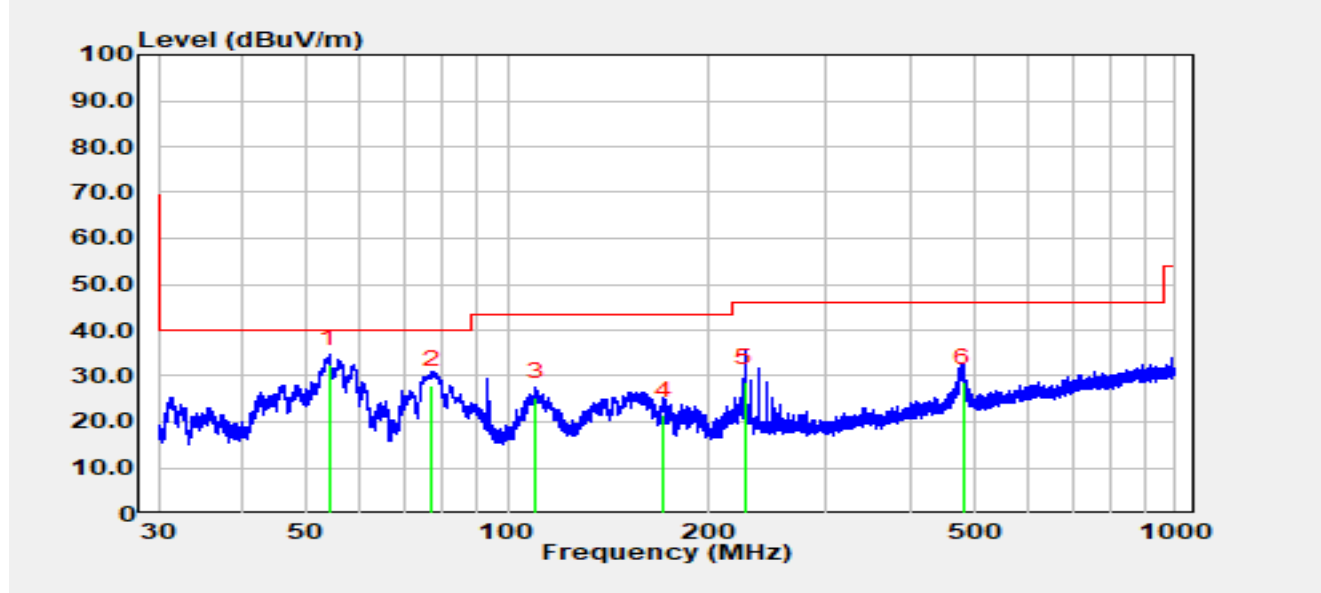


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	54.09	12.30	20.21	32.51	-7.49	40.00	QP
2		77.16	14.30	13.68	27.98	-12.02	40.00	QP
3		110.03	7.30	18.06	25.36	-18.14	43.50	QP
4		171.33	5.50	15.89	21.39	-22.11	43.50	QP
5		226.10	9.70	18.80	28.50	-17.50	46.00	QP
6		481.03	4.10	24.58	28.68	-17.32	46.00	QP

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission above 18 GHz:

Site	WJ-AC2	Test Date	2026-01-26
Temperature	21.5 °C	Humidity	22.3%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

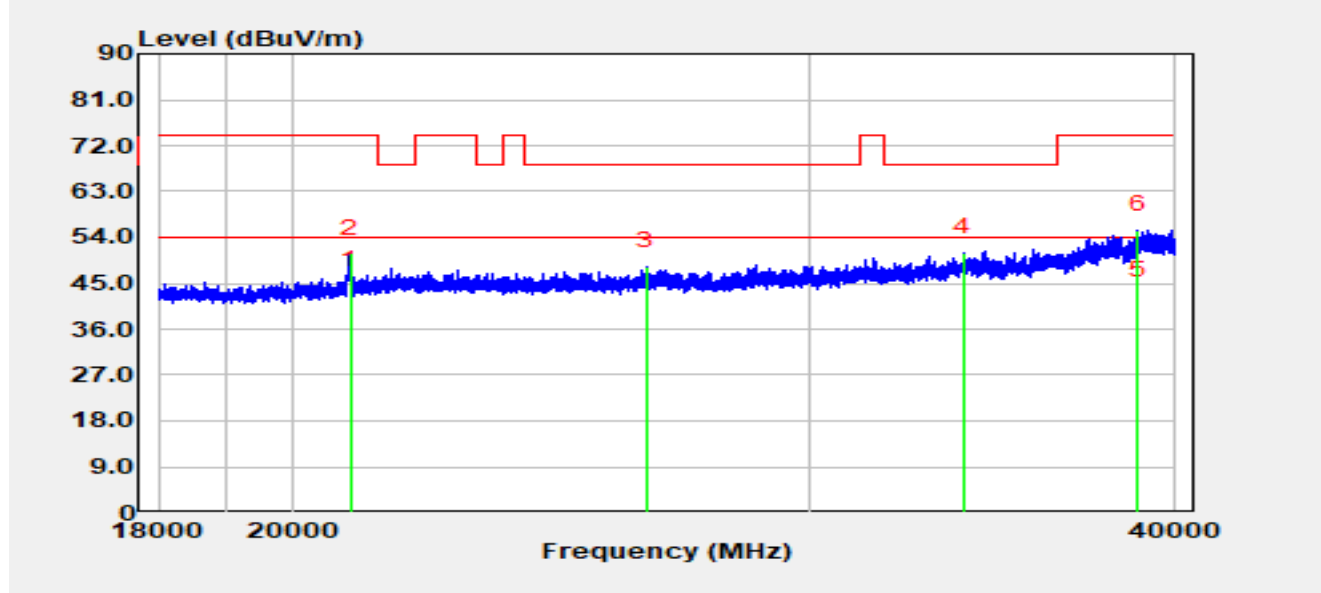


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	20937.00	51.21	-6.56	44.65	-9.35	54.00	Average
2		20937.00	57.34	-6.56	50.78	-23.22	74.00	Peak
3		26399.60	52.02	-3.64	48.38	-19.82	68.20	Peak
4		33848.80	54.28	-3.17	51.10	-17.10	68.20	Peak
5		38847.20	40.33	2.13	42.46	-11.54	54.00	Average
6		38847.20	53.24	2.13	55.37	-18.63	74.00	Peak

Notes:

1. " *" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-26
Temperature	21.5 °C	Humidity	22.3%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 5230 MHz		

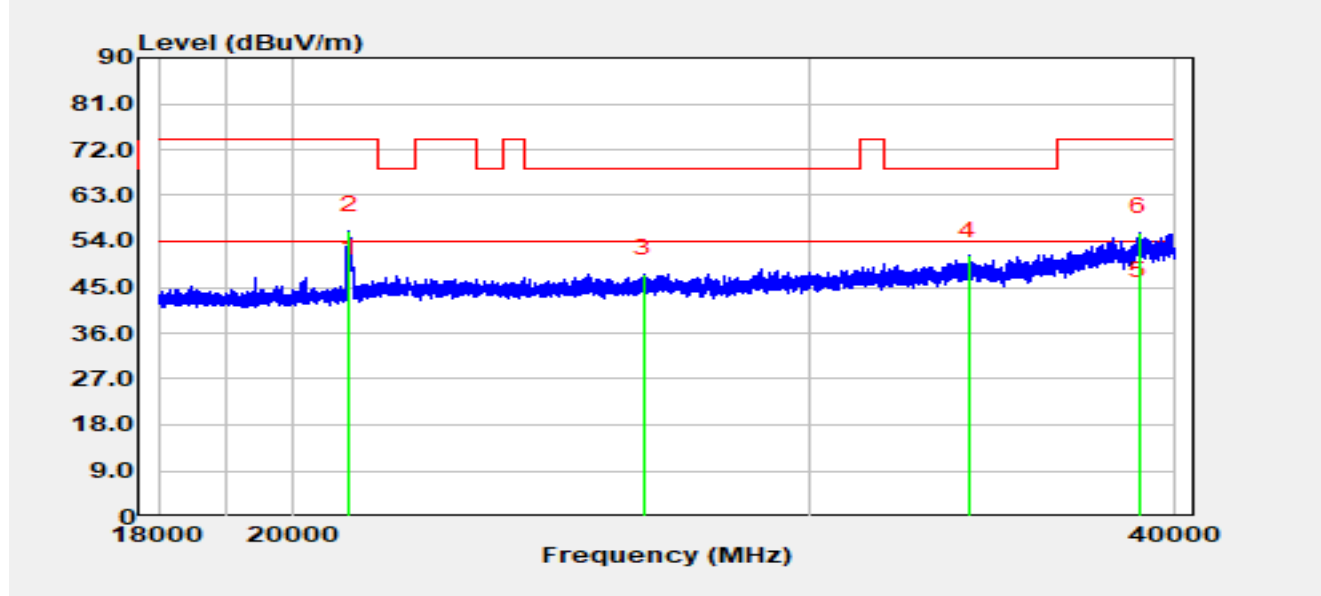


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	20915.00	54.34	-6.50	47.84	-6.16	54.00	Average
2		20915.00	62.69	-6.50	56.19	-17.81	74.00	Peak
3		26353.40	51.51	-3.83	47.68	-20.52	68.20	Peak
4		33996.20	54.37	-3.24	51.14	-17.06	68.20	Peak
5		38862.60	41.12	2.11	43.23	-10.77	54.00	Average
6		38862.60	53.71	2.11	55.83	-18.17	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.8 Radiated Restricted Band Edge Test Result

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

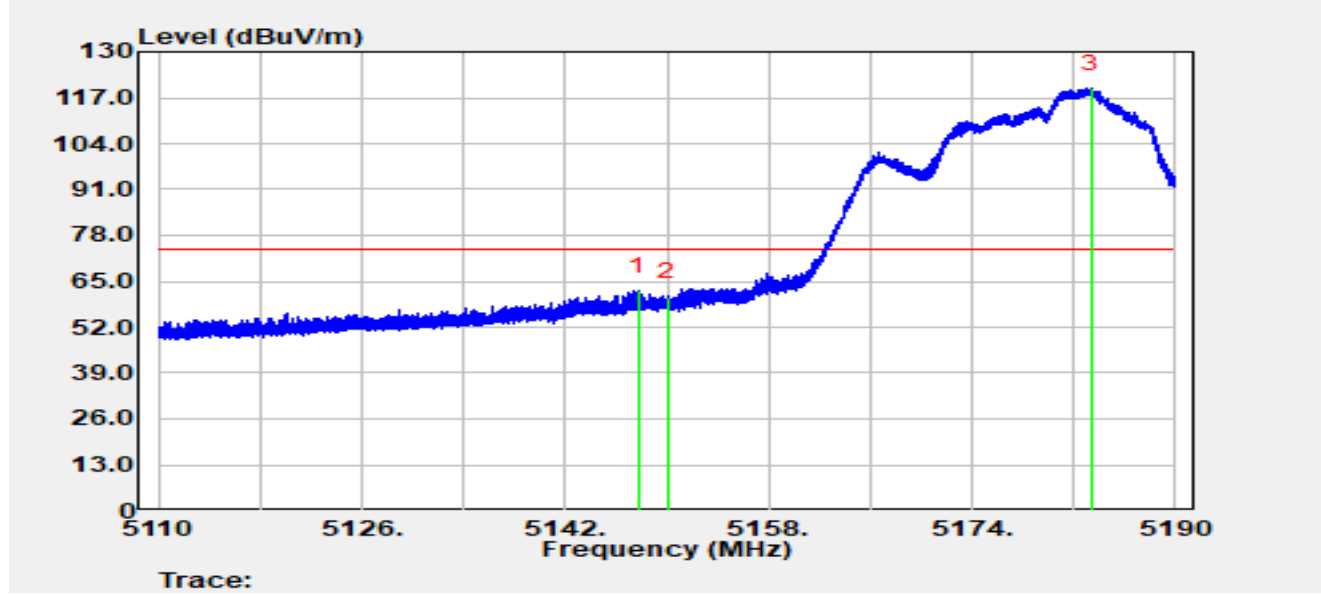


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.792	63.22	-0.99	62.24	-11.76	74.00	Peak
2		5150.000	61.00	-0.54	60.46	-13.54	74.00	Peak
3		5183.368	78.90	40.76	119.66	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5180 MHz		

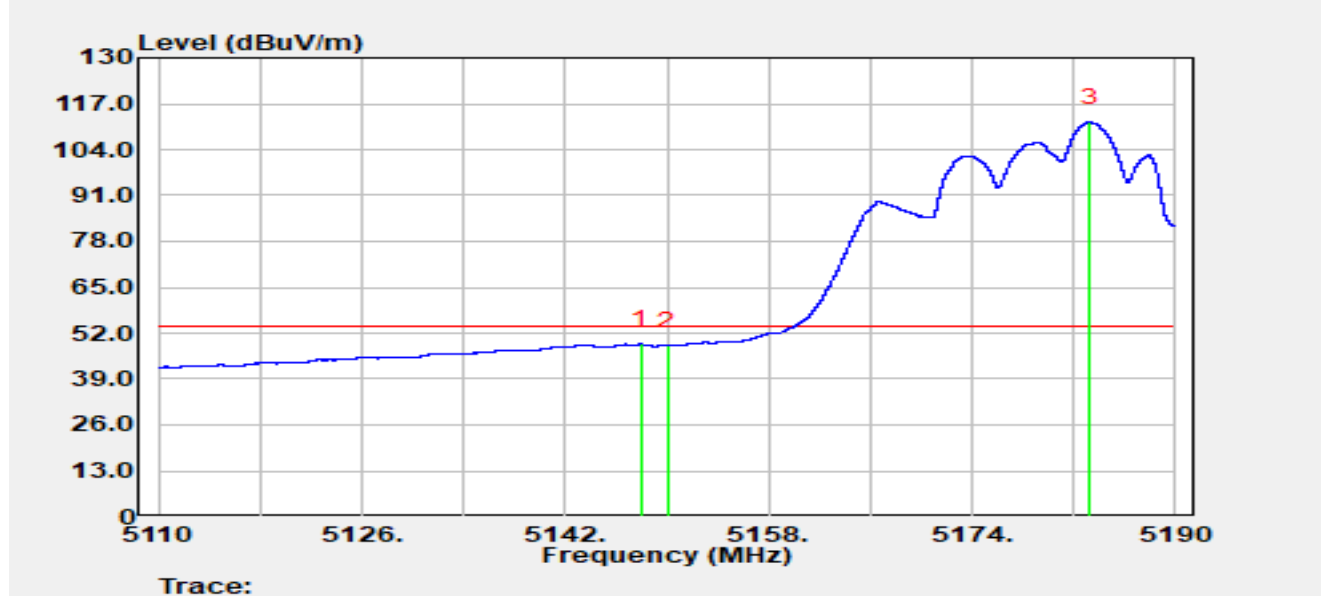


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.928	49.81	-0.96	48.85	-5.15	54.00	Average
2		5150.000	49.04	-0.54	48.50	-5.50	54.00	Average
3		5183.240	70.75	41.01	111.76	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

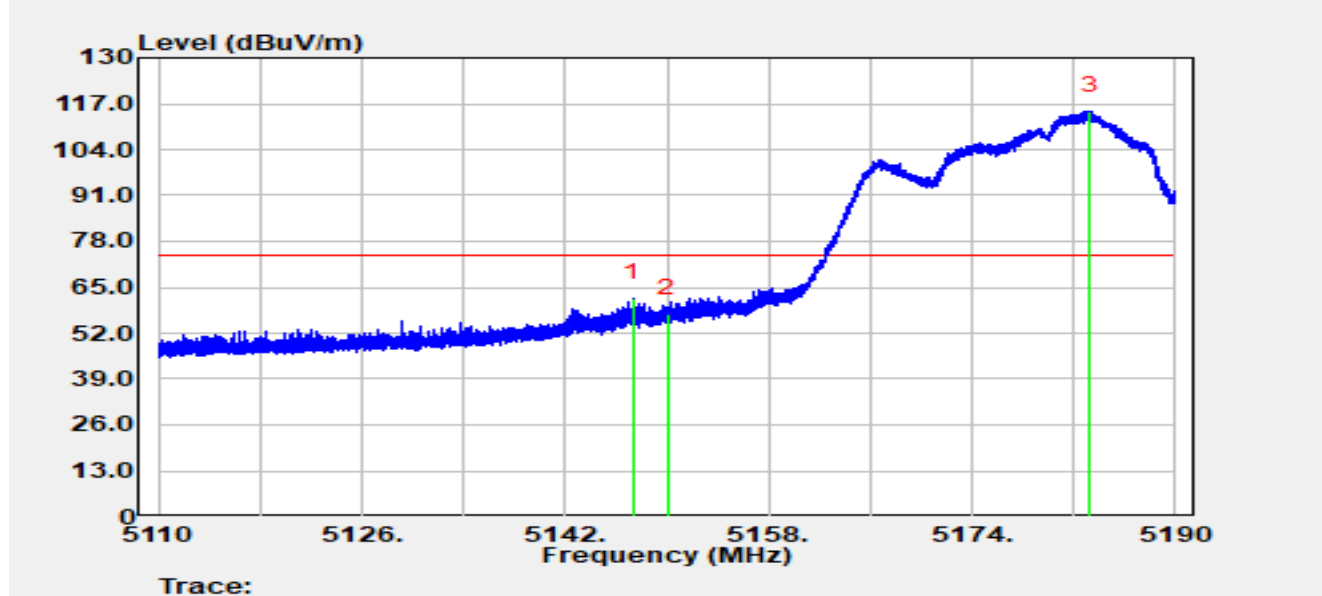


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5147.320	63.06	-1.09	61.97	-12.03	74.00	Peak
2		5150.000	57.95	-0.54	57.41	-16.59	74.00	Peak
3		5183.248	73.81	40.99	114.80	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5180 MHz		

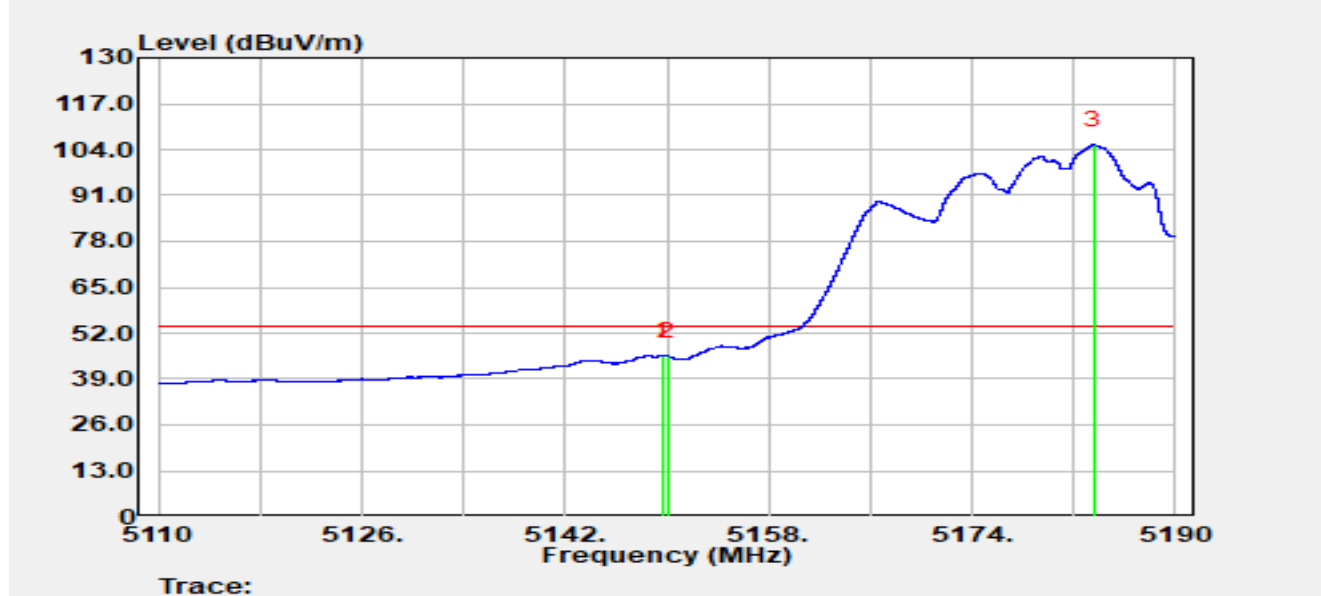


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5149.656	46.27	-0.74	45.53	-8.47	54.00	Average
2		5150.000	45.98	-0.54	45.43	-8.57	54.00	Average
3		5183.560	64.89	40.40	105.28	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5°C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

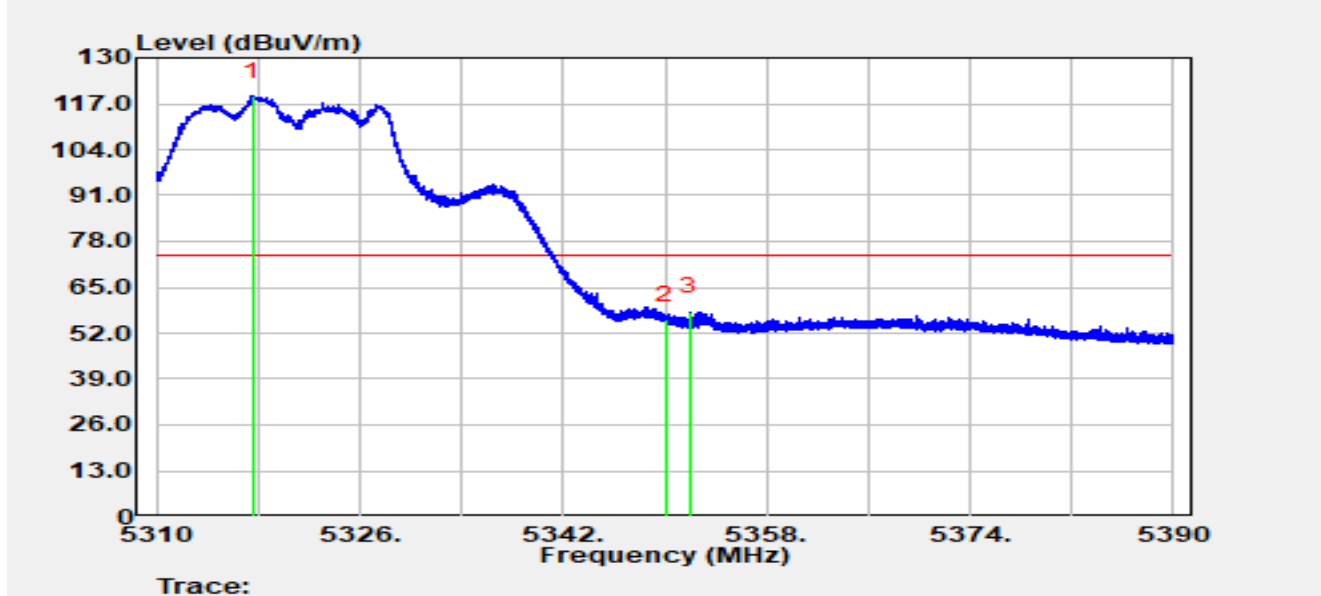


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5317.576	73.68	45.45	119.13	N/A	N/A	Peak
2		5350.000	53.47	2.28	55.75	-18.25	74.00	Peak
3	*	5351.976	57.13	0.93	58.06	-15.94	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5°C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5320 MHz		

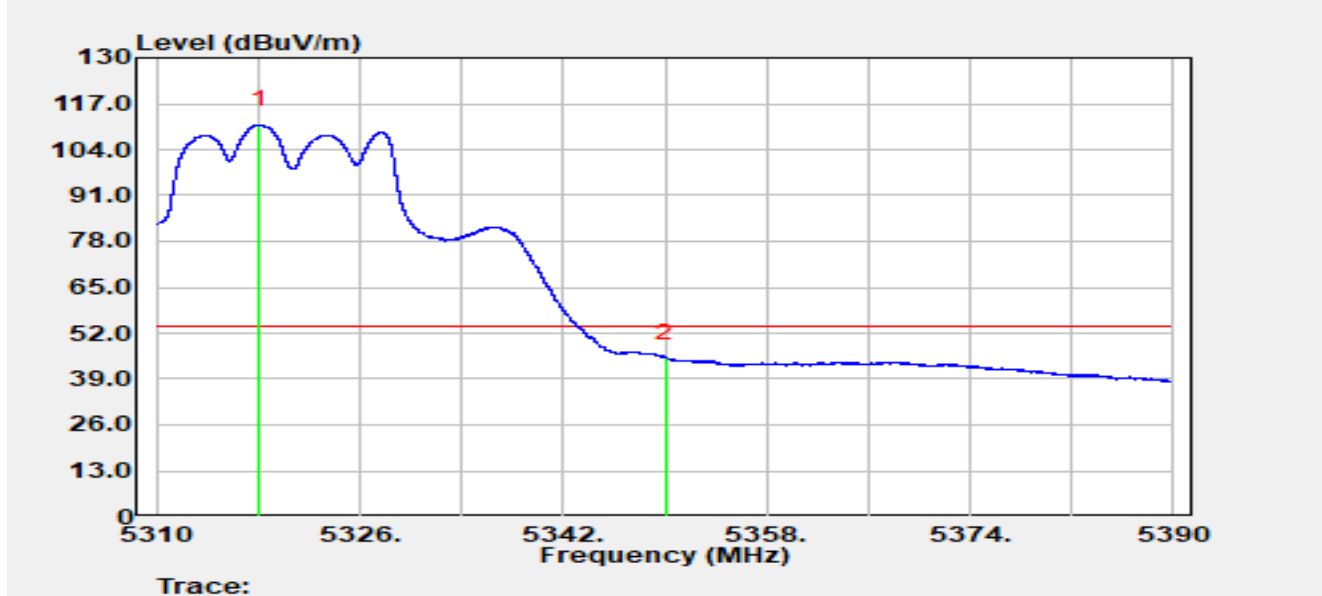


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.072	66.10	44.89	110.99	N/A	N/A	Average
2	*	5350.000	42.71	2.28	44.99	-9.01	54.00	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5°C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

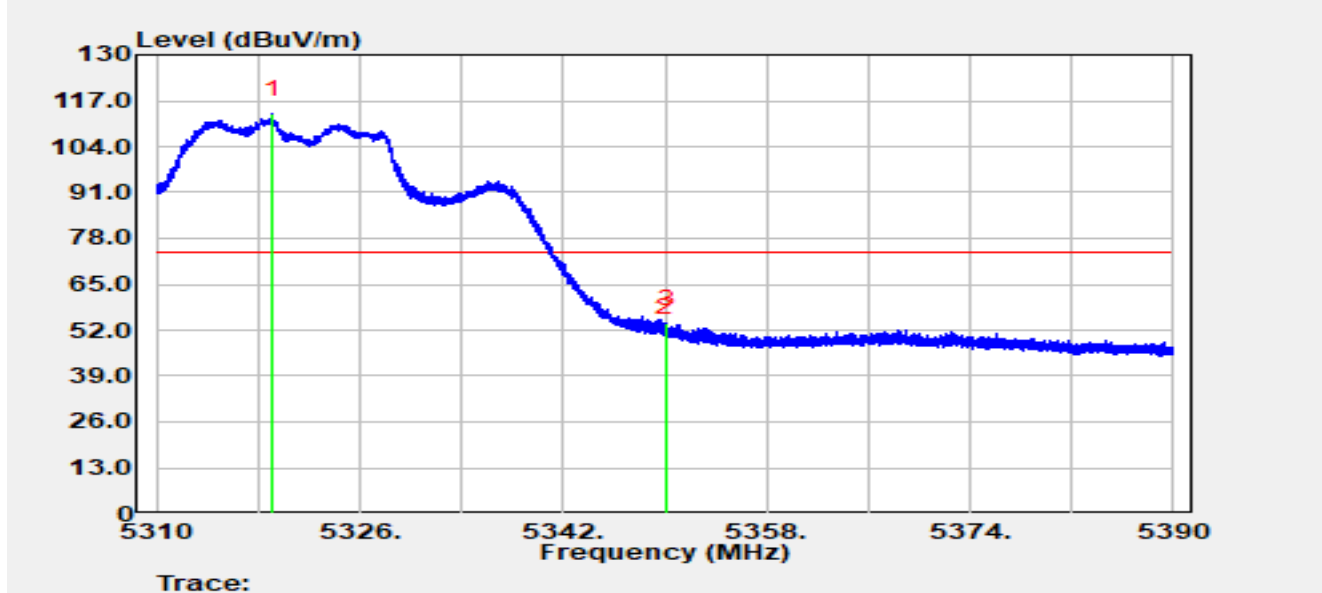


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5319.136	69.29	43.94	113.23	N/A	N/A	Peak
2		5350.000	48.96	2.28	51.24	-22.76	74.00	Peak
3	*	5350.120	51.53	2.22	53.75	-20.25	74.00	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	17.5°C	Humidity	50.8%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Yuuki Qiu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5320 MHz		

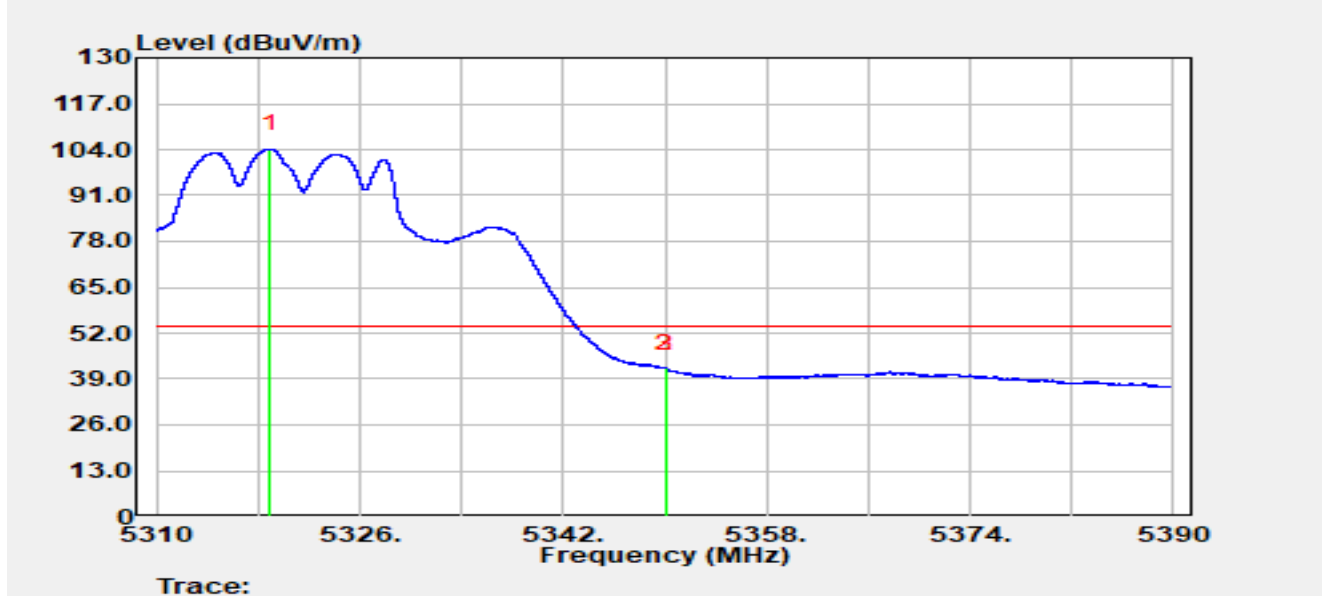


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5318.944	60.05	44.09	104.14	N/A	N/A	Average
2		5350.000	39.62	2.28	41.90	-12.10	54.00	Average
3	*	5350.096	39.88	2.23	42.11	-11.89	54.00	Average

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

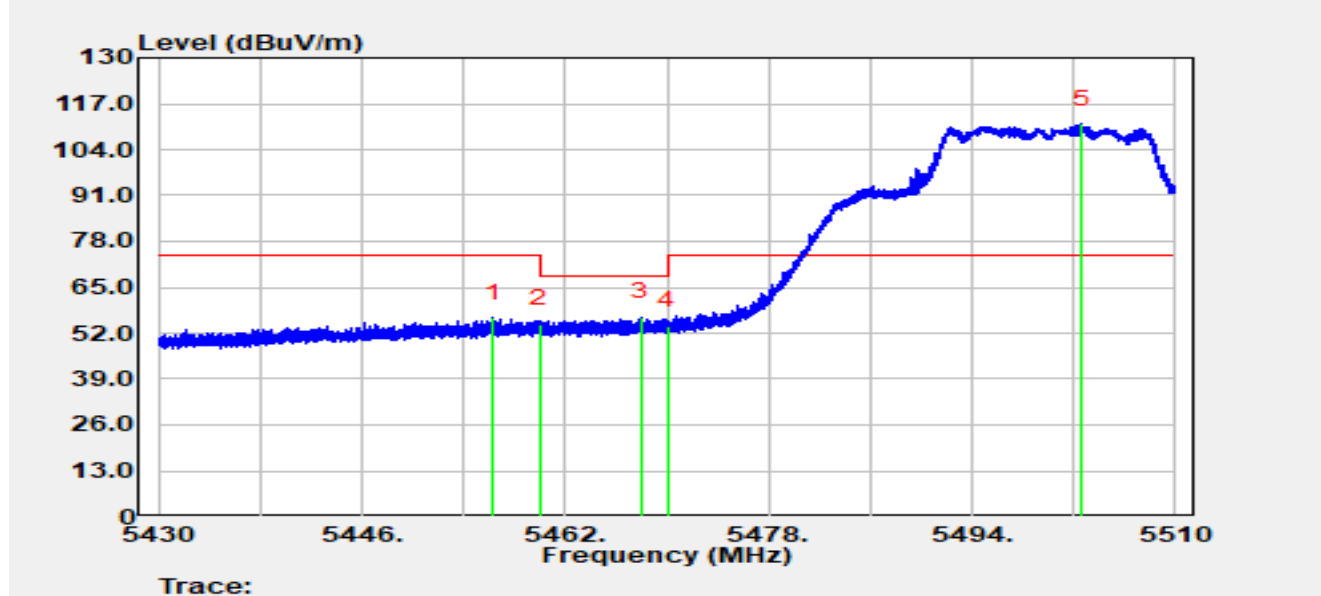


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5456.352	57.30	-0.99	56.30	-17.70	74.00	Peak
2		5460.000	55.18	-0.69	54.48	-13.72	68.20	Peak
3	*	5467.968	56.16	0.34	56.50	-11.70	68.20	Peak
4		5470.000	52.98	1.00	53.98	-14.22	68.20	Peak
5		5502.600	67.33	43.79	111.12	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5500 MHz		

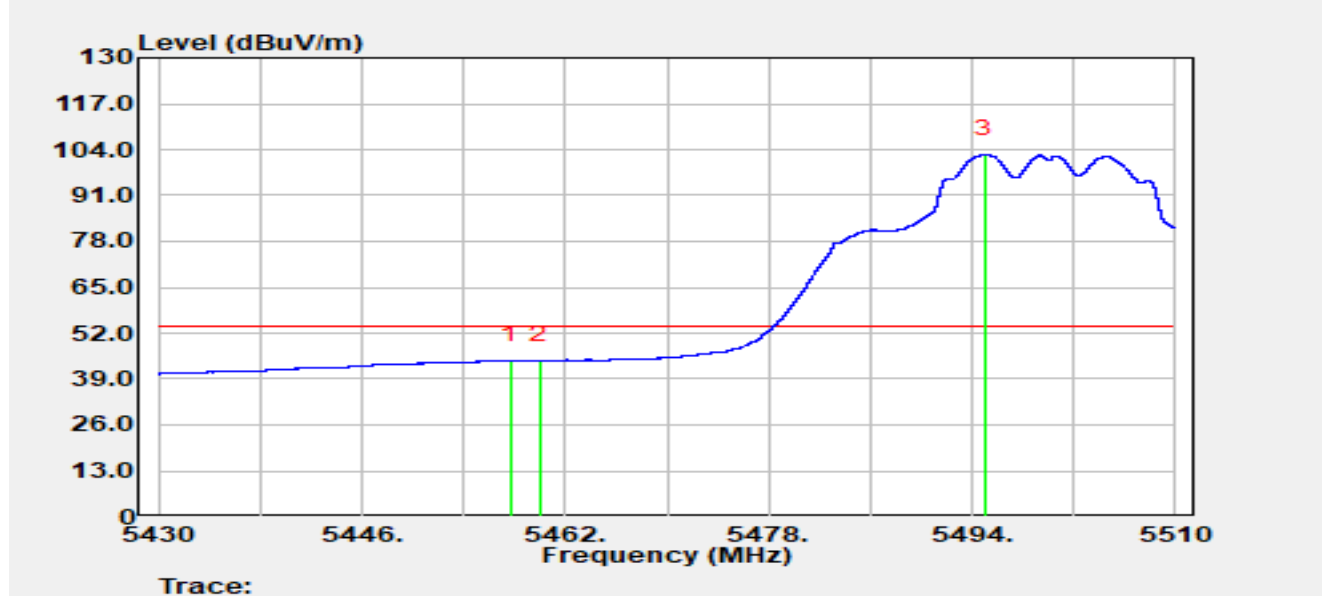


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5457.680	45.29	-0.90	44.39	-9.61	54.00	Average
2		5460.000	45.03	-0.69	44.34	-9.66	54.00	Average
3		5495.024	60.03	42.62	102.65	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

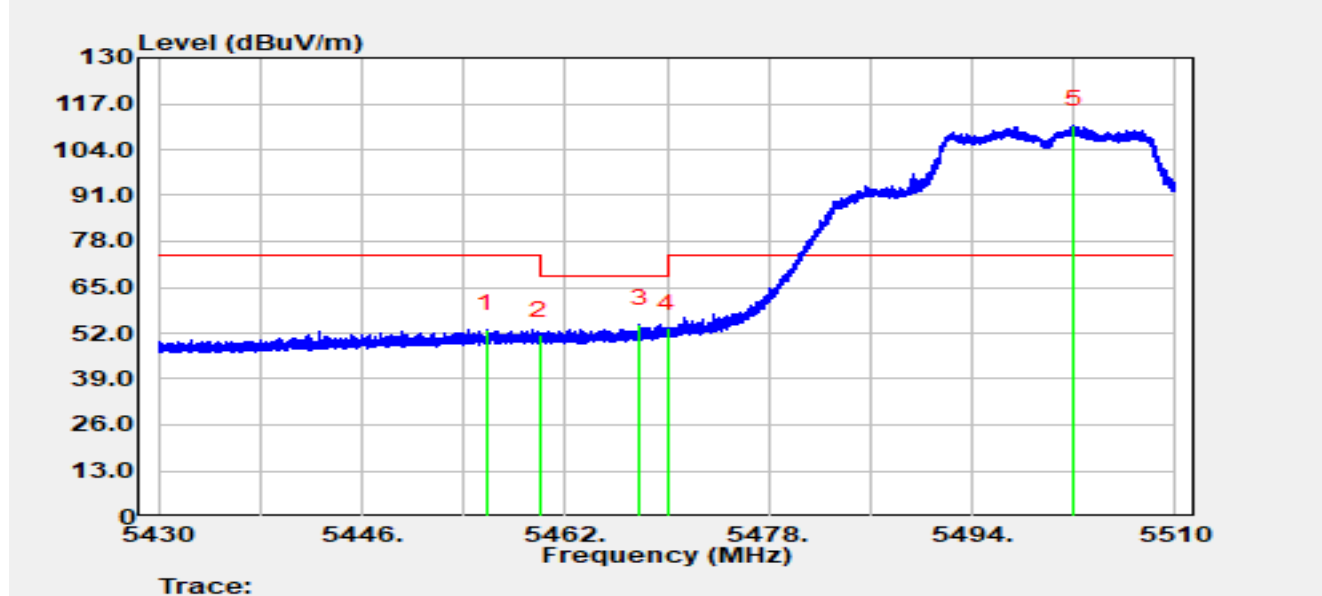


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5455.808	54.00	-0.99	53.02	-20.98	74.00	Peak
2		5460.000	52.11	-0.69	51.42	-16.78	68.20	Peak
3	*	5467.904	54.27	0.32	54.59	-13.61	68.20	Peak
4		5470.000	52.23	1.00	53.23	-14.97	68.20	Peak
5		5501.968	68.26	42.64	110.90	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5500 MHz		

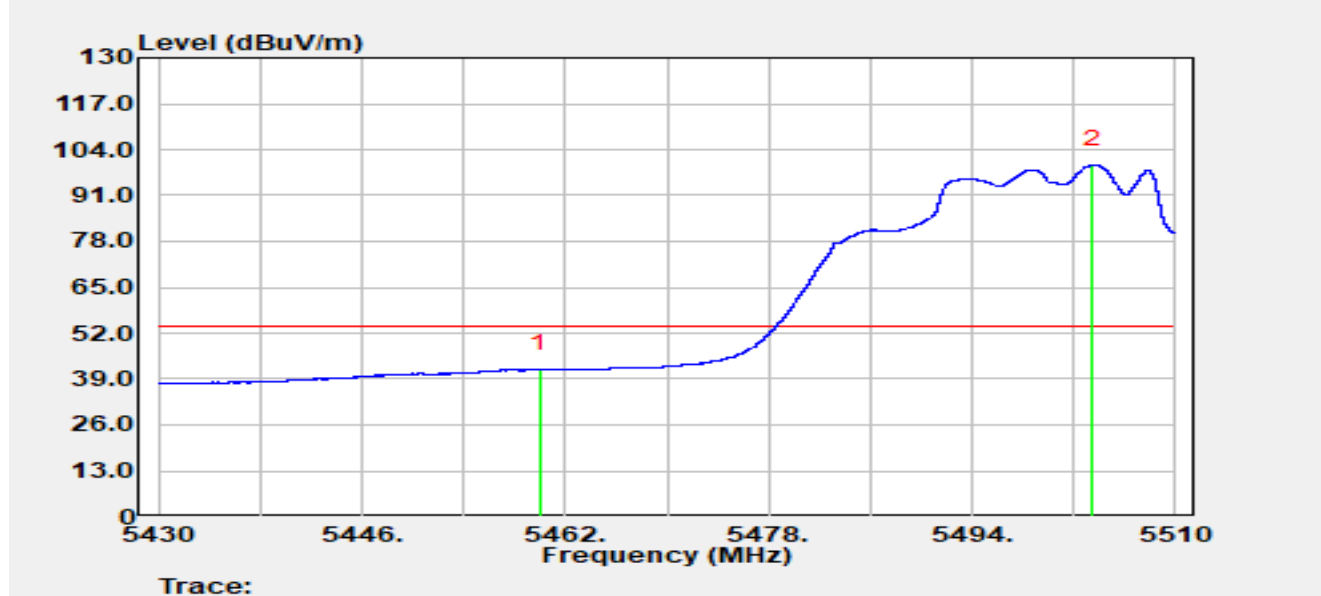


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5460.000	42.42	-0.69	41.73	-12.27	54.00	Average
2		5503.512	54.08	45.58	99.66	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5700 MHz		

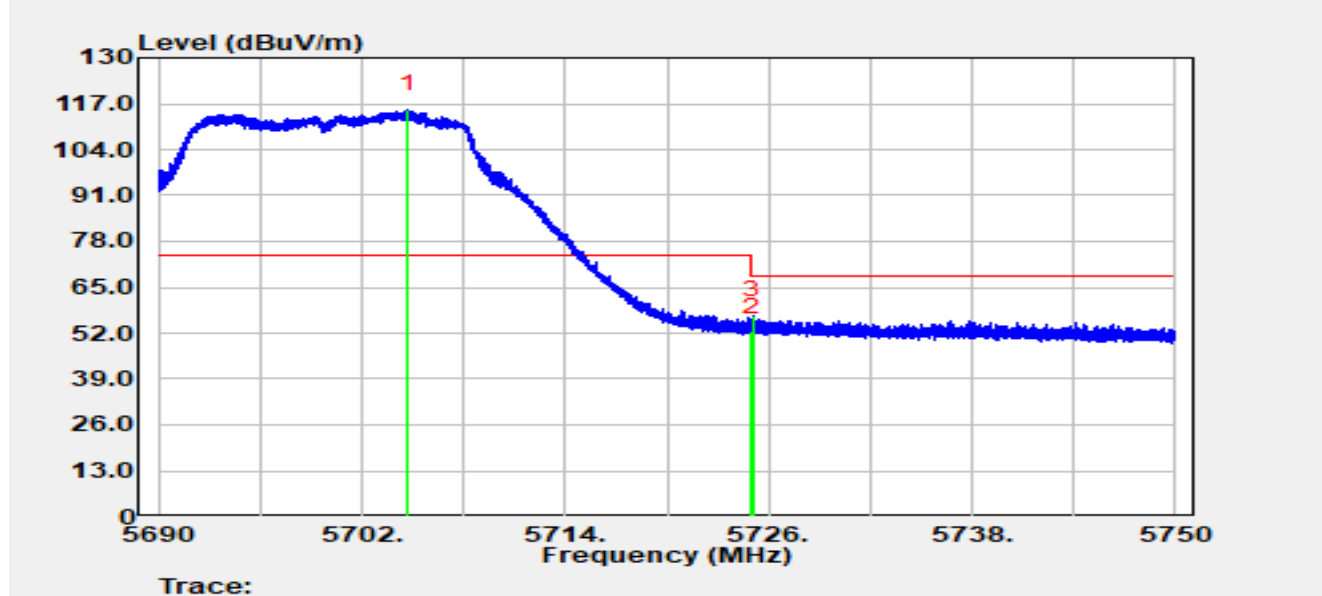


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5704.694	74.05	41.25	115.30	N/A	N/A	Peak
2		5725.000	51.39	1.01	52.40	-15.80	68.20	Peak
3	*	5725.088	55.97	0.96	56.92	-11.28	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5700 MHz		

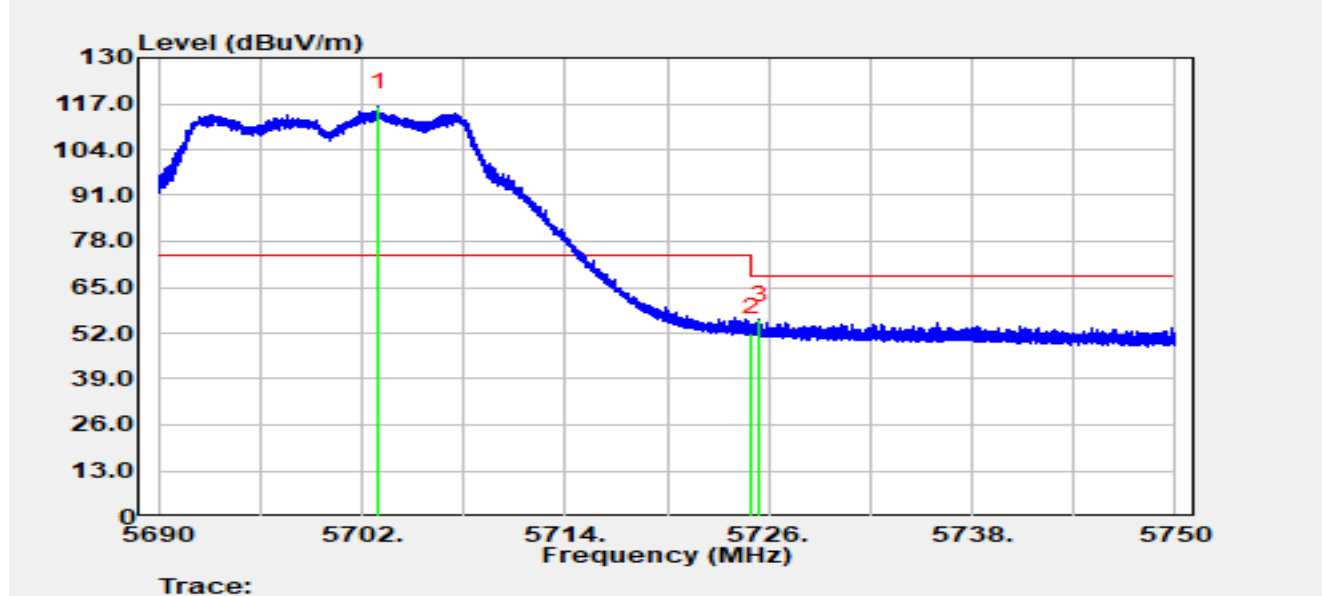


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5702.978	75.63	40.54	116.17	N/A	N/A	Peak
2		5725.000	51.11	1.01	52.11	-16.09	68.20	Peak
3	*	5725.478	55.03	0.74	55.77	-12.43	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5745 MHz		

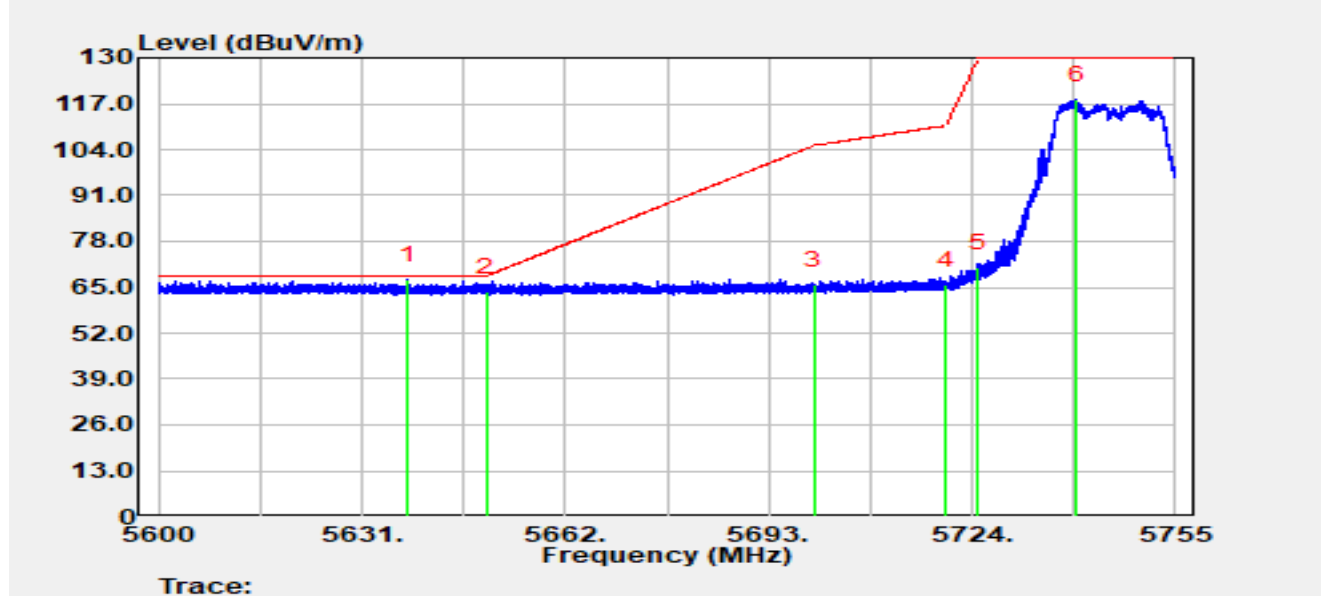


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5637.929	70.75	-3.59	67.16	-1.04	68.20	Peak
2		5650.000	67.28	-3.65	63.63	-4.57	68.20	Peak
3		5700.000	69.19	-3.47	65.71	-39.49	105.20	Peak
4		5720.000	68.99	-3.45	65.54	-45.26	110.80	Peak
5		5725.000	74.07	-3.47	70.60	-59.40	130.00	Peak
6		5739.856	121.66	-3.61	118.06	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5745 MHz		

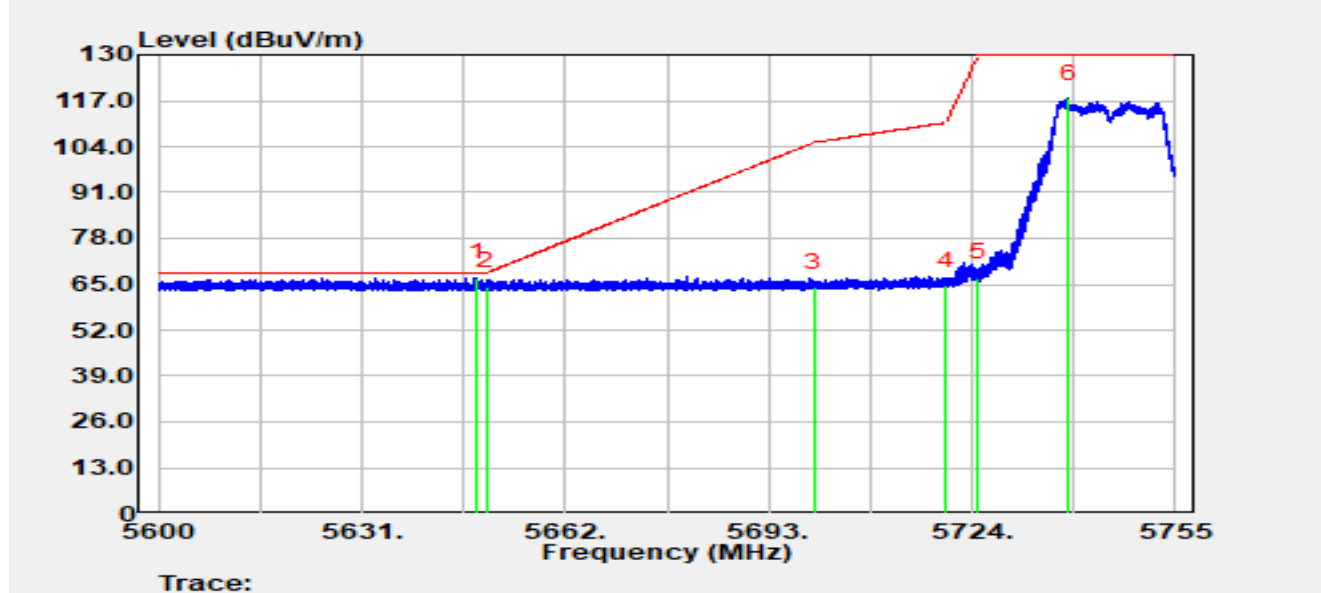


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5648.500	70.45	-3.65	66.80	-1.40	68.20	Peak
2		5650.000	68.14	-3.65	64.50	-3.70	68.20	Peak
3		5700.000	67.69	-3.47	64.22	-40.98	105.20	Peak
4		5720.000	68.13	-3.45	64.68	-46.12	110.80	Peak
5		5725.000	70.41	-3.47	66.94	-63.06	130.00	Peak
6		5738.663	121.15	-3.59	117.56	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11a at 5825 MHz		

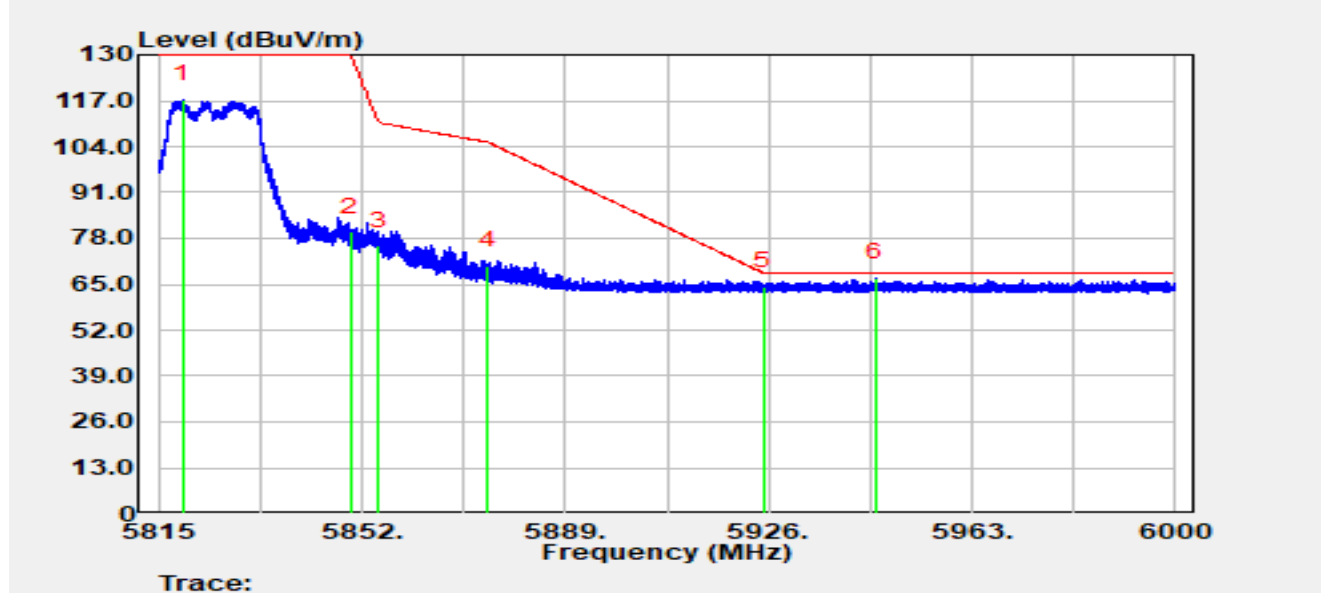


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.311	121.05	-3.79	117.26	N/A	N/A	Peak
2		5850.000	83.65	-3.75	79.90	-50.10	130.00	Peak
3		5855.000	79.69	-3.75	75.94	-34.86	110.80	Peak
4		5875.000	74.22	-3.82	70.39	-34.81	105.20	Peak
5		5925.000	67.98	-3.71	64.28	-3.92	68.20	Peak
6	*	5945.314	70.46	-3.70	66.76	-1.44	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15.407_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11a at 5825 MHz		

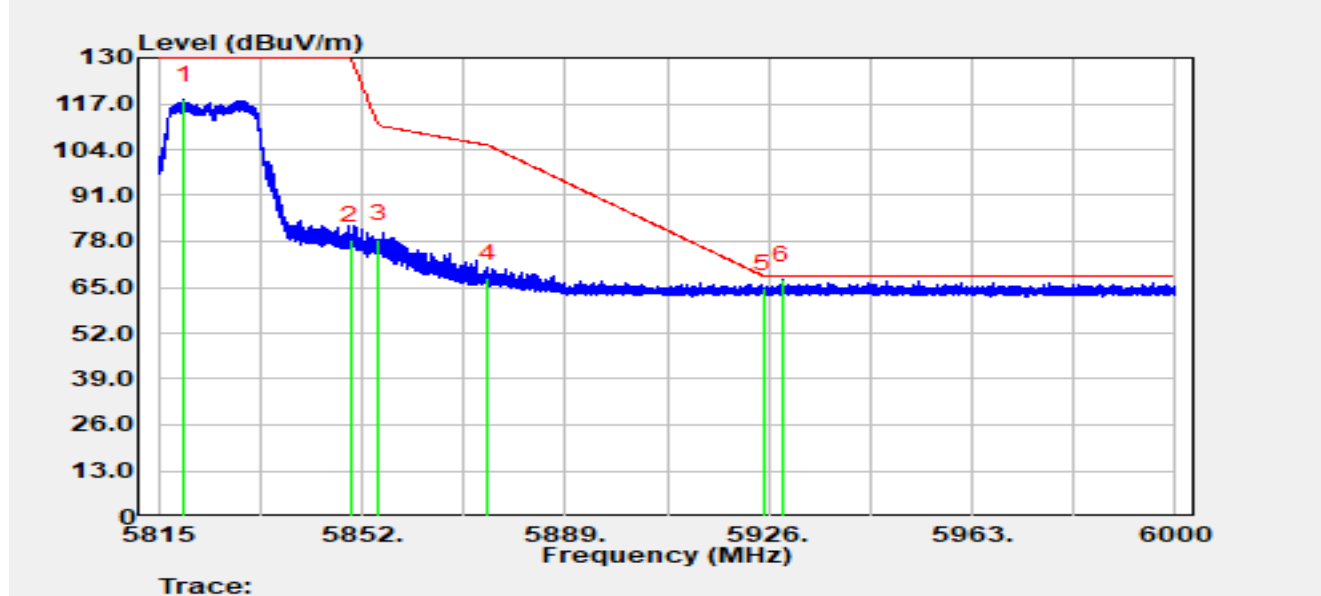


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5819.569	121.87	-3.79	118.08	N/A	N/A	Peak
2		5850.000	82.09	-3.75	78.34	-51.66	130.00	Peak
3		5855.000	82.38	-3.75	78.63	-32.17	110.80	Peak
4		5875.000	71.33	-3.82	67.51	-37.69	105.20	Peak
5		5925.000	68.24	-3.71	64.54	-3.66	68.20	Peak
6	*	5928.479	70.72	-3.67	67.04	-1.16	68.20	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	SIP-AC3	Test Date	2026-01-05
Temperature	15.1 °C	Humidity	58.6%
Limit	FCC_Part 15_Band Edge(3 m)	Test Engineer	Justin Guo
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ac-VHT20 at 5180 MHz		

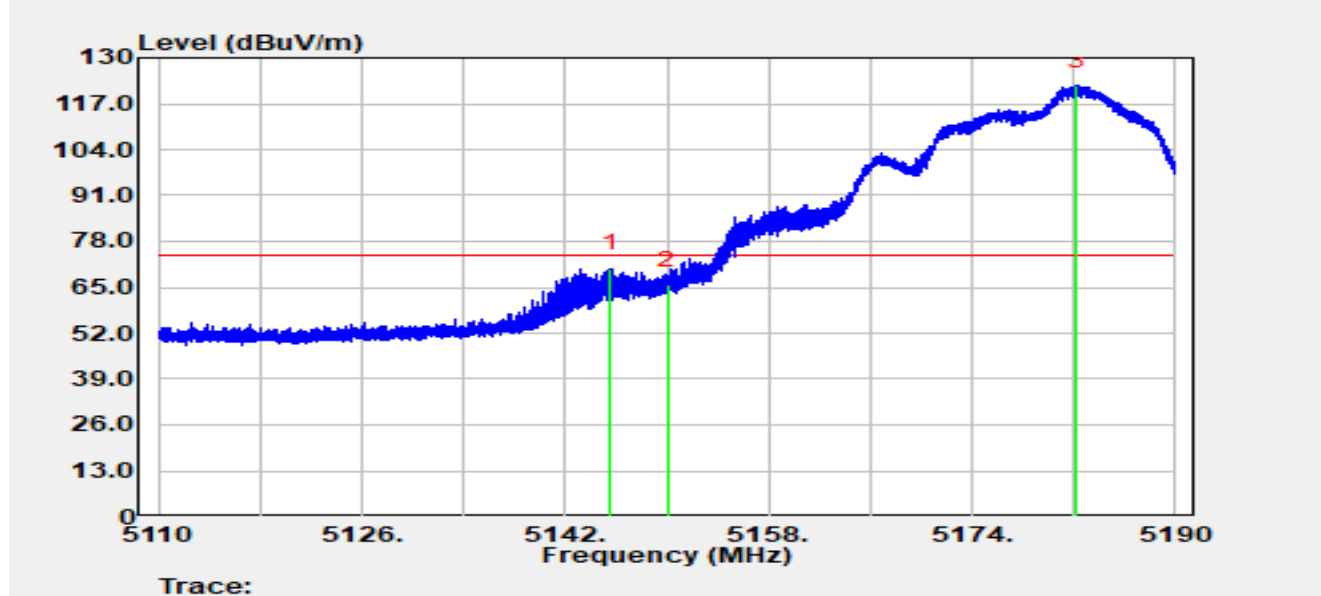

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5145.576	72.07	-1.77	70.31	-3.69	74.00	Peak
2		5150.000	66.27	-0.54	65.73	-8.27	74.00	Peak
3		5182.192	78.65	43.36	122.01	N/A	N/A	Peak

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).