


802.11be-EHT40 In-Band Emission - Ant 2


Channel 35 (6125 MHz)




Channel 59 (6245 MHz)

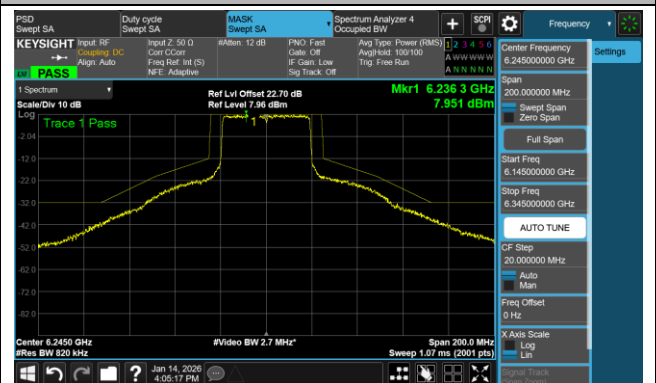

Channel 91 (6405 MHz)

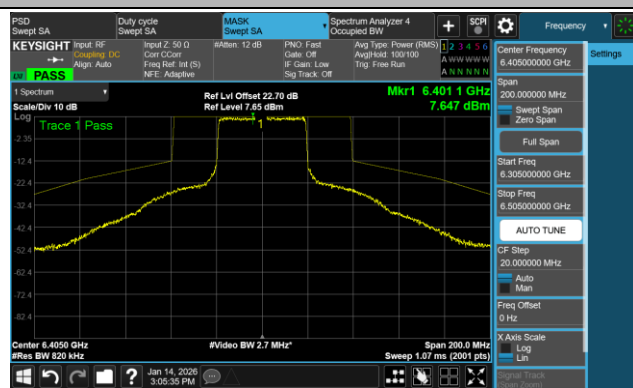

Channel 123 (6565 MHz)

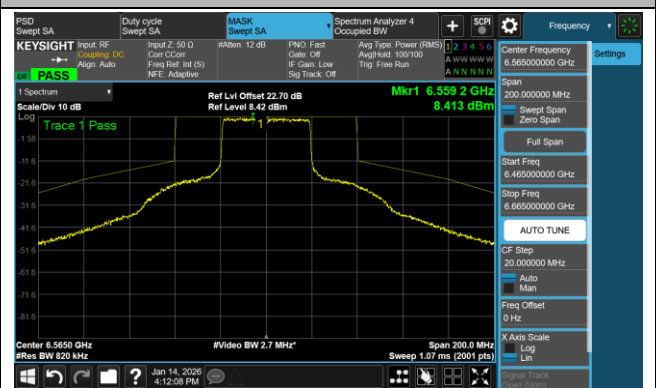

Channel 147 (6685 MHz)



Channel 179 (6845 MHz)




Note: The limit is based on 99% bandwidth, the limit is more stringent than the limit based on 26 dB bandwidth.

802.11be-EHT80 In-Band Emission - Ant 2

Channel 39 (6145 MHz)



Channel 55 (6225 MHz)

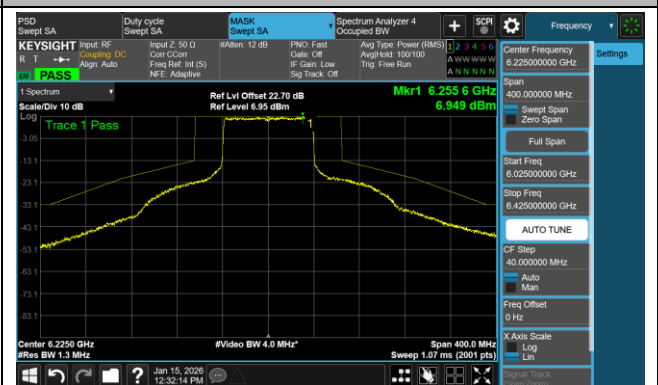


Channel 87 (6385 MHz)




Channel 135 (6625 MHz)



Channel 151 (6705 MHz)

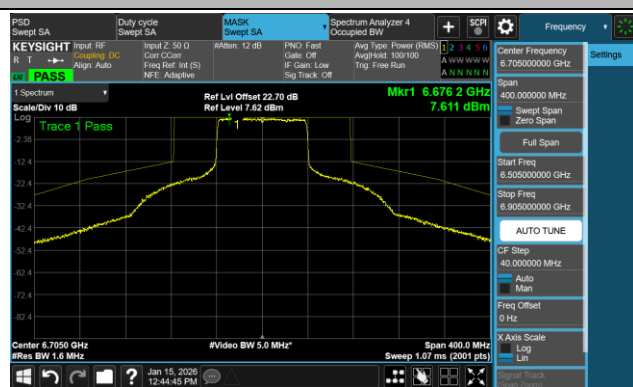


Channel 167 (6785 MHz)

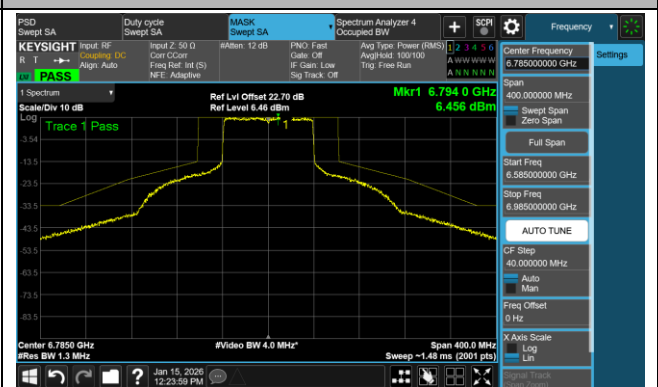


Note: The limit is based on 99% bandwidth, the limit is more stringent than the limit based on 26 dB bandwidth.

802.11be-EHT160 In-Band Emission - Ant 2


Channel 47 (6185 MHz)

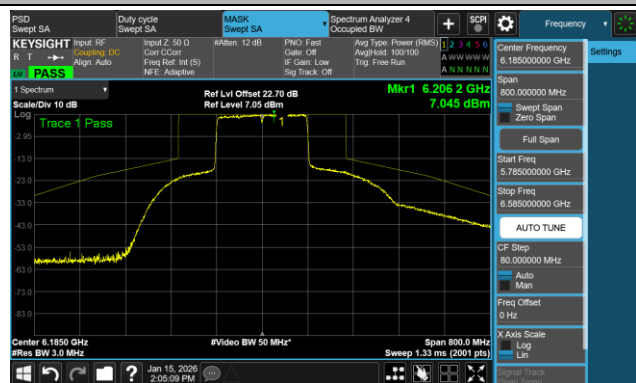

Channel 79 (6345 MHz)

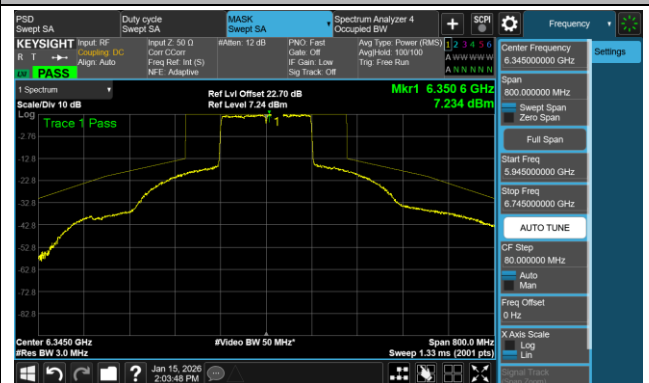

Channel 143 (6665 MHz)

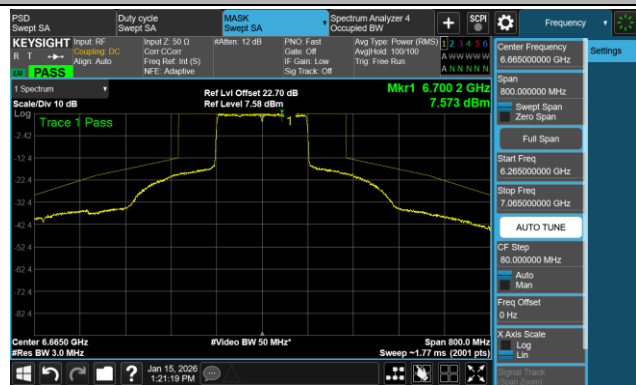

802.11be-EHT320 Power Spectral Density- Ant 2

Channel 63 (6265 MHz)



Note: The limit is based on 99% bandwidth, the limit is more stringent than the limit based on 26 dB bandwidth.

A.6 Frequency Stability Test Result

Test Site	WJ-TR1	Test Engineer	Layla Gui
Test Date	2026-01-16		
Test Mode	6115 MHz		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	-30	18.76	18.70	18.70	18.62
		-20	18.11	18.10	18.10	18.10
		-10	17.82	17.46	17.28	17.15
		0	14.75	14.70	14.66	14.61
		+10	7.86	7.66	7.54	7.41
		+20	7.67	7.20	6.91	6.69
		+30	1.68	1.26	1.07	0.90
		+40	-2.62	-2.76	-2.87	-2.96
		+50	-4.02	-4.22	-4.35	-4.44
115	138	+20	-3.64	-3.61	-3.57	-3.55
85	102	+20	-3.31	-1.00	-3.30	-3.29

Note: Frequency Tolerance (ppm) = $\{[\text{Measured Frequency (Hz)} - \text{Declared Frequency (Hz)}] / \text{Declared Frequency (Hz)}\} \times 10^6$.

A.7 Radiated Spurious Emission Test Result

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10137.50	26.75	17.98	44.73	88.20	-43.47	Peak	Horizontal
	11334.30	26.94	19.27	46.21	74.00	-27.79	Peak	Horizontal
*	14025.40	26.44	22.17	48.61	88.20	-39.59	Peak	Horizontal
	17836.80	11.32	29.36	40.68	54.00	-13.32	Average	Horizontal
	17836.80	25.52	29.36	54.88	74.00	-19.12	Peak	Horizontal
*	10163.00	27.17	17.92	45.09	88.20	-43.11	Peak	Vertical
	11531.50	27.58	19.49	47.07	74.00	-26.93	Peak	Vertical
*	13853.70	27.60	22.02	49.62	88.20	-38.58	Peak	Vertical
	17969.40	11.26	29.93	41.19	54.00	-12.81	Average	Vertical
	17969.40	26.92	29.93	56.85	74.00	-17.15	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10188.50	27.20	18.14	45.34	88.20	-42.86	Peak	Horizontal
	11820.50	26.35	20.14	46.49	74.00	-27.51	Peak	Horizontal
*	13991.40	25.61	22.42	48.03	88.20	-40.17	Peak	Horizontal
	17836.80	11.62	29.36	40.98	54.00	-13.02	Average	Horizontal
	17836.80	26.00	29.36	55.36	74.00	-18.64	Peak	Horizontal
*	10188.50	27.98	18.14	46.12	88.20	-42.08	Peak	Vertical
	11968.40	26.04	20.47	46.51	74.00	-27.49	Peak	Vertical
*	13991.40	27.08	22.42	49.50	88.20	-38.70	Peak	Vertical
	17881.00	11.45	30.19	41.64	54.00	-12.36	Average	Vertical
	17881.00	24.54	30.19	54.73	74.00	-19.27	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10062.70	27.44	17.98	45.42	88.20	-42.78	Peak	Horizontal
	11820.50	28.89	20.14	49.03	74.00	-24.97	Peak	Horizontal
*	13818.00	27.40	22.28	49.68	88.20	-38.52	Peak	Horizontal
	17836.80	11.25	29.36	40.61	54.00	-13.39	Average	Horizontal
	17836.80	26.00	29.36	55.36	74.00	-18.64	Peak	Horizontal
*	10288.80	26.98	18.24	45.22	88.20	-42.98	Peak	Vertical
	11820.50	25.90	20.14	46.04	74.00	-27.96	Peak	Vertical
*	13818.00	25.96	22.28	48.24	88.20	-39.96	Peak	Vertical
	17881.00	11.29	30.19	41.48	54.00	-12.52	Average	Vertical
	17881.00	25.46	30.19	55.65	74.00	-18.35	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10237.80	26.94	18.14	45.08	88.20	-43.12	Peak	Horizontal
	11791.60	26.85	20.16	47.01	74.00	-26.99	Peak	Horizontal
*	13921.70	26.54	22.04	48.58	88.20	-39.62	Peak	Horizontal
	17836.80	11.04	29.36	40.40	54.00	-13.60	Average	Horizontal
	17836.80	25.05	29.36	54.41	74.00	-19.59	Peak	Horizontal
*	10112.00	28.08	18.02	46.10	88.20	-42.10	Peak	Vertical
	11939.50	25.06	20.47	45.53	74.00	-28.47	Peak	Vertical
*	14025.40	25.20	22.17	47.37	88.20	-40.83	Peak	Vertical
	17881.00	11.19	30.19	41.38	54.00	-12.62	Average	Vertical
	17881.00	25.70	30.19	55.89	74.00	-18.11	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10037.20	26.41	17.76	44.17	88.20	-44.03	Peak	Horizontal
	11618.20	26.32	19.69	46.01	74.00	-27.99	Peak	Horizontal
*	14130.80	26.12	22.06	48.18	88.20	-40.02	Peak	Horizontal
	17836.80	10.98	29.36	40.34	54.00	-13.66	Average	Horizontal
	17836.80	26.39	29.36	55.75	74.00	-18.25	Peak	Horizontal
*	10088.20	28.78	17.83	46.61	88.20	-41.59	Peak	Vertical
	11723.60	29.76	19.98	49.74	74.00	-24.26	Peak	Vertical
*	14176.70	28.33	22.20	50.53	88.20	-37.67	Peak	Vertical
	17971.10	11.28	30.02	41.30	54.00	-12.70	Average	Vertical
	17971.10	27.64	30.02	57.66	74.00	-16.34	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10084.80	28.86	17.90	46.76	88.20	-41.44	Peak	Horizontal
	11883.40	28.22	20.40	48.62	74.00	-25.38	Peak	Horizontal
*	13914.90	28.88	22.06	50.94	88.20	-37.26	Peak	Horizontal
	17814.70	11.13	30.04	41.17	54.00	-12.83	Average	Horizontal
	17814.70	27.13	30.04	57.17	74.00	-16.83	Peak	Horizontal
*	10339.80	27.06	18.34	45.40	88.20	-42.80	Peak	Vertical
	12058.50	24.81	20.89	45.70	74.00	-28.30	Peak	Vertical
*	13921.70	24.77	22.04	46.81	88.20	-41.39	Peak	Vertical
	17881.00	10.86	30.19	41.05	54.00	-12.95	Average	Vertical
	17881.00	24.77	30.19	54.96	74.00	-19.04	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9914.80	27.17	17.56	44.73	88.20	-43.47	Peak	Horizontal
	11589.30	27.20	19.60	46.80	74.00	-27.20	Peak	Horizontal
*	14025.40	29.34	22.17	51.51	88.20	-36.69	Peak	Horizontal
	17925.20	11.24	30.02	41.26	54.00	-12.74	Average	Horizontal
	17925.20	25.24	30.02	55.26	74.00	-18.74	Peak	Horizontal
*	10237.80	27.84	18.14	45.98	88.20	-42.22	Peak	Vertical
	11851.10	26.40	20.23	46.63	74.00	-27.37	Peak	Vertical
*	14025.40	26.38	22.17	48.55	88.20	-39.65	Peak	Vertical
	17881.00	11.17	30.19	41.36	54.00	-12.64	Average	Vertical
	17881.00	25.18	30.19	55.37	74.00	-18.63	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10214.00	27.12	18.02	45.14	88.20	-43.06	Peak	Horizontal
	11939.50	25.82	20.47	46.29	74.00	-27.71	Peak	Horizontal
*	13991.40	27.02	22.42	49.44	88.20	-38.76	Peak	Horizontal
	17881.00	10.98	30.19	41.17	54.00	-12.83	Average	Horizontal
	17881.00	25.19	30.19	55.38	74.00	-18.62	Peak	Horizontal
*	10112.00	27.10	18.02	45.12	88.20	-43.08	Peak	Vertical
	11618.20	27.18	19.69	46.87	74.00	-27.13	Peak	Vertical
*	13887.70	26.40	22.54	48.94	88.20	-39.26	Peak	Vertical
	17836.80	11.12	29.36	40.48	54.00	-13.52	Average	Vertical
	17836.80	26.13	29.36	55.49	74.00	-18.51	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10062.70	27.22	17.98	45.20	88.20	-43.00	Peak	Horizontal
	11733.80	26.06	19.96	46.02	74.00	-27.98	Peak	Horizontal
*	13648.00	26.46	22.12	48.58	88.20	-39.62	Peak	Horizontal
	17881.00	11.32	30.19	41.51	54.00	-12.49	Average	Horizontal
	17881.00	24.50	30.19	54.69	74.00	-19.31	Peak	Horizontal
*	10137.50	25.80	17.98	43.78	88.20	-44.42	Peak	Vertical
	11704.90	25.61	19.94	45.55	74.00	-28.45	Peak	Vertical
*	13784.00	25.49	22.48	47.97	88.20	-40.23	Peak	Vertical
	17881.00	10.98	30.19	41.17	54.00	-12.83	Average	Vertical
	17881.00	24.99	30.19	55.18	74.00	-18.82	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10112.00	26.39	18.02	44.41	88.20	-43.79	Peak	Horizontal
	11791.60	25.50	20.16	45.66	74.00	-28.34	Peak	Horizontal
*	14095.10	27.15	22.55	49.70	88.20	-38.50	Peak	Horizontal
	17881.00	10.86	30.19	41.05	54.00	-12.95	Average	Horizontal
	17881.00	25.61	30.19	55.80	74.00	-18.20	Peak	Horizontal
*	10062.70	26.83	17.98	44.81	88.20	-43.39	Peak	Vertical
	11305.40	25.68	19.21	44.89	74.00	-29.11	Peak	Vertical
*	13955.70	26.61	22.28	48.89	88.20	-39.31	Peak	Vertical
	17881.00	10.75	30.19	40.94	54.00	-13.06	Average	Vertical
	17881.00	23.25	30.19	53.44	74.00	-20.56	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10088.20	27.56	17.83	45.39	88.20	-42.81	Peak	Horizontal
	11791.60	27.07	20.16	47.23	74.00	-26.77	Peak	Horizontal
*	14271.90	26.84	22.55	49.39	88.20	-38.81	Peak	Horizontal
	17792.60	11.07	28.95	40.02	54.00	-13.98	Average	Horizontal
	17792.60	24.62	28.95	53.57	74.00	-20.43	Peak	Horizontal
*	10062.70	27.83	17.98	45.81	88.20	-42.39	Peak	Vertical
	11851.10	27.78	20.23	48.01	74.00	-25.99	Peak	Vertical
*	14095.10	28.46	22.55	51.01	88.20	-37.19	Peak	Vertical
	17881.00	11.29	30.19	41.48	54.00	-12.52	Average	Vertical
	17881.00	27.30	30.19	57.49	74.00	-16.51	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10163.00	27.35	17.92	45.27	88.20	-42.93	Peak	Horizontal
	11791.60	25.02	20.16	45.18	74.00	-28.82	Peak	Horizontal
*	13853.70	26.65	22.02	48.67	88.20	-39.53	Peak	Horizontal
	17881.00	11.27	30.19	41.46	54.00	-12.54	Average	Horizontal
	17881.00	27.22	30.19	57.41	74.00	-16.59	Peak	Horizontal
*	10163.00	27.47	17.92	45.39	88.20	-42.81	Peak	Vertical
	11278.20	25.91	18.95	44.86	74.00	-29.14	Peak	Vertical
*	13887.70	28.87	22.54	51.41	88.20	-36.79	Peak	Vertical
	17836.80	10.77	29.36	40.13	54.00	-13.87	Average	Vertical
	17836.80	26.48	29.36	55.84	74.00	-18.16	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10117.10	28.42	18.07	46.49	88.20	-41.71	Peak	Horizontal
	11710.00	25.30	19.95	45.25	74.00	-28.75	Peak	Horizontal
*	13959.10	25.84	22.26	48.10	88.20	-40.10	Peak	Horizontal
	17838.50	10.92	29.22	40.14	54.00	-13.86	Average	Horizontal
	17838.50	23.93	29.22	53.15	74.00	-20.85	Peak	Horizontal
*	10067.80	25.57	18.06	43.63	88.20	-44.57	Peak	Vertical
	11536.60	25.24	19.52	44.76	74.00	-29.24	Peak	Vertical
*	13891.10	25.96	22.45	48.41	88.20	-39.79	Peak	Vertical
	17882.70	25.16	30.05	55.21	74.00	-18.79	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10168.10	27.94	18.04	45.98	88.20	-42.22	Peak	Horizontal
	12002.40	27.30	20.65	47.95	74.00	-26.05	Peak	Horizontal
*	13823.10	26.75	22.33	49.08	88.20	-39.12	Peak	Horizontal
	17838.50	10.99	29.22	40.21	54.00	-13.79	Average	Horizontal
	17838.50	25.60	29.22	54.82	74.00	-19.18	Peak	Horizontal
*	10244.60	27.16	18.10	45.26	88.20	-42.94	Peak	Vertical
	11885.10	25.98	20.42	46.40	74.00	-27.60	Peak	Vertical
*	13891.10	25.33	22.45	47.78	88.20	-40.42	Peak	Vertical
	17838.50	11.28	29.22	40.50	54.00	-13.50	Average	Vertical
	17838.50	26.52	29.22	55.74	74.00	-18.26	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10244.60	28.49	18.10	46.59	88.20	-41.61	Peak	Horizontal
	11767.80	26.29	20.04	46.33	74.00	-27.67	Peak	Horizontal
*	14028.80	25.39	22.18	47.57	88.20	-40.63	Peak	Horizontal
	17794.30	24.61	29.06	53.67	74.00	-20.33	Peak	Horizontal
	17794.30	10.76	29.06	39.82	74.00	-34.18	Peak	Horizontal
*	10168.10	27.91	18.04	45.95	88.20	-42.25	Peak	Vertical
	12002.40	25.81	20.65	46.46	74.00	-27.54	Peak	Vertical
*	13685.40	25.59	22.20	47.79	88.20	-40.41	Peak	Vertical
	17838.50	11.23	29.22	40.45	54.00	-13.55	Average	Vertical
	17838.50	26.23	29.22	55.45	74.00	-18.55	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10142.60	28.12	17.91	46.03	88.20	-42.17	Peak	Horizontal
	11451.60	27.01	19.47	46.48	74.00	-27.52	Peak	Horizontal
*	14064.50	26.60	22.21	48.81	88.20	-39.39	Peak	Horizontal
	17882.70	10.97	30.05	41.02	54.00	-12.98	Average	Horizontal
	17882.70	26.98	30.05	57.03	74.00	-16.97	Peak	Horizontal
*	10042.30	28.12	17.79	45.91	88.20	-42.29	Peak	Vertical
	11652.20	25.10	19.86	44.96	74.00	-29.04	Peak	Vertical
*	13857.10	25.72	22.03	47.75	88.20	-40.45	Peak	Vertical
	17882.70	11.12	30.05	41.17	54.00	-12.83	Average	Vertical
	17882.70	25.58	30.05	55.63	74.00	-18.37	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10067.80	27.33	18.06	45.39	88.20	-42.81	Peak	Horizontal
	11767.80	27.19	20.04	47.23	74.00	-26.77	Peak	Horizontal
*	13857.10	25.29	22.03	47.32	88.20	-40.88	Peak	Horizontal
	17926.90	11.09	30.08	41.17	54.00	-12.83	Average	Horizontal
	17926.90	27.10	30.08	57.18	74.00	-16.82	Peak	Horizontal
*	10067.80	27.03	18.06	45.09	88.20	-43.11	Peak	Vertical
	12002.40	28.79	20.65	49.44	74.00	-24.56	Peak	Vertical
*	13994.80	27.73	22.42	50.15	88.20	-38.05	Peak	Vertical
	17926.90	11.17	30.08	41.25	54.00	-12.75	Average	Vertical
	17926.90	25.17	30.08	55.25	74.00	-18.75	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.00	27.24	17.60	44.84	88.20	-43.36	Peak	Horizontal
	11422.70	26.53	19.32	45.85	74.00	-28.15	Peak	Horizontal
*	13719.40	27.58	22.19	49.77	88.20	-38.43	Peak	Horizontal
	17838.50	11.29	29.22	40.51	54.00	-13.49	Average	Horizontal
	17838.50	24.50	29.22	53.72	74.00	-20.28	Peak	Horizontal
*	10093.30	26.56	17.81	44.37	88.20	-43.83	Peak	Vertical
	11565.50	26.30	19.73	46.03	74.00	-27.97	Peak	Vertical
*	13891.10	27.95	22.45	50.40	88.20	-37.80	Peak	Vertical
	17882.70	11.09	30.05	41.14	54.00	-12.86	Average	Vertical
	17882.70	27.09	30.05	57.14	74.00	-16.86	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10112.00	28.66	18.02	46.68	88.20	-41.52	Peak	Horizontal
	12143.50	28.48	21.18	49.66	74.00	-24.34	Peak	Horizontal
*	13937.00	29.15	22.29	51.44	88.20	-36.76	Peak	Horizontal
	17877.60	10.78	30.51	41.29	54.00	-12.71	Average	Horizontal
	17877.60	27.78	30.51	58.29	74.00	-15.71	Peak	Horizontal
*	10217.40	29.35	18.05	47.40	88.20	-40.80	Peak	Vertical
	11625.00	29.00	19.74	48.74	74.00	-25.26	Peak	Vertical
*	13981.20	29.10	22.26	51.36	88.20	-36.84	Peak	Vertical
	17867.40	11.27	30.20	41.47	54.00	-12.53	Average	Vertical
	17867.40	27.07	30.20	57.27	74.00	-16.73	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10055.90	28.50	17.87	46.37	88.20	-41.83	Peak	Horizontal
	12129.90	29.18	21.11	50.29	74.00	-23.71	Peak	Horizontal
*	13903.00	28.72	22.13	50.85	88.20	-37.35	Peak	Horizontal
	17819.80	10.88	30.18	41.06	54.00	-12.94	Average	Horizontal
	17819.80	27.88	30.18	58.06	74.00	-15.94	Peak	Horizontal
*	10067.80	27.66	18.06	45.72	88.20	-42.48	Peak	Vertical
	11710.00	26.09	19.95	46.04	74.00	-27.96	Peak	Vertical
*	13959.10	28.31	22.26	50.57	88.20	-37.63	Peak	Vertical
	17926.90	11.10	30.08	41.18	54.00	-12.82	Average	Vertical
	17926.90	27.11	30.08	57.19	74.00	-16.81	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11ax-HE160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10268.40	28.13	18.03	46.16	88.20	-42.04	Peak	Horizontal
	11942.90	27.19	20.46	47.65	74.00	-26.35	Peak	Horizontal
*	13994.80	25.91	22.42	48.33	88.20	-39.87	Peak	Horizontal
	17882.70	10.91	30.05	40.96	54.00	-13.04	Average	Horizontal
	17882.70	23.91	30.05	53.96	74.00	-20.04	Peak	Horizontal
*	10093.30	27.50	17.81	45.31	88.20	-42.89	Peak	Vertical
	11623.30	27.30	19.73	47.03	74.00	-26.97	Peak	Vertical
*	13925.10	26.77	22.09	48.86	88.20	-39.34	Peak	Vertical
	17882.70	10.84	30.05	40.89	54.00	-13.11	Average	Vertical
	17882.70	25.84	30.05	55.89	74.00	-18.11	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT20	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10117.10	27.40	18.07	45.47	88.20	-42.73	Peak	Horizontal
	11310.50	26.13	19.26	45.39	74.00	-28.61	Peak	Horizontal
*	13187.30	24.48	22.49	46.97	88.20	-41.23	Peak	Horizontal
	17926.90	11.28	30.08	41.36	54.00	-12.64	Average	Horizontal
	17926.90	24.58	30.08	54.66	74.00	-19.34	Peak	Horizontal
*	10372.10	27.42	18.10	45.52	88.20	-42.68	Peak	Vertical
	11738.90	27.15	19.96	47.11	74.00	-26.89	Peak	Vertical
*	12961.20	24.71	22.76	47.47	88.20	-40.73	Peak	Vertical
	17976.20	11.17	30.30	41.47	54.00	-12.53	Average	Vertical
	17976.20	28.34	30.30	58.64	74.00	-15.36	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT20	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10122.20	25.97	18.12	44.09	88.20	-44.11	Peak	Horizontal
	11514.50	27.98	19.50	47.48	74.00	-26.52	Peak	Horizontal
*	13063.20	24.65	22.51	47.16	88.20	-41.04	Peak	Horizontal
	18000.00	11.27	29.26	40.53	54.00	-13.47	Average	Horizontal
	18000.00	25.33	29.26	54.59	74.00	-19.41	Peak	Horizontal
*	10149.40	26.79	17.89	44.68	88.20	-43.52	Peak	Vertical
	11701.50	26.87	19.93	46.80	74.00	-27.20	Peak	Vertical
*	12957.80	23.84	22.73	46.57	88.20	-41.63	Peak	Vertical
	17994.90	11.67	29.66	41.33	54.00	-12.67	Average	Vertical
	17994.90	28.46	29.66	58.12	74.00	-15.88	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT20	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9644.50	31.46	16.61	48.07	88.20	-40.13	Peak	Horizontal
	11511.10	30.97	19.52	50.49	74.00	-23.51	Peak	Horizontal
*	12937.40	25.63	22.51	48.14	88.20	-40.06	Peak	Horizontal
	17830.00	11.82	29.93	41.75	54.00	-12.25	Average	Horizontal
	17830.00	24.97	29.93	54.90	74.00	-19.10	Peak	Horizontal
*	9792.40	30.31	16.99	47.30	88.20	-40.90	Peak	Vertical
	11808.60	29.86	20.15	50.01	74.00	-23.99	Peak	Vertical
*	13005.40	24.06	22.47	46.53	88.20	-41.67	Peak	Vertical
	17860.60	11.19	29.96	41.15	54.00	-12.85	Average	Vertical
	17860.60	28.95	29.96	58.91	74.00	-15.09	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT20	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10190.20	30.43	18.12	48.55	88.20	-39.65	Peak	Horizontal
	11560.40	27.20	19.76	46.96	74.00	-27.04	Peak	Horizontal
*	12877.90	27.95	22.50	50.45	88.20	-37.75	Peak	Horizontal
	17823.20	11.14	30.27	41.41	54.00	-12.59	Average	Horizontal
	17823.20	28.17	30.27	58.44	74.00	-15.56	Peak	Horizontal
*	10207.20	30.23	18.02	48.25	88.20	-39.95	Peak	Vertical
	11919.10	29.31	20.48	49.79	74.00	-24.21	Peak	Vertical
*	12942.50	25.58	22.54	48.12	88.20	-40.08	Peak	Vertical
	17753.50	10.92	30.20	41.12	54.00	-12.88	Average	Vertical
	17753.50	27.97	30.20	58.17	74.00	-15.83	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT20	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10027.00	26.97	17.89	44.86	88.20	-43.34	Peak	Horizontal
	11375.10	30.73	19.26	49.99	74.00	-24.01	Peak	Horizontal
*	12815.00	25.51	22.46	47.97	88.20	-40.23	Peak	Horizontal
	17937.10	11.65	29.67	41.32	54.00	-12.68	Average	Horizontal
	17937.10	25.55	29.67	55.22	74.00	-18.78	Peak	Horizontal
*	10125.60	26.26	18.14	44.40	88.20	-43.80	Peak	Vertical
	12413.80	26.05	21.68	47.73	74.00	-26.27	Peak	Vertical
*	12910.20	26.42	22.51	48.93	88.20	-39.27	Peak	Vertical
	17760.30	11.75	30.29	42.04	54.00	-11.96	Average	Vertical
	17760.30	28.14	30.29	58.43	74.00	-15.57	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT20	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10174.90	30.25	18.19	48.44	88.20	-39.76	Peak	Horizontal
	12262.50	26.29	21.43	47.72	74.00	-26.28	Peak	Horizontal
*	13005.40	25.66	22.47	48.13	88.20	-40.07	Peak	Horizontal
	17981.30	11.68	30.57	42.25	54.00	-11.75	Average	Horizontal
	17981.30	26.36	30.57	56.93	74.00	-17.07	Peak	Horizontal
*	10406.10	30.52	18.34	48.86	88.20	-39.34	Peak	Vertical
	11934.40	26.41	20.49	46.90	74.00	-27.10	Peak	Vertical
*	12845.60	29.33	22.53	51.86	88.20	-36.34	Peak	Vertical
	17831.70	11.85	29.79	41.64	54.00	-12.36	Average	Vertical
	17831.70	28.16	29.79	57.95	74.00	-16.05	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT40	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10151.10	27.22	17.88	45.10	88.20	-43.10	Peak	Horizontal
	11818.80	26.40	20.14	46.54	74.00	-27.46	Peak	Horizontal
*	12910.20	25.95	22.51	48.46	88.20	-39.74	Peak	Horizontal
	17830.00	11.34	29.93	41.27	54.00	-12.73	Average	Horizontal
	17830.00	29.03	29.93	58.96	74.00	-15.04	Peak	Horizontal
*	10387.40	29.83	18.37	48.20	88.20	-40.00	Peak	Vertical
	11993.90	26.95	20.59	47.54	74.00	-26.46	Peak	Vertical
*	12809.90	29.58	22.46	52.04	88.20	-36.16	Peak	Vertical
	17994.90	11.42	29.66	41.08	54.00	-12.92	Average	Vertical
	17994.90	28.28	29.66	57.94	74.00	-16.06	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT40	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9760.10	27.51	16.94	44.45	88.20	-43.75	Peak	Horizontal
	11931.00	29.28	20.51	49.79	74.00	-24.21	Peak	Horizontal
*	12877.90	26.38	22.50	48.88	88.20	-39.32	Peak	Horizontal
	17923.50	11.84	29.96	41.80	54.00	-12.20	Average	Horizontal
	17923.50	28.32	29.96	58.28	74.00	-15.72	Peak	Horizontal
*	10001.50	27.99	17.66	45.65	88.20	-42.55	Peak	Vertical
	11699.80	30.01	19.92	49.93	74.00	-24.07	Peak	Vertical
*	13005.40	26.76	22.47	49.23	88.20	-38.97	Peak	Vertical
	17768.80	11.32	30.25	41.57	54.00	-12.43	Average	Vertical
	17768.80	28.46	30.25	58.71	74.00	-15.29	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT40	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9831.50	28.50	17.13	45.63	88.20	-42.57	Peak	Horizontal
	11846.00	29.38	20.26	49.64	74.00	-24.36	Peak	Horizontal
*	13166.90	25.24	22.42	47.66	88.20	-40.54	Peak	Horizontal
	17819.80	11.24	30.18	41.42	54.00	-12.58	Average	Horizontal
	17819.80	28.01	30.18	58.19	74.00	-15.81	Peak	Horizontal
*	10326.20	26.65	18.18	44.83	88.20	-43.37	Peak	Vertical
	12022.80	25.56	20.80	46.36	74.00	-27.64	Peak	Vertical
*	13903.00	30.51	22.13	52.64	88.20	-35.56	Peak	Vertical
	17976.20	11.37	30.30	41.67	54.00	-12.33	Average	Vertical
	17976.20	27.97	30.30	58.27	74.00	-15.73	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT40	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10299.00	29.08	18.21	47.29	88.20	-40.91	Peak	Horizontal
	11461.80	30.21	19.42	49.63	74.00	-24.37	Peak	Horizontal
*	13058.10	24.71	22.45	47.16	88.20	-41.04	Peak	Horizontal
	18000.00	11.57	29.26	40.83	54.00	-13.17	Average	Horizontal
	18000.00	26.02	29.26	55.28	74.00	-18.72	Peak	Horizontal
*	10217.40	27.35	18.05	45.40	88.20	-42.80	Peak	Vertical
	11458.40	26.73	19.44	46.17	74.00	-27.83	Peak	Vertical
*	12884.70	24.40	22.49	46.89	88.20	-41.31	Peak	Vertical
	17916.70	11.24	29.73	40.97	54.00	-13.03	Average	Vertical
	17916.70	28.40	29.73	58.13	74.00	-15.87	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT40	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9738.00	25.97	16.88	42.85	88.20	-45.35	Peak	Horizontal
	12248.90	24.55	21.38	45.93	74.00	-28.07	Peak	Horizontal
*	12884.70	25.25	22.49	47.74	88.20	-40.46	Peak	Horizontal
	17983.00	11.35	30.60	41.95	54.00	-12.05	Average	Horizontal
	17983.00	26.94	30.60	57.54	74.00	-16.46	Peak	Horizontal
*	10190.20	26.41	18.12	44.53	88.20	-43.67	Peak	Vertical
	11888.50	30.08	20.46	50.54	74.00	-23.46	Peak	Vertical
*	12920.40	23.93	22.49	46.42	88.20	-41.78	Peak	Vertical
	17942.20	11.51	29.30	40.81	54.00	-13.19	Average	Vertical
	17942.20	28.73	29.30	58.03	74.00	-15.97	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT40	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10163.00	27.00	17.92	44.92	88.20	-43.28	Peak	Horizontal
	11458.40	25.38	19.44	44.82	74.00	-29.18	Peak	Horizontal
*	12850.70	25.98	22.54	48.52	88.20	-39.68	Peak	Horizontal
	17937.10	11.18	29.67	40.85	54.00	-13.15	Average	Horizontal
	17937.10	24.96	29.67	54.63	74.00	-19.37	Peak	Horizontal
*	10072.90	29.54	18.14	47.68	88.20	-40.52	Peak	Vertical
	12150.30	25.81	21.19	47.00	74.00	-27.00	Peak	Vertical
*	12954.40	24.49	22.69	47.18	88.20	-41.02	Peak	Vertical
	17913.30	11.75	29.62	41.37	54.00	-12.63	Average	Vertical
	17913.30	28.52	29.62	58.14	74.00	-15.86	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT80	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10353.40	25.21	18.35	43.56	88.20	-44.64	Peak	Horizontal
	10989.20	30.77	18.94	49.71	74.00	-24.29	Peak	Horizontal
*	12918.70	25.25	22.49	47.74	88.20	-40.46	Peak	Horizontal
	17857.20	11.64	29.76	41.40	54.00	-12.60	Average	Horizontal
	17857.20	27.81	29.76	57.57	74.00	-16.43	Peak	Horizontal
*	10152.80	25.97	17.88	43.85	88.20	-44.35	Peak	Vertical
	12216.60	26.40	21.21	47.61	74.00	-26.39	Peak	Vertical
*	12857.50	24.32	22.52	46.84	88.20	-41.36	Peak	Vertical
	17984.70	11.29	30.47	41.76	54.00	-12.24	Average	Vertical
	17984.70	27.55	30.47	58.02	74.00	-15.98	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT80	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10159.60	27.41	17.86	45.27	88.20	-42.93	Peak	Horizontal
	11842.60	29.56	20.28	49.84	74.00	-24.16	Peak	Horizontal
*	13076.80	23.86	22.55	46.41	88.20	-41.79	Peak	Horizontal
	17869.10	11.55	30.26	41.81	54.00	-12.19	Average	Horizontal
	17869.10	27.27	30.26	57.53	74.00	-16.47	Peak	Horizontal
*	10173.20	29.74	18.16	47.90	88.20	-40.30	Peak	Vertical
	11878.30	25.20	20.34	45.54	74.00	-28.46	Peak	Vertical
*	12986.70	23.49	22.54	46.03	88.20	-42.17	Peak	Vertical
	17879.30	10.94	30.35	41.29	54.00	-12.71	Average	Vertical
	17879.30	27.74	30.35	58.09	74.00	-15.91	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT80	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10290.50	27.87	18.24	46.11	88.20	-42.09	Peak	Horizontal
	12138.40	24.83	21.18	46.01	74.00	-27.99	Peak	Horizontal
*	12952.70	24.46	22.67	47.13	88.20	-41.07	Peak	Horizontal
	17818.10	11.21	30.13	41.34	54.00	-12.66	Average	Horizontal
	17818.10	27.94	30.13	58.07	74.00	-15.93	Peak	Horizontal
*	10236.10	26.14	18.15	44.29	88.20	-43.91	Peak	Vertical
	11499.20	29.45	19.48	48.93	74.00	-25.07	Peak	Vertical
*	12847.30	26.29	22.53	48.82	88.20	-39.38	Peak	Vertical
	17877.60	11.34	30.51	41.85	54.00	-12.15	Average	Vertical
	17877.60	27.90	30.51	58.41	74.00	-15.59	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT80	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10125.60	29.07	18.14	47.21	88.20	-40.99	Peak	Horizontal
	11660.70	26.09	19.96	46.05	74.00	-27.95	Peak	Horizontal
*	13068.30	26.50	22.55	49.05	88.20	-39.15	Peak	Horizontal
	17972.80	11.24	30.11	41.35	54.00	-12.65	Average	Horizontal
	17972.80	28.03	30.11	58.14	74.00	-15.86	Peak	Horizontal
*	10057.60	27.78	17.90	45.68	88.20	-42.52	Peak	Vertical
	12121.40	25.72	21.02	46.74	74.00	-27.26	Peak	Vertical
*	12889.80	27.24	22.48	49.72	88.20	-38.48	Peak	Vertical
	17755.20	10.92	30.31	41.23	54.00	-12.77	Average	Vertical
	17755.20	27.92	30.31	58.23	74.00	-15.77	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT80	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10174.90	29.59	18.19	47.78	88.20	-40.42	Peak	Horizontal
	12104.40	28.94	21.06	50.00	74.00	-24.00	Peak	Horizontal
*	12774.20	25.34	22.58	47.92	88.20	-40.28	Peak	Horizontal
	17828.30	11.38	30.06	41.44	54.00	-12.56	Average	Horizontal
	17828.30	27.77	30.06	57.83	74.00	-16.17	Peak	Horizontal
*	10191.90	29.58	18.10	47.68	88.20	-40.52	Peak	Vertical
	11407.40	30.03	19.26	49.29	74.00	-24.71	Peak	Vertical
*	13117.60	28.20	22.45	50.65	88.20	-37.55	Peak	Vertical
	17828.30	11.02	30.06	41.08	54.00	-12.92	Average	Vertical
	17828.30	27.89	30.06	57.95	74.00	-16.05	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT80	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9919.90	26.87	17.55	44.42	88.20	-43.78	Peak	Horizontal
	11660.70	25.92	19.96	45.88	74.00	-28.12	Peak	Horizontal
*	12860.90	27.89	22.51	50.40	88.20	-37.80	Peak	Horizontal
	17763.70	11.67	30.28	41.95	54.00	-12.05	Average	Horizontal
	17763.70	28.13	30.28	58.41	74.00	-15.59	Peak	Horizontal
*	10088.20	30.42	17.83	48.25	88.20	-39.95	Peak	Vertical
	11767.80	28.69	20.04	48.73	74.00	-25.27	Peak	Vertical
*	12949.30	26.85	22.63	49.48	88.20	-38.72	Peak	Vertical
	17852.10	10.82	29.45	40.27	54.00	-13.73	Average	Vertical
	17852.10	25.11	29.45	54.56	74.00	-19.44	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT160	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10033.80	27.28	17.81	45.09	88.20	-43.11	Peak	Horizontal
	12204.70	25.21	21.21	46.42	74.00	-27.58	Peak	Horizontal
*	12889.80	24.19	22.48	46.67	88.20	-41.53	Peak	Horizontal
	17879.30	11.35	30.35	41.70	54.00	-12.30	Average	Horizontal
	17879.30	27.79	30.35	58.14	74.00	-15.86	Peak	Horizontal
*	10033.80	28.38	17.81	46.19	88.20	-42.01	Peak	Vertical
	11767.80	26.45	20.04	46.49	74.00	-27.51	Peak	Vertical
*	13008.80	25.76	22.45	48.21	88.20	-39.99	Peak	Vertical
	17882.70	11.37	30.05	41.42	54.00	-12.58	Average	Vertical
	17882.70	27.52	30.05	57.57	74.00	-16.43	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT160	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10079.70	26.33	18.01	44.34	88.20	-43.86	Peak	Horizontal
	11740.60	25.55	19.96	45.51	74.00	-28.49	Peak	Horizontal
*	12920.40	25.54	22.49	48.03	88.20	-40.17	Peak	Horizontal
	17977.90	11.26	30.39	41.65	54.00	-12.35	Average	Horizontal
	17977.90	27.88	30.39	58.27	74.00	-15.73	Peak	Horizontal
*	10195.30	29.96	18.07	48.03	88.20	-40.17	Peak	Vertical
	11902.10	25.98	20.48	46.46	74.00	-27.54	Peak	Vertical
*	12949.30	23.92	22.63	46.55	88.20	-41.65	Peak	Vertical
	17971.10	11.07	30.02	41.09	54.00	-12.91	Average	Vertical
	17971.10	27.95	30.02	57.97	74.00	-16.03	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT160	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10358.50	30.36	18.26	48.62	88.20	-39.58	Peak	Horizontal
	11774.60	28.91	20.07	48.98	74.00	-25.02	Peak	Horizontal
*	12900.00	24.32	22.50	46.82	88.20	-41.38	Peak	Horizontal
	17872.50	11.37	30.36	41.73	54.00	-12.27	Average	Horizontal
	17872.50	28.14	30.36	58.50	74.00	-15.50	Peak	Horizontal
*	10448.60	26.69	18.40	45.09	88.20	-43.11	Peak	Vertical
	12138.40	25.65	21.18	46.83	74.00	-27.17	Peak	Vertical
*	12816.70	25.08	22.46	47.54	88.20	-40.66	Peak	Vertical
	17853.80	11.17	29.56	40.73	54.00	-13.27	Average	Vertical
	17853.80	28.74	29.56	58.30	74.00	-15.70	Peak	Vertical

Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Ceiling Mount Wi-Fi 7 Access Point	Test Engineer	Alex Liu
Test Site	WJ-AC1	Test Date	2026-02-10 ~ 2026-02-11
Test Mode	802.11be-EHT320	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10129.00	27.26	18.09	45.35	88.20	-42.85	Peak	Horizontal
	11638.60	26.59	19.78	46.37	74.00	-27.63	Peak	Horizontal
*	12934.00	24.89	22.49	47.38	88.20	-40.82	Peak	Horizontal
	17826.60	11.31	30.19	41.50	54.00	-12.50	Average	Horizontal
	17826.60	28.09	30.19	58.28	74.00	-15.72	Peak	Horizontal
*	10163.00	30.97	17.92	48.89	88.20	-39.31	Peak	Vertical
	11643.70	26.61	19.79	46.40	74.00	-27.60	Peak	Vertical
*	13047.90	25.92	22.36	48.28	88.20	-39.92	Peak	Vertical
	17930.30	11.05	30.16	41.21	54.00	-12.79	Average	Vertical
	17930.30	25.69	30.16	55.85	74.00	-18.15	Peak	Vertical


Note 1: "*" is not in restricted band.us emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission in 9 kHz ~ 30 MHz:

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

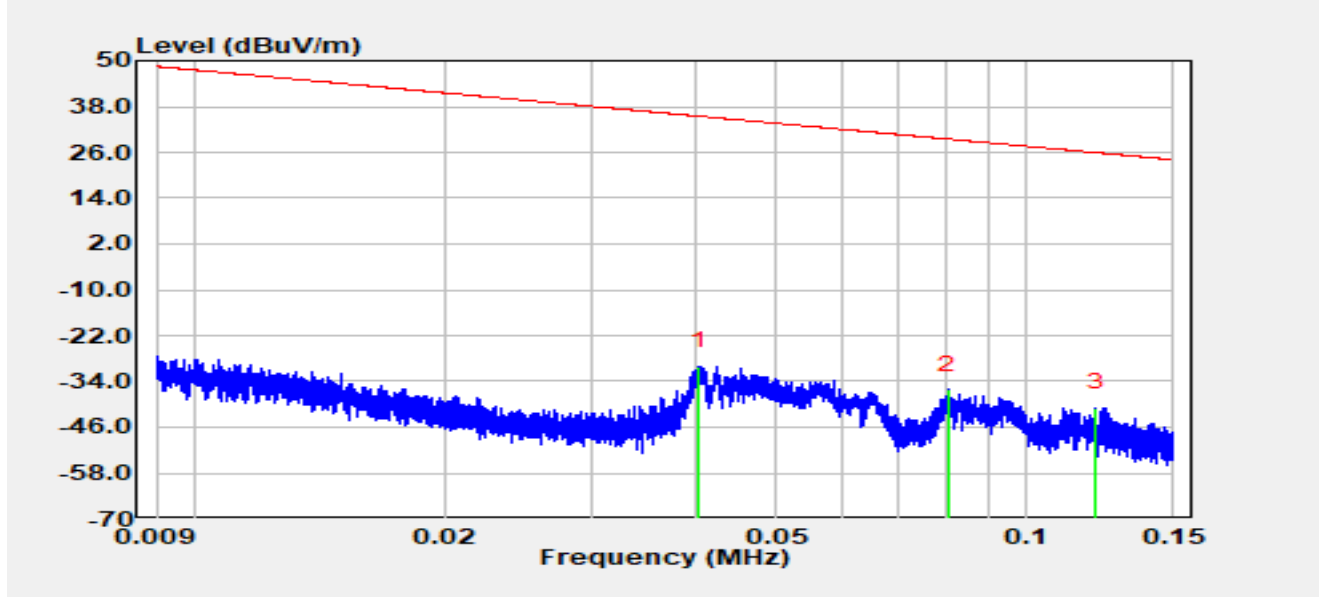


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.04	30.12	-60.15	-30.03	-65.50	35.47	Peak
2		0.08	24.03	-60.20	-36.17	-65.65	29.48	Peak
3		0.12	19.41	-60.23	-40.83	-66.78	25.95	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

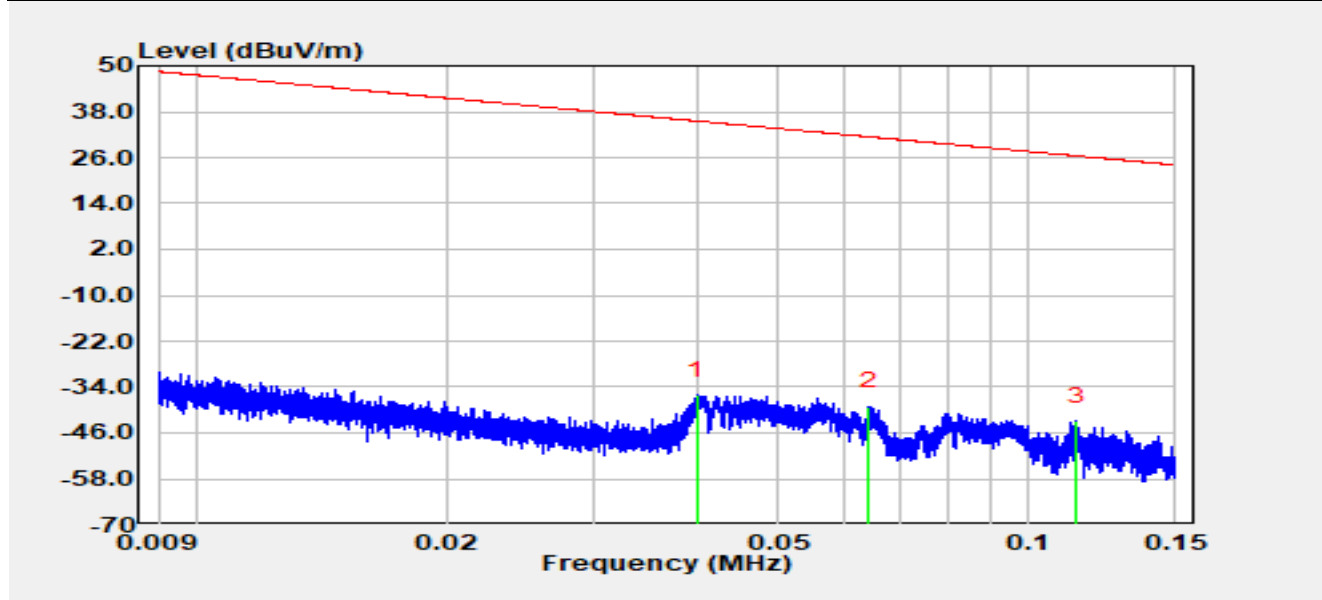


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.04	23.98	-60.15	-36.17	-71.74	35.57	Peak
2		0.06	21.07	-60.18	-39.12	-70.56	31.45	Peak
3	*	0.11	17.35	-60.23	-42.88	-69.32	26.45	Peak

Notes:

- “*” indicates the worst-case emission level observed during the measurement.
- $C.F (dB/m) = Antenna\ Factor (dB/m) + Cable\ Loss (dB) + 40\log(d1/d2) (dB)$, $d1 = 3\ m$, $d2 = 300\ m$ (9 kHz - 490 kHz) or $30\ m$ (490 kHz - 30 MHz).
- $Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m)$.

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

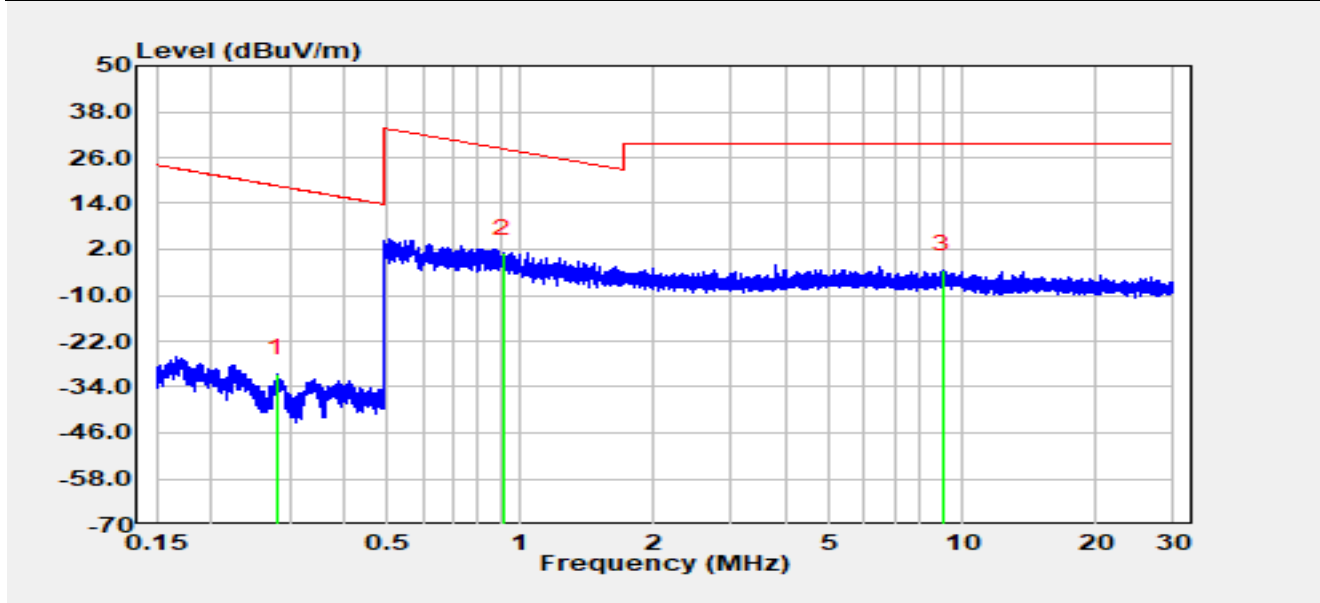


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.28	29.87	-60.31	-30.44	-49.07	18.64	Peak
2	*	0.92	21.44	-20.37	1.07	-27.31	28.38	Peak
3		9.04	17.06	-20.29	-3.22	-32.72	29.50	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

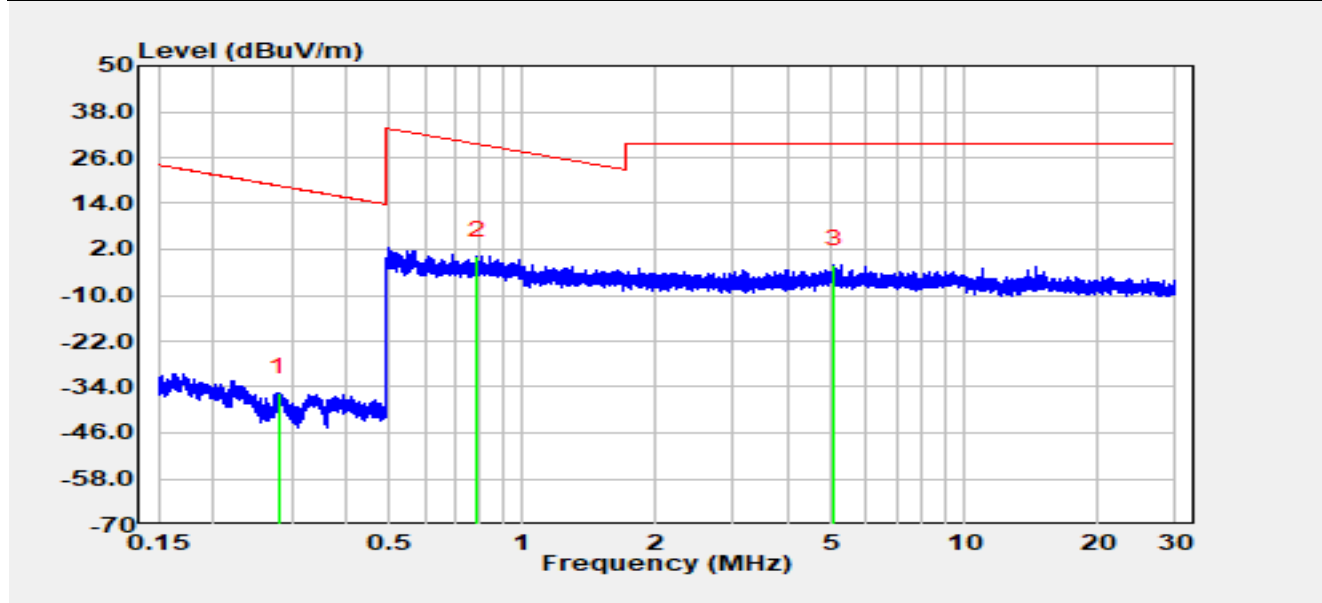


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.28	24.90	-60.31	-35.41	-54.04	18.64	Peak
2	*	0.79	20.66	-20.37	0.29	-29.37	29.66	Peak
3		5.06	18.47	-20.44	-1.97	-31.47	29.50	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission in 30 MHz ~ 1 GHz:

Site	WJ-AC1	Test Date	2026-01-04
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 230 V/50 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

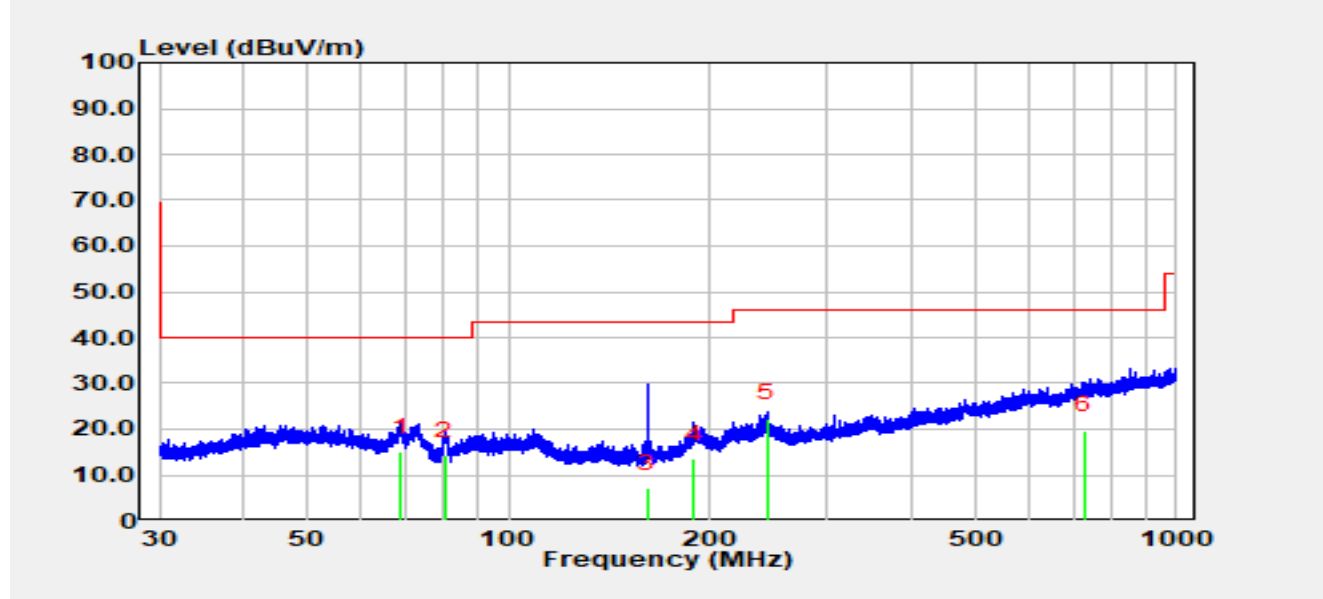


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		68.82	-1.30	16.38	15.08	-24.92	40.00	QP
2		80.42	0.70	13.55	14.25	-25.75	40.00	QP
3		161.08	-8.30	15.47	7.17	-36.33	43.50	QP
4		189.81	-4.30	17.73	13.43	-30.07	43.50	QP
5	*	243.80	2.50	19.82	22.32	-23.68	46.00	QP
6		726.30	-9.10	28.83	19.73	-26.27	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-04
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 230 V/50 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

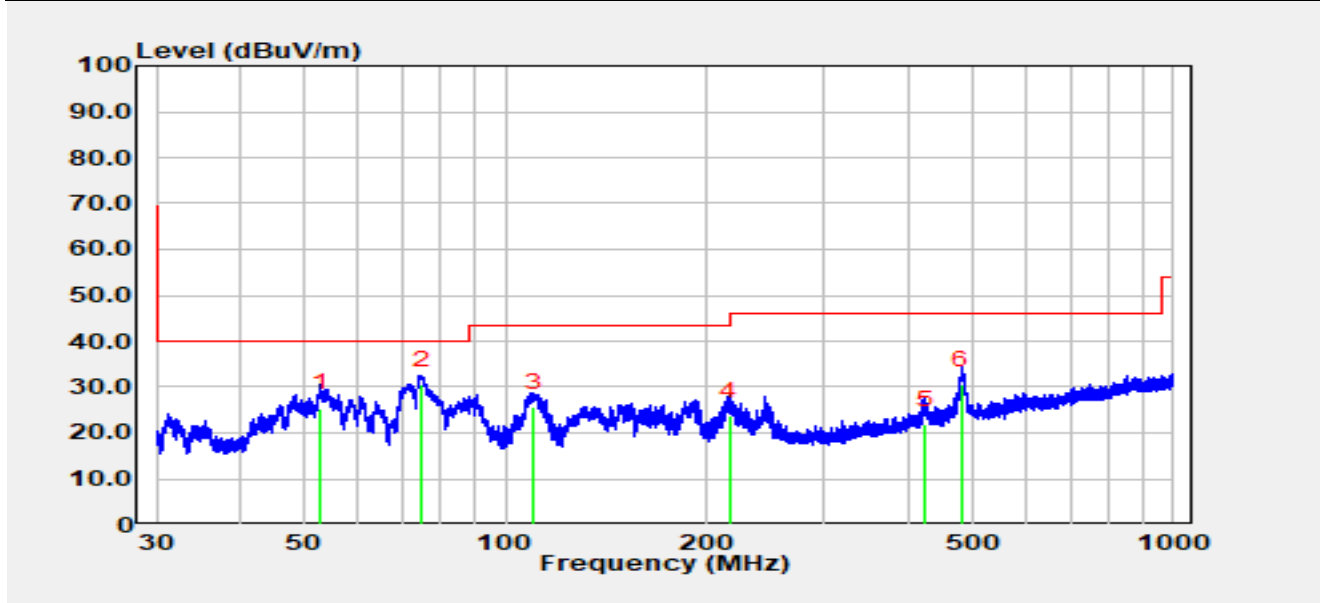


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		52.80	5.10	20.34	25.44	-14.56	40.00	QP
2	*	74.92	16.20	14.32	30.52	-9.48	40.00	QP
3		110.18	7.50	18.04	25.54	-17.96	43.50	QP
4		216.33	5.60	18.12	23.72	-22.28	46.00	QP
5		424.88	-2.00	23.75	21.75	-24.25	46.00	QP
6		481.54	5.80	24.60	30.40	-15.60	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission in 18 GHz ~ 40 GHz:

Site	WJ-AC2	Test Date	2026-02-06
Temperature	23.5 °C	Humidity	48.3%
Limit	FCC_Part 15.407_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

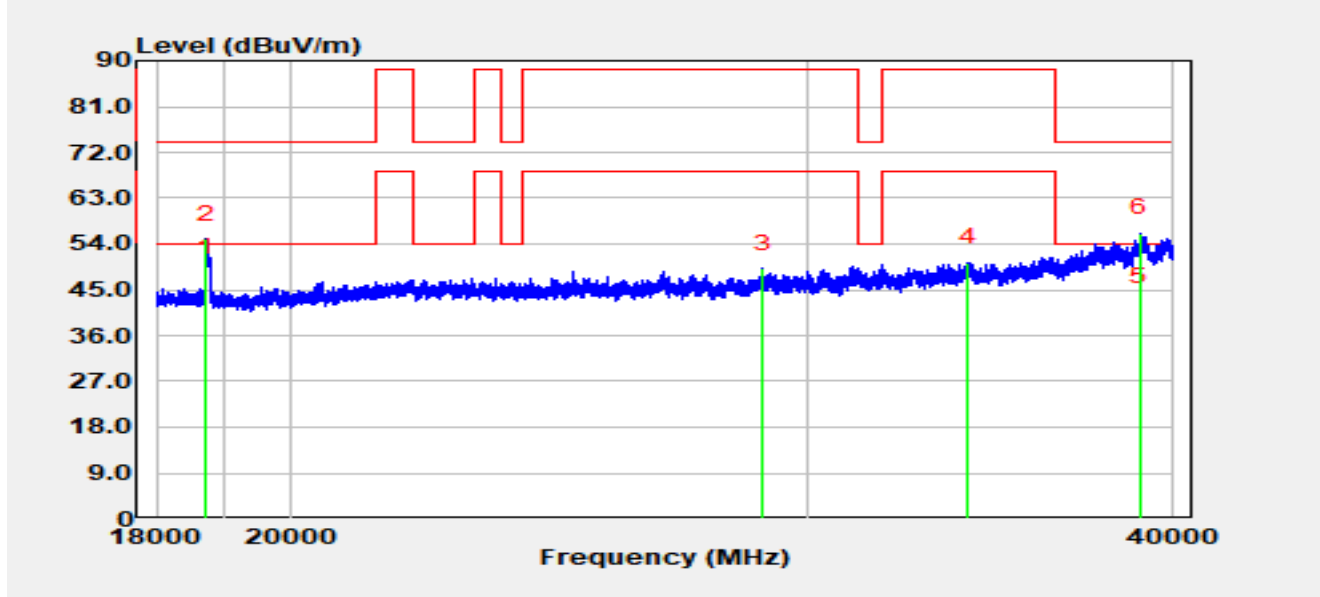


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	18721.60	57.64	-9.12	48.52	-5.48	54.00	Average
2		18721.60	64.11	-9.12	54.99	-19.01	74.00	Peak
3		28967.00	52.69	-3.47	49.22	-38.98	88.20	Peak
4		34051.20	53.78	-3.47	50.30	-37.90	88.20	Peak
5		38955.00	40.52	2.14	42.66	-11.34	54.00	Average
6		38955.00	53.97	2.14	56.10	-17.90	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-02-06
Temperature	23.5 °C	Humidity	48.3%
Limit	FCC_Part 15.407_RSE (3m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6245 MHz		

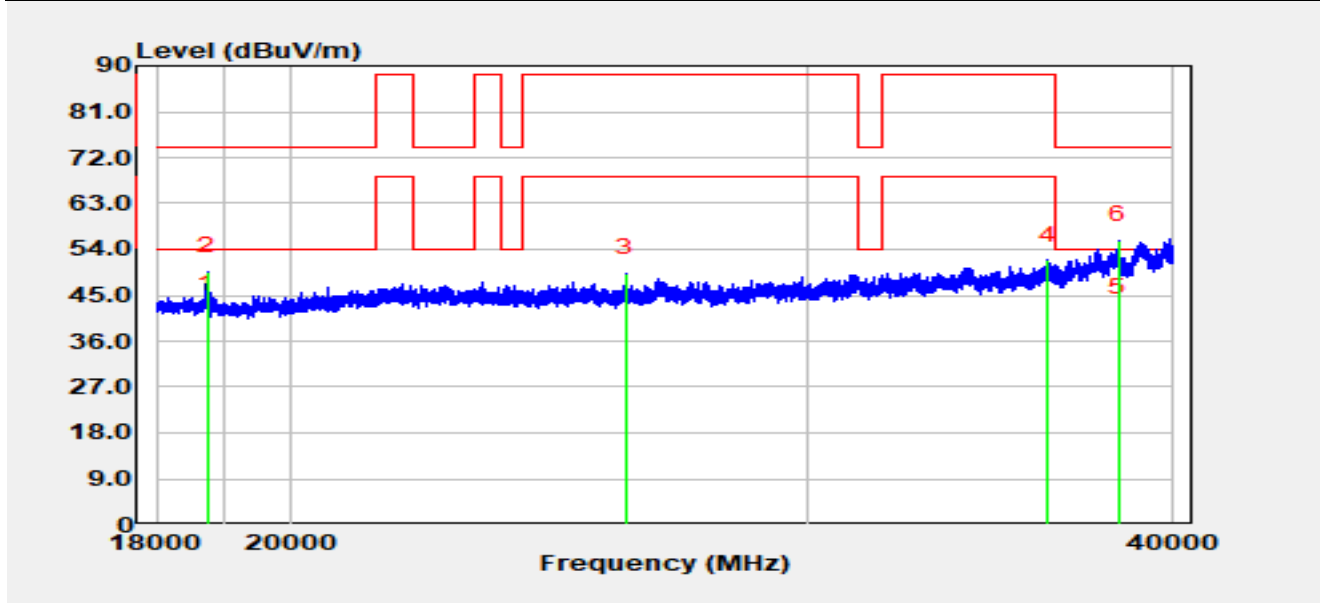


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	18743.60	51.38	-9.09	42.29	-11.71	54.00	Average
2		18743.60	58.68	-9.09	49.59	-24.41	74.00	Peak
3		26025.60	53.16	-3.87	49.29	-38.91	88.20	Peak
4		36260.00	55.23	-3.29	51.95	-36.25	88.20	Peak
5		38323.60	40.47	1.18	41.64	-12.36	54.00	Average
6		38323.60	54.60	1.18	55.78	-18.22	74.00	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement(dBμV/m) = Reading(dBμV) + C.F (dB/m).

A.8 Radiated Restricted Band Edge Test Result

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

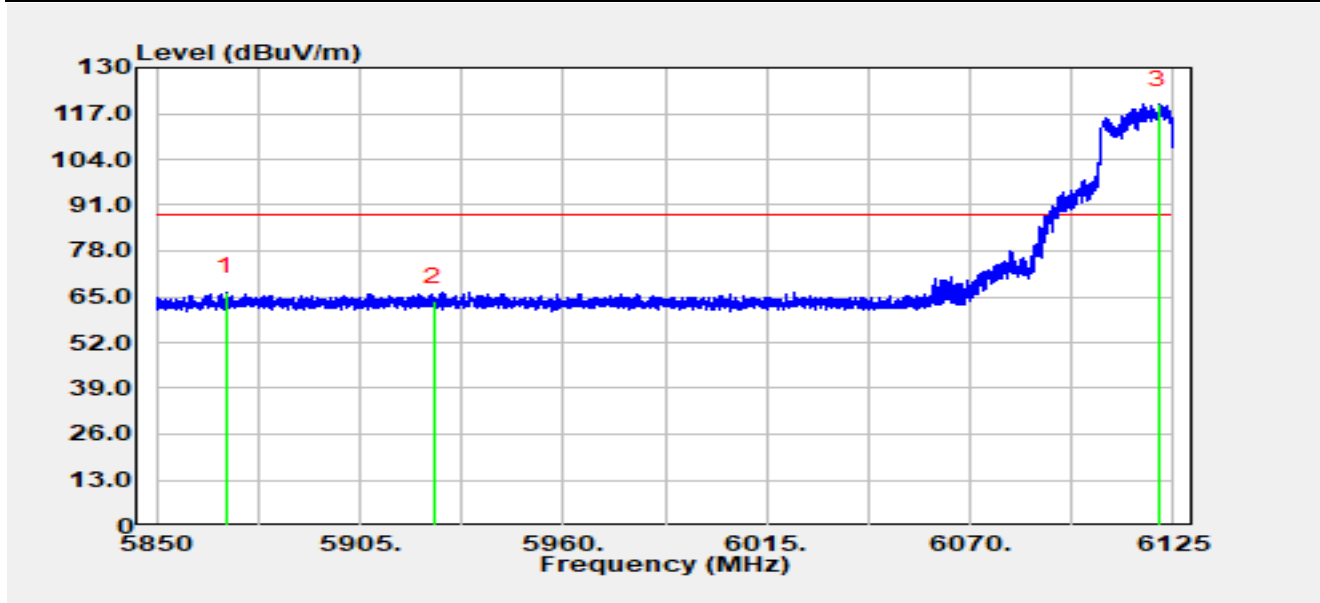


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.98	38.68	27.61	66.29	-21.91	88.20	Peak
2		5925.00	35.78	27.88	63.67	-24.53	88.20	Peak
3		6120.88	91.28	28.20	119.48	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

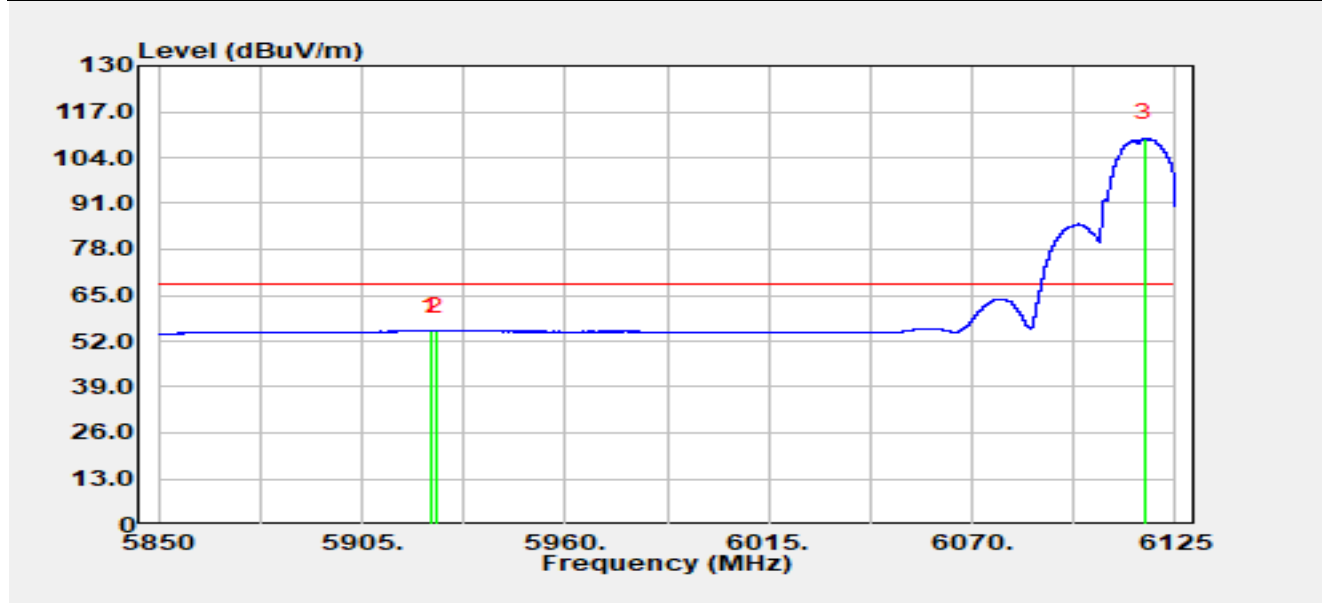


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.56	27.04	27.86	54.90	-13.30	68.20	Average
2		5925.00	26.98	27.88	54.86	-13.34	68.20	Average
3		6116.59	81.46	28.14	109.60	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

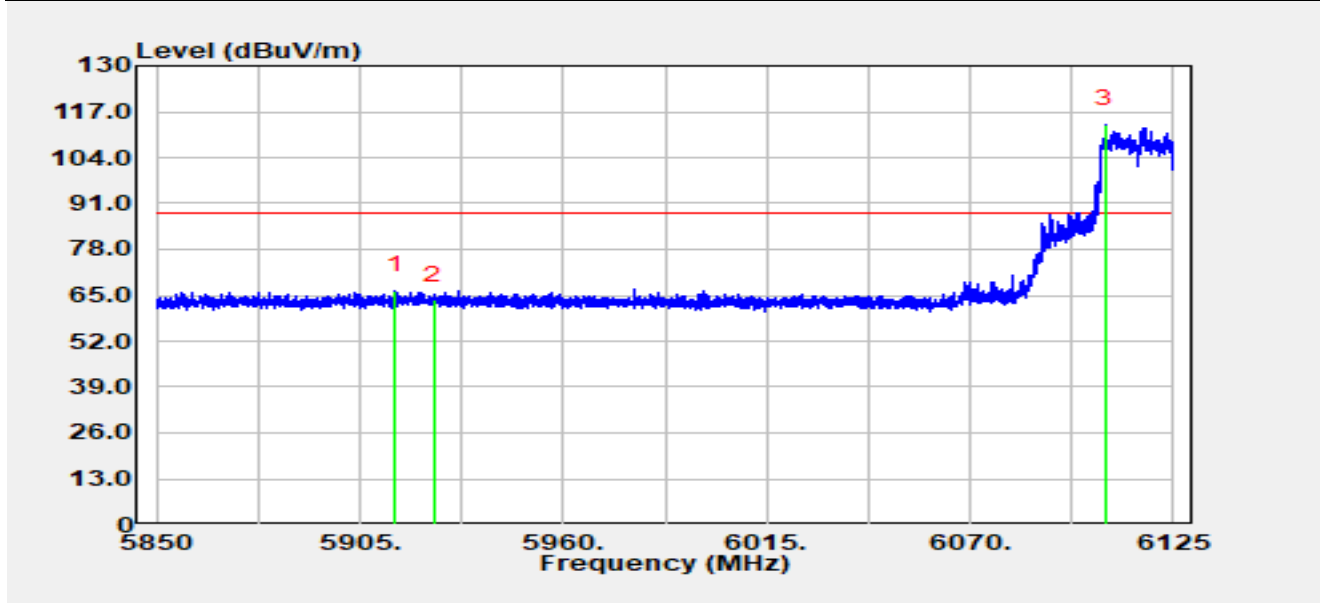


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.57	38.62	27.74	66.36	-21.84	88.20	Peak
2		5925.00	35.73	27.88	63.62	-24.58	88.20	Peak
3		6106.69	85.51	28.01	113.52	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

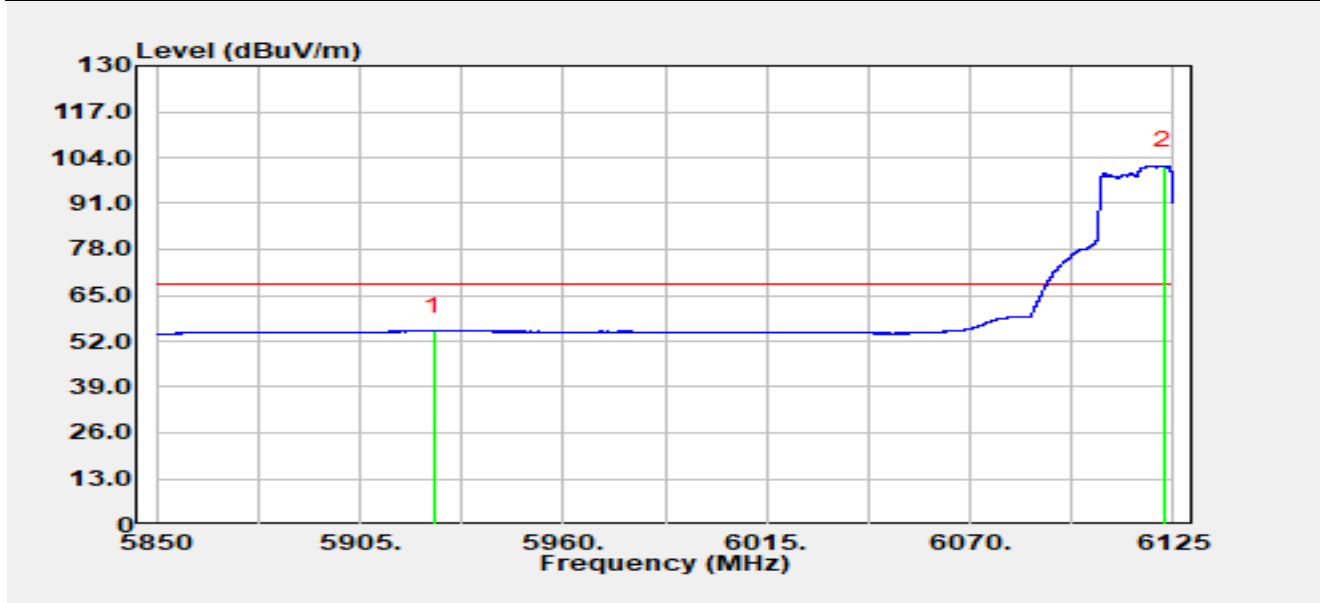


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.94	27.88	54.82	-13.38	68.20	Average
2		6122.25	73.56	28.22	101.78	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6855 MHz		

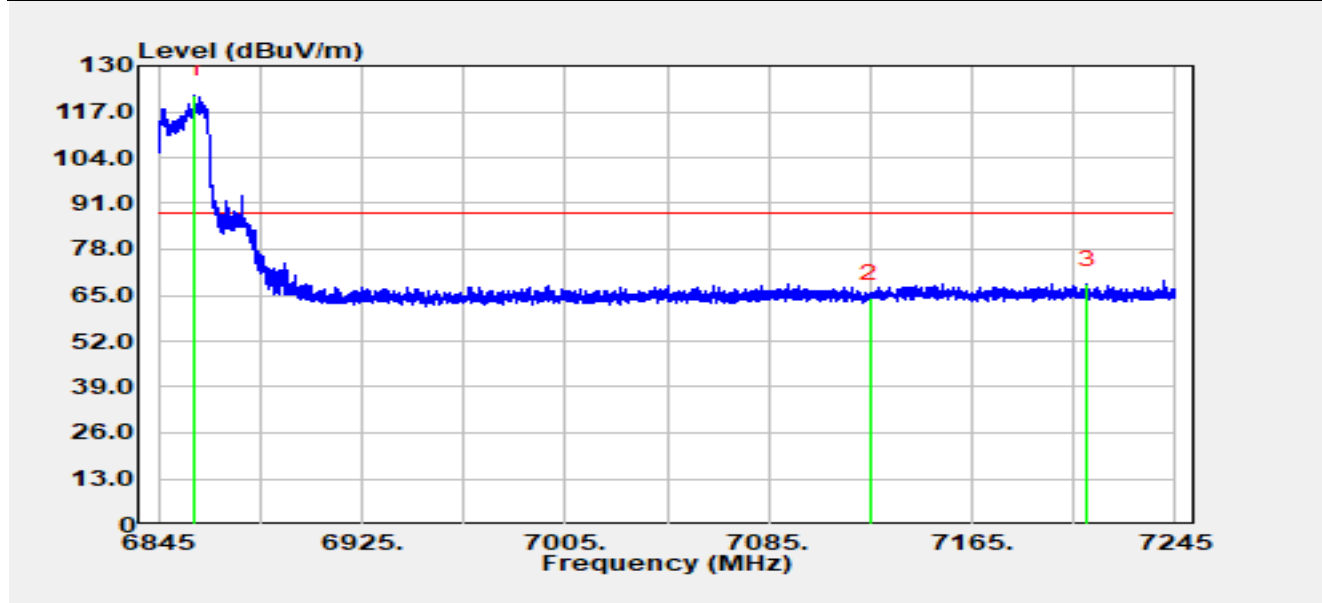


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6859.36	92.68	29.21	121.89	N/A	N/A	Peak
2		7125.00	34.83	29.34	64.17	-24.03	88.20	Peak
3	*	7210.16	38.56	29.60	68.16	-20.04	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6855 MHz		

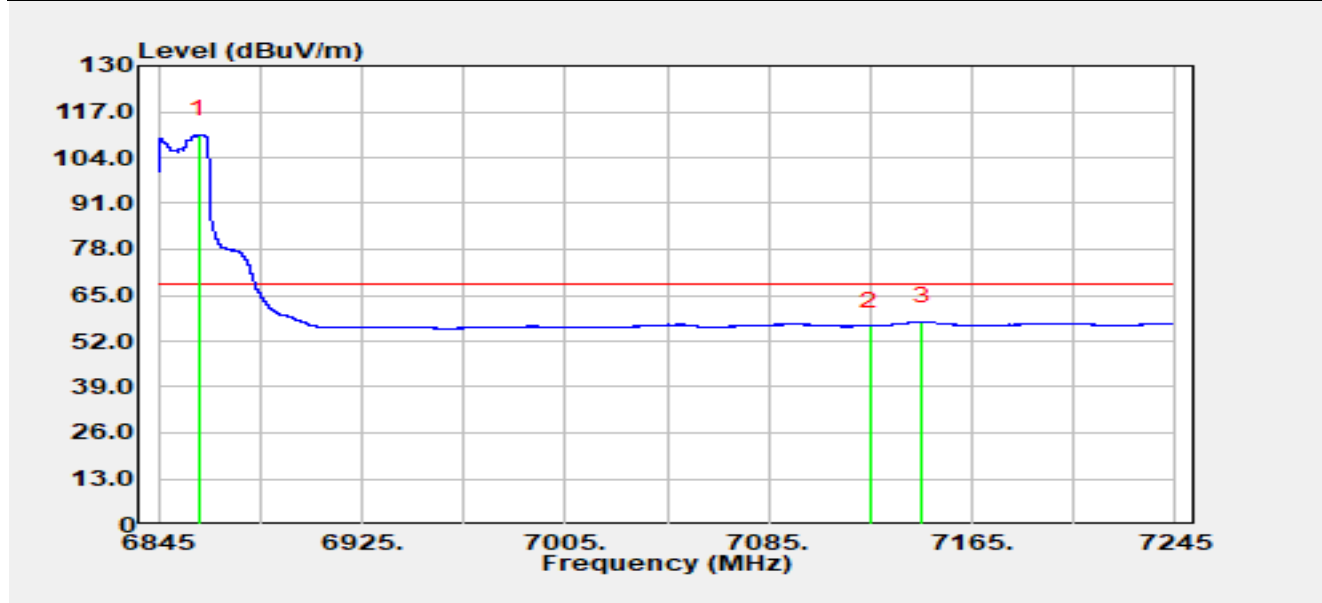


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6860.96	81.14	29.27	110.41	N/A	N/A	Average
2		7125.00	26.96	29.34	56.30	-11.90	68.20	Average
3	*	7145.08	27.75	29.71	57.46	-10.74	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6855 MHz		

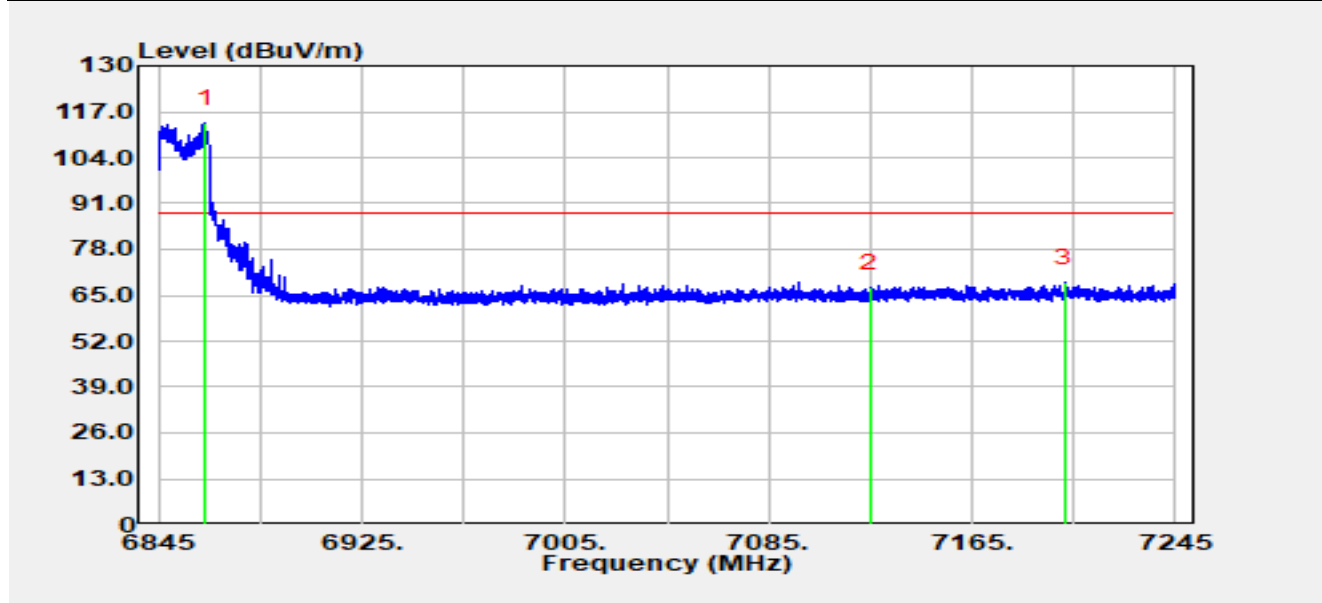


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6863.20	84.24	29.34	113.58	N/A	N/A	Peak
2		7125.00	37.67	29.34	67.02	-21.18	88.20	Peak
3	*	7201.28	38.77	29.81	68.58	-19.62	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6855 MHz		

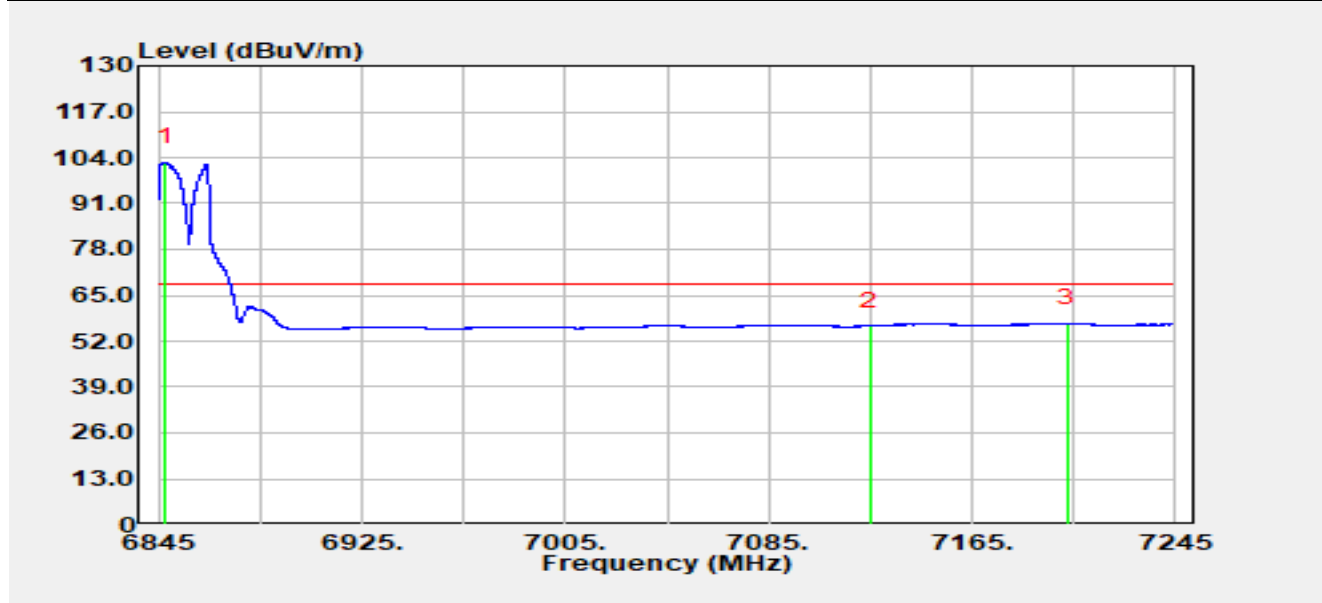


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6847.80	73.43	29.15	102.58	N/A	N/A	Average
2		7125.00	26.96	29.34	56.30	-11.90	68.20	Average
3	*	7202.56	27.18	29.83	57.01	-11.19	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

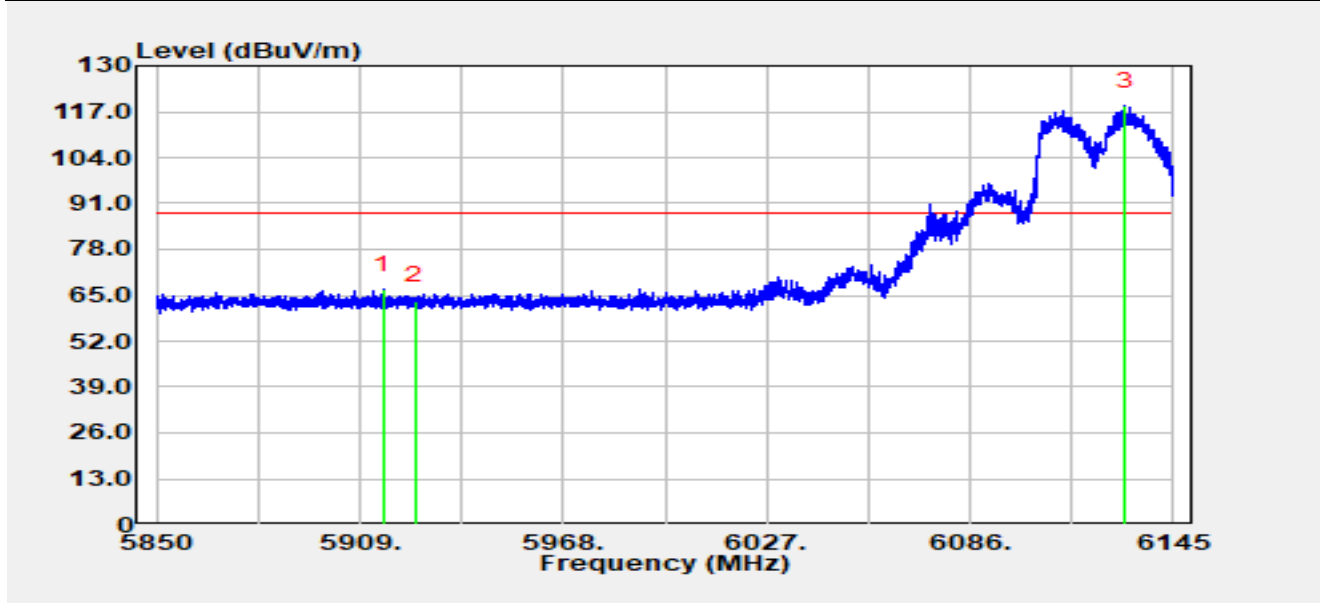


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.67	38.87	27.75	66.62	-21.58	88.20	Peak
2		5925.00	35.49	27.88	63.37	-24.83	88.20	Peak
3		6130.90	90.32	28.34	118.66	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

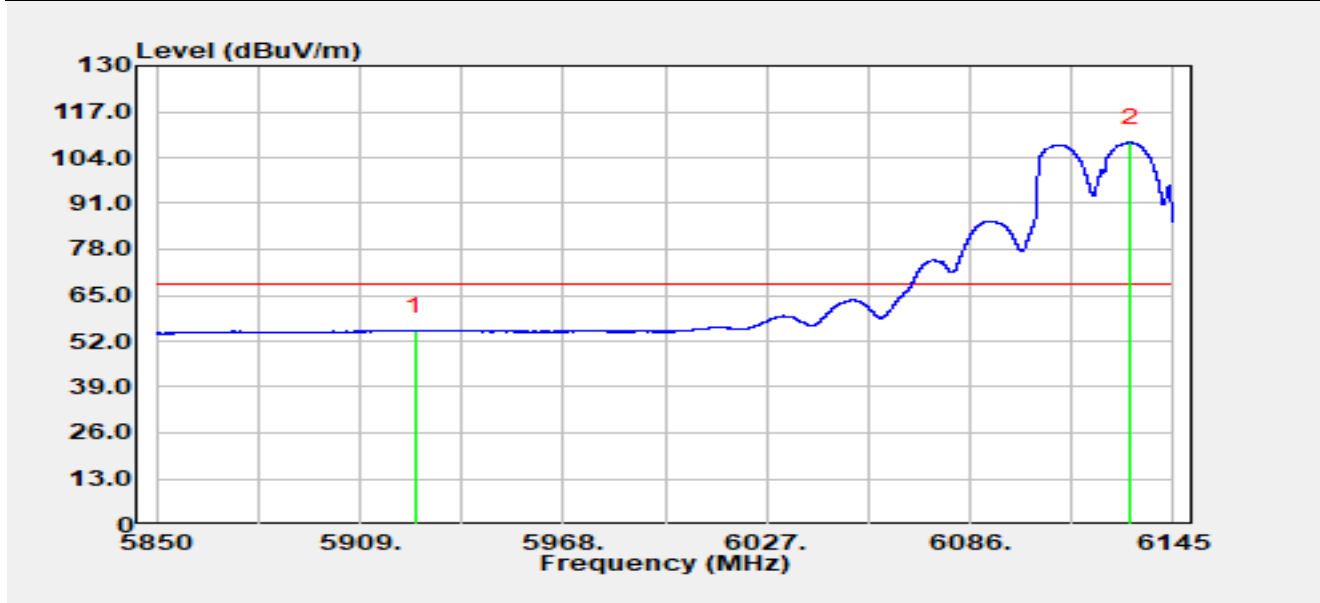


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.04	27.88	54.92	-13.28	68.20	Average
2		6132.46	79.90	28.36	108.27	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

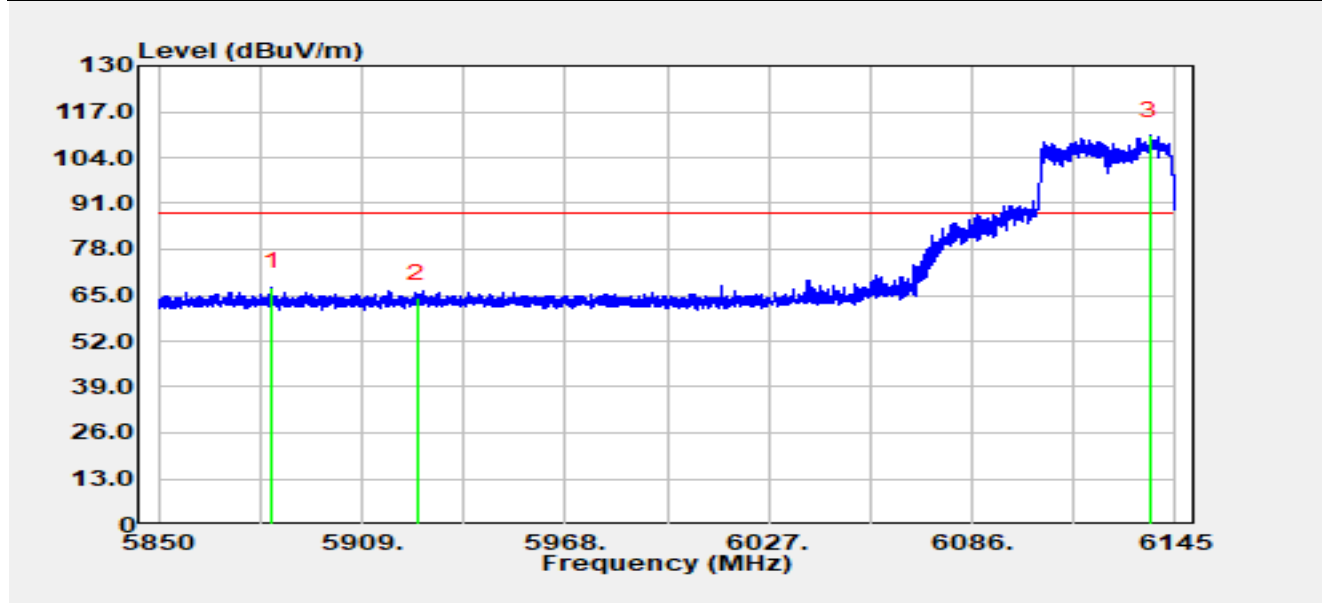


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5882.95	39.67	27.57	67.24	-20.96	88.20	Peak
2		5925.00	36.38	27.88	64.26	-23.94	88.20	Peak
3		6137.68	81.80	28.35	110.15	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

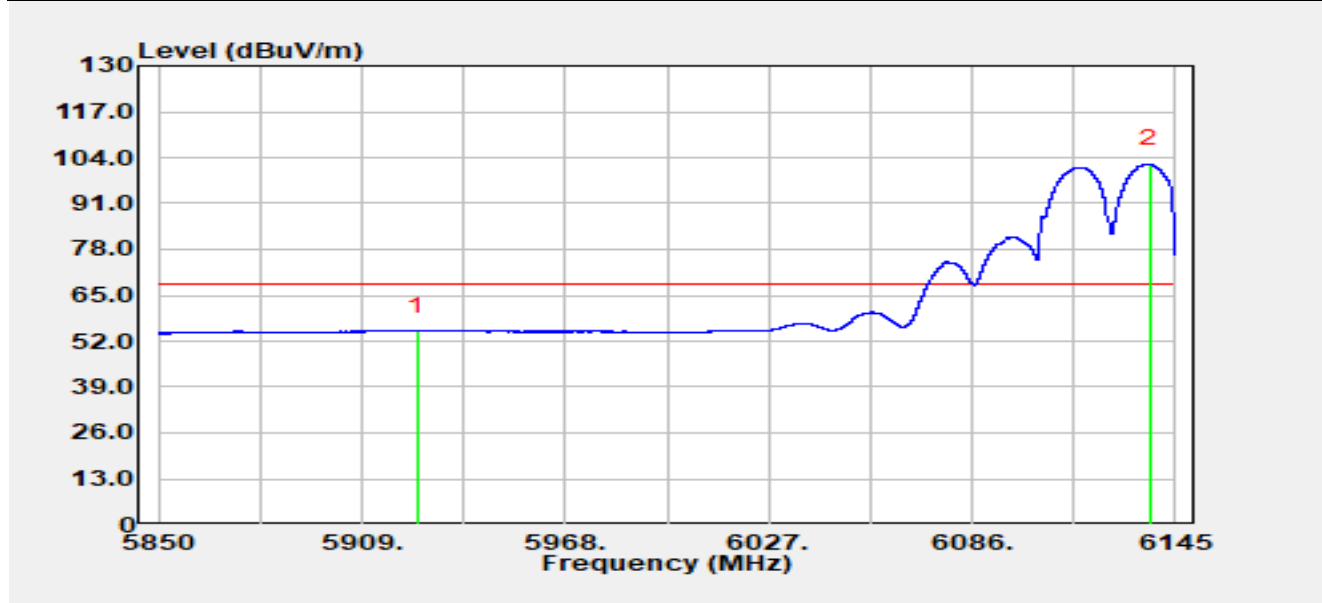


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.00	27.88	54.88	-13.32	68.20	Average
2		6137.51	73.74	28.36	102.10	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6845 MHz		

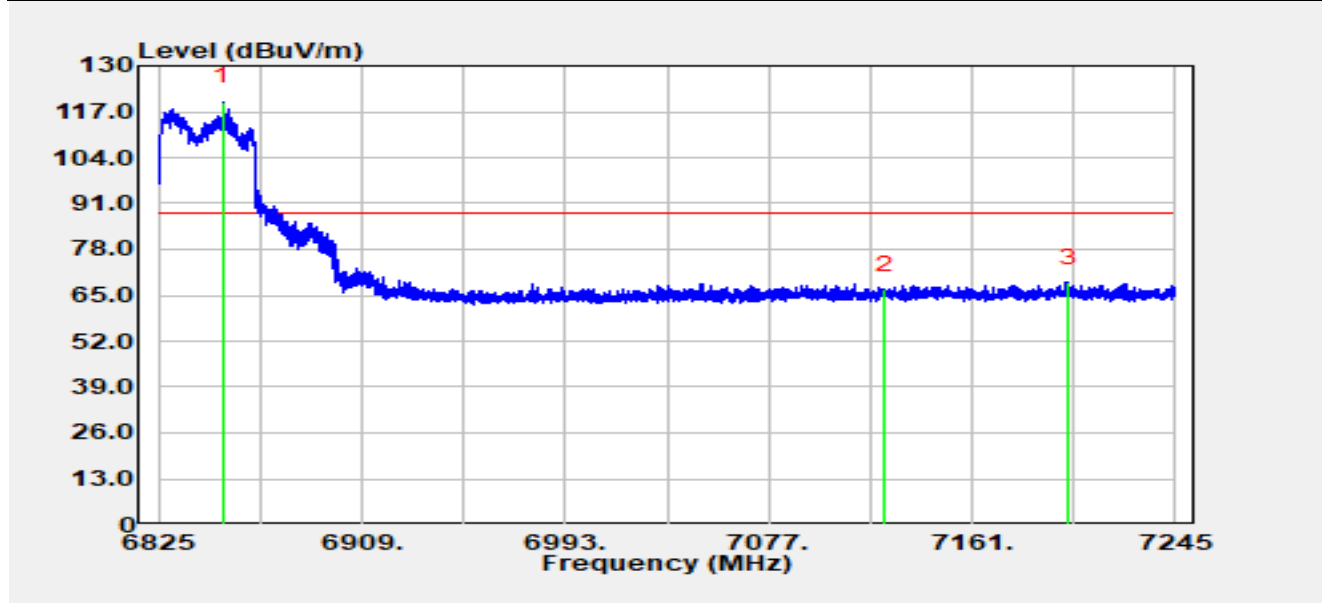


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6851.63	90.83	29.01	119.84	N/A	N/A	Peak
2		7125.00	37.29	29.34	66.64	-21.56	88.20	Peak
3	*	7200.61	38.78	29.80	68.58	-19.62	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6845 MHz		

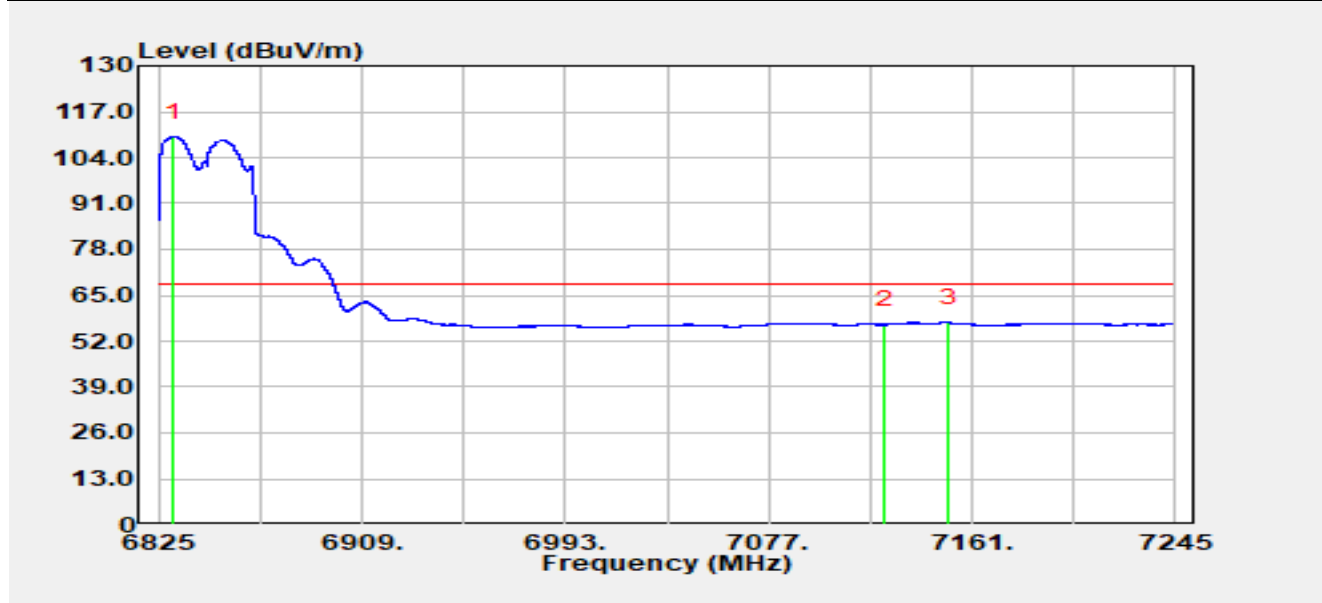


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6830.96	80.28	29.57	109.85	N/A	N/A	Average
2		7125.00	27.31	29.34	56.65	-11.55	68.20	Average
3	*	7151.47	27.64	29.76	57.39	-10.81	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6845 MHz		

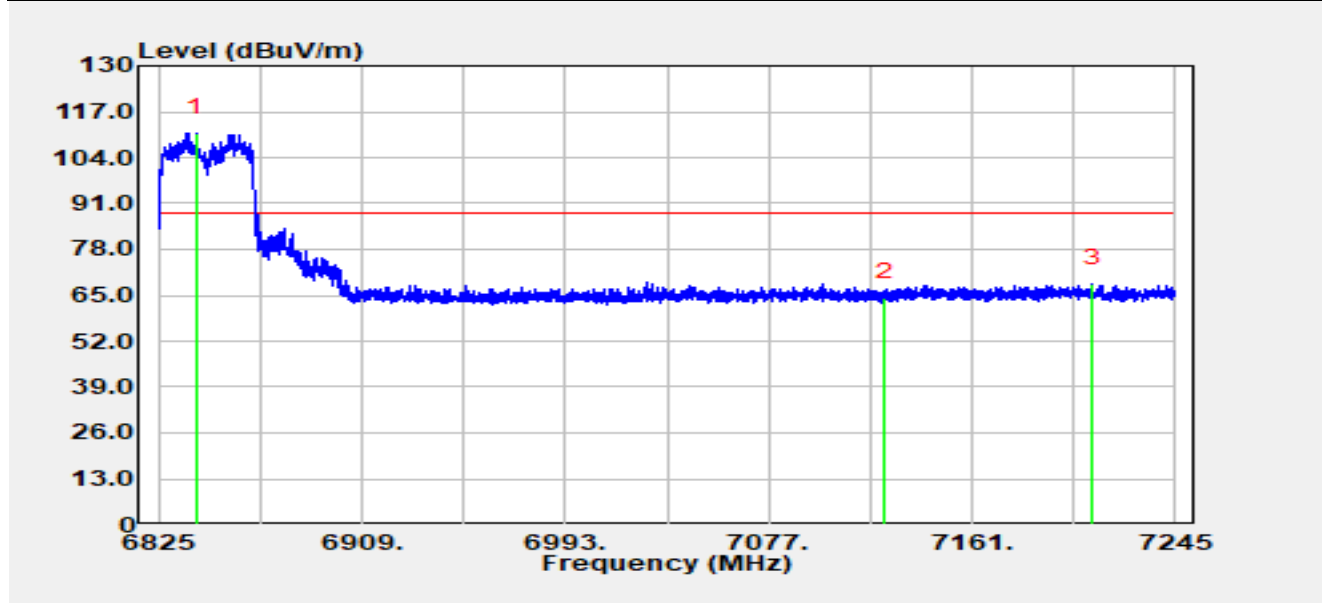


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6840.54	81.63	29.38	111.01	N/A	N/A	Peak
2		7125.00	35.12	29.34	64.47	-23.73	88.20	Peak
3	*	7210.69	38.76	29.58	68.34	-19.86	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6845 MHz		

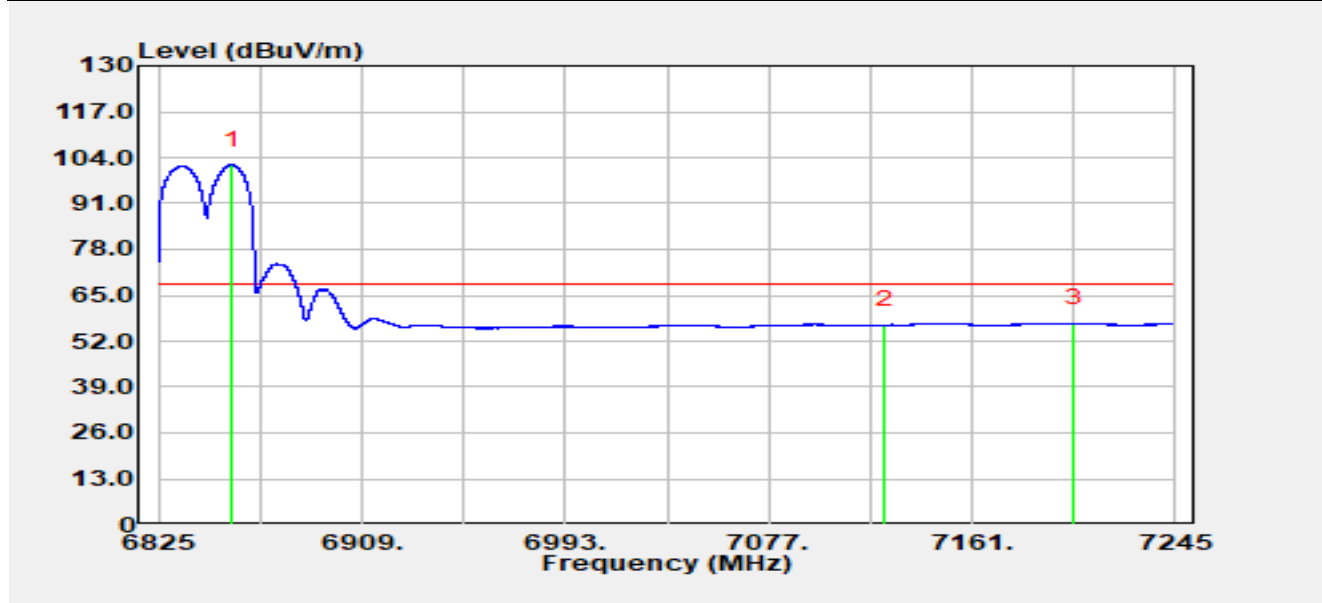


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6855.11	72.92	29.07	101.99	N/A	N/A	Average
2		7125.00	27.26	29.34	56.60	-11.60	68.20	Average
3	*	7203.21	27.28	29.81	57.09	-11.11	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

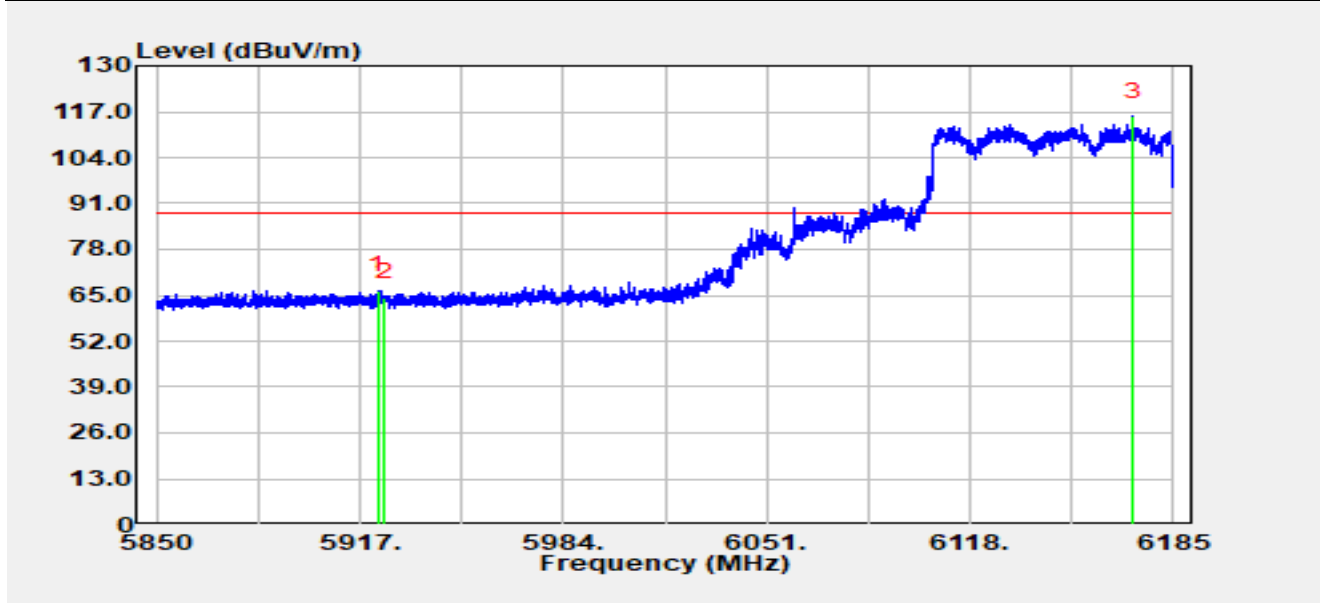


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.10	38.47	27.86	66.32	-21.88	88.20	Peak
2		5925.00	36.50	27.88	64.38	-23.82	88.20	Peak
3		6171.53	87.44	28.11	115.55	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

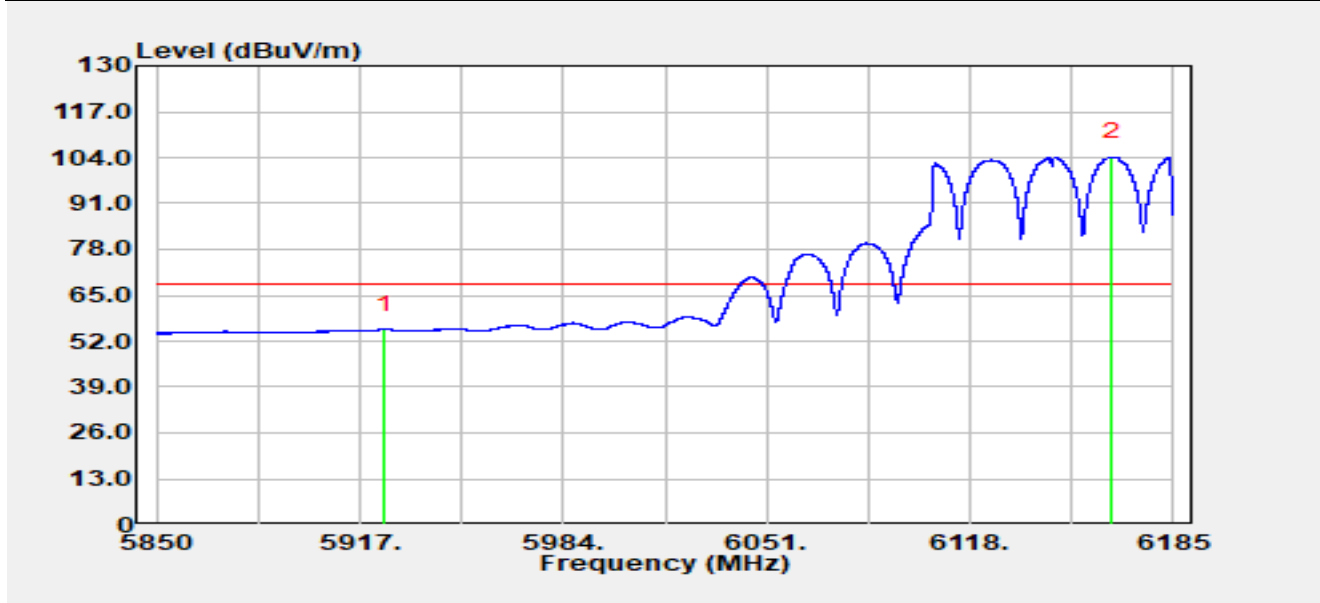


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.51	27.88	55.40	-12.80	68.20	Average
2		6164.90	76.08	28.09	104.17	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

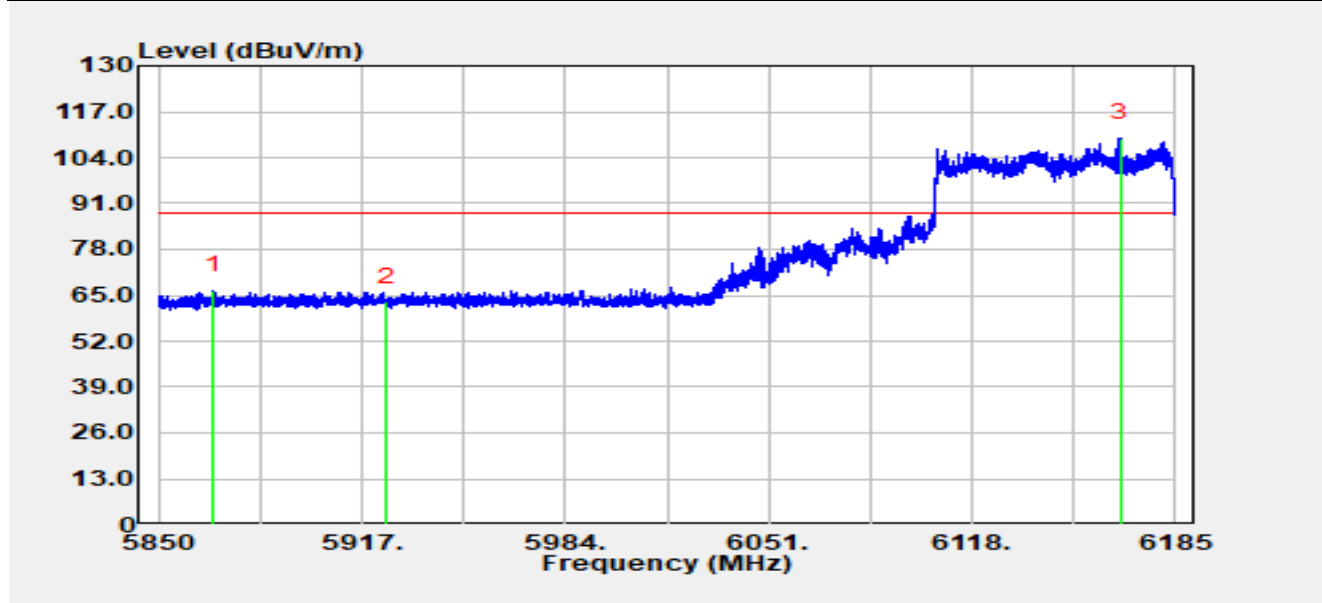


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.26	38.85	27.59	66.44	-21.76	88.20	Peak
2		5925.00	35.22	27.88	63.10	-25.10	88.20	Peak
3		6166.71	81.48	28.09	109.56	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

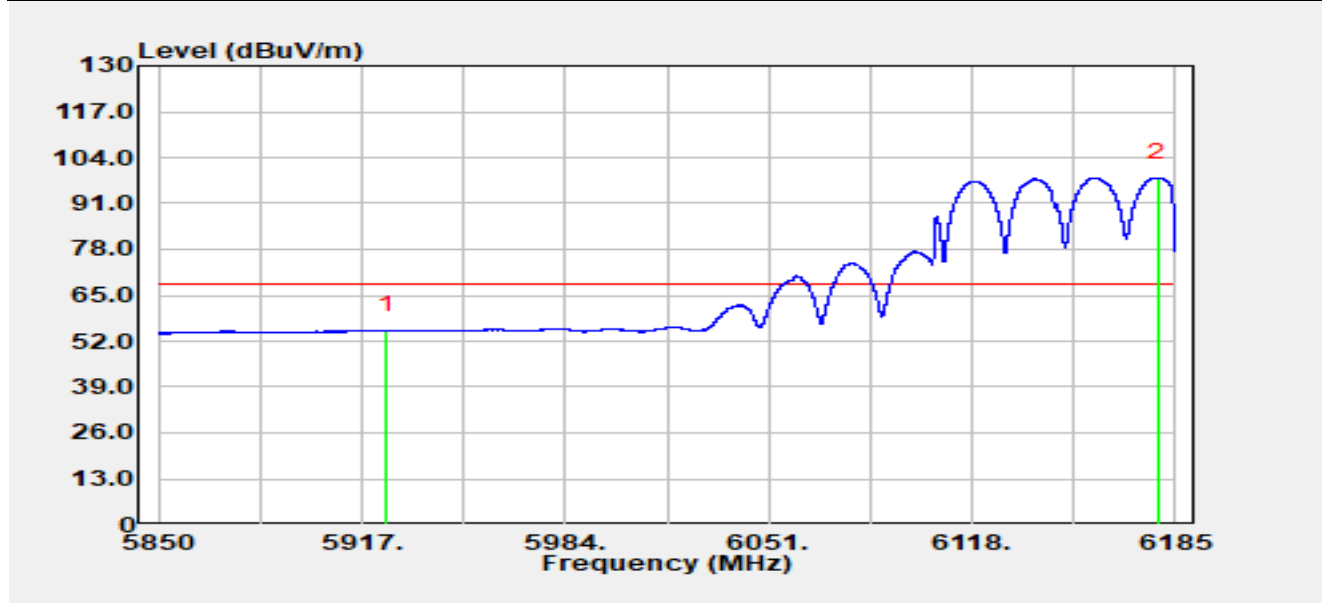


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.07	27.88	54.96	-13.24	68.20	Average
2		6179.04	70.12	28.19	98.30	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 6785 MHz		

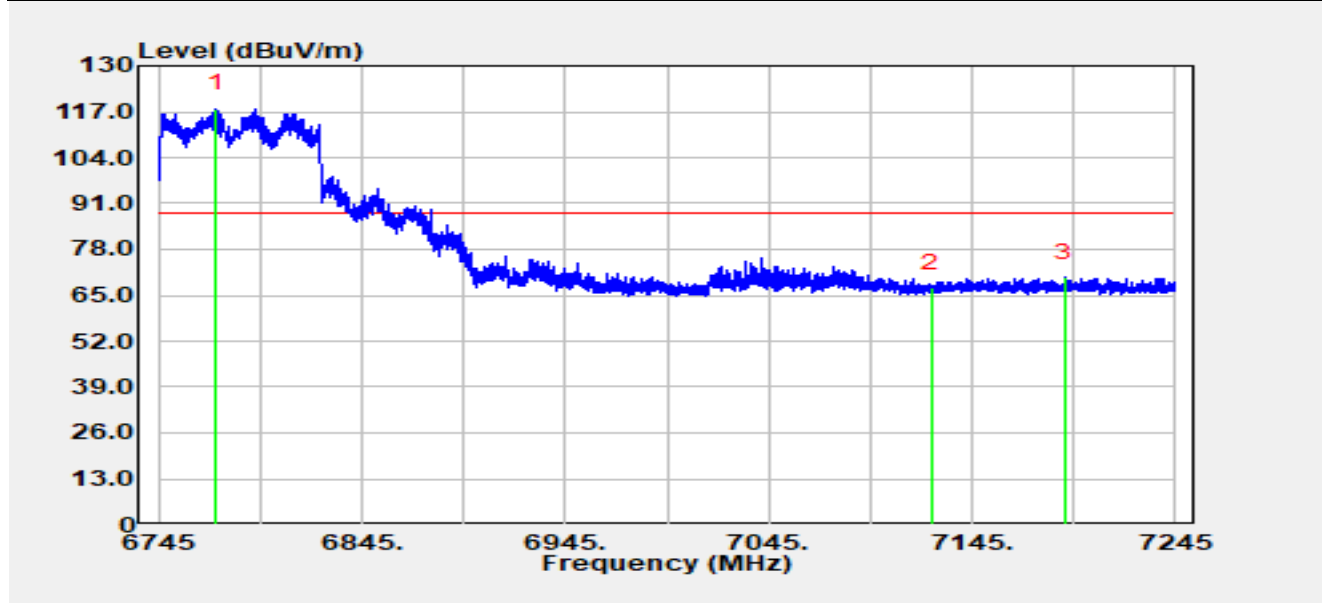


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6773.15	88.42	29.42	117.85	N/A	N/A	Peak
2		7125.00	37.80	29.34	67.15	-21.05	88.20	Peak
3	*	7190.50	40.33	29.64	69.96	-18.24	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 6785 MHz		

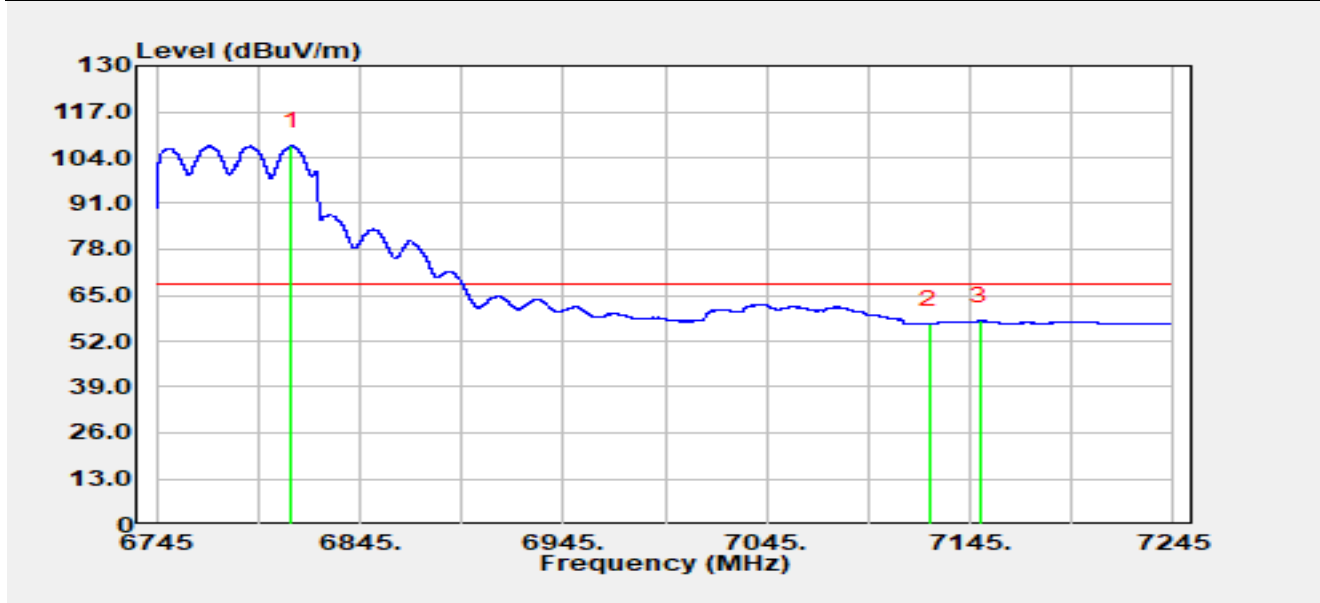


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6811.05	78.01	29.31	107.32	N/A	N/A	Average
2		7125.00	27.50	29.34	56.85	-11.35	68.20	Average
3	*	7150.15	27.93	29.79	57.73	-10.47	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 6785 MHz		

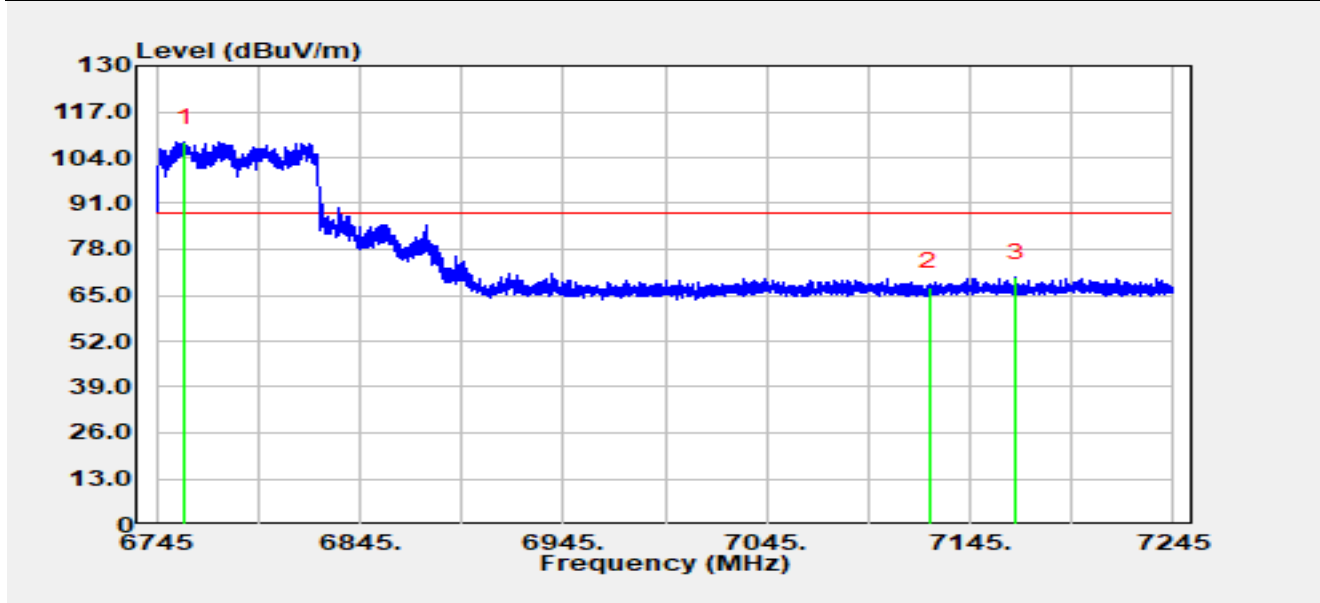


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6758.90	79.13	29.28	108.41	N/A	N/A	Peak
2		7125.00	37.89	29.34	67.23	-20.97	88.20	Peak
3	*	7167.25	40.61	29.33	69.93	-18.27	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 6785 MHz		

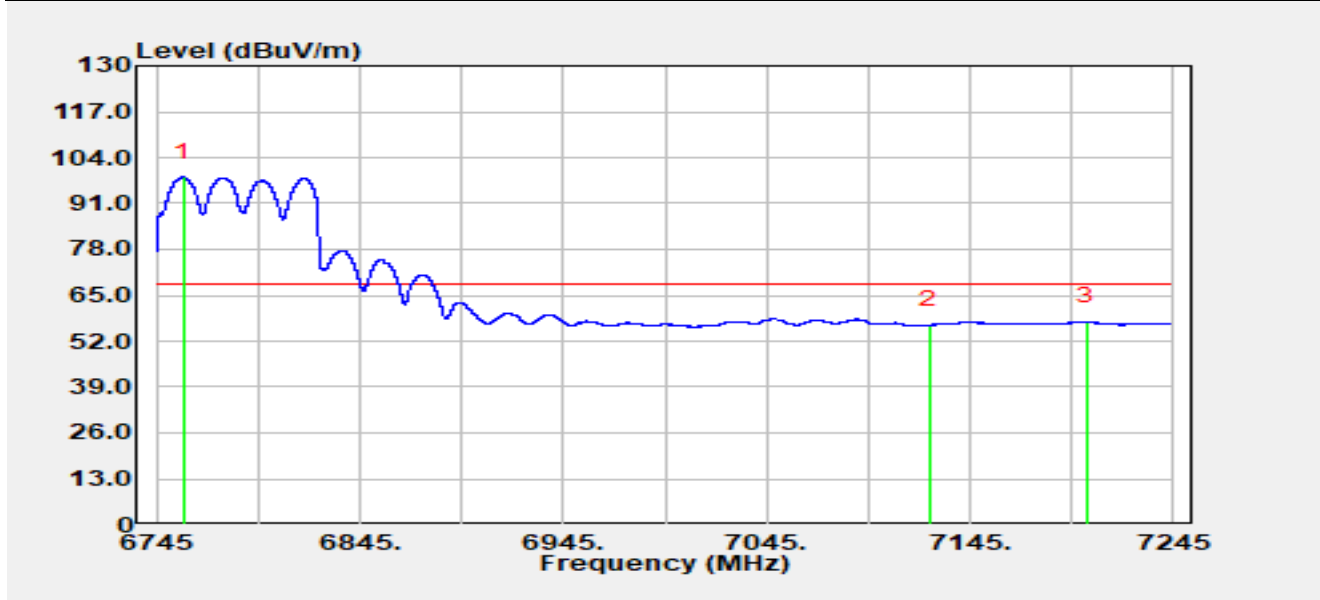


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6758.35	69.19	29.26	98.44	N/A	N/A	Average
2		7125.00	27.27	29.34	56.62	-11.58	68.20	Average
3	*	7202.45	27.58	29.83	57.41	-10.79	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

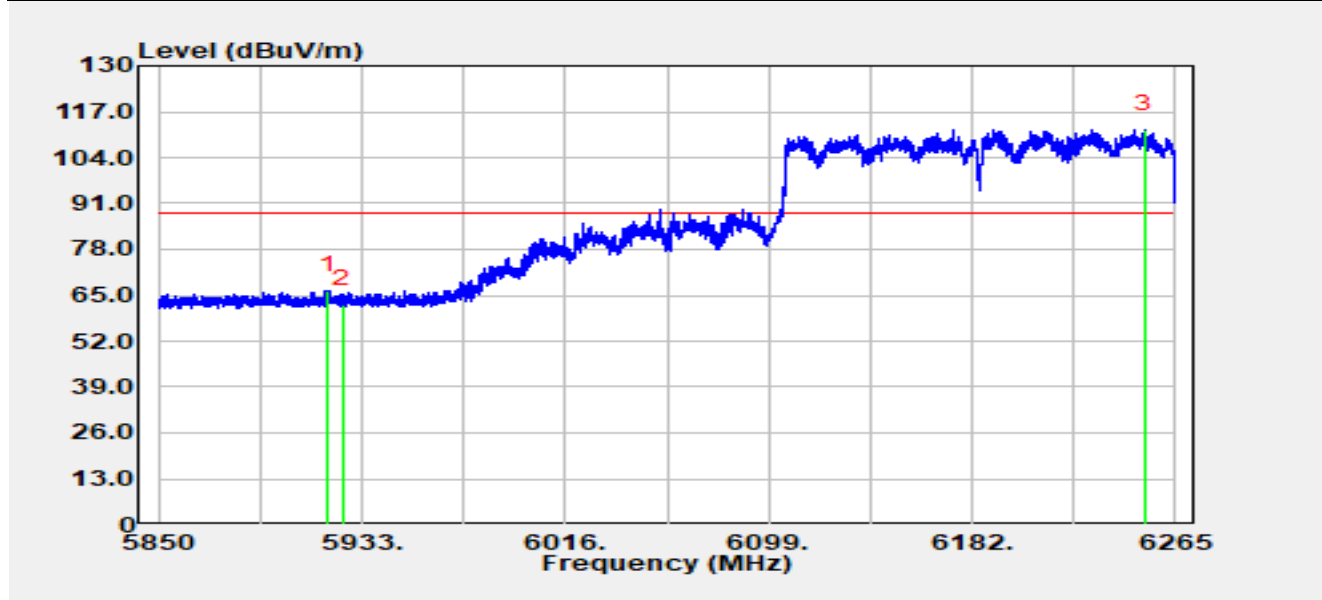


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.43	38.59	27.81	66.40	-21.80	88.20	Peak
2		5925.00	34.60	27.88	62.48	-25.72	88.20	Peak
3		6252.43	83.81	28.23	112.04	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

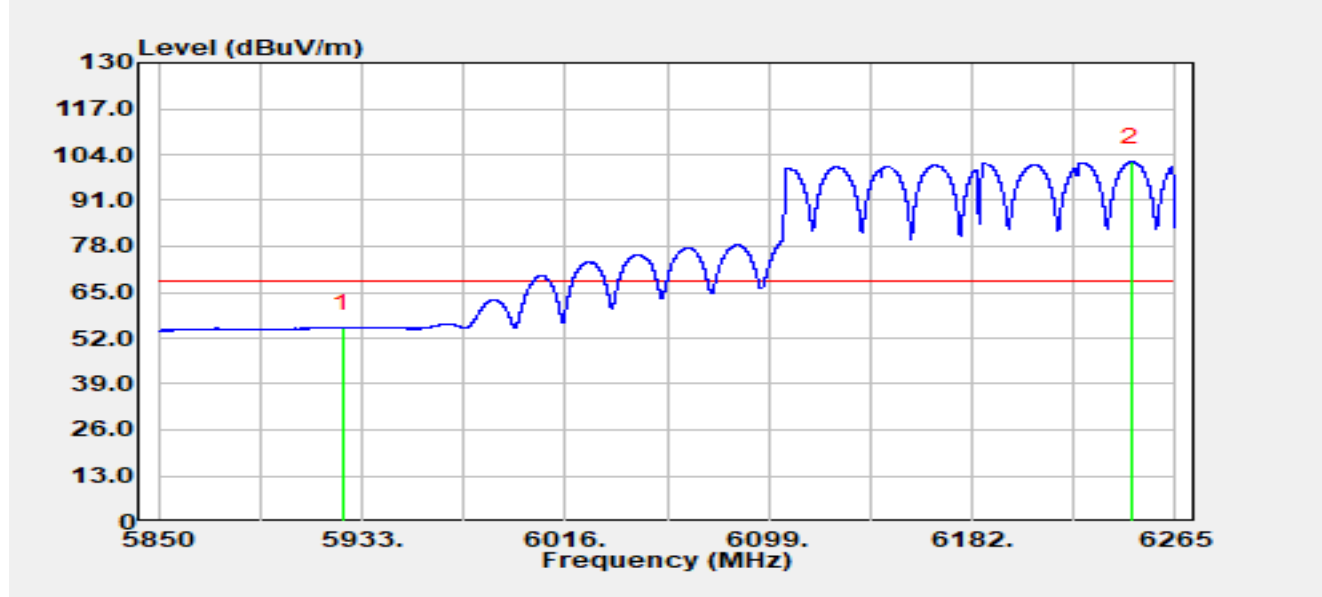


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.03	27.88	54.91	-13.29	68.20	Average
2		6246.91	73.60	28.35	101.94	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

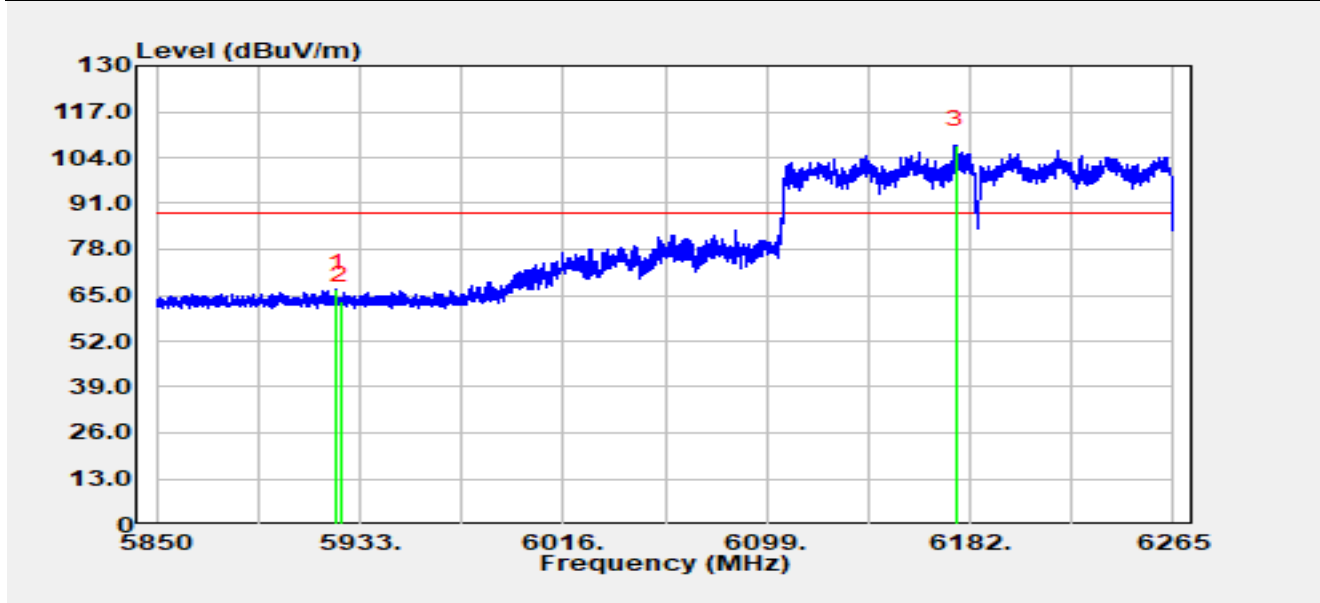


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.33	38.91	27.86	66.77	-21.43	88.20	Peak
2		5925.00	35.62	27.88	63.50	-24.70	88.20	Peak
3		6176.02	79.29	28.15	107.45	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

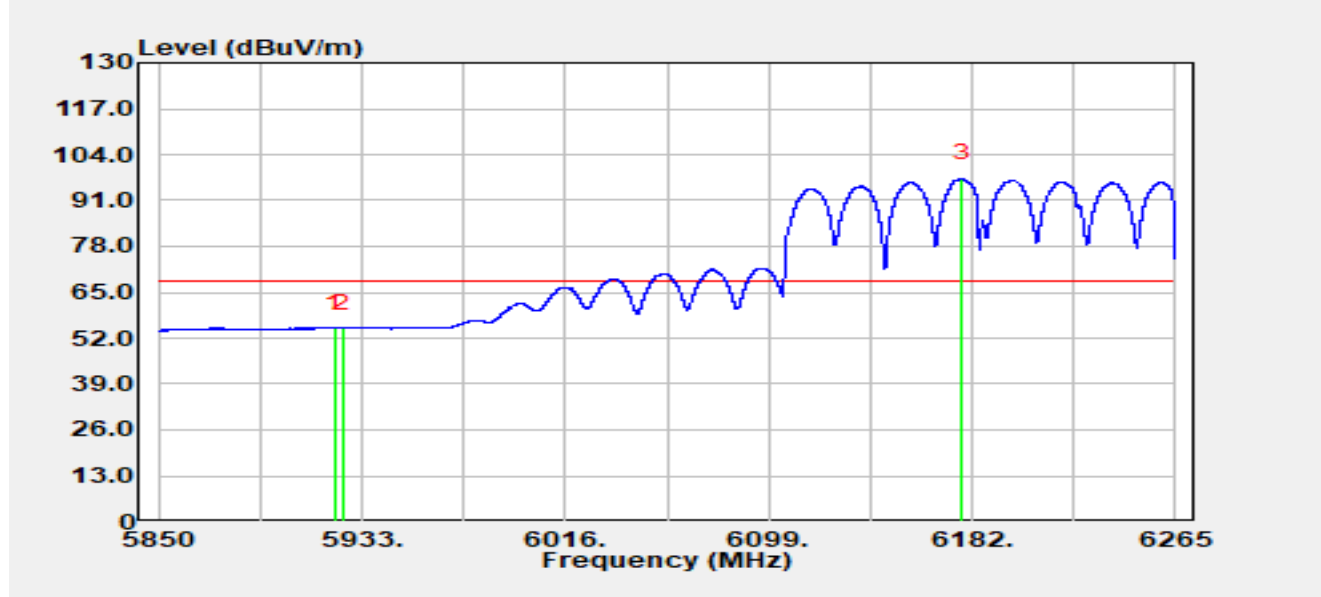


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.96	27.09	27.84	54.93	-13.27	68.20	Average
2		5925.00	27.01	27.88	54.89	-13.31	68.20	Average
3		6177.73	68.98	28.17	97.15	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6665 MHz		

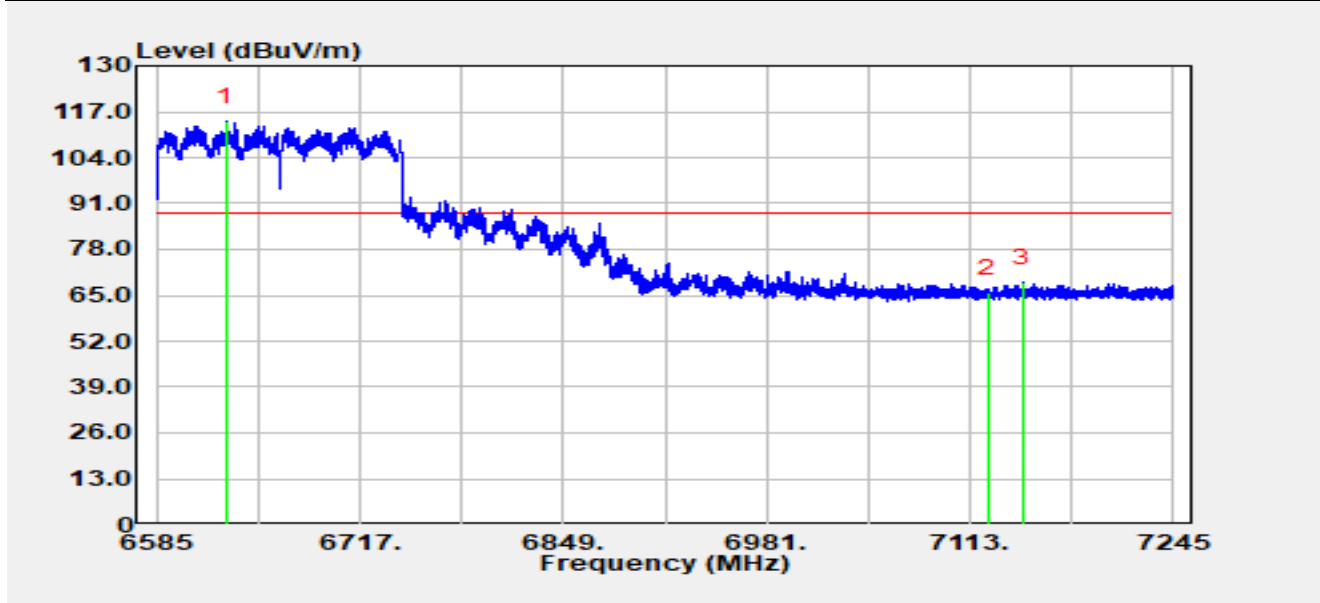


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6629.88	85.11	28.99	114.10	N/A	N/A	Peak
2		7125.00	36.39	29.34	65.73	-22.47	88.20	Peak
3	*	7146.86	38.82	29.74	68.56	-19.64	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6665 MHz		

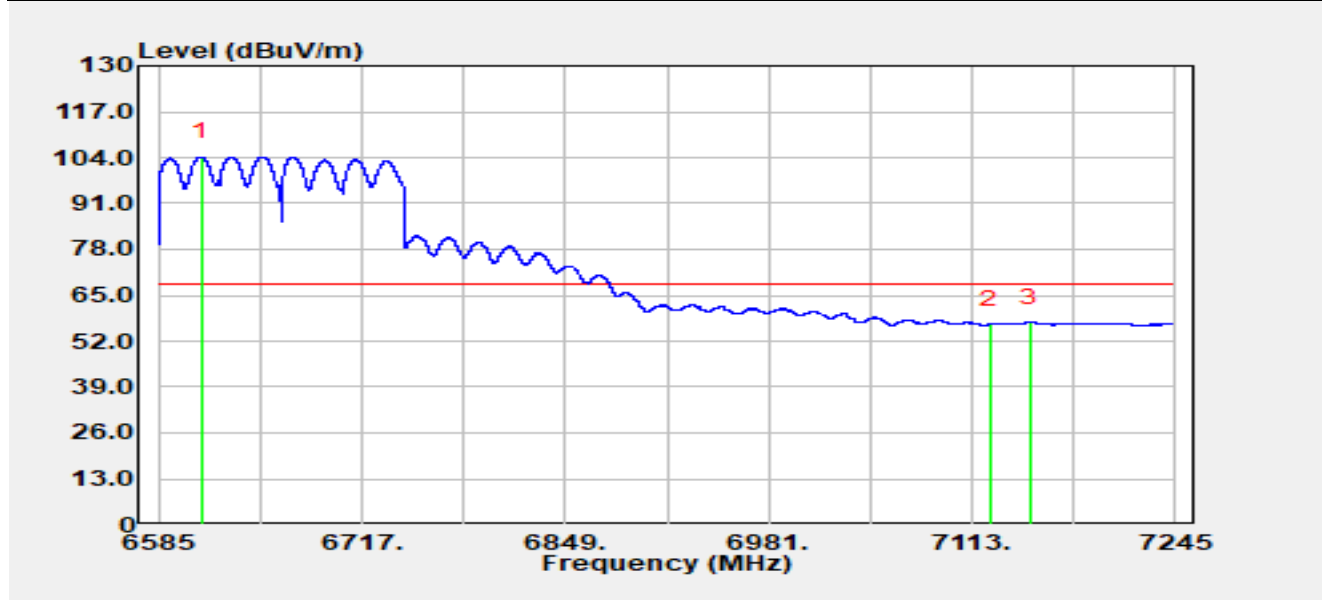


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6612.52	74.97	29.27	104.24	N/A	N/A	Average
2		7125.00	27.40	29.34	56.75	-11.45	68.20	Average
3	*	7150.42	27.54	29.78	57.32	-10.88	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6665 MHz		

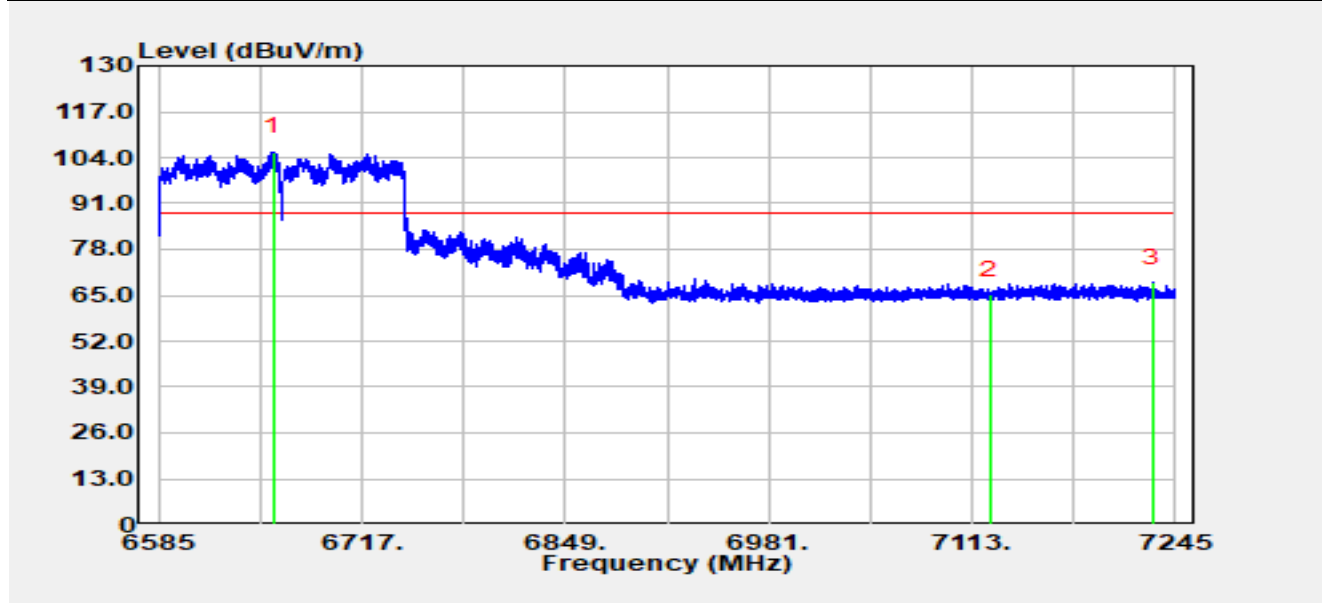


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6659.12	76.28	29.31	105.59	N/A	N/A	Peak
2		7125.00	35.73	29.34	65.07	-23.13	88.20	Peak
3	*	7229.89	39.21	29.39	68.60	-19.60	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6665 MHz		

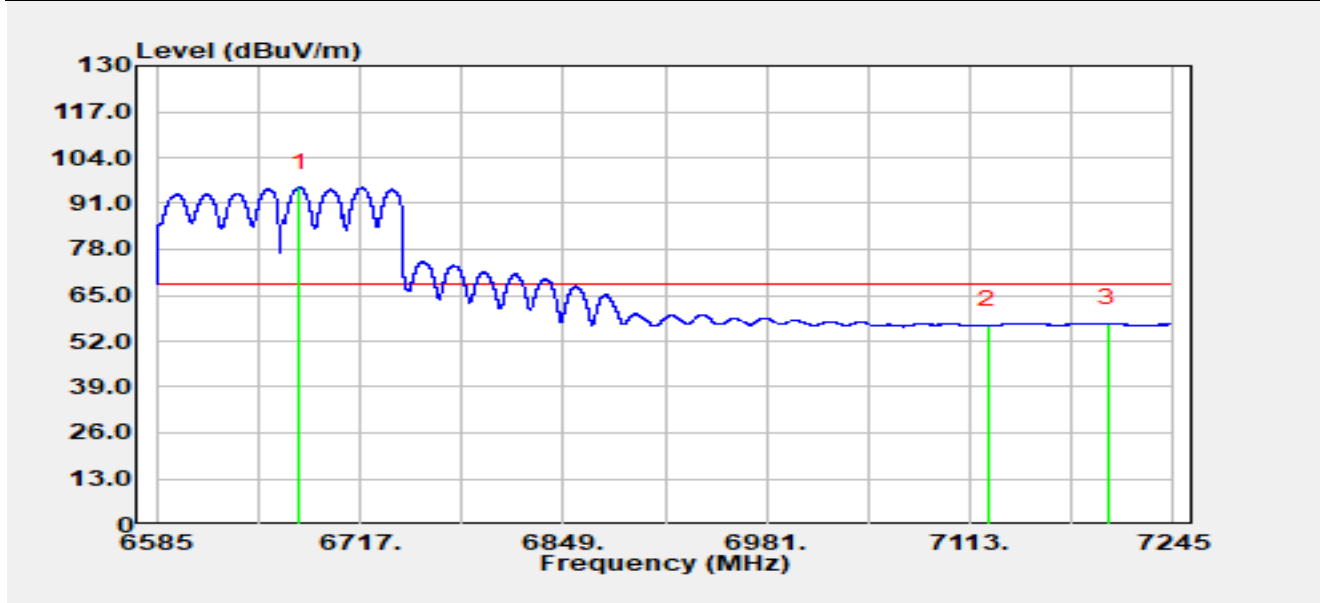


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6677.40	66.50	29.09	95.59	N/A	N/A	Average
2		7125.00	27.25	29.34	56.59	-11.61	68.20	Average
3	*	7202.43	27.30	29.83	57.13	-11.07	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

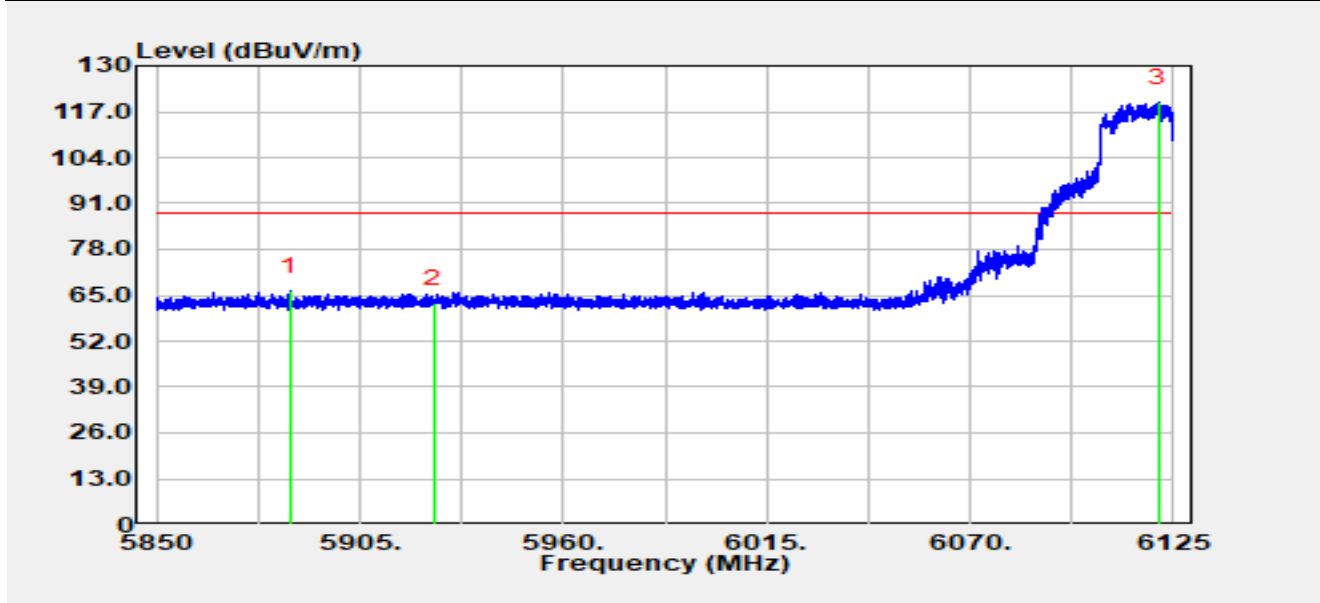


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5886.22	38.47	27.53	66.00	-22.20	88.20	Peak
2		5925.00	34.71	27.88	62.59	-25.61	88.20	Peak
3		6120.90	91.27	28.20	119.47	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

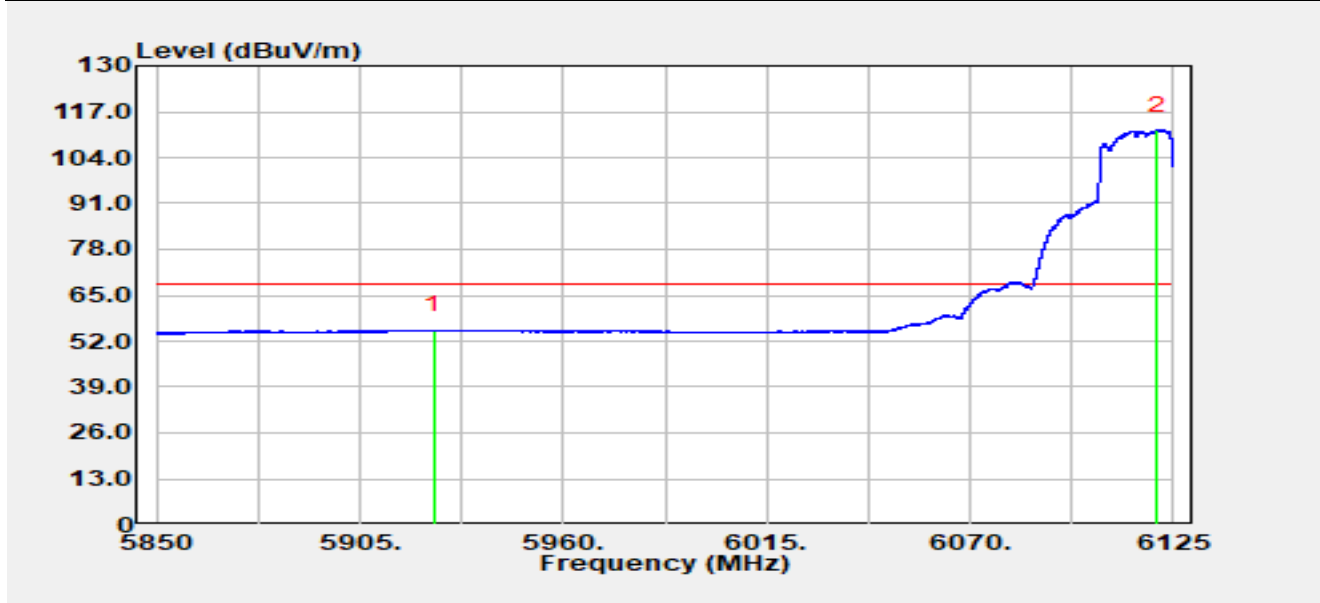


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.15	27.88	55.04	-13.16	68.20	Average
2		6120.77	83.57	28.20	111.76	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

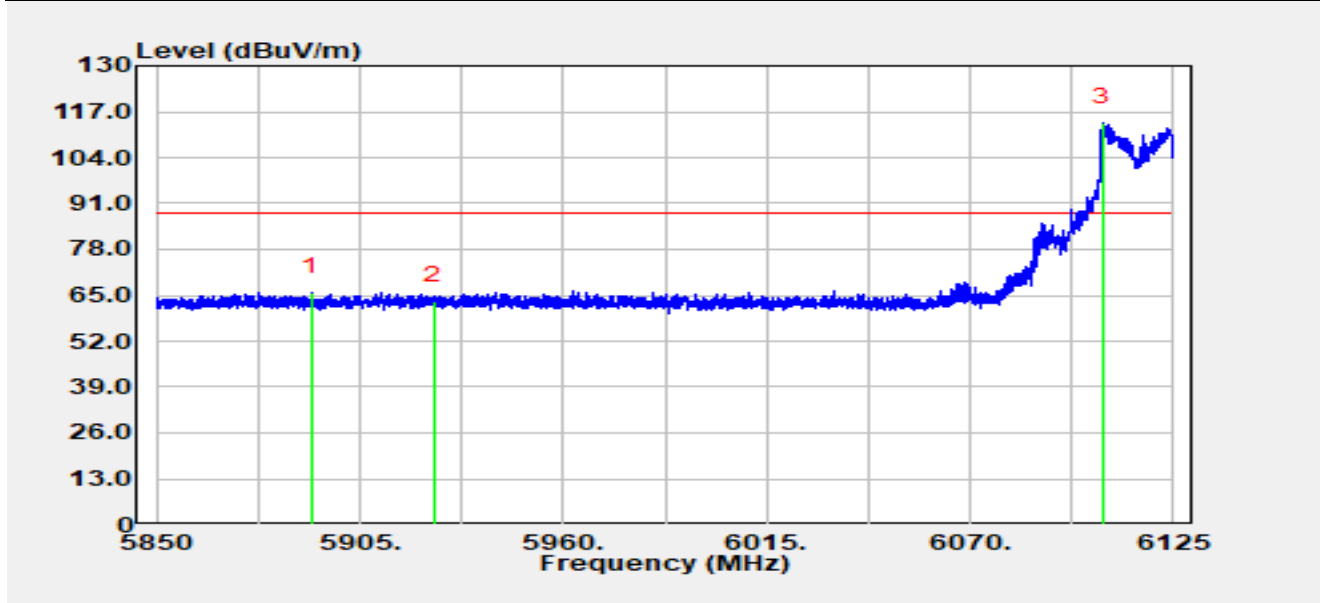


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5892.02	38.34	27.50	65.85	-22.35	88.20	Peak
2		5925.00	35.60	27.88	63.49	-24.71	88.20	Peak
3		6105.92	85.81	28.00	113.82	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

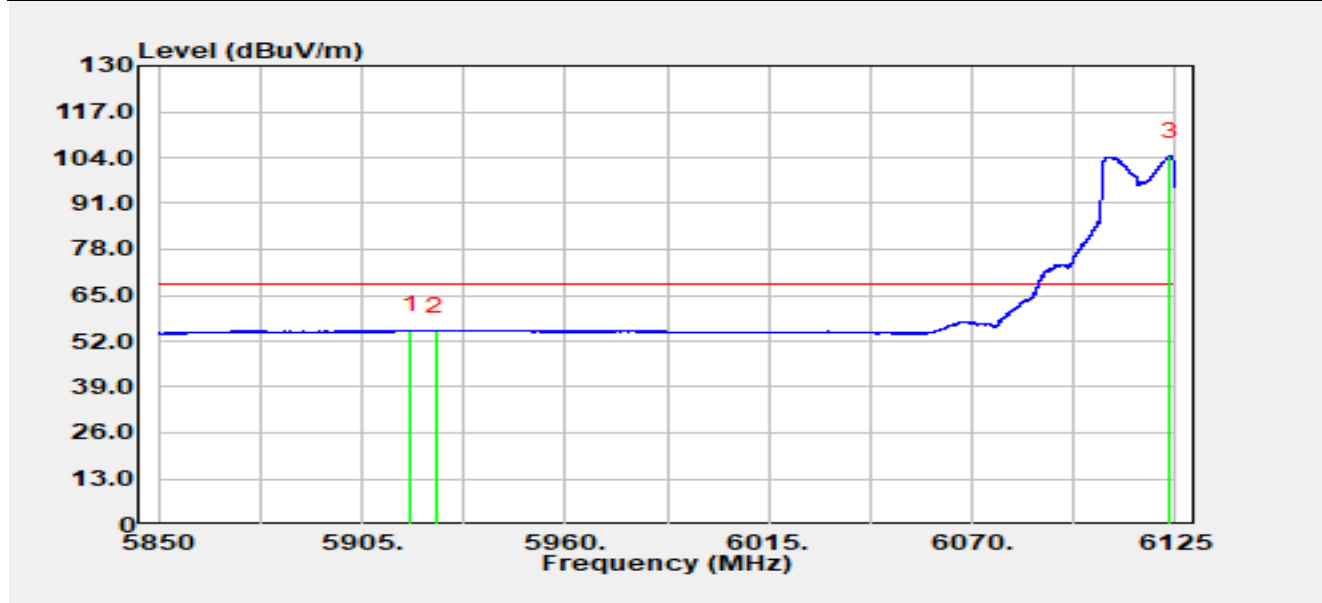


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.28	27.29	27.79	55.08	-13.12	68.20	Average
2		5925.00	27.01	27.88	54.89	-13.31	68.20	Average
3		6123.60	76.03	28.24	104.27	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 6855 MHz		

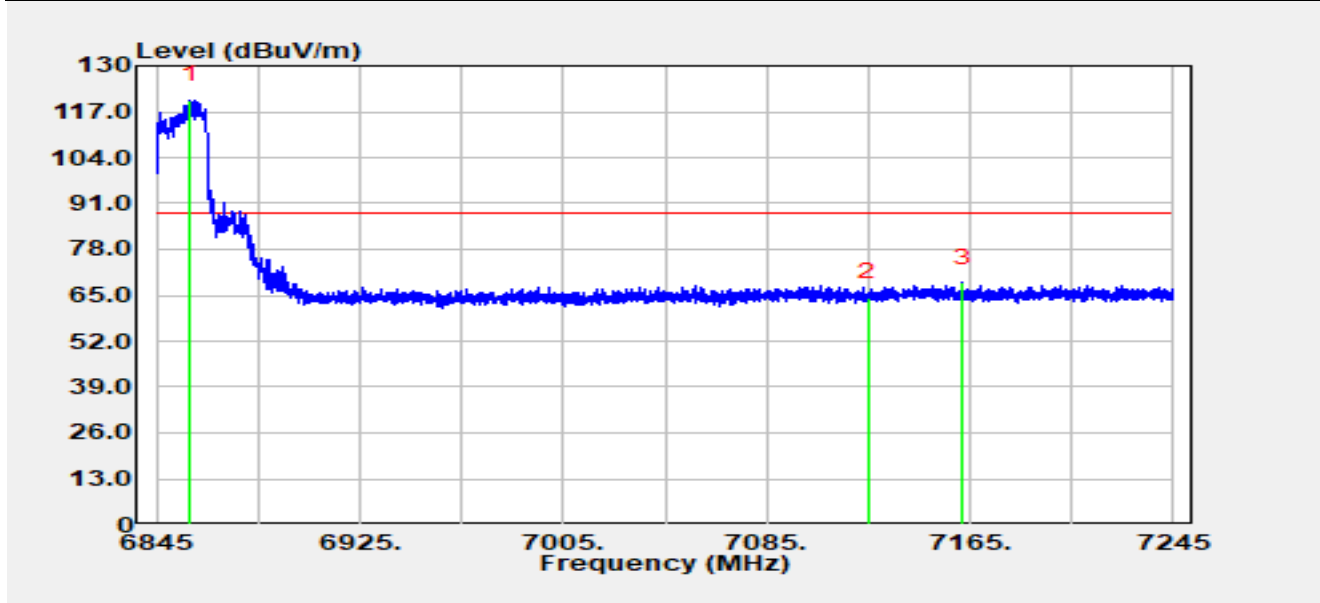


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6858.08	91.19	29.17	120.35	N/A	N/A	Peak
2		7125.00	34.97	29.34	64.31	-23.89	88.20	Peak
3	*	7161.92	39.20	29.47	68.68	-19.52	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 6855 MHz		

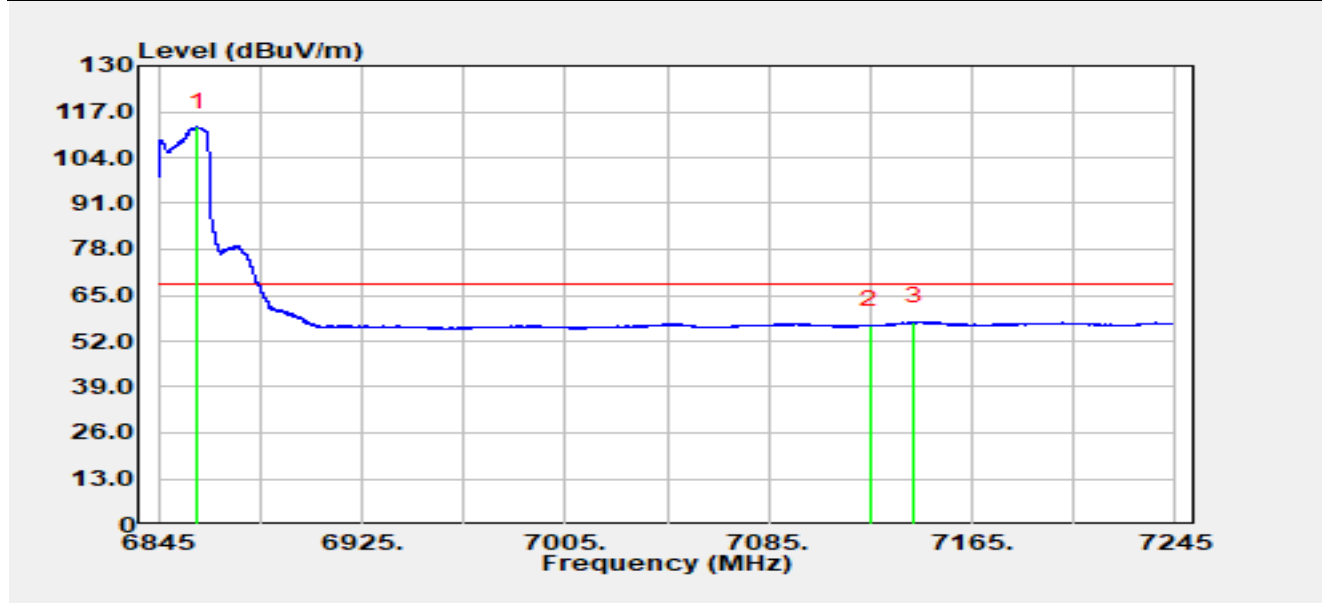


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6860.32	83.38	29.24	112.62	N/A	N/A	Average
2		7125.00	27.07	29.34	56.42	-11.78	68.20	Average
3	*	7142.24	27.80	29.66	57.47	-10.73	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 6855 MHz		

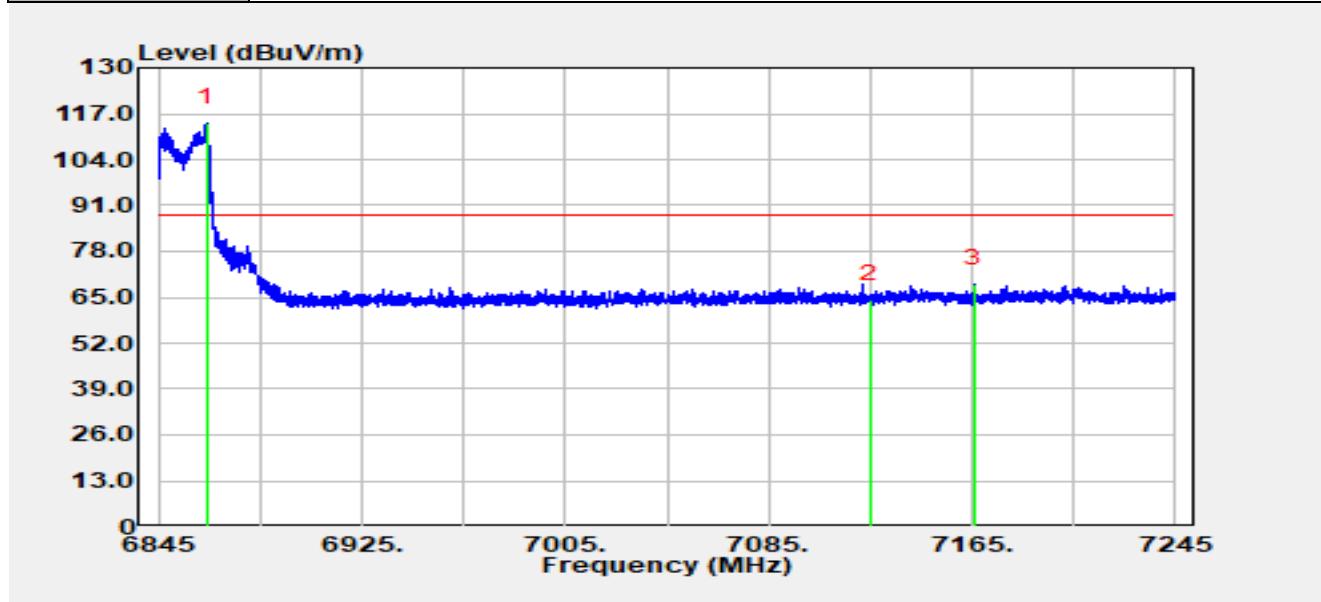


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6863.80	85.02	29.36	114.39	N/A	N/A	Peak
2		7125.00	35.07	29.34	64.41	-23.79	88.20	Peak
3	*	7165.64	39.43	29.37	68.80	-19.40	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 6855 MHz		

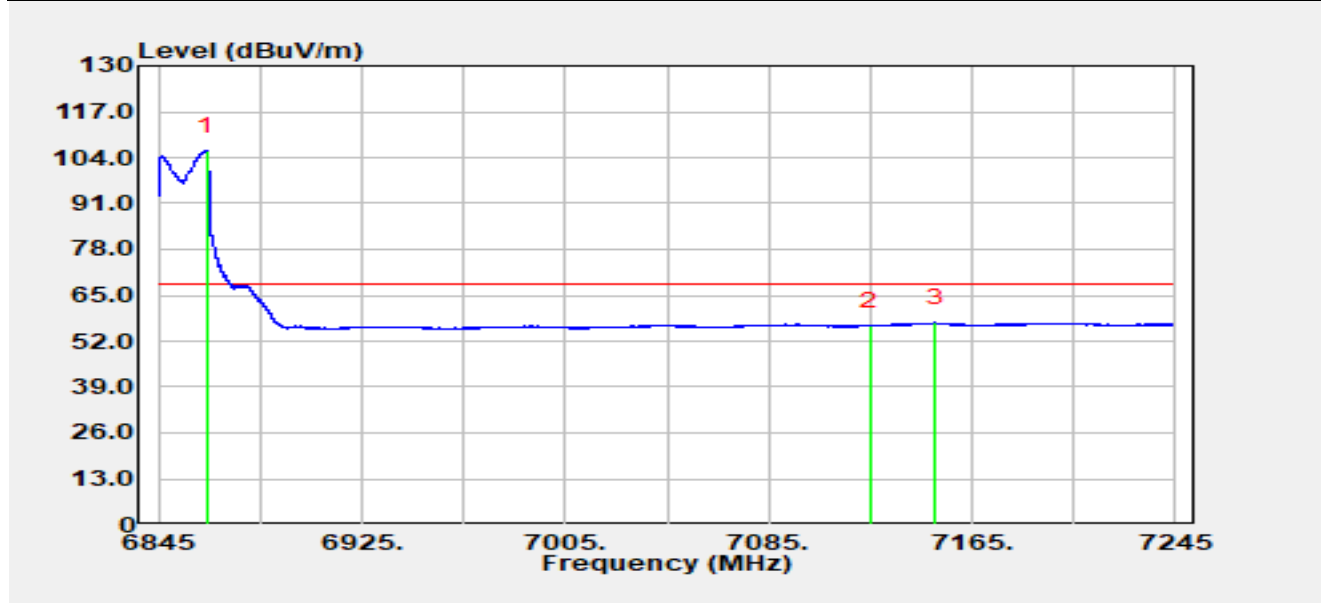


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6863.80	76.59	29.36	105.95	N/A	N/A	Average
2		7125.00	26.99	29.34	56.34	-11.86	68.20	Average
3	*	7150.64	27.49	29.78	57.27	-10.93	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

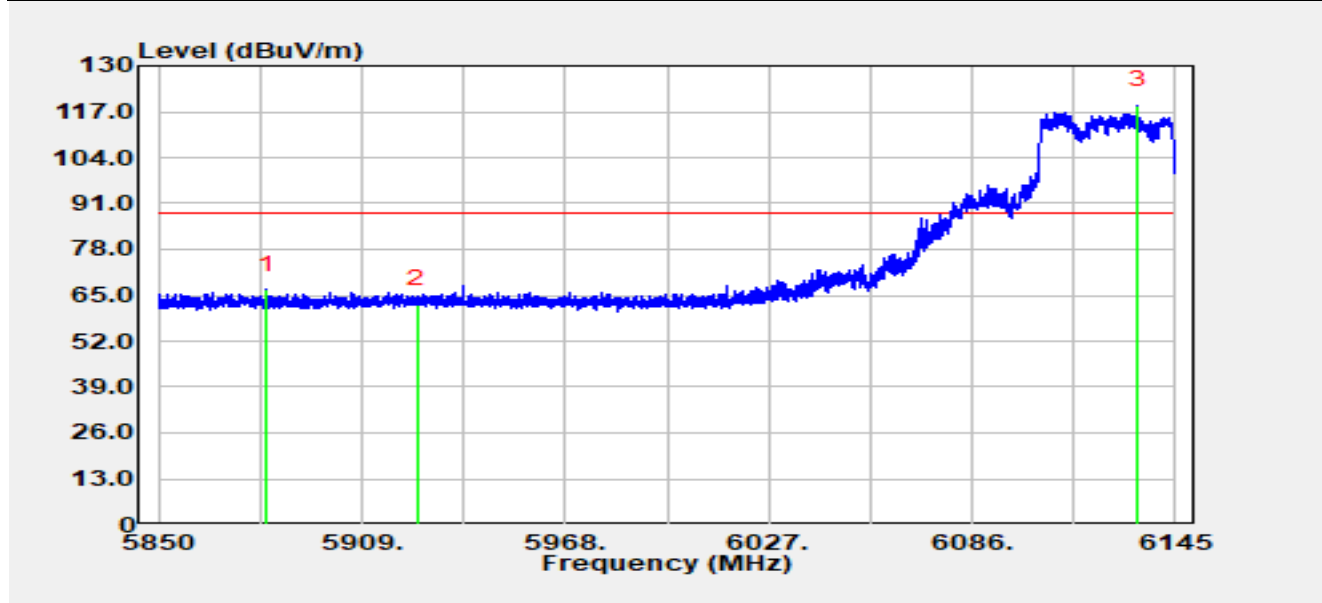


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5881.48	38.94	27.58	66.52	-21.68	88.20	Peak
2		5925.00	34.57	27.88	62.45	-25.75	88.20	Peak
3		6134.14	90.35	28.39	118.74	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

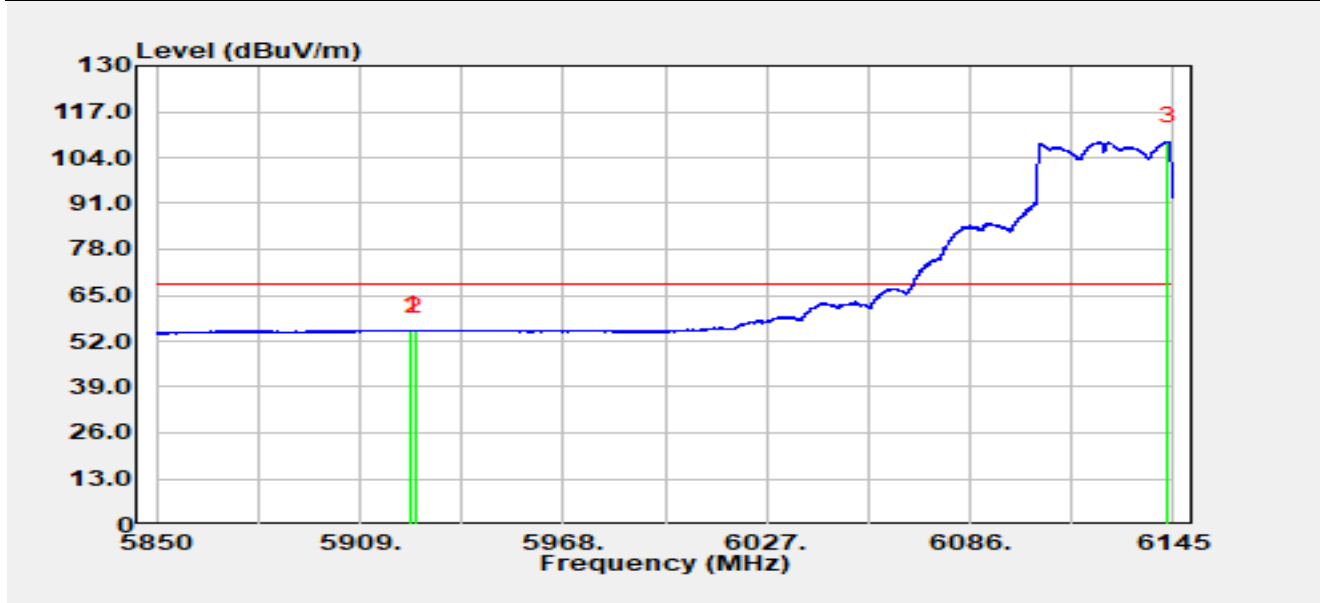


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.93	27.23	27.87	55.10	-13.10	68.20	Average
2		5925.00	27.02	27.88	54.91	-13.29	68.20	Average
3		6143.41	80.26	28.25	108.51	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

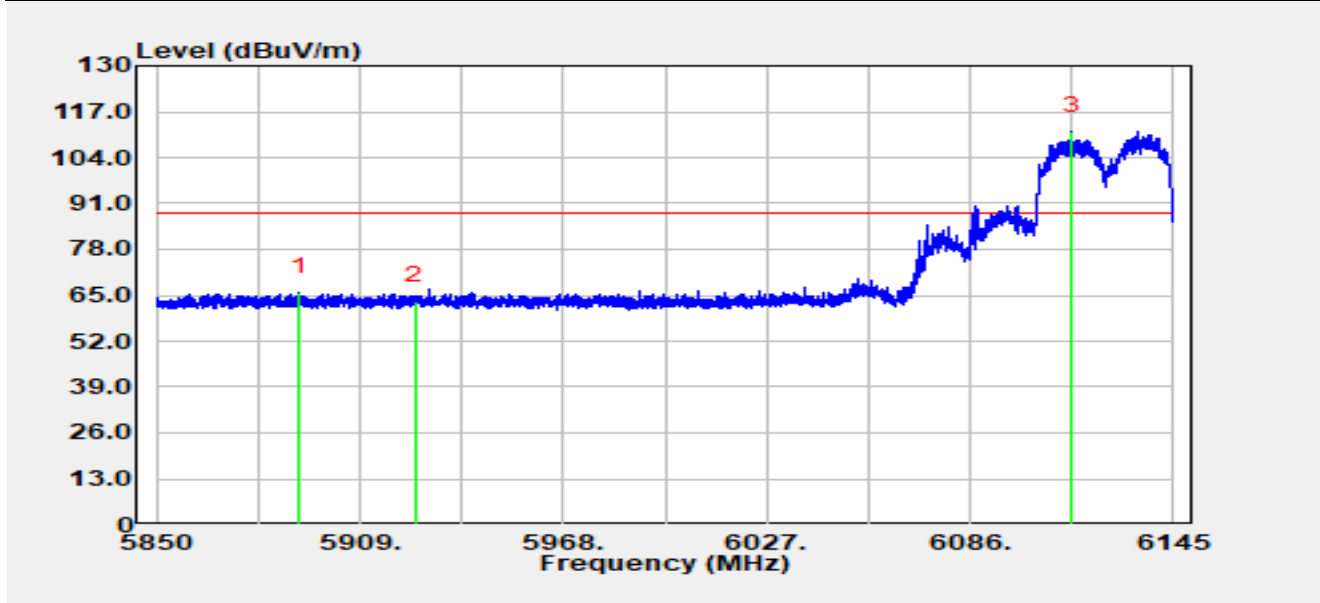


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5891.36	38.45	27.50	65.95	-22.25	88.20	Peak
2		5925.00	35.41	27.88	63.29	-24.91	88.20	Peak
3		6115.50	83.45	28.12	111.57	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

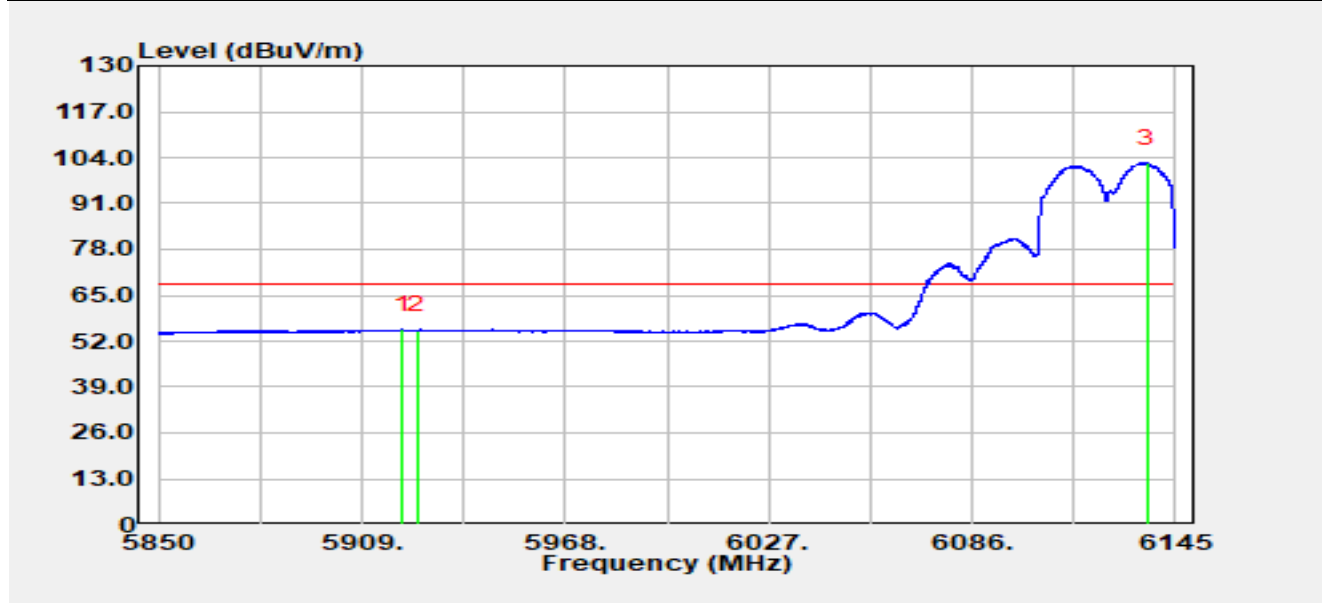


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.65	27.39	27.82	55.21	-12.99	68.20	Average
2		5925.00	27.12	27.88	55.00	-13.20	68.20	Average
3		6136.80	74.00	28.37	102.37	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 6845 MHz		

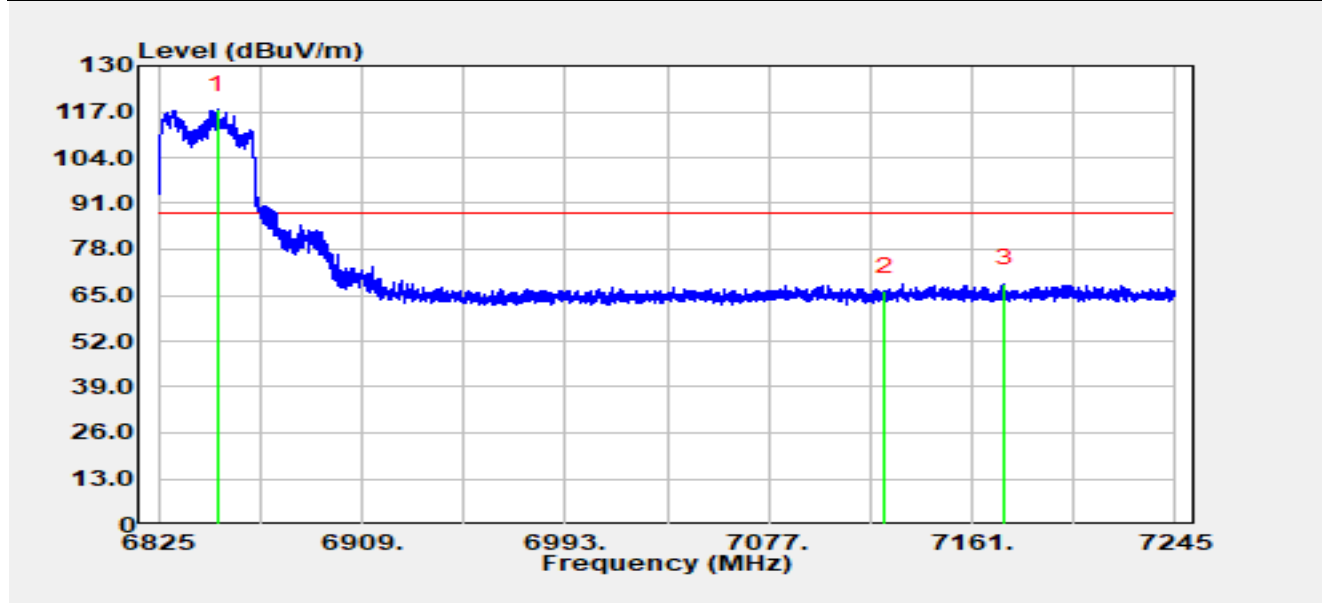


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6849.19	88.62	29.10	117.72	N/A	N/A	Peak
2		7125.00	36.82	29.34	66.17	-22.03	88.20	Peak
3	*	7174.31	38.94	29.41	68.34	-19.86	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 6845 MHz		

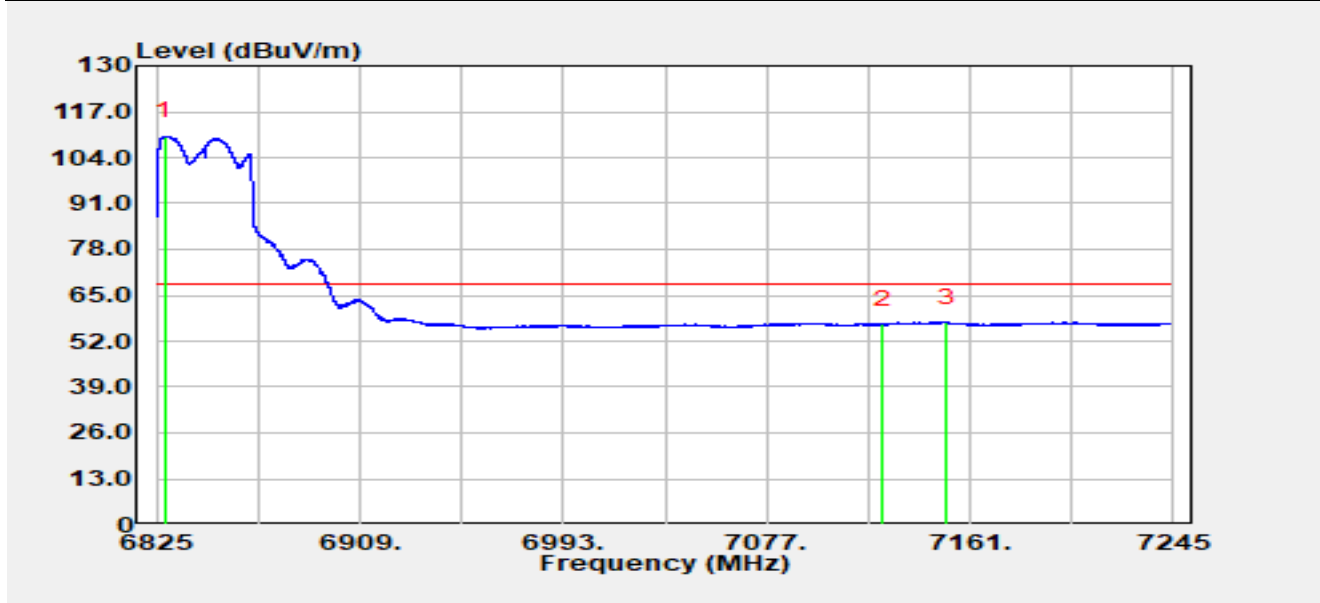


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6828.49	80.49	29.58	110.07	N/A	N/A	Average
2		7125.00	27.36	29.34	56.71	-11.49	68.20	Average
3	*	7151.21	27.62	29.76	57.38	-10.82	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 6845 MHz		

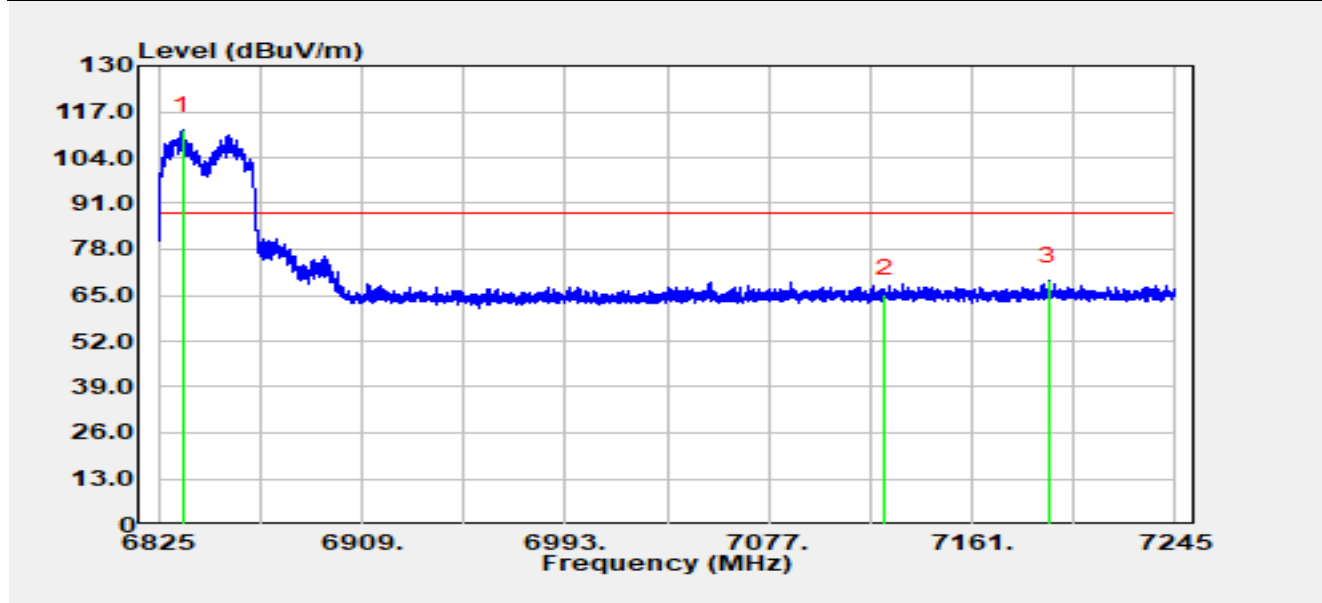


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6834.79	82.20	29.56	111.77	N/A	N/A	Peak
2		7125.00	36.03	29.34	65.37	-22.83	88.20	Peak
3	*	7192.67	39.27	29.67	68.94	-19.26	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 6845 MHz		

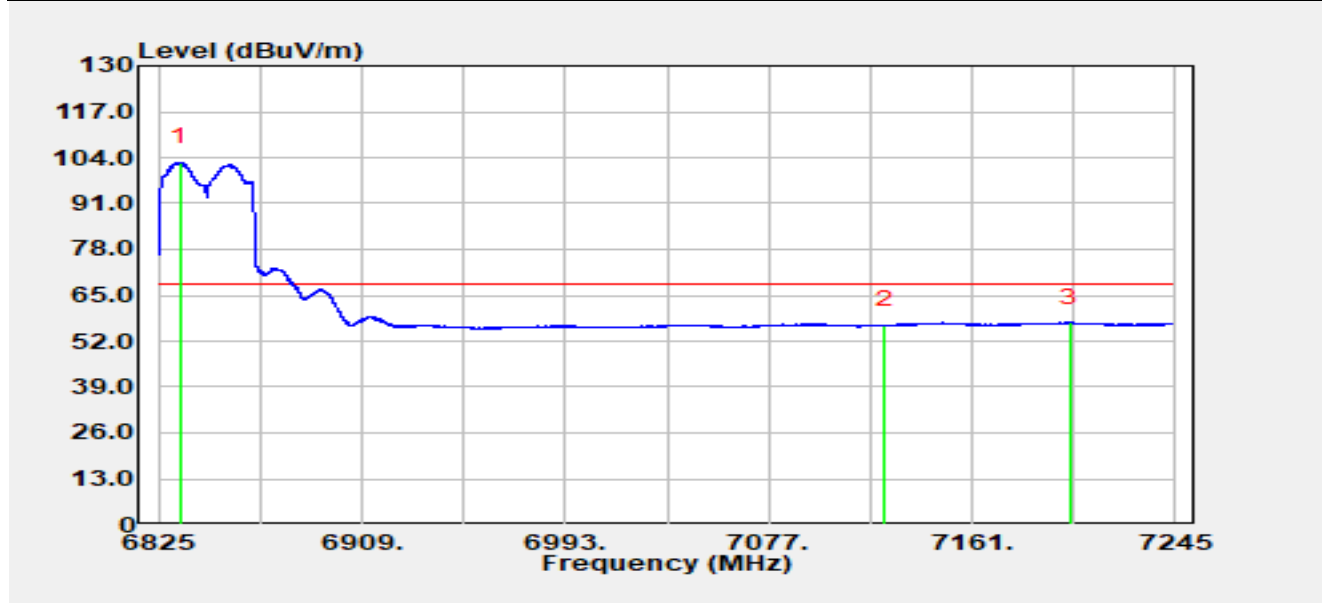


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6833.86	73.00	29.57	102.57	N/A	N/A	Average
2		7125.00	27.08	29.34	56.42	-11.78	68.20	Average
3	*	7201.15	27.42	29.81	57.23	-10.97	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

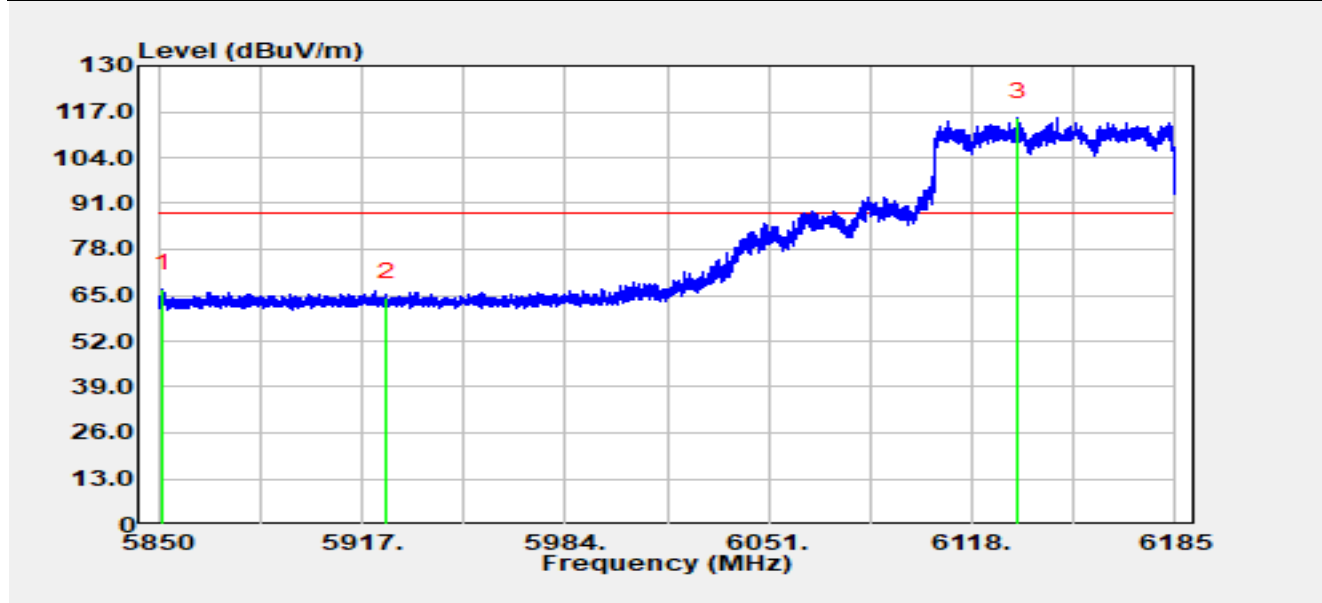


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5851.58	39.65	27.24	66.89	-21.31	88.20	Peak
2		5925.00	36.56	27.88	64.45	-23.75	88.20	Peak
3		6133.24	86.99	28.38	115.37	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

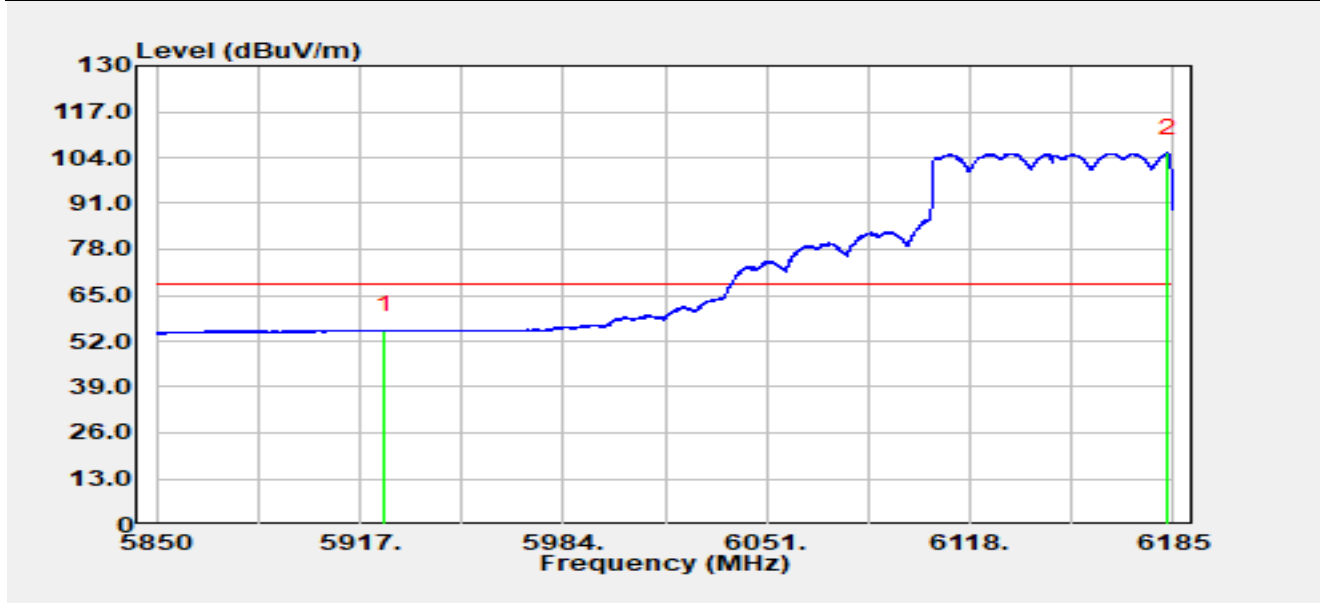


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.16	27.88	55.04	-13.16	68.20	Average
2		6183.26	77.17	28.23	105.40	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

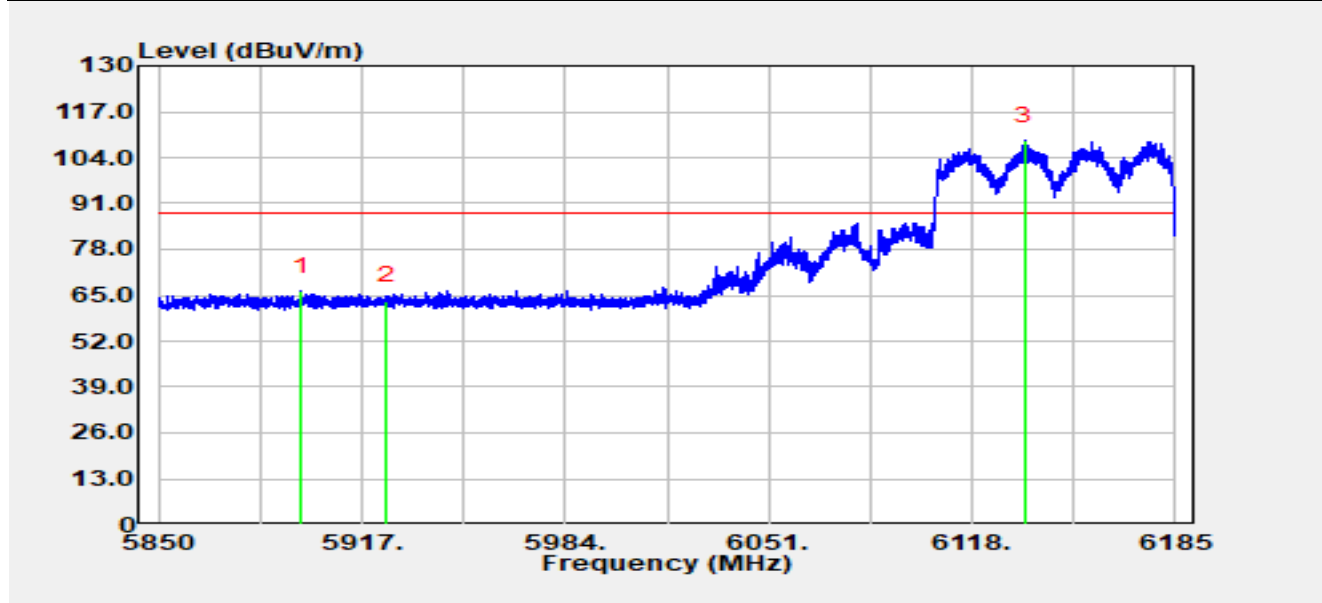


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5897.17	38.61	27.56	66.18	-22.02	88.20	Peak
2		5925.00	35.52	27.88	63.41	-24.79	88.20	Peak
3		6135.19	80.45	28.40	108.84	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

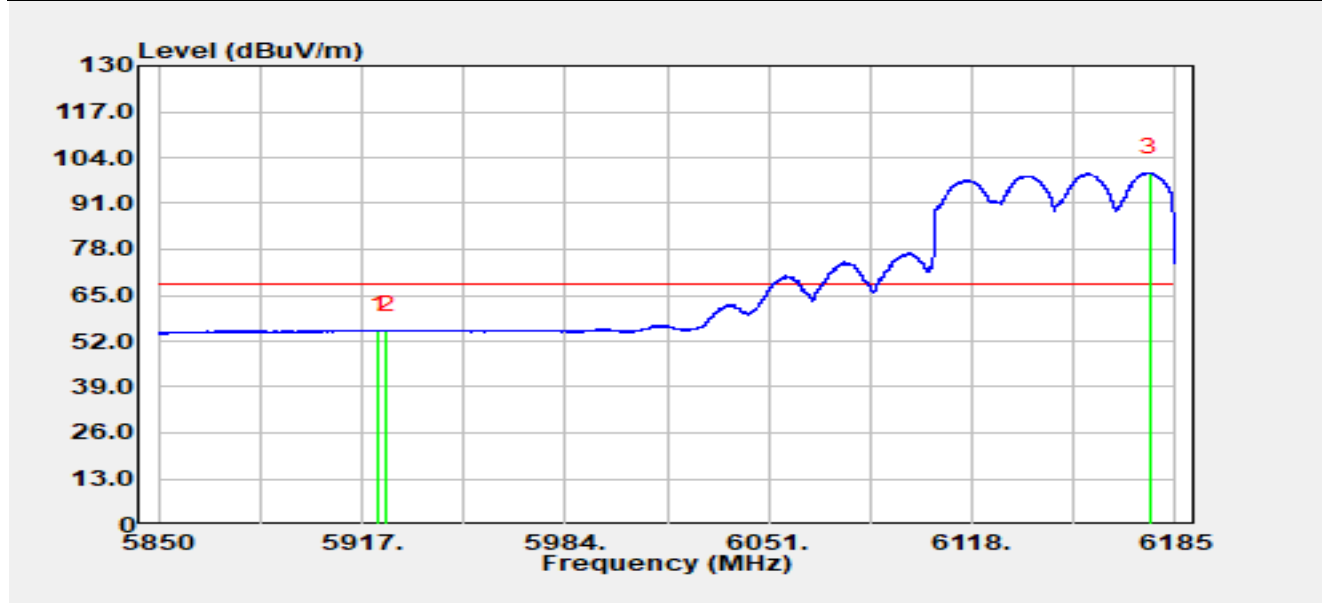


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.53	27.27	27.85	55.12	-13.08	68.20	Average
2		5925.00	27.07	27.88	54.96	-13.24	68.20	Average
3		6176.66	71.56	28.16	99.72	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 6785 MHz		

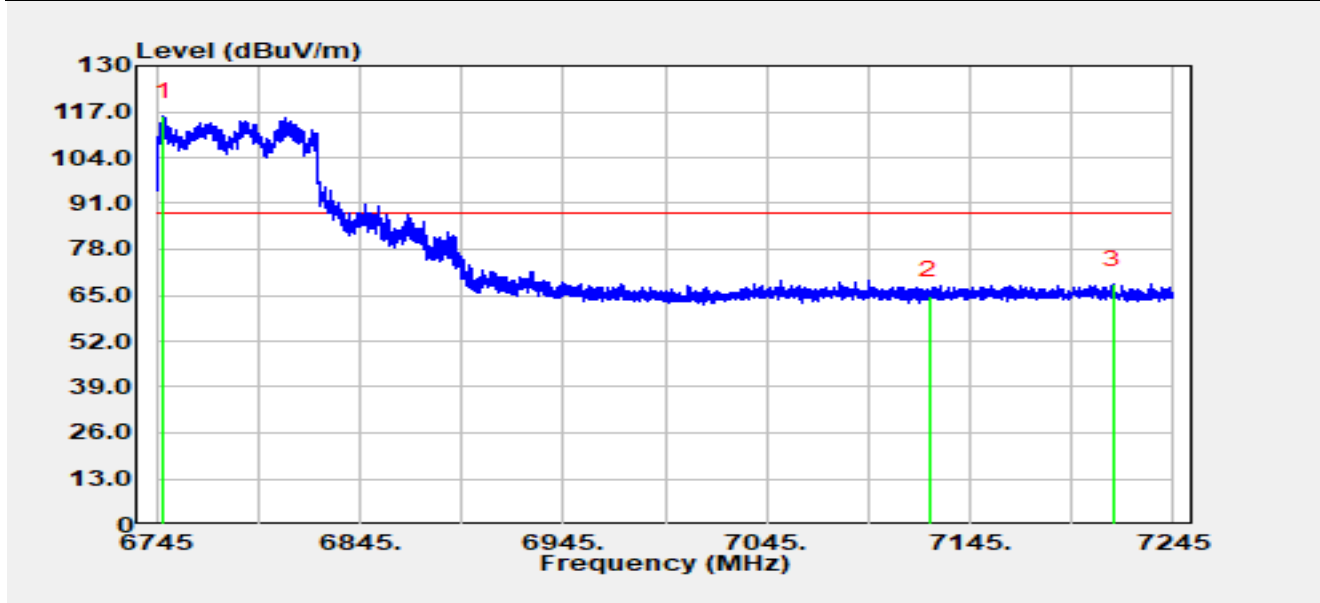


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6748.40	86.84	28.93	115.77	N/A	N/A	Peak
2		7125.00	35.52	29.34	64.86	-23.34	88.20	Peak
3	*	7215.20	38.70	29.44	68.14	-20.06	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 6785 MHz		

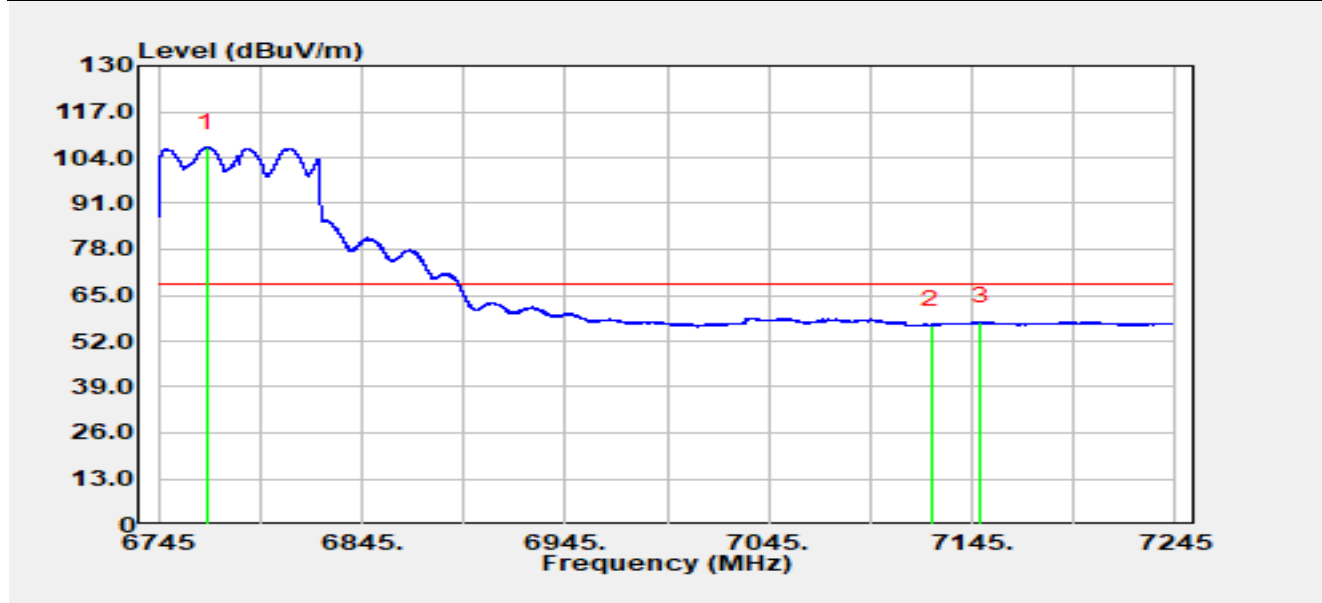


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6768.70	77.45	29.46	106.91	N/A	N/A	Average
2		7125.00	27.28	29.34	56.62	-11.58	68.20	Average
3	*	7149.55	27.68	29.79	57.46	-10.74	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 6785 MHz		

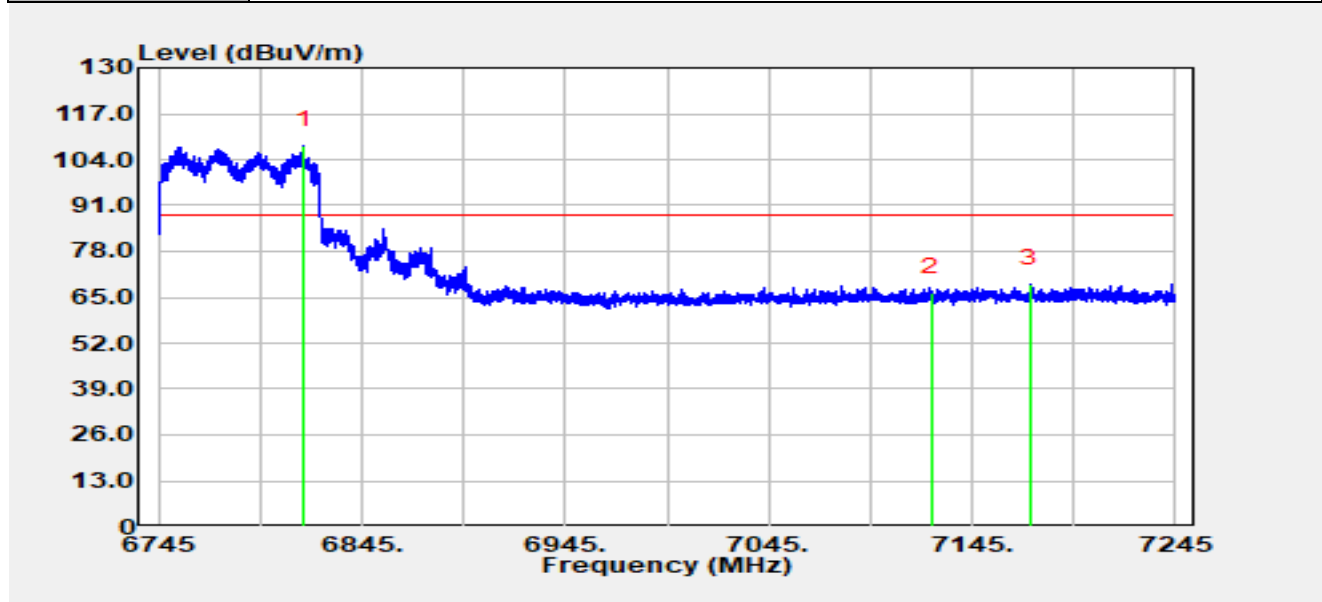


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6816.65	78.51	29.55	108.07	N/A	N/A	Peak
2		7125.00	37.10	29.34	66.45	-21.75	88.20	Peak
3	*	7173.65	39.44	29.40	68.84	-19.36	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 6785 MHz		

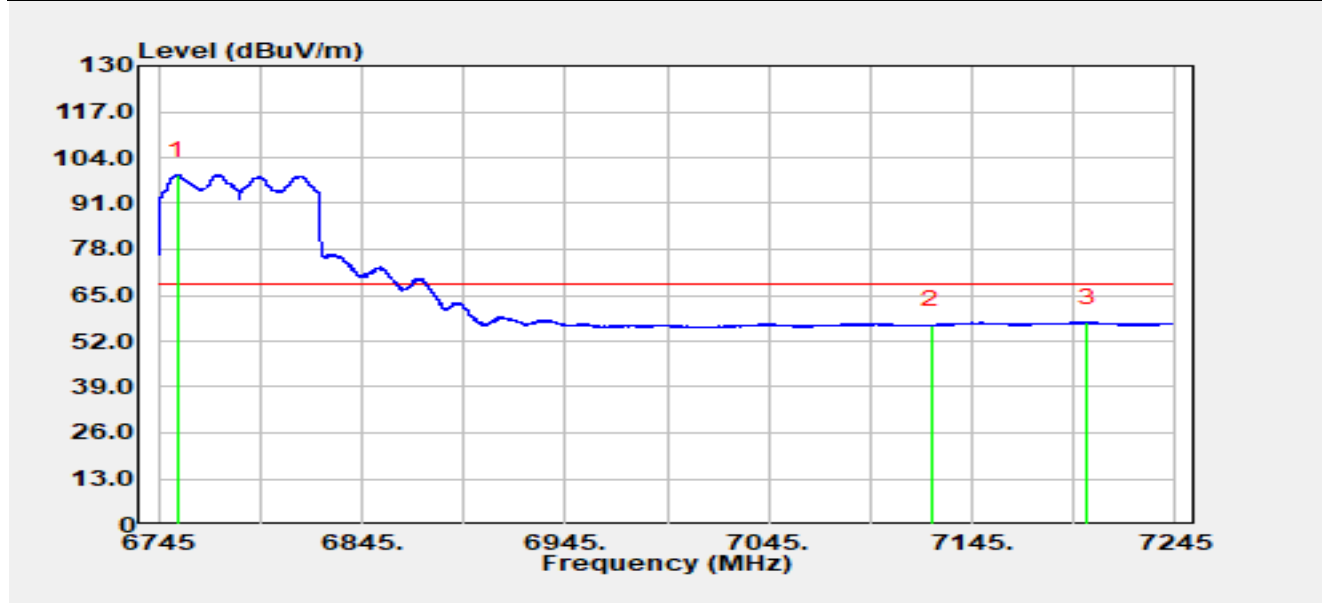


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6754.05	69.90	29.12	99.02	N/A	N/A	Average
2		7125.00	27.16	29.34	56.50	-11.70	68.20	Average
3	*	7201.80	27.47	29.82	57.30	-10.90	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

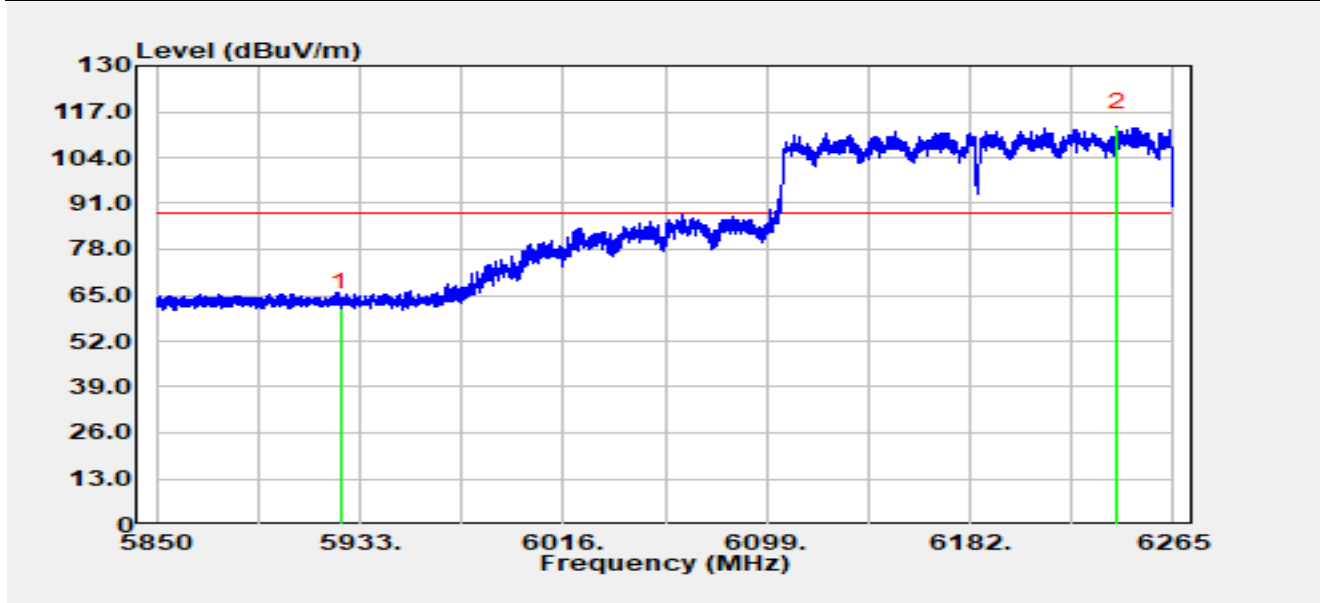


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	33.67	27.88	61.55	-26.65	88.20	Peak
2		6241.84	84.29	28.46	112.75	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

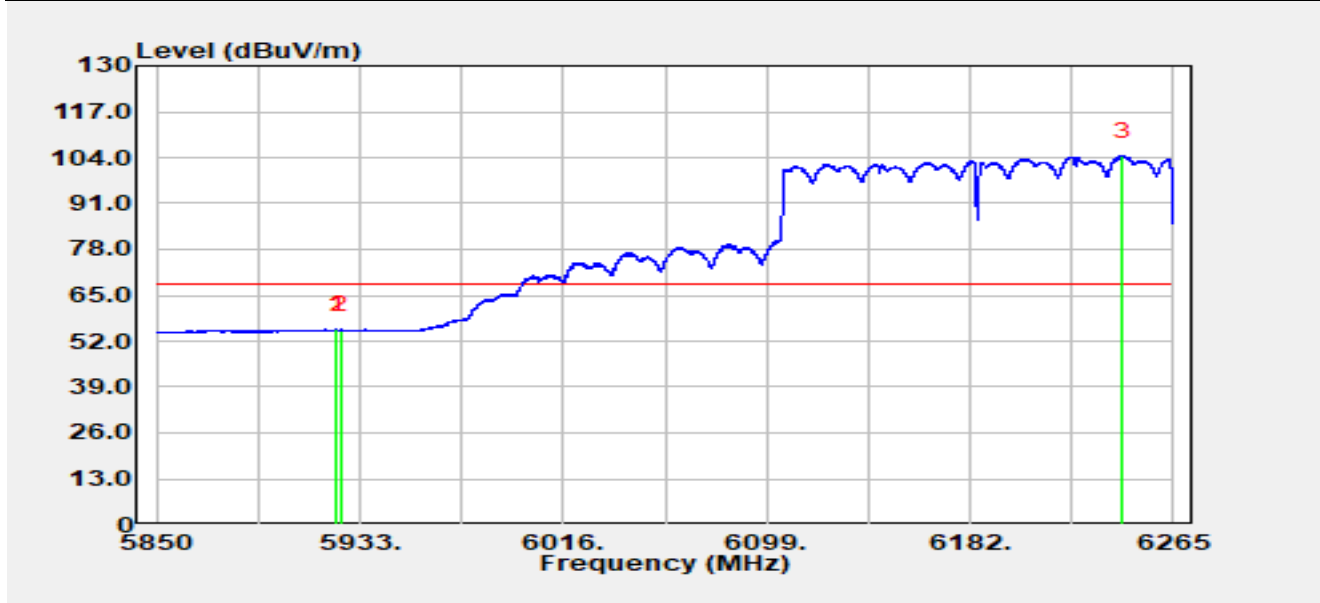


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.33	27.36	27.86	55.22	-12.98	68.20	Average
2		5925.00	27.14	27.88	55.03	-13.17	68.20	Average
3		6244.25	75.94	28.41	104.35	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

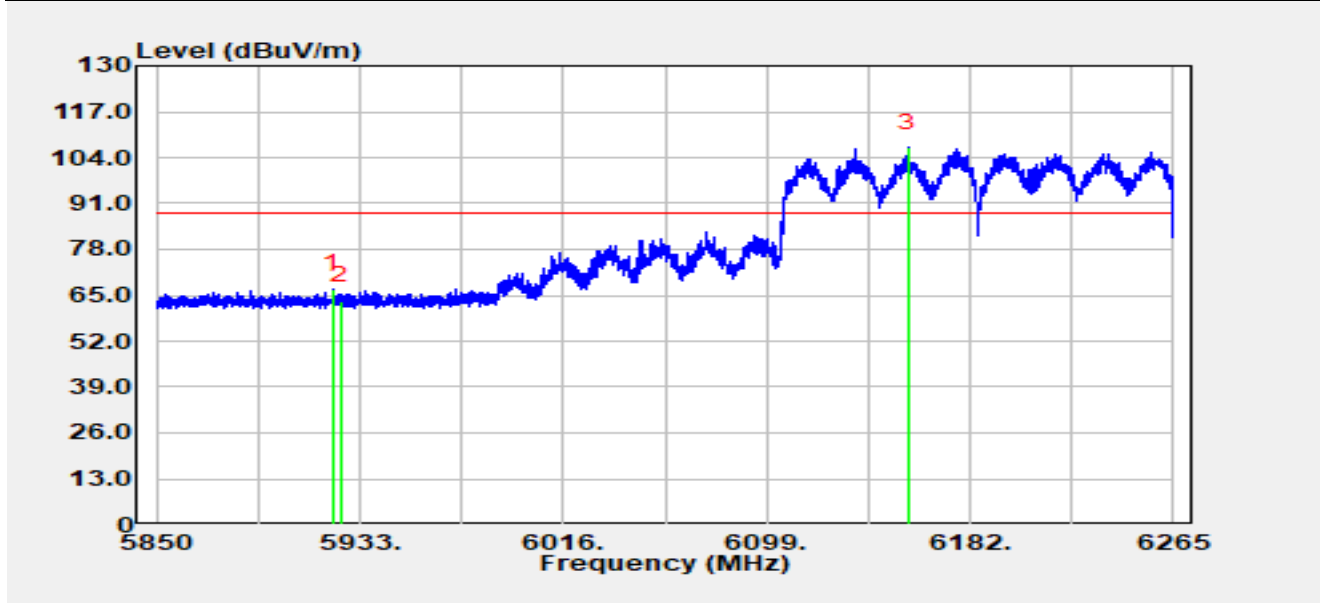


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.04	38.92	27.84	66.76	-21.44	88.20	Peak
2		5925.00	35.51	27.88	63.40	-24.80	88.20	Peak
3		6156.69	78.78	28.09	106.87	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

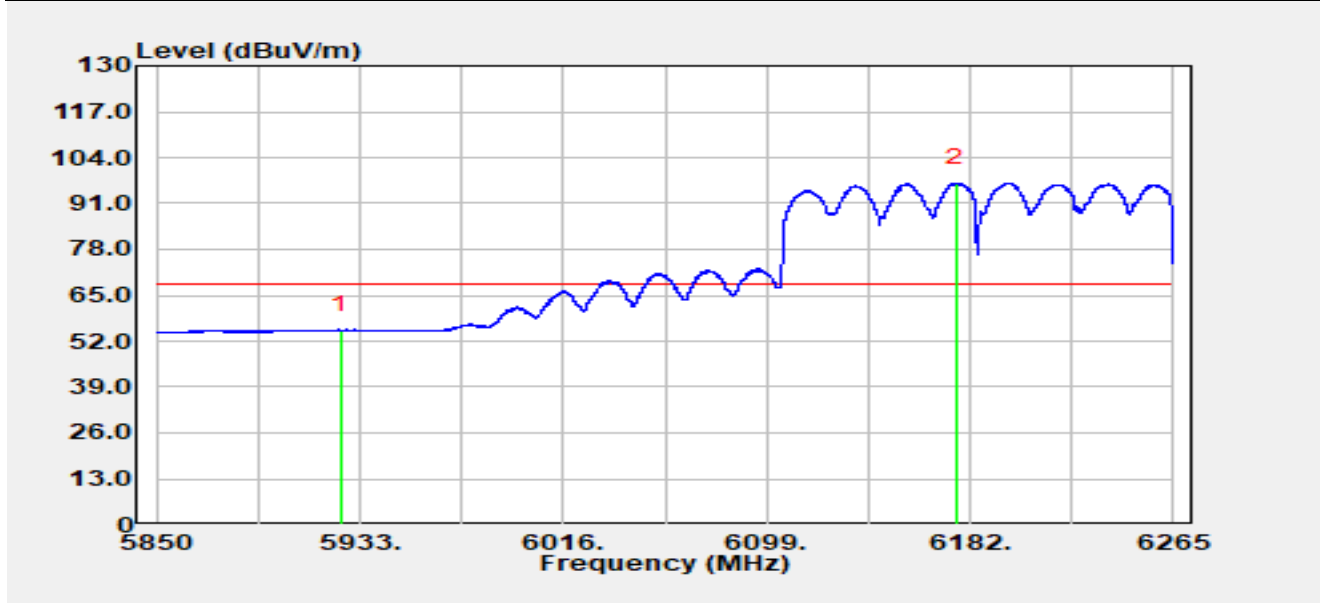


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.15	27.88	55.04	-13.16	68.20	Average
2		6176.48	68.60	28.16	96.76	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6665 MHz		

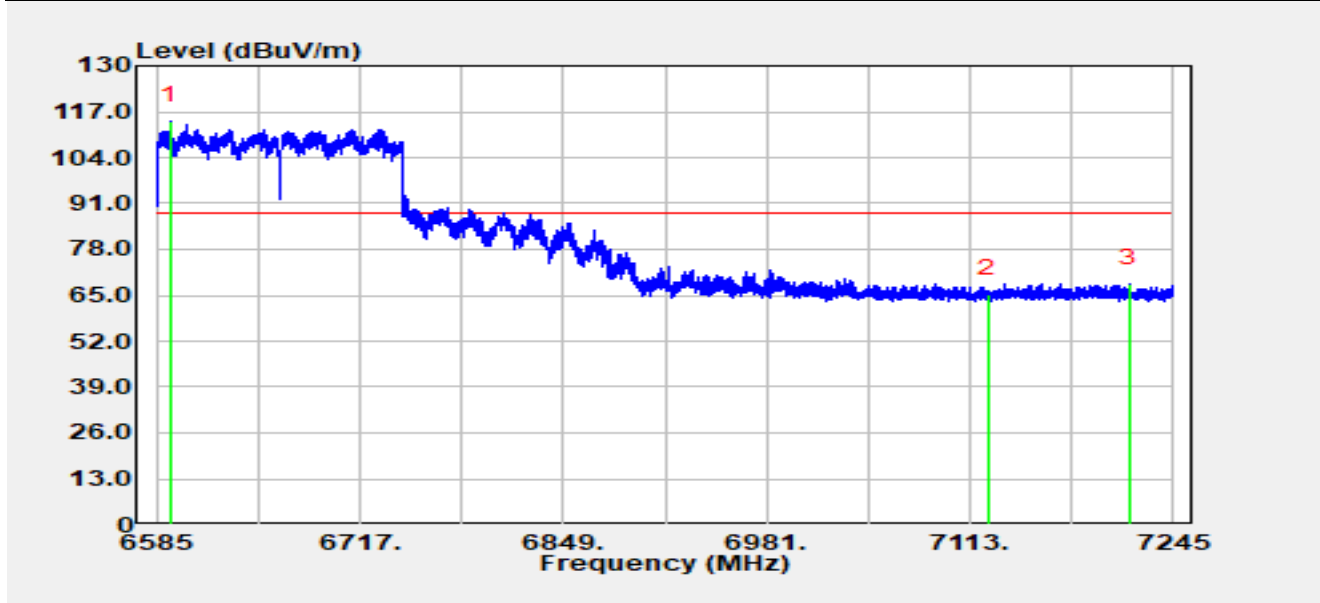


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6594.24	85.55	28.83	114.37	N/A	N/A	Peak
2		7125.00	35.95	29.34	65.29	-22.91	88.20	Peak
3	*	7216.16	38.91	29.41	68.32	-19.88	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6665 MHz		

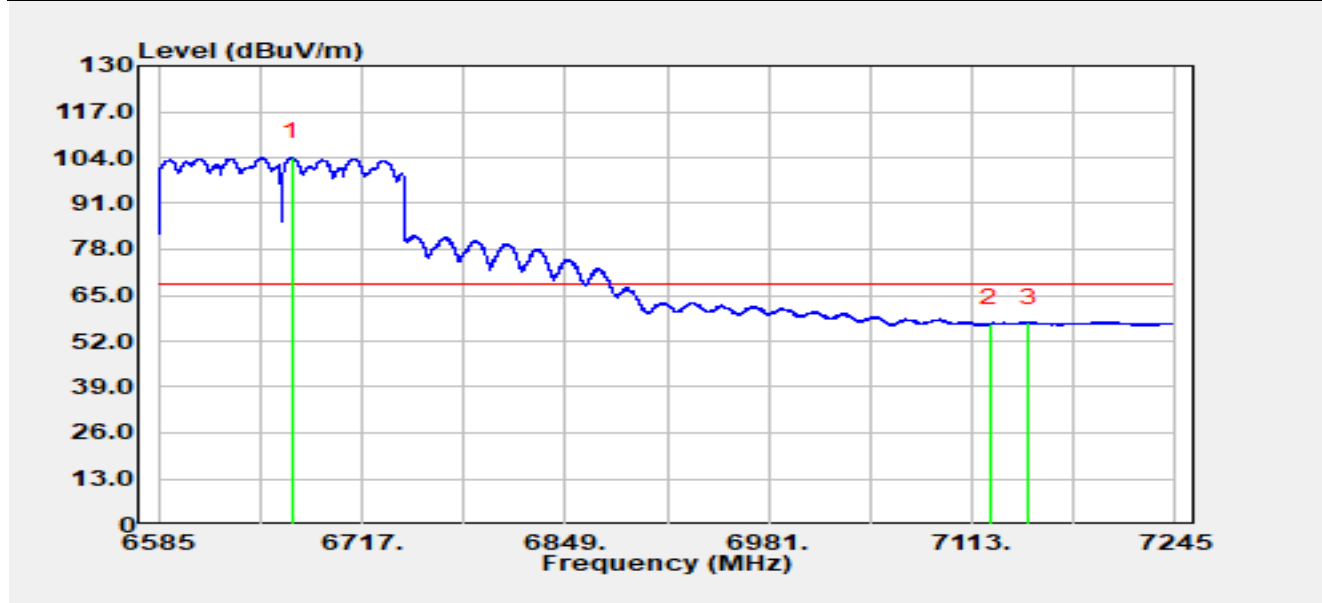


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6671.59	74.93	29.17	104.10	N/A	N/A	Average
2		7125.00	27.62	29.34	56.96	-11.24	68.20	Average
3	*	7149.63	27.56	29.79	57.35	-10.85	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6665 MHz		

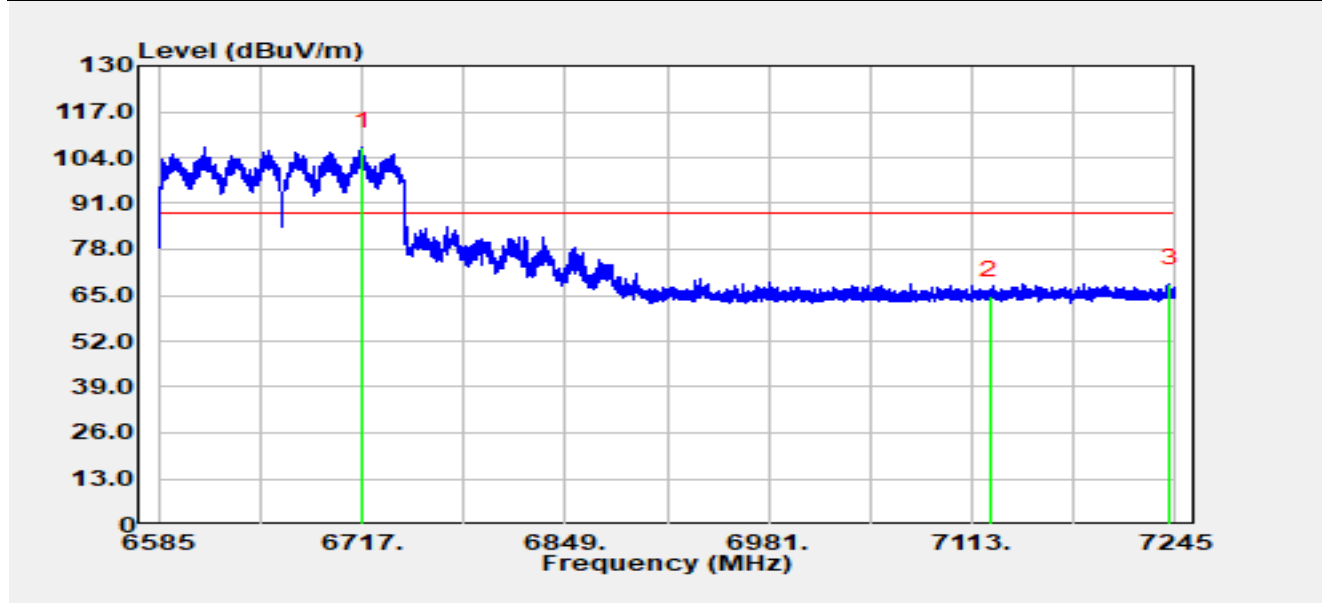


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6717.73	77.45	29.56	107.00	N/A	N/A	Peak
2		7125.00	35.65	29.34	64.99	-23.21	88.20	Peak
3	*	7241.44	38.65	29.56	68.21	-19.99	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6665 MHz		

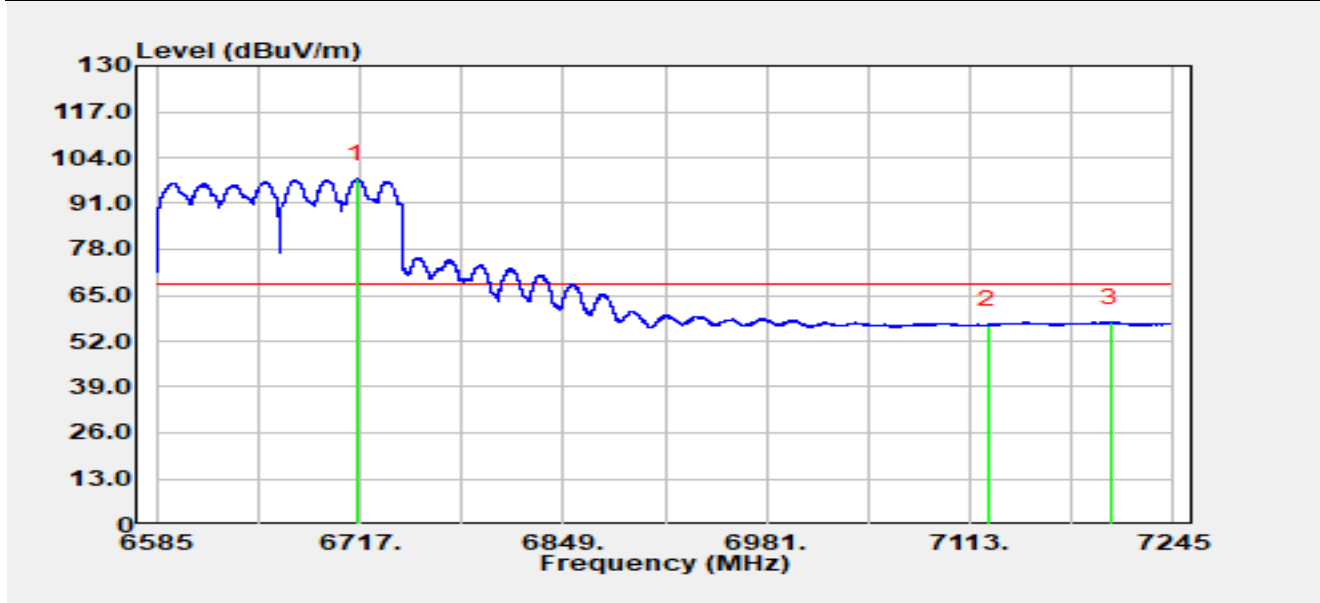


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6714.69	68.36	29.58	97.94	N/A	N/A	Average
2		7125.00	27.28	29.34	56.62	-11.58	68.20	Average
3	*	7204.54	27.53	29.77	57.30	-10.90	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

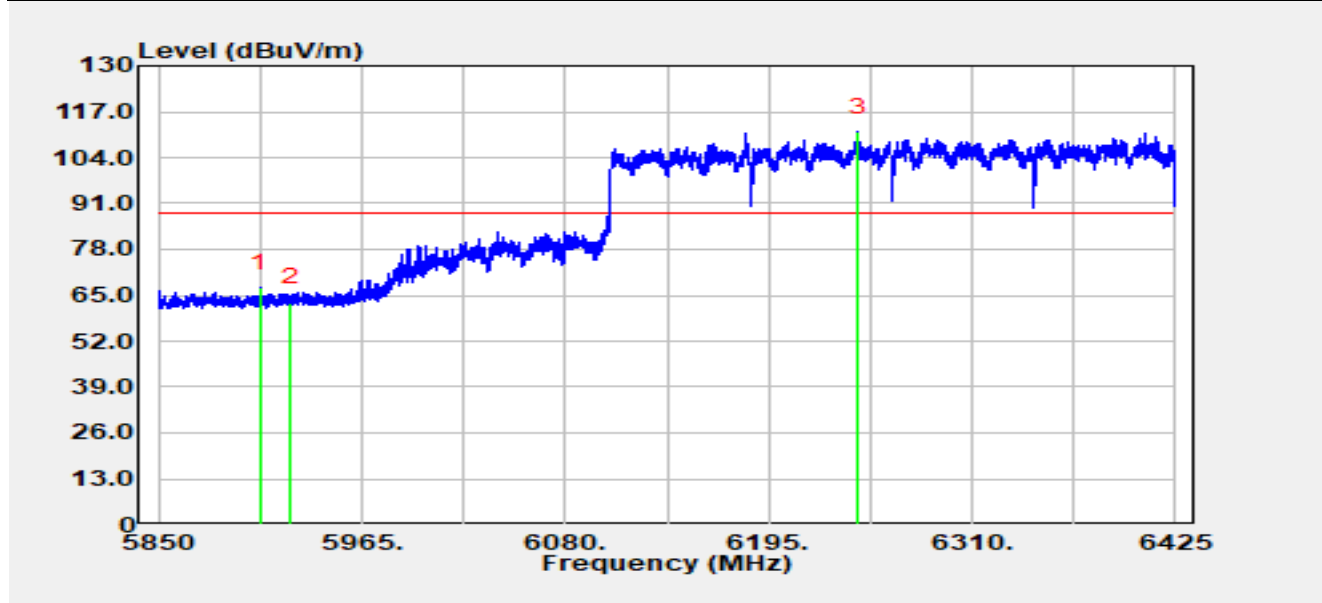


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5907.67	39.52	27.65	67.18	-21.02	88.20	Peak
2		5925.00	34.91	27.88	62.79	-25.41	88.20	Peak
3		6245.72	82.85	28.37	111.22	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

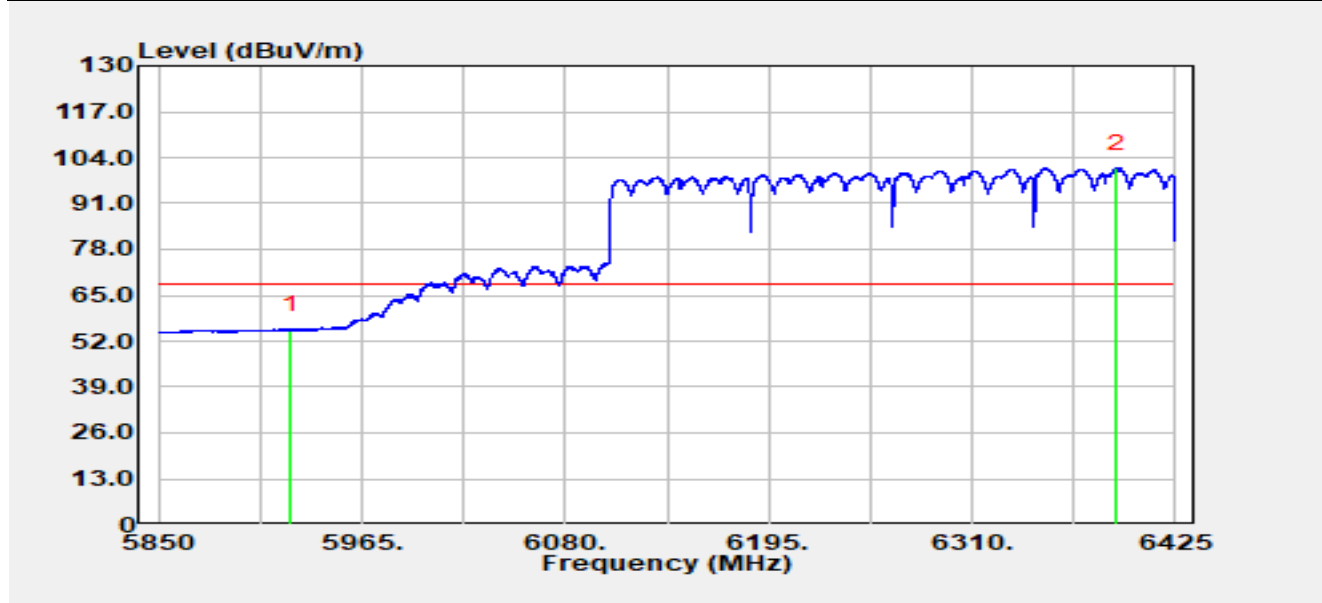


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.21	27.88	55.09	-13.11	68.20	Average
2		6391.54	72.25	28.77	101.02	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

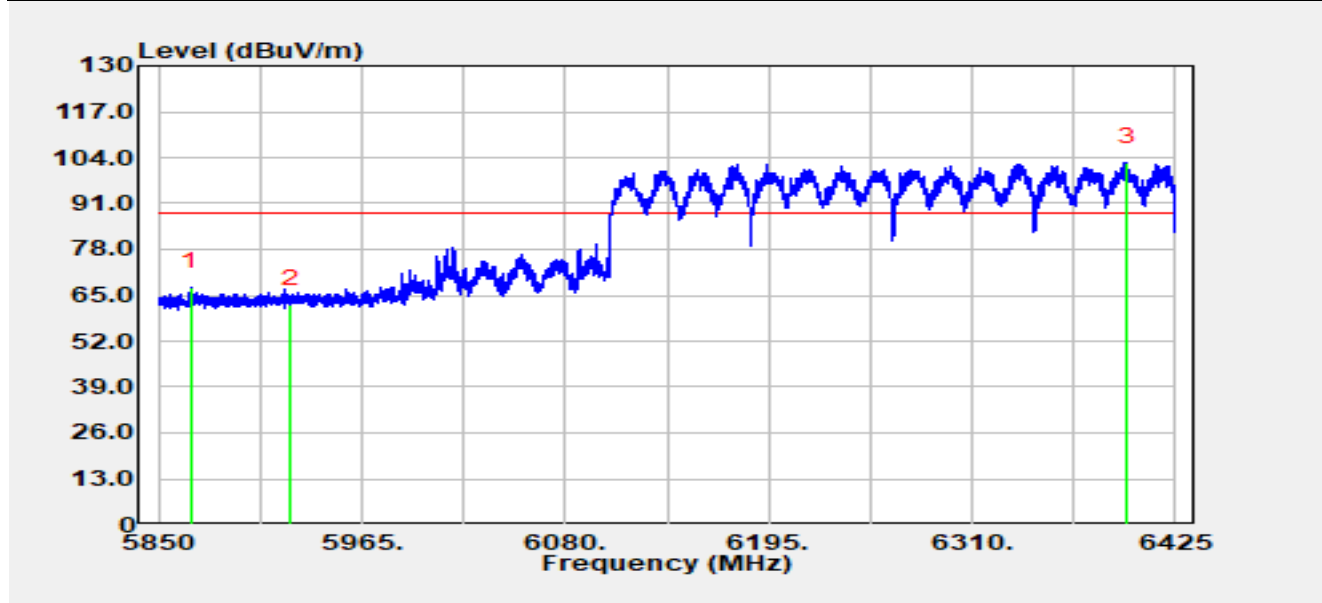


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5868.17	39.85	27.59	67.44	-20.76	88.20	Peak
2		5925.00	34.55	27.88	62.43	-25.77	88.20	Peak
3		6397.52	73.86	28.90	102.76	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

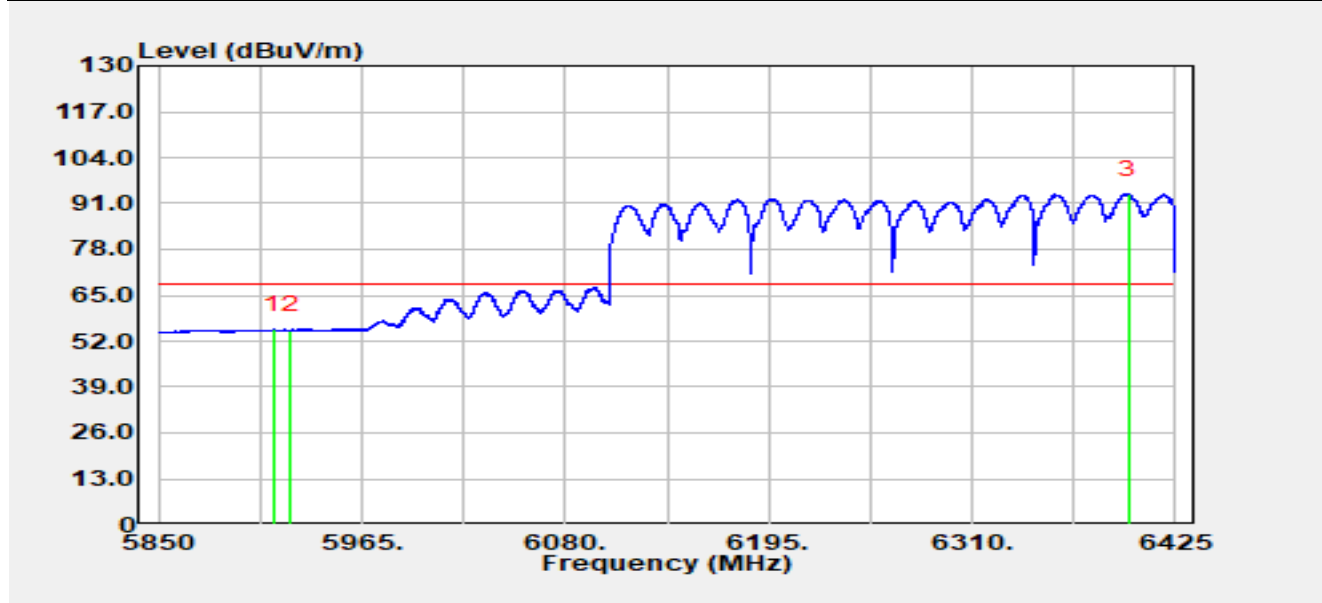


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.75	27.46	27.74	55.20	-13.00	68.20	Average
2		5925.00	27.18	27.88	55.06	-13.14	68.20	Average
3		6398.44	64.77	28.86	93.63	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

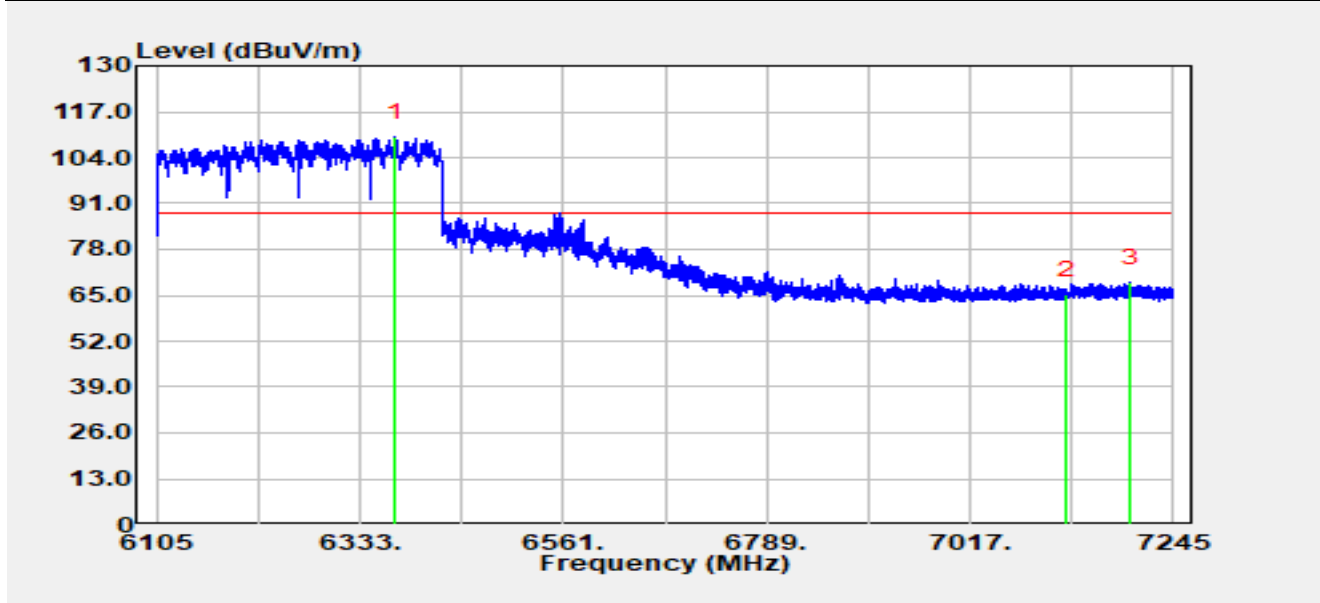


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6372.79	81.41	28.41	109.82	N/A	N/A	Peak
2		7125.00	35.82	29.34	65.16	-23.04	88.20	Peak
3	*	7196.55	38.75	29.73	68.48	-19.72	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

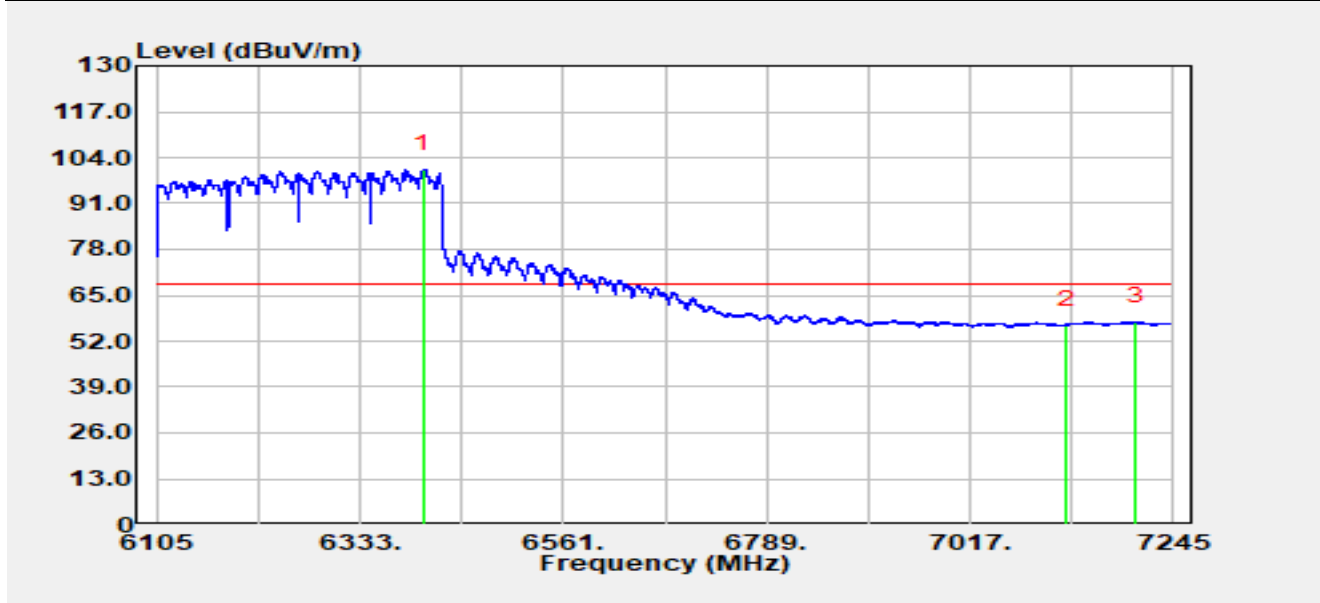


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6404.36	71.94	28.66	100.60	N/A	N/A	Average
2		7125.00	27.22	29.34	56.57	-11.63	68.20	Average
3	*	7202.48	27.57	29.83	57.41	-10.79	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

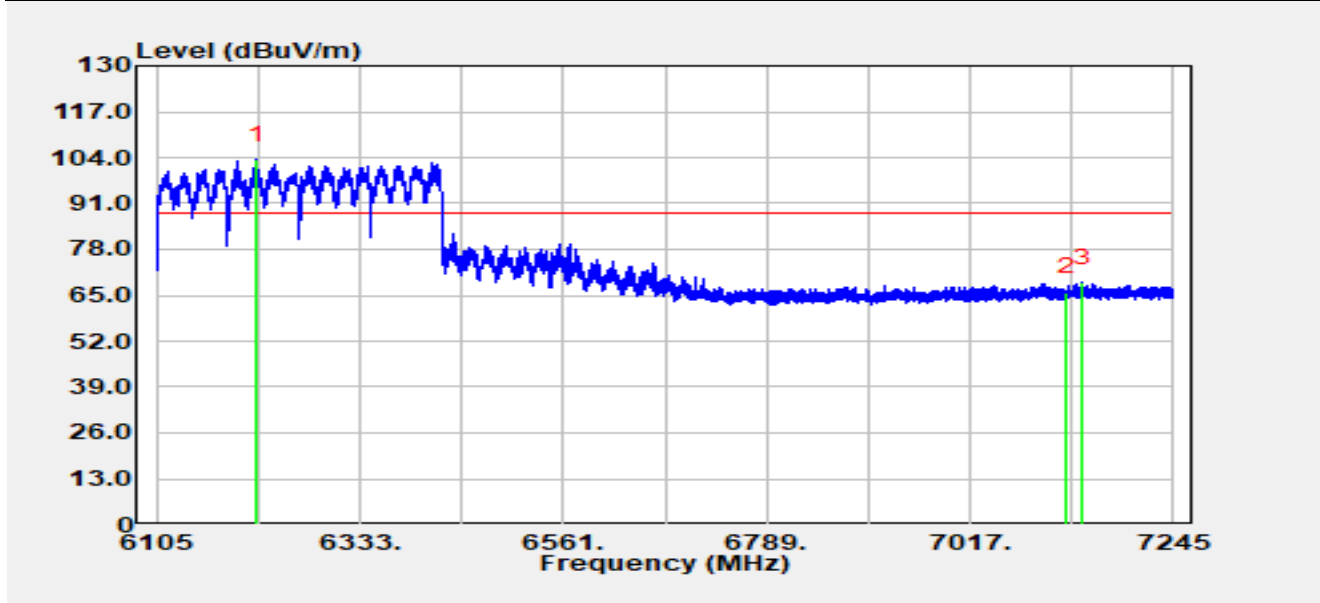


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6217.06	75.18	28.13	103.31	N/A	N/A	Peak
2		7125.00	36.43	29.34	65.77	-22.43	88.20	Peak
3	*	7142.40	38.95	29.67	68.62	-19.58	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-12
Temperature	17.4 °C	Humidity	39.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320-2 at 6265 MHz		

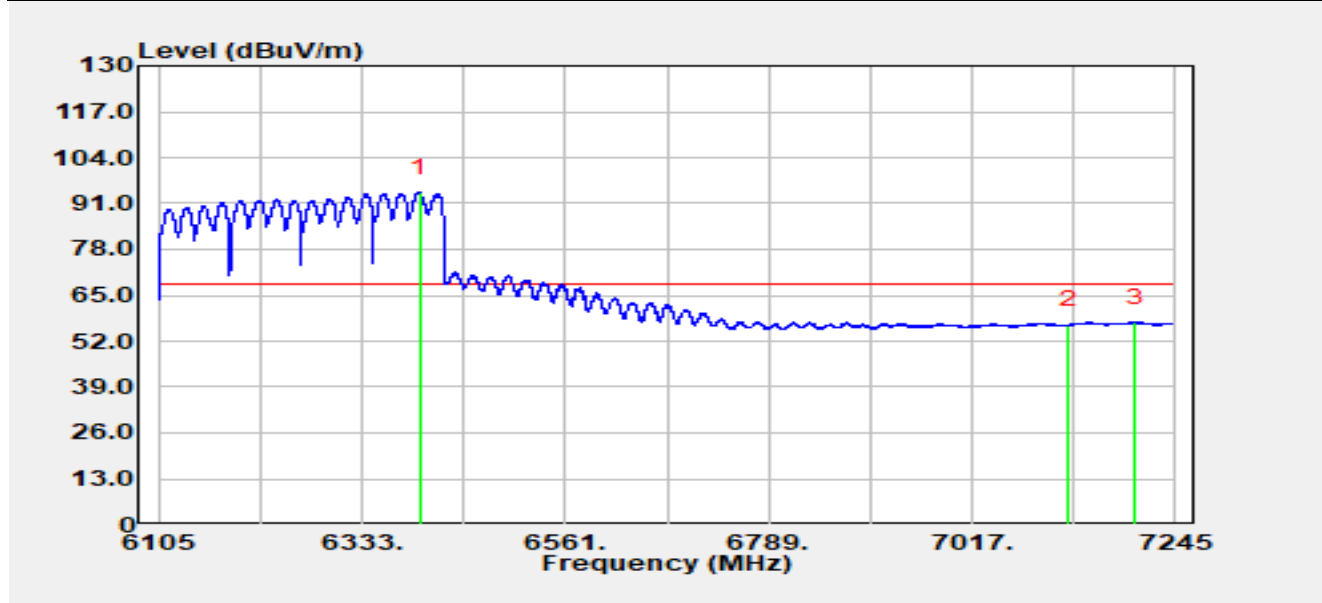

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6397.64	65.08	28.89	93.97	N/A	N/A	Average
2		7125.00	27.17	29.34	56.51	-11.69	68.20	Average
3	*	7200.54	27.54	29.80	57.34	-10.86	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Note Transmit by ax-HE40 at 6245 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-15


Temp 16.4 °C

Humi 39.4%

Polarity L

Test Site WJ-SR5

Spectrum Overview

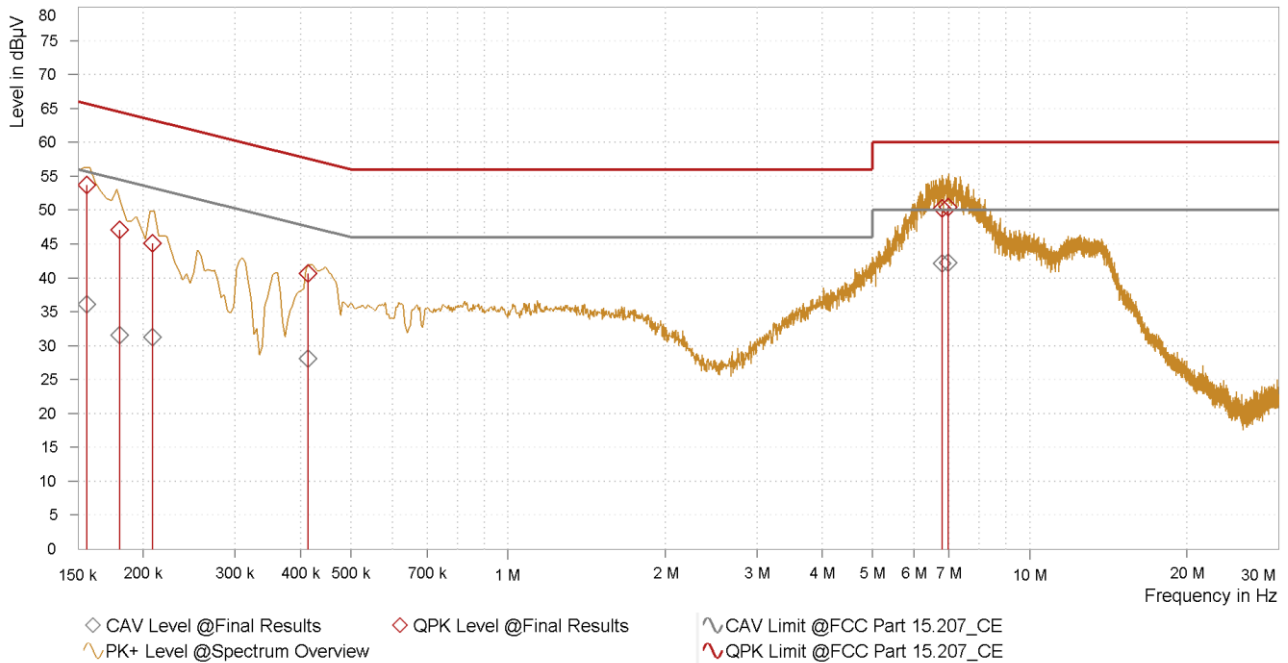

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	53.73	65.67	11.94	43.85	36.12	55.67	19.56	26.24	9.88	L1
0.180	47.09	64.49	17.40	37.21	31.57	54.49	22.91	21.70	9.88	L1
0.208	45.08	63.28	18.21	35.20	31.26	53.28	22.02	21.39	9.87	L1
0.414	40.61	57.57	16.95	30.76	28.13	47.57	19.44	18.28	9.85	L1
6.798	50.23	60.00	9.77	40.10	42.15	50.00	7.85	32.02	10.13	L1
6.984	50.43	60.00	9.57	40.30	42.23	50.00	7.77	32.09	10.14	L1

Notes:

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]=LISN Factor [dB] + Cable Loss [dB]

Note Transmit by ax-HE40 at 6245 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-01-15


Temp 16.4 °C

Humi 39.4%

Polarity N

Test Site WJ-SR5

Spectrum Overview

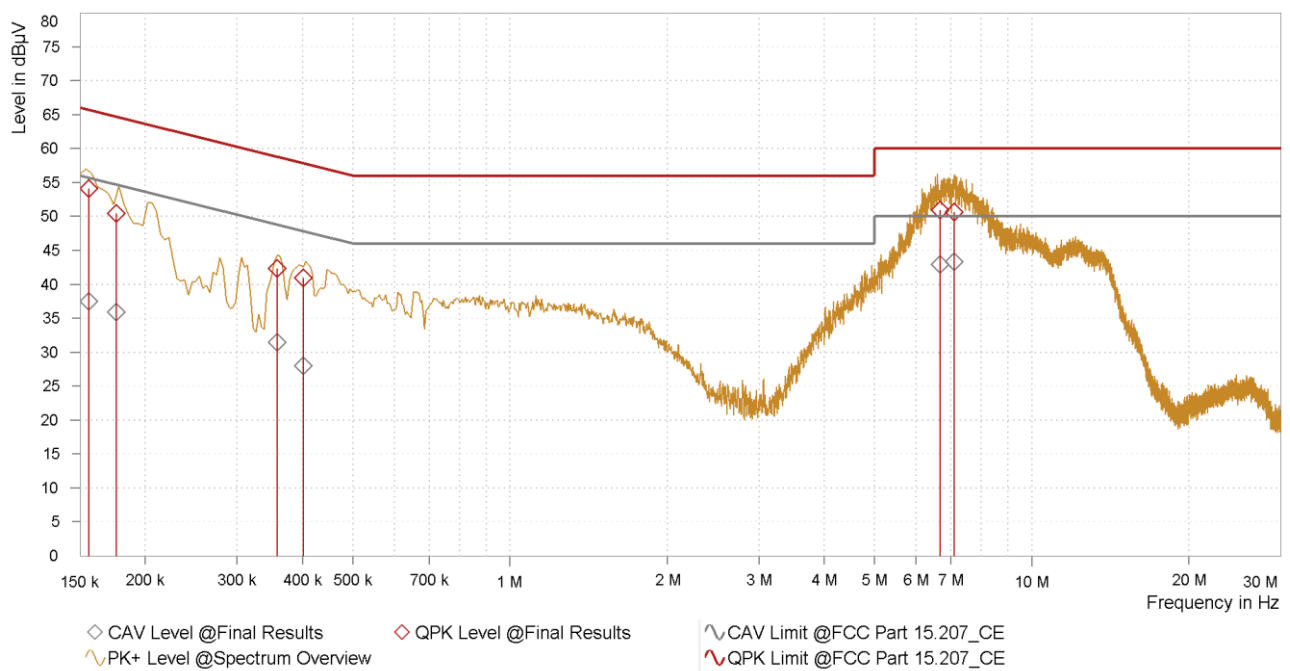

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.156	54.10	65.67	11.57	44.27	37.52	55.67	18.15	27.69	9.83	N
0.176	50.43	64.67	14.24	40.60	35.88	54.67	18.79	26.04	9.84	N
0.358	42.34	58.77	16.43	32.49	31.46	48.77	17.32	21.60	9.86	N
0.402	40.93	57.81	16.88	31.07	28.00	47.81	19.81	18.14	9.86	N
6.668	50.91	60.00	9.09	40.63	42.95	50.00	7.05	32.67	10.28	N
7.111	50.67	60.00	9.33	40.37	43.33	50.00	6.67	33.02	10.31	N

Notes:

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]=LISN Factor [dB] + Cable Loss [dB]

Appendix B - Test Setup Photograph

Refer to "R25S1036128-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1036128-UE" file.

_____ The End _____