



802.11be-EHT320 In-Band Emission - Ant 2 (Nss = 2)


Channel 63 (6265 MHz)

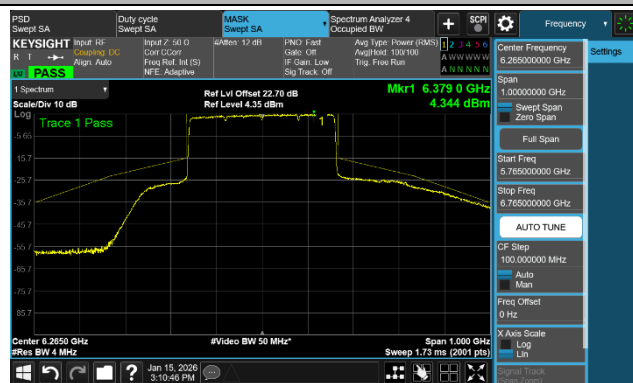


Channel 95 (6425 MHz)

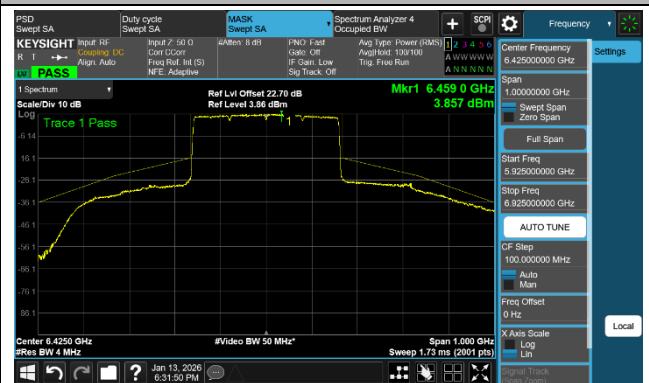

Channel 127 (6585 MHz)

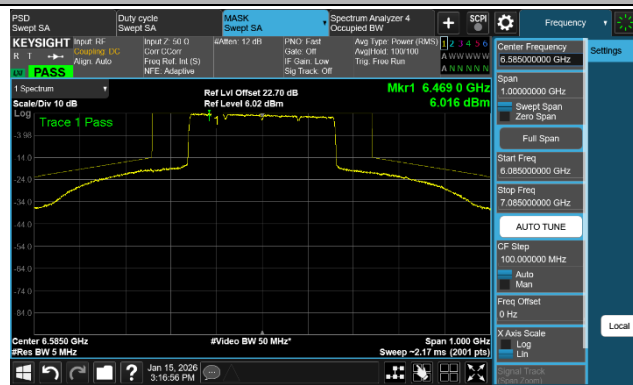

Channel 159 (6745 MHz)

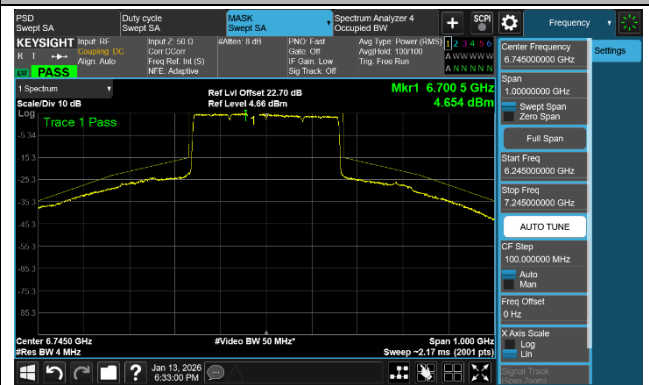

Channel 191 (6905 MHz)



A.6 Frequency Stability Test Result

Test Site	WJ-TR1	Test Engineer	Layla Gui
Test Date	2026-01-16		
Test Mode	6115 MHz (Carrier Mode)		

Voltage (%)	Power (VAC)	Temp (°C)	Frequency Tolerance (ppm)			
			0 minutes	2 minutes	5 minutes	10 minutes
100	120	- 30	18.76	18.70	18.70	18.62
		- 20	18.11	18.10	18.10	18.10
		- 10	17.82	17.46	17.28	17.15
		0	14.75	14.70	14.66	14.61
		+ 10	7.86	7.66	7.54	7.41
		+ 20	7.67	7.20	6.91	6.69
		+ 30	1.68	1.26	1.07	0.90
		+ 40	-2.62	-2.76	-2.87	-2.96
		+ 50	-4.02	-4.22	-4.35	-4.44
115	138	+ 20	-3.64	-3.61	-3.57	-3.55
85	102	+ 20	-3.31	-1.00	-3.30	-3.29

Note: Frequency Tolerance (ppm) = {[Measured Frequency (Hz) - Declared Frequency (Hz)] / Declared Frequency (Hz)} × 10⁶.

A.7 Contention Based Protocol Test Result

Test Site	WJ-SR7	Test Engineer	Jake Lan
Test Date	2026-04-01 ~ 2026-04-06	Test Mode	AP Mode

Test Channel	Bandwidth h (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
37	20	6135	6135	-65	4.42	-69.42	≤ -62.0	10	100	90	Pass
63	320	6265	6110	-66	4.42	-70.42	≤ -62.0	10	100	90	Pass
63	320	6265	6265	-67	4.42	-71.42	≤ -62.0	10	100	90	Pass
63	320	6265	6420	-66	4.42	-70.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
101	20	6455	6455	-66	4.42	-70.42	≤ -62.0	10	100	90	Pass
127	320	6585	6430	-66	4.42	-70.42	≤ -62.0	10	100	90	Pass
127	320	6585	6585	-65	4.42	-69.42	≤ -62.0	10	100	90	Pass
127	320	6585	6740	-64	4.42	-68.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
149	20	6695	6695	-68	4.42	-72.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
229	20	7095	7095	-67	4.42	-71.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7 & U-NII 8											
191	320	6905	6750	-65	4.42	-69.42	≤ -62.0	10	100	90	Pass
191	320	6905	6905	-66	4.42	-70.42	≤ -62.0	10	100	90	Pass
191	320	6905	7060	-64	4.42	-68.42	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) - Antenna Gain (dBi).

Note 2: Conducted measurements are used.

Note 3: The EUT uses bandwidth reduction for the purpose of incumbent avoidance.


Test Site	WJ-SR7	Test Engineer	Jake Lan
Test Date	2026-04-01 ~ 2026-04-06	Test Mode	AP Mode

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6135	6135	-69.42	ON
			-73.42	Minimal
			-74.42	OFF
320	6265	6110	-70.42	ON
			-73.42	Minimal
			-74.42	OFF
320	6265	6265	-71.42	ON
			-74.42	Minimal
			-75.42	OFF
320	6265	6420	-70.42	ON
			-74.42	Minimal
			-75.42	OFF
Operation Band: U-NII 6				
20	6455	6455	-70.42	ON
			-73.42	Minimal
			-74.42	OFF
320	6585	6430	-70.42	ON
			-73.42	Minimal
			-74.42	OFF
320	6585	6585	-69.42	ON
			-72.42	Minimal
			-73.42	OFF
320	6585	6740	-68.42	ON
			-72.42	Minimal
			-73.42	OFF


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6695	6695	-72.42	ON
			-75.42	Minimal
			-76.42	OFF
Operation Band: U-NII 8				
20	7095	7095	-71.42	ON
			-74.42	Minimal
			-75.42	OFF
Operation Band: U-NII 7 & U-NII 8				
320	6905	6750	-69.42	ON
			-73.42	Minimal
			-74.42	OFF
320	6905	6905	-70.42	ON
			-72.42	Minimal
			-73.42	OFF
320	6905	7060	-68.42	ON
			-71.42	Minimal
			-72.42	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

EUT Tx Waveform for AP Mode

802.11be-EHT20 / CH37

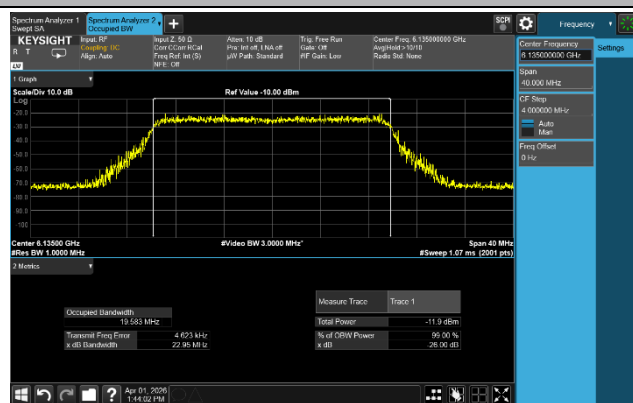


802.11be-EHT320 / CH63

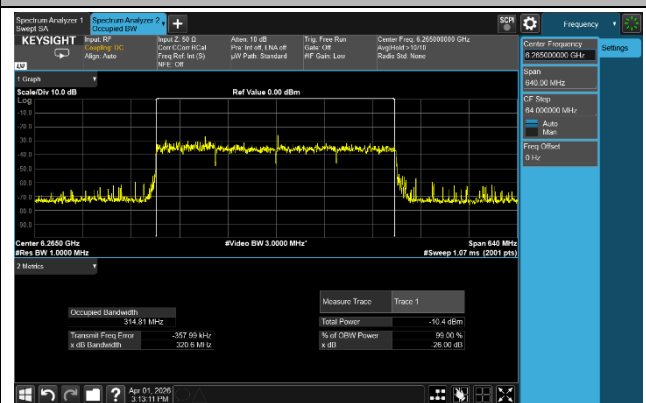


802.11be-EHT20 / CH101



802.11be-EHT320 / CH127

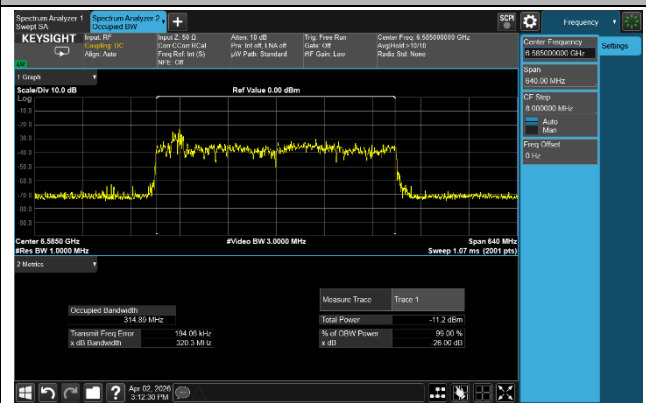


802.11be-EHT20 / CH149

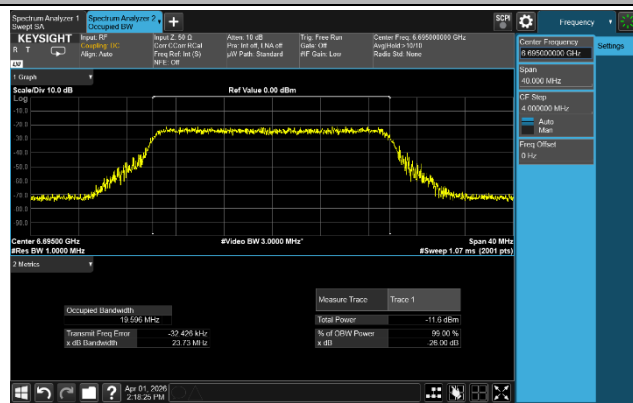

802.11be-EHT320 / CH191



802.11be-EHT20 / CH229

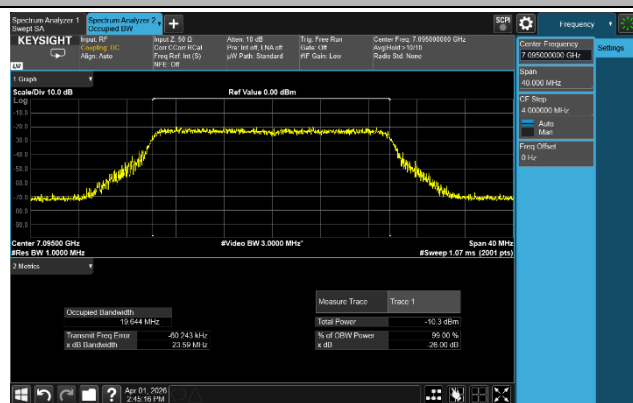


802.11be-EHT320 / CH191




Incumbent Signal Calibration Plots (NII-5 Band) for AP Mode


802.11be-EHT20 / CH37

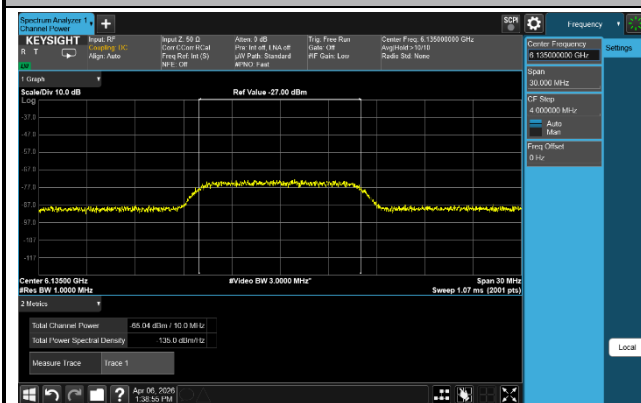


802.11be-EHT320 / CH63 (Low Edge)

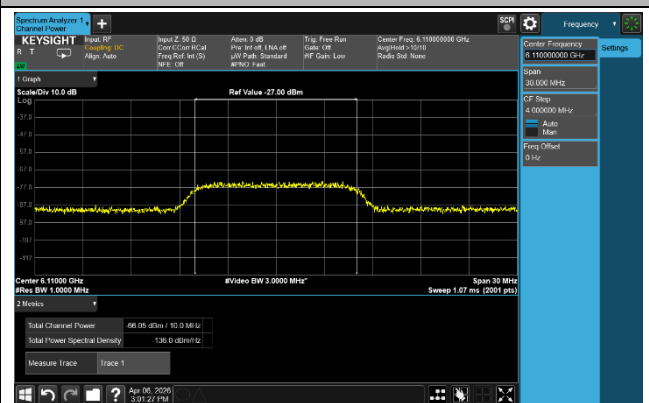

802.11be-EHT320 / CH63 (Middle)

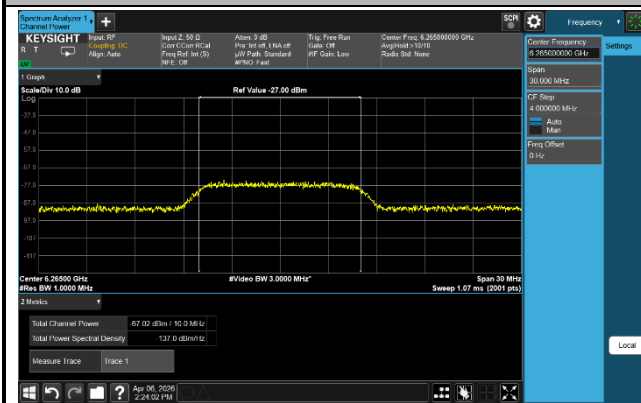


802.11be-EHT320 / CH63 (High Edge)

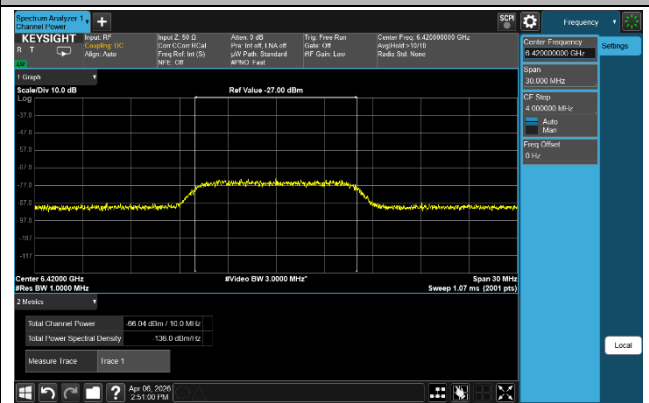


Incumbent Signal Calibration Plots (NII-6 Band) for AP Mode


802.11be-EHT20 / CH101

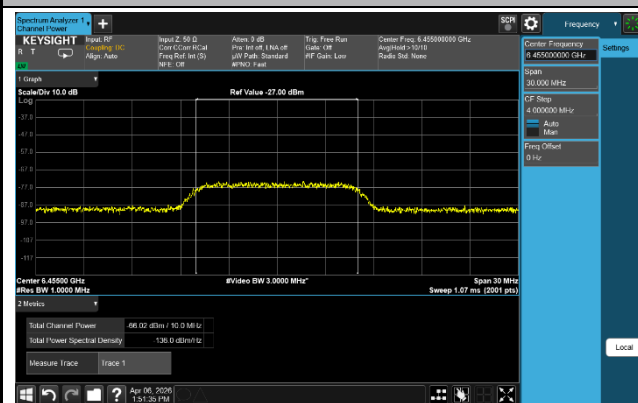


802.11be-EHT320 / CH127 (Low Edge)

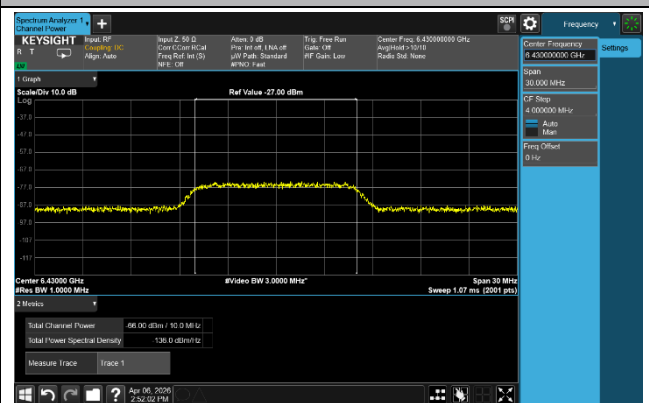


802.11be-EHT320 / CH127 (Middle)

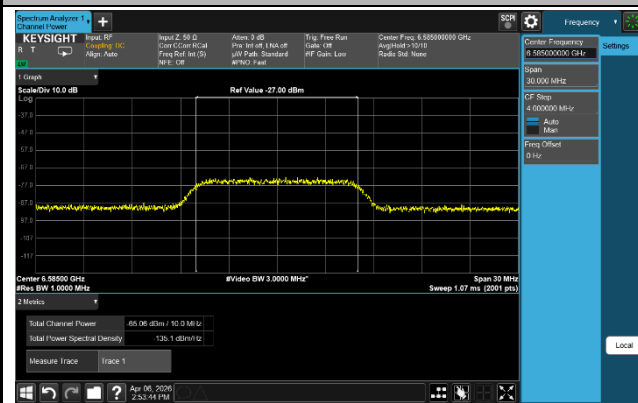


802.11be-EHT320 / CH127 (High Edge)

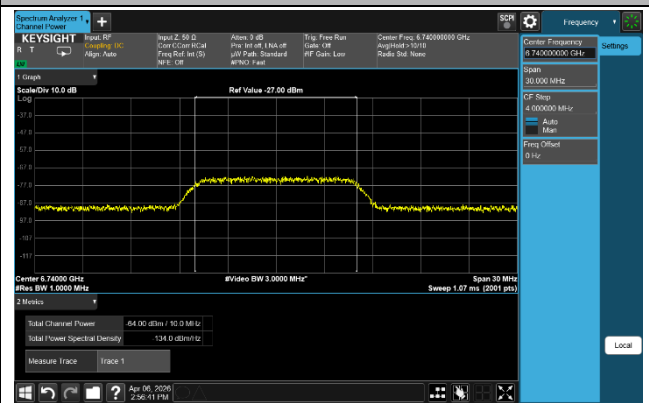

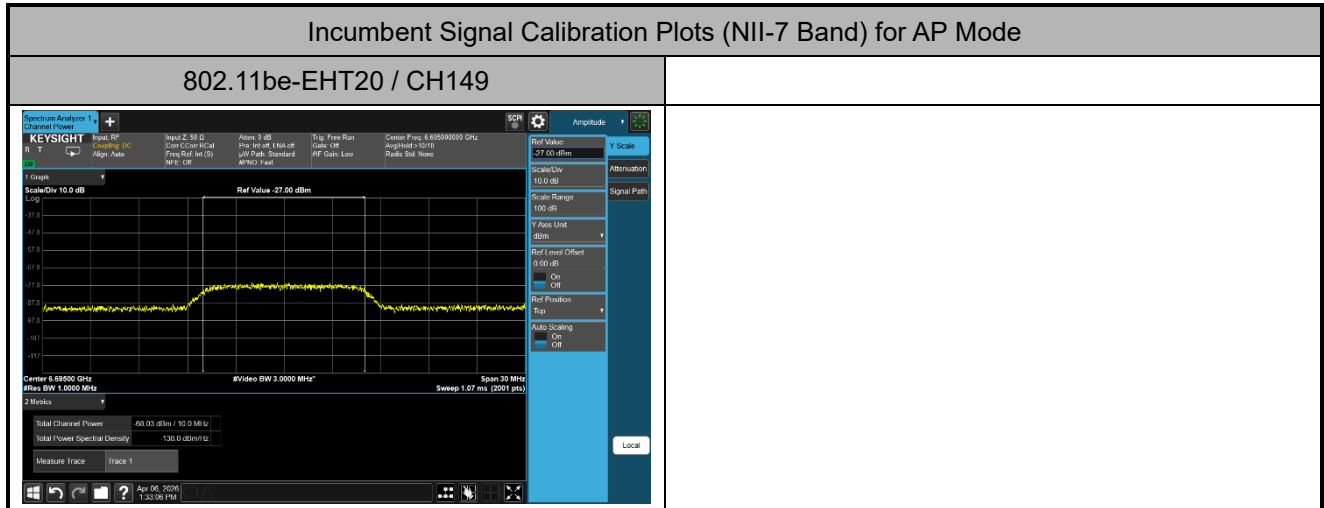


Incumbent Signal Calibration Plots (NII-8 Band) for AP Mode

802.11be-EHT20 / CH229

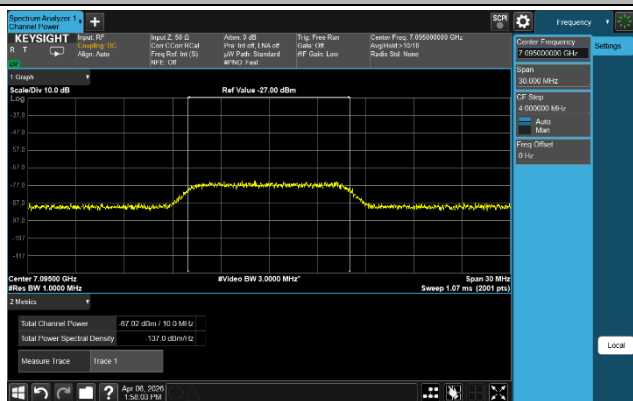


Incumbent Signal Calibration Plots (NII-7 & NII-8 Band) for AP Mode


802.11be-EHT320 / CH191 (Low Edge)

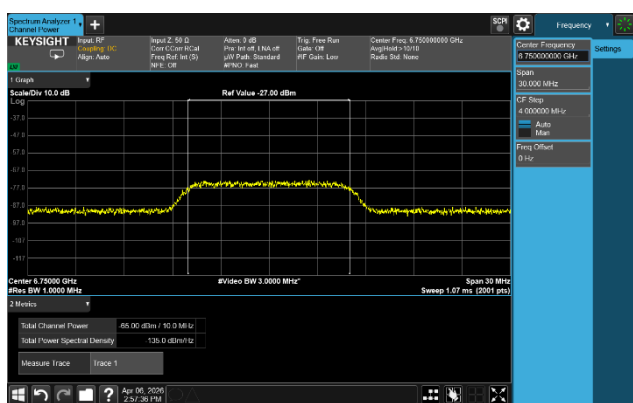

802.11be-EHT320 / CH191 (Middle)

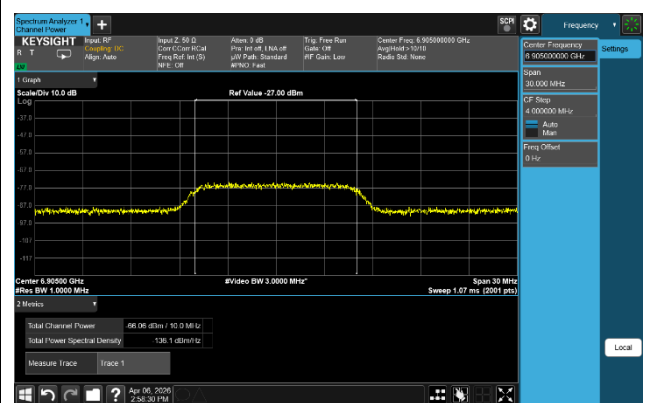


802.11be-EHT320 / CH191 (High Edge)

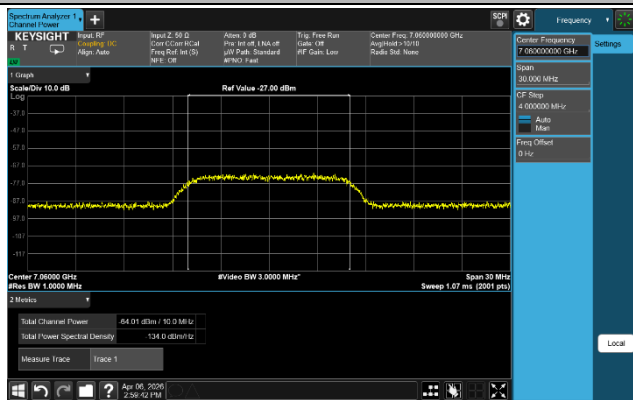


Test Result of EUT ceased transmission (NII-5 Band) for AP Mode


802.11be-EHT20 / CH37

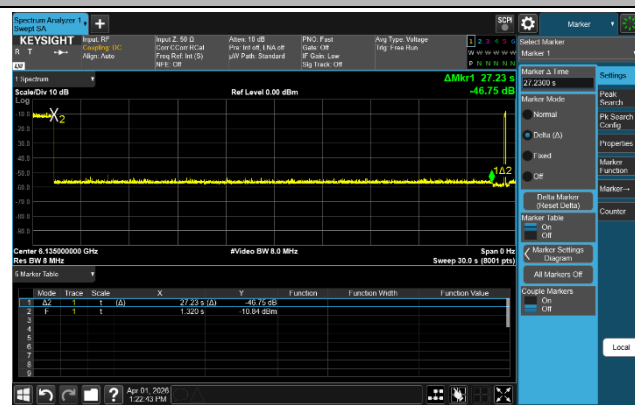


802.11be-EHT320 / CH63 (Low Edge)

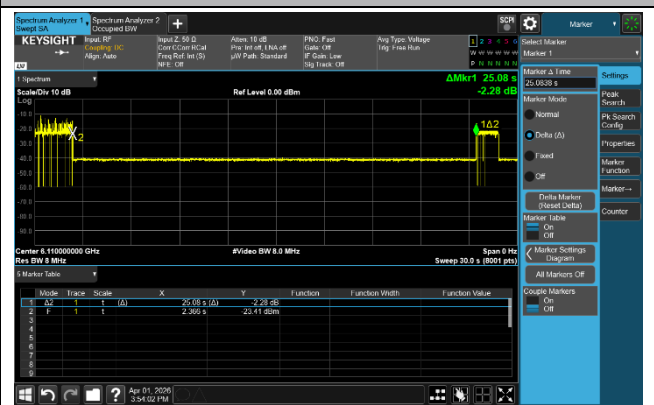

802.11be-EHT320 / CH63 (Middle)

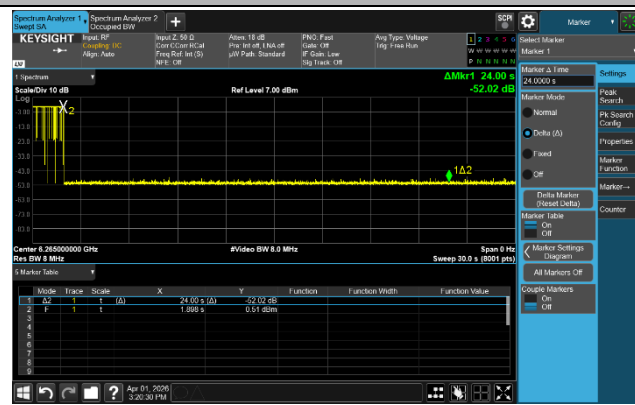


802.11be-EHT320 / CH63 (High Edge)

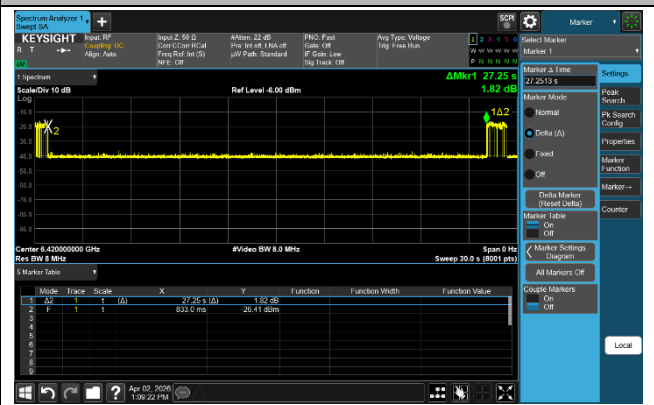

Test Result of EUT ceased transmission (NII-6 Band) for AP Mode

802.11be-EHT20 / CH101

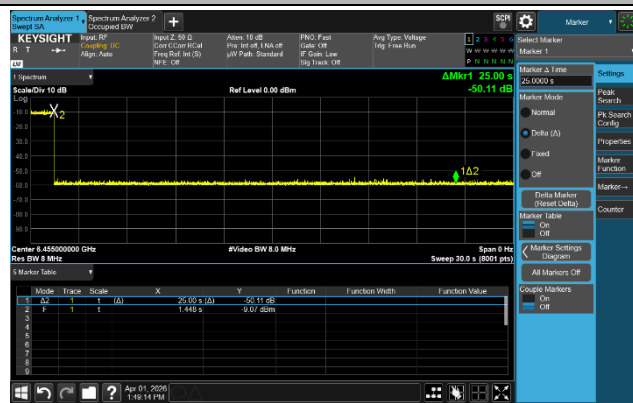

802.11be-EHT320 / CH127 (Low Edge)



802.11be-EHT320 / CH127 (Middle)




802.11be-EHT320 / CH127 (High Edge)




Test Result of EUT ceased transmission (NII-7 Band) for AP Mode

802.11be-EHT20 / CH149

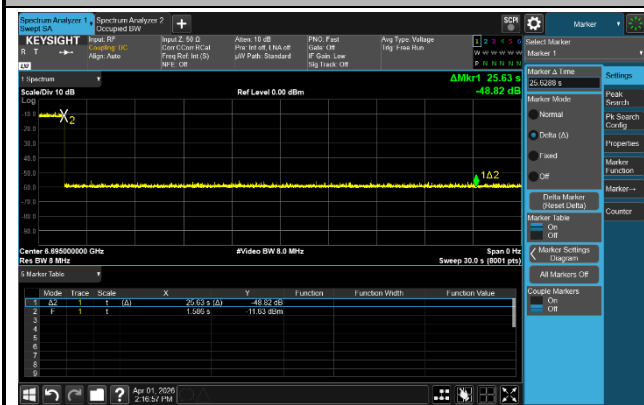


Test Result of EUT ceased transmission (NII-8 Band) for AP Mode

802.11be-EHT20 / CH229

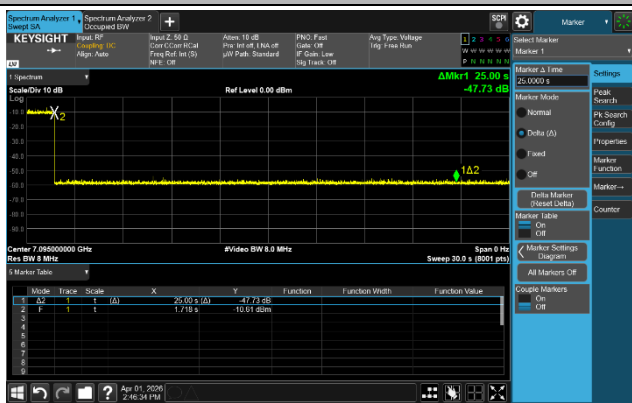


Test Result of EUT ceased transmission (NII-7 & NII-8 Band) for AP Mode


802.11be-EHT320 / CH191 (Low Edge)

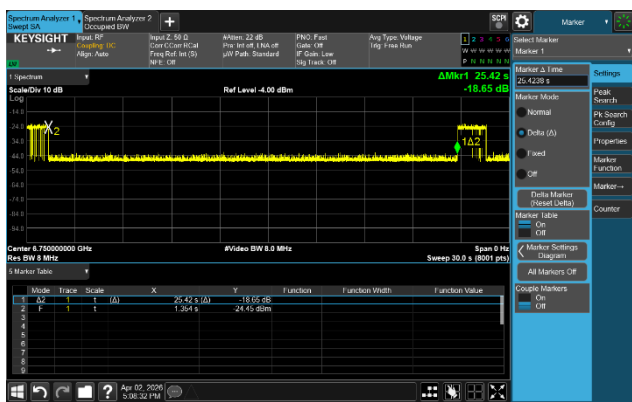

802.11be-EHT320 / CH191 (Middle)

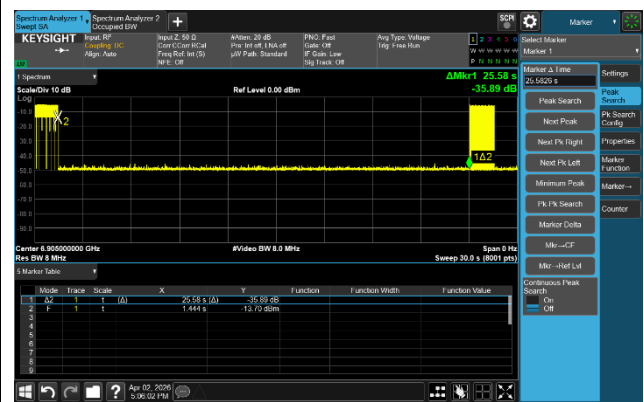

802.11be-EHT320 / CH191 (High Edge)

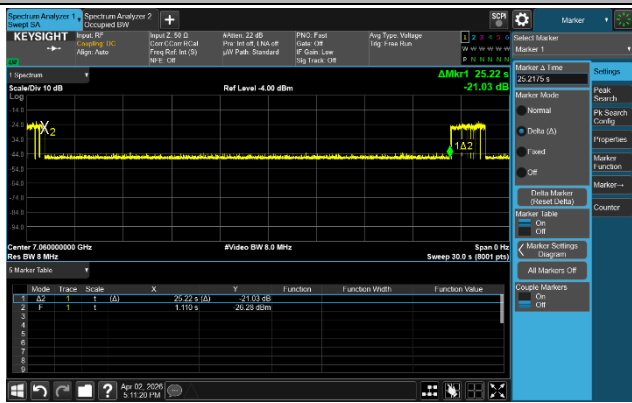

Test Site	WJ-SR7	Test Engineer	Jake Lan
Test Date	2026-04-07 ~ 2026-04-09	Test Mode	Mesh Mode

Test Channel	Bandwidth h (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	AWGN Power (dBm)	Ant. Gain (dBi)	Adjust Power (dBm)	Detection Limit (dBm)	Detected Number	Detection Probability (%)	Limit (%)	Test Result
Operation Band: U-NII 5											
37	20	6135	6135	-62	4.42	-66.42	≤ -62.0	10	100	90	Pass
63	320	6265	6110	-63	4.42	-67.42	≤ -62.0	10	100	90	Pass
63	320	6265	6265	-63	4.42	-67.42	≤ -62.0	10	100	90	Pass
63	320	6265	6420	-62	4.42	-66.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 6											
101	20	6455	6455	-60	4.42	-64.42	≤ -62.0	10	100	90	Pass
127	320	6585	6430	-64	4.42	-68.42	≤ -62.0	10	100	90	Pass
127	320	6585	6585	-63	4.42	-67.42	≤ -62.0	10	100	90	Pass
127	320	6585	6740	-62	4.42	-66.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7											
149	20	6695	6695	-61	4.42	-65.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 8											
229	20	7095	7095	-59	4.42	-63.42	≤ -62.0	10	100	90	Pass
Operation Band: U-NII 7 & U-NII 8											
191	320	6905	6750	-63	4.42	-67.42	≤ -62.0	10	100	90	Pass
191	320	6905	6905	-65	4.42	-69.42	≤ -62.0	10	100	90	Pass
191	320	6905	7060	-61	4.42	-65.42	≤ -62.0	10	100	90	Pass

Note 1: Adjust Power (dBm) = AWGN Power (dBm) - Antenna Gain (dBi).

Note 2: Conducted measurements are used.

Note 3: The EUT uses bandwidth reduction for the purpose of incumbent avoidance.


Test Site	WJ-SR7	Test Engineer	Jake Lan
Test Date	2026-04-07 ~ 2026-04-09	Test Mode	Mesh Mode

Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Tx Status
Operation Band: U-NII 5				
20	6135	6135	-66.42	ON
			-70.42	Minimal
			-71.42	OFF
320	6265	6110	-67.42	ON
			-70.42	Minimal
			-71.42	OFF
320	6265	6265	-67.42	ON
			-71.42	Minimal
			-72.42	OFF
320	6265	6420	-66.42	ON
			-69.42	Minimal
			-70.42	OFF
Operation Band: U-NII 6				
20	6455	6455	-64.42	ON
			-67.42	Minimal
			-68.42	OFF
320	6585	6430	-68.42	ON
			-71.42	Minimal
			-72.42	OFF
320	6585	6585	-67.42	ON
			-70.42	Minimal
			-71.42	OFF
320	6585	6740	-66.42	ON
			-69.42	Minimal
			-70.42	OFF


Bandwidth (MHz)	Freq. (MHz)	AWGN Freq. (MHz)	Adjust Power (dBm)	EUT Status
Operation Band: U-NII 7				
20	6695	6695	-65.42	ON
			-68.42	Minimal
			-69.42	OFF
Operation Band: U-NII 8				
20	7095	7095	-63.42	ON
			-67.42	Minimal
			-68.42	OFF
Operation Band: U-NII 7 & U-NII 8				
320	6905	6750	-67.42	ON
			-71.42	Minimal
			-72.42	OFF
320	6905	6905	-69.42	ON
			-72.42	Minimal
			-73.42	OFF
320	6905	7060	-65.42	ON
			-68.42	Minimal
			-69.42	OFF
Note: OFF: AWGN level at which no transmission is detected, consistently for a minimum period of 10 seconds Minimal: AWGN level at which the system begins to trigger the transmission switch-off, albeit not being kept off consistently ON: AWGN level at which no impact on the transmission is detected, consistently for a minimum period of 10 seconds				

EUT Tx Waveform for Mesh Mode


802.11be-EHT20 / CH37

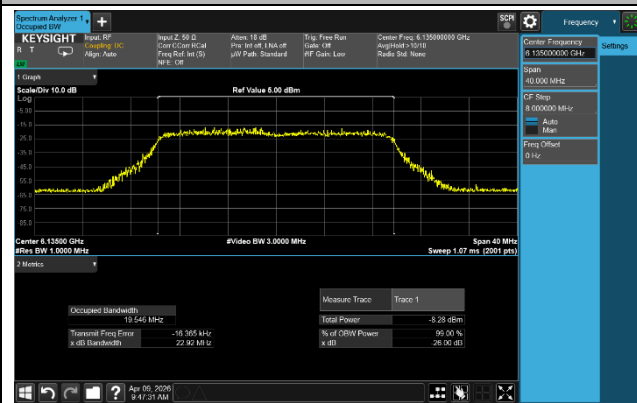


802.11be-EHT320 / CH63

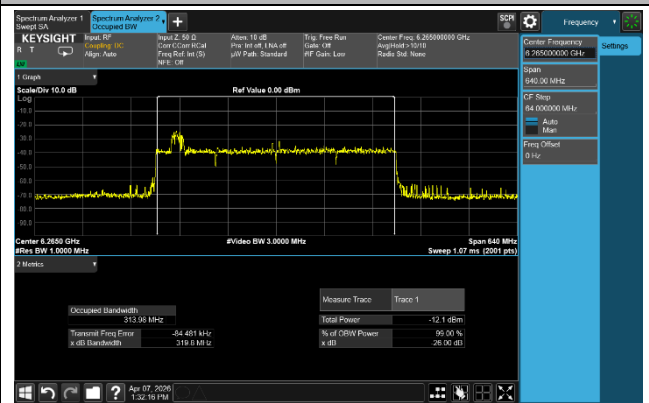


802.11be-EHT20 / CH101

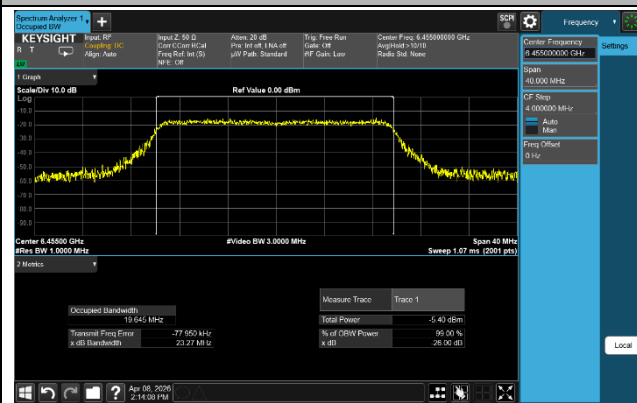

802.11be-EHT320 / CH127

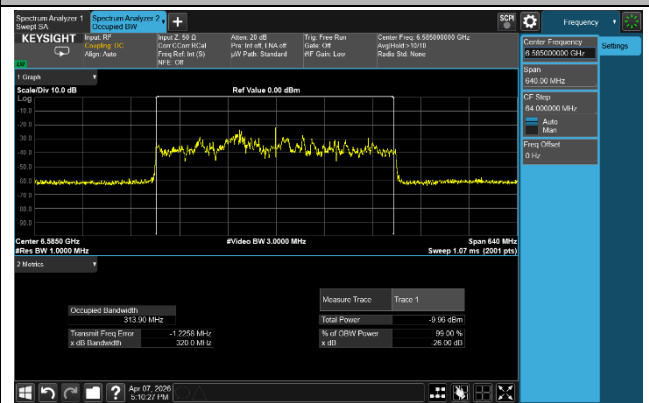


802.11be-EHT20 / CH149

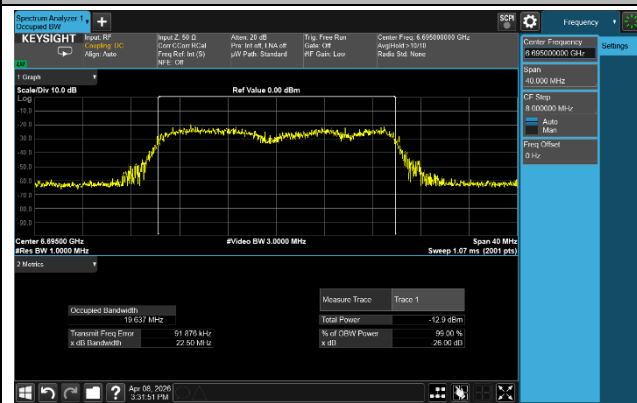


802.11be-EHT320 / CH191



802.11be-EHT20 / CH229

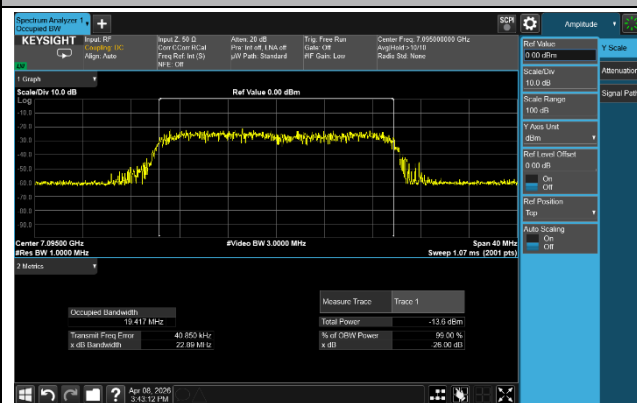


802.11be-EHT320 / CH191

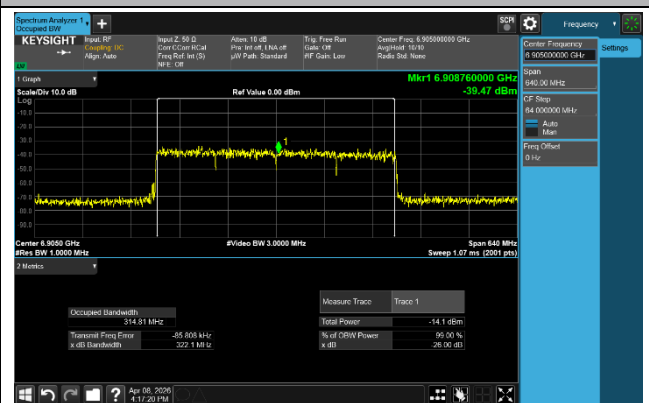


Incumbent Signal Calibration Plots (NII-5 Band) for Mesh Mode


802.11be-EHT20 / CH37

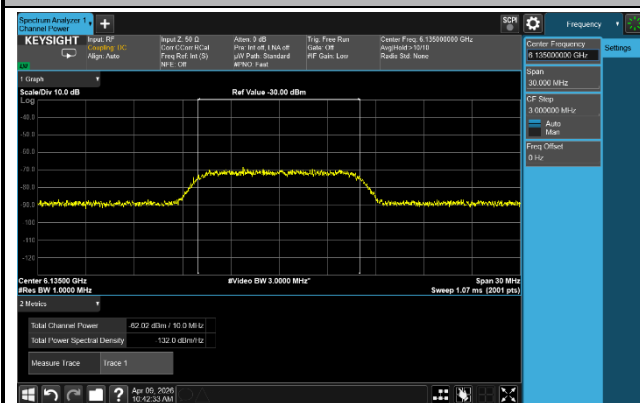


802.11be-EHT320 / CH63 (Low Edge)

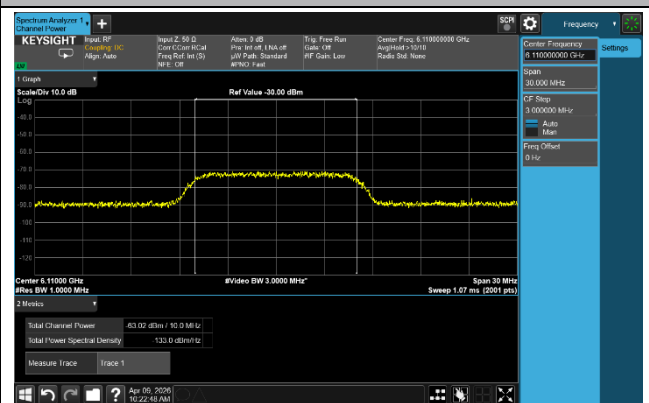

802.11be-EHT320 / CH63 (Middle)

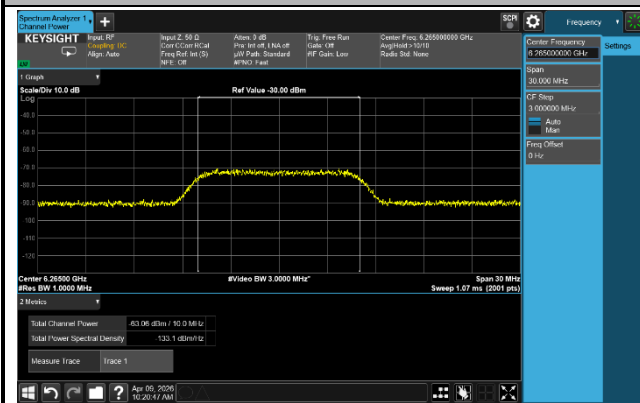


802.11be-EHT320 / CH63 (High Edge)

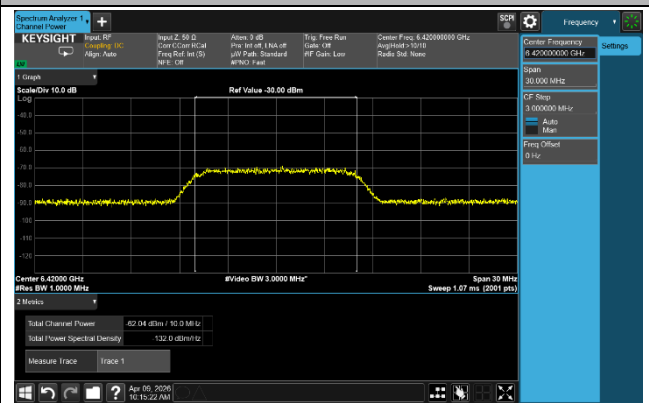


Incumbent Signal Calibration Plots (NII-6 Band) for Mesh Mode


802.11be-EHT20 / CH101

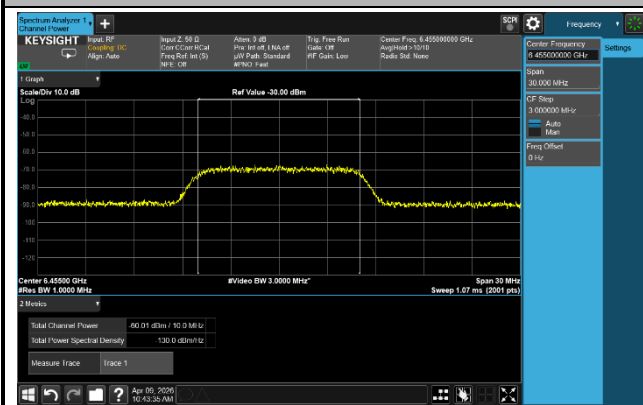


802.11be-EHT320 / CH127 (Low Edge)

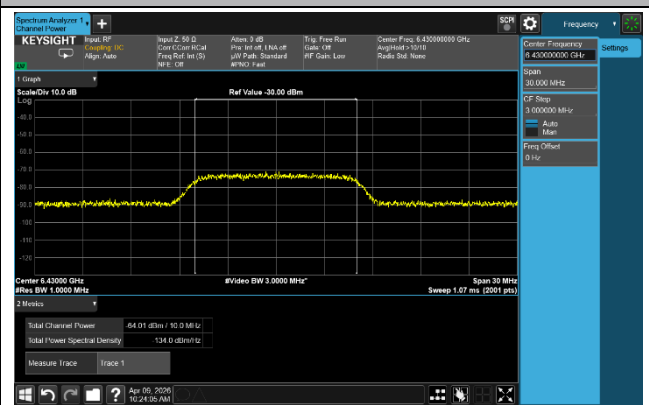

802.11be-EHT320 / CH127 (Middle)

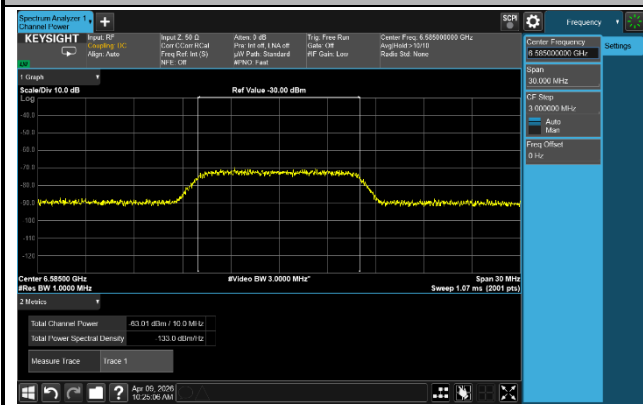


802.11be-EHT320 / CH127 (High Edge)

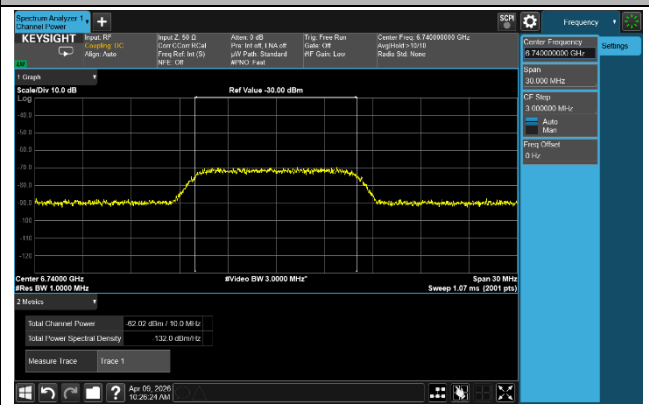


Incumbent Signal Calibration Plots (NII-7 Band) for Mesh Mode

802.11be-EHT20 / CH149

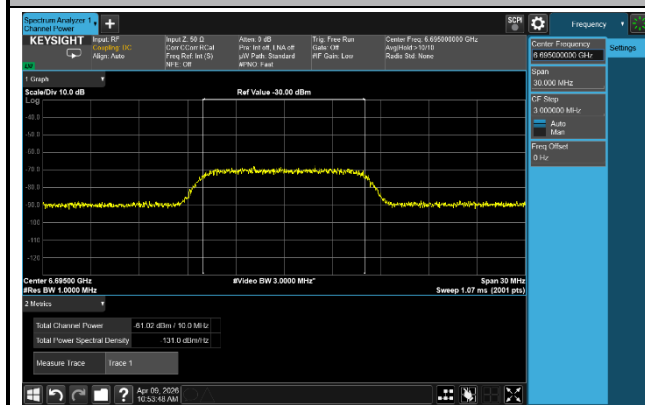


Incumbent Signal Calibration Plots (NII-8 Band) for Mesh Mode

802.11be-EHT20 / CH229

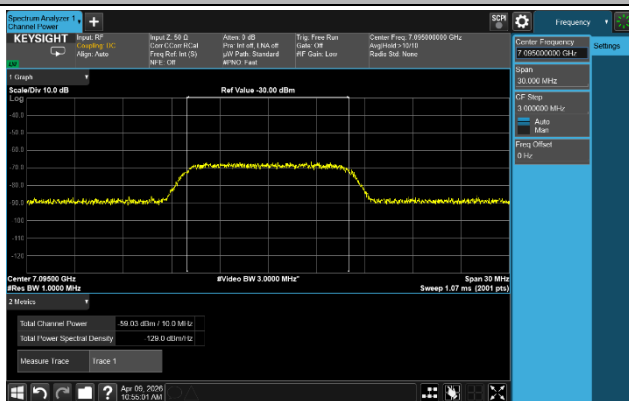


Incumbent Signal Calibration Plots (NII-7 & NII-8 Band) for AP Mode


802.11be-EHT320 / CH191 (Low Edge)

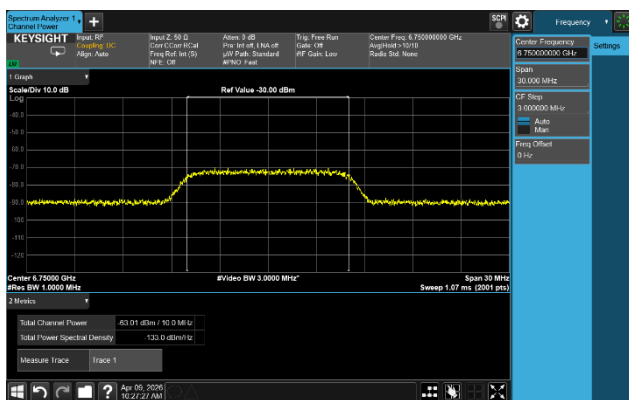

802.11be-EHT320 / CH191 (Middle)

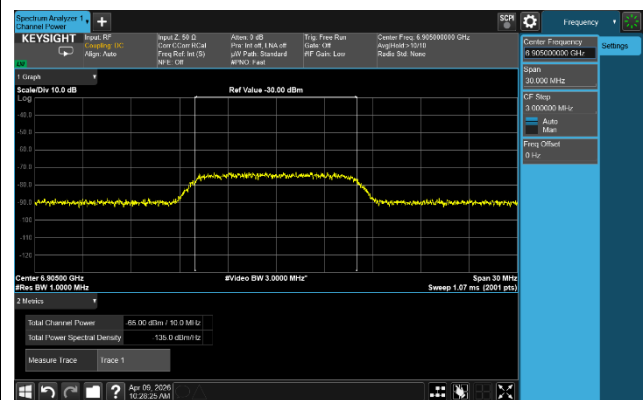


802.11be-EHT320 / CH191 (High Edge)

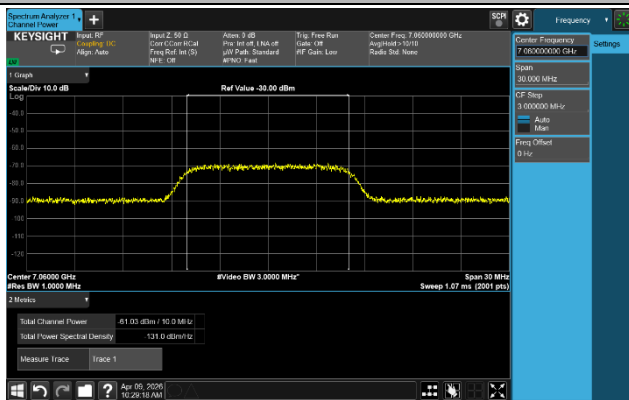


Test Result of EUT ceased transmission (NII-5 Band) for Mesh Mode


802.11be-EHT20 / CH37

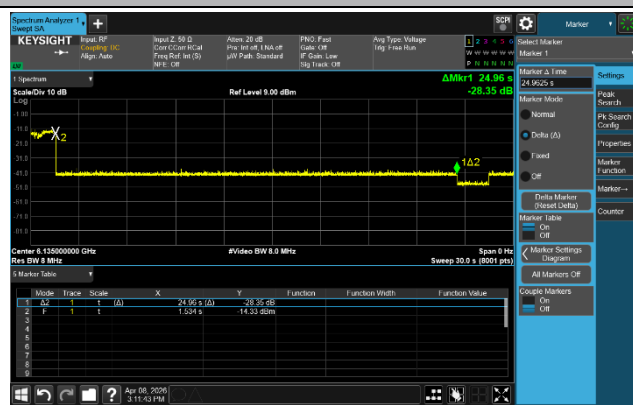


802.11be-EHT320 / CH63 (Low Edge)

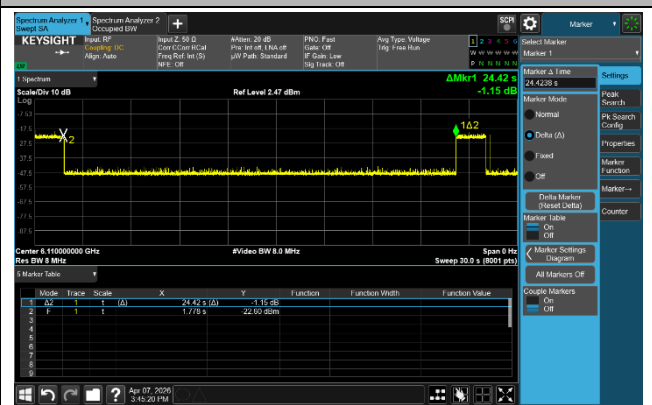

802.11be-EHT320 / CH63 (Middle)

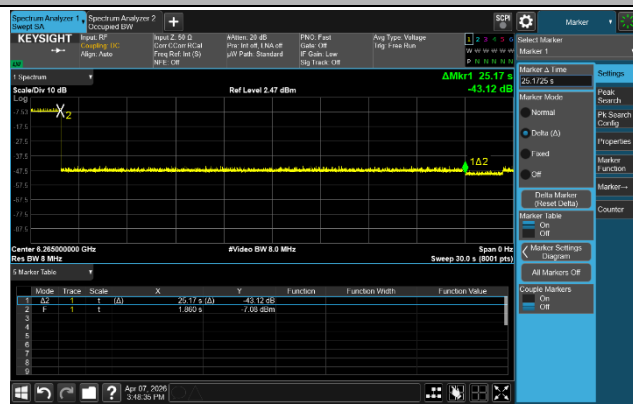


802.11be-EHT320 / CH63 (High Edge)

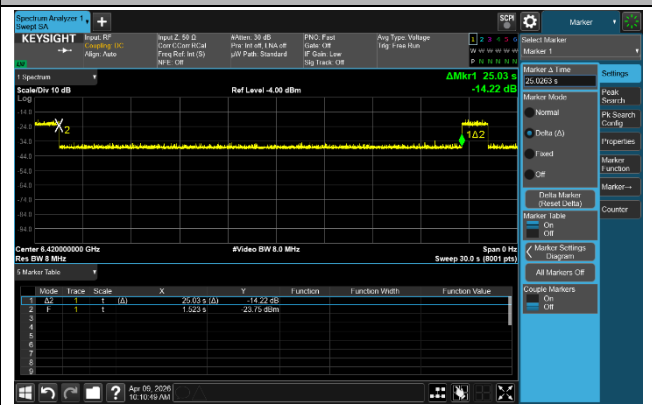


Test Result of EUT ceased transmission (NII-6 Band) for Mesh Mode


802.11be-EHT20 / CH101

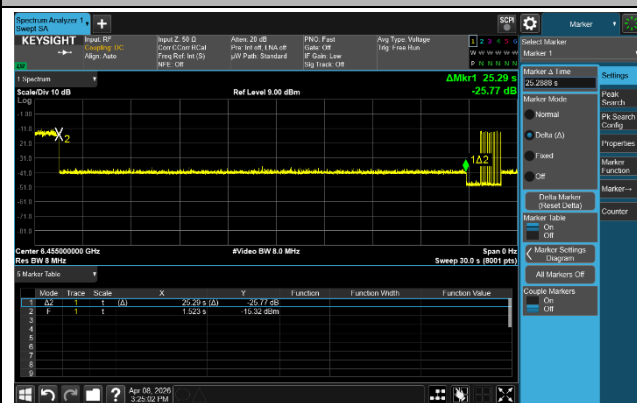


802.11be-EHT320 / CH127 (Low Edge)

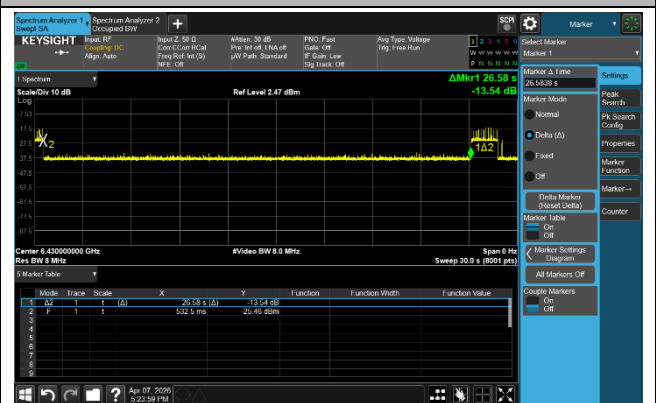

802.11be-EHT320 / CH127 (Middle)

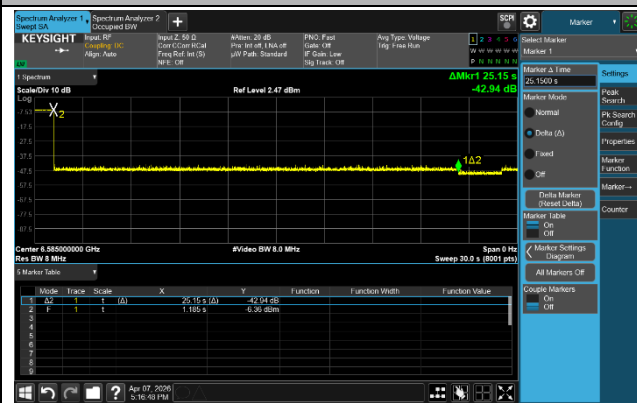


802.11be-EHT320 / CH127 (High Edge)

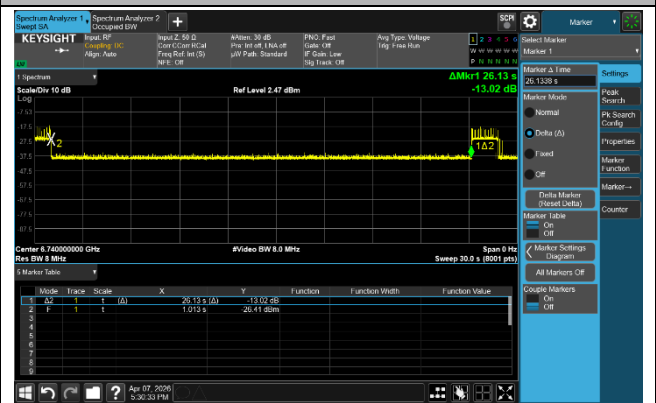

Test Result of EUT ceased transmission (NII-7 Band) for Mesh Mode

802.11be-EHT20 / CH149

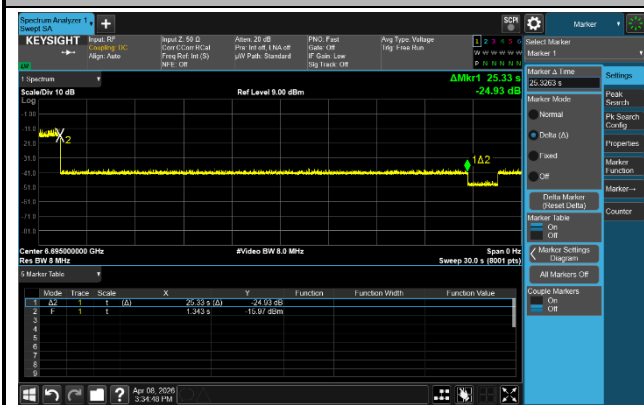


Test Result of EUT ceased transmission (NII-8 Band) for Mesh Mode

802.11be-EHT20 / CH229




Test Result of EUT ceased transmission (NII-7 & NII-8 Band) for AP Mode


802.11be-EHT320 / CH191 (Low Edge)

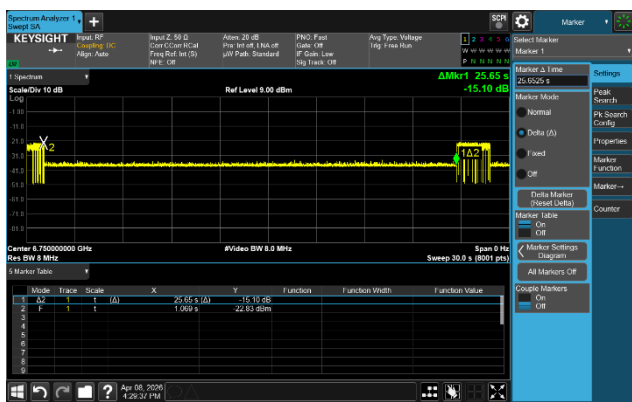

802.11be-EHT320 / CH191 (Middle)

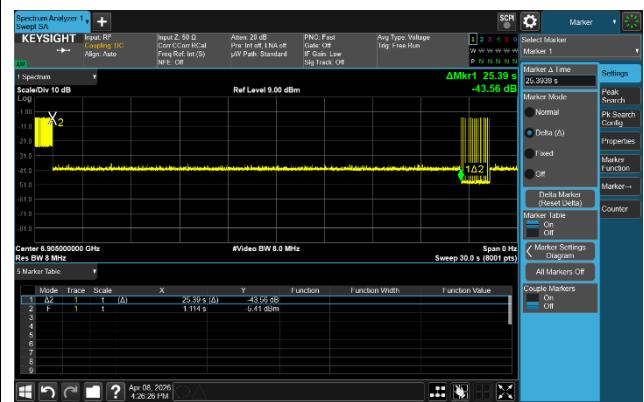

802.11be-EHT320 / CH191 (High Edge)

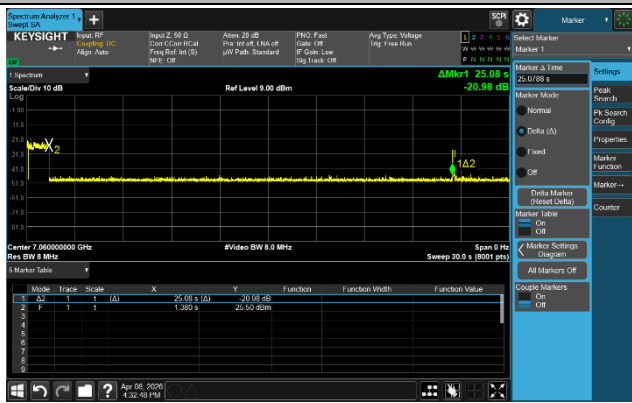

A.8 Radiated Spurious Emission Test Result

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{SS} = 2)	Test Channel	33
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10174.90	27.34	18.19	45.53	88.20	-42.67	Peak	Horizontal
	11829.00	26.05	20.18	46.23	74.00	-27.77	Peak	Horizontal
*	12903.40	25.92	22.51	48.43	88.20	-39.77	Peak	Horizontal
	17845.30	10.71	29.04	39.75	54.00	-14.25	Average	Horizontal
	17845.30	23.85	29.04	52.89	74.00	-21.11	Peak	Horizontal
*	10011.70	27.15	17.84	44.99	88.20	-43.21	Peak	Vertical
	11296.90	25.39	19.11	44.50	74.00	-29.50	Peak	Vertical
*	13887.70	27.31	22.54	49.85	88.20	-38.35	Peak	Vertical
	17952.40	11.38	29.13	40.51	54.00	-13.49	Average	Vertical
	17952.40	27.84	29.13	56.97	74.00	-17.03	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	61
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9906.30	26.95	17.48	44.43	88.20	-43.77	Peak	Horizontal
	11526.40	27.34	19.45	46.79	74.00	-27.21	Peak	Horizontal
*	13029.20	23.47	22.55	46.02	88.20	-42.18	Peak	Horizontal
	17913.30	11.28	29.62	40.90	54.00	-13.10	Average	Horizontal
	17913.30	24.75	29.62	54.37	74.00	-19.63	Peak	Horizontal
*	10037.20	27.62	17.76	45.38	88.20	-42.82	Peak	Vertical
	11495.80	26.22	19.45	45.67	74.00	-28.33	Peak	Vertical
*	13063.20	24.64	22.51	47.15	88.20	-41.05	Peak	Vertical
	17960.90	11.22	29.51	40.73	54.00	-13.27	Average	Vertical
	17960.90	27.55	29.51	57.06	74.00	-16.94	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	93
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9906.30	27.55	17.48	45.03	88.20	-43.17	Peak	Horizontal
	11769.50	25.51	20.04	45.55	74.00	-28.45	Peak	Horizontal
*	12927.20	24.33	22.47	46.80	88.20	-41.40	Peak	Horizontal
	17960.90	11.58	29.51	41.09	54.00	-12.91	Average	Horizontal
	17960.90	24.59	29.51	54.10	74.00	-19.90	Peak	Horizontal
*	10076.30	27.67	18.08	45.75	88.20	-42.45	Peak	Vertical
	11441.40	27.76	19.49	47.25	74.00	-26.75	Peak	Vertical
*	12891.50	26.67	22.48	49.15	88.20	-39.05	Peak	Vertical
	17966.00	11.33	29.75	41.08	54.00	-12.92	Average	Vertical
	17966.00	25.32	29.75	55.07	74.00	-18.93	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	97
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10110.30	28.36	17.99	46.35	88.20	-41.85	Peak	Horizontal
	11434.60	28.57	19.46	48.03	74.00	-25.97	Peak	Horizontal
*	12898.30	26.96	22.49	49.45	88.20	-38.75	Peak	Horizontal
	17908.20	11.52	29.46	40.98	54.00	-13.02	Average	Horizontal
	17908.20	28.47	29.46	57.93	74.00	-16.07	Peak	Horizontal
*	10028.70	27.97	17.87	45.84	88.20	-42.36	Peak	Vertical
	11434.60	26.76	19.46	46.22	74.00	-27.78	Peak	Vertical
*	12932.30	24.78	22.49	47.27	88.20	-40.93	Peak	Vertical
	17957.50	11.25	29.36	40.61	54.00	-13.39	Average	Vertical
	17957.50	25.95	29.36	55.31	74.00	-18.69	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	105
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9855.30	28.21	17.34	45.55	88.20	-42.65	Peak	Horizontal
	11393.80	25.33	19.26	44.59	74.00	-29.41	Peak	Horizontal
*	12910.20	25.50	22.51	48.01	88.20	-40.19	Peak	Horizontal
	17870.80	11.85	30.31	42.16	54.00	-11.84	Average	Horizontal
	17870.80	23.69	30.31	54.00	74.00	-20.00	Peak	Horizontal
*	10282.00	28.24	18.25	46.49	88.20	-41.71	Peak	Vertical
	11478.80	26.46	19.38	45.84	74.00	-28.16	Peak	Vertical
*	12877.90	25.65	22.50	48.15	88.20	-40.05	Peak	Vertical
	17915.00	11.75	29.67	41.42	54.00	-12.58	Average	Vertical
	17915.00	25.12	29.67	54.79	74.00	-19.21	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	113
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9806.00	27.91	17.11	45.02	88.20	-43.18	Peak	Horizontal
	11976.90	27.01	20.48	47.49	74.00	-26.51	Peak	Horizontal
*	12750.40	27.59	22.64	50.23	88.20	-37.97	Peak	Horizontal
	17915.00	11.69	29.67	41.36	54.00	-12.64	Average	Horizontal
	17915.00	26.81	29.67	56.48	74.00	-17.52	Peak	Horizontal
*	10079.70	29.13	18.01	47.14	88.20	-41.06	Peak	Vertical
	11421.00	25.95	19.30	45.25	74.00	-28.75	Peak	Vertical
*	12974.80	24.99	22.69	47.68	88.20	-40.52	Peak	Vertical
	17870.80	11.32	30.31	41.63	54.00	-12.37	Average	Vertical
	17870.80	25.84	30.31	56.15	74.00	-17.85	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	117
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10518.30	29.61	18.57	48.18	88.20	-40.02	Peak	Horizontal
	12012.60	29.15	20.73	49.88	74.00	-24.12	Peak	Horizontal
*	12993.50	27.48	22.50	49.98	88.20	-38.22	Peak	Horizontal
	17870.80	11.45	30.31	41.76	54.00	-12.24	Average	Horizontal
	17870.80	28.85	30.31	59.16	74.00	-14.84	Peak	Horizontal
*	10054.20	30.09	17.85	47.94	88.20	-40.26	Peak	Vertical
	11650.50	29.12	19.84	48.96	74.00	-25.04	Peak	Vertical
*	13095.50	27.91	22.38	50.29	88.20	-37.91	Peak	Vertical
	17879.30	11.26	30.35	41.61	54.00	-12.39	Average	Vertical
	17879.30	27.36	30.35	57.71	74.00	-16.29	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	149
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9909.70	27.28	17.51	44.79	88.20	-43.41	Peak	Horizontal
	11449.90	26.63	19.47	46.10	74.00	-27.90	Peak	Horizontal
*	12976.50	24.34	22.67	47.01	88.20	-41.19	Peak	Horizontal
	18000.00	11.85	29.26	41.11	54.00	-12.89	Average	Horizontal
	18000.00	26.83	29.26	56.09	74.00	-17.91	Peak	Horizontal
*	9862.10	26.60	17.35	43.95	88.20	-44.25	Peak	Vertical
	11784.80	25.85	20.14	45.99	74.00	-28.01	Peak	Vertical
*	13039.40	23.57	22.45	46.02	88.20	-42.18	Peak	Vertical
	17957.50	11.89	29.36	41.25	54.00	-12.75	Average	Vertical
	17957.50	27.14	29.36	56.50	74.00	-17.50	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	181
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9790.70	26.92	16.99	43.91	88.20	-44.29	Peak	Horizontal
	11043.60	25.72	18.88	44.60	74.00	-29.40	Peak	Horizontal
*	12944.20	25.00	22.57	47.57	88.20	-40.63	Peak	Horizontal
	17957.50	11.77	29.36	41.13	54.00	-12.87	Average	Horizontal
	17957.50	25.05	29.36	54.41	74.00	-19.59	Peak	Horizontal
*	9933.50	26.43	17.48	43.91	88.20	-44.29	Peak	Vertical
	11393.80	28.92	19.26	48.18	74.00	-25.82	Peak	Vertical
*	12913.60	25.76	22.50	48.26	88.20	-39.94	Peak	Vertical
	17957.50	11.29	29.36	40.65	54.00	-13.35	Average	Vertical
	17957.50	25.87	29.36	55.23	74.00	-18.77	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	185
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10224.20	28.08	18.12	46.20	88.20	-42.00	Peak	Horizontal
	11985.40	26.87	20.52	47.39	74.00	-26.61	Peak	Horizontal
*	13880.90	25.82	22.36	48.18	88.20	-40.02	Peak	Horizontal
	17957.50	11.14	29.36	40.50	54.00	-13.50	Average	Horizontal
	17957.50	25.83	29.36	55.19	74.00	-18.81	Peak	Horizontal
*	10176.60	27.01	18.23	45.24	88.20	-42.96	Peak	Vertical
	11643.70	27.25	19.79	47.04	74.00	-26.96	Peak	Vertical
*	13914.90	26.65	22.06	48.71	88.20	-39.49	Peak	Vertical
	17828.30	11.36	30.06	41.42	54.00	-12.58	Average	Vertical
	17828.30	24.09	30.06	54.15	74.00	-19.85	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	189
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10030.40	27.55	17.85	45.40	88.20	-42.80	Peak	Horizontal
	11257.80	26.93	19.08	46.01	74.00	-27.99	Peak	Horizontal
*	12976.50	23.90	22.67	46.57	88.20	-41.63	Peak	Horizontal
	17870.80	11.74	30.31	42.05	54.00	-11.95	Average	Horizontal
	17870.80	25.88	30.31	56.19	74.00	-17.81	Peak	Horizontal
*	10078.00	27.14	18.05	45.19	88.20	-43.01	Peak	Vertical
	11560.40	28.20	19.76	47.96	74.00	-26.04	Peak	Vertical
*	12944.20	25.45	22.57	48.02	88.20	-40.18	Peak	Vertical
	17870.80	11.85	30.31	42.16	54.00	-11.84	Average	Vertical
	17870.80	25.50	30.31	55.81	74.00	-18.19	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	209
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10078.00	26.02	18.05	44.07	88.20	-44.13	Peak	Horizontal
	11422.70	27.51	19.32	46.83	74.00	-27.17	Peak	Horizontal
*	12852.40	25.17	22.54	47.71	88.20	-40.49	Peak	Horizontal
	17870.80	11.52	30.31	41.83	54.00	-12.17	Average	Horizontal
	17870.80	25.02	30.31	55.33	74.00	-18.67	Peak	Horizontal
*	10033.80	26.70	17.81	44.51	88.20	-43.69	Peak	Vertical
	11268.00	25.86	19.01	44.87	74.00	-29.13	Peak	Vertical
*	13000.30	25.72	22.49	48.21	88.20	-39.99	Peak	Vertical
	17875.90	11.29	30.47	41.76	54.00	-12.24	Average	Vertical
	17875.90	25.65	30.47	56.12	74.00	-17.88	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE20 (N _{ss} = 2)	Test Channel	229
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10030.40	27.94	17.85	45.79	88.20	-42.41	Peak	Horizontal
	11337.70	28.44	19.28	47.72	74.00	-26.28	Peak	Horizontal
*	12991.80	26.22	22.51	48.73	88.20	-39.47	Peak	Horizontal
	18000.00	11.69	29.26	40.95	54.00	-13.05	Average	Horizontal
	18000.00	25.45	29.26	54.71	74.00	-19.29	Peak	Horizontal
*	10084.80	28.95	17.90	46.85	88.20	-41.35	Peak	Vertical
	11555.30	29.13	19.70	48.83	74.00	-25.17	Peak	Vertical
*	13132.90	26.99	22.59	49.58	88.20	-38.62	Peak	Vertical
	17864.00	11.21	30.10	41.31	54.00	-12.69	Average	Vertical
	17864.00	26.86	30.10	56.96	74.00	-17.04	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	35
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10112.00	26.83	18.02	44.85	88.20	-43.35	Peak	Horizontal
	11682.80	27.78	19.91	47.69	74.00	-26.31	Peak	Horizontal
*	14020.30	26.68	22.19	48.87	88.20	-39.33	Peak	Horizontal
	17816.40	11.66	30.08	41.74	54.00	-12.26	Average	Horizontal
	17816.40	24.35	30.08	54.43	74.00	-19.57	Peak	Horizontal
*	10355.10	29.81	18.32	48.13	88.20	-40.07	Peak	Vertical
	12010.90	29.87	20.71	50.58	74.00	-23.42	Peak	Vertical
*	14135.90	27.57	22.10	49.67	88.20	-38.53	Peak	Vertical
	17864.00	11.08	30.10	41.18	54.00	-12.82	Average	Vertical
	17864.00	26.75	30.10	56.85	74.00	-17.15	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	59
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10387.40	30.75	18.37	49.12	88.20	-39.08	Peak	Horizontal
	11179.60	30.51	18.97	49.48	74.00	-24.52	Peak	Horizontal
*	13852.00	31.13	22.03	53.16	88.20	-35.04	Peak	Horizontal
	17869.10	11.43	30.26	41.69	54.00	-12.31	Average	Horizontal
	17869.10	28.66	30.26	58.92	74.00	-15.08	Peak	Horizontal
*	10147.70	29.45	17.89	47.34	88.20	-40.86	Peak	Vertical
	11534.90	29.40	19.51	48.91	74.00	-25.09	Peak	Vertical
*	13892.80	28.68	22.40	51.08	88.20	-37.12	Peak	Vertical
	17775.60	11.35	29.96	41.31	54.00	-12.69	Average	Vertical
	17775.60	28.63	29.96	58.59	74.00	-15.41	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	91
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10251.40	26.59	18.06	44.65	88.20	-43.55	Peak	Horizontal
	11842.60	26.20	20.28	46.48	74.00	-27.52	Peak	Horizontal
*	13982.90	26.94	22.29	49.23	88.20	-38.97	Peak	Horizontal
	17981.30	11.37	30.57	41.94	54.00	-12.06	Average	Horizontal
	17981.30	27.88	30.57	58.45	74.00	-15.55	Peak	Horizontal
*	10057.60	27.48	17.90	45.38	88.20	-42.82	Peak	Vertical
	11650.50	26.16	19.84	46.00	74.00	-28.00	Peak	Vertical
*	13982.90	27.68	22.29	49.97	88.20	-38.23	Peak	Vertical
	18000.00	11.41	29.26	40.67	54.00	-13.33	Average	Vertical
	18000.00	25.51	29.26	54.77	74.00	-19.23	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	99
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10030.40	28.96	17.85	46.81	88.20	-41.39	Peak	Horizontal
	11682.80	28.25	19.91	48.16	74.00	-25.84	Peak	Horizontal
*	13906.40	25.79	22.08	47.87	88.20	-40.33	Peak	Horizontal
	17962.60	11.23	29.59	40.82	54.00	-13.18	Average	Horizontal
	17962.60	27.10	29.59	56.69	74.00	-17.31	Peak	Horizontal
*	9921.60	27.63	17.54	45.17	88.20	-43.03	Peak	Vertical
	11778.00	27.37	20.08	47.45	74.00	-26.55	Peak	Vertical
*	13829.90	27.80	22.40	50.20	88.20	-38.00	Peak	Vertical
	17913.30	11.38	29.62	41.00	54.00	-13.00	Average	Vertical
	17913.30	26.86	29.62	56.48	74.00	-17.52	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	107
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10195.30	28.23	18.07	46.30	88.20	-41.90	Peak	Horizontal
	11650.50	27.37	19.84	47.21	74.00	-26.79	Peak	Horizontal
*	13906.40	26.74	22.08	48.82	88.20	-39.38	Peak	Horizontal
	17864.00	11.07	30.10	41.17	54.00	-12.83	Average	Horizontal
	17864.00	26.37	30.10	56.47	74.00	-17.53	Peak	Horizontal
*	10139.20	26.82	17.96	44.78	88.20	-43.42	Peak	Vertical
	11587.60	25.79	19.61	45.40	74.00	-28.60	Peak	Vertical
*	13943.80	26.68	22.33	49.01	88.20	-39.19	Peak	Vertical
	17775.60	11.57	29.96	41.53	54.00	-12.47	Average	Vertical
	17775.60	28.47	29.96	58.43	74.00	-15.57	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	115
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10139.20	28.46	17.96	46.42	88.20	-41.78	Peak	Horizontal
	11650.50	26.89	19.84	46.73	74.00	-27.27	Peak	Horizontal
*	13755.10	25.55	22.06	47.61	88.20	-40.59	Peak	Horizontal
	17913.30	11.29	29.62	40.91	54.00	-13.09	Average	Horizontal
	17913.30	26.85	29.62	56.47	74.00	-17.53	Peak	Horizontal
*	9760.10	28.47	16.94	45.41	88.20	-42.79	Peak	Vertical
	11907.20	26.48	20.46	46.94	74.00	-27.06	Peak	Vertical
*	13829.90	26.10	22.40	48.50	88.20	-39.70	Peak	Vertical
	17816.40	11.47	30.08	41.55	54.00	-12.45	Average	Vertical
	17816.40	24.50	30.08	54.58	74.00	-19.42	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	123
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10057.60	27.06	17.90	44.96	88.20	-43.24	Peak	Horizontal
	11587.60	28.05	19.61	47.66	74.00	-26.34	Peak	Horizontal
*	13943.80	27.17	22.33	49.50	88.20	-38.70	Peak	Horizontal
	17864.00	11.28	30.10	41.38	54.00	-12.62	Average	Horizontal
	17864.00	26.37	30.10	56.47	74.00	-17.53	Peak	Horizontal
*	10222.50	26.64	18.11	44.75	88.20	-43.45	Peak	Vertical
	11368.30	26.81	19.26	46.07	74.00	-27.93	Peak	Vertical
*	13943.80	25.89	22.33	48.22	88.20	-39.98	Peak	Vertical
	17864.00	11.51	30.10	41.61	54.00	-12.39	Average	Vertical
	17864.00	25.77	30.10	55.87	74.00	-18.13	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	147
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10030.40	26.78	17.85	44.63	88.20	-43.57	Peak	Horizontal
	11555.30	28.63	19.70	48.33	74.00	-25.67	Peak	Horizontal
*	13792.50	25.25	22.27	47.52	88.20	-40.68	Peak	Horizontal
	17913.30	11.17	29.62	40.79	54.00	-13.21	Average	Horizontal
	17913.30	27.17	29.62	56.79	74.00	-17.21	Peak	Horizontal
*	10307.50	29.60	18.13	47.73	88.20	-40.47	Peak	Vertical
	11682.80	26.49	19.91	46.40	74.00	-27.60	Peak	Vertical
*	13869.00	25.83	22.05	47.88	88.20	-40.32	Peak	Vertical
	17864.00	11.57	30.10	41.67	54.00	-12.33	Average	Vertical
	17864.00	25.74	30.10	55.84	74.00	-18.16	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	179
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9921.60	27.61	17.54	45.15	88.20	-43.05	Peak	Horizontal
	11524.70	25.94	19.44	45.38	74.00	-28.62	Peak	Horizontal
*	13943.80	26.08	22.33	48.41	88.20	-39.79	Peak	Horizontal
	17767.10	11.44	30.26	41.70	54.00	-12.30	Average	Horizontal
	17767.10	25.44	30.26	55.70	74.00	-18.30	Peak	Horizontal
*	9976.00	26.99	17.68	44.67	88.20	-43.53	Peak	Vertical
	11745.70	26.30	19.96	46.26	74.00	-27.74	Peak	Vertical
*	13755.10	26.20	22.06	48.26	88.20	-39.94	Peak	Vertical
	17864.00	11.24	30.10	41.34	54.00	-12.66	Average	Vertical
	17864.00	25.43	30.10	55.53	74.00	-18.47	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	187
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10003.20	27.66	17.67	45.33	88.20	-42.87	Peak	Horizontal
	11337.70	26.37	19.28	45.65	74.00	-28.35	Peak	Horizontal
*	13943.80	25.80	22.33	48.13	88.20	-40.07	Peak	Horizontal
	17864.00	11.54	30.10	41.64	54.00	-12.36	Average	Horizontal
	17864.00	25.54	30.10	55.64	74.00	-18.36	Peak	Horizontal
*	10390.80	26.28	18.37	44.65	88.20	-43.55	Peak	Vertical
	11939.50	26.34	20.47	46.81	74.00	-27.19	Peak	Vertical
*	13869.00	27.78	22.05	49.83	88.20	-38.37	Peak	Vertical
	17864.00	11.62	30.10	41.72	54.00	-12.28	Average	Vertical
	17864.00	24.63	30.10	54.73	74.00	-19.27	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	195
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10251.40	27.78	18.06	45.84	88.20	-42.36	Peak	Horizontal
	11907.20	27.95	20.46	48.41	74.00	-25.59	Peak	Horizontal
*	13982.90	26.46	22.29	48.75	88.20	-39.45	Peak	Horizontal
	17816.40	11.26	30.08	41.34	54.00	-12.66	Average	Horizontal
	17816.40	25.27	30.08	55.35	74.00	-18.65	Peak	Horizontal
*	10139.20	26.34	17.96	44.30	88.20	-43.90	Peak	Vertical
	11650.50	27.50	19.84	47.34	74.00	-26.66	Peak	Vertical
*	13906.40	24.75	22.08	46.83	88.20	-41.37	Peak	Vertical
	17962.60	11.18	29.59	40.77	54.00	-13.23	Average	Vertical
	17962.60	25.82	29.59	55.41	74.00	-18.59	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	211
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10278.60	27.03	18.20	45.23	88.20	-42.97	Peak	Horizontal
	11618.20	27.04	19.69	46.73	74.00	-27.27	Peak	Horizontal
*	13792.50	25.19	22.27	47.46	88.20	-40.74	Peak	Horizontal
	17864.00	11.63	30.10	41.73	54.00	-12.27	Average	Horizontal
	17864.00	25.63	30.10	55.73	74.00	-18.27	Peak	Horizontal
*	10139.20	27.69	17.96	45.65	88.20	-42.55	Peak	Vertical
	11555.30	27.41	19.70	47.11	74.00	-26.89	Peak	Vertical
*	13906.40	26.80	22.08	48.88	88.20	-39.32	Peak	Vertical
	17864.00	11.28	30.10	41.38	54.00	-12.62	Average	Vertical
	17864.00	25.90	30.10	56.00	74.00	-18.00	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE40 (N _{ss} = 2)	Test Channel	227
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10222.50	27.82	18.11	45.93	88.20	-42.27	Peak	Horizontal
	11907.20	26.55	20.46	47.01	74.00	-26.99	Peak	Horizontal
*	13943.80	28.24	22.33	50.57	88.20	-37.63	Peak	Horizontal
	17864.00	11.45	30.10	41.55	54.00	-12.45	Average	Horizontal
	17864.00	25.46	30.10	55.56	74.00	-18.44	Peak	Horizontal
*	10003.20	26.99	17.67	44.66	88.20	-43.54	Peak	Vertical
	11524.70	26.53	19.44	45.97	74.00	-28.03	Peak	Vertical
*	14173.30	27.31	22.19	49.50	88.20	-38.70	Peak	Vertical
	17962.60	11.64	29.59	41.23	54.00	-12.77	Average	Vertical
	17962.60	26.49	29.59	56.08	74.00	-17.92	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	39
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10195.30	27.86	18.07	45.93	88.20	-42.27	Peak	Horizontal
	11461.80	26.97	19.42	46.39	74.00	-27.61	Peak	Horizontal
*	14020.30	27.21	22.19	49.40	88.20	-38.80	Peak	Horizontal
	17864.00	11.24	30.10	41.34	54.00	-12.66	Average	Horizontal
	17864.00	24.65	30.10	54.75	74.00	-19.25	Peak	Horizontal
*	10030.40	26.93	17.85	44.78	88.20	-43.42	Peak	Vertical
	11555.30	27.01	19.70	46.71	74.00	-27.29	Peak	Vertical
*	13906.40	25.67	22.08	47.75	88.20	-40.45	Peak	Vertical
	17913.30	11.37	29.62	40.99	54.00	-13.01	Average	Vertical
	17913.30	26.68	29.62	56.30	74.00	-17.70	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	55
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10112.00	26.30	18.02	44.32	88.20	-43.88	Peak	Horizontal
	11810.30	25.73	20.15	45.88	74.00	-28.12	Peak	Horizontal
*	13792.50	27.76	22.27	50.03	88.20	-38.17	Peak	Horizontal
	17864.00	11.27	30.10	41.37	54.00	-12.63	Average	Horizontal
	17864.00	27.60	30.10	57.70	74.00	-16.30	Peak	Horizontal
*	10533.60	26.68	18.40	45.08	88.20	-43.12	Peak	Vertical
	11123.50	26.22	19.06	45.28	74.00	-28.72	Peak	Vertical
*	13982.90	26.45	22.29	48.74	88.20	-39.46	Peak	Vertical
	17864.00	11.07	30.10	41.17	54.00	-12.83	Average	Vertical
	17864.00	27.26	30.10	57.36	74.00	-16.64	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	87
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10003.20	25.75	17.67	43.42	88.20	-44.78	Peak	Horizontal
	11971.80	26.19	20.47	46.66	74.00	-27.34	Peak	Horizontal
*	13982.90	25.89	22.29	48.18	88.20	-40.02	Peak	Horizontal
	17816.40	11.49	30.08	41.57	54.00	-12.43	Average	Horizontal
	17816.40	27.00	30.08	57.08	74.00	-16.92	Peak	Horizontal
*	10195.30	26.02	18.07	44.09	88.20	-44.11	Peak	Vertical
	11461.80	26.31	19.42	45.73	74.00	-28.27	Peak	Vertical
*	14057.70	26.70	22.27	48.97	88.20	-39.23	Peak	Vertical
	17816.40	11.32	30.08	41.40	54.00	-12.60	Average	Vertical
	17816.40	26.68	30.08	56.76	74.00	-17.24	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	103
Test Date	2026-02-09		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10251.40	26.89	18.06	44.95	88.20	-43.25	Peak	Horizontal
	11682.80	26.83	19.91	46.74	74.00	-27.26	Peak	Horizontal
*	14020.30	25.59	22.19	47.78	88.20	-40.42	Peak	Horizontal
	17816.40	11.29	30.08	41.37	54.00	-12.63	Average	Horizontal
	17816.40	26.70	30.08	56.78	74.00	-17.22	Peak	Horizontal
*	10139.20	27.81	17.96	45.77	88.20	-42.43	Peak	Vertical
	11276.50	27.17	18.96	46.13	74.00	-27.87	Peak	Vertical
*	13869.00	27.52	22.05	49.57	88.20	-38.63	Peak	Vertical
	17864.00	11.42	30.10	41.52	54.00	-12.48	Average	Vertical
	17864.00	24.97	30.10	55.07	74.00	-18.93	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	119
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10139.20	27.25	17.96	45.21	88.20	-42.99	Peak	Horizontal
	11915.70	26.12	20.47	46.59	74.00	-27.41	Peak	Horizontal
*	14044.10	26.47	22.37	48.84	88.20	-39.36	Peak	Horizontal
	17818.10	11.29	30.13	41.42	54.00	-12.58	Average	Horizontal
	17818.10	26.00	30.13	56.13	74.00	-17.87	Peak	Horizontal
*	10052.50	27.88	17.84	45.72	88.20	-42.48	Peak	Vertical
	11485.60	25.84	19.40	45.24	74.00	-28.76	Peak	Vertical
*	13846.90	26.38	22.16	48.54	88.20	-39.66	Peak	Vertical
	17818.10	11.26	30.13	41.39	54.00	-12.61	Average	Vertical
	17818.10	26.97	30.13	57.10	74.00	-16.90	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	135
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10025.30	27.07	17.92	44.99	88.20	-43.21	Peak	Horizontal
	11324.10	28.19	19.29	47.48	74.00	-26.52	Peak	Horizontal
*	13886.00	27.81	22.51	50.32	88.20	-37.88	Peak	Horizontal
	17818.10	11.24	30.13	41.37	54.00	-12.63	Average	Horizontal
	17818.10	24.98	30.13	55.11	74.00	-18.89	Peak	Horizontal
*	10225.90	27.56	18.14	45.70	88.20	-42.50	Peak	Vertical
	11550.20	27.43	19.64	47.07	74.00	-26.93	Peak	Vertical
*	14044.10	25.74	22.37	48.11	88.20	-40.09	Peak	Vertical
	17867.40	11.12	30.20	41.32	54.00	-12.68	Average	Vertical
	17867.40	24.13	30.20	54.33	74.00	-19.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	151
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10139.20	26.25	17.96	44.21	88.20	-43.99	Peak	Horizontal
	11749.10	26.31	19.97	46.28	74.00	-27.72	Peak	Horizontal
*	14044.10	25.32	22.37	47.69	88.20	-40.51	Peak	Horizontal
	17918.40	11.36	29.79	41.15	54.00	-12.85	Average	Horizontal
	17918.40	26.56	29.79	56.35	74.00	-17.65	Peak	Horizontal
*	10052.50	26.46	17.84	44.30	88.20	-43.90	Peak	Vertical
	11582.50	28.39	19.62	48.01	74.00	-25.99	Peak	Vertical
*	13768.70	25.38	22.29	47.67	88.20	-40.53	Peak	Vertical
	17969.40	11.25	29.93	41.18	54.00	-12.82	Average	Vertical
	17969.40	25.37	29.93	55.30	74.00	-18.70	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	167
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10081.40	25.99	17.97	43.96	88.20	-44.24	Peak	Horizontal
	11915.70	25.94	20.47	46.41	74.00	-27.59	Peak	Horizontal
*	13886.00	27.84	22.51	50.35	88.20	-37.85	Peak	Horizontal
	17918.40	11.29	29.79	41.08	54.00	-12.92	Average	Horizontal
	17918.40	24.59	29.79	54.38	74.00	-19.62	Peak	Horizontal
*	9855.30	27.28	17.34	44.62	88.20	-43.58	Peak	Vertical
	11038.50	27.47	18.90	46.37	74.00	-27.63	Peak	Vertical
*	13964.20	25.94	22.22	48.16	88.20	-40.04	Peak	Vertical
	17969.40	11.41	29.93	41.34	54.00	-12.66	Average	Vertical
	17969.40	24.98	29.93	54.91	74.00	-19.09	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	183
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10052.50	28.06	17.84	45.90	88.20	-42.30	Peak	Horizontal
	11550.20	26.62	19.64	46.26	74.00	-27.74	Peak	Horizontal
*	14124.00	26.49	22.21	48.70	88.20	-39.50	Peak	Horizontal
	17918.40	11.35	29.79	41.14	54.00	-12.86	Average	Horizontal
	17918.40	24.35	29.79	54.14	74.00	-19.86	Peak	Horizontal
*	9967.50	27.03	17.82	44.85	88.20	-43.35	Peak	Vertical
	11715.10	26.12	19.98	46.10	74.00	-27.90	Peak	Vertical
*	14005.00	26.37	22.31	48.68	88.20	-39.52	Peak	Vertical
	17918.40	11.19	29.79	40.98	54.00	-13.02	Average	Vertical
	17918.40	25.40	29.79	55.19	74.00	-18.81	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	199
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10283.70	26.49	18.26	44.75	88.20	-43.45	Peak	Horizontal
	11681.10	27.49	19.91	47.40	74.00	-26.60	Peak	Horizontal
*	14083.20	26.13	22.21	48.34	88.20	-39.86	Peak	Horizontal
	17918.40	11.27	29.79	41.06	54.00	-12.94	Average	Horizontal
	17918.40	26.27	29.79	56.06	74.00	-17.94	Peak	Horizontal
*	10081.40	26.80	17.97	44.77	88.20	-43.43	Peak	Vertical
	11582.50	27.43	19.62	47.05	74.00	-26.95	Peak	Vertical
*	13729.60	26.35	22.38	48.73	88.20	-39.47	Peak	Vertical
	17867.40	11.14	30.20	41.34	54.00	-12.66	Average	Vertical
	17867.40	25.65	30.20	55.85	74.00	-18.15	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE80 (N _{ss} = 2)	Test Channel	215
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10052.50	27.25	17.84	45.09	88.20	-43.11	Peak	Horizontal
	11681.10	26.58	19.91	46.49	74.00	-27.51	Peak	Horizontal
*	13121.00	24.56	22.48	47.04	88.20	-41.16	Peak	Horizontal
	17918.40	11.25	29.79	41.04	54.00	-12.96	Average	Horizontal
	17918.40	23.13	29.79	52.92	74.00	-21.08	Peak	Horizontal
*	10225.90	27.23	18.14	45.37	88.20	-42.83	Peak	Vertical
	11359.80	25.95	19.28	45.23	74.00	-28.77	Peak	Vertical
*	13013.90	26.75	22.43	49.18	88.20	-39.02	Peak	Vertical
	17886.10	11.36	29.76	41.12	54.00	-12.88	Average	Vertical
	17886.10	25.98	29.76	55.74	74.00	-18.26	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE160 (N _{ss} = 2)	Test Channel	47
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10147.70	28.44	17.89	46.33	88.20	-41.87	Peak	Horizontal
	10735.90	27.06	18.68	45.74	74.00	-28.26	Peak	Horizontal
*	12913.60	28.20	22.50	50.70	88.20	-37.50	Peak	Horizontal
	17932.00	11.39	30.04	41.43	54.00	-12.57	Average	Horizontal
	17932.00	26.74	30.04	56.78	74.00	-17.22	Peak	Horizontal
*	9714.20	26.17	16.77	42.94	88.20	-45.26	Peak	Vertical
	11302.00	26.06	19.17	45.23	74.00	-28.77	Peak	Vertical
*	12913.60	24.22	22.50	46.72	88.20	-41.48	Peak	Vertical
	17932.00	11.85	30.04	41.89	54.00	-12.11	Average	Vertical
	17932.00	26.93	30.04	56.97	74.00	-17.03	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE160 (N _{ss} = 2)	Test Channel	79
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9979.40	26.34	17.63	43.97	88.20	-44.23	Peak	Horizontal
	11449.90	27.19	19.47	46.66	74.00	-27.34	Peak	Horizontal
*	12910.20	25.28	22.51	47.79	88.20	-40.41	Peak	Horizontal
	17915.00	11.18	29.67	40.85	54.00	-13.15	Average	Horizontal
	17915.00	25.67	29.67	55.34	74.00	-18.66	Peak	Horizontal
*	9953.90	27.92	17.70	45.62	88.20	-42.58	Peak	Vertical
	11565.50	26.60	19.73	46.33	74.00	-27.67	Peak	Vertical
*	12974.80	23.90	22.69	46.59	88.20	-41.61	Peak	Vertical
	17915.00	11.45	29.67	41.12	54.00	-12.88	Average	Vertical
	17915.00	26.00	29.67	55.67	74.00	-18.33	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE160 (N _{ss} = 2)	Test Channel	111
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9780.50	26.80	16.94	43.74	88.20	-44.46	Peak	Horizontal
	11711.70	27.52	19.96	47.48	74.00	-26.52	Peak	Horizontal
*	12942.50	24.21	22.54	46.75	88.20	-41.45	Peak	Horizontal
	17870.80	11.52	30.31	41.83	54.00	-12.17	Average	Horizontal
	17870.80	23.59	30.31	53.90	74.00	-20.10	Peak	Horizontal
*	10154.50	26.13	17.87	44.00	88.20	-44.20	Peak	Vertical
	11565.50	25.74	19.73	45.47	74.00	-28.53	Peak	Vertical
*	13007.10	23.19	22.46	45.65	88.20	-42.55	Peak	Vertical
	17826.60	11.36	30.19	41.55	54.00	-12.45	Average	Vertical
	17826.60	25.13	30.19	55.32	74.00	-18.68	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE160 (N _{ss} = 2)	Test Channel	143
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10231.00	25.35	18.18	43.53	88.20	-44.67	Peak	Horizontal
	11681.10	27.09	19.91	47.00	74.00	-27.00	Peak	Horizontal
*	13950.60	25.42	22.30	47.72	88.20	-40.48	Peak	Horizontal
	17915.00	11.21	29.67	40.88	54.00	-13.12	Average	Horizontal
	17915.00	26.30	29.67	55.97	74.00	-18.03	Peak	Horizontal
*	10129.00	27.02	18.09	45.11	88.20	-43.09	Peak	Vertical
	11857.90	26.57	20.19	46.76	74.00	-27.24	Peak	Vertical
*	14056.00	25.91	22.29	48.20	88.20	-40.00	Peak	Vertical
	17915.00	11.23	29.67	40.90	54.00	-13.10	Average	Vertical
	17915.00	23.67	29.67	53.34	74.00	-20.66	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE160 (N _{ss} = 2)	Test Channel	175
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10231.00	27.85	18.18	46.03	88.20	-42.17	Peak	Horizontal
	11740.60	25.58	19.96	45.54	74.00	-28.46	Peak	Horizontal
*	13880.90	25.83	22.36	48.19	88.20	-40.01	Peak	Horizontal
	17870.80	11.34	30.31	41.65	54.00	-12.35	Average	Horizontal
	17870.80	24.33	30.31	54.64	74.00	-19.36	Peak	Horizontal
*	10054.20	26.72	17.85	44.57	88.20	-43.63	Peak	Vertical
	11623.30	26.66	19.73	46.39	74.00	-27.61	Peak	Vertical
*	13986.30	25.05	22.34	47.39	88.20	-40.81	Peak	Vertical
	17870.80	11.19	30.31	41.50	54.00	-12.50	Average	Vertical
	17870.80	25.85	30.31	56.16	74.00	-17.84	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11ax-HE160 (N _{ss} = 2)	Test Channel	207
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10129.00	26.98	18.09	45.07	88.20	-43.13	Peak	Horizontal
	11740.60	26.09	19.96	46.05	74.00	-27.95	Peak	Horizontal
*	13950.60	25.03	22.30	47.33	88.20	-40.87	Peak	Horizontal
	17870.80	11.41	30.31	41.72	54.00	-12.28	Average	Horizontal
	17870.80	26.32	30.31	56.63	74.00	-17.37	Peak	Horizontal
*	10003.20	25.73	17.67	43.40	88.20	-44.80	Peak	Vertical
	11565.50	25.47	19.73	45.20	74.00	-28.80	Peak	Vertical
*	13950.60	25.51	22.30	47.81	88.20	-40.39	Peak	Vertical
	17826.60	11.23	30.19	41.42	54.00	-12.58	Average	Vertical
	17826.60	25.30	30.19	55.49	74.00	-18.51	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	33
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10205.50	26.45	18.03	44.48	88.20	-43.72	Peak	Horizontal
	11917.40	26.93	20.48	47.41	74.00	-26.59	Peak	Horizontal
*	14022.00	26.99	22.18	49.17	88.20	-39.03	Peak	Horizontal
	17870.80	11.16	30.31	41.47	54.00	-12.53	Average	Horizontal
	17870.80	24.64	30.31	54.95	74.00	-19.05	Peak	Horizontal
*	10129.00	26.06	18.09	44.15	88.20	-44.05	Peak	Vertical
	11976.90	26.48	20.48	46.96	74.00	-27.04	Peak	Vertical
*	14056.00	27.10	22.29	49.39	88.20	-38.81	Peak	Vertical
	17870.80	11.39	30.31	41.70	54.00	-12.30	Average	Vertical
	17870.80	23.99	30.31	54.30	74.00	-19.70	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	61
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10129.00	27.63	18.09	45.72	88.20	-42.48	Peak	Horizontal
	11681.10	25.02	19.91	44.93	74.00	-29.07	Peak	Horizontal
*	14056.00	26.55	22.29	48.84	88.20	-39.36	Peak	Horizontal
	17870.80	11.28	30.31	41.59	54.00	-12.41	Average	Horizontal
	17870.80	24.81	30.31	55.12	74.00	-18.88	Peak	Horizontal
*	10154.50	26.84	17.87	44.71	88.20	-43.49	Peak	Vertical
	11829.00	27.52	20.18	47.70	74.00	-26.30	Peak	Vertical
*	13986.30	26.42	22.34	48.76	88.20	-39.44	Peak	Vertical
	17826.60	11.63	30.19	41.82	54.00	-12.18	Average	Vertical
	17826.60	25.66	30.19	55.85	74.00	-18.15	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	93
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10028.70	27.83	17.87	45.70	88.20	-42.50	Peak	Horizontal
	11681.10	25.97	19.91	45.88	74.00	-28.12	Peak	Horizontal
*	13950.60	26.83	22.30	49.13	88.20	-39.07	Peak	Horizontal
	17826.60	11.51	30.19	41.70	54.00	-12.30	Average	Horizontal
	17826.60	26.13	30.19	56.32	74.00	-17.68	Peak	Horizontal
*	9953.90	27.46	17.70	45.16	88.20	-43.04	Peak	Vertical
	11740.60	25.47	19.96	45.43	74.00	-28.57	Peak	Vertical
*	13950.60	26.65	22.30	48.95	88.20	-39.25	Peak	Vertical
	17915.00	11.47	29.67	41.14	54.00	-12.86	Average	Vertical
	17915.00	24.76	29.67	54.43	74.00	-19.57	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	97
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9879.10	26.09	17.17	43.26	88.20	-44.94	Peak	Horizontal
	11478.80	27.23	19.38	46.61	74.00	-27.39	Peak	Horizontal
*	14022.00	25.25	22.18	47.43	88.20	-40.77	Peak	Horizontal
	17870.80	11.08	30.31	41.39	54.00	-12.61	Average	Horizontal
	17870.80	26.22	30.31	56.53	74.00	-17.47	Peak	Horizontal
*	10231.00	28.31	18.18	46.49	88.20	-41.71	Peak	Vertical
	11740.60	25.79	19.96	45.75	74.00	-28.25	Peak	Vertical
*	13986.30	28.01	22.34	50.35	88.20	-37.85	Peak	Vertical
	17780.70	11.27	29.53	40.80	54.00	-13.20	Average	Vertical
	17780.70	25.08	29.53	54.61	74.00	-19.39	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	105
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10105.20	27.58	17.92	45.50	88.20	-42.70	Peak	Horizontal
	11623.30	26.17	19.73	45.90	74.00	-28.10	Peak	Horizontal
*	13880.90	27.26	22.36	49.62	88.20	-38.58	Peak	Horizontal
	17870.80	11.46	30.31	41.77	54.00	-12.23	Average	Horizontal
	17870.80	24.26	30.31	54.57	74.00	-19.43	Peak	Horizontal
*	10180.00	27.39	18.23	45.62	88.20	-42.58	Peak	Vertical
	11681.10	25.84	19.91	45.75	74.00	-28.25	Peak	Vertical
*	13846.90	25.49	22.16	47.65	88.20	-40.55	Peak	Vertical
	17960.90	11.59	29.51	41.10	54.00	-12.90	Average	Vertical
	17960.90	26.97	29.51	56.48	74.00	-17.52	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	113
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9780.50	26.36	16.94	43.30	88.20	-44.90	Peak	Horizontal
	11917.40	26.37	20.48	46.85	74.00	-27.15	Peak	Horizontal
*	13950.60	26.21	22.30	48.51	88.20	-39.69	Peak	Horizontal
	17915.00	11.38	29.67	41.05	54.00	-12.95	Average	Horizontal
	17915.00	26.83	29.67	56.50	74.00	-17.50	Peak	Horizontal
*	10360.20	26.21	18.23	44.44	88.20	-43.76	Peak	Vertical
	12038.10	26.29	20.86	47.15	74.00	-26.85	Peak	Vertical
*	13950.60	25.61	22.30	47.91	88.20	-40.29	Peak	Vertical
	17915.00	11.19	29.67	40.86	54.00	-13.14	Average	Vertical
	17915.00	26.90	29.67	56.57	74.00	-17.43	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	117
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10079.70	26.31	18.01	44.32	88.20	-43.88	Peak	Horizontal
	11888.50	26.47	20.46	46.93	74.00	-27.07	Peak	Horizontal
*	13986.30	27.31	22.34	49.65	88.20	-38.55	Peak	Horizontal
	17826.60	11.52	30.19	41.71	54.00	-12.29	Average	Horizontal
	17826.60	25.24	30.19	55.43	74.00	-18.57	Peak	Horizontal
*	10154.50	26.99	17.87	44.86	88.20	-43.34	Peak	Vertical
	11888.50	26.49	20.46	46.95	74.00	-27.05	Peak	Vertical
*	13880.90	26.63	22.36	48.99	88.20	-39.21	Peak	Vertical
	17826.60	11.49	30.19	41.68	54.00	-12.32	Average	Vertical
	17826.60	25.50	30.19	55.69	74.00	-18.31	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	149
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10231.00	26.45	18.18	44.63	88.20	-43.57	Peak	Horizontal
	11857.90	27.00	20.19	47.19	74.00	-26.81	Peak	Horizontal
*	14056.00	26.84	22.29	49.13	88.20	-39.07	Peak	Horizontal
	17826.60	11.32	30.19	41.51	54.00	-12.49	Average	Horizontal
	17826.60	25.32	30.19	55.51	74.00	-18.49	Peak	Horizontal
*	10105.20	27.43	17.92	45.35	88.20	-42.85	Peak	Vertical
	11917.40	27.12	20.48	47.60	74.00	-26.40	Peak	Vertical
*	13986.30	26.39	22.34	48.73	88.20	-39.47	Peak	Vertical
	17915.00	11.23	29.67	40.90	54.00	-13.10	Average	Vertical
	17915.00	25.66	29.67	55.33	74.00	-18.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	181
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10079.70	27.03	18.01	45.04	88.20	-43.16	Peak	Horizontal
	12007.50	26.40	20.69	47.09	74.00	-26.91	Peak	Horizontal
*	14056.00	28.53	22.29	50.82	88.20	-37.38	Peak	Horizontal
	17870.80	11.48	30.31	41.79	54.00	-12.21	Average	Horizontal
	17870.80	24.81	30.31	55.12	74.00	-18.88	Peak	Horizontal
*	10205.50	28.64	18.03	46.67	88.20	-41.53	Peak	Vertical
	11976.90	28.86	20.48	49.34	74.00	-24.66	Peak	Vertical
*	14056.00	25.86	22.29	48.15	88.20	-40.05	Peak	Vertical
	17826.60	11.21	30.19	41.40	54.00	-12.60	Average	Vertical
	17826.60	25.14	30.19	55.33	74.00	-18.67	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	185
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10105.20	26.22	17.92	44.14	88.20	-44.06	Peak	Horizontal
	11536.60	26.30	19.52	45.82	74.00	-28.18	Peak	Horizontal
*	14091.70	25.90	22.44	48.34	88.20	-39.86	Peak	Horizontal
	17870.80	11.37	30.31	41.68	54.00	-12.32	Average	Horizontal
	17870.80	25.76	30.31	56.07	74.00	-17.93	Peak	Horizontal
*	10054.20	26.48	17.85	44.33	88.20	-43.87	Peak	Vertical
	11652.20	27.96	19.86	47.82	74.00	-26.18	Peak	Vertical
*	13880.90	26.15	22.36	48.51	88.20	-39.69	Peak	Vertical
	17870.80	11.19	30.31	41.50	54.00	-12.50	Average	Vertical
	17870.80	26.47	30.31	56.78	74.00	-17.22	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	189
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9967.50	27.31	17.82	45.13	88.20	-43.07	Peak	Horizontal
	11555.30	26.58	19.70	46.28	74.00	-27.72	Peak	Horizontal
*	13034.30	25.25	22.51	47.76	88.20	-40.44	Peak	Horizontal
	17858.90	11.54	29.87	41.41	54.00	-12.59	Average	Horizontal
	17858.90	26.37	29.87	56.24	74.00	-17.76	Peak	Horizontal
*	9986.20	26.86	17.56	44.42	88.20	-43.78	Peak	Vertical
	11458.40	25.35	19.44	44.79	74.00	-29.21	Peak	Vertical
*	12915.30	24.94	22.50	47.44	88.20	-40.76	Peak	Vertical
	17940.50	11.86	29.42	41.28	54.00	-12.72	Average	Vertical
	17940.50	26.08	29.42	55.50	74.00	-18.50	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	209
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10190.20	26.73	18.12	44.85	88.20	-43.35	Peak	Horizontal
	11400.60	28.66	19.25	47.91	74.00	-26.09	Peak	Horizontal
*	12816.70	25.24	22.46	47.70	88.20	-40.50	Peak	Horizontal
	17894.60	11.78	29.05	40.83	54.00	-13.17	Average	Horizontal
	17894.60	26.78	29.05	55.83	74.00	-18.17	Peak	Horizontal
*	9909.70	27.03	17.51	44.54	88.20	-43.66	Peak	Vertical
	11516.20	27.05	19.49	46.54	74.00	-27.46	Peak	Vertical
*	12947.60	25.47	22.61	48.08	88.20	-40.12	Peak	Vertical
	17940.50	11.48	29.42	40.90	54.00	-13.10	Average	Vertical
	17940.50	26.33	29.42	55.75	74.00	-18.25	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT20 (N _{ss} = 2)	Test Channel	229
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9960.70	28.37	17.76	46.13	88.20	-42.07	Peak	Horizontal
	11516.20	27.85	19.49	47.34	74.00	-26.66	Peak	Horizontal
*	12981.60	25.72	22.60	48.32	88.20	-39.88	Peak	Horizontal
	17894.60	11.83	29.05	40.88	54.00	-13.12	Average	Horizontal
	17894.60	27.31	29.05	56.36	74.00	-17.64	Peak	Horizontal
*	9865.50	26.51	17.31	43.82	88.20	-44.38	Peak	Vertical
	11415.90	27.65	19.28	46.93	74.00	-27.07	Peak	Vertical
*	12986.70	24.99	22.54	47.53	88.20	-40.67	Peak	Vertical
	17903.10	11.64	29.30	40.94	54.00	-13.06	Average	Vertical
	17903.10	25.48	29.30	54.78	74.00	-19.22	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	35
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9889.30	26.86	17.30	44.16	88.20	-44.04	Peak	Horizontal
	11443.10	27.58	19.48	47.06	74.00	-26.94	Peak	Horizontal
*	12954.40	25.53	22.69	48.22	88.20	-39.98	Peak	Horizontal
	17858.90	11.32	29.87	41.19	54.00	-12.81	Average	Horizontal
	17858.90	25.89	29.87	55.76	74.00	-18.24	Peak	Horizontal
*	9865.50	26.47	17.31	43.78	88.20	-44.42	Peak	Vertical
	11472.00	27.25	19.36	46.61	74.00	-27.39	Peak	Vertical
*	12923.80	26.01	22.47	48.48	88.20	-39.72	Peak	Vertical
	17903.10	11.96	29.30	41.26	54.00	-12.74	Average	Vertical
	17903.10	24.92	29.30	54.22	74.00	-19.78	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	59
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9698.90	26.97	16.82	43.79	88.20	-44.41	Peak	Horizontal
	11443.10	26.44	19.48	45.92	74.00	-28.08	Peak	Horizontal
*	12954.40	25.58	22.69	48.27	88.20	-39.93	Peak	Horizontal
	17858.90	11.88	29.87	41.75	54.00	-12.25	Average	Horizontal
	17858.90	25.73	29.87	55.60	74.00	-18.40	Peak	Horizontal
*	10157.90	27.75	17.86	45.61	88.20	-42.59	Peak	Vertical
	11415.90	26.20	19.28	45.48	74.00	-28.52	Peak	Vertical
*	12923.80	24.76	22.47	47.23	88.20	-40.97	Peak	Vertical
	17903.10	11.62	29.30	40.92	54.00	-13.08	Average	Vertical
	17903.10	26.23	29.30	55.53	74.00	-18.47	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	91
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9914.80	28.15	17.56	45.71	88.20	-42.49	Peak	Horizontal
	11725.30	26.24	19.98	46.22	74.00	-27.78	Peak	Horizontal
*	13019.00	24.49	22.46	46.95	88.20	-41.25	Peak	Horizontal
	17903.10	11.51	29.30	40.81	54.00	-13.19	Average	Horizontal
	17903.10	26.29	29.30	55.59	74.00	-18.41	Peak	Horizontal
*	9938.60	27.65	17.54	45.19	88.20	-43.01	Peak	Vertical
	11956.50	28.51	20.46	48.97	74.00	-25.03	Peak	Vertical
*	13049.60	26.62	22.37	48.99	88.20	-39.21	Peak	Vertical
	17858.90	11.31	29.87	41.18	54.00	-12.82	Average	Vertical
	17858.90	24.18	29.87	54.05	74.00	-19.95	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	99
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9965.80	26.06	17.80	43.86	88.20	-44.34	Peak	Horizontal
	11852.80	26.57	20.22	46.79	74.00	-27.21	Peak	Horizontal
*	12925.50	25.01	22.47	47.48	88.20	-40.72	Peak	Horizontal
	17937.10	11.25	29.67	40.92	54.00	-13.08	Average	Horizontal
	17937.10	27.37	29.67	57.04	74.00	-16.96	Peak	Horizontal
*	10139.20	28.19	17.96	46.15	88.20	-42.05	Peak	Vertical
	11310.50	27.11	19.26	46.37	74.00	-27.63	Peak	Vertical
*	13022.40	24.72	22.49	47.21	88.20	-40.99	Peak	Vertical
	17947.30	11.39	28.93	40.32	54.00	-13.68	Average	Vertical
	17947.30	25.08	28.93	54.01	74.00	-19.99	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	107
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9704.00	26.33	16.81	43.14	88.20	-45.06	Peak	Horizontal
	11560.40	28.55	19.76	48.31	74.00	-25.69	Peak	Horizontal
*	12990.10	24.06	22.52	46.58	88.20	-41.62	Peak	Horizontal
	17947.30	11.42	28.93	40.35	54.00	-13.65	Average	Horizontal
	17947.30	25.94	28.93	54.87	74.00	-19.13	Peak	Horizontal
*	10064.40	27.90	18.01	45.91	88.20	-42.29	Peak	Vertical
	11988.80	24.52	20.55	45.07	74.00	-28.93	Peak	Vertical
*	13022.40	24.62	22.49	47.11	88.20	-41.09	Peak	Vertical
	17903.10	11.84	29.30	41.14	54.00	-12.86	Average	Vertical
	17903.10	25.37	29.30	54.67	74.00	-19.33	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	115
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10188.50	27.25	18.14	45.39	88.20	-42.81	Peak	Horizontal
	11533.20	27.19	19.50	46.69	74.00	-27.31	Peak	Horizontal
*	13022.40	26.03	22.49	48.52	88.20	-39.68	Peak	Horizontal
	17947.30	11.42	28.93	40.35	54.00	-13.65	Average	Horizontal
	17947.30	25.68	28.93	54.61	74.00	-19.39	Peak	Horizontal
*	10089.90	25.90	17.80	43.70	88.20	-44.50	Peak	Vertical
	11120.10	27.31	19.05	46.36	74.00	-27.64	Peak	Vertical
*	13022.40	26.77	22.49	49.26	88.20	-38.94	Peak	Vertical
	17903.10	11.95	29.30	41.25	54.00	-12.75	Average	Vertical
	17903.10	26.56	29.30	55.86	74.00	-18.14	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	123
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10040.60	28.60	17.78	46.38	88.20	-41.82	Peak	Horizontal
	11038.50	26.50	18.90	45.40	74.00	-28.60	Peak	Horizontal
*	12990.10	24.18	22.52	46.70	88.20	-41.50	Peak	Horizontal
	17991.50	11.13	29.93	41.06	54.00	-12.94	Average	Horizontal
	17991.50	25.77	29.93	55.70	74.00	-18.30	Peak	Horizontal
*	10089.90	28.17	17.80	45.97	88.20	-42.23	Peak	Vertical
	11759.30	27.20	20.02	47.22	74.00	-26.78	Peak	Vertical
*	12990.10	24.22	22.52	46.74	88.20	-41.46	Peak	Vertical
	17816.40	11.17	30.08	41.25	54.00	-12.75	Average	Vertical
	17816.40	24.96	30.08	55.04	74.00	-18.96	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	147
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10016.80	26.85	17.93	44.78	88.20	-43.42	Peak	Horizontal
	11701.50	26.88	19.93	46.81	74.00	-27.19	Peak	Horizontal
*	12990.10	25.53	22.52	48.05	88.20	-40.15	Peak	Horizontal
	17903.10	11.28	29.30	40.58	54.00	-13.42	Average	Horizontal
	17903.10	26.03	29.30	55.33	74.00	-18.67	Peak	Horizontal
*	10188.50	27.52	18.14	45.66	88.20	-42.54	Peak	Vertical
	11759.30	25.61	20.02	45.63	74.00	-28.37	Peak	Vertical
*	13022.40	24.44	22.49	46.93	88.20	-41.27	Peak	Vertical
	17903.10	11.36	29.30	40.66	54.00	-13.34	Average	Vertical
	17903.10	25.33	29.30	54.63	74.00	-19.37	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	179
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9919.90	25.74	17.55	43.29	88.20	-44.91	Peak	Horizontal
	11844.30	26.71	20.27	46.98	74.00	-27.02	Peak	Horizontal
*	12927.20	23.81	22.47	46.28	88.20	-41.92	Peak	Horizontal
	17947.30	11.23	28.93	40.16	54.00	-13.84	Average	Horizontal
	17947.30	24.41	28.93	53.34	74.00	-20.66	Peak	Horizontal
*	10064.40	27.34	18.01	45.35	88.20	-42.85	Peak	Vertical
	11902.10	25.79	20.48	46.27	74.00	-27.73	Peak	Vertical
*	12959.50	24.29	22.76	47.05	88.20	-41.15	Peak	Vertical
	17923.50	11.57	29.96	41.53	54.00	-12.47	Average	Vertical
	17923.50	29.98	29.96	59.94	74.00	-14.06	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	187
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10280.30	30.80	18.22	49.02	88.20	-39.18	Peak	Horizontal
	11247.60	30.63	19.14	49.77	74.00	-24.23	Peak	Horizontal
*	12988.40	27.26	22.53	49.79	88.20	-38.41	Peak	Horizontal
	17969.40	11.81	29.93	41.74	54.00	-12.26	Average	Horizontal
	17969.40	25.70	29.93	55.63	74.00	-18.37	Peak	Horizontal
*	9964.10	26.02	17.79	43.81	88.20	-44.39	Peak	Vertical
	11762.70	26.31	20.03	46.34	74.00	-27.66	Peak	Vertical
*	12956.10	24.28	22.71	46.99	88.20	-41.21	Peak	Vertical
	17872.50	11.57	30.36	41.93	54.00	-12.07	Average	Vertical
	17872.50	27.88	30.36	58.24	74.00	-15.76	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	195
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10139.20	27.56	17.96	45.52	88.20	-42.68	Peak	Horizontal
	11672.60	26.83	19.95	46.78	74.00	-27.22	Peak	Horizontal
*	13054.70	24.92	22.41	47.33	88.20	-40.87	Peak	Horizontal
	17860.60	11.22	29.96	41.18	54.00	-12.82	Average	Horizontal
	17860.60	24.91	29.96	54.87	74.00	-19.13	Peak	Horizontal
*	10113.70	27.62	18.03	45.65	88.20	-42.55	Peak	Vertical
	11477.10	26.87	19.37	46.24	74.00	-27.76	Peak	Vertical
*	12896.60	25.07	22.49	47.56	88.20	-40.64	Peak	Vertical
	17947.30	11.46	28.93	40.39	54.00	-13.61	Average	Vertical
	17947.30	25.59	28.93	54.52	74.00	-19.48	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	211
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9823.00	27.96	17.10	45.06	88.20	-43.14	Peak	Horizontal
	11759.30	25.95	20.02	45.97	74.00	-28.03	Peak	Horizontal
*	13117.60	25.73	22.45	48.18	88.20	-40.02	Peak	Horizontal
	17947.30	11.37	28.93	40.30	54.00	-13.70	Average	Horizontal
	17947.30	25.74	28.93	54.67	74.00	-19.33	Peak	Horizontal
*	10113.70	27.45	18.03	45.48	88.20	-42.72	Peak	Vertical
	11988.80	26.08	20.55	46.63	74.00	-27.37	Peak	Vertical
*	12927.20	25.19	22.47	47.66	88.20	-40.54	Peak	Vertical
	17991.50	11.85	29.93	41.78	54.00	-12.22	Average	Vertical
	17991.50	25.00	29.93	54.93	74.00	-19.07	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT40 (N _{ss} = 2)	Test Channel	227
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9870.60	26.25	17.26	43.51	88.20	-44.69	Peak	Horizontal
	11533.20	26.47	19.50	45.97	74.00	-28.03	Peak	Horizontal
*	12864.30	25.67	22.50	48.17	88.20	-40.03	Peak	Horizontal
	17860.60	11.19	29.96	41.15	54.00	-12.85	Average	Horizontal
	17860.60	26.68	29.96	56.64	74.00	-17.36	Peak	Horizontal
*	10113.70	25.91	18.03	43.94	88.20	-44.26	Peak	Vertical
	11902.10	25.98	20.48	46.46	74.00	-27.54	Peak	Vertical
*	13054.70	24.58	22.41	46.99	88.20	-41.21	Peak	Vertical
	17903.10	11.50	29.30	40.80	54.00	-13.20	Average	Vertical
	17903.10	25.91	29.30	55.21	74.00	-18.79	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	39
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9943.70	26.82	17.59	44.41	88.20	-43.79	Peak	Horizontal
	11959.90	26.69	20.46	47.15	74.00	-26.85	Peak	Horizontal
*	12927.20	24.68	22.47	47.15	88.20	-41.05	Peak	Horizontal
	17903.10	11.15	29.30	40.45	54.00	-13.55	Average	Horizontal
	17903.10	25.82	29.30	55.12	74.00	-18.88	Peak	Horizontal
*	9855.30	32.34	17.34	49.68	88.20	-38.52	Peak	Vertical
	11815.40	27.52	20.15	47.67	74.00	-26.33	Peak	Vertical
*	13022.40	24.96	22.49	47.45	88.20	-40.75	Peak	Vertical
	17860.60	11.49	29.96	41.45	54.00	-12.55	Average	Vertical
	17860.60	27.36	29.96	57.32	74.00	-16.68	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	55
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10327.90	26.98	18.21	45.19	88.20	-43.01	Peak	Horizontal
	11689.60	25.69	19.92	45.61	74.00	-28.39	Peak	Horizontal
*	13668.40	31.13	22.46	53.59	88.20	-34.61	Peak	Horizontal
	17950.70	11.26	29.05	40.31	54.00	-13.69	Average	Horizontal
	17950.70	25.70	29.05	54.75	74.00	-19.25	Peak	Horizontal
*	10020.20	25.84	17.99	43.83	88.20	-44.37	Peak	Vertical
	11657.30	27.78	19.93	47.71	74.00	-26.29	Peak	Vertical
*	12905.10	25.55	22.51	48.06	88.20	-40.14	Peak	Vertical
	17853.80	11.49	29.56	41.05	54.00	-12.95	Average	Vertical
	17853.80	24.70	29.56	54.26	74.00	-19.74	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	87
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10135.80	27.59	18.00	45.59	88.20	-42.61	Peak	Horizontal
	11893.60	25.89	20.51	46.40	74.00	-27.60	Peak	Horizontal
*	12884.70	24.43	22.49	46.92	88.20	-41.28	Peak	Horizontal
	17925.20	11.25	30.02	41.27	54.00	-12.73	Average	Horizontal
	17925.20	26.70	30.02	56.72	74.00	-17.28	Peak	Horizontal
*	9979.40	26.44	17.63	44.07	88.20	-44.13	Peak	Vertical
	11531.50	26.77	19.49	46.26	74.00	-27.74	Peak	Vertical
*	12884.70	25.84	22.49	48.33	88.20	-39.87	Peak	Vertical
	17925.20	11.59	30.02	41.61	54.00	-12.39	Average	Vertical
	17925.20	27.57	30.02	57.59	74.00	-16.41	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	103
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10161.30	27.69	17.89	45.58	88.20	-42.62	Peak	Horizontal
	11625.00	26.93	19.74	46.67	74.00	-27.33	Peak	Horizontal
*	12891.50	25.62	22.48	48.10	88.20	-40.10	Peak	Horizontal
	17916.70	11.35	29.73	41.08	54.00	-12.92	Average	Horizontal
	17916.70	26.52	29.73	56.25	74.00	-17.75	Peak	Horizontal
*	9848.50	26.70	17.32	44.02	88.20	-44.18	Peak	Vertical
	11681.10	26.43	19.91	46.34	74.00	-27.66	Peak	Vertical
*	12922.10	25.85	22.48	48.33	88.20	-39.87	Peak	Vertical
	17872.50	11.56	30.36	41.92	54.00	-12.08	Average	Vertical
	17872.50	25.36	30.36	55.72	74.00	-18.28	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	119
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10186.80	28.25	18.16	46.41	88.20	-41.79	Peak	Horizontal
	11681.10	27.04	19.91	46.95	74.00	-27.05	Peak	Horizontal
*	13015.60	25.06	22.44	47.50	88.20	-40.70	Peak	Horizontal
	17745.00	11.28	29.58	40.86	54.00	-13.14	Average	Horizontal
	17745.00	25.16	29.58	54.74	74.00	-19.26	Peak	Horizontal
*	10234.40	27.89	18.16	46.05	88.20	-42.15	Peak	Vertical
	11514.50	25.98	19.50	45.48	74.00	-28.52	Peak	Vertical
*	12922.10	25.87	22.48	48.35	88.20	-39.85	Peak	Vertical
	17830.00	11.74	29.93	41.67	54.00	-12.33	Average	Vertical
	17830.00	24.21	29.93	54.14	74.00	-19.86	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	135
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9896.10	25.83	17.39	43.22	88.20	-44.98	Peak	Horizontal
	11240.80	28.17	19.15	47.32	74.00	-26.68	Peak	Horizontal
*	13046.20	25.55	22.37	47.92	88.20	-40.28	Peak	Horizontal
	18000.00	11.26	29.26	40.52	54.00	-13.48	Average	Horizontal
	18000.00	25.54	29.26	54.80	74.00	-19.20	Peak	Horizontal
*	9826.40	27.43	17.09	44.52	88.20	-43.68	Peak	Vertical
	11541.70	29.51	19.55	49.06	74.00	-24.94	Peak	Vertical
*	12922.10	24.67	22.48	47.15	88.20	-41.05	Peak	Vertical
	17916.70	11.38	29.73	41.11	54.00	-12.89	Average	Vertical
	17916.70	24.99	29.73	54.72	74.00	-19.28	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	151
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10064.40	26.15	18.01	44.16	88.20	-44.04	Peak	Horizontal
	12109.50	26.20	21.04	47.24	74.00	-26.76	Peak	Horizontal
*	12891.50	24.75	22.48	47.23	88.20	-40.97	Peak	Horizontal
	17877.60	11.83	30.51	42.34	54.00	-11.66	Average	Horizontal
	17877.60	28.89	30.51	59.40	74.00	-14.60	Peak	Horizontal
*	10016.80	26.77	17.93	44.70	88.20	-43.50	Peak	Vertical
	11541.70	25.73	19.55	45.28	74.00	-28.72	Peak	Vertical
*	12983.30	26.34	22.58	48.92	88.20	-39.28	Peak	Vertical
	17872.50	11.22	30.36	41.58	54.00	-12.42	Average	Vertical
	17872.50	25.53	30.36	55.89	74.00	-18.11	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	167
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.00	26.18	17.60	43.78	88.20	-44.42	Peak	Horizontal
	10790.30	26.36	18.67	45.03	74.00	-28.97	Peak	Horizontal
*	12922.10	24.65	22.48	47.13	88.20	-41.07	Peak	Horizontal
	17959.20	11.52	29.43	40.95	54.00	-13.05	Average	Horizontal
	17959.20	25.98	29.43	55.41	74.00	-18.59	Peak	Horizontal
*	10234.40	26.00	18.16	44.16	88.20	-44.04	Peak	Vertical
	11908.90	26.63	20.45	47.08	74.00	-26.92	Peak	Vertical
*	12952.70	24.25	22.67	46.92	88.20	-41.28	Peak	Vertical
	17872.50	11.86	30.36	42.22	54.00	-11.78	Average	Vertical
	17872.50	25.13	30.36	55.49	74.00	-18.51	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	183
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	9993.00	26.73	17.60	44.33	88.20	-43.87	Peak	Horizontal
	11541.70	26.64	19.55	46.19	74.00	-27.81	Peak	Horizontal
*	12859.20	23.97	22.52	46.49	88.20	-41.71	Peak	Horizontal
	17830.00	11.51	29.93	41.44	54.00	-12.56	Average	Horizontal
	17830.00	25.34	29.93	55.27	74.00	-18.73	Peak	Horizontal
*	10161.30	26.62	17.89	44.51	88.20	-43.69	Peak	Vertical
	11710.00	27.24	19.95	47.19	74.00	-26.81	Peak	Vertical
*	13078.50	26.68	22.55	49.23	88.20	-38.97	Peak	Vertical
	17972.80	11.73	30.11	41.84	54.00	-12.16	Average	Vertical
	17972.80	28.78	30.11	58.89	74.00	-15.11	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	199
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10040.60	26.48	17.78	44.26	88.20	-43.94	Peak	Horizontal
	11653.90	28.39	19.88	48.27	74.00	-25.73	Peak	Horizontal
*	12952.70	23.26	22.67	45.93	88.20	-42.27	Peak	Horizontal
	17872.50	11.98	30.36	42.34	54.00	-11.66	Average	Horizontal
	17872.50	26.44	30.36	56.80	74.00	-17.20	Peak	Horizontal
*	10234.40	27.80	18.16	45.96	88.20	-42.24	Peak	Vertical
	11625.00	26.38	19.74	46.12	74.00	-27.88	Peak	Vertical
*	12952.70	24.42	22.67	47.09	88.20	-41.11	Peak	Vertical
	17916.70	11.21	29.73	40.94	54.00	-13.06	Average	Vertical
	17916.70	28.59	29.73	58.32	74.00	-15.68	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT80 (N _{ss} = 2)	Test Channel	215
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10137.50	26.64	17.98	44.62	88.20	-43.58	Peak	Horizontal
	12374.70	26.59	21.72	48.31	74.00	-25.69	Peak	Horizontal
*	13688.80	27.30	22.11	49.41	88.20	-38.79	Peak	Horizontal
	17830.00	11.52	29.93	41.45	54.00	-12.55	Average	Horizontal
	17830.00	25.62	29.93	55.55	74.00	-18.45	Peak	Horizontal
*	10210.60	27.92	18.01	45.93	88.20	-42.27	Peak	Vertical
	12080.60	26.30	20.90	47.20	74.00	-26.80	Peak	Vertical
*	12922.10	24.79	22.48	47.27	88.20	-40.93	Peak	Vertical
	17872.50	11.33	30.36	41.69	54.00	-12.31	Average	Vertical
	17872.50	23.54	30.36	53.90	74.00	-20.10	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT160 (N _{ss} = 2)	Test Channel	47
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10259.90	28.77	18.01	46.78	88.20	-41.42	Peak	Horizontal
	11625.00	25.23	19.74	44.97	74.00	-29.03	Peak	Horizontal
*	12952.70	24.74	22.67	47.41	88.20	-40.79	Peak	Horizontal
	18000.00	11.18	29.26	40.44	54.00	-13.56	Average	Horizontal
	18000.00	26.41	29.26	55.67	74.00	-18.33	Peak	Horizontal
*	9943.70	26.58	17.59	44.17	88.20	-44.03	Peak	Vertical
	11822.20	25.38	20.14	45.52	74.00	-28.48	Peak	Vertical
*	13046.20	23.37	22.37	45.74	88.20	-42.46	Peak	Vertical
	17989.80	11.41	30.06	41.47	54.00	-12.53	Average	Vertical
	17989.80	29.06	30.06	59.12	74.00	-14.88	Peak	Vertical

Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT160 (N _{ss} = 2)	Test Channel	79
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10309.20	27.91	18.12	46.03	88.20	-42.17	Peak	Horizontal
	11653.90	27.71	19.88	47.59	74.00	-26.41	Peak	Horizontal
*	12922.10	24.95	22.48	47.43	88.20	-40.77	Peak	Horizontal
	17882.70	11.17	30.05	41.22	54.00	-12.78	Average	Horizontal
	17882.70	28.38	30.05	58.43	74.00	-15.57	Peak	Horizontal
*	9884.20	27.90	17.23	45.13	88.20	-43.07	Peak	Vertical
	12276.10	26.70	21.36	48.06	74.00	-25.94	Peak	Vertical
*	12867.70	24.66	22.50	47.16	88.20	-41.04	Peak	Vertical
	17938.80	11.65	29.55	41.20	54.00	-12.80	Average	Vertical
	17938.80	25.37	29.55	54.92	74.00	-19.08	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT160 (N _{ss} = 2)	Test Channel	111
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10169.80	26.40	18.08	44.48	88.20	-43.72	Peak	Horizontal
	12058.50	26.72	20.89	47.61	74.00	-26.39	Peak	Horizontal
*	12951.00	24.69	22.65	47.34	88.20	-40.86	Peak	Horizontal
	17916.70	11.27	29.73	41.00	54.00	-13.00	Average	Horizontal
	17916.70	29.21	29.73	58.94	74.00	-15.06	Peak	Horizontal
*	10215.70	26.87	18.03	44.90	88.20	-43.30	Peak	Vertical
	10946.70	27.86	18.87	46.73	74.00	-27.27	Peak	Vertical
*	12922.10	24.75	22.48	47.23	88.20	-40.97	Peak	Vertical
	17962.60	11.87	29.59	41.46	54.00	-12.54	Average	Vertical
	17962.60	25.86	29.59	55.45	74.00	-18.55	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT160 (N _{ss} = 2)	Test Channel	143
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10191.90	27.28	18.10	45.38	88.20	-42.82	Peak	Horizontal
	12339.00	27.15	21.54	48.69	74.00	-25.31	Peak	Horizontal
*	13909.80	25.52	22.08	47.60	88.20	-40.60	Peak	Horizontal
	17962.60	11.13	29.59	40.72	54.00	-13.28	Average	Horizontal
	17962.60	23.51	29.59	53.10	74.00	-20.90	Peak	Horizontal
*	10052.50	27.31	17.84	45.15	88.20	-43.05	Peak	Vertical
	11676.00	25.88	19.93	45.81	74.00	-28.19	Peak	Vertical
*	12981.60	26.08	22.60	48.68	88.20	-39.52	Peak	Vertical
	17879.30	11.15	30.35	41.50	54.00	-12.50	Average	Vertical
	17879.30	24.91	30.35	55.26	74.00	-18.74	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT160 (N _{ss} = 2)	Test Channel	175
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10191.90	28.00	18.10	46.10	88.20	-42.10	Peak	Horizontal
	12367.90	27.56	21.72	49.28	74.00	-24.72	Peak	Horizontal
*	13010.50	25.13	22.43	47.56	88.20	-40.64	Peak	Horizontal
	17981.30	11.85	30.57	42.42	54.00	-11.58	Average	Horizontal
	17981.30	27.92	30.57	58.49	74.00	-15.51	Peak	Horizontal
*	10028.70	27.86	17.87	45.73	88.20	-42.47	Peak	Vertical
	12282.90	26.52	21.41	47.93	74.00	-26.07	Peak	Vertical
*	12774.20	26.65	22.58	49.23	88.20	-38.97	Peak	Vertical
	18000.00	11.11	29.26	40.37	54.00	-13.63	Average	Vertical
	18000.00	25.13	29.26	54.39	74.00	-19.61	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT160 (N _{ss} = 2)	Test Channel	207
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10287.10	25.23	18.25	43.48	88.20	-44.72	Peak	Horizontal
	11866.40	25.86	20.24	46.10	74.00	-27.90	Peak	Horizontal
*	13041.10	24.67	22.43	47.10	88.20	-41.10	Peak	Horizontal
	17986.40	11.19	30.33	41.52	54.00	-12.48	Average	Horizontal
	17986.40	28.02	30.33	58.35	74.00	-15.65	Peak	Horizontal
*	10146.00	27.43	17.90	45.33	88.20	-42.87	Peak	Vertical
	12087.40	27.27	20.92	48.19	74.00	-25.81	Peak	Vertical
*	12803.10	25.37	22.45	47.82	88.20	-40.38	Peak	Vertical
	17879.30	11.54	30.35	41.89	54.00	-12.11	Average	Vertical
	17879.30	25.15	30.35	55.50	74.00	-18.50	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT320 (N _{ss} = 2)	Test Channel	63
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10103.50	26.18	17.90	44.08	88.20	-44.12	Peak	Horizontal
	12111.20	25.76	21.04	46.80	74.00	-27.20	Peak	Horizontal
*	12986.70	25.66	22.54	48.20	88.20	-40.00	Peak	Horizontal
	17983.00	11.88	30.60	42.48	54.00	-11.52	Average	Horizontal
	17983.00	27.76	30.60	58.36	74.00	-15.64	Peak	Horizontal
*	10147.70	26.76	17.89	44.65	88.20	-43.55	Peak	Vertical
	12221.70	30.17	21.21	51.38	74.00	-22.62	Peak	Vertical
*	12959.50	23.57	22.76	46.33	88.20	-41.87	Peak	Vertical
	17855.50	11.91	29.66	41.57	54.00	-12.43	Average	Vertical
	17855.50	29.52	29.66	59.18	74.00	-14.82	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT320 (N _{ss} = 2)	Test Channel	95
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10122.20	28.22	18.12	46.34	88.20	-41.86	Peak	Horizontal
	11676.00	28.15	19.93	48.08	74.00	-25.92	Peak	Horizontal
*	13071.70	24.65	22.56	47.21	88.20	-40.99	Peak	Horizontal
	17959.20	11.29	29.43	40.72	54.00	-13.28	Average	Horizontal
	17959.20	29.47	29.43	58.90	74.00	-15.10	Peak	Horizontal
*	10169.80	27.22	18.08	45.30	88.20	-42.90	Peak	Vertical
	11676.00	26.45	19.93	46.38	74.00	-27.62	Peak	Vertical
*	12891.50	27.09	22.48	49.57	88.20	-38.63	Peak	Vertical
	17920.10	11.81	29.85	41.66	54.00	-12.34	Average	Vertical
	17920.10	28.69	29.85	58.54	74.00	-15.46	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT320 (N _{ss} = 2)	Test Channel	127
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10169.80	27.14	18.08	45.22	88.20	-42.98	Peak	Horizontal
	12031.30	25.40	20.86	46.26	74.00	-27.74	Peak	Horizontal
*	12901.70	25.95	22.50	48.45	88.20	-39.75	Peak	Horizontal
	17930.30	11.68	30.16	41.84	54.00	-12.16	Average	Horizontal
	17930.30	27.98	30.16	58.14	74.00	-15.86	Peak	Horizontal
*	10169.80	29.75	18.08	47.83	88.20	-40.37	Peak	Vertical
	11927.60	26.72	20.52	47.24	74.00	-26.76	Peak	Vertical
*	12959.50	24.42	22.76	47.18	88.20	-41.02	Peak	Vertical
	17823.20	11.58	30.27	41.85	54.00	-12.15	Average	Vertical
	17823.20	26.49	30.27	56.76	74.00	-17.24	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT320 (N _{ss} = 2)	Test Channel	159
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10122.20	26.73	18.12	44.85	88.20	-43.35	Peak	Horizontal
	12339.00	26.99	21.54	48.53	74.00	-25.47	Peak	Horizontal
*	12951.00	24.29	22.65	46.94	88.20	-41.26	Peak	Horizontal
	18000.00	11.53	29.26	40.79	54.00	-13.21	Average	Horizontal
	18000.00	25.50	29.26	54.76	74.00	-19.24	Peak	Horizontal
*	10028.70	27.19	17.87	45.06	88.20	-43.14	Peak	Vertical
	11676.00	25.72	19.93	45.65	74.00	-28.35	Peak	Vertical
*	12862.60	26.91	22.51	49.42	88.20	-38.78	Peak	Vertical
	17974.50	11.79	30.21	42.00	54.00	-12.00	Average	Vertical
	17974.50	28.39	30.21	58.60	74.00	-15.40	Peak	Vertical

Note 1: "*" is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a "conversion" factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Test Site	WJ-AC1	Test Engineer	Alex Liu
Test Mode	802.11be-EHT320 (N _{ss} = 2)	Test Channel	191
Test Date	2026-02-10		
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
*	10418.00	26.88	18.10	44.98	88.20	-43.22	Peak	Horizontal
	11927.60	26.85	20.52	47.37	74.00	-26.63	Peak	Horizontal
*	12789.50	26.70	22.52	49.22	88.20	-38.98	Peak	Horizontal
	17935.40	11.72	29.79	41.51	54.00	-12.49	Average	Horizontal
	17935.40	28.54	29.79	58.33	74.00	-15.67	Peak	Horizontal
*	10169.80	28.74	18.08	46.82	88.20	-41.38	Peak	Vertical
	11492.40	26.89	19.43	46.32	74.00	-27.68	Peak	Vertical
*	12986.70	25.15	22.54	47.69	88.20	-40.51	Peak	Vertical
	17823.20	11.39	30.27	41.66	54.00	-12.34	Average	Vertical
	17823.20	25.16	30.27	55.43	74.00	-18.57	Peak	Vertical


Note 1: “*” is not in restricted band, its limit is -27 dBm/MHz. At a distance of 3 meters, the field strength limit in dBμV/m can be determined by adding a “conversion” factor of 95.2 dB to the Limit of -27 dBm/MHz to obtain the limit for out of band spurious emissions.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission for 9 kHz ~ 30 MHz:

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)_9k-30M	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

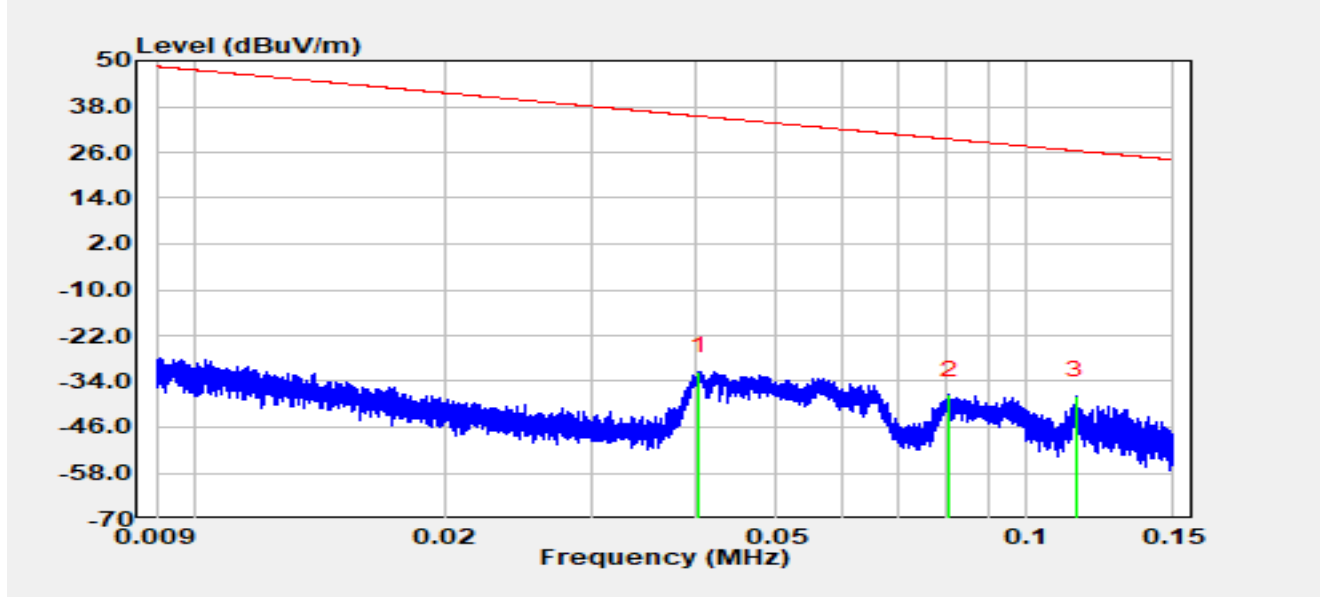


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.04	28.84	-60.15	-31.31	-66.78	35.47	Peak
2		0.08	22.64	-60.20	-37.56	-67.03	29.47	Peak
3	*	0.11	22.60	-60.23	-37.63	-64.06	26.42	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)_9k-30M	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coaxial
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

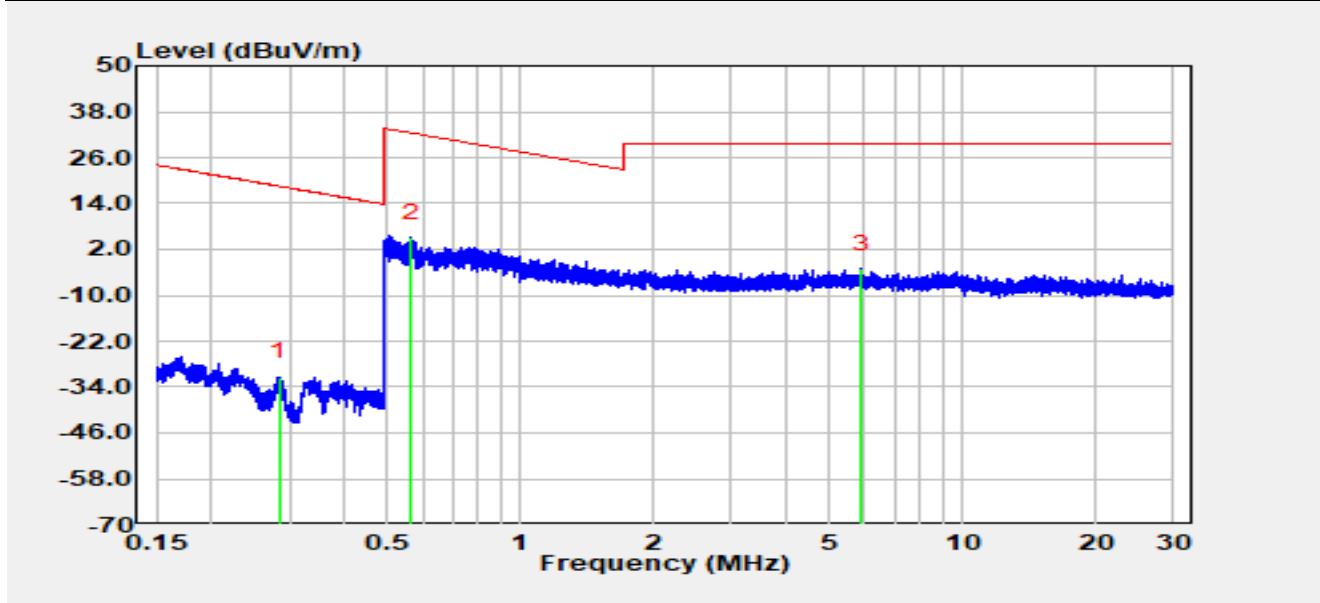


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.28	28.90	-60.31	-31.40	-49.95	18.54	Peak
2	*	0.57	25.34	-20.33	5.01	-27.55	32.56	Peak
3		5.91	17.29	-20.47	-3.18	-32.68	29.50	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)_9k-30M	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

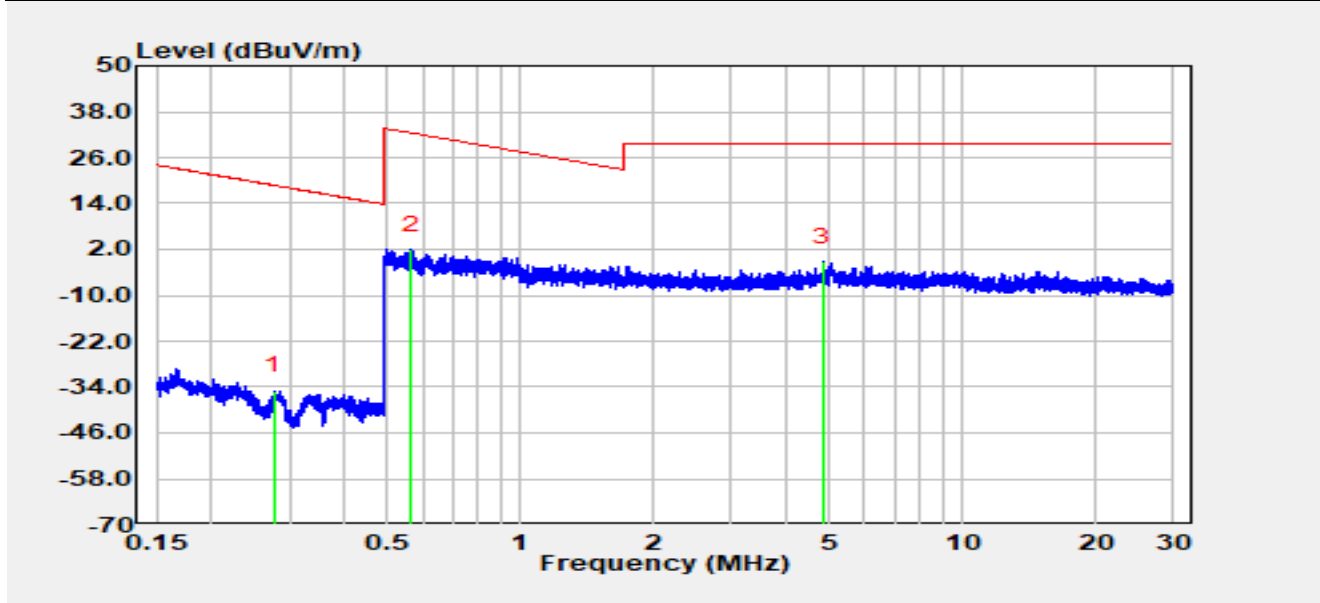


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		0.28	25.31	-60.30	-34.99	-53.77	18.77	Peak
2	*	0.56	22.26	-20.33	1.93	-30.65	32.58	Peak
3		4.82	19.13	-20.44	-1.31	-30.81	29.50	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-05
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)_9k-30M	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Coplanar
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

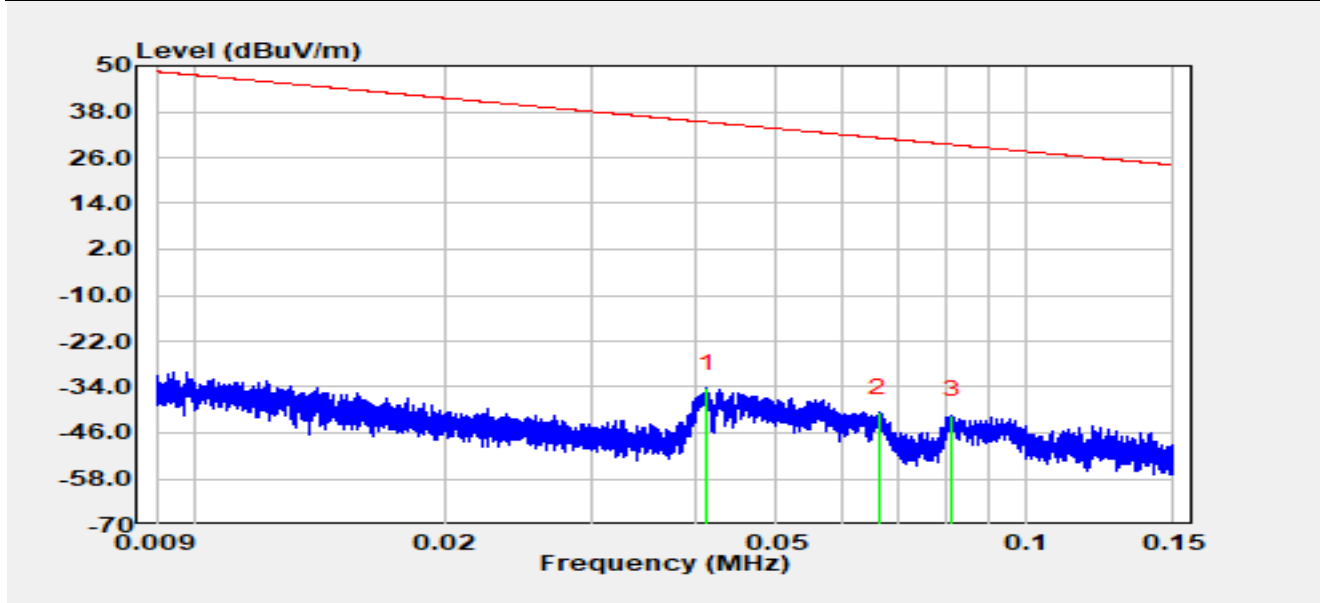


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	0.04	25.75	-60.15	-34.40	-69.68	35.27	Peak
2		0.07	19.56	-60.19	-40.63	-71.80	31.17	Peak
3		0.08	18.80	-60.20	-41.41	-70.79	29.39	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + 40log(d1/d2) (dB), d1 = 3 m, d2 = 300 m (9 kHz - 490 kHz) or 30 m (490 kHz - 30 MHz).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission for 30 MHz ~ 1 GHz:

Site	WJ-AC1	Test Date	2026-01-04
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

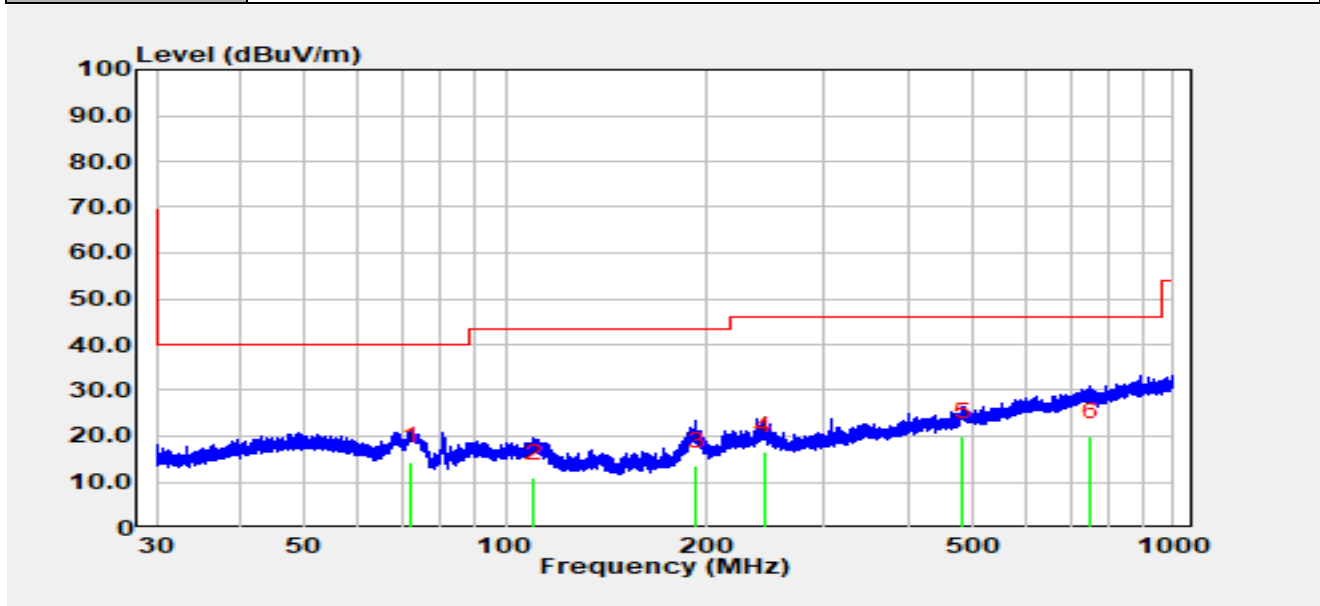


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	72.29	-0.80	15.30	14.50	-25.50	40.00	QP
2		110.34	-7.10	18.01	10.91	-32.59	43.50	QP
3		193.37	-5.00	18.56	13.56	-29.94	43.50	QP
4		243.72	-3.20	19.81	16.61	-29.39	46.00	QP
5		483.57	-4.80	24.68	19.88	-26.12	46.00	QP
6		751.95	-9.60	29.46	19.86	-26.14	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-04
Temperature	17.9 °C	Humidity	33.5%
Limit	FCC_Part 15.209_RSE (3 m)	Test Engineer	Alex Liu
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

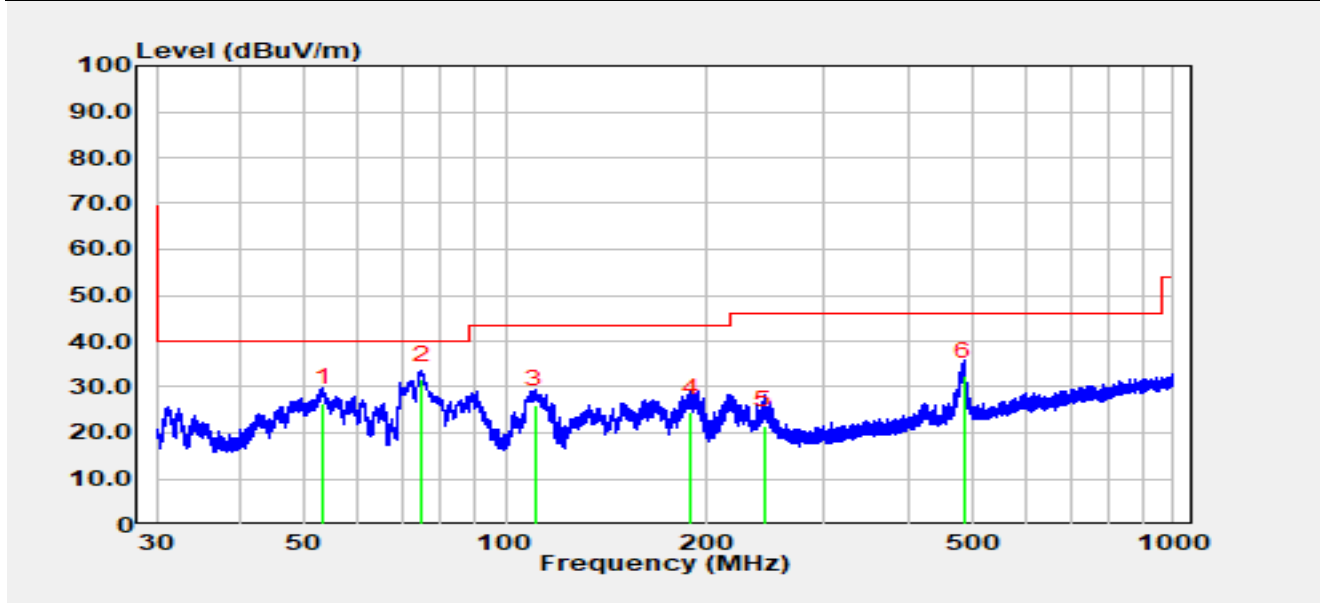


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		53.39	6.30	20.28	26.58	-13.42	40.00	QP
2	*	74.84	17.20	14.35	31.55	-8.45	40.00	QP
3		110.61	8.10	17.97	26.07	-17.43	43.50	QP
4		189.14	6.80	17.61	24.41	-19.09	43.50	QP
5		243.72	1.70	19.81	21.51	-24.49	46.00	QP
6		484.76	7.60	24.74	32.34	-13.66	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

The Result of Radiated Emission above 18 GHz:

Site	WJ-AC2	Test Date	2026-01-24
Temperature	21.5 °C	Humidity	22.3%
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

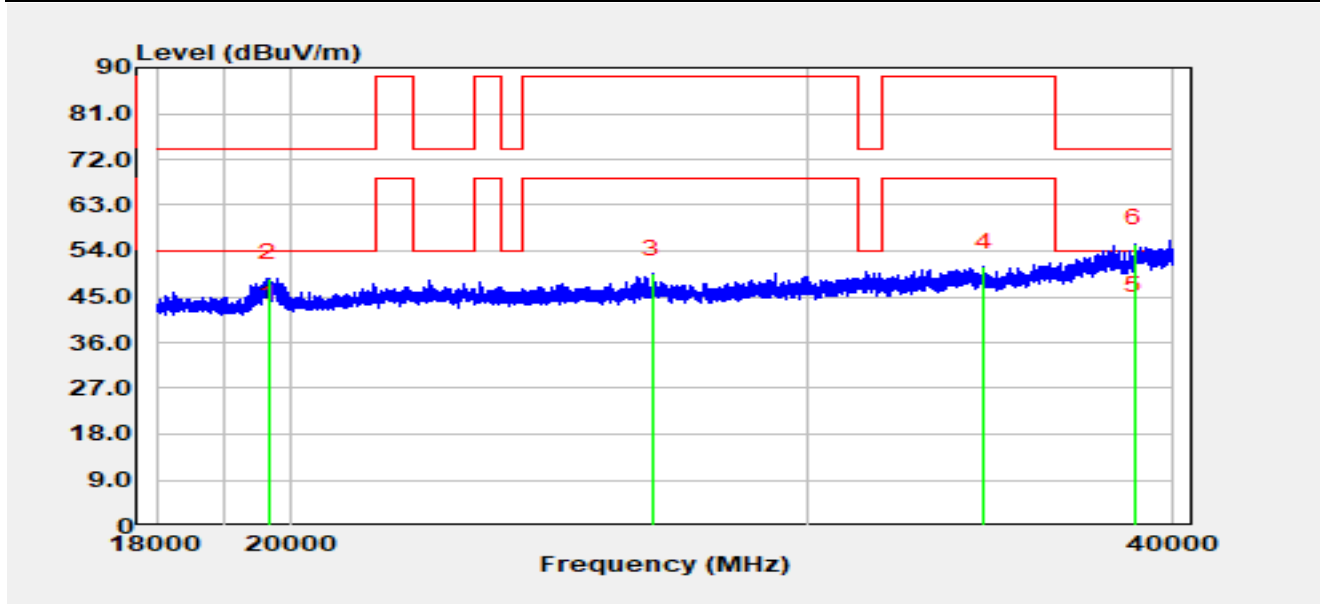


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		19663.20	48.91	-8.40	40.51	-13.49	54.00	Average
2		19663.20	57.09	-8.40	48.69	-25.31	74.00	Peak
3		26564.60	53.08	-3.66	49.42	-38.78	88.20	Peak
4		34469.20	54.67	-3.87	50.80	-37.40	88.20	Peak
5	*	38805.40	40.33	1.93	42.26	-11.74	54.00	Average
6		38805.40	53.56	1.93	55.49	-18.51	74.00	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC2	Test Date	2026-01-24
Temperature	21.5 °C	Humidity	22.3%
Limit	FCC_Part 15.407_RSE (3 m)	Test Engineer	Bob Zhang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT320 at 6585 MHz		

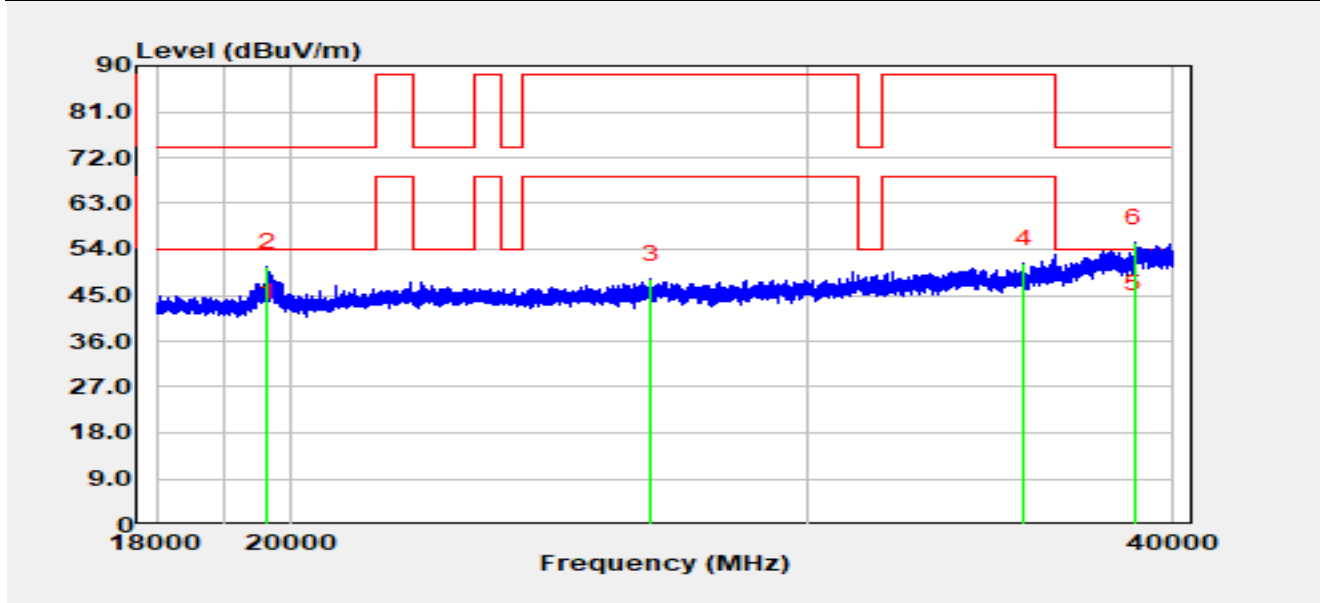


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		19641.20	49.21	-8.46	40.75	-13.25	54.00	Average
2		19641.20	58.93	-8.46	50.47	-23.53	74.00	Peak
3		26531.60	51.61	-3.51	48.11	-40.09	88.20	Peak
4		35582.40	55.98	-4.75	51.22	-36.98	88.20	Peak
5	*	38805.40	40.25	1.93	42.18	-11.82	54.00	Average
6		38805.40	53.29	1.93	55.22	-18.78	74.00	Peak

Notes:

- " * " indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 Radiated Restricted Band Edge Test Result

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

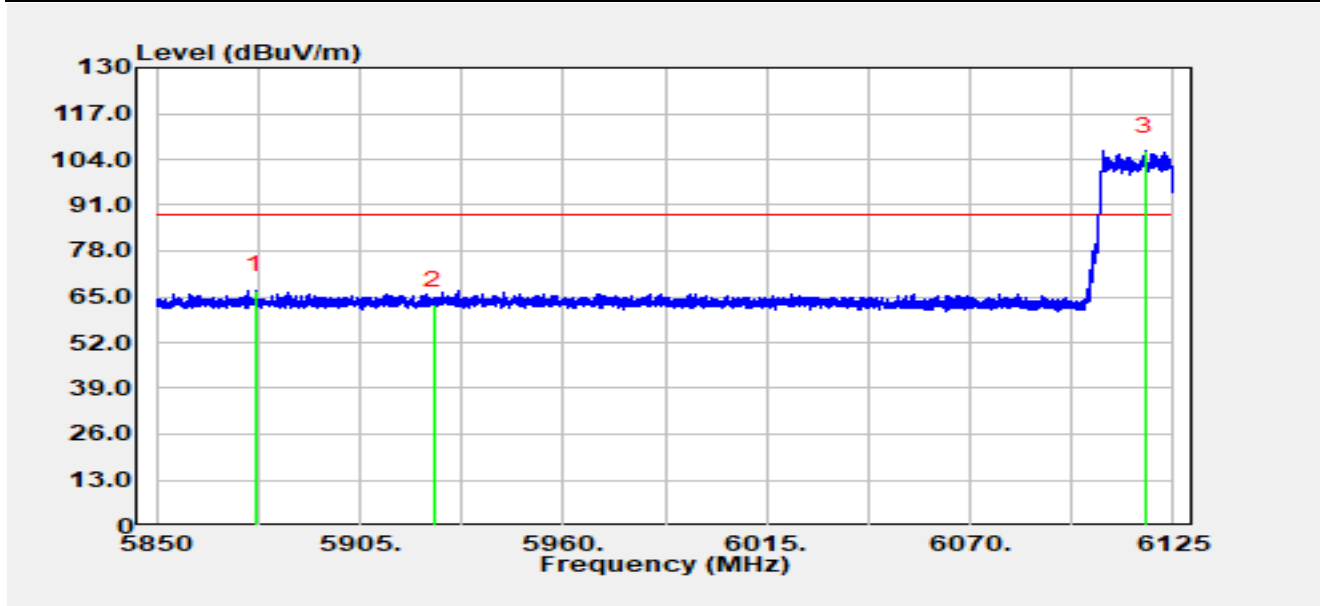


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5876.70	39.14	27.64	66.79	-21.41	88.20	Peak
2		5925.00	34.68	27.88	62.57	-25.63	88.20	Peak
3		6117.36	78.29	28.15	106.43	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

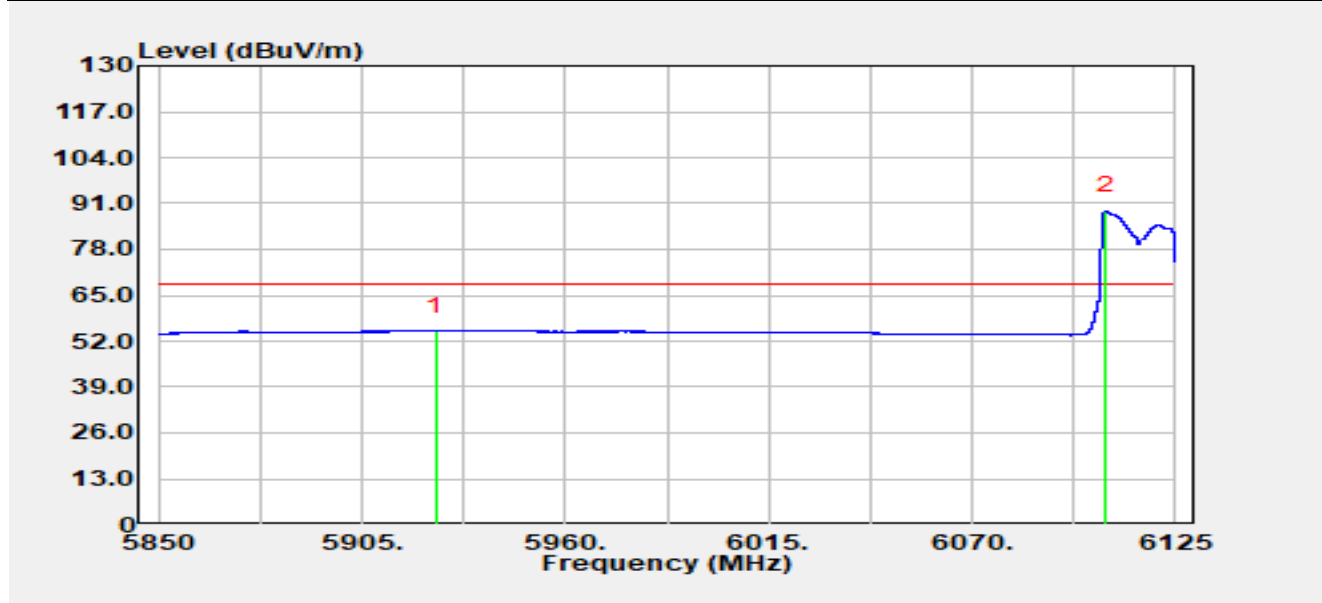


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.04	27.88	54.92	-13.28	68.20	Average
2		6106.27	60.91	28.01	88.92	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

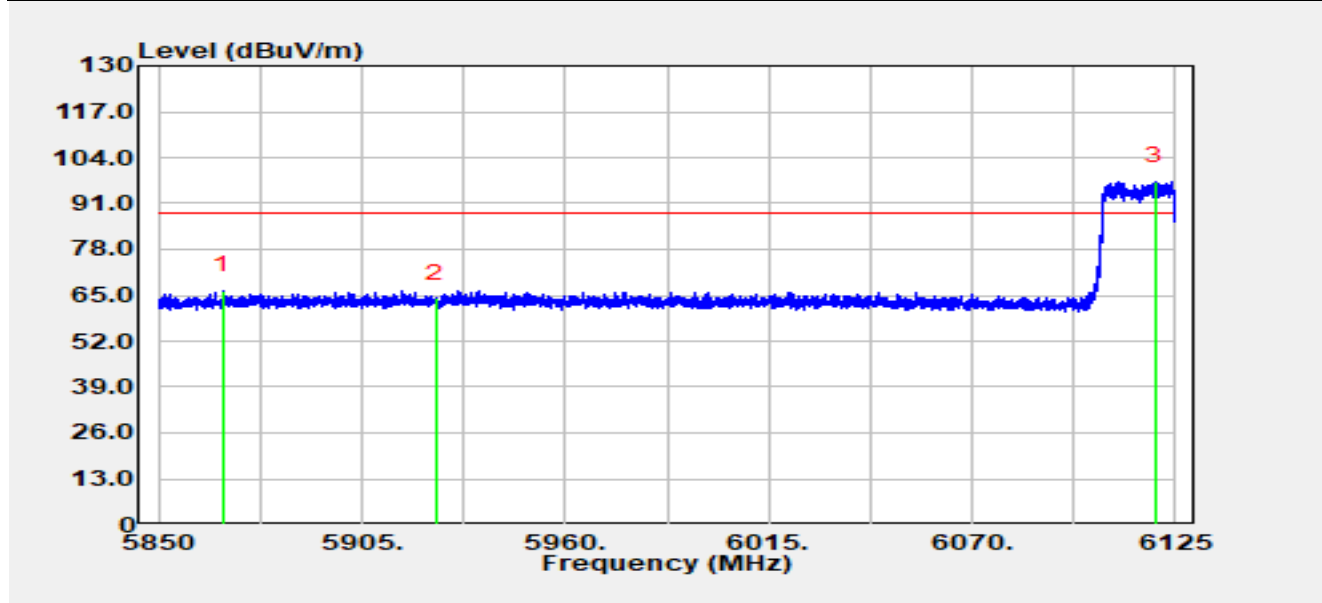


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5867.41	38.85	27.57	66.42	-21.78	88.20	Peak
2		5925.00	36.28	27.88	64.17	-24.03	88.20	Peak
3		6119.36	69.01	28.17	97.19	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 6115 MHz		

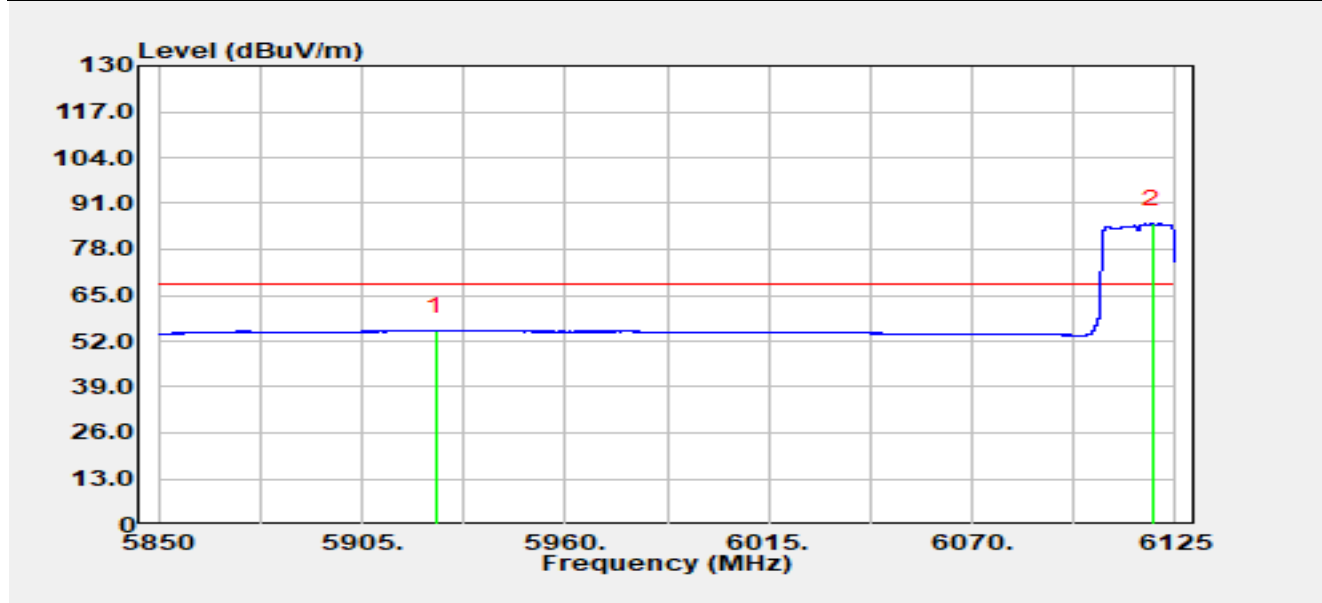


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.04	27.88	54.92	-13.28	68.20	Average
2		6118.70	57.01	28.17	85.18	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

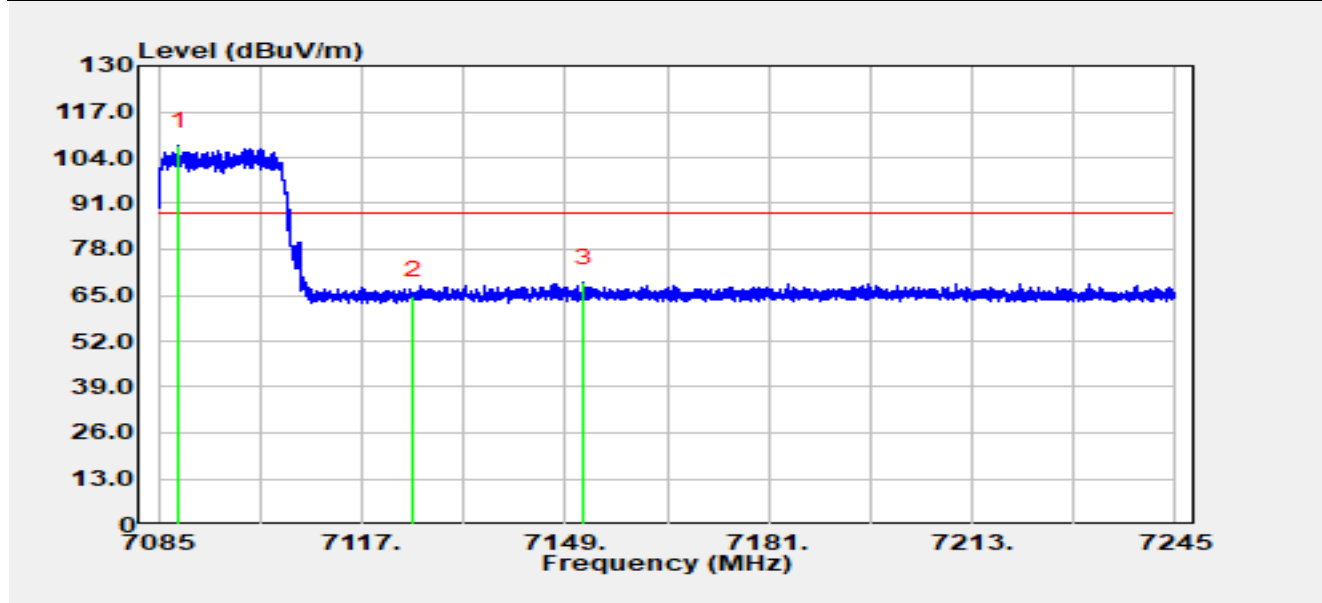


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7088.09	77.69	29.64	107.33	N/A	N/A	Peak
2		7125.00	35.50	29.34	64.84	-23.36	88.20	Peak
3	*	7151.86	38.92	29.75	68.66	-19.54	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

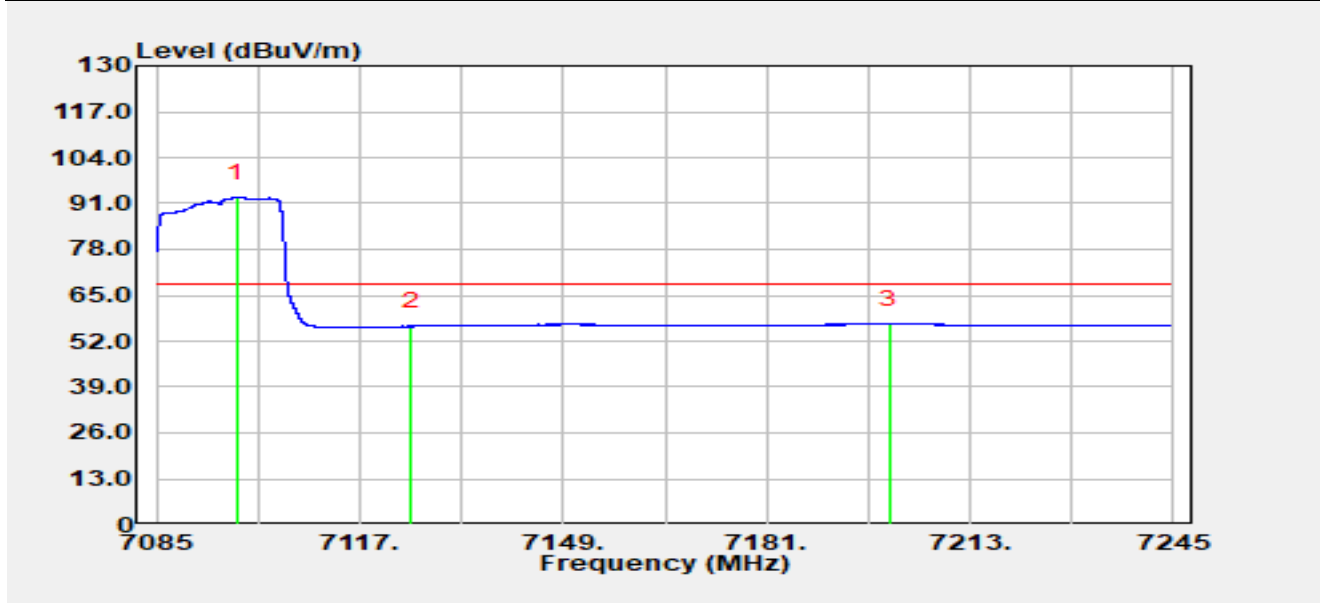


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.54	62.91	29.70	92.60	N/A	N/A	Average
2		7125.00	26.81	29.34	56.15	-12.05	68.20	Average
3	*	7200.31	27.03	29.80	56.82	-11.38	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

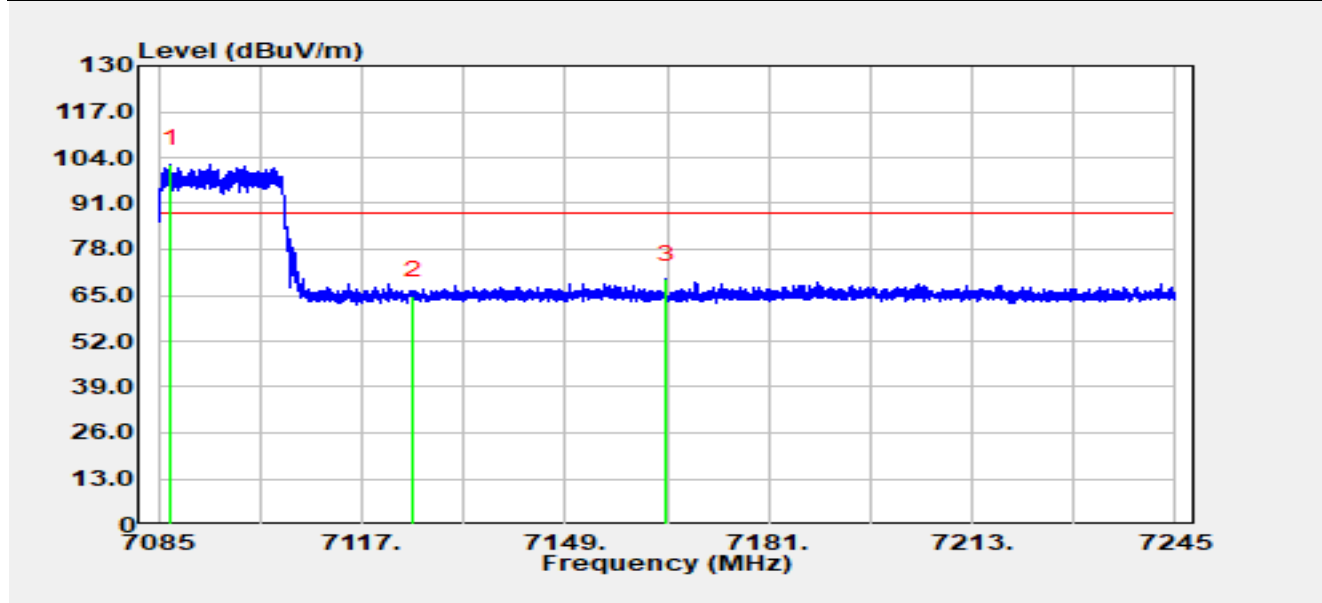


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.92	72.52	29.63	102.15	N/A	N/A	Peak
2		7125.00	35.53	29.34	64.87	-23.33	88.20	Peak
3	*	7164.89	40.10	29.39	69.49	-18.71	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE20 at 7095 MHz		

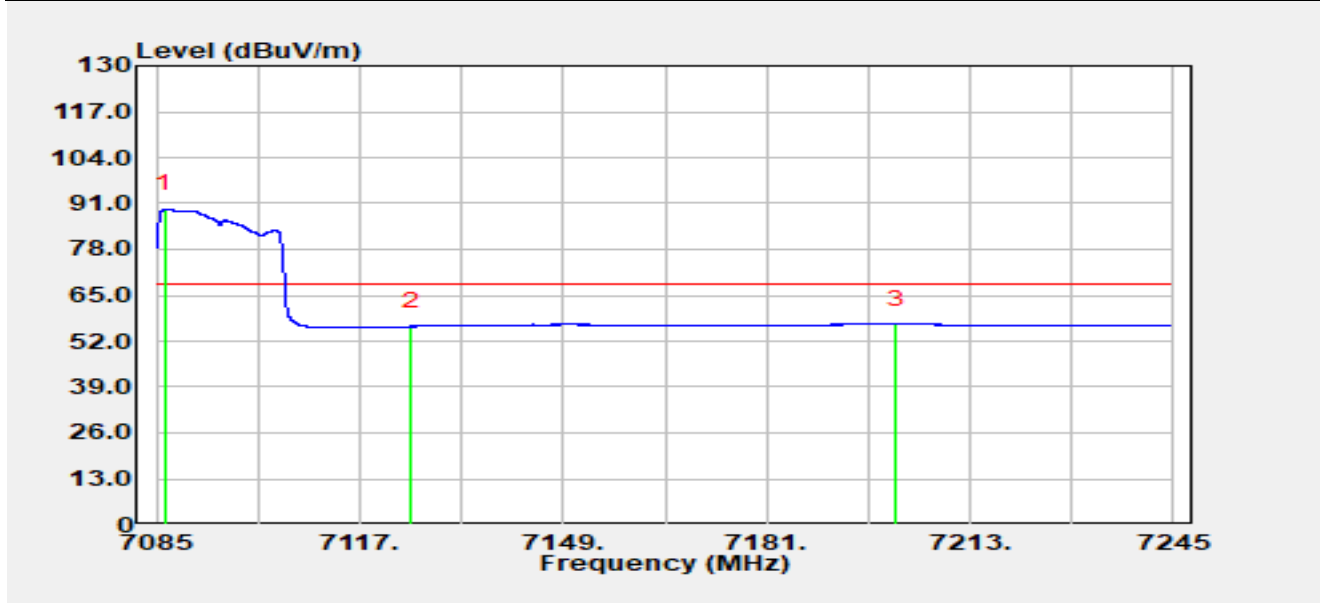


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.25	59.81	29.63	89.44	N/A	N/A	Average
2		7125.00	26.81	29.34	56.16	-12.04	68.20	Average
3	*	7201.32	27.06	29.81	56.87	-11.33	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

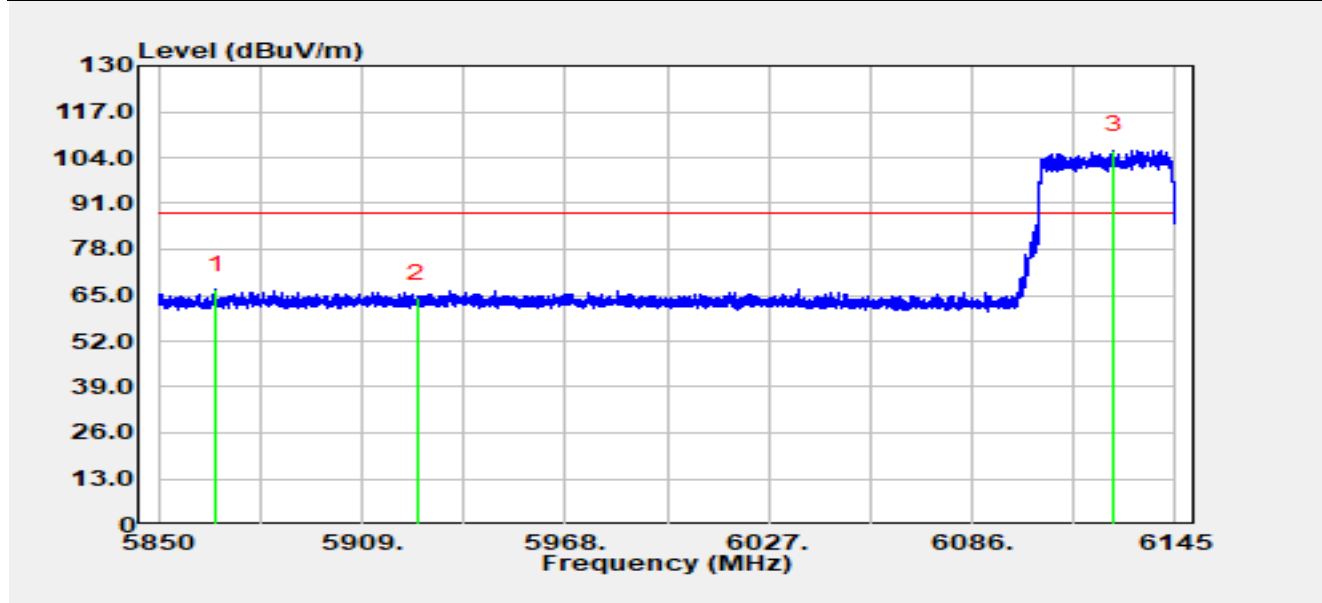


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5866.67	39.00	27.55	66.55	-21.65	88.20	Peak
2	*	5925.00	36.34	27.88	64.22	-23.98	88.20	Peak
3		6127.27	77.78	28.29	106.06	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

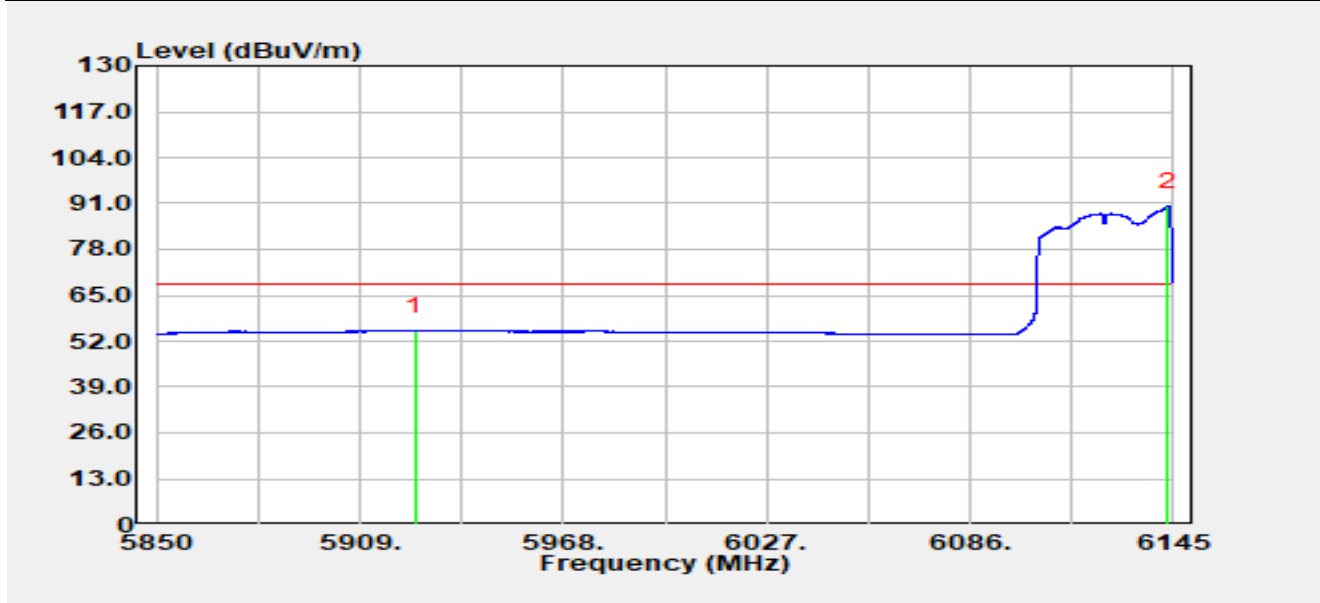


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.01	27.88	54.89	-13.31	68.20	Average
2		6143.50	61.90	28.25	90.15	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

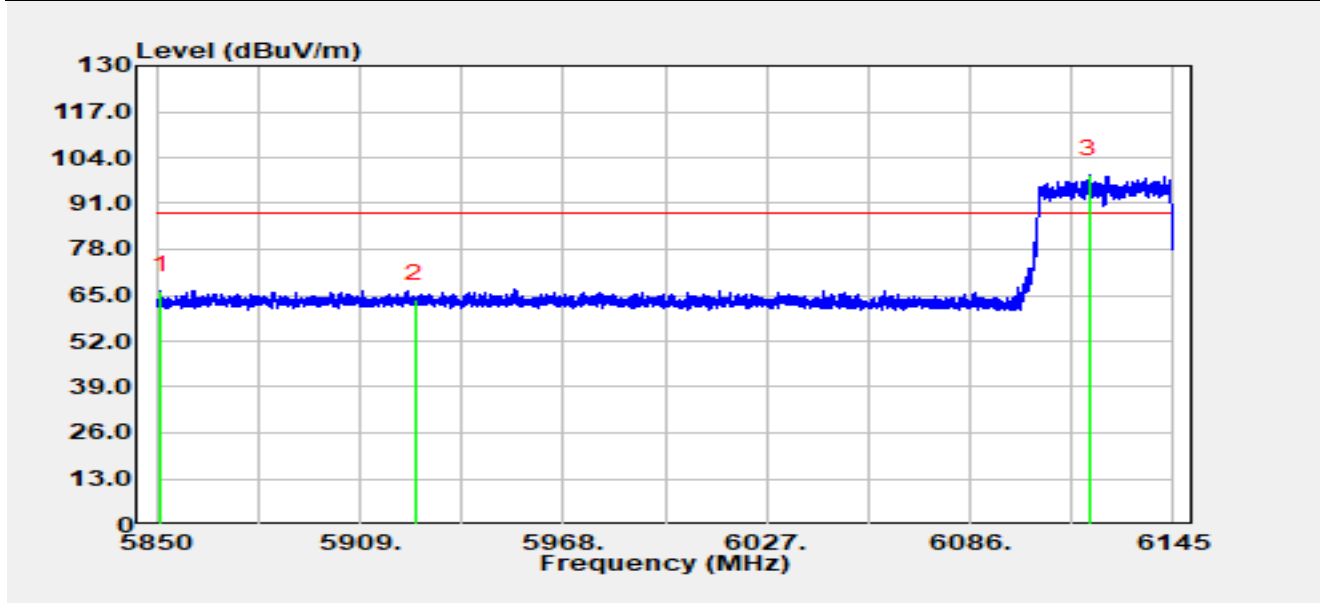


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5851.18	39.18	27.24	66.42	-21.78	88.20	Peak
2		5925.00	36.04	27.88	63.92	-24.28	88.20	Peak
3		6120.60	71.00	28.19	99.19	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 6125 MHz		

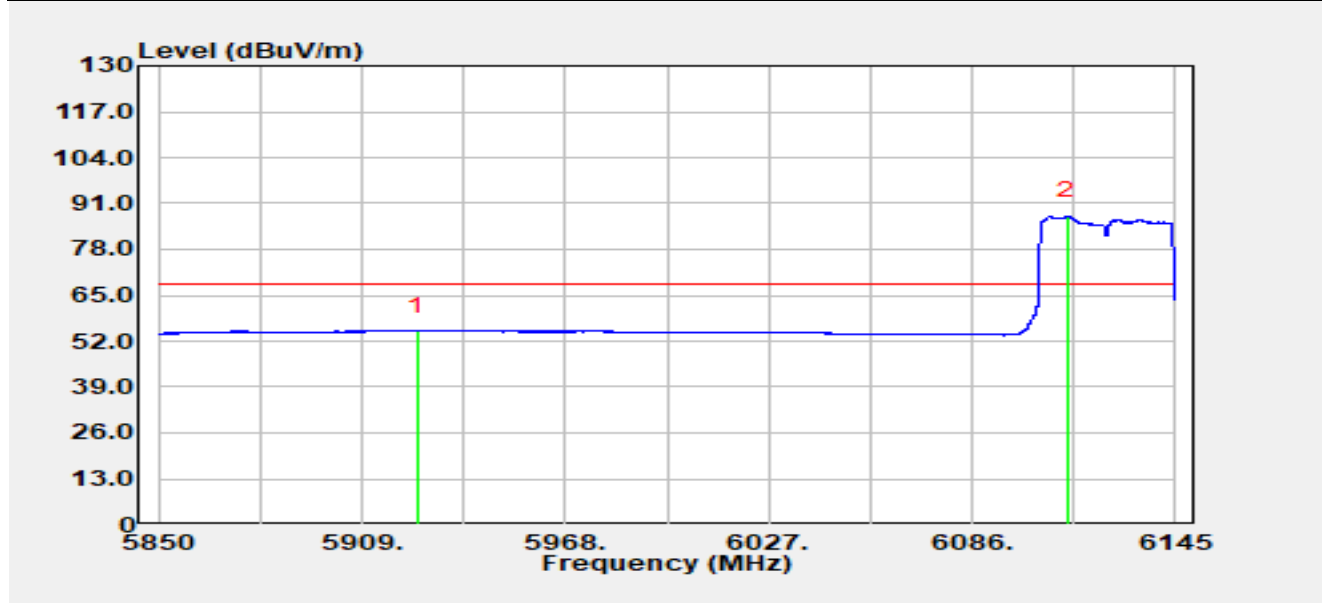


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.02	27.88	54.90	-13.30	68.20	Average
2		6113.79	59.33	28.10	87.43	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

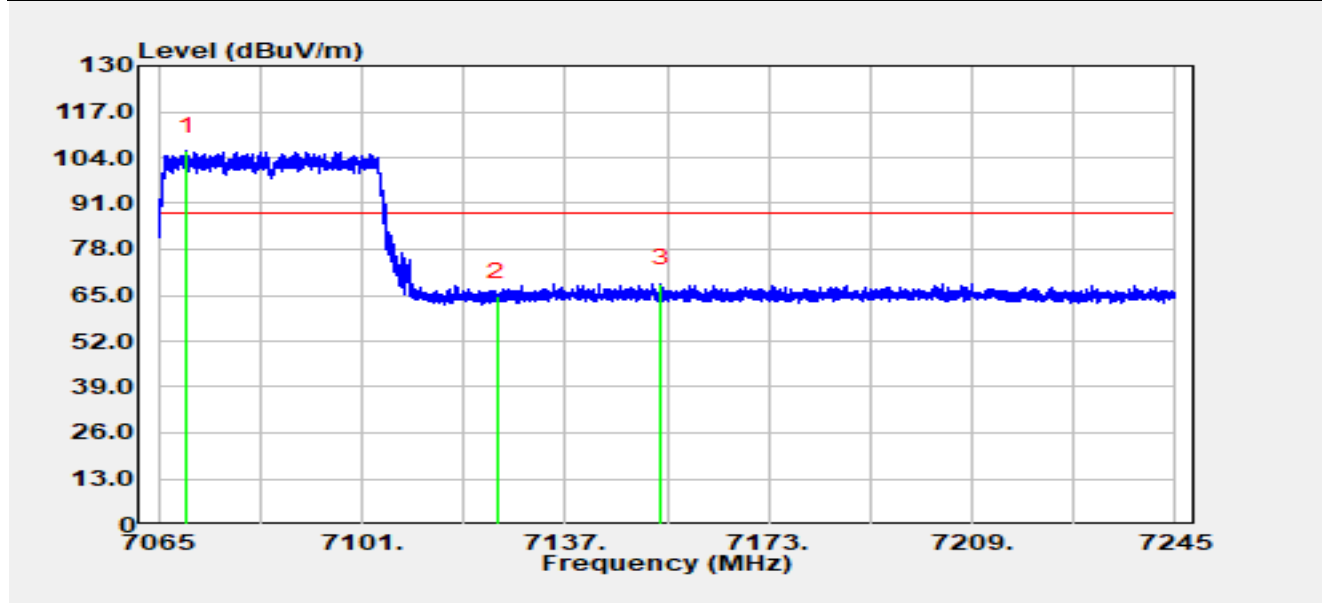


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7069.93	76.55	29.31	105.87	N/A	N/A	Peak
2		7125.00	35.19	29.34	64.54	-23.66	88.20	Peak
3	*	7153.85	38.54	29.69	68.23	-19.97	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

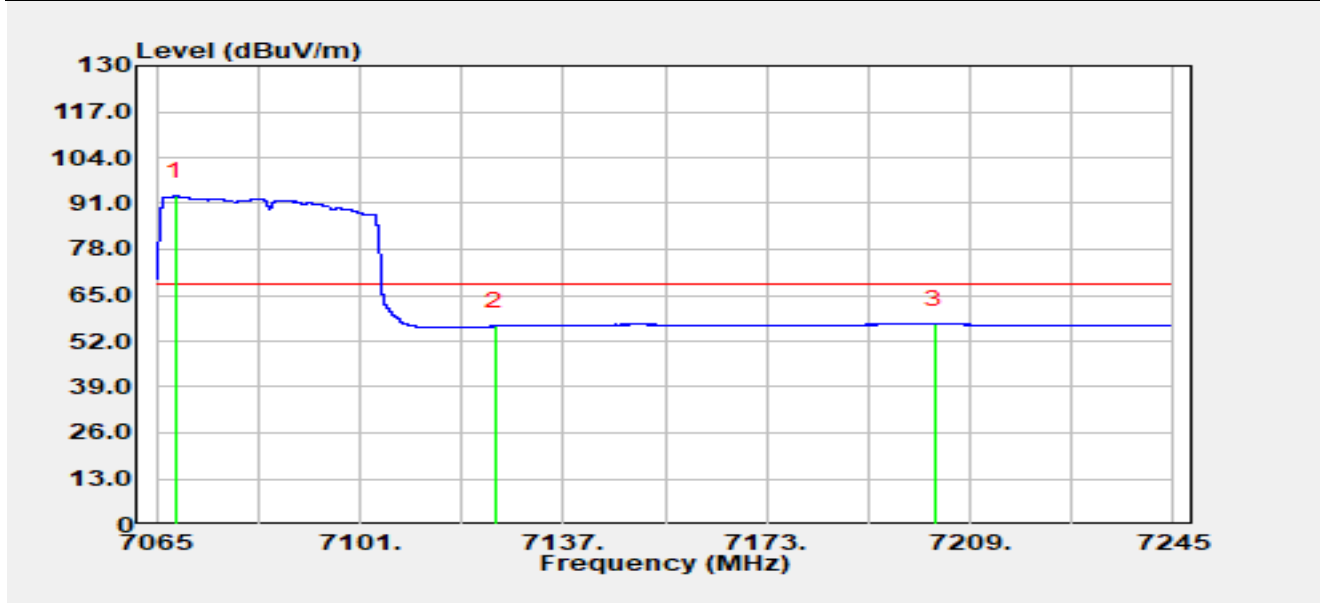


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7068.38	63.84	29.28	93.12	N/A	N/A	Average
2		7125.00	26.88	29.34	56.22	-11.98	68.20	Average
3	*	7202.83	27.06	29.82	56.88	-11.32	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

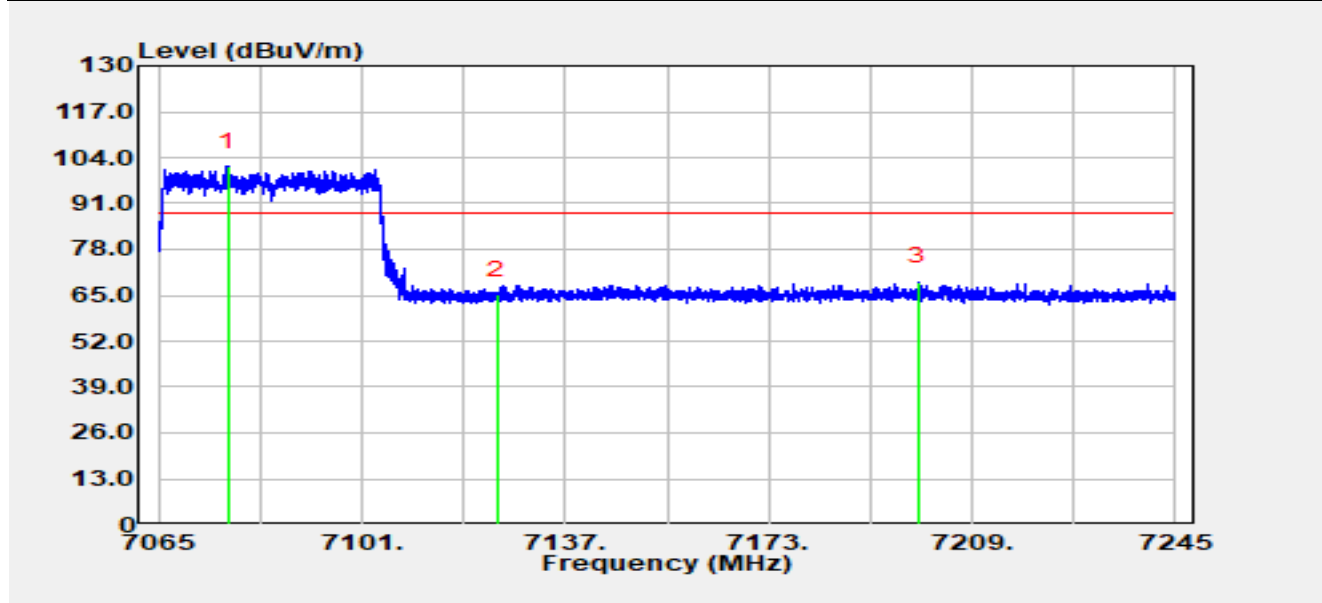


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7077.20	71.97	29.50	101.48	N/A	N/A	Peak
2		7125.00	35.81	29.34	65.15	-23.05	88.20	Peak
3	*	7199.42	39.08	29.78	68.86	-19.34	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE40 at 7085 MHz		

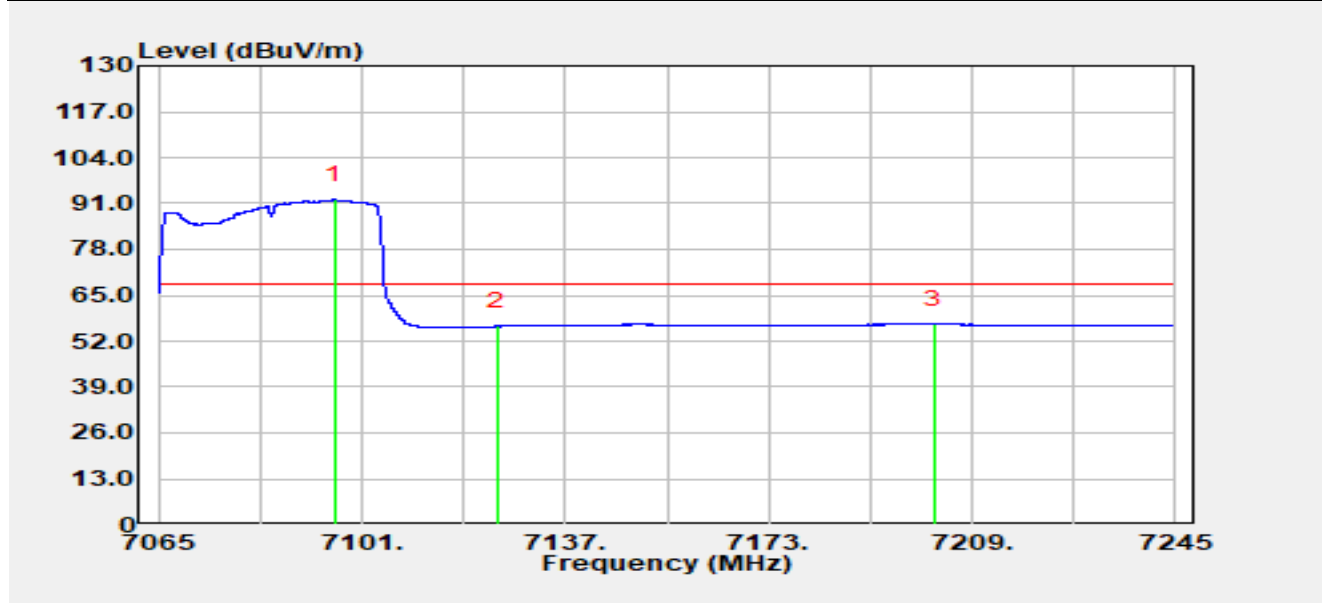


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7096.14	62.36	29.69	92.05	N/A	N/A	Average
2		7125.00	26.83	29.34	56.17	-12.03	68.20	Average
3	*	7202.23	27.02	29.83	56.85	-11.35	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

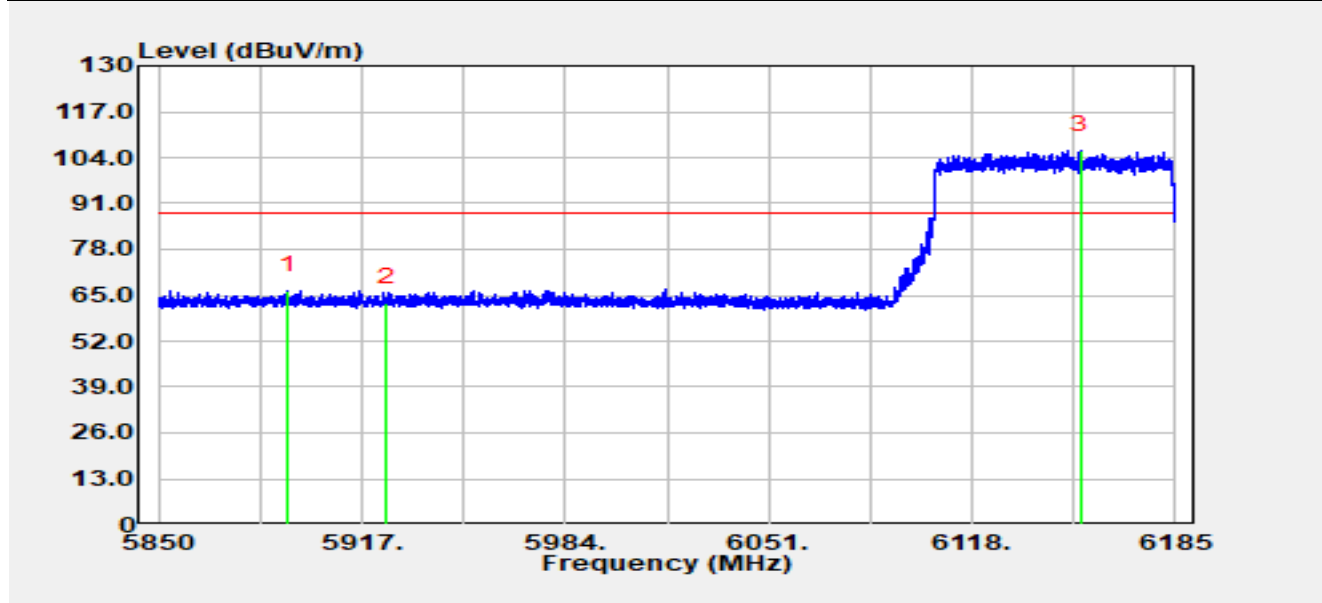


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5892.55	38.86	27.51	66.37	-21.83	88.20	Peak
2		5925.00	35.04	27.88	62.92	-25.28	88.20	Peak
3		6153.58	77.92	28.09	106.02	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

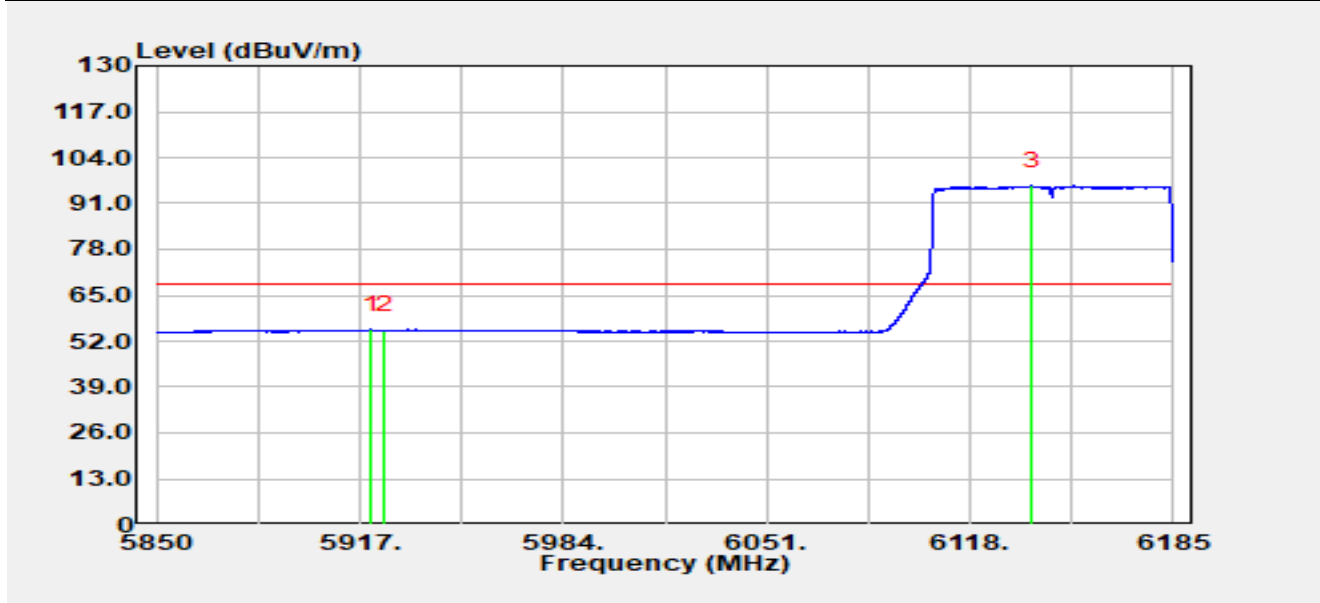

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.55	27.42	27.82	55.24	-12.96	68.20	Average
2		5925.00	27.21	27.88	55.09	-13.11	68.20	Average
3		6138.37	67.59	28.34	95.94	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).