


Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

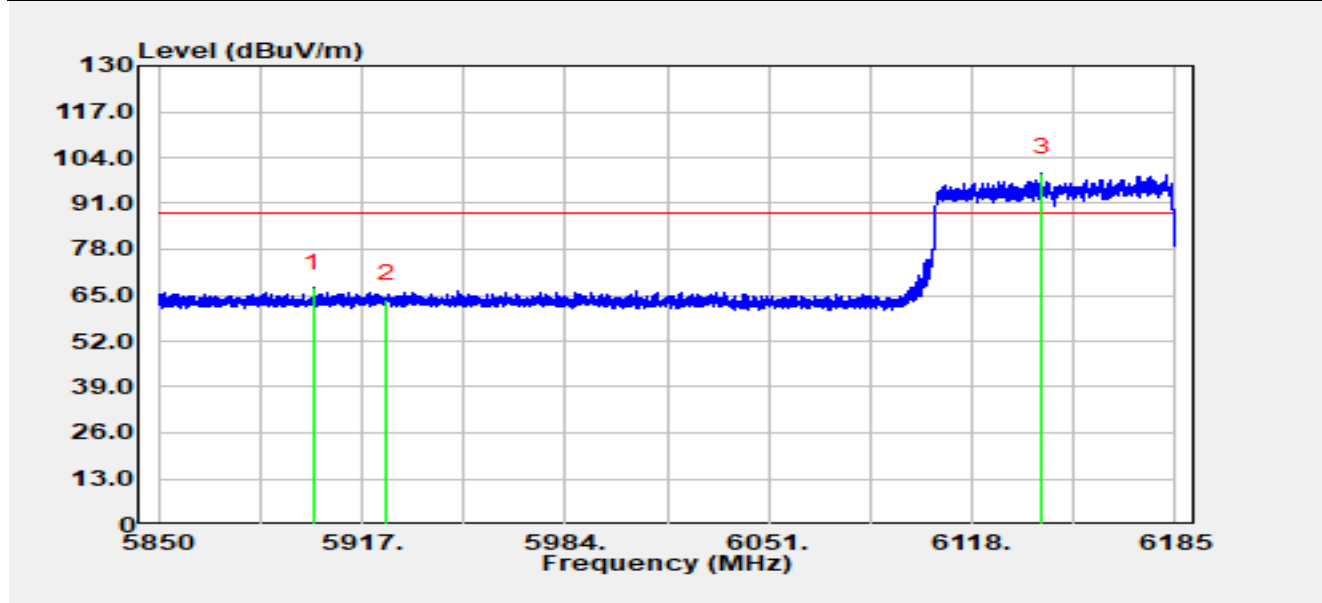


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5900.95	39.39	27.60	66.99	-21.21	88.20	Peak
2		5925.00	35.95	27.88	63.84	-24.36	88.20	Peak
3		6140.81	71.52	28.30	99.82	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 6145 MHz		

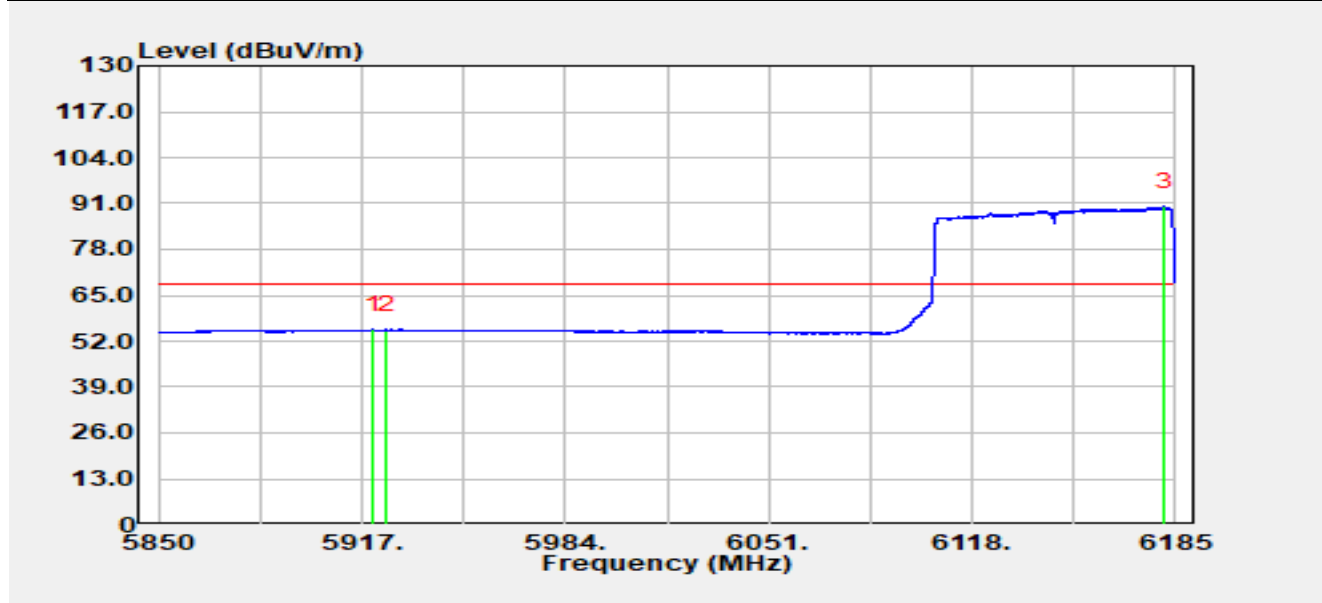


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.95	27.41	27.83	55.23	-12.97	68.20	Average
2		5925.00	27.26	27.88	55.14	-13.06	68.20	Average
3		6181.45	61.93	28.21	90.14	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

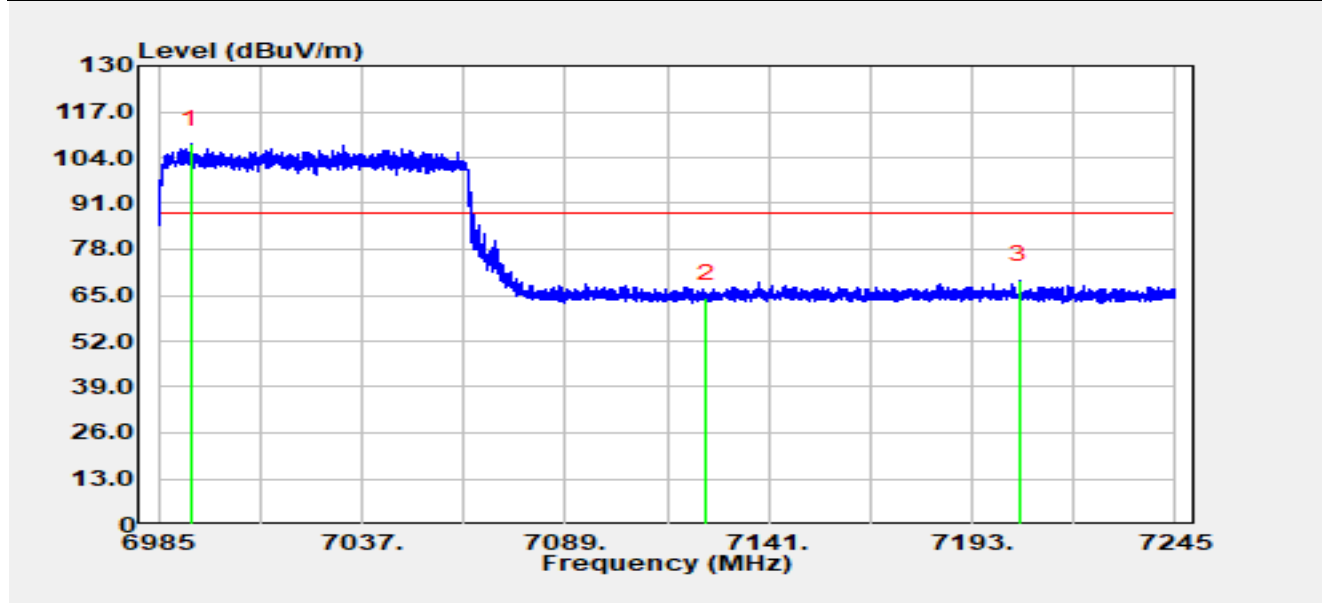


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6993.35	78.19	29.66	107.85	N/A	N/A	Peak
2		7125.00	34.84	29.34	64.18	-24.02	88.20	Peak
3	*	7205.25	39.65	29.75	69.40	-18.80	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

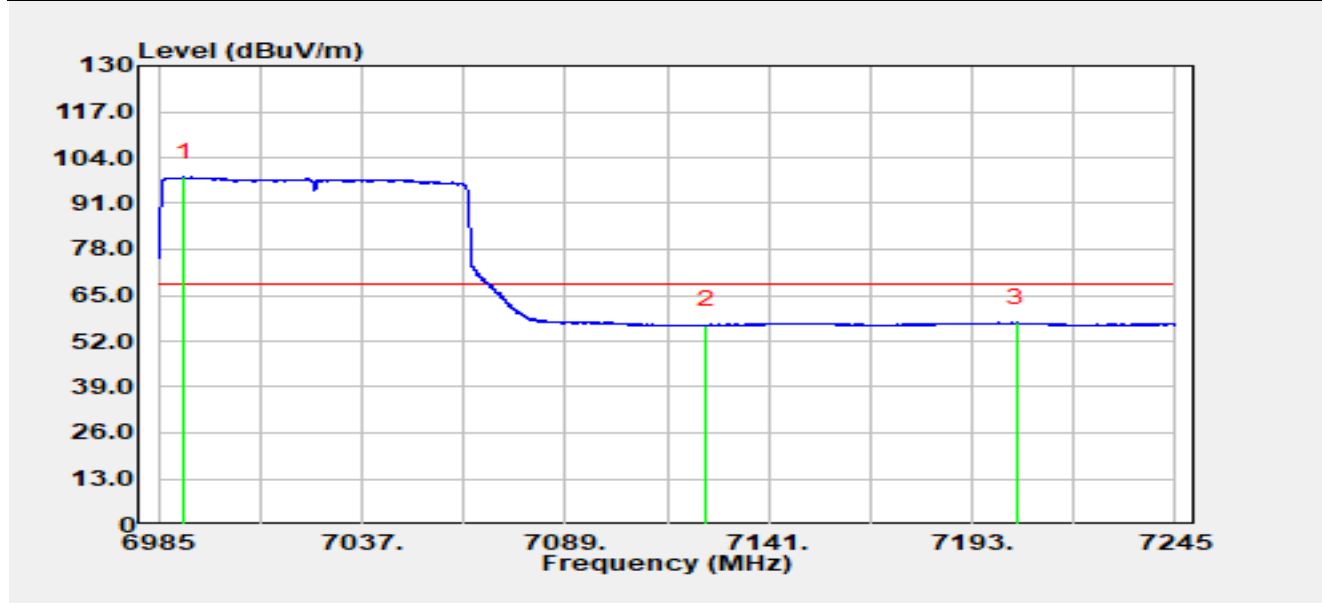


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6991.45	68.71	29.67	98.38	N/A	N/A	Average
2		7125.00	27.12	29.34	56.47	-11.73	68.20	Average
3	*	7204.34	27.45	29.78	57.23	-10.97	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

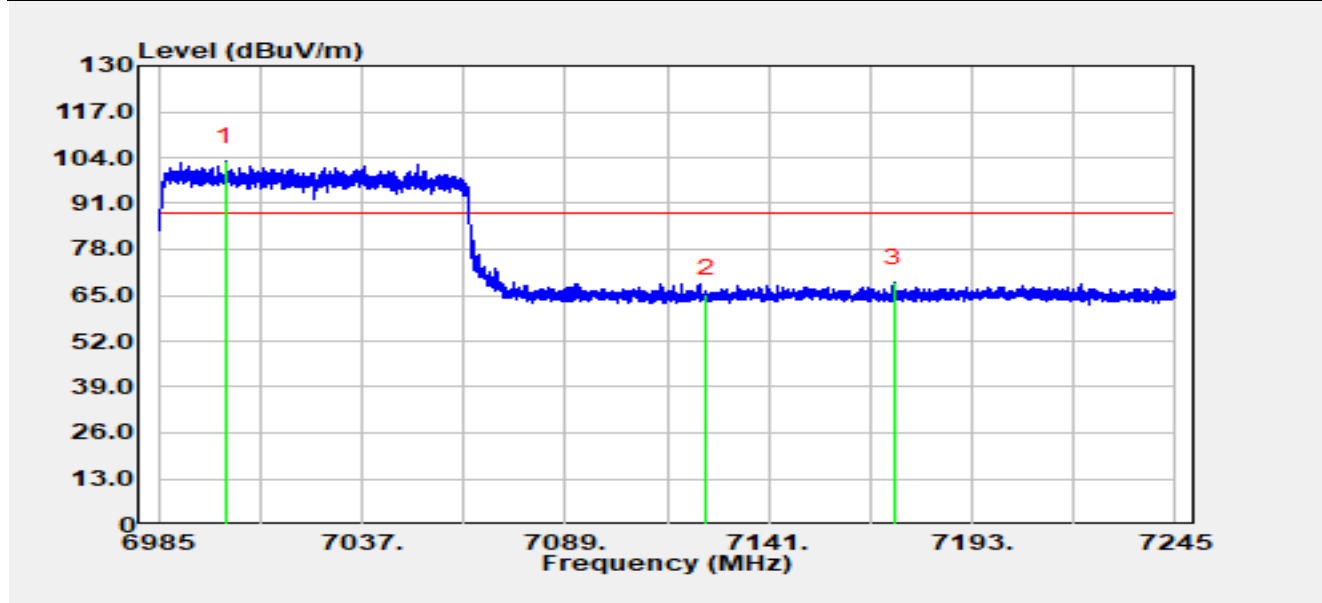


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7002.08	73.55	29.42	102.97	N/A	N/A	Peak
2		7125.00	36.09	29.34	65.44	-22.76	88.20	Peak
3	*	7173.16	39.06	29.39	68.45	-19.75	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-09
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE80 at 7025 MHz		

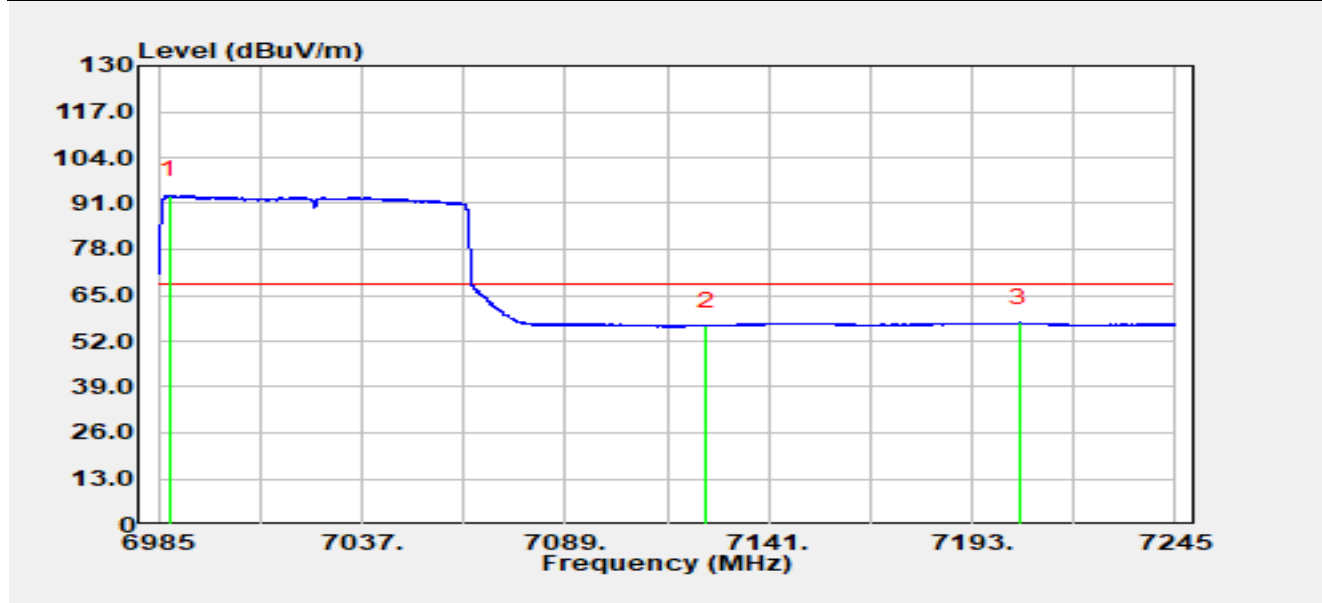


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6987.94	63.63	29.63	93.26	N/A	N/A	Average
2		7125.00	27.07	29.34	56.41	-11.79	68.20	Average
3	*	7205.01	27.41	29.76	57.17	-11.03	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

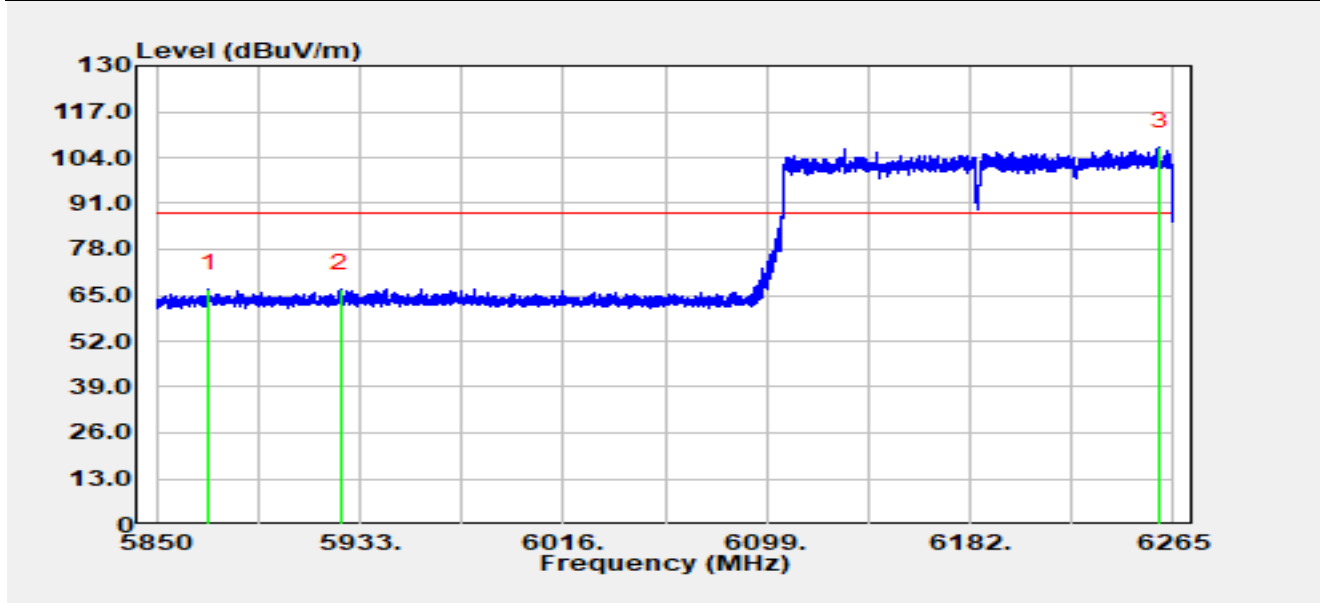


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5871.50	39.07	27.67	66.74	-21.46	88.20	Peak
2	*	5925.00	38.97	27.88	66.85	-21.35	88.20	Peak
3		6259.48	78.97	28.15	107.13	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

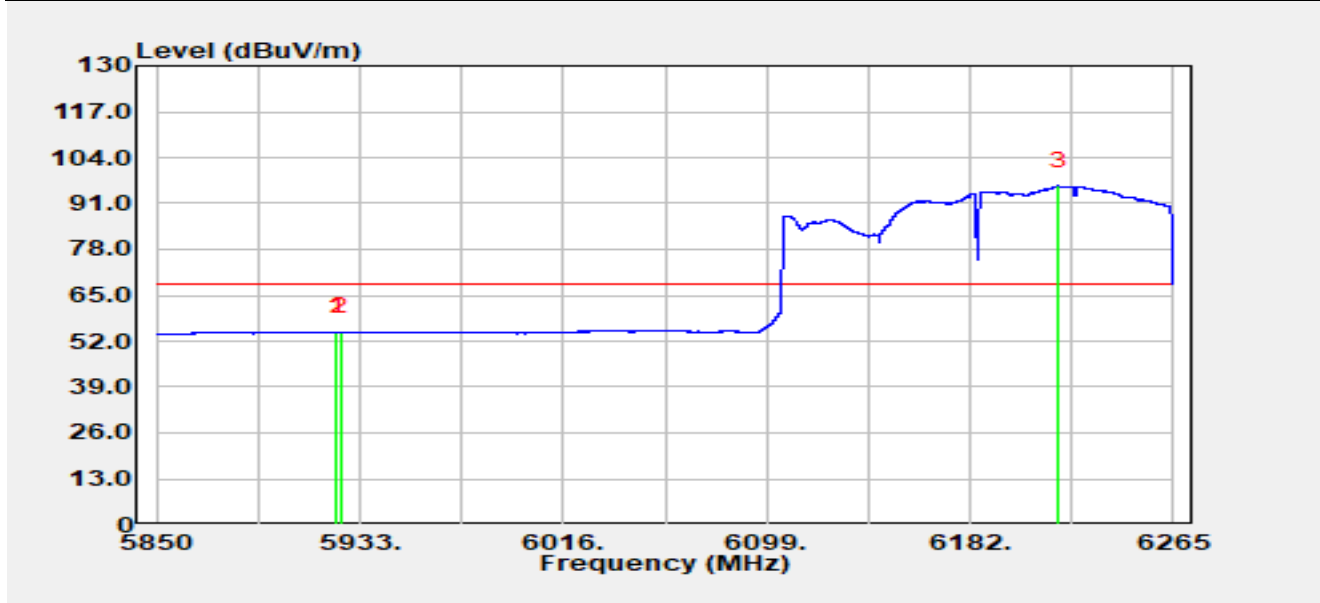


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.58	26.81	27.86	54.68	-13.52	68.20	Average
2		5925.00	26.79	27.88	54.67	-13.53	68.20	Average
3		6217.90	67.92	28.14	96.06	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

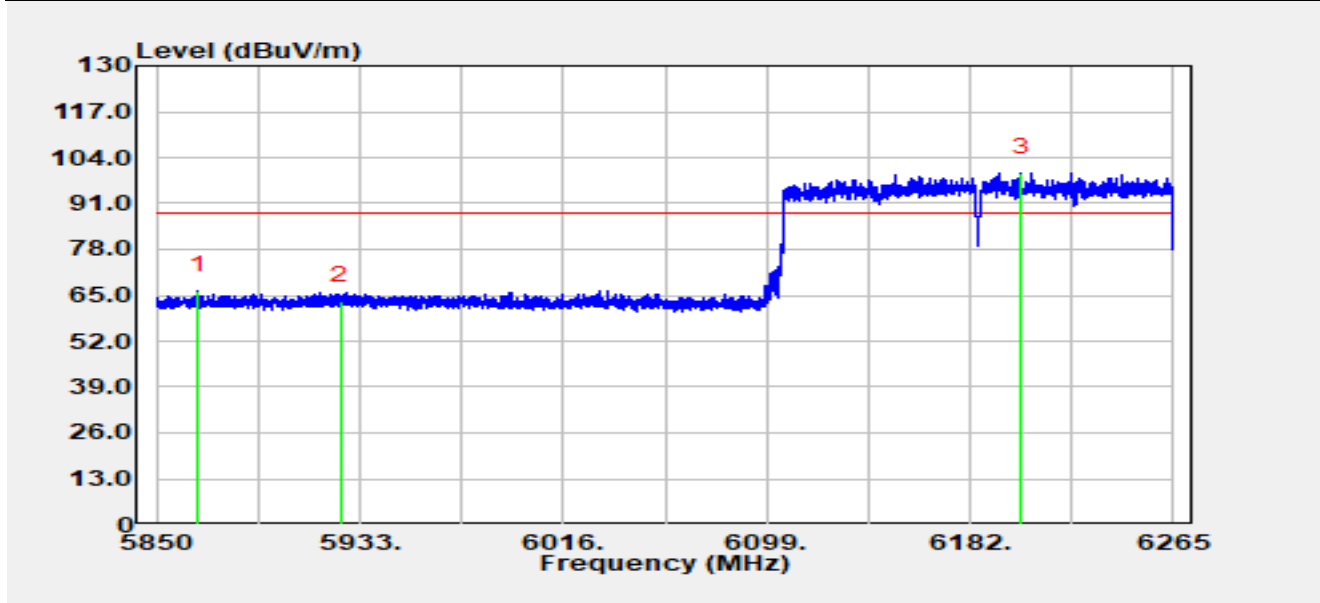


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5867.02	38.74	27.56	66.30	-21.90	88.20	Peak
2		5925.00	35.48	27.88	63.36	-24.84	88.20	Peak
3		6202.88	71.79	28.03	99.81	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6185 MHz		

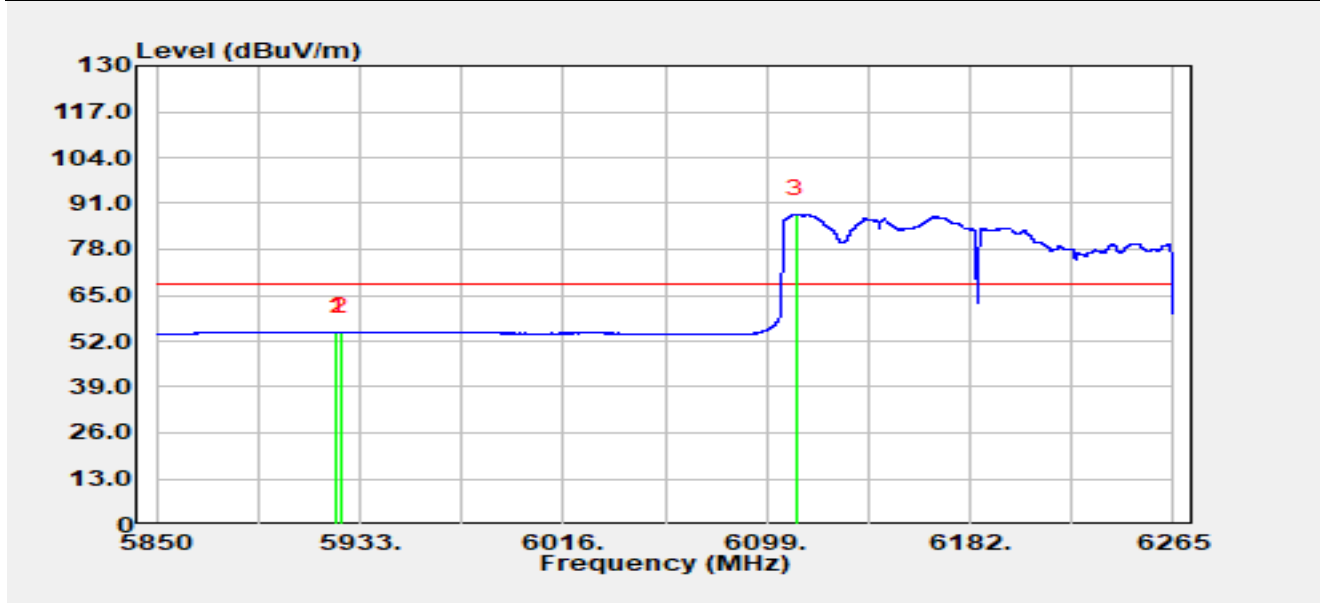


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.50	26.80	27.86	54.66	-13.54	68.20	Average
2		5925.00	26.75	27.88	54.63	-13.57	68.20	Average
3		6111.12	59.89	28.07	87.96	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

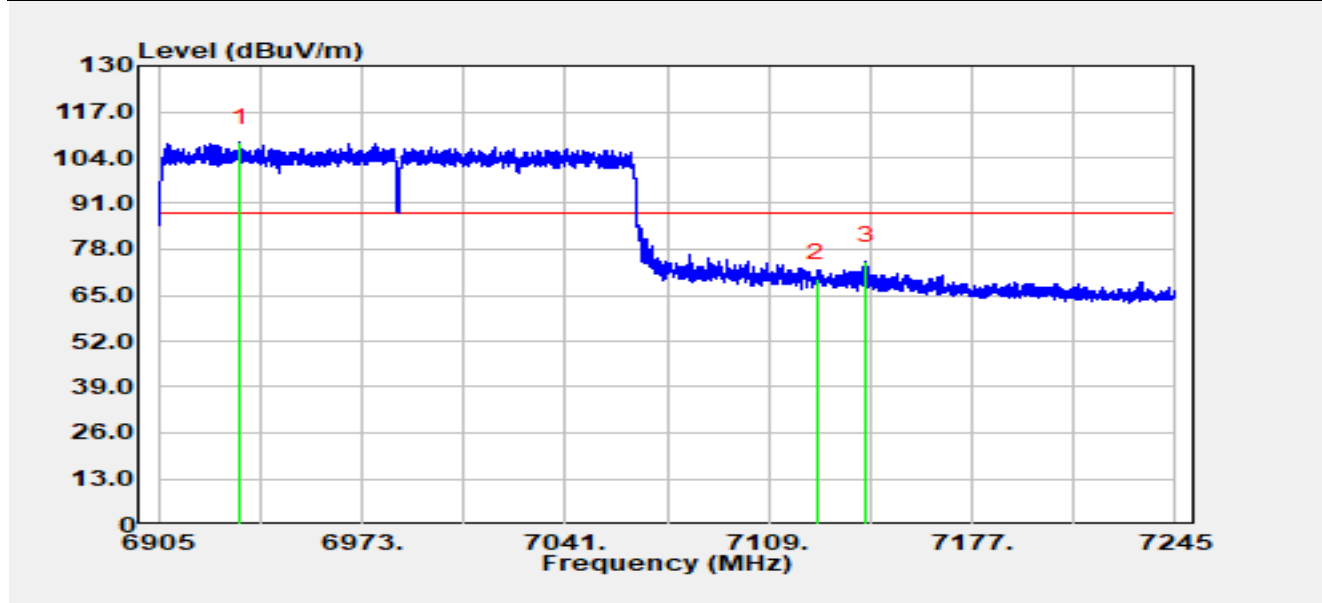


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6932.34	78.71	29.65	108.37	N/A	N/A	Peak
2		7125.00	40.42	29.34	69.76	-18.44	88.20	Peak
3	*	7141.40	45.15	29.65	74.80	-13.40	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

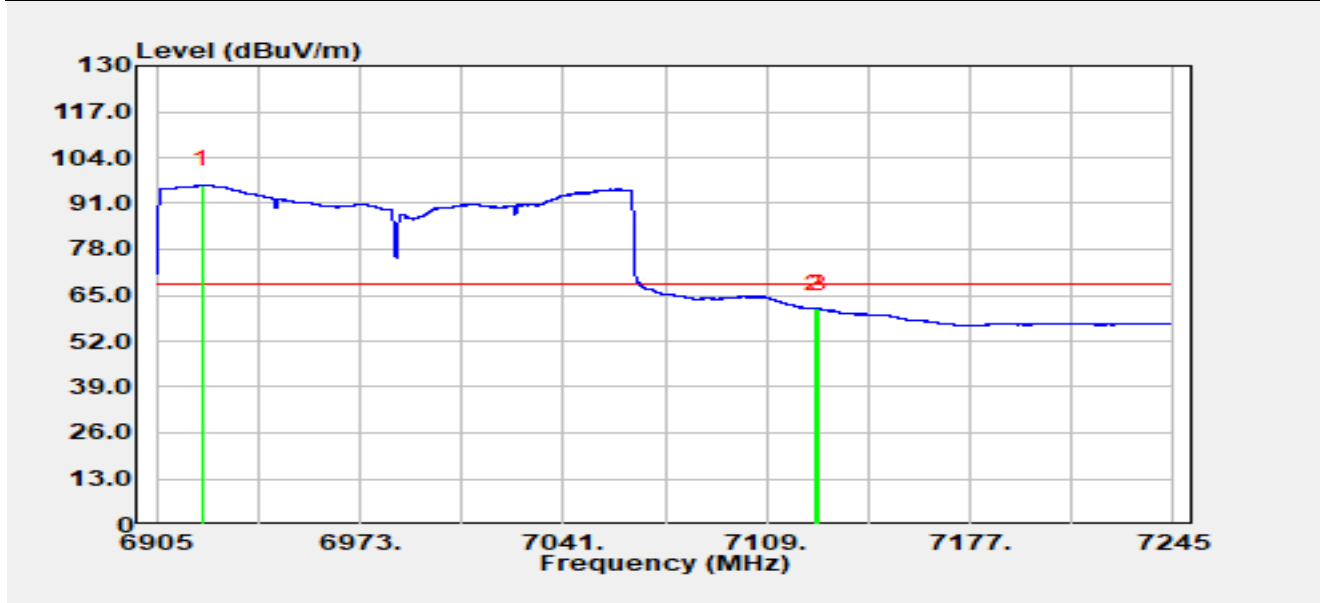


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6920.40	66.82	29.51	96.33	N/A	N/A	Average
2		7125.00	31.78	29.34	61.12	-7.08	68.20	Average
3	*	7126.27	31.82	29.37	61.19	-7.01	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

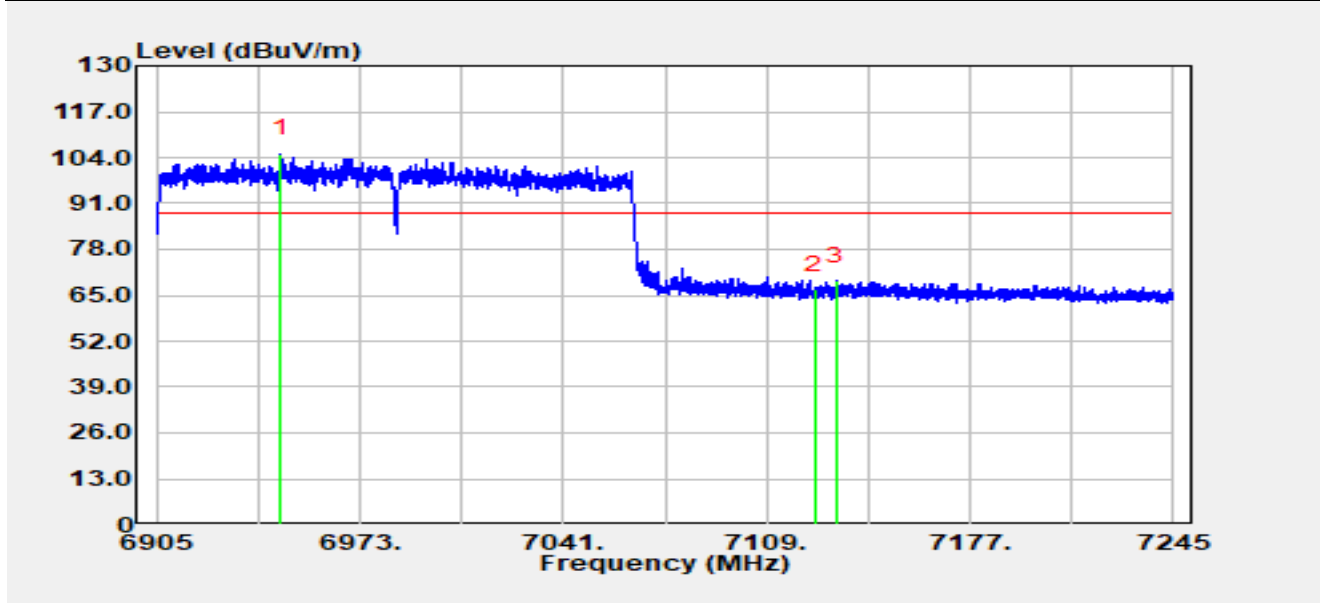


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6946.65	75.71	29.48	105.20	N/A	N/A	Peak
2		7125.00	37.14	29.34	66.48	-21.72	88.20	Peak
3	*	7132.12	39.48	29.49	68.97	-19.23	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11ax-HE160 at 6985 MHz		

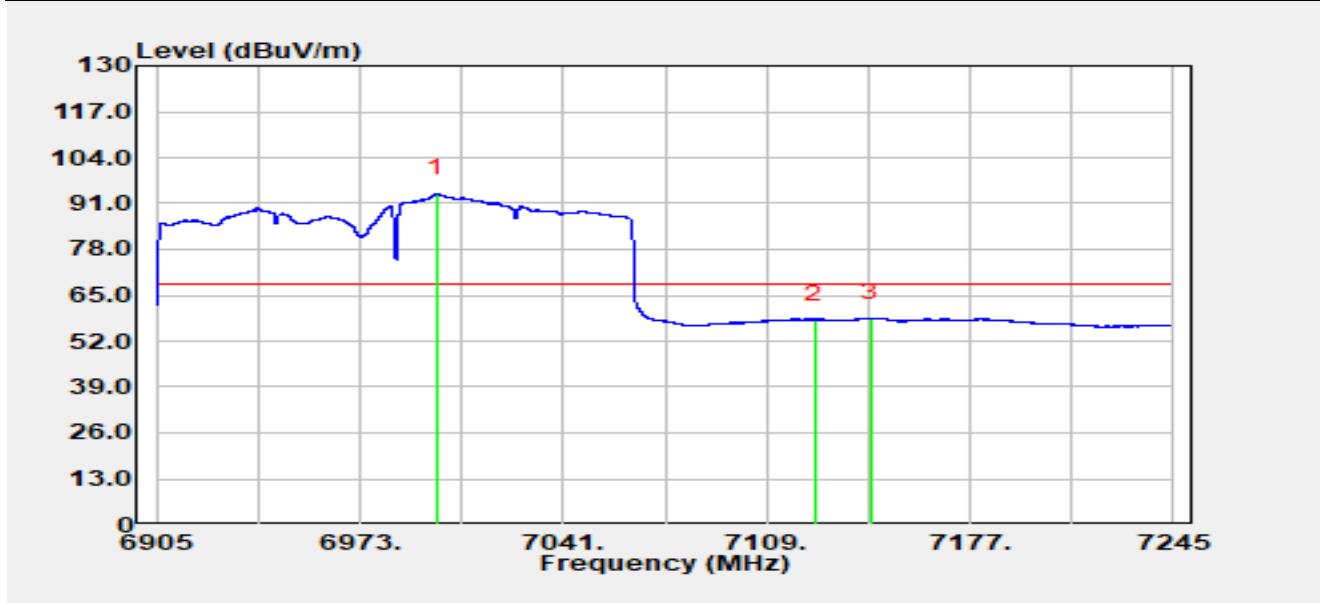


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6998.84	64.21	29.51	93.72	N/A	N/A	Average
2		7125.00	28.73	29.34	58.08	-10.12	68.20	Average
3	*	7143.65	28.85	29.69	58.53	-9.67	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

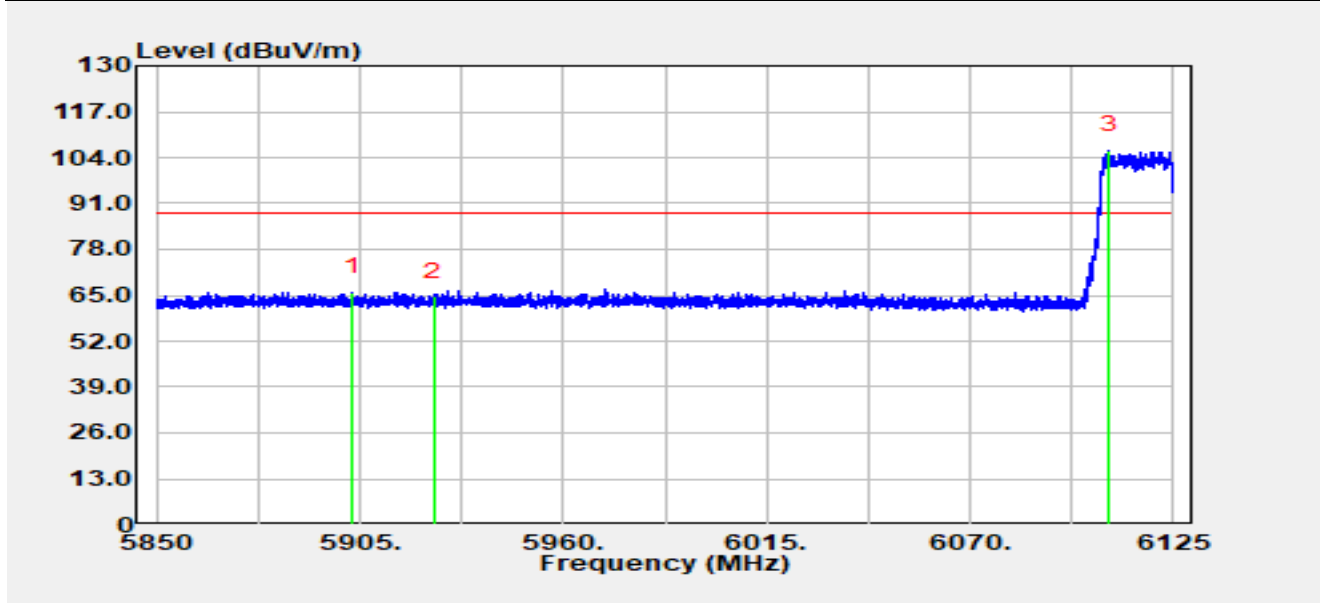


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5903.05	38.18	27.62	65.80	-22.40	88.20	Peak
2		5925.00	36.70	27.88	64.58	-23.62	88.20	Peak
3		6107.76	78.03	28.03	106.05	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

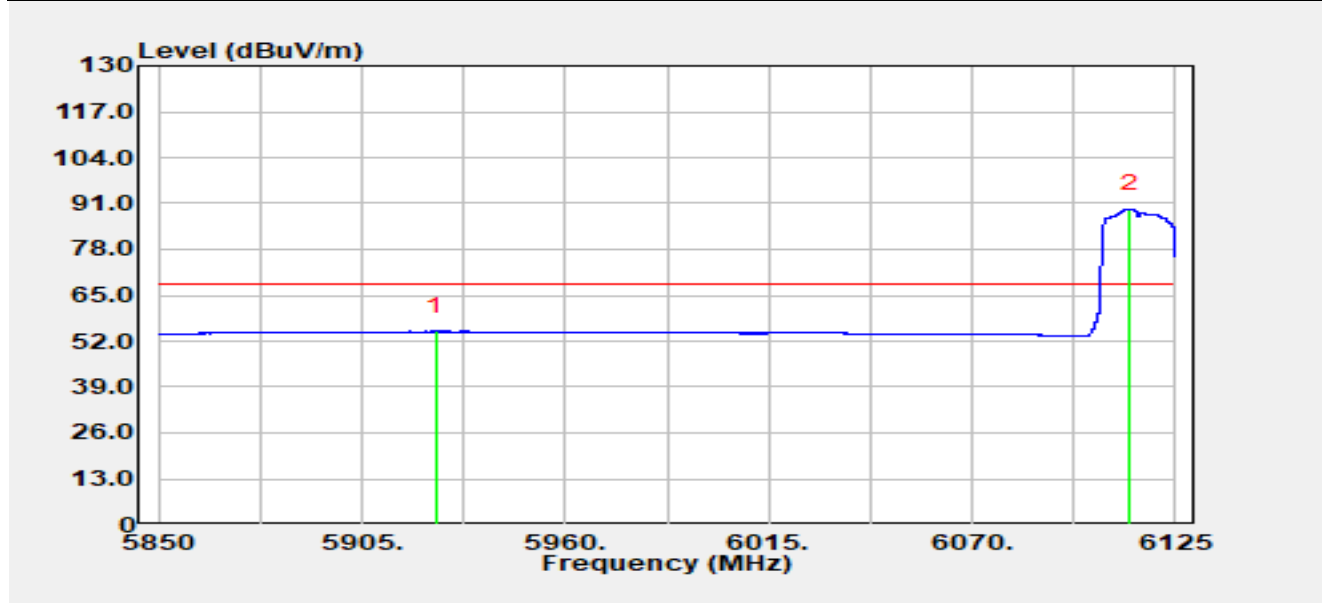


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.86	27.88	54.74	-13.46	68.20	Average
2		6112.57	61.26	28.09	89.35	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

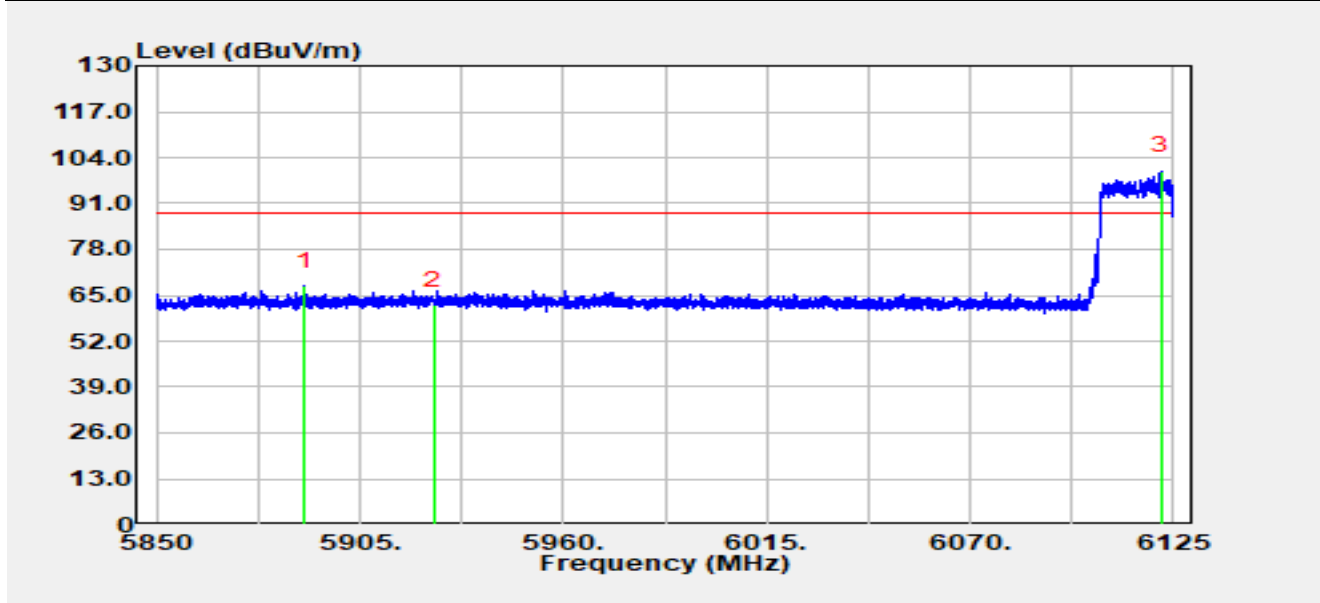


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5890.04	40.00	27.48	67.48	-20.72	88.20	Peak
2		5925.00	34.21	27.88	62.10	-26.10	88.20	Peak
3		6121.78	72.00	28.21	100.21	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 6115 MHz		

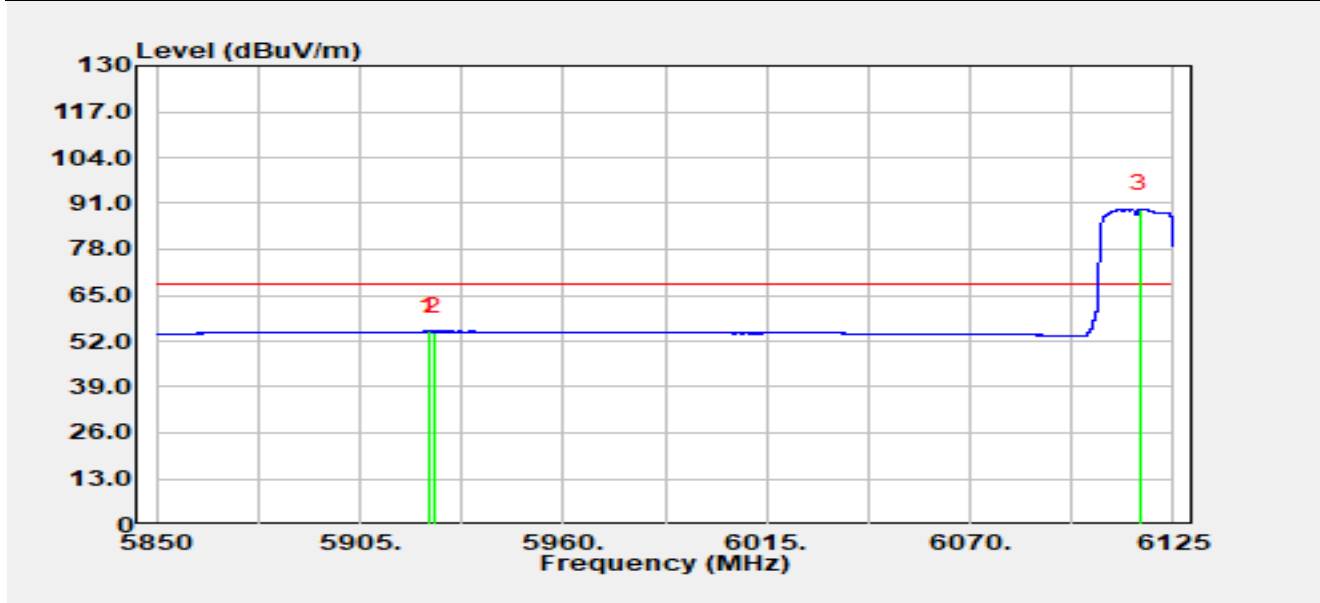


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.70	26.87	27.86	54.73	-13.47	68.20	Average
2		5925.00	26.80	27.88	54.68	-13.52	68.20	Average
3		6116.06	61.24	28.13	89.37	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 7095 MHz		

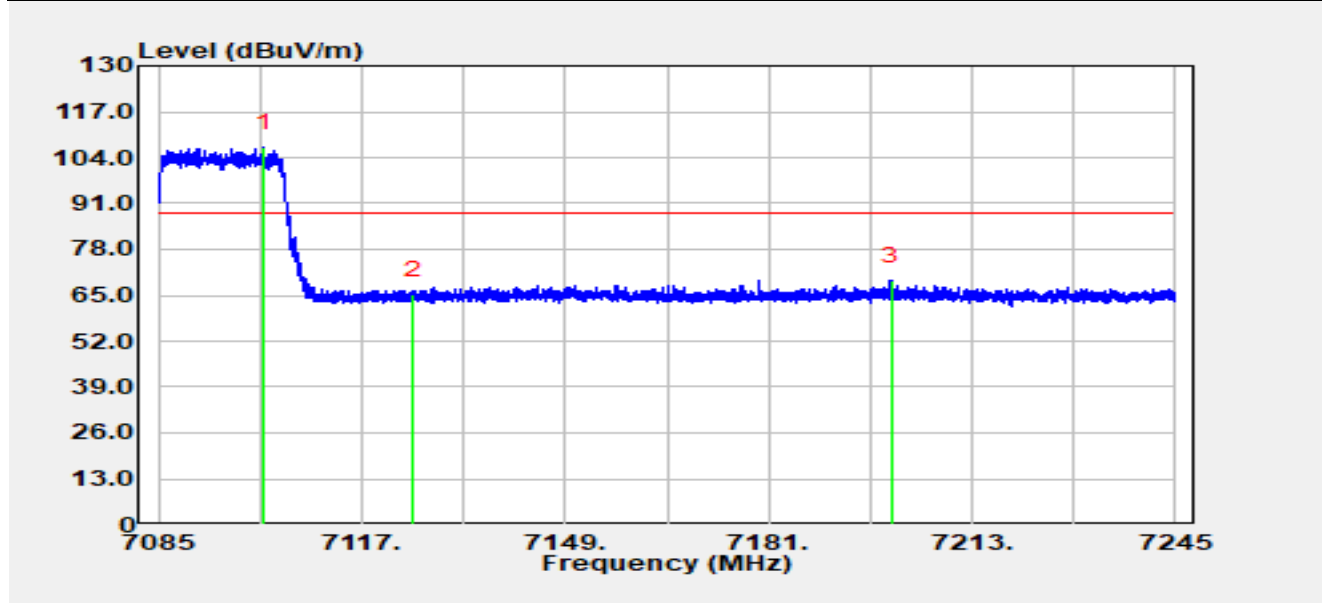


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.62	77.13	29.57	106.70	N/A	N/A	Peak
2		7125.00	35.78	29.34	65.13	-23.07	88.20	Peak
3	*	7200.22	39.24	29.80	69.03	-19.17	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE20 at 7095 MHz		

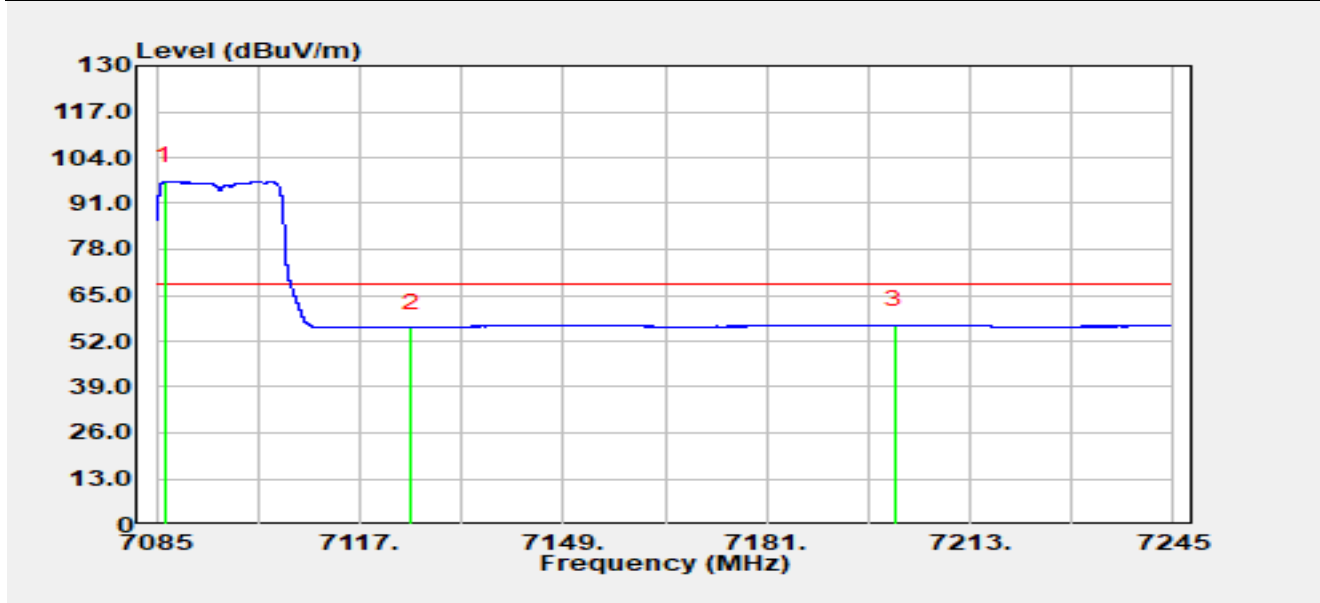


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.28	67.71	29.63	97.34	N/A	N/A	Average
2		7125.00	26.58	29.34	55.92	-12.28	68.20	Average
3	*	7201.22	26.83	29.81	56.64	-11.56	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 7095 MHz		

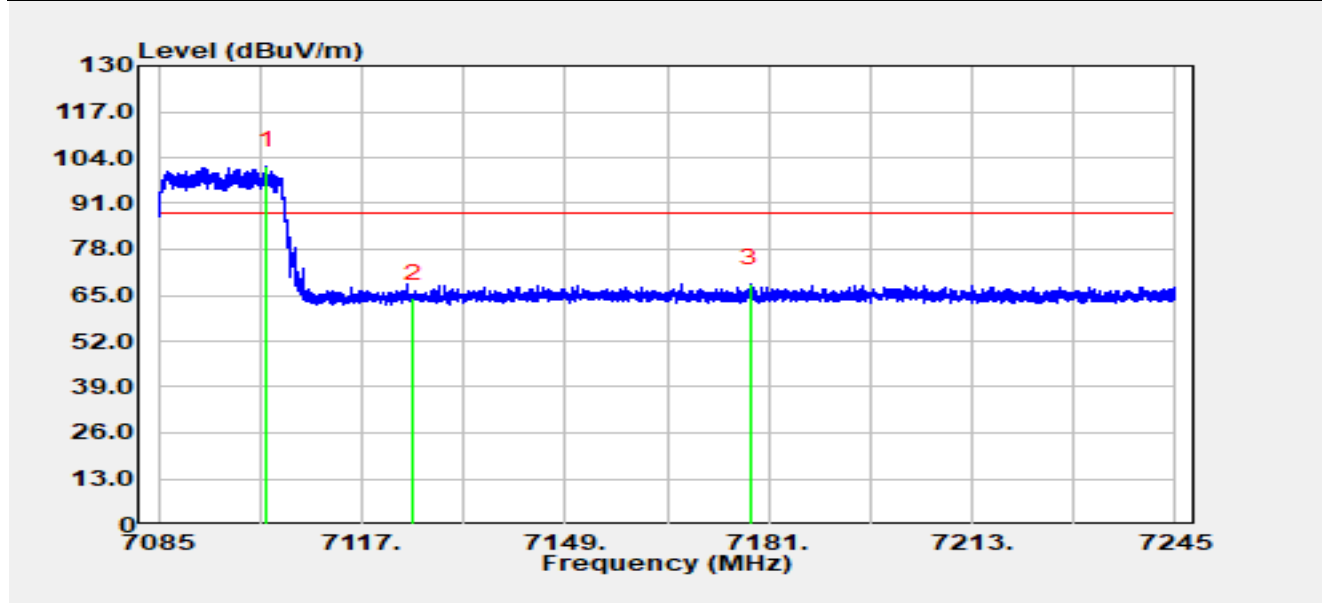


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7101.99	72.21	29.56	101.77	N/A	N/A	Peak
2		7125.00	34.69	29.34	64.04	-24.16	88.20	Peak
3	*	7178.18	38.78	29.46	68.24	-19.96	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE20 at 7095 MHz		

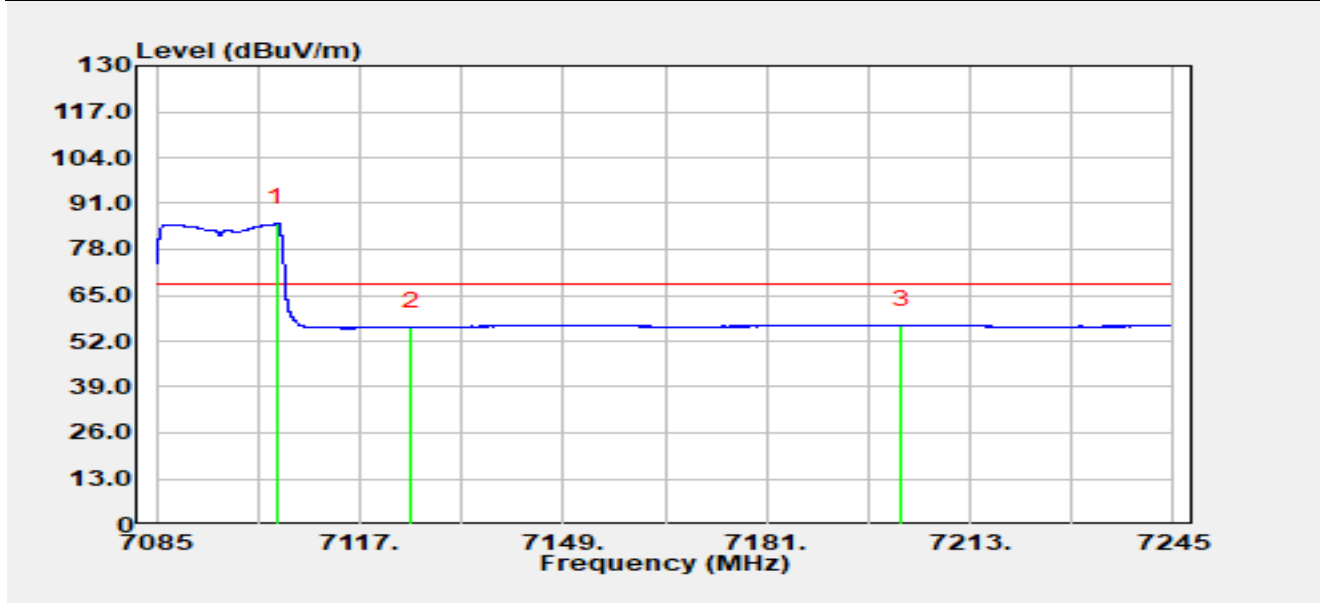


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7103.99	56.09	29.50	85.59	N/A	N/A	Average
2		7125.00	26.58	29.34	55.92	-12.28	68.20	Average
3	*	7202.20	26.82	29.83	56.65	-11.55	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

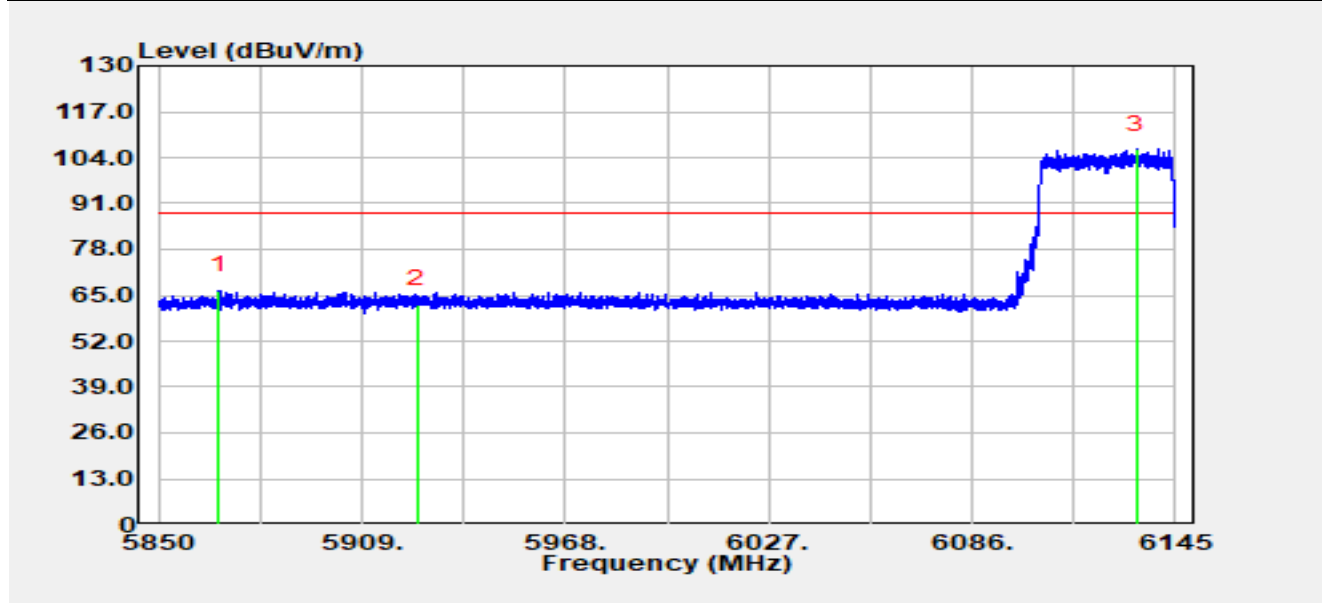


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5867.64	38.82	27.58	66.40	-21.80	88.20	Peak
2		5925.00	34.47	27.88	62.36	-25.84	88.20	Peak
3		6133.58	77.92	28.38	106.30	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

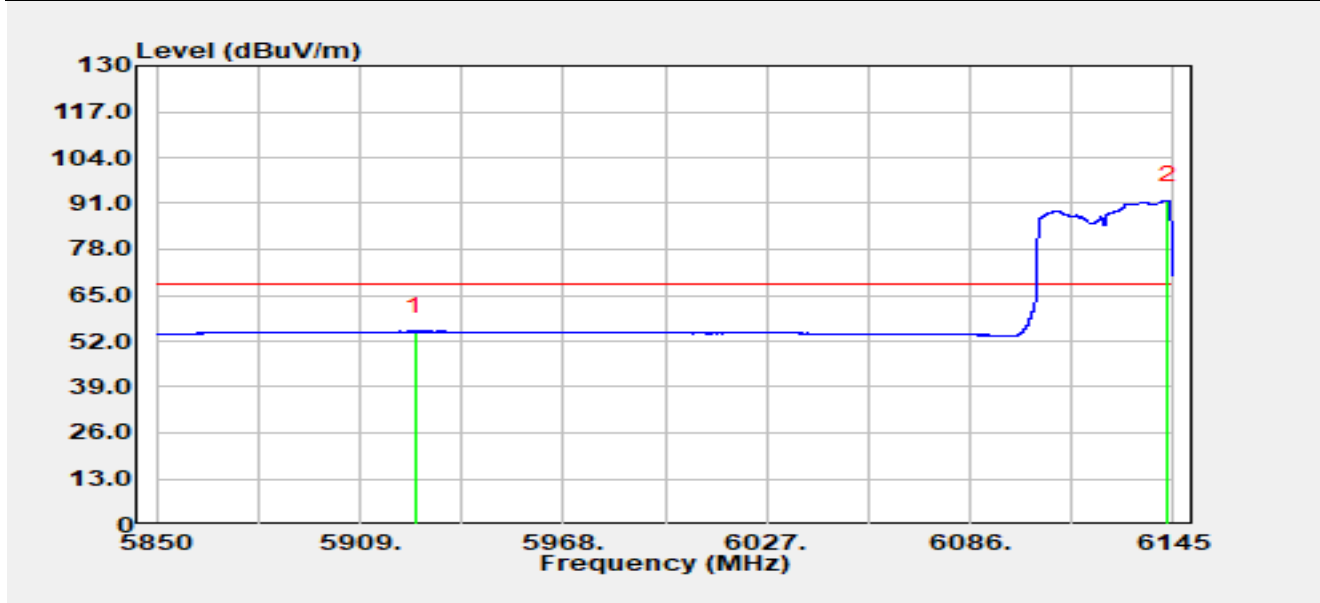


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.80	27.88	54.68	-13.52	68.20	Average
2		6143.35	63.67	28.25	91.92	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

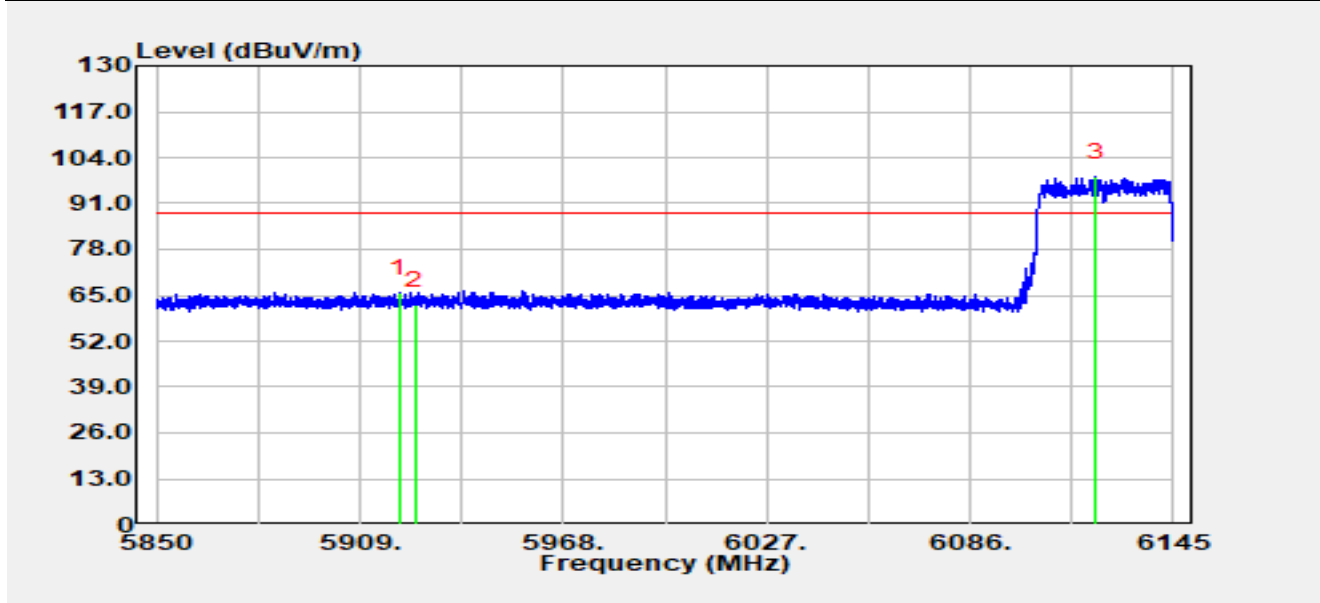


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.36	37.91	27.82	65.72	-22.48	88.20	Peak
2		5925.00	34.38	27.88	62.26	-25.94	88.20	Peak
3		6122.31	70.18	28.22	98.40	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 6125 MHz		

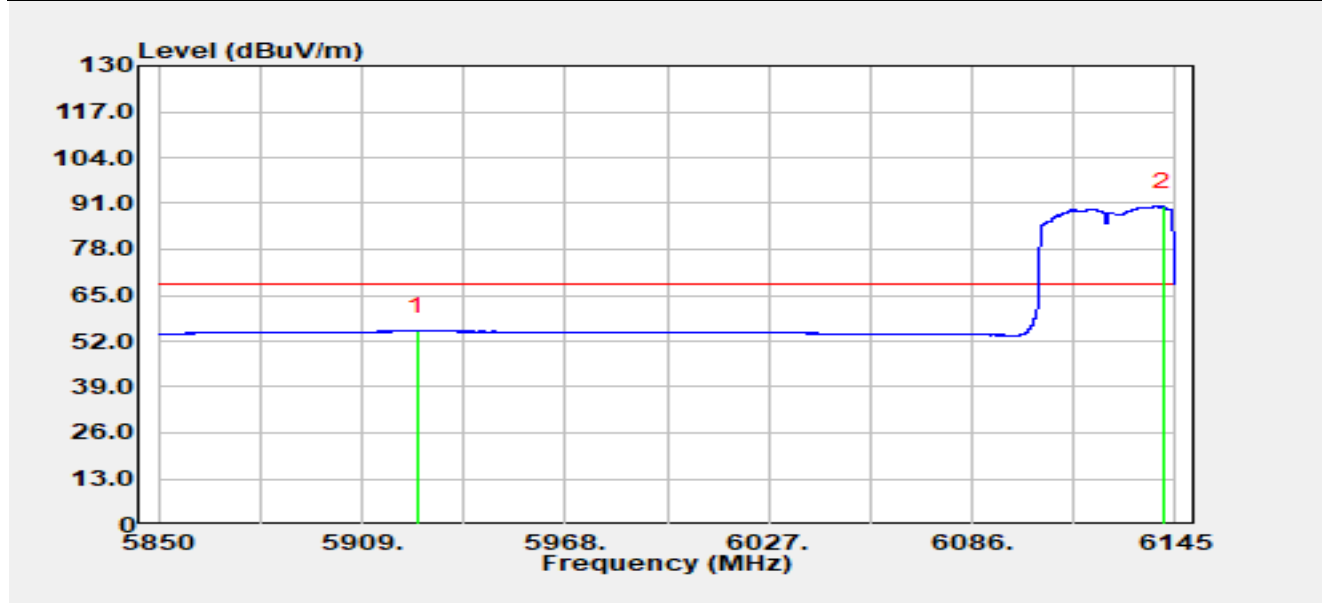


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.91	27.88	54.80	-13.40	68.20	Average
2		6141.49	61.81	28.29	90.10	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 7085 MHz		

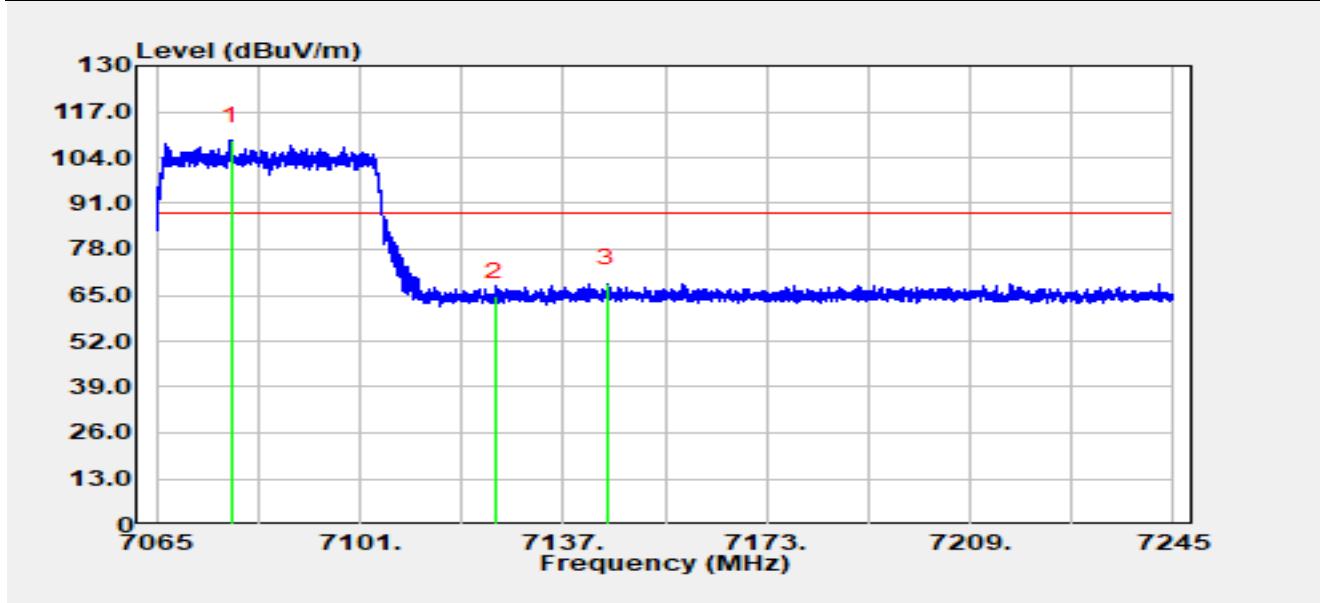


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7078.14	79.17	29.53	108.70	N/A	N/A	Peak
2		7125.00	35.28	29.34	64.62	-23.58	88.20	Peak
3	*	7144.76	38.70	29.71	68.41	-19.79	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE40 at 7085 MHz		

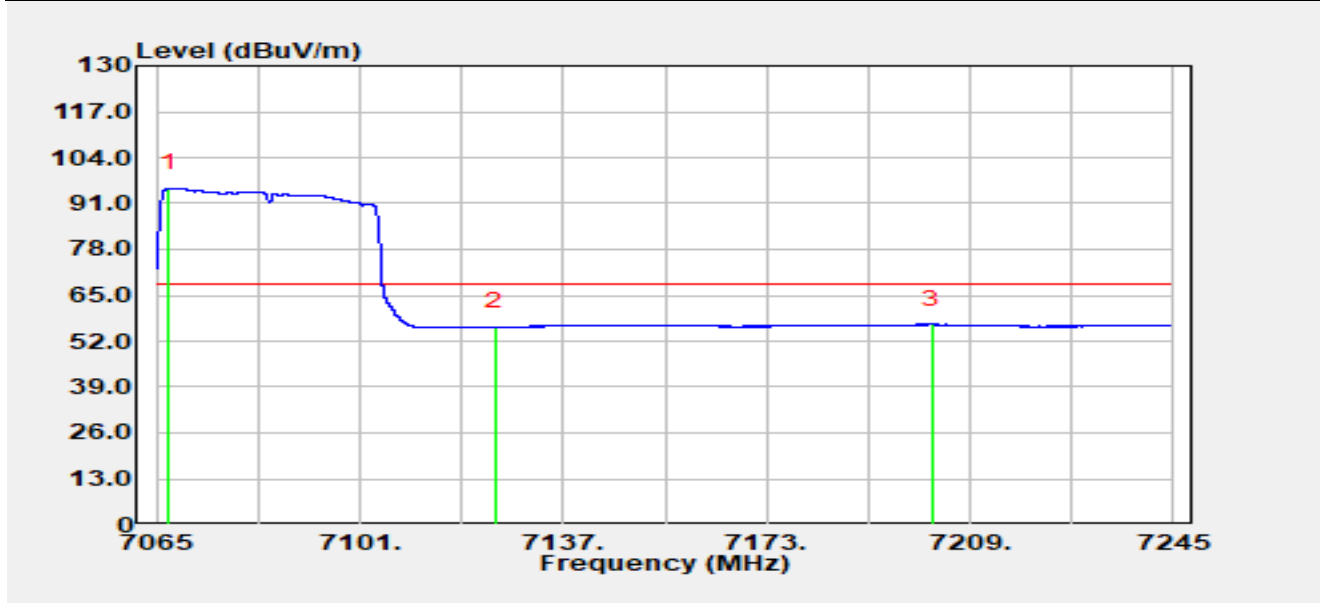


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7067.29	66.09	29.25	95.34	N/A	N/A	Average
2		7125.00	26.65	29.34	55.99	-12.21	68.20	Average
3	*	7202.34	26.93	29.83	56.76	-11.44	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 7085 MHz		

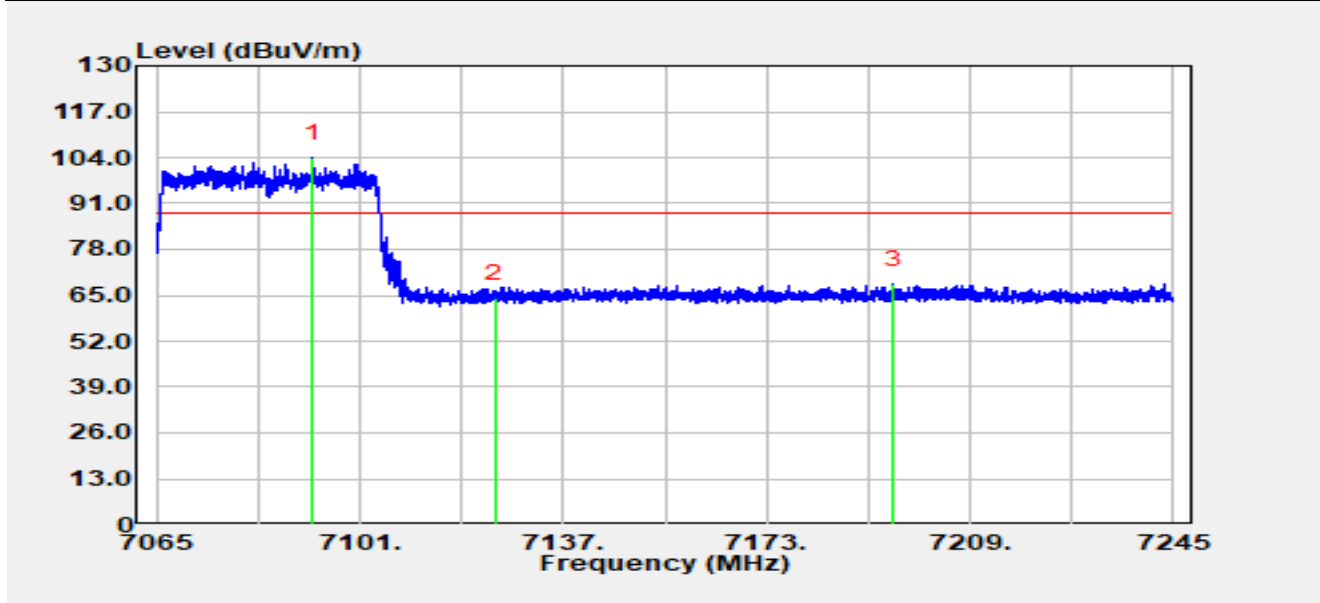


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7092.70	74.26	29.67	103.93	N/A	N/A	Peak
2		7125.00	34.79	29.34	64.14	-24.06	88.20	Peak
3	*	7195.43	38.44	29.72	68.15	-20.05	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE40 at 7085 MHz		

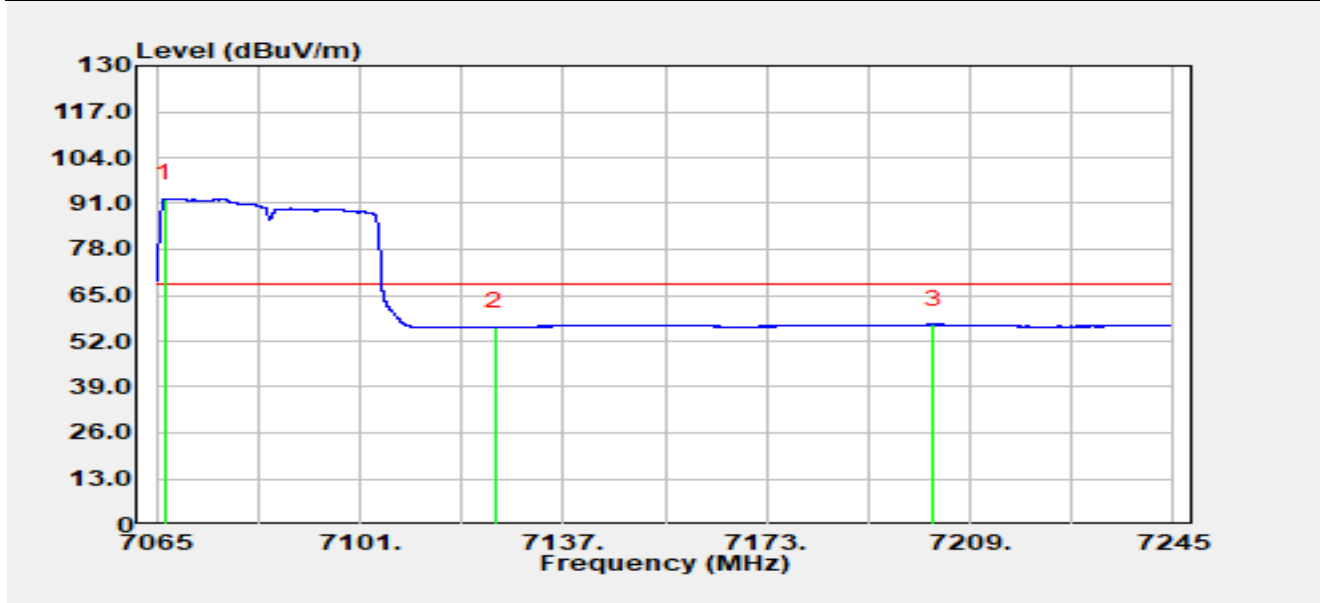


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7066.58	63.15	29.24	92.39	N/A	N/A	Average
2		7125.00	26.60	29.34	55.94	-12.26	68.20	Average
3	*	7202.39	26.85	29.83	56.69	-11.51	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

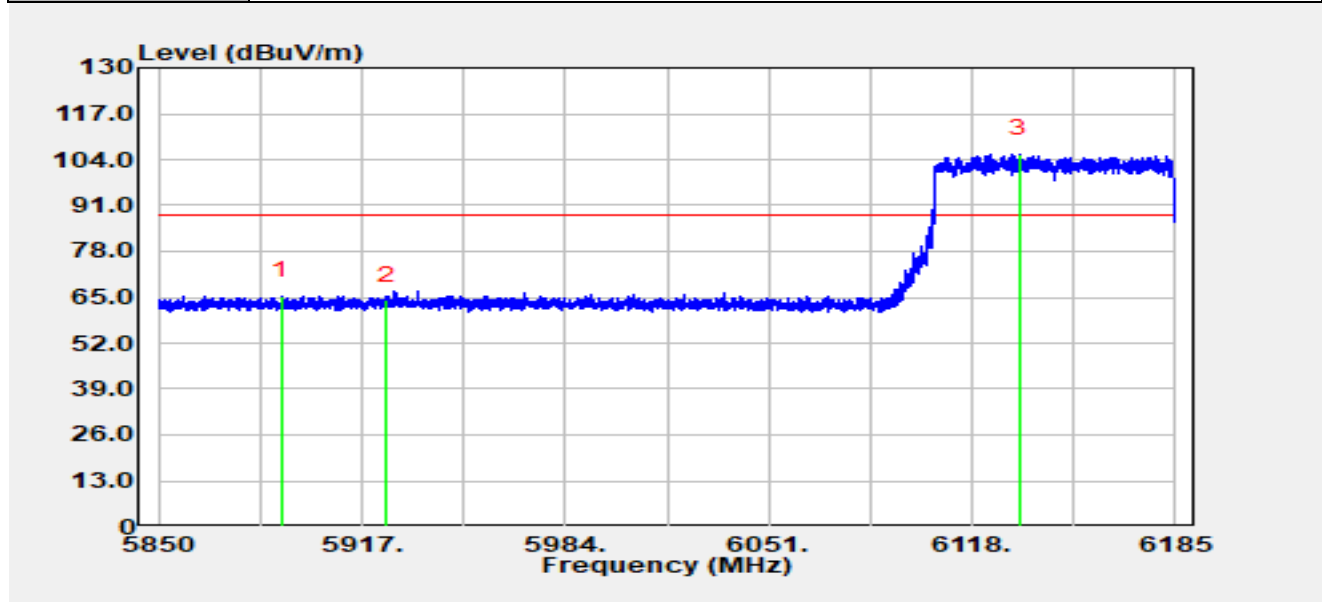


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5890.54	37.94	27.49	65.43	-22.77	88.20	Peak
2		5925.00	36.33	27.88	64.21	-23.99	88.20	Peak
3		6133.44	77.29	28.38	105.67	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

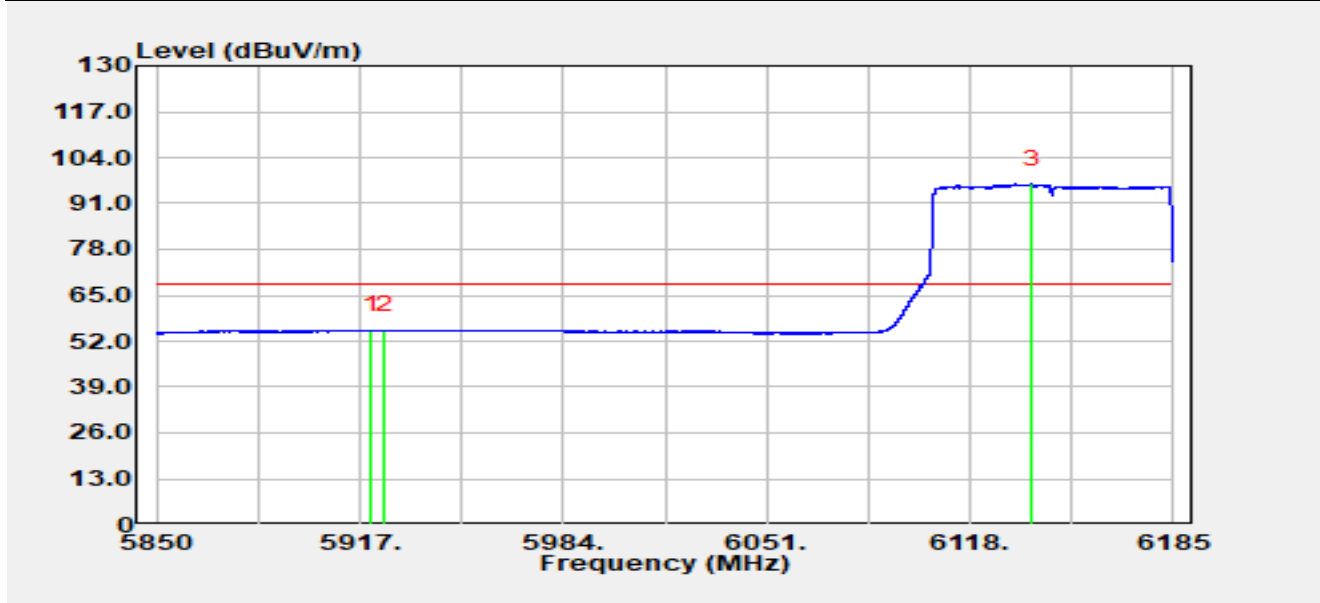


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5920.85	27.33	27.83	55.15	-13.05	68.20	Average
2		5925.00	27.10	27.88	54.99	-13.21	68.20	Average
3		6138.23	68.21	28.34	96.55	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

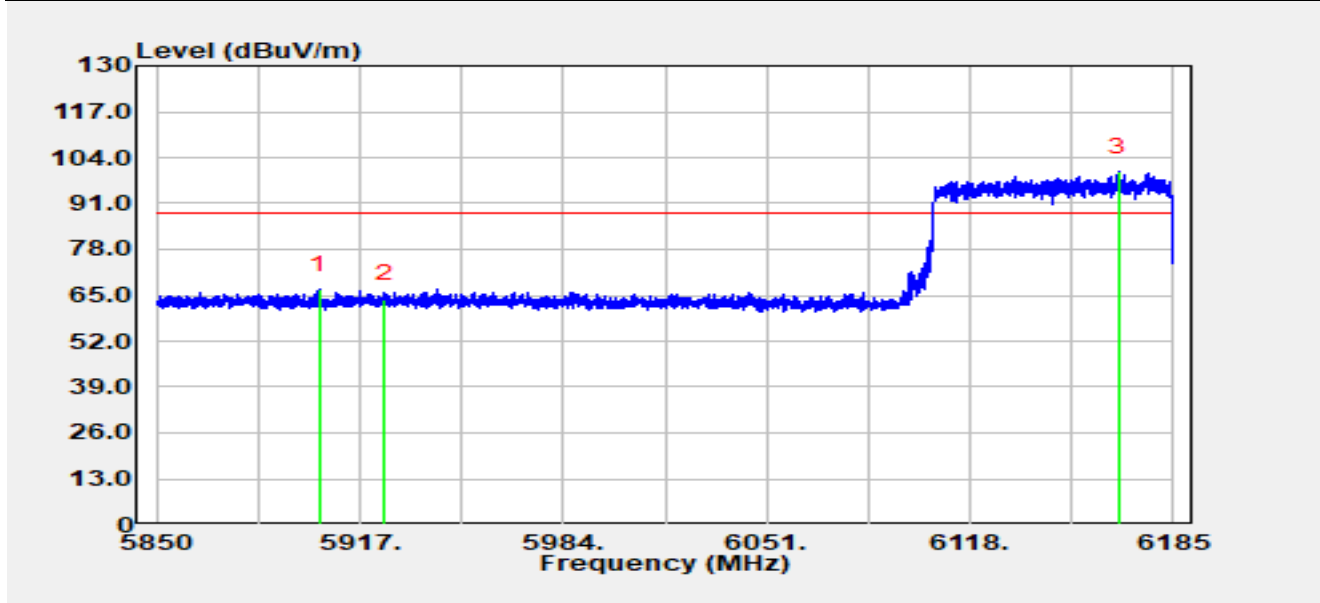


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5903.47	38.85	27.62	66.47	-21.73	88.20	Peak
2		5925.00	35.96	27.88	63.84	-24.36	88.20	Peak
3		6167.11	71.82	28.09	99.90	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 6145 MHz		

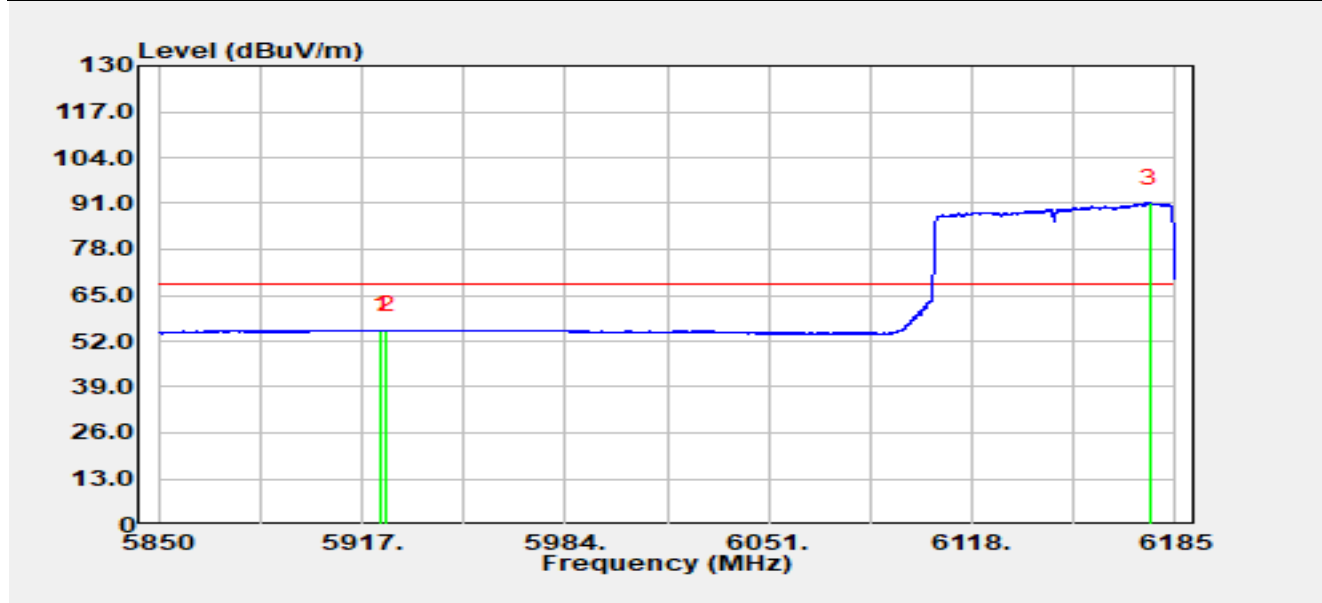


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5923.53	27.25	27.86	55.11	-13.09	68.20	Average
2		5925.00	27.10	27.88	54.98	-13.22	68.20	Average
3		6176.36	63.02	28.16	91.18	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 7025 MHz		

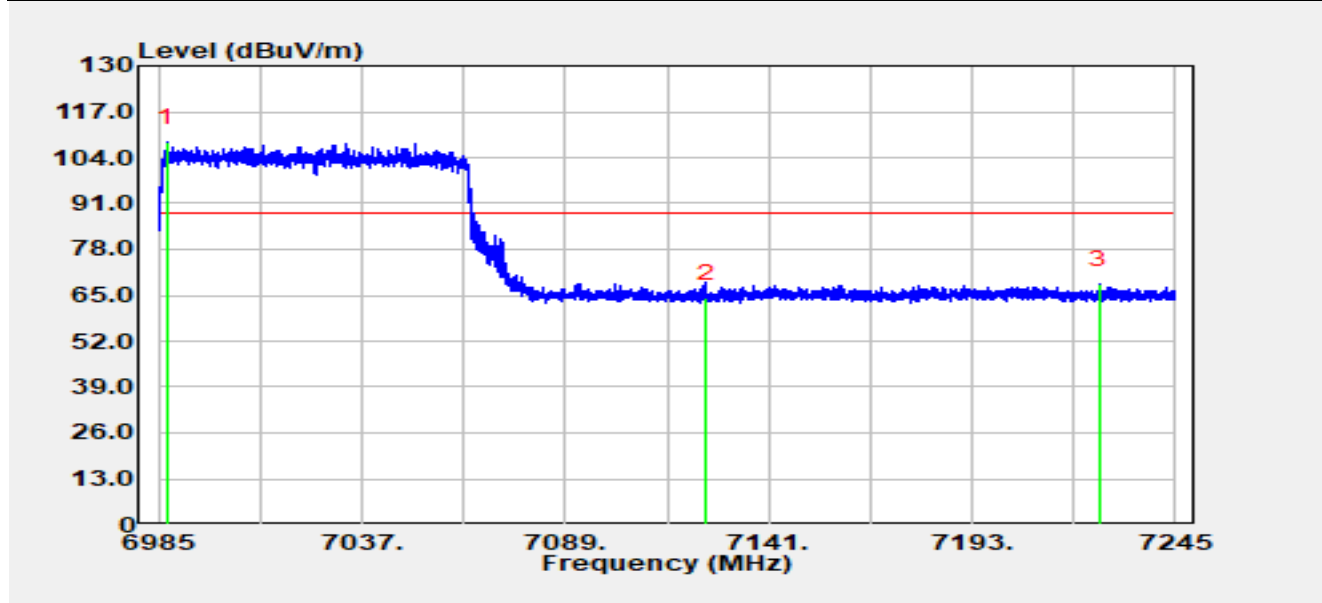


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6987.21	78.75	29.62	108.37	N/A	N/A	Peak
2		7125.00	34.80	29.34	64.14	-24.06	88.20	Peak
3	*	7225.63	38.62	29.35	67.97	-20.23	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE80 at 7025 MHz		

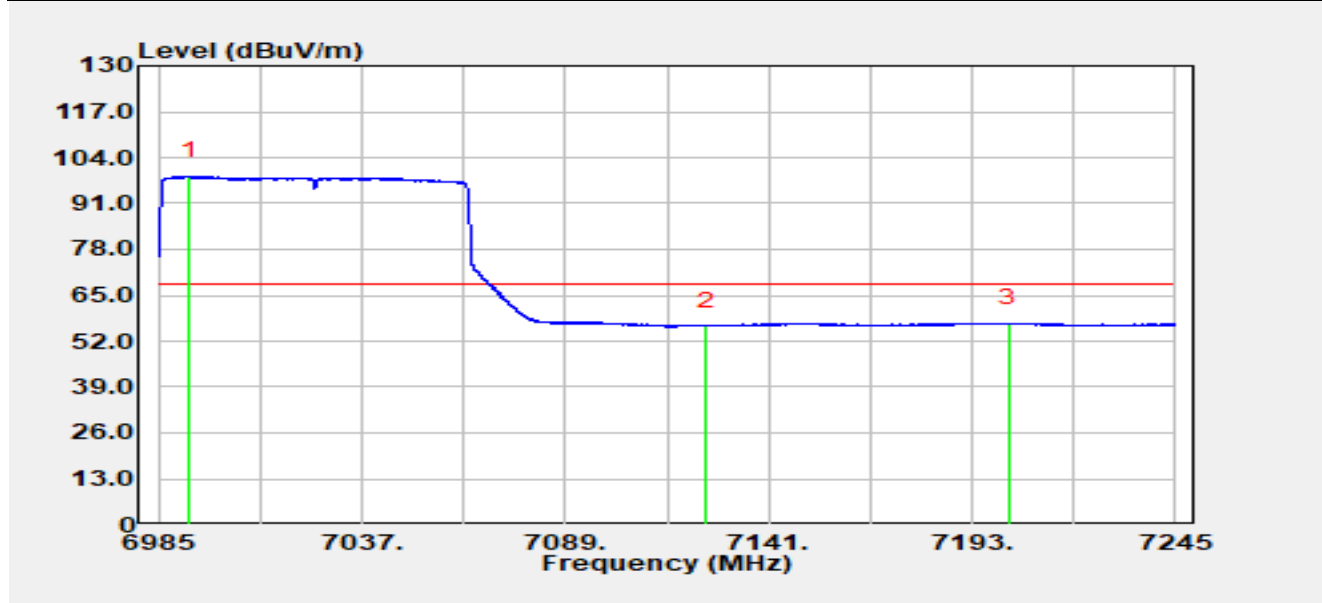


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6992.80	68.96	29.67	98.64	N/A	N/A	Average
2		7125.00	26.96	29.34	56.30	-11.90	68.20	Average
3	*	7202.46	27.29	29.83	57.12	-11.08	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 7025 MHz		

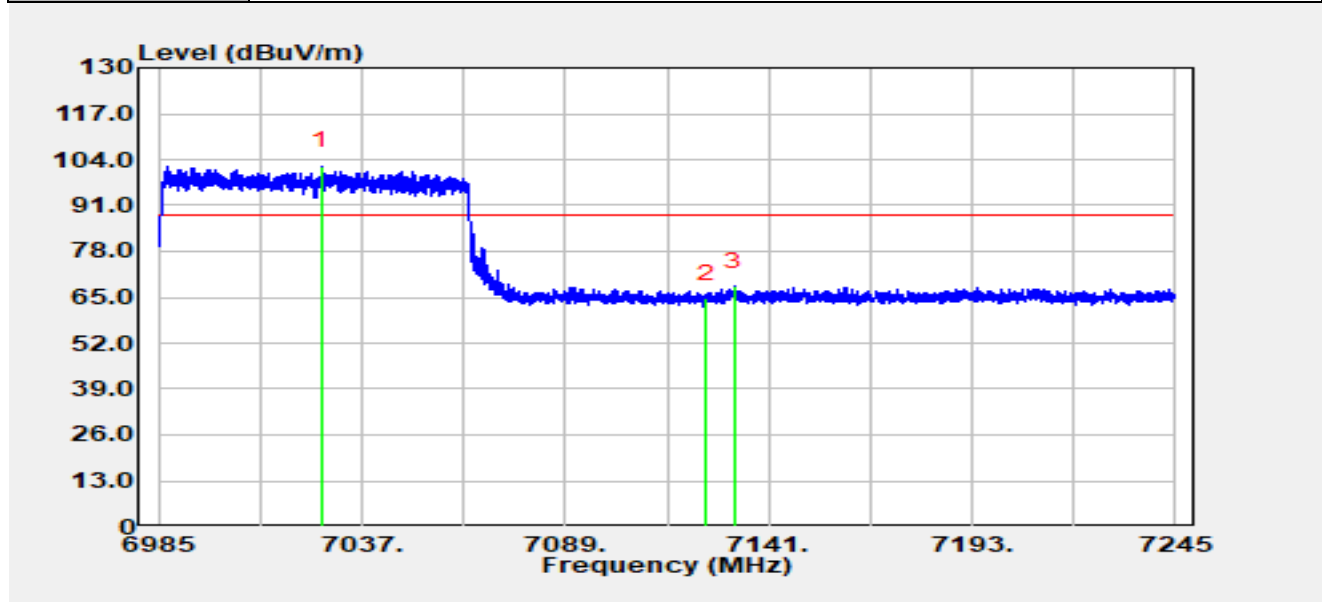


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7026.78	72.82	29.44	102.26	N/A	N/A	Peak
2		7125.00	35.30	29.34	64.64	-23.56	88.20	Peak
3	*	7132.21	38.57	29.49	68.06	-20.14	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE80 at 7025 MHz		

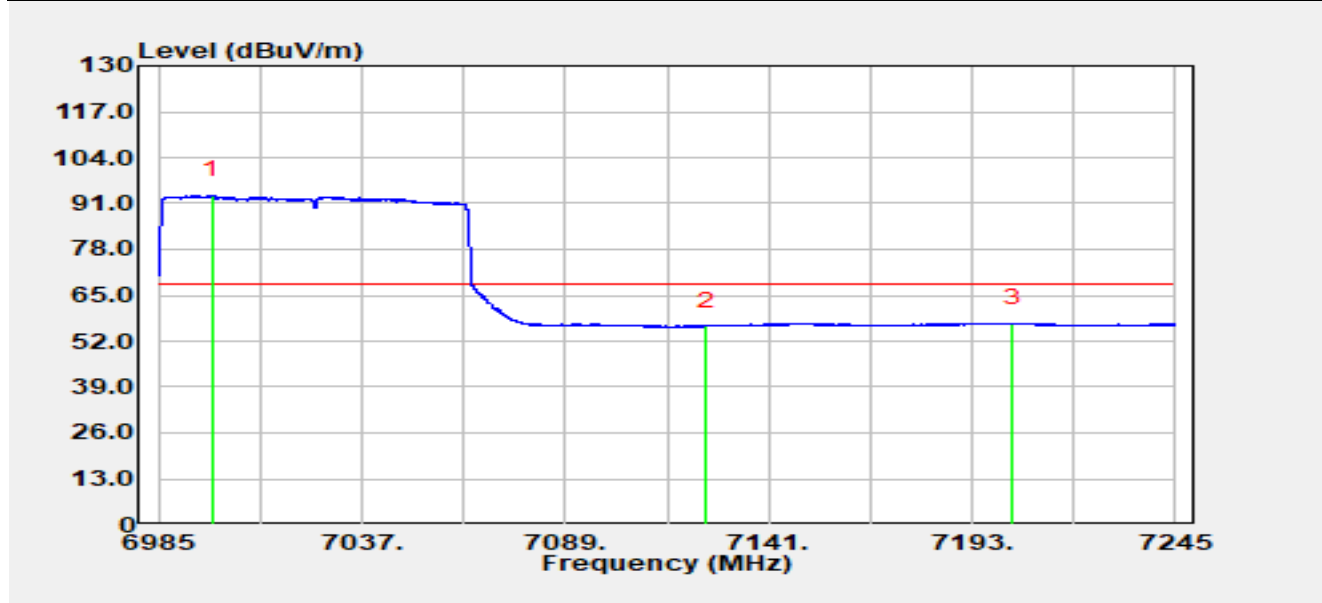


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6998.86	63.78	29.51	93.29	N/A	N/A	Average
2		7125.00	26.90	29.34	56.25	-11.95	68.20	Average
3	*	7203.35	27.30	29.81	57.11	-11.09	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

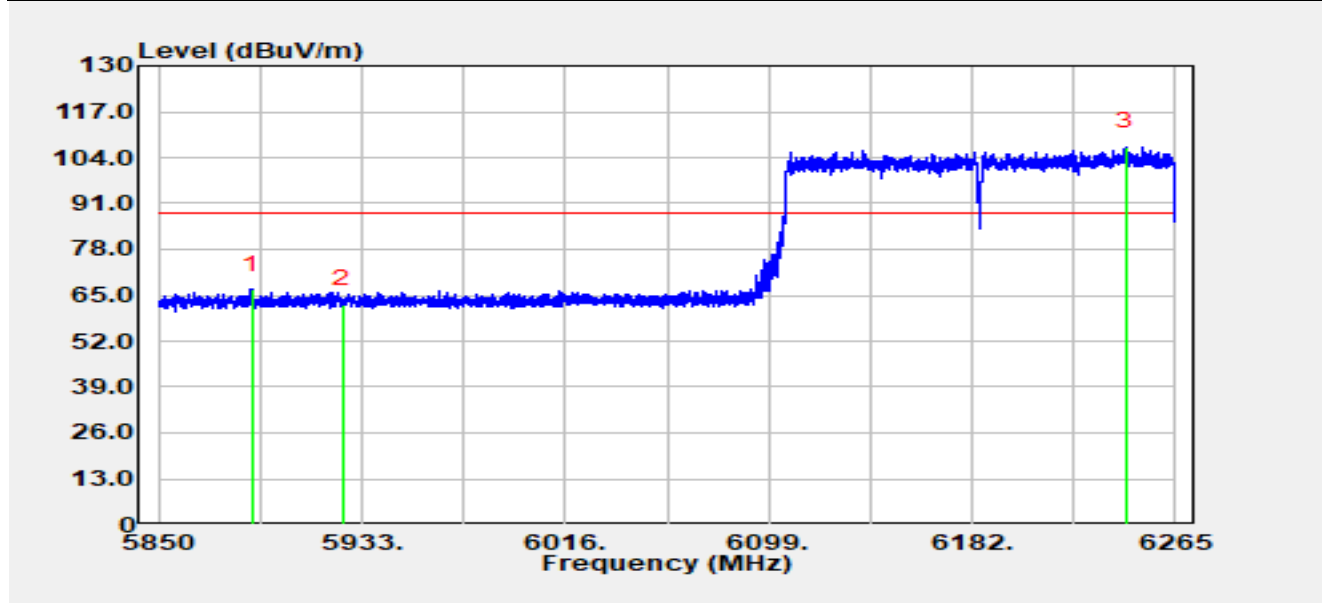


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5887.93	39.04	27.51	66.55	-21.65	88.20	Peak
2		5925.00	34.58	27.88	62.47	-25.73	88.20	Peak
3		6244.54	78.57	28.40	106.97	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

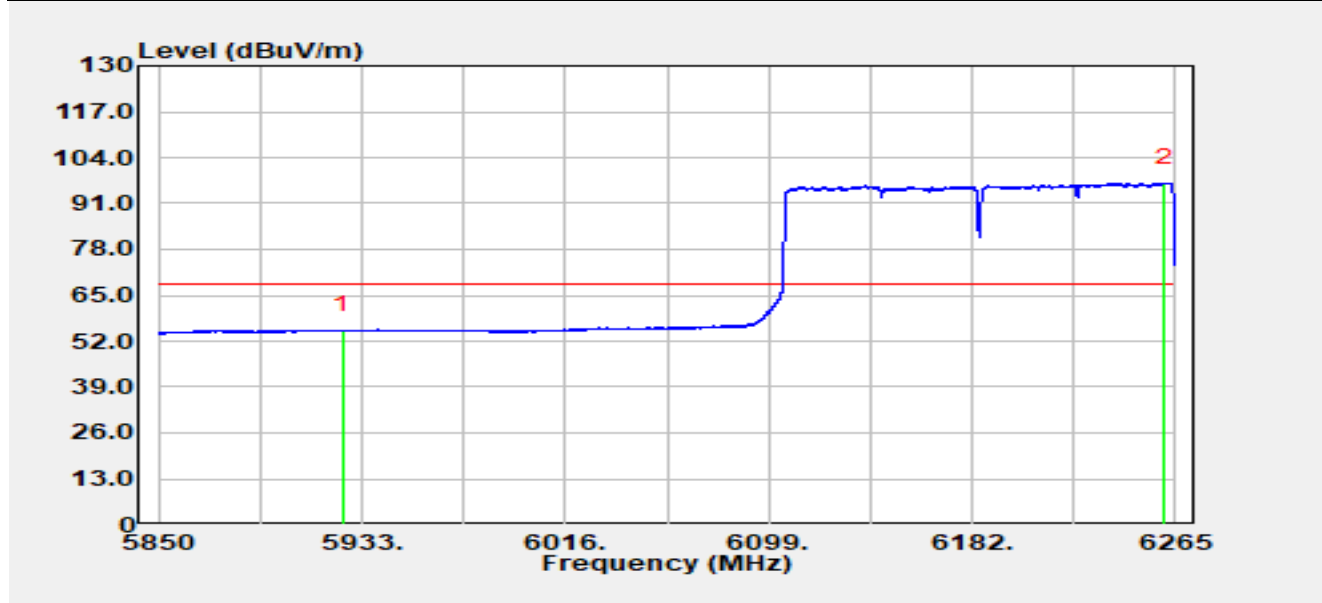


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	27.10	27.88	54.98	-13.22	68.20	Average
2		6260.48	68.68	28.16	96.84	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

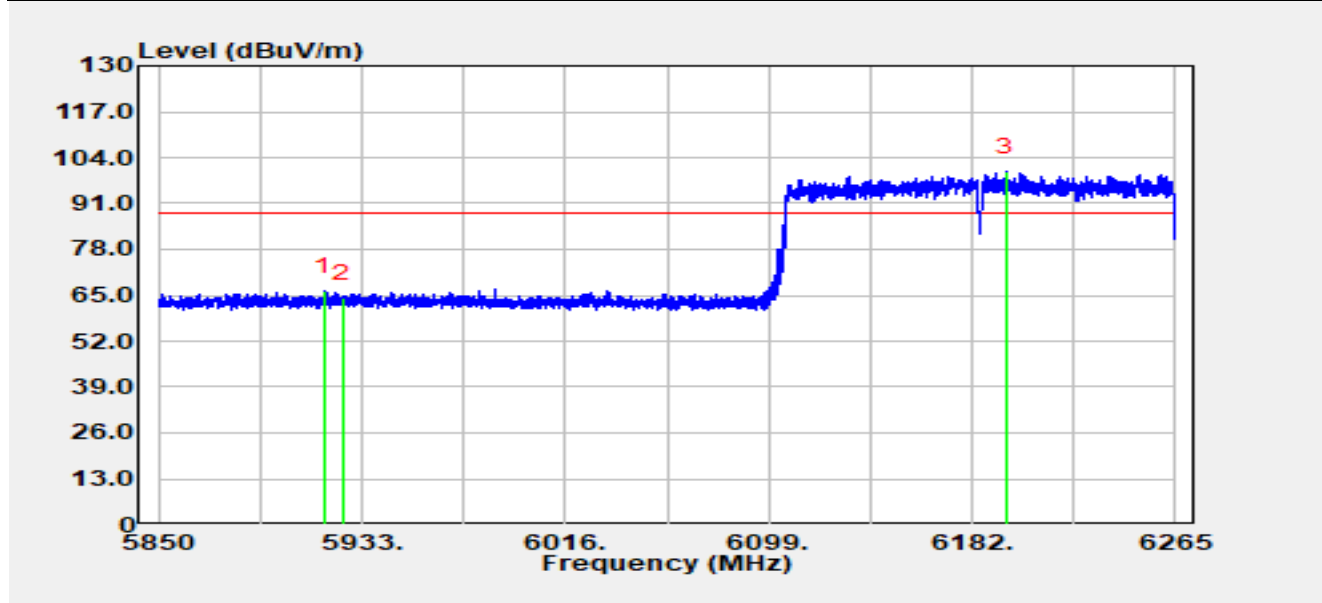


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.44	38.30	27.78	66.08	-22.12	88.20	Peak
2		5925.00	36.24	27.88	64.13	-24.07	88.20	Peak
3		6195.94	71.75	28.14	99.89	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6185 MHz		

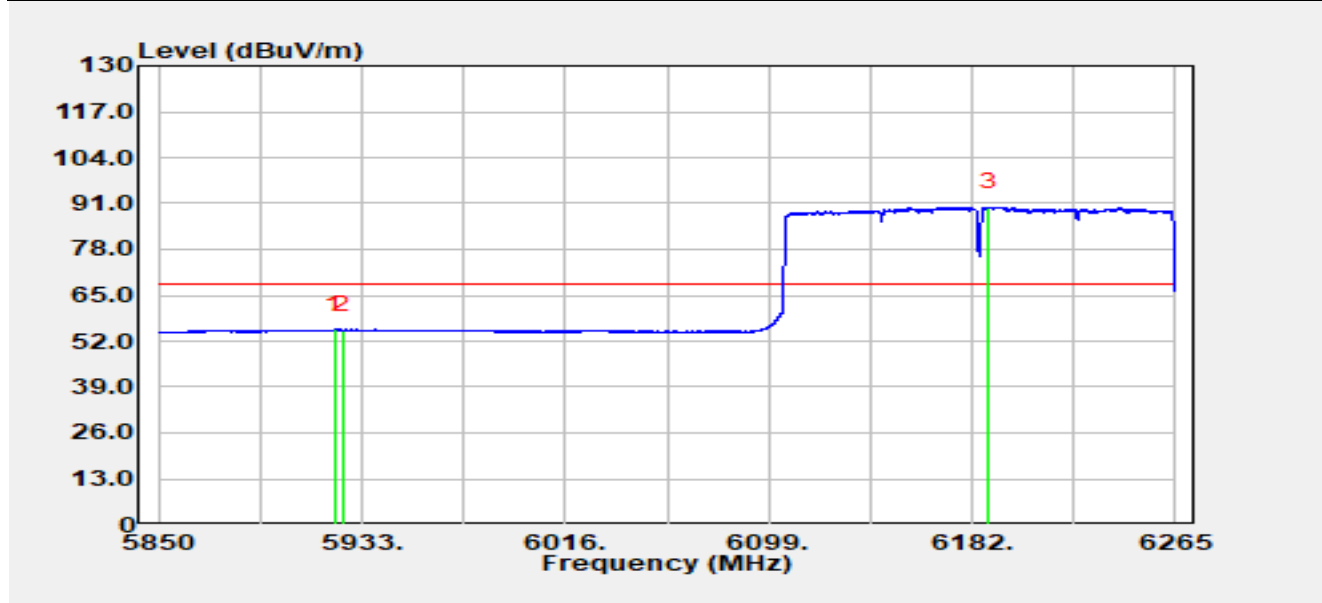


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5921.92	27.46	27.84	55.30	-12.90	68.20	Average
2		5925.00	27.18	27.88	55.06	-13.14	68.20	Average
3		6188.93	61.75	28.26	90.00	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6985 MHz		

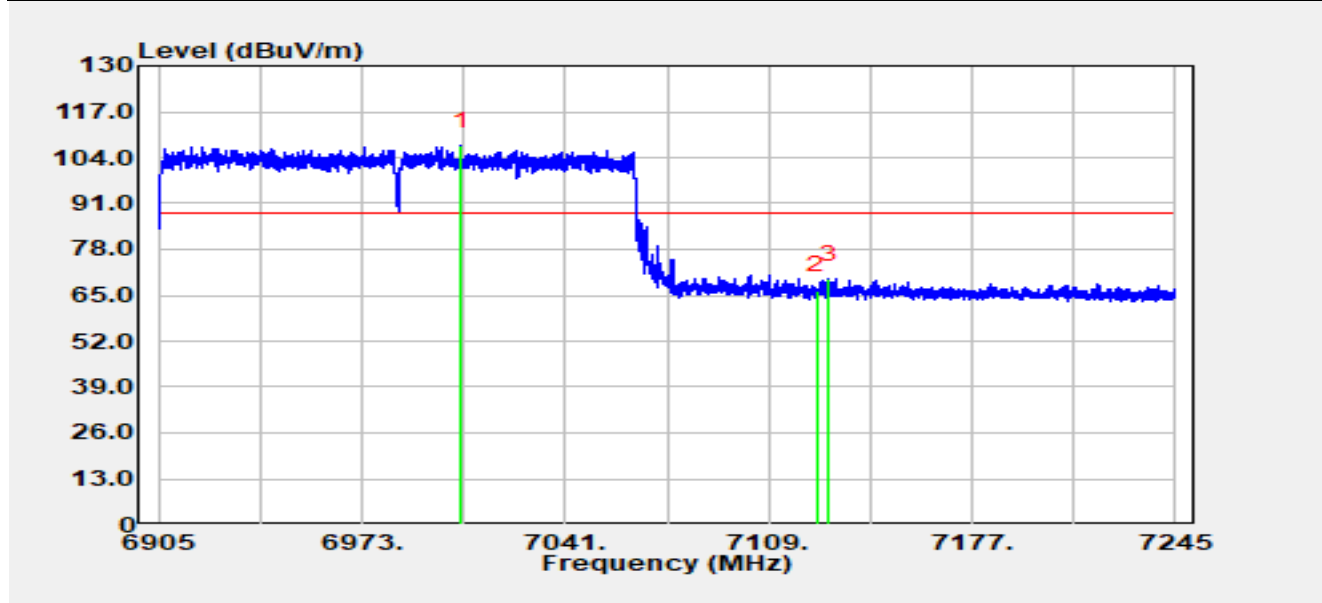


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7006.01	77.94	29.30	107.24	N/A	N/A	Peak
2		7125.00	37.12	29.34	66.46	-21.74	88.20	Peak
3	*	7129.26	40.04	29.43	69.47	-18.73	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE160 at 6985 MHz		

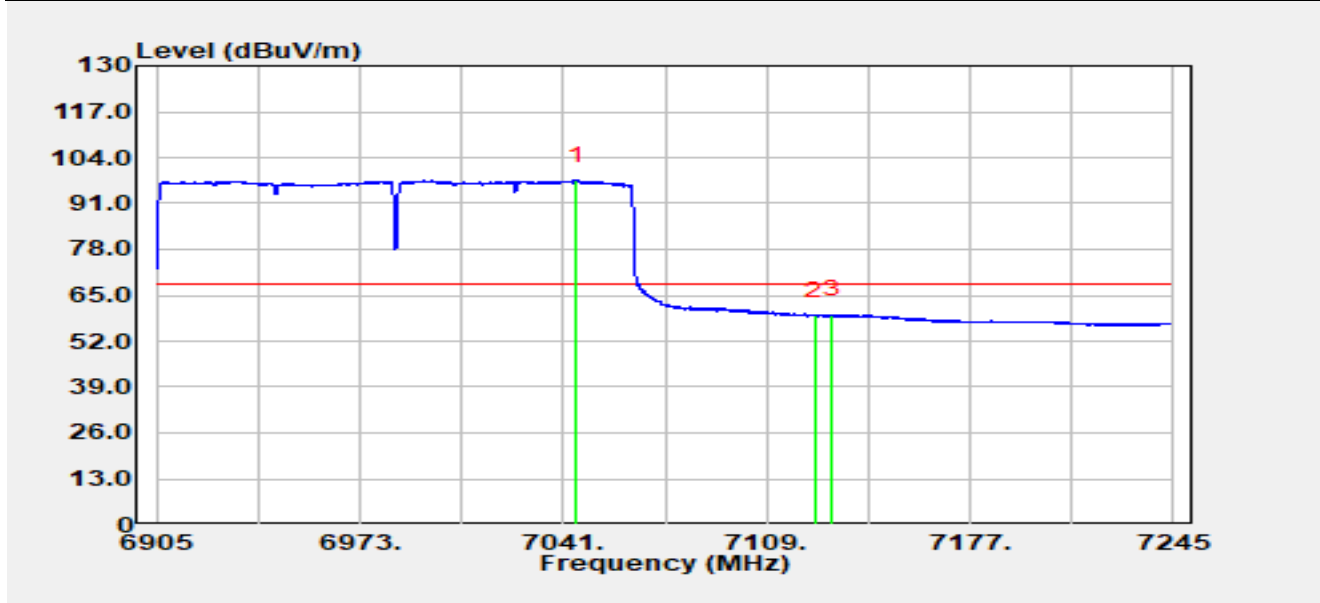


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7045.52	67.74	29.70	97.43	N/A	N/A	Average
2		7125.00	29.88	29.34	59.23	-8.97	68.20	Average
3	*	7131.00	30.01	29.46	59.47	-8.73	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6985 MHz		

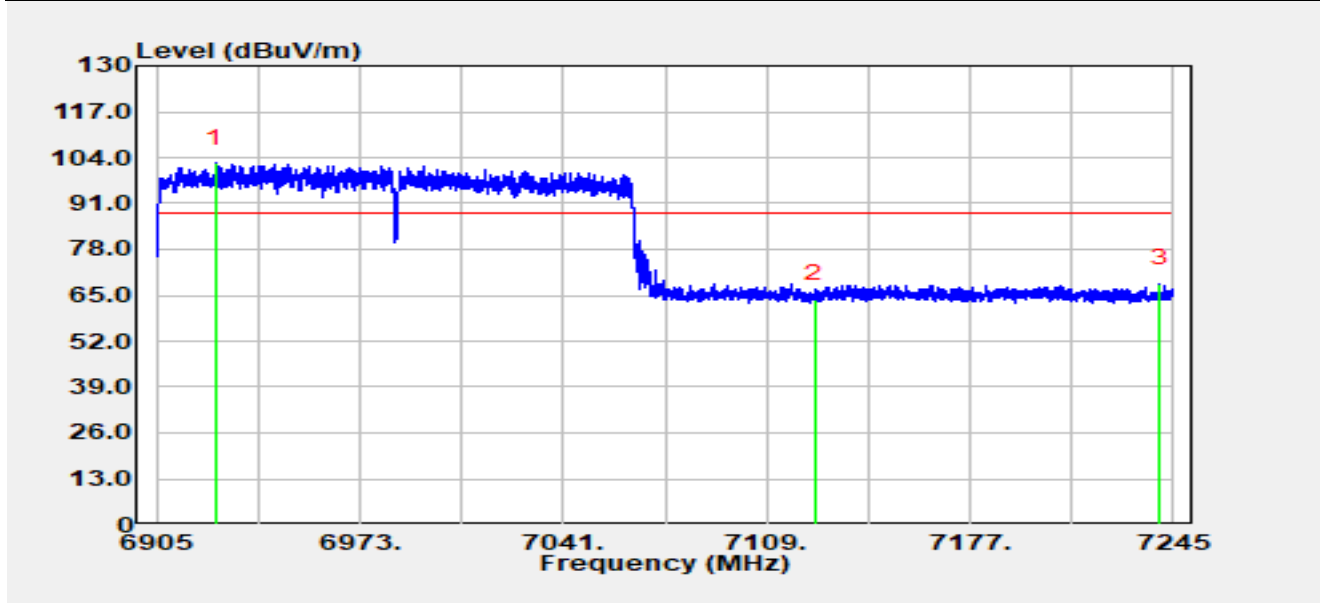


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6924.89	72.72	29.60	102.32	N/A	N/A	Peak
2		7125.00	34.47	29.34	63.82	-24.38	88.20	Peak
3	*	7240.31	38.69	29.54	68.22	-19.98	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE160 at 6985 MHz		

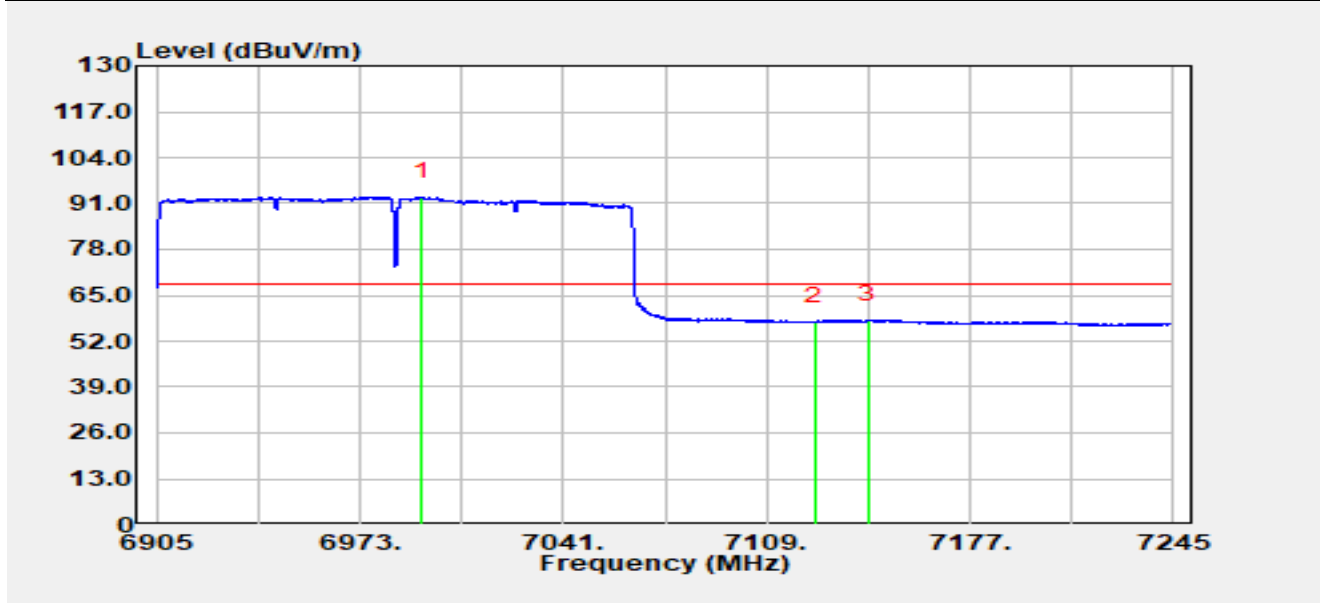


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6993.67	63.31	29.65	92.96	N/A	N/A	Average
2		7125.00	28.07	29.34	57.41	-10.79	68.20	Average
3	*	7142.86	28.27	29.67	57.95	-10.25	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6425 MHz		

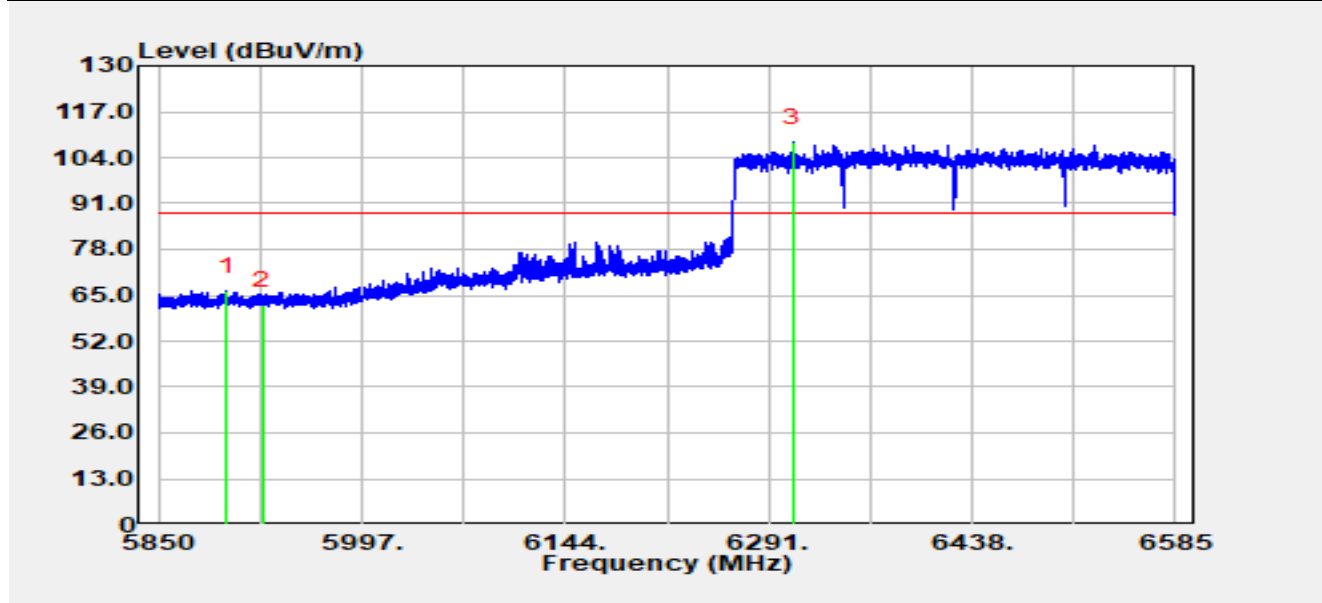


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5899.25	38.59	27.58	66.17	-22.03	88.20	Peak
2		5925.00	34.24	27.88	62.12	-26.08	88.20	Peak
3		6308.20	80.31	28.09	108.39	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6425 MHz		

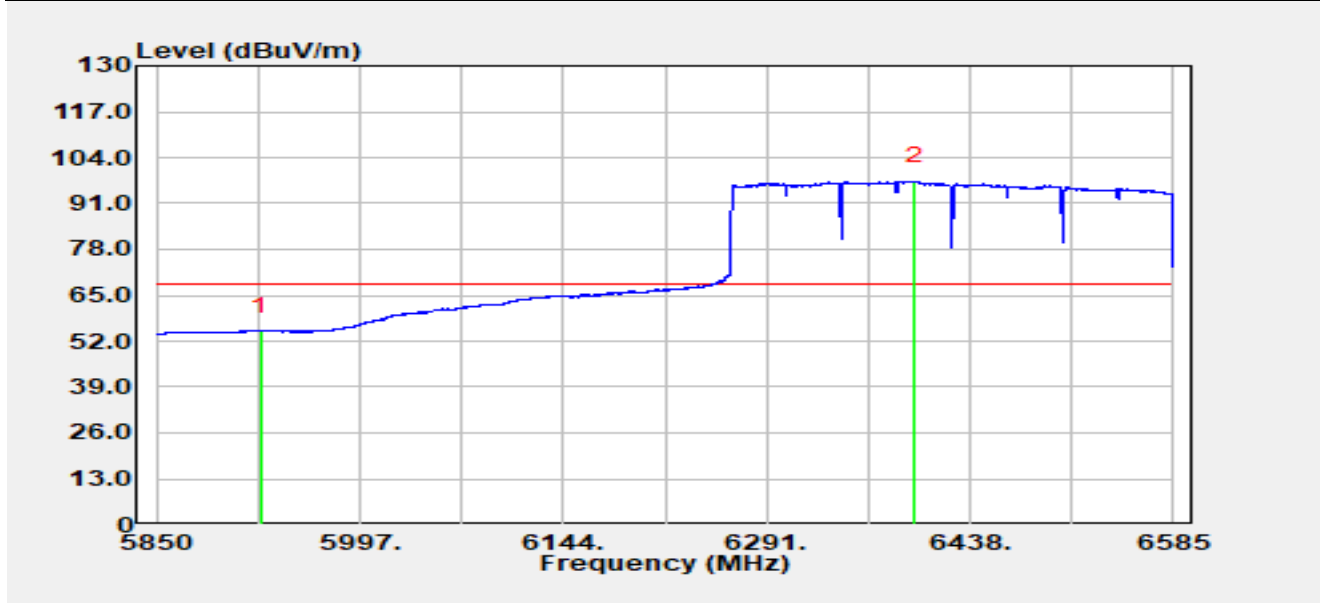


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.92	27.88	54.80	-13.40	68.20	Average
2		6397.58	68.36	28.89	97.25	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6425 MHz		

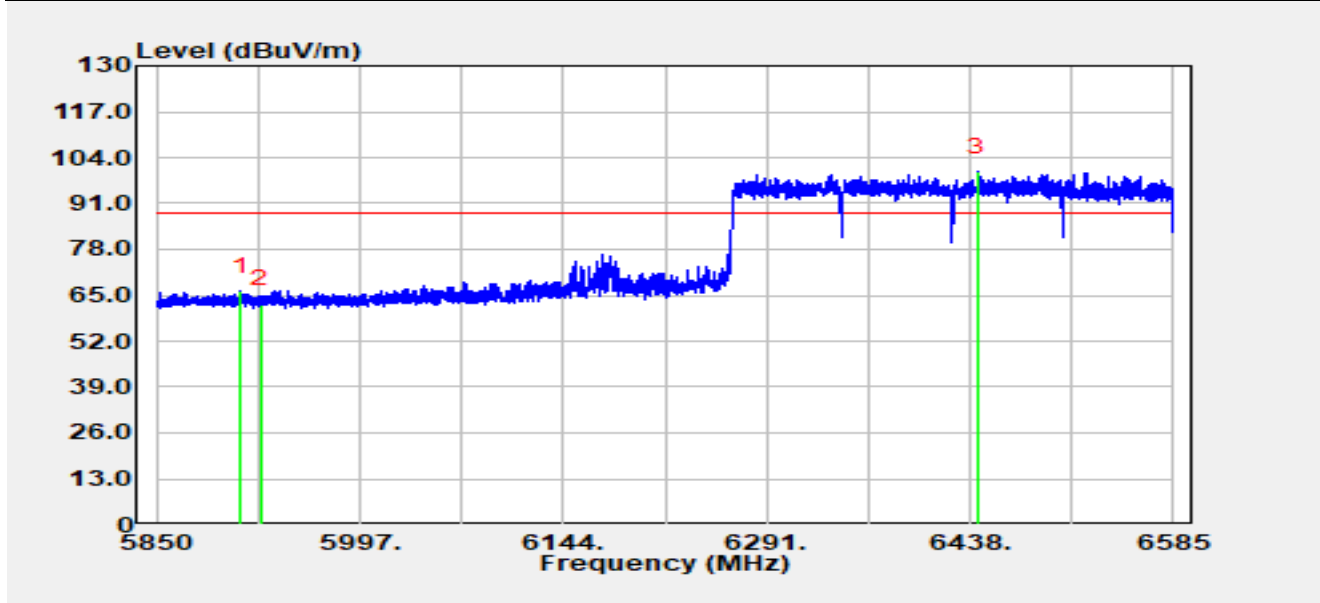


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.08	38.43	27.69	66.12	-22.08	88.20	Peak
2		5925.00	34.58	27.88	62.47	-25.73	88.20	Peak
3		6443.51	71.25	28.71	99.97	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6425 MHz		

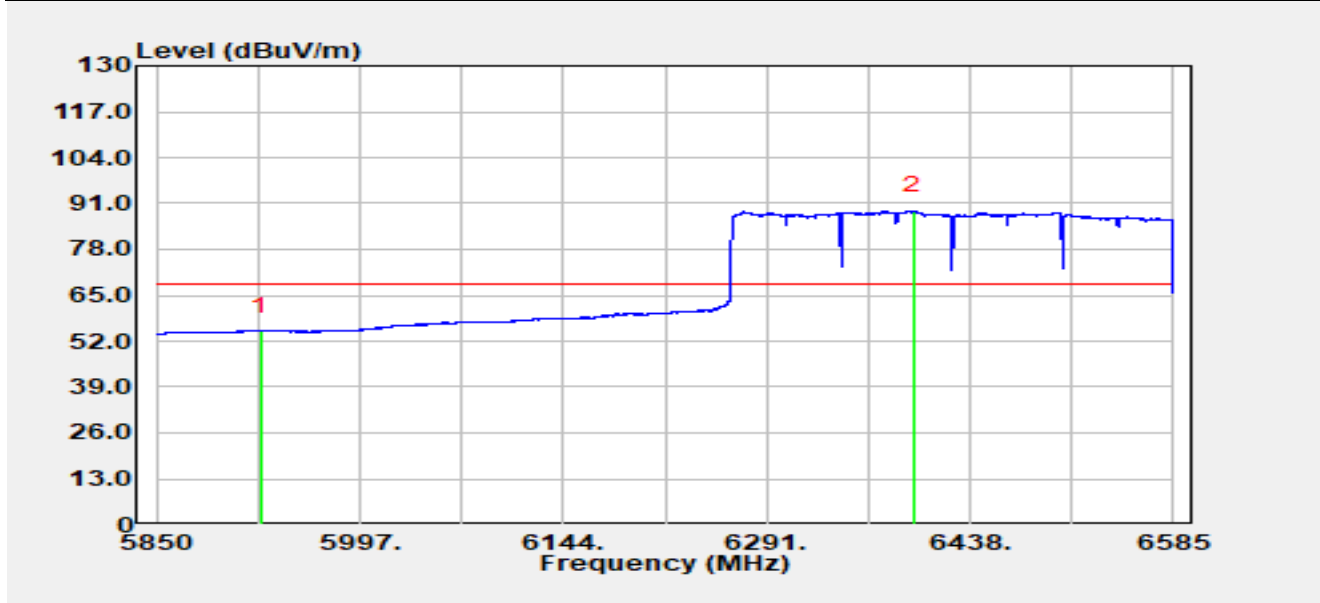


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.92	27.88	54.80	-13.40	68.20	Average
2		6396.84	60.14	28.88	89.02	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6745 MHz		

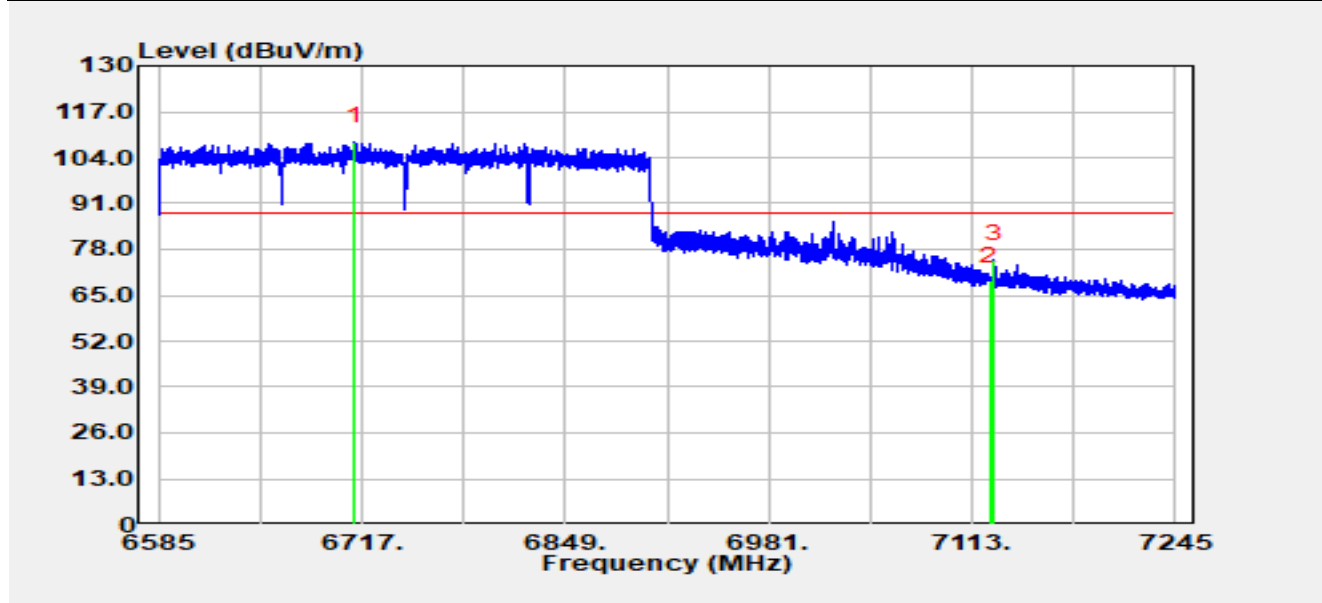


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6712.25	78.85	29.59	108.44	N/A	N/A	Peak
2		7125.00	39.73	29.34	69.07	-19.13	88.20	Peak
3	*	7127.19	45.78	29.39	75.16	-13.04	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6745 MHz		

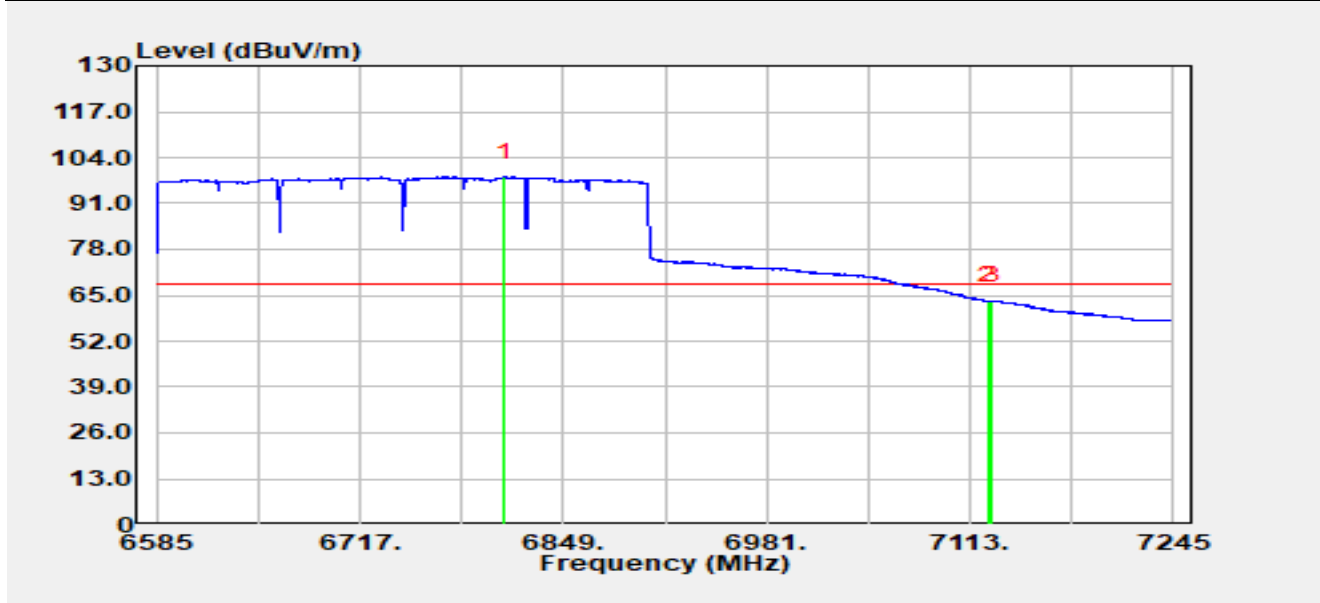


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6811.25	69.18	29.32	98.50	N/A	N/A	Average
2		7125.00	34.07	29.34	63.41	-4.79	68.20	Average
3	*	7127.26	34.10	29.39	63.49	-4.71	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6745 MHz		

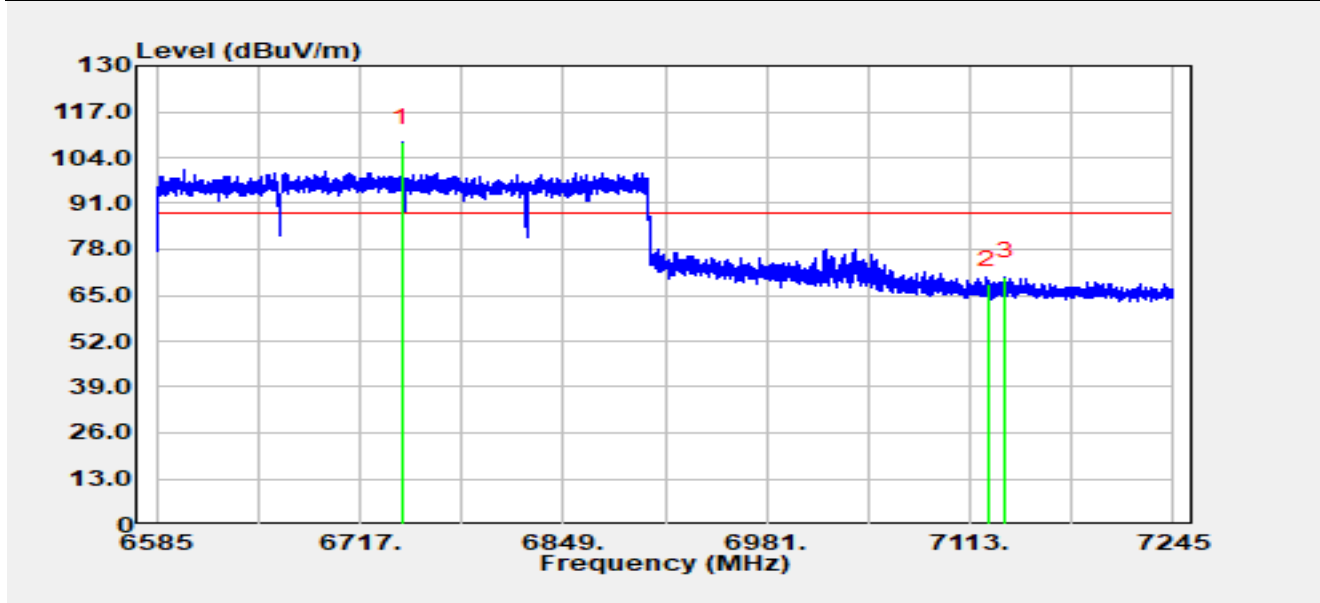


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6744.46	79.39	29.00	108.39	N/A	N/A	Peak
2		7125.00	38.80	29.34	68.14	-20.06	88.20	Peak
3	*	7136.10	40.60	29.56	70.16	-18.04	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6745 MHz		

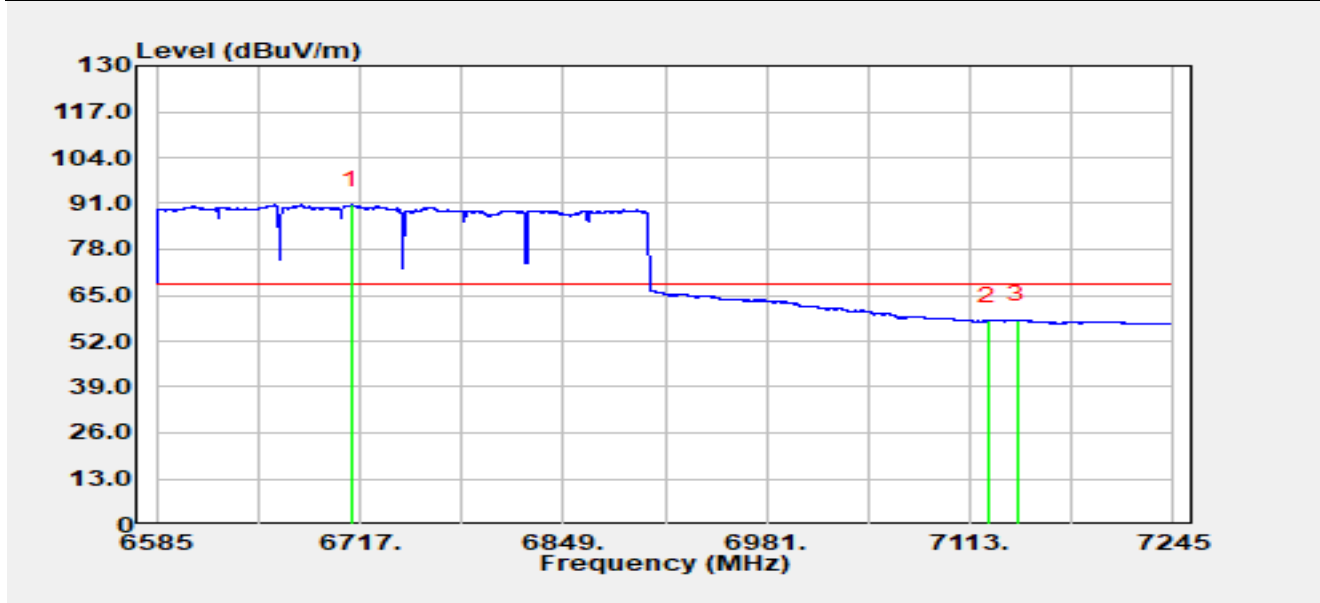


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6711.65	61.06	29.57	90.63	N/A	N/A	Average
2		7125.00	28.40	29.34	57.74	-10.46	68.20	Average
3	*	7143.23	28.28	29.68	57.96	-10.24	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6265 MHz		

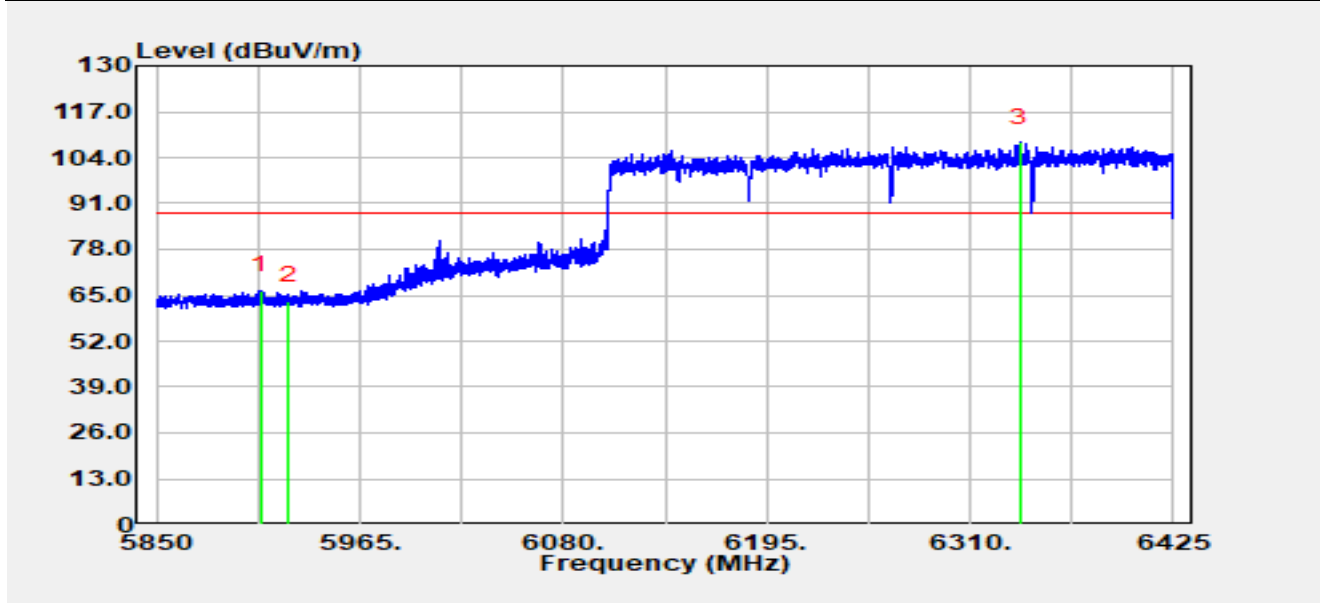


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5908.59	38.57	27.66	66.23	-21.97	88.20	Peak
2		5925.00	35.46	27.88	63.34	-24.86	88.20	Peak
3		6338.18	79.72	28.49	108.22	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6265 MHz		

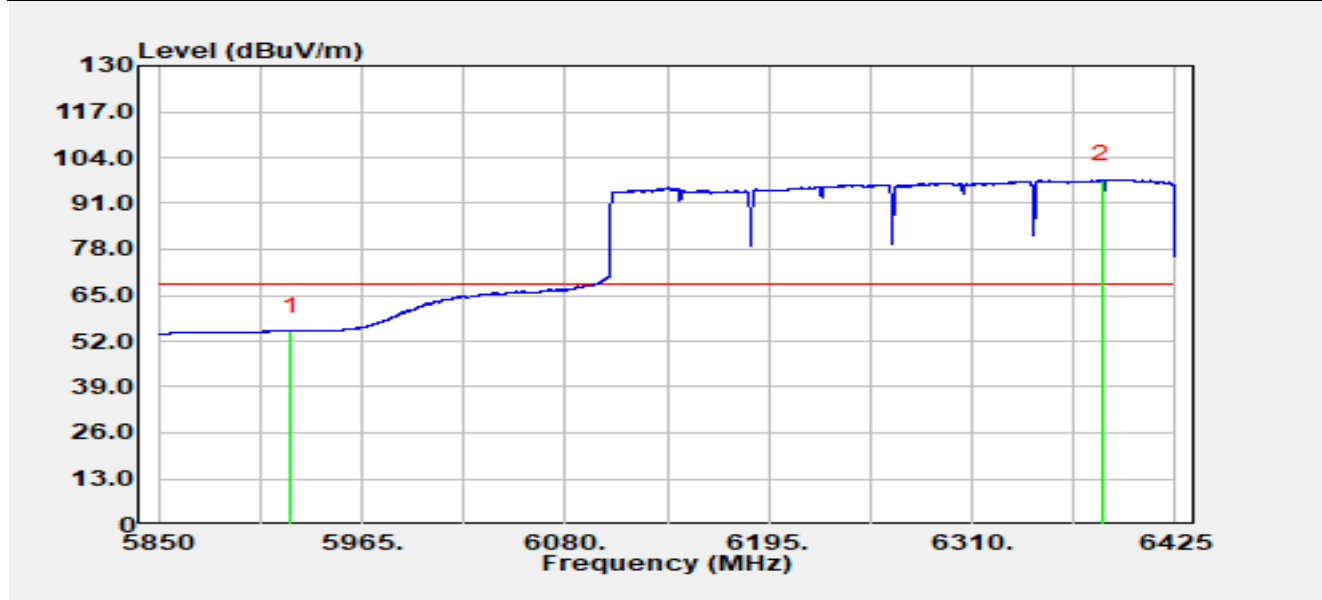


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.98	27.88	54.86	-13.34	68.20	Average
2		6383.49	69.16	28.58	97.75	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6265 MHz		

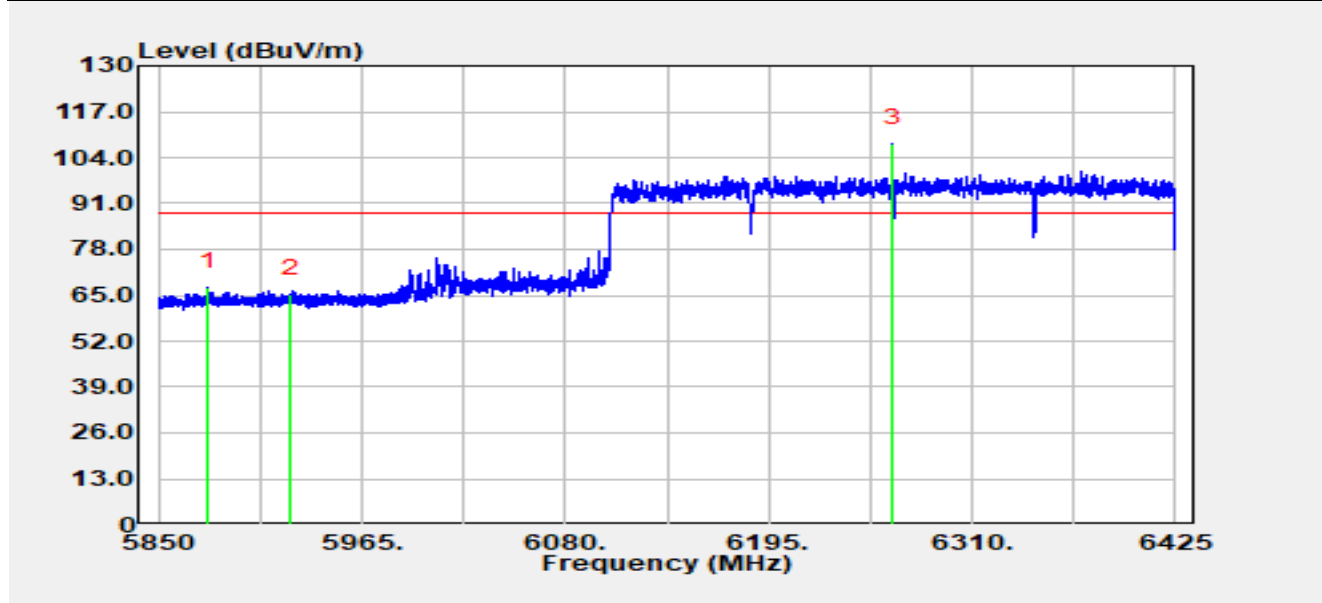


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5878.29	39.74	27.62	67.36	-20.84	88.20	Peak
2		5925.00	37.54	27.88	65.42	-22.78	88.20	Peak
3		6265.21	79.83	28.19	108.02	N/A	N/A	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6265 MHz		

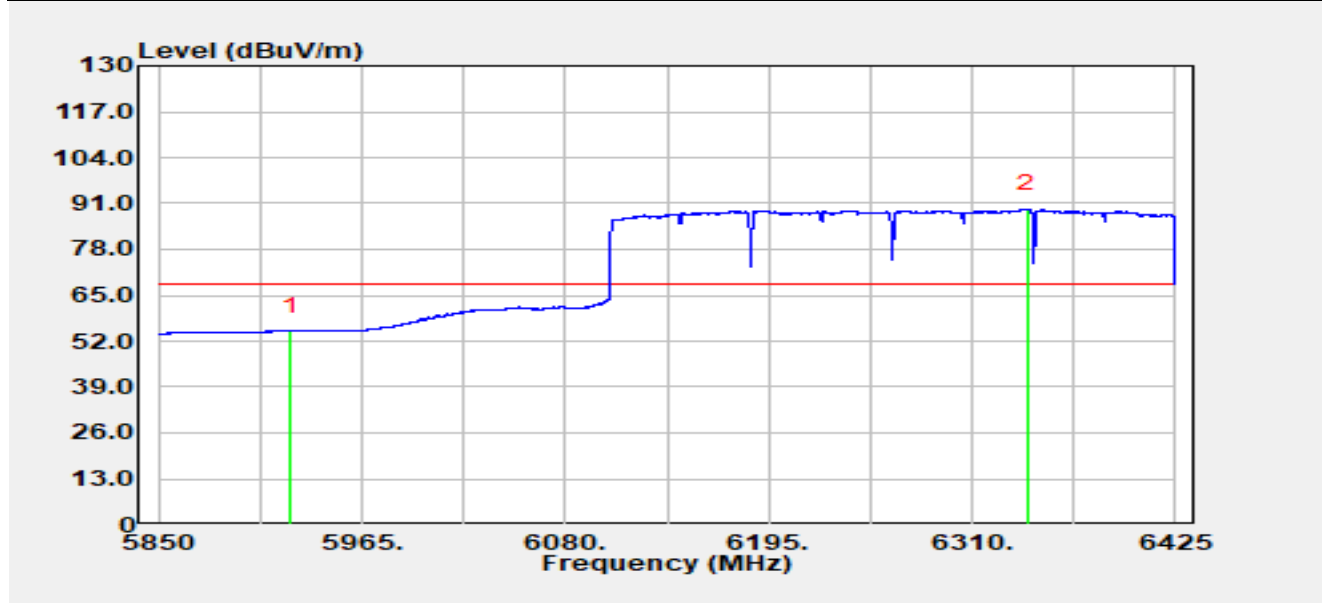


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5925.00	26.99	27.88	54.87	-13.33	68.20	Average
2		6341.51	60.80	28.57	89.37	N/A	N/A	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6905 MHz		

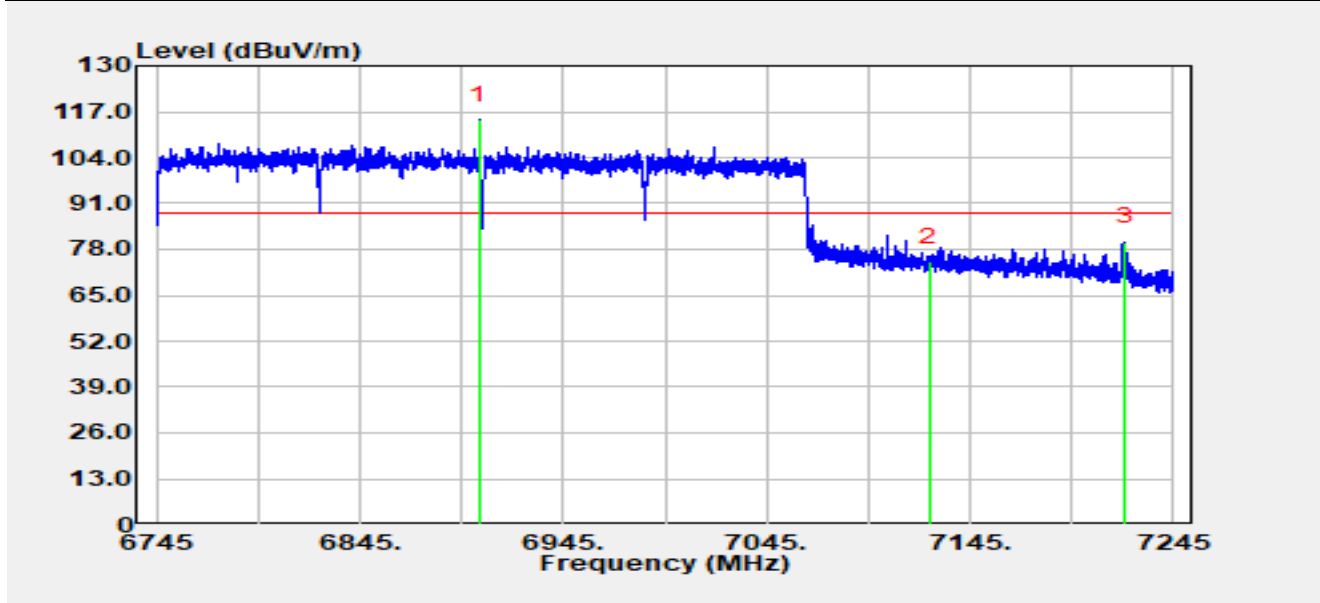


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6903.70	85.66	29.08	114.73	N/A	N/A	Peak
2		7125.00	45.15	29.34	74.50	-13.70	88.20	Peak
3	*	7221.40	50.86	29.30	80.16	-8.04	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Horizontal
Test Mode	Transmit by 802.11be-HE320 at 6905 MHz		

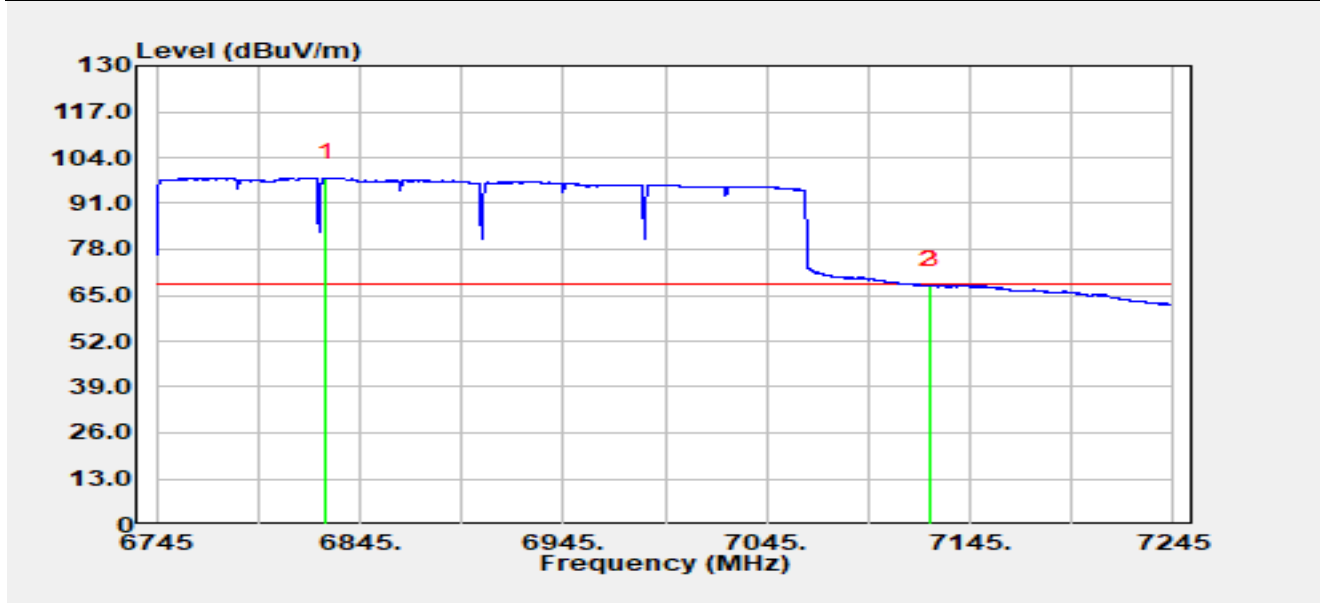


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6828.50	68.72	29.58	98.29	N/A	N/A	Average
2		7125.00	38.38	29.34	67.73	-0.47	68.20	Average
3	*	7125.90	38.51	29.36	67.87	-0.33	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6905 MHz		

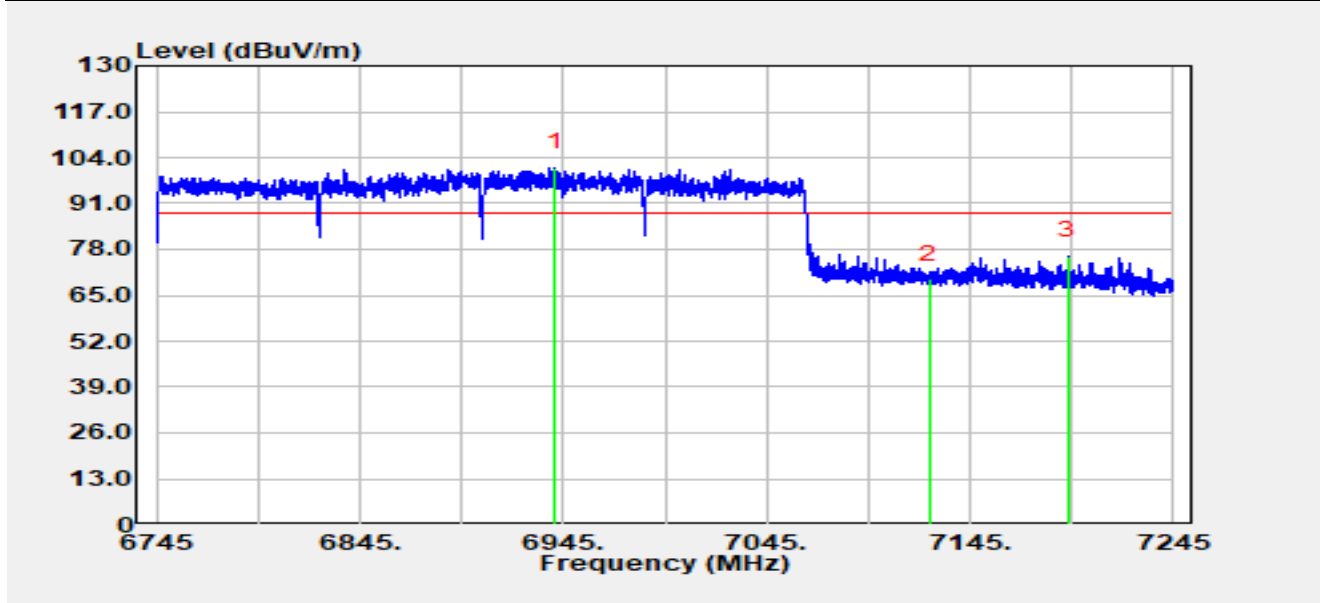


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6941.05	71.60	29.67	101.27	N/A	N/A	Peak
2		7125.00	40.08	29.34	69.42	-18.78	88.20	Peak
3	*	7193.30	46.50	29.68	76.18	-12.02	88.20	Peak

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WJ-AC1	Test Date	2026-01-10
Temperature	17.8 °C	Humidity	44.2%
Limit	FCC_6G RE (3 m)	Test Engineer	Carl Jiang
Test Voltage	AC 120 V/60 Hz	Polarity	Vertical
Test Mode	Transmit by 802.11be-HE320 at 6905 MHz		

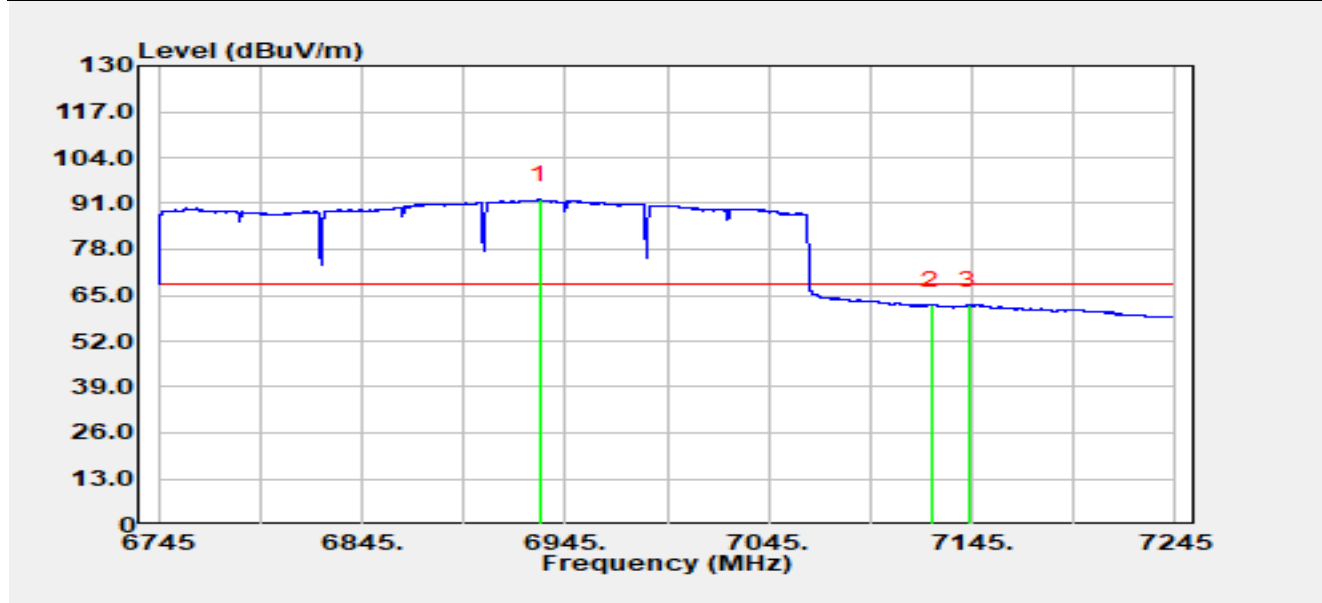

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6932.30	62.35	29.65	92.00	N/A	N/A	Average
2		7125.00	32.85	29.34	62.19	-6.01	68.20	Average
3	*	7143.30	32.61	29.68	62.29	-5.91	68.20	Average

Notes:

1. “*” indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.10 AC Conducted Emissions Test Result

Note Transmit by be-EHT320 at 6585 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-04-16


Temp 20.8°C

Humi 64.0%

Polarity L

Test Site WJ-SR5

Spectrum Overview

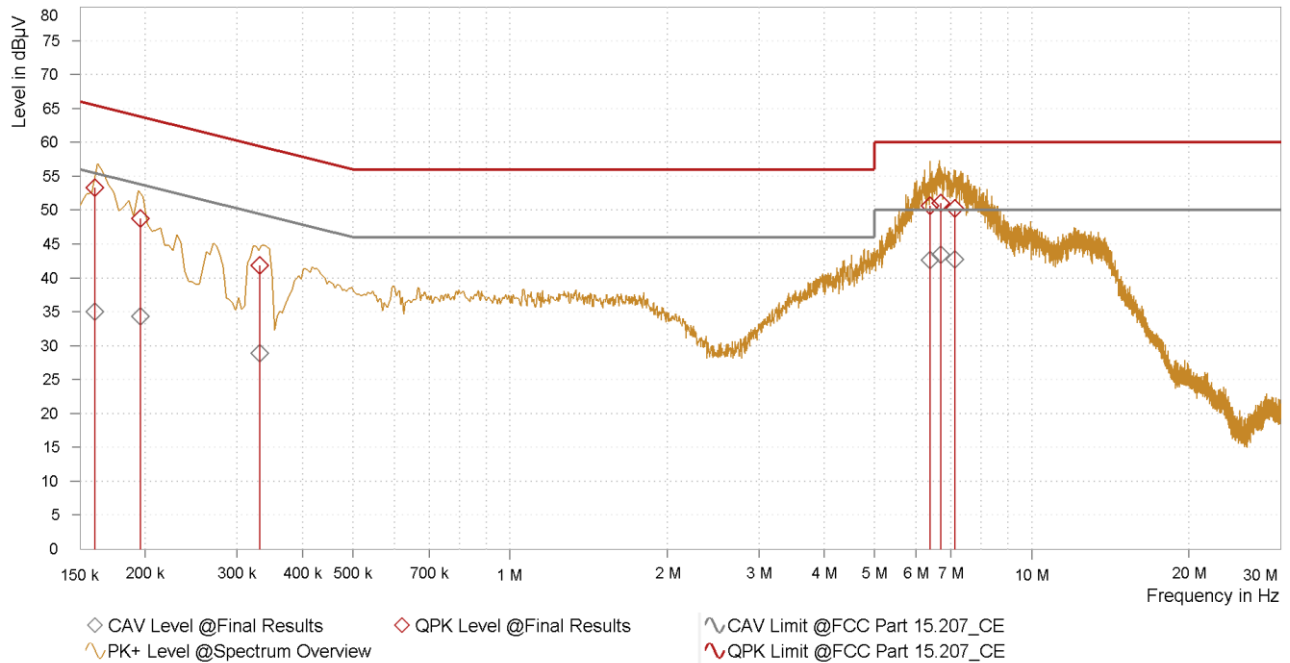

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.160	53.27	65.46	12.20	43.39	35.02	55.46	20.45	25.14	9.88	L1
0.196	48.77	63.78	15.01	38.89	34.36	53.78	19.42	24.49	9.87	L1
0.331	41.83	59.43	17.59	31.97	28.83	49.43	20.59	18.97	9.86	L1
6.382	50.64	60.00	9.36	40.52	42.58	50.00	7.42	32.47	10.12	L1
6.699	51.05	60.00	8.95	40.92	43.41	50.00	6.59	33.28	10.13	L1
7.127	50.22	60.00	9.78	40.07	42.71	50.00	7.29	32.56	10.15	L1

Notes

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

Note Transmit by be-EHT320 at 6585 MHz

Test Voltage AC 120 V/60 Hz

Test Engineer Carl Jiang

Test Date 2026-04-16


Temp 20.8°C

Humi 64.0%

Polarity N

Test Site WJ-SR5

Spectrum Overview

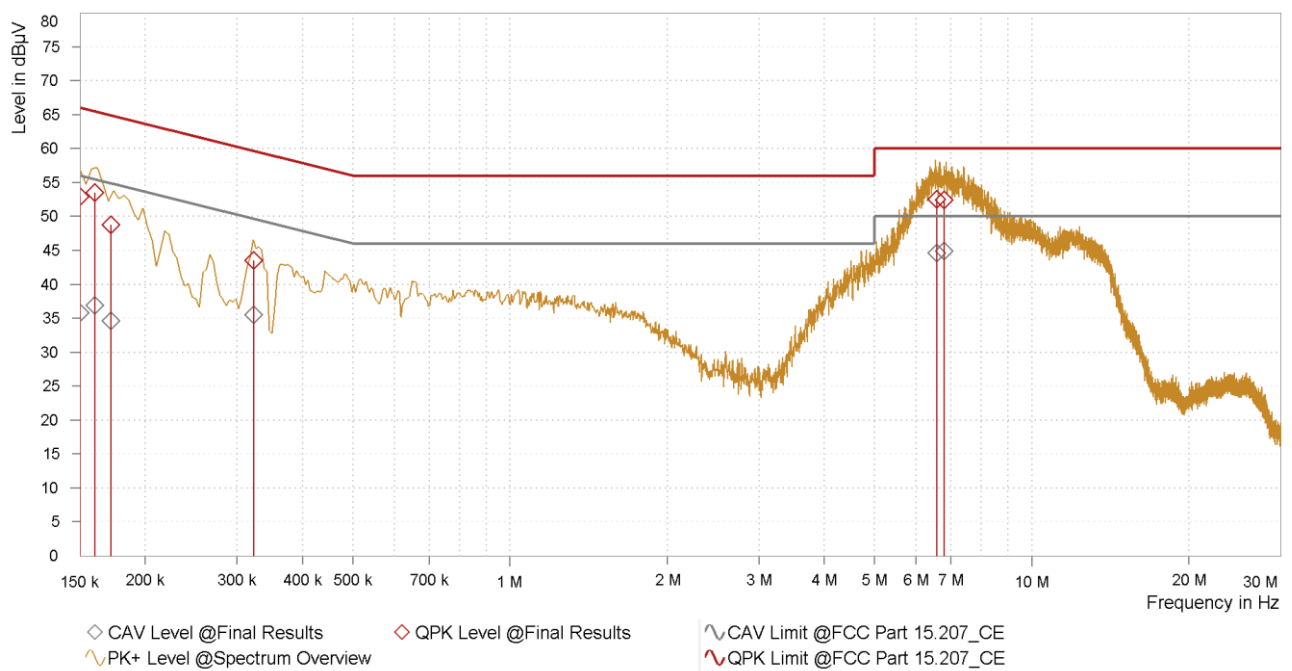

Final Results

Frequency [MHz]	QPK Level [dBμV]	QPK Limit [dBμV]	QPK Margin [dB]	QPK Raw Lvl [dBμV]	CAV Level [dBμV]	CAV Limit [dBμV]	CAV Margin [dB]	CAV Raw Lvl [dBμV]	Correction [dB]	Line
0.150	52.87	66.00	13.13	43.04	35.84	56.00	20.16	26.01	9.83	N
0.160	53.54	65.46	11.92	43.71	36.84	55.46	18.62	27.01	9.83	N
0.172	48.77	64.86	16.09	38.94	34.59	54.86	20.27	24.76	9.84	N
0.323	43.55	59.63	16.08	33.70	35.53	49.63	14.10	25.67	9.86	N
6.569	52.50	60.00	7.50	42.23	44.64	50.00	5.36	34.37	10.27	N
6.789	52.44	60.00	7.56	42.16	44.85	50.00	5.15	34.56	10.29	N

Notes

1. QPK Level [dBμV]=QPK Raw Lvl [dBμV] + Correction [dB]
2. CAV Level [dBμV]=CAV Raw Lvl [dBμV] + Correction [dB]
3. Correction [dB]= LISN Factor [dB] + Cable Loss [dB]

Appendix B - Test Setup Photograph

Refer to "R25S1036128-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1036128-UE" file.

_____ The End _____