



RF MEASUREMENT REPORT

FCC ID: 2BH7FEAP773V2
Applicant: TP-Link Systems Inc.
Product: BE11000 Ceiling Mount Wi-Fi 7 Access Point
Model No.: EAP773
Brand Name: tp-link
FCC Classification: 15E 6GHz Standard Power Access Point (6SD)
FCC Rule Part(s): Part 15 Subpart E (Section 15.407)
Result: Complies
Received Date: 2025-12-20
Test Date: 2026-02-12 ~ 2026-04-17

Reviewed By:

Yuri Li

Yuri Li

Approved By:

Robin Wu

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report. Testing was performed in accordance with the applicable measurement procedures. The test results reported herein apply only to the specific item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.



Revision History

Report No.	Version	Description	Issue Date	Note
R25S1036128-U207	V01	Initial Report	2026-04-20	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information	6
1.5. Radio Specification under Test	6
1.6. Working Frequencies	7
1.7. Antenna Details	8
1.8. AFCD General Capabilities Declaration	9
2. Test Configuration	10
2.1. Test system connection diagram	10
2.2. Applied Standards	10
2.3. Test Environment Condition	10
3. Measuring Equipment	11
4. Decision Rules and Measurement Uncertainty	12
4.1. Decision Rules	12
4.2. Measurement Uncertainty	12
5. Test Result	13
5.1. Summary	13
5.2. Successful Registration and Spectrum Access Request	15
5.2.1. Test compliance requirement	15
5.2.2. Test Procedure	15
5.2.3. Test Result	17
5.3. Unsuccessful Spectrum Access Request	18
5.3.1. Test compliance requirement	18
5.3.2. Test Procedure	18
5.3.3. Test Result	19
5.4. Successful Spectrum Access Update	20
5.4.1. Test compliance requirement	20
5.4.2. Test Procedure	20
5.4.3. Test Result	23
5.5. Unsuccessful Spectrum Access Update	24
5.5.1. Test compliance requirement	24
5.5.2. Test Procedure	24
5.5.3. Test Result	26

5.6.	Unsuccessful Server Validation	27
5.6.1.	Test compliance requirement	27
5.6.2.	Test Procedure	27
5.6.3.	Test Result	28
Appendix A - Test Result.....		29
A.1	Successful Registration and Spectrum Access Request	29
A.2	Unsuccessful Spectrum Access Request.....	176
A.3	Successful Spectrum Access Update.....	183
A.4	Unsuccessful Spectrum Access Update.....	231
A.5	Unsuccessful Server Validation	252
Appendix B - Test Setup Photograph		254
Appendix C - EUT Photograph		255

1. General Information

1.1. Applicant

TP-Link Systems Inc.

10 Mauchly, Irvine, CA 92618

1.2. Manufacturer

TP-Link Systems Inc.

10 Mauchly, Irvine, CA 92618

1.3. Testing Facility

☒	Test Site - MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations A2LA: 3628.01 CNAS: L10551 FCC: CN1166 ISED: CN0001
☐	Test Site - MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations A2LA: 3628.02 FCC: CN1284 ISED: CN0105
☐	Test Site - MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations TAF: 3261 FCC: 291082, TW3261 ISED: TW3261

1.4. Product Information

Product Name	BE11000 Ceiling Mount Wi-Fi 7 Access Point	
Model No.	EAP773	
Hardware Version	2.0	
Software Version	2.0	
EUT Identification No.	20251220Sample#12	
DUT Type	☒ Standard Power Access Point ☐ Fixed Client	
Proxy	☐ With Proxy ☒ Without Proxy	
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be	
Bluetooth Specification	BLE only	
Antenna Information	Refer to section 1.7	
Power Type	AC/DC Adapter or PoE	
Operating Environment	☒ Indoor Use	☐ Outdoor Use
Accessory(ies)		
AC/DC Adapter	Model: T120250 - 2B4 Input: 100-240 V 50/60 Hz 0.8 A Output: 12 V DC 2.5 A	
PoE Adapter	Model: POE4824G Input: 100-240 V ~ 50/60 Hz 0.8 A Output: 48 V DC 0.5 A 24.0 W	
Notes: 1. The information of the EUT (Equipment Under Test) was provided by the manufacturer. The accuracy, completeness, and validity of the information are solely the responsibility of the manufacturer. 2. For this report, we select AC Adapter for testing. 3. AC/DC Adapter and PoE Injector are not marketed in conjunction with the device.		

1.5. Radio Specification under Test

Frequency Range	UNII-5: 6105 ~ 6425 MHz UNII-7: 6525 ~ 6875 MHz	
Type of Modulation	802.11ax/be: OFDMA	
Data Rate	802.11ax: up to 2402 Mbps 802.11be: up to 5764 Mbps	
Channel Puncturing Function	☐ Supported	☒ Unsupported
Support RU	☒ Full RU	☐ Partial RU

1.6. Working Frequencies

802.11ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
33	6115 MHz	37	6135 MHz	41	6155 MHz
45	6175 MHz	49	6195 MHz	53	6215 MHz
57	6235 MHz	61	6255 MHz	65	6275 MHz
69	6295 MHz	73	6315 MHz	77	6335 MHz
81	6355 MHz	85	6375 MHz	89	6395 MHz
93	6415 MHz	117	6535 MHz	121	6555 MHz
125	6575 MHz	129	6595 MHz	133	6615 MHz
137	6635 MHz	141	6655 MHz	145	6675 MHz
149	6695 MHz	153	6715 MHz	157	6735 MHz
161	6755 MHz	165	6775 MHz	169	6795 MHz
173	6815 MHz	177	6835 MHz	181	6855 MHz

802.11ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
35	6125 MHz	43	6165 MHz	51	6205 MHz
59	6245 MHz	67	6285 MHz	75	6325 MHz
83	6365 MHz	91	6405 MHz	123	6565 MHz
131	6605 MHz	139	6645 MHz	147	6685 MHz
155	6725 MHz	163	6765 MHz	171	6805 MHz
179	6845 MHz	--	--	--	--

802.11ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
39	6145 MHz	55	6225 MHz	71	6305 MHz
87	6385 MHz	135	6625 MHz	151	6705 MHz
167	6785 MHz	--	--	--	--

802.11ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
47	6185 MHz	79	6345 MHz	143	6665 MHz

802.11be-EHT320

Channel	Frequency	Channel	Frequency	Channel	Frequency
63	6265 MHz	--	--	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Tx Paths	Number of spatial streams	Antenna Gain (dBi)				CDD Directional Gain (dBi)	
				Ant 1	Ant 2	Ant 3	Ant 4	For Power	For PSD
Wi-Fi 2.4G									
PIFA	2400 ~ 2483.5	2	1	4.79	4.52	--	--	3.0	4.0
Wi-Fi 5G									
PIFA	5150 ~ 5250	2	1	--	--	6.02	5.20	3.0	5.0
	5250 ~ 5350	2	1	--	--	6.02	6.30	3.0	5.0
	5470 ~ 5725	2	1	--	--	6.53	6.03	3.0	5.0
	5725 ~ 5850	2	1	--	--	6.98	6.02	3.0	5.0
Wi-Fi 6G									
PIFA	5925 ~ 6425	2	1	5.20	6.54	--	--	3.0	5.0
		2	2	5.20	6.54	--	--	3.0	3.0
	6425 ~ 6525	2	1	4.42	6.40	--	--	3.0	5.0
		2	2	4.42	6.40	--	--	3.0	3.0
	6525 ~ 6875	2	1	5.34	7.37	--	--	3.0	5.0
		2	2	5.34	7.37	--	--	3.0	3.0
	6875 ~ 7125	2	1	4.70	7.22	--	--	3.0	5.0
		2	2	4.70	7.22	--	--	3.0	3.0

Notes:

1. The EUT supports Cyclic Delay Diversity (CDD) mode, and CDD signals are correlated.
2. The EUT also supports Beam Forming mode, and the Beam Forming support 802.11n/ac/ax/be, not include 802.11a/b/g.
3. The antenna gain is from antenna report that was provided by the applicant.


1.8. AFCD General Capabilities Declaration

Item	Question	Vendor response
1	AFC DUT Type	Standalone AP
2	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Frequency Range field?	Yes
3	Does the AFC DUT supports sending an Available Spectrum Inquiry Request based on the inquired Channels fields?	Yes
4	If the Answer to Items 2 and 3 is "Yes", what is AFC DUT's default inquiry type?	Both
5	Does the AFC DUT need to be supplied with BSS configuration parameters?	Yes
6	Does the AFC DUT manufacturer attest to AFC DUT compliance with rules for LPI operation?	Yes
7	Does the AFC DUT need to be supplied with mandatory registration information to formulate an Available Spectrum Inquiry Request	No
8	If the Answer to Item 7 is "Yes". What is the geographic Supported by the AFC DUT?	N/A
9	Does the AFC DUT support 160 MHz channel width operation?	Yes
10	Which method does AFC DUT acting as a Fixed Client uses for sending an Available Spectrum Inquiry Request?	N/A
11	Does the AFC DUT support 320 MHz channel width operation?	Yes

Note: The above information was declared by manufacturer

2. Test Configuration

2.1. Test system connection diagram

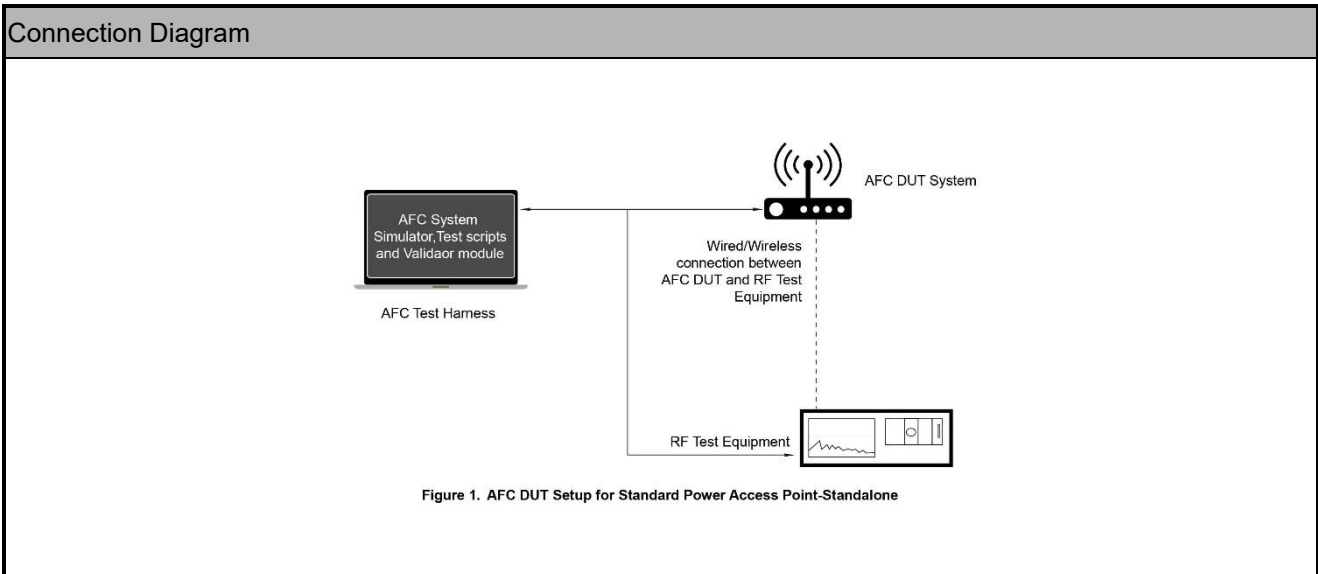

2.2. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 987594 D05 v01r01
- FCC KDB 987594 D01 v03r01
- 47 CFR FCC Part 15.407
- ANSI C63.10-2020
- ANSI C63.10-2020/Cor1-2023
- ANSI C63.10a-2024
- The test guidance is the “AFC Device (AFC DUT) Compliance Test Plan”, and the version was 1.7.

2.3. Test Environment Condition

Ambient Temperature	15 ~ 35 °C
Relative Humidity	20 ~ 75%RH

3. Measuring Equipment

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Signal Analyzer	Keysight	N9010 B	MRTSUE06457	1 year	2026-04-26	WZ-SR5
Attenuator	MVE	MVE2213	MRTSUE11083	1 year	2026-06-02	WZ-SR5
RF Cable	UCwave	UCE500	MRTSUE07374	1 year	2026-07-20	WZ-SR5
Signal Analyzer	Keysight	N9010B	MRTSUE06558	1 year	2026-05-17	WZ-SR5

Software	Version	Manufacturer	Function
AFC Test Harness	V 2.0.65.184	Wi-Fi Alliance	AFC Test Software

Client Information

Instrument	Manufacturer	Type No.	Certification Number
Wi-Fi Module	Intel	Intel(R) Wi-Fi 7 BE200 320MHz	FCC ID: PD9BE200NG

4. Decision Rules and Measurement Uncertainty

4.1. Decision Rules

The Decision Rule is based on Simple Acceptance in accordance with ISO Guide 98-4: 2012 Clause 8.2.
(Measurement uncertainty is not taken into account when stating conformity with a specified requirement.)

4.2. Measurement Uncertainty

Where relevant, the following test uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k = 2$.

Output Power
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 1.4 dB
Power Spectrum Density
Measuring Uncertainty for a Level of Confidence of 95% ($U=2 U_c(y)$): 2.9 dB

5. Test Result

5.1. Summary

FCC Section(s)	Requirement	Verdict
15.407(k)(1)	Transmit only as instructed by AFC System	Pass
15.407(k)(8)(i)	Register with AFC System prior to initial transmission. Register with AFC System after change of location	Pass
15.407(k)(8)(ii)	Provide required registration parameters. Update AFC System upon change of registration parameters	Pass
15.407(k)(8)(iii)	Registration either directly or via Network Element/Proxy	Pass
15.407(k)(8)(iv)	The device can adjust accordingly to subsequent 'daily' AFC responses with the latest list of available frequencies and the maximum permissible power	Pass
15.407(k)(8)(v)	Security of connection to AFC	Pass
15.407(k)(9)(i)	Report location and uncertainty from power-off condition	Pass

Ref Std. Clause	Test Case Name	Result
AFC capability - Inquired Frequency & Channel		
3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20 MHz_10625_1	Pass
3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40 MHz_10626_1	Pass
3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_80 MHz_10627_1	Pass
3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_160 MHz_10628_1	Pass
3.2.4	CT_AFC_SP_AP_AFCDUSA32_FrequencyChannel_10629_1	Pass
3.3.4	CT_AFC_SP_AP_AFCDUAU33_FrequencyChannel_10630_1	Pass
3.4.4	CT_AFC_SP_AP_AFCDUAU34_FrequencyChannel_10631_1	Pass
3.1.4	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_320 MHz_10715_1	Pass
AFC capability - Server Validation - Mandatory		
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NonMatchSAN_10632_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_DifferentRootCA_10633_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_MatchSuffixSAN_10634_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_ServerCertRevoked_10635_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_OCSPStaplingDisabled_10636_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_StapledOCSPRespExpired_10637_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_TLSCipherSuiteENULL_10638_1	Pass
3.5.4	CT_AFC_ServerValidation_AP_AFCDUSV35_NoRootCA_10639_1	Pass

Test Description	Test Case Identifier	FCC Requirement	Short Description
Successful Registration and Spectrum Access Request	AFCD.RSA	15.407(k)(1)	Transmit only as instructed by AFC System
		15.407(k)(8)(i)	Register with AFC System prior to initial transmission
		15.407(k)(8)(ii)	Provide required registration parameters
		15.407(k)(8)(iii)	Registration either directly or via proxy
		15.407(l)(ii)	Determination of appropriate channel configuration implied by AFC System response
		15.407(k)(8)(iv)	Must contact an AFC system at least once per day to obtain the latest list of available frequencies and the maximum permissible power
Unsuccessful Spectrum Access Request	AFCD.USA	15.407(k)(1)	Transmit only as instructed by AFC System
		15.407(k)(8)(i)	Register with AFC System prior to initial transmission
		15.407(k)(8)(ii)	Provide required registration parameters
		15.407(k)(8)(iii)	Registration either directly or via proxy
Successful Spectrum Access Update	AFCD.SAU	15.407(k)(8)(i)	Transmit only as instructed by AFC System
		15.407(k)(8)(ii)	Register with AFC System prior to initial transmission
		15.407(k)(9)(i)	Report location and uncertainty from power-off condition
Unsuccessful Spectrum Access Update	AFCD.UAU	15.407(k)(8)(i)	Transmit only as instructed by AFC System
		15.407(k)(8)(ii)	Register with AFC System prior to initial transmission
		15.407(k)(9)(i)	Report location and uncertainty from power-off condition
Unsuccessful Server Validation	AFCD.USV	15.407(k)(8)(v)	Incorporate adequate security measurements to prevent it from accessing AFC systems not approved by the FCC

5.2. Successful Registration and Spectrum Access Request

5.2.1. Test compliance requirement

FCC Section(s)	Requirement
15.407(k)(1)	Transmit only as instructed by AFC System
15.407(k)(8)(i)	Register with AFC System prior to initial transmission.
15.407(k)(8)(ii)	Provide required registration parameters.
15.407(k)(8)(iii)	Registration either directly or via proxy
15.407(l)(ii)	Determination of appropriate channel configuration implied by AFC System response
15.407(k)(8)(iv)	Must contact an AFC system at least once per day to obtain the latest list of available frequencies and the maximum permissible power

5.2.2. Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
4	AFC DUT Test Harness validates the presence of mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields.

Step	Description
6	Throughout Step 1 to Step 4, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
7	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request.
8	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields.
9	AFC DUT Test Harness validates the presence of mandatory registration information
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields which are significantly different from Step 5.
11	Wait for 5 minutes (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of band methods

Step	Description
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of band methods
21	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
22	AFC DUT Test Harness validates the presence of mandatory registration information
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields which are significantly different from Step 17
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds (configurable) RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

5.2.3. Test Result

Refer to Appendix A.1.

5.3. Unsuccessful Spectrum Access Request

5.3.1. Test compliance requirement

FCC Section(s)	Requirement
15.407(k)(1)	Transmit only as instructed by AFC System
15.407(k)(8)(i)	Register with AFC System prior to initial transmission.
15.407(k)(8)(ii)	Provide required registration parameters.
15.407(k)(8)(iii)	Registration either directly or via proxy

5.3.2. Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 7
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
4	AFC DUT Test Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available
6	Throughout Step 2 to Step 5 and subsequent to Step 5, RF Test Equipment monitors the output of the AFC DUT to confirm the following • For SP only operation, AFC DUT does not transmit in the band • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits
7	If the AFC DUT is Fixed Client, go to Step 8 else Stop the test
8	The AFC DUT set to Initial Pre-test State.
9	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request
10	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
11	AFC DUT Test Harness validates mandatory registration information

Step	Description
12	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available using either In-band or Out-of-band methods.
13	If AFC DUT used Out-of-band method, initiate connection procedure between Fixed Client and SP Access Point by following instructions provided by the AFC DUT Vendor
14	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel.

5.3.3. Test Result

Refer to Appendix A.2.

5.4. Successful Spectrum Access Update

5.4.1. Test compliance requirement

FCC Section(s)	Requirement
15.407(k)(8)(i)	Register with AFC System after change of location
15.407(k)(8)(ii)	Provide required registration parameters.
15.407(k)(9)(i)	Report location and uncertainty from power-off condition

5.4.2. Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
4	AFC DUT Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields.
6	Throughout the preceding steps, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.

Step	Description
7	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the following and STOP the test • For SP only operation, AFC DUT does not transmit in the band. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 9
9	AFC DUT Test Harness evaluates validity of mandatory registration information
10	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields which are significantly different from Step 5. • During the 60 seconds wait time: ▪ For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT does not transmit above LPI threshold limits ▪ For SP only operation, RF Test Equipment monitors the output of the AFC DUT to confirm that AFC DUT doesn't transmit in the band
11	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State.
14	If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of band methods

Step	Description
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies
20	AFC DUT is power cycled If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the AFC DUT to verify the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel and STOP the test. If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 21
22	AFC DUT Test Harness evaluates validity of mandatory registration information
23	AFC DUT Test Harness waits for 60 seconds before sending an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields which are significantly different from step 17. During the 60 seconds wait time, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the latest Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

5.4.3. Test Result

Refer to Appendix A.3.

5.5. Unsuccessful Spectrum Access Update

5.5.1. Test compliance requirement

FCC Section(s)	Requirement
15.407(k)(8)(i)	Register with AFC System after change of location
15.407(k)(8)(ii)	Update AFC System upon change of registration parameters
15.407(k)(9)(i)	Report location and uncertainty from power-off condition

5.5.2. Test Procedure

Step	Description
1	If the AFC DUT is Standard Power Access Point, go to Step 2, else go to Step 12
2	AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the DUT with AFC System URL and server root certificate. Trigger the DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of-band methods.
3	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
4	AFC DUT Test Harness validates mandatory registration information
5	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields.
6	Throughout the Step 2 to 5, RF Test Equipment monitors the output of the AFC DUT to confirm that the AFC DUT does not transmit: • In the band if the AFC DUT supports only SP operation Or • Above LPI limits for AFC DUT whose manufacturer attests to its compliance with rules for LPI operation Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the following: • For SP only operation, AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, AFC DUT transmit power in the band is less than CEILING [LPI limits, SP limits contained in the Available Spectrum Inquiry Response] and does not exceed emissions limits in adjacent frequencies.

Step	Description
7	AFC DUT is power cycled. If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters Configure the AFC DUT with AFC System URL and server root certificate.
8	Wait for 60 seconds • If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors the output of the DUT to verify the following and STOP the test • For SP only operation, AFC DUT does not transmit in the band. • For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits. • If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 8
9	AFC DUT Test Harness evaluates validity of mandatory registration information
10	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
11	Throughout Step 7 to 10 and subsequent to Step 10 Test Equipment monitors the output of the AFC DUT to confirm that: For SP only operation, AFC DUT does not transmit in the band. For AFC DUT whose manufacturer attests to its compliance with rules for LPI operation, the AFC DUT does not transmit above LPI limits
12	If the AFC DUT is Fixed Client, go to Step 13 else Stop the test
13	The AFC DUT set to Initial Pre-test State
14	If needed (see Table 5 declaration), configure the DUT with a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate. Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of band methods
15	AFC DUT sends a valid Available Spectrum Inquiry Request containing the inquired Frequency Range and/or the inquired Channels fields
16	AFC DUT Test Harness validates the presence of mandatory registration information
17	AFC DUT Test Harness sends an Available Spectrum Inquiry Response containing a list of available frequency ranges and/or channels and the maximum permissible transmit power in the available Frequency Info and/or available Channel Info fields
18	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
19	Wait for 60 seconds RF Test Equipment monitors any transmission by the AFC DUT conforms to the conditions contained in the Available Spectrum Inquiry Response and does not exceed emissions limits in adjacent frequencies

Step	Description
20	AFC DUT is power cycled If needed (see Table 5 declaration), configure the AFC DUT with a temporary test regulatory identifier (e.g., FCC ID), new geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT with AFC System URL and server root certificate.
21	Wait for 60 seconds If the AFC DUT does not send an Available Spectrum Inquiry Request, RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel If the AFC DUT sends an Available Spectrum Inquiry Request, then CONTINUE with Step 22 else STOP the test
22	AFC DUT Test Harness validity of mandatory registration information
23	AFC DUT Test Harness sends an Available Spectrum Inquiry Response indicating that no frequency ranges and/or channels are available.
24	If AFC DUT used Out-of-band method, initiate connection procedure between AFC DUT and SP Access Point by following instructions provided by the AFC DUT Vendor
25	Wait for 60 seconds RF Test Equipment monitors that the AFC DUT does not transmit above maximum transmit power limits advertised by the Standard Power Access Point for Standard Client Devices in the channel

5.5.3. Test Result

Refer to Appendix A.4.

5.6. Unsuccessful Server Validation

5.6.1. Test compliance requirement

FCC Section(s)	Requirement
15.407(k)(8)(v)	Incorporate adequate security measurements to prevent it from accessing AFC systems not approved by the FCC

5.6.2. Test Procedure

Step	Description
1	The AFC DUT set to Initial Pre-test State. If needed (see Table 5 declaration), configure the AFC DUT with BSS parameters per Table 9 and a temporary test regulatory identifier (e.g., FCC ID), geographic coordinates, antenna height, and uncertainty parameters. Configure the AFC DUT Test Harness with TLS configuration that is the same as the default configuration defined in Section 2.3.1 except for the following: Run 1: A different server certificate (and private key) with SAN domain name entry "badafc.com" (i.e. that does not match AFC system URL's domain name); signed by the same root certificate as per Section 2.3.1 Run 2: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1, but the certificate is signed by a different root certificate Run 3: A different server certificate (and private key) with SAN domain name entry "wfatestorg.org" only (i.e. SAN domain name only matches suffix of AFC server's hostname); signed by the same root certificate as per Section 2.3.1 Run 4: A different server certificate (and private key) where all attributes other than Public Key are the same as the server certificate per Section 2.3.1 signed by the same root certificate as per Section 2.3.1, but the server certificate is revoked as indicated in stapled OCSP response Run 5: Same configuration as per Section 2.3.1, except OCSP stapling is disabled and CRL/OCSP servers are not available Run 6: Same configuration as per Section 2.3.1, except stapled OCSP response has expired and CRL/OCSP servers are not available Run 7: Same configuration as per Section 2.3.1, except only the TLS cipher suite "eNULL" (no encryption) is enabled Run 8: N/A (same configuration as per Section 2.3.1) Configure the AFC DUT with the AFC System URL and the following root certificate: Runs 1-7: Root certificate as per Section 2.3.1 Run 8: No root certificate Trigger the AFC DUT to send to the AFC DUT Test Harness an Available Spectrum Inquiry Request using either In-band or Out-of band methods.

Step	Description
2	AFC DUT Test Harness waits 10 seconds, and verifies no Available Spectrum Inquiry Request is sent to it.
3	Steps 1and 2 are repeated for each of the remaining Runs

5.6.3. Test Result

Refer to Appendix A.5.

Appendix A - Test Result

A.1 Successful Registration and Spectrum Access Request

Test Site	WZ-SR5	Test Engineer	Cloud Guo
Test Date	2026-02-12 ~ 2026-04-17		

AFC DUT Compliance Test Report

DUT Information

AFC DUT System	Standard Power AP
DUT Vendor Name	tp-link
DUT Product Model	EAP773

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(i)(ii), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_20MHz_10625_1 (Successful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (17.1 dBm/MHz PSD, 30.1 dBm EIRP) in Spectrum Response) on channel 149 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (12.1 dBm/MHz PSD, 25.1 dBm EIRP) in Spectrum Response) on channel 37 bandwidth 20.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(i)(ii), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDRSA31_FrequencyChannel_40MHz_10626_1 (Successful registration and spectrum access request)
TestResult: PASS
Band: 6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (11.6 dBm/MHz PSD, 27.6 dBm EIRP) in Spectrum Response) on channel center frequency index 83 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (9.8 dBm/MHz PSD, 25.8 dBm EIRP) in Spectrum Response) on channel center frequency index 67 bandwidth 40.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS



Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(i)(iv), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDSA31_FrequencyChannel_80MHz_10627_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDSA31_FrequencyChannel_80MHz_10627_1 (Successful registration and spectrum access request)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (9.3 dBm/MHz PSD, 28.3 dBm EIRP) in Spectrum Reponse) on channel center frequency index 135 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (16.5 dBm/MHz PSD, 35.5 dBm EIRP) in Spectrum Reponse) on channel center frequency index 87 bandwidth 80.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(i)(iv), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDSA31_FrequencyChannel_160MHz_10628_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDSA31_FrequencyChannel_160MHz_10628_1 (Successful registration and spectrum access request)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (8.4 dBm/MHz PSD, 30.4 dBm EIRP) in Spectrum Reponse) on channel center frequency index 47 bandwidth 160.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (8.9 dBm/MHz PSD, 30.9 dBm EIRP) in Spectrum Reponse) on channel center frequency index 143 bandwidth 160.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

Test Result

FCC Requirements	TestCaseName	Test Result
15.407(k)(1), 15.407(k)(8)(i), 15.407(k)(8)(ii), 15.407(k)(8)(iii), 15.407(i)(iv), 15.407(k)(8)(iv)	CT_AFC_SP_AP_AFCDSA31_FrequencyChannel_320MHz_10715_1 (Successful registration and spectrum access request)	PASS

Test Measurements

TestCaseName: CT_AFC_SP_AP_AFCDSA31_FrequencyChannel_320MHz_10715_1 (Successful registration and spectrum access request)

TestResult:PASS

Band:6GHz

Measurements Name	Description	Value	Validation Result
AFC_DUT_SP_OPERATION	AFC DUT transmit with standard power in the band before the Spectrum Inquiry Response	false	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_1	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_1	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_1	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (9.5 dBm/MHz PSD, 34.6 dBm EIRP) in Spectrum Reponse) on channel center frequency index 63 bandwidth 320.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_1	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS
AFC_DUT_SEND_SPECTRUM_INQUIRYREQUEST_2	AFC DUT sends an Available Spectrum Inquiry Request	true	PASS
AFC_DUT_SPECTRUM_INQUIRYREQUEST_VALID_2	Valid mandatory registration information	true	PASS
AFC_DUT_CONFORM_SPECTRUM_INQUIRYRESPONSE_2	AFC DUT transmit power in the band is less than CEILING(LPI limits (5 dBm/MHz PSD) , SP limits (1.5 dBm/MHz PSD, 23.6 dBm EIRP) in Spectrum Reponse) on channel center frequency index 63 bandwidth 320.	true	PASS
AFC_DUT_CONFORM_ADJACENT_FREQUENCIES_EMISSIONS_LIMITS_2	AFC DUT conforms to not exceed emissions limits in adjacent frequencies	true	PASS

Test Mode	Working Mode	Channel No.	Freq. (MHz)	Average Power (dBm)		Duty Cycle (%)	EIRP (dBm)	AFC Response Limit (dBm)
				Ant 0	Ant 1			
802.11be-EHT20	LPI	53	6215	6.68	7.86	91.05	13.32	30.00
802.11be-EHT20	SD	149	6695	10.67	11.43	91.05	17.08	30.10
802.11be-EHT20	SD	37	6135	8.43	9.40	91.05	14.95	25.10
802.11be-EHT40	LPI	35	6125	9.13	9.56	93.88	15.36	30.00
802.11be-EHT40	SD	83	6365	11.03	11.87	93.88	17.48	27.60
802.11be-EHT40	SD	67	6285	9.72	11.75	93.88	16.86	25.80
802.11be-EHT80	LPI	39	6145	12.48	12.83	95.40	18.67	30.00
802.11be-EHT80	SD	135	6625	10.42	11.43	95.40	16.96	28.30
802.11be-EHT80	SD	87	6385	11.33	12.04	95.40	17.71	35.50
802.11be-EHT160	LPI	79	6345	15.98	16.94	95.36	22.50	30.00
802.11be-EHT160	SD	47	6185	13.72	15.76	95.36	20.87	30.40
802.11be-EHT160	SD	143	6665	10.55	11.89	95.36	17.28	30.90
802.11be-EHT320	LPI	127	6585	4.86	4.12	43.17	10.52	30.00
802.11be-EHT320	SD	63	6265	5.35	4.48	43.17	10.95	34.60
802.11be-EHT320	SD	63	6265	4.02	3.98	43.17	10.01	23.60


Note: EIRP (dBm) = $10 \times \log \{10^{(\text{Ant 0 Average Power} / 10)} + 10^{(\text{Ant 1 Average Power} / 10)}\} + \text{Directional Gain for Power (dBi)} + 10 \times \log (1/\text{Duty Cycle})$.

Test Mode	Working Mode	Channel No.	Freq. (MHz)	PSD (dBm/MHz)		Duty Cycle (%)	EIRP PSD (dBm/MHz)	AFC Response Limit (dBm/MHz)
				Ant 0	Ant 1			
802.11be-EHT20	LPI	53	6215	-4.959	-3.931	91.05	4.003	5.00
802.11be-EHT20	SD	149	6695	-1.430	-0.163	91.05	7.667	17.10
802.11be-EHT20	SD	37	6135	-3.555	-2.451	91.05	5.449	12.10
802.11be-EHT40	LPI	35	6125	-5.758	-4.988	93.88	2.929	5.00
802.11be-EHT40	SD	83	6365	-3.839	-2.870	93.88	4.957	11.60
802.11be-EHT40	SD	67	6285	-4.762	-3.037	93.88	4.470	9.80
802.11be-EHT80	LPI	39	6145	-6.062	-4.124	95.40	3.229	5.00
802.11be-EHT80	SD	135	6625	-7.558	-6.118	95.40	1.436	9.30
802.11be-EHT80	SD	87	6385	-6.819	-5.999	95.40	1.825	16.50
802.11be-EHT160	LPI	79	6345	-4.943	-4.387	95.36	3.561	5.00
802.11be-EHT160	SD	47	6185	-6.913	-4.985	95.36	2.374	8.40
802.11be-EHT160	SD	143	6665	-10.043	-8.734	95.36	-1.123	8.90
802.11be-EHT320	LPI	127	6585	-13.820	-12.320	43.17	-1.347	5.00
802.11be-EHT320	SD	63	6265	-17.049	-14.306	43.17	-3.806	9.50
802.11be-EHT320	SD	63	6265	-15.025	-16.854	43.17	-4.185	-1.50


Note: EIRP PSD (dBm/MHz) = $10 \times \log \{10^{(\text{Ant 0 PSD}/10)} + 10^{(\text{Ant 1 PSD}/10)}\}$ (dBm/MHz) + $10 \times \log (1/\text{Duty Cycle})$ + Directional Gain for PSD (dBi).

Duty Cycle


802.11be-EHT20

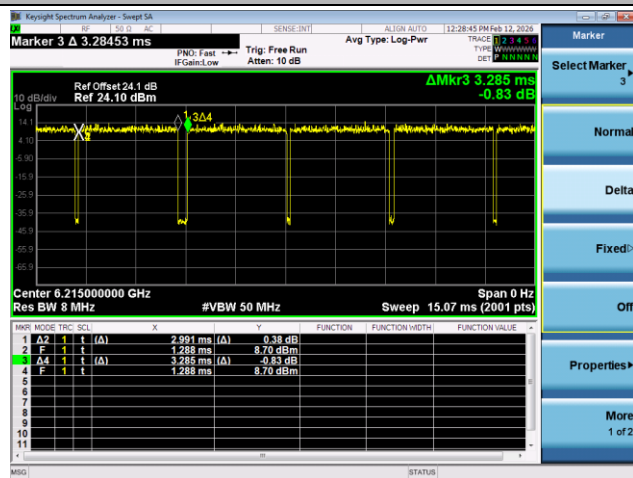


802.11be-EHT40

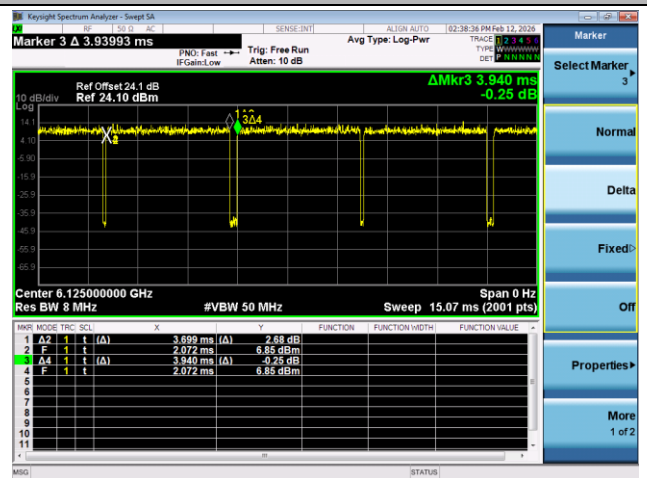


802.11be-EHT80

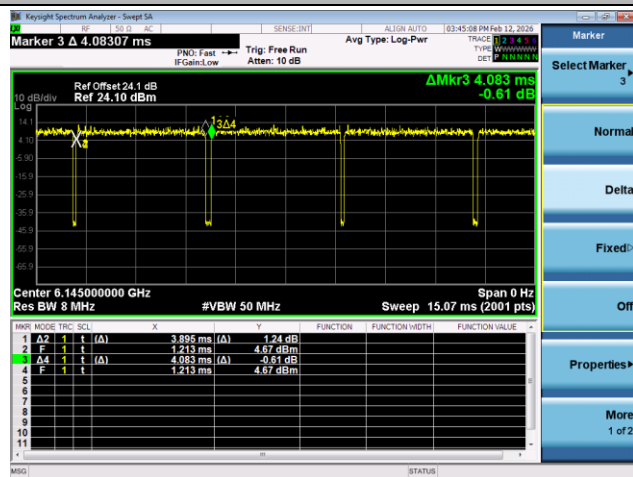

802.11be-EHT160

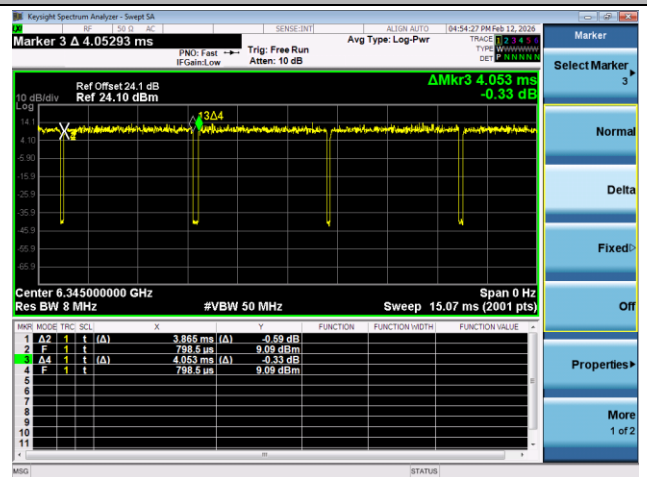


802.11be-EHT320

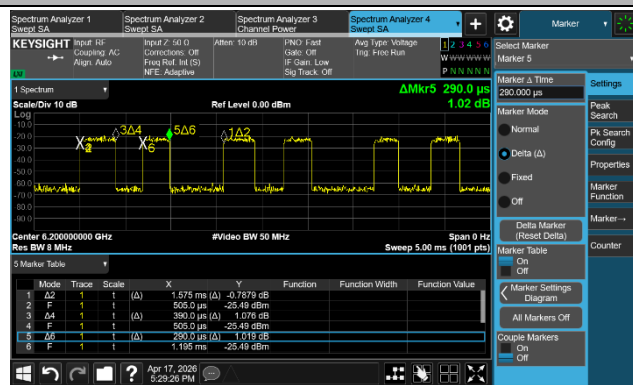


802.11be-EHT20 -Channel 53 (6215 MHz) Average Power (LPI)

Ant 0

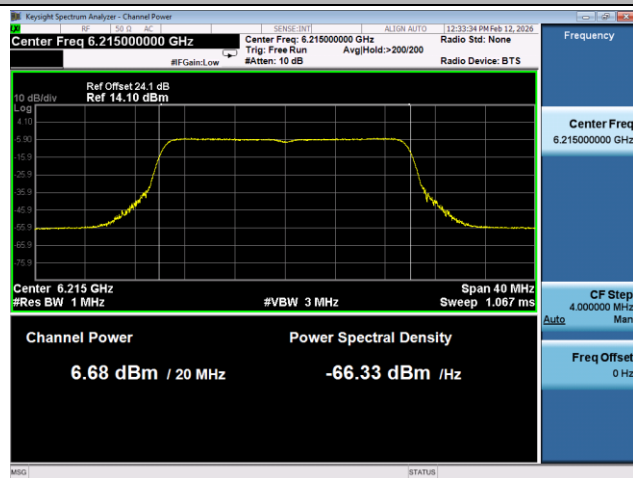


Ant 1

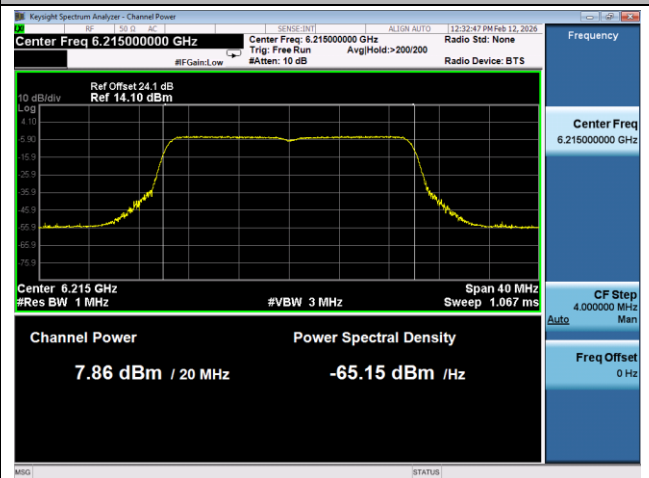


802.11be-EHT20 -Channel 149 (6695 MHz) Average Power (SD)

Ant 0

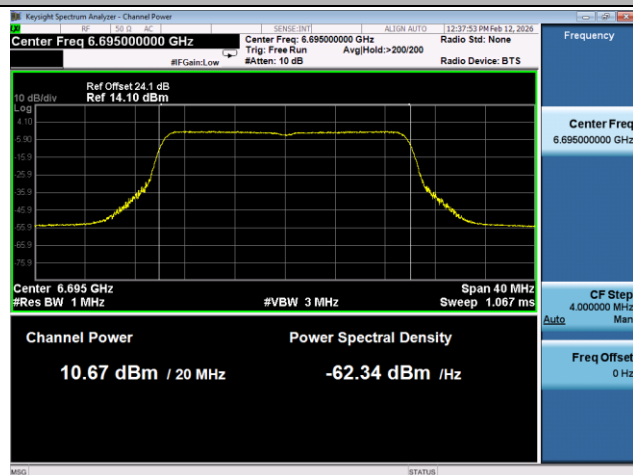


Ant 1

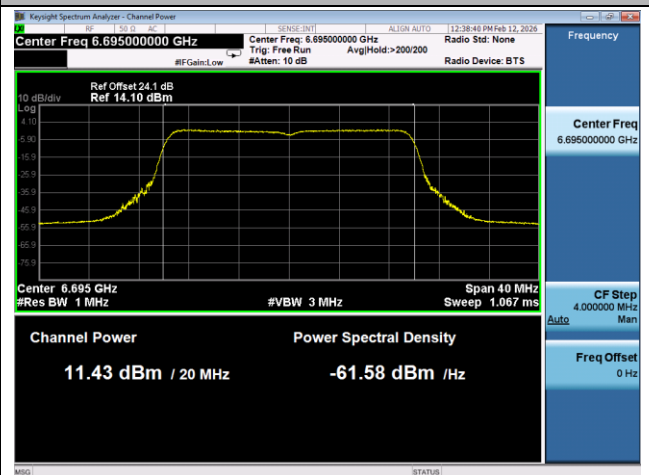


802.11be-EHT20 -Channel 37 (6135 MHz) Average Power (SD)

Ant 0

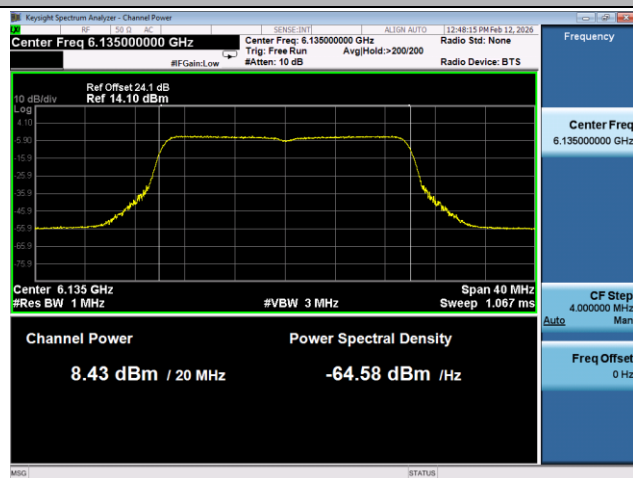


Ant 1

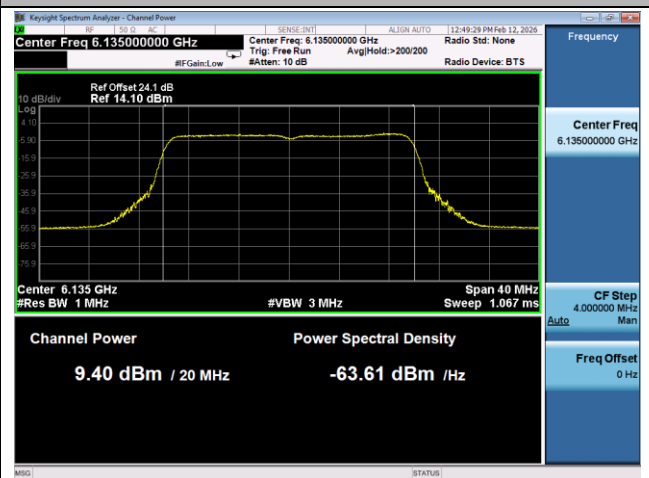


802.11be-EHT40 - Channel 35 (6125 MHz) Average Power (LPI)

Ant 0

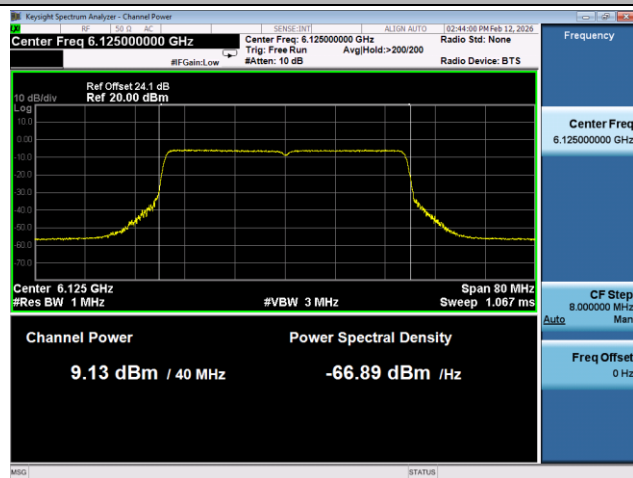


Ant 1

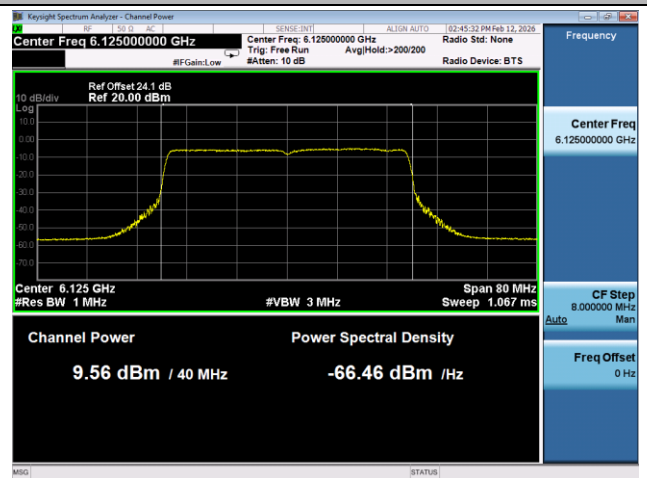


802.11be-EHT40 - Channel 83 (6365 MHz) Average Power (SD)

Ant 0

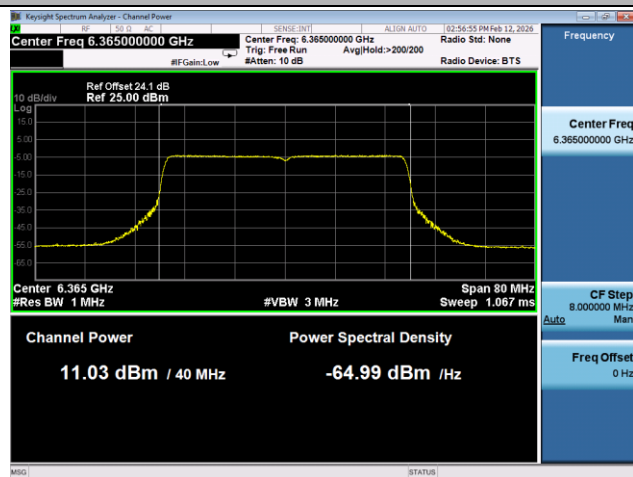


Ant 1

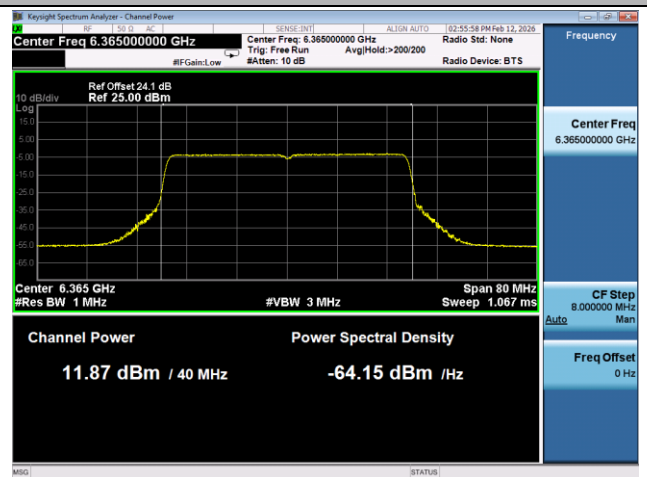


802.11be-EHT40 - Channel 67 (6285 MHz) Average Power (SD)

Ant 0

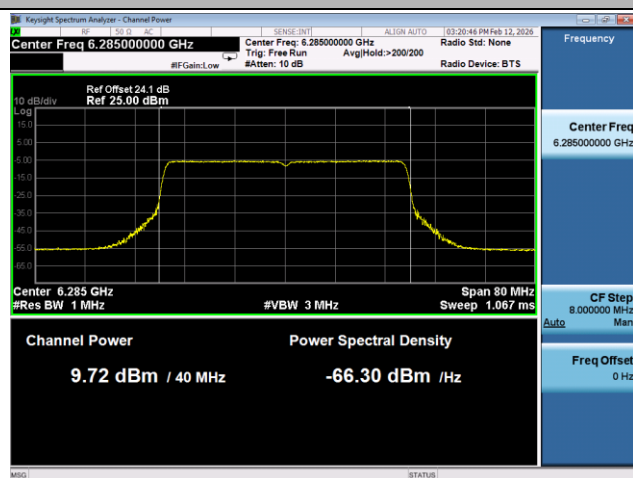


Ant 1

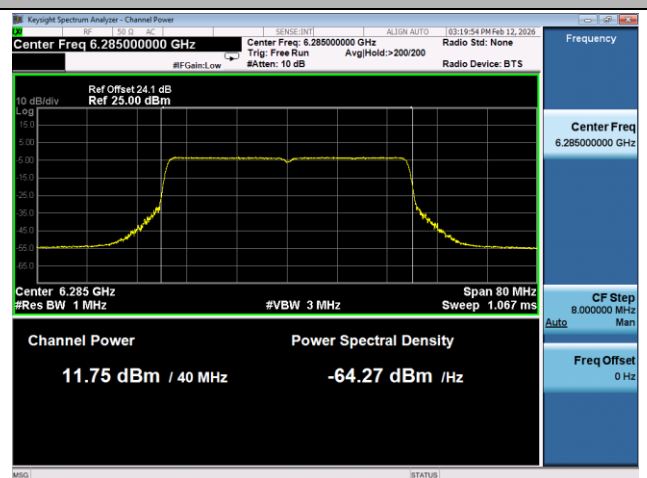


802.11be-EHT80 - Channel 39 (6145 MHz) Average Power (LPI)

Ant 0

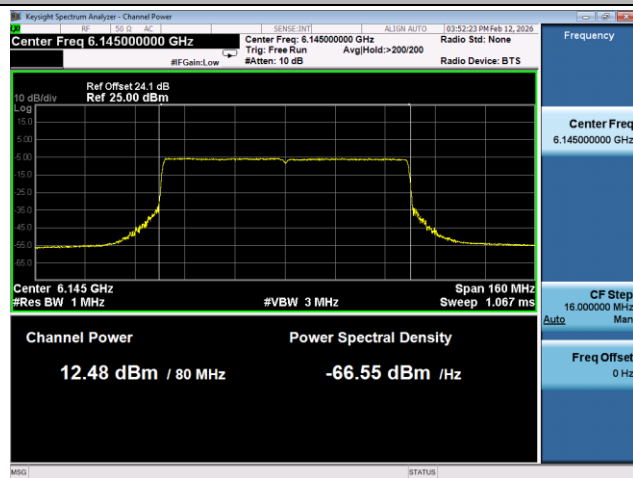


Ant 1

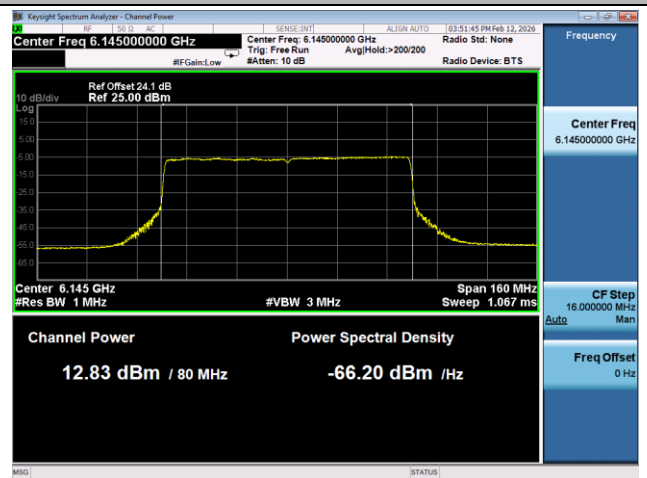


802.11be-EHT80 - Channel 135 (6625 MHz) Average Power (SD)

Ant 0

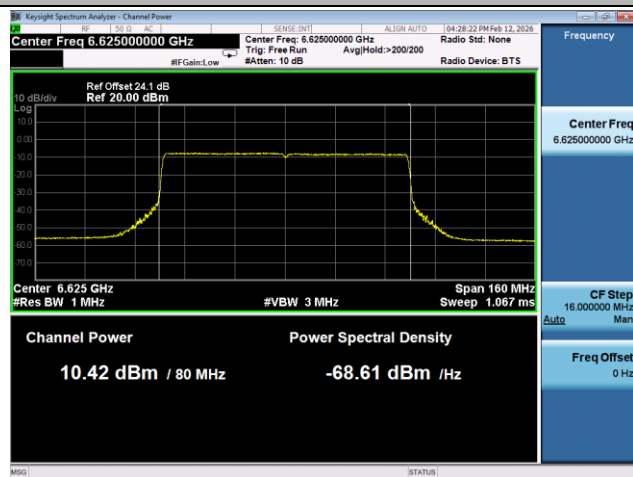


Ant 1

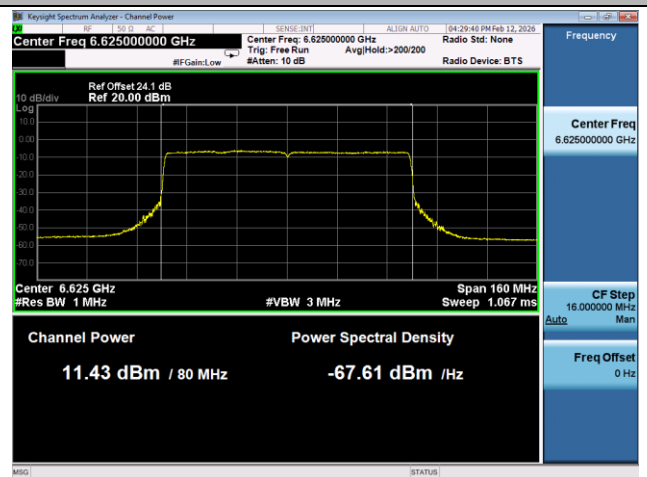


802.11be-EHT80 - Channel 87 (6385 MHz) Average Power (SD)

Ant 0

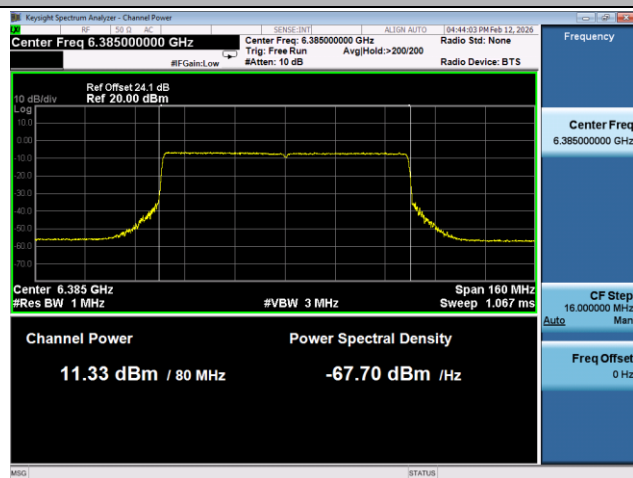


Ant 1

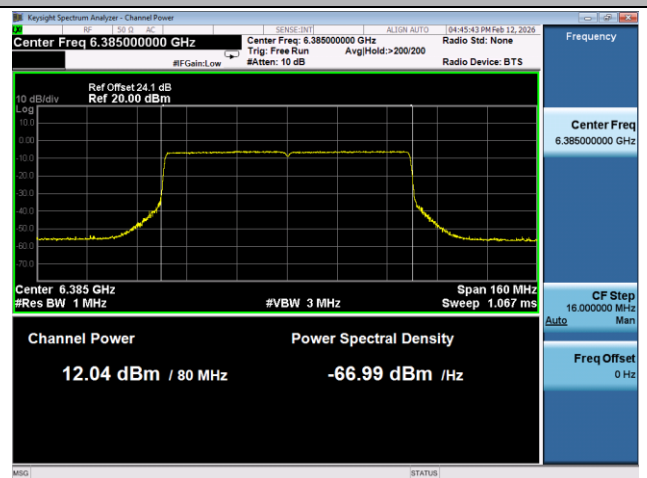


802.11be-EHT160 - Channel 79 (6345 MHz) Average Power (LPI)

Ant 0

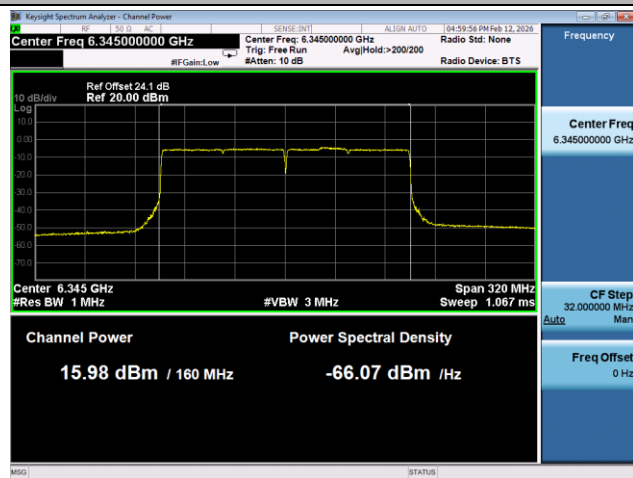


Ant 1

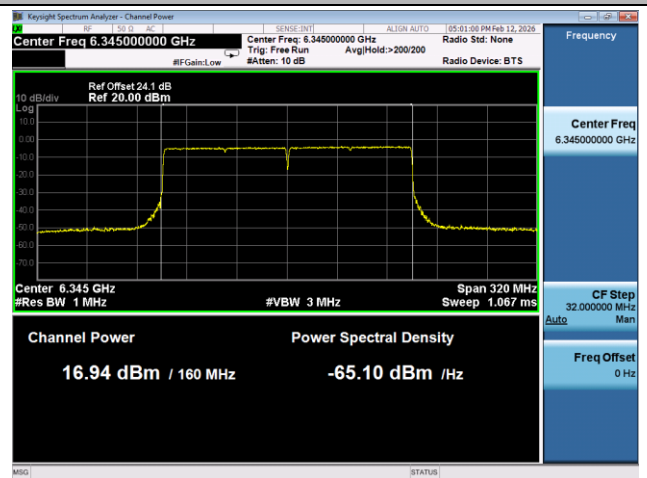


802.11be-EHT160 - Channel 47 (6185 MHz) Average Power (SD)

Ant 0

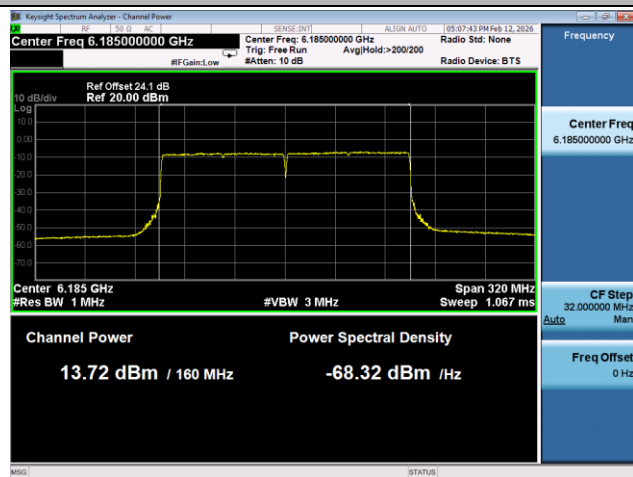


Ant 1

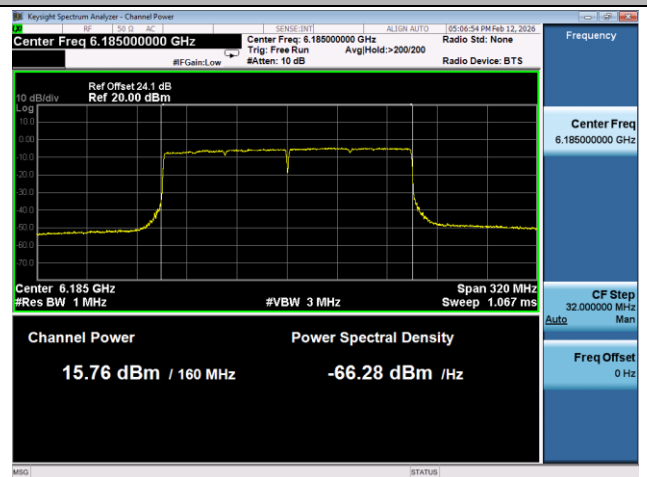


802.11be-EHT160 - Channel 143 (6665 MHz) Average Power (SD)

Ant 0

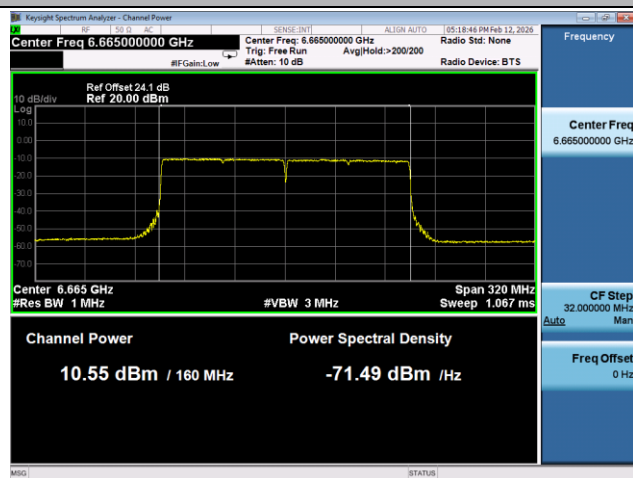


Ant 1

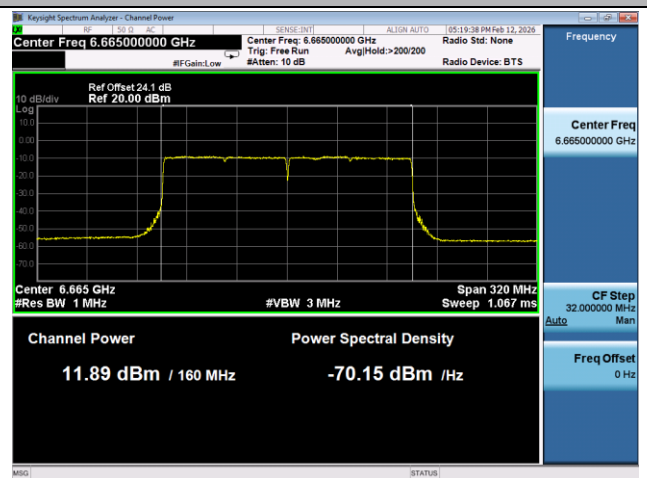


802.11be-EHT320 - Channel 127 (6585 MHz) Average Power (LPI)

Ant 0

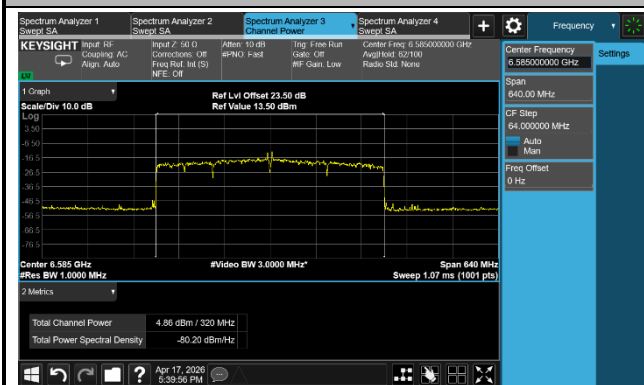


Ant 1

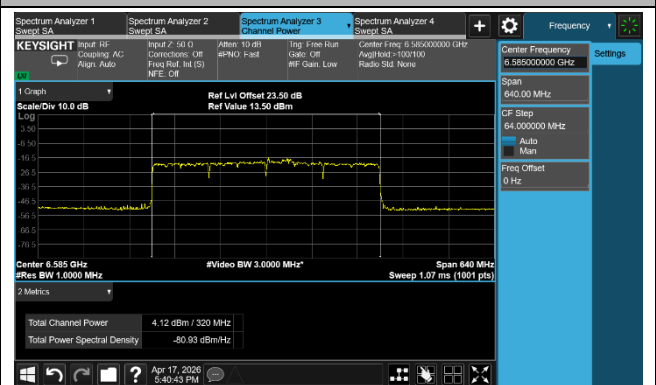


802.11be-EHT320 - Channel 63 (6265 MHz) Average Power (SD)

Ant 0

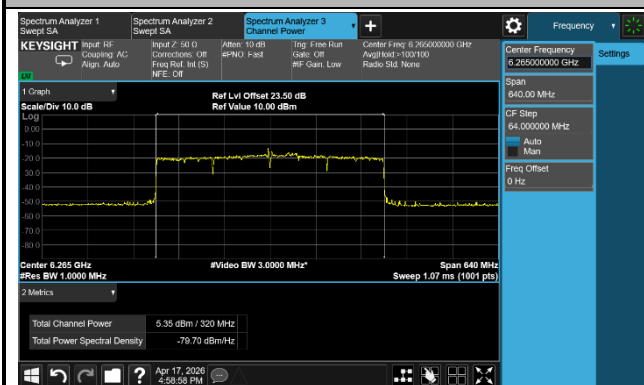


Ant 1

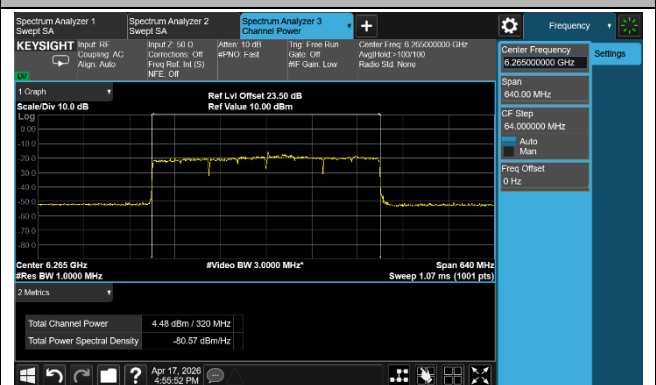


802.11be-EHT320 - Channel 63 (6265 MHz) Average Power (SD)

Ant 0

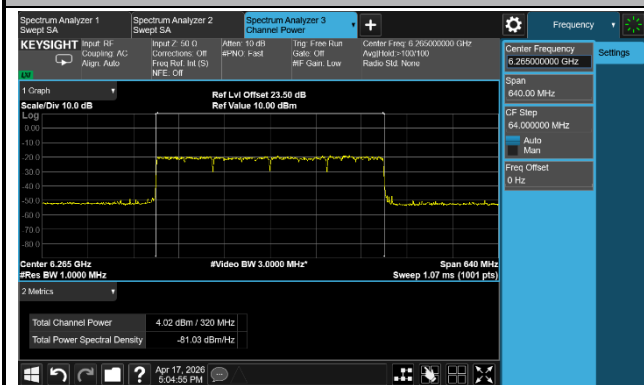


Ant 1

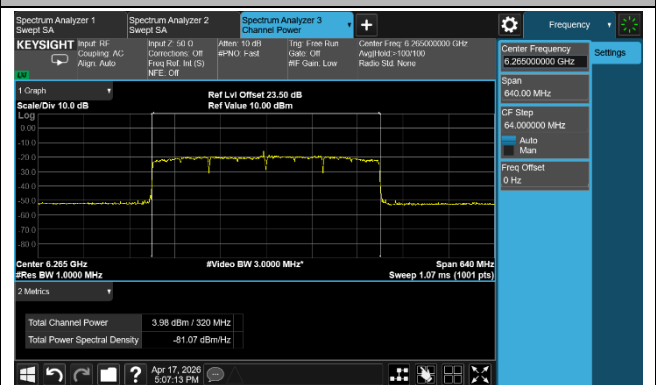


802.11be-EHT20 -Channel 53 (6215 MHz) Power Spectral Density (LPI)

Ant 0

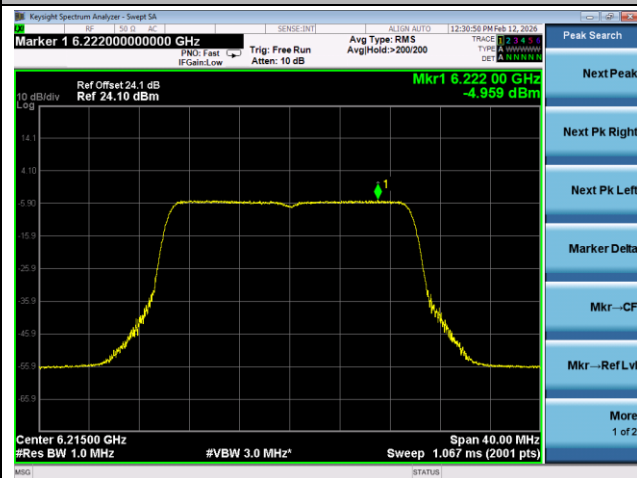


Ant 1

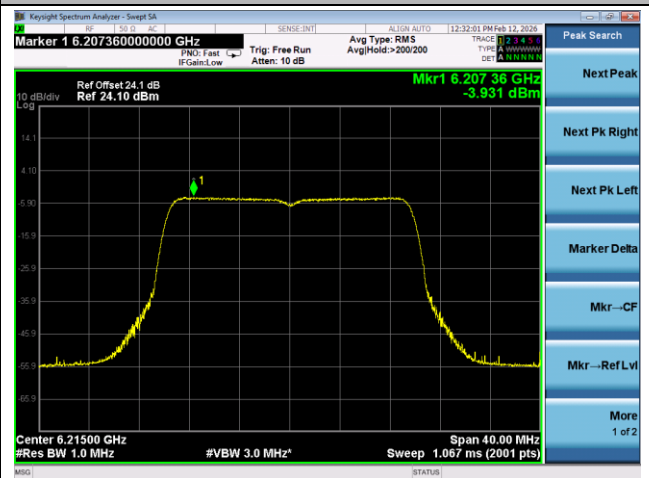


802.11be-EHT20 -Channel 149 (6695 MHz) Power Spectral Density (SD)

Ant 0

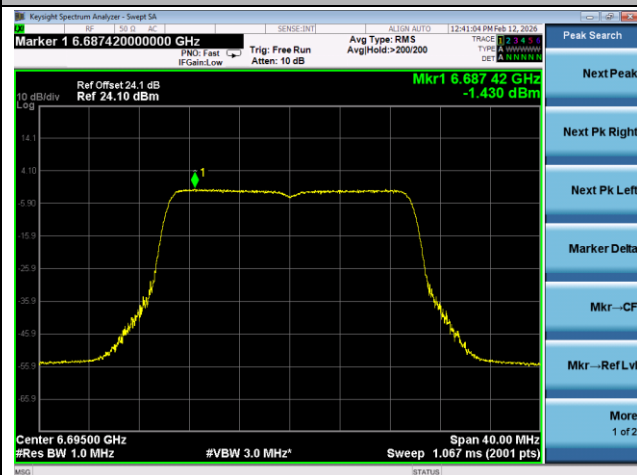


Ant 1

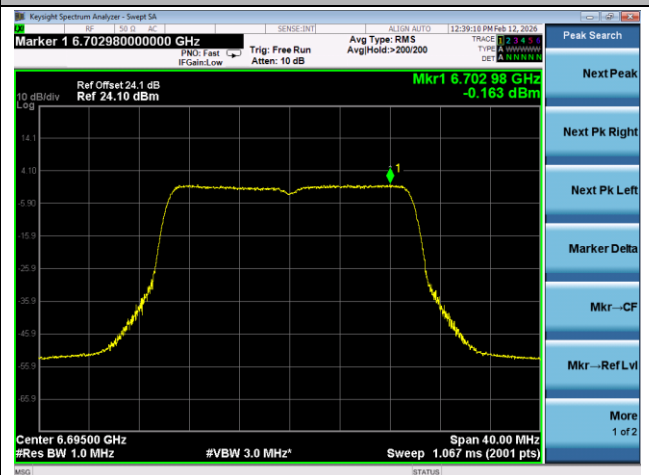


802.11be-EHT20 -Channel 37 (6135 MHz) Power Spectral Density (SD)

Ant 0

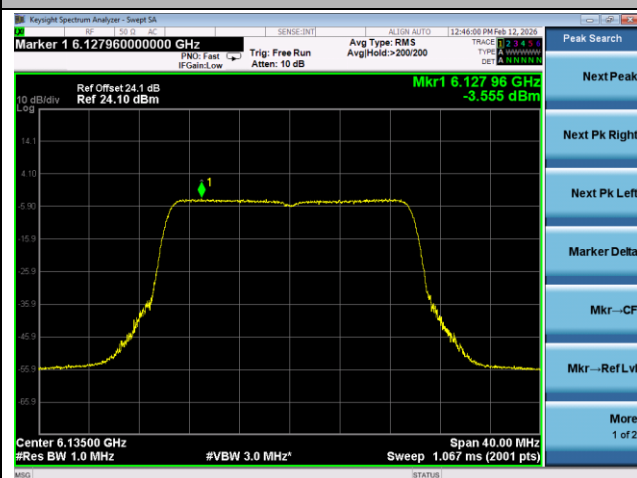


Ant 1

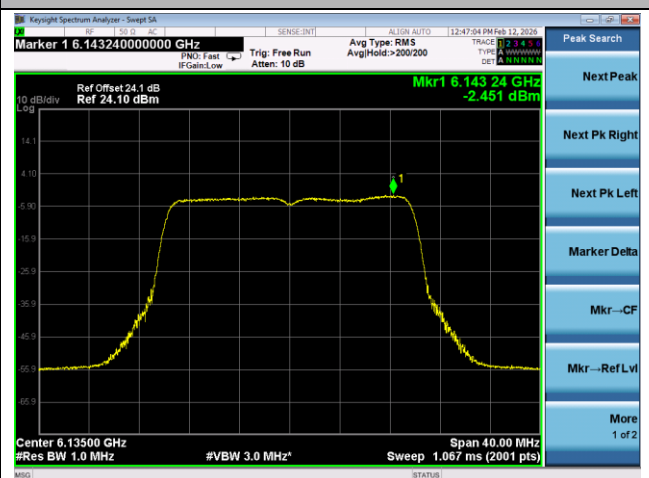


802.11be-EHT40 - Channel 35 (6125 MHz) Power Spectral Density (LPI)

Ant 0

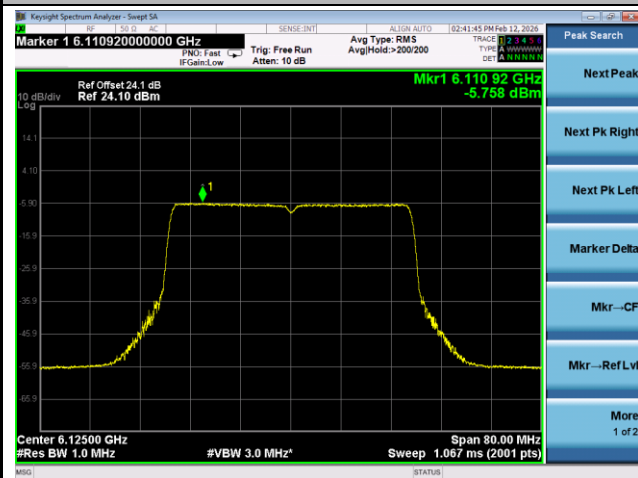


Ant 1

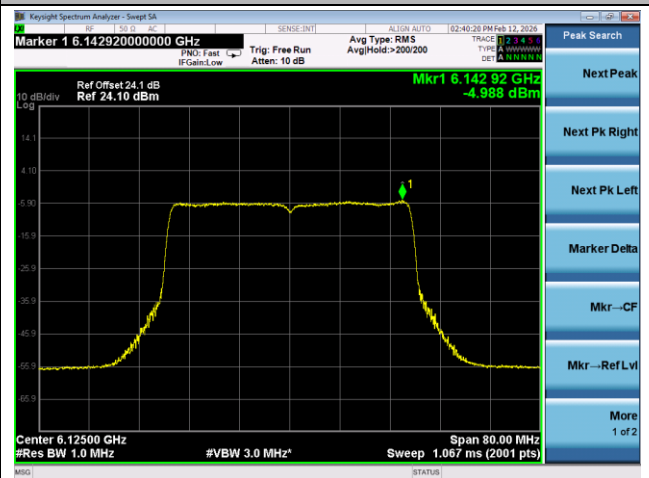


802.11be-EHT40 - Channel 83 (6365 MHz) Power Spectral Density (SD)

Ant 0

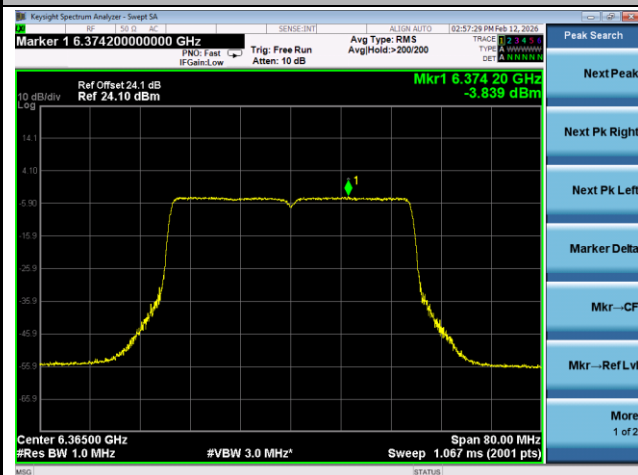


Ant 1

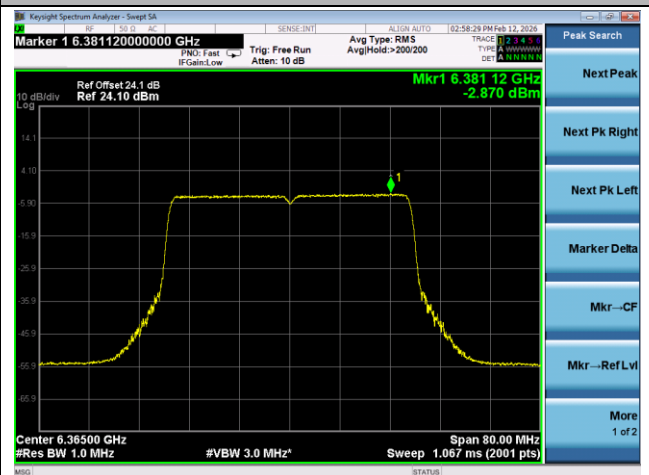


802.11be-EHT40 - Channel 67 (6285 MHz) Power Spectral Density (SD)

Ant 0

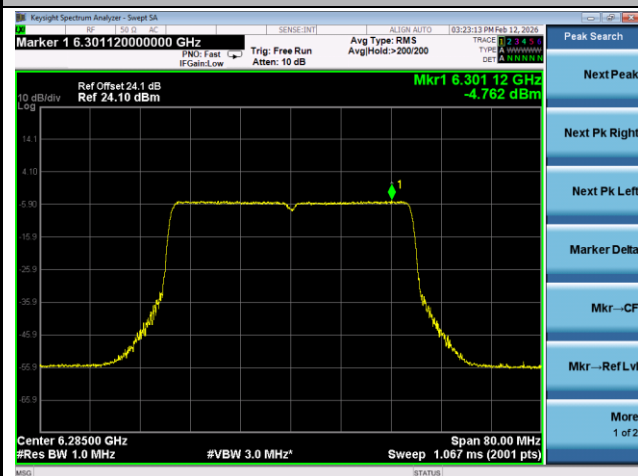


Ant 1

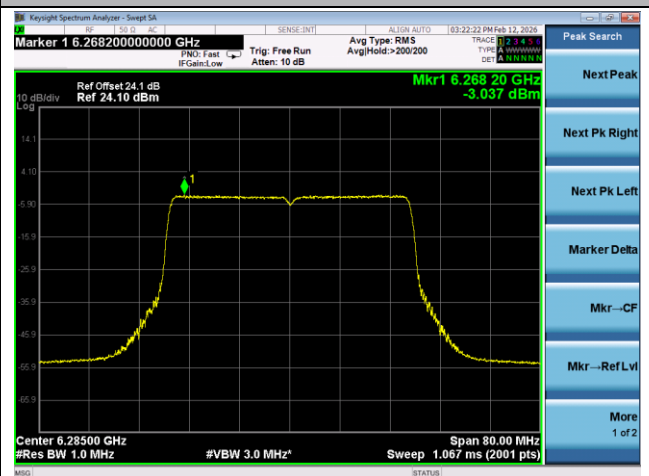


802.11be-EHT80 - Channel 39 (6145 MHz) Power Spectral Density (LPI)

Ant 0

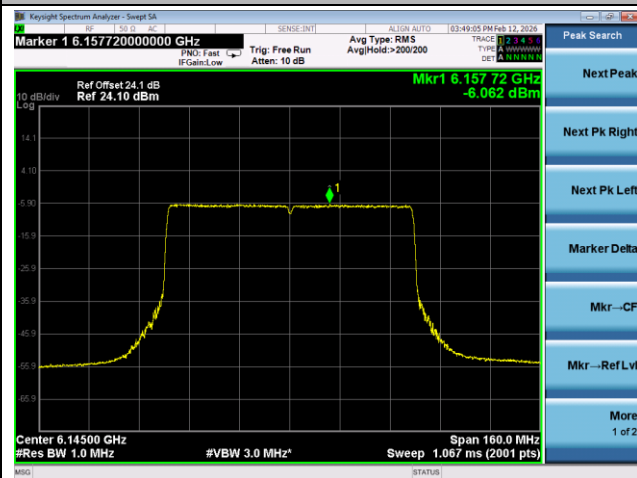


Ant 1

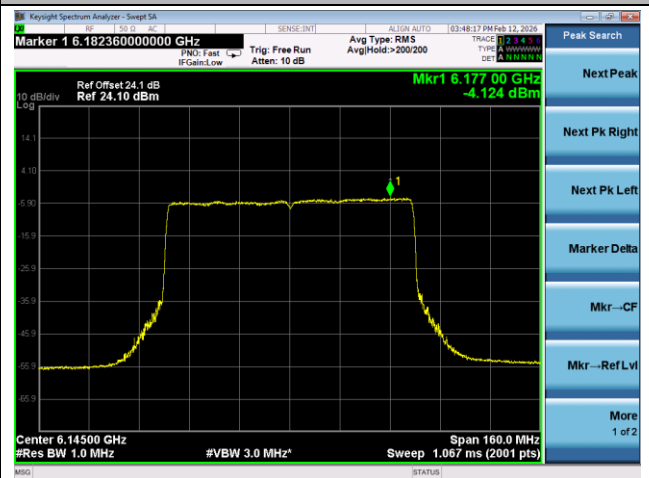

802.11be-EHT80 - Channel 135 (6625 MHz) Power Spectral Density (SD)

Ant 0

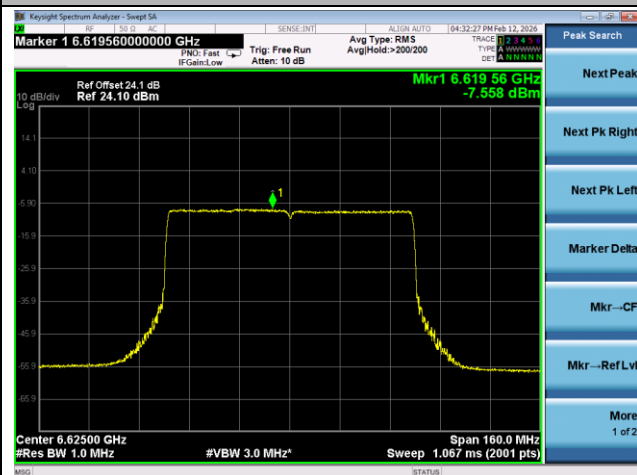


Ant 1



802.11be-EHT80 - Channel 87 (6385 MHz) Power Spectral Density (SD)

Ant 0

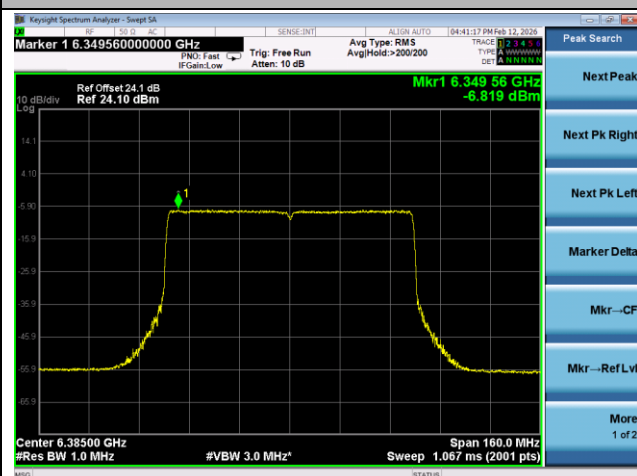

Ant 1

