

A.7 Radiated Spurious Emission Test Result

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	33
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11358.10	25.15	14.25	39.40	54.00	-14.60	Average	Horizontal
	11358.10	37.17	14.25	51.42	74.00	-22.58	Peak	Horizontal
*	13945.50	37.47	15.20	52.67	88.20	-35.53	Peak	Horizontal
*	14877.10	36.87	15.65	52.52	88.20	-35.68	Peak	Horizontal
	17996.60	19.25	24.13	43.38	54.00	-10.62	Average	Horizontal
	17996.60	36.16	24.13	60.29	74.00	-13.71	Peak	Horizontal
	10875.30	35.87	14.99	50.86	74.00	-23.14	Peak	Vertical
*	14183.50	37.22	15.59	52.81	88.20	-35.39	Peak	Vertical
*	14926.40	36.99	15.38	52.37	88.20	-35.83	Peak	Vertical
	17993.20	19.22	24.10	43.32	54.00	-10.68	Average	Vertical
	17993.20	36.12	24.10	60.22	74.00	-13.78	Peak	Vertical

Note 1: "*" is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	61
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10718.90	35.93	14.96	50.89	74.00	-23.11	Peak	Horizontal
*	14283.80	36.23	15.90	52.13	88.20	-36.07	Peak	Horizontal
*	14543.90	36.37	15.88	52.25	88.20	-35.95	Peak	Horizontal
	17966.00	19.43	23.42	42.85	54.00	-11.15	Average	Horizontal
	17966.00	35.87	23.42	59.29	74.00	-14.71	Peak	Horizontal
	11466.90	36.43	14.15	50.58	74.00	-23.42	Peak	Vertical
*	14333.10	36.67	15.85	52.52	88.20	-35.68	Peak	Vertical
*	14853.30	36.23	15.70	51.93	88.20	-36.27	Peak	Vertical
	17984.70	19.58	24.02	43.60	54.00	-10.40	Average	Vertical
	17984.70	35.57	24.02	59.59	74.00	-14.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	93
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10759.70	26.29	14.93	41.22	54.00	-12.78	Average	Horizontal
	10759.70	36.17	14.93	51.10	74.00	-22.90	Peak	Horizontal
*	13563.00	37.76	14.42	52.18	88.20	-36.02	Peak	Horizontal
*	14571.10	36.67	15.89	52.56	88.20	-35.64	Peak	Horizontal
	17983.00	20.14	24.00	44.14	54.00	-9.86	Average	Horizontal
	17983.00	35.83	24.00	59.83	74.00	-14.17	Peak	Horizontal
	10873.60	35.66	15.00	50.66	74.00	-23.34	Peak	Vertical
*	14200.50	36.14	15.63	51.77	88.20	-36.43	Peak	Vertical
*	14722.40	36.37	15.79	52.16	88.20	-36.04	Peak	Vertical
	17966.00	20.23	23.42	43.65	54.00	-10.35	Average	Vertical
	17966.00	36.06	23.42	59.48	74.00	-14.52	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	97
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10652.60	35.29	14.95	50.24	74.00	-23.76	Peak	Horizontal
*	13518.80	36.70	14.27	50.97	88.20	-37.23	Peak	Horizontal
*	14865.20	36.78	15.68	52.46	88.20	-35.74	Peak	Horizontal
	17983.00	20.18	24.00	44.18	54.00	-9.82	Average	Horizontal
	17983.00	34.98	24.00	58.98	74.00	-15.02	Peak	Horizontal
	10635.60	35.92	15.02	50.94	74.00	-23.06	Peak	Vertical
*	14380.70	36.21	16.13	52.34	88.20	-35.86	Peak	Vertical
*	14577.90	36.70	15.95	52.65	88.20	-35.55	Peak	Vertical
	17994.90	20.31	24.12	44.43	54.00	-9.57	Average	Vertical
	17994.90	35.09	24.12	59.21	74.00	-14.79	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	105
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10839.60	35.64	14.97	50.61	74.00	-23.39	Peak	Horizontal
*	14379.00	36.33	16.14	52.47	88.20	-35.73	Peak	Horizontal
*	14798.90	36.04	15.85	51.89	88.20	-36.31	Peak	Horizontal
	17959.20	19.56	23.34	42.90	54.00	-11.10	Average	Horizontal
	17959.20	36.66	23.34	60.00	74.00	-14.00	Peak	Horizontal
	11028.30	36.18	14.71	50.89	74.00	-23.11	Peak	Vertical
*	14387.50	35.86	16.09	51.95	88.20	-36.25	Peak	Vertical
*	14642.50	35.74	15.84	51.58	88.20	-36.62	Peak	Vertical
	17979.60	19.86	23.88	43.74	54.00	-10.26	Average	Vertical
	17979.60	35.07	23.88	58.95	74.00	-15.05	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	113
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11069.10	24.51	14.51	39.02	54.00	-14.98	Average	Horizontal
	11069.10	36.66	14.51	51.17	74.00	-22.83	Peak	Horizontal
*	14316.10	36.64	15.91	52.55	88.20	-35.65	Peak	Horizontal
*	14725.80	35.30	15.78	51.08	88.20	-37.12	Peak	Horizontal
	18000.00	20.15	24.16	44.31	54.00	-9.69	Average	Horizontal
	18000.00	34.32	24.16	58.48	74.00	-15.52	Peak	Horizontal
	11084.40	25.49	14.48	39.97	54.00	-14.03	Average	Vertical
	11084.40	36.97	14.48	51.45	74.00	-22.55	Peak	Vertical
*	14271.90	35.61	15.88	51.49	88.20	-36.71	Peak	Vertical
*	14802.30	35.72	15.85	51.57	88.20	-36.63	Peak	Vertical
	17983.00	20.34	24.00	44.34	54.00	-9.66	Average	Vertical
	17983.00	34.99	24.00	58.99	74.00	-15.01	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	117
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10945.00	35.56	14.97	50.53	74.00	-23.47	Peak	Horizontal
*	14414.70	36.21	15.88	52.09	88.20	-36.11	Peak	Horizontal
*	14666.30	35.40	15.91	51.31	88.20	-36.89	Peak	Horizontal
	17991.50	20.37	24.08	44.45	54.00	-9.55	Average	Horizontal
	17991.50	34.63	24.08	58.71	74.00	-15.29	Peak	Horizontal
	10628.80	35.82	15.01	50.83	74.00	-23.17	Peak	Vertical
*	14458.90	35.44	16.04	51.48	88.20	-36.72	Peak	Vertical
*	14950.20	36.66	15.39	52.05	88.20	-36.15	Peak	Vertical
	17981.30	19.84	23.94	43.78	54.00	-10.22	Average	Vertical
	17981.30	34.74	23.94	58.68	74.00	-15.32	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	149
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11033.40	35.80	14.68	50.48	74.00	-23.52	Peak	Horizontal
*	14348.40	35.33	15.94	51.27	88.20	-36.93	Peak	Horizontal
*	14644.20	36.05	15.82	51.87	88.20	-36.33	Peak	Horizontal
	17998.30	19.59	24.15	43.74	54.00	-10.26	Average	Horizontal
	17998.30	34.89	24.15	59.04	74.00	-14.96	Peak	Horizontal
	10994.30	25.47	14.88	40.35	54.00	-13.65	Average	Vertical
	10994.30	36.36	14.88	51.24	74.00	-22.76	Peak	Vertical
*	14202.20	36.20	15.63	51.83	88.20	-36.37	Peak	Vertical
*	14620.40	35.87	15.82	51.69	88.20	-36.51	Peak	Vertical
	17977.90	19.68	23.82	43.50	54.00	-10.50	Average	Vertical
	17977.90	35.43	23.82	59.25	74.00	-14.75	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	181
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11473.70	36.24	14.16	50.40	74.00	-23.60	Peak	Horizontal
*	14307.60	35.76	15.87	51.63	88.20	-36.57	Peak	Horizontal
*	14669.70	35.36	15.94	51.30	88.20	-36.90	Peak	Horizontal
	17981.30	20.18	23.94	44.12	54.00	-9.88	Average	Horizontal
	17981.30	34.86	23.94	58.80	74.00	-15.20	Peak	Horizontal
	10744.40	35.33	14.91	50.24	74.00	-23.76	Peak	Vertical
*	14455.50	35.87	16.06	51.93	88.20	-36.27	Peak	Vertical
*	14758.10	35.93	15.82	51.75	88.20	-36.45	Peak	Vertical
	17981.30	19.62	23.94	43.56	54.00	-10.44	Average	Vertical
	17981.30	34.30	23.94	58.24	74.00	-15.76	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	185
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11439.70	36.47	14.30	50.77	74.00	-23.23	Peak	Horizontal
*	14302.50	36.13	15.84	51.97	88.20	-36.23	Peak	Horizontal
*	14821.00	35.40	15.69	51.09	88.20	-37.11	Peak	Horizontal
	17996.60	20.41	24.13	44.54	54.00	-9.46	Average	Horizontal
	17996.60	34.83	24.13	58.96	74.00	-15.04	Peak	Horizontal
	11495.80	36.72	14.12	50.84	74.00	-23.16	Peak	Vertical
*	14423.20	35.87	15.79	51.66	88.20	-36.54	Peak	Vertical
*	14800.60	35.75	15.85	51.60	88.20	-36.60	Peak	Vertical
	17952.40	20.18	23.27	43.45	54.00	-10.55	Average	Vertical
	17952.40	35.74	23.27	59.01	74.00	-14.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	189
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11147.30	36.43	14.31	50.74	74.00	-23.26	Peak	Horizontal
*	14277.00	35.59	15.95	51.54	88.20	-36.66	Peak	Horizontal
*	14853.30	36.11	15.70	51.81	88.20	-36.39	Peak	Horizontal
	17947.30	20.52	23.22	43.74	54.00	-10.26	Average	Horizontal
	17947.30	36.42	23.22	59.64	74.00	-14.36	Peak	Horizontal
	11290.10	25.48	14.26	39.74	54.00	-14.26	Average	Vertical
	11290.10	36.86	14.26	51.12	74.00	-22.88	Peak	Vertical
*	14462.30	36.62	16.01	52.63	88.20	-35.57	Peak	Vertical
*	14685.00	35.61	16.03	51.64	88.20	-36.56	Peak	Vertical
	17960.90	20.35	23.36	43.71	54.00	-10.29	Average	Vertical
	17960.90	34.97	23.36	58.33	74.00	-15.67	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	209
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11079.30	35.84	14.50	50.34	74.00	-23.66	Peak	Horizontal
*	14433.40	35.86	15.92	51.78	88.20	-36.42	Peak	Horizontal
*	14914.50	35.80	15.49	51.29	88.20	-36.91	Peak	Horizontal
	17989.80	20.29	24.07	44.36	54.00	-9.64	Average	Horizontal
	17989.80	34.53	24.07	58.60	74.00	-15.40	Peak	Horizontal
	10899.10	35.46	14.90	50.36	74.00	-23.64	Peak	Vertical
*	14219.20	35.96	15.48	51.44	88.20	-36.76	Peak	Vertical
*	14890.70	35.30	15.67	50.97	88.20	-37.23	Peak	Vertical
	17971.10	20.16	23.59	43.75	54.00	-10.25	Average	Vertical
	17971.10	34.82	23.59	58.41	74.00	-15.59	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT20 (Nss = 2)	Test Channel	229
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10905.90	35.28	14.89	50.17	74.00	-23.83	Peak	Horizontal
*	14300.80	35.06	15.83	50.89	88.20	-37.31	Peak	Horizontal
*	14554.10	36.47	15.87	52.34	88.20	-35.86	Peak	Horizontal
	17960.90	20.22	23.36	43.58	54.00	-10.42	Average	Horizontal
	17960.90	34.87	23.36	58.23	74.00	-15.77	Peak	Horizontal
	11264.60	36.18	14.12	50.30	74.00	-23.70	Peak	Vertical
*	13948.90	36.59	15.24	51.83	88.20	-36.37	Peak	Vertical
*	14710.50	34.74	15.86	50.60	88.20	-37.60	Peak	Vertical
	17994.90	20.53	24.12	44.65	54.00	-9.35	Average	Vertical
	17994.90	34.75	24.12	58.87	74.00	-15.13	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	35
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10887.20	35.79	14.97	50.76	74.00	-23.24	Peak	Horizontal
*	14239.60	36.54	15.67	52.21	88.20	-35.99	Peak	Horizontal
*	14853.30	35.80	15.70	51.50	88.20	-36.70	Peak	Horizontal
	17996.60	19.86	24.13	43.99	54.00	-10.01	Average	Horizontal
	17996.60	35.01	24.13	59.14	74.00	-14.86	Peak	Horizontal
	10989.20	35.64	14.90	50.54	74.00	-23.46	Peak	Vertical
*	14202.20	35.96	15.63	51.59	88.20	-36.61	Peak	Vertical
*	14737.70	36.09	15.76	51.85	88.20	-36.35	Peak	Vertical
	17959.20	20.51	23.34	43.85	54.00	-10.15	Average	Vertical
	17959.20	35.78	23.34	59.12	74.00	-14.88	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	59
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11710.00	36.61	13.47	50.08	74.00	-23.92	Peak	Horizontal
*	13620.80	37.42	14.40	51.82	88.20	-36.38	Peak	Horizontal
*	14770.00	35.74	15.89	51.63	88.20	-36.57	Peak	Horizontal
	17887.80	20.35	22.87	43.22	54.00	-10.78	Average	Horizontal
	17887.80	34.67	22.87	57.54	74.00	-16.46	Peak	Horizontal
	11313.90	36.60	14.10	50.70	74.00	-23.30	Peak	Vertical
*	14334.80	35.33	15.85	51.18	88.20	-37.02	Peak	Vertical
*	14851.60	35.56	15.70	51.26	88.20	-36.94	Peak	Vertical
	17984.70	20.26	24.02	44.28	54.00	-9.72	Average	Vertical
	17984.70	33.88	24.02	57.90	74.00	-16.10	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	91
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11483.90	36.07	14.15	50.22	74.00	-23.78	Peak	Horizontal
*	14387.50	35.71	16.09	51.80	88.20	-36.40	Peak	Horizontal
*	14593.20	35.87	15.98	51.85	88.20	-36.35	Peak	Horizontal
	17989.80	19.68	24.07	43.75	54.00	-10.25	Average	Horizontal
	17989.80	34.61	24.07	58.68	74.00	-15.32	Peak	Horizontal
	11553.60	36.66	13.93	50.59	74.00	-23.41	Peak	Vertical
*	14394.30	35.16	16.02	51.18	88.20	-37.02	Peak	Vertical
*	14785.30	35.32	15.87	51.19	88.20	-37.01	Peak	Vertical
	17986.40	20.26	24.03	44.29	54.00	-9.71	Average	Vertical
	17986.40	34.12	24.03	58.15	74.00	-15.85	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	99
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10849.80	35.53	15.02	50.55	74.00	-23.45	Peak	Horizontal
*	14052.60	35.92	15.33	51.25	88.20	-36.95	Peak	Horizontal
*	14639.10	35.41	15.87	51.28	88.20	-36.92	Peak	Horizontal
	17977.90	20.61	23.82	44.43	54.00	-9.57	Average	Horizontal
	17977.90	35.10	23.82	58.92	74.00	-15.08	Peak	Horizontal
	11225.50	36.33	14.24	50.57	74.00	-23.43	Peak	Vertical
*	14154.60	35.77	15.33	51.10	88.20	-37.10	Peak	Vertical
*	14690.10	34.94	16.06	51.00	88.20	-37.20	Peak	Vertical
	17981.30	19.86	23.94	43.80	54.00	-10.20	Average	Vertical
	17981.30	35.14	23.94	59.08	74.00	-14.92	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	107
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10735.90	35.57	14.93	50.50	74.00	-23.50	Peak	Horizontal
*	14430.00	35.71	15.84	51.55	88.20	-36.65	Peak	Horizontal
*	14865.20	36.16	15.68	51.84	88.20	-36.36	Peak	Horizontal
	18000.00	19.76	24.16	43.92	54.00	-10.08	Average	Horizontal
	18000.00	34.41	24.16	58.57	74.00	-15.43	Peak	Horizontal
	10985.80	35.43	14.91	50.34	74.00	-23.66	Peak	Vertical
*	14294.00	35.39	15.81	51.20	88.20	-37.00	Peak	Vertical
*	14666.30	34.94	15.91	50.85	88.20	-37.35	Peak	Vertical
	17981.30	20.48	23.94	44.42	54.00	-9.58	Average	Vertical
	17981.30	34.95	23.94	58.89	74.00	-15.11	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	115
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11058.90	26.51	14.55	41.06	54.00	-12.94	Average	Horizontal
	11058.90	36.50	14.55	51.05	74.00	-22.95	Peak	Horizontal
*	14156.30	35.82	15.36	51.18	88.20	-37.02	Peak	Horizontal
*	14720.70	35.85	15.79	51.64	88.20	-36.56	Peak	Horizontal
	17945.60	20.29	23.21	43.50	54.00	-10.50	Average	Horizontal
	17945.60	35.97	23.21	59.18	74.00	-14.82	Peak	Horizontal
	11336.00	35.40	14.27	49.67	74.00	-24.33	Peak	Vertical
*	14280.40	35.52	15.93	51.45	88.20	-36.75	Peak	Vertical
*	14712.20	35.80	15.84	51.64	88.20	-36.56	Peak	Vertical
	17989.80	20.52	24.07	44.59	54.00	-9.41	Average	Vertical
	17989.80	34.91	24.07	58.98	74.00	-15.02	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	123
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10837.90	35.84	14.95	50.79	74.00	-23.21	Peak	Horizontal
*	14523.50	35.71	15.83	51.54	88.20	-36.66	Peak	Horizontal
*	14821.00	35.69	15.69	51.38	88.20	-36.82	Peak	Horizontal
	17988.10	20.19	24.05	44.24	54.00	-9.76	Average	Horizontal
	17988.10	35.00	24.05	59.05	74.00	-14.95	Peak	Horizontal
	12036.40	36.47	13.20	49.67	74.00	-24.33	Peak	Vertical
*	14370.50	35.21	16.08	51.29	88.20	-36.91	Peak	Vertical
*	14628.90	35.91	15.85	51.76	88.20	-36.44	Peak	Vertical
	17906.50	19.94	22.90	42.84	54.00	-11.16	Average	Vertical
	17906.50	35.99	22.90	58.89	74.00	-15.11	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	147
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11030.00	35.49	14.70	50.19	74.00	-23.81	Peak	Horizontal
*	14154.60	36.10	15.33	51.43	88.20	-36.77	Peak	Horizontal
*	14873.70	35.24	15.64	50.88	88.20	-37.32	Peak	Horizontal
	18000.00	20.27	24.16	44.43	54.00	-9.57	Average	Horizontal
	18000.00	34.35	24.16	58.51	74.00	-15.49	Peak	Horizontal
	10890.60	35.26	14.96	50.22	74.00	-23.78	Peak	Vertical
*	14464.00	35.46	15.99	51.45	88.20	-36.75	Peak	Vertical
*	14906.00	35.59	15.57	51.16	88.20	-37.04	Peak	Vertical
	17988.10	20.18	24.05	44.23	54.00	-9.77	Average	Vertical
	17988.10	33.92	24.05	57.97	74.00	-16.03	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	179
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11419.30	35.35	14.34	49.69	74.00	-24.31	Peak	Horizontal
*	14411.30	36.01	15.91	51.92	88.20	-36.28	Peak	Horizontal
*	14904.30	34.89	15.58	50.47	88.20	-37.73	Peak	Horizontal
	17904.80	20.38	22.92	43.30	54.00	-10.70	Average	Horizontal
	17904.80	35.75	22.92	58.67	74.00	-15.33	Peak	Horizontal
	11291.80	35.88	14.26	50.14	74.00	-23.86	Peak	Vertical
*	14441.90	34.94	16.10	51.04	88.20	-37.16	Peak	Vertical
*	14744.50	35.22	15.76	50.98	88.20	-37.22	Peak	Vertical
	17957.50	19.67	23.33	43.00	54.00	-11.00	Average	Vertical
	17957.50	35.37	23.33	58.70	74.00	-15.30	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	187
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11910.60	36.54	13.32	49.86	74.00	-24.14	Peak	Horizontal
*	14375.60	35.44	16.12	51.56	88.20	-36.64	Peak	Horizontal
*	15193.30	35.91	14.63	50.54	88.20	-37.66	Peak	Horizontal
	17984.70	19.79	24.02	43.81	54.00	-10.19	Average	Horizontal
	17984.70	33.83	24.02	57.85	74.00	-16.15	Peak	Horizontal
	10955.20	35.40	14.94	50.34	74.00	-23.66	Peak	Vertical
*	14350.10	36.19	15.95	52.14	88.20	-36.06	Peak	Vertical
*	14787.00	36.70	15.87	52.57	88.20	-35.63	Peak	Vertical
	17988.10	20.59	24.05	44.64	54.00	-9.36	Average	Vertical
	17988.10	34.44	24.05	58.49	74.00	-15.51	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	195
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11072.50	35.90	14.50	50.40	74.00	-23.60	Peak	Horizontal
*	14516.70	35.56	15.77	51.33	88.20	-36.87	Peak	Horizontal
*	14887.30	35.43	15.66	51.09	88.20	-37.11	Peak	Horizontal
	18000.00	19.69	24.16	43.85	54.00	-10.15	Average	Horizontal
	18000.00	34.98	24.16	59.14	74.00	-14.86	Peak	Horizontal
	10984.10	35.73	14.91	50.64	74.00	-23.36	Peak	Vertical
*	14460.60	35.72	16.03	51.75	88.20	-36.45	Peak	Vertical
*	14724.10	35.91	15.79	51.70	88.20	-36.50	Peak	Vertical
	17984.70	20.37	24.02	44.39	54.00	-9.61	Average	Vertical
	17984.70	34.57	24.02	58.59	74.00	-15.41	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	211
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10807.30	35.98	14.96	50.94	74.00	-23.06	Peak	Horizontal
*	14295.70	35.88	15.81	51.69	88.20	-36.51	Peak	Horizontal
*	14628.90	35.31	15.85	51.16	88.20	-37.04	Peak	Horizontal
	17898.00	20.47	22.96	43.43	54.00	-10.57	Average	Horizontal
	17898.00	35.03	22.96	57.99	74.00	-16.01	Peak	Horizontal
	11276.50	35.84	14.20	50.04	74.00	-23.96	Peak	Vertical
*	14467.40	37.17	15.98	53.15	88.20	-35.05	Peak	Vertical
*	14792.10	35.52	15.86	51.38	88.20	-36.82	Peak	Vertical
	17977.90	20.38	23.82	44.20	54.00	-9.80	Average	Vertical
	17977.90	34.28	23.82	58.10	74.00	-15.90	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT40 (Nss = 2)	Test Channel	227
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11106.50	36.13	14.42	50.55	74.00	-23.45	Peak	Horizontal
*	14416.40	36.25	15.86	52.11	88.20	-36.09	Peak	Horizontal
*	14763.20	35.05	15.87	50.92	88.20	-37.28	Peak	Horizontal
	17983.00	20.34	24.00	44.34	54.00	-9.66	Average	Horizontal
	17983.00	34.77	24.00	58.77	74.00	-15.23	Peak	Horizontal
	11568.90	36.14	13.91	50.05	74.00	-23.95	Peak	Vertical
*	14328.00	35.31	15.86	51.17	88.20	-37.03	Peak	Vertical
*	14775.10	35.68	15.89	51.57	88.20	-36.63	Peak	Vertical
	17928.60	20.41	23.03	43.44	54.00	-10.56	Average	Vertical
	17928.60	34.86	23.03	57.89	74.00	-16.11	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	39
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11482.20	36.50	14.16	50.66	74.00	-23.34	Peak	Horizontal
*	14283.80	35.64	15.90	51.54	88.20	-36.66	Peak	Horizontal
*	14809.10	34.93	15.80	50.73	88.20	-37.47	Peak	Horizontal
	17954.10	19.76	23.29	43.05	54.00	-10.95	Average	Horizontal
	17954.10	35.02	23.29	58.31	74.00	-15.69	Peak	Horizontal
	11121.80	35.79	14.40	50.19	74.00	-23.81	Peak	Vertical
*	14314.40	35.86	15.91	51.77	88.20	-36.43	Peak	Vertical
*	14821.00	35.35	15.69	51.04	88.20	-37.16	Peak	Vertical
	17984.70	19.69	24.02	43.71	54.00	-10.29	Average	Vertical
	17984.70	34.63	24.02	58.65	74.00	-15.35	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	55
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11237.40	36.54	14.20	50.74	74.00	-23.26	Peak	Horizontal
*	14300.80	35.79	15.83	51.62	88.20	-36.58	Peak	Horizontal
*	14708.80	35.38	15.89	51.27	88.20	-36.93	Peak	Horizontal
	17964.30	20.72	23.40	44.12	54.00	-9.88	Average	Horizontal
	17964.30	34.49	23.40	57.89	74.00	-16.11	Peak	Horizontal
	11069.10	36.41	14.51	50.92	74.00	-23.08	Peak	Vertical
*	14348.40	35.33	15.94	51.27	88.20	-36.93	Peak	Vertical
*	14902.60	36.64	15.59	52.23	88.20	-35.97	Peak	Vertical
	17998.30	20.18	24.15	44.33	54.00	-9.67	Average	Vertical
	17998.30	34.41	24.15	58.56	74.00	-15.44	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	87
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10984.10	35.47	14.91	50.38	74.00	-23.62	Peak	Horizontal
*	14382.40	36.28	16.12	52.40	88.20	-35.80	Peak	Horizontal
*	14685.00	35.31	16.03	51.34	88.20	-36.86	Peak	Horizontal
	17976.20	19.89	23.77	43.66	54.00	-10.34	Average	Horizontal
	17976.20	35.57	23.77	59.34	74.00	-14.66	Peak	Horizontal
	11504.30	36.00	14.14	50.14	74.00	-23.86	Peak	Vertical
*	14331.40	35.46	15.85	51.31	88.20	-36.89	Peak	Vertical
*	14778.50	34.90	15.89	50.79	88.20	-37.41	Peak	Vertical
	17935.40	20.44	23.10	43.54	54.00	-10.46	Average	Vertical
	17935.40	35.22	23.10	58.32	74.00	-15.68	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	103
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10839.60	35.26	14.97	50.23	74.00	-23.77	Peak	Horizontal
*	13986.30	35.64	15.29	50.93	88.20	-37.27	Peak	Horizontal
*	14583.00	35.57	15.99	51.56	88.20	-36.64	Peak	Horizontal
	17955.80	20.47	23.31	43.78	54.00	-10.22	Average	Horizontal
	17955.80	35.04	23.31	58.35	74.00	-15.65	Peak	Horizontal
	10839.60	35.01	14.97	49.98	74.00	-24.02	Peak	Vertical
*	14365.40	36.02	16.04	52.06	88.20	-36.14	Peak	Vertical
*	14588.10	34.98	16.00	50.98	88.20	-37.22	Peak	Vertical
	17943.90	20.13	23.19	43.32	54.00	-10.68	Average	Vertical
	17943.90	34.93	23.19	58.12	74.00	-15.88	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	119
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11303.70	35.52	14.19	49.71	74.00	-24.29	Peak	Horizontal
*	14351.80	35.89	15.97	51.86	88.20	-36.34	Peak	Horizontal
*	14634.00	36.08	15.88	51.96	88.20	-36.24	Peak	Horizontal
	17969.40	20.33	23.54	43.87	54.00	-10.13	Average	Horizontal
	17969.40	35.64	23.54	59.18	74.00	-14.82	Peak	Horizontal
	11534.90	36.37	14.05	50.42	74.00	-23.58	Peak	Vertical
*	14348.40	35.87	15.94	51.81	88.20	-36.39	Peak	Vertical
*	14637.40	35.55	15.87	51.42	88.20	-36.78	Peak	Vertical
	17988.10	20.11	24.05	44.16	54.00	-9.84	Average	Vertical
	17988.10	34.02	24.05	58.07	74.00	-15.93	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	135
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11585.90	36.00	13.88	49.88	74.00	-24.12	Peak	Horizontal
*	14384.10	34.95	16.11	51.06	88.20	-37.14	Peak	Horizontal
*	14691.80	34.93	16.06	50.99	88.20	-37.21	Peak	Horizontal
	17969.40	20.28	23.54	43.82	54.00	-10.18	Average	Horizontal
	17969.40	34.99	23.54	58.53	74.00	-15.47	Peak	Horizontal
	11052.10	35.74	14.59	50.33	74.00	-23.67	Peak	Vertical
*	13753.40	35.81	14.70	50.51	88.20	-37.69	Peak	Vertical
*	14744.50	35.72	15.76	51.48	88.20	-36.72	Peak	Vertical
	18000.00	19.97	24.16	44.13	54.00	-9.87	Average	Vertical
	18000.00	34.94	24.16	59.10	74.00	-14.90	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	151
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11257.80	36.14	14.11	50.25	74.00	-23.75	Peak	Horizontal
*	13634.40	36.42	14.50	50.92	88.20	-37.28	Peak	Horizontal
*	14673.10	35.45	15.95	51.40	88.20	-36.80	Peak	Horizontal
	18000.00	20.23	24.16	44.39	54.00	-9.61	Average	Horizontal
	18000.00	33.86	24.16	58.02	74.00	-15.98	Peak	Horizontal
	11500.90	35.91	14.14	50.05	74.00	-23.95	Peak	Vertical
*	14188.60	35.08	15.61	50.69	88.20	-37.51	Peak	Vertical
*	14567.70	35.55	15.87	51.42	88.20	-36.78	Peak	Vertical
	17979.60	20.55	23.88	44.43	54.00	-9.57	Average	Vertical
	17979.60	35.54	23.88	59.42	74.00	-14.58	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	167
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10883.80	35.54	14.99	50.53	74.00	-23.47	Peak	Horizontal
*	14033.90	35.50	15.35	50.85	88.20	-37.35	Peak	Horizontal
*	14392.60	35.07	16.04	51.11	88.20	-37.09	Peak	Horizontal
	17991.50	20.38	24.08	44.46	54.00	-9.54	Average	Horizontal
	17991.50	35.19	24.08	59.27	74.00	-14.73	Peak	Horizontal
	11115.00	35.79	14.43	50.22	74.00	-23.78	Peak	Vertical
*	14368.80	35.27	16.07	51.34	88.20	-36.86	Peak	Vertical
*	14666.30	36.06	15.91	51.97	88.20	-36.23	Peak	Vertical
	17972.80	19.67	23.65	43.32	54.00	-10.68	Average	Vertical
	17972.80	34.87	23.65	58.52	74.00	-15.48	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	183
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11478.80	35.50	14.17	49.67	74.00	-24.33	Peak	Horizontal
*	14186.90	35.48	15.60	51.08	88.20	-37.12	Peak	Horizontal
*	14571.10	35.86	15.89	51.75	88.20	-36.45	Peak	Horizontal
	17976.20	20.36	23.77	44.13	54.00	-9.87	Average	Horizontal
	17976.20	33.95	23.77	57.72	74.00	-16.28	Peak	Horizontal
	10853.20	25.84	15.02	40.86	54.00	-13.14	Average	Vertical
	10853.20	36.28	15.02	51.30	74.00	-22.70	Peak	Vertical
*	13947.20	35.94	15.22	51.16	88.20	-37.04	Peak	Vertical
*	14756.40	35.67	15.81	51.48	88.20	-36.72	Peak	Vertical
	17991.50	20.33	24.08	44.41	54.00	-9.59	Average	Vertical
	17991.50	34.42	24.08	58.50	74.00	-15.50	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	199
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11021.50	35.22	14.75	49.97	74.00	-24.03	Peak	Horizontal
*	14380.70	34.65	16.13	50.78	88.20	-37.42	Peak	Horizontal
*	14759.80	35.61	15.84	51.45	88.20	-36.75	Peak	Horizontal
	17994.90	19.94	24.12	44.06	54.00	-9.94	Average	Horizontal
	17994.90	34.07	24.12	58.19	74.00	-15.81	Peak	Horizontal
	11482.20	36.08	14.16	50.24	74.00	-23.76	Peak	Vertical
*	14402.80	35.77	15.96	51.73	88.20	-36.47	Peak	Vertical
*	14729.20	35.61	15.77	51.38	88.20	-36.82	Peak	Vertical
	17891.20	19.84	22.91	42.75	54.00	-11.25	Average	Vertical
	17891.20	36.67	22.91	59.58	74.00	-14.42	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT80 (Nss = 2)	Test Channel	215
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11069.10	35.76	14.51	50.27	74.00	-23.73	Peak	Horizontal
*	14287.20	34.98	15.87	50.85	88.20	-37.35	Peak	Horizontal
*	14868.60	35.83	15.67	51.50	88.20	-36.70	Peak	Horizontal
	17981.30	20.34	23.94	44.28	54.00	-9.72	Average	Horizontal
	17981.30	34.21	23.94	58.15	74.00	-15.85	Peak	Horizontal
	11448.20	35.69	14.24	49.93	74.00	-24.07	Peak	Vertical
*	14338.20	35.71	15.87	51.58	88.20	-36.62	Peak	Vertical
*	14722.40	35.13	15.79	50.92	88.20	-37.28	Peak	Vertical
	17952.40	20.18	23.27	43.45	54.00	-10.55	Average	Vertical
	17952.40	34.93	23.27	58.20	74.00	-15.80	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT160 (Nss = 2)	Test Channel	47
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11217.00	35.63	14.22	49.85	74.00	-24.15	Peak	Horizontal
*	14443.60	35.23	16.11	51.34	88.20	-36.86	Peak	Horizontal
*	14899.20	35.59	15.61	51.20	88.20	-37.00	Peak	Horizontal
	17955.80	20.59	23.31	43.90	54.00	-10.10	Average	Horizontal
	17955.80	35.70	23.31	59.01	74.00	-14.99	Peak	Horizontal
	11043.60	35.53	14.63	50.16	74.00	-23.84	Peak	Vertical
*	14377.30	34.94	16.13	51.07	88.20	-37.13	Peak	Vertical
*	14756.40	36.53	15.81	52.34	88.20	-35.86	Peak	Vertical
	17976.20	19.86	23.77	43.63	54.00	-10.37	Average	Vertical
	17976.20	34.87	23.77	58.64	74.00	-15.36	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT160 (Nss = 2)	Test Channel	79
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	11519.60	36.13	14.05	50.18	74.00	-23.82	Peak	Horizontal
*	13969.30	36.39	15.33	51.72	88.20	-36.48	Peak	Horizontal
*	14923.00	36.32	15.41	51.73	88.20	-36.47	Peak	Horizontal
	17993.20	20.35	24.10	44.45	54.00	-9.55	Average	Horizontal
	17993.20	34.45	24.10	58.55	74.00	-15.45	Peak	Horizontal
	11470.30	36.06	14.15	50.21	74.00	-23.79	Peak	Vertical
*	14146.10	36.88	15.20	52.08	88.20	-36.12	Peak	Vertical
*	14860.10	35.08	15.70	50.78	88.20	-37.42	Peak	Vertical
	17986.40	19.68	24.03	43.71	54.00	-10.29	Average	Vertical
	17986.40	34.39	24.03	58.42	74.00	-15.58	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT160 (Nss = 2)	Test Channel	111
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10875.30	35.33	14.99	50.32	74.00	-23.68	Peak	Horizontal
*	14195.40	35.57	15.63	51.20	88.20	-37.00	Peak	Horizontal
*	14640.80	35.55	15.85	51.40	88.20	-36.80	Peak	Horizontal
	17974.50	20.47	23.71	44.18	54.00	-9.82	Average	Horizontal
	17974.50	35.36	23.71	59.07	74.00	-14.93	Peak	Horizontal
	10958.60	35.20	14.94	50.14	74.00	-23.86	Peak	Vertical
*	14401.10	36.30	15.97	52.27	88.20	-35.93	Peak	Vertical
*	14753.00	35.62	15.78	51.40	88.20	-36.80	Peak	Vertical
	17998.30	20.53	24.15	44.68	54.00	-9.32	Average	Vertical
	17998.30	33.99	24.15	58.14	74.00	-15.86	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT160 (Nss = 2)	Test Channel	143
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10776.70	35.15	14.94	50.09	74.00	-23.91	Peak	Horizontal
*	14345.00	36.58	15.91	52.49	88.20	-35.71	Peak	Horizontal
*	14790.40	35.59	15.86	51.45	88.20	-36.75	Peak	Horizontal
	18000.00	19.47	24.16	43.63	54.00	-10.37	Average	Horizontal
	18000.00	34.92	24.16	59.08	74.00	-14.92	Peak	Horizontal
	10907.60	34.82	14.90	49.72	74.00	-24.28	Peak	Vertical
*	14203.90	35.51	15.63	51.14	88.20	-37.06	Peak	Vertical
*	14630.60	36.08	15.86	51.94	88.20	-36.26	Peak	Vertical
	17971.10	20.59	23.59	44.18	54.00	-9.82	Average	Vertical
	17971.10	35.13	23.59	58.72	74.00	-15.28	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT160 (Nss = 2)	Test Channel	175
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10984.10	35.02	14.91	49.93	74.00	-24.07	Peak	Horizontal
*	14453.80	35.92	16.07	51.99	88.20	-36.21	Peak	Horizontal
*	14708.80	35.29	15.89	51.18	88.20	-37.02	Peak	Horizontal
	17981.30	20.52	23.94	44.46	54.00	-9.54	Average	Horizontal
	17981.30	34.33	23.94	58.27	74.00	-15.73	Peak	Horizontal
	10948.40	35.74	14.96	50.70	74.00	-23.30	Peak	Vertical
*	13710.90	36.13	14.51	50.64	88.20	-37.56	Peak	Vertical
*	14511.60	36.27	15.77	52.04	88.20	-36.16	Peak	Vertical
	18000.00	19.87	24.16	44.03	54.00	-9.97	Average	Vertical
	18000.00	33.84	24.16	58.00	74.00	-16.00	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT160 (Nss = 2)	Test Channel	207
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10848.10	35.35	15.02	50.37	74.00	-23.63	Peak	Horizontal
*	14314.40	35.74	15.91	51.65	88.20	-36.55	Peak	Horizontal
*	14751.30	35.59	15.78	51.37	88.20	-36.83	Peak	Horizontal
	17937.10	19.89	23.12	43.01	54.00	-10.99	Average	Horizontal
	17937.10	34.65	23.12	57.77	74.00	-16.23	Peak	Horizontal
	11101.40	35.87	14.41	50.28	74.00	-23.72	Peak	Vertical
*	14348.40	35.20	15.94	51.14	88.20	-37.06	Peak	Vertical
*	14577.90	35.04	15.95	50.99	88.20	-37.21	Peak	Vertical
	17974.50	20.18	23.71	43.89	54.00	-10.11	Average	Vertical
	17974.50	35.56	23.71	59.27	74.00	-14.73	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT320 (Nss = 2)	Test Channel	63
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10754.60	35.45	14.93	50.38	74.00	-23.62	Peak	Horizontal
*	14209.00	36.47	15.62	52.09	88.20	-36.11	Peak	Horizontal
*	14763.20	35.83	15.87	51.70	88.20	-36.50	Peak	Horizontal
	17954.10	20.39	23.29	43.68	54.00	-10.32	Average	Horizontal
	17954.10	35.52	23.29	58.81	74.00	-15.19	Peak	Horizontal
	11635.20	35.72	13.75	49.47	74.00	-24.53	Peak	Vertical
*	14188.60	35.21	15.61	50.82	88.20	-37.38	Peak	Vertical
*	14693.50	35.05	16.07	51.12	88.20	-37.08	Peak	Vertical
	17921.80	20.59	22.95	43.54	54.00	-10.46	Average	Vertical
	17921.80	35.06	22.95	58.01	74.00	-15.99	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT320 (Nss = 2)	Test Channel	127
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10623.70	34.58	14.98	49.56	74.00	-24.44	Peak	Horizontal
*	14453.80	34.81	16.07	50.88	88.20	-37.32	Peak	Horizontal
*	14654.40	35.12	15.77	50.89	88.20	-37.31	Peak	Horizontal
	17930.30	19.95	23.04	42.99	54.00	-11.01	Average	Horizontal
	17930.30	35.44	23.04	58.48	74.00	-15.52	Peak	Horizontal
	10955.20	35.17	14.94	50.11	74.00	-23.89	Peak	Vertical
*	14452.10	35.88	16.09	51.97	88.20	-36.23	Peak	Vertical
*	14848.20	35.01	15.69	50.70	88.20	-37.50	Peak	Vertical
	17991.50	20.44	24.08	44.52	54.00	-9.48	Average	Vertical
	17991.50	34.40	24.08	58.48	74.00	-15.52	Peak	Vertical

Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Product	BE11000 Wall Plate Wi-Fi 7 Access Point	Test Engineer	Jerry Lu
Test Site	WZ-AC1	Test Date	2025-09-26
Test Mode	802.11be-EHT320 (Nss = 2)	Test Channel	191
Remark	1. Average measurement was not performed if peak level lower than average limit. 2. Other frequency was 20 dB below limit line within 1-18 GHz, there is not show in the report.		

Mark	Frequency (MHz)	Reading Level (dBμV)	Factor (dB/m)	Measure Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	Detector	Polarization
	10897.40	35.22	14.91	50.13	74.00	-23.87	Peak	Horizontal
*	14576.20	35.48	15.93	51.41	88.20	-36.79	Peak	Horizontal
*	15006.30	36.06	15.17	51.23	88.20	-36.97	Peak	Horizontal
	17989.80	19.89	24.07	43.96	54.00	-10.04	Average	Horizontal
	17989.80	35.04	24.07	59.11	74.00	-14.89	Peak	Horizontal
	11516.20	35.78	14.07	49.85	74.00	-24.15	Peak	Vertical
*	13976.10	35.78	15.34	51.12	88.20	-37.08	Peak	Vertical
*	14892.40	35.55	15.66	51.21	88.20	-36.99	Peak	Vertical
	17969.40	20.47	23.54	44.01	54.00	-9.99	Average	Vertical
	17969.40	34.83	23.54	58.37	74.00	-15.63	Peak	Vertical


Note 1: " * " is not in restricted band.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

The Result of Radiated Emission below 1 GHz:

Site	WZ-AC1	Test Date	2025-09-26
Temperature	24.9 °C	Humidity	48.0%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 6115 MHz		

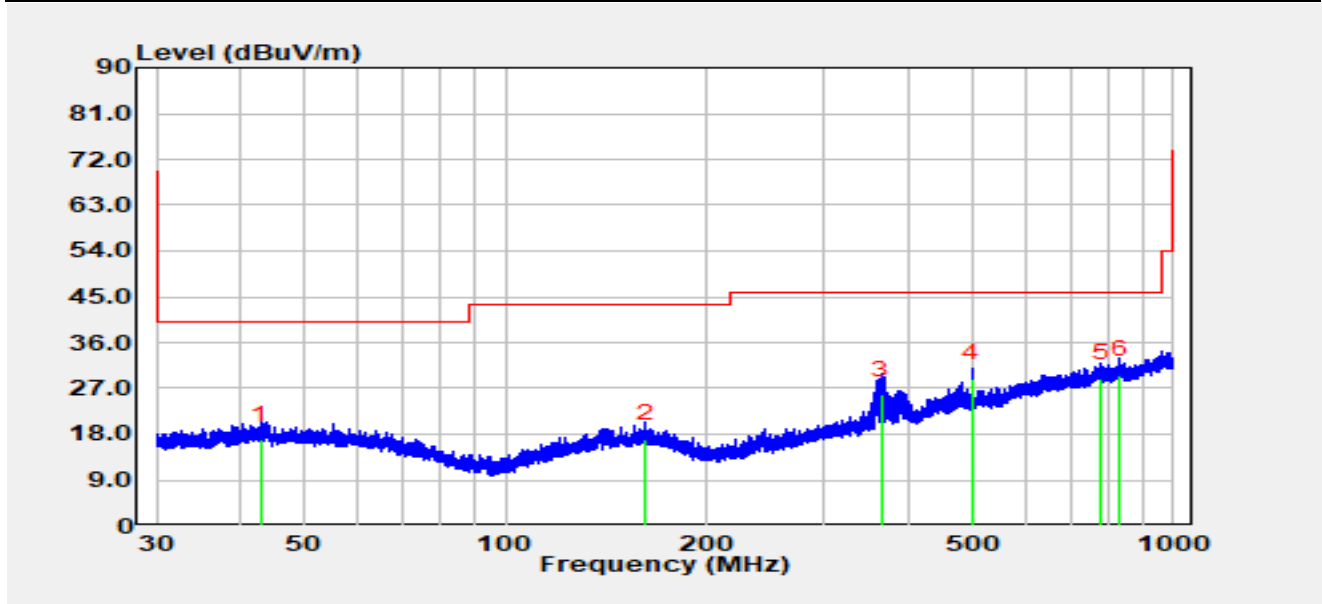


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		42.91	-1.23	18.09	16.86	-23.14	40.00	QP
2		161.93	-1.22	18.31	17.09	-26.41	43.50	QP
3		365.67	5.42	20.22	25.64	-20.36	46.00	QP
4		500.00	5.58	23.40	28.98	-17.02	46.00	QP
5		779.88	0.15	28.74	28.89	-17.11	46.00	QP
6	*	831.86	0.14	29.44	29.58	-16.42	46.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
- The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

Site	WZ-AC1	Test Date	2025-09-26
Temperature	24.9 °C	Humidity	48.0%
Limit	FCC_Part 15.209_RSE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 6115 MHz		

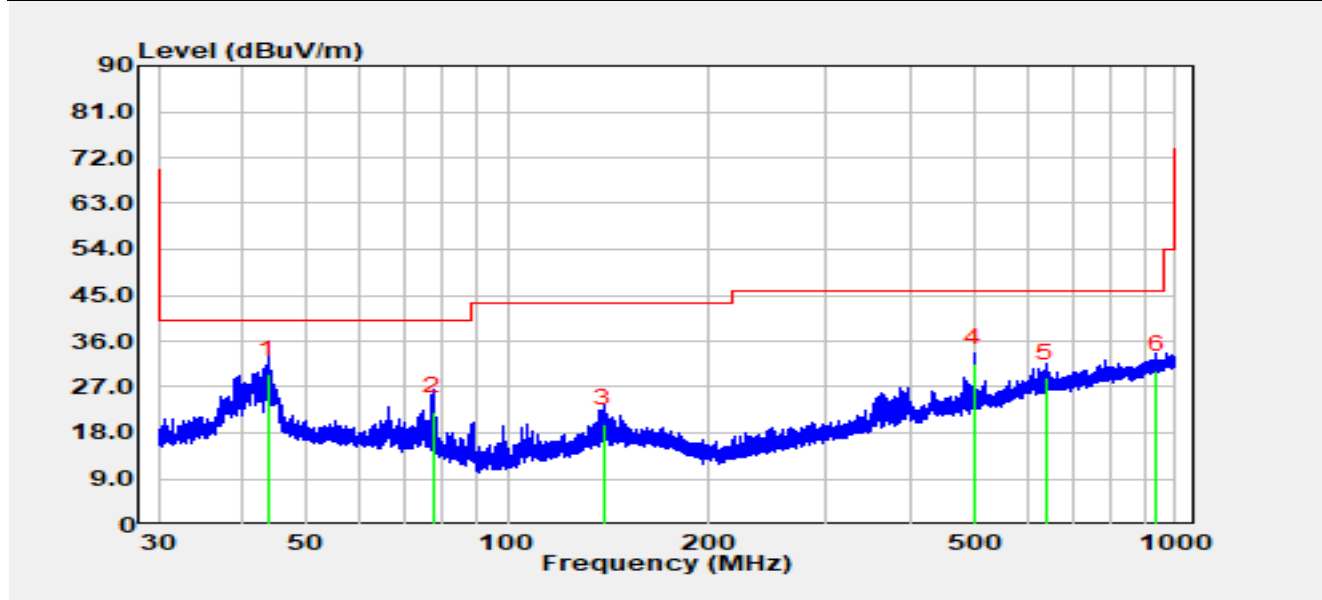


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	43.81	11.34	18.18	29.52	-10.48	40.00	QP
2		77.19	7.53	14.66	22.19	-17.81	40.00	QP
3		139.21	2.18	17.64	19.82	-23.68	43.50	QP
4		500.00	8.22	23.40	31.61	-14.39	46.00	QP
5		639.26	2.51	26.25	28.76	-17.24	46.00	QP
6		936.86	0.16	30.12	30.28	-15.72	46.00	QP

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).
4. The amplitude of the radiated emissions in the frequency range from 9 kHz to 30 MHz and 18 GHz to 40 GHz is close to the ambient noise level, and all emissions are at least 20 dB below the applicable limit. Therefore, the data is not presented in this report.

A.8 Radiated Restricted Band Edge Test Result

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 6115 MHz		

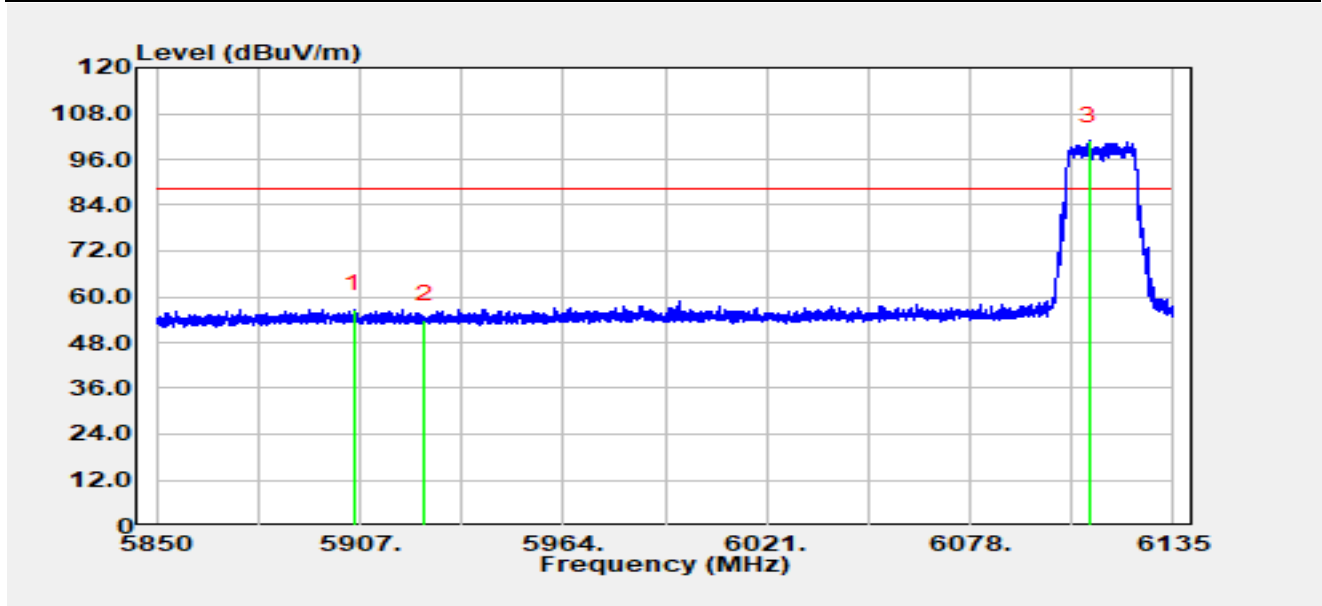


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5905.29	35.50	21.32	56.82	-31.38	88.20	Peak
2		5925.00	32.89	21.04	53.93	-34.27	88.20	Peak
3		6111.29	79.23	21.58	100.81	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 6115 MHz		

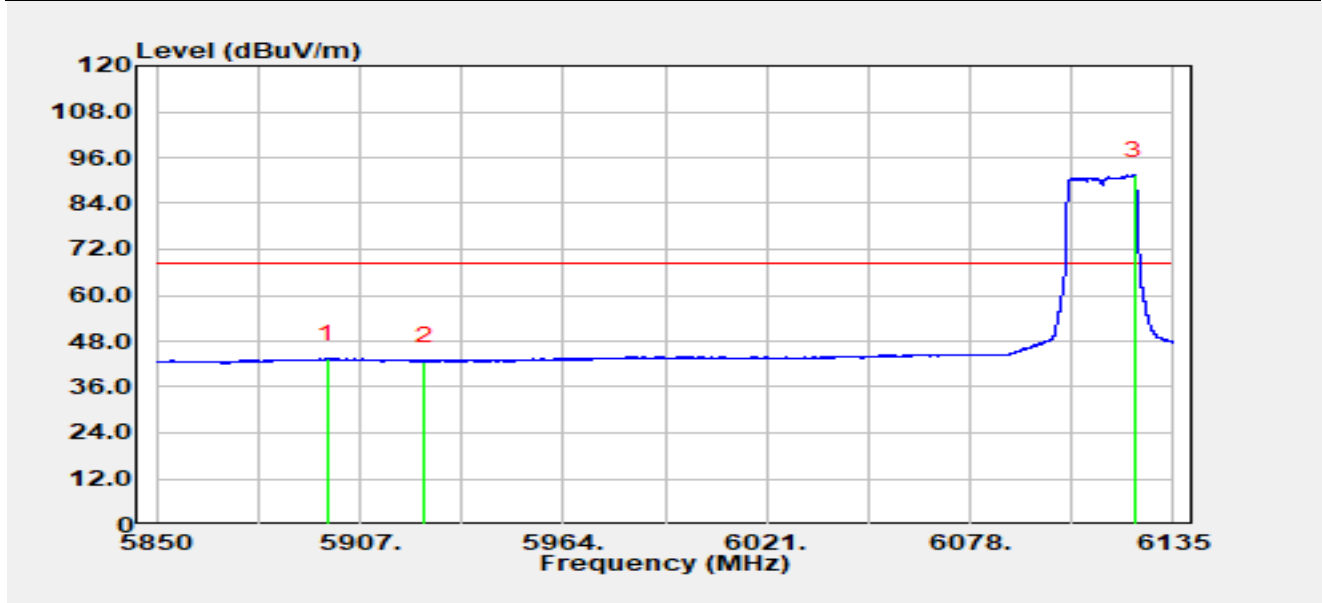


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5897.94	22.05	21.35	43.40	-24.80	68.20	Average
2		5925.00	21.68	21.04	42.72	-25.48	68.20	Average
3		6123.94	69.65	21.70	91.34	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 6115 MHz		

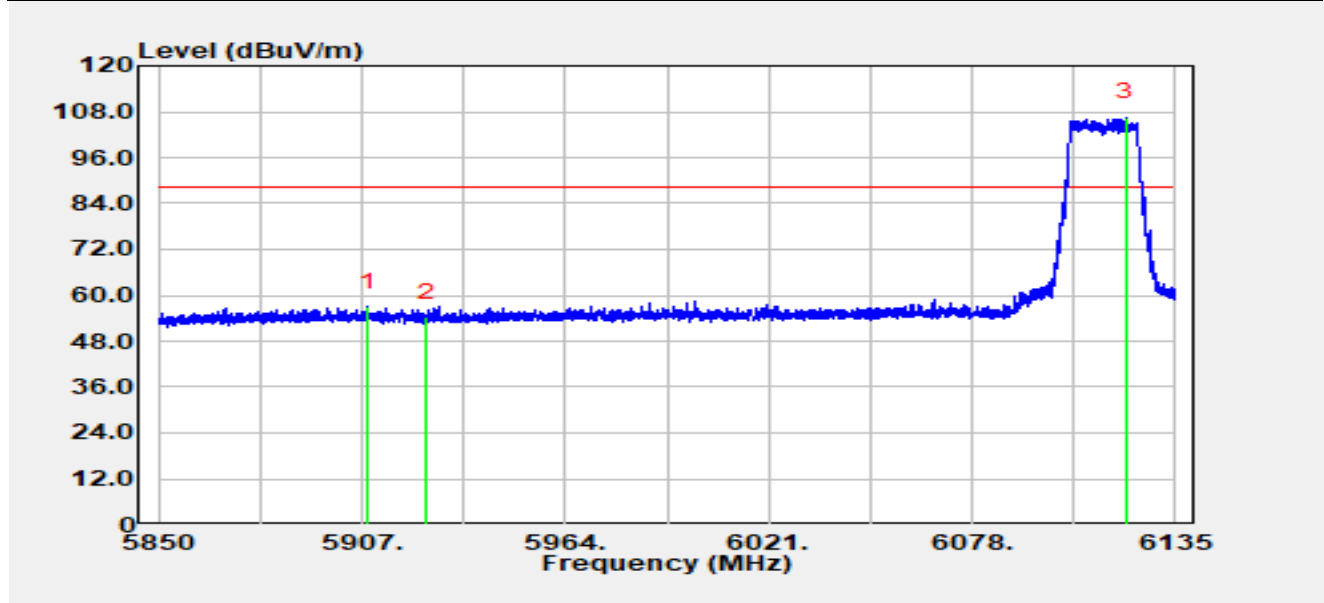


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5908.54	35.74	21.29	57.03	-31.17	88.20	Peak
2		5925.00	33.16	21.04	54.21	-33.99	88.20	Peak
3		6121.26	84.89	21.67	106.55	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 6115 MHz		

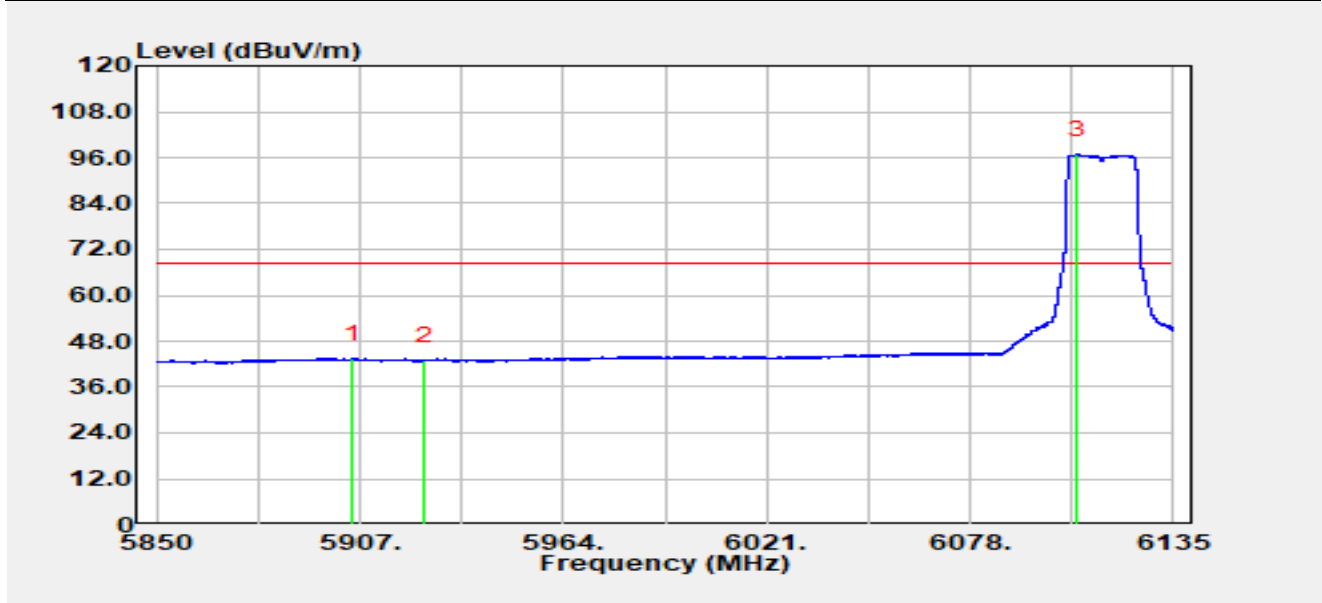


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5905.06	22.05	21.32	43.37	-24.83	68.20	Average
2		5925.00	21.84	21.04	42.89	-25.31	68.20	Average
3		6107.98	75.15	21.59	96.74	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

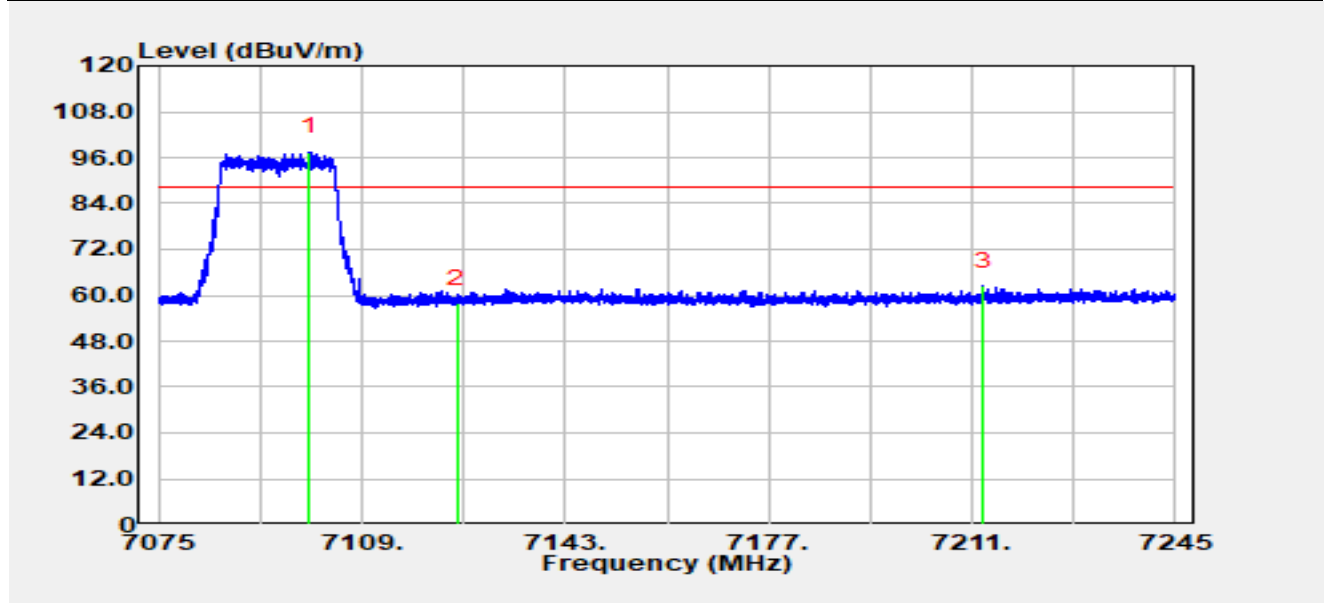


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7100.31	71.19	26.32	97.51	N/A	N/A	Peak
2		7125.00	31.13	26.71	57.84	-30.36	88.20	Peak
3	*	7212.94	35.27	27.09	62.36	-25.84	88.20	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

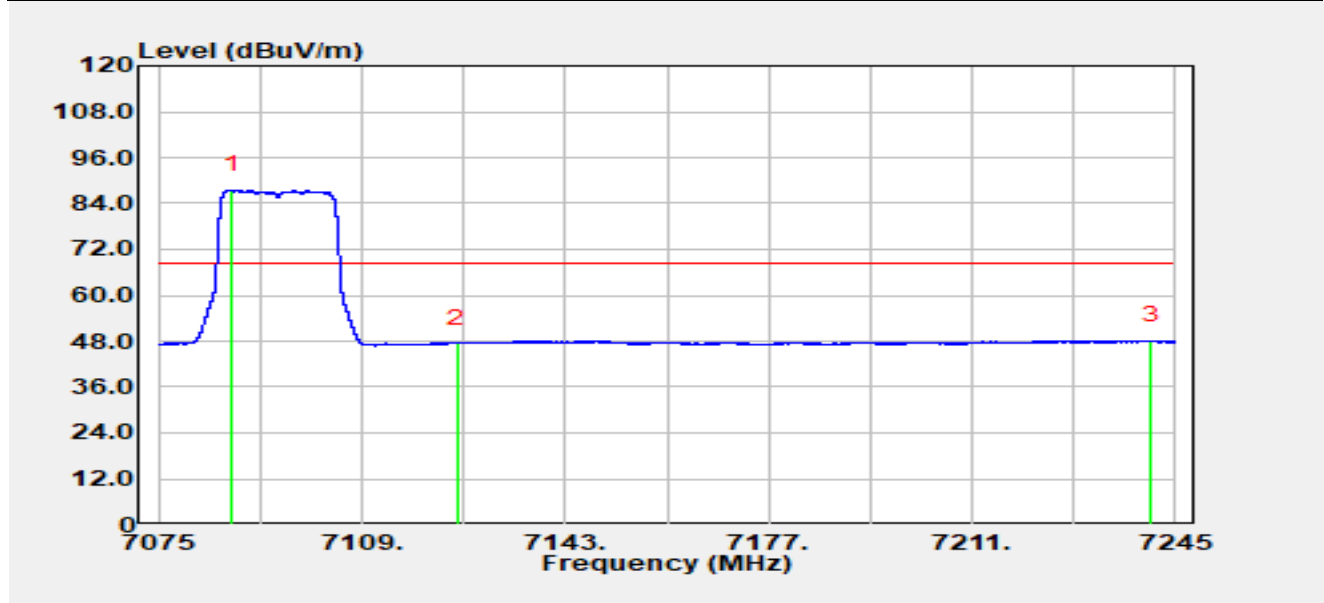


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7087.19	60.94	26.53	87.47	N/A	N/A	Average
2		7125.00	20.70	26.71	47.41	-20.79	68.20	Average
3	*	7240.92	20.84	27.34	48.18	-20.02	68.20	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

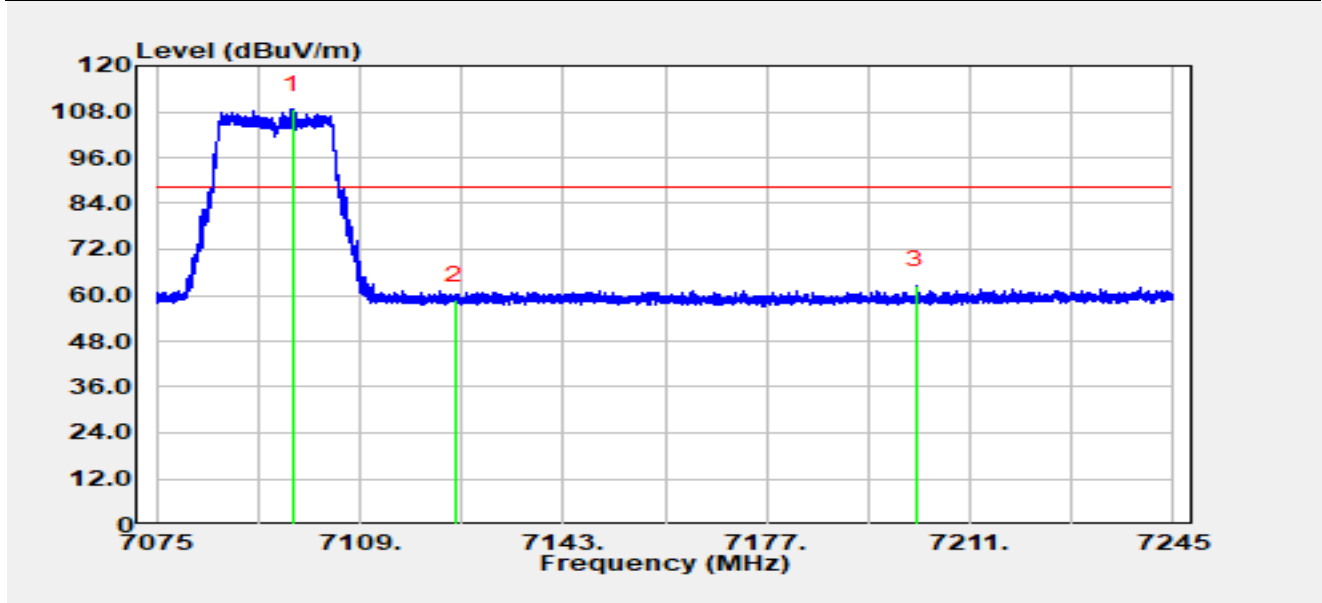


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7097.66	82.32	26.35	108.68	N/A	N/A	Peak
2		7125.00	32.10	26.71	58.81	-29.39	88.20	Peak
3	*	7202.02	35.51	27.09	62.60	-25.60	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT20 at 7095 MHz		

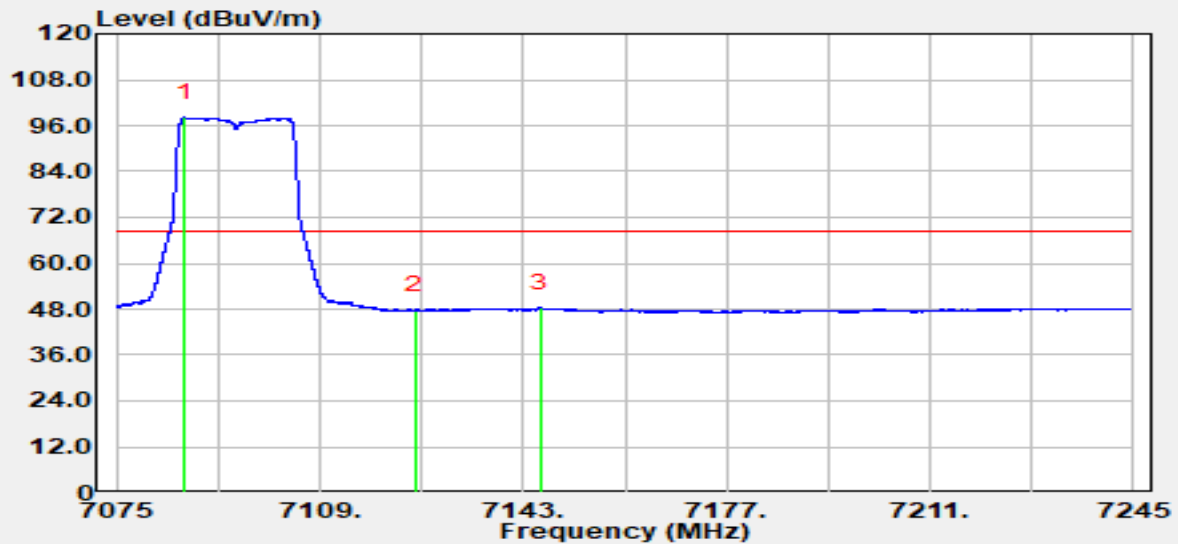


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7086.42	71.53	26.53	98.07	N/A	N/A	Average
2		7125.00	20.91	26.71	47.62	-20.58	68.20	Average
3	*	7145.81	21.12	27.14	48.26	-19.94	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 6125 MHz		

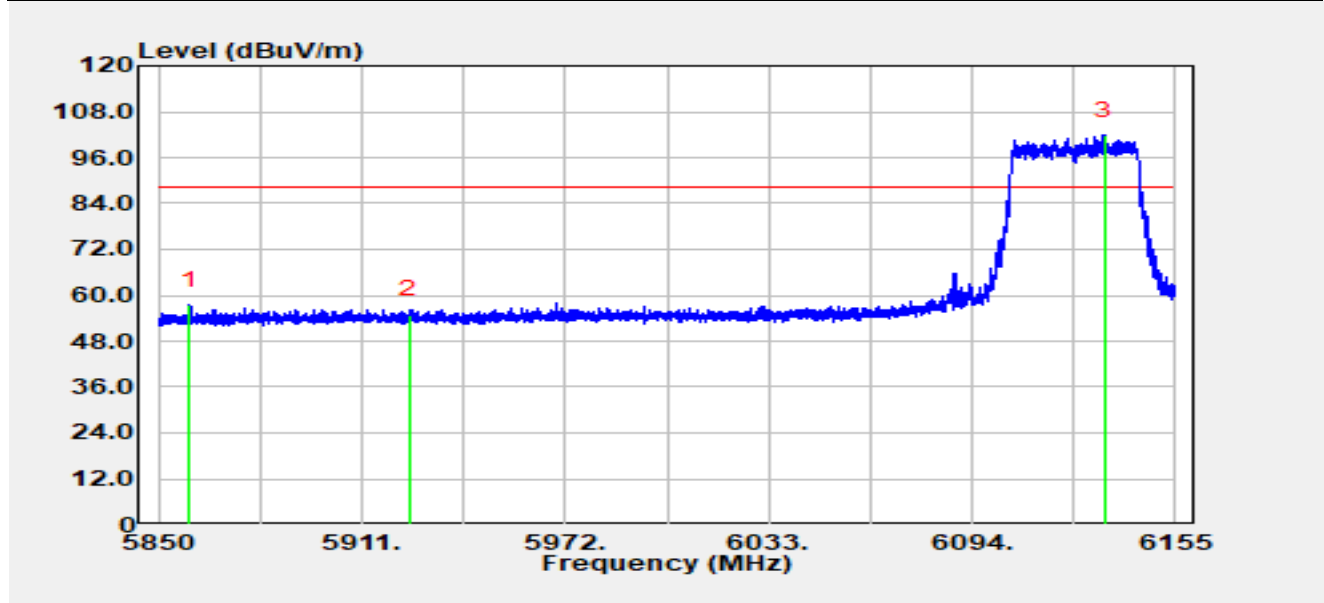


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5859.46	36.66	20.81	57.47	-30.73	88.20	Peak
2		5925.00	33.76	21.04	54.80	-33.40	88.20	Peak
3		6133.56	79.94	21.83	101.77	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 6125 MHz		

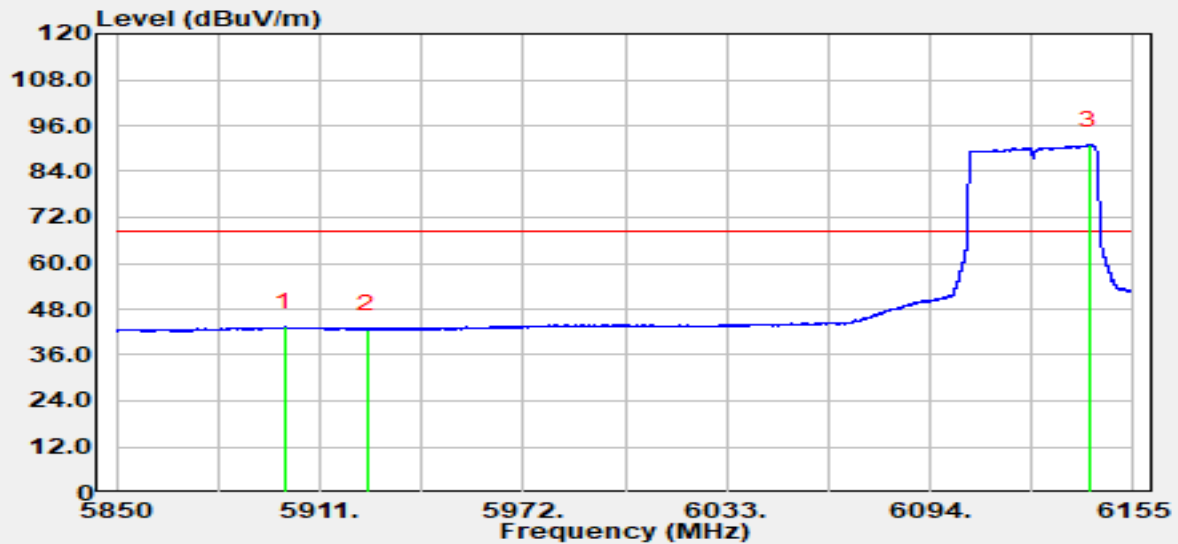


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5900.36	22.02	21.34	43.36	-24.84	68.20	Average
2		5925.00	21.64	21.04	42.69	-25.51	68.20	Average
3		6141.64	69.02	21.98	91.00	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 6125 MHz		

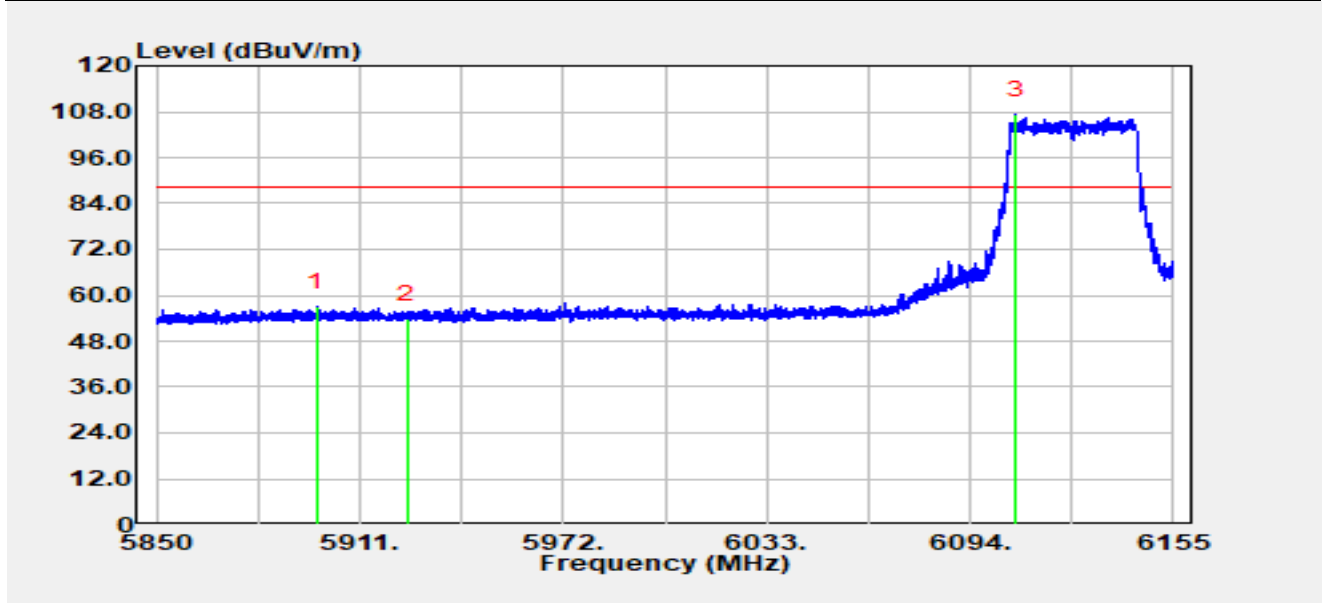


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5898.22	35.57	21.34	56.92	-31.28	88.20	Peak
2		5925.00	32.82	21.04	53.87	-34.33	88.20	Peak
3		6107.60	85.50	21.60	107.10	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 6125 MHz		

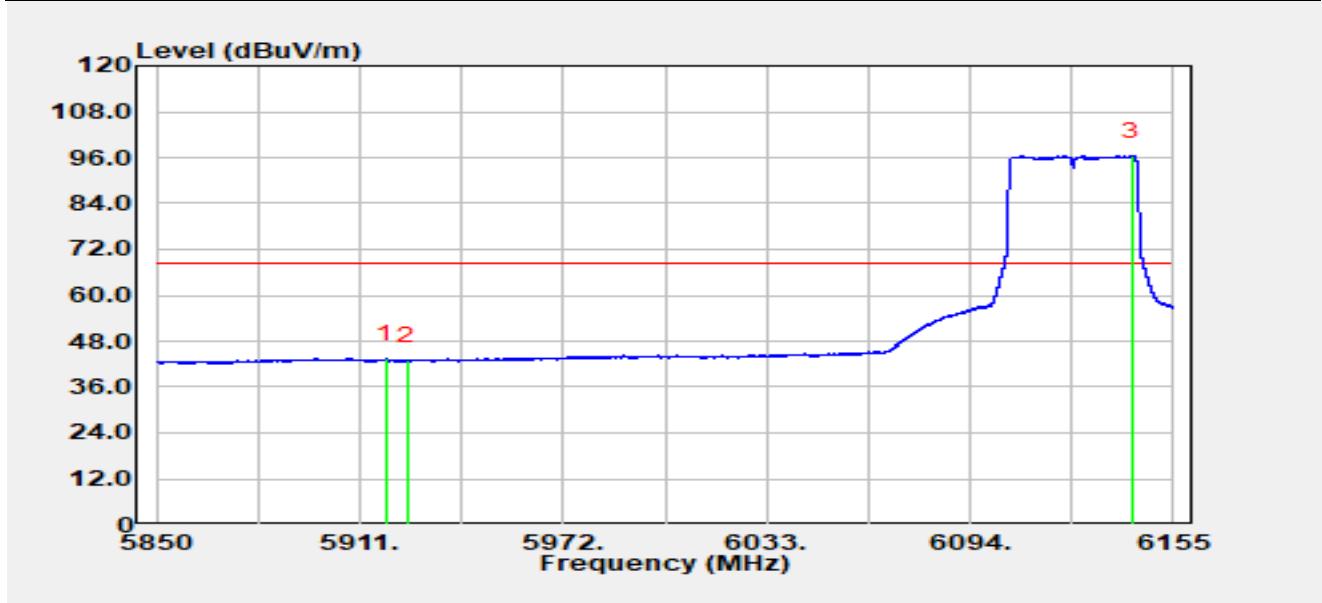


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.96	22.22	21.13	43.35	-24.85	68.20	Average
2		5925.00	21.75	21.04	42.79	-25.41	68.20	Average
3		6142.53	74.37	21.99	96.36	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

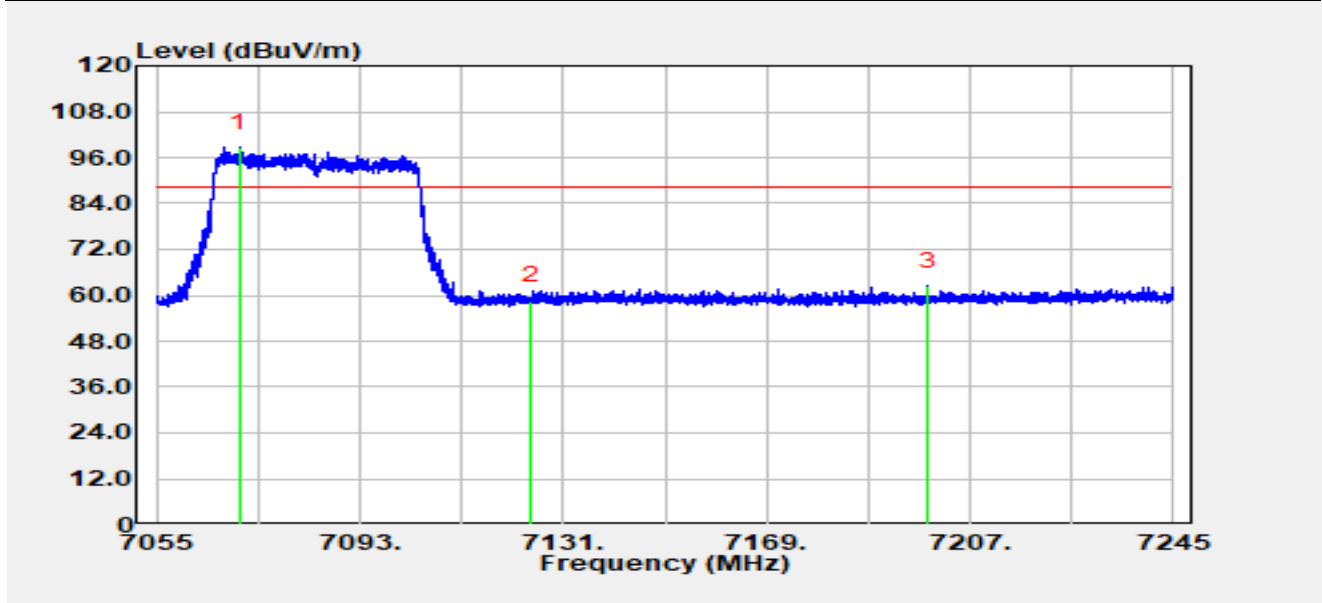


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7070.41	71.99	26.62	98.60	N/A	N/A	Peak
2		7125.00	31.91	26.71	58.62	-29.58	88.20	Peak
3	*	7199.10	35.34	27.06	62.40	-25.80	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

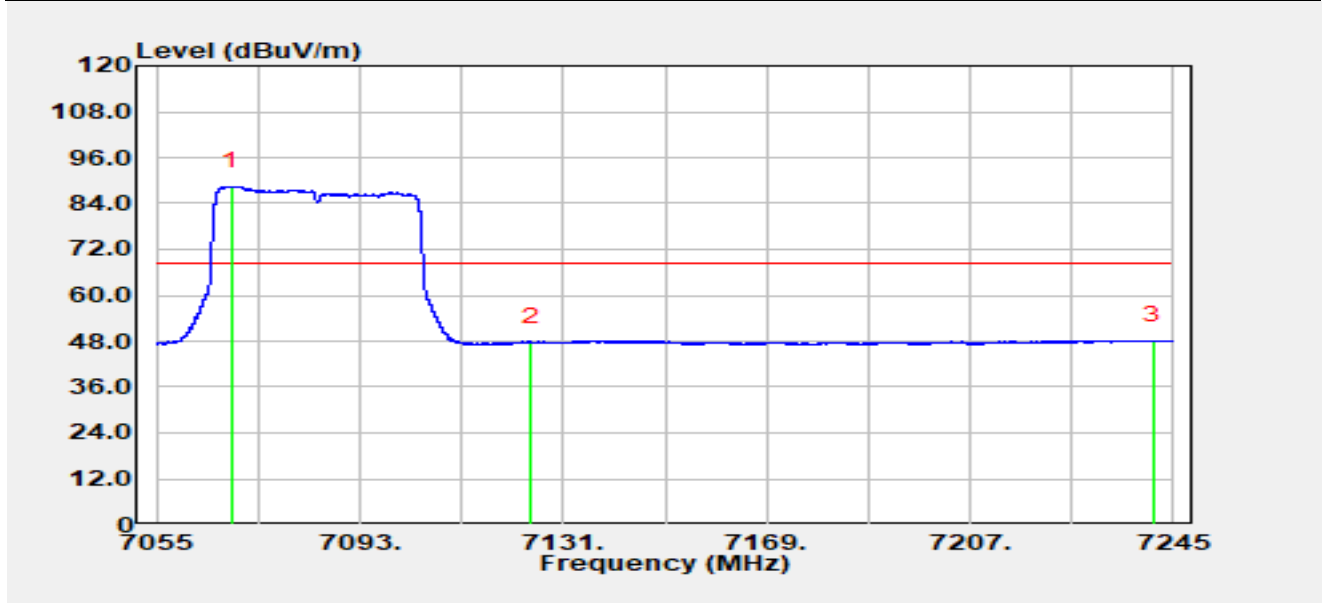


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7068.87	61.77	26.62	88.39	N/A	N/A	Average
2		7125.00	20.86	26.71	47.57	-20.63	68.20	Average
3	*	7241.31	20.83	27.33	48.17	-20.03	68.20	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

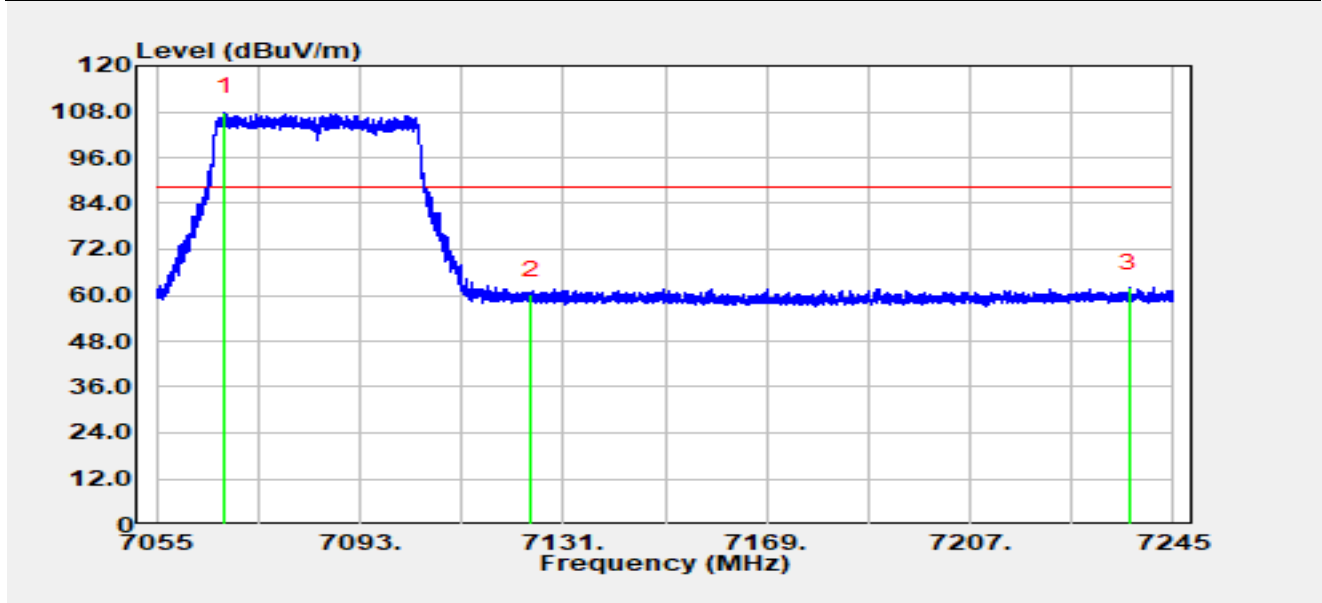


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7067.73	81.22	26.62	107.85	N/A	N/A	Peak
2		7125.00	33.30	26.71	60.01	-28.19	88.20	Peak
3	*	7236.74	34.60	27.36	61.96	-26.24	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT40 at 7085 MHz		

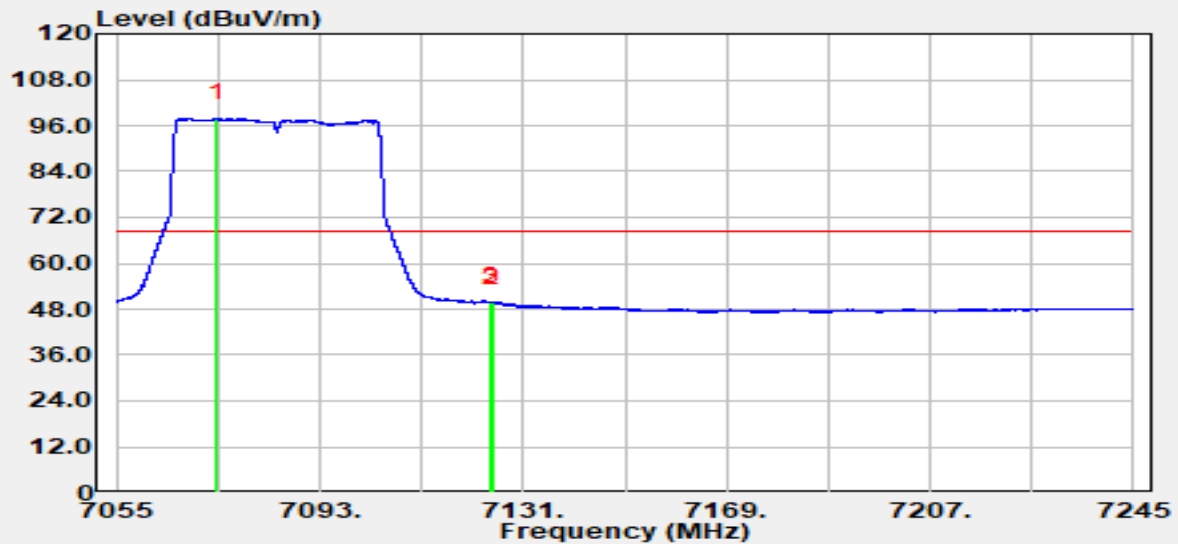


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7073.72	71.26	26.60	97.86	N/A	N/A	Average
2		7125.00	22.95	26.71	49.66	-18.54	68.20	Average
3	*	7125.15	23.18	26.71	49.90	-18.30	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 6145 MHz		

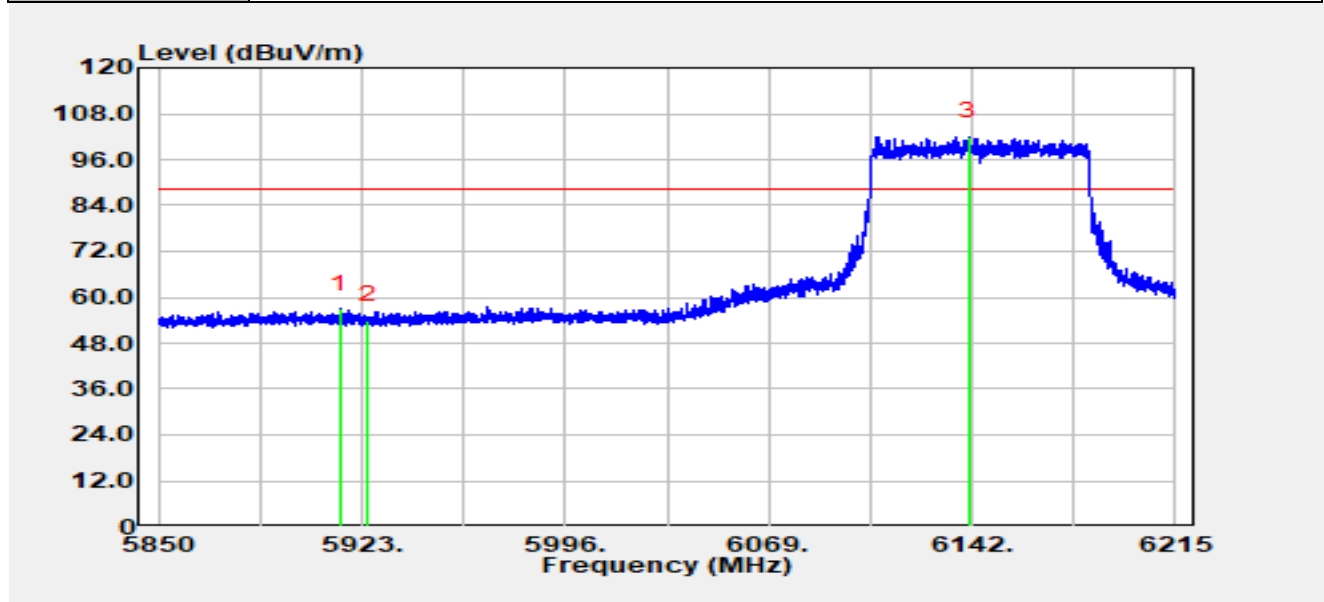


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5915.23	35.66	21.19	56.85	-31.35	88.20	Peak
2		5925.00	33.00	21.04	54.04	-34.16	88.20	Peak
3		6140.65	79.99	21.96	101.95	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 6145 MHz		

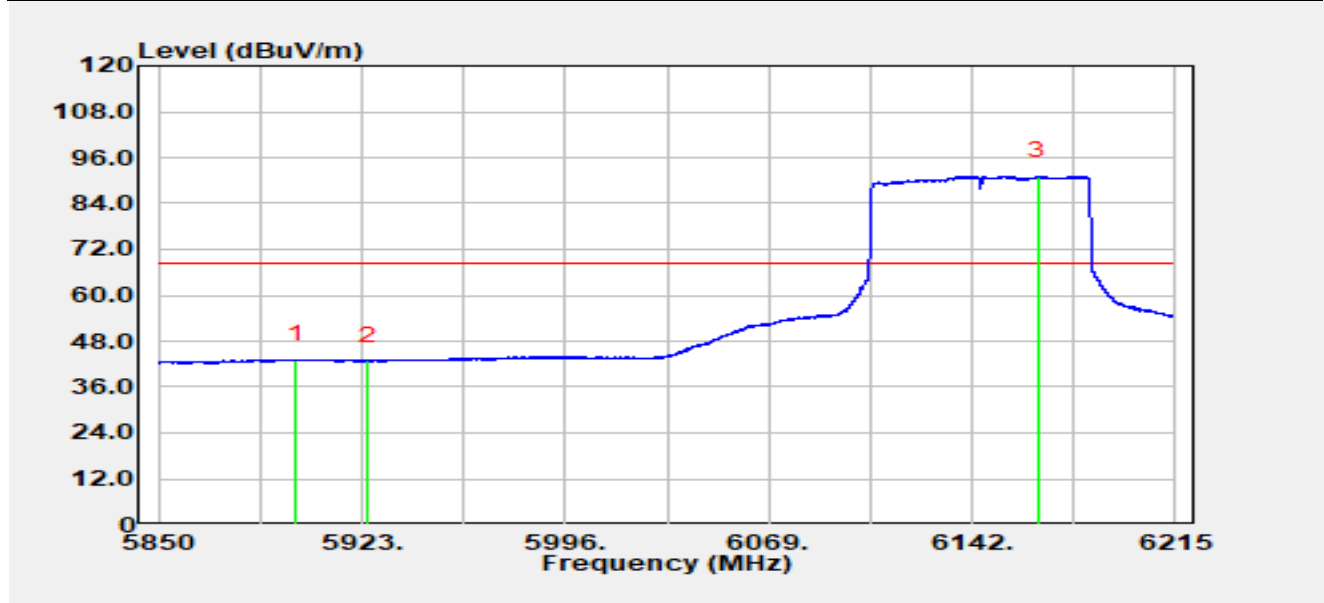


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5899.46	21.90	21.34	43.24	-24.96	68.20	Average
2		5925.00	21.75	21.04	42.79	-25.41	68.20	Average
3		6165.80	68.84	22.32	91.16	N/A	N/A	Average

Notes:

1. "*" indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 6145 MHz		

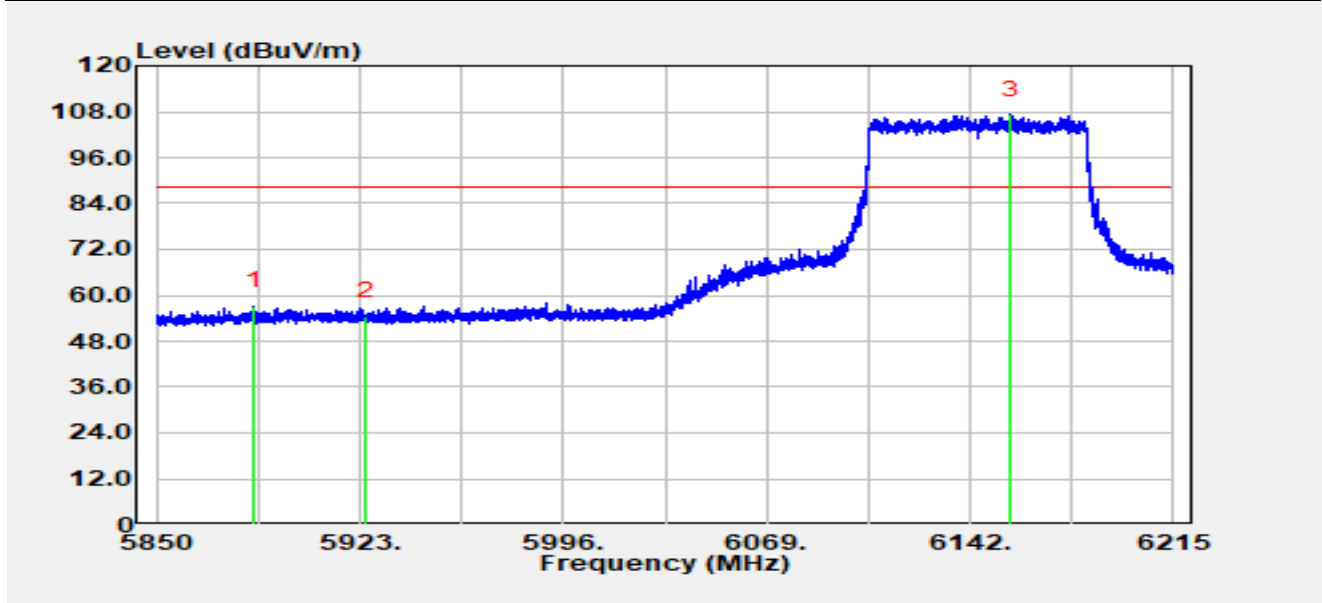


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5885.15	35.97	21.27	57.23	-30.97	88.20	Peak
2		5925.00	33.50	21.04	54.54	-33.66	88.20	Peak
3		6156.38	85.13	22.14	107.27	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 6145 MHz		

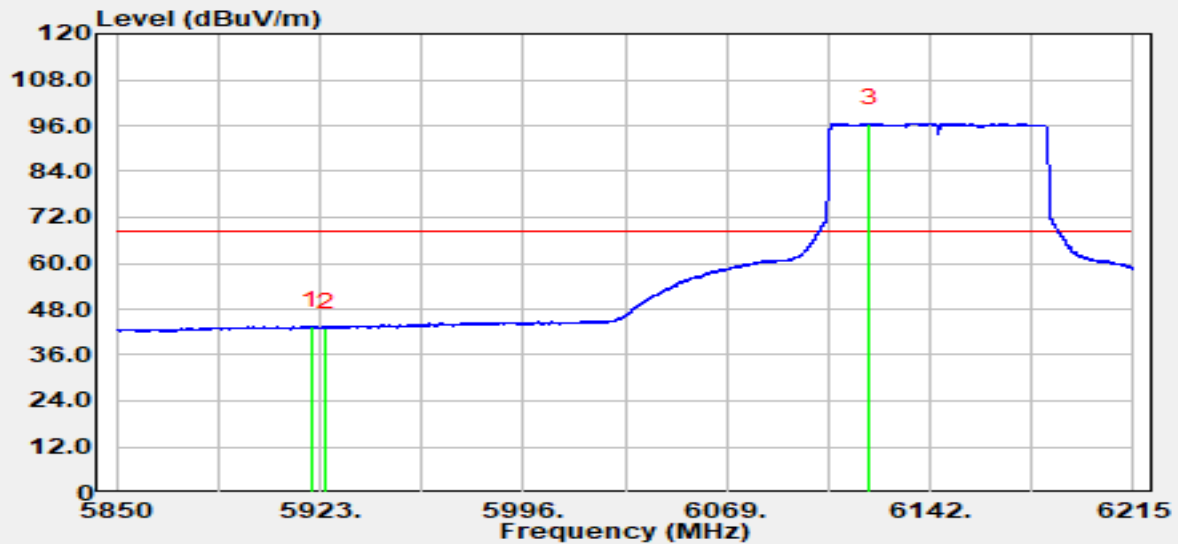


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5919.68	22.41	21.12	43.53	-24.67	68.20	Average
2		5925.00	22.13	21.04	43.17	-25.03	68.20	Average
3		6120.47	74.82	21.65	96.47	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

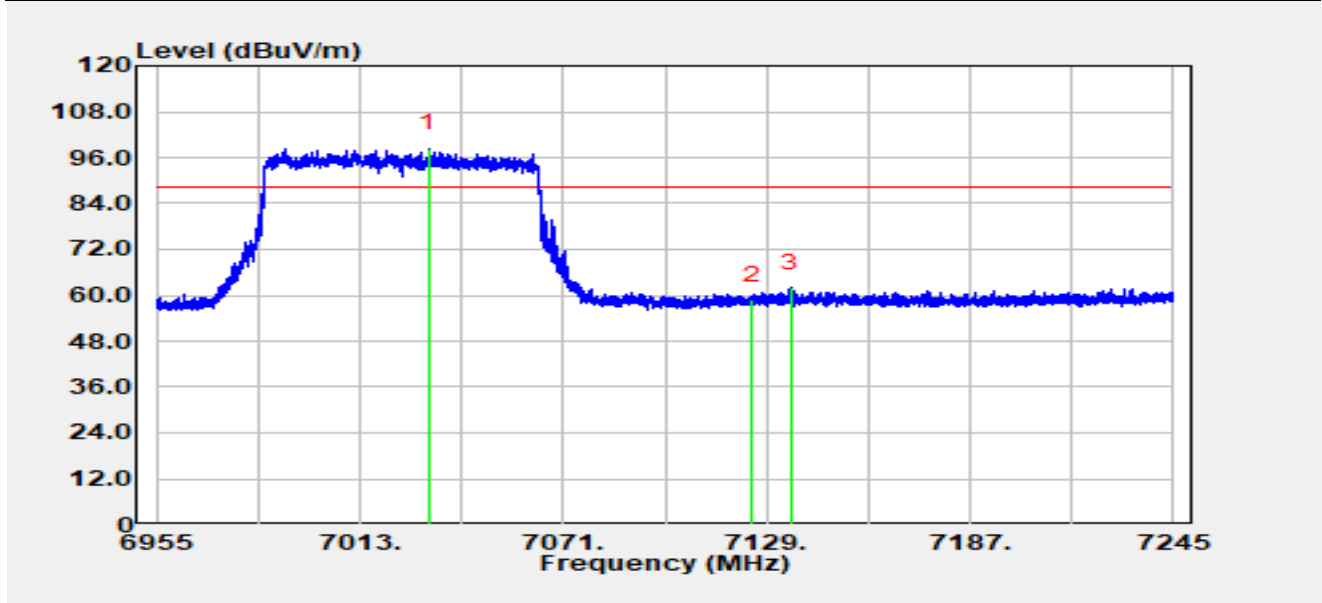


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7032.58	71.85	26.52	98.37	N/A	N/A	Peak
2		7125.00	31.97	26.71	58.68	-29.52	88.20	Peak
3	*	7135.76	34.86	26.97	61.84	-26.36	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

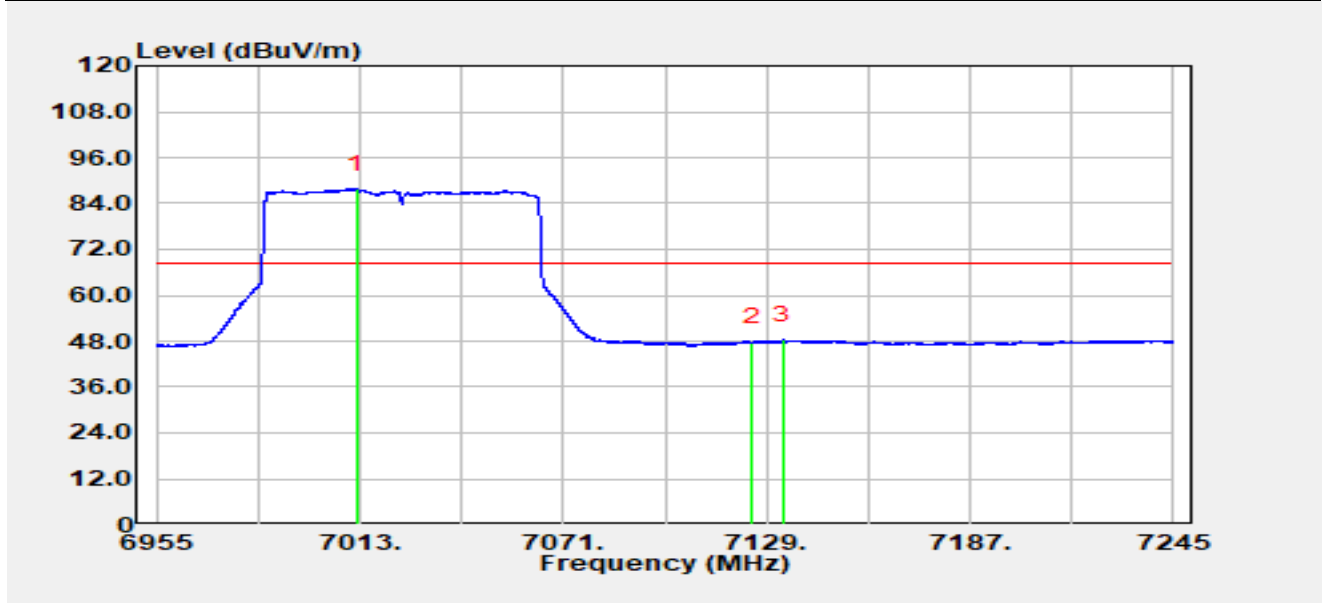


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7012.16	61.96	25.88	87.83	N/A	N/A	Average
2		7125.00	20.97	26.71	47.68	-20.52	68.20	Average
3	*	7133.55	21.29	26.93	48.23	-19.97	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

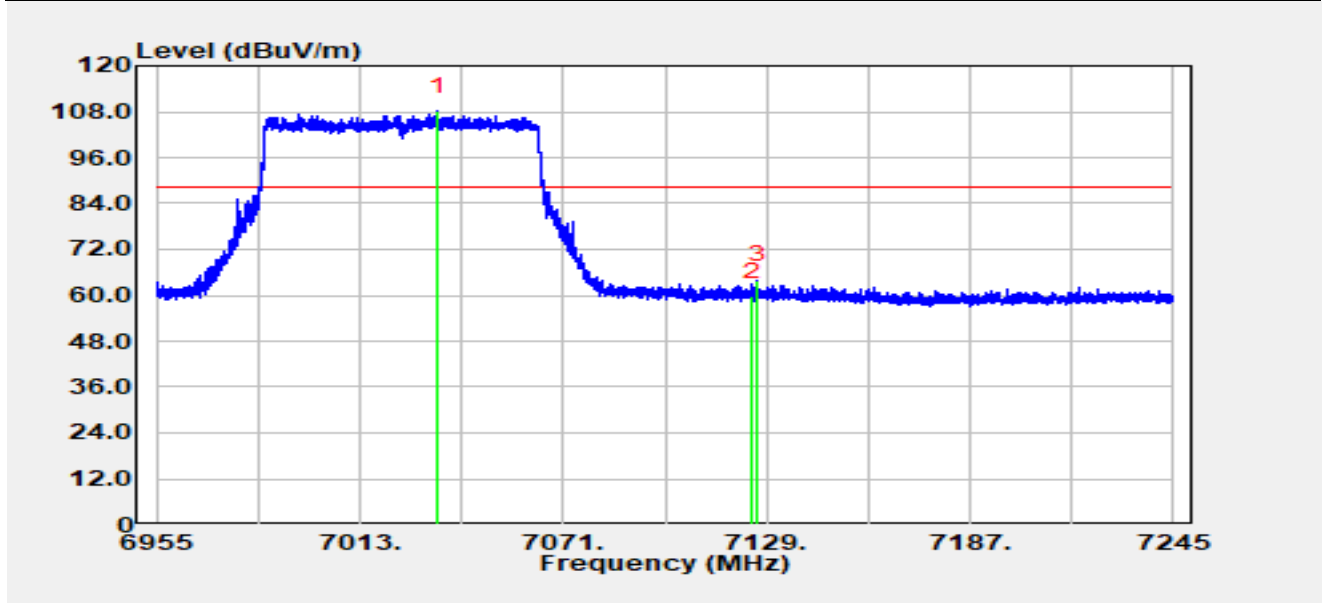


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7035.21	81.57	26.60	108.17	N/A	N/A	Peak
2		7125.00	32.91	26.71	59.62	-28.58	88.20	Peak
3	*	7126.22	37.12	26.75	63.88	-24.32	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT80 at 7025 MHz		

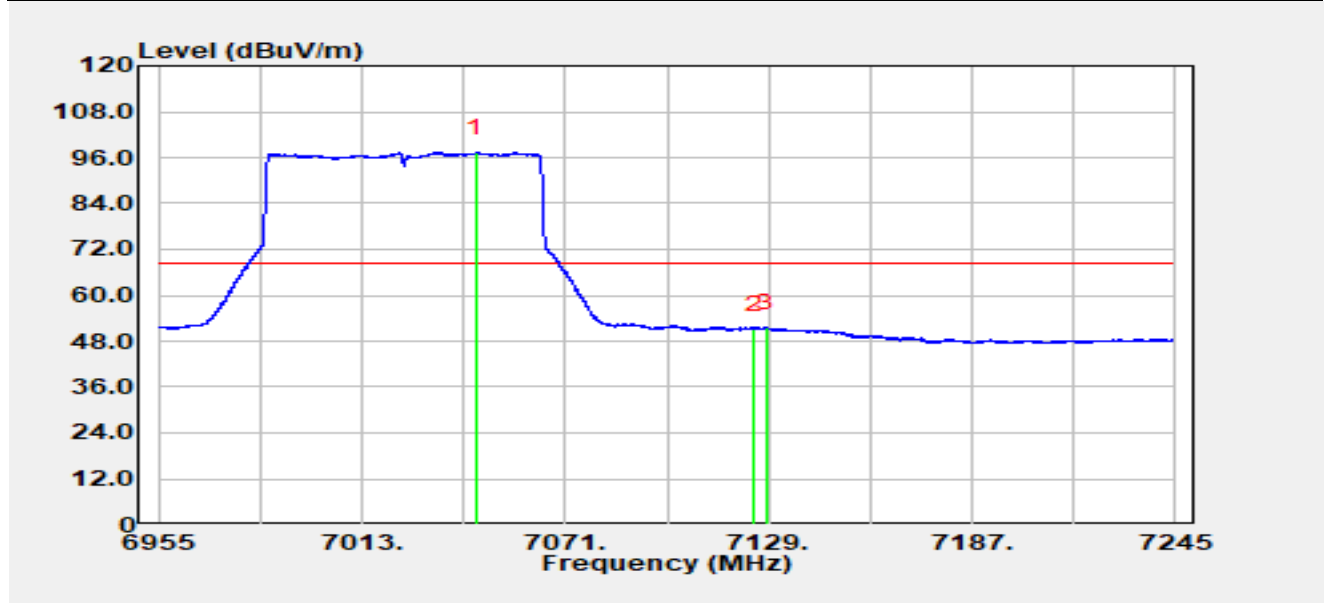


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		7045.65	70.61	26.69	97.31	N/A	N/A	Average
2		7125.00	24.40	26.71	51.11	-17.09	68.20	Average
3	*	7128.33	24.68	26.83	51.51	-16.69	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6185 MHz		

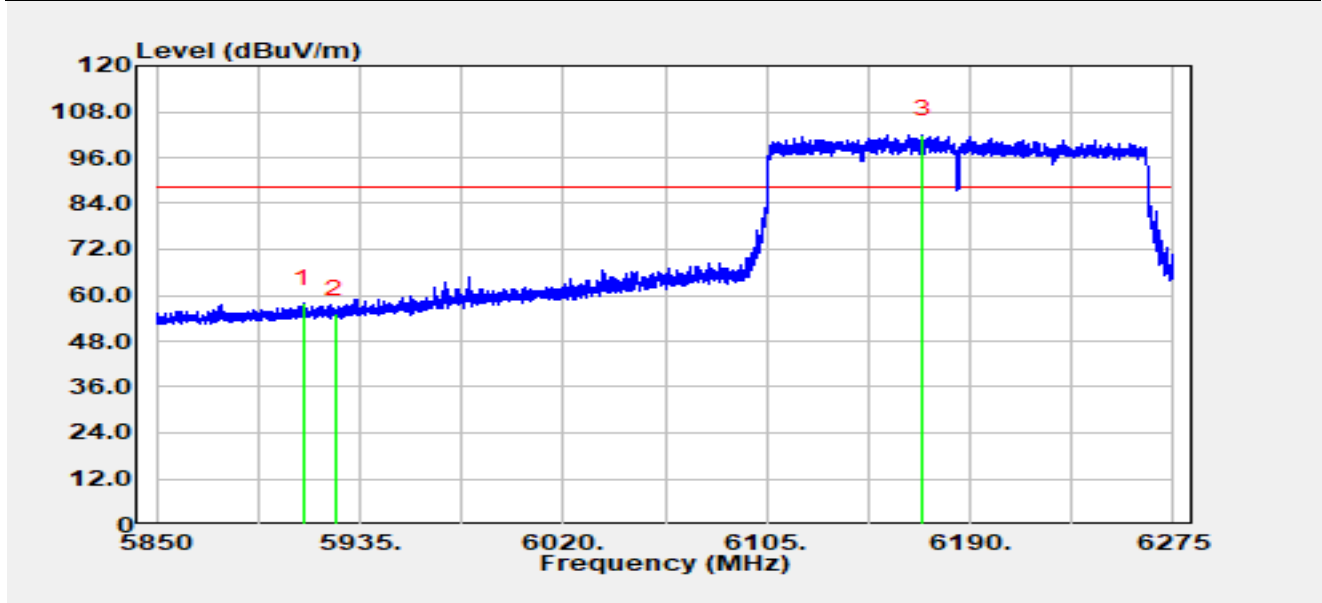


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5911.24	36.56	21.25	57.80	-30.40	88.20	Peak
2		5925.00	34.06	21.04	55.11	-33.09	88.20	Peak
3		6169.94	79.77	22.34	102.11	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6185 MHz		

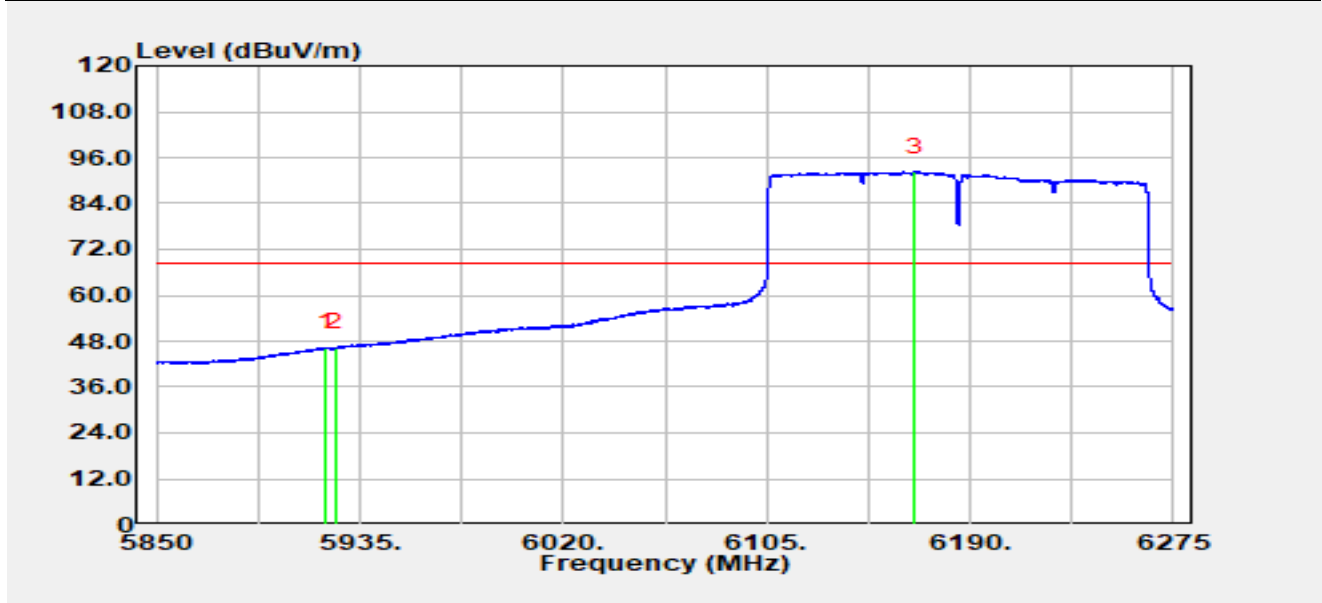


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5921.10	25.10	21.10	46.20	-22.00	68.20	Average
2	*	5925.00	25.20	21.04	46.24	-21.96	68.20	Average
3		6166.80	69.91	22.33	92.25	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6185 MHz		

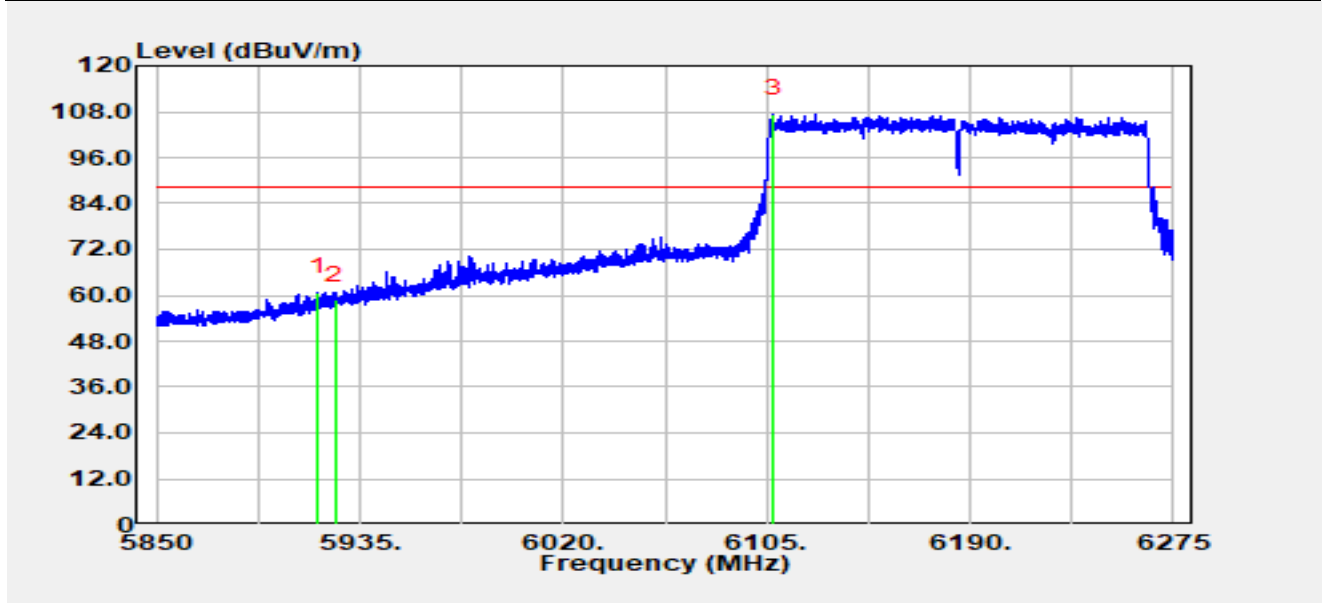


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5917.66	39.70	21.15	60.85	-27.35	88.20	Peak
2		5925.00	37.73	21.04	58.78	-29.42	88.20	Peak
3		6107.85	85.74	21.59	107.33	N/A	N/A	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6185 MHz		

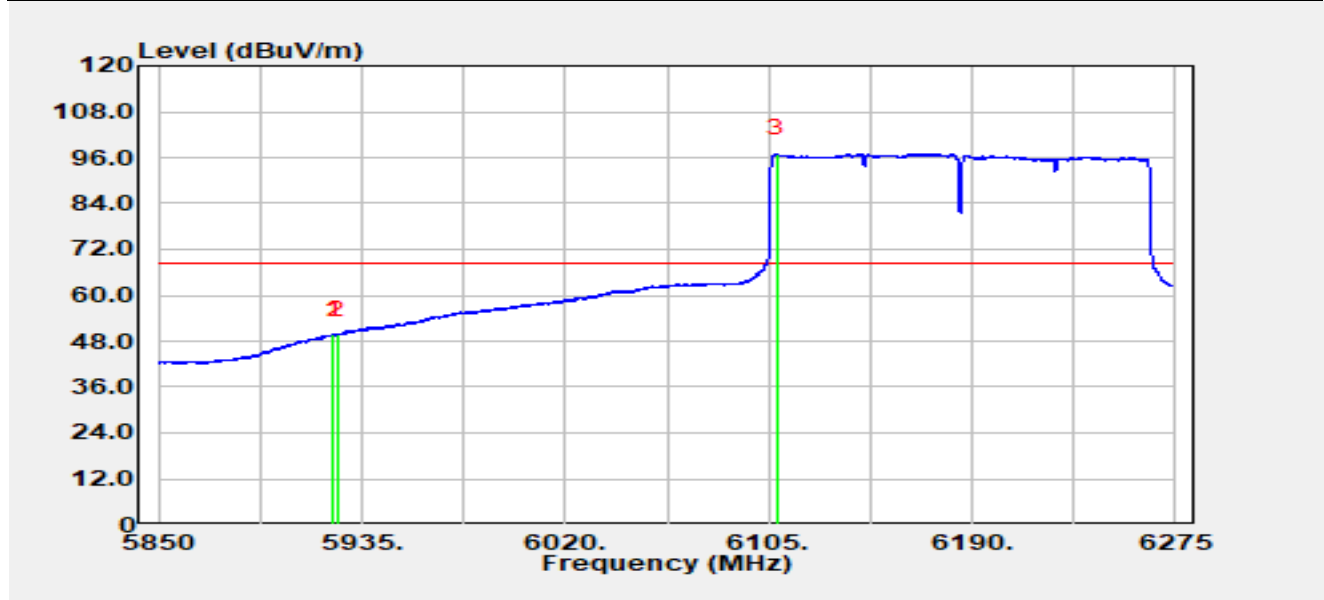


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5923.27	28.60	21.07	49.67	-18.53	68.20	Average
2	*	5925.00	28.69	21.04	49.73	-18.47	68.20	Average
3		6108.44	75.47	21.59	97.06	N/A	N/A	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

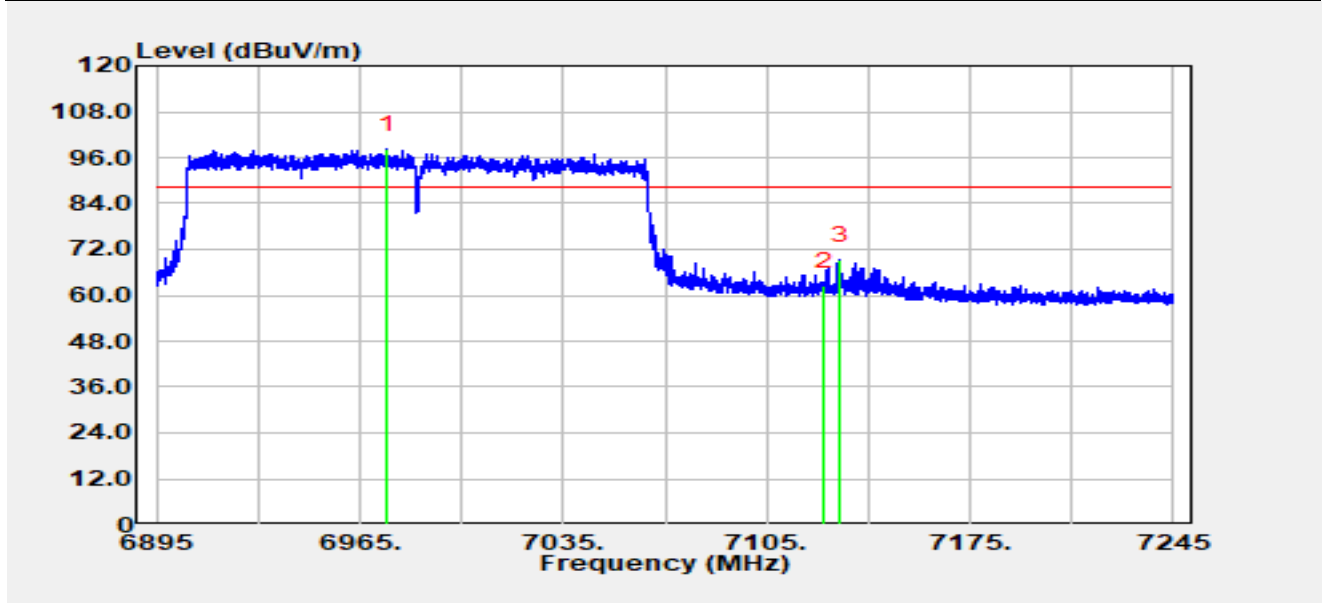


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6974.24	72.43	25.68	98.12	N/A	N/A	Peak
2		7125.00	35.73	26.71	62.44	-25.76	88.20	Peak
3	*	7130.27	42.21	26.88	69.09	-19.11	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

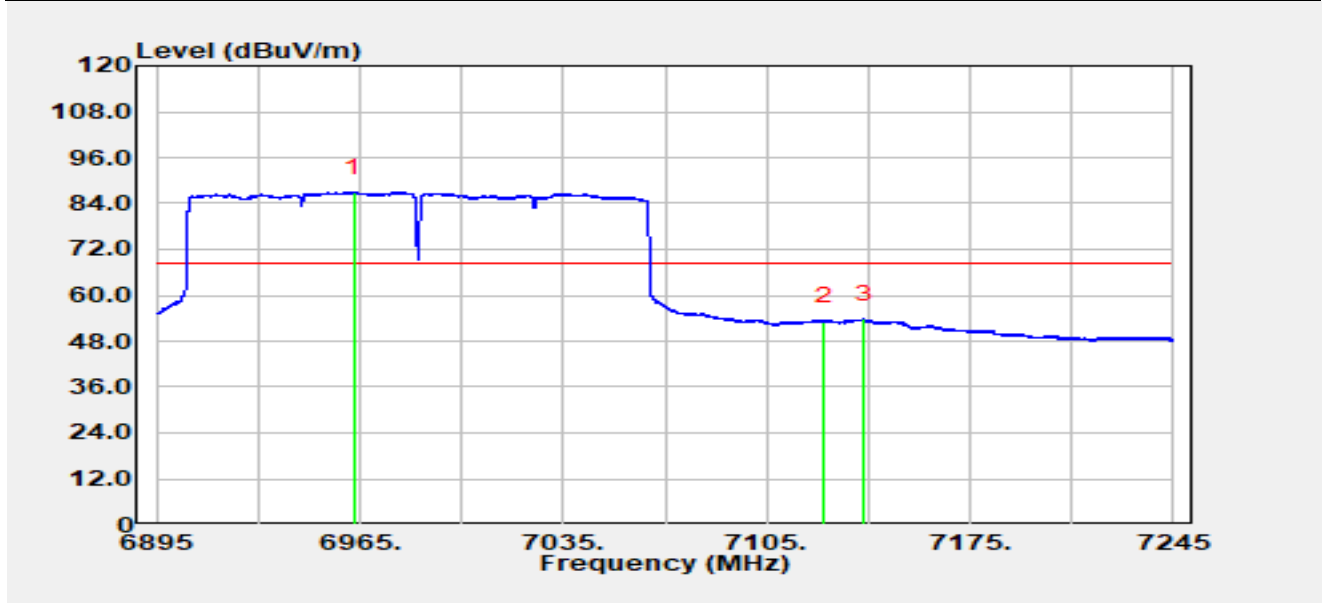


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6962.80	61.29	25.62	86.91	N/A	N/A	Average
2		7125.00	26.43	26.71	53.14	-15.06	68.20	Average
3	*	7138.36	26.68	27.02	53.69	-14.51	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

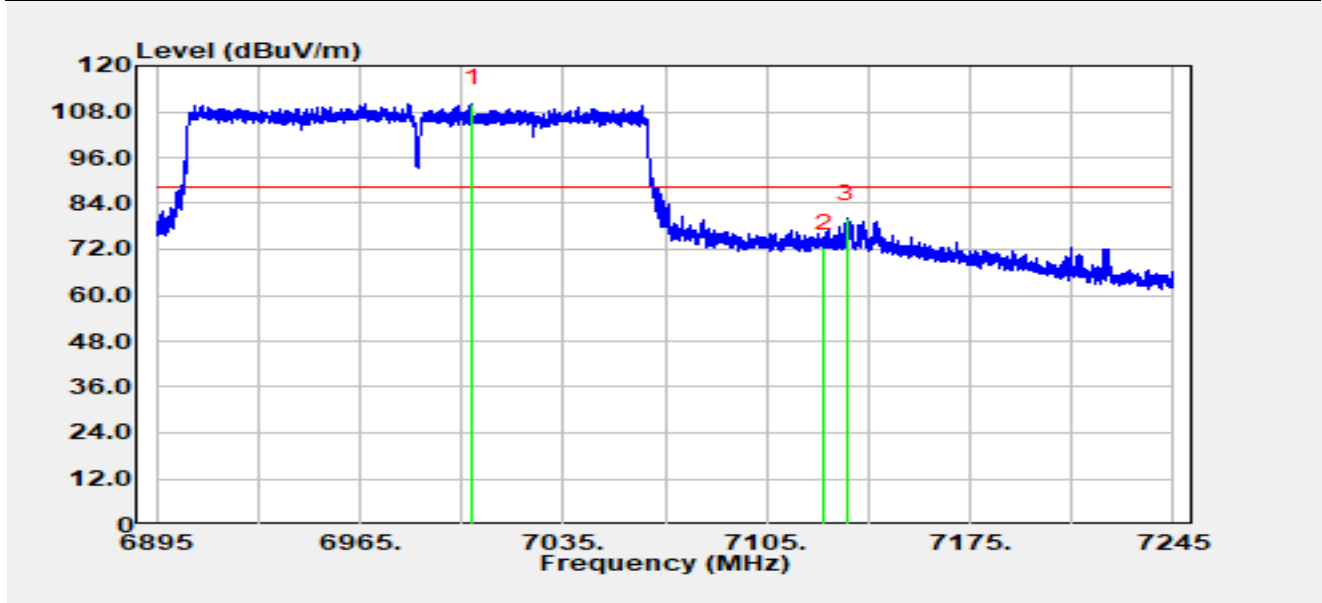


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		7003.78	84.50	25.66	110.15	N/A	N/A	Peak
2		7125.00	45.69	26.71	72.40	-15.80	88.20	Peak
3	*	7132.55	53.17	26.92	80.09	-8.11	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT160 at 6985 MHz		

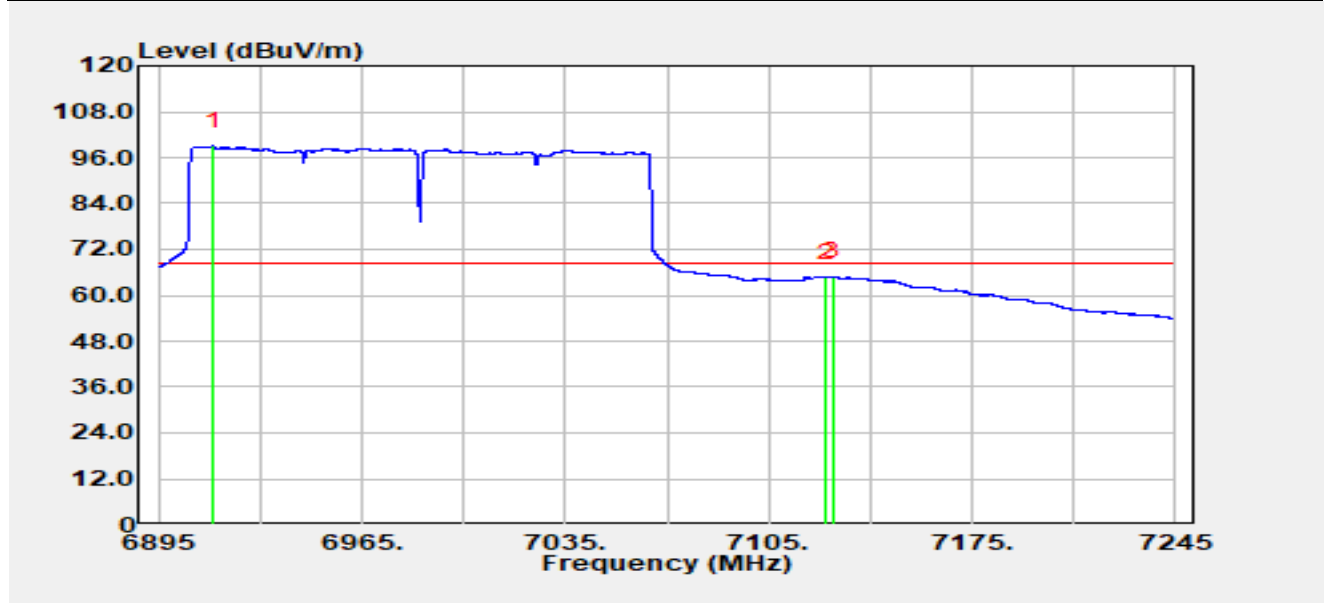


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6913.76	73.91	25.08	98.99	N/A	N/A	Average
2		7125.00	37.95	26.71	64.66	-3.54	68.20	Average
3	*	7127.30	38.12	26.79	64.91	-3.29	68.20	Average

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

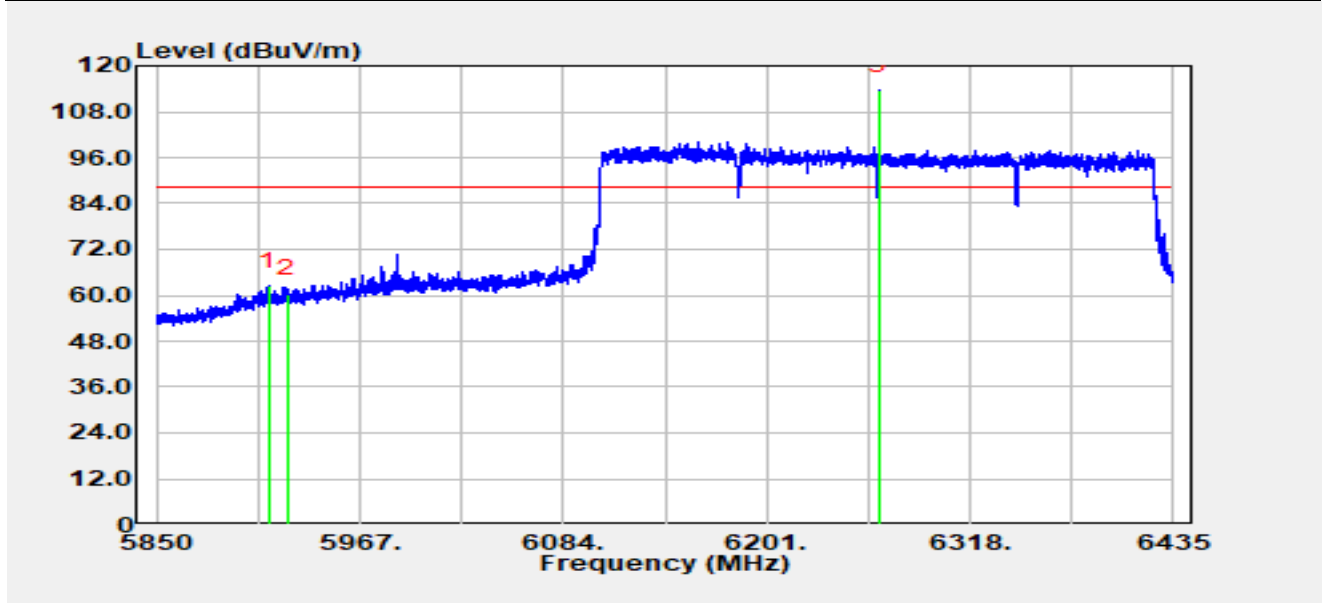


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5914.17	41.13	21.20	62.33	-25.87	88.20	Peak
2		5925.00	39.25	21.04	60.30	-27.90	88.20	Peak
3		6265.82	91.09	22.38	113.47	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

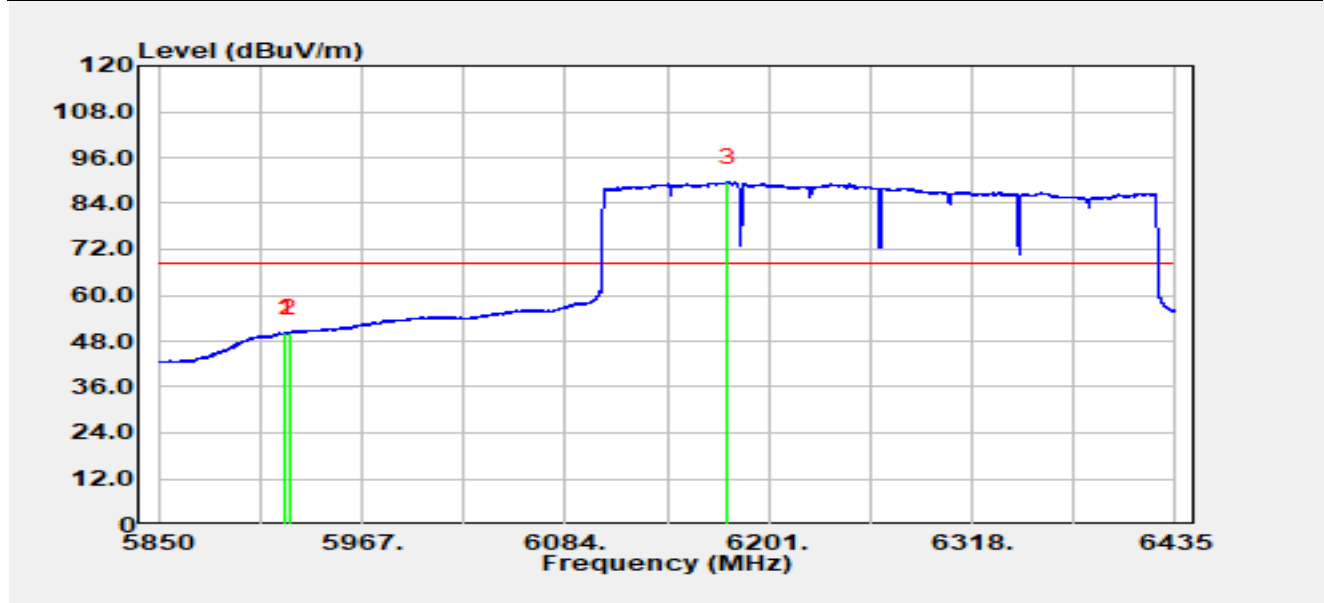


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		5923.13	29.08	21.07	50.14	-18.06	68.20	Average
2	*	5925.00	29.12	21.04	50.17	-18.03	68.20	Average
3		6177.72	67.16	22.33	89.48	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

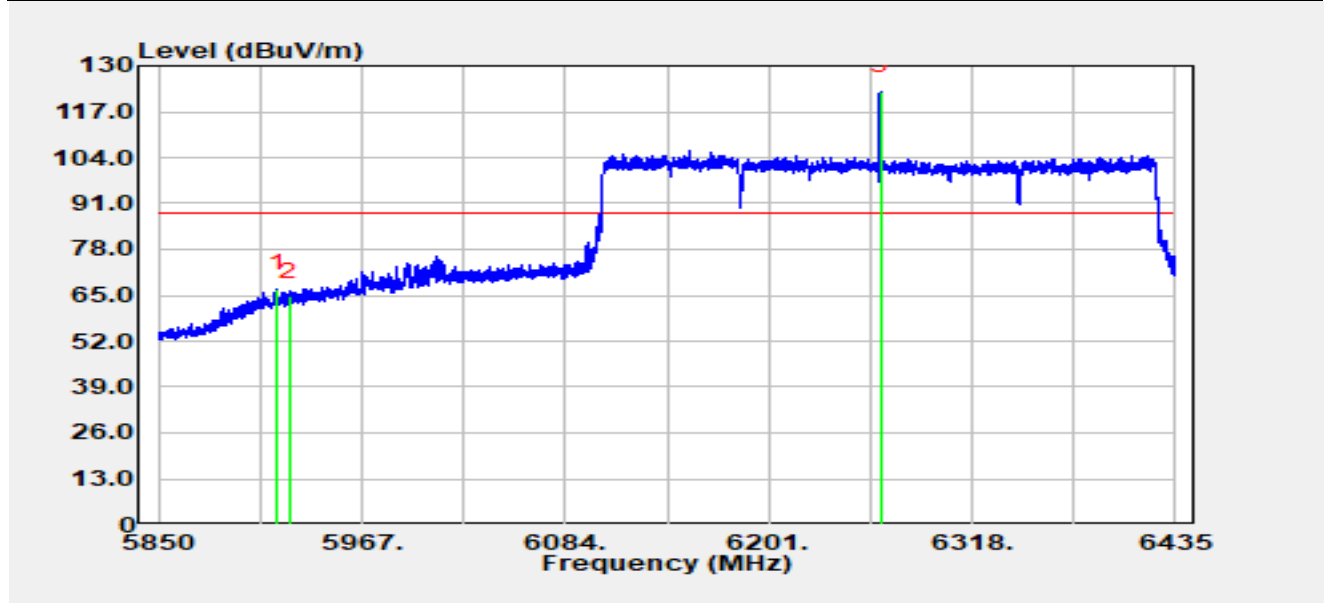


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5918.56	45.59	21.14	66.73	-21.47	88.20	Peak
2		5925.00	43.64	21.04	64.68	-23.52	88.20	Peak
3		6265.17	100.28	22.39	122.67	N/A	N/A	Peak

Notes:

1. " * " indicates the worst-case emission level observed during the measurement.
2. C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
3. Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT320-2 at 6265 MHz		

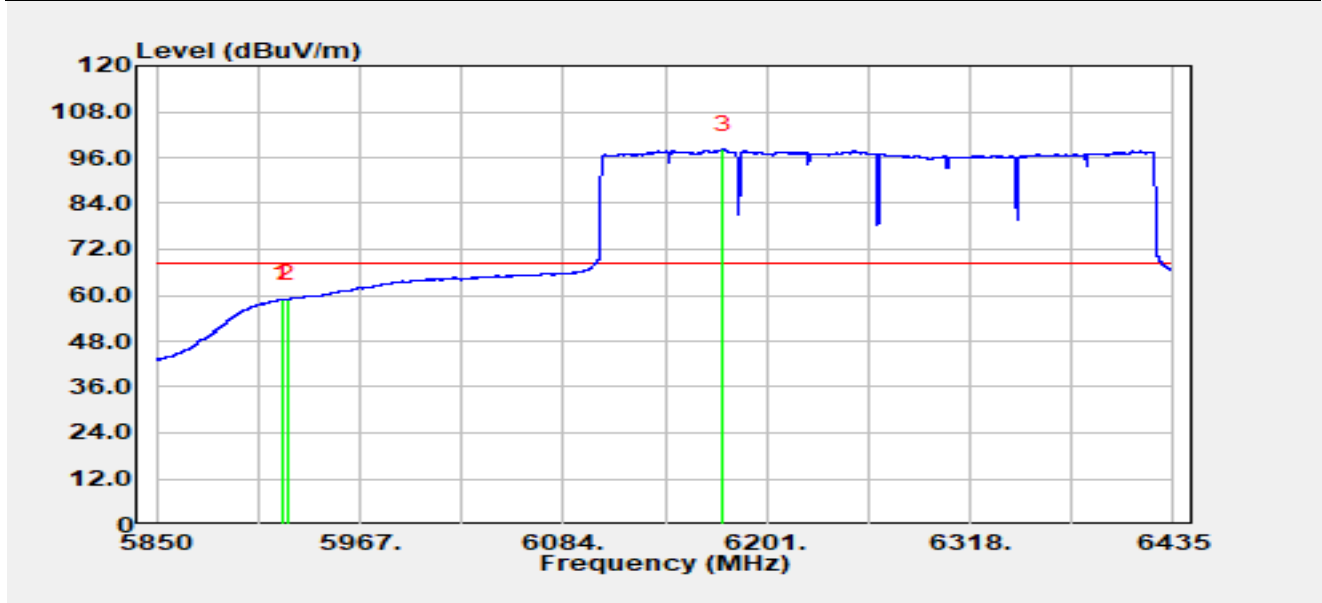


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1	*	5922.36	37.80	21.08	58.88	-9.32	68.20	Average
2		5925.00	37.82	21.04	58.87	-9.33	68.20	Average
3		6176.20	75.75	22.34	98.09	N/A	N/A	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT320-2 at 6905 MHz		

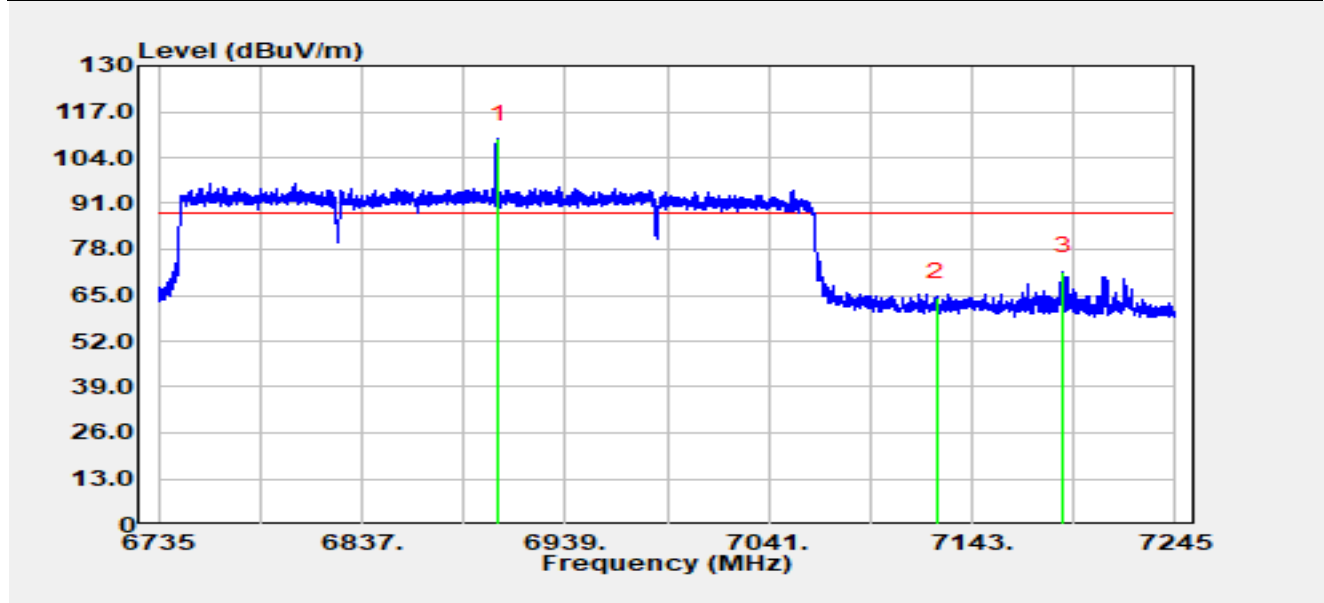


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6905.44	84.34	24.91	109.25	N/A	N/A	Peak
2		7125.00	37.69	26.71	64.40	-23.80	88.20	Peak
3	*	7188.95	44.81	26.95	71.76	-16.44	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Horizontal
Test Mode	Transmit by 802.11be-EHT320-2 at 6905 MHz		

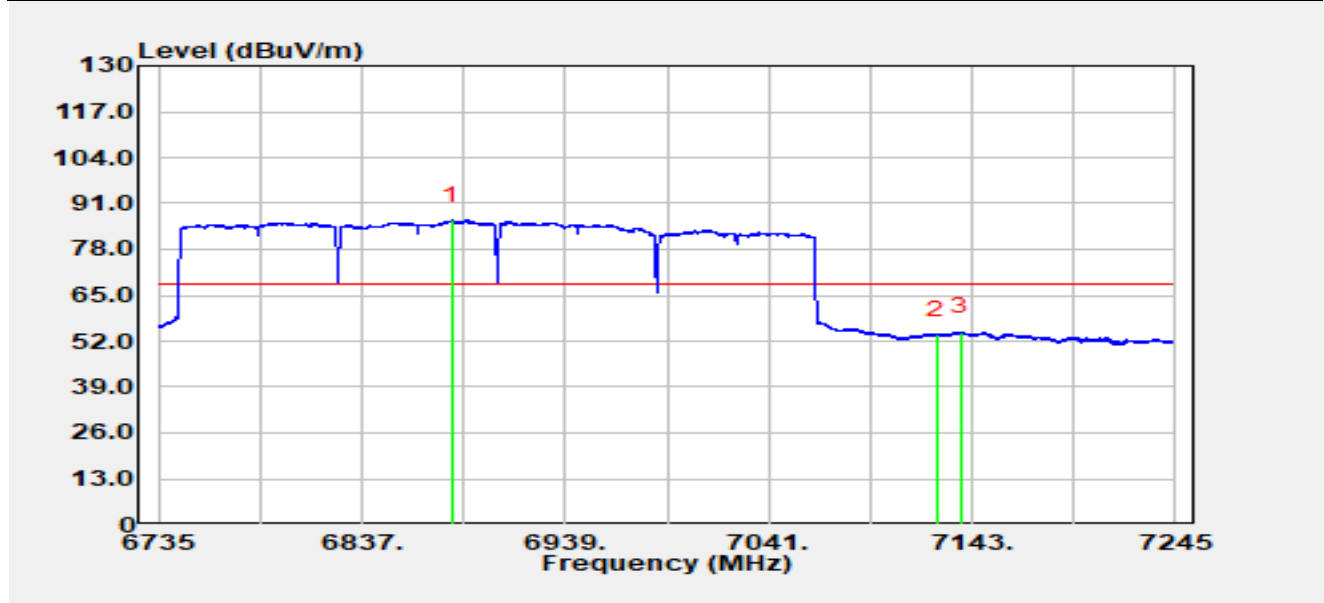


No	Mark	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Detector
1		6882.08	61.38	24.86	86.25	N/A	N/A	Average
2		7125.00	27.05	26.71	53.76	-14.44	68.20	Average
3	*	7137.39	27.56	27.00	54.56	-13.64	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBUV/m) = Reading (dBUV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT320-2 at 6905 MHz		

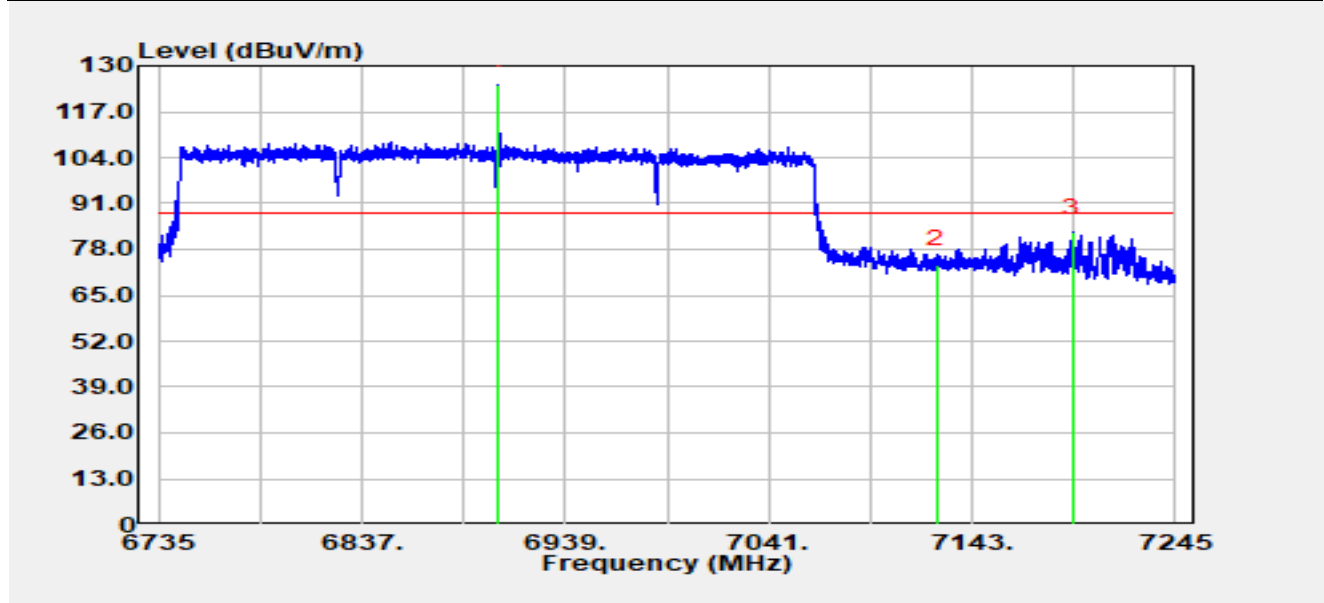


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6905.09	99.58	24.90	124.49	N/A	N/A	Peak
2		7125.00	47.06	26.71	73.77	-14.43	88.20	Peak
3	*	7193.24	55.73	26.99	82.72	-5.48	88.20	Peak

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

Site	WZ-AC2	Test Date	2025-09-26
Temperature	23.5 °C	Humidity	50.0%
Limit	FCC_6G RE (3m)	Test Engineer	Jerry Lu
Test Voltage	By PoE	Polarity	Vertical
Test Mode	Transmit by 802.11be-EHT320-2 at 6905 MHz		

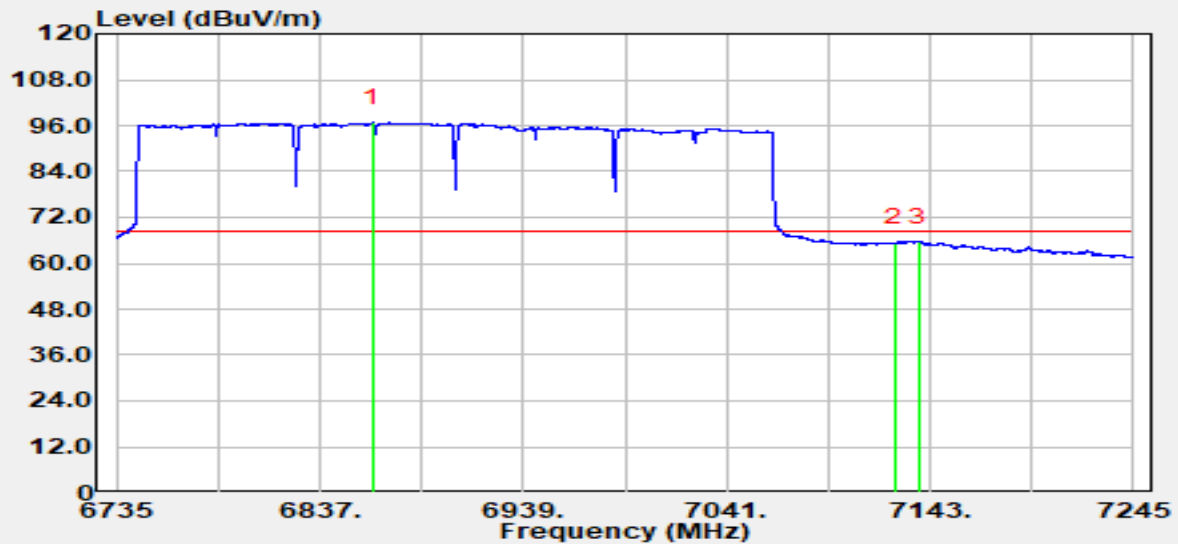


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB/m)	Measurement (dBμV/m)	Margin (dB)	Limit (dBμV/m)	Detector
1		6863.57	71.86	24.85	96.71	N/A	N/A	Average
2		7125.00	38.58	26.71	65.29	-2.91	68.20	Average
3	*	7137.39	38.66	27.00	65.66	-2.54	68.20	Average

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) + Attenuation (dB) - AMP (dB).
- Measurement (dBμV/m) = Reading (dBμV) + C.F (dB/m).

A.9 AC Conducted Emissions Test Result

Site	WZ-SR2	Test Date	2025-09-28
Temperature	25.7 °C	Humidity	54.0%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	By PoE	Polarity	Line1
Test Mode	Transmit by 802.11be-EHT160 at 6505 MHz_Nss=2		

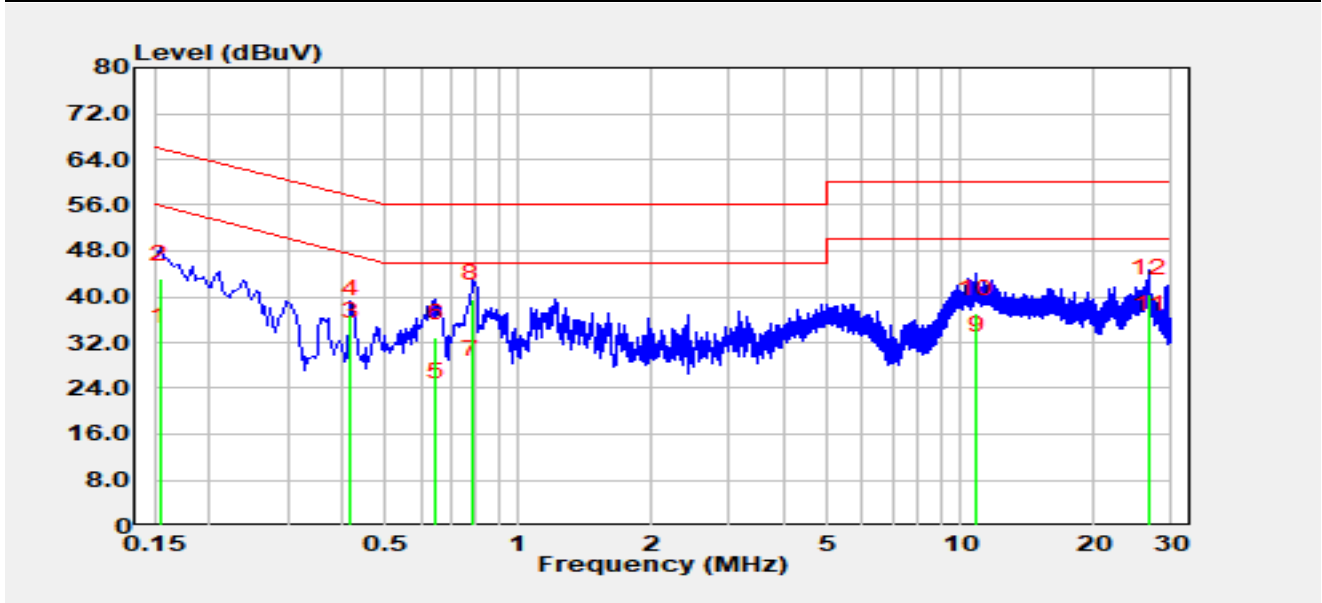


No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	22.40	9.67	32.07	-23.71	55.78	Average
2		0.15	33.40	9.67	43.07	-22.71	65.78	QP
3	*	0.42	23.20	9.76	32.96	-14.53	47.49	Average
4		0.42	27.10	9.76	36.86	-20.63	57.49	QP
5		0.65	12.60	9.87	22.47	-23.53	46.00	Average
6		0.65	22.90	9.87	32.77	-23.23	56.00	QP
7		0.79	16.50	9.93	26.43	-19.57	46.00	Average
8		0.79	29.70	9.93	39.63	-16.37	56.00	QP
9		10.85	20.30	10.29	30.59	-19.41	50.00	Average
10		10.85	26.70	10.29	36.99	-23.01	60.00	QP
11		26.81	23.40	10.74	34.14	-15.86	50.00	Average
12		26.81	29.80	10.74	40.54	-19.46	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Site	WZ-SR2	Test Date	2025-09-28
Temperature	25.7 °C	Humidity	54.0%
Limit	FCC Part 15.207_CE_Mains	Test Engineer	Linda Wei
Test Voltage	By PoE	Polarity	Neutral
Test Mode	Transmit by 802.11be-EHT160 at 6505 MHz_Nss=2		

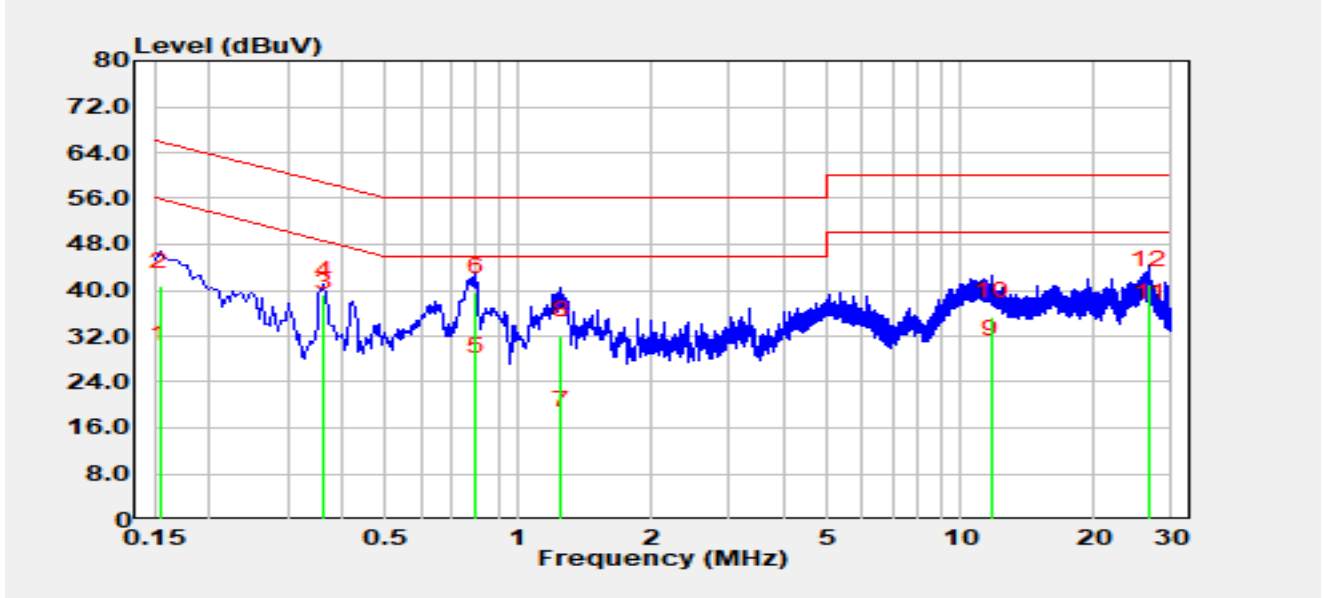

No	Mark	Frequency (MHz)	Reading (dBμV)	C.F (dB)	Measurement (dBμV)	Margin (dB)	Limit (dBμV)	Detector
1		0.15	18.00	9.79	27.79	-27.99	55.78	Average
2		0.15	30.90	9.79	40.69	-25.09	65.78	QP
3	*	0.36	27.00	9.85	36.85	-11.83	48.68	Average
4		0.36	29.30	9.85	39.15	-19.53	58.68	QP
5		0.80	15.70	10.04	25.74	-20.26	46.00	Average
6		0.80	29.60	10.04	39.64	-16.36	56.00	QP
7		1.25	6.40	10.13	16.53	-29.47	46.00	Average
8		1.25	21.90	10.13	32.03	-23.97	56.00	QP
9		11.76	18.40	10.44	28.84	-21.16	50.00	Average
10		11.76	25.00	10.44	35.44	-24.56	60.00	QP
11		26.80	24.40	10.88	35.28	-14.72	50.00	Average
12		26.80	30.10	10.88	40.98	-19.02	60.00	QP

Notes:

- "*" indicates the worst-case emission level observed during the measurement.
- C.F (dB) = LISN Factor (dB) + Cable Loss (dB).
- Measurement (dBμV) = Reading (dBμV) + C.F (dB).

Appendix B - Test Setup Photograph

Refer to "R25S1056092-UT" file.

Appendix C - EUT Photograph

Refer to "R25S1056092-UE" file.

_____ The End _____