


AUT Report

Product Model: Fusion G+ 1.0

Manufacturer: TP-Link Systems Inc.

Test Date: 2025.10.11


Tested By: Lin Shuojin 

TP-Link Systems Inc.
10 Mauchly, Irvine, CA 92618

Index

1. Antenna Distribution.....	3
2. Electrical Characteristics	3
3. Gain and Radiation Pattern	3
3.1 Measurement Procedure	3
3.2 Test Setup	5
3.3 S Parameter Test Data.....	6
3.4 Antenna Peak Gain	6
3.5 Antenna Radiation Pattern.....	6

1. Antenna Distribution

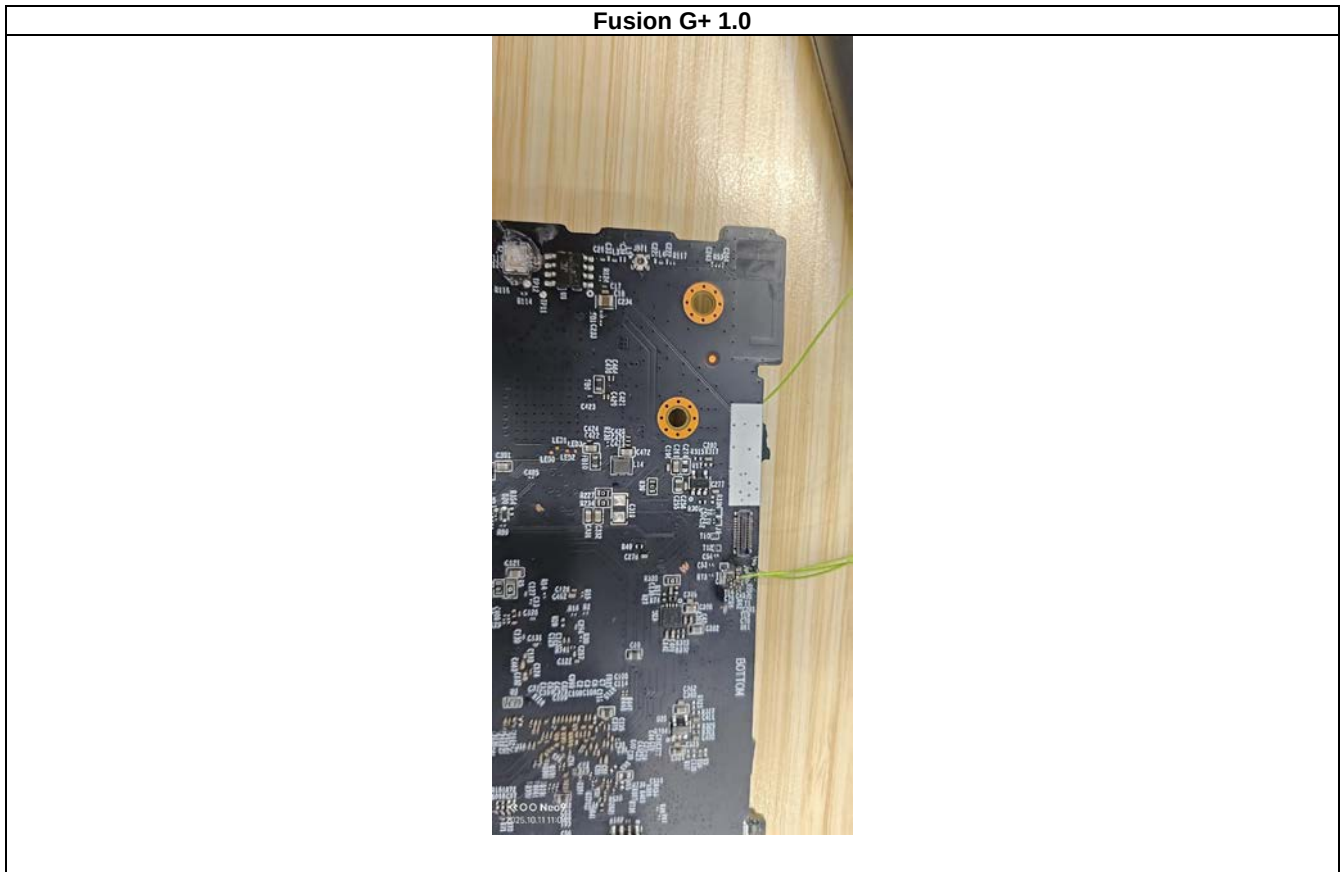

2. Electrical Characteristics

Ant1	
Frequency	2400 ~2500MHz
Impedance	50Ohm
Antenna Type	Dipole
Antenna Gain	2400-2500:3.94dBi
Radiation pattern	Omni-Directional
P/N	

3. Gain and Radiation Pattern

3.1 Measurement Procedure

This measurement experiment adopted an antenna near-field measurement system, and the diagram of the measurement system was shown in Figure 3-1. The excitation signal was generated by the Keysight E5071C (300kHz-20GHz). Under the control of the central computer, the probe rotated in the θ direction, and the EUT rotated in the ϕ direction with the turntable. The probe sampling frame received and collected signals in the near-field range of the EUT. The software system which was controlled by the central computer completed the processing, output and display of the test data.

GTS MaxSign100 Software	V2.1	GTS(General Test System)	/	/	/
----------------------------	------	-----------------------------	---	---	---

3.2 Test Setup

*需提供测试时的样机状态图，如图 3-4。

The test setup was shown in Figure 3-3, 3-4:



Figure 3-3


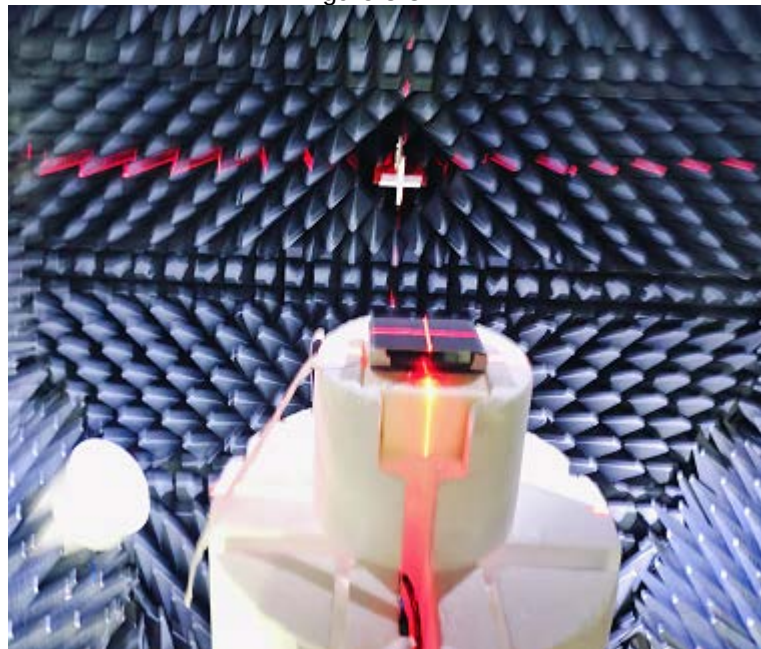


Figure 3-4

3.3 S Parameter Test Data

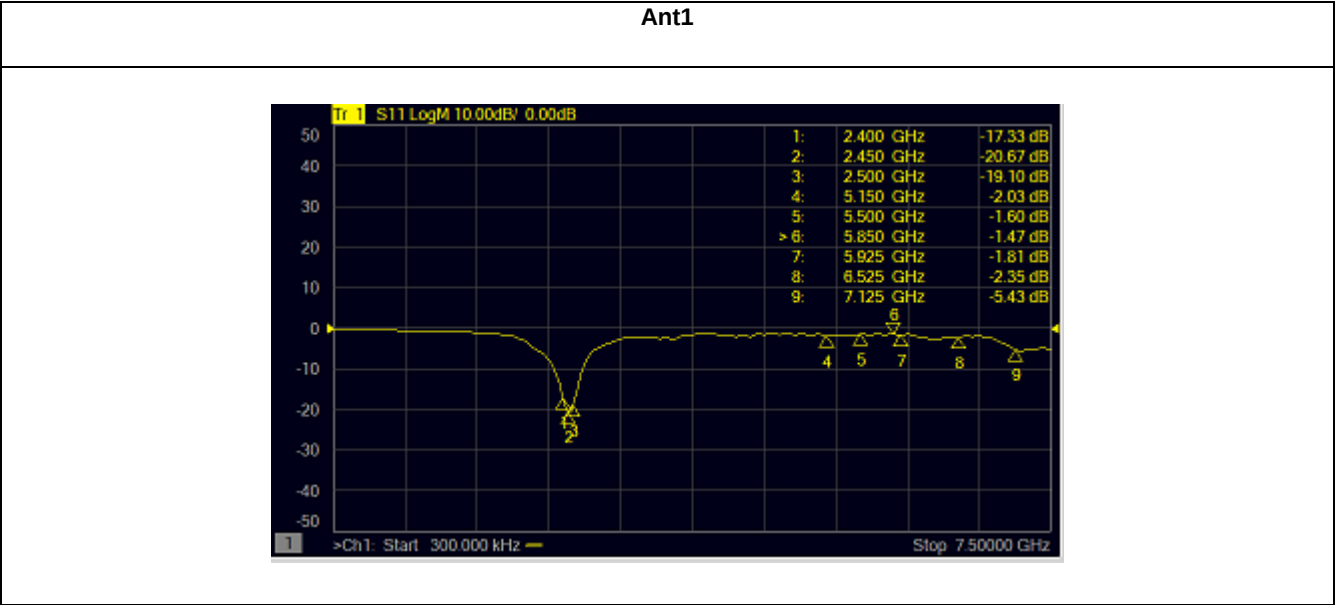

3.4 Antenna Peak Gain

Frequency	2.49GHz 2400~2500MHz
Ant1 MaxGain(dBi)	3.94
Ant1 Polarization/ Φ ($^{\circ}$) / θ ($^{\circ}$)	Theta/240/135
Max Gain(dBi)	3.94

3.5 Antenna Radiation Pattern

Ant1

