



SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd

Report No.: SUCR240900032706

Rev.: 01

Appendix B

Detailed Test Results

1. LTE
LTE Band 7
LTE Band 12
LTE Band 13
LTE Band 14
LTE Band 25
LTE Band 30
LTE Band 41
LTE Band 48
LTE Band 66
LTE Band 71
2. NR
NR Band n5
NR Band n12
NR Band n14
NR Band n25
NR Band n30
NR Band n41
NR Band n48
NR Band n66
NR Band n71
NR Band n77
3. WIFI
WIFI 2.4G
WIFI 5G
WIFI 6E

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com

SGS-CSTC Standards Technical Services (Suzhou) Co., Ltd
Wireless Laboratory

South of No. 6 Plant, No. 1, Runsheng Road, Suzhou Industrial Park, Suzhou Area, China (Jiangsu) Pilot Free Trade Zone 215000 T (86-512) 62992980 www.sgsgroup.com.cn

Member of the SGS Group (SGS SA)

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 7 20M QPSK 1RB0 Ch21100 Right Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2535 MHz; Duty Cycle: 1:1

Medium: HSL2600; Medium parameters used: $f = 2535$ MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 37.932$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (measured) = 0.991 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.30 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.733 W/kg; SAR(10 g) = 0.395 W/kg

Maximum value of SAR (measured) = 1.08 W/kg

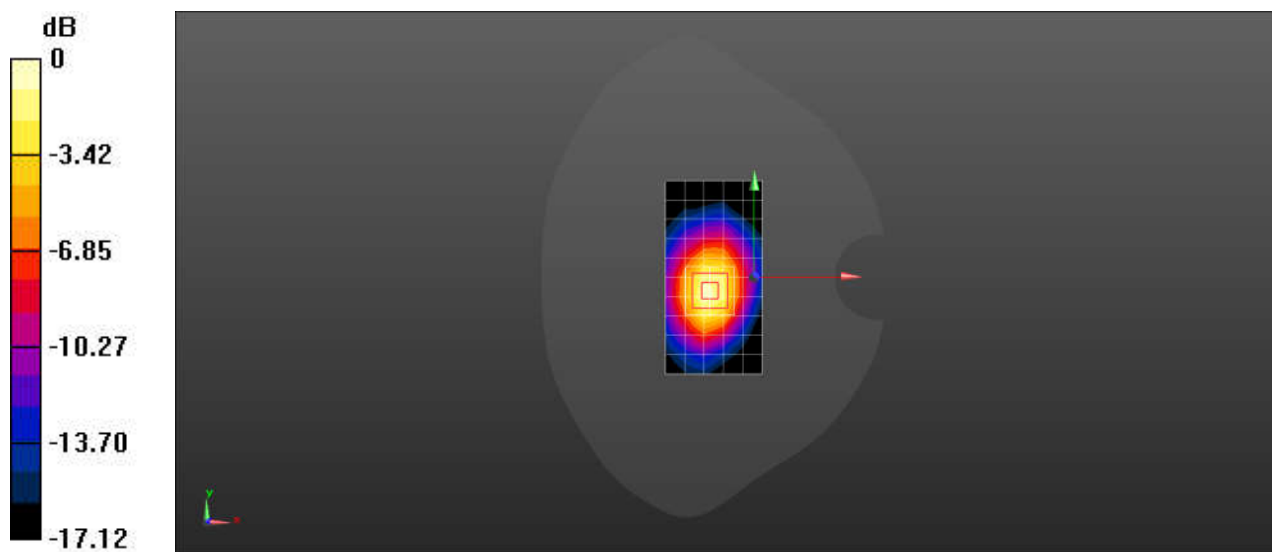

0 dB = 1.08 W/kg = 0.33 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 12 10M QPSK 1RB0 Ch23095 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.863$ S/m; $\epsilon_r = 43.001$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.446 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.82 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.447 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.265 W/kg

Maximum value of SAR (measured) = 0.410 W/kg

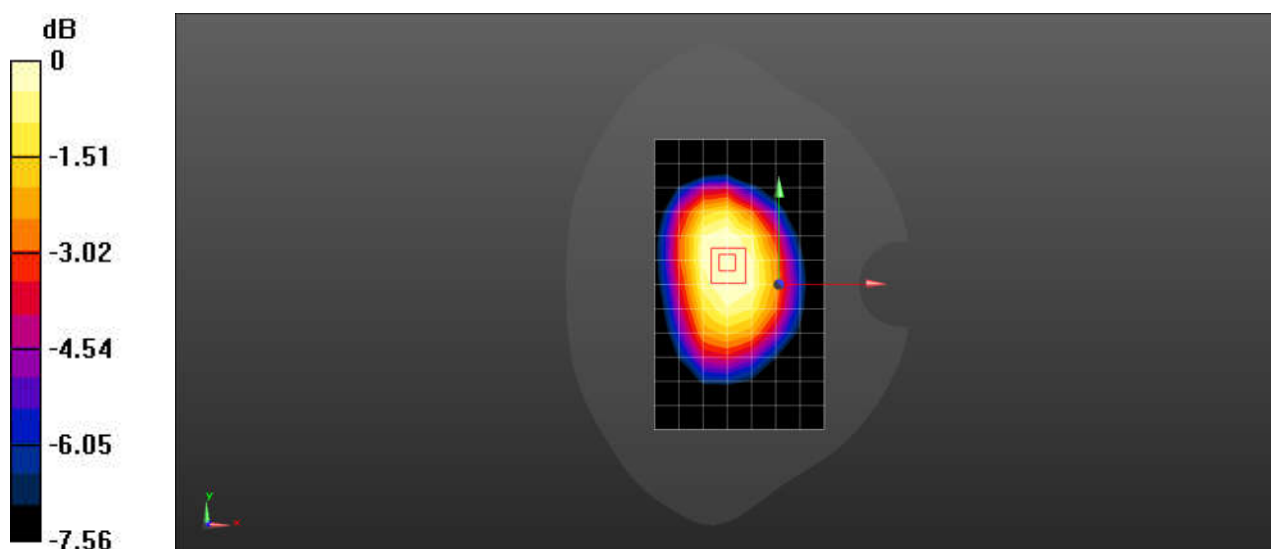

0 dB = 0.410 W/kg = -3.87 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 13 10M QPSK 1RB0 Ch23230 Front Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 782 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.902 \text{ S/m}$; $\epsilon_r = 42.665$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$
Maximum value of SAR (measured) = 0.633 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 23.24 V/m ; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.684 W/kg

SAR(1 g) = 0.525 W/kg ; SAR(10 g) = 0.408 W/kg

Maximum value of SAR (measured) = 0.628 W/kg

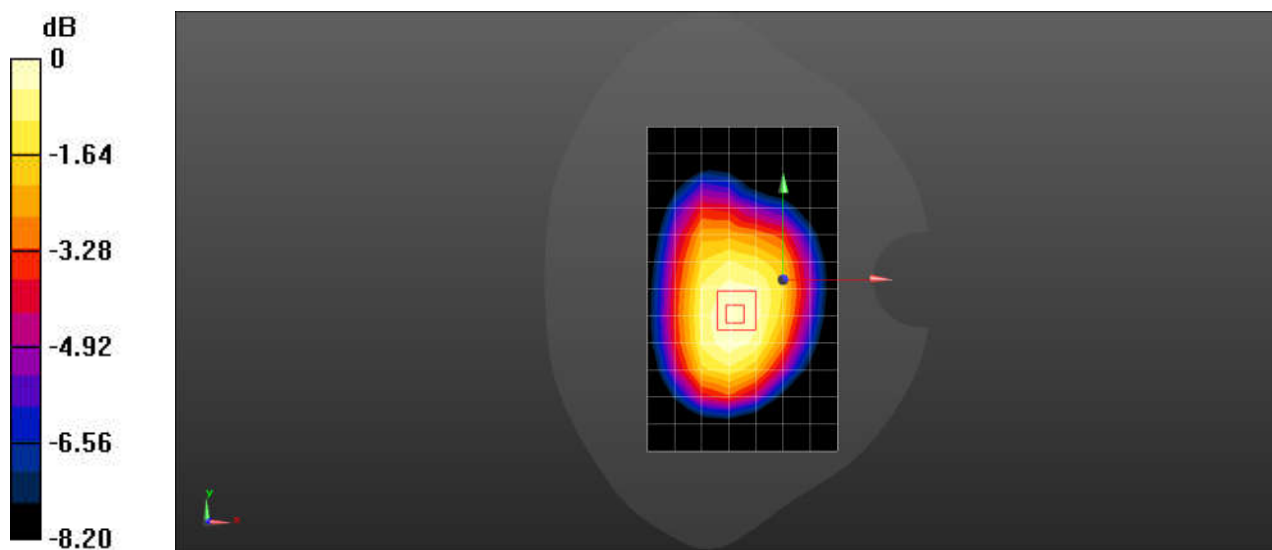

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 14 10M QPSK 1RB0 Ch23330 Front Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 793 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 793 \text{ MHz}$; $\sigma = 0.909 \text{ S/m}$; $\epsilon_r = 42.626$; $\rho = 1000 \text{ kg/m}^3$

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (measured) = 0.623 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.13 V/m ; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.419 W/kg ; SAR(10 g) = 0.286 W/kg

Maximum value of SAR (measured) = 0.624 W/kg

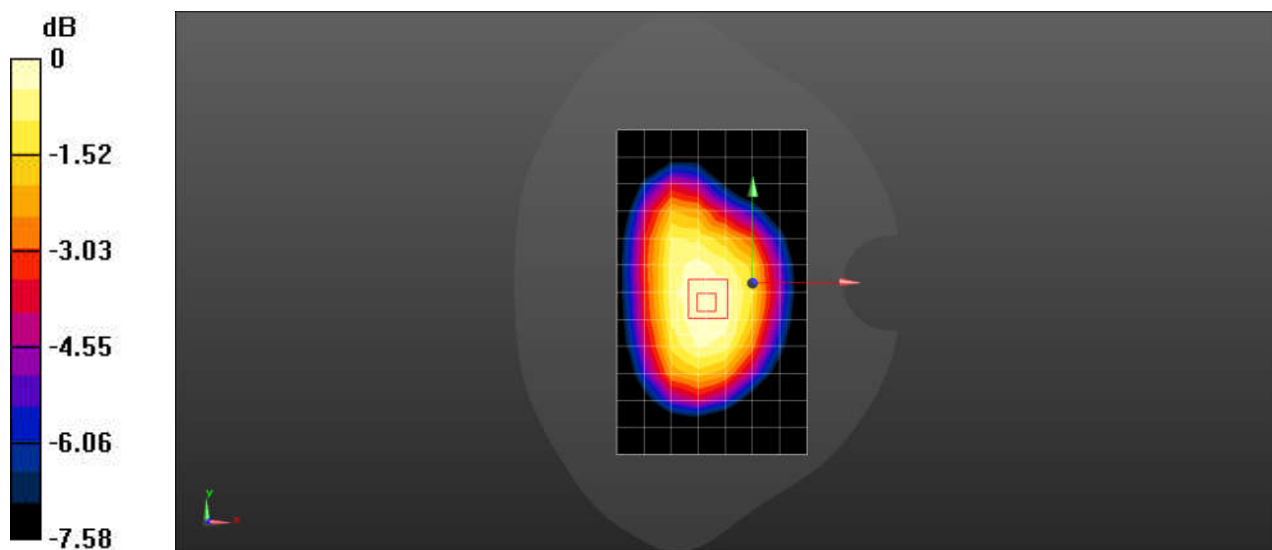

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 25 20M QPSK 1RB0 Ch26365 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 38.997$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.518 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.63 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.595 W/kg

SAR(1 g) = 0.383 W/kg; SAR(10 g) = 0.245 W/kg

Maximum value of SAR (measured) = 0.521 W/kg

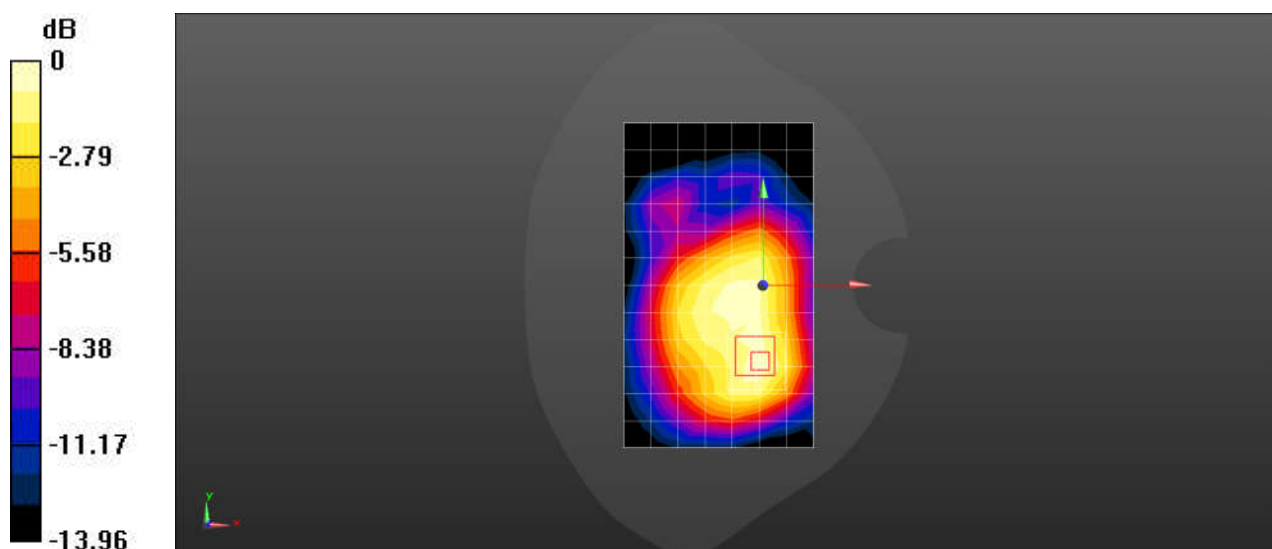

0 dB = 0.521 W/kg = -2.83 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 26 15M QPSK 1RB0 Ch26865 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 15MHz (0); Frequency: 831.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 831.5$ MHz; $\sigma = 0.893$ S/m; $\epsilon_r = 42.936$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.35, 10.35, 10.35); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.612 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.93 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.677 W/kg

SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.405 W/kg

Maximum value of SAR (measured) = 0.622 W/kg

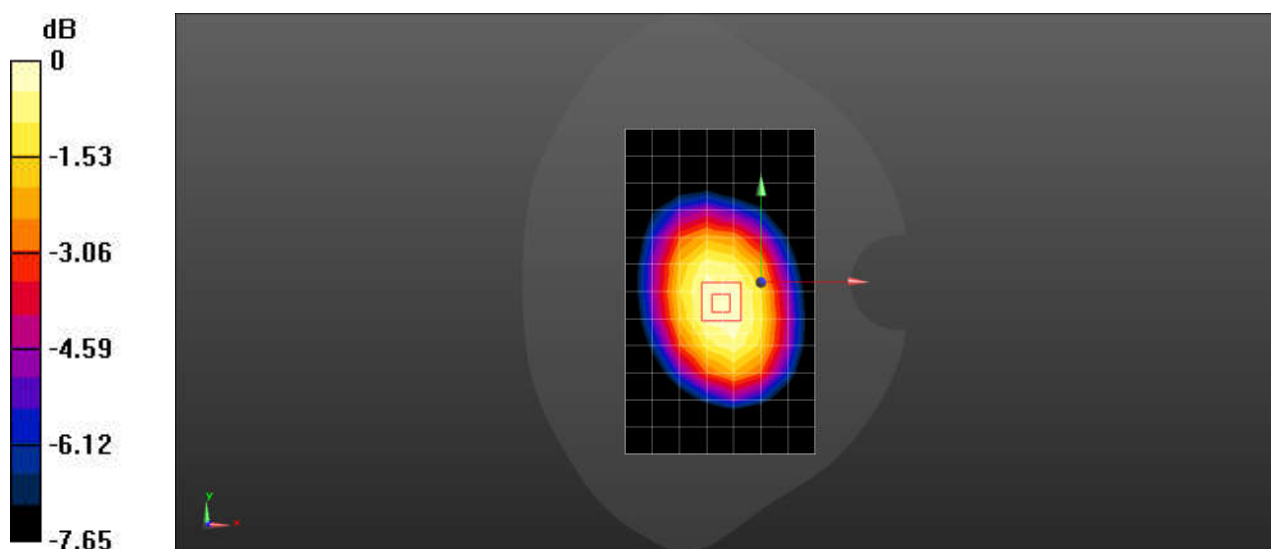

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 30 10M QPSK 1RB0 Ch27710 Right Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 2310 MHz;Duty Cycle: 1:1

Medium: HSL2300;Medium parameters used: $f = 2310$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 39.658$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.29, 8.29, 8.29); Calibrated: 2024/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.06 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.29 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.767 W/kg; SAR(10 g) = 0.426 W/kg

Maximum value of SAR (measured) = 1.10 W/kg

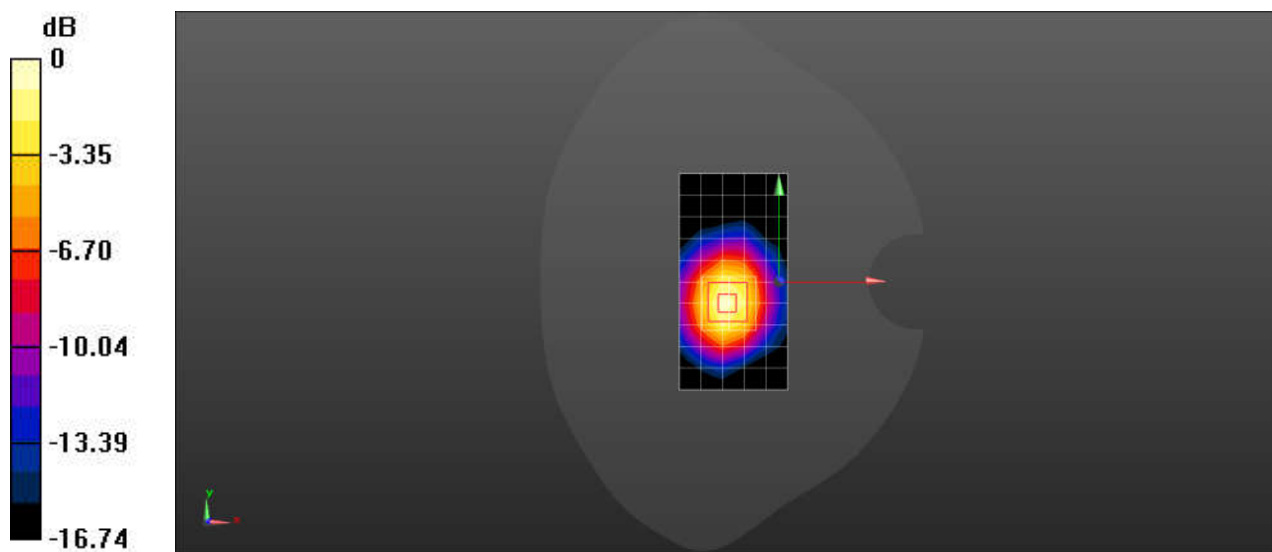

0 dB = 1.10 W/kg = 0.41 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 41_PC2 20M QPSK 1RB0 Ch41490 Right Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz;Duty Cycle: 1:1.58

Medium: HSL2600;Medium parameters used: $f = 2593$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 37.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.85, 7.85, 7.85); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.24 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 20.85 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.58 W/kg

SAR(1 g) = 0.885 W/kg; SAR(10 g) = 0.463 W/kg

Maximum value of SAR (measured) = 1.33 W/kg

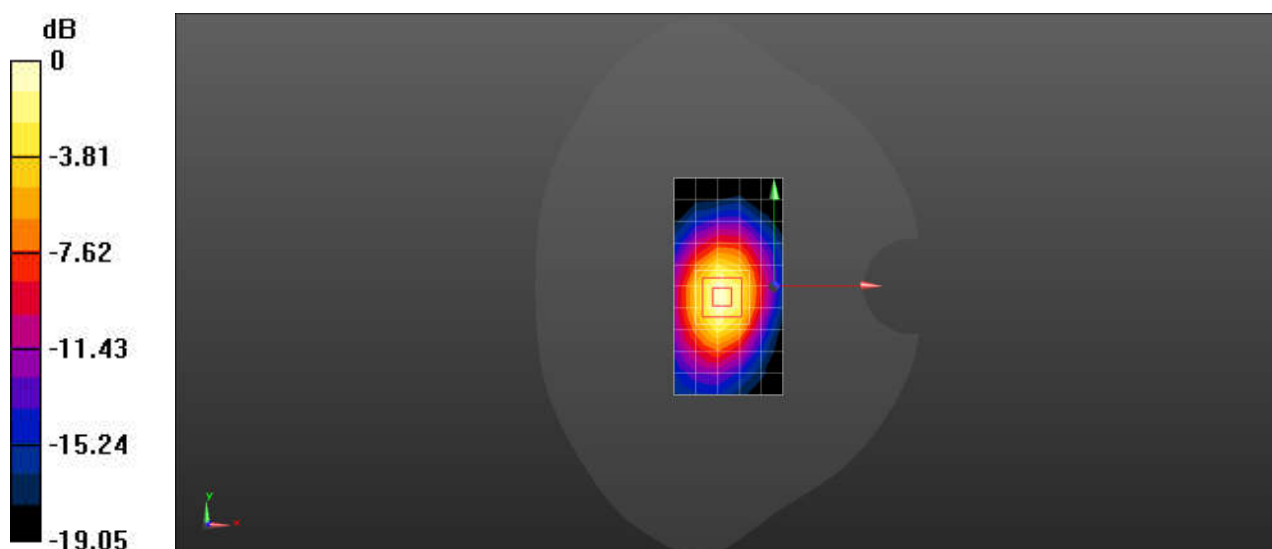

0 dB = 1.33 W/kg = 1.24 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 41_PC3 20M QPSK 1RB0 Ch40620 Right Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2593 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 1.945$ S/m; $\epsilon_r = 37.706$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.85, 7.85, 7.85); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (6x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 1.02 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 18.41 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.32 W/kg

SAR(1 g) = 0.725 W/kg; SAR(10 g) = 0.375 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

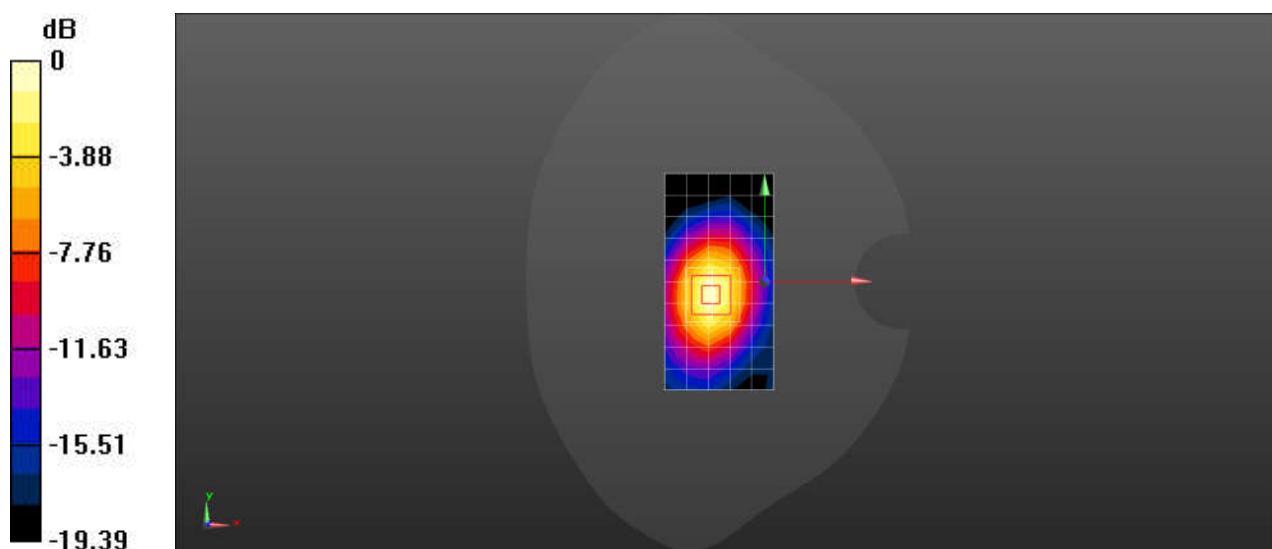

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 48 20M QPSK 1RB0 Ch55830 Left Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 3609 MHz;Duty Cycle: 1:1.58

Medium: HSL3700;Medium parameters used: $f = 3609$ MHz; $\sigma = 3.157$ S/m; $\epsilon_r = 37.665$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.08, 7.08, 7.08); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x13x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.651 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 11.38 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.436 W/kg; SAR(10 g) = 0.240 W/kg

Maximum value of SAR (measured) = 0.673 W/kg

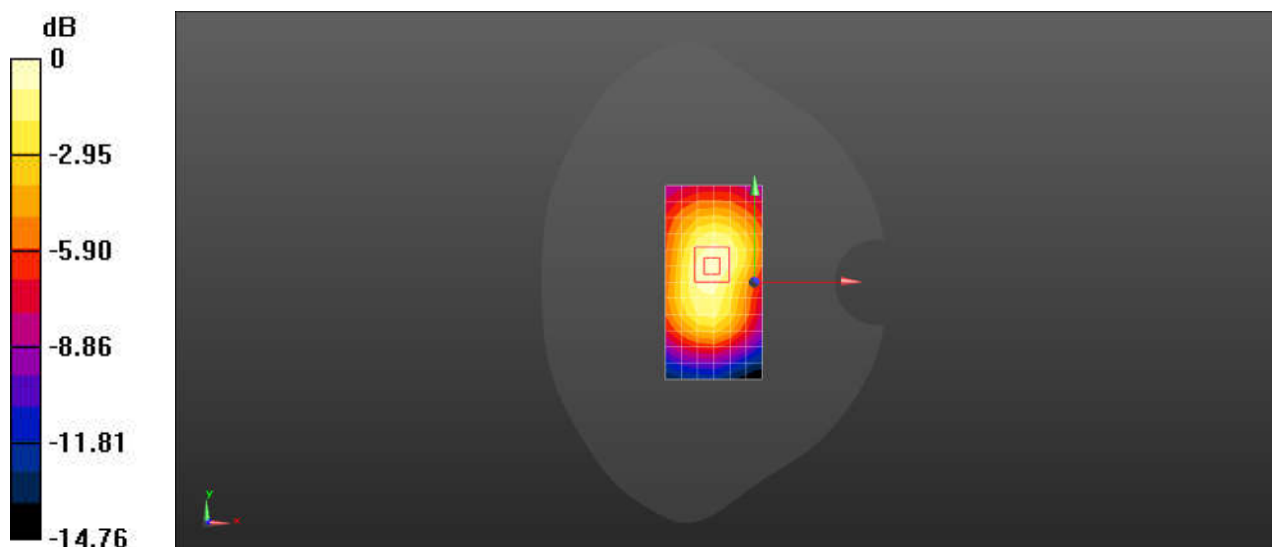

0 dB = 0.673 W/kg = -1.72 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 66 20M QPSK 1RB0 Ch132322 Front Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: HSL1750;Medium parameters used: $f = 1745$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 40.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.86, 8.86, 8.86); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.422 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.35 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.521 W/kg

SAR(1 g) = 0.336 W/kg; SAR(10 g) = 0.218 W/kg

Maximum value of SAR (measured) = 0.454 W/kg

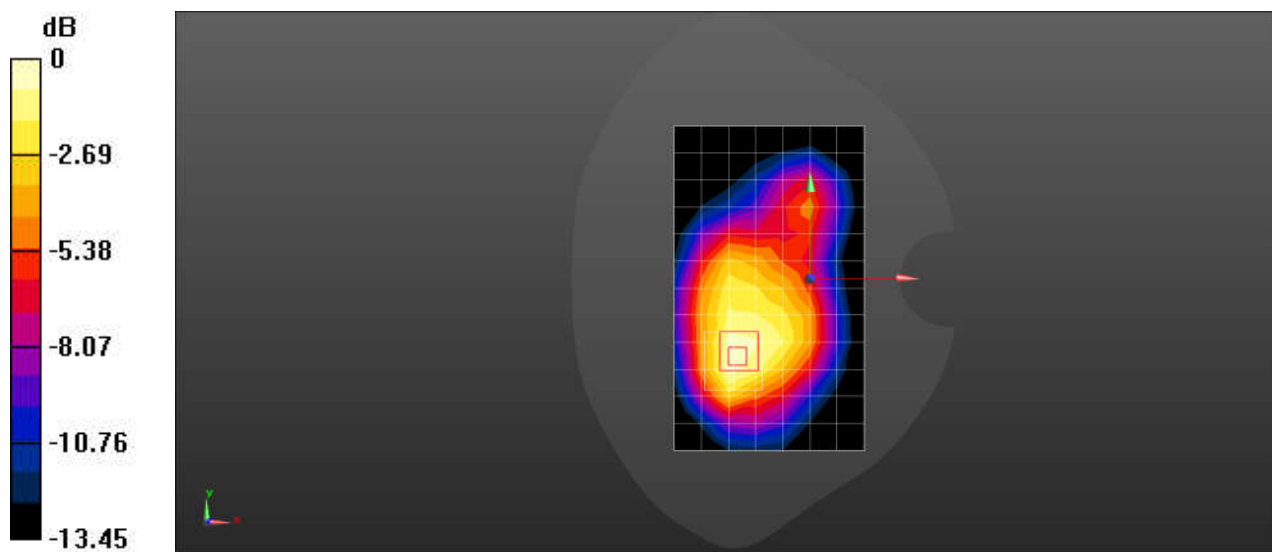

Test Laboratory: SGS-SAR Lab

M8550 LTE Band 71 20M QPSK 1RB0 Ch133322 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 683 MHz;Duty Cycle: 1:1

Medium: HSL750;Medium parameters used: $f = 683$ MHz; $\sigma = 0.849$ S/m; $\epsilon_r = 43.108$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.708 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.35 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.800 W/kg

SAR(1 g) = 0.579 W/kg; SAR(10 g) = 0.429 W/kg

Maximum value of SAR (measured) = 0.719 W/kg

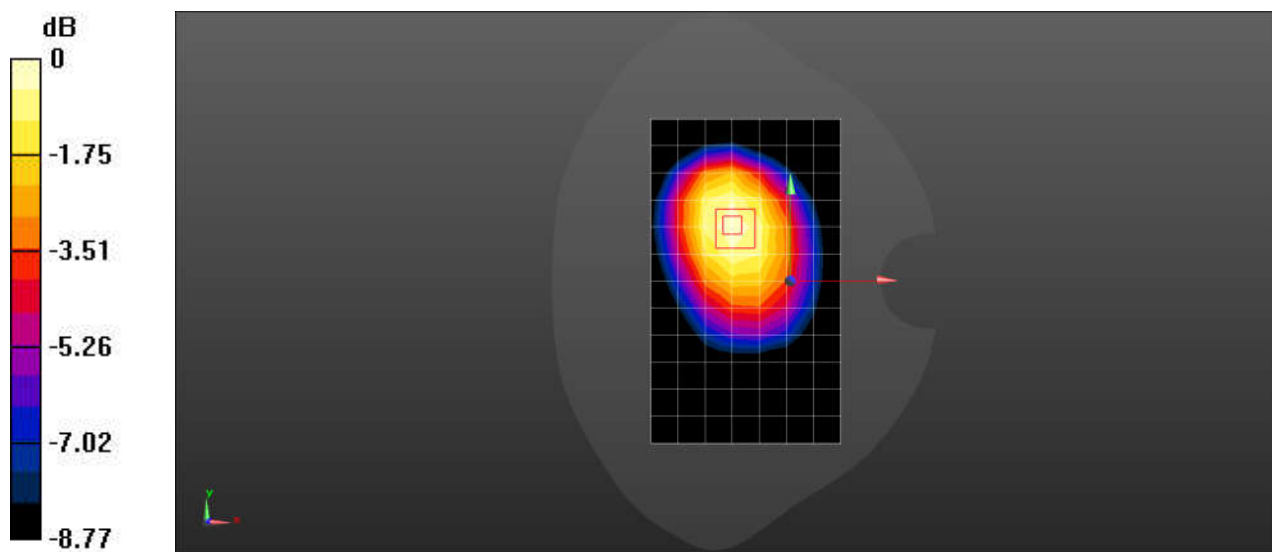

0 dB = 0.719 W/kg = -1.43 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n5 20M QPSK 1RB1 Ch167300 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 836.5 MHz; Duty Cycle: 1:1

Medium: HSL835; Medium parameters used: $f = 836.5$ MHz; $\sigma = 0.896$ S/m; $\epsilon_r = 42.9$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.35, 10.35, 10.35); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.672 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.69 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.734 W/kg

SAR(1 g) = 0.503 W/kg; SAR(10 g) = 0.386 W/kg

Maximum value of SAR (measured) = 0.668 W/kg

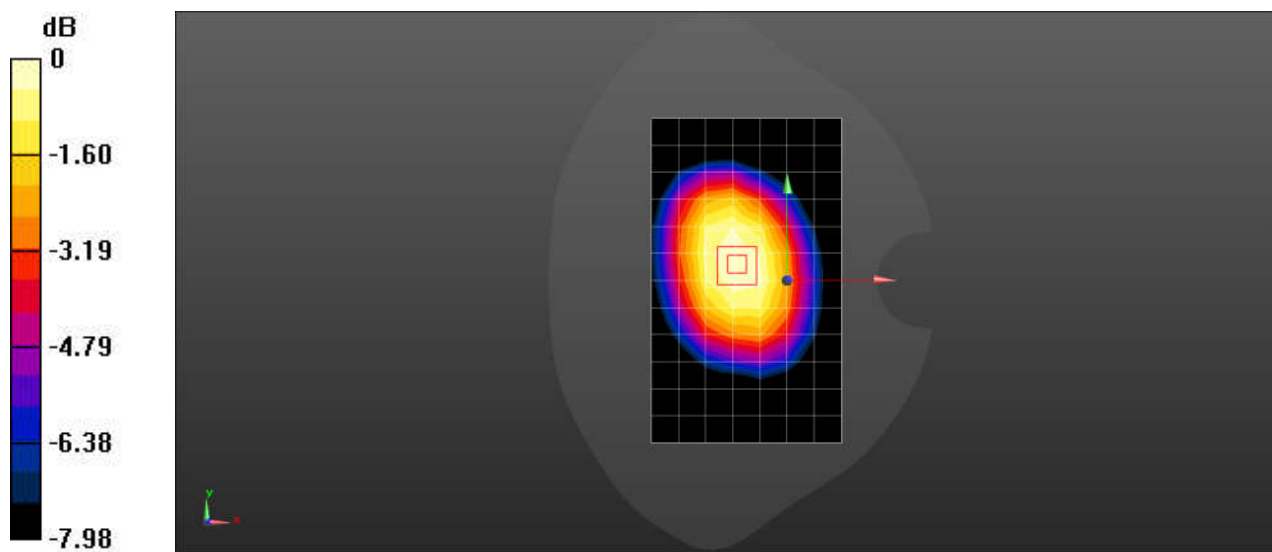

Test Laboratory: SGS-SAR Lab

M8550 NR n12 15M QPSK 36RB22 Ch141500 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 707.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 707.5$ MHz; $\sigma = 0.866$ S/m; $\epsilon_r = 42.899$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.538 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.58 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.587 W/kg

SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.349 W/kg

Maximum value of SAR (measured) = 0.540 W/kg

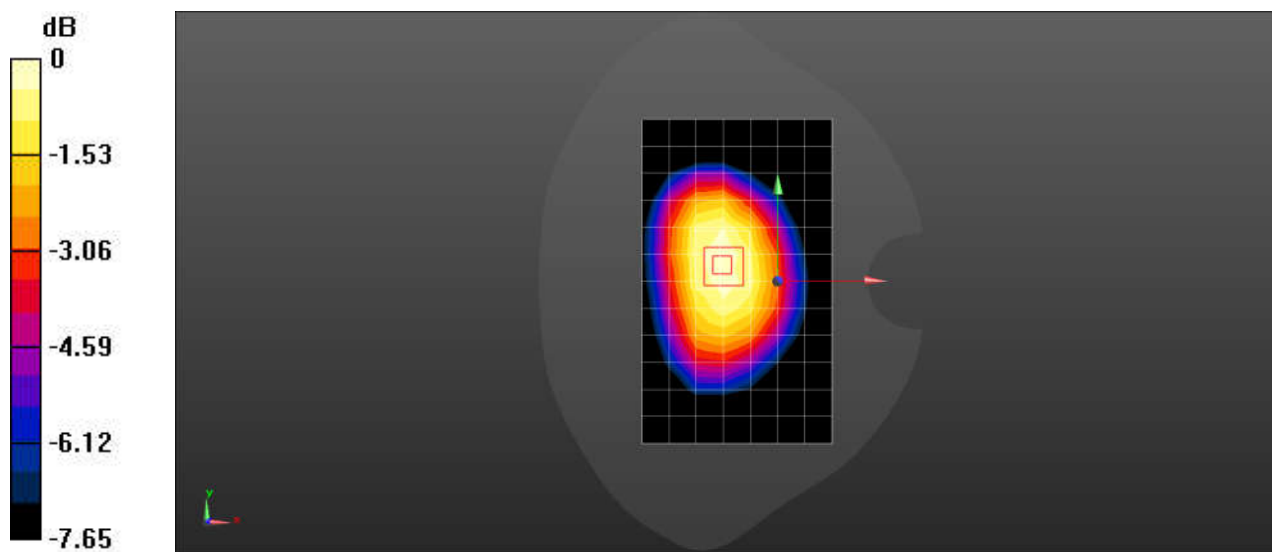

Test Laboratory: SGS-SAR Lab

M8550 NR n14 10M QPSK 25RB14 Ch158600 Front Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 793 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 793$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 42.524$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.591 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.65 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.641 W/kg

SAR(1 g) = 0.502 W/kg; SAR(10 g) = 0.397 W/kg

Maximum value of SAR (measured) = 0.592 W/kg

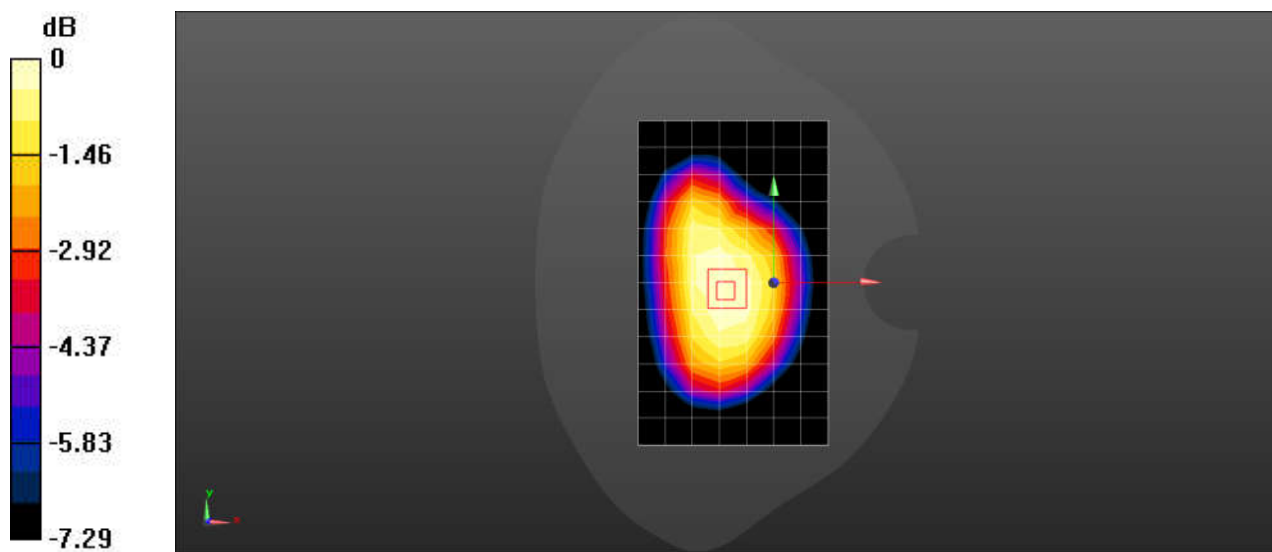

Test Laboratory: SGS-SAR Lab

M8550 NR n25 40M QPSK 1RB1 Ch376500 Front Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 1882.5 MHz; Duty Cycle: 1:1

Medium: HSL1950; Medium parameters used: $f = 1882.5$ MHz; $\sigma = 1.4$ S/m; $\epsilon_r = 38.997$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.5, 8.5, 8.5); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.622 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.18 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.746 W/kg

SAR(1 g) = 0.467 W/kg; SAR(10 g) = 0.288 W/kg

Maximum value of SAR (measured) = 0.649 W/kg

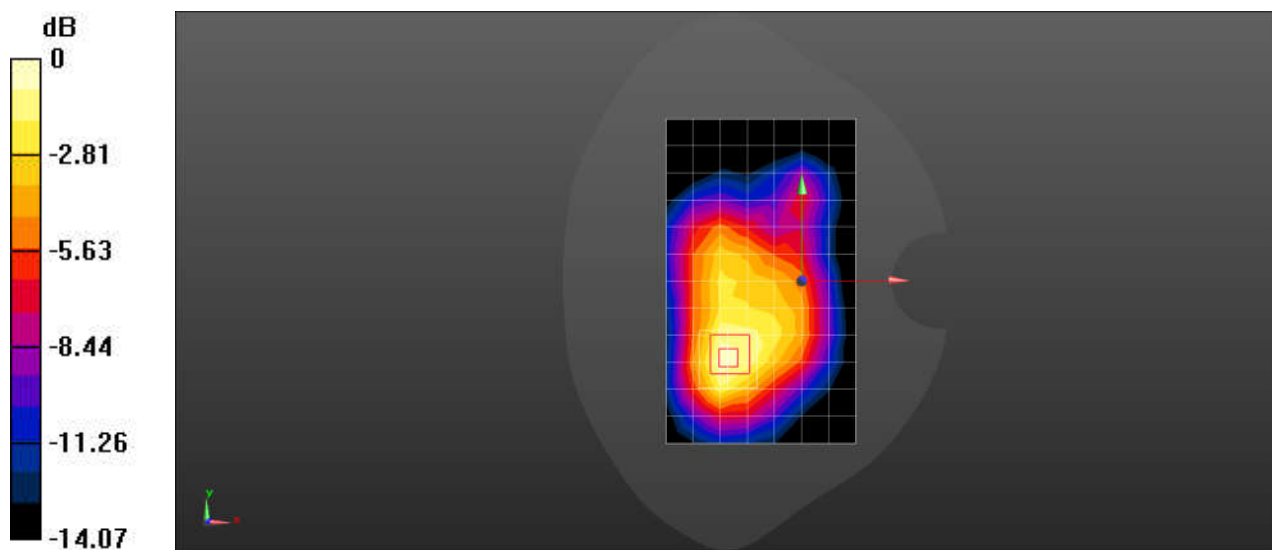

0 dB = 0.649 W/kg = -1.88 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n30 10M QPSK 25RB14 Ch462000 Right Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 2310 MHz; Duty Cycle: 1:1

Medium: HSL2300; Medium parameters used: $f = 2310$ MHz; $\sigma = 1.703$ S/m; $\epsilon_r = 39.658$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.29, 8.29, 8.29); Calibrated: 2024/4/26
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.929 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 16.41 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.11 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.373 W/kg

Maximum value of SAR (measured) = 0.956 W/kg

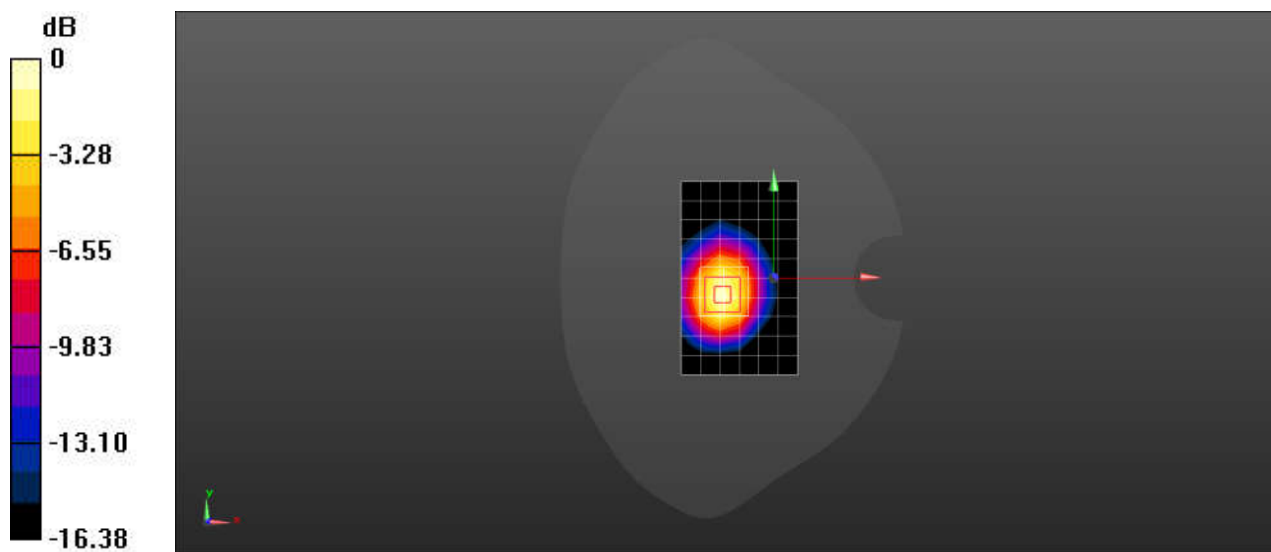

0 dB = 0.956 W/kg = -0.20 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n41_PC2 100M QPSK 135RB69 Ch518598 Left Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 2592.99 MHz; Duty Cycle: 1:1.58

Medium: HSL2600; Medium parameters used: $f = 2593$ MHz; $\sigma = 2.025$ S/m; $\epsilon_r = 38.291$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.85, 7.85, 7.85); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x11x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.924 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 13.24 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.731 W/kg; SAR(10 g) = 0.381 W/kg

Maximum value of SAR (measured) = 1.11 W/kg

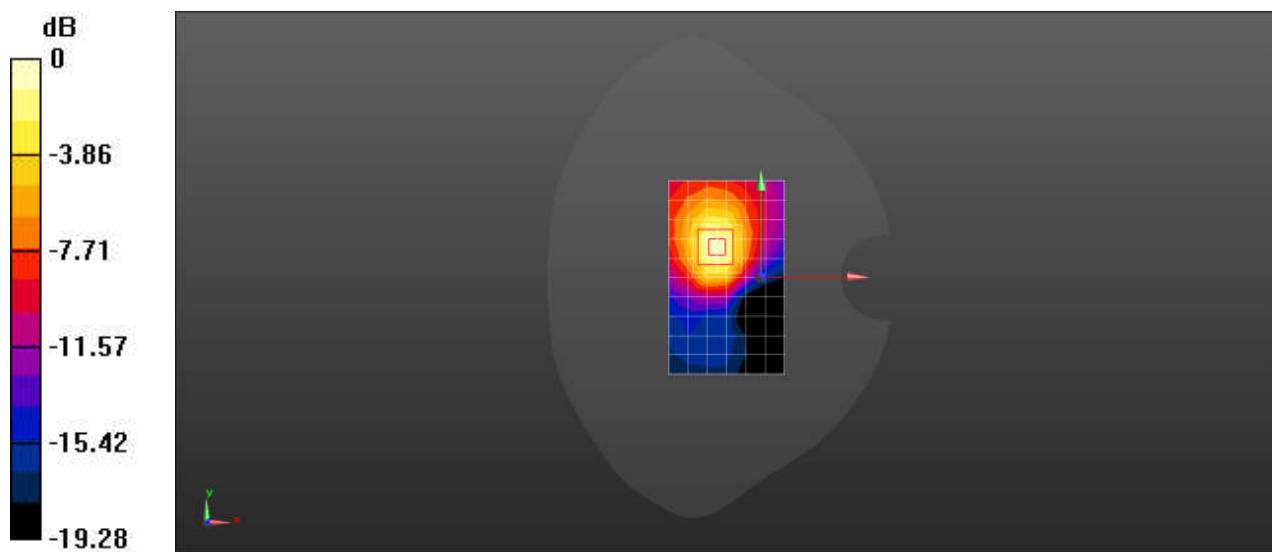

0 dB = 1.11 W/kg = 0.45 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n48 40M QPSK 1RB1 Ch641666 Top Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 3624.99 MHz; Duty Cycle: 1:1.58

Medium: HSL3700; Medium parameters used: $f = 3625$ MHz; $\sigma = 3.176$ S/m; $\epsilon_r = 37.617$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.08, 7.08, 7.08); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.687 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 4.985 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.949 W/kg

SAR(1 g) = 0.448 W/kg; SAR(10 g) = 0.183 W/kg

Maximum value of SAR (measured) = 0.783 W/kg

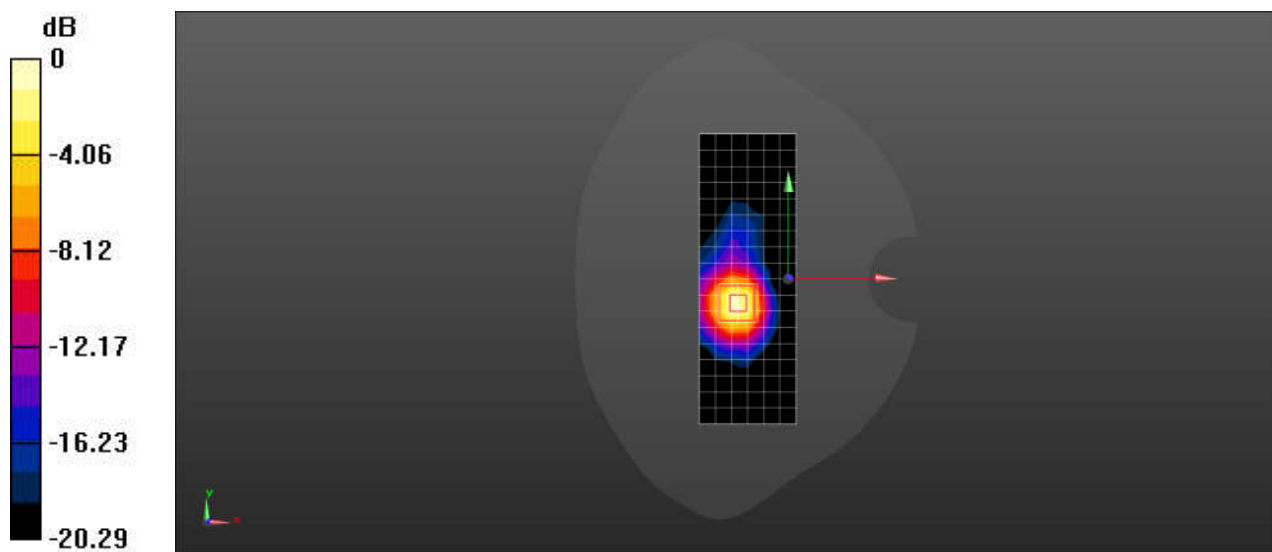

0 dB = 0.783 W/kg = -1.06 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n66 40M QPSK 1RB1 Ch349000 Front Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: HSL1750; Medium parameters used: $f = 1745$ MHz; $\sigma = 1.341$ S/m; $\epsilon_r = 40.116$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.86, 8.86, 8.86); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.592 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.62 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.692 W/kg

SAR(1 g) = 0.455 W/kg; SAR(10 g) = 0.299 W/kg

Maximum value of SAR (measured) = 0.602 W/kg

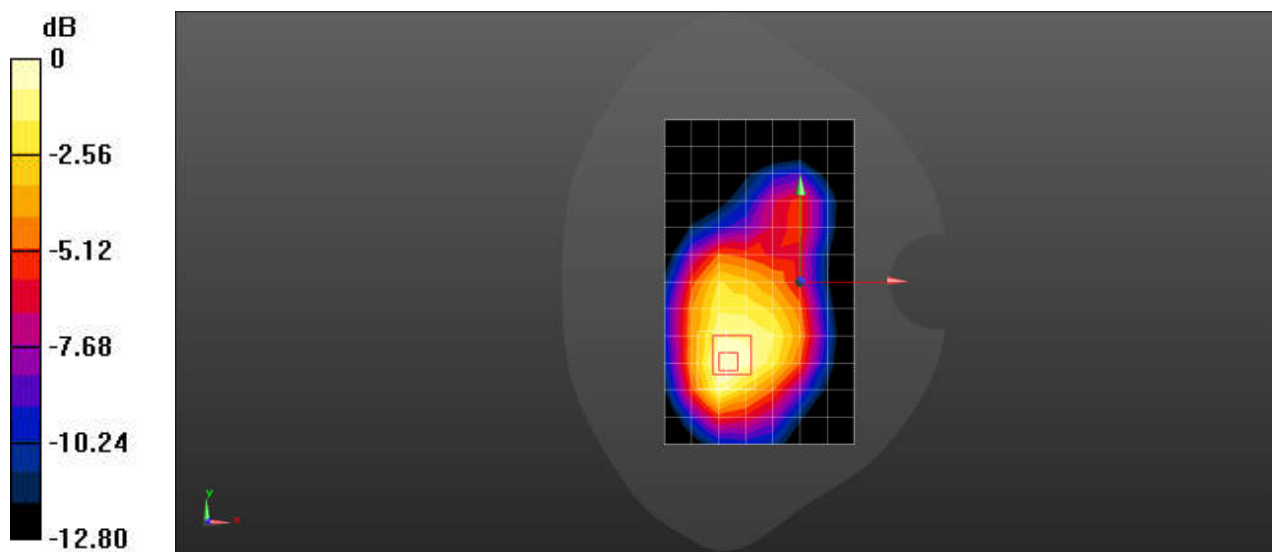

0 dB = 0.602 W/kg = -2.20 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n71 20M QPSK 50RB28 Ch136100 Back Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 680.5 MHz; Duty Cycle: 1:1

Medium: HSL750; Medium parameters used: $f = 680.5$ MHz; $\sigma = 0.851$ S/m; $\epsilon_r = 43.02$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(10.66, 10.66, 10.66); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (8x13x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.745 W/kg


Configuration/Body/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.92 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.817 W/kg

SAR(1 g) = 0.573 W/kg; SAR(10 g) = 0.423 W/kg

Maximum value of SAR (measured) = 0.741 W/kg

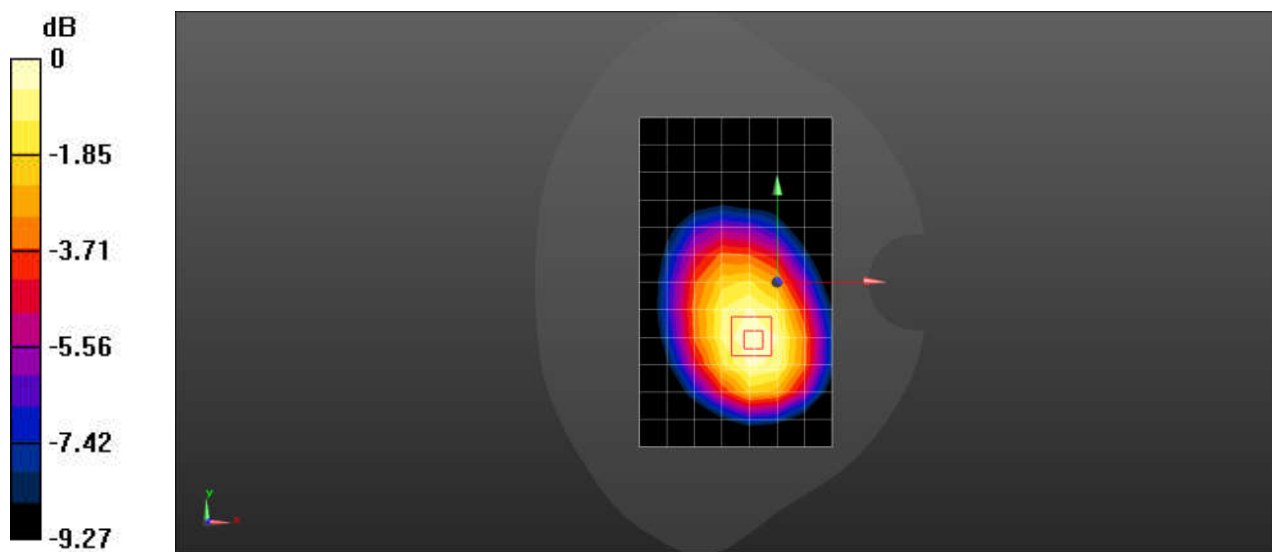

0 dB = 0.741 W/kg = -1.30 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n77 100M QPSK 135RB69 Ch633334 Top Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 3500 MHz; Duty Cycle: 1:1

Medium: HSL3500; Medium parameters used: $f = 3500$ MHz; $\sigma = 2.957$ S/m; $\epsilon_r = 39.04$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.28, 7.28, 7.28); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 1.14 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 9.619 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 1.45 W/kg

SAR(1 g) = 0.721 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

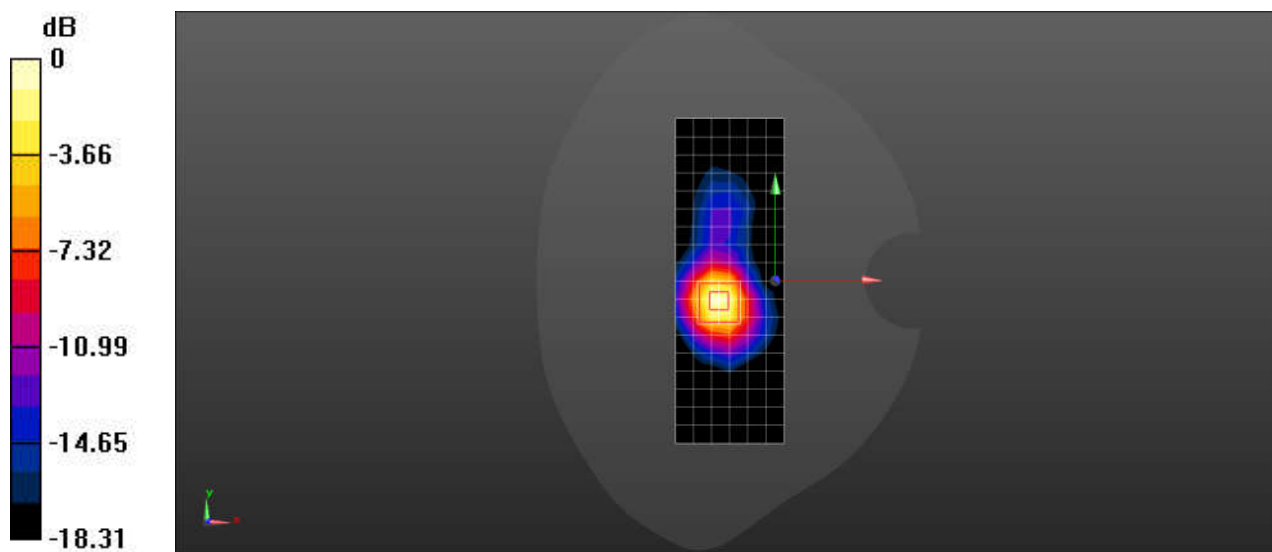

0 dB = 1.21 W/kg = 0.83 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 NR n77 100M QPSK 135RB69 Ch656000 Top Side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, NR (0); Frequency: 3840 MHz; Duty Cycle: 1:1

Medium: HSL3900; Medium parameters used: $f = 3840$ MHz; $\sigma = 3.383$ S/m; $\epsilon_r = 37.166$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(7.01, 7.01, 7.01); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (7x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 1.04 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.020 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.54 W/kg

SAR(1 g) = 0.717 W/kg; SAR(10 g) = 0.307 W/kg

Maximum value of SAR (measured) = 1.24 W/kg

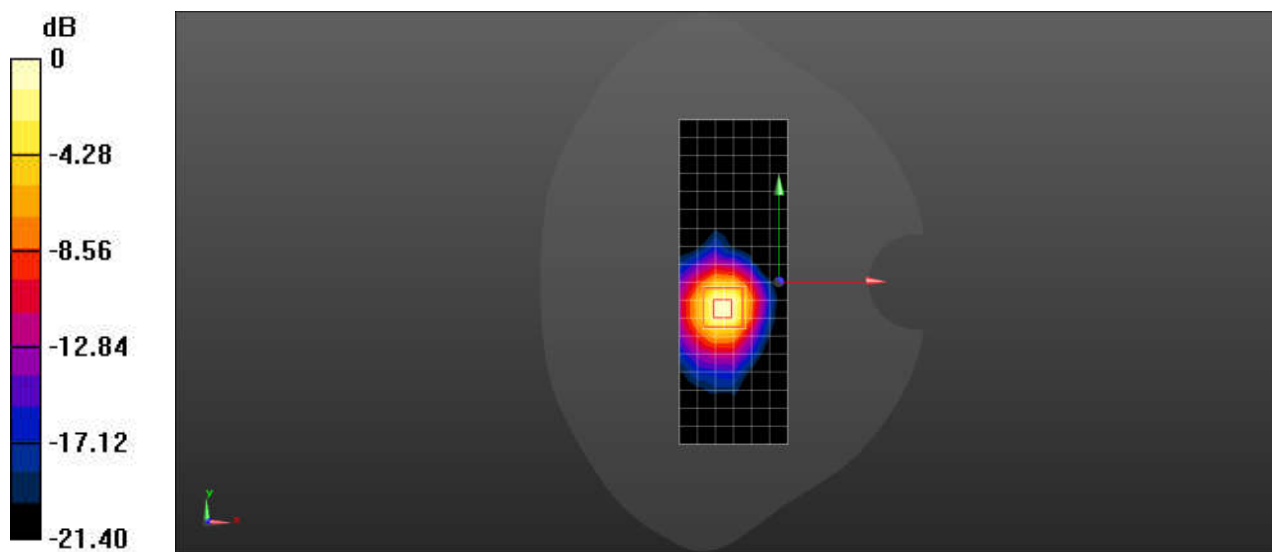

Test Laboratory: SGS-SAR Lab

M8550 WIFI2.4G 802.11b Ch1 Back side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.018

Medium: HSL2450;Medium parameters used: $f = 2412$ MHz; $\sigma = 1.733$ S/m; $\epsilon_r = 40.222$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(8.1, 8.1, 8.1); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (11x16x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (measured) = 0.0477 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.845 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.0590 W/kg

SAR(1 g) = 0.034 W/kg; SAR(10 g) = 0.020 W/kg

Maximum value of SAR (measured) = 0.0495 W/kg

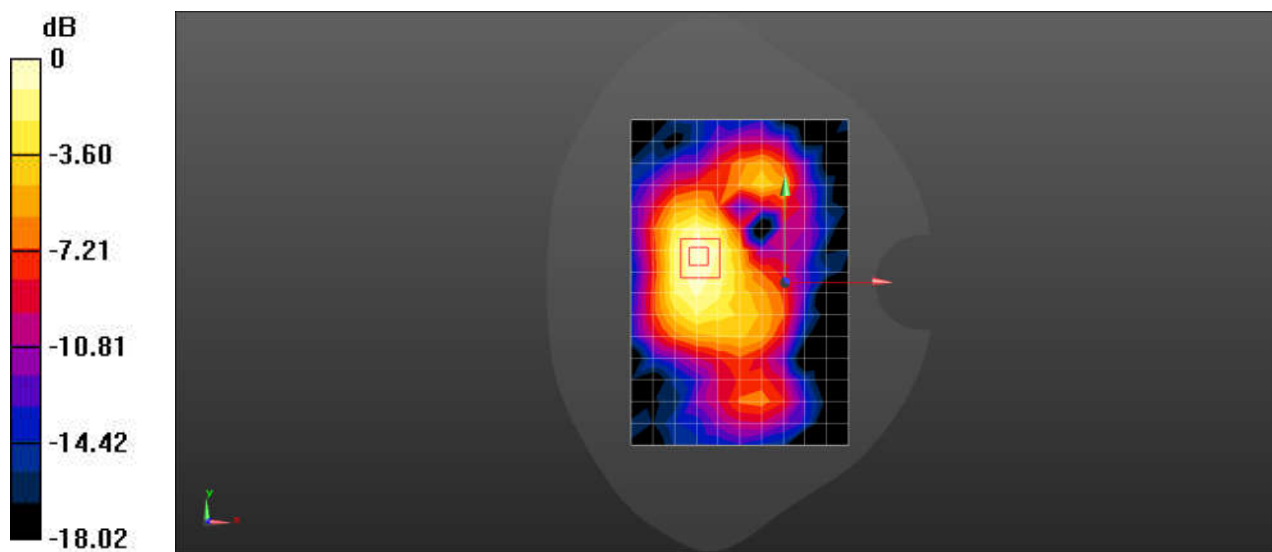

0 dB = 0.0495 W/kg = -13.05 dBW/kg

Test Laboratory: SGS-SAR Lab

M8550 WIFI5G 802.11a Ch40 Top side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5200 MHz; Duty Cycle: 1:1.008

Medium: HSL5000; Medium parameters used: $f = 5200$ MHz; $\sigma = 4.793$ S/m; $\epsilon_r = 36.387$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.72, 5.72, 5.72); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.355 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 2.409 V/m; Power Drift = -0.19 dB

Peak SAR (extrapolated) = 0.564 W/kg

SAR(1 g) = 0.185 W/kg; SAR(10 g) = 0.068 W/kg

Maximum value of SAR (measured) = 0.392 W/kg

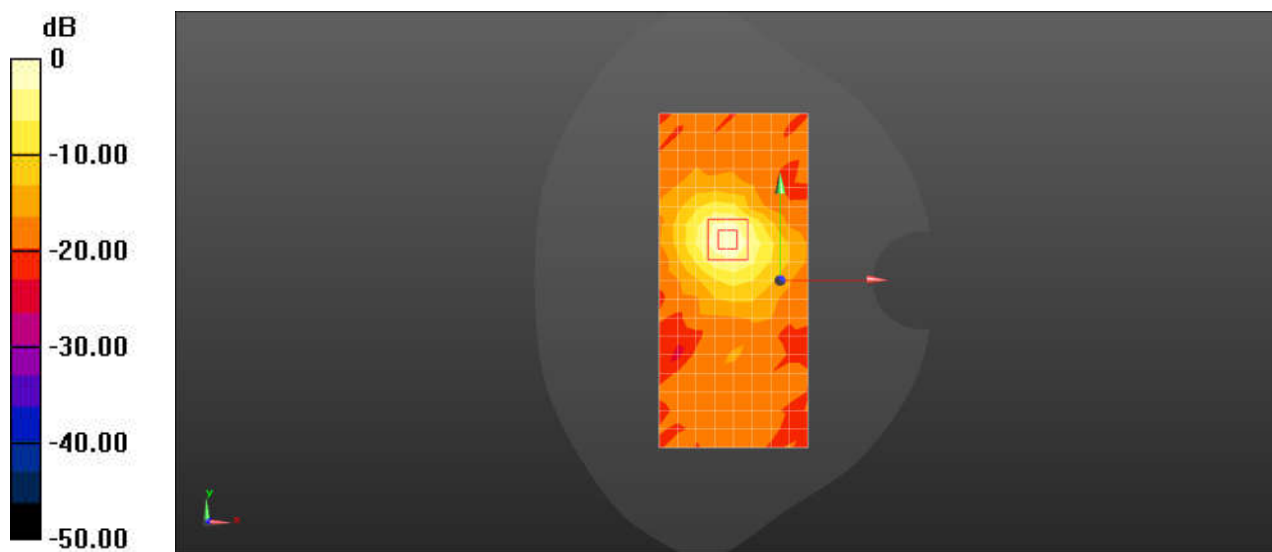

Test Laboratory: SGS-SAR Lab

M8550 WIFI5G 802.11a Ch157 Top side 10mm

DUT: M8550; Type: 5G Mobile Wi-Fi; Serial: 352921970001420

Communication System: UID 0, WI-FI(5GHz) (0); Frequency: 5785 MHz; Duty Cycle: 1:1.008

Medium: HSL5000; Medium parameters used: $f = 5785$ MHz; $\sigma = 5.459$ S/m; $\epsilon_r = 35.332$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

DASY 5 Configuration:

- Probe: EX3DV4 - SN3982; ConvF(5.23, 5.23, 5.23); Calibrated: 2024/4/29
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1327; Calibrated: 2023/11/17
- Phantom: SAM 8; Type: SAM; Serial: 1824
- DASY52 52.10.4(1527); SEMCAD X 14.6.14(7483)

Configuration/Body/Area Scan (9x19x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.325 W/kg


Configuration/Body/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.8460 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.535 W/kg

SAR(1 g) = 0.154 W/kg; SAR(10 g) = 0.061 W/kg

Maximum value of SAR (measured) = 0.338 W/kg

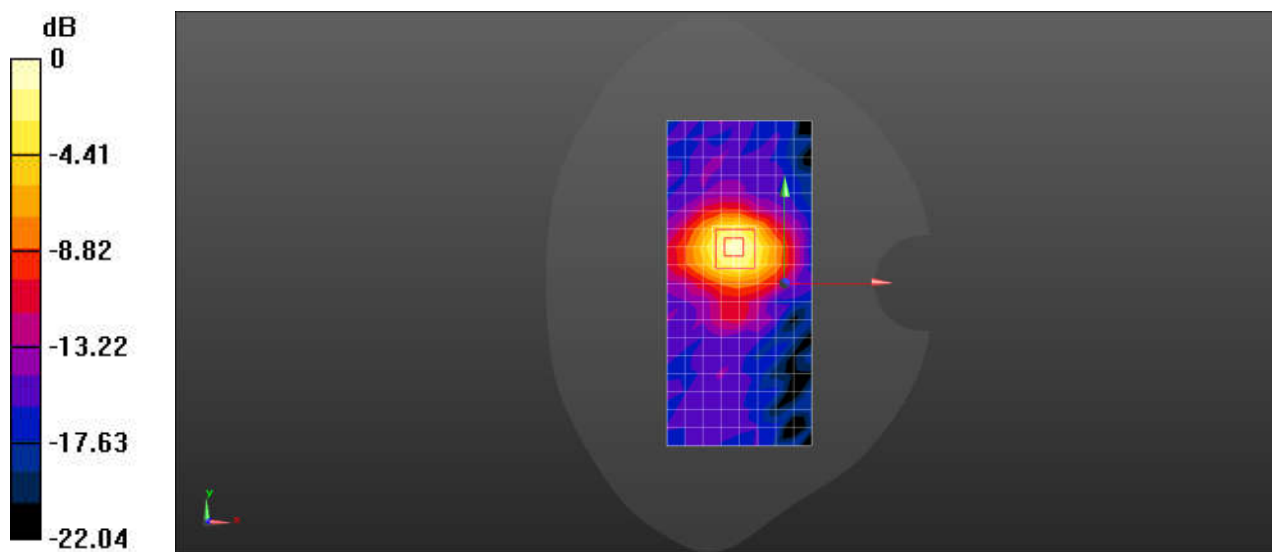

M8550 WIFI6G 802.11ax HE160 47CH Bottom side 10mm

Communication System: U-NII-5; Frequency: 6185.000

Medium: HSL. Medium parameters used: $f = 6185.000$ MHz; $\sigma = 5.78$ S/m; $\epsilon_r = 34.2$

DASY8 Configuration:

- Probe: EX3DV4 - SN7833; ConvF(4.74, 5.36, 4.91); Calibrated: 2023-08-24
- Sensor-Surface: 1.4 mm
- Electronics: DAE4ip Sn1826; Calibrated: 2023-12-27
- Phantom: Twin-SAM V8.0 (30deg probe tilt); Serial: 2155
- Measurement Software: cDASY8 V16.2.0.1425

Area Scan (51.0 mm x 170.0 mm): Measurement Grid: 8.5 mm x 8.5 mm

SAR (1g) = 0.128 W/kg; SAR (10g) = 0.047 W/kg;

Zoom Scan (22.0 mm x 22.0 mm x 22.0 mm): Measurement Grid: 3.4 mm x 3.4 mm x 1.4 mm

Power Drift = -0.15 dB

SAR (1g) = 0.145 W/kg; SAR (10g) = 0.051 W/kg;

