


EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-17
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

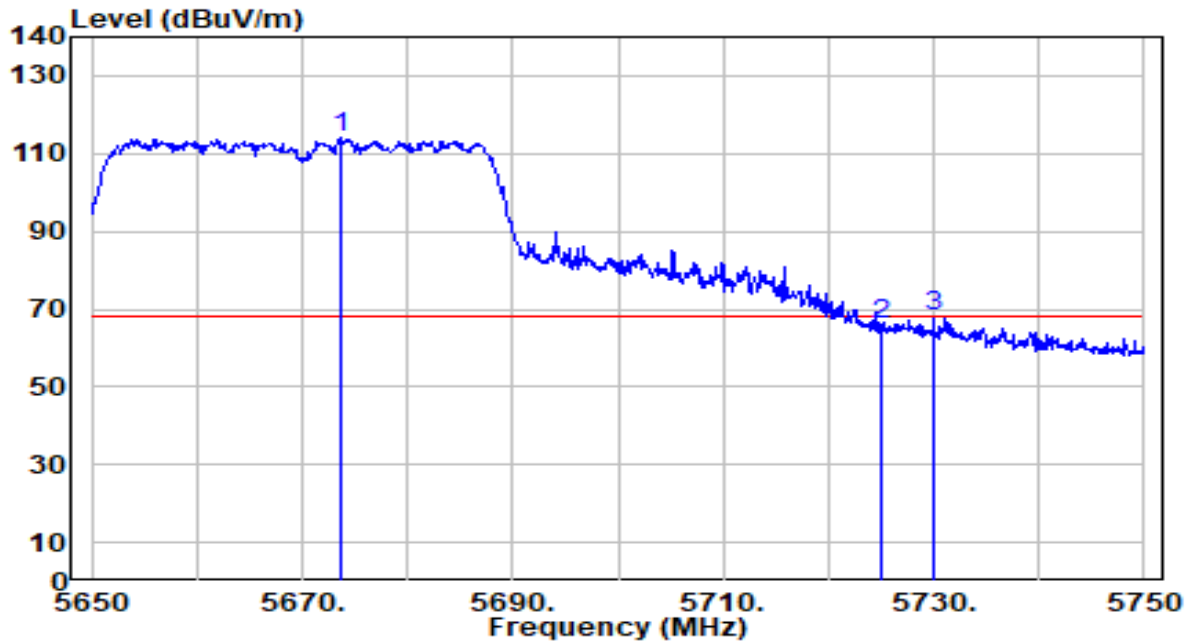


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5673.700	112.24	1.65	113.89	N/A	N/A	200	54	Peak
2	5725.000	64.12	1.89	66.02	-2.18	68.20	200	54	Peak
3	* 5730.000	65.99	1.92	67.91	-0.29	68.20	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

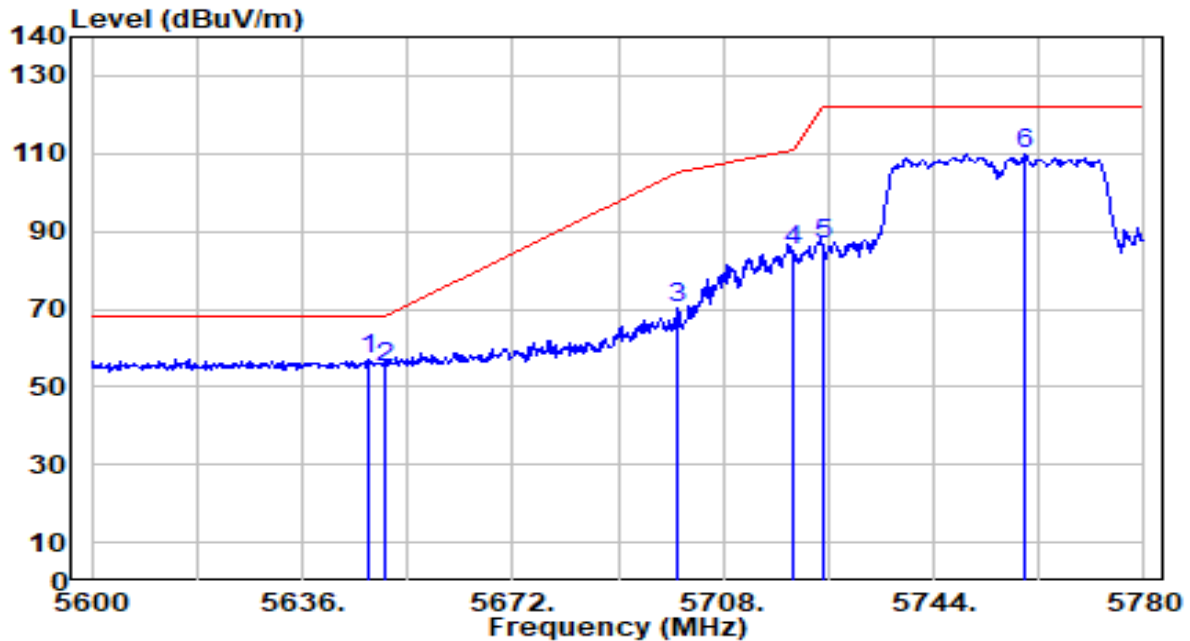


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5647.340	55.47	1.53	57.00	-11.20	68.20	100	238	Peak
2		5650.000	53.48	1.54	55.02	-13.18	68.20	100	238	Peak
3		5700.000	68.68	1.78	70.46	-34.74	105.20	100	238	Peak
4		5720.000	83.01	1.87	84.88	-25.92	110.80	100	238	Peak
5		5725.000	84.49	1.89	86.38	-35.82	122.20	100	238	Peak
6		5759.660	107.59	2.06	109.64	N/A	N/A	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

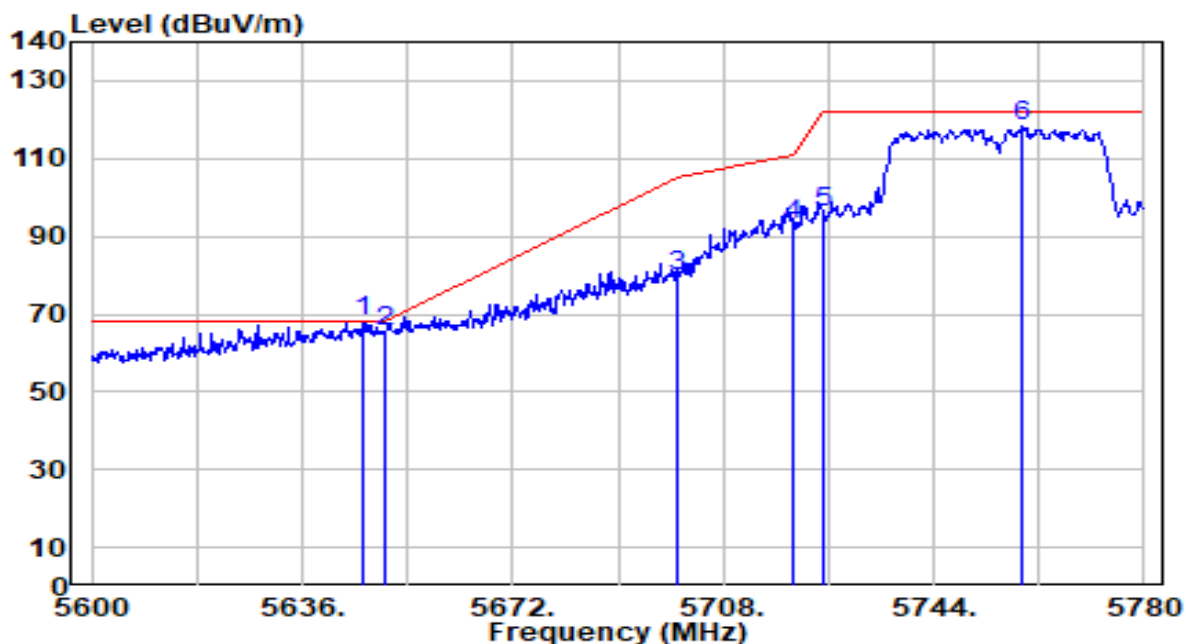


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5646.260	66.43	1.52	67.96	-0.24	68.20	200	54	Peak
2		5650.000	63.82	1.54	65.36	-2.84	68.20	200	54	Peak
3		5700.000	78.14	1.78	79.92	-25.28	105.20	200	54	Peak
4		5720.000	91.07	1.87	92.94	-17.86	110.80	200	54	Peak
5		5725.000	94.36	1.89	96.25	-25.95	122.20	200	54	Peak
6		5759.300	116.25	2.05	118.30	N/A	N/A	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

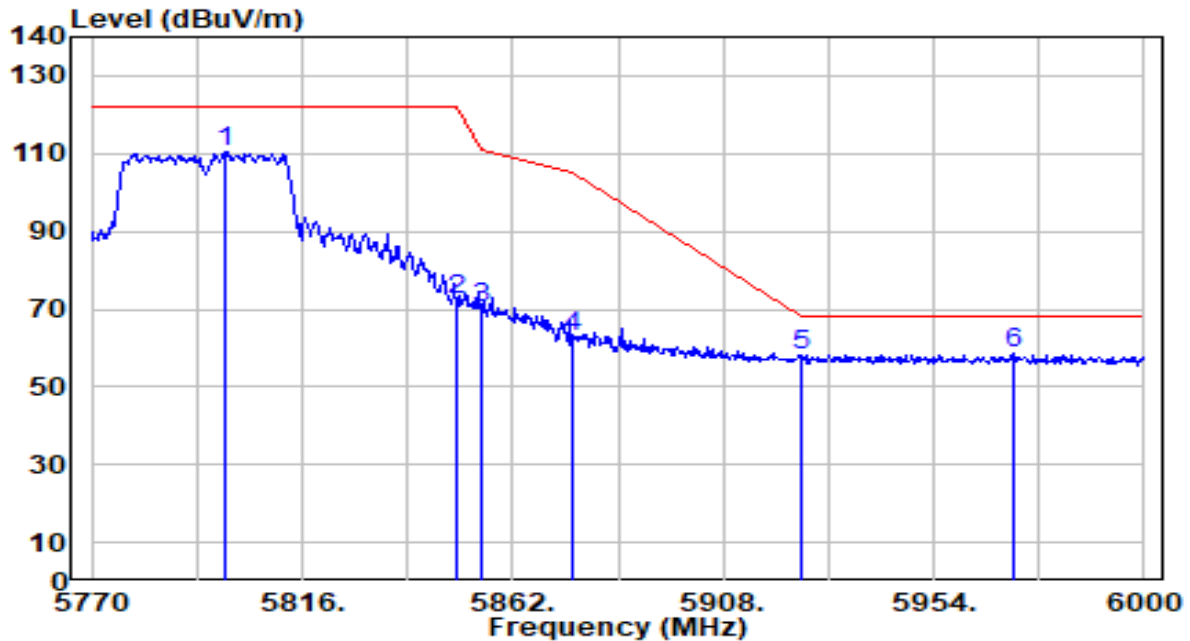


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5799.210	108.20	2.24	110.44	N/A	N/A	100	239	Peak
2	5850.000	70.25	2.25	72.50	-49.70	122.20	100	239	Peak
3	5855.000	68.15	2.25	70.40	-40.40	110.80	100	239	Peak
4	5875.000	60.70	2.26	62.96	-42.24	105.20	100	239	Peak
5	5925.000	55.64	2.27	57.91	-10.29	68.20	100	239	Peak
6	* 5971.250	56.51	2.27	58.79	-9.41	68.20	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

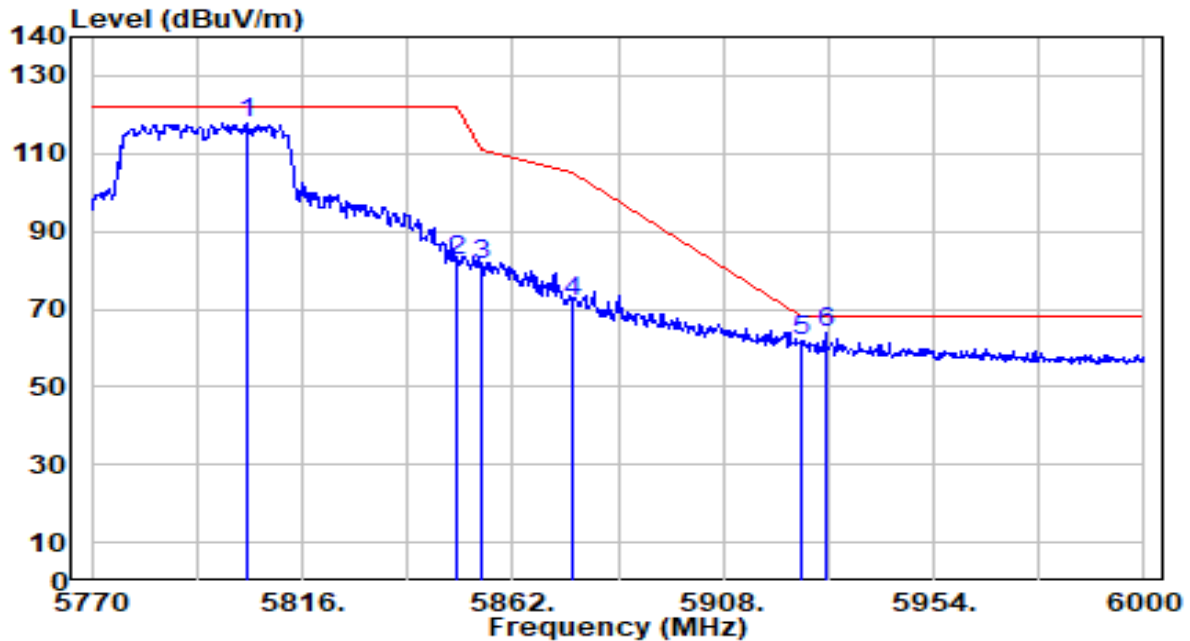


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5803.810	115.48	2.24	117.73	N/A	N/A	200	239	Peak
2	5850.000	79.96	2.25	82.22	-39.98	122.20	200	239	Peak
3	5855.000	79.09	2.25	81.35	-29.45	110.80	200	239	Peak
4	5875.000	69.76	2.26	72.01	-33.19	105.20	200	239	Peak
5	5925.000	59.74	2.27	62.01	-6.19	68.20	200	239	Peak
6	* 5930.540	61.68	2.27	63.95	-4.25	68.20	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

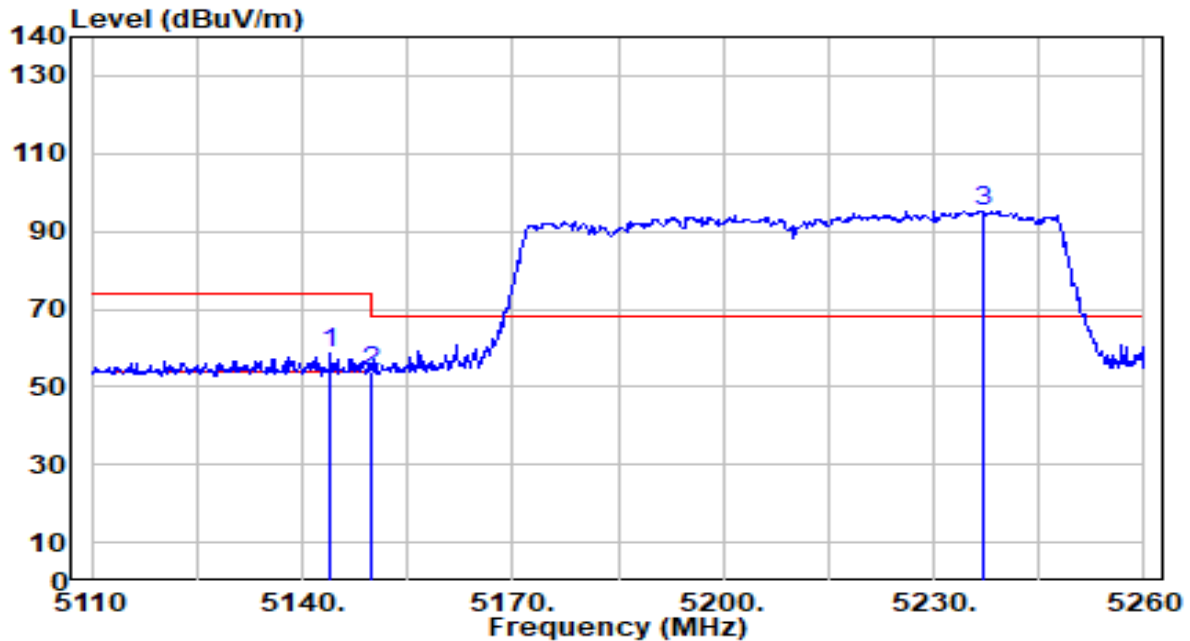


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.900	58.00	0.65	58.65	-15.35	74.00	231	73	Peak
2		5150.000	53.45	0.65	54.10	-19.90	74.00	231	73	Peak
3		5237.200	94.68	0.64	95.32	N/A	N/A	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

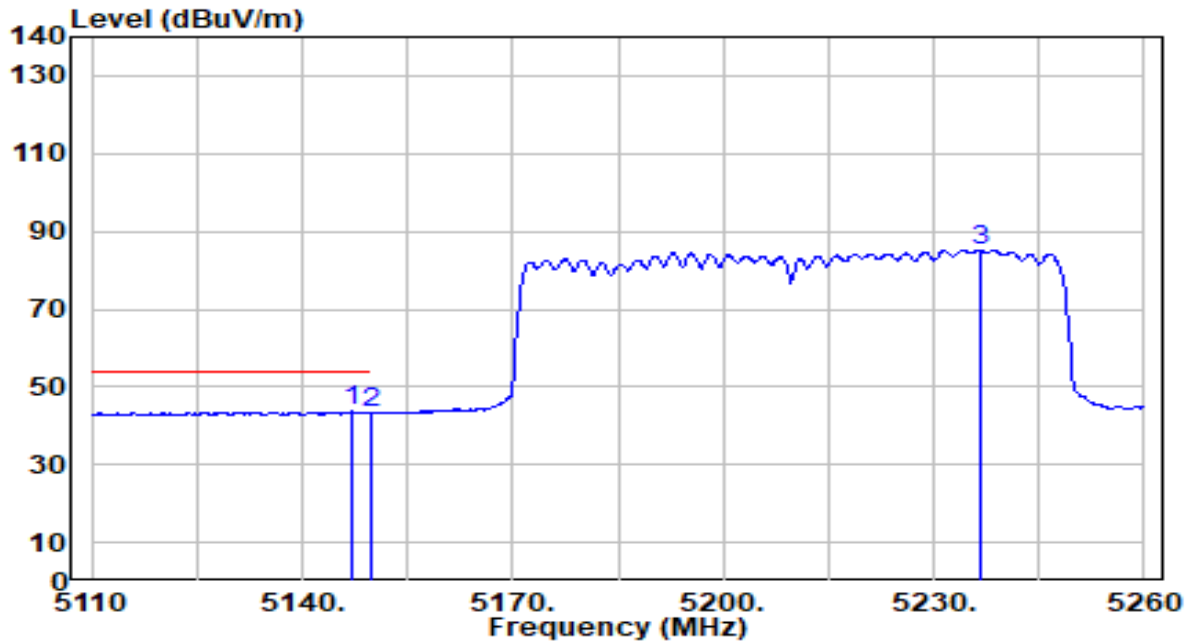


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.050	42.97	0.65	43.62	-10.38	54.00	231	73	Average
2		5150.000	42.74	0.65	43.40	-10.60	54.00	231	73	Average
3		5236.600	84.44	0.65	85.09	N/A	N/A	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

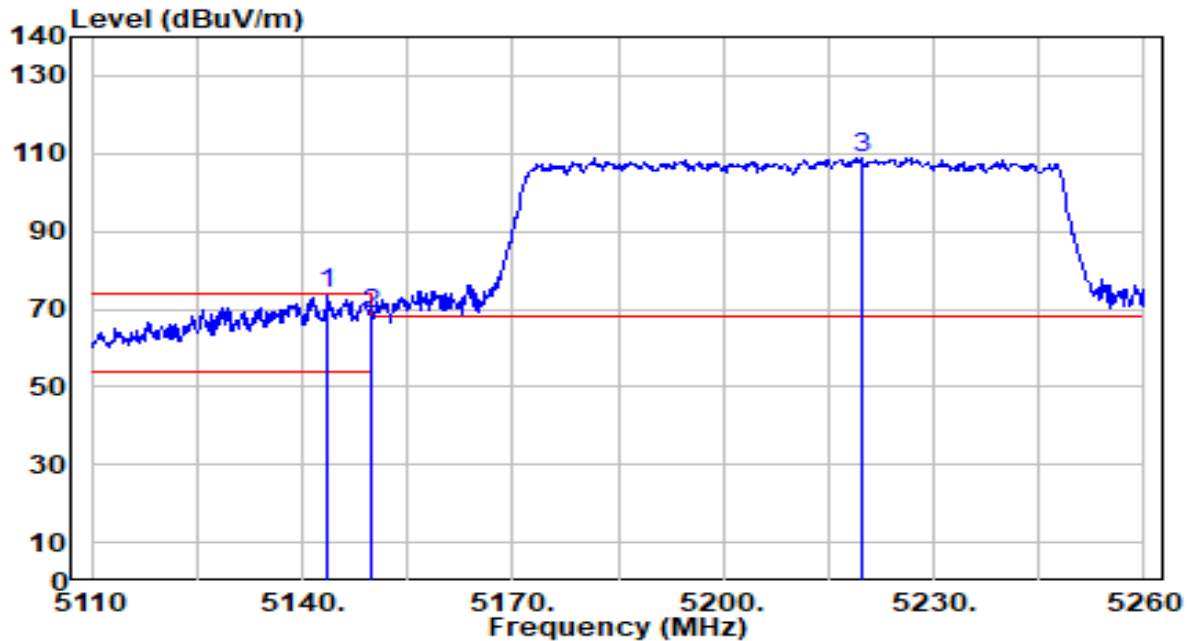


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5143.600	73.09	0.65	73.73	-0.27	74.00	200	242	Peak
2		5150.000	68.15	0.65	68.80	-5.20	74.00	200	242	Peak
3		5219.800	108.13	0.67	108.80	N/A	N/A	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

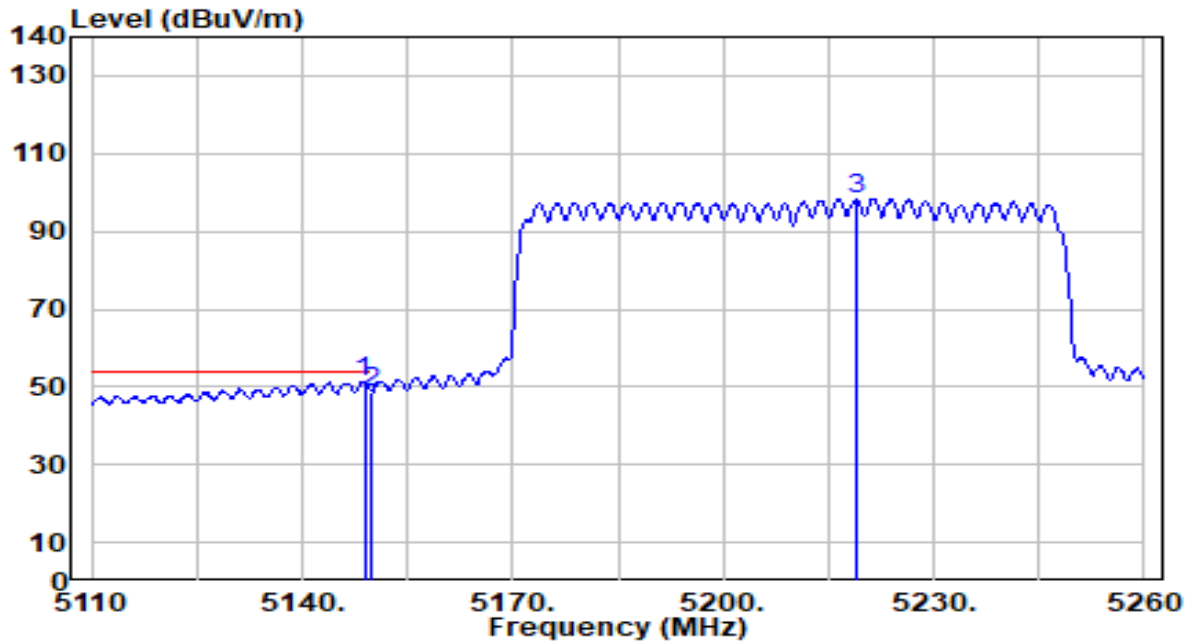


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	50.76	0.65	51.41	-2.59	54.00	200	242	Average
2		5150.000	48.16	0.65	48.82	-5.18	54.00	200	242	Average
3		5219.050	97.71	0.67	98.38	N/A	N/A	200	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

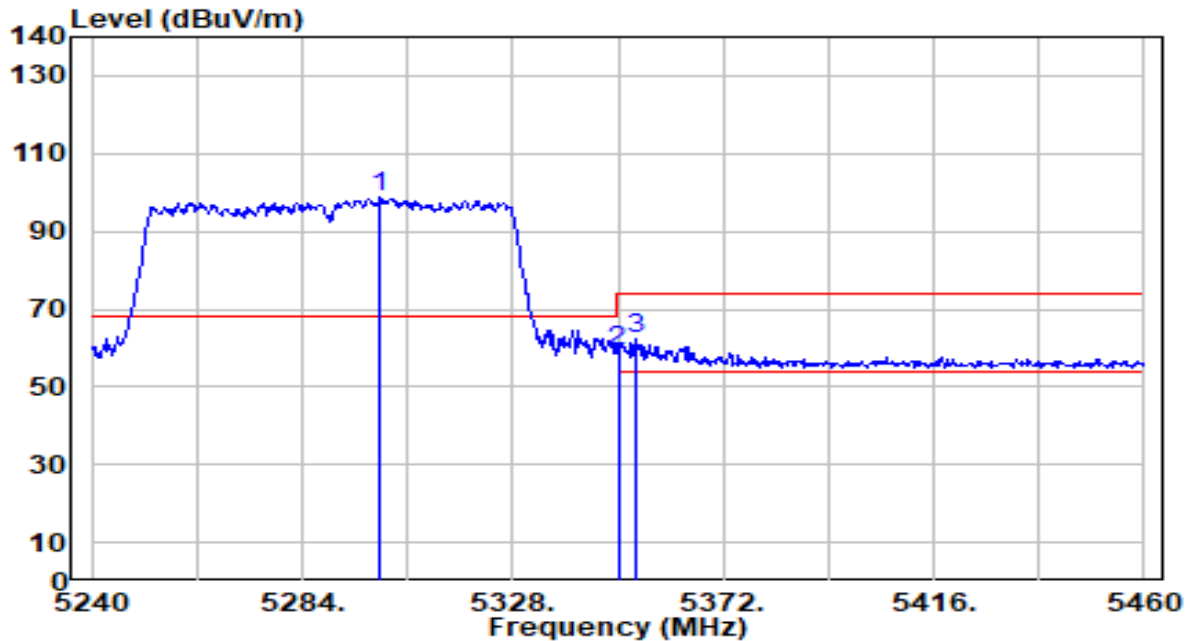


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.280	98.08	0.55	98.62	N/A	N/A	300	225	Peak
2	5350.000	58.49	0.47	58.96	-15.04	74.00	300	225	Peak
3	* 5353.520	62.09	0.47	62.55	-11.45	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

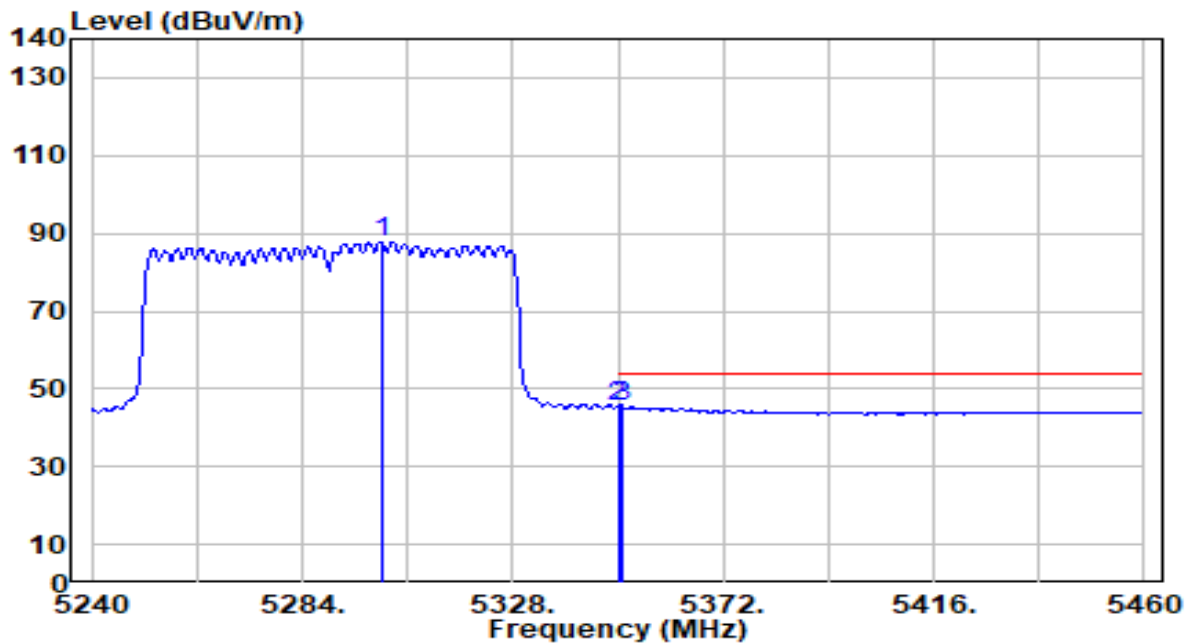


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5300.500	87.32	0.55	87.87	N/A	N/A	300	225	Average
2	5350.000	45.00	0.47	45.47	-8.53	54.00	300	225	Average
3	* 5350.880	45.08	0.47	45.55	-8.45	54.00	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

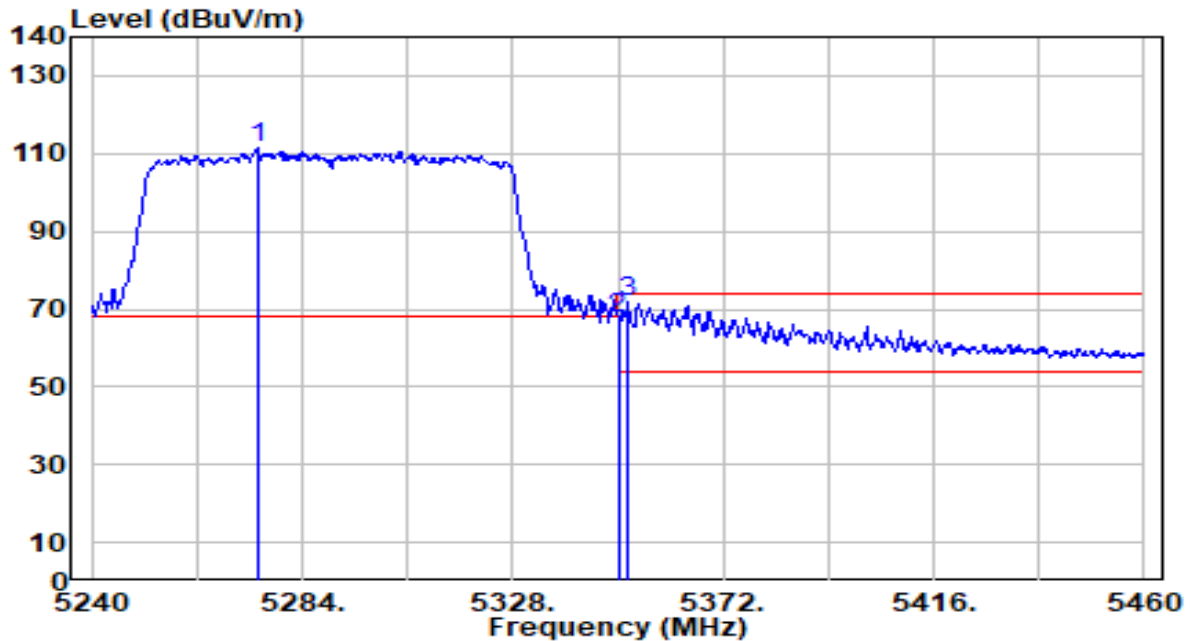


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5274.760	110.64	0.59	111.23	N/A	N/A	200	67	Peak
2	5350.000	67.01	0.47	67.48	-6.52	74.00	200	67	Peak
3	* 5351.980	71.54	0.47	72.01	-1.99	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-17
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

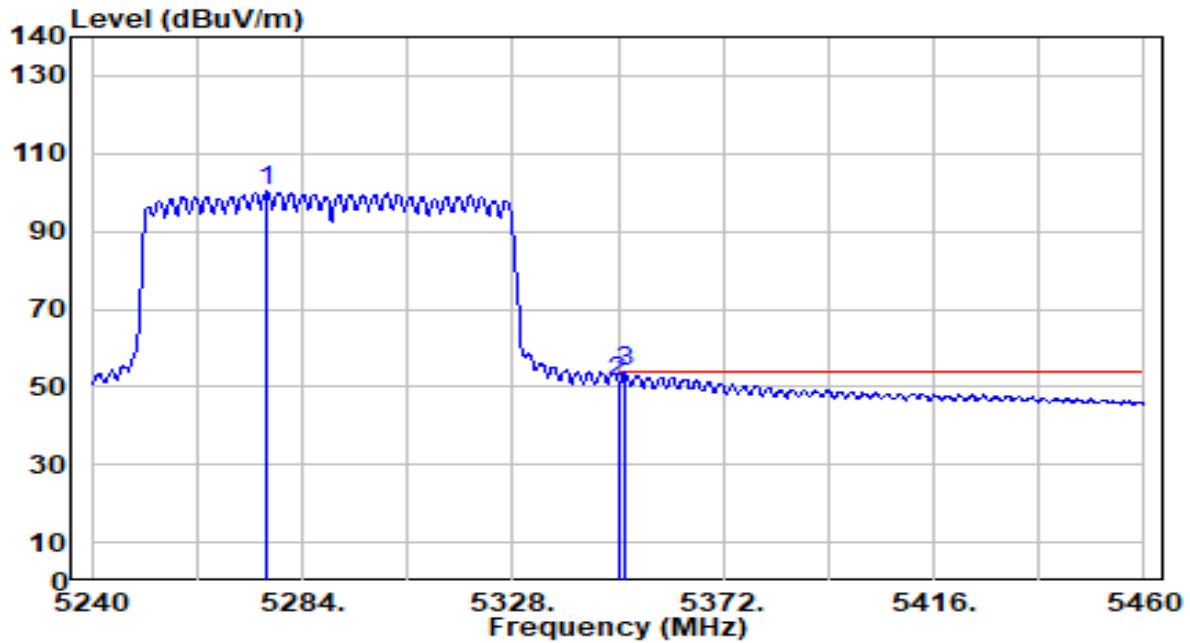


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.520	99.60	0.58	100.18	N/A	N/A	200	67	Average
2	5350.000	50.64	0.47	51.11	-2.89	54.00	200	67	Average
3	* 5351.540	53.32	0.47	53.79	-0.21	54.00	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

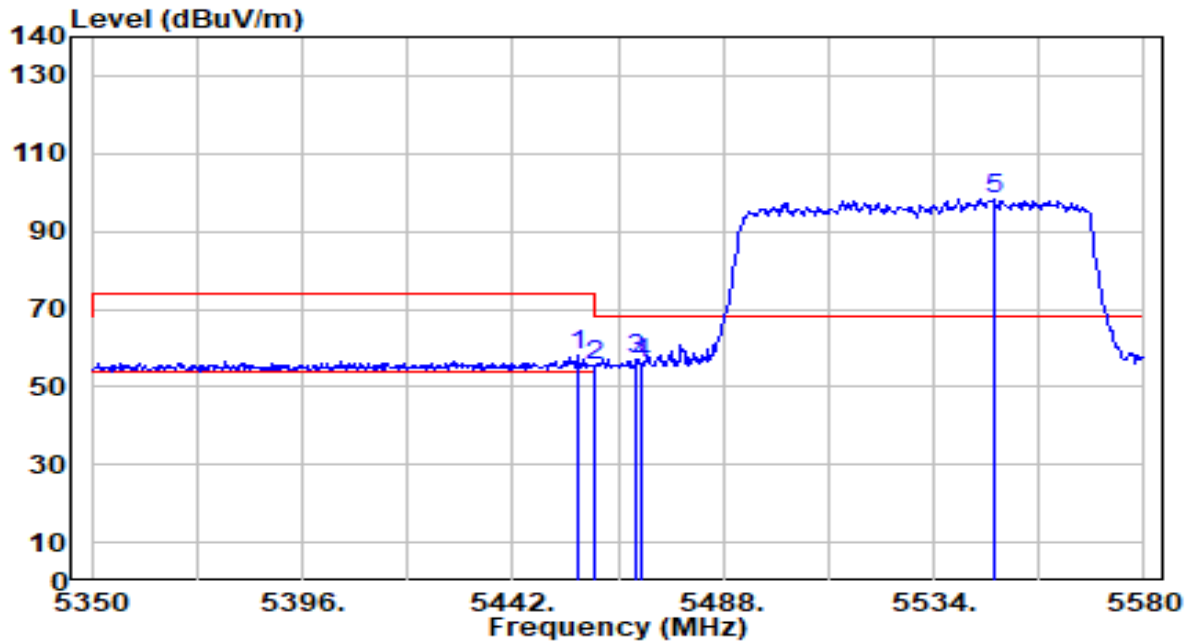


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.030	57.29	0.64	57.93	-16.07	74.00	100	53	Peak
2	5460.000	54.92	0.66	55.58	-18.42	74.00	100	53	Peak
3	* 5468.910	56.40	0.70	57.10	-11.10	68.20	100	53	Peak
4	5470.000	55.47	0.71	56.17	-12.03	68.20	100	53	Peak
5	5547.110	97.38	1.06	98.44	N/A	N/A	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

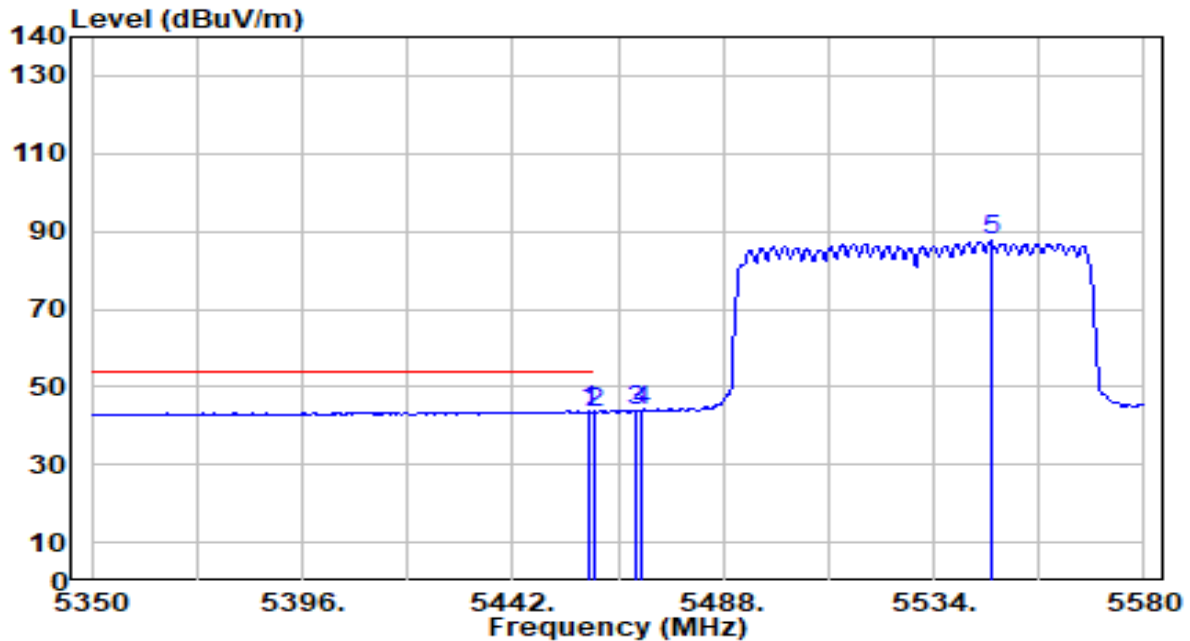


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.790	43.10	0.66	43.76	-10.24	54.00	100	53	Average
2		5460.000	42.83	0.66	43.49	-10.51	54.00	100	53	Average
3		5468.910	43.24	0.70	43.94	N/A	N/A	100	53	Average
4		5470.000	42.95	0.71	43.65	N/A	N/A	100	53	Average
5		5546.650	86.38	1.06	87.44	N/A	N/A	100	53	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

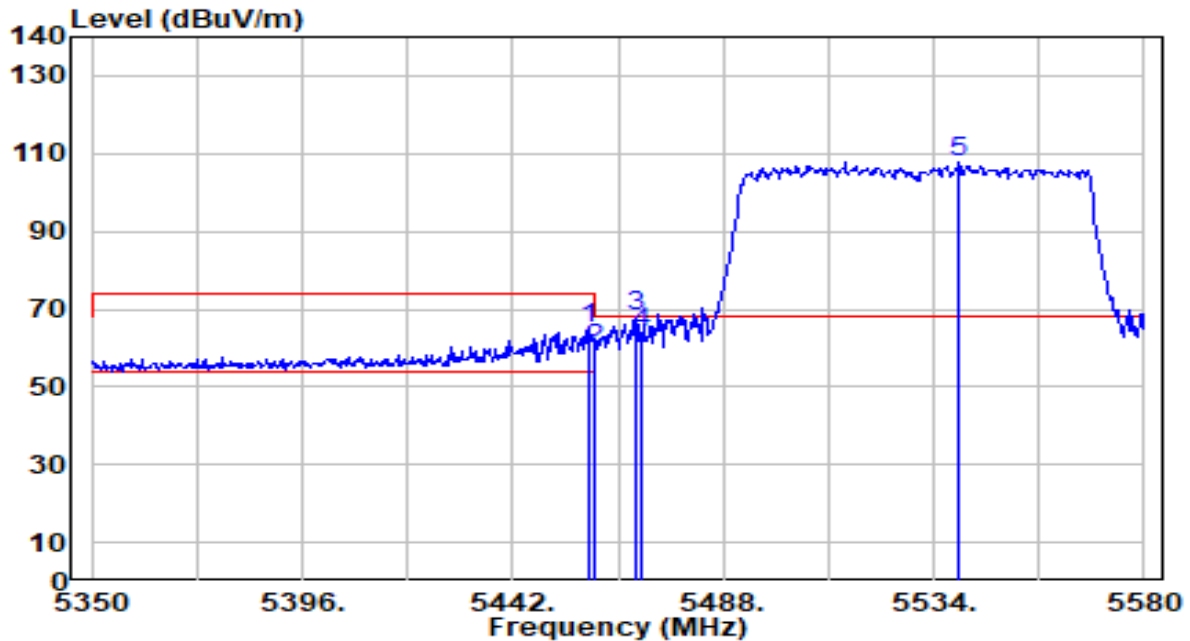


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.560	64.37	0.66	65.03	-8.97	74.00	200	243	Peak
2	5460.000	59.08	0.66	59.74	-14.26	74.00	200	243	Peak
3	* 5468.680	67.29	0.70	67.99	-0.21	68.20	200	243	Peak
4	5470.000	62.96	0.71	63.67	-4.53	68.20	200	243	Peak
5	5539.520	106.71	1.02	107.73	N/A	N/A	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

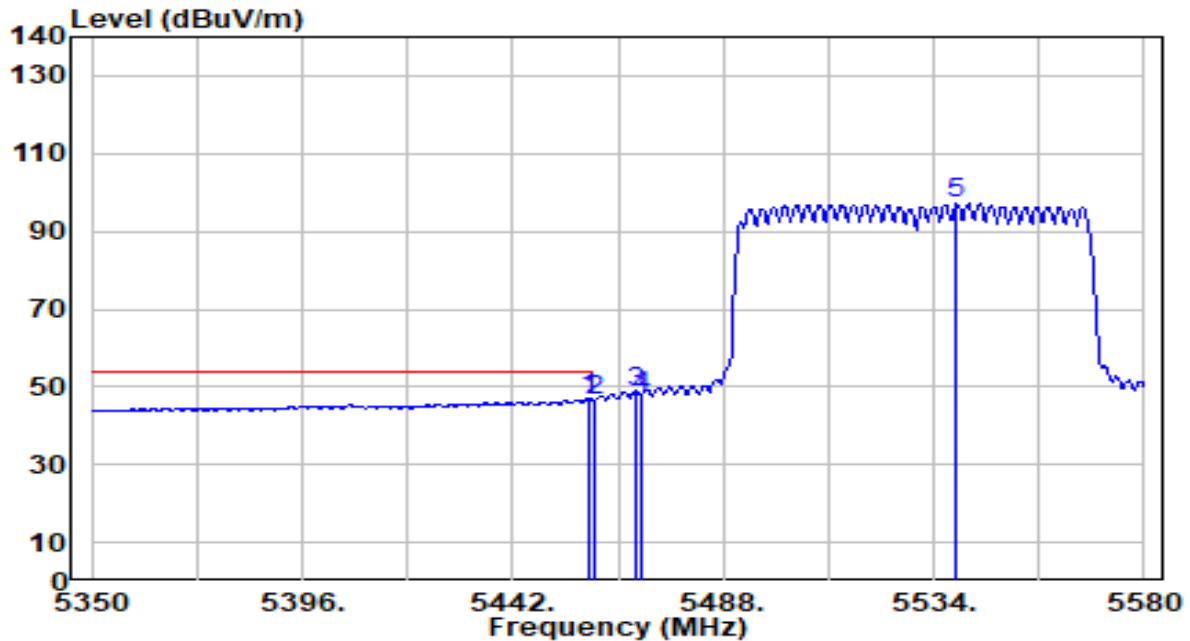


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.560	46.50	0.66	47.16	-6.84	54.00	200	243	Average
2		5460.000	45.81	0.66	46.48	-7.52	54.00	200	243	Average
3		5468.680	48.16	0.70	48.86	N/A	N/A	200	243	Average
4		5470.000	46.82	0.71	47.53	N/A	N/A	200	243	Average
5		5539.060	95.95	1.02	96.97	N/A	N/A	200	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

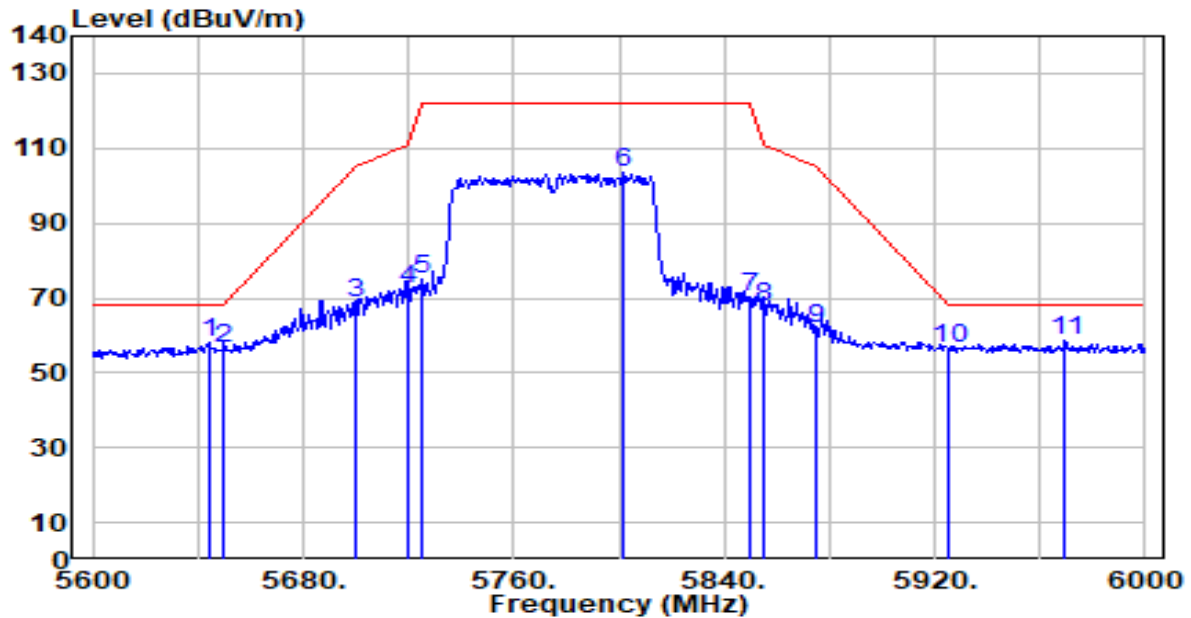


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5644.000	56.73	1.51	58.24	-9.96	68.20	100	238	Peak
2	5650.000	55.12	1.54	56.66	-11.54	68.20	100	238	Peak
3	5700.000	66.99	1.78	68.77	-36.43	105.20	100	238	Peak
4	5720.000	70.65	1.87	72.52	-38.28	110.80	100	238	Peak
5	5725.000	72.97	1.89	74.86	-47.34	122.20	100	238	Peak
6	5802.000	101.22	2.24	103.46	N/A	N/A	100	238	Peak
7	5850.000	67.87	2.25	70.12	-52.08	122.20	100	238	Peak
8	5855.000	65.40	2.25	67.65	-43.15	110.80	100	238	Peak
9	5875.000	59.55	2.26	61.81	-43.39	105.20	100	238	Peak
10	5925.000	54.48	2.27	56.74	-11.46	68.20	100	238	Peak
11	* 5969.600	56.22	2.27	58.49	-9.71	68.20	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

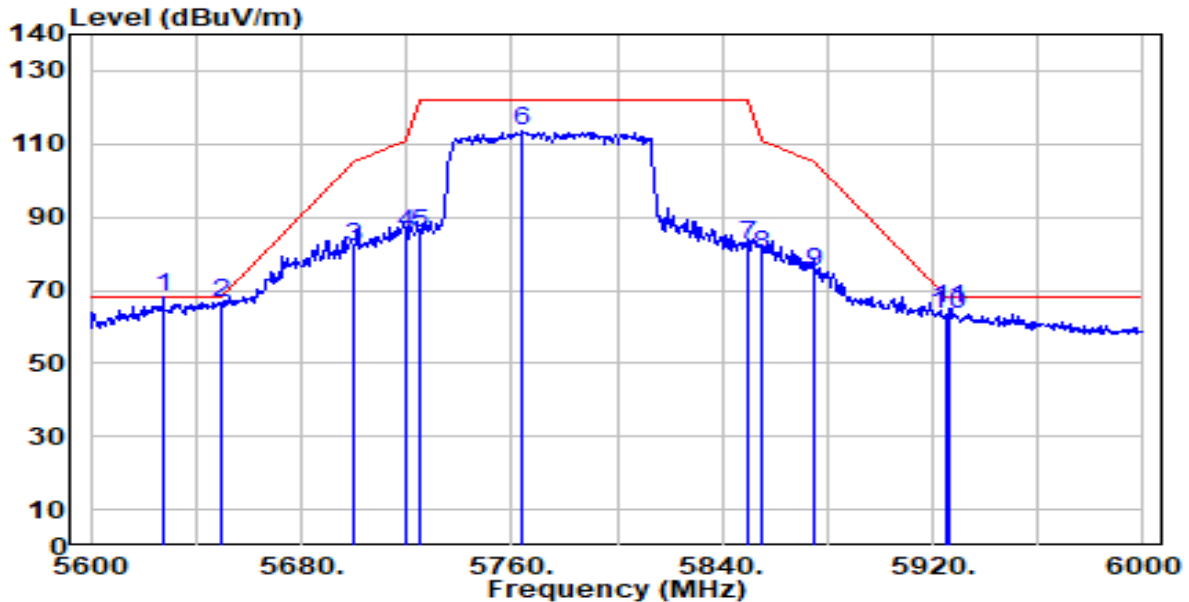


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5627.600	66.58	1.44	68.02	-0.18	68.20	200	54	Peak
2		5650.000	64.93	1.54	66.48	-1.72	68.20	200	54	Peak
3		5700.000	79.99	1.78	81.77	-23.43	105.20	200	54	Peak
4		5720.000	83.90	1.87	85.77	-25.03	110.80	200	54	Peak
5		5725.000	83.56	1.89	85.45	-36.75	122.20	200	54	Peak
6		5764.000	111.47	2.08	113.55	N/A	N/A	200	54	Peak
7		5850.000	80.18	2.25	82.43	-39.77	122.20	200	54	Peak
8		5855.000	77.31	2.25	79.57	-31.23	110.80	200	54	Peak
9		5875.000	72.51	2.26	74.76	-30.44	105.20	200	54	Peak
10		5925.000	60.88	2.27	63.15	-5.05	68.20	200	54	Peak
11		5926.400	62.90	2.27	65.16	-3.04	68.20	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Pre-amplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

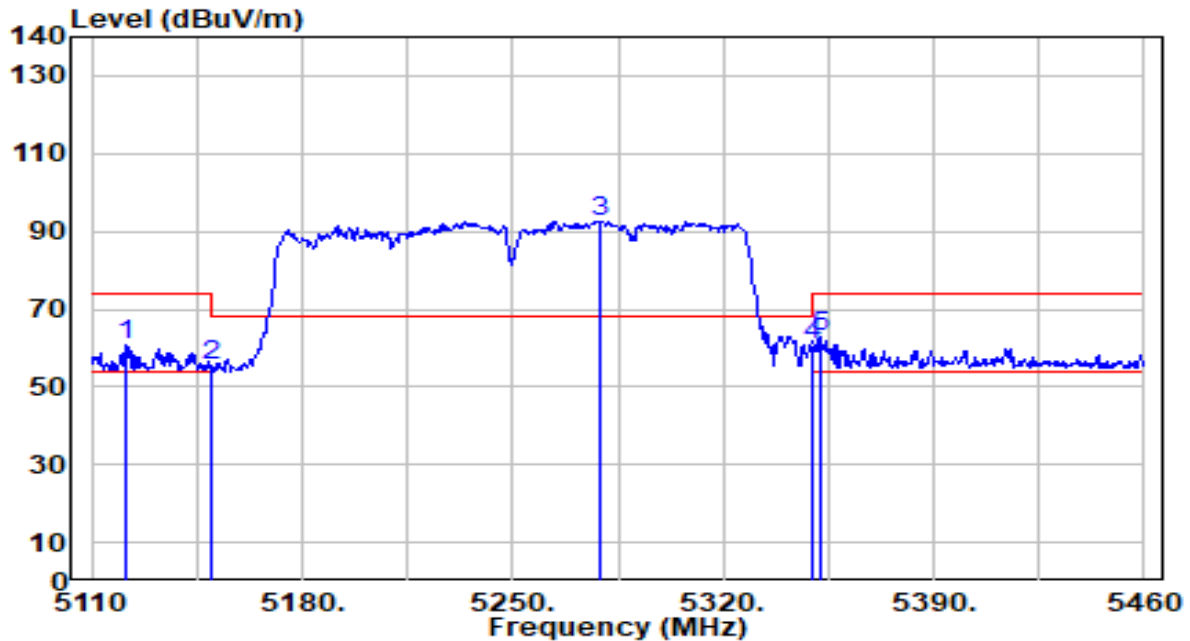


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5121.550	60.28	0.63	60.91	-13.09	74.00	231	73	Peak
2	5150.000	54.74	0.65	55.39	-18.61	74.00	231	73	Peak
3	5279.400	92.10	0.58	92.68	N/A	N/A	231	73	Peak
4	5350.000	60.40	0.47	60.87	-13.13	74.00	231	73	Peak
5	* 5352.200	62.35	0.47	62.82	-11.18	74.00	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

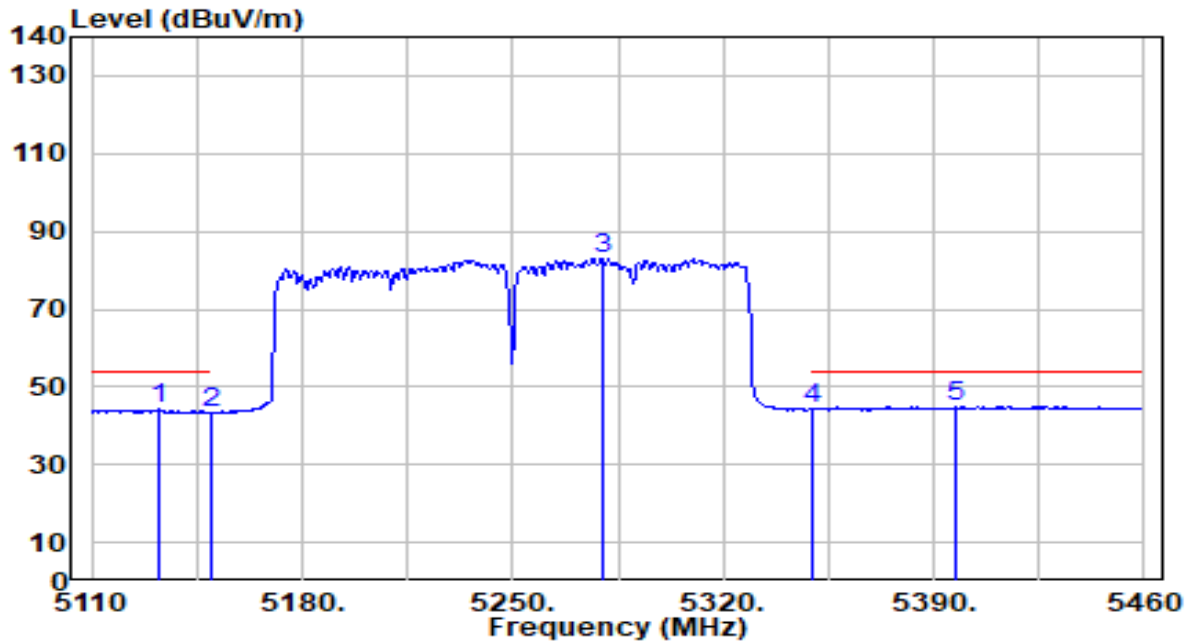


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5132.400	43.50	0.64	44.14	-9.86	54.00	231	73	Average
2	5150.000	42.86	0.65	43.52	-10.48	54.00	231	73	Average
3	5279.750	82.55	0.58	83.13	N/A	N/A	231	73	Average
4	5350.000	43.83	0.47	44.30	-9.70	54.00	231	73	Average
5	* 5397.000	44.58	0.40	44.98	-9.02	54.00	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

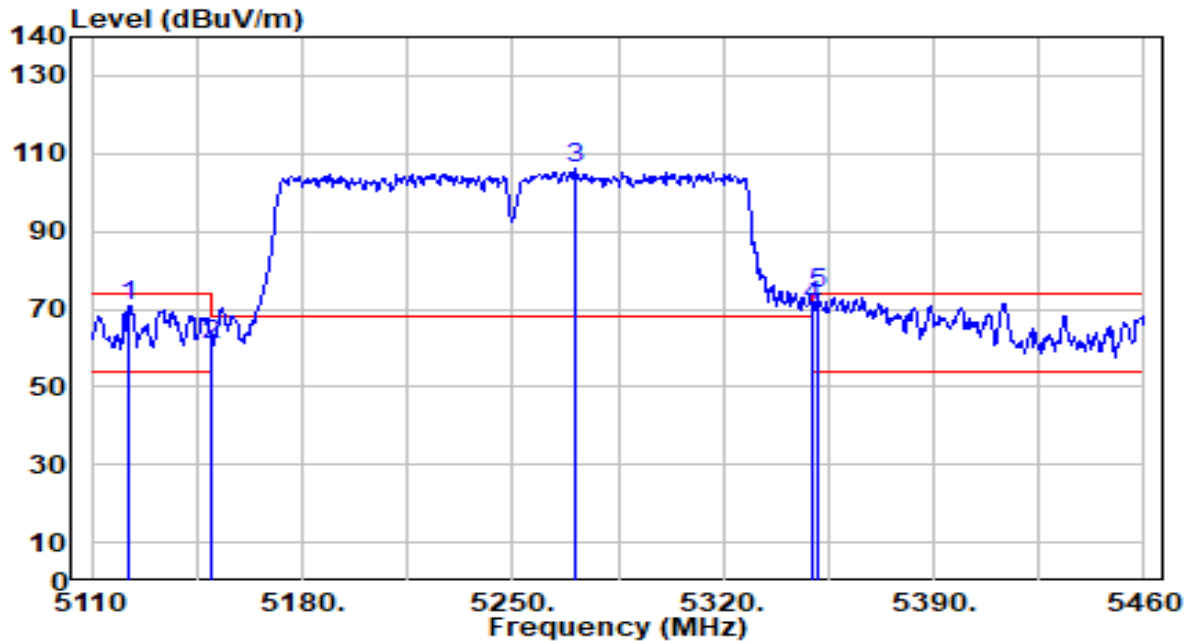


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5122.600	70.33	0.63	70.96	-3.04	74.00	200	243	Peak
2	5150.000	59.96	0.65	60.61	-13.39	74.00	200	243	Peak
3	5271.000	105.68	0.59	106.27	N/A	N/A	200	243	Peak
4	5350.000	70.20	0.47	70.67	-3.33	74.00	200	243	Peak
5	* 5351.500	73.25	0.47	73.72	-0.28	74.00	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

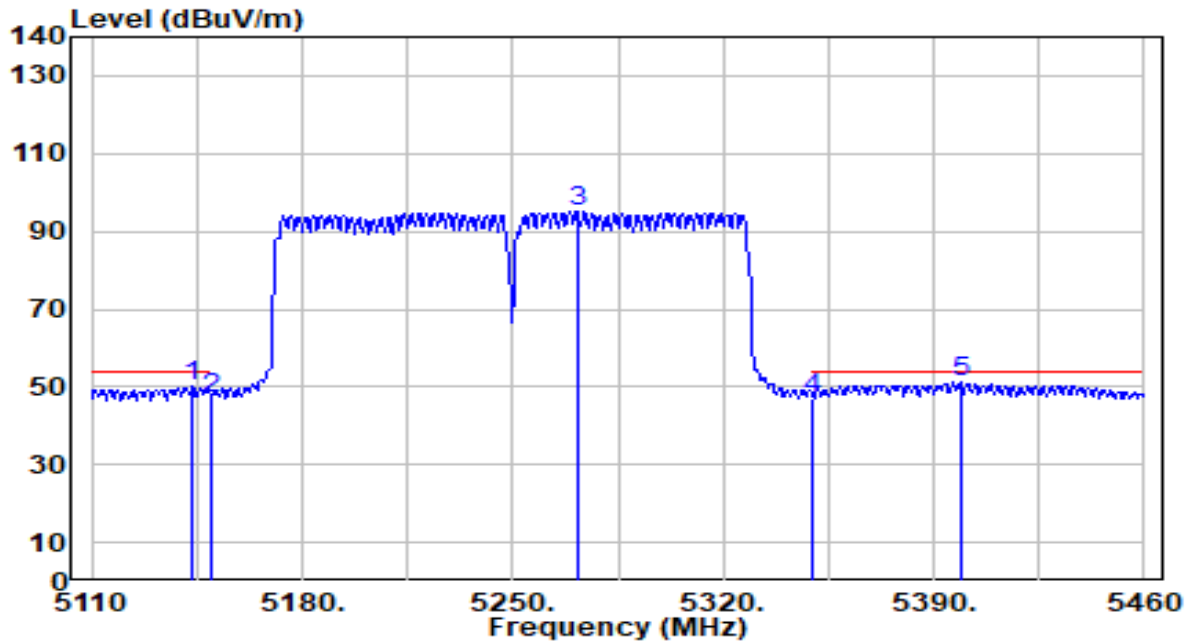


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5143.600	49.29	0.65	49.94	-4.06	54.00	200	243	Average
2	5150.000	46.42	0.65	47.08	-6.92	54.00	200	243	Average
3	5271.350	94.56	0.59	95.15	N/A	N/A	200	243	Average
4	5350.000	46.71	0.47	47.18	-6.82	54.00	200	243	Average
5	* 5399.100	50.83	0.40	51.22	-2.78	54.00	200	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

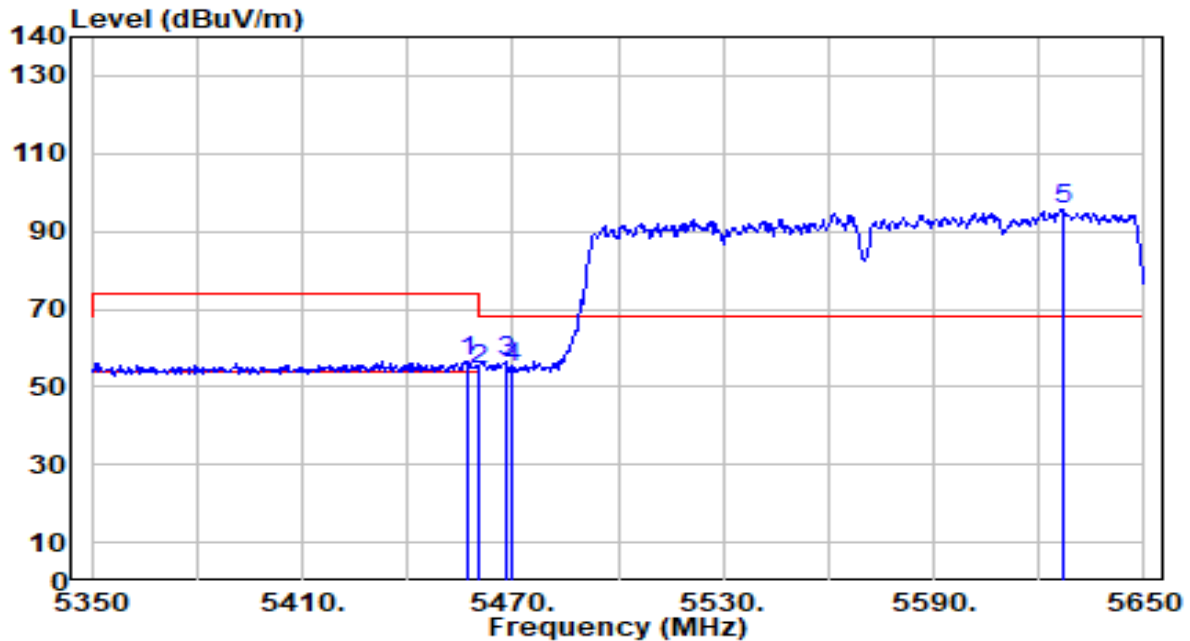


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.100	56.14	0.65	56.79	-17.21	74.00	300	225	Peak
2	5460.000	54.01	0.66	54.67	-19.33	74.00	300	225	Peak
3	* 5468.500	55.70	0.70	56.40	-11.80	68.20	300	225	Peak
4	5470.000	54.20	0.71	54.91	-13.29	68.20	300	225	Peak
5	5626.600	94.00	1.43	95.43	N/A	N/A	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

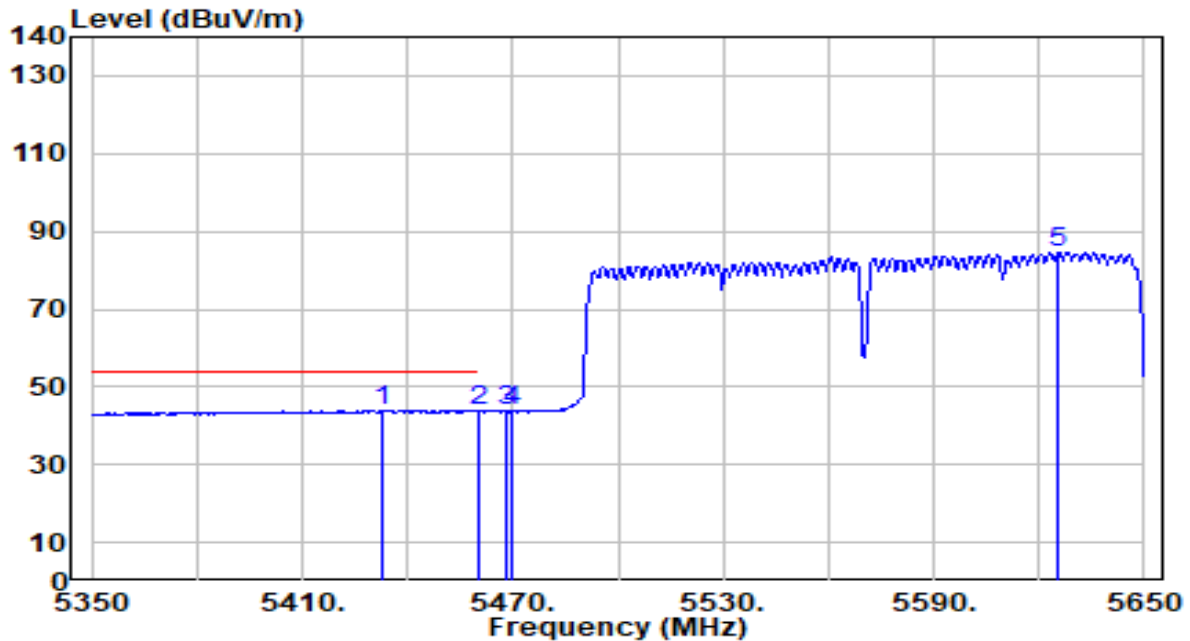


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5432.500	43.46	0.54	44.00	-10.00	54.00	300	225	Average
2		5460.000	42.96	0.66	43.63	-10.37	54.00	300	225	Average
3		5468.500	43.01	0.70	43.71	N/A	N/A	300	225	Average
4		5470.000	43.10	0.71	43.81	N/A	N/A	300	225	Average
5		5625.700	83.25	1.43	84.67	N/A	N/A	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

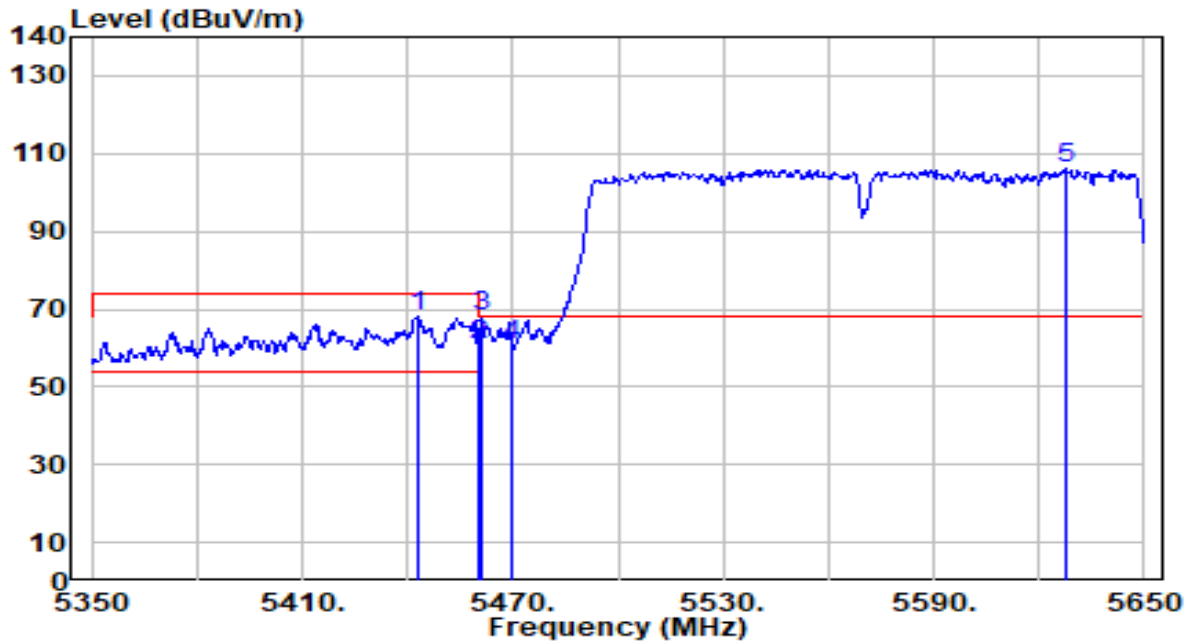


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5442.700	67.53	0.58	68.12	-5.88	74.00	200	67	Peak
2	5460.000	60.34	0.66	61.01	-12.99	74.00	200	67	Peak
3	* 5461.000	67.30	0.67	67.96	-0.24	68.20	200	67	Peak
4	5470.000	60.19	0.71	60.90	-7.30	68.20	200	67	Peak
5	5627.500	104.57	1.44	106.00	N/A	N/A	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ac-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

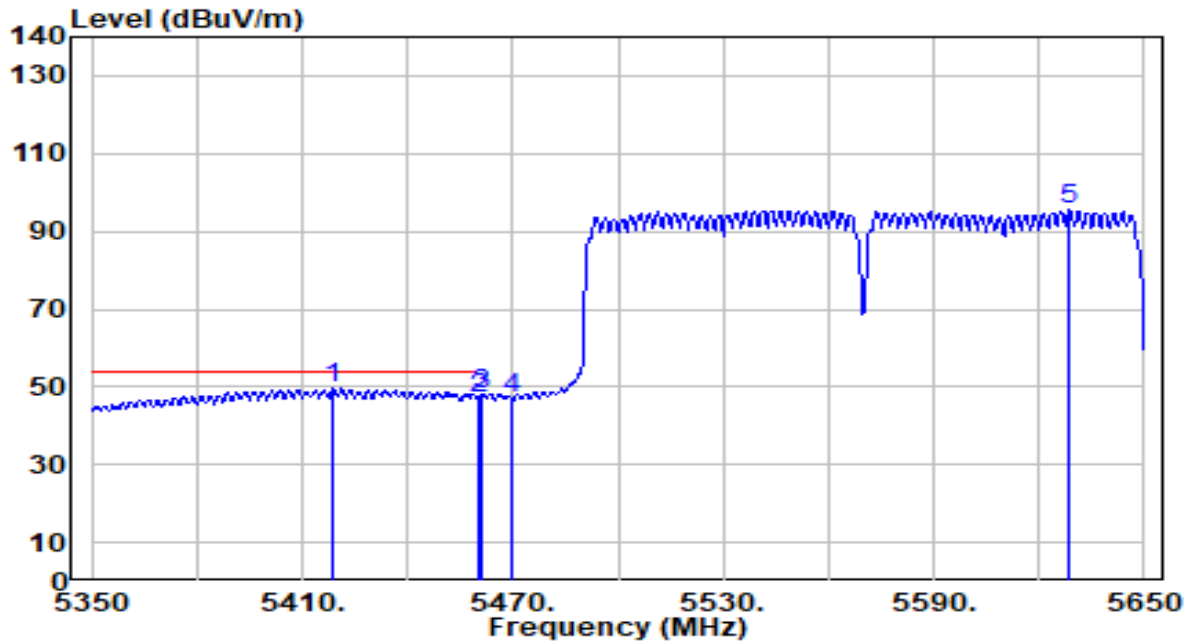


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5418.700	48.98	0.48	49.46	-4.54	54.00	200	67	Average
2		5460.000	46.19	0.66	46.85	-7.15	54.00	200	67	Average
3		5461.000	47.23	0.67	47.90	N/A	N/A	200	67	Average
4		5470.000	46.07	0.71	46.77	N/A	N/A	200	67	Average
5		5628.700	94.11	1.44	95.55	N/A	N/A	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

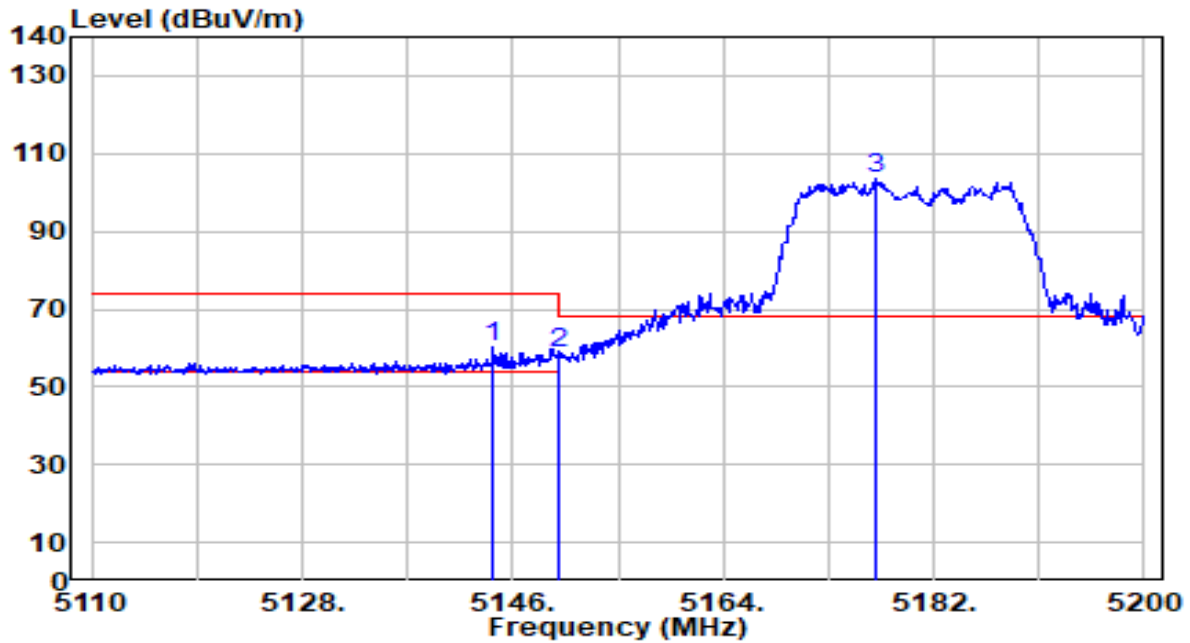


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.380	59.65	0.65	60.30	-13.70	74.00	231	73	Peak
2		5150.000	58.12	0.65	58.77	-15.23	74.00	231	73	Peak
3		5177.140	102.84	0.68	103.52	N/A	N/A	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

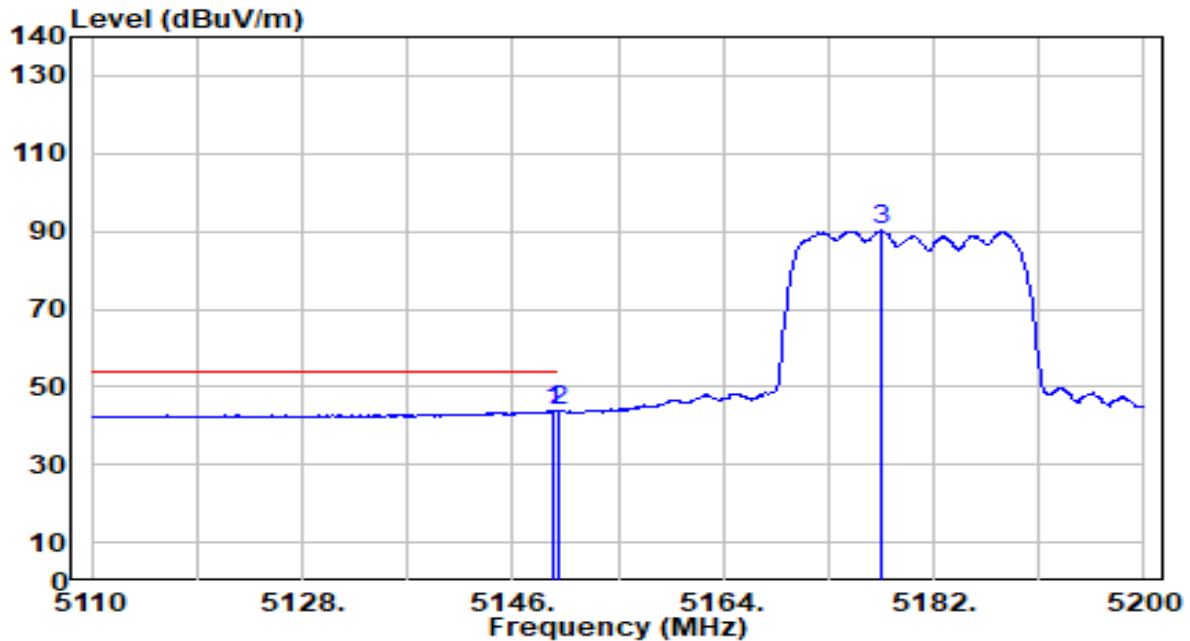


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5149.420	43.24	0.65	43.89	-10.11	54.00	231	73	Average
2	*	5150.000	43.25	0.65	43.90	-10.10	54.00	231	73	Average
3		5177.410	89.44	0.68	90.12	N/A	N/A	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

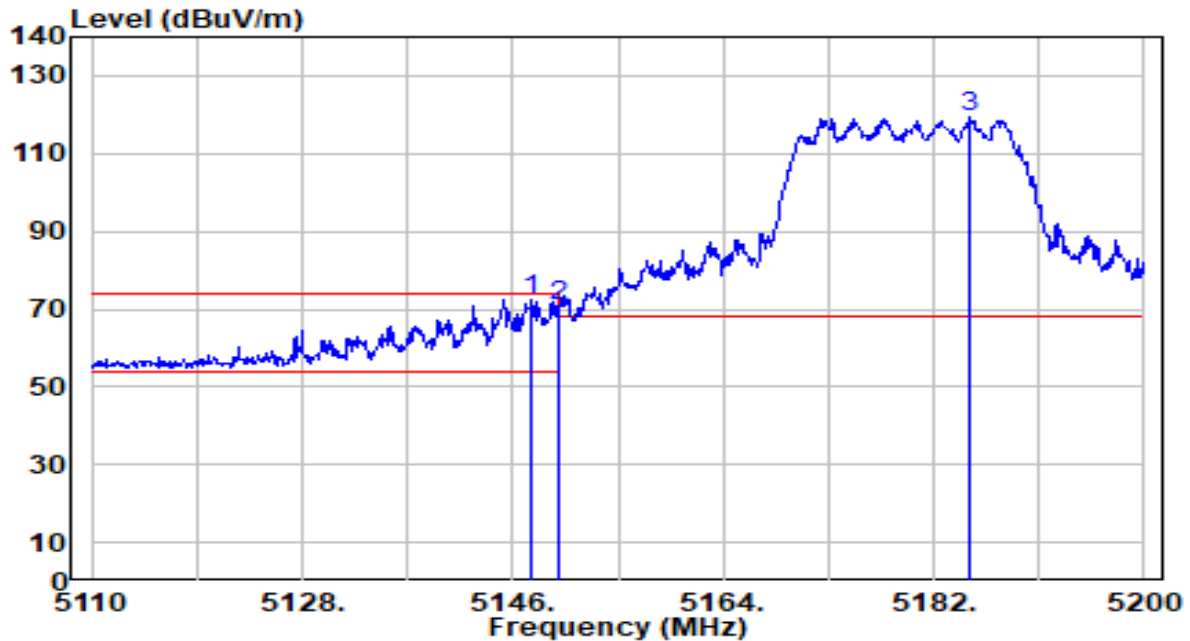


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.620	71.59	0.65	72.24	-1.76	74.00	200	242	Peak
2		5150.000	70.33	0.65	70.98	-3.02	74.00	200	242	Peak
3		5185.060	118.85	0.69	119.54	N/A	N/A	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

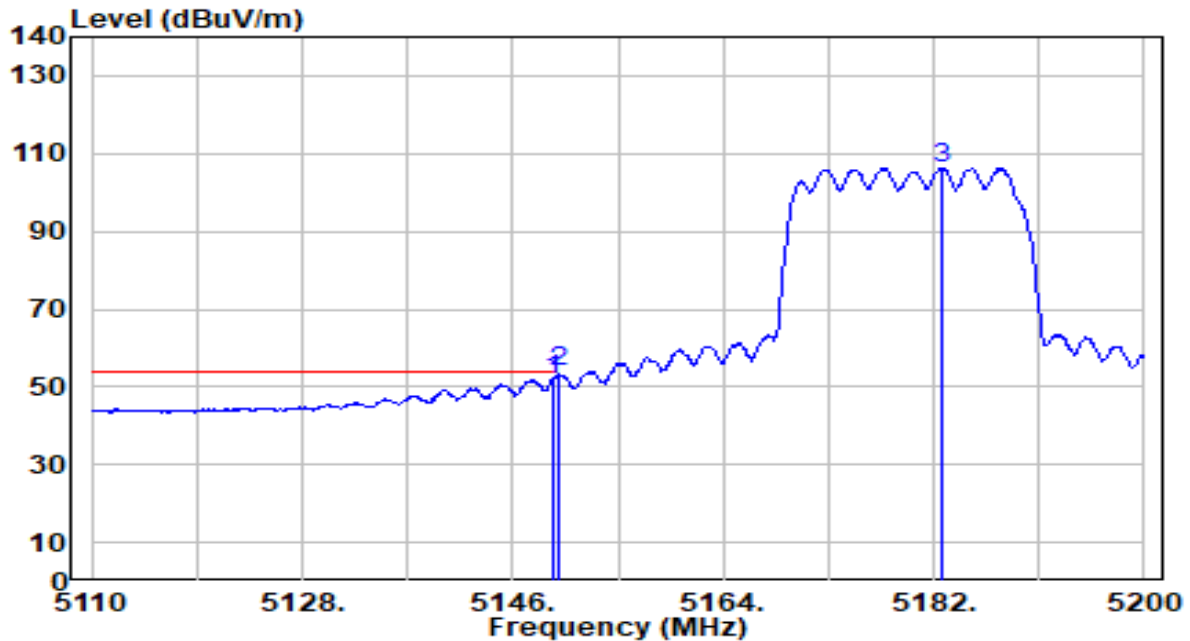


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5149.420	51.28	0.65	51.93	-2.07	54.00	200	242	Average
2	* 5150.000	53.06	0.65	53.72	-0.28	54.00	200	242	Average
3	5182.720	105.62	0.69	106.31	N/A	N/A	200	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

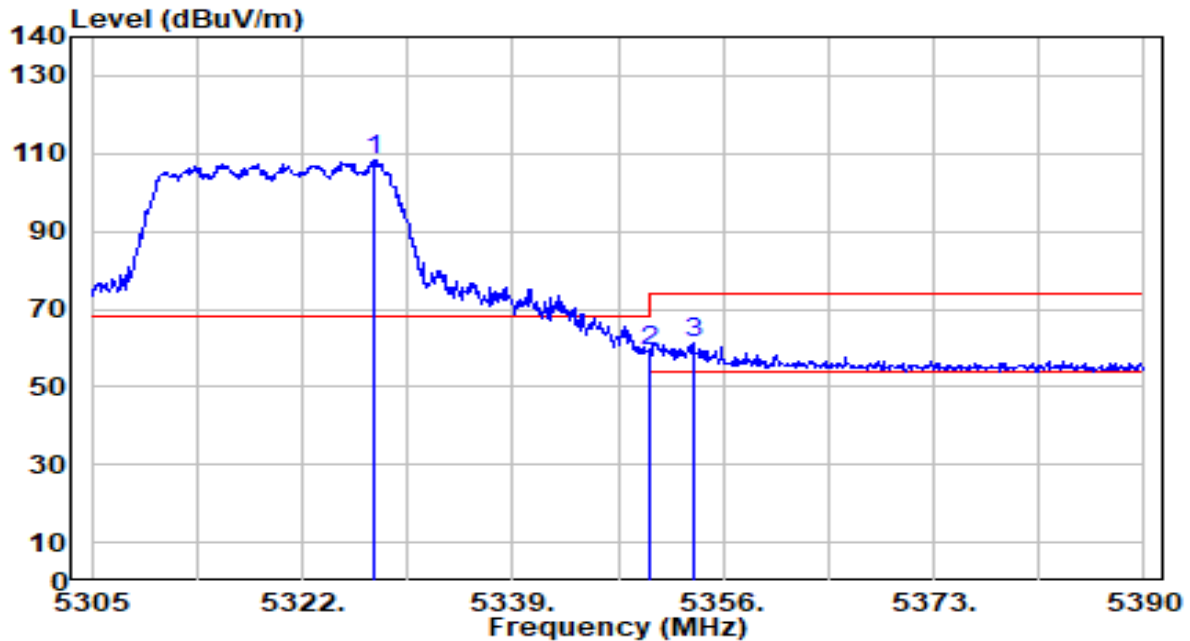


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5327.865	107.73	0.51	108.24	N/A	N/A	300	225	Peak
2	5350.000	58.69	0.47	59.16	-14.84	74.00	300	225	Peak
3	* 5353.620	60.68	0.47	61.15	-12.85	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

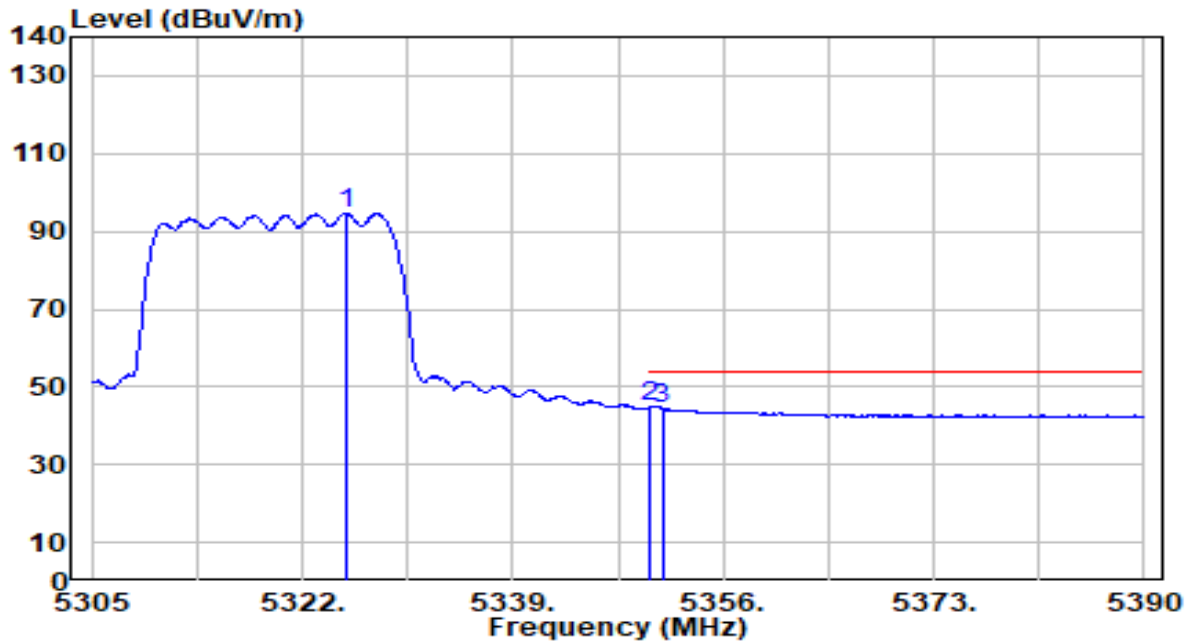


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5325.485	94.04	0.51	94.54	N/A	N/A	300	225	Average
2	*	5350.000	44.17	0.47	44.65	-9.35	54.00	300	225	Average
3		5351.070	44.15	0.47	44.62	-9.38	54.00	300	225	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

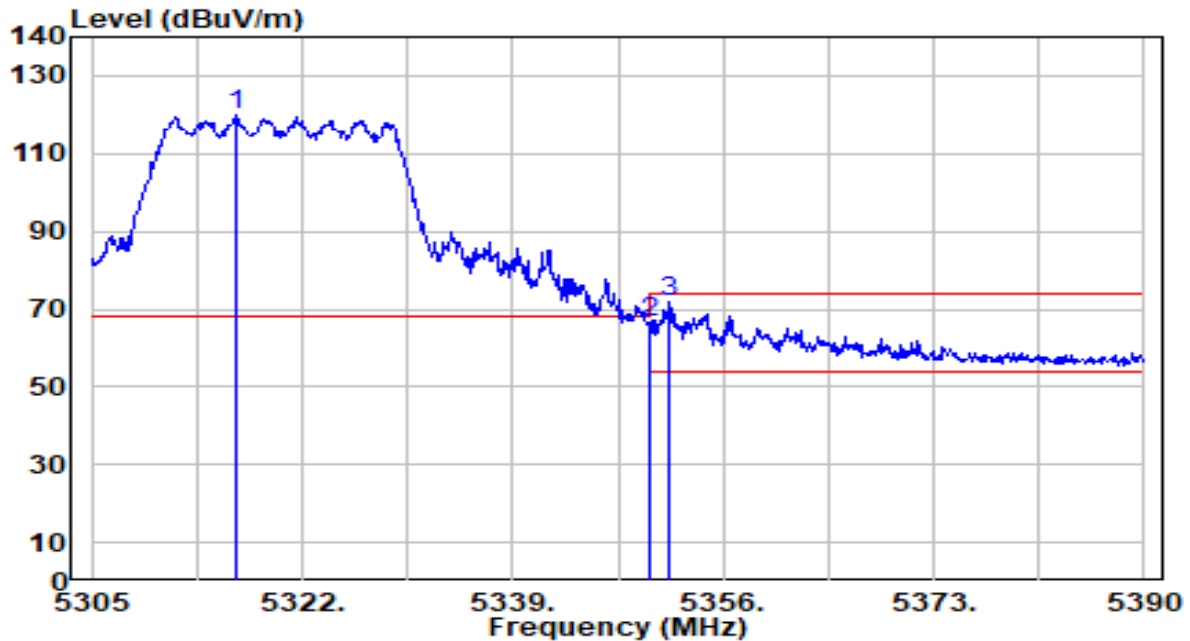


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.730	119.43	0.52	119.95	N/A	N/A	200	67	Peak
2	5350.000	66.12	0.47	66.59	-7.41	74.00	200	67	Peak
3	* 5351.665	71.49	0.47	71.95	-2.05	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

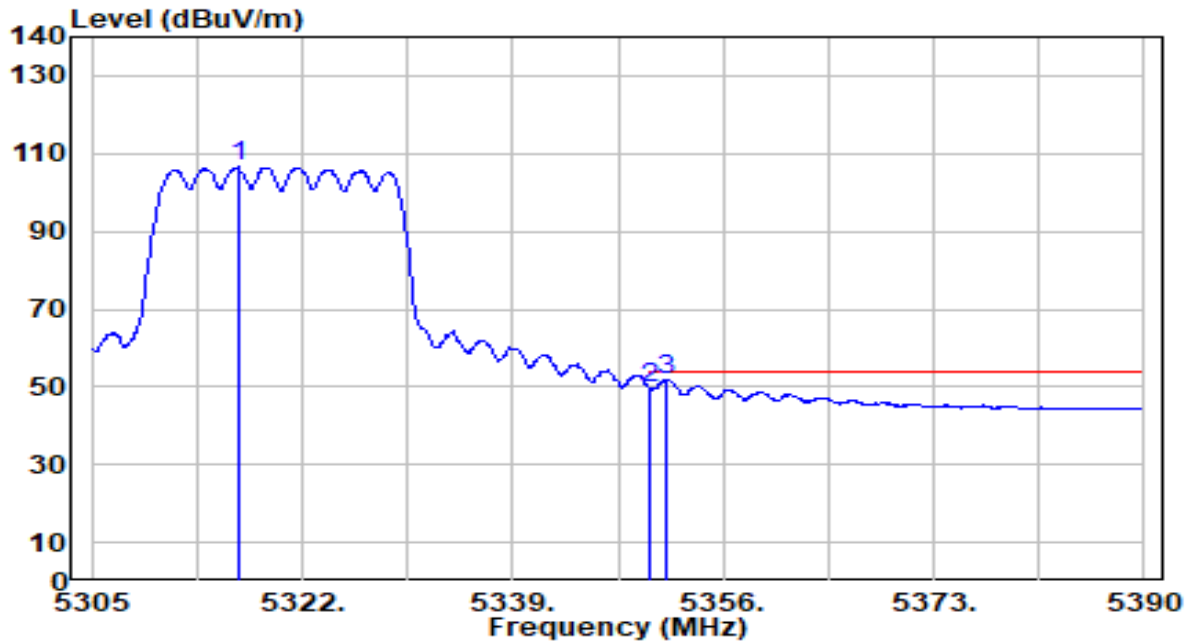


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.815	105.96	0.52	106.49	N/A	N/A	200	67	Average
2	5350.000	49.44	0.47	49.91	-4.09	54.00	200	67	Average
3	* 5351.410	51.53	0.47	52.00	-2.00	54.00	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

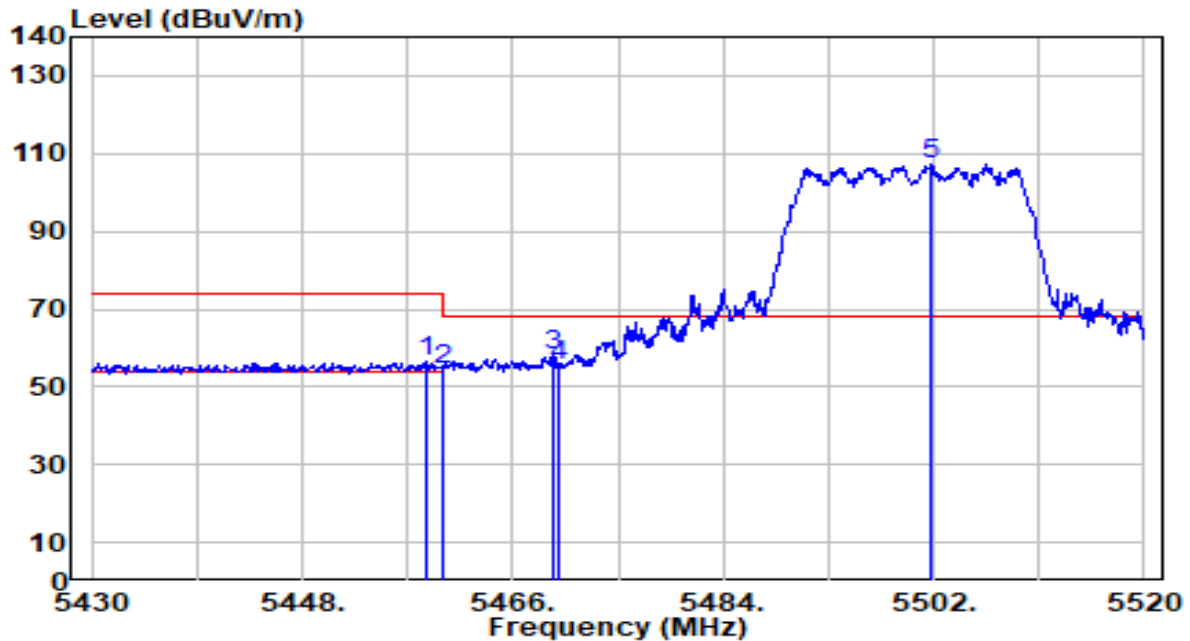


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.530	55.77	0.66	56.43	-17.57	74.00	100	53	Peak
2	5460.000	54.01	0.66	54.67	-19.33	74.00	100	53	Peak
3	* 5469.420	57.66	0.70	58.36	-9.84	68.20	100	53	Peak
4	5470.000	54.55	0.71	55.25	-12.95	68.20	100	53	Peak
5	5501.820	106.42	0.85	107.27	N/A	N/A	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

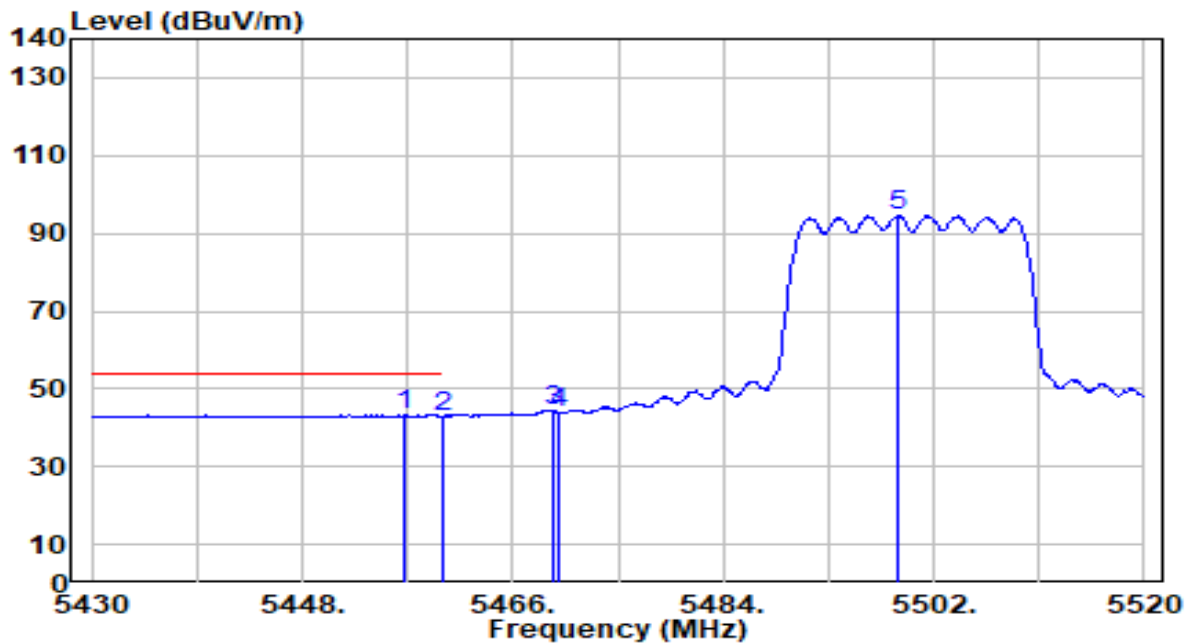


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5456.730	42.62	0.65	43.27	-10.73	54.00	100	53	Average
2		5460.000	42.24	0.66	42.90	-11.10	54.00	100	53	Average
3		5469.420	43.71	0.70	44.41	N/A	N/A	100	53	Average
4		5470.000	42.99	0.71	43.69	N/A	N/A	100	53	Average
5		5498.940	93.71	0.84	94.55	N/A	N/A	100	53	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

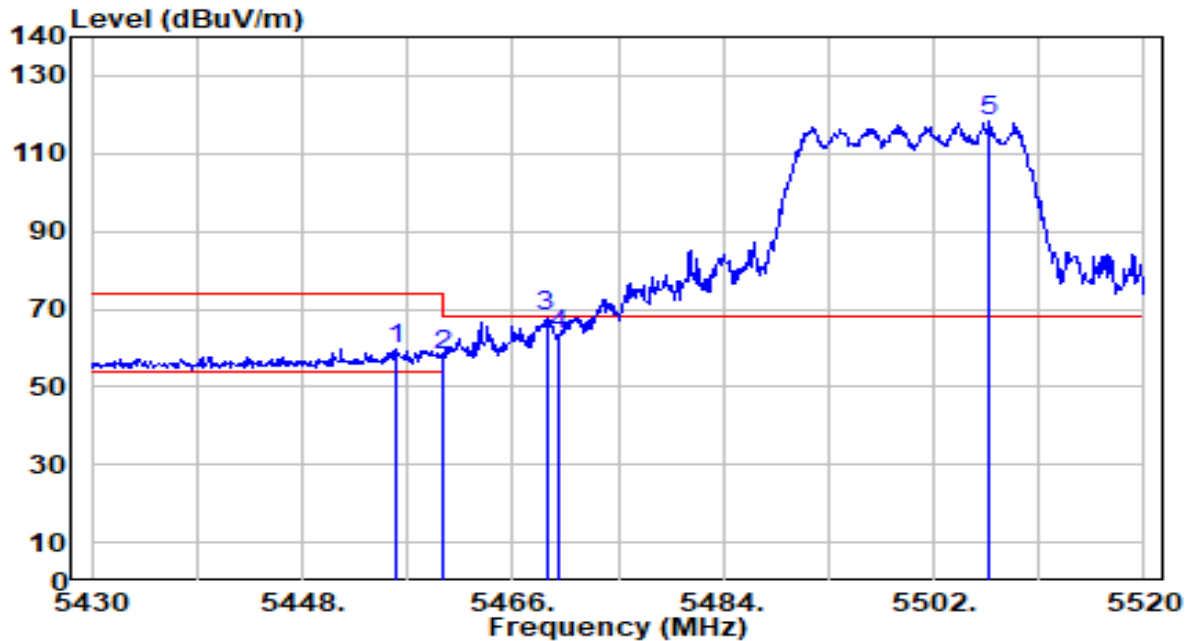


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.100	59.13	0.64	59.77	-14.23	74.00	200	243	Peak
2	5460.000	57.31	0.66	57.97	-16.03	74.00	200	243	Peak
3	* 5468.880	67.25	0.70	67.95	-0.25	68.20	200	243	Peak
4	5470.000	62.46	0.71	63.17	-5.03	68.20	200	243	Peak
5	5506.770	117.66	0.87	118.53	N/A	N/A	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

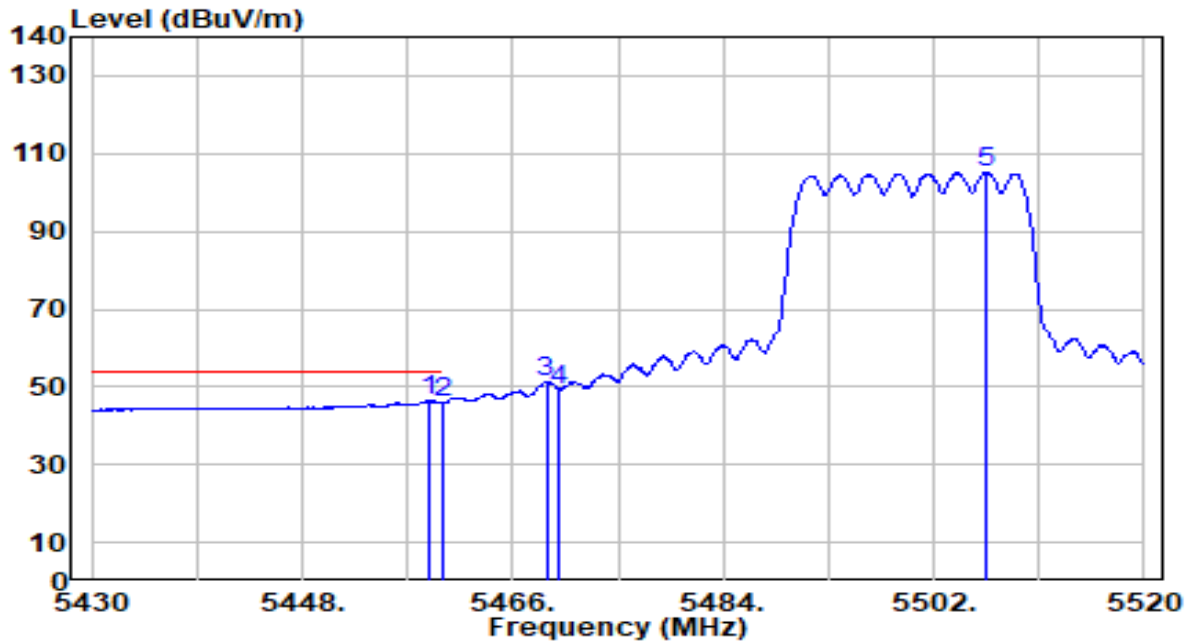


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.800	45.76	0.66	46.42	-7.58	54.00	200	243	Average
2		5460.000	45.21	0.66	45.87	-8.13	54.00	200	243	Average
3		5468.880	50.45	0.70	51.15	N/A	N/A	200	243	Average
4		5470.000	48.55	0.71	49.25	N/A	N/A	200	243	Average
5		5506.410	104.29	0.87	105.16	N/A	N/A	200	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-20
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

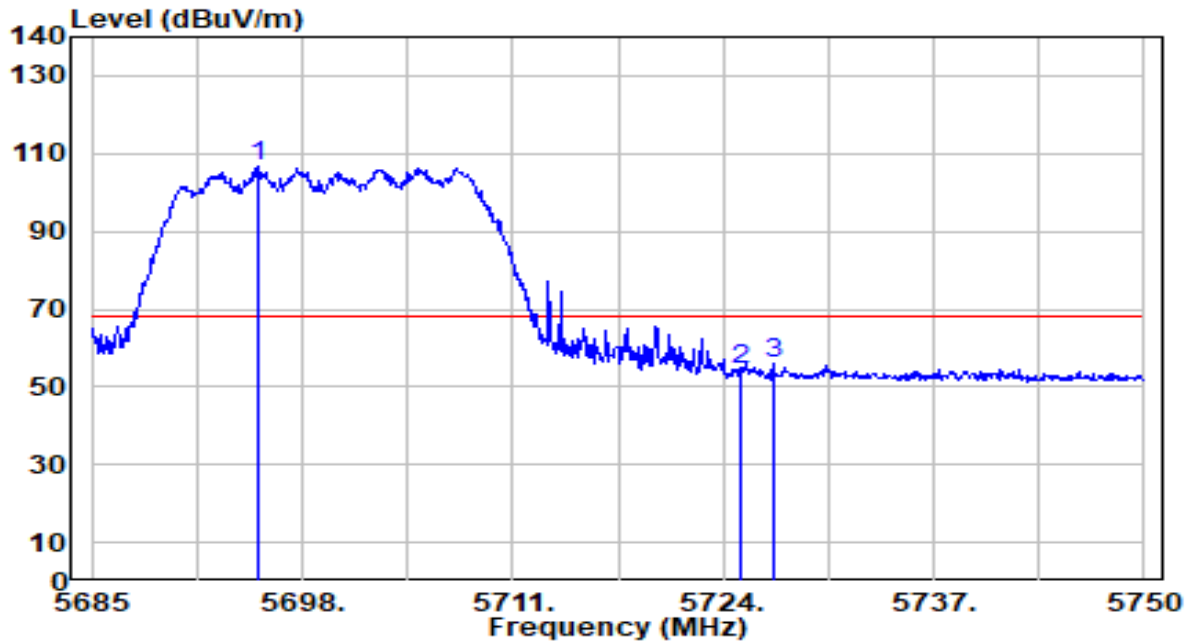


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5695.335	104.79	1.75	106.55	N/A	N/A	200	26	Peak
2		5725.000	52.60	1.89	54.49	-13.71	68.20	200	26	Peak
3		5727.120	53.96	1.90	55.87	-12.33	68.20	200	26	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

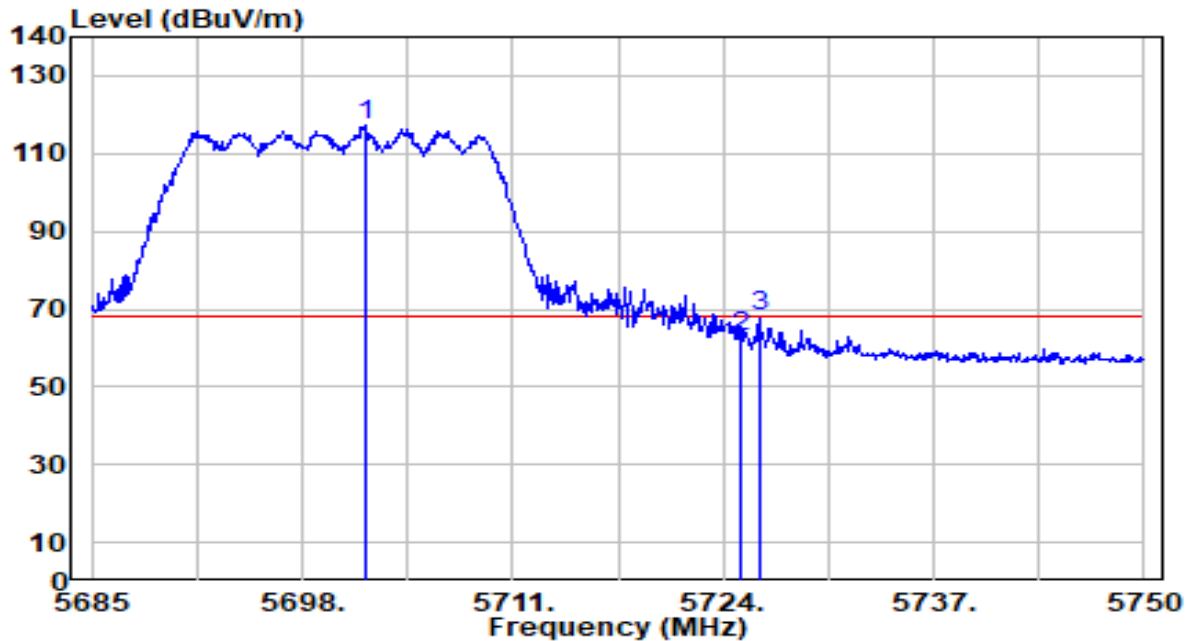


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5701.965	115.28	1.79	117.06	N/A	N/A	200	54	Peak
2	5725.000	61.03	1.89	62.92	-5.28	68.20	200	54	Peak
3	* 5726.210	66.01	1.90	67.91	-0.29	68.20	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

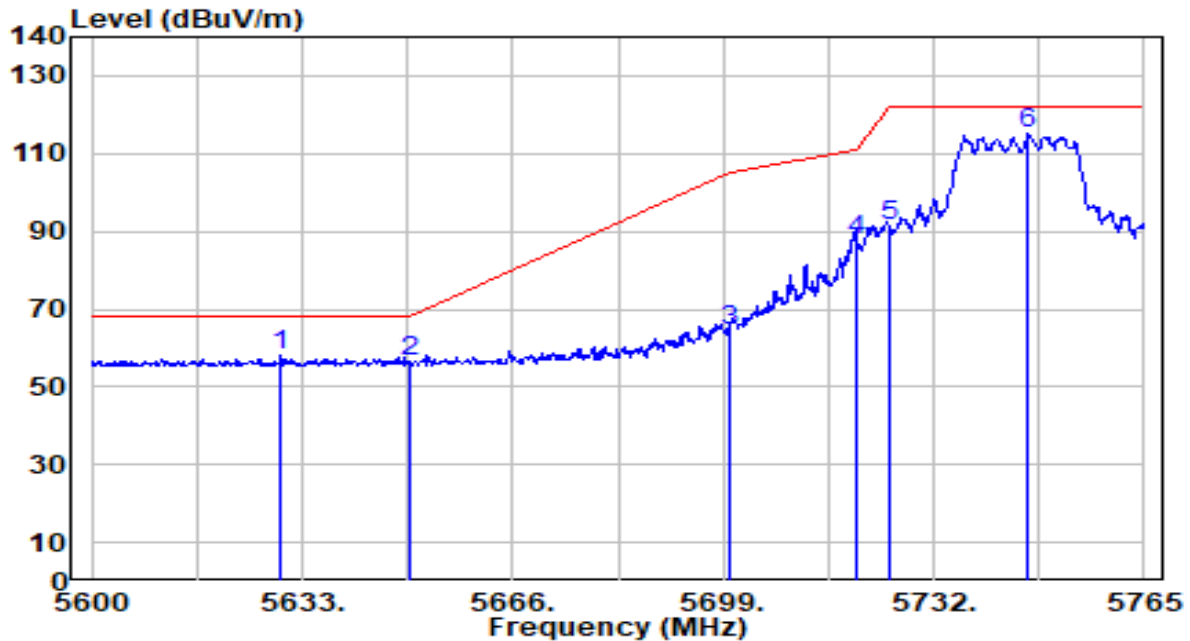


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5629.700	56.42	1.45	57.86	-10.34	68.20	100	238	Peak
2		5650.000	54.91	1.54	56.45	-11.75	68.20	100	238	Peak
3		5700.000	62.83	1.78	64.60	-40.60	105.20	100	238	Peak
4		5720.000	85.70	1.87	87.57	-23.23	110.80	100	238	Peak
5		5725.000	89.46	1.89	91.35	-30.85	122.20	100	238	Peak
6		5746.685	113.17	1.99	115.17	N/A	N/A	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

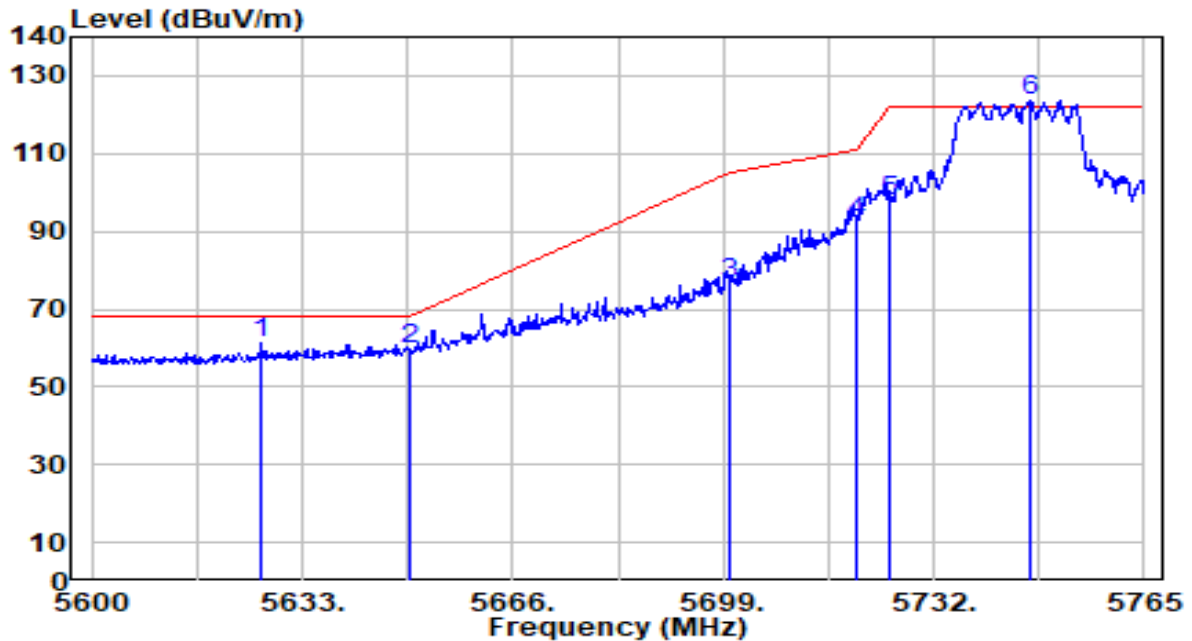


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5626.730	59.62	1.43	61.05	-7.15	68.20	200	54	Peak
2		5650.000	58.34	1.54	59.88	-8.32	68.20	200	54	Peak
3		5700.000	74.61	1.78	76.39	-28.81	105.20	200	54	Peak
4		5720.000	90.83	1.87	92.70	-18.10	110.80	200	54	Peak
5		5725.000	95.58	1.89	97.47	-24.73	122.20	200	54	Peak
6		5747.180	121.62	2.00	123.62	N/A	N/A	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

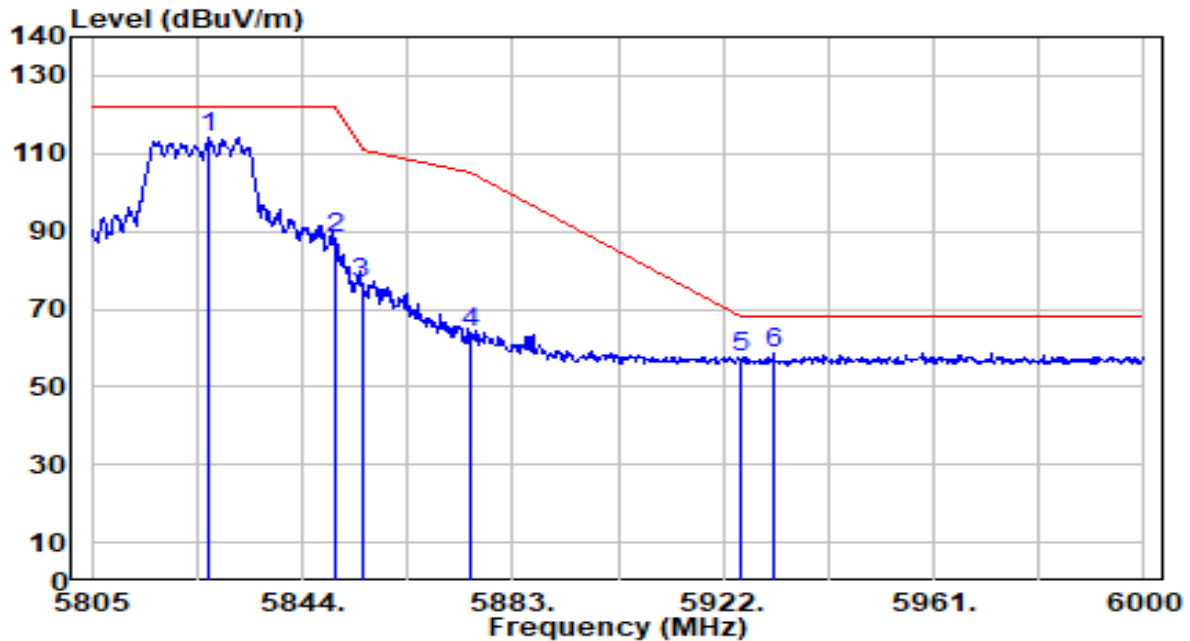


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	111.82	2.25	114.07	N/A	N/A	100	239	Peak
2	5850.000	86.03	2.25	88.28	-33.92	122.20	100	239	Peak
3	5855.000	74.36	2.25	76.61	-34.19	110.80	100	239	Peak
4	5875.000	61.75	2.26	64.00	-41.20	105.20	100	239	Peak
5	5925.000	55.46	2.27	57.72	-10.48	68.20	100	239	Peak
6	* 5931.360	56.55	2.27	58.82	-9.38	68.20	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

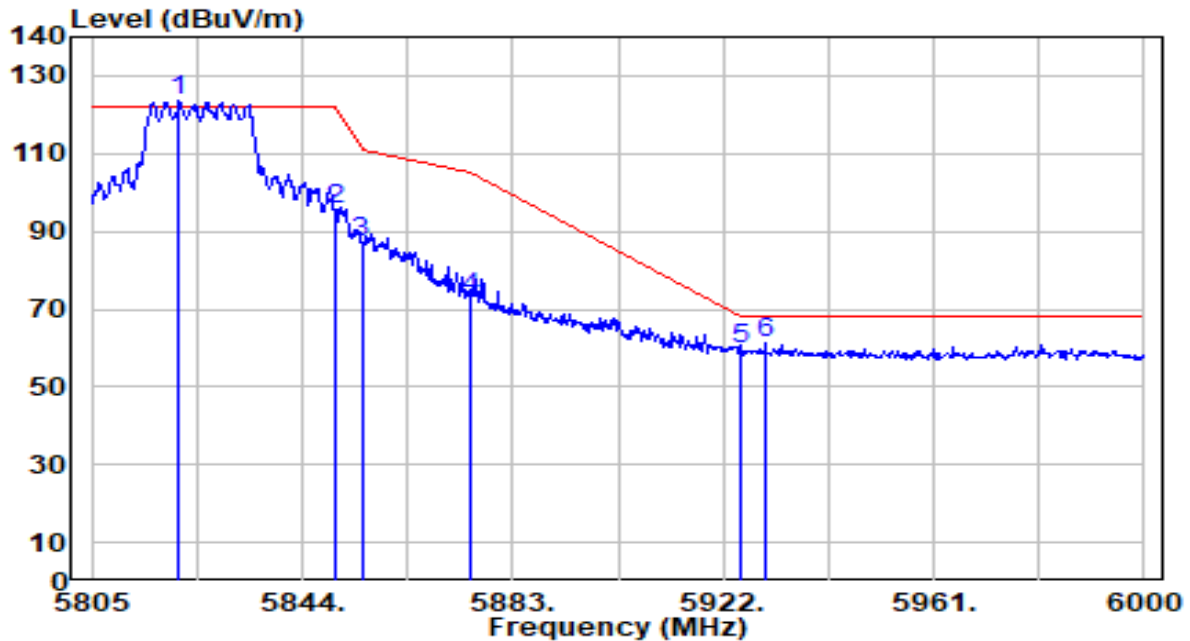


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5820.990	121.19	2.25	123.44	N/A	N/A	200	239	Peak
2	5850.000	93.37	2.25	95.63	-26.57	122.20	200	239	Peak
3	5855.000	85.01	2.25	87.26	-23.54	110.80	200	239	Peak
4	5875.000	70.88	2.26	73.14	-32.06	105.20	200	239	Peak
5	5925.000	57.69	2.27	59.95	-8.25	68.20	200	239	Peak
6	* 5929.800	58.95	2.27	61.22	-6.98	68.20	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

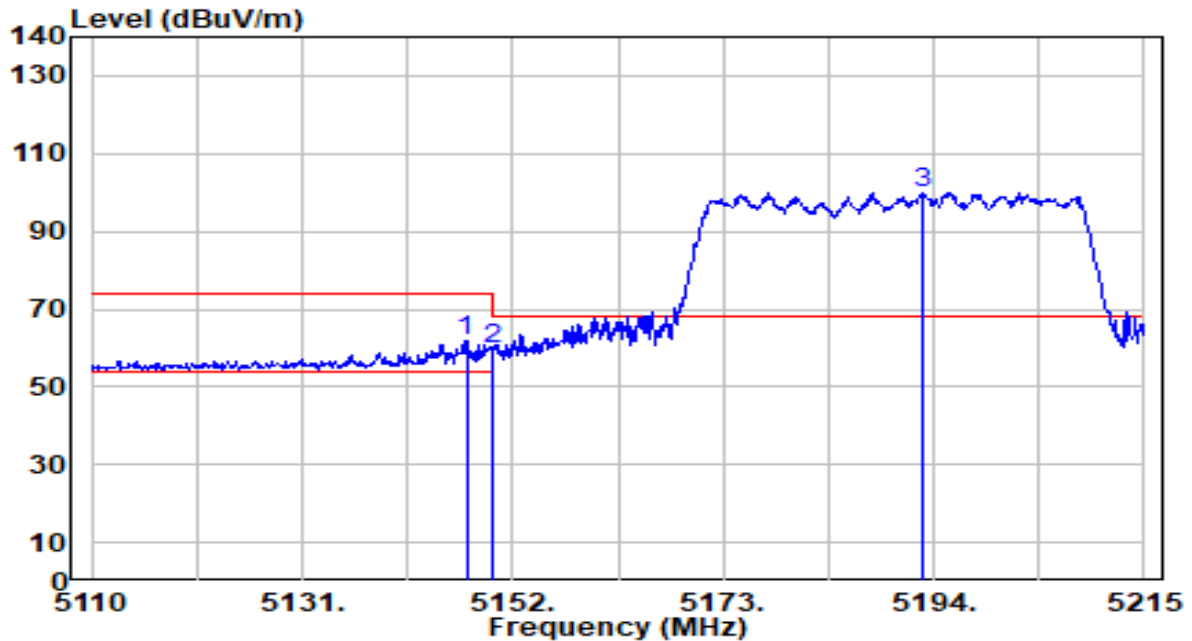


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.380	61.17	0.65	61.82	-12.18	74.00	231	73	Peak
2		5150.000	59.12	0.65	59.77	-14.23	74.00	231	73	Peak
3		5192.845	99.27	0.70	99.96	N/A	N/A	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

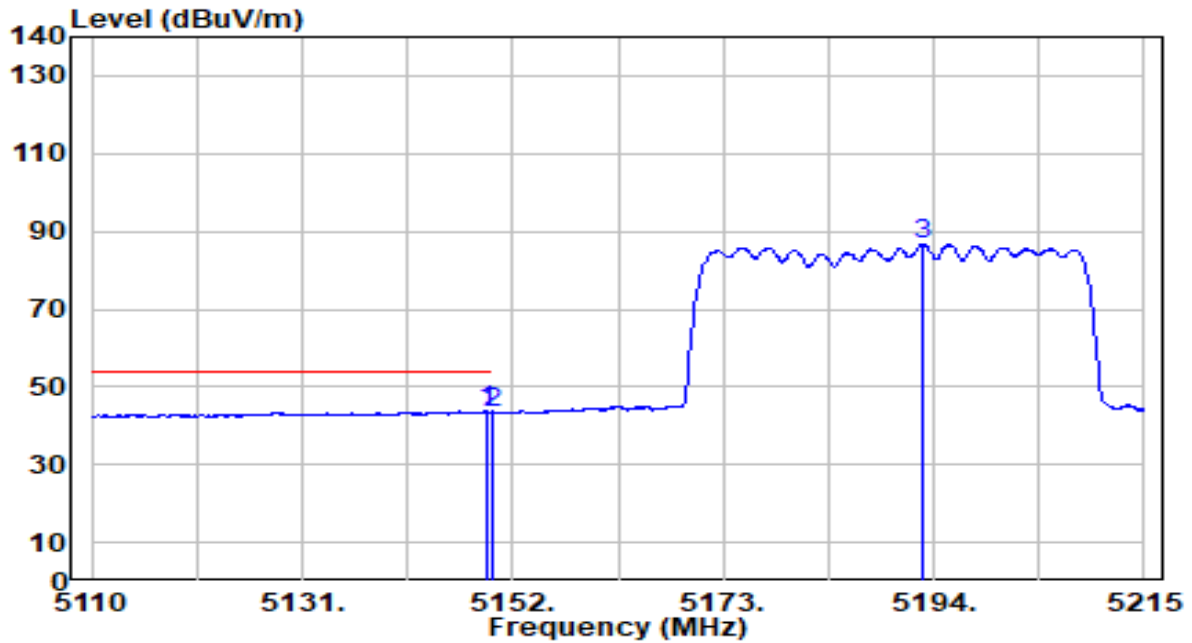


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.480	43.11	0.65	43.76	-10.24	54.00	231	73	Average
2		5150.000	42.80	0.65	43.45	-10.55	54.00	231	73	Average
3		5192.845	85.93	0.70	86.63	N/A	N/A	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

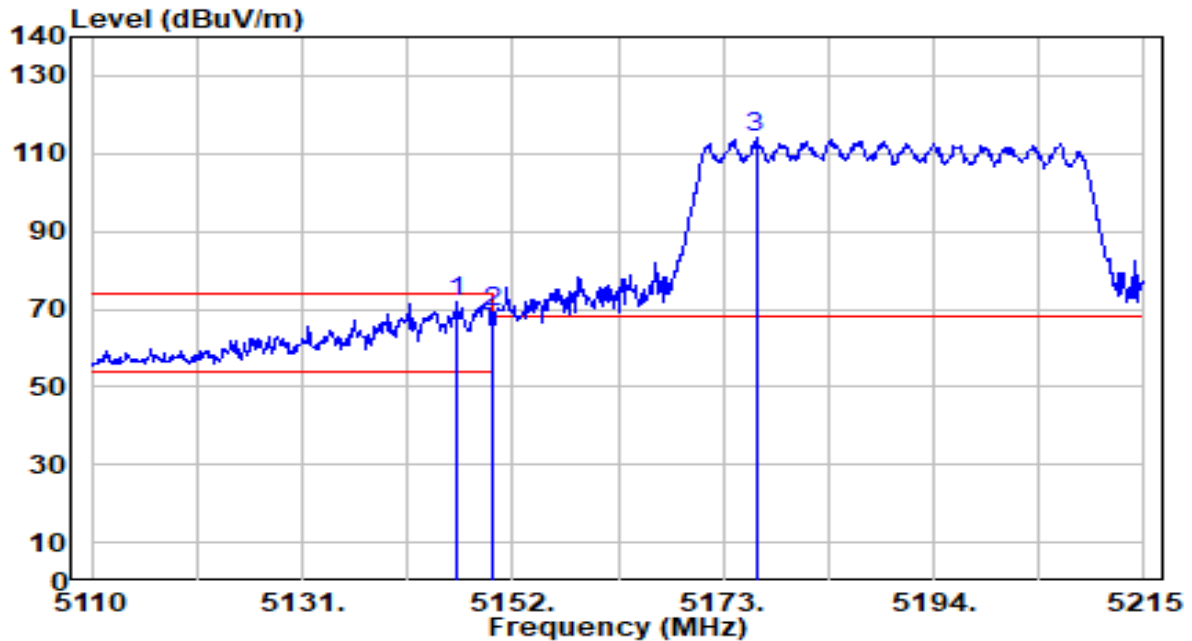


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.435	71.05	0.65	71.70	-2.30	74.00	200	242	Peak
2		5150.000	68.33	0.65	68.99	-5.01	74.00	200	242	Peak
3		5176.255	113.34	0.68	114.02	N/A	N/A	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

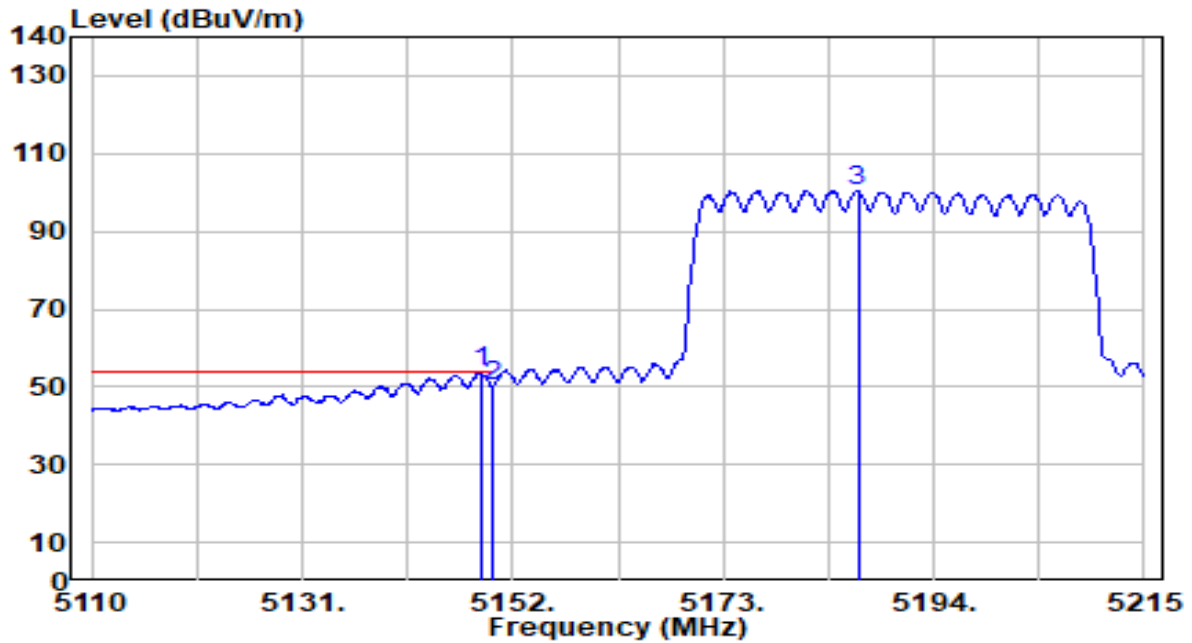


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.850	53.06	0.65	53.71	-0.29	54.00	200	242	Average
2		5150.000	49.42	0.65	50.08	-3.92	54.00	200	242	Average
3		5186.440	99.67	0.69	100.36	N/A	N/A	200	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

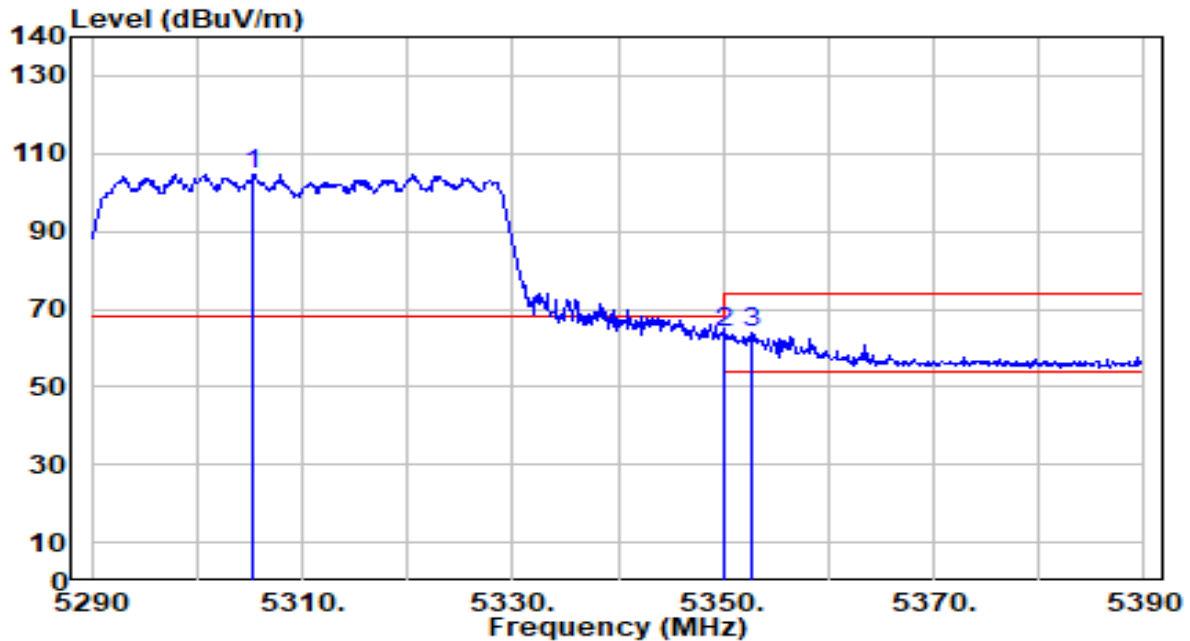


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5305.300	104.17	0.54	104.71	N/A	N/A	300	225	Peak
2	* 5350.000	63.69	0.47	64.16	-9.84	74.00	300	225	Peak
3	5352.600	63.33	0.47	63.80	-10.20	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

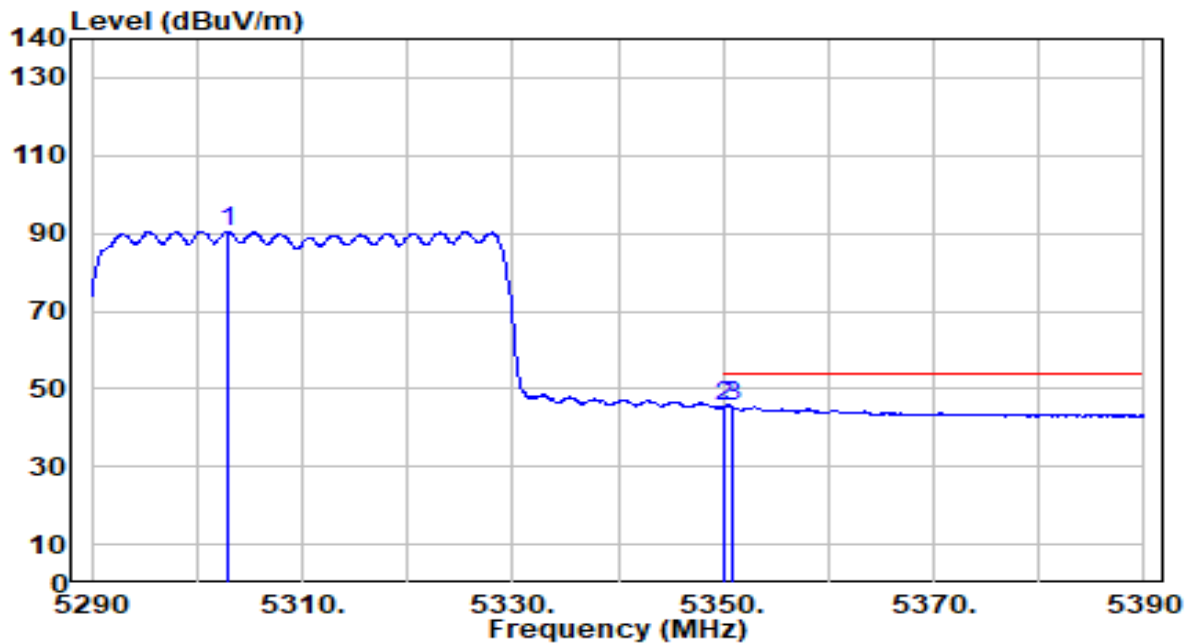


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5302.900	89.94	0.54	90.49	N/A	N/A	300	225	Average
2	*	5350.000	45.17	0.47	45.64	-8.36	54.00	300	225	Average
3		5351.000	45.11	0.47	45.58	-8.42	54.00	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

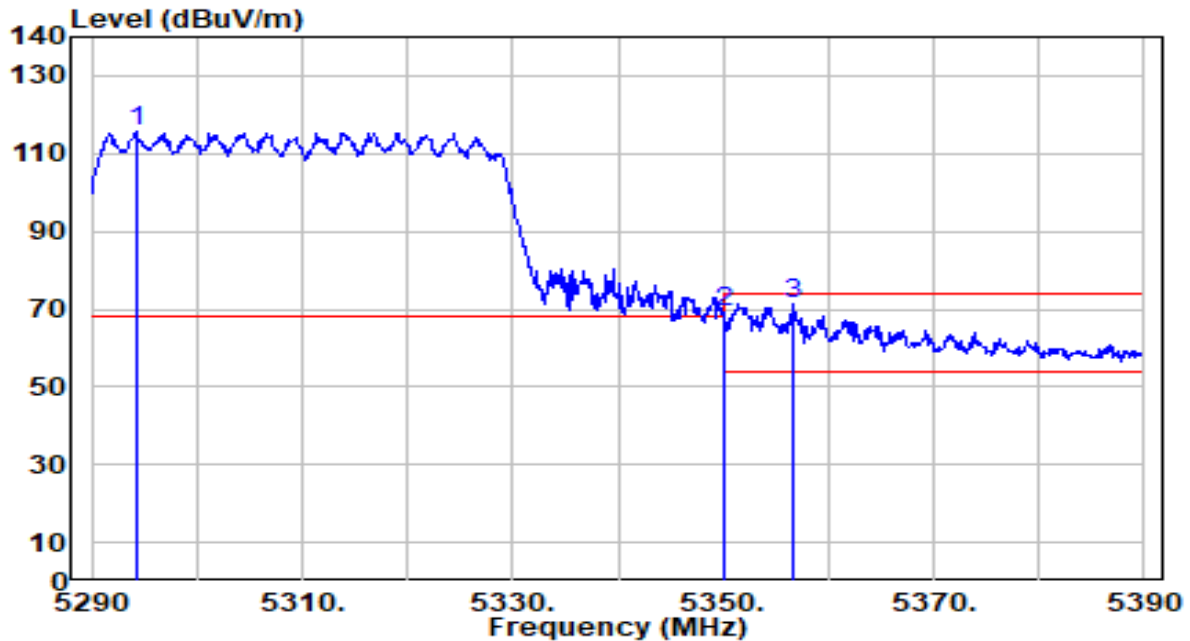


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5294.300	114.91	0.56	115.47	N/A	N/A	200	67	Peak
2	5350.000	68.84	0.47	69.31	-4.69	74.00	200	67	Peak
3	* 5356.600	71.10	0.46	71.56	-2.44	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

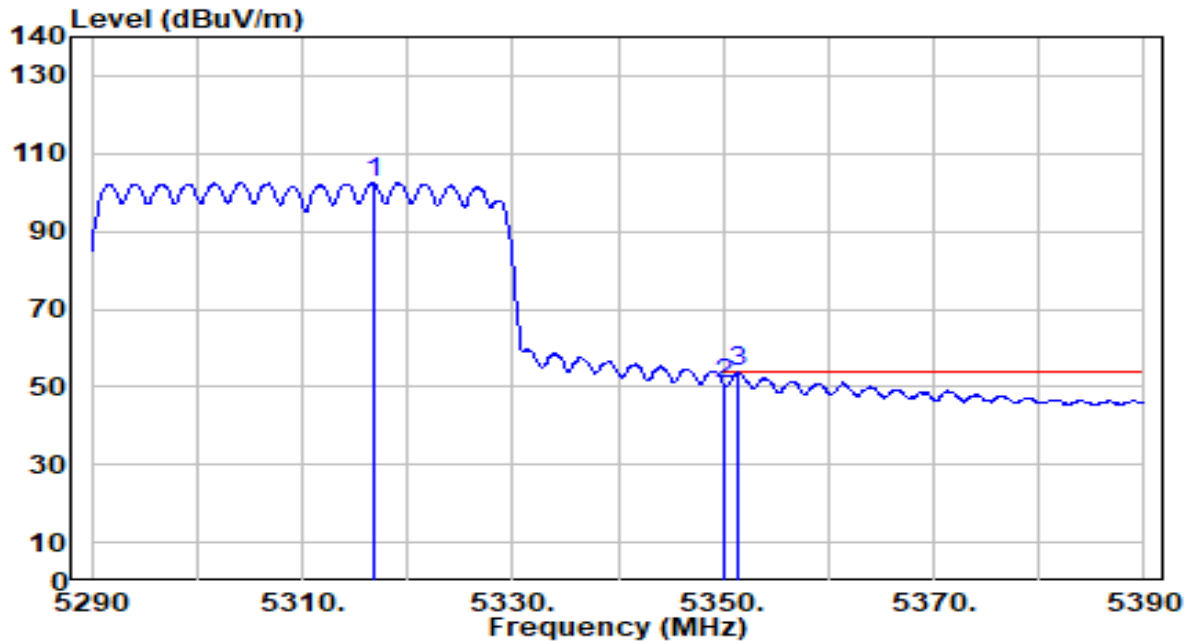


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.700	101.91	0.52	102.43	N/A	N/A	200	67	Average
2	5350.000	50.49	0.47	50.96	-3.04	54.00	200	67	Average
3	* 5351.500	53.30	0.47	53.77	-0.23	54.00	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

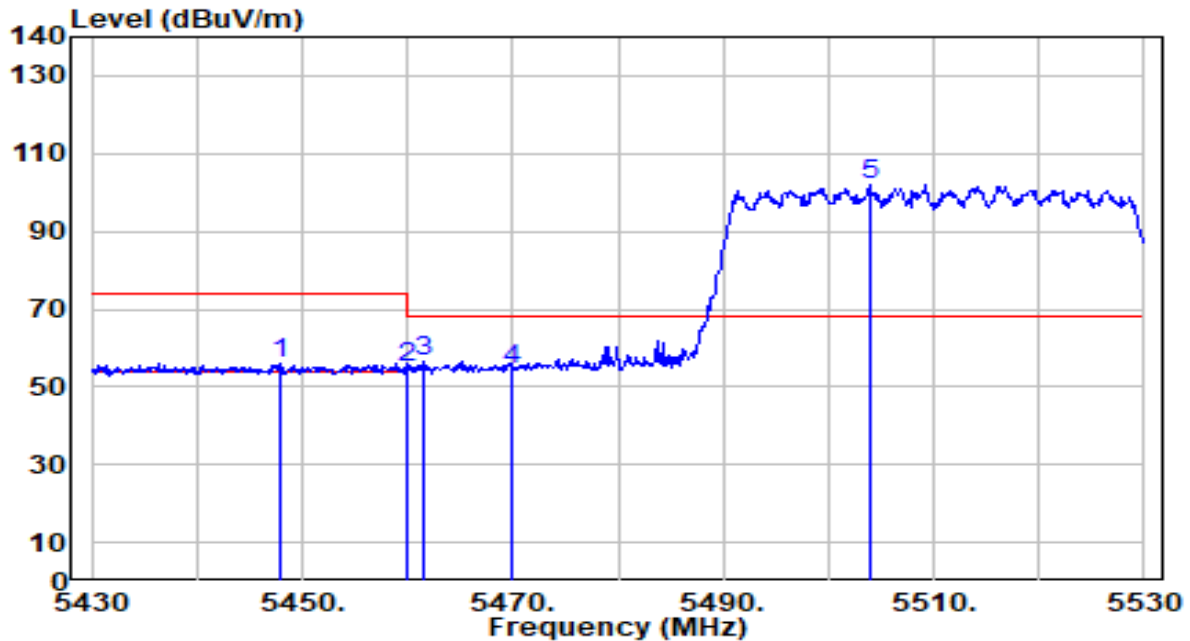


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.800	55.24	0.61	55.85	-18.15	74.00	100	53	Peak
2	5460.000	54.34	0.66	55.00	-19.00	74.00	100	53	Peak
3	* 5461.500	55.71	0.67	56.38	-11.82	68.20	100	53	Peak
4	5470.000	53.71	0.71	54.42	-13.78	68.20	100	53	Peak
5	5504.000	101.33	0.86	102.19	N/A	N/A	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

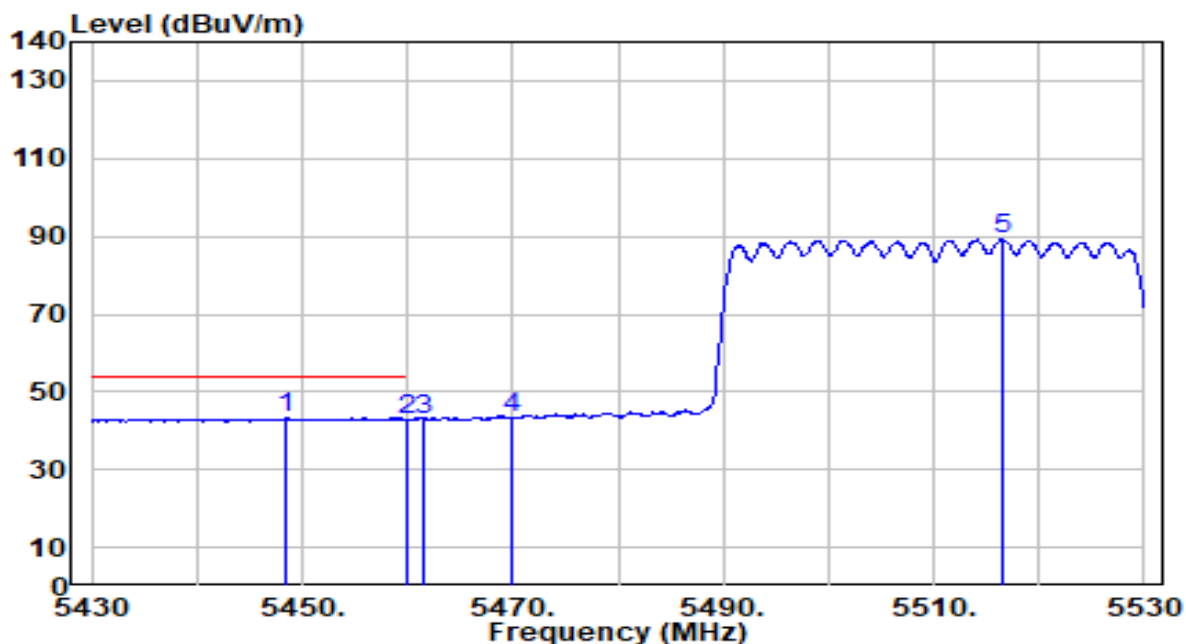


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.500	42.62	0.61	43.23	-10.77	54.00	100	53	Average
2		5460.000	42.20	0.66	42.86	-11.14	54.00	100	53	Average
3		5461.500	42.32	0.67	42.99	N/A	N/A	100	53	Average
4		5470.000	42.52	0.71	43.23	N/A	N/A	100	53	Average
5		5516.500	88.23	0.92	89.14	N/A	N/A	100	53	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

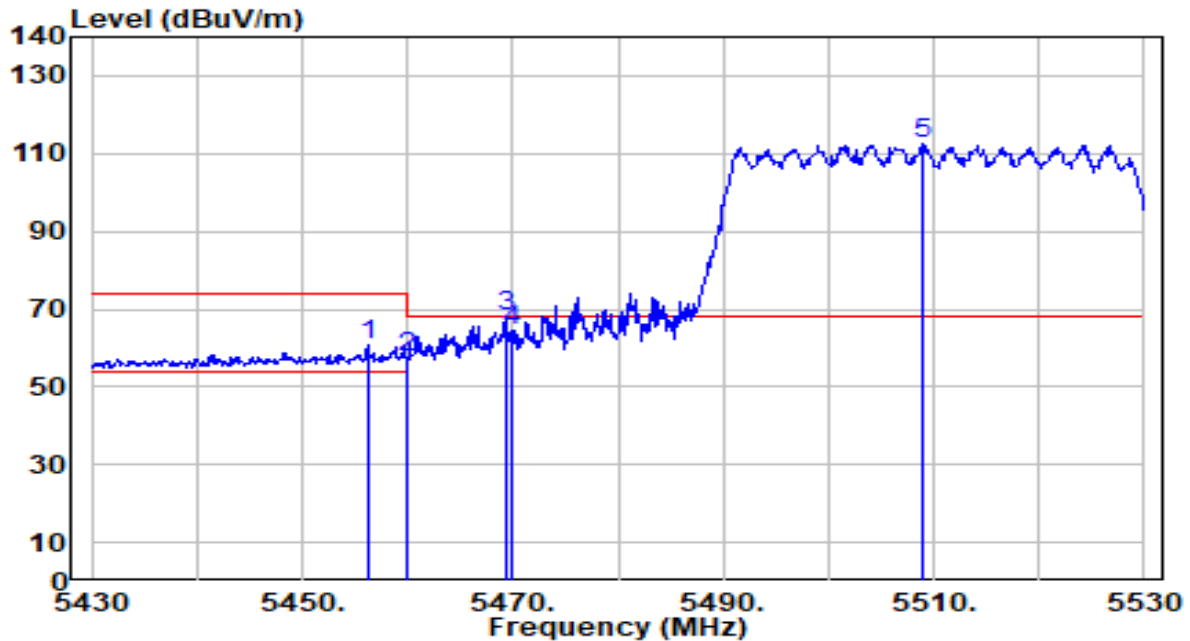


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.200	60.30	0.64	60.95	-13.05	74.00	200	243	Peak
2	5460.000	56.97	0.66	57.63	-16.37	74.00	200	243	Peak
3	* 5469.300	67.28	0.70	67.98	-0.22	68.20	200	243	Peak
4	5470.000	63.68	0.71	64.39	-3.81	68.20	200	243	Peak
5	5509.000	111.73	0.88	112.61	N/A	N/A	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

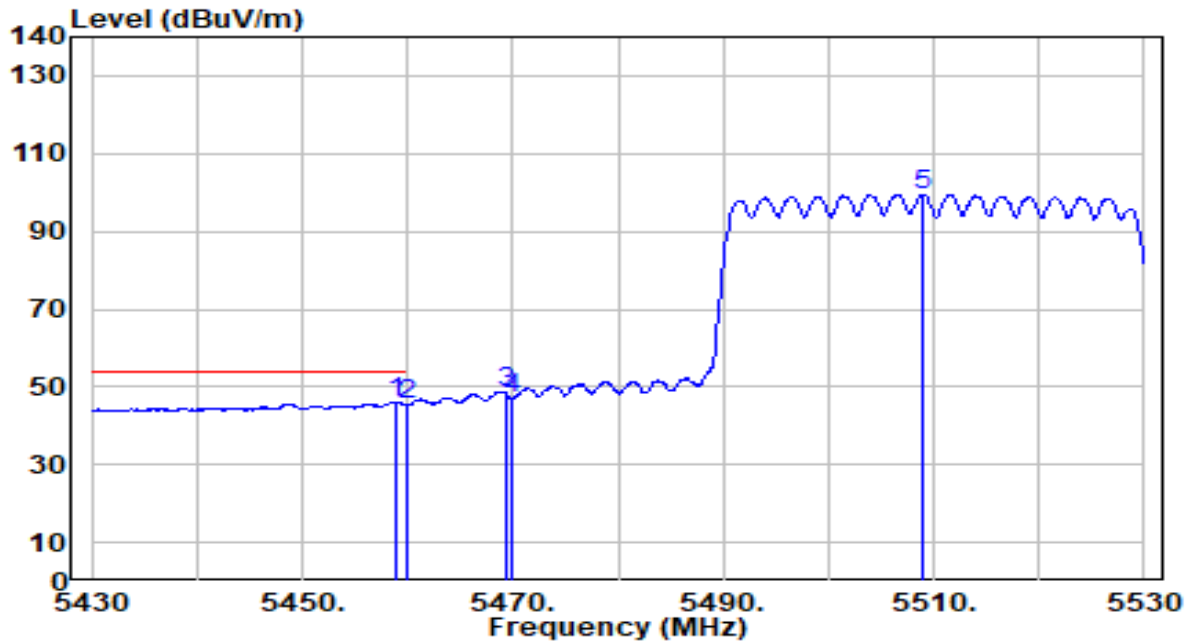


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.900	45.45	0.66	46.10	-7.90	54.00	200	243	Average
2		5460.000	44.64	0.66	45.30	-8.70	54.00	200	243	Average
3		5469.300	47.64	0.70	48.34	N/A	N/A	200	243	Average
4		5470.000	46.09	0.71	46.80	N/A	N/A	200	243	Average
5		5509.000	98.59	0.88	99.47	N/A	N/A	200	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

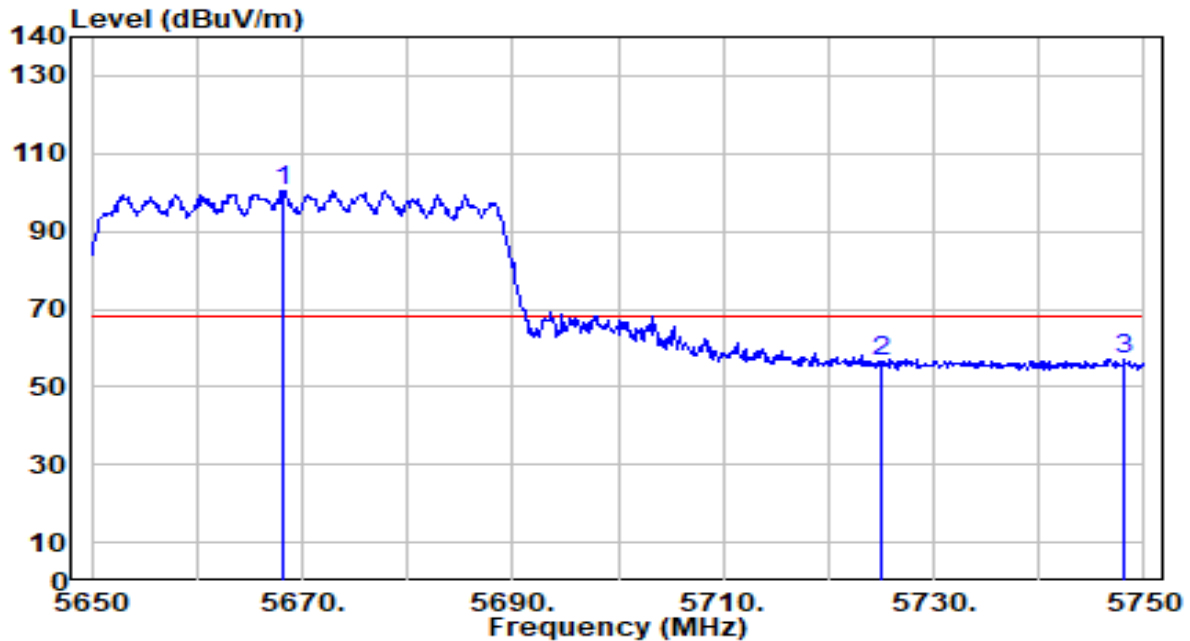


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5668.200	98.74	1.63	100.37	N/A	N/A	200	12	Peak
2	5725.000	54.46	1.89	56.35	-11.85	68.20	200	12	Peak
3	* 5748.200	55.08	2.00	57.08	-11.12	68.20	200	12	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

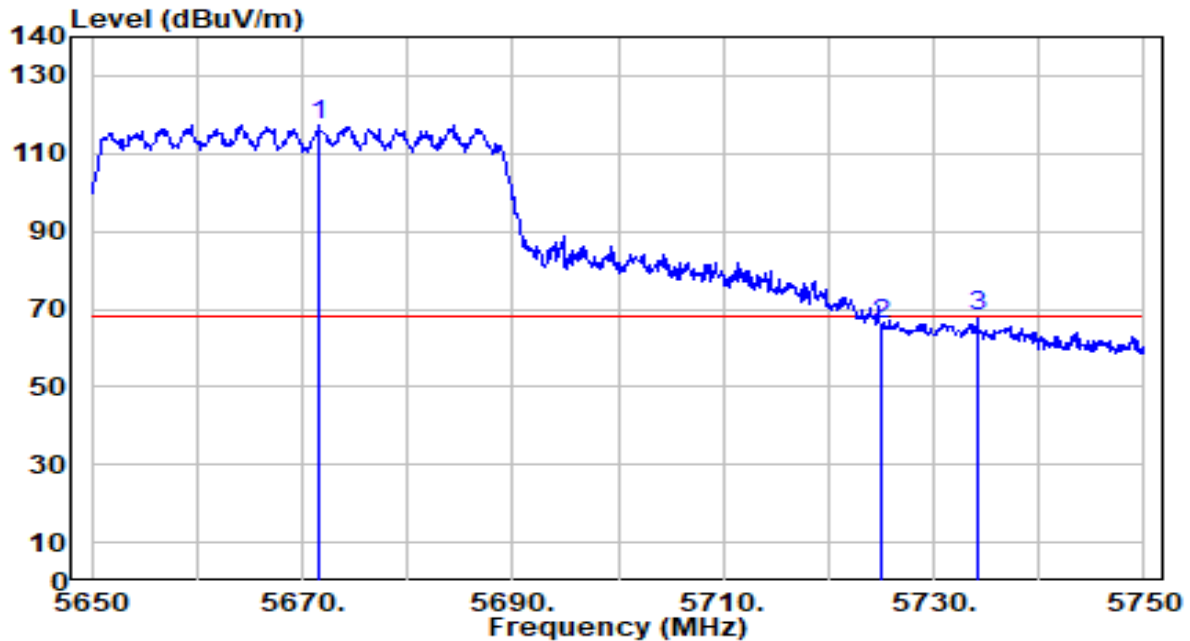


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5671.600	115.57	1.64	117.22	N/A	N/A	200	54	Peak
2	5725.000	64.19	1.89	66.09	-2.11	68.20	200	54	Peak
3	* 5734.200	65.98	1.94	67.92	-0.28	68.20	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

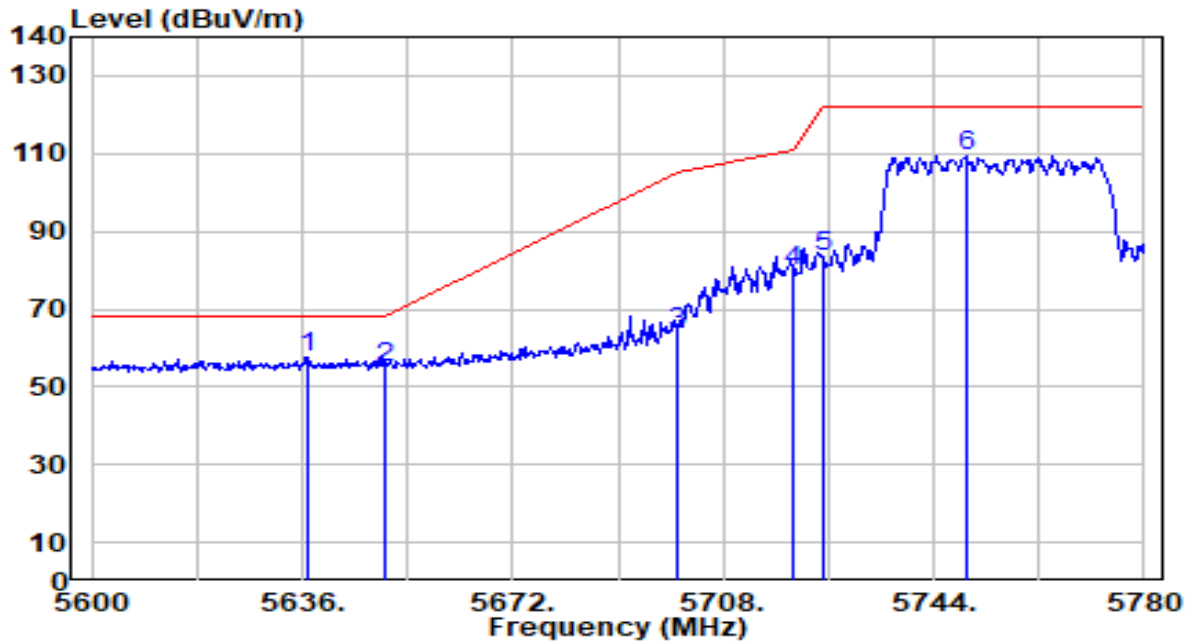


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.815	56.08	1.48	57.56	-10.64	68.20	100	238	Peak
2		5650.000	53.53	1.54	55.07	-13.13	68.20	100	238	Peak
3		5700.000	61.92	1.78	63.70	-41.50	105.20	100	238	Peak
4		5720.000	78.13	1.87	80.00	-30.80	110.80	100	238	Peak
5		5725.000	81.37	1.89	83.26	-38.94	122.20	100	238	Peak
6		5749.480	107.44	2.01	109.45	N/A	N/A	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

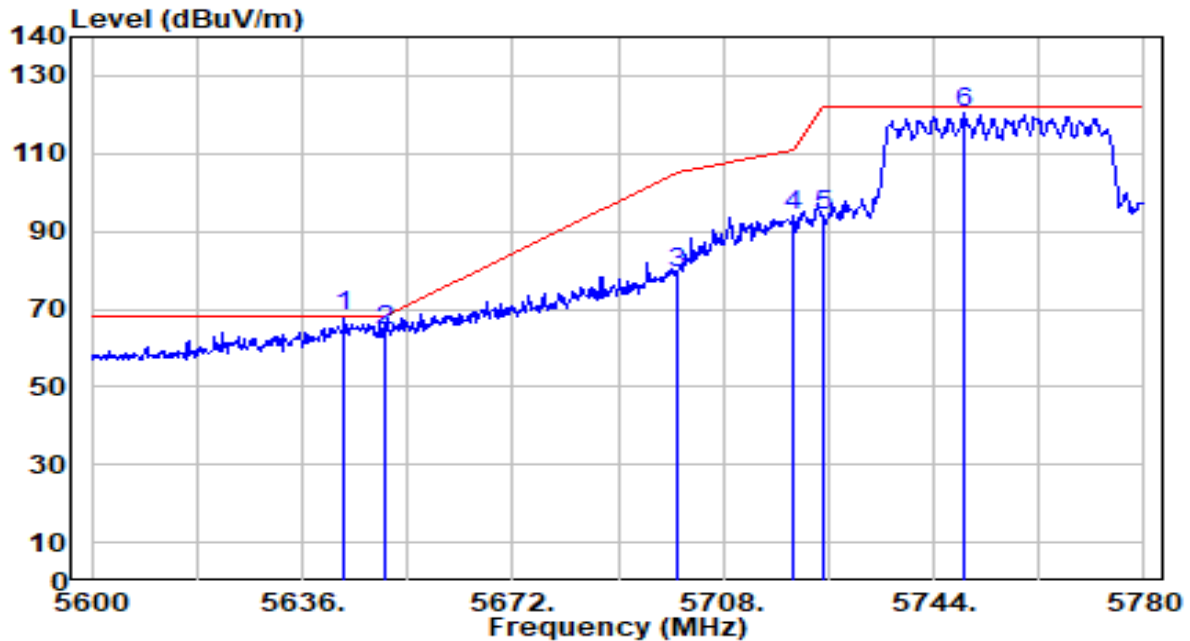


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5643.290	66.44	1.51	67.95	-0.25	68.20	200	54	Peak
2		5650.000	62.98	1.54	64.52	-3.68	68.20	200	54	Peak
3		5700.000	77.44	1.78	79.21	-25.99	105.20	200	54	Peak
4		5720.000	92.14	1.87	94.01	-16.79	110.80	200	54	Peak
5		5725.000	92.33	1.89	94.22	-27.98	122.20	200	54	Peak
6		5749.110	118.38	2.01	120.39	N/A	N/A	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

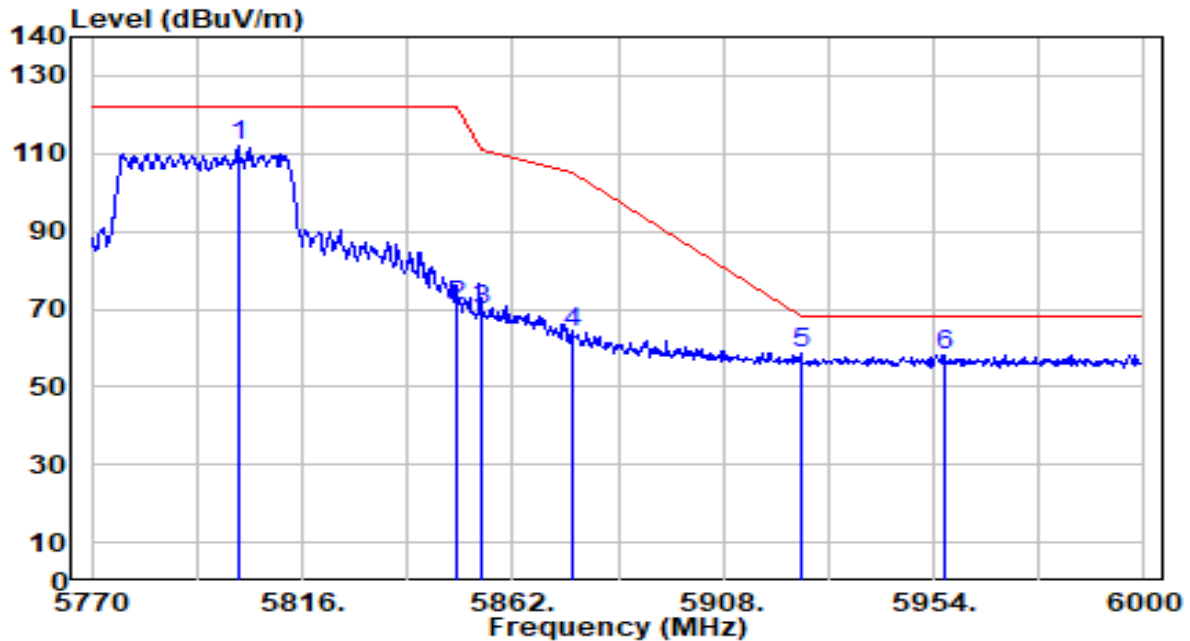


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5801.970	109.75	2.24	111.99	N/A	N/A	100	239	Peak
2	5850.000	68.59	2.25	70.85	-51.35	122.20	100	239	Peak
3	5855.000	67.67	2.25	69.93	-40.87	110.80	100	239	Peak
4	5875.000	61.68	2.26	63.94	-41.26	105.20	100	239	Peak
5	* 5925.000	56.27	2.27	58.54	-9.66	68.20	100	239	Peak
6	5956.530	56.05	2.27	58.32	-9.88	68.20	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Stanley
Test Mode	802.11ax-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

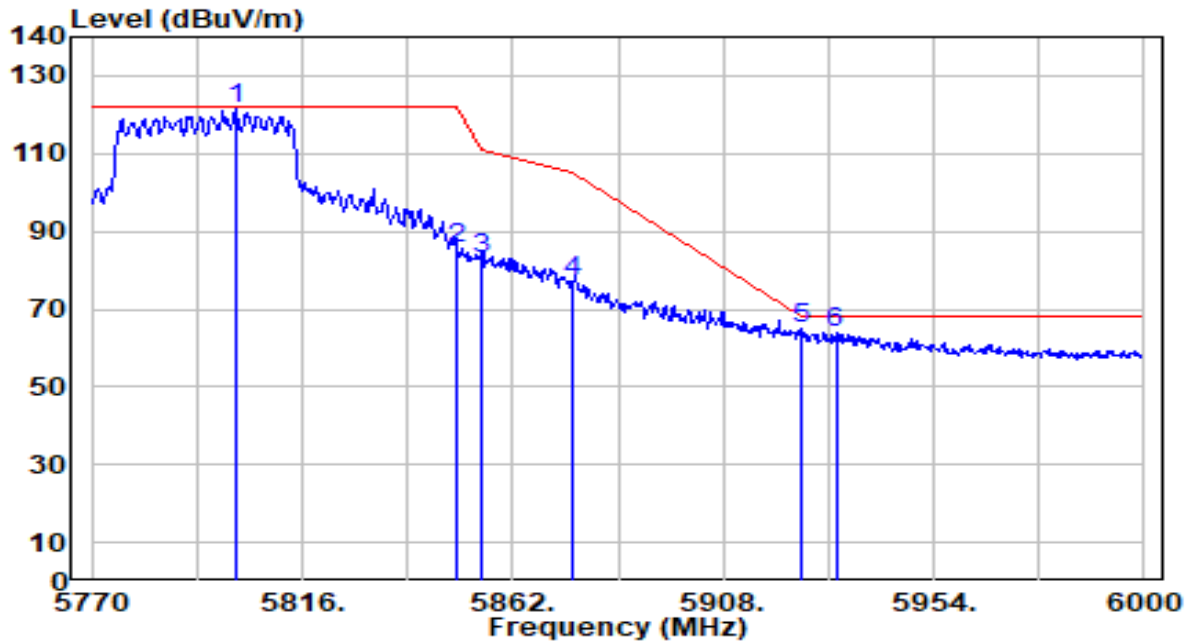


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5801.280	119.43	2.24	121.68	N/A	N/A	200	239	Peak
2	5850.000	83.43	2.25	85.68	-36.52	122.20	200	239	Peak
3	5855.000	80.56	2.25	82.82	-27.98	110.80	200	239	Peak
4	5875.000	74.79	2.26	77.05	-28.15	105.20	200	239	Peak
5	* 5925.000	62.90	2.27	65.16	-3.04	68.20	200	239	Peak
6	5932.610	61.71	2.27	63.98	-4.22	68.20	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

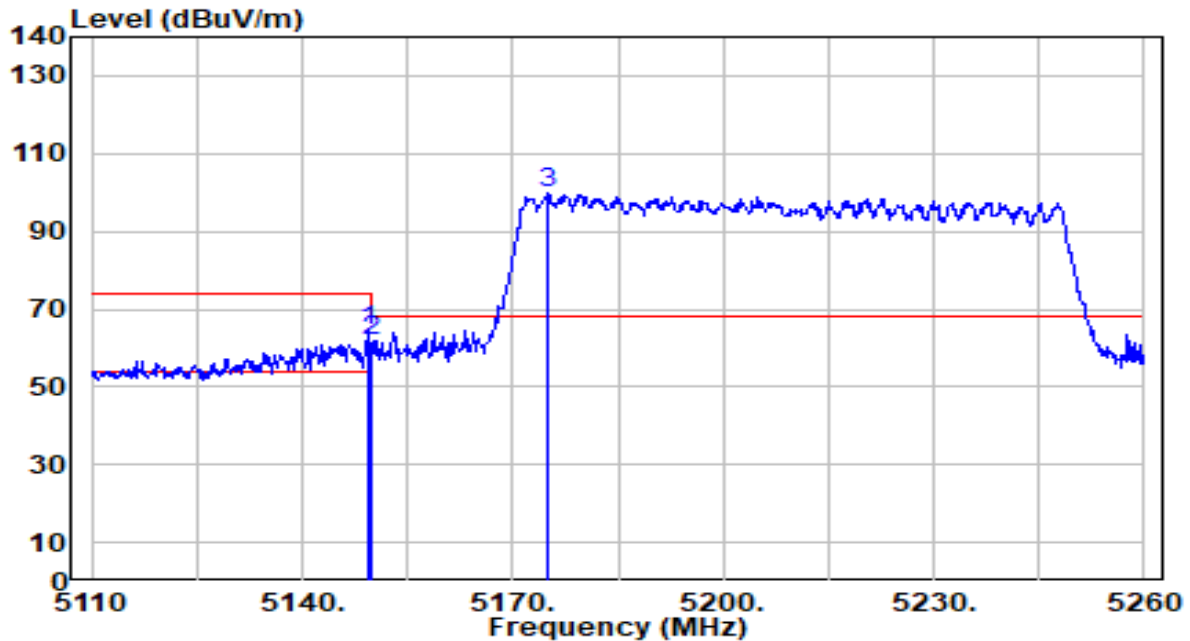


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.300	63.67	0.65	64.32	-9.68	74.00	231	73	Peak
2		5150.000	60.95	0.65	61.60	-12.40	74.00	231	73	Peak
3		5174.950	99.18	0.68	99.86	N/A	N/A	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

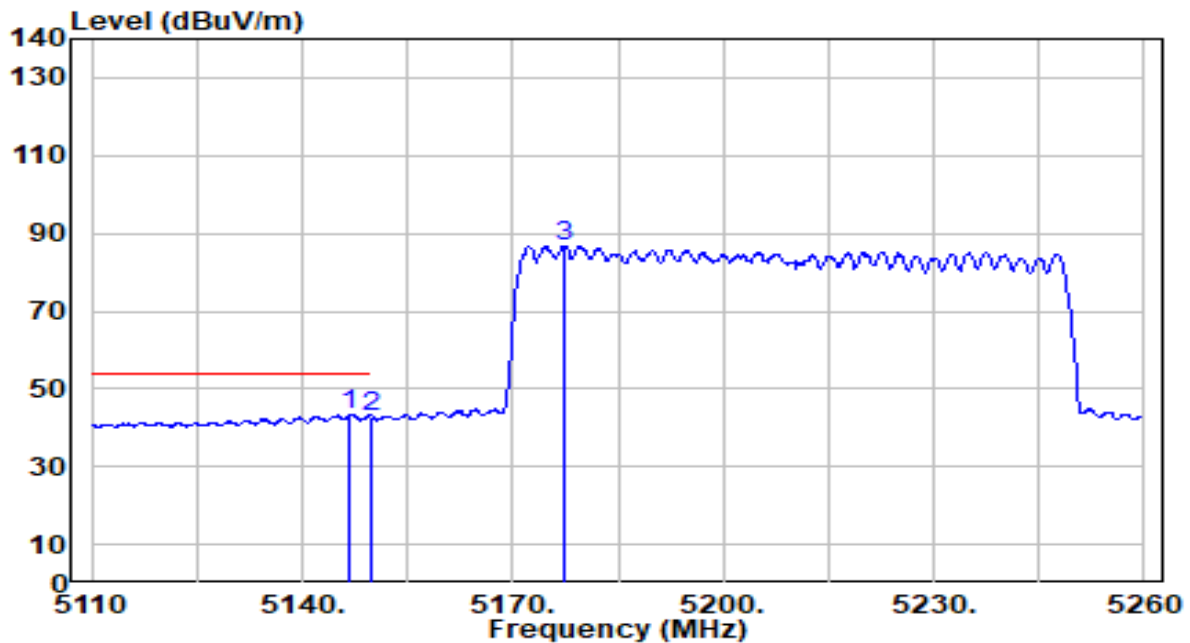


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.750	42.79	0.65	43.44	-10.56	54.00	231	73	Average
2		5150.000	42.31	0.65	42.97	-11.03	54.00	231	73	Average
3		5177.350	86.15	0.68	86.83	N/A	N/A	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

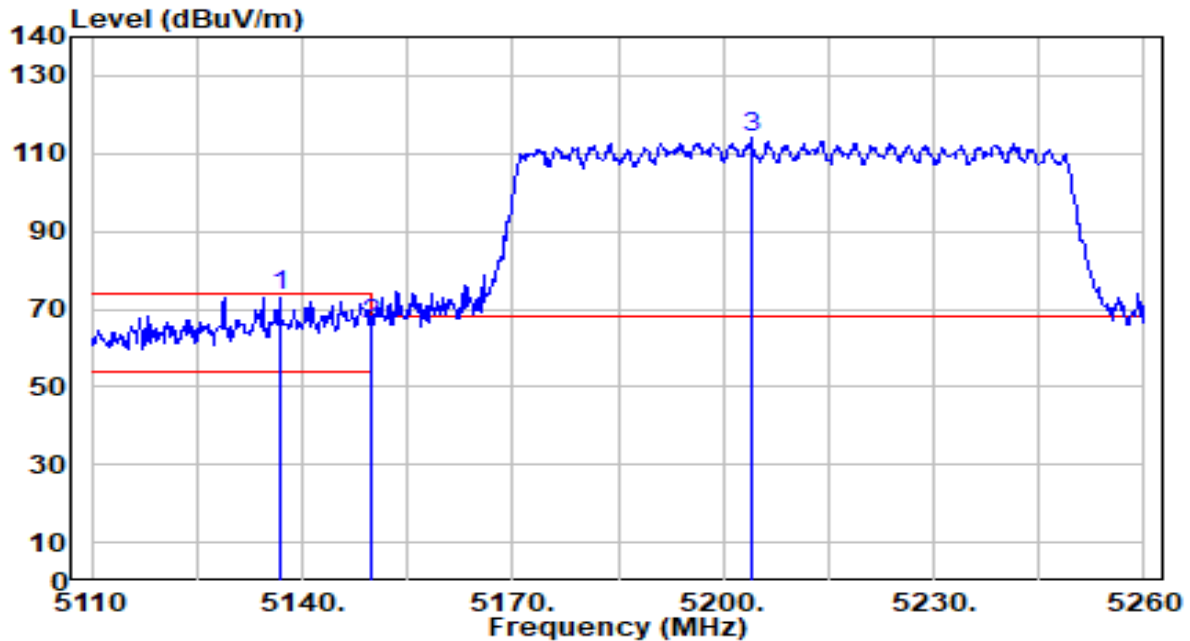


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5136.850	72.80	0.64	73.44	-0.56	74.00	228	242	Peak
2		5150.000	65.57	0.65	66.22	-7.78	74.00	228	242	Peak
3		5203.900	113.25	0.70	113.94	N/A	N/A	228	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

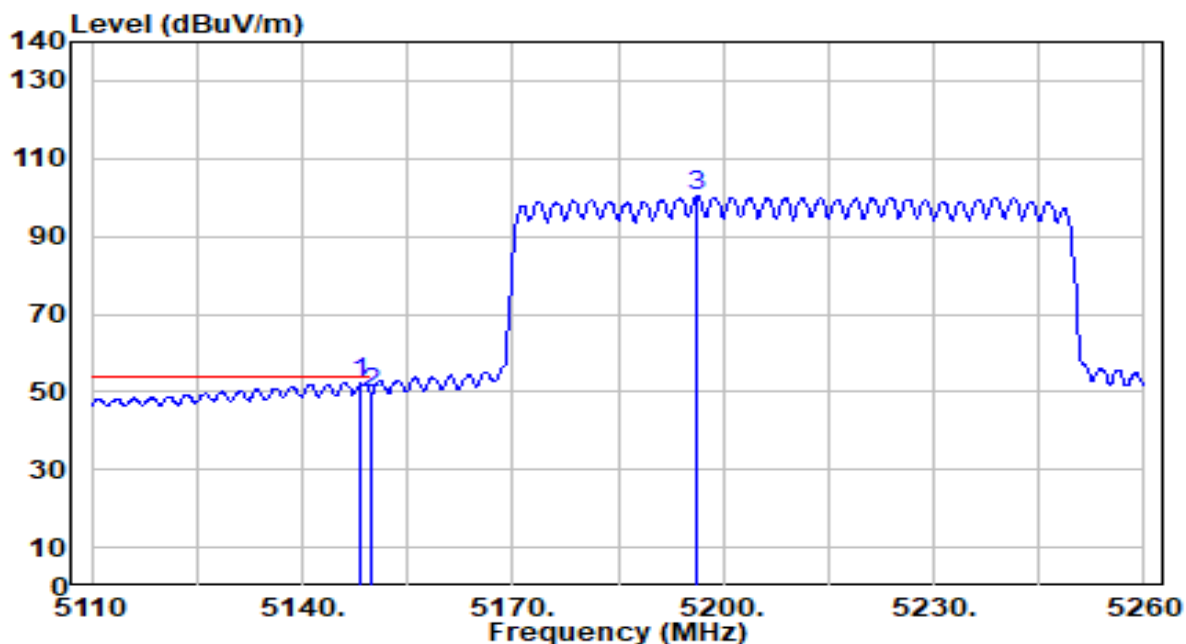


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.400	51.84	0.65	52.49	-1.51	54.00	228	242	Average
2		5150.000	49.25	0.65	49.90	-4.10	54.00	228	242	Average
3		5196.250	99.49	0.70	100.19	N/A	N/A	228	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

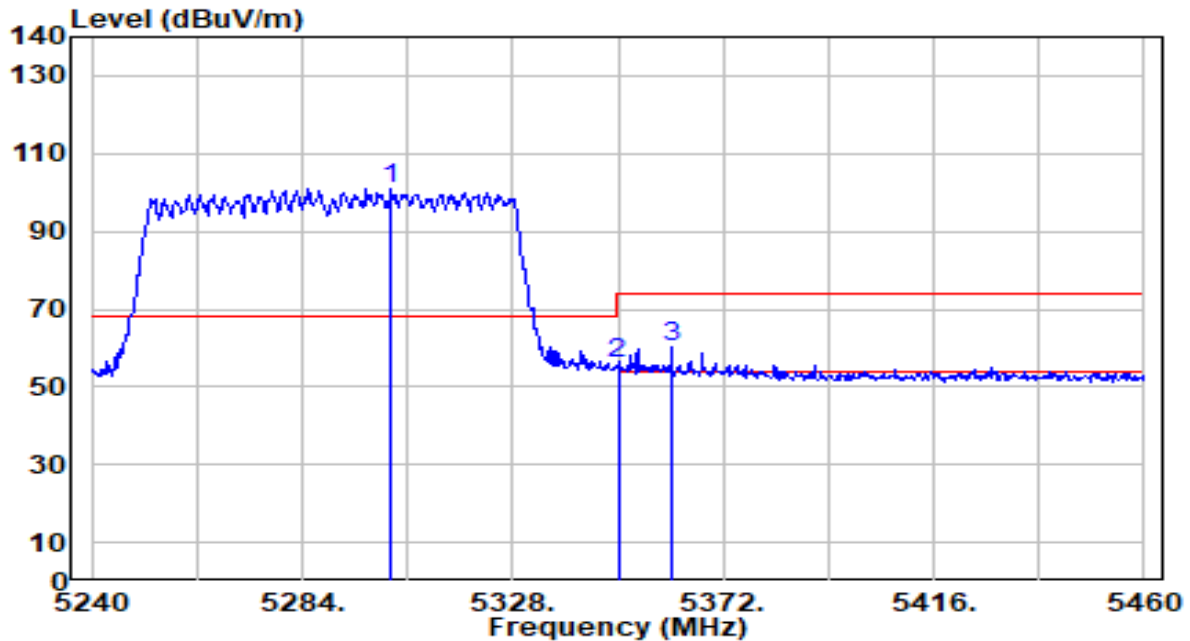


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5302.700	100.48	0.54	101.03	N/A	N/A	300	225	Peak
2	5350.000	55.38	0.47	55.85	-18.15	74.00	300	225	Peak
3	* 5361.220	59.99	0.45	60.45	-13.55	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

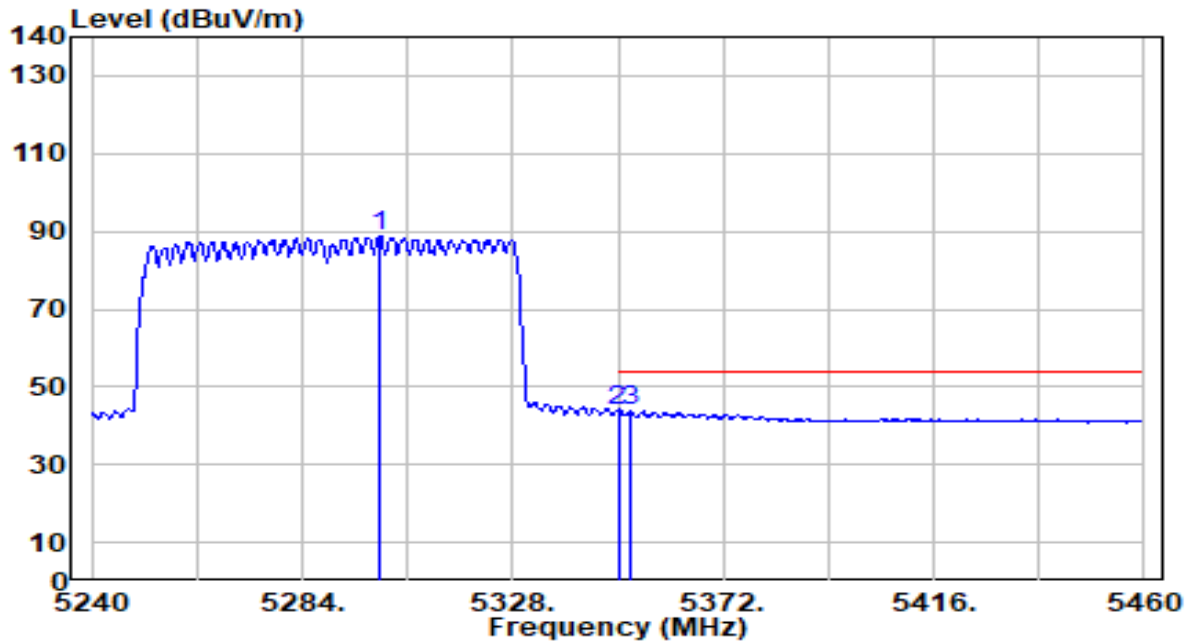


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5300.280	88.06	0.55	88.61	N/A	N/A	300	225	Average
2	*	5350.000	43.61	0.47	44.08	-9.92	54.00	300	225	Average
3		5352.860	43.53	0.47	44.00	-10.00	54.00	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

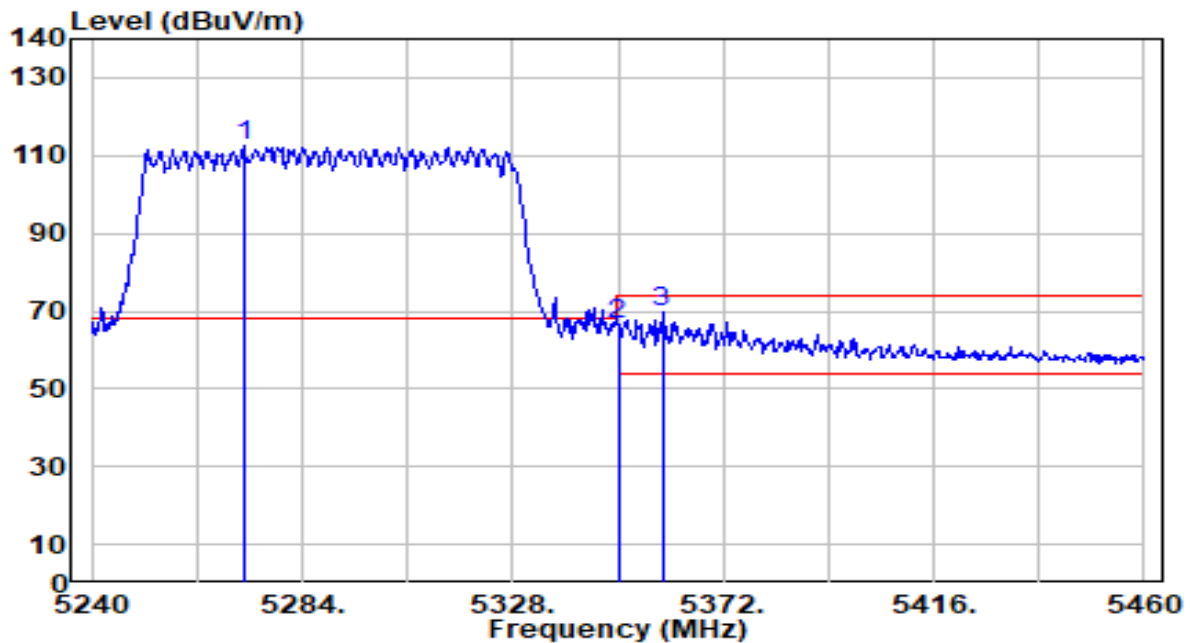


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5271.900	111.76	0.59	112.36	N/A	N/A	200	67	Peak
2	5350.000	65.88	0.47	66.35	-7.65	74.00	200	67	Peak
3	* 5359.240	69.13	0.46	69.59	-4.41	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

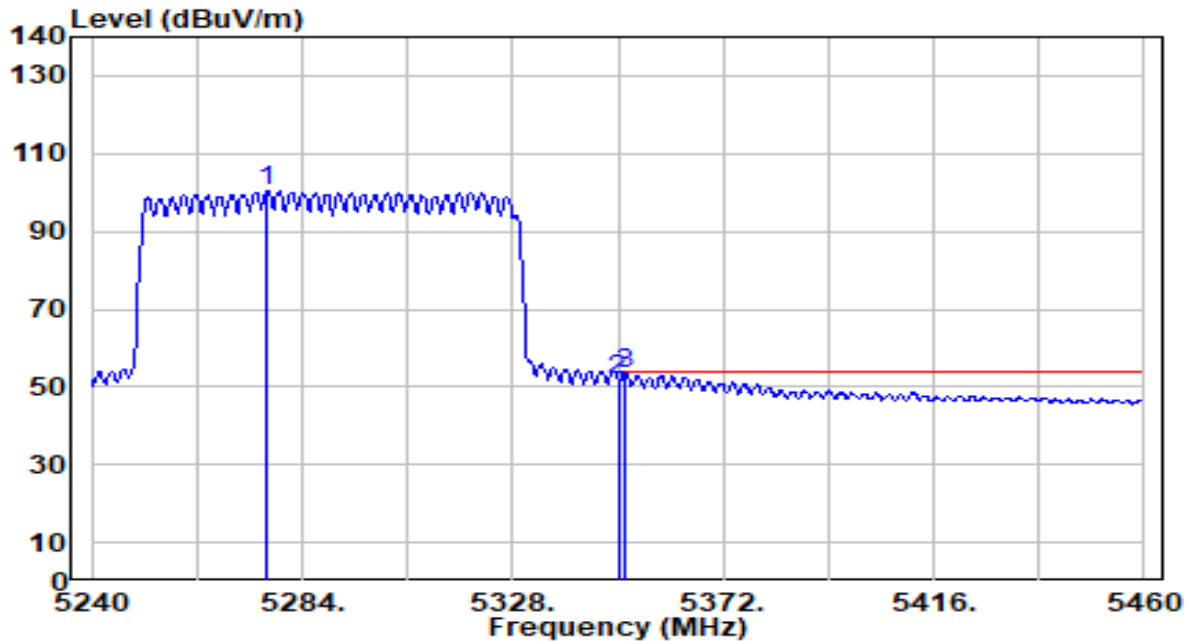


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.740	99.77	0.58	100.36	N/A	N/A	200	67	Average
2	5350.000	51.09	0.47	51.56	-2.44	54.00	200	67	Average
3	* 5351.540	52.94	0.47	53.40	-0.60	54.00	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

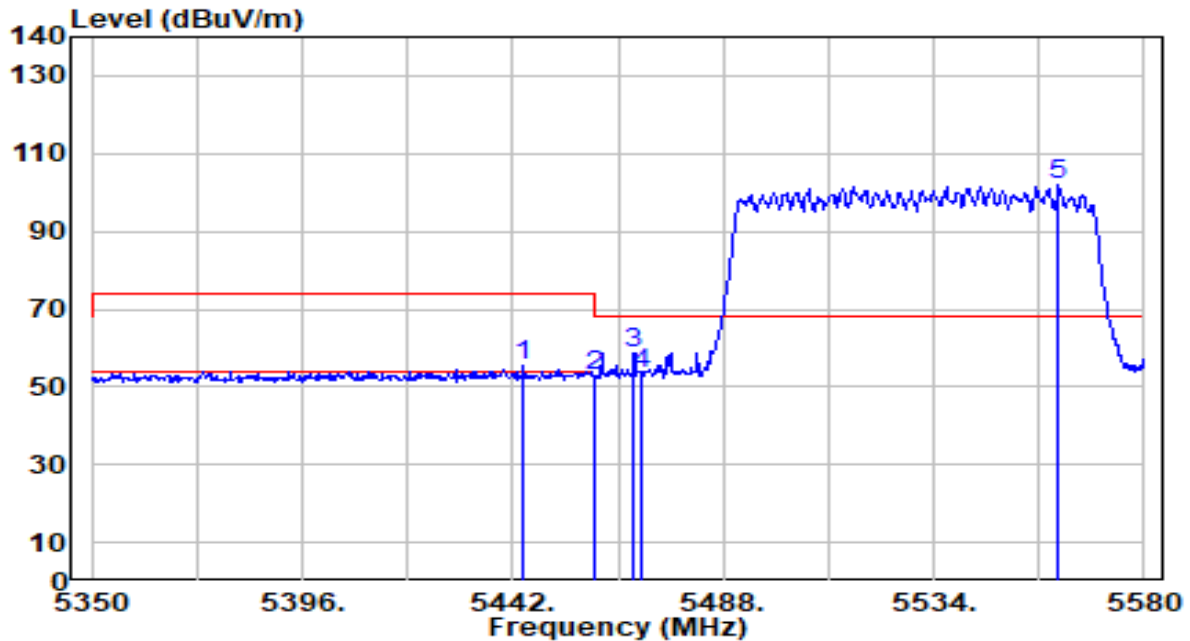


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5444.300	54.81	0.59	55.41	-18.59	74.00	100	50	Peak
2	5460.000	52.32	0.66	52.99	-21.01	74.00	100	50	Peak
3	* 5468.450	57.99	0.70	58.69	-9.51	68.20	100	50	Peak
4	5470.000	52.72	0.71	53.43	-14.77	68.20	100	50	Peak
5	5561.370	100.75	1.13	101.88	N/A	N/A	100	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

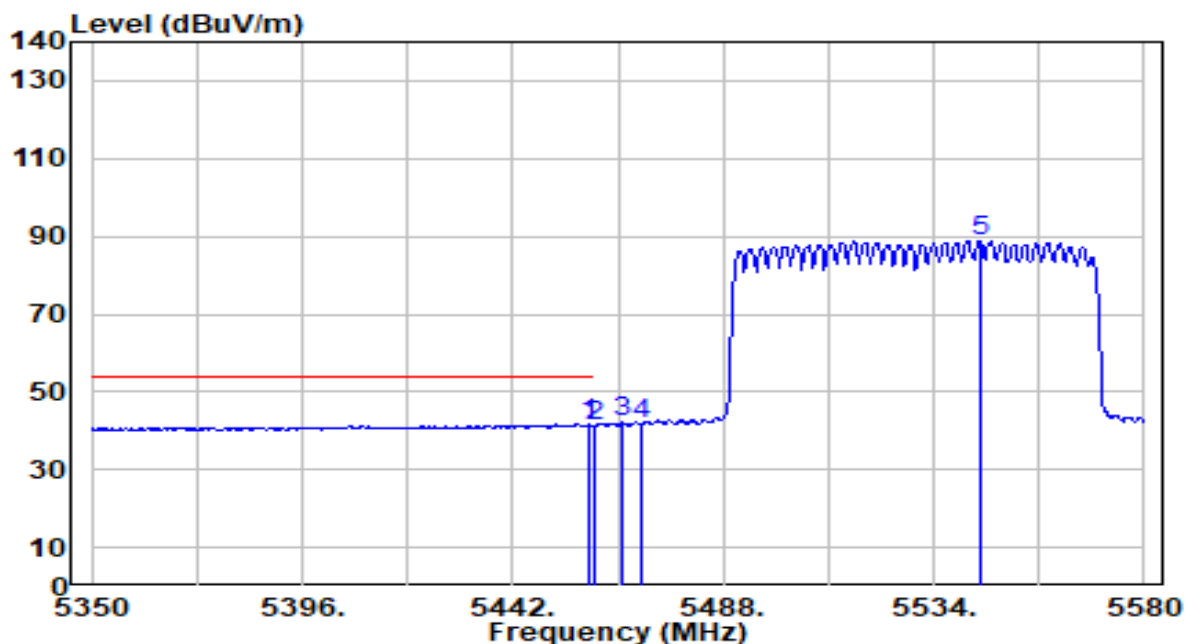


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.790	41.01	0.66	41.67	-12.33	54.00	100	50	Average
2		5460.000	40.66	0.66	41.32	-12.68	54.00	100	50	Average
3		5466.150	41.48	0.69	42.17	N/A	N/A	100	50	Average
4		5470.000	40.78	0.71	41.48	N/A	N/A	100	50	Average
5		5544.120	87.77	1.05	88.82	N/A	N/A	100	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

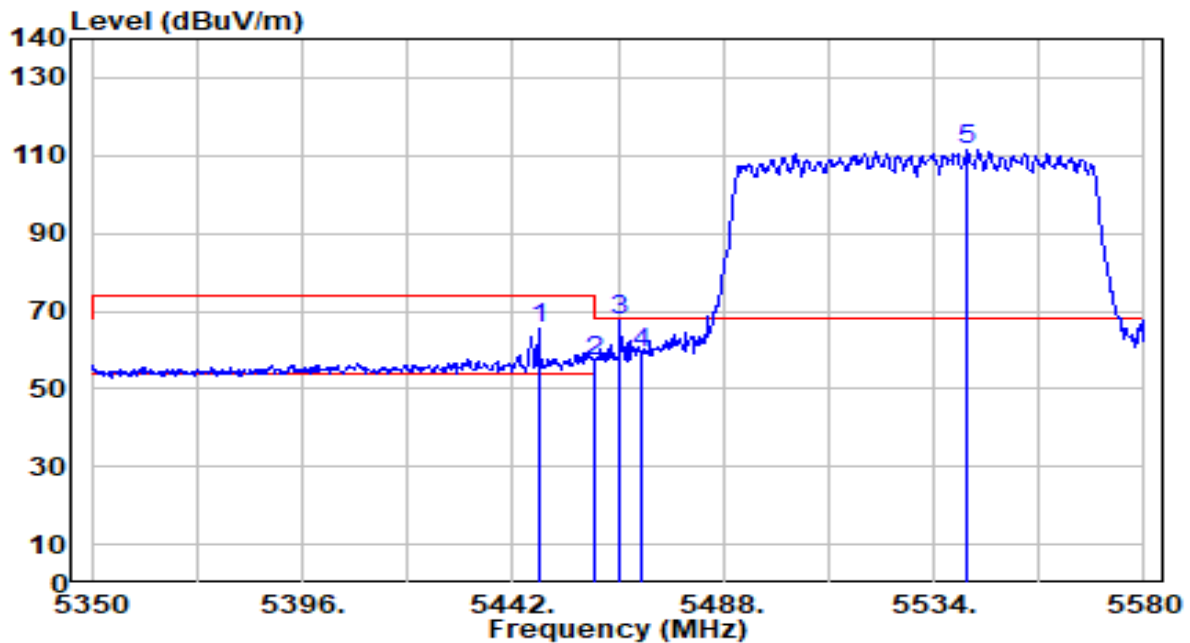


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5447.750	64.84	0.61	65.44	-8.56	74.00	218	240	Peak
2	5460.000	56.35	0.66	57.01	-16.99	74.00	218	240	Peak
3	* 5465.230	66.99	0.68	67.67	-0.53	68.20	218	240	Peak
4	5470.000	58.24	0.71	58.95	-9.25	68.20	218	240	Peak
5	5541.360	110.25	1.03	111.28	N/A	N/A	218	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

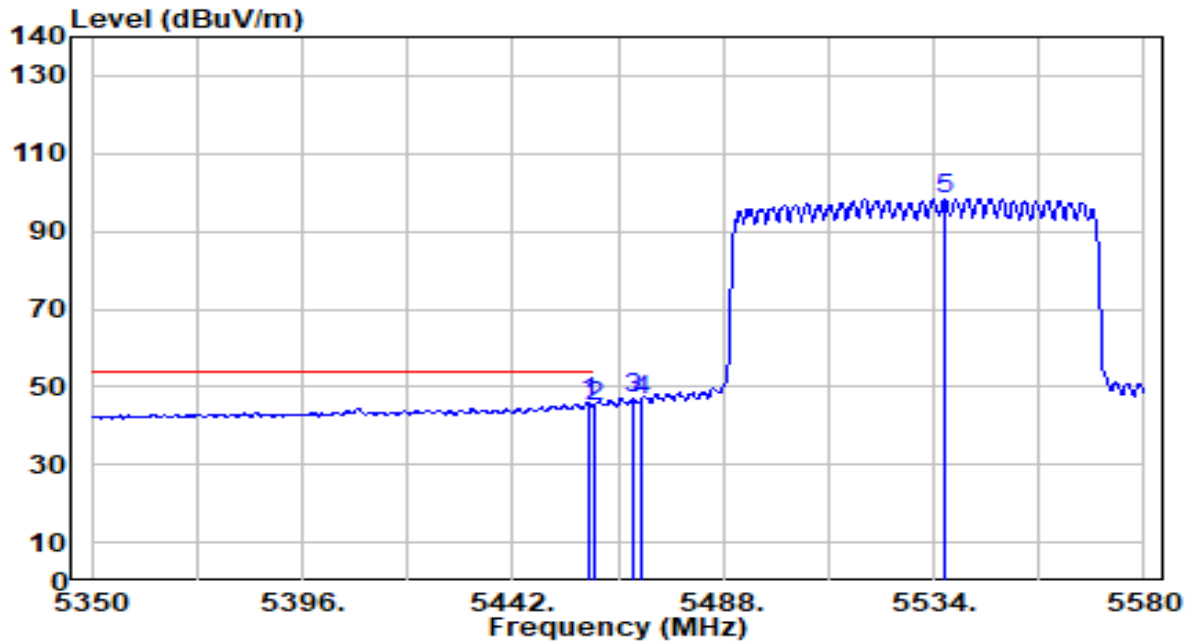


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.560	45.34	0.66	45.99	-8.01	54.00	218	240	Average
2		5460.000	44.44	0.66	45.10	-8.90	54.00	218	240	Average
3		5468.450	46.54	0.70	47.23	N/A	N/A	218	240	Average
4		5470.000	45.63	0.71	46.34	N/A	N/A	218	240	Average
5		5536.300	97.45	1.01	98.46	N/A	N/A	218	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

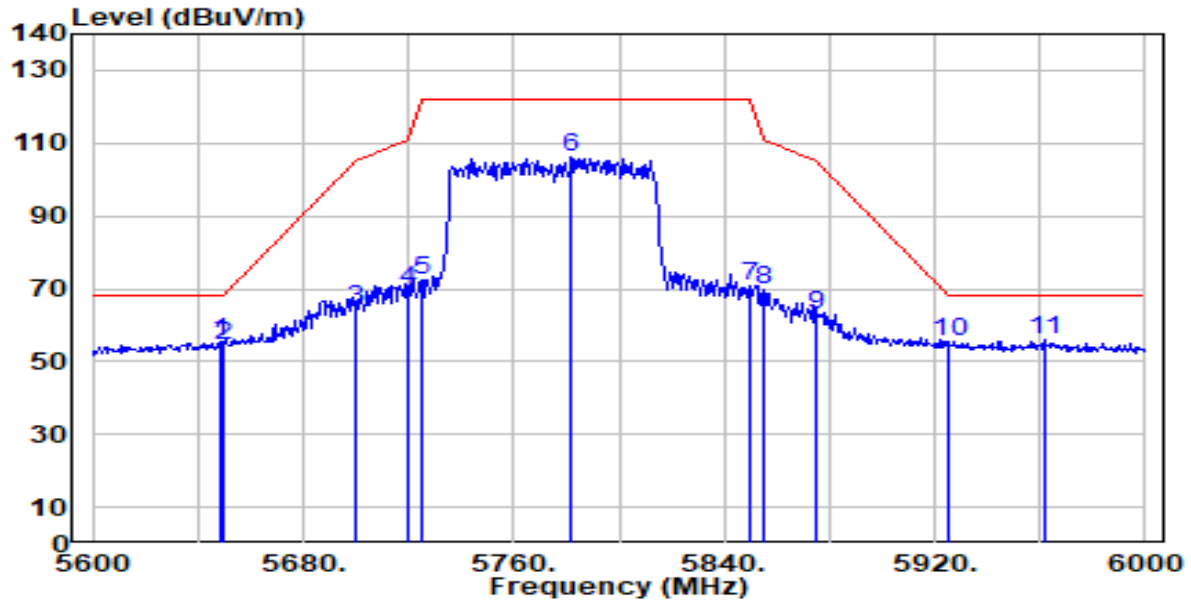


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5648.800	54.17	1.54	55.70	-12.50	68.20	103	241	Peak
2	5650.000	52.79	1.54	54.33	-13.87	68.20	103	241	Peak
3	5700.000	62.55	1.78	64.33	-40.87	105.20	103	241	Peak
4	5720.000	67.69	1.87	69.56	-41.24	110.80	103	241	Peak
5	5725.000	70.60	1.89	72.50	-49.70	122.20	103	241	Peak
6	5782.000	104.19	2.16	106.35	N/A	N/A	103	241	Peak
7	5850.000	68.36	2.25	70.61	-51.59	122.20	103	241	Peak
8	5855.000	67.47	2.25	69.72	-41.08	110.80	103	241	Peak
9	5875.000	60.78	2.26	63.04	-42.16	105.20	103	241	Peak
10	5925.000	53.27	2.27	55.54	-12.66	68.20	103	241	Peak
11	* 5962.000	53.67	2.27	55.94	-12.26	68.20	103	241	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

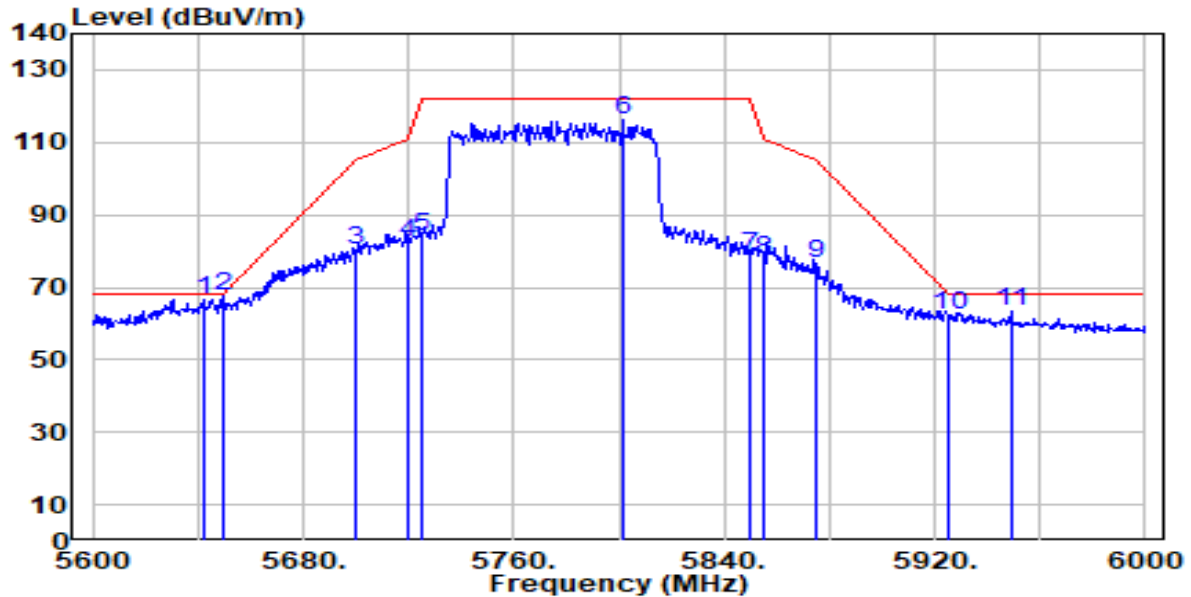


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5642.400	65.15	1.51	66.66	-1.54	68.20	200	57	Peak
2	*	5650.000	66.14	1.54	67.68	-0.52	68.20	200	57	Peak
3		5700.000	78.34	1.78	80.12	-25.08	105.20	200	57	Peak
4		5720.000	80.33	1.87	82.20	-28.60	110.80	200	57	Peak
5		5725.000	81.98	1.89	83.87	-38.33	122.20	200	57	Peak
6		5801.600	114.06	2.24	116.30	N/A	N/A	200	57	Peak
7		5850.000	76.68	2.25	78.93	-43.27	122.20	200	57	Peak
8		5855.000	75.32	2.25	77.57	-33.23	110.80	200	57	Peak
9		5875.000	74.26	2.26	76.51	-28.69	105.20	200	57	Peak
10		5925.000	60.00	2.27	62.27	-5.93	68.20	200	57	Peak
11		5949.200	61.11	2.27	63.38	-4.82	68.20	200	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

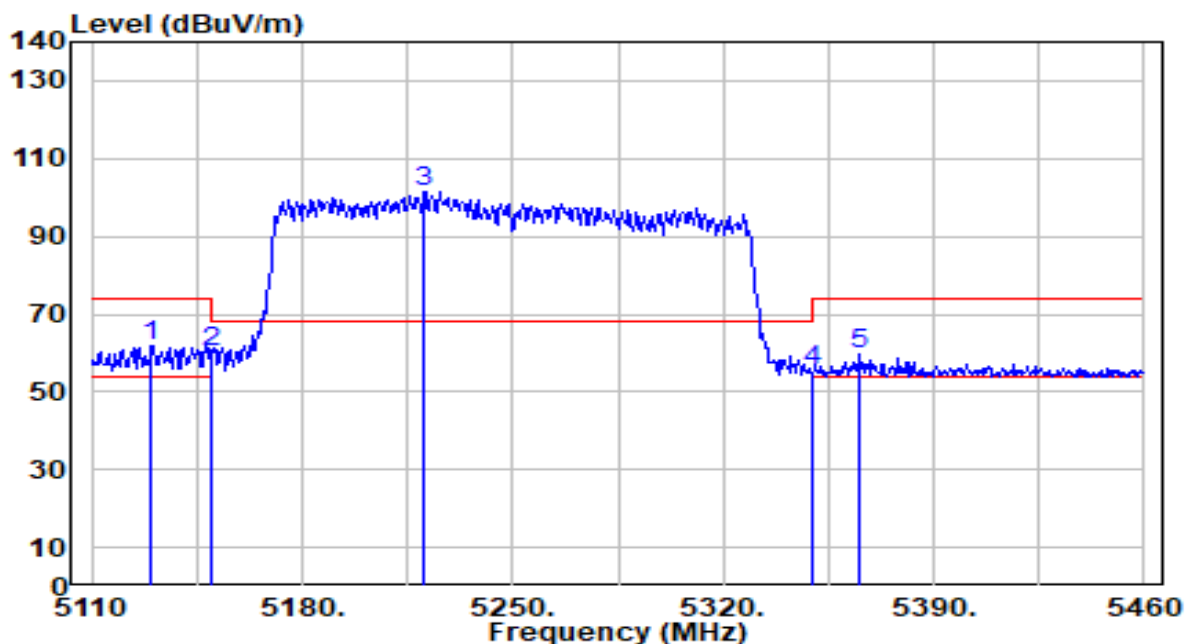


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5129.950	61.37	0.63	62.00	-12.00	74.00	231	88	Peak
2		5150.000	59.57	0.65	60.22	-13.78	74.00	231	88	Peak
3		5220.600	100.98	0.67	101.65	N/A	N/A	231	88	Peak
4		5350.000	55.21	0.47	55.68	-18.32	74.00	231	88	Peak
5		5365.500	59.08	0.45	59.53	-14.47	74.00	231	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

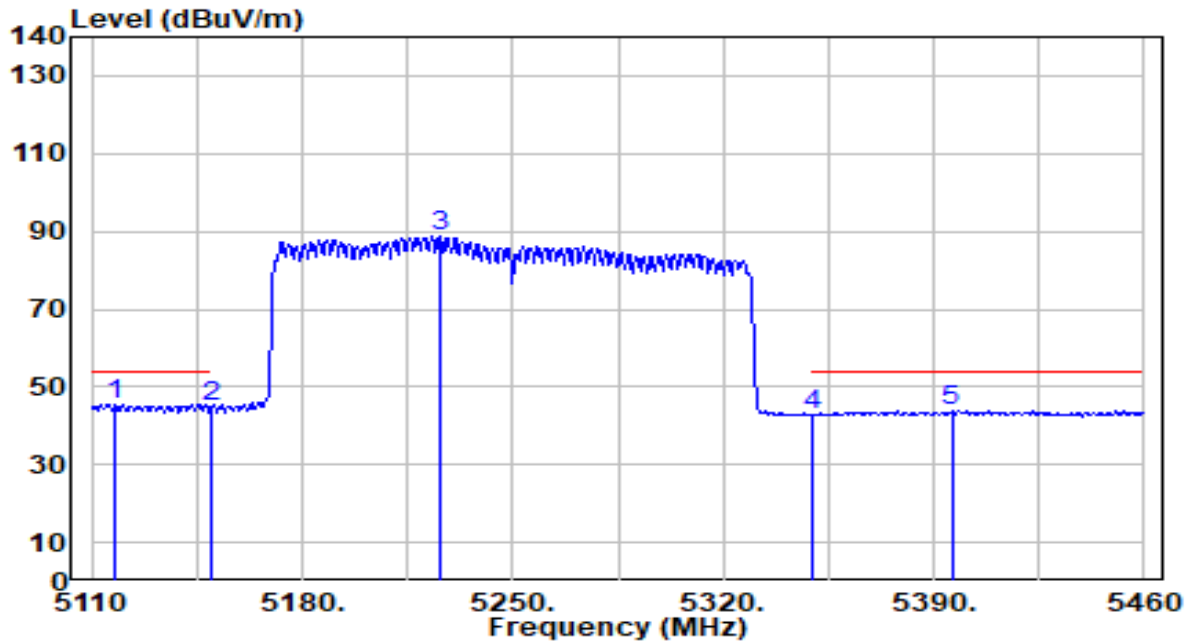


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5118.050	44.80	0.62	45.42	-8.58	54.00	231	88	Average
2		5150.000	44.01	0.65	44.67	-9.33	54.00	231	88	Average
3		5225.500	87.87	0.66	88.53	N/A	N/A	231	88	Average
4		5350.000	42.16	0.47	42.64	-11.36	54.00	231	88	Average
5		5395.950	43.32	0.40	43.72	-10.28	54.00	231	88	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

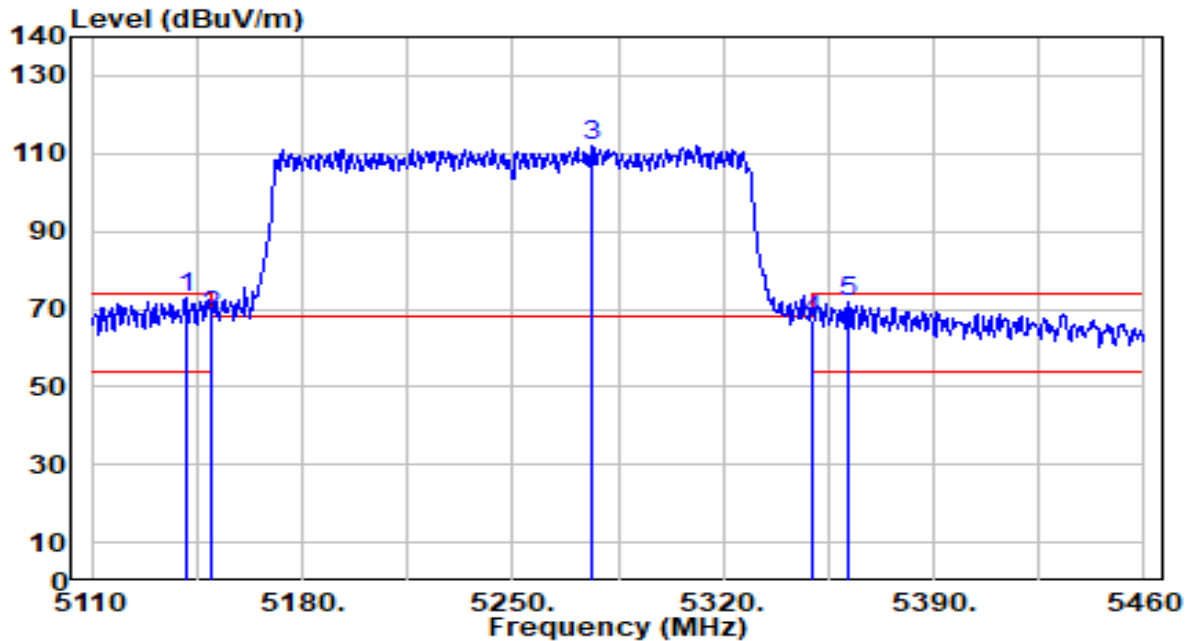


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5141.150	72.07	0.65	72.71	-1.29	74.00	223	243	Peak
2		5150.000	67.57	0.65	68.22	-5.78	74.00	223	243	Peak
3		5276.600	111.51	0.58	112.09	N/A	N/A	223	243	Peak
4		5350.000	66.81	0.47	67.29	-6.71	74.00	223	243	Peak
5		5361.650	71.58	0.45	72.04	-1.96	74.00	223	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

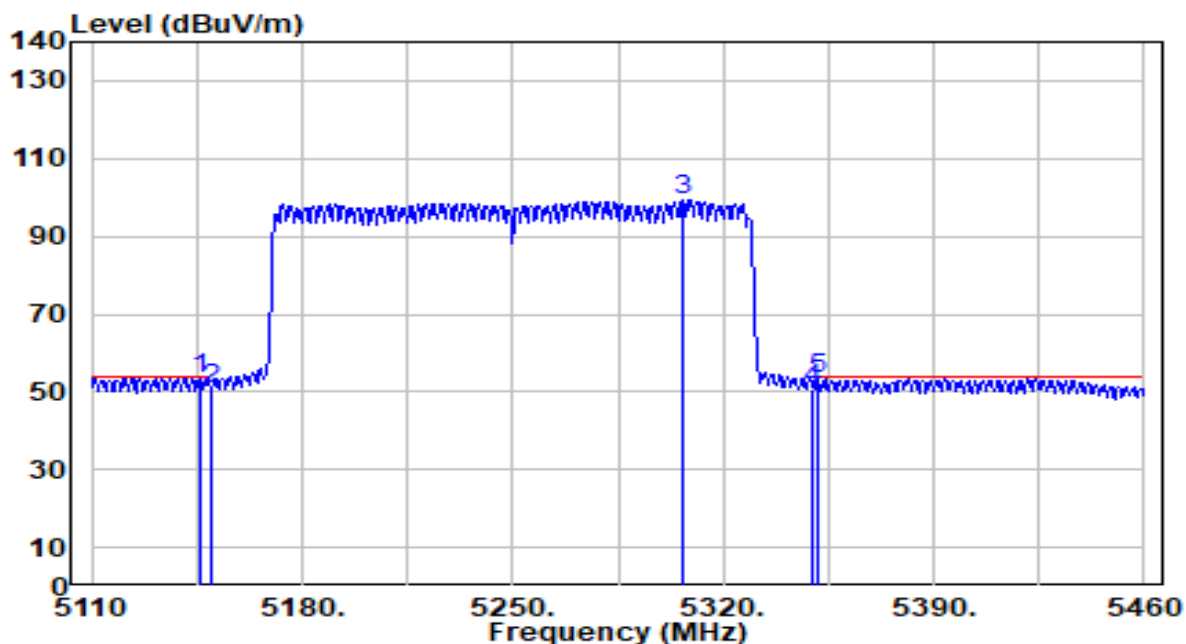


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5146.050	52.78	0.65	53.43	-0.57	54.00	223	243	Average
2	5150.000	50.20	0.65	50.86	-3.14	54.00	223	243	Average
3	5306.350	98.64	0.54	99.18	N/A	N/A	223	243	Average
4	5350.000	50.01	0.47	50.48	-3.52	54.00	223	243	Average
5	* 5351.150	53.02	0.47	53.49	-0.51	54.00	223	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

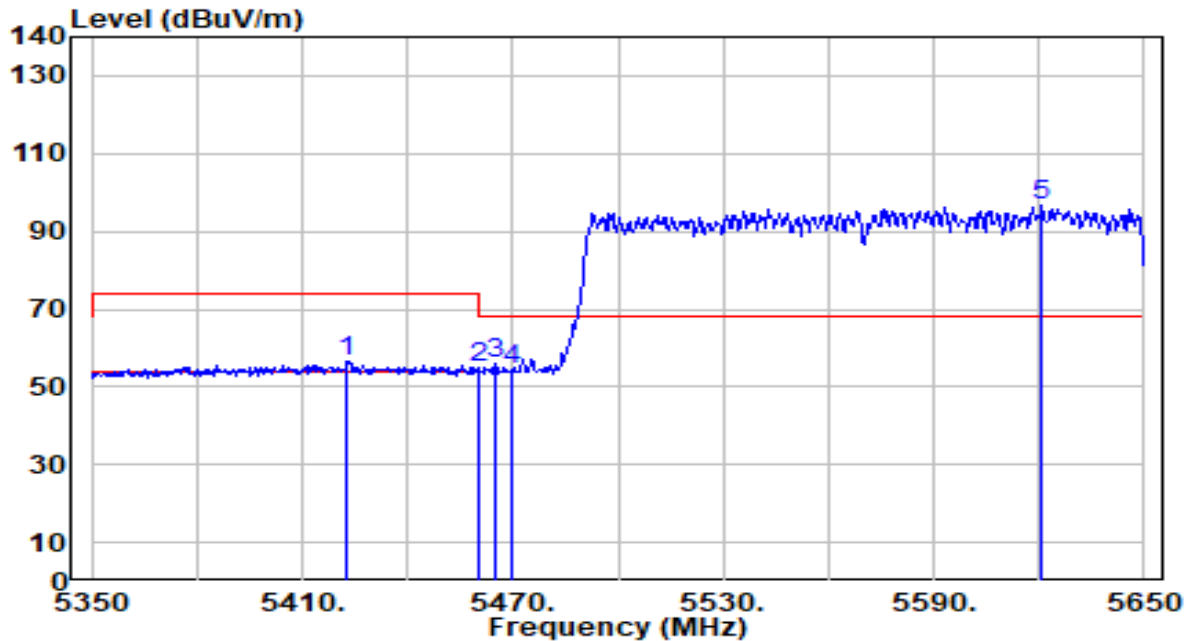


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5422.900	56.17	0.50	56.66	-17.34	74.00	300	225	Peak
2	5460.000	54.17	0.66	54.83	-19.17	74.00	300	225	Peak
3	* 5465.200	55.13	0.68	55.82	-12.38	68.20	300	225	Peak
4	5470.000	53.95	0.71	54.66	-13.54	68.20	300	225	Peak
5	5620.900	95.12	1.41	96.53	N/A	N/A	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

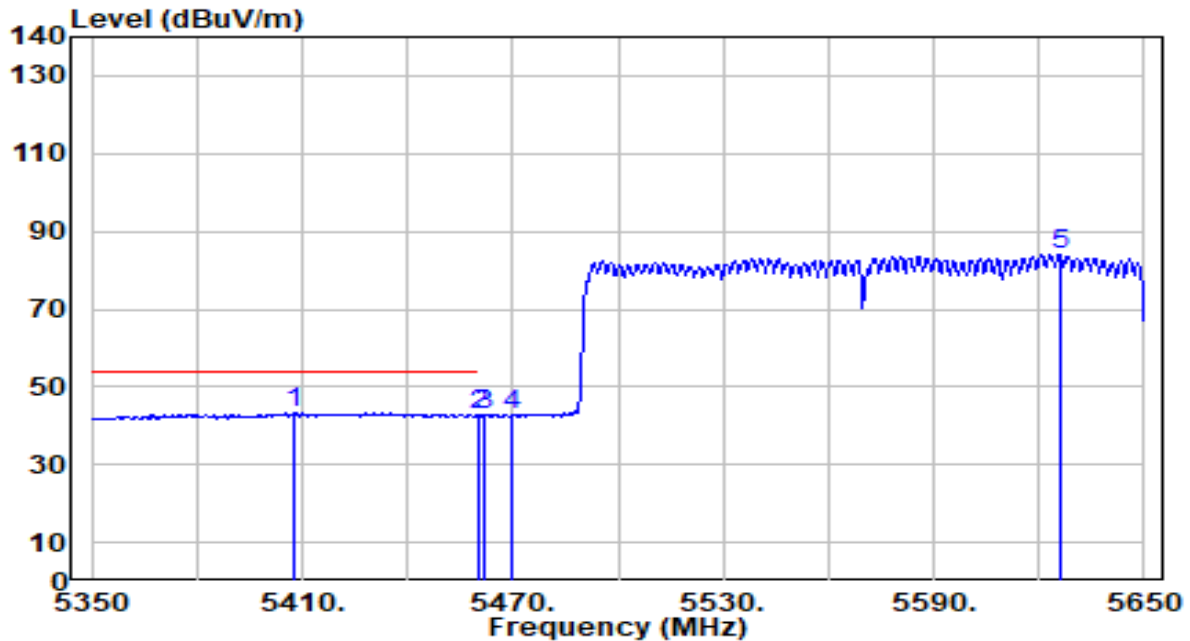


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5407.900	42.90	0.43	43.32	-10.68	54.00	300	225	Average
2		5460.000	41.89	0.66	42.55	-11.45	54.00	300	225	Average
3		5462.200	42.25	0.67	42.92	N/A	N/A	300	225	Average
4		5470.000	42.08	0.71	42.78	N/A	N/A	300	225	Average
5		5626.000	82.56	1.43	83.99	N/A	N/A	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

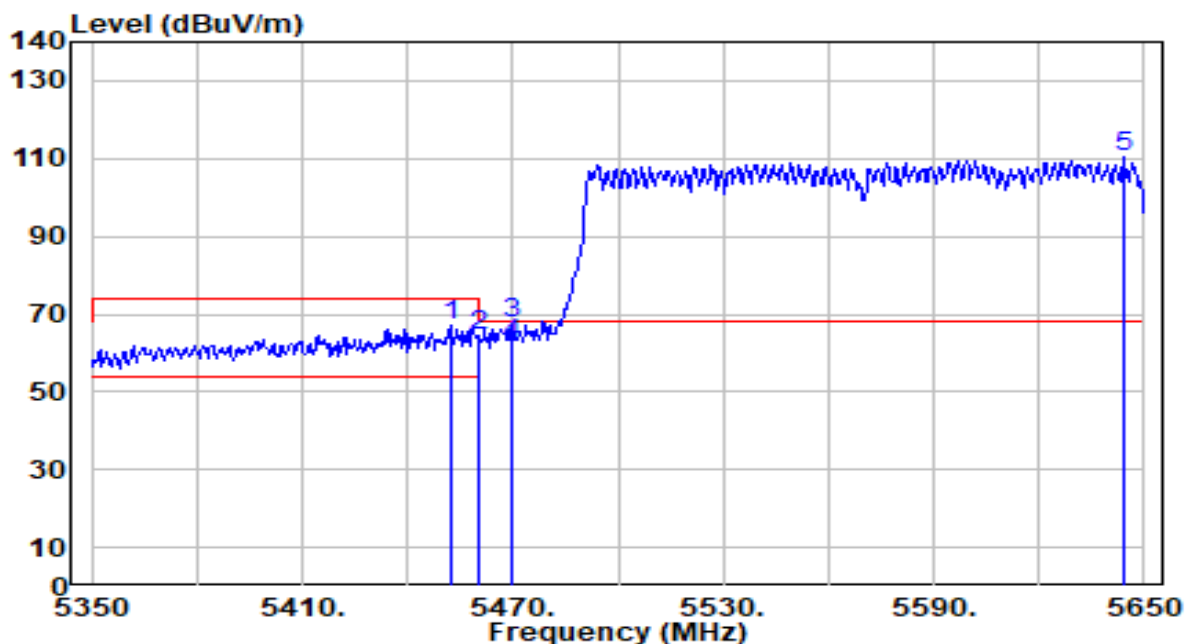


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5452.300	66.69	0.63	67.31	-6.69	74.00	200	60	Peak
2	5460.000	63.67	0.66	64.33	-9.67	74.00	200	60	Peak
3	* 5469.400	66.95	0.70	67.66	-0.54	68.20	200	60	Peak
4	5470.000	61.62	0.71	62.32	-5.88	68.20	200	60	Peak
5	5644.300	108.79	1.52	110.31	N/A	N/A	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11ax-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

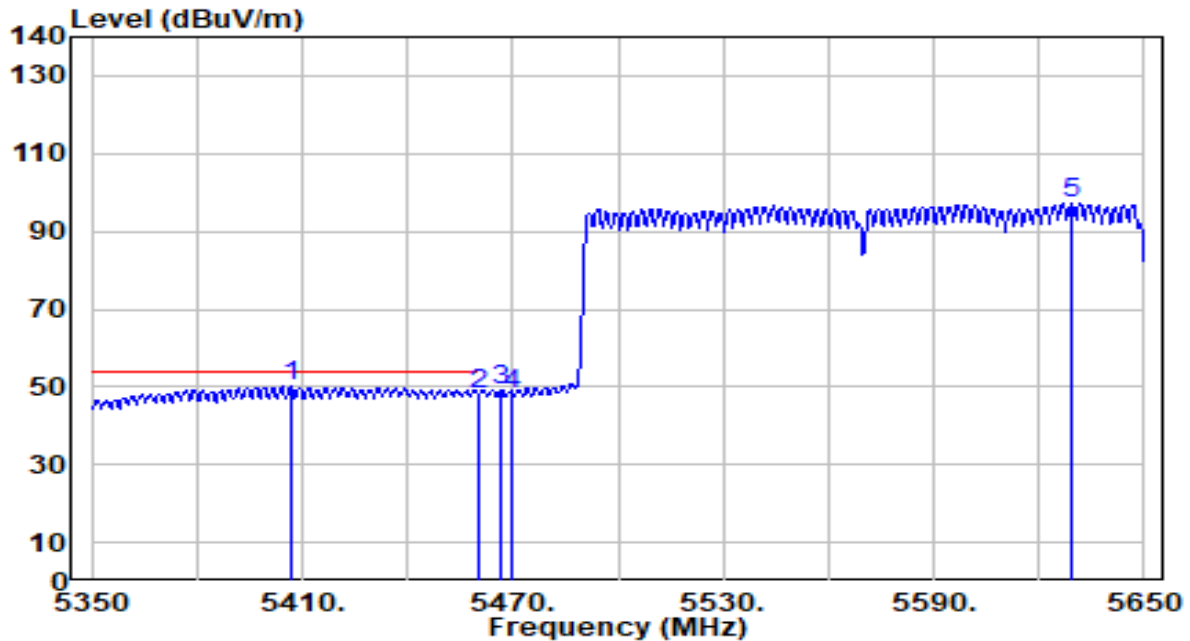


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5406.700	49.52	0.42	49.94	-4.06	54.00	200	60	Average
2		5460.000	47.33	0.66	47.99	-6.01	54.00	200	60	Average
3		5466.400	48.55	0.69	49.24	N/A	N/A	200	60	Average
4		5470.000	47.28	0.71	47.99	N/A	N/A	200	60	Average
5		5629.300	95.91	1.45	97.36	N/A	N/A	200	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

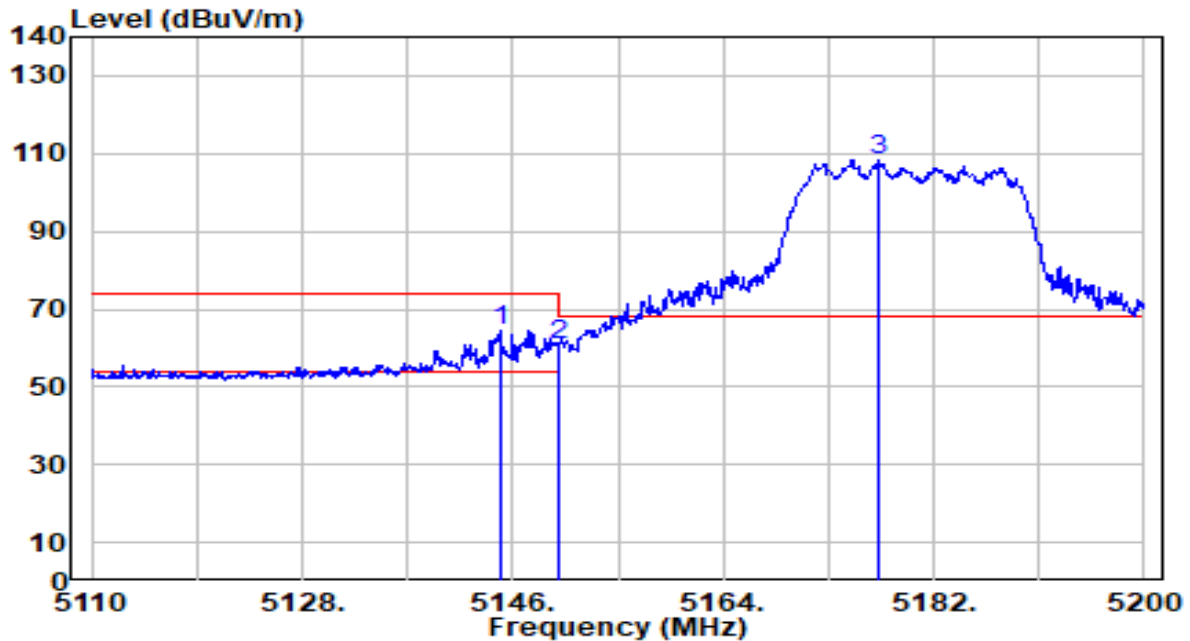


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5144.920	63.96	0.65	64.61	-9.39	74.00	231	73	Peak
2		5150.000	59.85	0.65	60.50	-13.50	74.00	231	73	Peak
3		5177.230	107.50	0.68	108.18	N/A	N/A	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

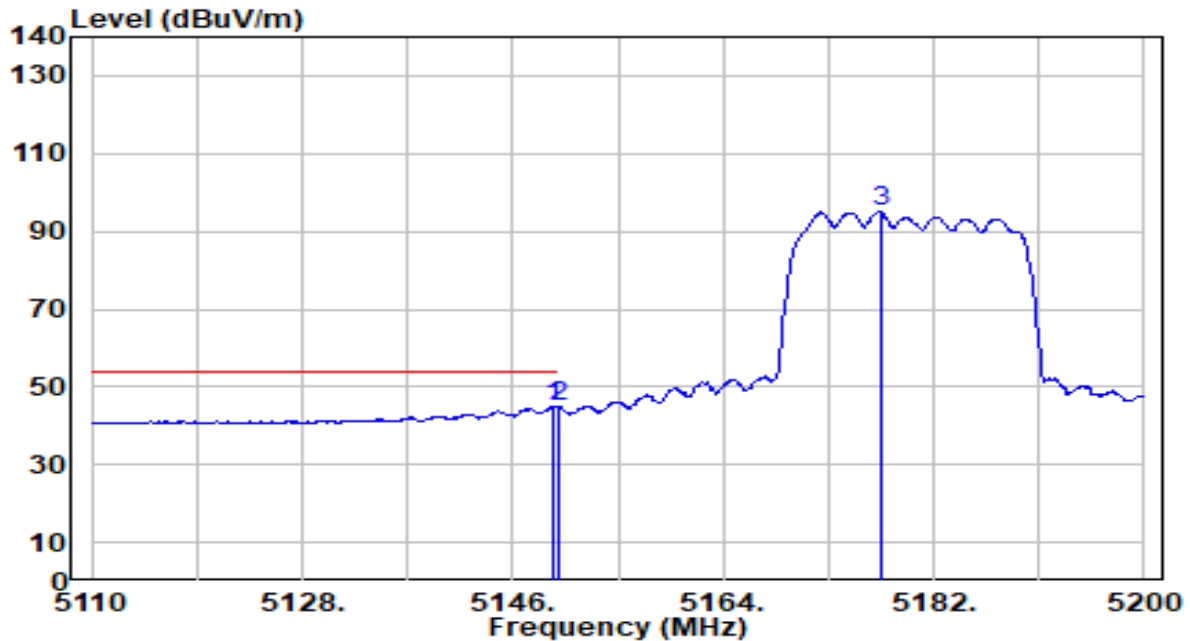


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.420	44.48	0.65	45.13	-8.87	54.00	231	73	Average
2		5150.000	44.31	0.65	44.96	-9.04	54.00	231	73	Average
3		5177.410	94.36	0.68	95.04	N/A	N/A	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

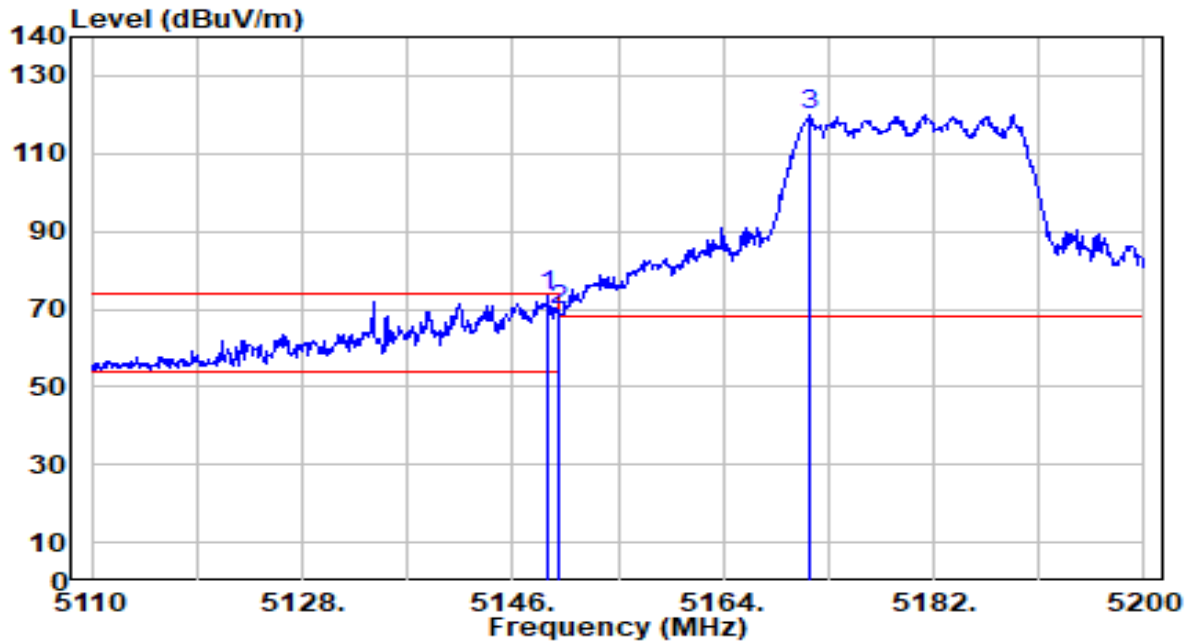


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.970	72.78	0.65	73.43	-0.57	74.00	200	242	Peak
2		5150.000	69.04	0.65	69.69	-4.31	74.00	200	242	Peak
3		5171.470	119.07	0.67	119.74	N/A	N/A	200	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-14
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band1_CH 36_ANT 0+1	Test Voltage	AC 120V/60Hz

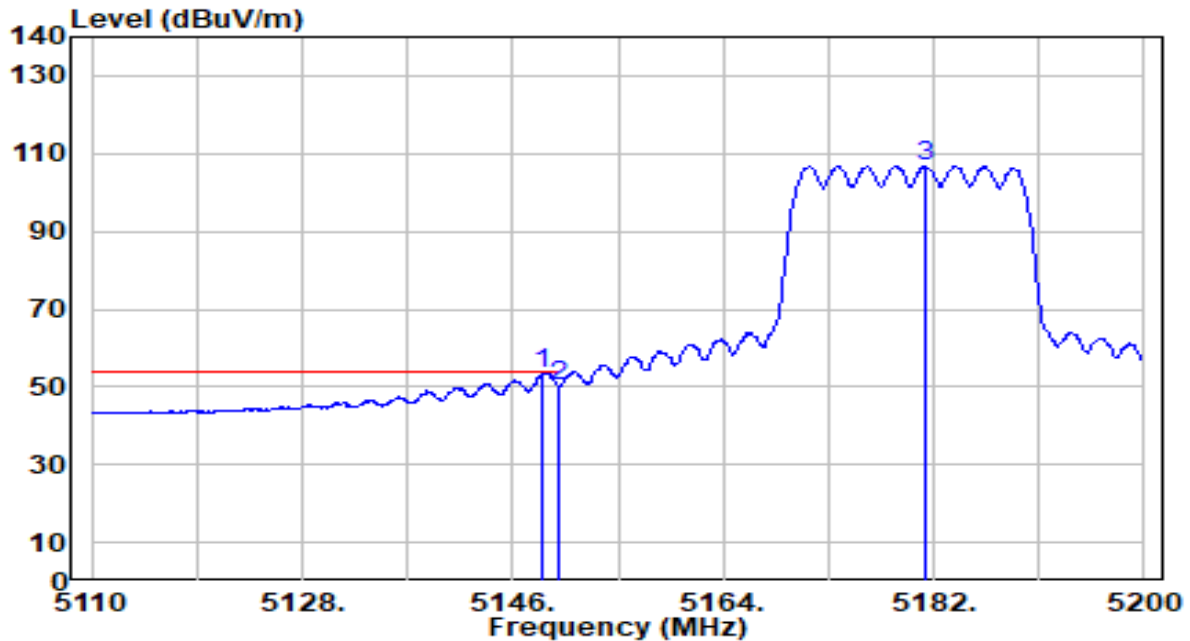


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.610	52.71	0.65	53.36	-0.64	54.00	200	242	Average
2		5150.000	49.73	0.65	50.38	-3.62	54.00	200	242	Average
3		5181.370	106.22	0.68	106.91	N/A	N/A	200	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

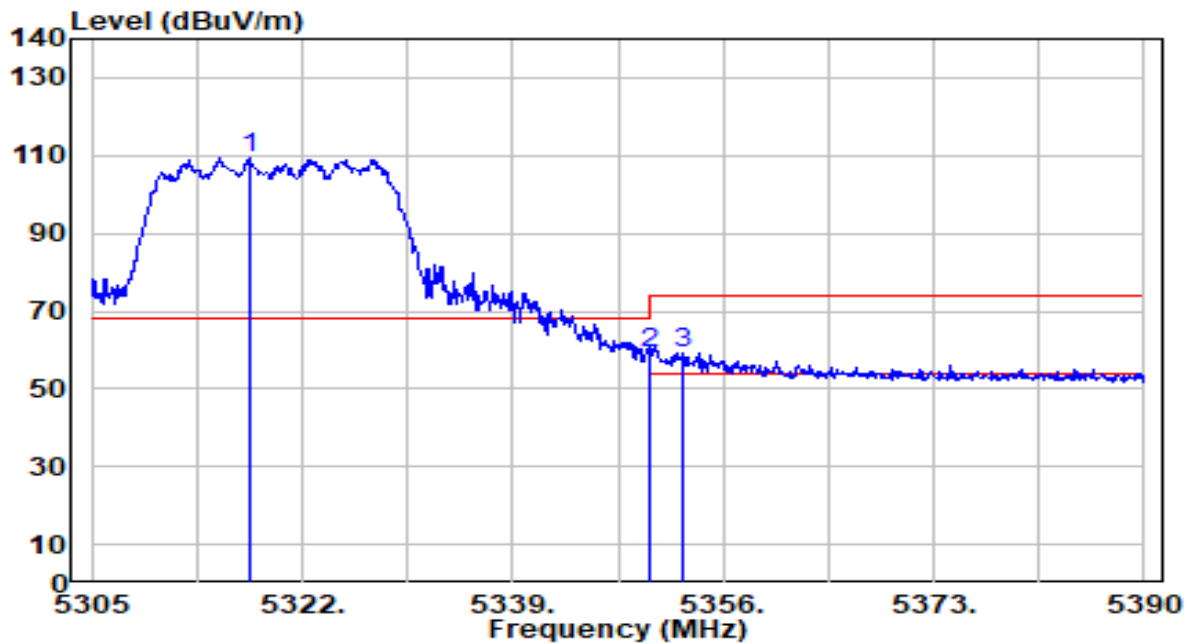


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5317.750	108.95	0.52	109.47	N/A	N/A	300	225	Peak
2	5350.000	58.81	0.47	59.28	-14.72	74.00	300	225	Peak
3	* 5352.770	58.86	0.47	59.33	-14.67	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

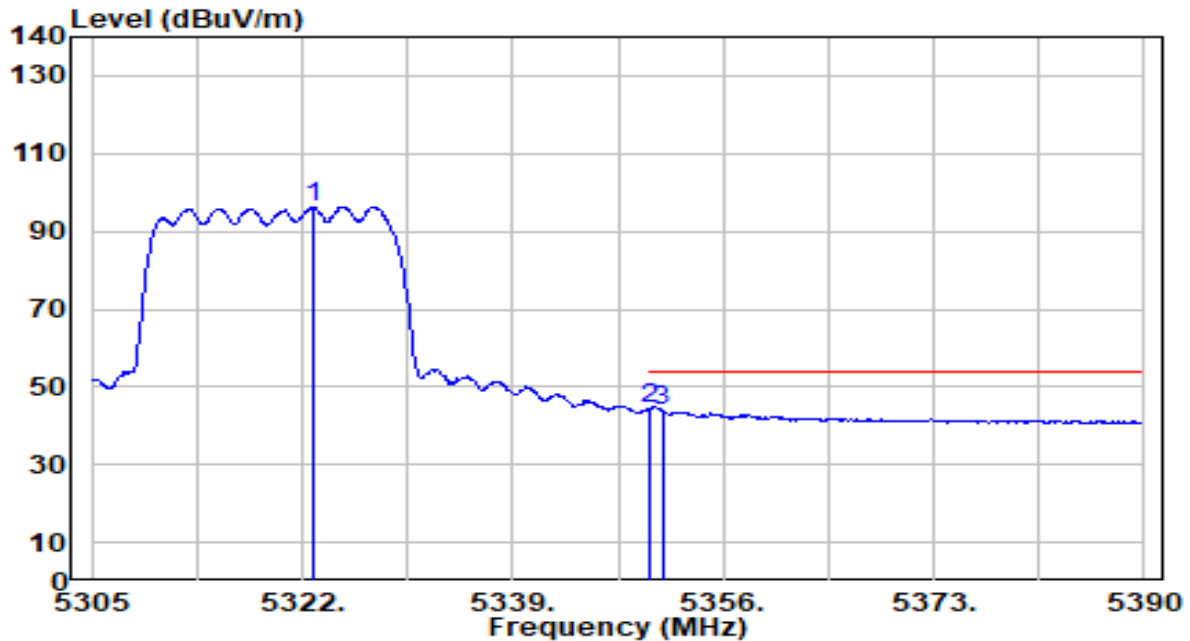


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5322.850	95.78	0.51	96.30	N/A	N/A	300	225	Average
2	*	5350.000	43.79	0.47	44.26	-9.74	54.00	300	225	Average
3		5351.070	43.38	0.47	43.85	-10.15	54.00	300	225	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

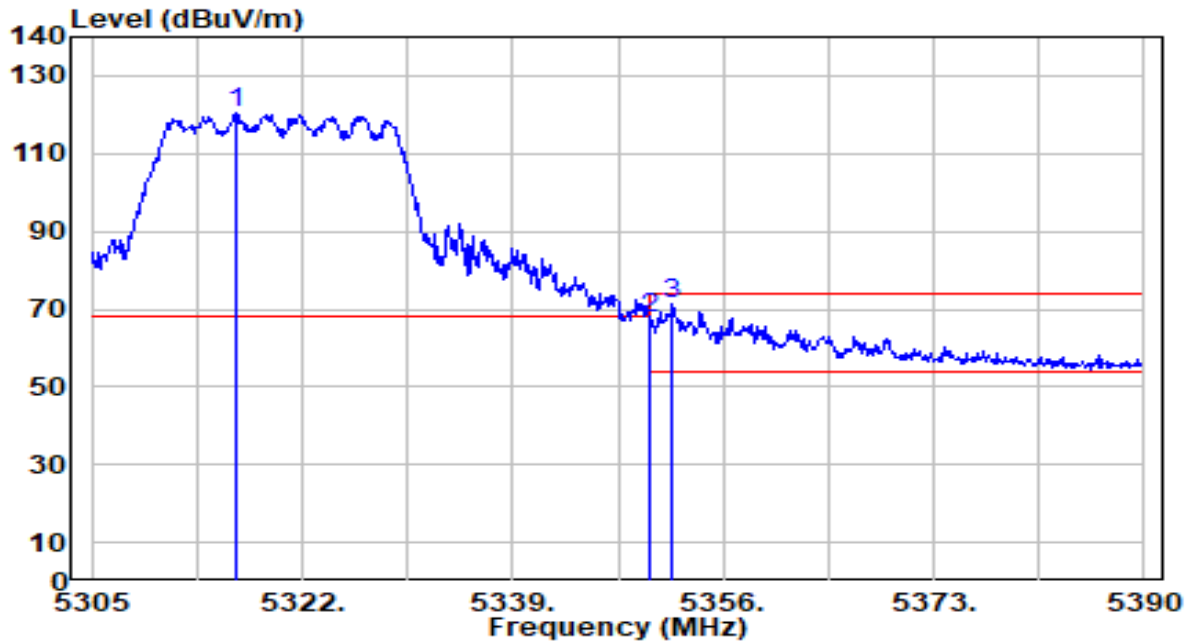


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5316.560	119.97	0.52	120.49	N/A	N/A	200	67	Peak
2	5350.000	67.11	0.47	67.58	-6.42	74.00	200	67	Peak
3	* 5351.835	70.59	0.47	71.06	-2.94	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band2_CH 64_ANT 0+1	Test Voltage	AC 120V/60Hz

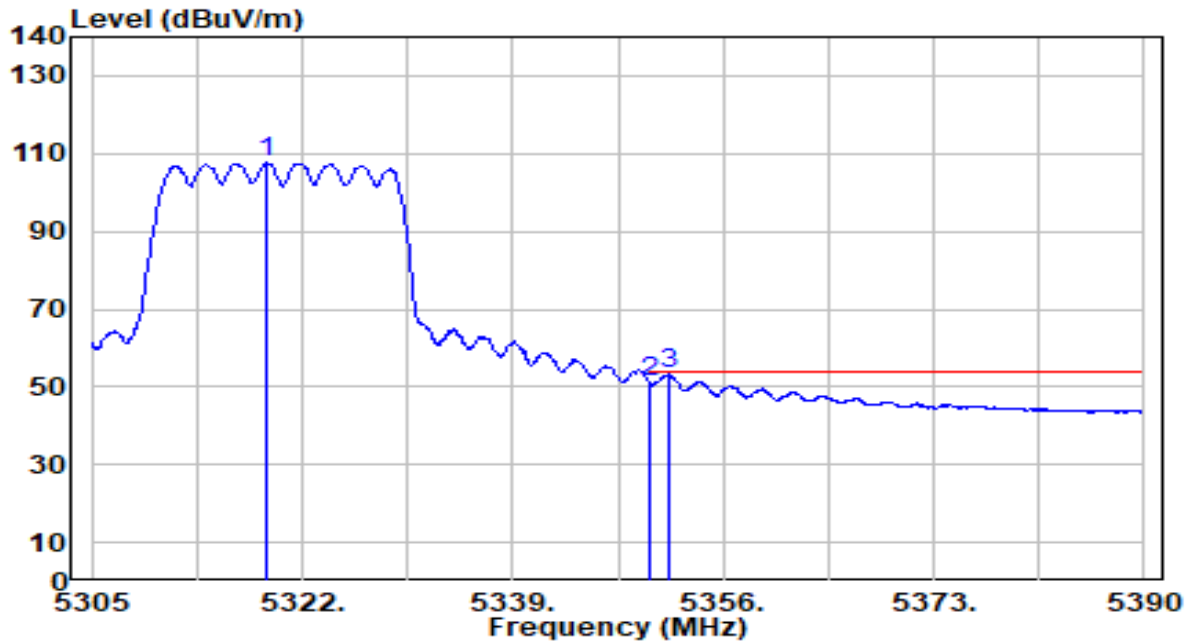


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5319.110	106.99	0.52	107.51	N/A	N/A	200	67	Average
2	5350.000	50.89	0.47	51.36	-2.64	54.00	200	67	Average
3	* 5351.580	52.78	0.47	53.25	-0.75	54.00	200	67	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

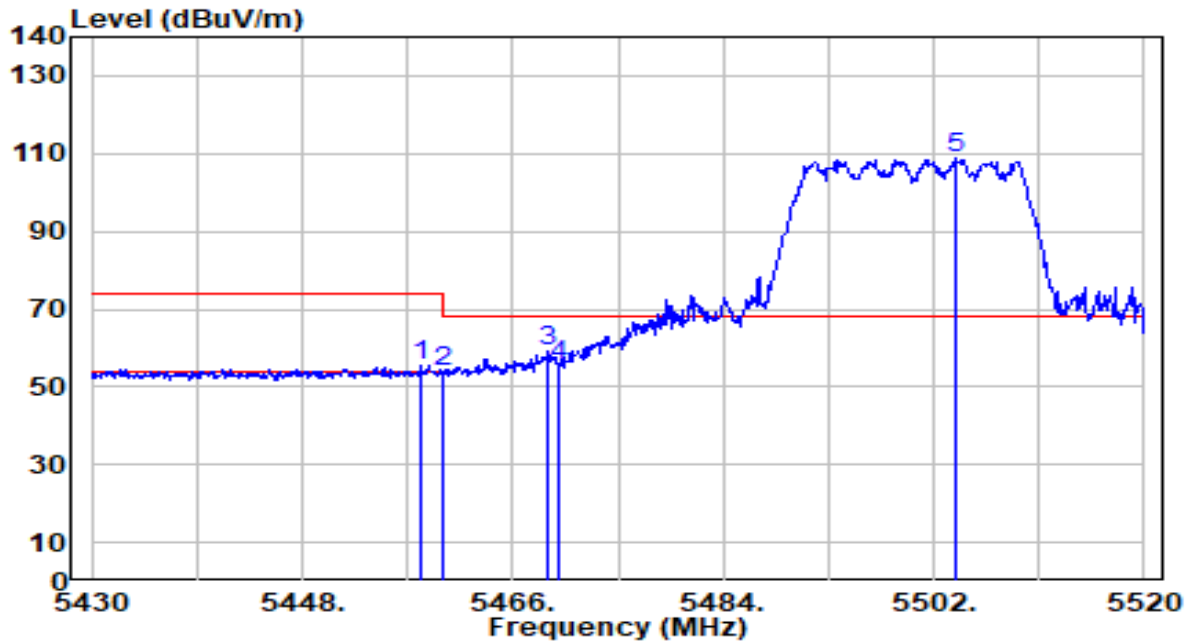


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.260	55.05	0.65	55.70	-18.30	74.00	100	53	Peak
2	5460.000	53.27	0.66	53.93	-20.07	74.00	100	53	Peak
3	* 5468.970	58.64	0.70	59.34	-8.86	68.20	100	53	Peak
4	5470.000	54.61	0.71	55.31	-12.89	68.20	100	53	Peak
5	5503.800	108.12	0.86	108.98	N/A	N/A	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

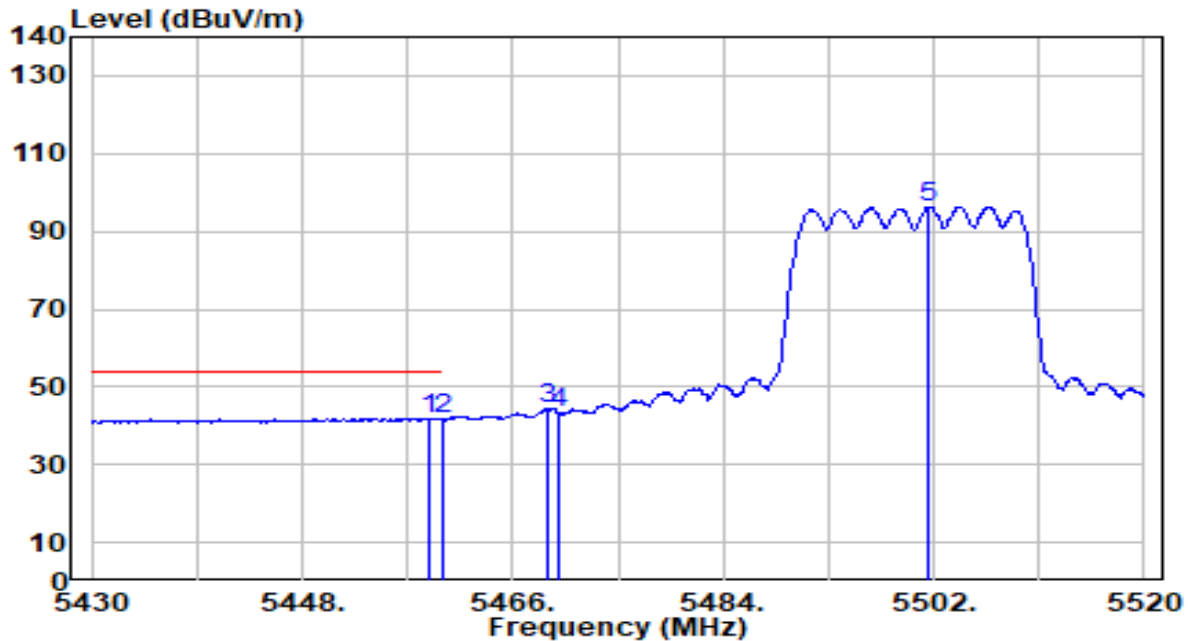


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.890	41.29	0.66	41.95	-12.05	54.00	100	53	Average
2		5460.000	41.05	0.66	41.71	-12.29	54.00	100	53	Average
3		5468.970	43.66	0.70	44.36	N/A	N/A	100	53	Average
4		5470.000	42.65	0.71	43.35	N/A	N/A	100	53	Average
5		5501.550	95.37	0.85	96.21	N/A	N/A	100	53	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

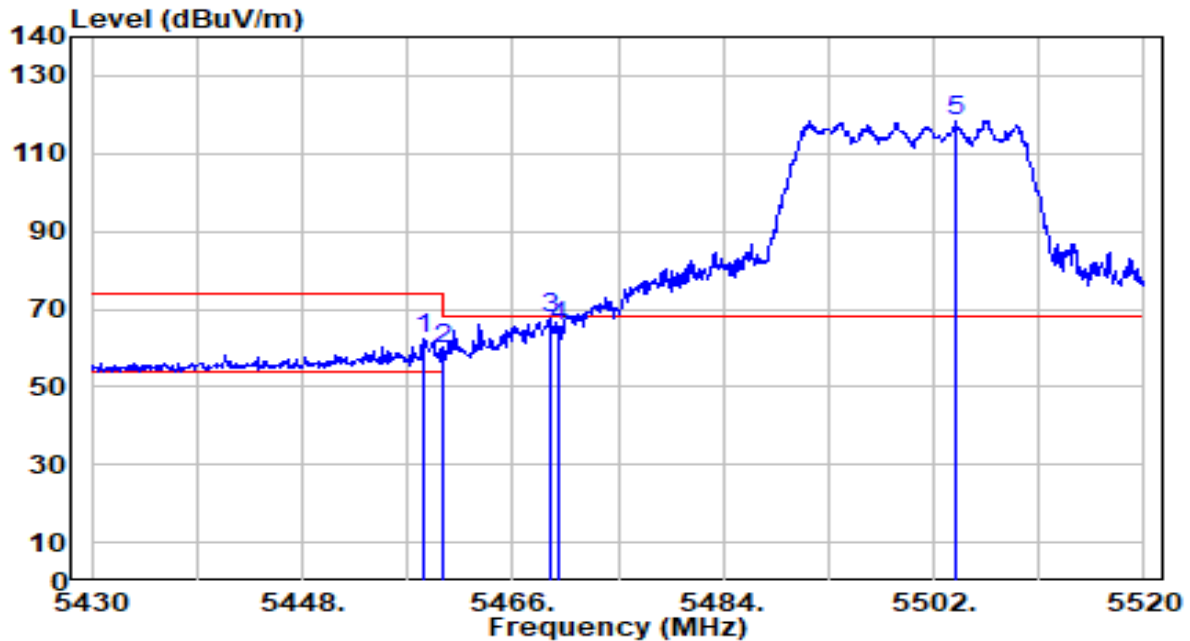


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.440	61.79	0.65	62.45	-11.55	74.00	200	243	Peak
2	5460.000	59.05	0.66	59.71	-14.29	74.00	200	243	Peak
3	* 5469.150	67.00	0.70	67.70	-0.50	68.20	200	243	Peak
4	5470.000	64.76	0.71	65.46	-2.74	68.20	200	243	Peak
5	5503.980	117.67	0.86	118.53	N/A	N/A	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 100_ANT 0+1	Test Voltage	AC 120V/60Hz

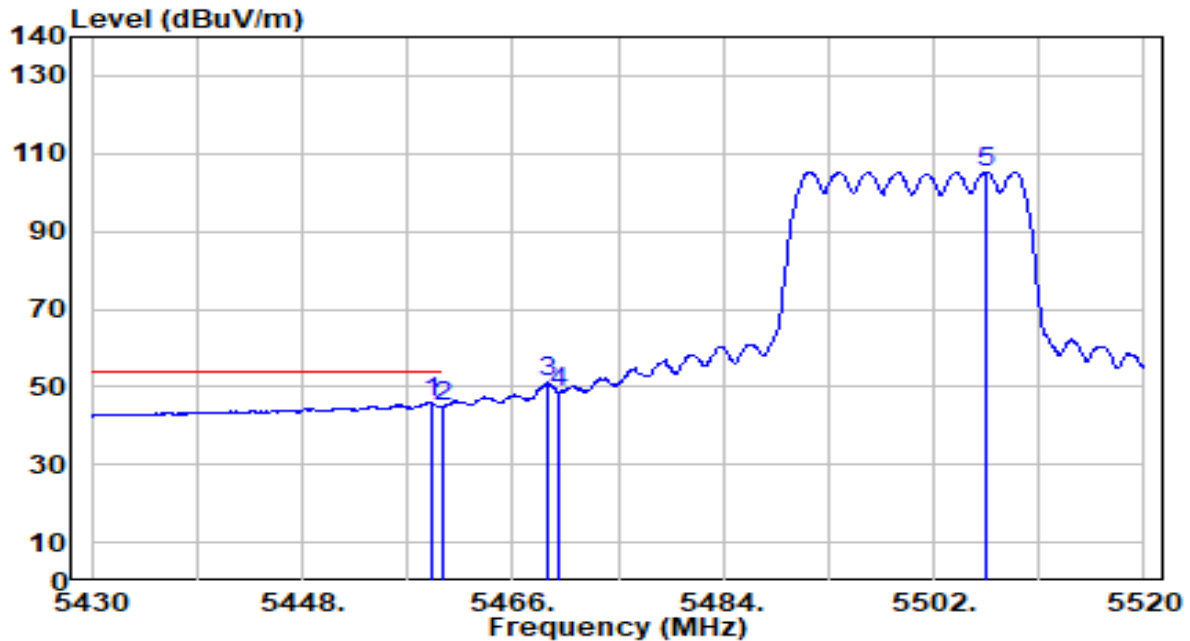


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.980	45.35	0.66	46.00	-8.00	54.00	200	243	Average
2		5460.000	44.29	0.66	44.95	-9.05	54.00	200	243	Average
3		5469.060	50.40	0.70	51.11	N/A	N/A	200	243	Average
4		5470.000	47.75	0.71	48.45	N/A	N/A	200	243	Average
5		5506.590	104.47	0.87	105.34	N/A	N/A	200	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

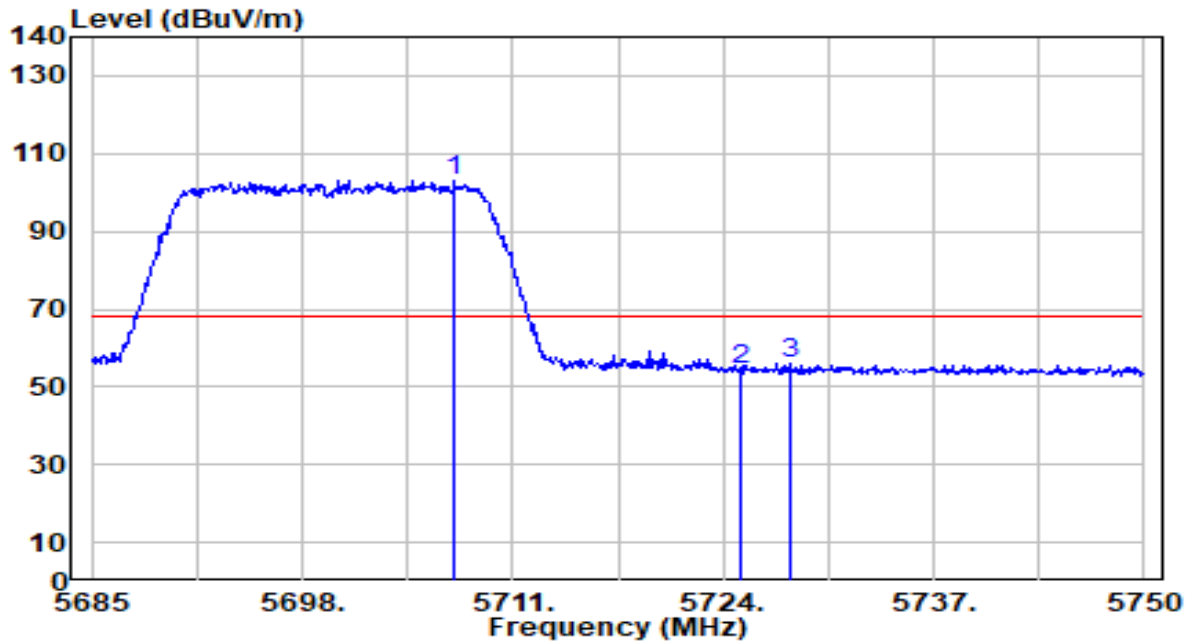


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5707.360	101.35	1.81	103.16	N/A	N/A	200	12	Peak
2	5725.000	52.46	1.89	54.35	-13.85	68.20	200	12	Peak
3	* 5728.225	54.11	1.91	56.02	-12.18	68.20	200	12	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band3_CH 140_ANT 0+1	Test Voltage	AC 120V/60Hz

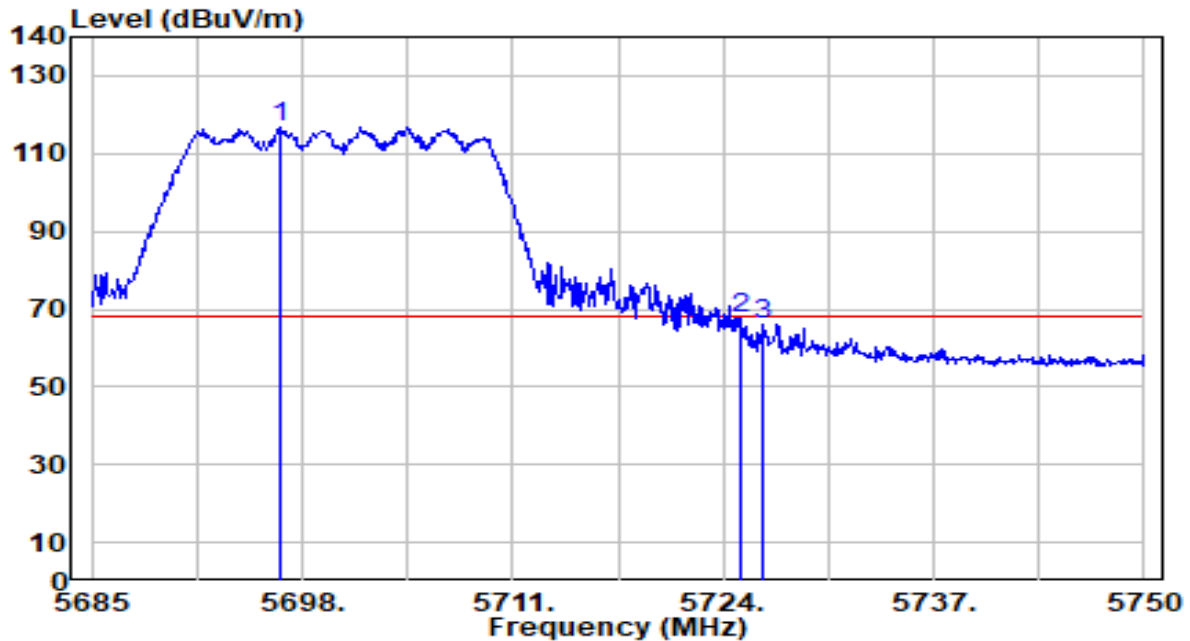


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5696.635	115.18	1.76	116.94	N/A	N/A	200	54	Peak
2	* 5725.000	65.68	1.89	67.57	-0.63	68.20	200	54	Peak
3	5726.470	64.23	1.90	66.13	-2.07	68.20	200	54	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

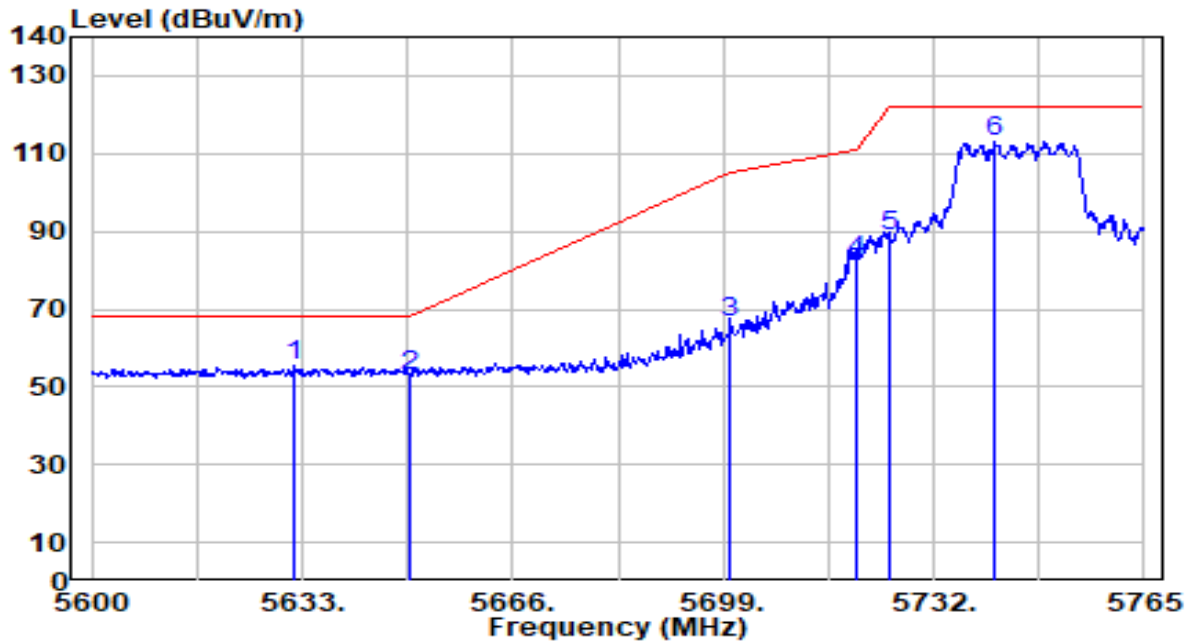


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5631.680	53.91	1.46	55.37	-12.83	68.20	100	238	Peak
2		5650.000	51.38	1.54	52.92	-15.28	68.20	100	238	Peak
3		5700.000	64.79	1.78	66.57	-38.63	105.20	100	238	Peak
4		5720.000	80.70	1.87	82.57	-28.23	110.80	100	238	Peak
5		5725.000	86.68	1.89	88.57	-33.63	122.20	100	238	Peak
6		5741.570	111.25	1.97	113.22	N/A	N/A	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 149_ANT 0+1	Test Voltage	AC 120V/60Hz

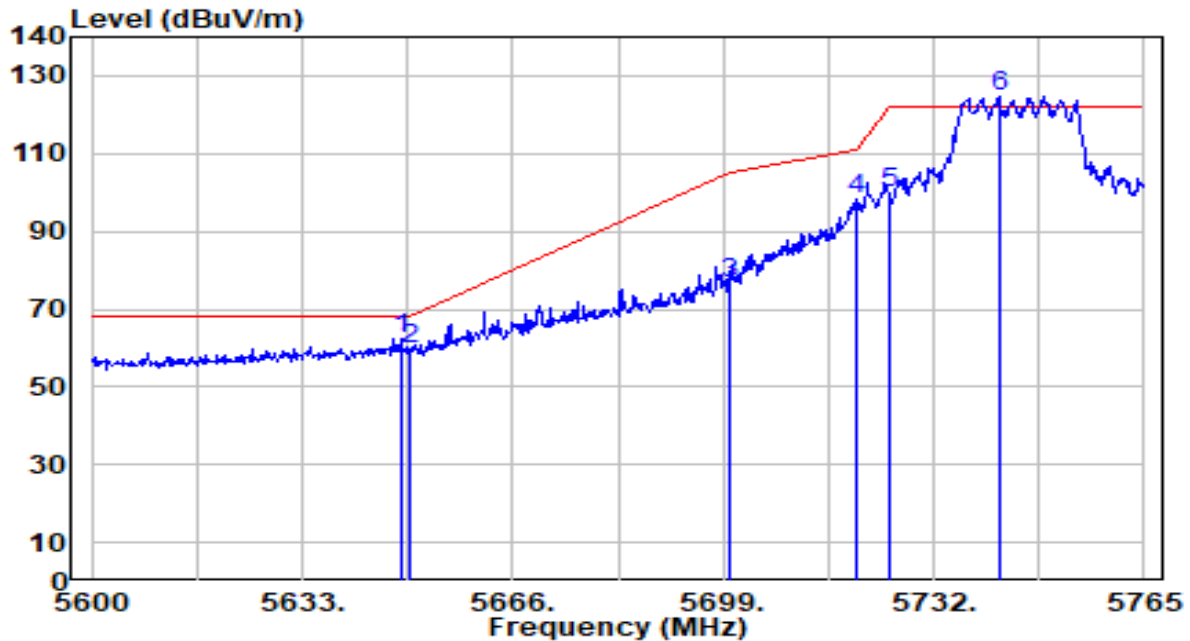


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5648.510	61.04	1.54	62.57	-5.63	68.20	200	54	Peak
2		5650.000	57.98	1.54	59.52	-8.68	68.20	200	54	Peak
3		5700.000	74.97	1.78	76.74	-28.46	105.20	200	54	Peak
4		5720.000	96.14	1.87	98.01	-12.79	110.80	200	54	Peak
5		5725.000	97.93	1.89	99.83	-22.37	122.20	200	54	Peak
6		5742.230	122.52	1.97	124.49	N/A	N/A	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

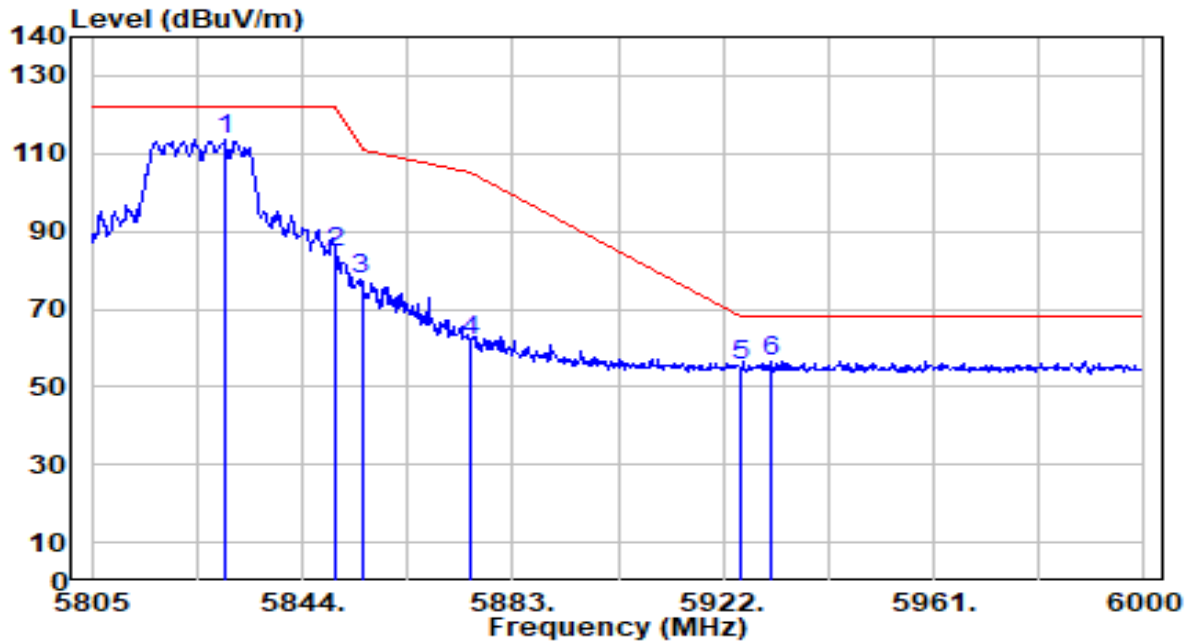


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5829.765	111.18	2.25	113.43	N/A	N/A	100	239	Peak
2	5850.000	82.43	2.25	84.68	-37.52	122.20	100	239	Peak
3	5855.000	75.34	2.25	77.60	-33.20	110.80	100	239	Peak
4	5875.000	59.79	2.26	62.04	-43.16	105.20	100	239	Peak
5	5925.000	53.27	2.27	55.53	-12.67	68.20	100	239	Peak
6	* 5930.775	54.25	2.27	56.52	-11.68	68.20	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-20MHz_TX_Band4_CH 165_ANT 0+1	Test Voltage	AC 120V/60Hz

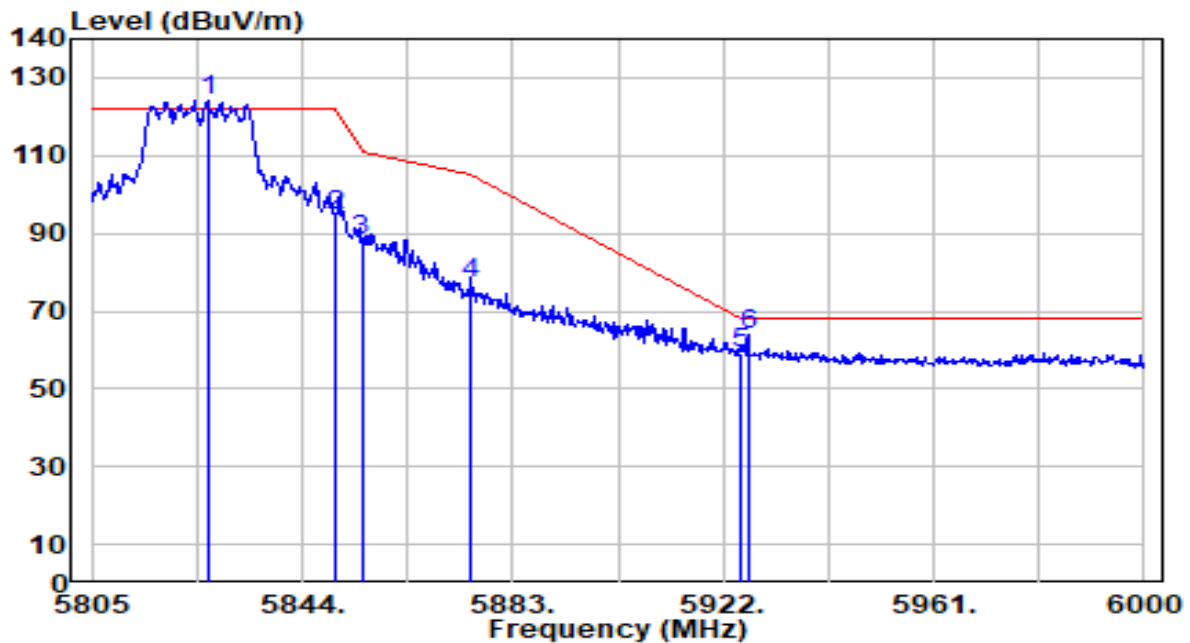


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5826.450	121.95	2.25	124.20	N/A	N/A	200	239	Peak
2	5850.000	92.27	2.25	94.52	-27.68	122.20	200	239	Peak
3	5855.000	85.89	2.25	88.14	-22.66	110.80	200	239	Peak
4	5875.000	74.85	2.26	77.11	-28.09	105.20	200	239	Peak
5	5925.000	56.80	2.27	59.07	-9.13	68.20	200	239	Peak
6	* 5926.680	61.67	2.27	63.93	-4.27	68.20	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

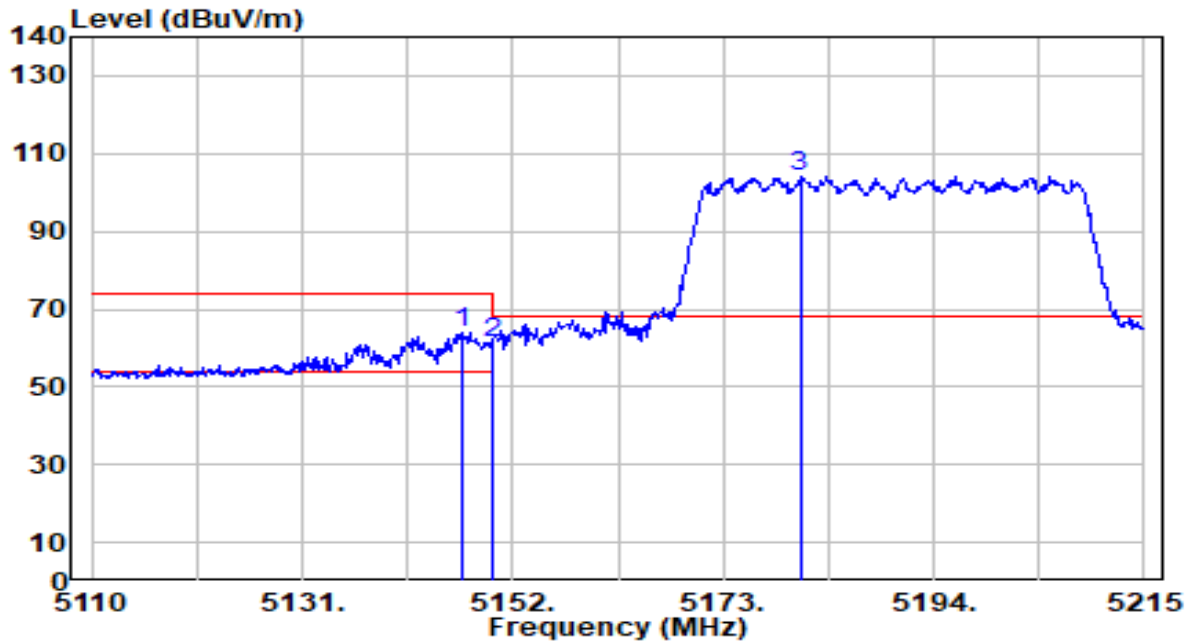


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.065	63.36	0.65	64.01	-9.99	74.00	100	231	Peak
2		5150.000	60.50	0.65	61.15	-12.85	74.00	100	231	Peak
3		5180.665	103.44	0.68	104.13	N/A	N/A	100	231	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

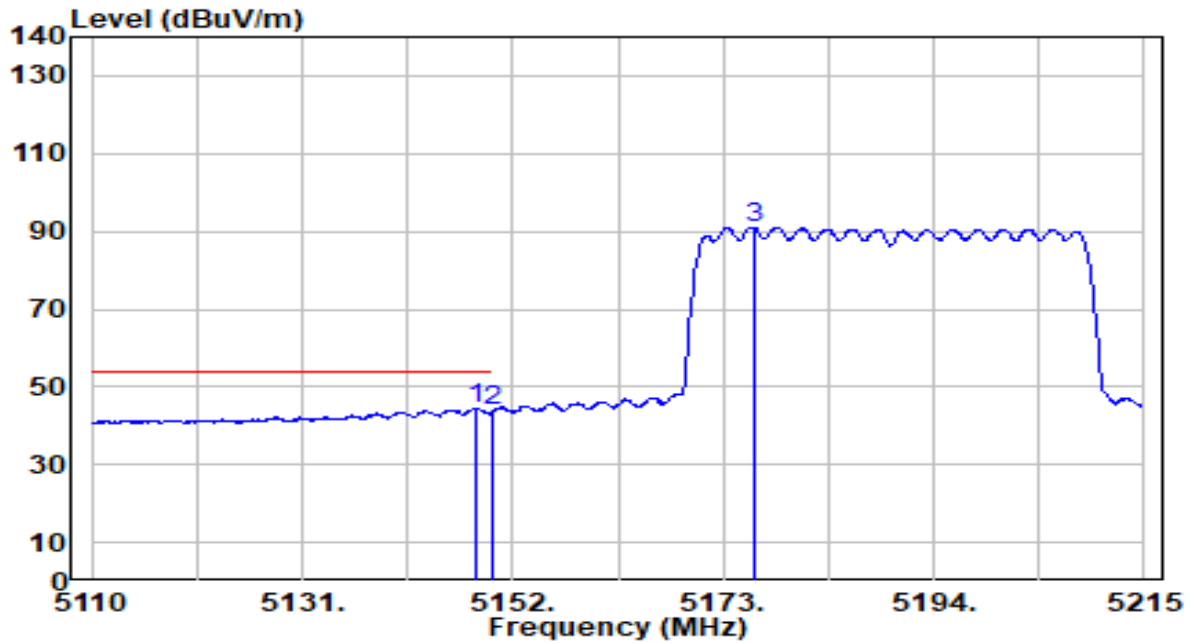


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.430	43.95	0.65	44.60	-9.40	54.00	100	231	Average
2		5150.000	43.02	0.65	43.67	-10.33	54.00	100	231	Average
3		5176.045	90.42	0.68	91.10	N/A	N/A	100	231	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

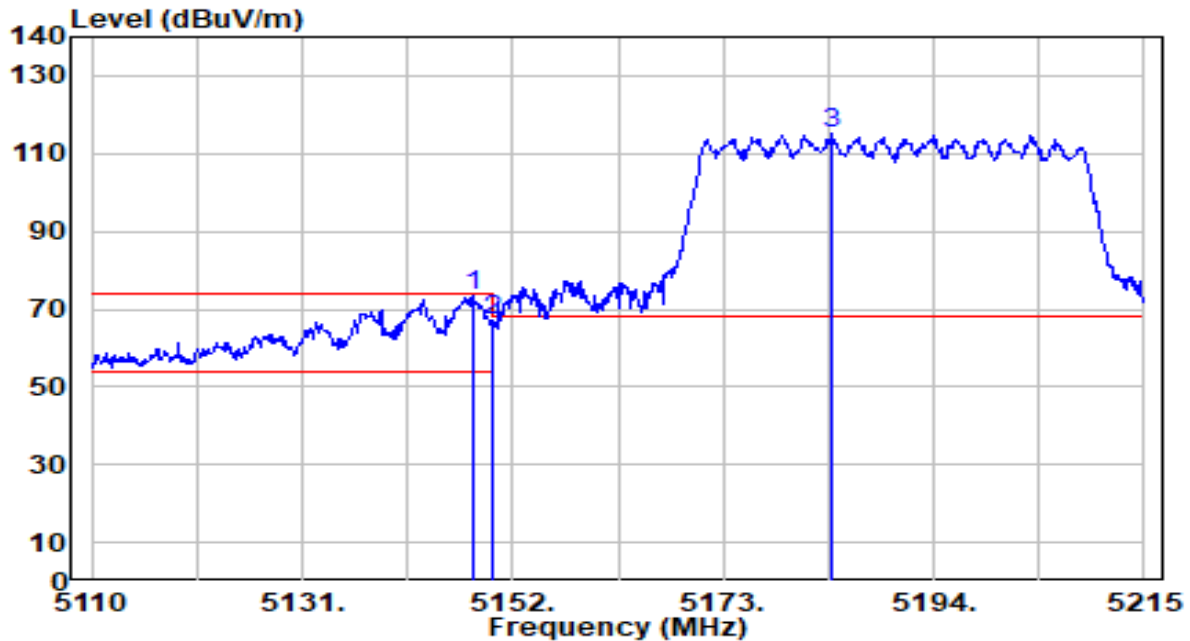


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.010	72.83	0.65	73.48	-0.52	74.00	200	240	Peak
2		5150.000	66.49	0.65	67.14	-6.86	74.00	200	240	Peak
3		5183.815	114.37	0.69	115.06	N/A	N/A	200	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band1_CH 38_ANT 0+1	Test Voltage	AC 120V/60Hz

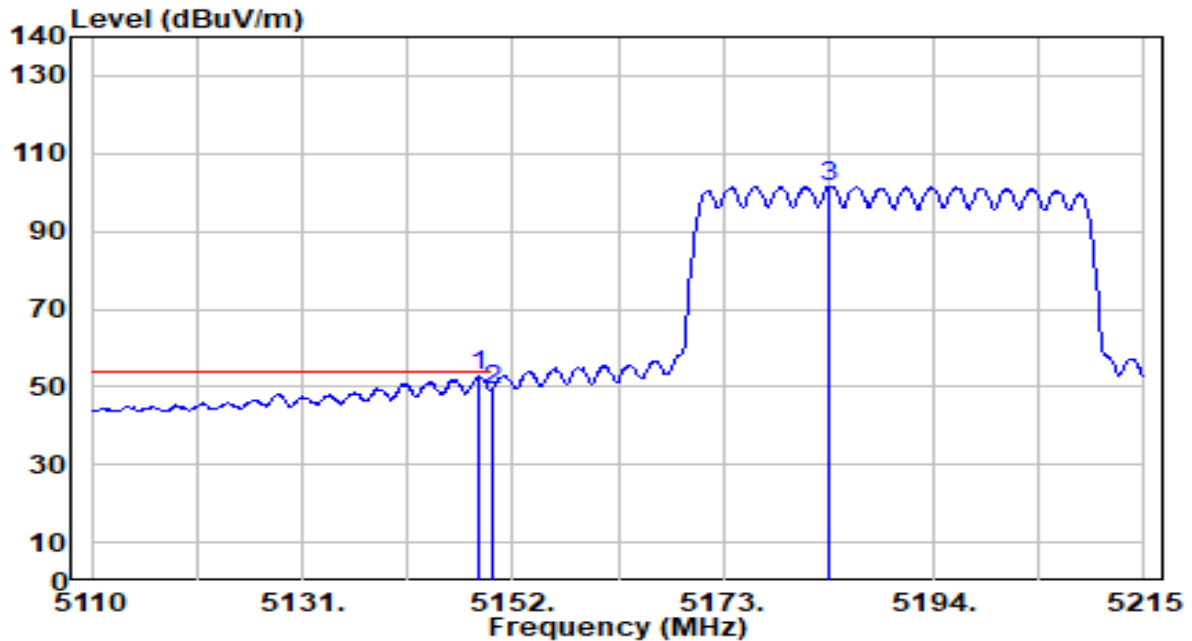


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5148.640	51.94	0.65	52.60	-1.40	54.00	200	240	Average
2		5150.000	48.58	0.65	49.23	-4.77	54.00	200	240	Average
3		5183.605	100.85	0.69	101.54	N/A	N/A	200	240	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

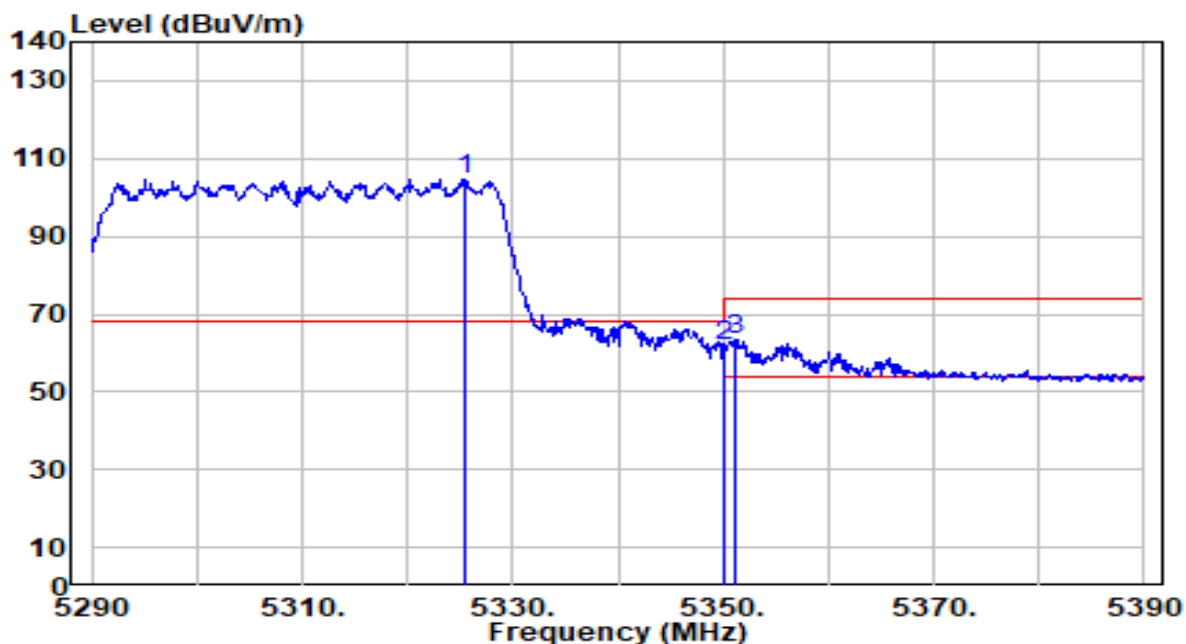


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5325.400	104.19	0.51	104.70	N/A	N/A	300	225	Peak
2	5350.000	61.28	0.47	61.76	-12.24	74.00	300	225	Peak
3	* 5351.200	62.98	0.47	63.45	-10.55	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

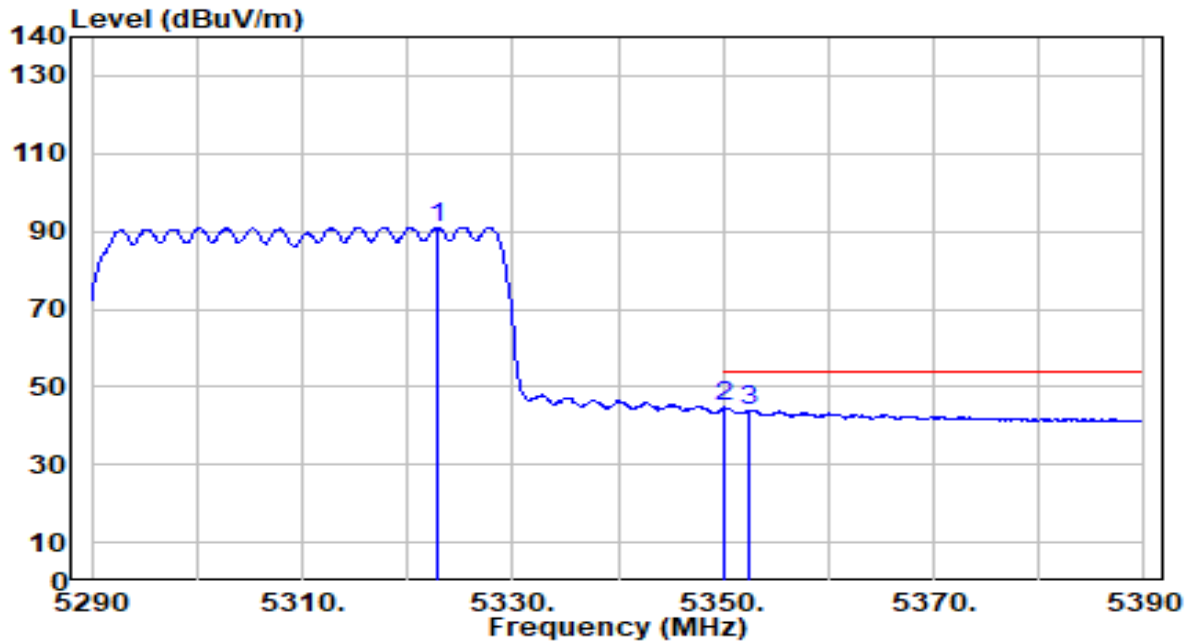


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5322.900	90.61	0.51	91.13	N/A	N/A	300	225	Average
2	*	5350.000	44.20	0.47	44.67	-9.33	54.00	300	225	Average
3		5352.400	43.54	0.47	44.00	-10.00	54.00	300	225	Average

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

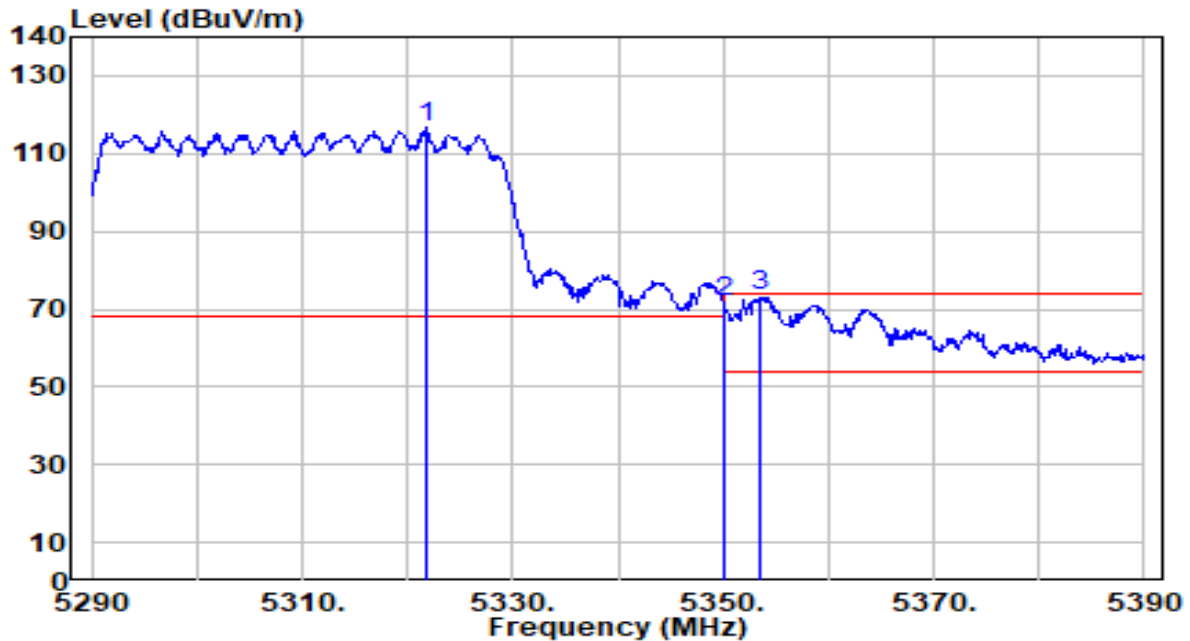


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.700	116.48	0.51	116.99	N/A	N/A	200	67	Peak
2	5350.000	71.35	0.47	71.83	-2.17	74.00	200	67	Peak
3	* 5353.400	72.98	0.47	73.45	-0.55	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band2_CH 62_ANT 0+1	Test Voltage	AC 120V/60Hz

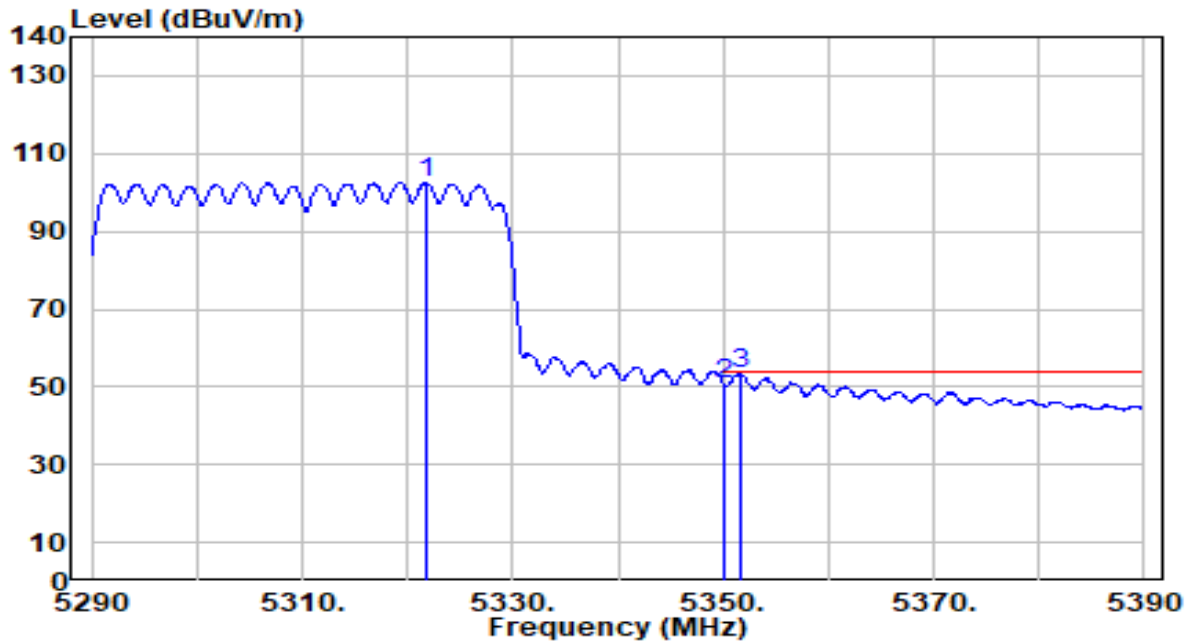


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5321.700	102.06	0.51	102.57	N/A	N/A	200	67	Average
2	5350.000	50.50	0.47	50.97	-3.03	54.00	200	67	Average
3	* 5351.600	52.71	0.47	53.18	-0.82	54.00	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

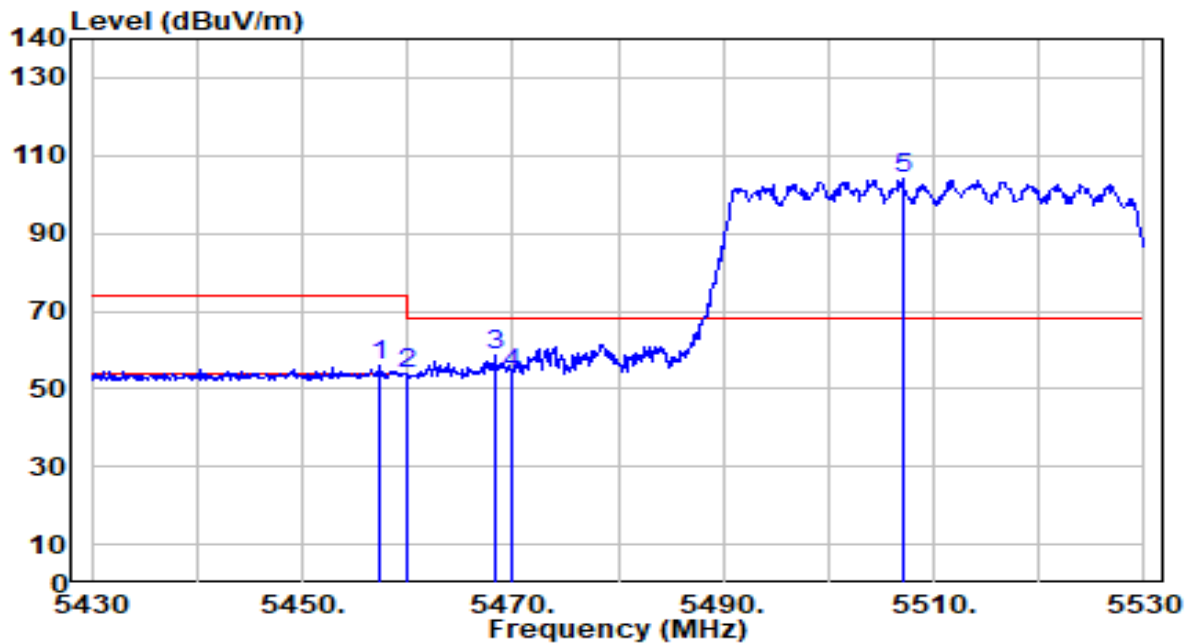


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5457.400	55.32	0.65	55.97	-18.03	74.00	100	53	Peak
2	5460.000	53.09	0.66	53.75	-20.25	74.00	100	53	Peak
3	* 5468.300	58.20	0.70	58.90	-9.30	68.20	100	53	Peak
4	5470.000	53.24	0.71	53.94	-14.26	68.20	100	53	Peak
5	5507.000	103.12	0.87	103.99	N/A	N/A	100	53	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

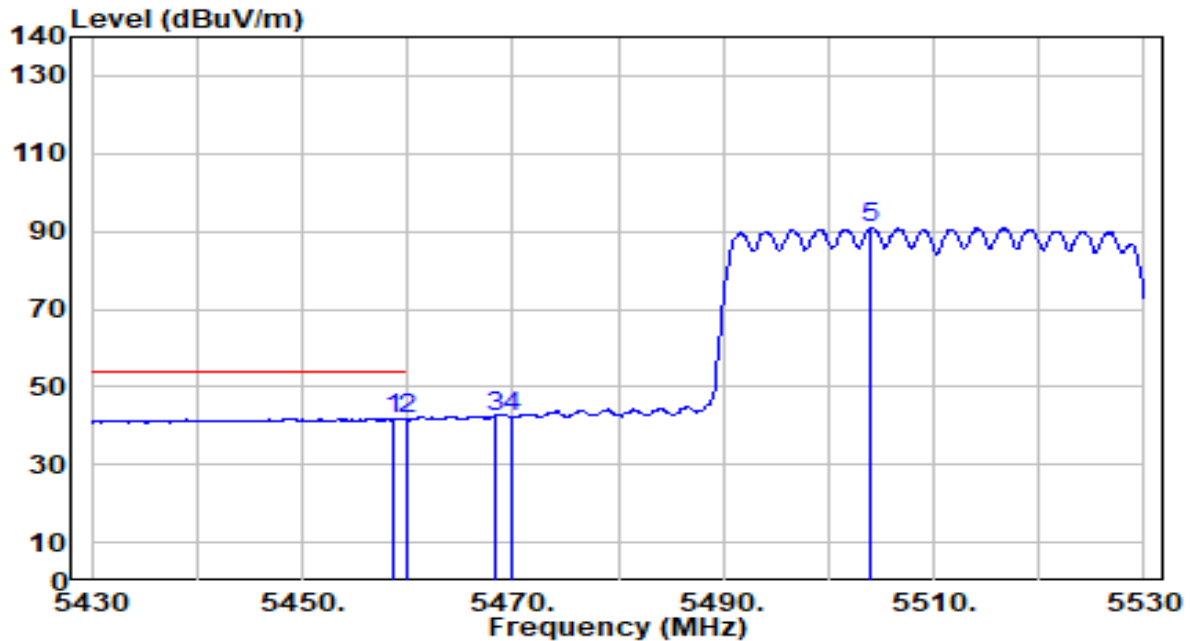


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.700	41.13	0.66	41.79	-12.21	54.00	100	53	Average
2		5460.000	40.93	0.66	41.59	-12.41	54.00	100	53	Average
3		5468.300	41.82	0.70	42.52	N/A	N/A	100	53	Average
4		5470.000	41.56	0.71	42.27	N/A	N/A	100	53	Average
5		5504.100	89.93	0.86	90.79	N/A	N/A	100	53	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

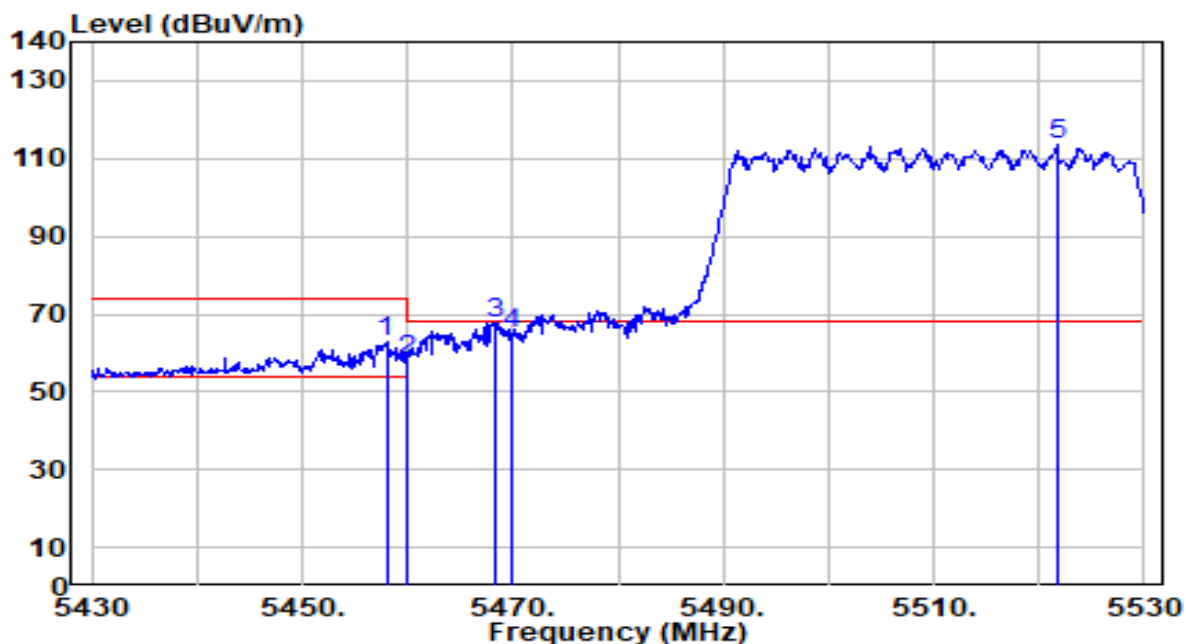


No	Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.000	62.10	0.65	62.75	-11.25	74.00	200	243	Peak
2	5460.000	57.54	0.66	58.21	-15.79	74.00	200	243	Peak
3	* 5468.400	66.94	0.70	67.64	-0.56	68.20	200	243	Peak
4	5470.000	64.30	0.71	65.01	-3.19	68.20	200	243	Peak
5	5521.700	112.69	0.94	113.64	N/A	N/A	200	243	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 102_ANT 0+1	Test Voltage	AC 120V/60Hz

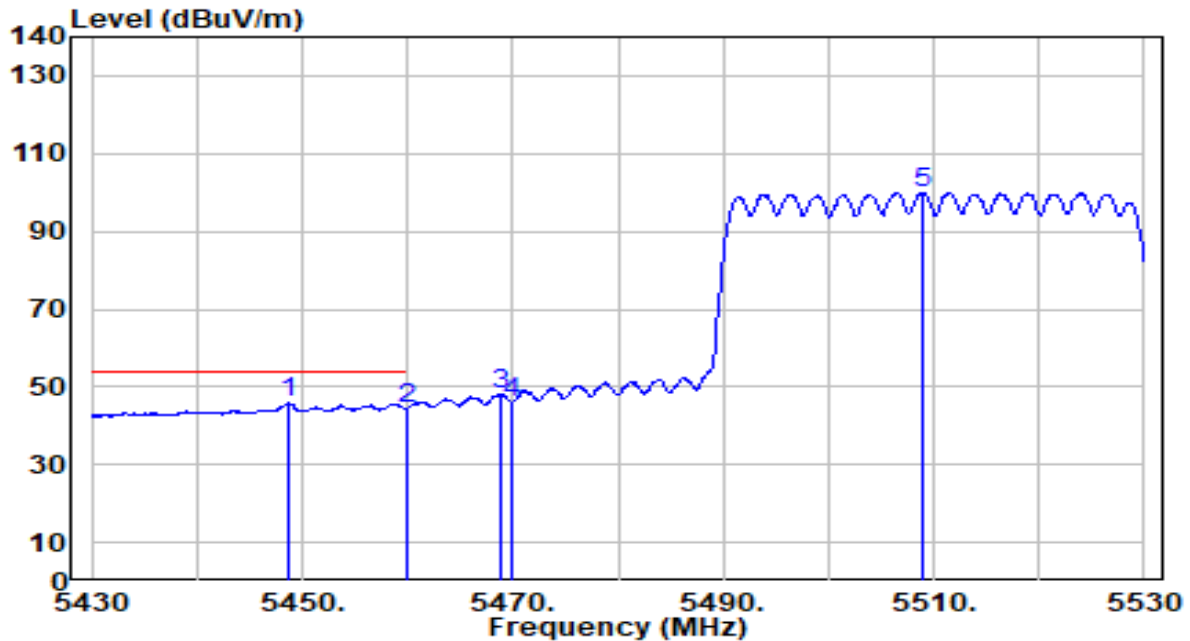


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5448.800	45.26	0.61	45.87	-8.13	54.00	200	243	Average
2		5460.000	43.96	0.66	44.62	-9.38	54.00	200	243	Average
3		5468.900	47.39	0.70	48.09	N/A	N/A	200	243	Average
4		5470.000	45.23	0.71	45.93	N/A	N/A	200	243	Average
5		5508.900	99.03	0.88	99.91	N/A	N/A	200	243	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

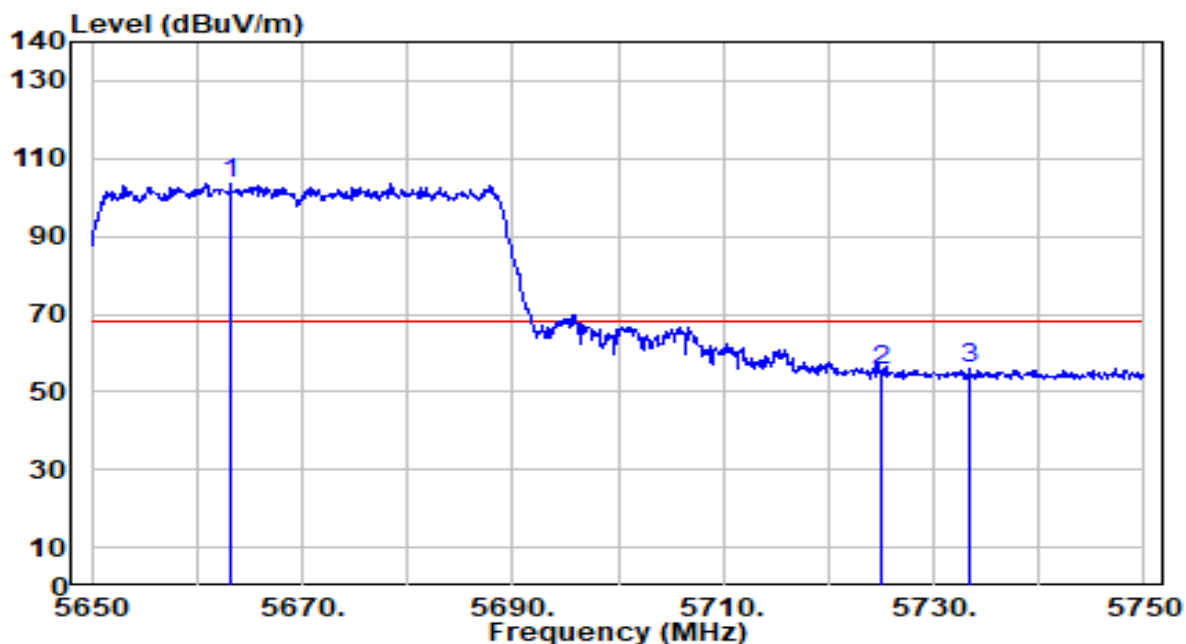


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5663.200	102.14	1.60	103.75	N/A	N/A	200	12	Peak
2	5725.000	53.67	1.89	55.57	-12.63	68.20	200	12	Peak
3	* 5733.500	54.27	1.93	56.20	-12.00	68.20	200	12	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band3_CH 134_ANT 0+1	Test Voltage	AC 120V/60Hz

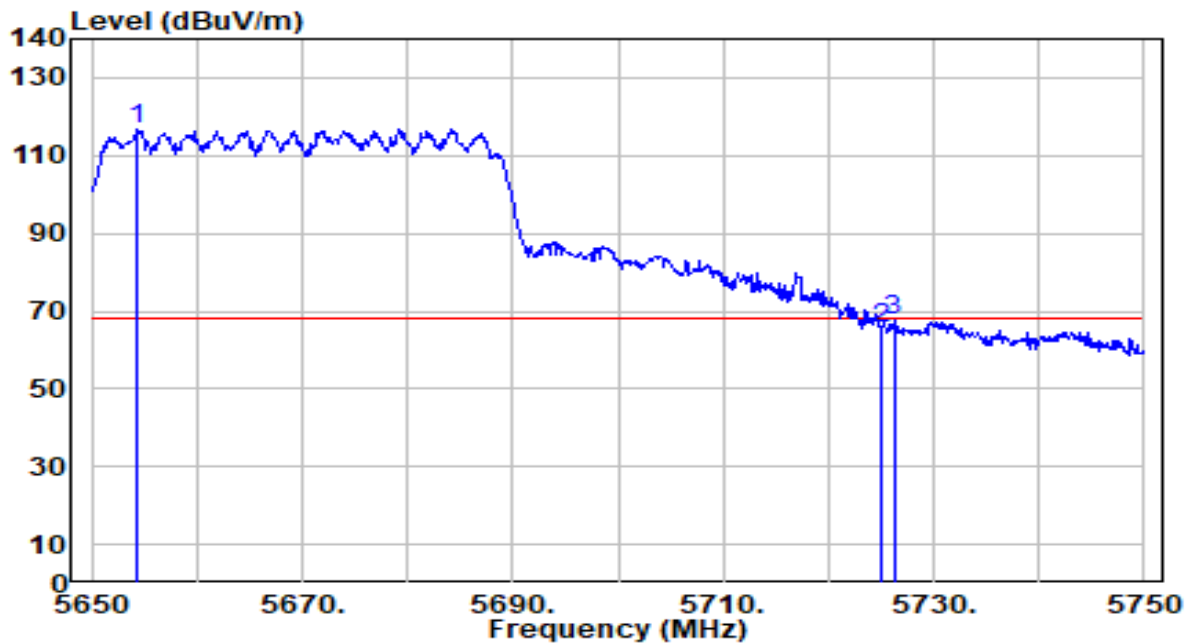


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5654.200	115.13	1.56	116.69	N/A	N/A	200	54	Peak
2	5725.000	63.66	1.89	65.55	-2.65	68.20	200	54	Peak
3	* 5726.200	65.75	1.90	67.64	-0.56	68.20	200	54	Peak

Note:

1. " * ", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

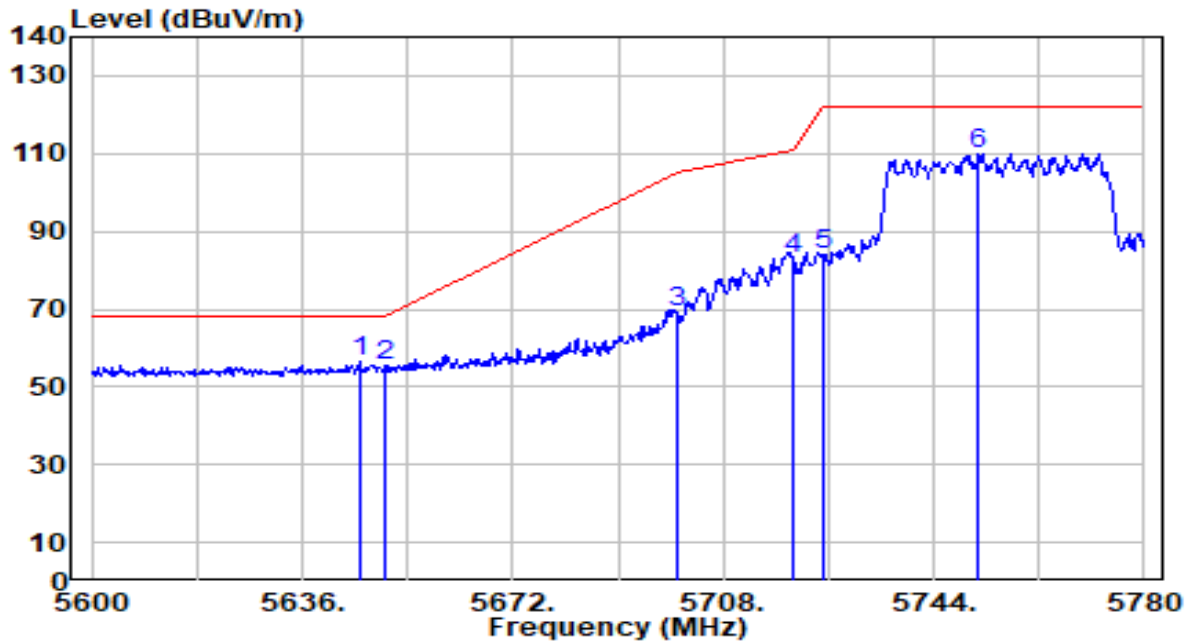


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5645.720	54.96	1.52	56.48	-11.72	68.20	100	238	Peak
2		5650.000	53.92	1.54	55.46	-12.74	68.20	100	238	Peak
3		5700.000	67.28	1.78	69.05	-36.15	105.20	100	238	Peak
4		5720.000	81.08	1.87	82.95	-27.85	110.80	100	238	Peak
5		5725.000	82.08	1.89	83.97	-38.23	122.20	100	238	Peak
6		5751.740	108.06	2.02	110.08	N/A	N/A	100	238	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 151_ANT 0+1	Test Voltage	AC 120V/60Hz

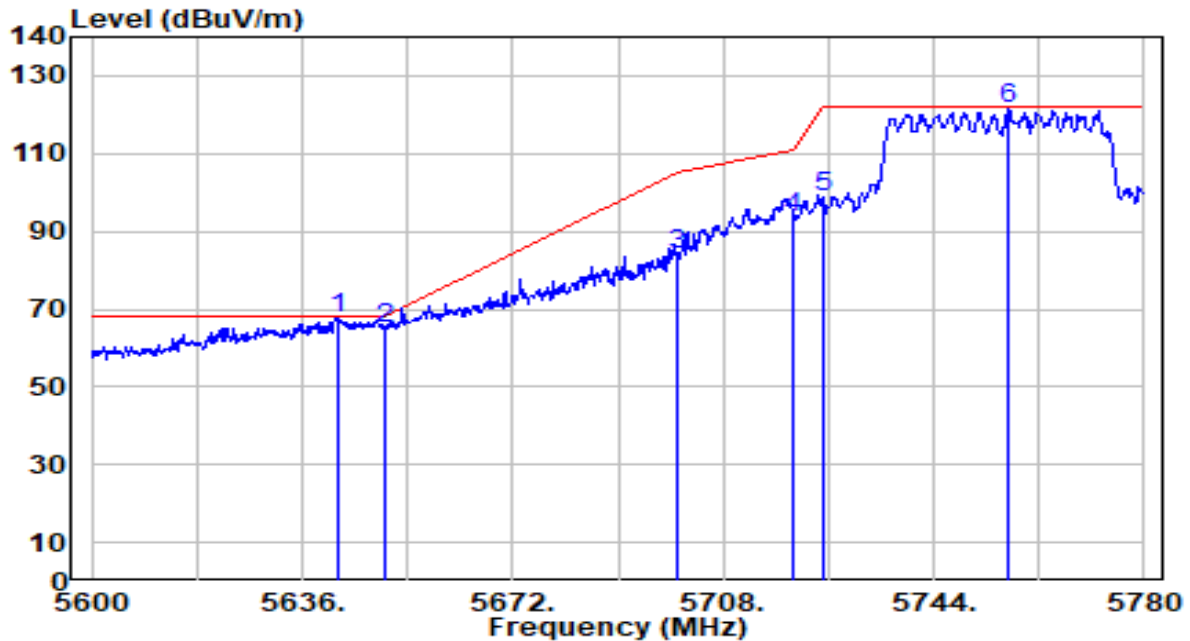


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5642.300	66.18	1.51	67.69	-0.51	68.20	200	54	Peak
2		5650.000	63.38	1.54	64.92	-3.28	68.20	200	54	Peak
3		5700.000	82.17	1.78	83.94	-21.26	105.20	200	54	Peak
4		5720.000	91.68	1.87	93.55	-17.25	110.80	200	54	Peak
5		5725.000	96.89	1.89	98.79	-23.41	122.20	200	54	Peak
6		5756.780	119.40	2.04	121.44	N/A	N/A	200	54	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

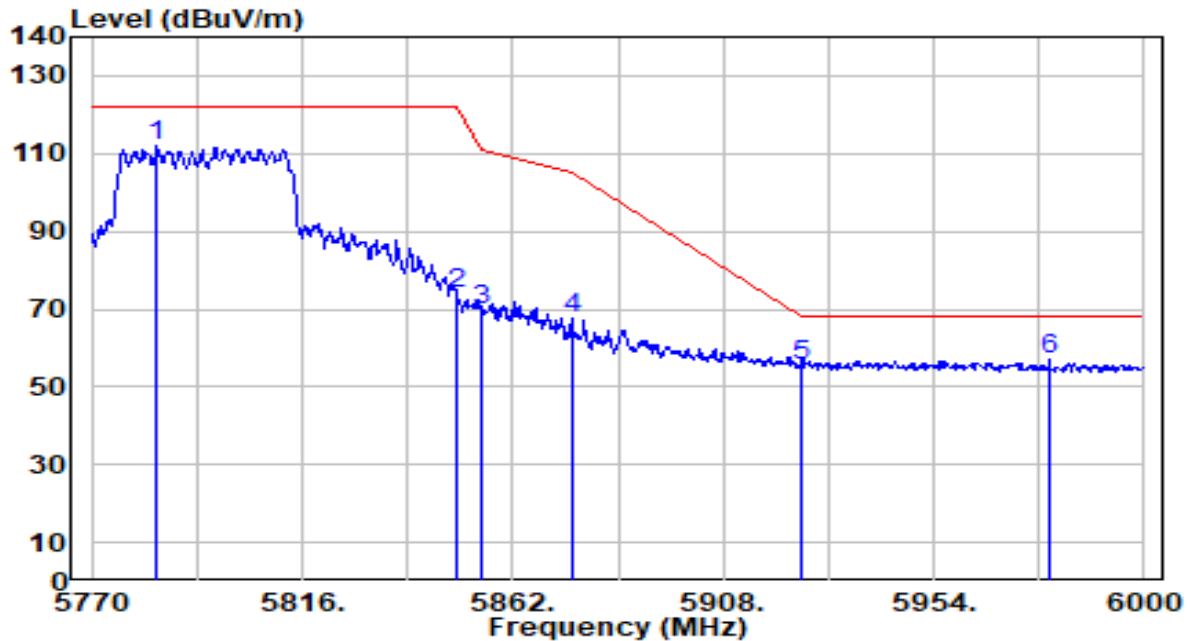


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5784.260	109.67	2.17	111.84	N/A	N/A	100	239	Peak
2	5850.000	71.57	2.25	73.82	-48.38	122.20	100	239	Peak
3	5855.000	67.73	2.25	69.99	-40.81	110.80	100	239	Peak
4	5875.000	65.43	2.26	67.69	-37.51	105.20	100	239	Peak
5	5925.000	53.40	2.27	55.66	-12.54	68.20	100	239	Peak
6	* 5979.300	54.86	2.28	57.14	-11.06	68.20	100	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-40MHz_TX_Band4_CH 159_ANT 0+1	Test Voltage	AC 120V/60Hz

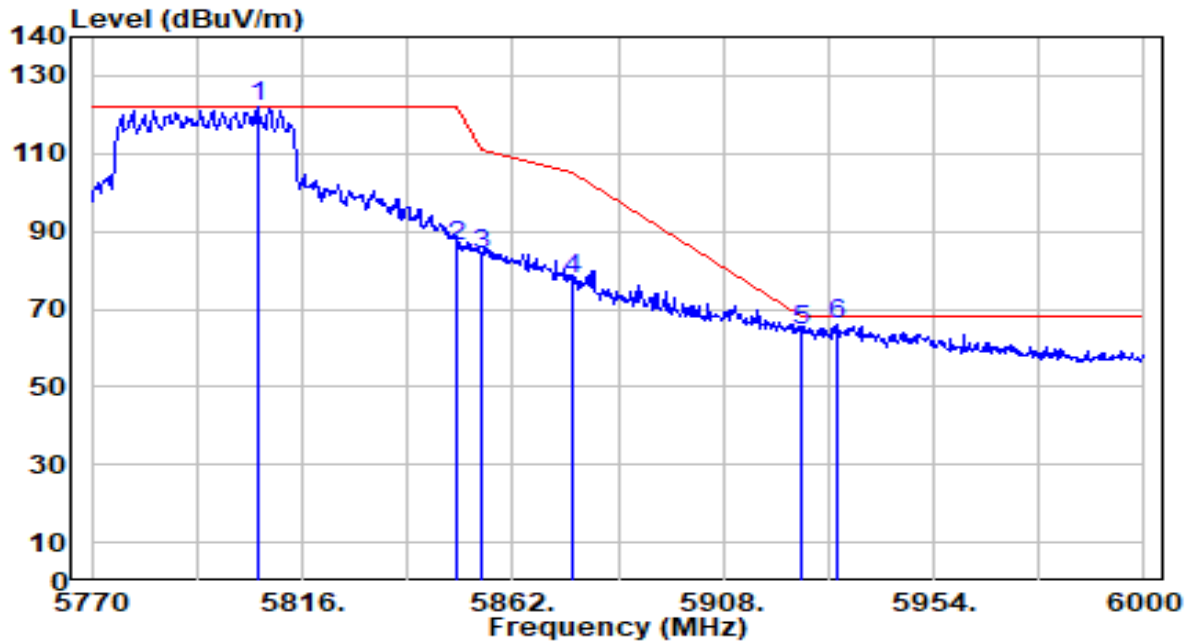


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5806.110	119.97	2.25	122.22	N/A	N/A	200	239	Peak
2	5850.000	83.97	2.25	86.22	-35.98	122.20	200	239	Peak
3	5855.000	81.96	2.25	84.21	-26.59	110.80	200	239	Peak
4	5875.000	75.64	2.26	77.89	-27.31	105.20	200	239	Peak
5	5925.000	62.39	2.27	64.66	-3.54	68.20	200	239	Peak
6	* 5932.840	63.52	2.27	65.79	-2.41	68.20	200	239	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

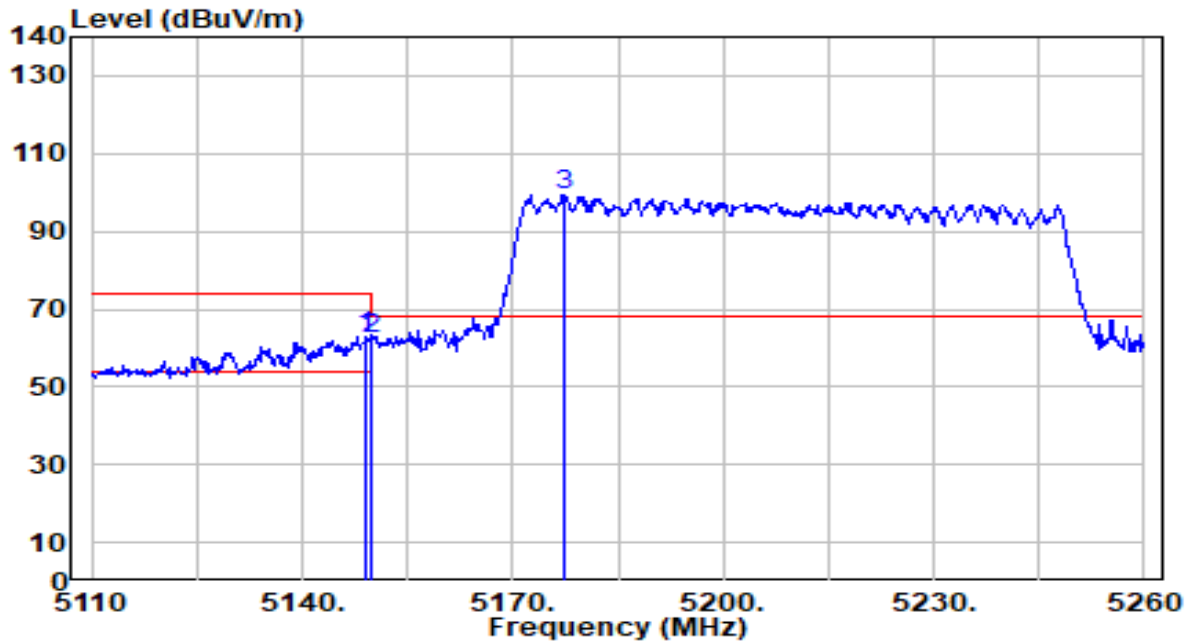


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5149.000	62.45	0.65	63.11	-10.89	74.00	231	73	Peak
2		5150.000	61.45	0.65	62.10	-11.90	74.00	231	73	Peak
3		5177.350	98.85	0.68	99.53	N/A	N/A	231	73	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

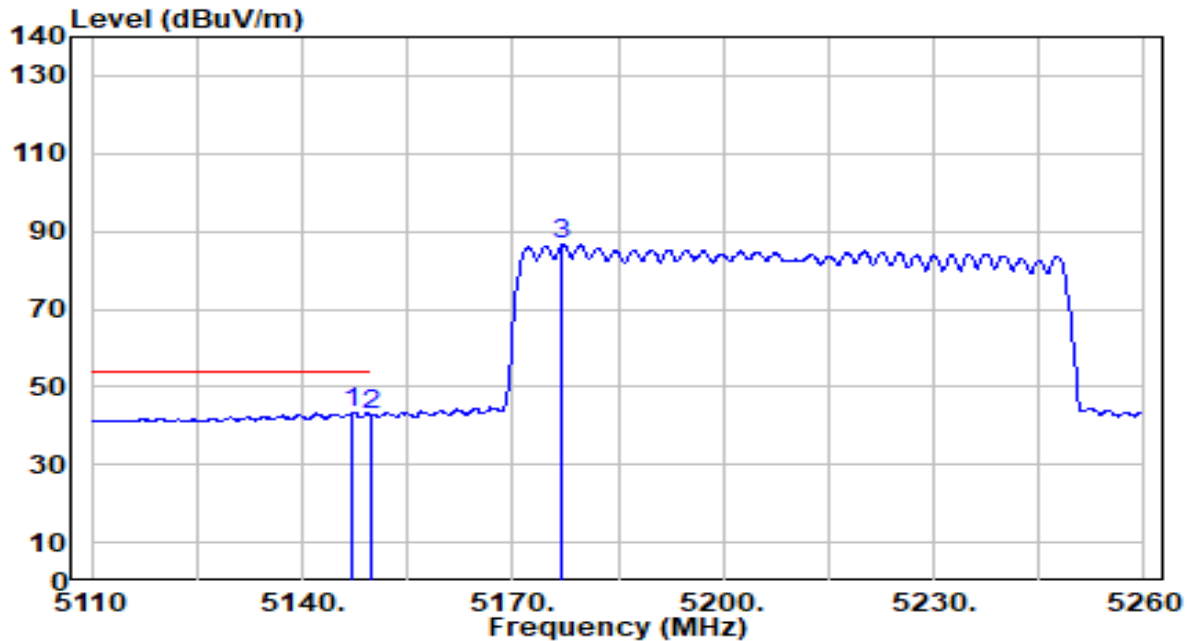


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.200	42.72	0.65	43.37	-10.63	54.00	231	73	Average
2		5150.000	42.27	0.65	42.92	-11.08	54.00	231	73	Average
3		5177.050	85.89	0.68	86.57	N/A	N/A	231	73	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

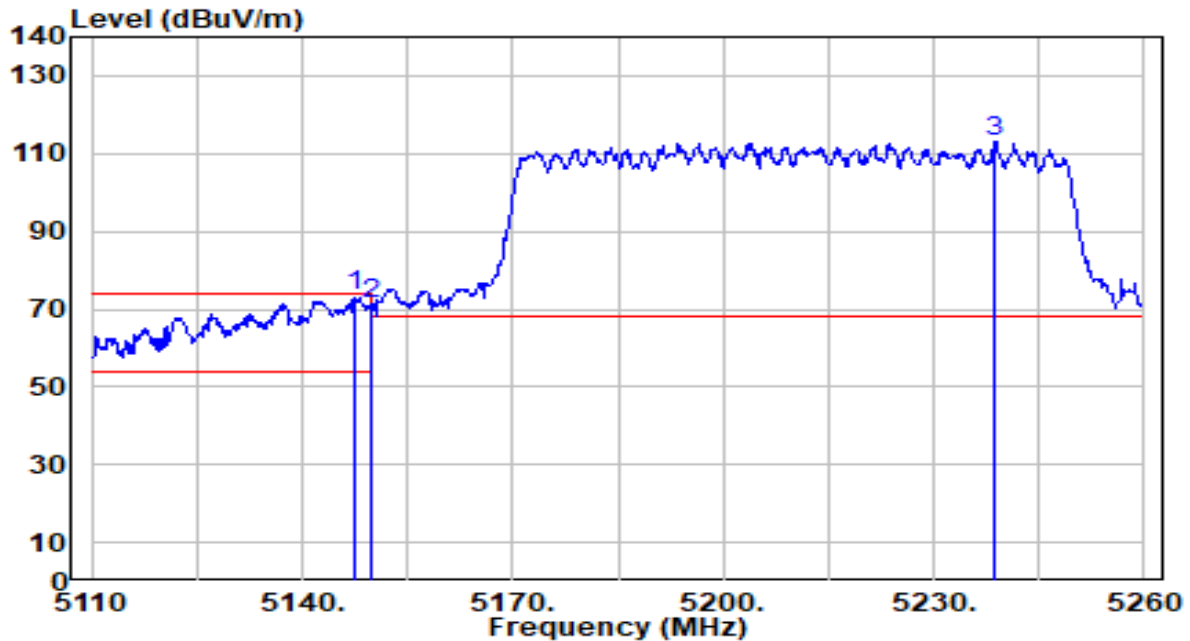


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.500	72.76	0.65	73.41	-0.59	74.00	228	242	Peak
2		5150.000	70.58	0.65	71.23	-2.77	74.00	228	242	Peak
3		5238.700	112.60	0.64	113.24	N/A	N/A	228	242	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band1_CH 42_ANT 0+1	Test Voltage	AC 120V/60Hz

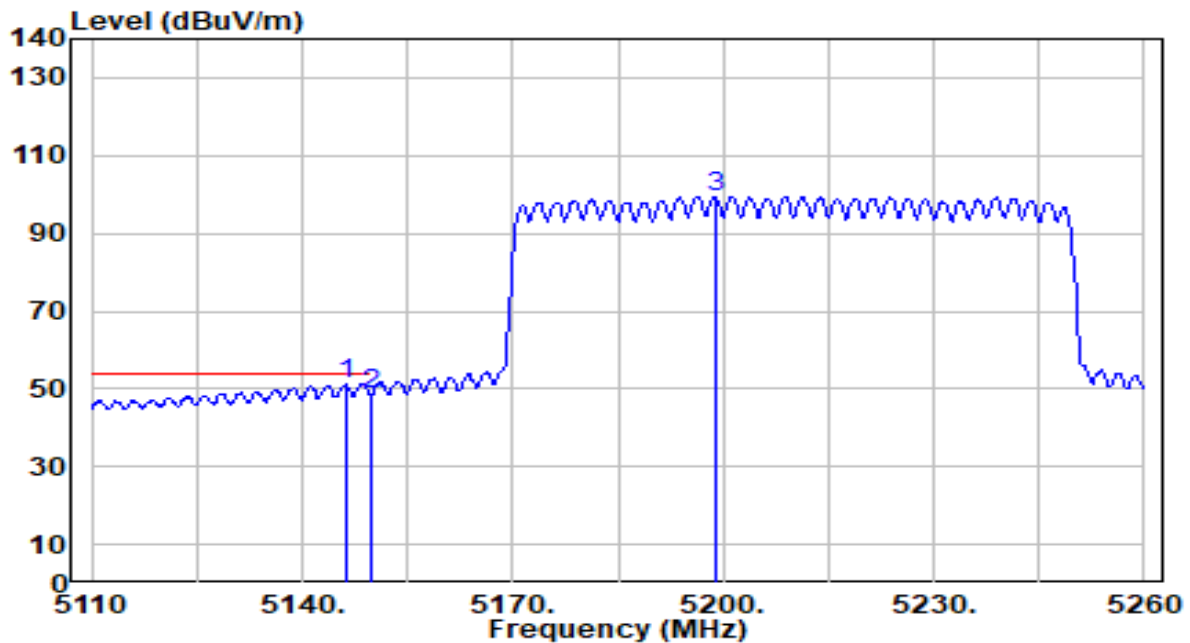


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5146.150	50.50	0.65	51.15	-2.85	54.00	228	242	Average
2		5150.000	48.04	0.65	48.70	-5.30	54.00	228	242	Average
3		5198.800	98.75	0.70	99.46	N/A	N/A	228	242	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

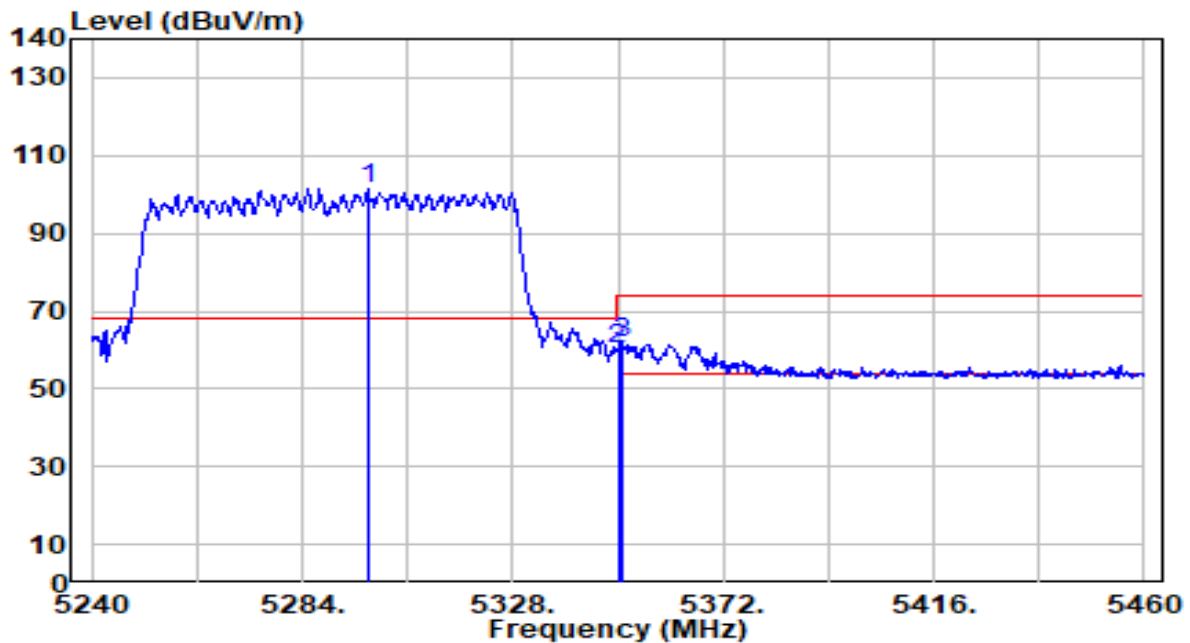


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5297.640	101.01	0.55	101.57	N/A	N/A	300	225	Peak
2	5350.000	59.96	0.47	60.43	-13.57	74.00	300	225	Peak
3	* 5350.880	61.54	0.47	62.01	-11.99	74.00	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

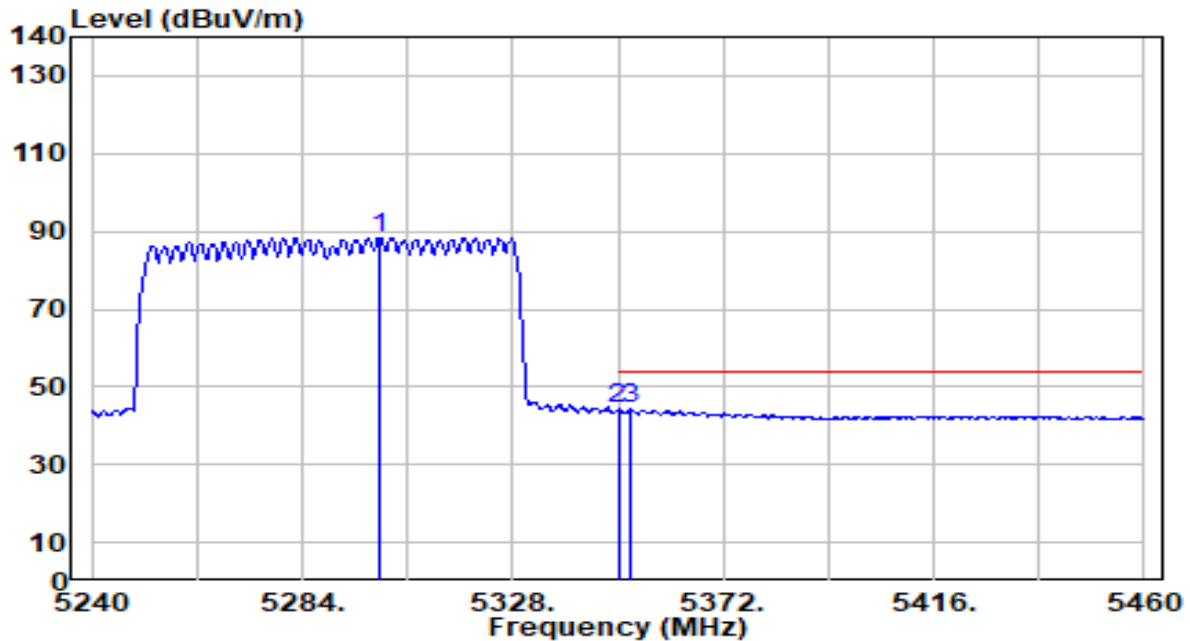


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1		5300.280	87.74	0.55	88.29	N/A	N/A	300	225	Average
2	*	5350.000	43.84	0.47	44.31	-9.69	54.00	300	225	Average
3		5352.420	43.76	0.47	44.22	-9.78	54.00	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

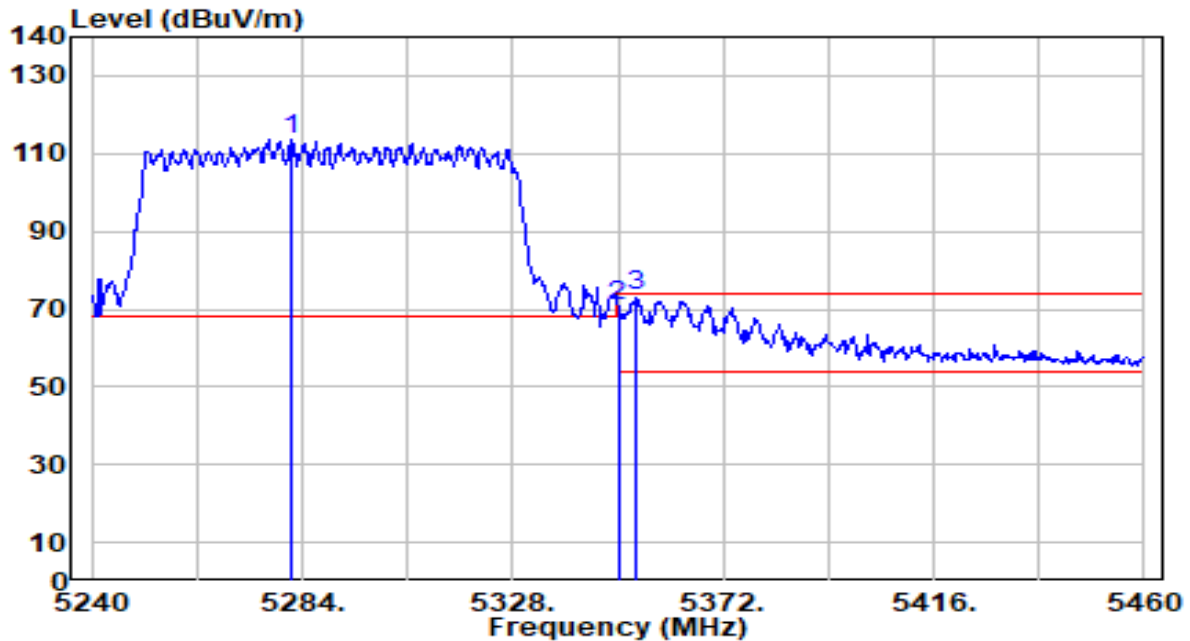


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5281.800	112.83	0.58	113.40	N/A	N/A	200	67	Peak
2	5350.000	70.10	0.47	70.57	-3.43	74.00	200	67	Peak
3	* 5353.960	72.99	0.46	73.45	-0.55	74.00	200	67	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band2_CH 58_ANT 0+1	Test Voltage	AC 120V/60Hz

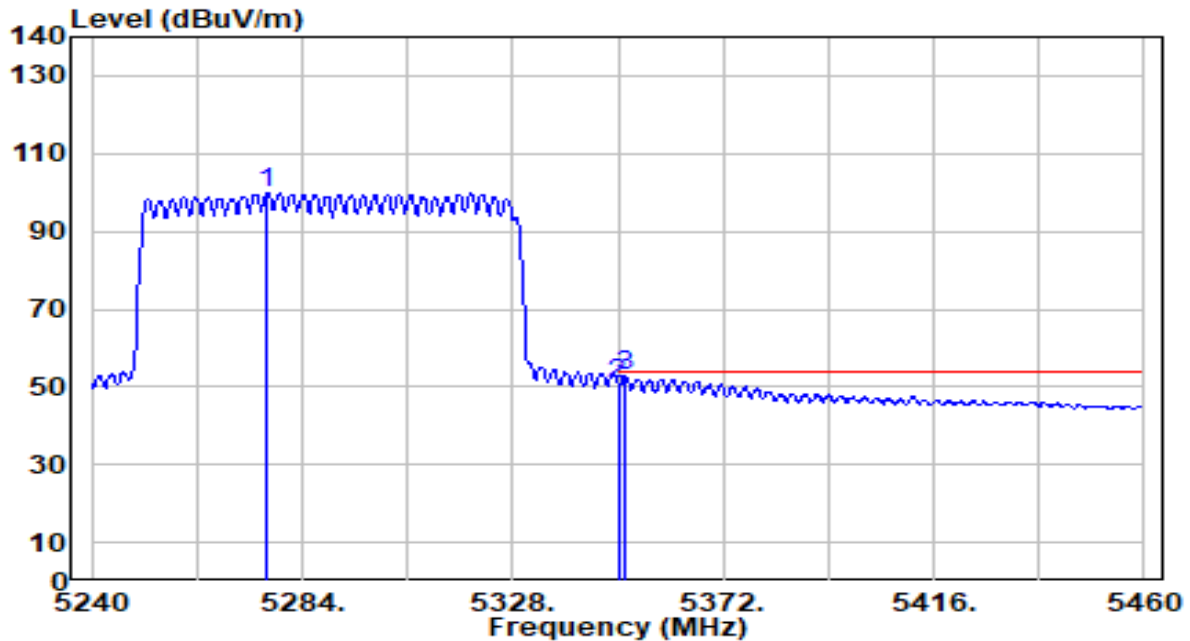


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5276.740	99.17	0.58	99.75	N/A	N/A	200	67	Average
2	5350.000	50.17	0.47	50.64	-3.36	54.00	200	67	Average
3	* 5351.320	52.31	0.47	52.78	-1.22	54.00	200	67	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

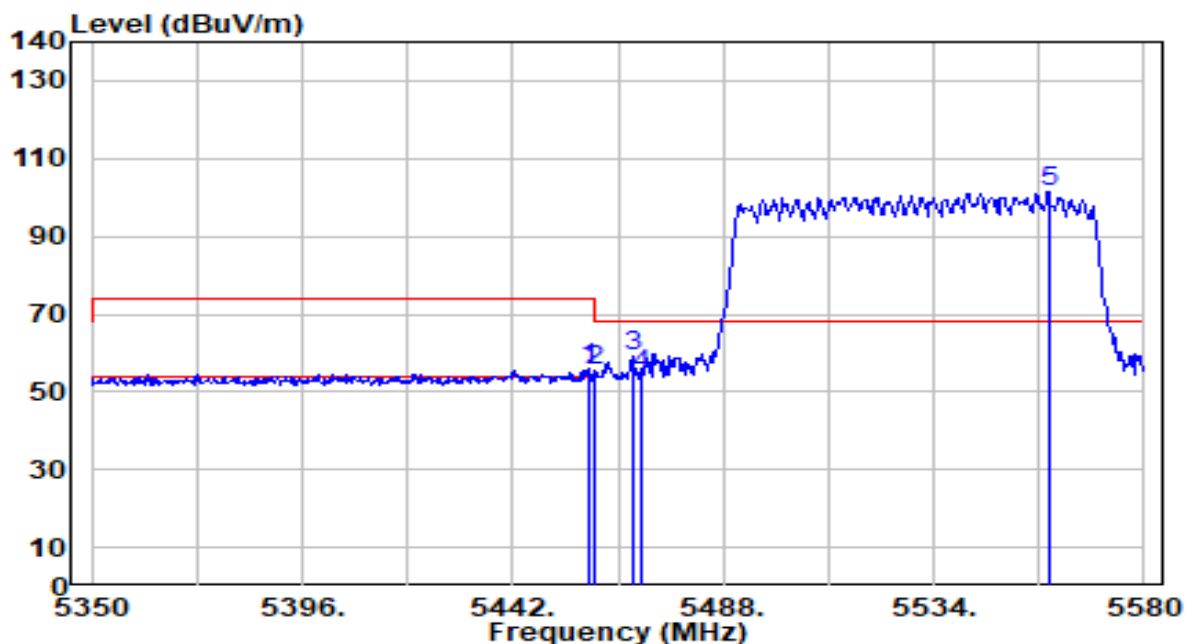


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5458.560	55.44	0.66	56.10	-17.90	74.00	100	50	Peak
2	5460.000	54.89	0.66	55.55	-18.45	74.00	100	50	Peak
3	* 5468.220	58.59	0.70	59.29	-8.91	68.20	100	50	Peak
4	5470.000	53.87	0.71	54.58	-13.62	68.20	100	50	Peak
5	5559.070	100.18	1.12	101.30	N/A	N/A	100	50	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

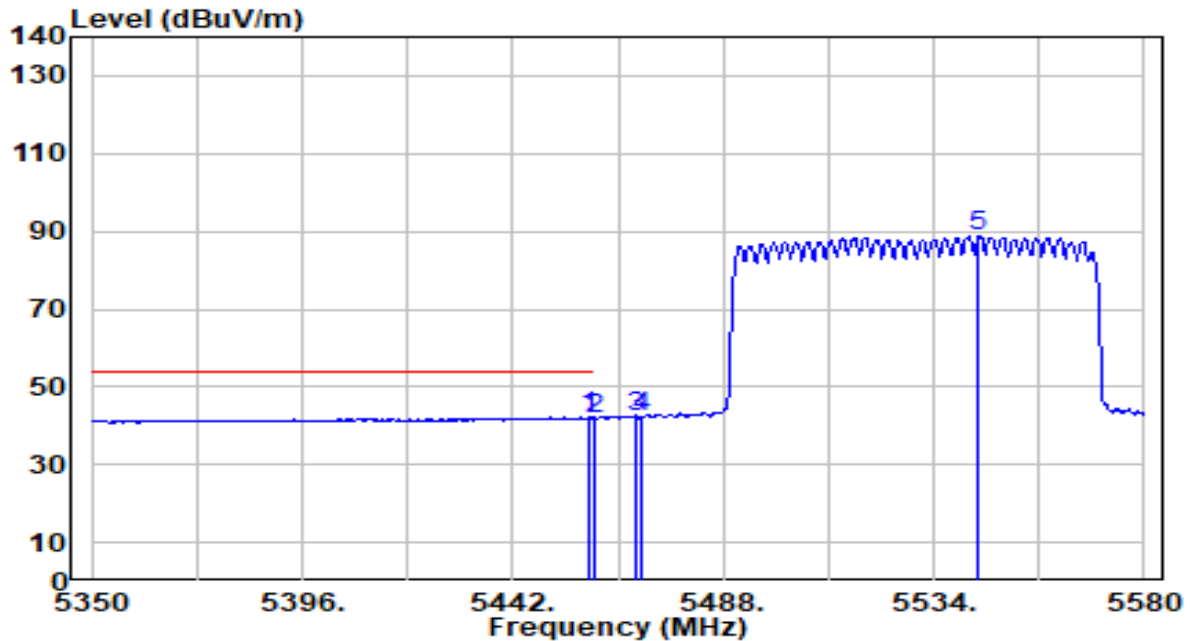


No		Frequency (MHz)	Reading (dBUV)	C.F (dB/m)	Measurement (dBUV/m)	Margin (dB)	Limit (dBUV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.790	41.48	0.66	42.14	-11.86	54.00	100	50	Average
2		5460.000	41.16	0.66	41.82	-12.18	54.00	100	50	Average
3		5468.680	41.76	0.70	42.46	N/A	N/A	100	50	Average
4		5470.000	41.43	0.71	42.14	N/A	N/A	100	50	Average
5		5543.890	87.68	1.05	88.73	N/A	N/A	100	50	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBUV/m) = Reading(dBUV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

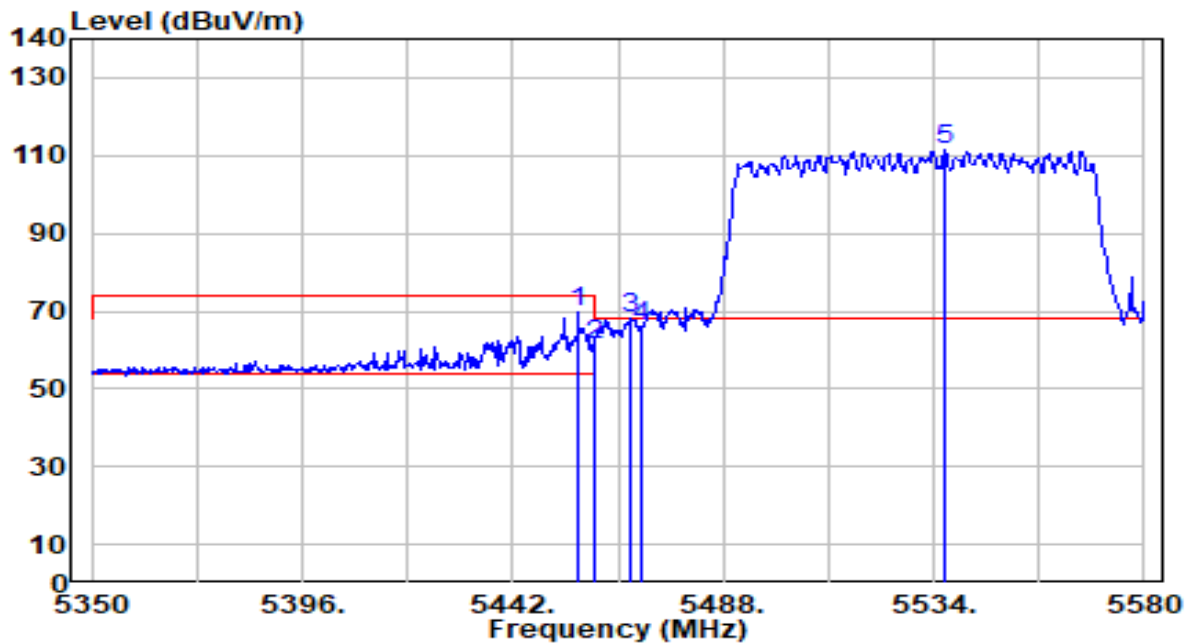


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5456.260	68.95	0.64	69.60	-4.40	74.00	218	240	Peak
2	5460.000	60.45	0.66	61.11	-12.89	74.00	218	240	Peak
3	* 5467.990	67.25	0.70	67.95	-0.25	68.20	218	240	Peak
4	5470.000	65.53	0.71	66.24	-1.96	68.20	218	240	Peak
5	5536.530	110.29	1.01	111.30	N/A	N/A	218	240	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band3_CH 106_ANT 0+1	Test Voltage	AC 120V/60Hz

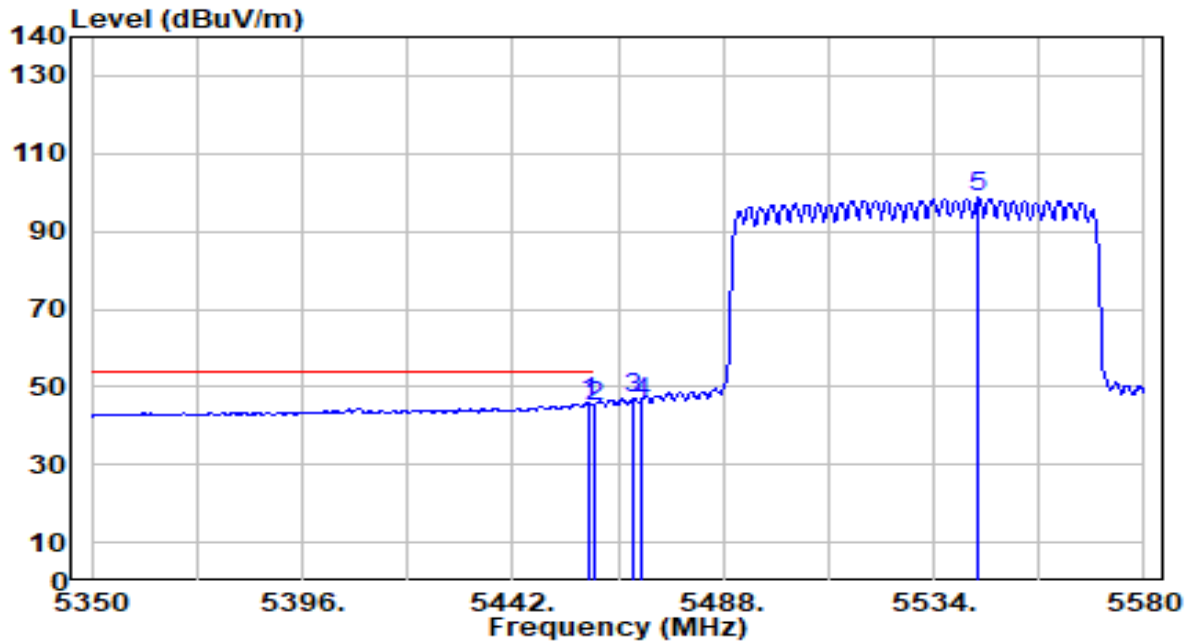


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5458.560	45.31	0.66	45.96	-8.04	54.00	218	240	Average
2		5460.000	44.47	0.66	45.13	-8.87	54.00	218	240	Average
3		5468.450	46.52	0.70	47.22	N/A	N/A	218	240	Average
4		5470.000	45.31	0.71	46.02	N/A	N/A	218	240	Average
5		5543.890	97.54	1.05	98.58	N/A	N/A	218	240	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

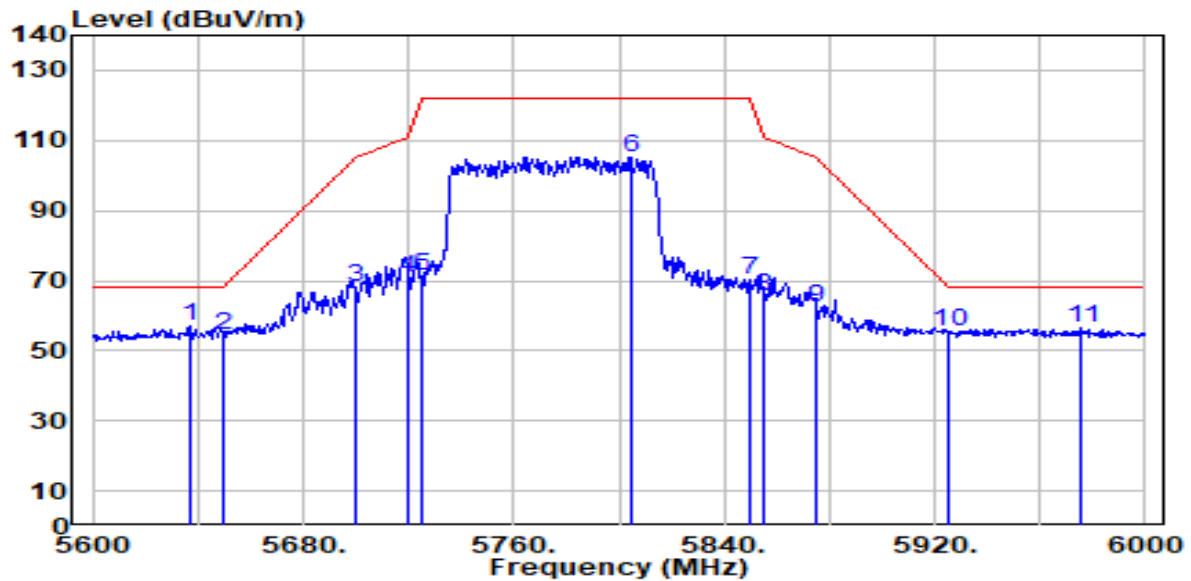


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.800	55.48	1.48	56.96	-11.24	68.20	103	241	Peak
2		5650.000	52.64	1.54	54.18	-14.02	68.20	103	241	Peak
3		5700.000	66.17	1.78	67.95	-37.25	105.20	103	241	Peak
4		5720.000	69.02	1.87	70.89	-39.91	110.80	103	241	Peak
5		5725.000	69.26	1.89	71.15	-51.05	122.20	103	241	Peak
6		5804.400	103.12	2.24	105.36	N/A	N/A	103	241	Peak
7		5850.000	67.85	2.25	70.11	-52.09	122.20	103	241	Peak
8		5855.000	63.24	2.25	65.50	-45.30	110.80	103	241	Peak
9		5875.000	59.93	2.26	62.19	-43.01	105.20	103	241	Peak
10		5925.000	53.35	2.27	55.62	-12.58	68.20	103	241	Peak
11		5976.000	54.00	2.28	56.27	-11.93	68.20	103	241	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-80MHz_TX_Band4_CH 155_ANT 0+1	Test Voltage	AC 120V/60Hz

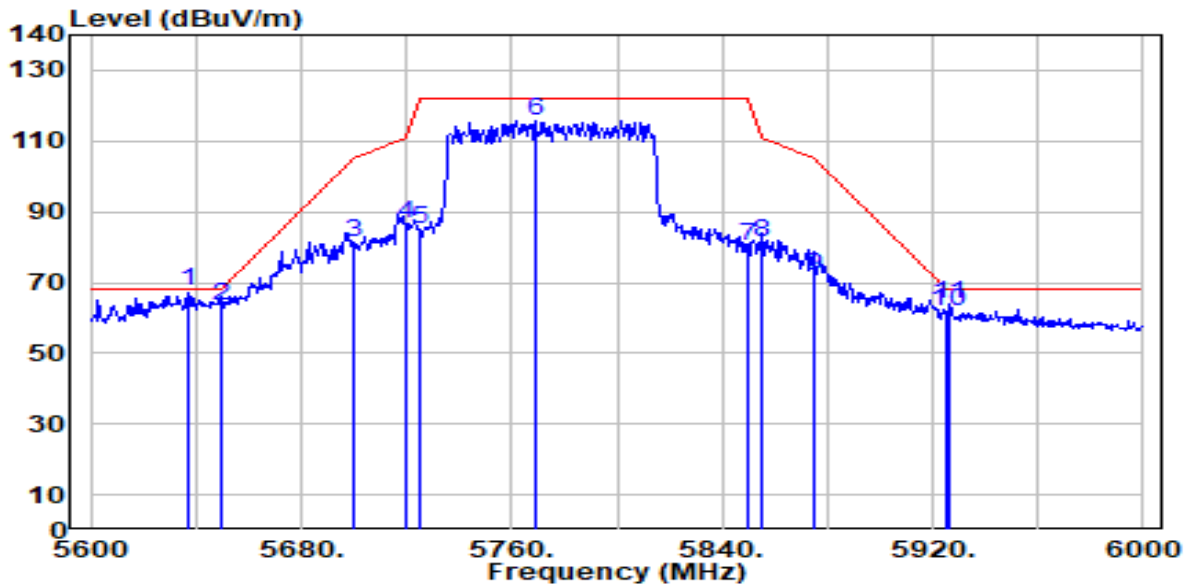


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5636.800	66.15	1.48	67.63	-0.57	68.20	200	57	Peak
2		5650.000	61.86	1.54	63.40	-4.80	68.20	200	57	Peak
3		5700.000	79.34	1.78	81.11	-24.09	105.20	200	57	Peak
4		5720.000	84.88	1.87	86.75	-24.05	110.80	200	57	Peak
5		5725.000	83.05	1.89	84.95	-37.25	122.20	200	57	Peak
6		5769.200	113.47	2.10	115.57	N/A	N/A	200	57	Peak
7		5850.000	78.16	2.25	80.41	-41.79	122.20	200	57	Peak
8		5855.000	79.36	2.25	81.61	-29.19	110.80	200	57	Peak
9		5875.000	69.54	2.26	71.79	-33.41	105.20	200	57	Peak
10		5925.000	59.75	2.27	62.01	-6.19	68.20	200	57	Peak
11		5926.400	61.54	2.27	63.80	-4.40	68.20	200	57	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

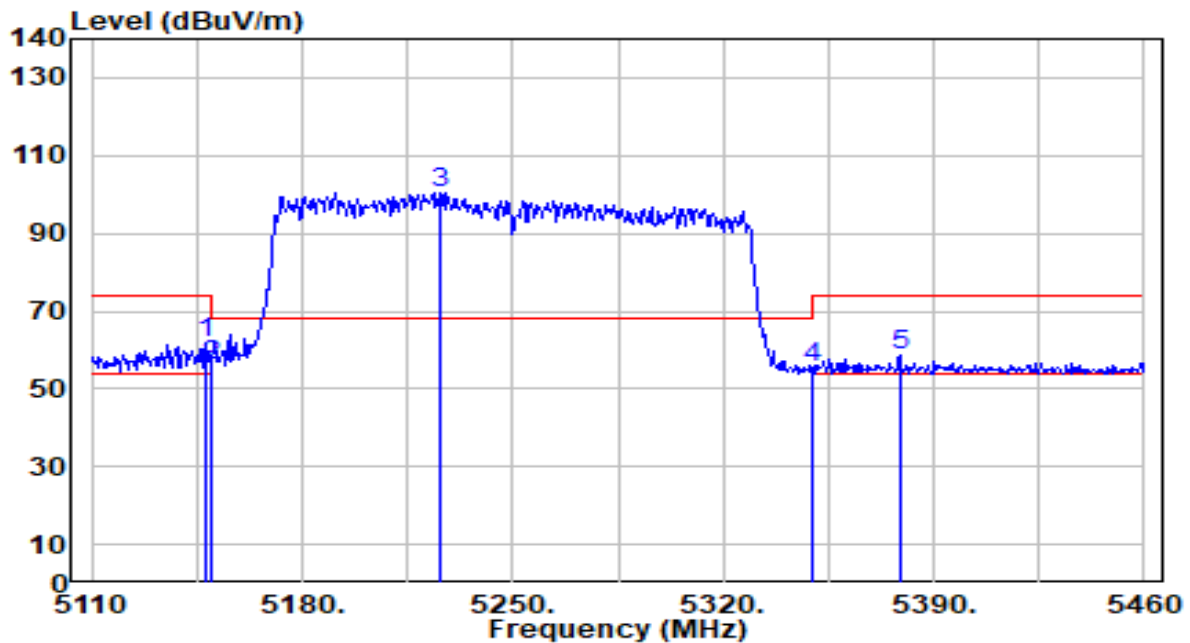


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5147.800	61.30	0.65	61.95	-12.05	74.00	231	88	Peak
2		5150.000	55.23	0.65	55.89	-18.11	74.00	231	88	Peak
3		5225.850	99.91	0.66	100.57	N/A	N/A	231	88	Peak
4		5350.000	54.75	0.47	55.22	-18.78	74.00	231	88	Peak
5		5378.800	57.98	0.43	58.40	-15.60	74.00	231	88	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

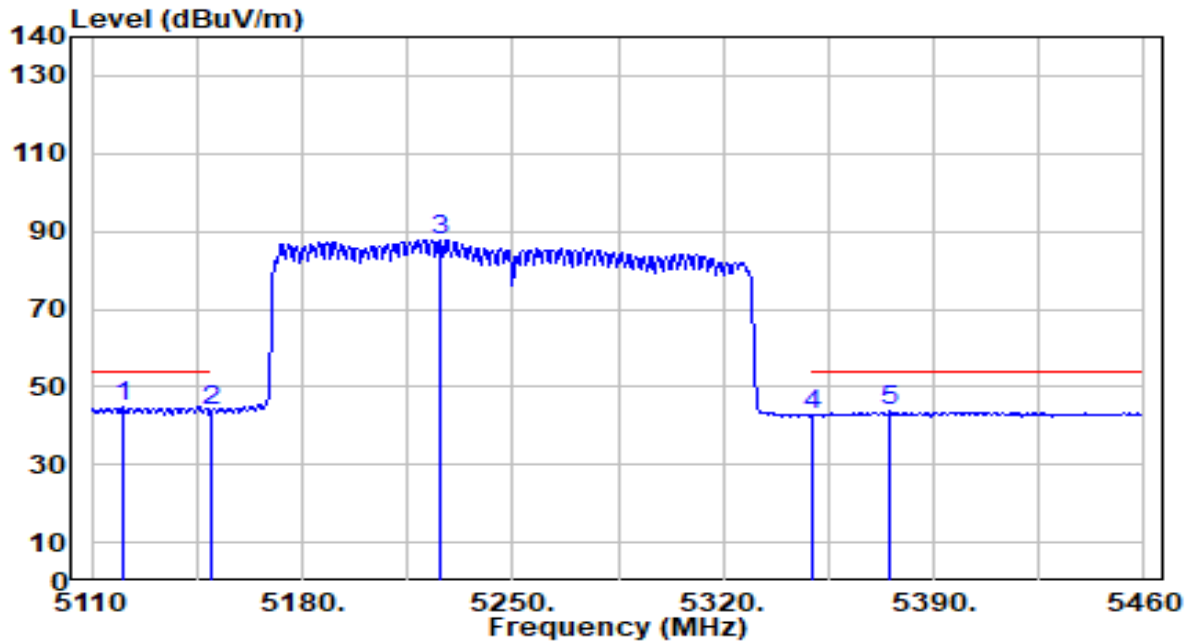


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5120.500	44.13	0.63	44.75	-9.25	54.00	231	88	Average
2		5150.000	43.40	0.65	44.05	-9.95	54.00	231	88	Average
3		5225.850	87.20	0.66	87.86	N/A	N/A	231	88	Average
4		5350.000	42.28	0.47	42.75	-11.25	54.00	231	88	Average
5		5375.300	43.18	0.43	43.61	-10.39	54.00	231	88	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

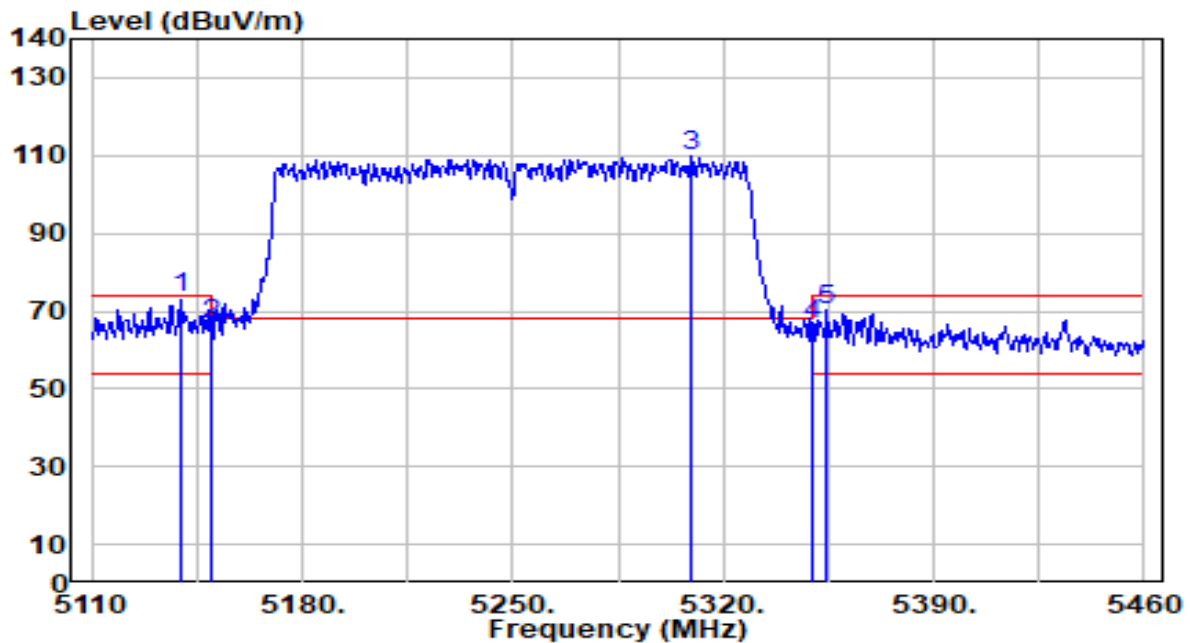


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5139.400	72.82	0.64	73.46	-0.54	74.00	200	272	Peak
2		5150.000	66.17	0.65	66.82	-7.18	74.00	200	272	Peak
3		5309.500	109.33	0.53	109.86	N/A	N/A	200	272	Peak
4		5350.000	66.21	0.47	66.68	-7.32	74.00	200	272	Peak
5		5354.650	69.77	0.46	70.24	-3.76	74.00	200	272	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band1,2_CH 50_ANT 0+1	Test Voltage	AC 120V/60Hz

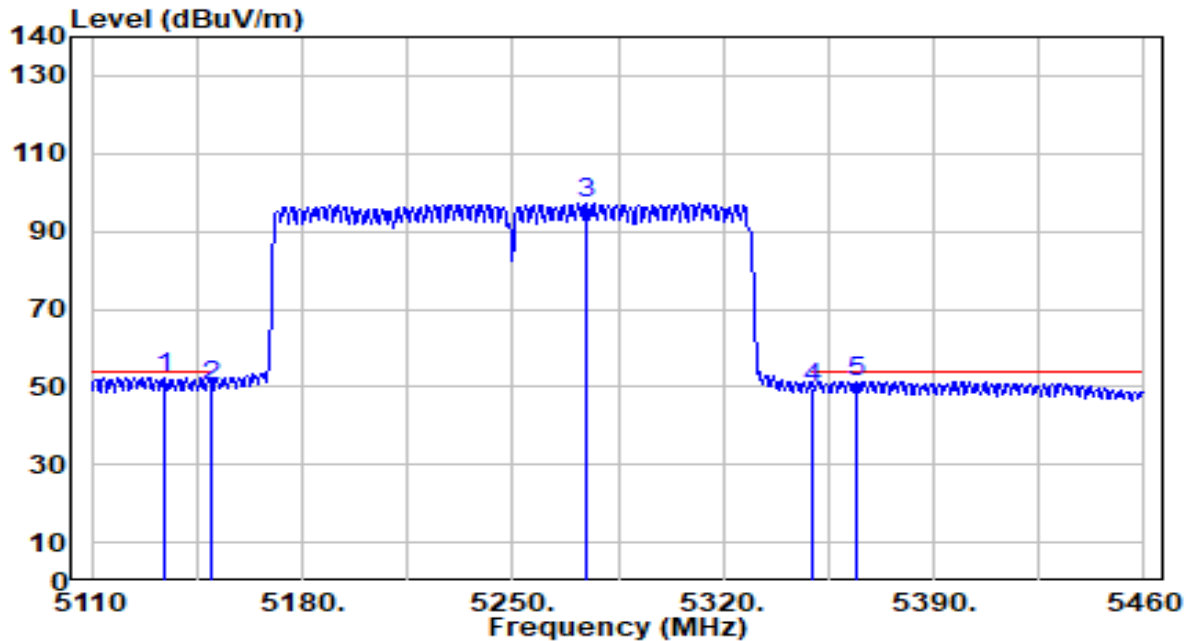


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5134.150	51.64	0.64	52.28	-1.72	54.00	200	272	Average
2		5150.000	49.80	0.65	50.45	-3.55	54.00	200	272	Average
3		5274.150	96.62	0.59	97.21	N/A	N/A	200	272	Average
4		5350.000	49.39	0.47	49.86	-4.14	54.00	200	272	Average
5		5364.450	51.03	0.45	51.48	-2.52	54.00	200	272	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

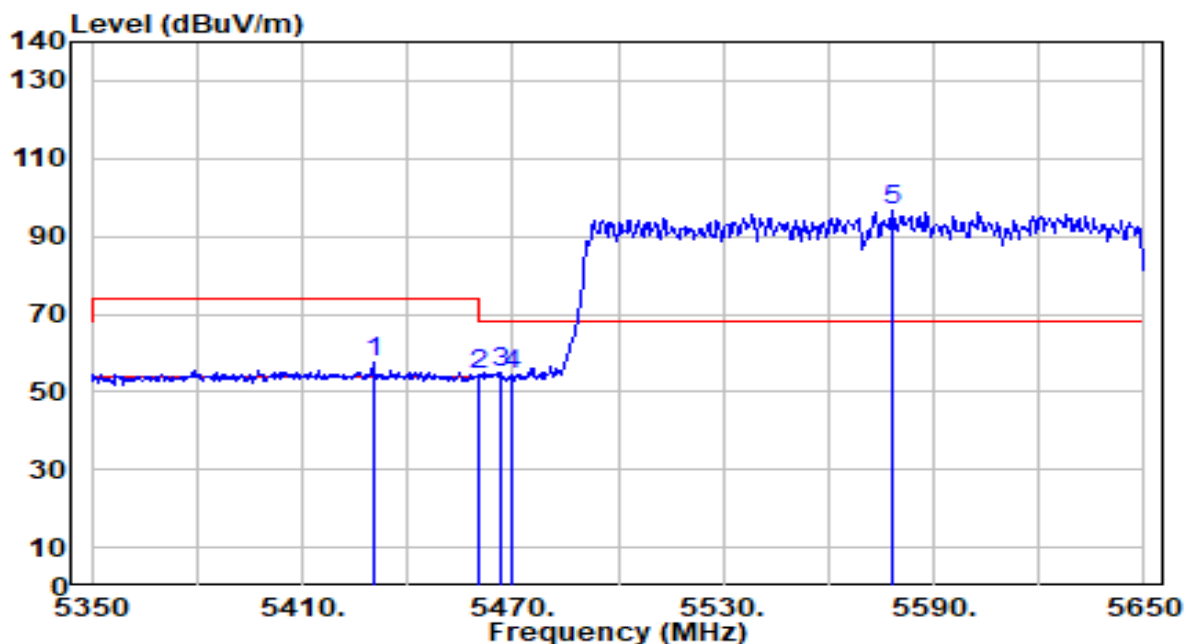


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5430.100	57.15	0.53	57.68	-16.32	74.00	300	225	Peak
2	5460.000	53.94	0.66	54.60	-19.40	74.00	300	225	Peak
3	* 5466.400	54.40	0.69	55.09	-13.11	68.20	300	225	Peak
4	5470.000	53.80	0.71	54.51	-13.69	68.20	300	225	Peak
5	5578.000	95.63	1.21	96.84	N/A	N/A	300	225	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Horizontal	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

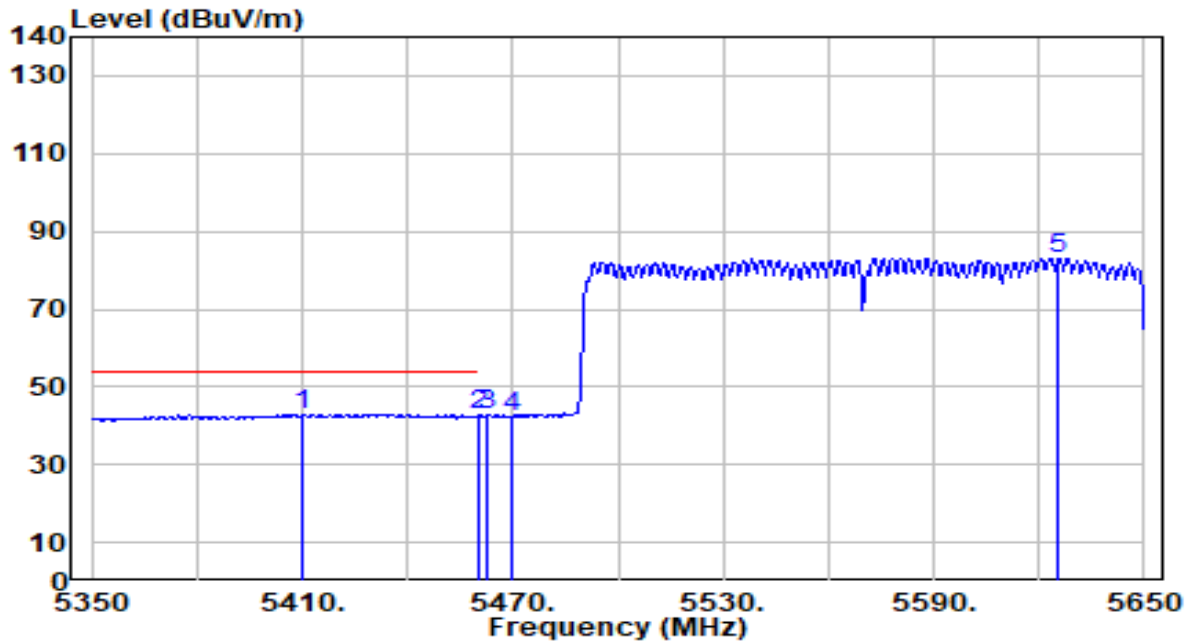


No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5410.300	42.58	0.44	43.02	-10.98	54.00	300	225	Average
2		5460.000	41.98	0.66	42.64	-11.36	54.00	300	225	Average
3		5462.800	42.32	0.67	43.00	N/A	N/A	300	225	Average
4		5470.000	41.79	0.71	42.50	N/A	N/A	300	225	Average
5		5625.700	81.56	1.43	82.99	N/A	N/A	300	225	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

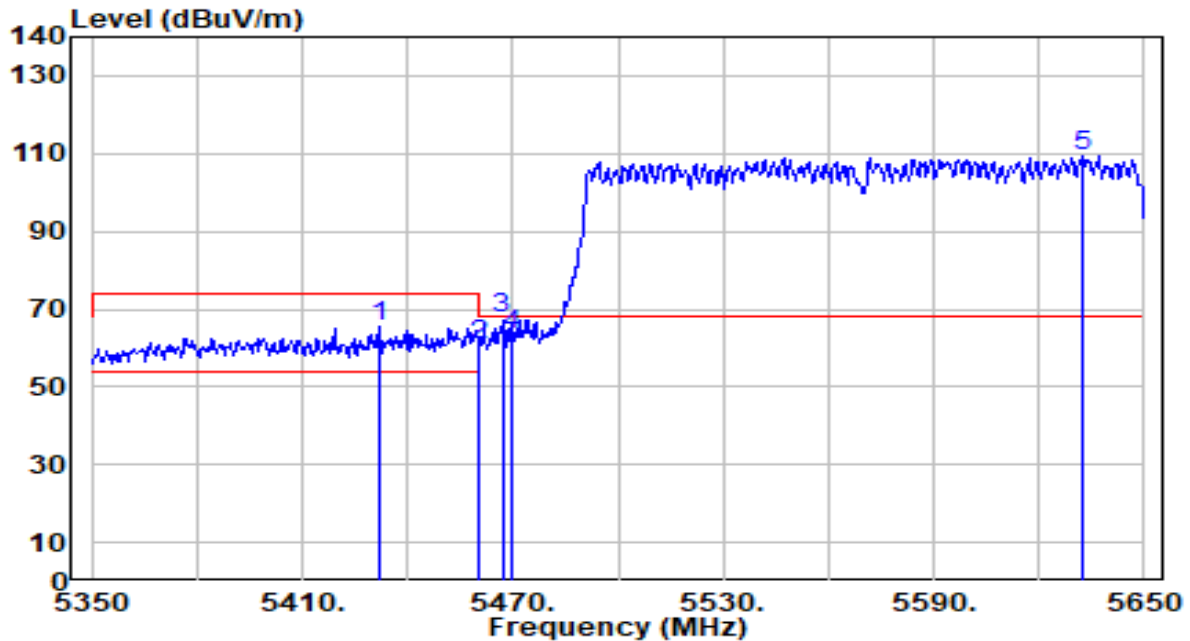


No	Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	5432.200	65.09	0.54	65.63	-8.37	74.00	200	60	Peak
2	5460.000	59.95	0.66	60.61	-13.39	74.00	200	60	Peak
3	* 5467.000	66.97	0.69	67.66	-0.54	68.20	200	60	Peak
4	5470.000	62.83	0.71	63.54	-4.66	68.20	200	60	Peak
5	5632.300	107.93	1.46	109.39	N/A	N/A	200	60	Peak

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-15
Factor	DRH18-E	Temp. / Humidity	20°C /65%
Polarity	Vertical	Site / Test Engineer	AC2 / Yang
Test Mode	802.11be-160MHz_TX_Band3_CH 114_ANT 0+1	Test Voltage	AC 120V/60Hz

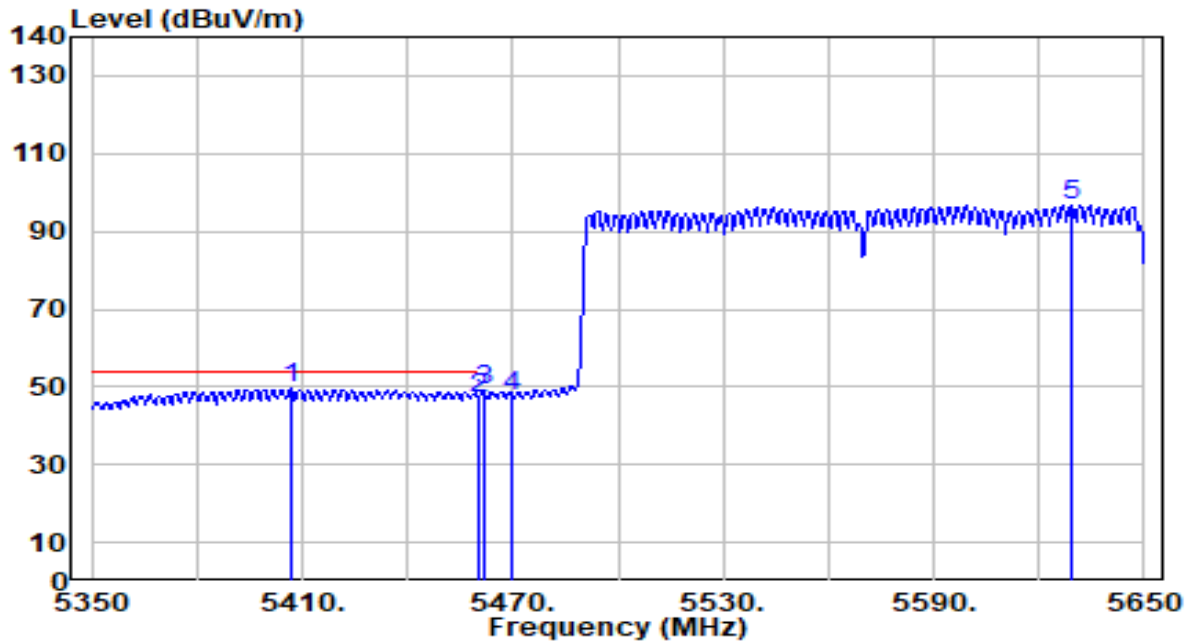

No		Frequency (MHz)	Reading (dBuV)	C.F (dB/m)	Measurement (dBuV/m)	Margin (dB)	Limit (dBuV/m)	Height (cm)	Angle (deg)	Remark (QP/PK/AV)
1	*	5406.700	49.02	0.42	49.44	-4.56	54.00	200	60	Average
2		5460.000	46.50	0.66	47.16	-6.84	54.00	200	60	Average
3		5461.600	48.25	0.67	48.92	N/A	N/A	200	60	Average
4		5470.000	46.82	0.71	47.53	N/A	N/A	200	60	Average
5		5629.300	95.37	1.45	96.82	N/A	N/A	200	60	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = Antenna Factor (dB/m) + Cable Loss (dB) – Preamplifier(dB) + 10dB Attenuation.
3. Measurement (dBuV/m) = Reading(dBuV) + C.F (Correction Factor).
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

7.10.AC Conducted Emissions Measurement

7.10.1.Test Limit

FCC Part 15.207 Limits		
Frequency (MHz)	QP (dB μ V)	AV (dB μ V)
0.15 - 0.50	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30	60	50

Note 1: The lower limit shall apply at the transition frequencies.

Note 2: The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.


7.10.2.Test Procedure

The EUT was setup according to ANSI C63.4, 2009 and tested according to KDB 789033 for compliance to FCC 47CFR 15.247 requirements. The EUT was placed on a platform of nominal size, 1 m by 1.5 m, raised 80 cm above the conducting ground plane. The vertical conducting plane was located 40 cm to the rear of the EUT. All other surfaces of EUT were at least 80 cm from any other grounded conducting surface. The EUT and simulators are connected to the main power through a line impedance stabilization network (LISN). The LISN provides a 50 ohm /50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN. (Please refer to the block diagram of the test setup and photographs) Each current-carrying conductor of the EUT power cord, except the ground (safety) conductor, was individually connected through a LISN to the input power source.

The excess length of the power cord between the EUT and the LISN receptacle were folded back and forth at the center of the lead to form a bundle not exceeding 40 cm in length.


Conducted emissions were investigated over the frequency range from 0.15MHz to 30MHz using a receiver bandwidth of 9kHz.

7.10.3. Test Setup

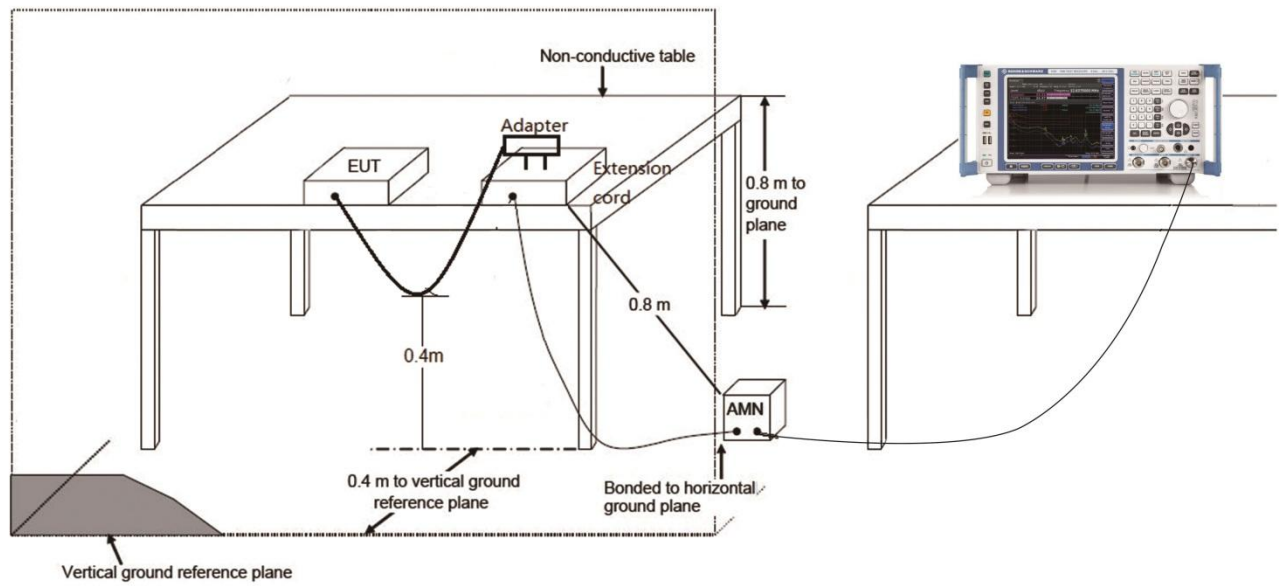

7.10.4.Test Result

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	CE_ENV216-L1 (Filter ON)	Temp. / Humidity	21.6°C /47%
Polarity	Line1	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

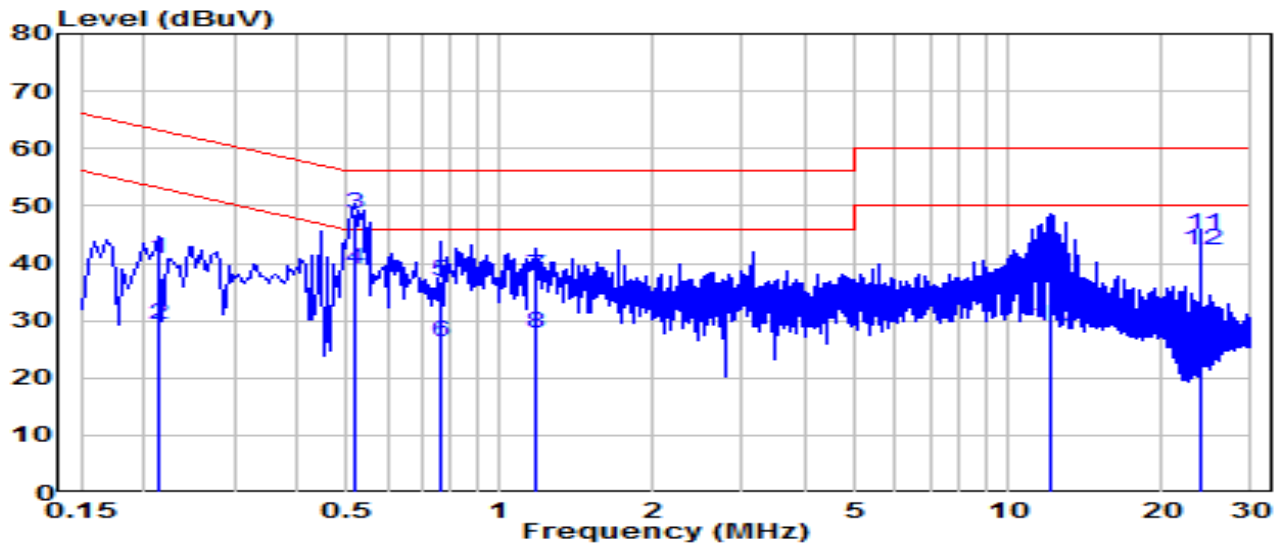


No	Frequency (MHz)	Reading (dBUV)	C.F (dB)	Measurement (dBUV)	Margin (dB)	Limit (dBUV)	Remark (QP/PK/AV)
1	0.213	31.02	9.63	40.65	-22.44	63.09	QP
2	0.213	19.51	9.63	29.14	-23.95	53.09	Average
3	* 0.519	38.96	9.65	48.61	-7.39	56.00	QP
4	* 0.519	29.30	9.65	38.95	-7.05	46.00	Average
5	0.766	27.23	9.67	36.89	-19.11	56.00	QP
6	0.766	16.62	9.67	26.29	-19.71	46.00	Average
7	1.180	28.07	9.68	37.75	-18.25	56.00	QP
8	1.180	17.96	9.68	27.64	-18.36	46.00	Average
9	12.128	30.46	9.88	40.34	-19.66	60.00	QP
10	12.128	19.06	9.88	28.94	-21.06	50.00	Average
11	23.998	35.11	9.92	45.03	-14.97	60.00	QP
12	23.998	32.32	9.92	42.24	-7.76	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBUV) = Reading(dBUV) + C.F (Correction Factor).

EUT	BE3600 Wi-Fi 7 Portable Router	Date of Test	2025-03-18
Factor	CE_ENV216-N (Filter ON)	Temp. / Humidity	21.6°C /47%
Polarity	Neutral	Site / Test Engineer	SR2 / Ryan
Test Mode	802.11ac-20MHz_TX_Band1_CH 40_ANT 0+1	Test Voltage	AC 120V/60Hz

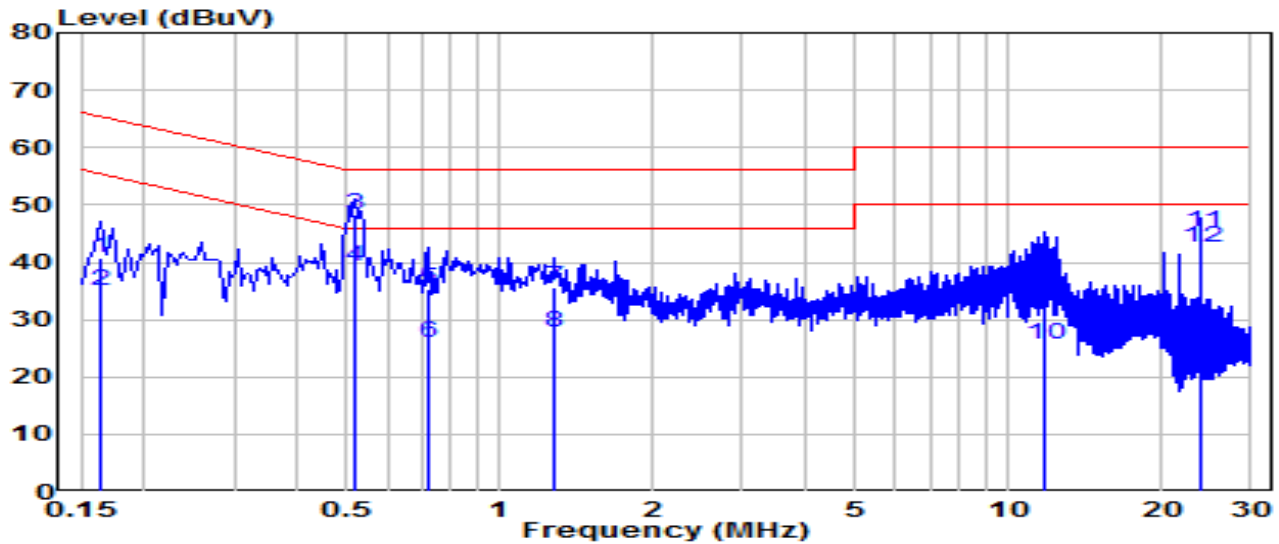

No	Frequency (MHz)	Reading (dBuV)	C.F (dB)	Measurement (dBuV)	Margin (dB)	Limit (dBuV)	Remark (QP/PK/AV)
1	0.163	31.12	9.63	40.75	-24.54	65.28	QP
2	0.163	25.42	9.63	35.05	-20.23	55.28	Average
3	* 0.519	38.52	9.65	48.18	-7.82	56.00	QP
4	* 0.519	29.61	9.65	39.26	-6.74	46.00	Average
5	0.726	25.69	9.66	35.36	-20.64	56.00	QP
6	0.726	16.19	9.66	25.86	-20.14	46.00	Average
7	1.275	26.05	9.69	35.74	-20.26	56.00	QP
8	1.275	17.95	9.69	27.63	-18.37	46.00	Average
9	11.831	27.50	9.91	37.41	-22.59	60.00	QP
10	11.831	15.67	9.91	25.58	-24.42	50.00	Average
11	23.998	35.34	10.01	45.35	-14.65	60.00	QP
12	23.998	32.58	10.01	42.59	-7.41	50.00	Average

Note:

1. " *", means this data is the worst emission level.
2. C.F (Correction Factor) = LISN Factor (dB)+ Cable Loss (dB).
3. Measurement (dBuV) = Reading(dBuV) + C.F (Correction Factor).

8. CONCLUSION

The data collected relate only the item(s) tested and show that the device is in compliance with Part 15E of the FCC Rules.

Appendix A : Test Setup Photograph

Refer to “2502TW0125-UT” file.

Appendix B : EUT Photograph

Refer to “2502TW0125-UE” file.

Appendix C : Internal Photograph

Refer to “2502TW0125-UI” file.

_____ The End _____