

FCC Radio Test Report

FCC ID: 2BH7FX60V4

Report No. : BTL-FCCP-2-2509C326
Equipment : AX5400 Whole Home Mesh Wi-Fi 6 System
Model Name : Deco X60
Brand Name : tp-link
Applicant : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618
Manufacturer : TP-Link Systems Inc.
Address : 10 Mauchly, Irvine, CA 92618

Radio Function : RLAN 5 GHz (U-NII 1, U-NII 2A, U-NII 2C, U-NII 3)

FCC Rule Part(s) : FCC CFR Title 47, Part 15, Subpart E (15.407)
Measurement Procedure(s) : ANSI C63.10-2020

Date of Receipt : 2025/9/22
Date of Test : 2025/10/13 ~ 2025/11/10
Issued Date : 2025/11/28

The above equipment has been tested and found in compliance with the requirement of the above standards by BTL Inc.

Prepared by : Poken Huang
Poken Huang, Engineer

Approved by : Eric Lee
Eric Lee, Supervisor

**BTL Inc.**

No.18, Ln. 171, Sec. 2, Jiuzong Rd., Neihu Dist., Taipei City 114, Taiwan

Tel: +886-2-2657-3299 Fax: +886-2-2657-3331 Web: www.newbtl.com Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** assumes no responsibility for the data provided by the Customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by **BTL**.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

CONTENTS

REVISION HISTORY	5
1 SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
1.4 DUTY CYCLE	8
2 GENERAL INFORMATION	10
2.1 DESCRIPTION OF EUT	10
2.2 TEST MODES	14
2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.4 SUPPORT UNITS	17
3 AC POWER LINE CONDUCTED EMISSIONS TEST	18
3.1 LIMIT	18
3.2 TEST PROCEDURE	18
3.3 DEVIATION FROM TEST STANDARD	18
3.4 TEST SETUP	19
3.5 TEST RESULT	19
4 RADIATED EMISSIONS TEST	20
4.1 LIMIT	20
4.2 TEST PROCEDURE	21
4.3 DEVIATION FROM TEST STANDARD	21
4.4 TEST SETUP	22
4.5 EUT OPERATING CONDITIONS	23
4.6 TEST RESULT – 9 KHZ TO 30 MHZ	23
4.7 TEST RESULT – 30 MHZ TO 1 GHZ	23
4.8 TEST RESULT – ABOVE 1 GHZ	23
5 BANDWIDTH TEST	24
5.1 LIMIT	24
5.2 TEST PROCEDURE	24
5.3 DEVIATION FROM TEST STANDARD	24
5.4 TEST SETUP	24
5.5 EUT OPERATING CONDITIONS	24
5.6 TEST RESULT	24
6 OUTPUT POWER TEST	25
6.1 LIMIT	25
6.2 DEVIATION FROM TEST STANDARD	25
6.3 TEST SETUP	25
6.4 EUT OPERATING CONDITIONS	25
6.5 TEST RESULT	25
7 POWER SPECTRAL DENSITY	26
7.1 LIMIT	26
7.2 TEST PROCEDURE	26
7.3 DEVIATION FROM TEST STANDARD	26
7.4 TEST SETUP	26
7.5 EUT OPERATING CONDITIONS	26
7.6 TEST RESULT	26
8 LIST OF MEASURING EQUIPMENTS	27

9	EUT TEST PHOTO	29
10	EUT PHOTOS	29
APPENDIX A	AC POWER LINE CONDUCTED EMISSIONS	30
APPENDIX B	RADIATED EMISSIONS - 30 MHZ TO 1 GHZ	33
APPENDIX C	RADIATED EMISSIONS - ABOVE 1 GHZ	36
APPENDIX D	BANDWIDTH	174
APPENDIX E	CONDUCTED OUTPUT POWER	207
APPENDIX F	POWER SPECTRAL DENSITY	245

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-2-2509C326	R00	Original Report.	2025/11/28	Valid

1 SUMMARY OF TEST RESULTS

Test procedures according to the technical standards.

Standard(s) Section	Description	Test Result	Judgement	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	Pass	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	Pass	-----
15.407(a) 15.407(e)	Bandwidth	APPENDIX D	Pass	-----
15.407(a)	Output Power	APPENDIX E	Pass	-----
15.407(a)	Power Spectral Density	APPENDIX F	Pass	-----
15.407(g)	Frequency Stability	-----	NOTE (4)	-----
15.407(c)	Antenna Requirement	-----	Pass	NOTE (2)
15.203	Automatically Discontinue Transmission	-----	Pass	NOTE (3)

NOTE:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. The EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) The item is declared by the manufacturer.
- (5) The report format version is TP.1.1.1.

1.1 TEST FACILITY

The test locations stated below are under the TAF Accreditation Number 0659.

The test location(s) used to collect the test data in this report are:

No.64, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☒ C01 ☒ CB20

No. 68-2, Ln. 169, Sec. 2, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan
(FCC DN: TW0659)

☒ SR06

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k = 2$, providing a level of confidence of approximately **95 %**.

A. AC power line conducted emissions test:

Test Site	Method	Measurement Frequency Range	U (dB)
C01	CISPR	150 kHz ~ 30MHz	3.44

B. Radiated emissions test:

Test Site	Measurement Frequency Range	U,(dB)
CB20	0.03~0.2	4.01
	0.02~1	4.64
	1 ~ 6	5.91
	6 ~ 18	6.24
	18 ~ 26	3.93
	26 ~ 40	4.06

C. Conducted test:

Test Item	U,(dB)
Occupied Bandwidth	0.86 %
Output power	0.40 dB
Power Spectral Density	0.86 dB
Conducted Spurious emissions	1.83 dB
Conducted Band edges	1.83 dB
Frequency Stability	166.77 Hz

NOTE:

Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS





Test Item	Environment Condition	Test Voltage	Tested by
AC Power Line Conducted Emissions	25 °C, 45 %	AC 120V	Benny Cao
Radiated emissions below 1 GHz	Refer to data	AC 120V	Benny Cao
Radiated emissions above 1 GHz	Refer to data	AC 120V	Benny Cao
Bandwidth	24 °C, 48 %	AC 120V	Cheng Tsai
Output Power	25 °C, 47 %	AC 120V	Cheng Tsai
Power Spectral Density	24 °C, 48 %	AC 120V	Cheng Tsai


1.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.

If duty cycle is $< 98\%$, duty factor shall be considered.

Remark	Delta 1			Delta 2	On Time/Period	10 log(1/Duty Cycle)
Mode	ON (ms)	Numbers (ON)	On Time (B) (ms)	Period (ON+OFF) (ms)	Duty Cycle (%)	Duty Factor (dB)
IEEE 802.11a	1.984	1	1.984	2.048	96.88%	0.14
IEEE 802.11ac (VHT20)	5.460	1	5.460	6.360	85.85%	0.66
IEEE 802.11ac (VHT40)	1.955	1	1.955	1.955	100.00%	0.00
IEEE 802.11ac (VHT80)	5.435	1	5.435	5.865	92.67%	0.33
IEEE 802.11ac (VHT160)	0.735	1	0.735	0.735	100.00%	0.00
IEEE 802.11ax (HE20)	0.736	1	0.736	0.736	100.00%	0.00
IEEE 802.11ax (HE40)	0.800	1	0.800	0.800	100.00%	0.00
IEEE 802.11ax (HE80)	0.180	1	0.180	0.180	100.00%	0.00
IEEE 802.11ax (HE160)	1.480	1	1.480	1.480	100.00%	0.00

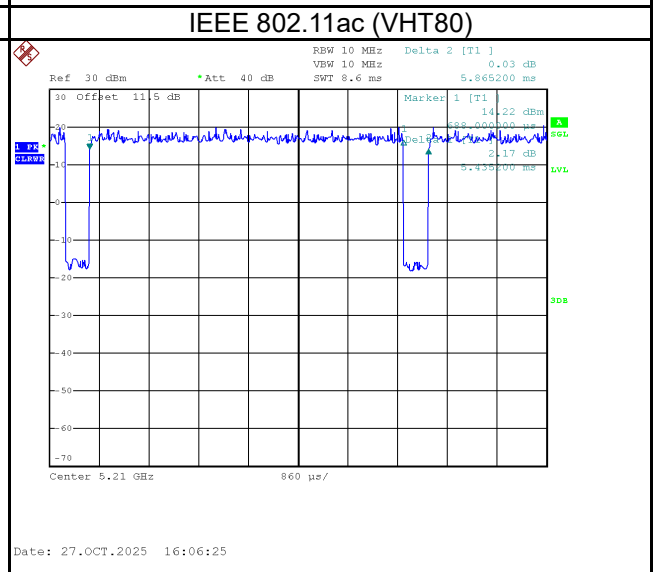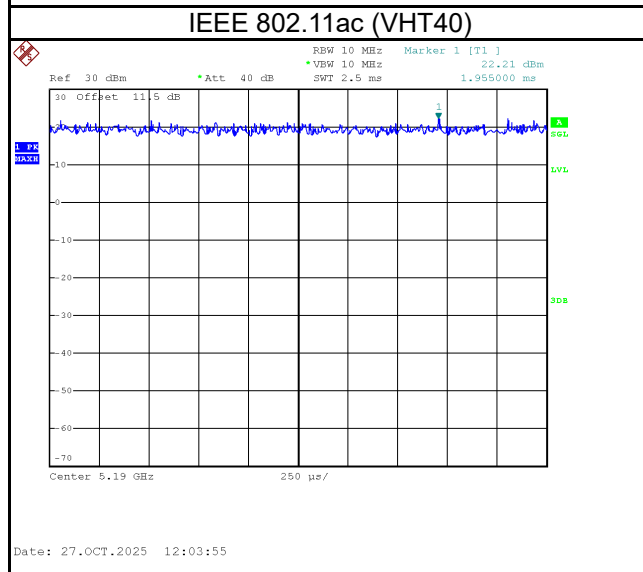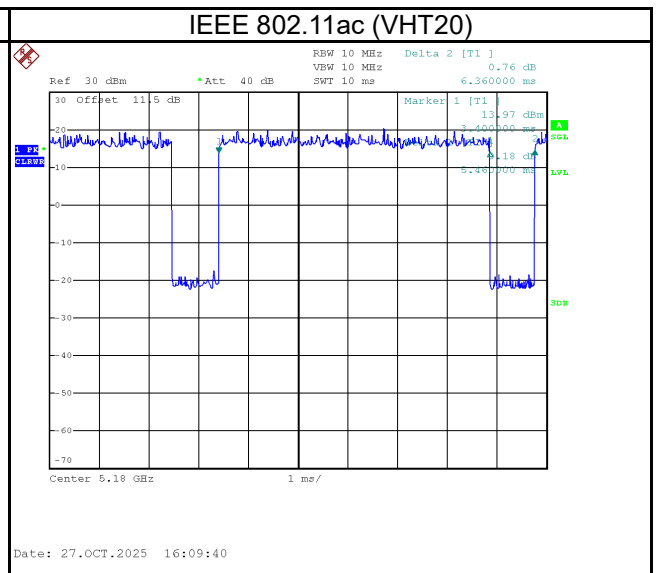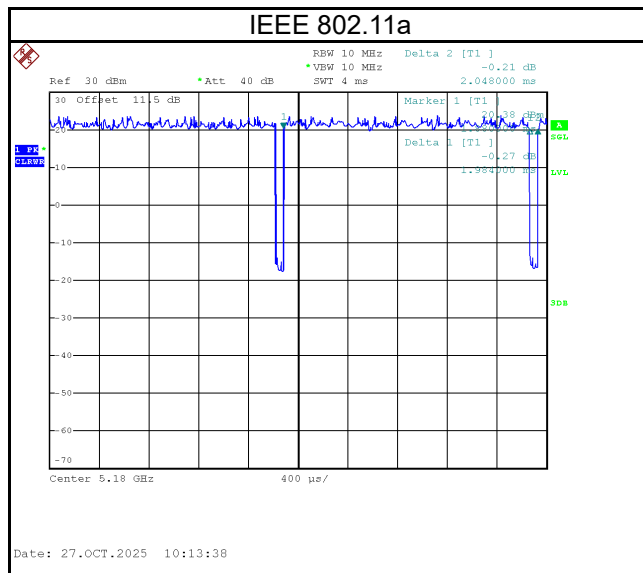

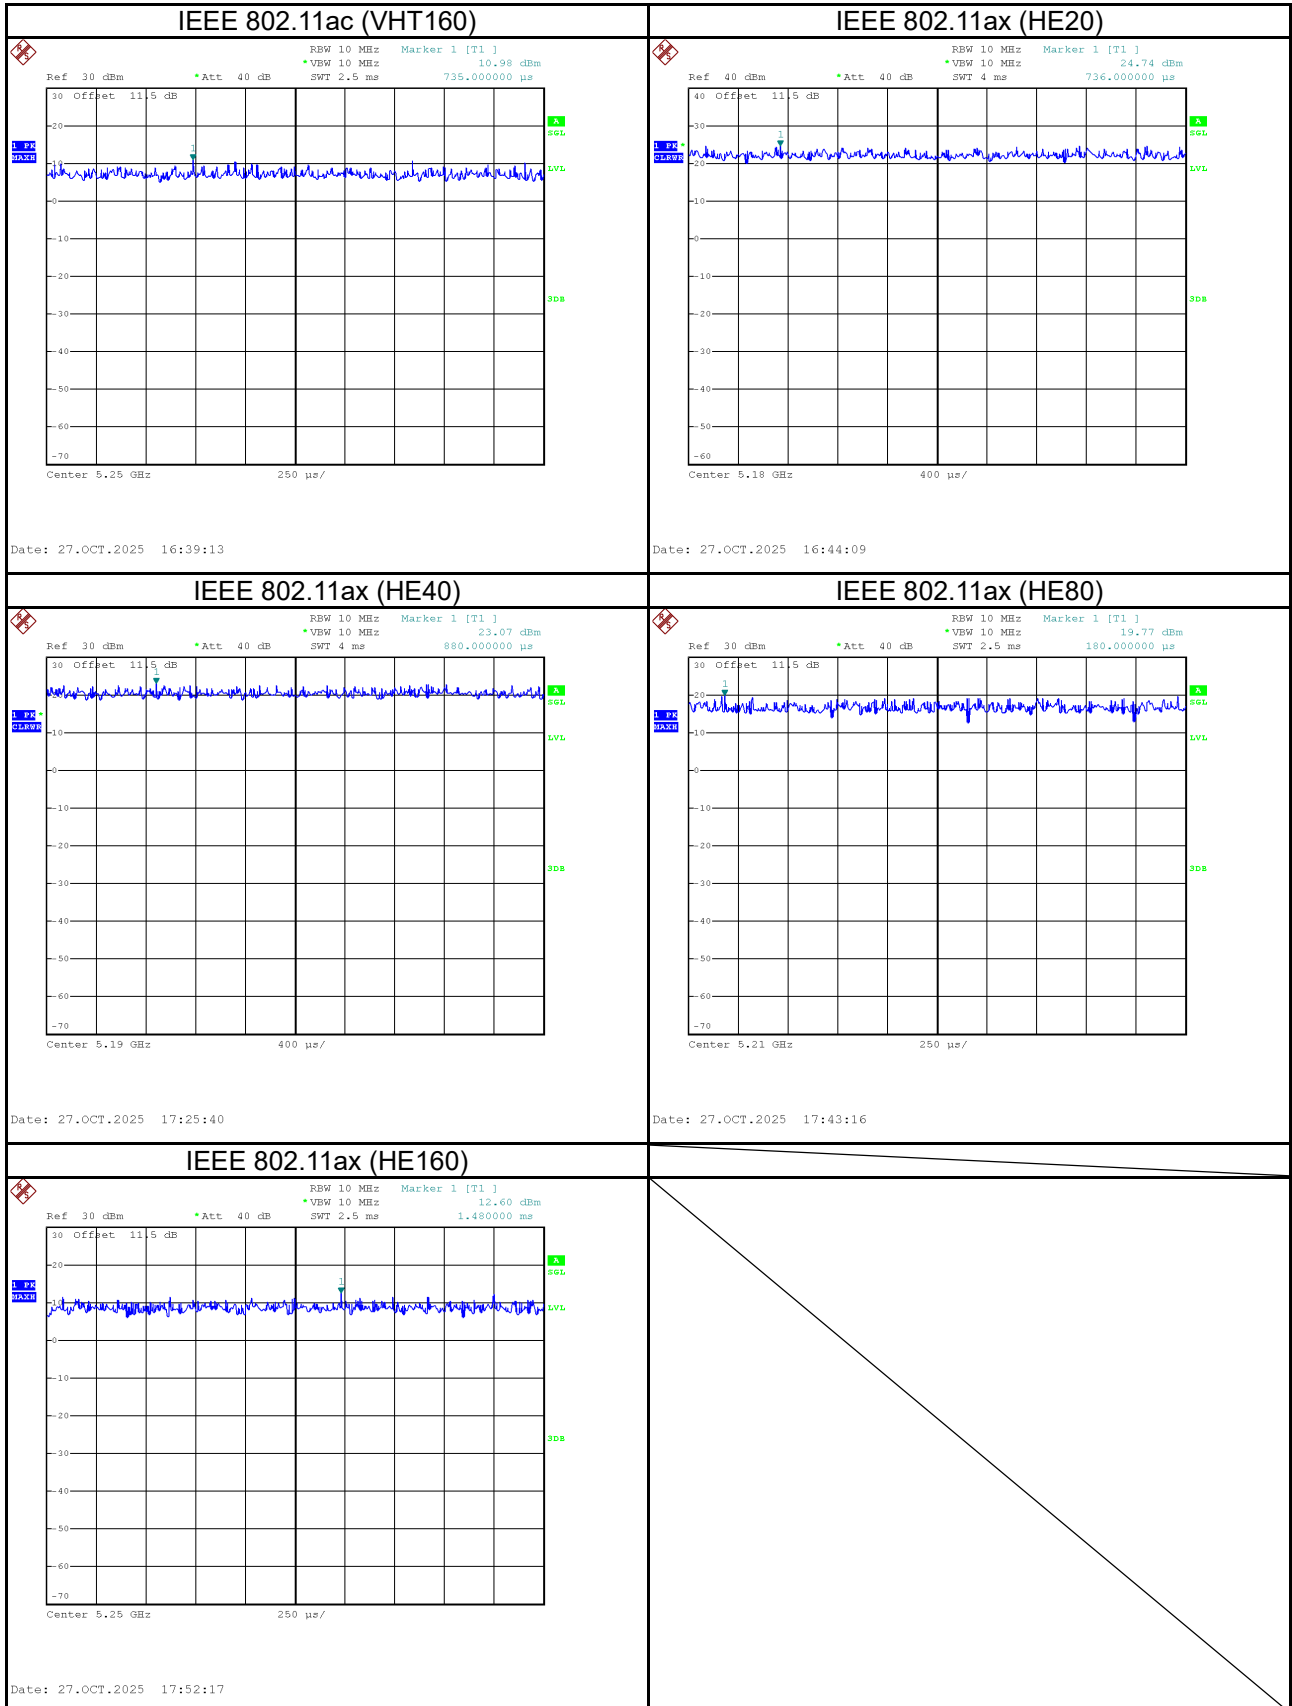

2 GENERAL INFORMATION

2.1 DESCRIPTION OF EUT

Equipment	AX5400 Whole Home Mesh Wi-Fi 6 System
Model Name	Deco X60
Brand Name	tp-link
Model Difference	N/A
Hardware Version	V4.2
Software Version	V4.2
Power Source	DC voltage supplied from AC Adapter.
Power Rating	12V $\Rightarrow$ 2A
Operation Band	UNII-1: 5150 MHz to 5250 MHz UNII-2A: 5250 MHz to 5350 MHz UNII-2C: 5470 MHz to 5725 MHz UNII-3: 5725 MHz to 5850 MHz
Operation Frequency	UNII-1: 5180 MHz to 5250 MHz UNII-2A: 5250 MHz to 5320 MHz UNII-2C: 5500 MHz to 5720 MHz UNII-3: 5745 MHz to 5825 MHz
Modulation Technology	OFDM, OFDMA
Transfer Rate	IEEE 802.11a: 6/9/12/18/24/36/48/54 Mbps IEEE 802.11n: up to 600 Mbps IEEE 802.11ac: up to 3466.8 Mbps IEEE 802.11ax: up to 4804 Mbps
Output Power Max. for UNII-1	IEEE 802.11ac (VHT20): 28.53 dBm (0.7129 W)
Output Power Max. for UNII-2A	IEEE 802.11ac (VHT20): 23.96 dBm (0.2489 W)
Output Power Max. for UNII-2C	IEEE 802.11ac (VHT20): 23.97 dBm (0.2495 W)
Output Power Max. for UNII-3	IEEE 802.11a: 28.09 dBm (0.6441 W)
Operating Software	QDART-1.0.67
Test Model	Deco X60
Sample Status	Engineering Sample
EUT Modification(s)	N/A

NOTE:

(1) The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

(2) Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2A		UNII-2A		UNII-2A	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
52	5260	54	5270	58	5290
56	5280	62	5310		
60	5300				
64	5320				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-2C		UNII-2C		UNII-2C	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
100	5500	102	5510	106	5530
104	5520	110	5550	122	5610
108	5540	118	5590	138	5690
112	5560	126	5630		
116	5580	134	5670		
120	5600	142	5710		
124	5620				
128	5640				
132	5660				
136	5680				
140	5700				
144	5720				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20) IEEE 802.11ax (HE20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40) IEEE 802.11ax (HE40)		IEEE 802.11ac (VHT80) IEEE 802.11ax (HE80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

802.11ac (VHT160) 802.11ax (HE160)	
Channel	Frequency (MHz)
50	5250
114	5570

(3) Table for Filed Antenna:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	tp-link	Deco X60	Dipole	IPEX	2.90	UNII-1
					3.26	UNII-2A
					3.11	UNII-2C
					3.01	UNII-3
2	tp-link	Deco X60	Dipole	IPEX	4.07	UNII-1
					4.34	UNII-2A
					4.12	UNII-2C
					4.07	UNII-3
3	tp-link	Deco X60	Dipole	IPEX	5.32	UNII-1
					5.13	UNII-2A
					5.65	UNII-2C
					4.79	UNII-3
4	tp-link	Deco X60	Dipole	IPEX	4.40	UNII-1
					4.40	UNII-2A
					3.60	UNII-2C
					3.36	UNII-3

Note:

- 1) This EUT supports CDD, and all antenna gains are not equal, Directional gain = $G_{ANT} + \text{Array Gain}$. For power measurements, Array Gain=0dB ($N_{ANT} \leq 4$), so the UNII-1 Directional gain=3.26, the UNII-2A Directional gain=4.34, the UNII-2C Directional gain=5.65, the UNII-3 Directional gain=4.40. The Directional gain is less than 6 dBi, so output power limits will not be reduced.

For power spectral density measurements,

so Directional gain(each angle)= $10\log[(10^{G1/20} + 10^{G2/20} + \dots + 10^{GN/20})^2/N]$ dBi,

so the UNII-1 Directional gain= $10\log[(10^{-0.54/20} + 10^{3.10/20} + 10^{1.40/20} + 10^{3.70/20})^2/4]$ dBi =8.09, the power spectral density limit is $17-(8.09-6)=14.91$,

the UNII-2A Directional gain= $10\log[(10^{-0.50/20} + 10^{3.50/20} + 10^{0.65/20} + 10^{2.78/20})^2/4]$ dBi =7.77, the power spectral density limit is $11-(7.77-6)=9.23$,

the UNII-2C Directional gain= $10\log[(10^{-1.81/20} + 10^{4.44/20} + 10^{1.58/20} + 10^{2.57/20})^2/4]$ dBi =8.00, the power spectral density limit is $11-(8.00-6)=9.00$,

the UNII-3 Directional gain= $10\log[(10^{-7.73/20} + 10^{3.10/20} + 10^{4.07/20} + 10^{2.37/20})^2/4]$ dBi =7.52 the power spectral density limit is $30-(7.52-6)=28.48$.

- (4) The above Antenna information are derived from the antenna data sheet provided by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

(5) Operating Mode and Antenna Configuration

TX Mode	Operating Mode	4TX
IEEE 802.11a		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11n (HT20)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11n (HT40)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ac (VHT20)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ac (VHT40)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ac (VHT80)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ac (VHT160)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ax (HE20)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ax (HE40)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ax (HE80)		V (Ant 1+Ant 2 + Ant 3+Ant 4)
IEEE 802.11ax (HE160)		V (Ant 1+Ant 2 + Ant 3+Ant 4)

2.2 TEST MODES

Test Items	Test mode	Channel	Note
AC power line conducted emissions	Normal	-	-
Transmitter Radiated Emissions (below 1GHz)	TX Mode_ IEEE 802.11ac (VHT20)	40	-
Transmitter Radiated Emissions (above 1GHz)	TX Mode_ IEEE 802.11a	36/48, 52/64	Bandedge
	TX Mode_ IEEE 802.11ac (VHT20)	100/140/144	
	TX Mode_ IEEE 802.11ax (HE20)	149/165	
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62	
	TX Mode_ IEEE 802.11ax (HE40)	102/134/142	
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58	Harmonic
	TX Mode_ IEEE 802.11ax (HE80)	106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160)	50/114	
	TX Mode_ IEEE 802.11ax (HE160)	50/114	
	TX Mode_ IEEE 802.11a	36/40/48	Harmonic
	TX Mode_ IEEE 802.11ac (VHT20)	52/60/64	
	TX Mode_ IEEE 802.11ax (HE20)	100/116/140/144	
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62	
	TX Mode_ IEEE 802.11ax (HE40)	102/110/134/142	
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58	-
	TX Mode_ IEEE 802.11ax (HE80)	106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160)	50/114	
	TX Mode_ IEEE 802.11ax (HE160)	50/114	
Transmitter Radiated Emissions (above 18GHz)	TX Mode_ IEEE 802.11ac (VHT20)	40	-
Bandwidth & Power Spectral Density & Output Power	TX Mode_ IEEE 802.11a	36/40/48	-
	TX Mode_ IEEE 802.11ac (VHT20)	52/60/64	
	TX Mode_ IEEE 802.11ax (HE20)	100/116/140/144	
	TX Mode_ IEEE 802.11ac (VHT40)	38/46, 54/62	
	TX Mode_ IEEE 802.11ax (HE40)	102/110/134/142	
	TX Mode_ IEEE 802.11ac (VHT80)	42, 58	
	TX Mode_ IEEE 802.11ax (HE80)	106/122/138, 155	
	TX Mode_ IEEE 802.11ac (VHT160)	50/114	
	TX Mode_ IEEE 802.11ax (HE160)	50/114	


NOTE:

- (1) For radiated emission band edge test, both Vertical and Horizontal are evaluated, but only the worst case (Vertical) is recorded.
- (2) All X, Y and Z axes are evaluated, but only the worst case (X axis) is recorded.
- (3) VHT20/VHT40 covers HT20/HT40, due to same modulation. The power setting for 802.11n HT20 and HT40 are the same or lower than 802.11ac VHT20 and VHT40.
- (4) IEEE 802.11ax mode only supports full RU, so only the full RU is evaluated and measured inside report.
- (5) The electric field intensity signal emitted at 9 kHz - 30 MHz is too weak (20 dB below the limit), so the measured value is not recorded in this report.
- (6) For radiated emission above 18GHz test, only tested and recorded the worst case.
- (7) For radiated emission below 1 GHz test, the IEEE 802.11ac(VHT20) Mode Channel 40 is found to be the worst case and recorded.


2.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Equipment letters and Cable numbers refer to item numbers described in the tables of clause 2.4.

AC power line conducted emissions

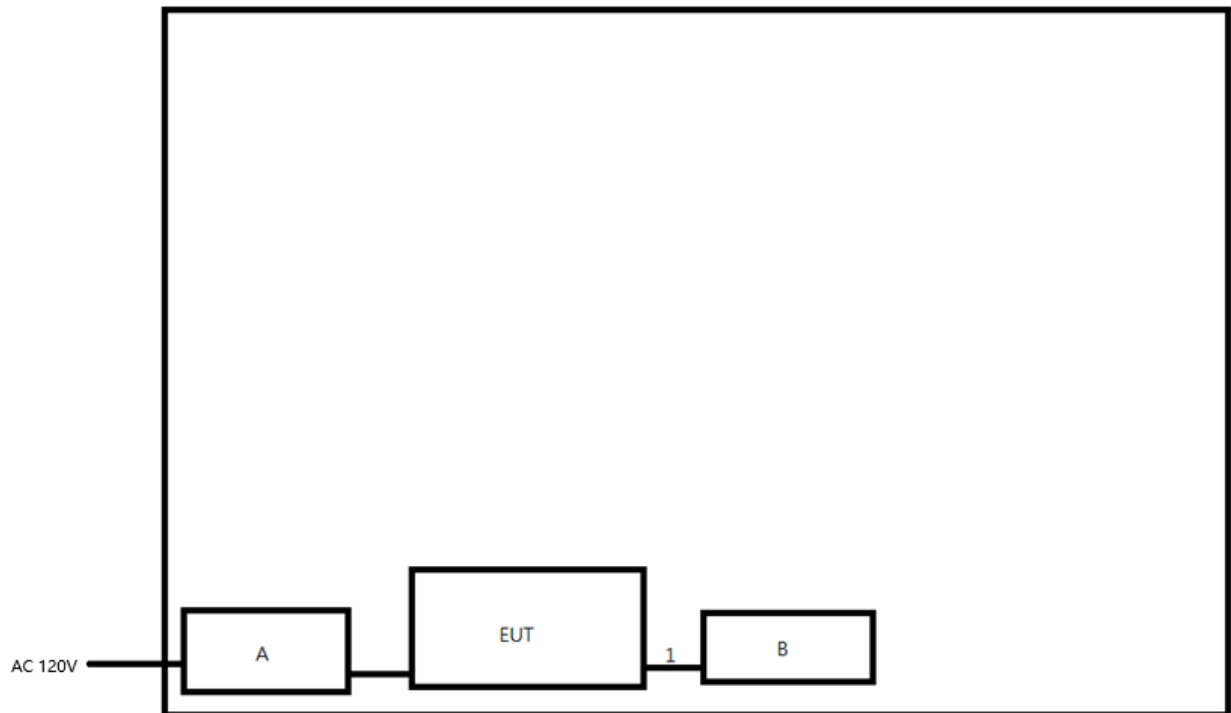

Radiated Emissions

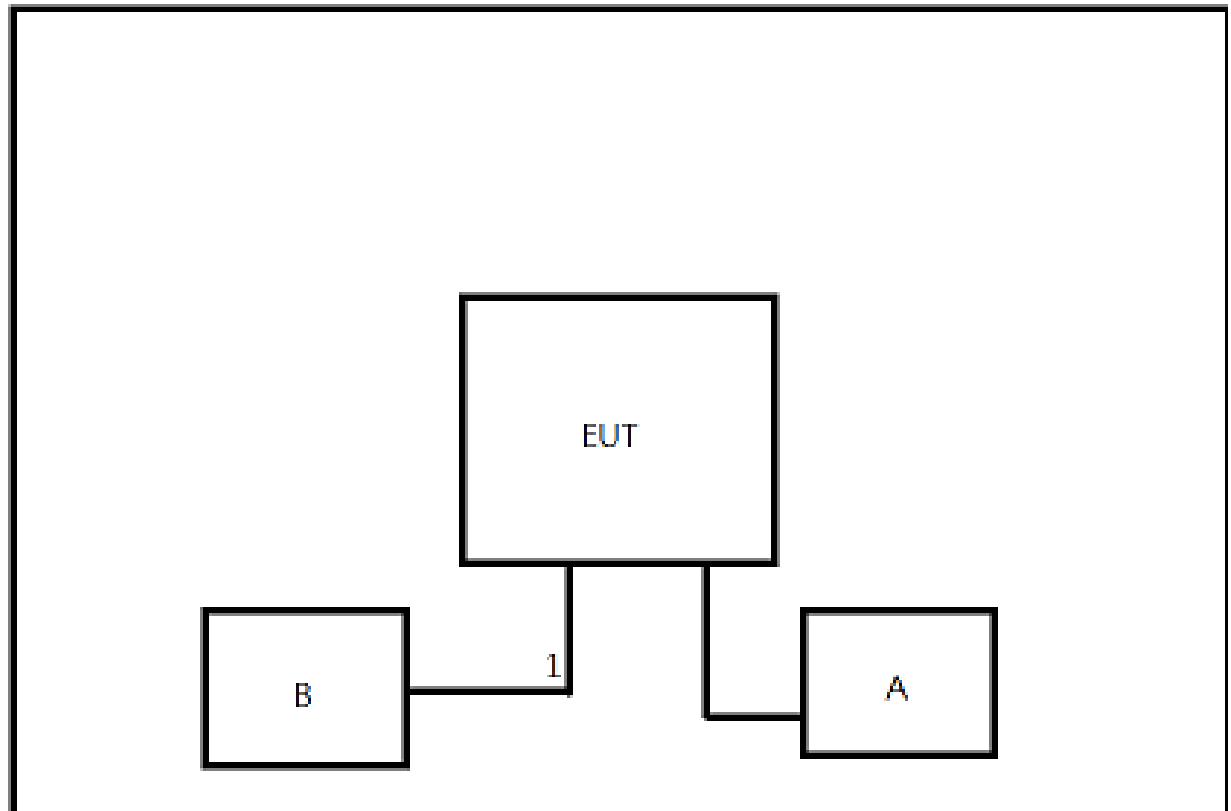

2.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.	Remarks
A	Adapter	tp-link	T120200-2B4	N/A	Supplied by test requester
B	Notebook	Lenovo	ThinkBook 14 G4 IAP	N/A	Furnished by test lab.

Item	Shielded	Ferrite Core	Length	Cable Type	Remarks
1	No	No	1.2m	RJ45 Cable	Supplied by test requester

3 AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dBμV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56 *	56 - 46 *
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.
- (3) The test result calculated as following:
 Measurement Value = Reading Level + Correct Factor
 Correct Factor = Insertion Loss + Cable Loss + Attenuator Factor (if use)
 Margin Level = Measurement Value – Limit Value
 Calculation example:

Reading Level (dBμV)		Correct Factor (dB)		Measurement Value (dBμV)
38.22	+	3.45	=	41.67

Measurement Value (dBμV)		Limit Value (dBμV)		Margin Level (dB)
41.67	-	60	=	-18.33

The following table is the setting of the receiver.

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 m above the horizontal ground plane with the EUT being connected to the power mains through a line impedance stabilization network (LISN).
 All other support equipment were powered from an additional LISN(s).
 The LISN provides 50 Ohm/50uH of impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle to keep the cable above 40 cm.
- c. Excess I/O cables that are not connected to a peripheral shall be bundled in the center.
 The end of the cable will be terminated, using the correct terminating impedance.
 The overall length shall not exceed 1 m.
- d. The LISN is spaced at least 80 cm from the nearest part of the EUT chassis.
- e. For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.


NOTE:

- (1) In the results, each reading is marked as Peak, QP or AVG per the detector used.
 BW=9 kHz (6 dB Bandwidth)
- (2) All readings are Peak unless otherwise stated QP or AVG in column of Note. Both the QP and the AVG readings must be less than the limit for compliance.

3.3 DEVIATION FROM TEST STANDARD

No deviation.

3.4 TEST SETUP

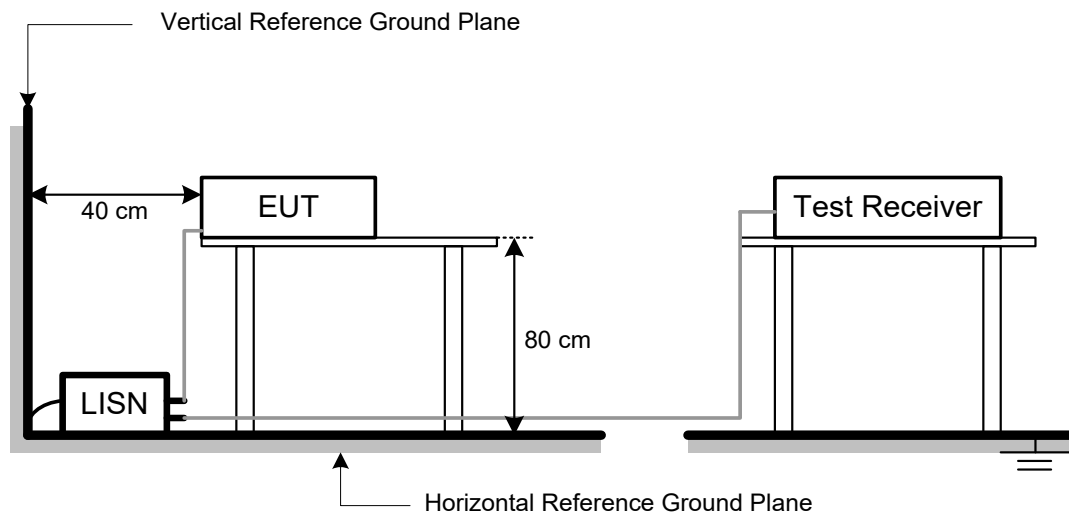

3.5 TEST RESULT

Please refer to the APPENDIX A.

4 RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205, then the 15.209 limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
960~1000	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm)	Equivalent Field Strength at 3m (dBμV/m)
5150-5250	-27	68.3
5250-5350	-27	68.3
5470-5725	-27	68.3
5725-5850	-27 (NOTE 2)	68.3
	10 (NOTE 2)	105.3
	15.6 (NOTE 2)	110.9
	27 (NOTE 2)	122.3

NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to FCC 16-24, All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) The test result calculated as following:

Measurement Value = Reading Level + Correct Factor

Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain(if use)

Margin Level = Measurement Value - Limit Value

Calculation example:

Reading Level (dBμV)		Correct Factor (dB/m)		Measurement Value (dBμV/m)
36.23	+	-11.97	=	24.26

Measurement Value (dBμV/m)		Limit Value (dBμV/m)		Margin Level (dB)
24.26	-	40	=	-15.74

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1MHz / 1/T for Average

Spectrum Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9KHz~90KHz for PK/AVG detector
Start ~ Stop Frequency	90KHz~110KHz for QP detector
Start ~ Stop Frequency	110KHz~490KHz for PK/AVG detector
Start ~ Stop Frequency	490KHz~30MHz for QP detector
Start ~ Stop Frequency	30MHz~1000MHz for QP detector

4.2 TEST PROCEDURE


- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- The height of the equipment or of the substitution antenna shall be 0.8 m or 1.5 m, the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1GHz.
- The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1GHz)
- All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1GHz)
- For the actual test configuration, please refer to the related Item – EUT TEST PHOTO.

4.3 DEVIATION FROM TEST STANDARD


No deviation.


4.4 TEST SETUP

9 kHz to 30 MHz

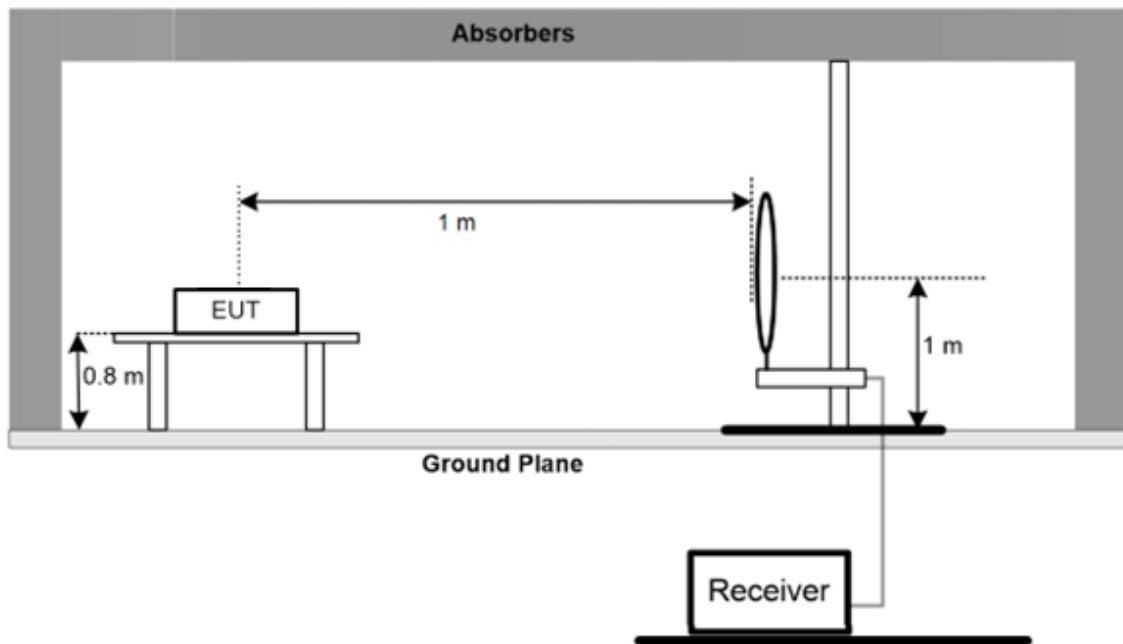

30 MHz to 1 GHz

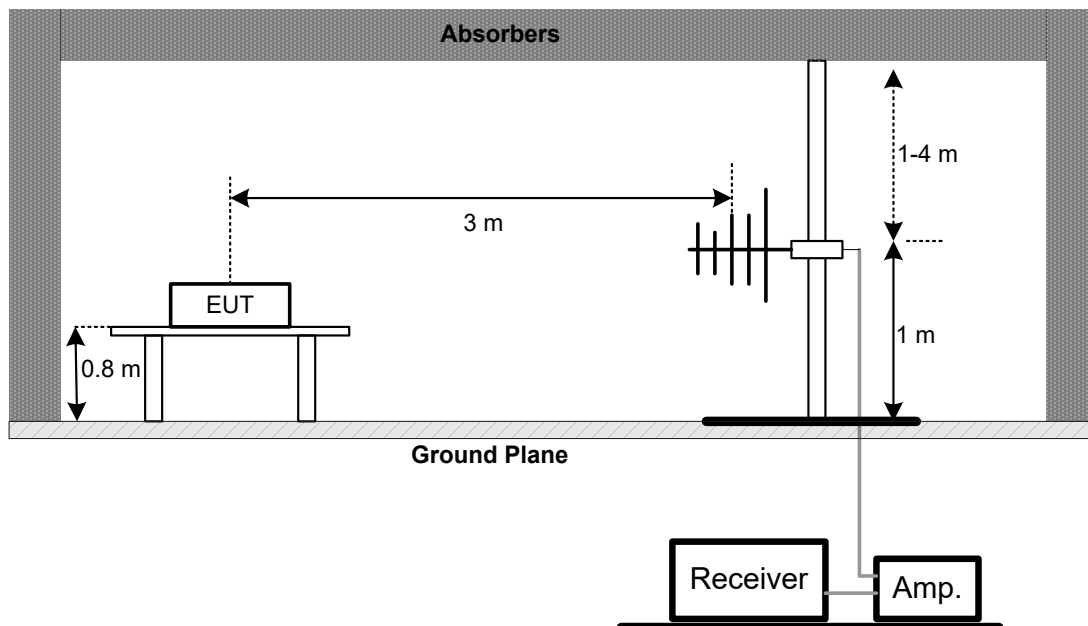

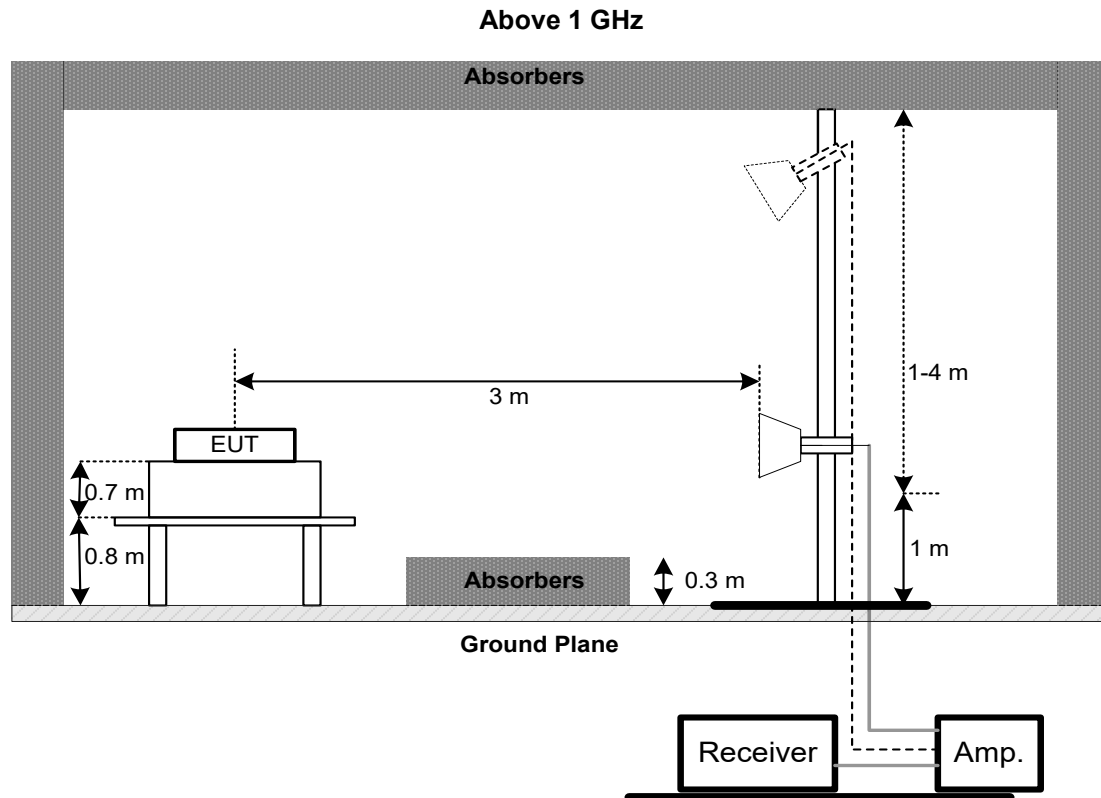

4.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

4.6 TEST RESULT – 9 KHZ TO 30 MHZ

There were no emissions found below 30 MHz within 20 dB of the limit.

4.7 TEST RESULT – 30 MHZ TO 1 GHZ

Please refer to the APPENDIX B.

4.8 TEST RESULT – ABOVE 1 GHZ

Please refer to the APPENDIX C.

NOTE:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5 BANDWIDTH TEST

5.1 LIMIT

Section	Test Item	Frequency Range (MHz)
FCC 15.407(a) FCC 15.407(e)	26 dB Bandwidth	5150-5250
		5250-5350
		5470-5725
	Minimum 500 kHz 6 dB Bandwidth	5725-5850

5.2 TEST PROCEDURE


- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz(Bandwidth 20 MHz) 1 MHz(Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz(Bandwidth 20 MHz) 3 MHz(Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

5.3 DEVIATION FROM TEST STANDARD

No deviation.

5.4 TEST SETUP

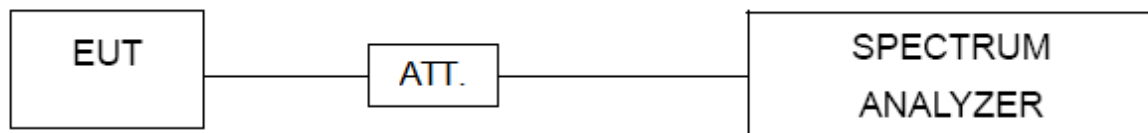

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT

Please refer to the APPENDIX D.

6 OUTPUT POWER TEST

6.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
FCC 15.407(a)	Maximum Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (23.98 dBm)	5150-5250
		250 mW (23.98 dBm)	5250-5350
		250 mW (23.98 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850


Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.

6.2 DEVIATION FROM TEST STANDARD

No deviation.

6.3 TEST SETUP

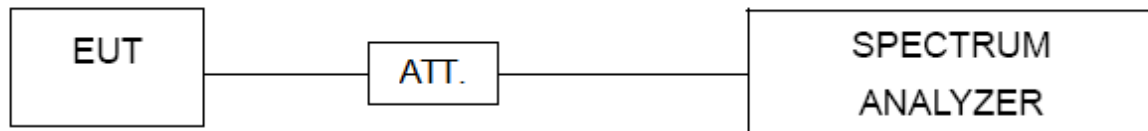

6.4 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.5 TEST RESULT

Please refer to the APPENDIX E.

7 POWER SPECTRAL DENSITY

7.1 LIMIT

Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	Other than Mobile and portable: 17 dBm/MHz	5150-5250
		Mobile and portable: 11 dBm/MHz	
		11 dBm/MHz	5250-5350
		30 dBm/500 kHz	5470-5725
			5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz
VBW	≥ 3 MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

7.3 DEVIATION FROM TEST STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULT

Please refer to the APPENDIX F.

8 LIST OF MEASURING EQUIPMENTS

AC Power Line Conducted Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	EMC Receiver	keysight	N9038A	MY54130009	2025/6/25	2026/6/24
2	Test Cable	EMCI	EMCRG58-BM-B M-9000	210501	2024/12/10	2025/12/9
3	Two-Line V-Network	R&S	ENV216	101051	2025/7/2	2026/7/1
4	Measurement Software	Farad	EZ_EMC (Version NB-03A1-01)	N/A	N/A	N/A

Radiated Emissions						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Pre-Amplifier	EMCI	EMC184045SE	980512	2024/12/10	2025/12/9
2	Broad-Band Horn Antenna	Schwarzbeck	BBHA 9170	340	2025/6/25	2026/6/24
3	Test Cable	EMCI	EMC102-KM-KM- 1000	220328	2024/12/10	2025/12/9
4	Test Cable	EMCI	EMC102-KM-KM- 3000	220330	2024/12/10	2025/12/9
5	Broad-Band Horn Antenna	RFSPIN	DRH18-E	210109A18E	2025/1/14	2026/1/13
6	Pre-Amplifier	EMCI	EMC1181A45SE	981030	2025/3/5	2026/3/4
7	Test Cable	EMCI	EMC102-KM-KM- 1000	210119	2024/12/10	2025/12/9
8	Test Cable	EMCI	EMC102-KM-KM- 3000	210118	2024/12/10	2025/12/9
9	Test Cable	EMCI	EMC105-SM-SM- 7000	241237	2024/12/10	2025/12/9
10	EXA Spectrum Analyzer	keysight	N9020B	MY59050137	2024/11/26	2025/11/25
11	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	1207	2024/12/4	2025/12/3
12	Pre-Amplifier	EMCI	EMC001330	980807	2024/12/9	2025/12/8
13	Test Cable	EMCI	EMC-8D-NM-NM -5000	150106	2024/12/9	2025/12/8
14	Test Cable	EMCI	EMC-CFD-400-N M-NM-8000	200343	2024/12/9	2025/12/8
15	Test Cable	EMCI	EMC-CFD-400-N M-NM-3300	200348	2024/12/9	2025/12/8
16	Measurement Software	Farad	EZ_EMC (Ver. NB-03A1-01)	N/A	N/A	N/A

Bandwidth & Power Spectral Density						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	Spectrum Analyzer	R&S	FSP 30	100854	2025/7/1	2026/6/30
2	10dbAttenuator	INMET	AHC-10dB	1	2024/11/26	2025/11/25
3	BTL-Conducted Test	BTL	1247788684	N/A	N/A	N/A

Output Power						
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated Date	Calibrated Until
1	USB Peak Power Sensor	Anritsu	MA24408A	12591	2024/11/8	2025/11/7
2	USB Peak Power Sensor	Anritsu	MA24408A	12589	2025/10/20	2026/10/19
3	Measurement Software	Anritsu	MA2440A Peak Power analyzer(Ver1.1.0.0)	N/A	N/A	N/A

Remark: "N/A" denotes no model name, no serial no. or no calibration specified.
All calibration period of equipment list is one year.

9 EUT TEST PHOTO


Please refer to document Appendix No.: TP-2509C326-FCCP-1 (APPENDIX-TEST PHOTOS).

10 EUT PHOTOS

Please refer to document Appendix No.: EP-2509C326-1 (APPENDIX-EUT PHOTOS).

APPENDIX A AC POWER LINE CONDUCTED EMISSIONS

Test Mode	Normal	Tested Date	2025/10/30
Test Frequency	-	Phase	Line

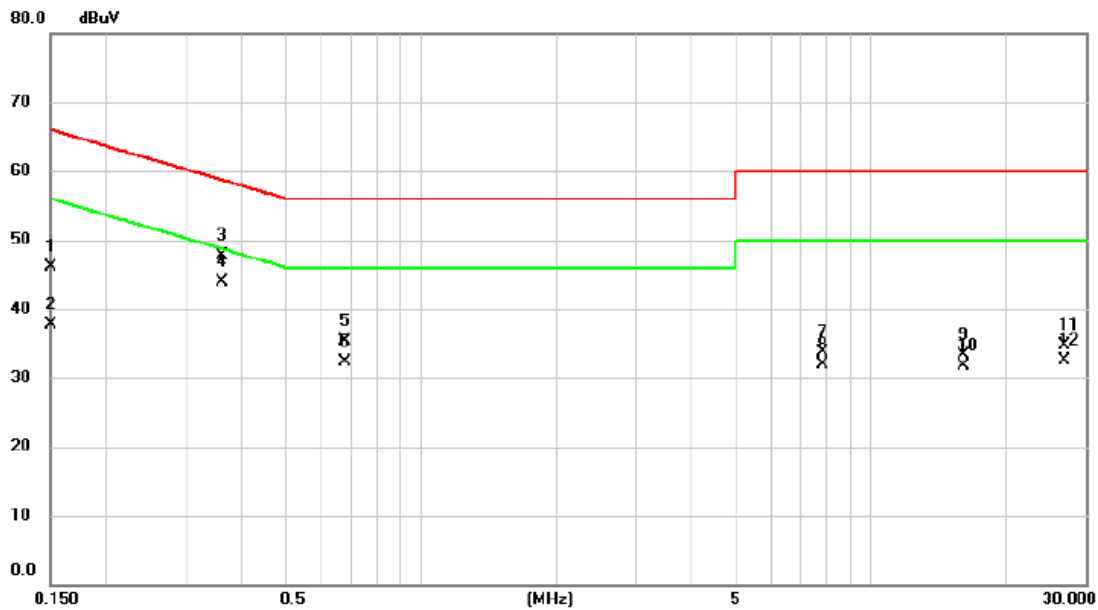


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		0.1503	36.55	9.50	46.05	65.98	-19.93	QP	
2		0.1503	28.27	9.50	37.77	55.98	-18.21	AVG	
3		0.3618	38.25	9.52	47.77	58.69	-10.92	QP	
4	*	0.3618	34.40	9.52	43.92	48.69	-4.77	AVG	
5		0.6800	25.68	9.53	35.21	56.00	-20.79	QP	
6		0.6800	22.85	9.53	32.38	46.00	-13.62	AVG	
7		7.8000	24.02	9.78	33.80	60.00	-26.20	QP	
8		7.8000	22.22	9.78	32.00	50.00	-18.00	AVG	
9		16.1000	23.20	10.01	33.21	60.00	-26.79	QP	
10		16.1000	21.72	10.01	31.73	50.00	-18.27	AVG	
11		26.9000	24.50	10.12	34.62	60.00	-25.38	QP	
12		26.9000	22.42	10.12	32.54	50.00	-17.46	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	Normal	Tested Date	2025/10/30
Test Frequency	-	Phase	Neutral

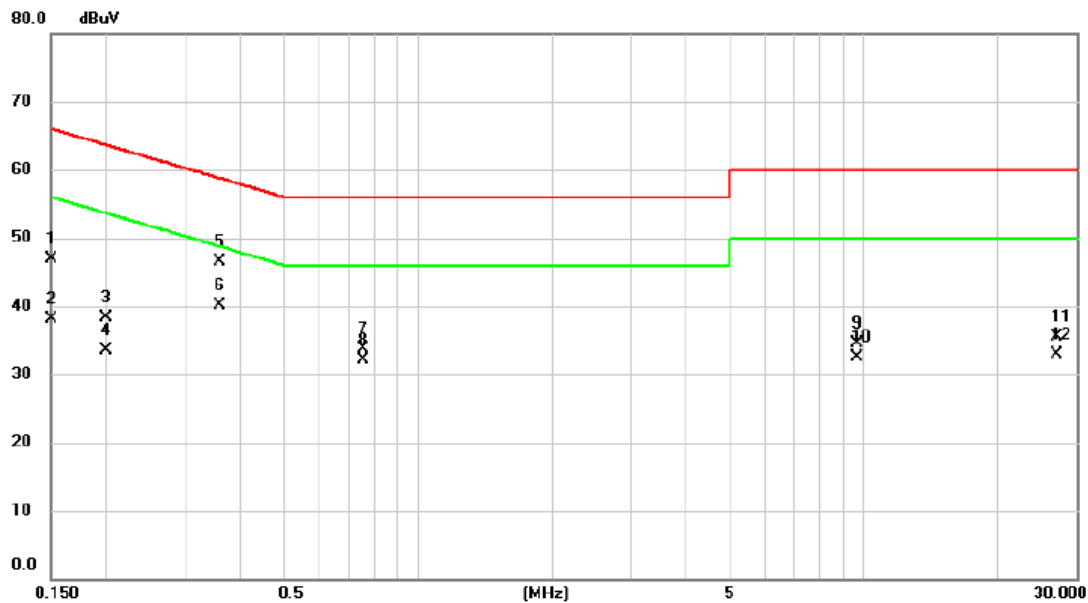


No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	0.1507	37.42	9.55	46.97	65.96	-18.99	QP	
2	0.1507	28.54	9.55	38.09	55.96	-17.87	AVG	
3	0.1993	28.73	9.56	38.29	63.64	-25.35	QP	
4	0.1993	23.93	9.56	33.49	53.64	-20.15	AVG	
5	0.3597	37.03	9.57	46.60	58.74	-12.14	QP	
6 *	0.3597	30.59	9.57	40.16	48.74	-8.58	AVG	
7	0.7520	24.21	9.56	33.77	56.00	-22.23	QP	
8	0.7520	22.64	9.56	32.20	46.00	-13.80	AVG	
9	9.6750	24.53	9.88	34.41	60.00	-25.59	QP	
10	9.6750	22.57	9.88	32.45	50.00	-17.55	AVG	
11	27.0500	25.27	10.28	35.55	60.00	-24.45	QP	
12	27.0500	22.61	10.28	32.89	50.00	-17.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX B RADIATED EMISSIONS - 30 MHZ TO 1 GHZ

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

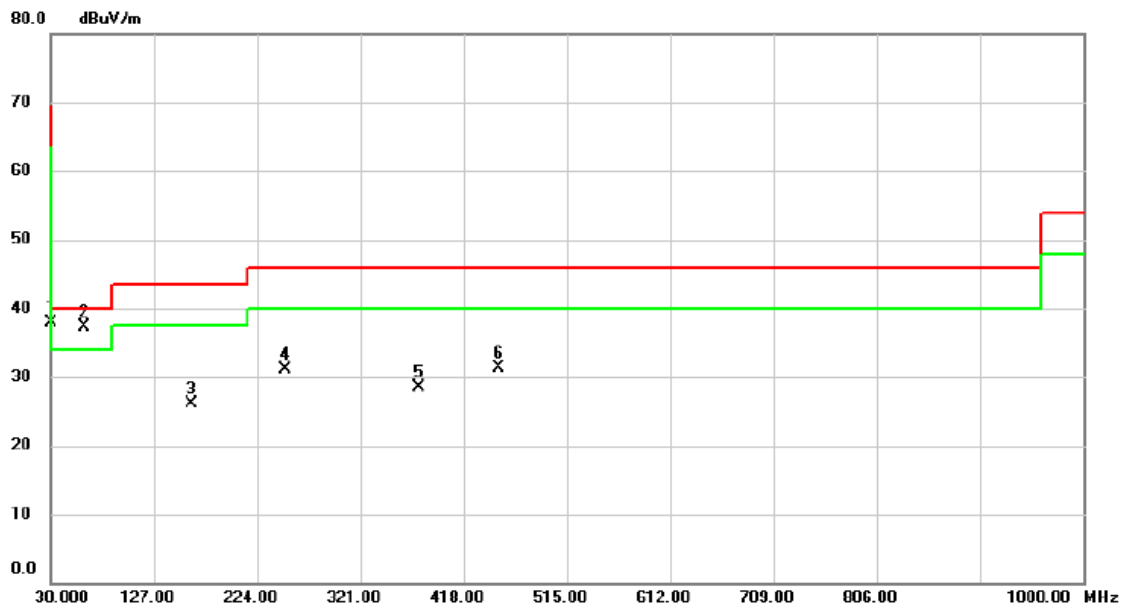


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	30.0000	51.79	-13.93	37.86	40.00	-2.14	peak	
2		61.0400	49.17	-11.92	37.25	40.00	-2.75	peak	
3		161.9200	37.24	-11.22	26.02	43.50	-17.48	peak	
4		250.1900	42.82	-11.75	31.07	46.00	-14.93	peak	
5		375.3200	36.49	-7.99	28.50	46.00	-17.50	peak	
6		450.9800	37.02	-5.70	31.32	46.00	-14.68	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5200MHz	Polarization	Horizontal
Temp	25°C	Hum.	65%

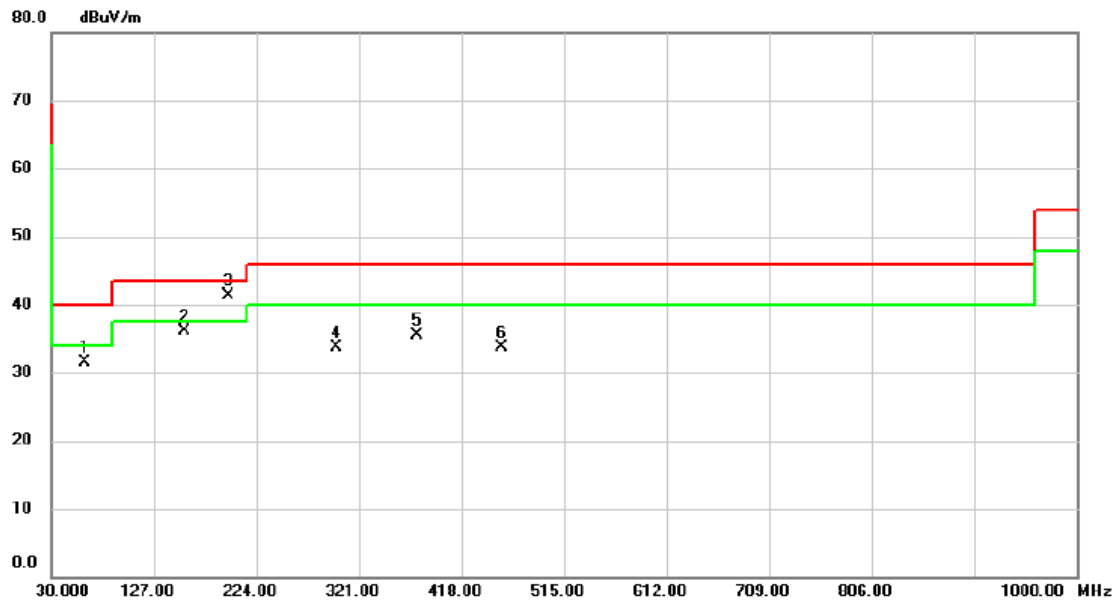


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		62.0100	43.65	-12.10	31.55	40.00	-8.45	peak	
2		156.1000	47.09	-11.06	36.03	43.50	-7.47	peak	
3	*	197.8100	55.21	-13.98	41.23	43.50	-2.27	peak	
4		299.6600	43.70	-10.00	33.70	46.00	-12.30	peak	
5		375.3200	43.50	-7.99	35.51	46.00	-10.49	peak	
6		455.8300	39.33	-5.63	33.70	46.00	-12.30	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX C RADIATED EMISSIONS - ABOVE 1 GHZ

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

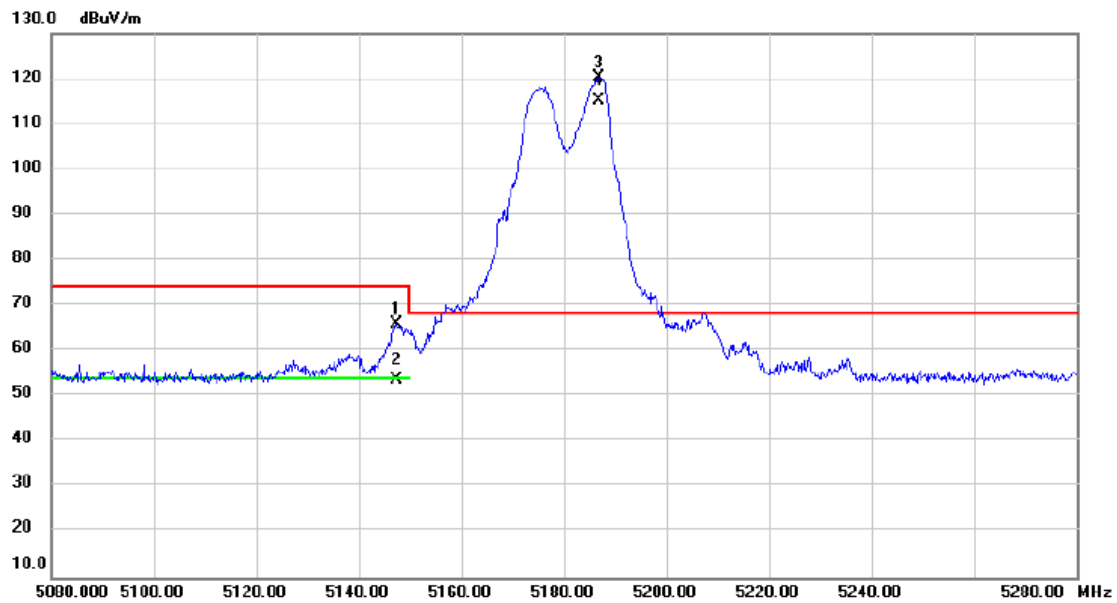


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.400	53.60	12.24	65.84	74.00	-8.16	peak	
2		5147.400	41.43	12.24	53.67	54.00	-0.33	AVG	
3	*	5186.800	108.0	12.29	120.33	68.20	52.13	peak	No Limit
4	X	5186.800	102.8	12.29	115.14	68.20	46.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

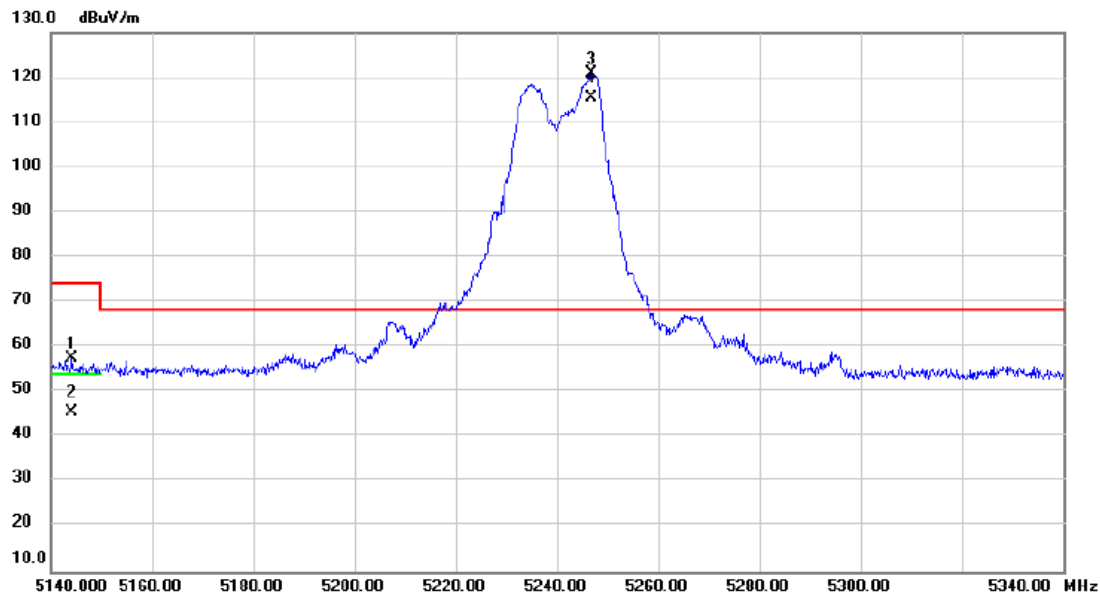


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5144.200	45.17	12.24	57.41	74.00	-16.59	peak	
2		5144.200	33.25	12.24	45.49	54.00	-8.51	AVG	
3	*	5246.800	108.4	12.35	120.84	68.20	52.64	peak	No Limit
4	X	5246.800	103.0	12.35	115.35	68.20	47.15	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

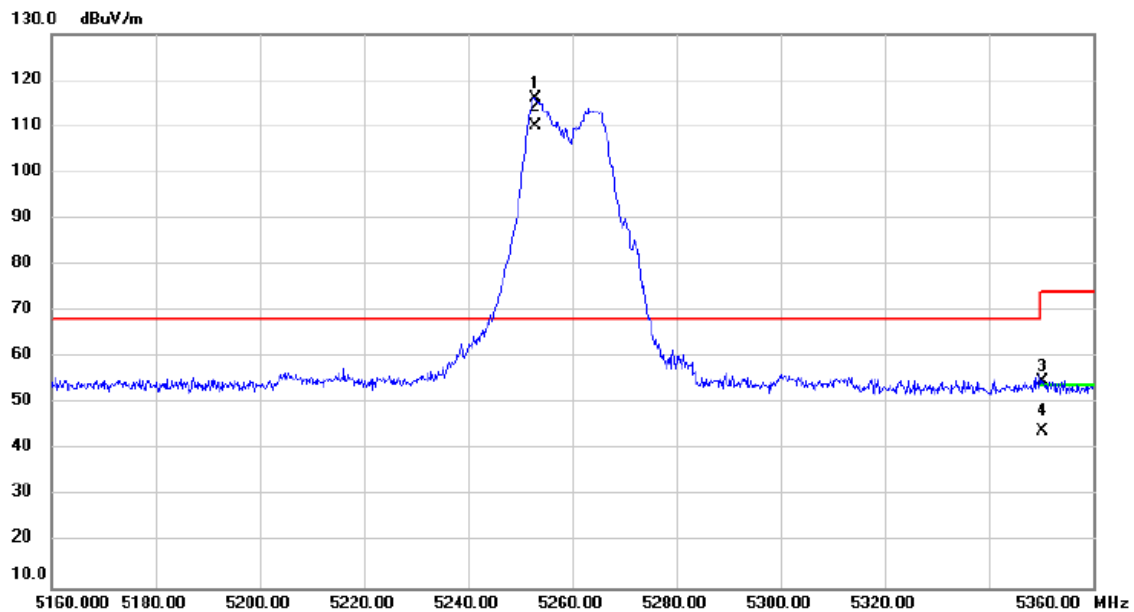


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5253.000	103.7	12.36	116.06	68.20	47.86	peak	No Limit
2	X	5253.000	97.61	12.36	109.97	68.20	41.77	AVG	No Limit
3		5350.400	42.48	12.47	54.95	74.00	-19.05	peak	
4		5350.400	31.51	12.47	43.98	54.00	-10.02	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

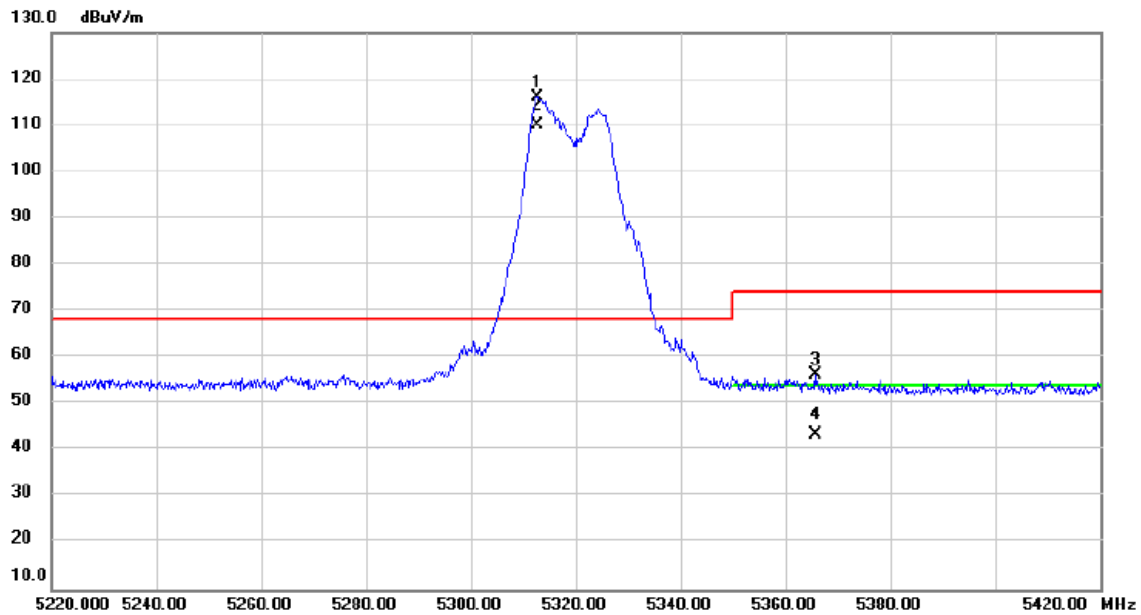


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	5312.600	103.6	12.42	116.06	68.20	47.86	peak	No Limit
2	X	5312.600	97.65	12.42	110.07	68.20	41.87	AVG	No Limit
3		5365.600	43.73	12.48	56.21	74.00	-17.79	peak	
4		5365.600	31.11	12.48	43.59	54.00	-10.41	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

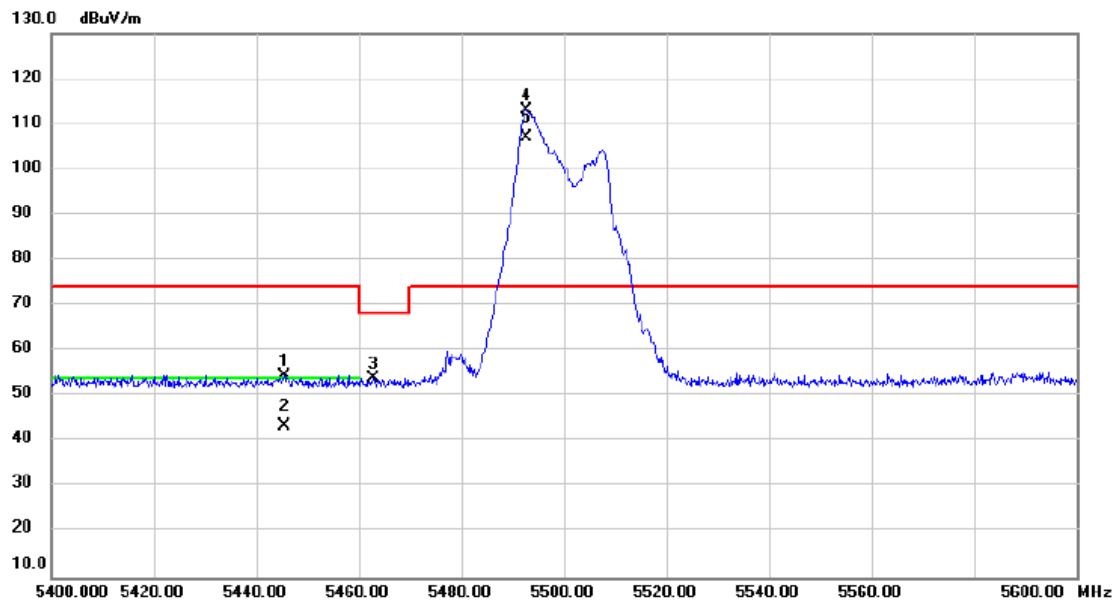


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5445.400	42.06	12.58	54.64	74.00	-19.36	peak	
2		5445.400	30.91	12.58	43.49	54.00	-10.51	AVG	
3		5462.800	41.35	12.59	53.94	68.20	-14.26	peak	
4	*	5492.600	100.4	12.62	113.07	74.00	39.07	peak	No Limit
5	X	5492.600	94.28	12.62	106.90	74.00	32.90	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

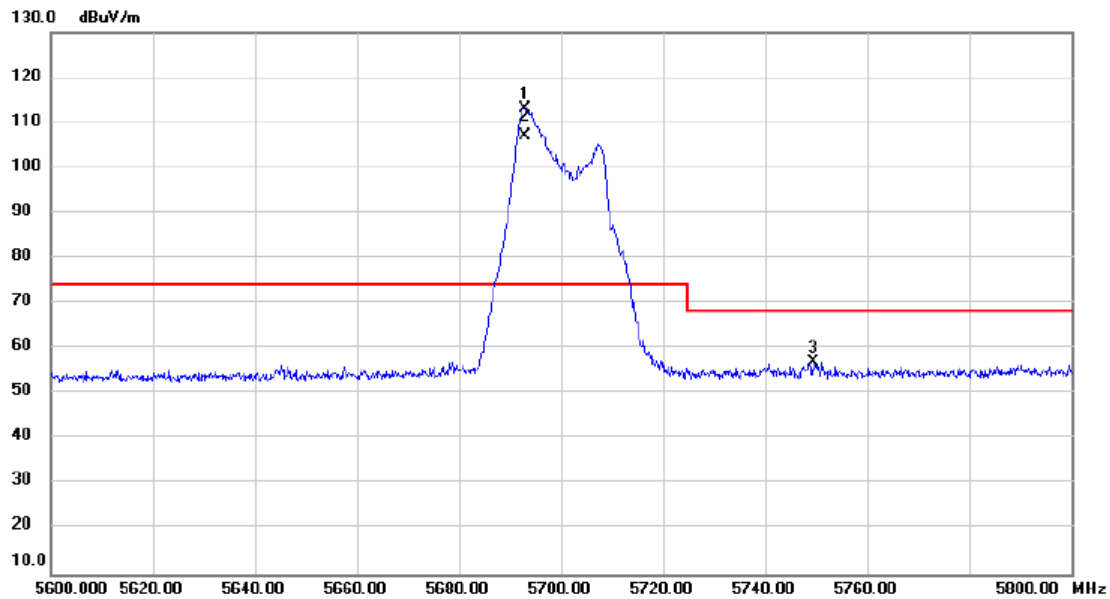


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5693.000	100.1	13.03	113.19	74.00	39.19	peak	No Limit
2	X	5693.000	93.89	13.03	106.92	74.00	32.92	AVG	No Limit
3		5749.400	43.83	13.14	56.97	68.20	-11.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

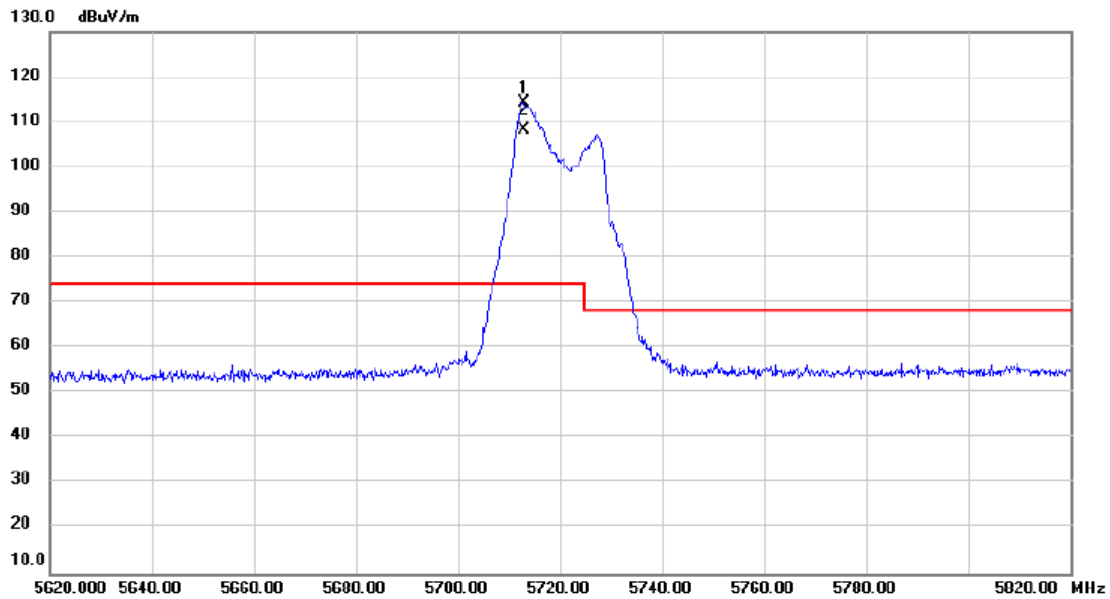


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5713.000	101.2	13.07	114.36	74.00	40.36	peak	No Limit
2	X	5713.000	95.15	13.07	108.22	74.00	34.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

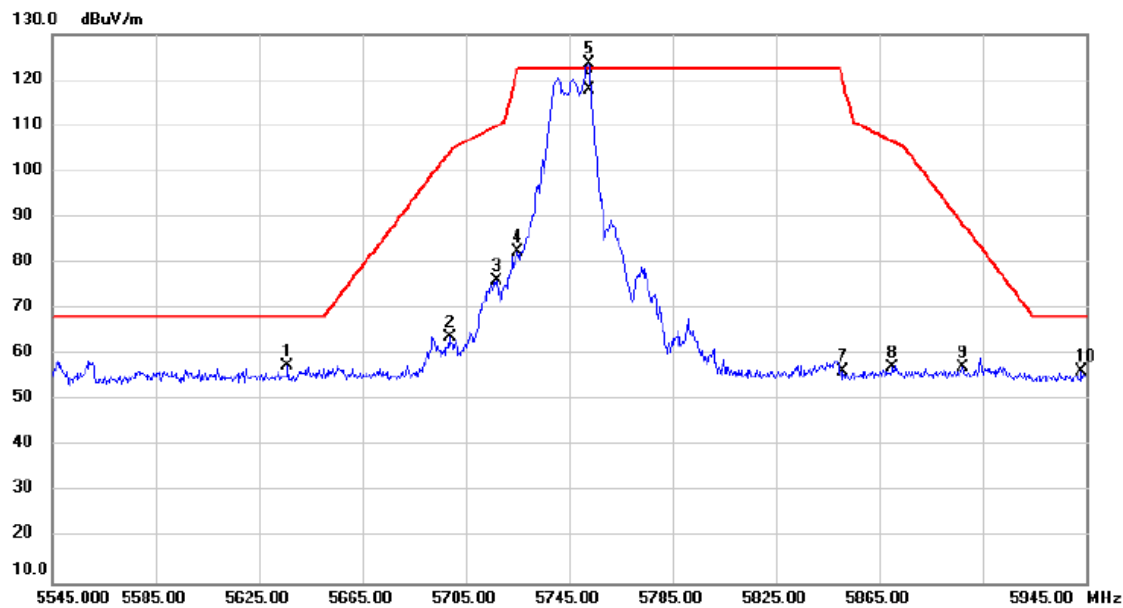


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5636.200	44.75	12.91	57.66	68.20	-10.54	peak	
2		5698.600	50.87	13.04	63.91	104.17	-40.26	peak	
3		5717.000	62.95	13.07	76.02	109.96	-33.94	peak	
4		5725.000	69.28	13.10	82.38	122.20	-39.82	peak	
5	*	5752.600	110.4	13.16	123.64	122.20	1.44	peak	No Limit
6		5752.600	104.5	13.16	117.72	122.20	-4.48	AVG	No Limit
7		5850.600	42.95	13.36	56.31	120.83	-64.52	peak	
8		5870.200	43.73	13.40	57.13	106.54	-49.41	peak	
9		5897.400	43.90	13.46	57.36	88.59	-31.23	peak	
10		5943.400	42.80	13.55	56.35	68.20	-11.85	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/29
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

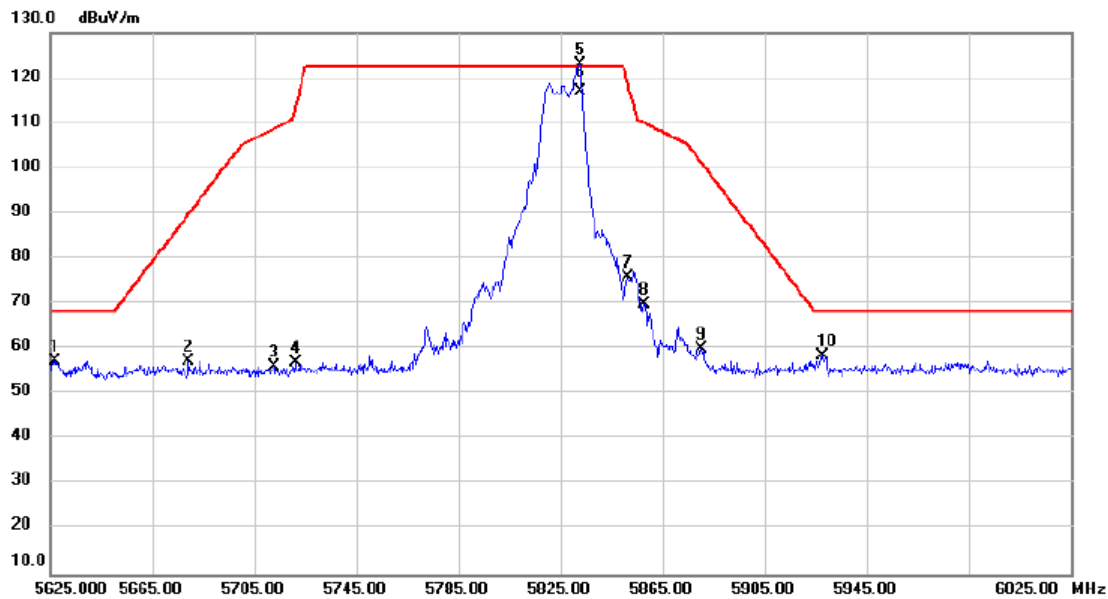


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5627.000	44.51	12.89	57.40	68.20	-10.80	peak	
2		5679.400	44.25	13.00	57.25	90.00	-32.75	peak	
3		5712.600	42.93	13.07	56.00	108.73	-52.73	peak	
4		5721.000	43.96	13.09	57.05	113.08	-56.03	peak	
5	*	5832.600	109.6	13.33	122.93	122.20	0.73	peak	No Limit
6		5832.600	103.5	13.33	116.89	122.20	-5.31	AVG	No Limit
7		5851.400	62.38	13.36	75.74	119.01	-43.27	peak	
8		5857.800	56.49	13.38	69.87	110.01	-40.14	peak	
9		5880.200	46.68	13.42	60.10	101.34	-41.24	peak	
10		5927.800	44.93	13.52	58.45	68.20	-9.75	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/29
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

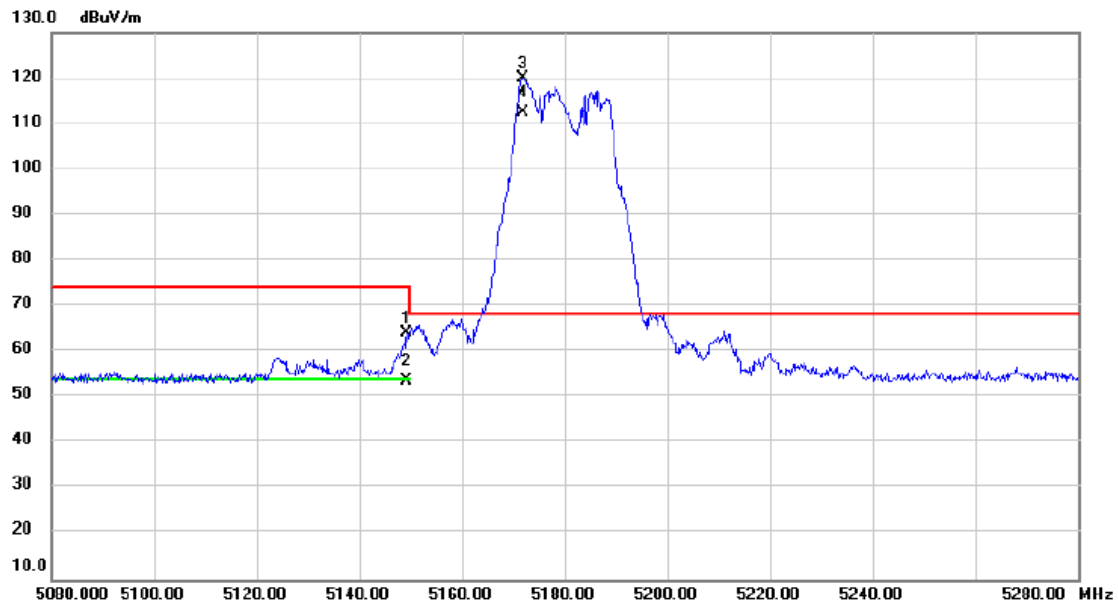


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.200	51.89	12.24	64.13	74.00	-9.87	peak	
2		5149.200	41.33	12.24	53.57	54.00	-0.43	AVG	
3	*	5171.800	107.6	12.28	119.97	68.20	51.77	peak	No Limit
4	X	5171.800	100.2	12.28	112.49	68.20	44.29	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

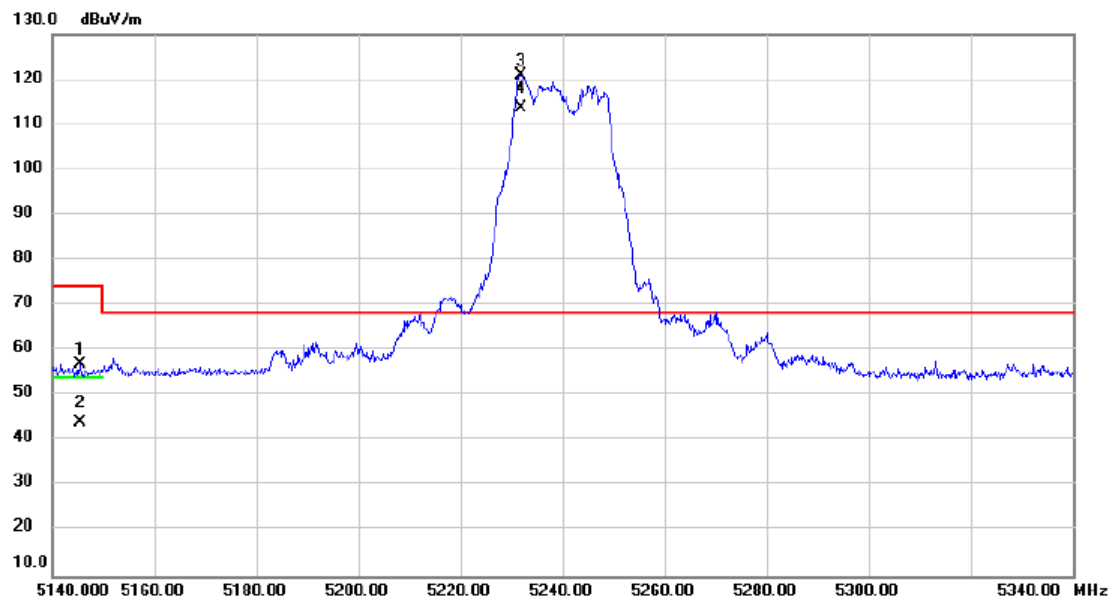


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5145.400	44.73	12.24	56.97	74.00	-17.03	peak	
2		5145.400	31.71	12.24	43.95	54.00	-10.05	AVG	
3	*	5231.800	108.5	12.34	120.92	68.20	52.72	peak	No Limit
4	X	5231.800	101.3	12.34	113.71	68.20	45.51	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

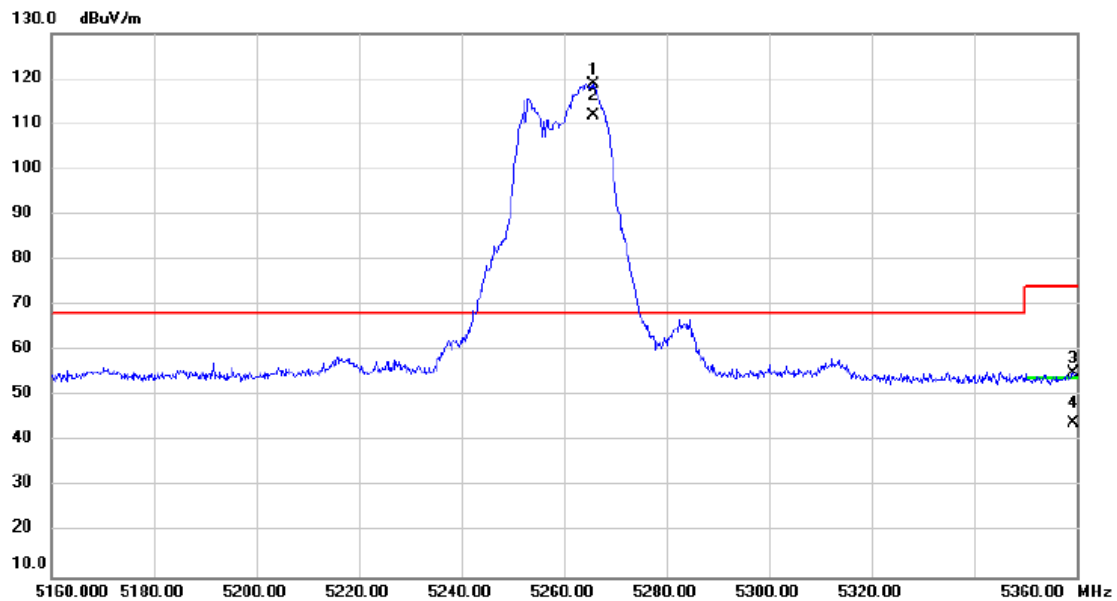


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5265.600	106.4	12.37	118.81	68.20	50.61	peak	No Limit
2	X	5265.600	99.49	12.37	111.86	68.20	43.66	AVG	No Limit
3		5359.400	42.54	12.47	55.01	74.00	-18.99	peak	
4		5359.400	31.71	12.47	44.18	54.00	-9.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

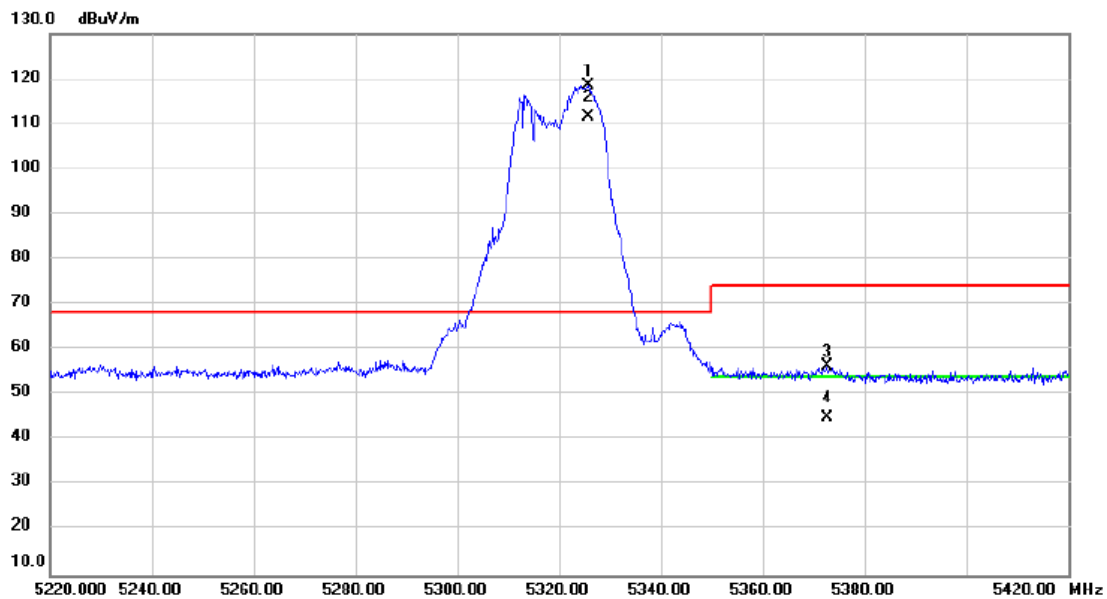


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5325.600	106.1	12.44	118.54	68.20	50.34	peak	No Limit
2	X	5325.600	98.99	12.44	111.43	68.20	43.23	AVG	No Limit
3		5372.600	43.80	12.49	56.29	74.00	-17.71	peak	
4		5372.600	32.46	12.49	44.95	54.00	-9.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

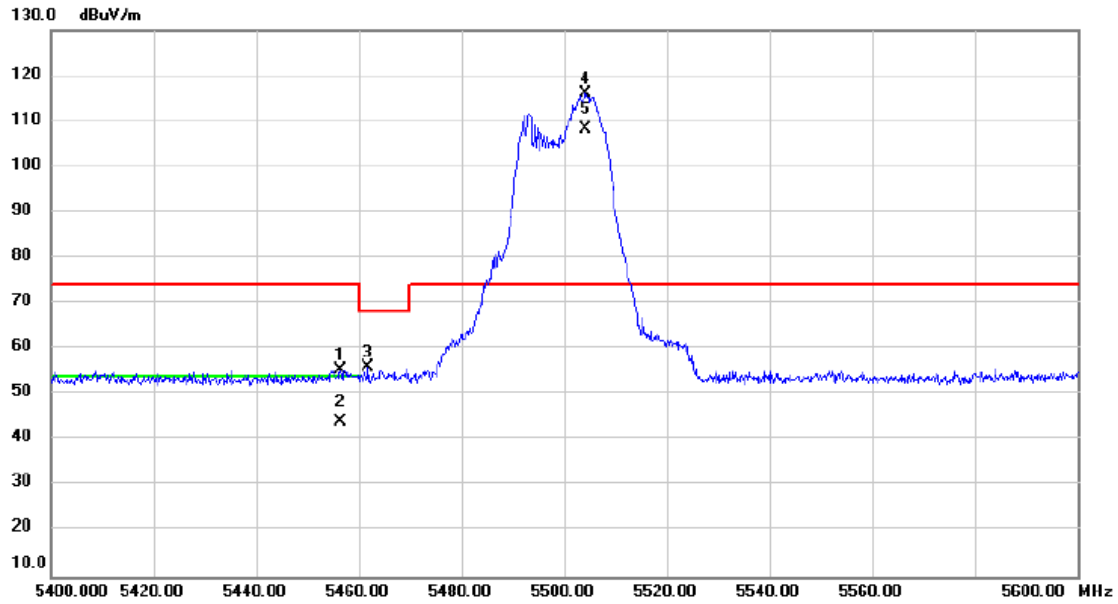


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5456.400	42.82	12.58	55.40	74.00	-18.60	peak	
2		5456.400	31.58	12.58	44.16	54.00	-9.84	AVG	
3		5461.800	43.57	12.59	56.16	68.20	-12.04	peak	
4	*	5504.200	103.3	12.64	115.96	74.00	41.96	peak	No Limit
5	X	5504.200	95.58	12.64	108.22	74.00	34.22	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

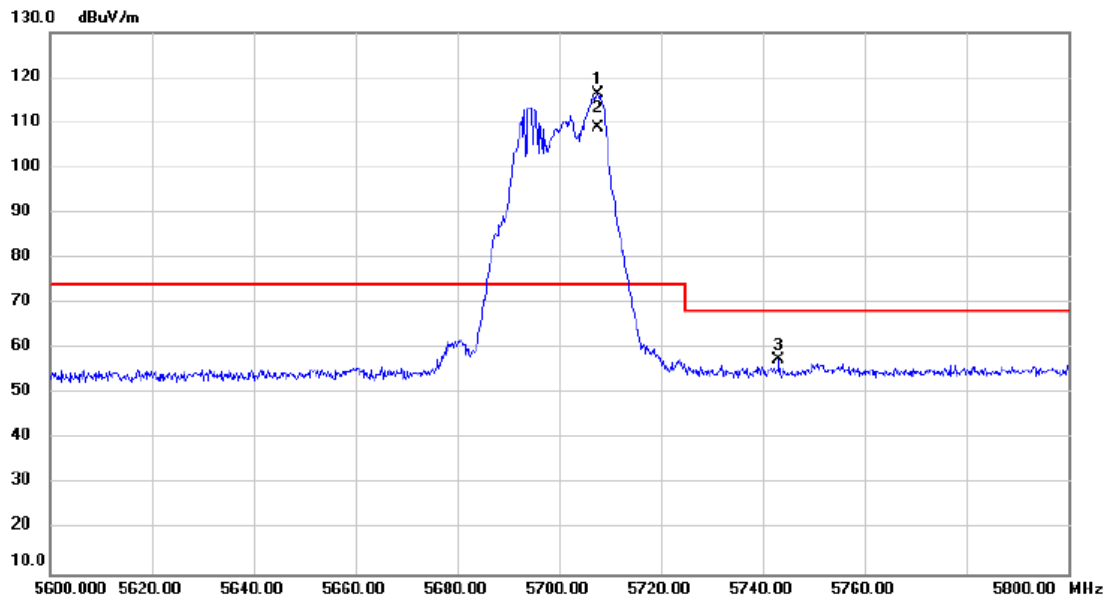


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5707.600	103.1	13.06	116.25	74.00	42.25	peak	No Limit
2	X	5707.600	95.94	13.06	109.00	74.00	35.00	AVG	No Limit
3		5743.200	44.52	13.13	57.65	68.20	-10.55	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

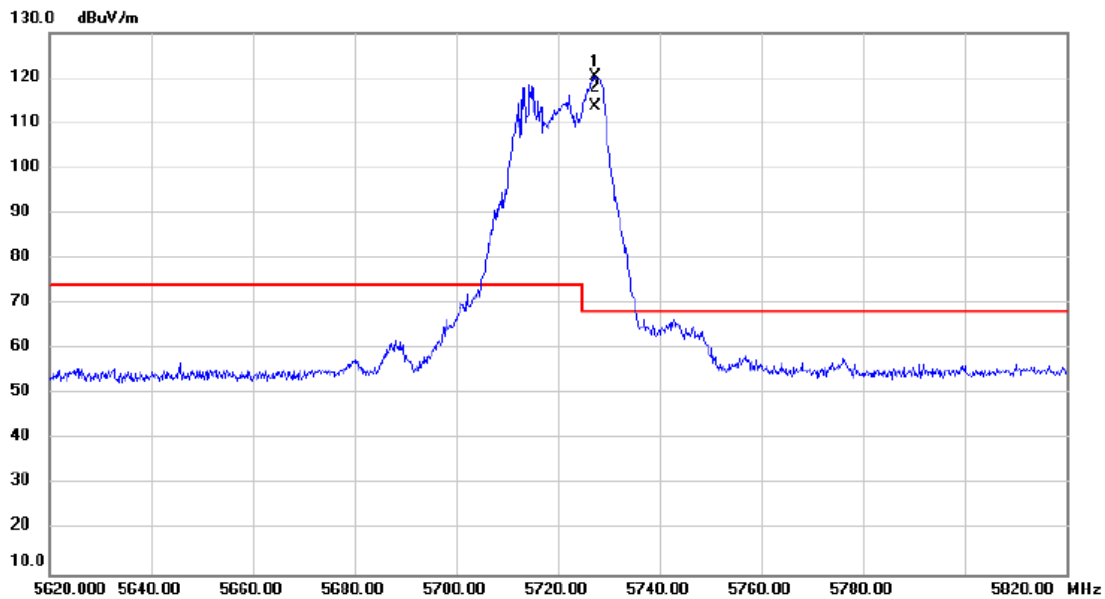


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5727.400	107.2	13.10	120.36	68.20	52.16	peak	No Limit
2	X	5727.400	100.5	13.10	113.62	68.20	45.42	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

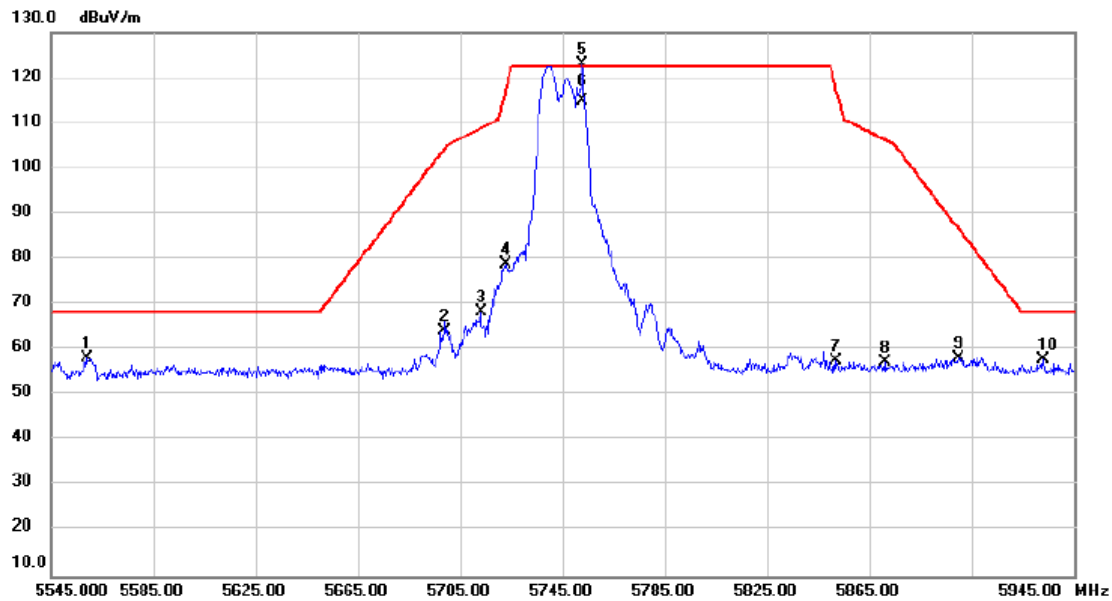


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5559.000	45.38	12.75	58.13	68.20	-10.07	peak	
2		5698.600	51.26	13.04	64.30	104.17	-39.87	peak	
3		5713.000	55.21	13.07	68.28	108.84	-40.56	peak	
4		5723.000	65.65	13.09	78.74	117.64	-38.90	peak	
5	*	5752.600	109.8	13.16	123.05	122.20	0.85	peak	No Limit
6		5752.600	101.7	13.16	114.90	122.20	-7.30	AVG	No Limit
7		5851.800	44.33	13.36	57.69	118.09	-60.40	peak	
8		5871.000	43.89	13.40	57.29	106.32	-49.03	peak	
9		5900.200	44.84	13.46	58.30	86.51	-28.21	peak	
10		5933.000	44.35	13.54	57.89	68.20	-10.31	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/30
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

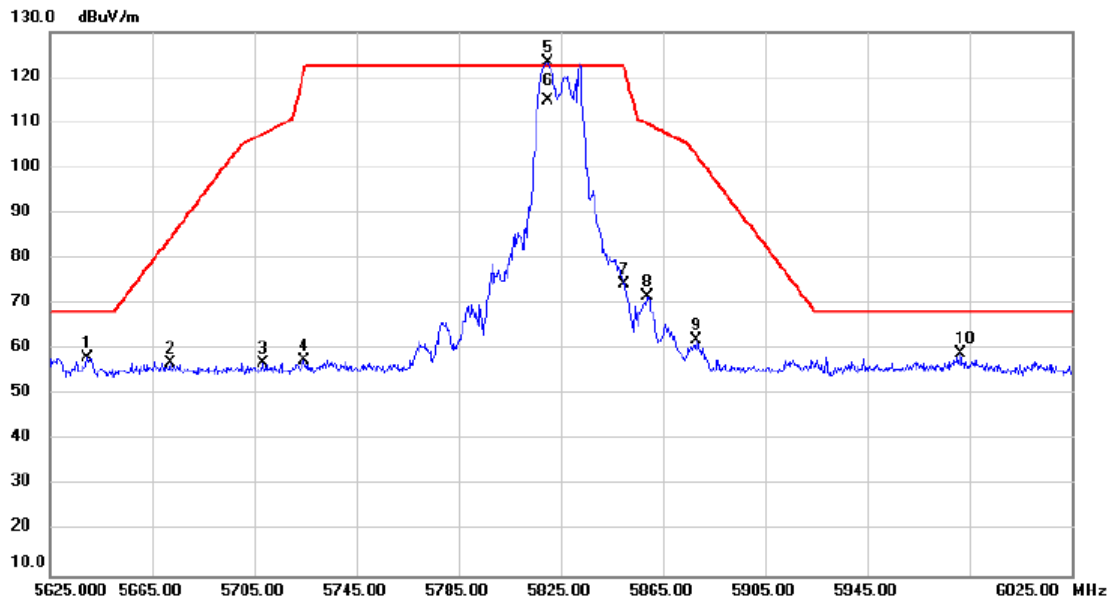


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5639.800	45.15	12.92	58.07	68.20	-10.13	peak	
2		5672.200	43.99	12.98	56.97	84.67	-27.70	peak	
3		5708.600	43.97	13.06	57.03	107.61	-50.58	peak	
4		5724.600	44.40	13.09	57.49	121.29	-63.80	peak	
5	*	5820.200	109.9	13.30	123.21	122.20	1.01	peak	No Limit
6		5820.200	101.6	13.30	114.99	122.20	-7.21	AVG	No Limit
7		5849.800	61.13	13.36	74.49	122.20	-47.71	peak	
8		5859.000	58.19	13.38	71.57	109.68	-38.11	peak	
9		5878.200	48.58	13.42	62.00	102.82	-40.82	peak	
10		5981.400	45.28	13.63	58.91	68.20	-9.29	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

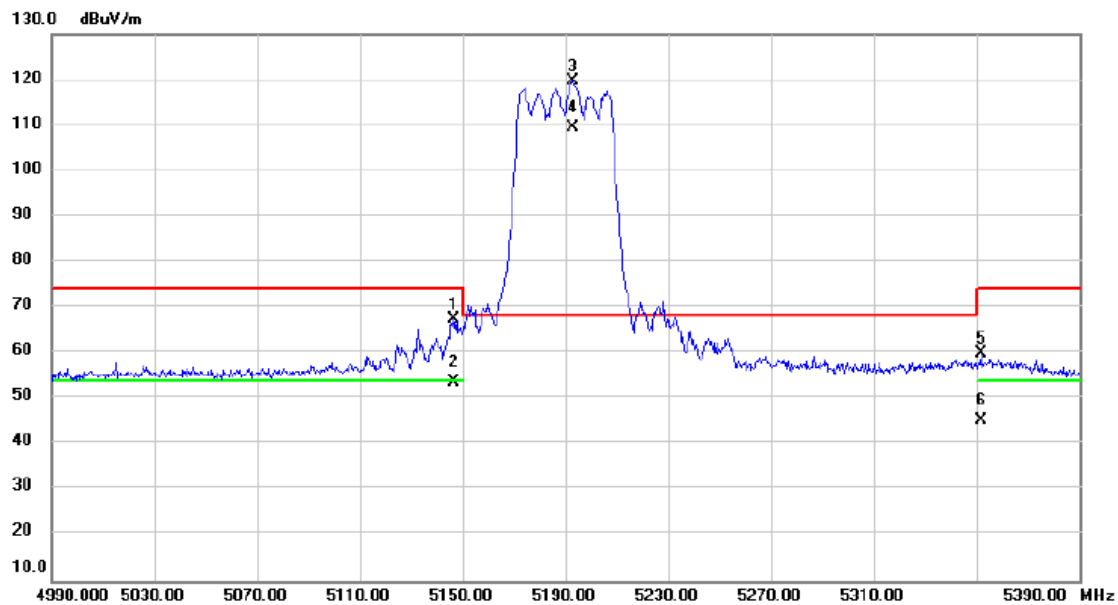


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.400	55.22	12.24	67.46	74.00	-6.54	peak	
2		5146.400	41.41	12.24	53.65	54.00	-0.35	AVG	
3	*	5192.800	107.3	12.29	119.59	68.20	51.39	peak	No Limit
4	X	5192.800	97.31	12.29	109.60	68.20	41.40	AVG	No Limit
5		5351.600	47.45	12.47	59.92	74.00	-14.08	peak	
6		5351.600	32.66	12.47	45.13	54.00	-8.87	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

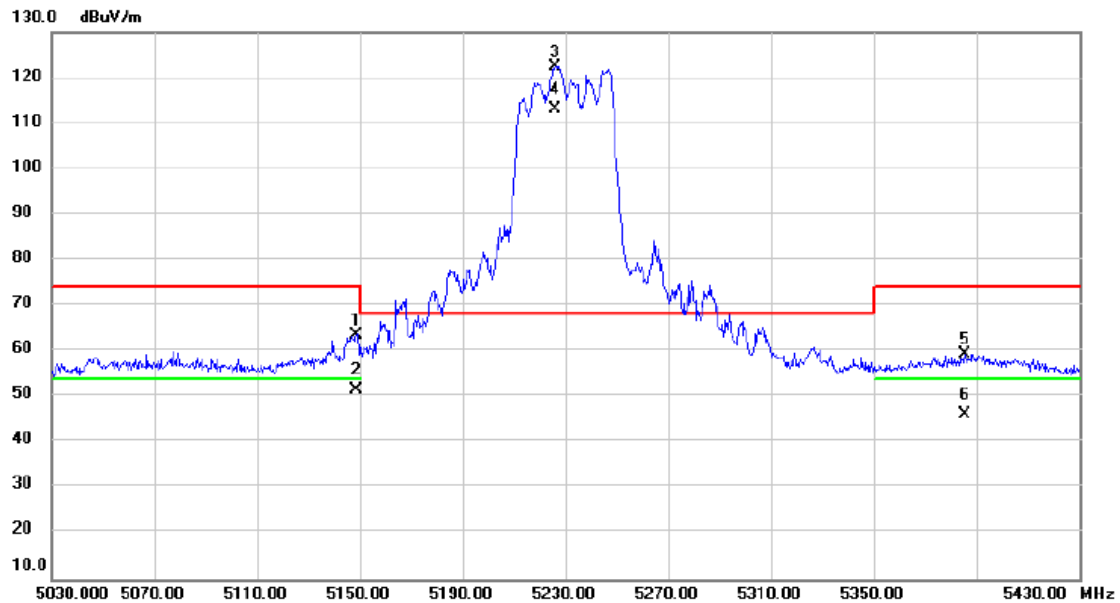


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.800	51.34	12.24	63.58	74.00	-10.42	peak	
2		5148.800	39.35	12.24	51.59	54.00	-2.41	AVG	
3	*	5226.000	110.1	12.33	122.45	68.20	54.25	peak	No Limit
4	X	5226.000	100.8	12.33	113.15	68.20	44.95	AVG	No Limit
5		5385.600	46.92	12.51	59.43	74.00	-14.57	peak	
6		5385.600	33.79	12.51	46.30	54.00	-7.70	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

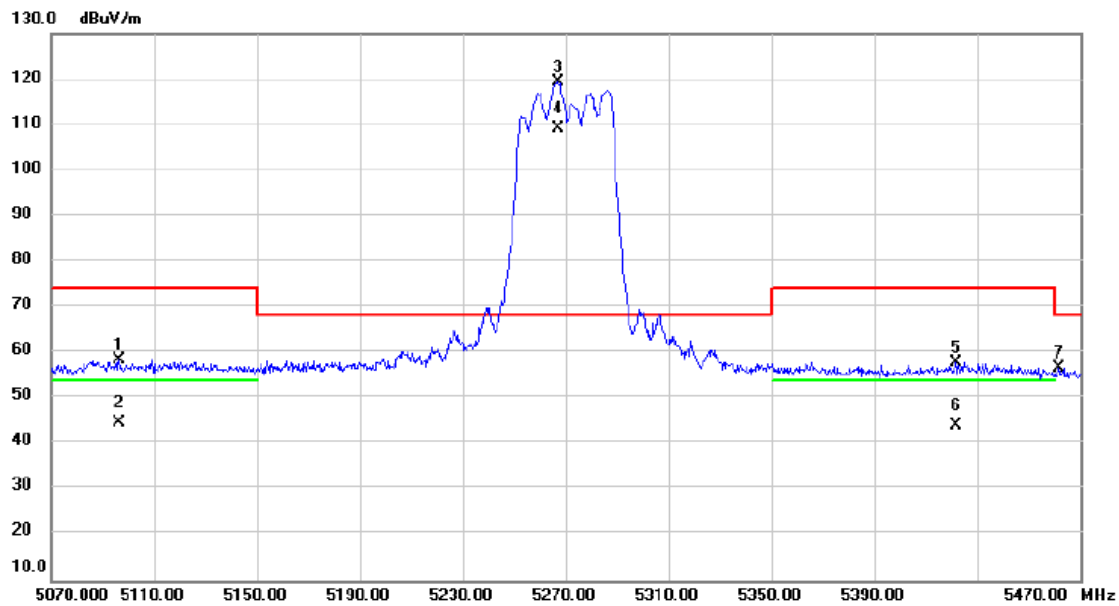


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5096.400	46.37	12.19	58.56	74.00	-15.44	peak	
2		5096.400	32.39	12.19	44.58	54.00	-9.42	AVG	
3	*	5266.800	107.0	12.37	119.38	68.20	51.18	peak	No Limit
4	X	5266.800	96.92	12.37	109.29	68.20	41.09	AVG	No Limit
5		5421.600	45.44	12.55	57.99	74.00	-16.01	peak	
6		5421.600	31.42	12.55	43.97	54.00	-10.03	AVG	
7		5461.600	43.99	12.59	56.58	68.20	-11.62	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

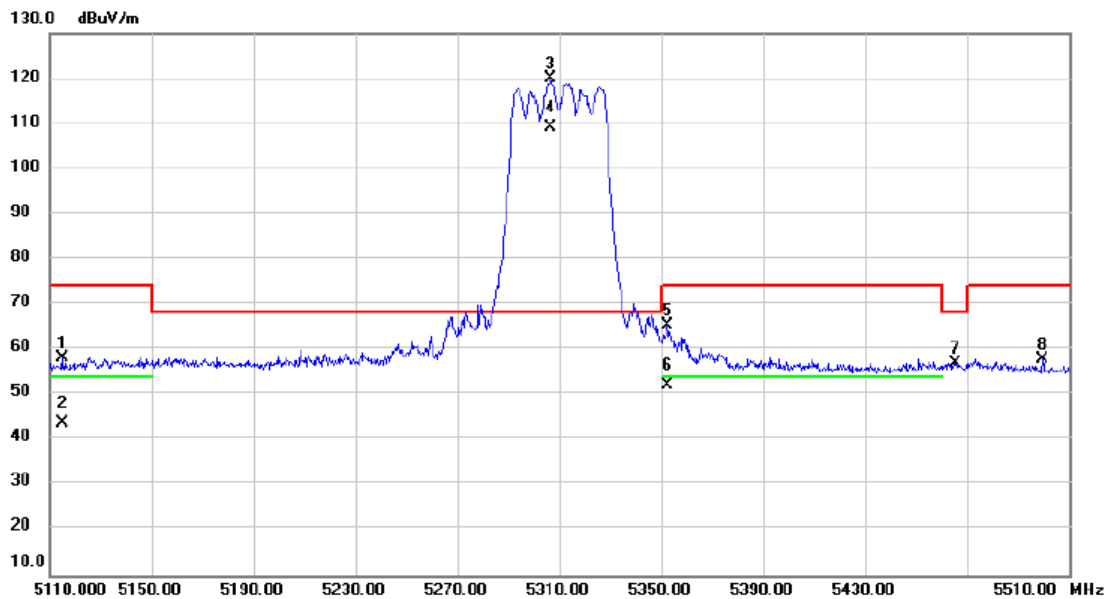


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5114.800	46.05	12.20	58.25	74.00	-15.75	peak	
2		5114.800	31.68	12.20	43.88	54.00	-10.12	AVG	
3	*	5306.400	107.6	12.42	120.10	68.20	51.90	peak	No Limit
4	X	5306.400	96.64	12.42	109.06	68.20	40.86	AVG	No Limit
5		5352.400	52.81	12.47	65.28	74.00	-8.72	peak	
6		5352.400	39.60	12.47	52.07	54.00	-1.93	AVG	
7		5465.600	44.49	12.59	57.08	68.20	-11.12	peak	
8		5499.600	45.32	12.63	57.95	74.00	-16.05	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

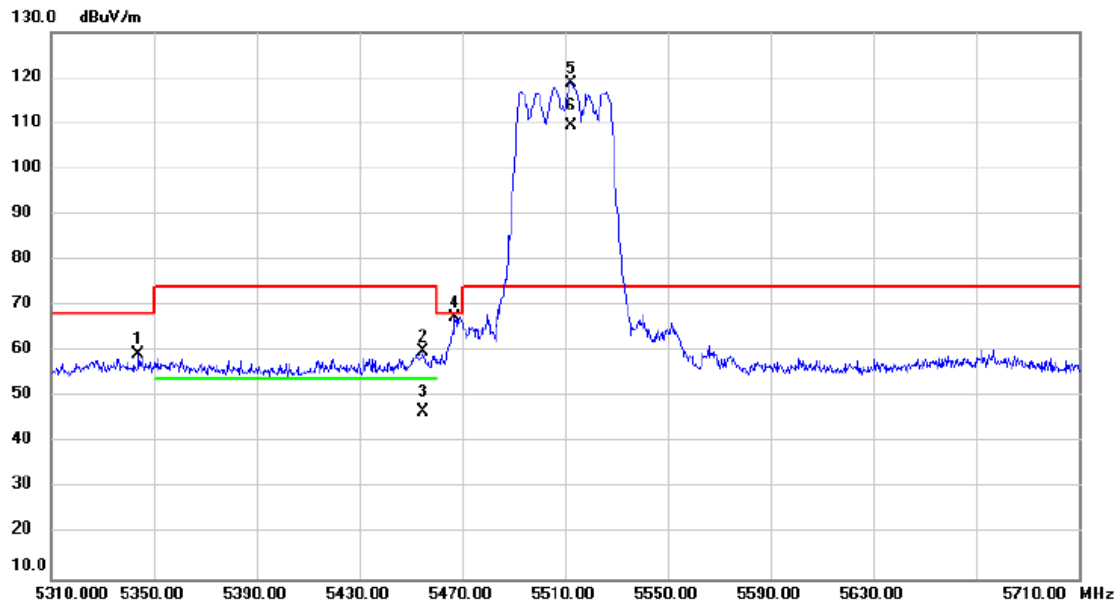


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5344.000	46.81	12.46	59.27	68.20	-8.93	peak	
2		5454.800	47.45	12.57	60.02	74.00	-13.98	peak	
3		5454.800	34.05	12.57	46.62	54.00	-7.38	AVG	
4		5467.200	54.94	12.59	67.53	68.20	-0.67	peak	
5	*	5512.400	106.2	12.66	118.88	74.00	44.88	peak	No Limit
6	X	5512.400	96.84	12.66	109.50	74.00	35.50	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

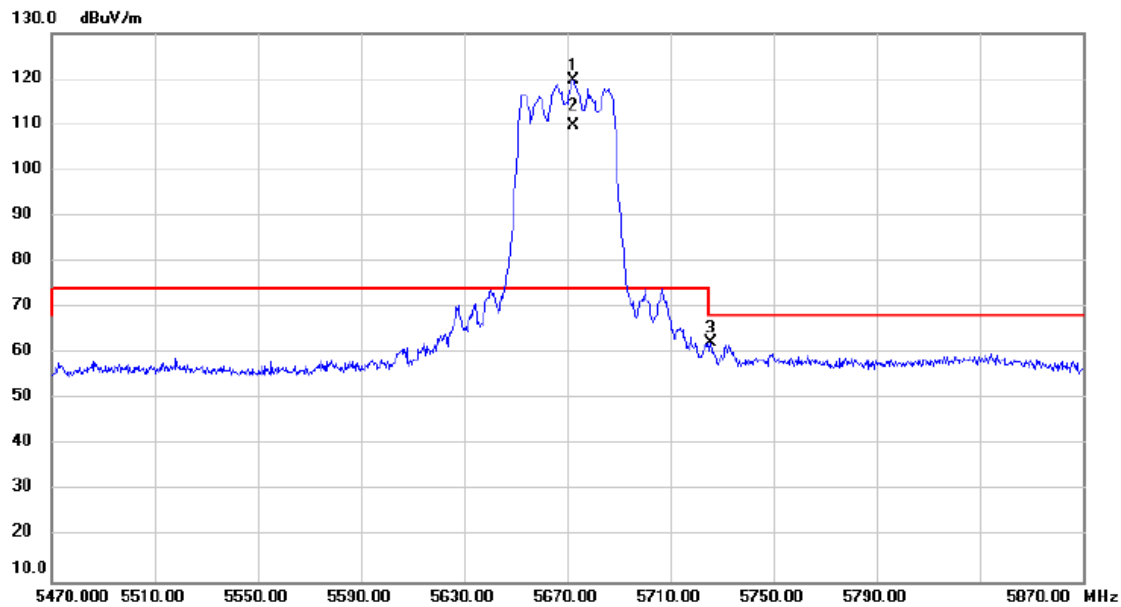


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5672.400	106.7	12.98	119.75	74.00	45.75	peak	No Limit
2	X	5672.400	96.63	12.98	109.61	74.00	35.61	AVG	No Limit
3		5725.600	49.28	13.10	62.38	68.20	-5.82	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

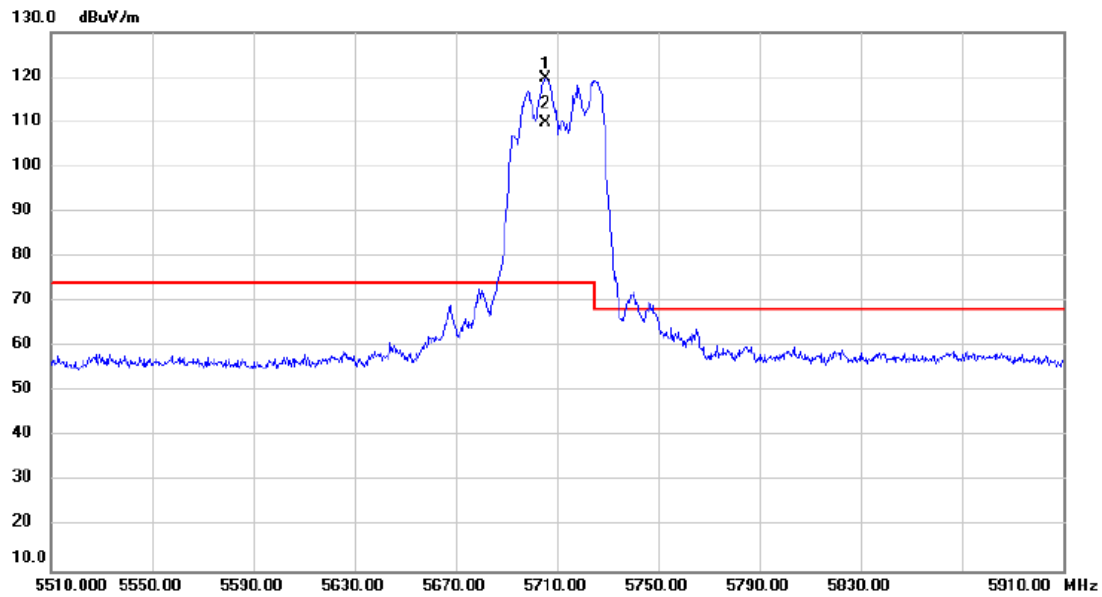


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5705.600	106.4	13.06	119.55	74.00	45.55	peak	No Limit
2	X	5705.600	96.57	13.06	109.63	74.00	35.63	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

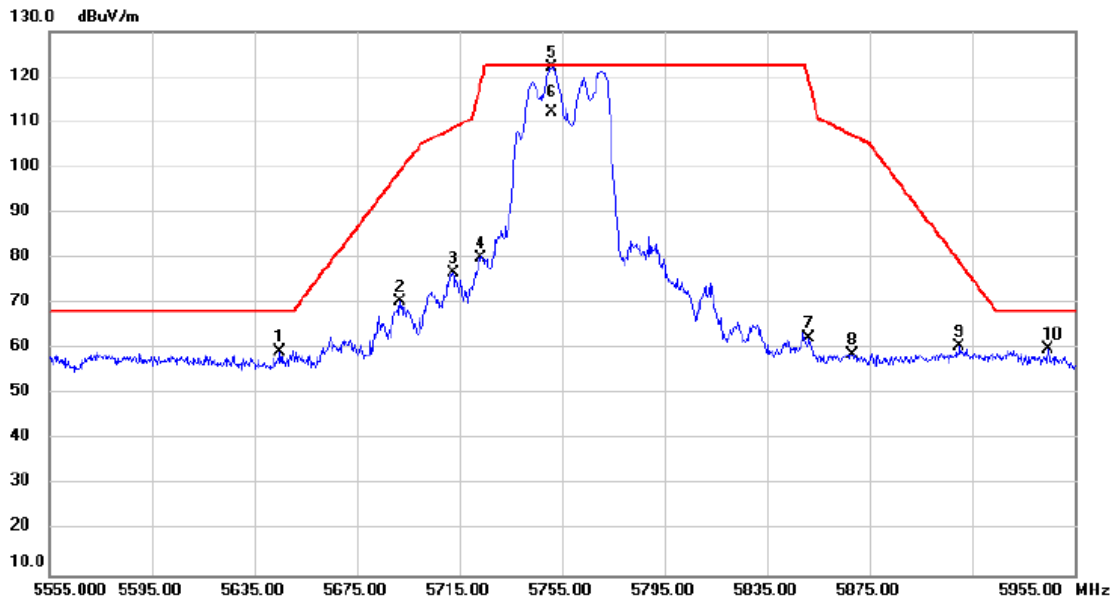


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5645.000	46.30	12.93	59.23	68.20	-8.97	peak	
2		5691.800	57.30	13.03	70.33	99.15	-28.82	peak	
3		5712.600	63.61	13.07	76.68	108.73	-32.05	peak	
4		5723.400	67.06	13.09	80.15	118.55	-38.40	peak	
5	*	5751.000	108.8	13.16	121.99	122.20	-0.21	peak	No Limit
6		5751.000	99.06	13.16	112.22	122.20	-9.98	AVG	No Limit
7		5851.400	48.97	13.36	62.33	119.01	-56.68	peak	
8		5868.200	45.48	13.40	58.88	107.10	-48.22	peak	
9		5910.200	47.04	13.48	60.52	79.12	-18.60	peak	
10		5944.600	46.31	13.55	59.86	68.20	-8.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/30
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

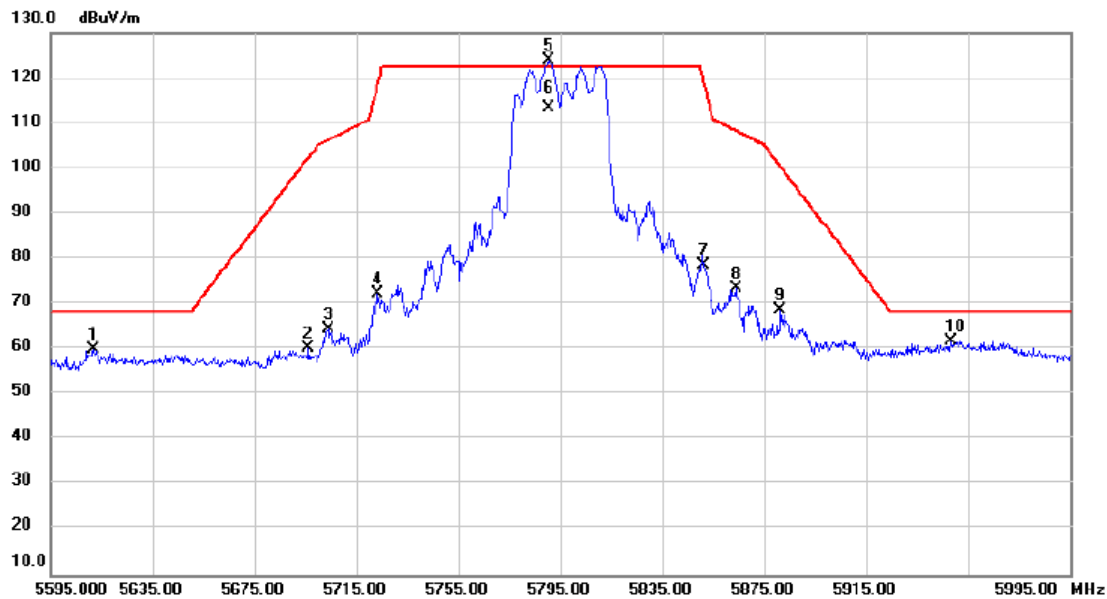


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5611.800	46.95	12.86	59.81	68.20	-8.39	peak	
2		5696.200	47.13	13.03	60.16	102.40	-42.24	peak	
3		5703.800	51.39	13.05	64.44	106.27	-41.83	peak	
4		5723.000	59.09	13.09	72.18	117.64	-45.46	peak	
5	*	5790.600	110.5	13.24	123.77	122.20	1.57	peak	No Limit
6		5790.600	100.1	13.24	113.43	122.20	-8.77	AVG	No Limit
7		5851.400	65.24	13.36	78.60	119.01	-40.41	peak	
8		5863.800	60.06	13.39	73.45	108.33	-34.88	peak	
9		5881.400	55.37	13.42	68.79	100.45	-31.66	peak	
10		5948.200	48.18	13.57	61.75	68.20	-6.45	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/30
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

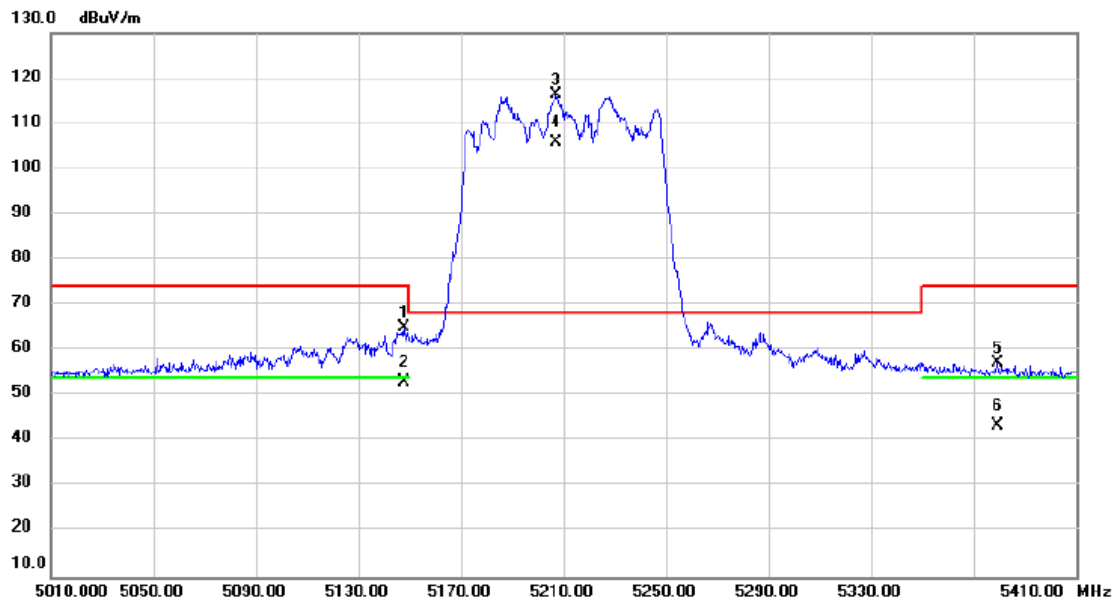


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.600	52.75	12.24	64.99	74.00	-9.01	peak	
2		5147.600	40.89	12.24	53.13	54.00	-0.87	AVG	
3	*	5207.200	104.0	12.31	116.34	68.20	48.14	peak	No Limit
4	X	5207.200	93.44	12.31	105.75	68.20	37.55	AVG	No Limit
5		5379.200	44.67	12.50	57.17	74.00	-16.83	peak	
6		5379.200	30.83	12.50	43.33	54.00	-10.67	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/30
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

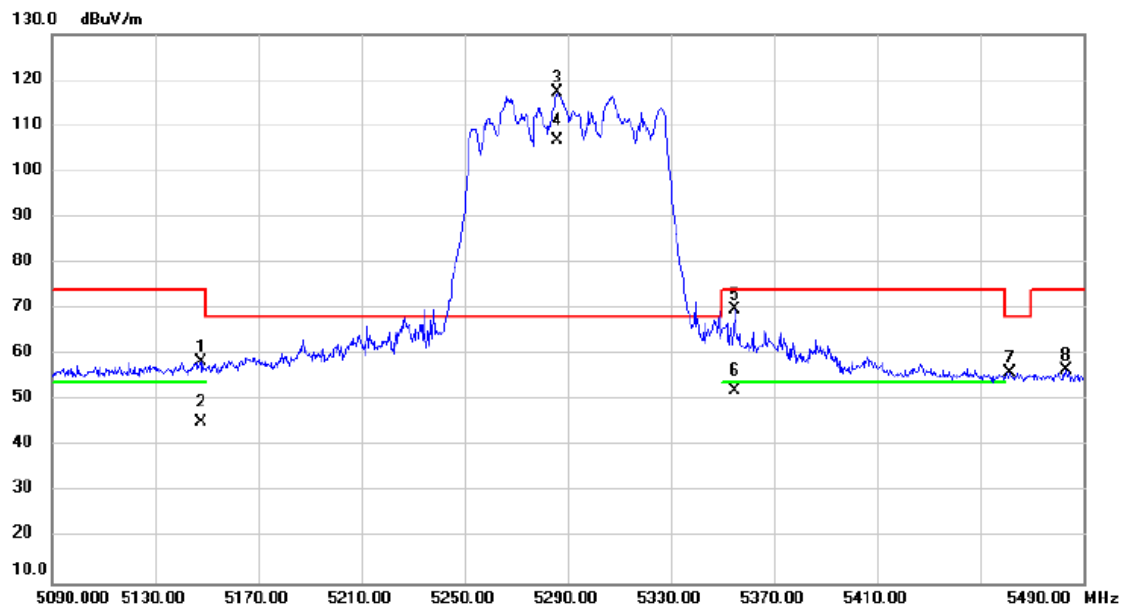


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.600	46.19	12.24	58.43	74.00	-15.57	peak	
2		5147.600	32.87	12.24	45.11	54.00	-8.89	AVG	
3	*	5286.000	104.9	12.40	117.33	68.20	49.13	peak	No Limit
4	X	5286.000	94.28	12.40	106.68	68.20	38.48	AVG	No Limit
5		5354.800	57.32	12.47	69.79	74.00	-4.21	peak	
6		5354.800	39.63	12.47	52.10	54.00	-1.90	AVG	
7		5461.600	43.57	12.59	56.16	68.20	-12.04	peak	
8		5483.200	44.09	12.62	56.71	74.00	-17.29	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/30
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

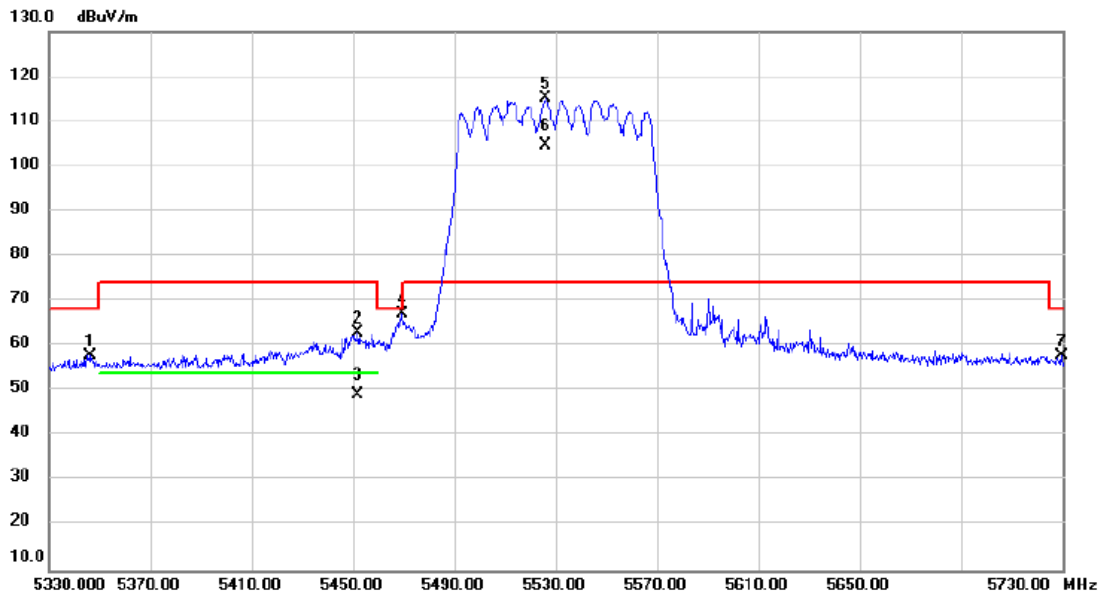


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5346.400	45.44	12.46	57.90	68.20	-10.30	peak	
2		5452.000	50.26	12.58	62.84	74.00	-11.16	peak	
3		5452.000	36.69	12.58	49.27	54.00	-4.73	AVG	
4		5469.600	54.41	12.60	67.01	68.20	-1.19	peak	
5	*	5526.000	102.3	12.69	115.02	74.00	41.02	peak	No Limit
6	X	5526.000	92.02	12.69	104.71	74.00	30.71	AVG	No Limit
7		5729.600	44.63	13.10	57.73	68.20	-10.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/30
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

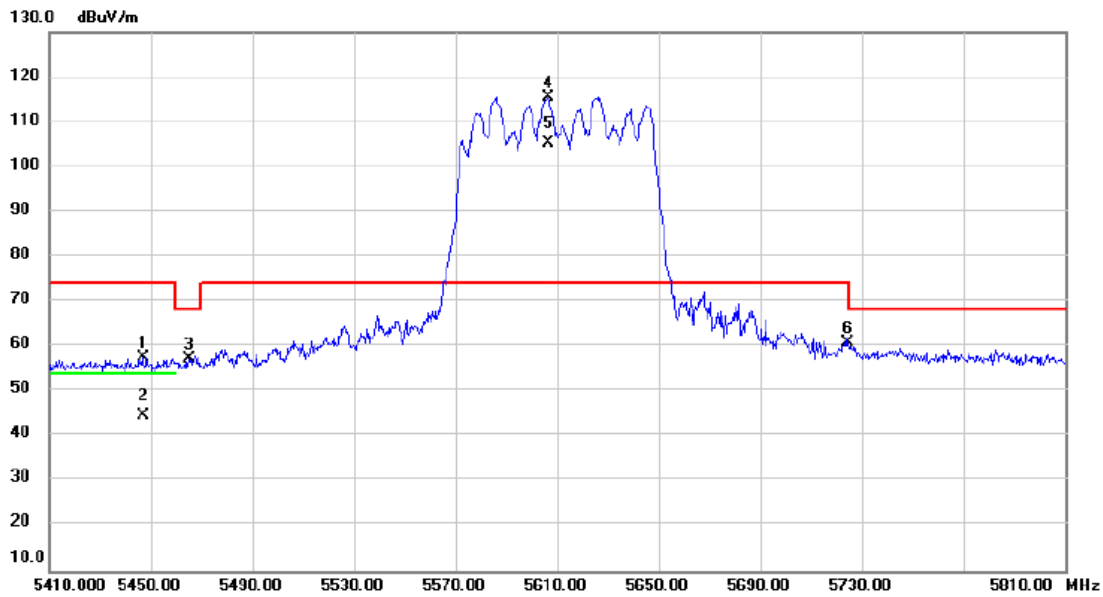


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5446.800	44.98	12.58	57.56	74.00	-16.44	peak	
2		5446.800	31.97	12.58	44.55	54.00	-9.45	AVG	
3		5465.200	44.75	12.59	57.34	68.20	-10.86	peak	
4	*	5606.400	102.6	12.85	115.48	74.00	41.48	peak	No Limit
5	X	5606.400	92.41	12.85	105.26	74.00	31.26	AVG	No Limit
6		5724.400	47.77	13.09	60.86	74.00	-13.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/30
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

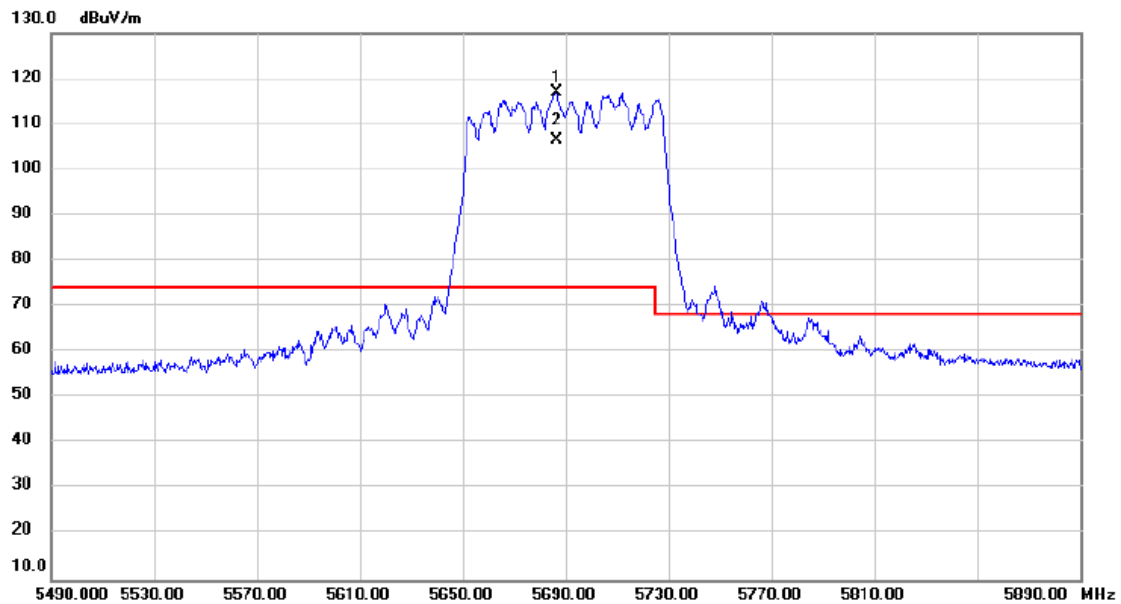


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5686.400	103.8	13.01	116.90	74.00	42.90	peak	No Limit
2	X	5686.400	93.37	13.01	106.38	74.00	32.38	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/30
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

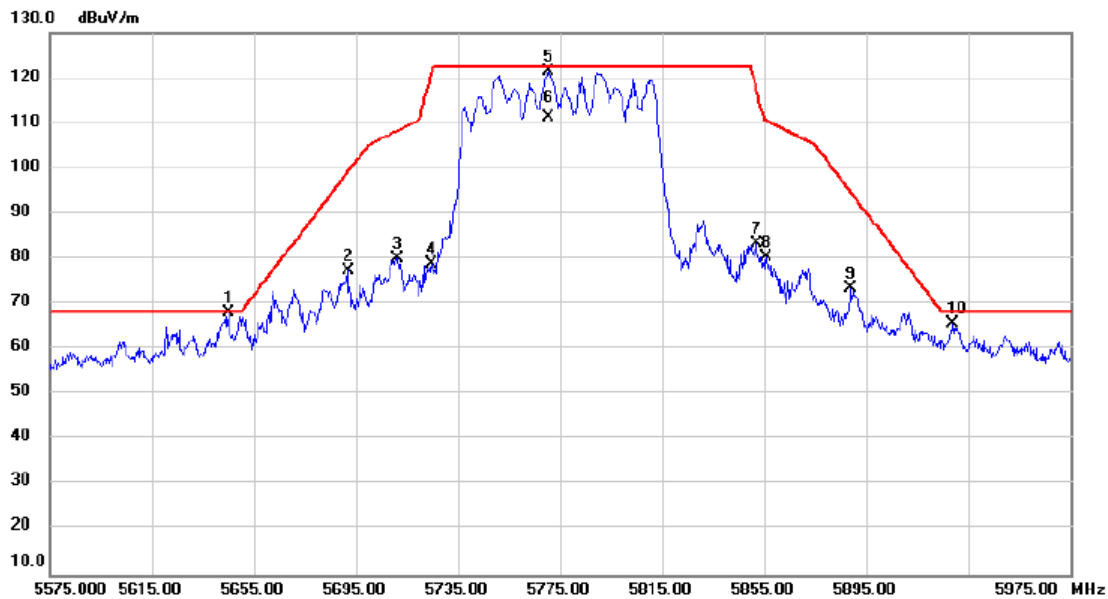


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5645.000	55.23	12.93	68.16	68.20	-0.04	peak	
2		5691.800	64.24	13.03	77.27	99.15	-21.88	peak	
3		5711.000	67.10	13.07	80.17	108.28	-28.11	peak	
4		5724.600	65.66	13.09	78.75	121.29	-42.54	peak	
5		5770.600	108.3	13.20	121.51	122.20	-0.69	peak	No Limit
6		5770.600	98.15	13.20	111.35	122.20	-10.85	AVG	No Limit
7		5851.800	69.94	13.36	83.30	118.09	-34.79	peak	
8		5855.800	66.85	13.37	80.22	110.58	-30.36	peak	
9		5889.000	60.12	13.44	73.56	94.81	-21.25	peak	
10		5929.000	52.12	13.52	65.64	68.20	-2.56	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/10/30
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

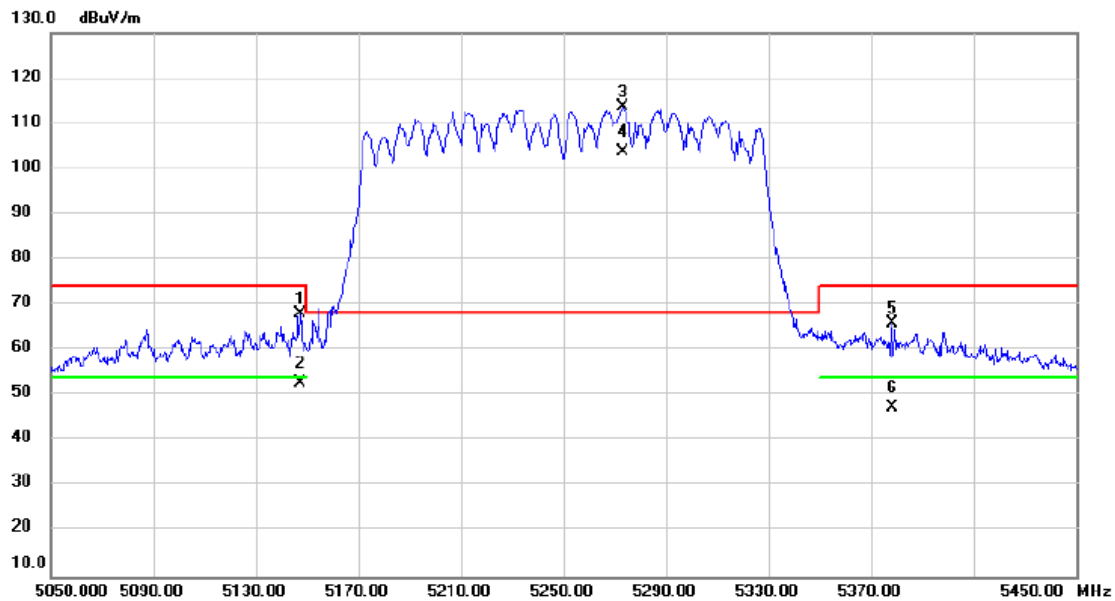


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5147.200	55.91	12.24	68.15	74.00	-5.85	peak	
2		5147.200	40.60	12.24	52.84	54.00	-1.16	AVG	
3	*	5273.200	101.3	12.38	113.71	68.20	45.51	peak	No Limit
4	X	5273.200	91.43	12.38	103.81	68.20	35.61	AVG	No Limit
5		5378.000	53.59	12.49	66.08	74.00	-7.92	peak	
6		5378.000	34.96	12.49	47.45	54.00	-6.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/10/30
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

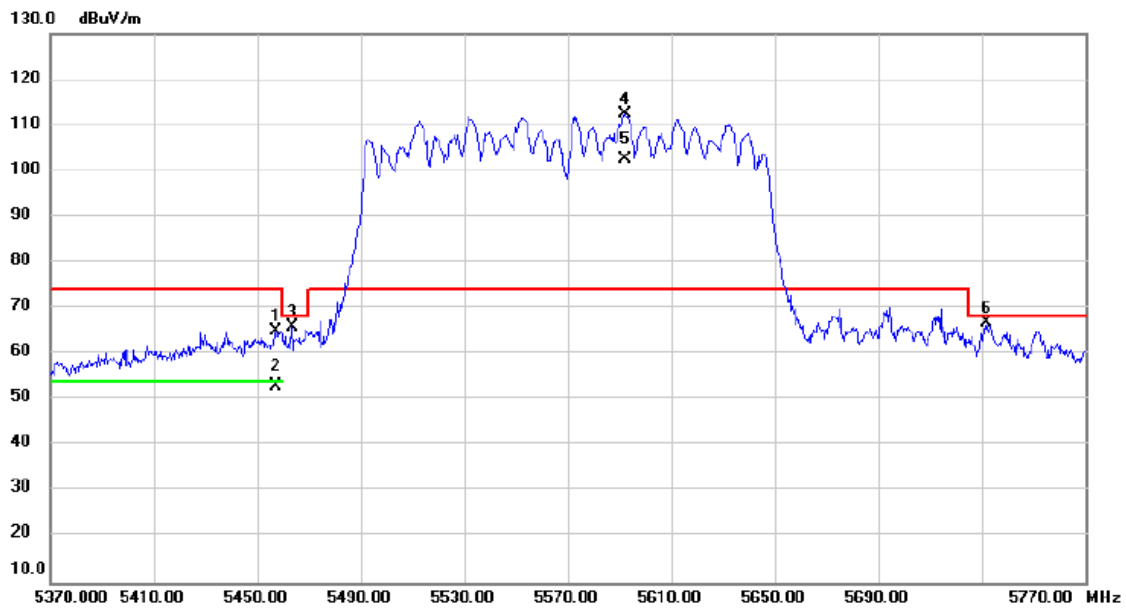


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5457.200	52.41	12.58	64.99	74.00	-9.01	peak	
2		5457.200	40.60	12.58	53.18	54.00	-0.82	AVG	
3		5463.600	53.23	12.59	65.82	68.20	-2.38	peak	
4	*	5592.000	99.58	12.82	112.40	74.00	38.40	peak	No Limit
5	X	5592.000	89.58	12.82	102.40	74.00	28.40	AVG	No Limit
6		5731.600	53.63	13.10	66.73	68.20	-1.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/30
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

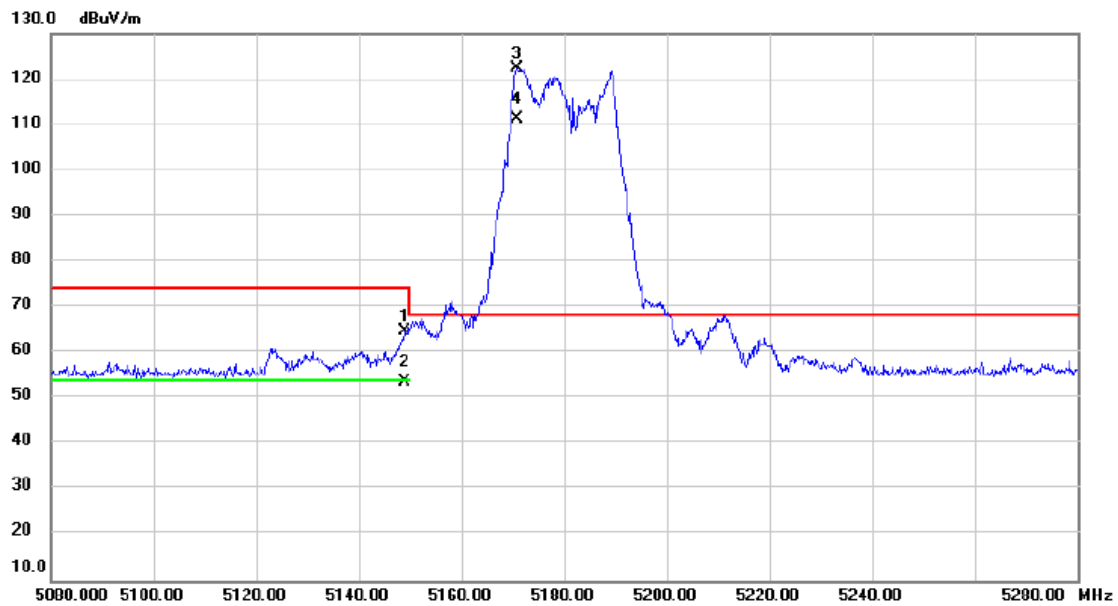


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.000	52.57	12.24	64.81	74.00	-9.19	peak	
2		5149.000	41.31	12.24	53.55	54.00	-0.45	AVG	
3	*	5170.800	109.9	12.28	122.27	68.20	54.07	peak	No Limit
4	X	5170.800	98.87	12.28	111.15	68.20	42.95	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/30
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

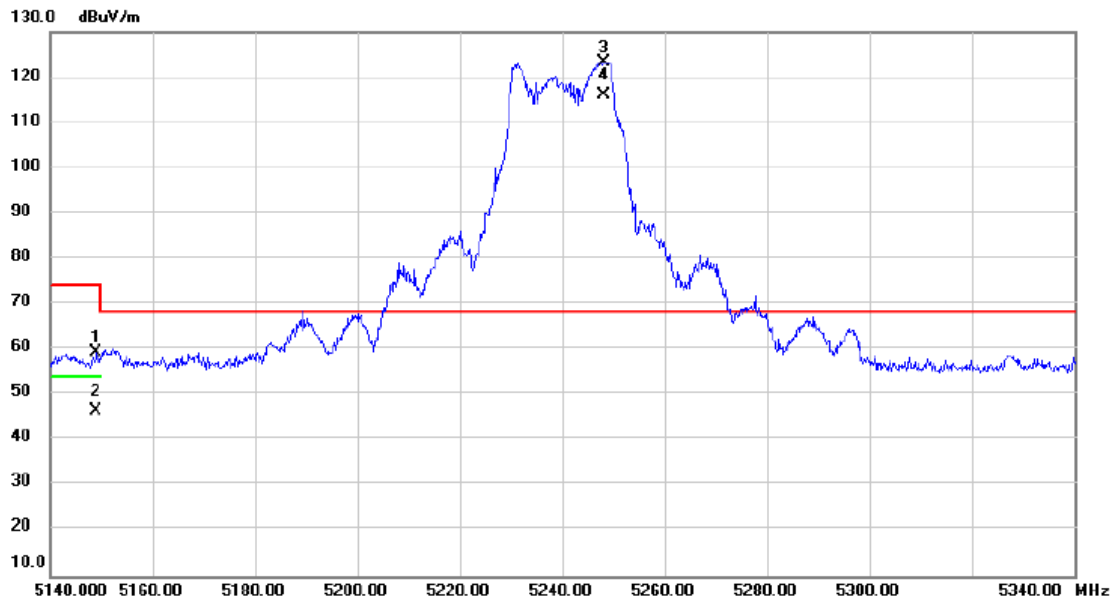


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5149.000	47.14	12.24	59.38	74.00	-14.62	peak	
2		5149.000	34.15	12.24	46.39	54.00	-7.61	AVG	
3	*	5248.200	110.9	12.35	123.32	68.20	55.12	peak	No Limit
4	X	5248.200	103.5	12.35	115.91	68.20	47.71	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/10/30
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

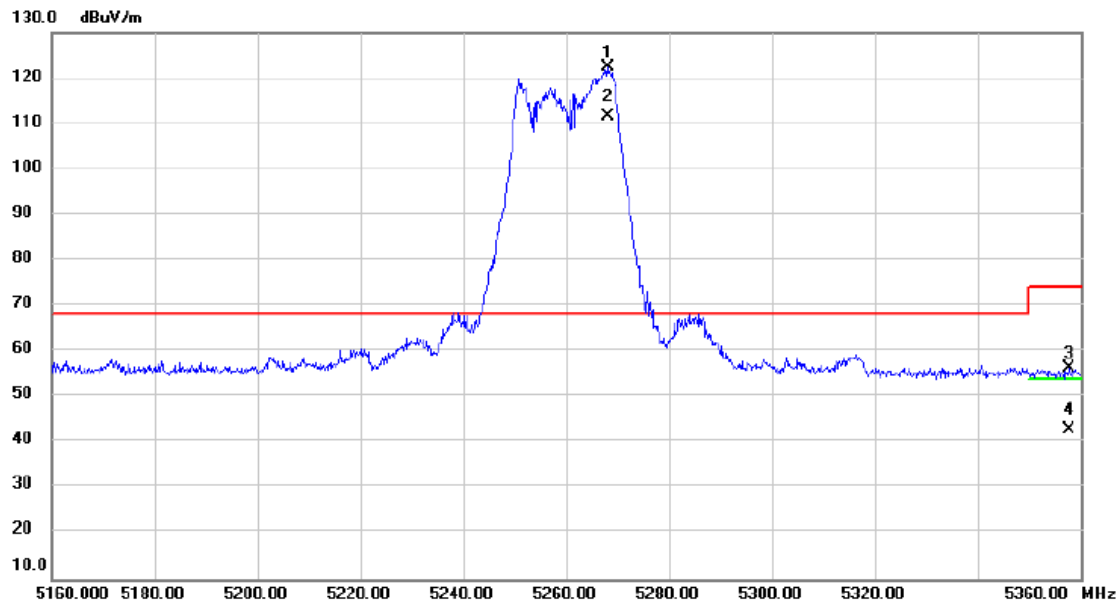


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5268.000	109.8	12.37	122.25	68.20	54.05	peak	No Limit
2	X	5268.000	99.33	12.37	111.70	68.20	43.50	AVG	No Limit
3		5357.600	43.76	12.48	56.24	74.00	-17.76	peak	
4		5357.600	30.46	12.48	42.94	54.00	-11.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/30
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

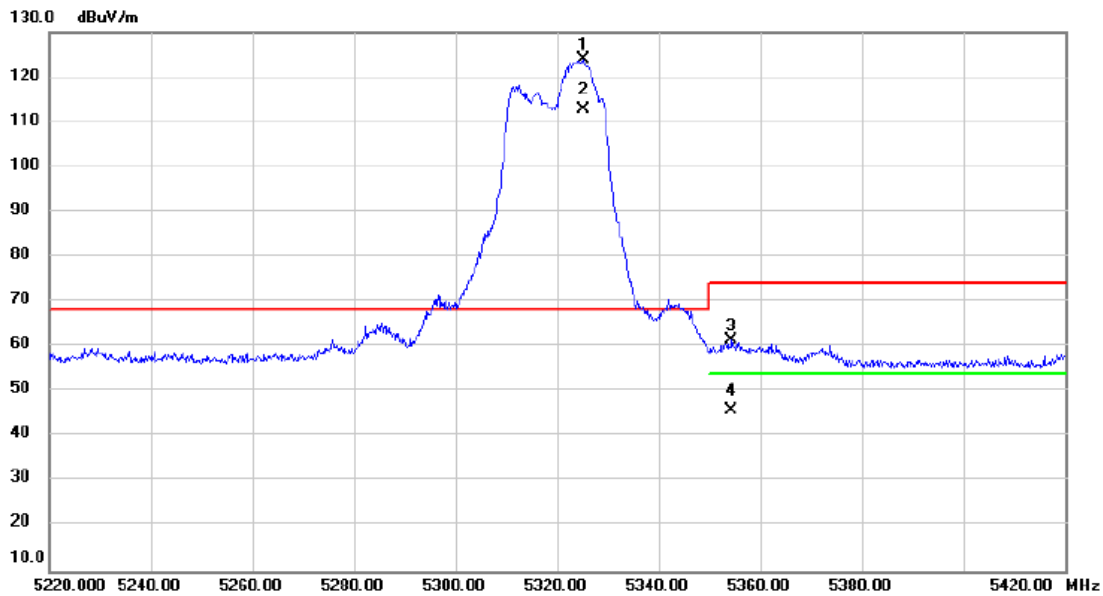


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5325.200	111.2	12.44	123.72	68.20	55.52	peak	No Limit
2	X	5325.200	100.3	12.44	112.83	68.20	44.63	AVG	No Limit
3		5354.400	48.97	12.47	61.44	74.00	-12.56	peak	
4		5354.400	33.50	12.47	45.97	54.00	-8.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/30
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

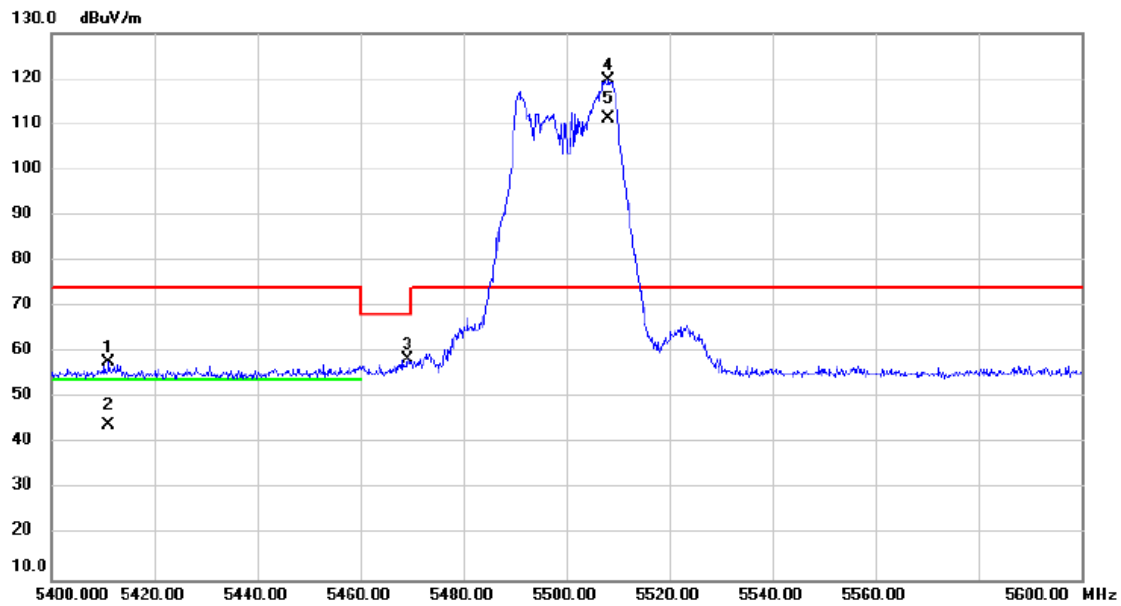


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5411.200	45.44	12.53	57.97	74.00	-16.03	peak	
2		5411.200	31.38	12.53	43.91	54.00	-10.09	AVG	
3		5469.200	45.94	12.60	58.54	68.20	-9.66	peak	
4	*	5508.200	107.1	12.65	119.77	74.00	45.77	peak	No Limit
5	X	5508.200	98.55	12.65	111.20	74.00	37.20	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/10/30
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

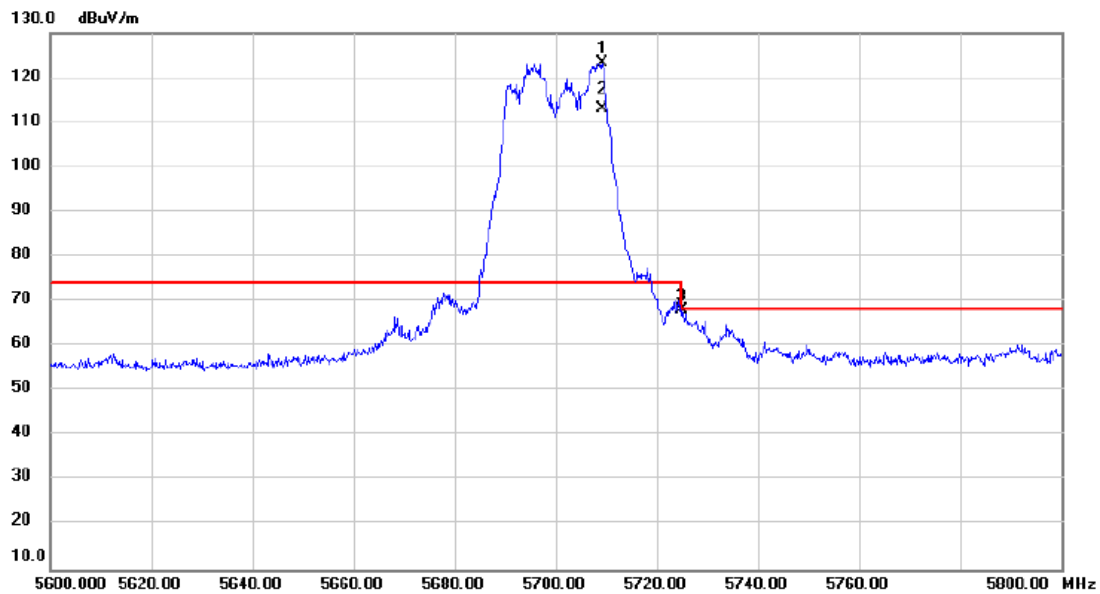


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5709.200	110.2	13.06	123.31	74.00	49.31	peak	No Limit
2	X	5709.200	99.87	13.06	112.93	74.00	38.93	AVG	No Limit
3		5725.000	54.95	13.10	68.05	68.20	-0.15	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax(HE20)	Test Date	2025/10/30
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

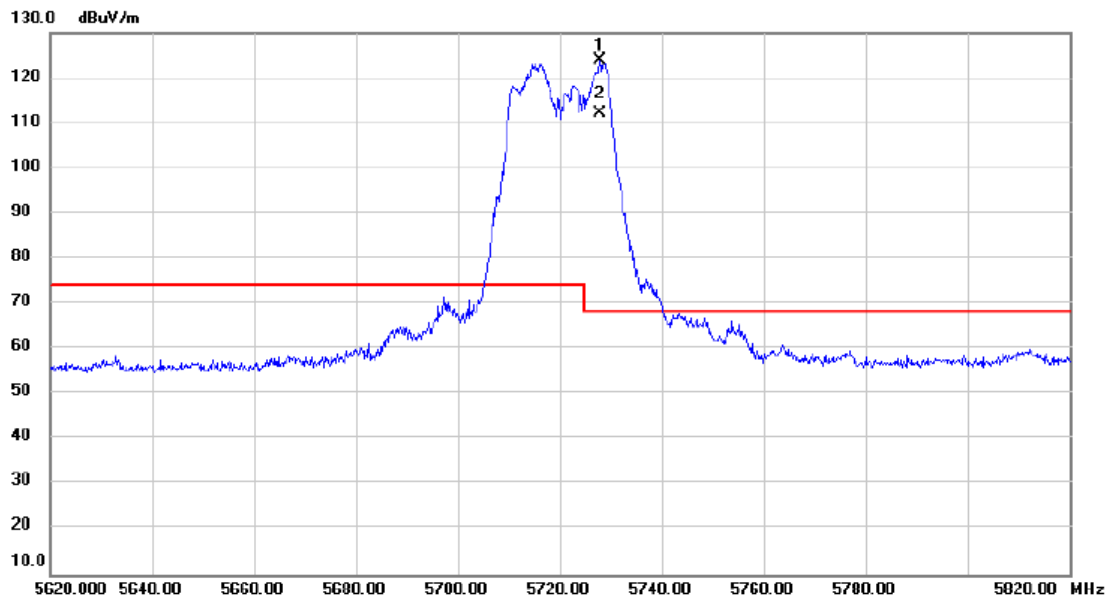


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5727.800	110.8	13.10	123.94	68.20	55.74	peak	No Limit
2	X	5727.800	98.93	13.10	112.03	68.20	43.83	AVG	No Limit

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/30
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

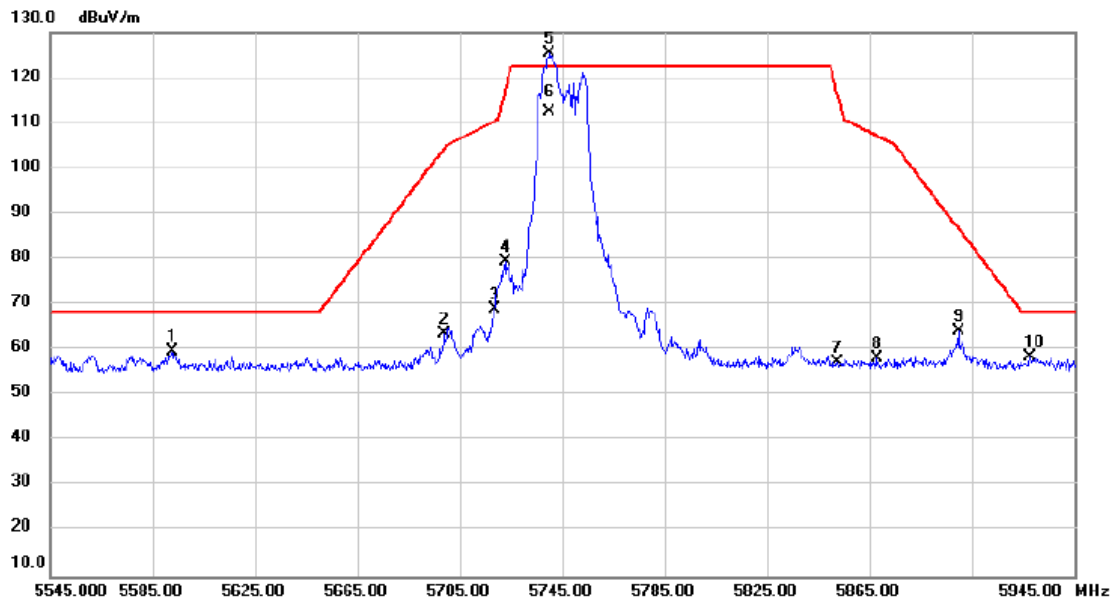


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5592.600	46.85	12.82	59.67	68.20	-8.53	peak	
2		5699.000	50.58	13.04	63.62	104.46	-40.84	peak	
3		5718.600	55.82	13.08	68.90	110.41	-41.51	peak	
4		5723.000	66.30	13.09	79.39	117.64	-38.25	peak	
5	*	5740.200	112.2	13.13	125.33	122.20	3.13	peak	No Limit
6		5740.200	99.46	13.13	112.59	122.20	-9.61	AVG	No Limit
7		5852.600	43.87	13.36	57.23	116.27	-59.04	peak	
8		5867.800	44.71	13.39	58.10	107.21	-49.11	peak	
9		5899.800	50.73	13.46	64.19	86.81	-22.62	peak	
10		5927.800	44.92	13.52	58.44	68.20	-9.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

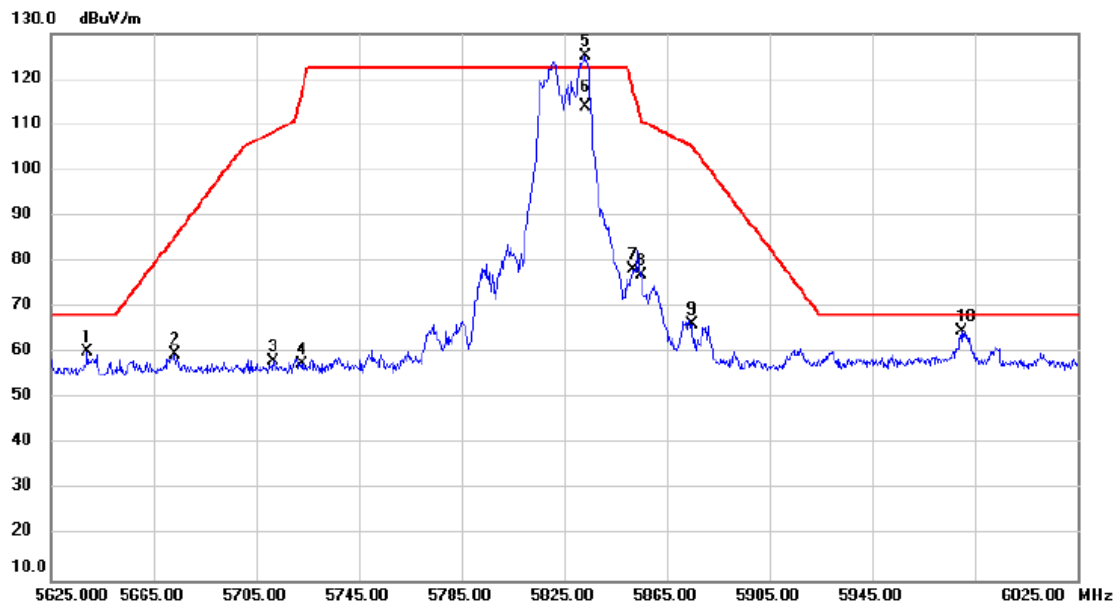


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5639.400	47.25	12.92	60.17	68.20	-8.03	peak	
2		5673.000	46.53	12.98	59.51	85.26	-25.75	peak	
3		5711.800	45.09	13.07	58.16	108.51	-50.35	peak	
4		5723.000	44.43	13.09	57.52	117.64	-60.12	peak	
5	*	5833.000	111.7	13.33	125.09	122.20	2.89	peak	No Limit
6		5833.000	100.6	13.33	113.98	122.20	-8.22	AVG	No Limit
7		5852.200	64.94	13.36	78.30	117.18	-38.88	peak	
8		5855.000	63.56	13.37	76.93	110.80	-33.87	peak	
9		5874.600	52.97	13.41	66.38	105.31	-38.93	peak	
10		5979.800	50.99	13.63	64.62	68.20	-3.58	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

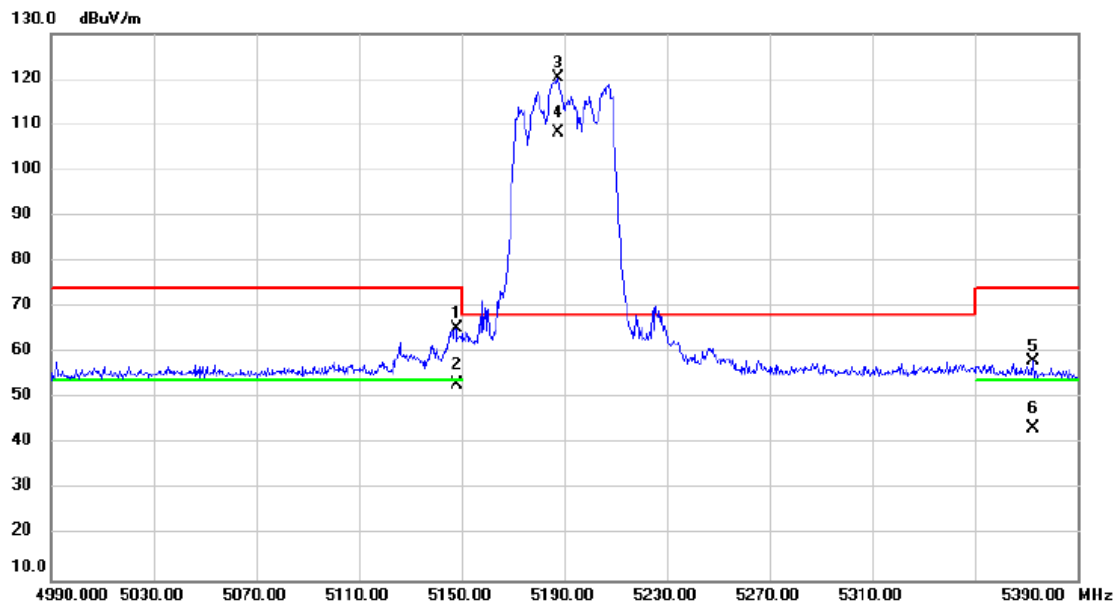


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5148.000	53.09	12.24	65.33	74.00	-8.67	peak	
2		5148.000	40.84	12.24	53.08	54.00	-0.92	AVG	
3	*	5187.600	107.8	12.29	120.12	68.20	51.92	peak	No Limit
4	X	5187.600	96.05	12.29	108.34	68.20	40.14	AVG	No Limit
5		5372.800	45.63	12.49	58.12	74.00	-15.88	peak	
6		5372.800	31.01	12.49	43.50	54.00	-10.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

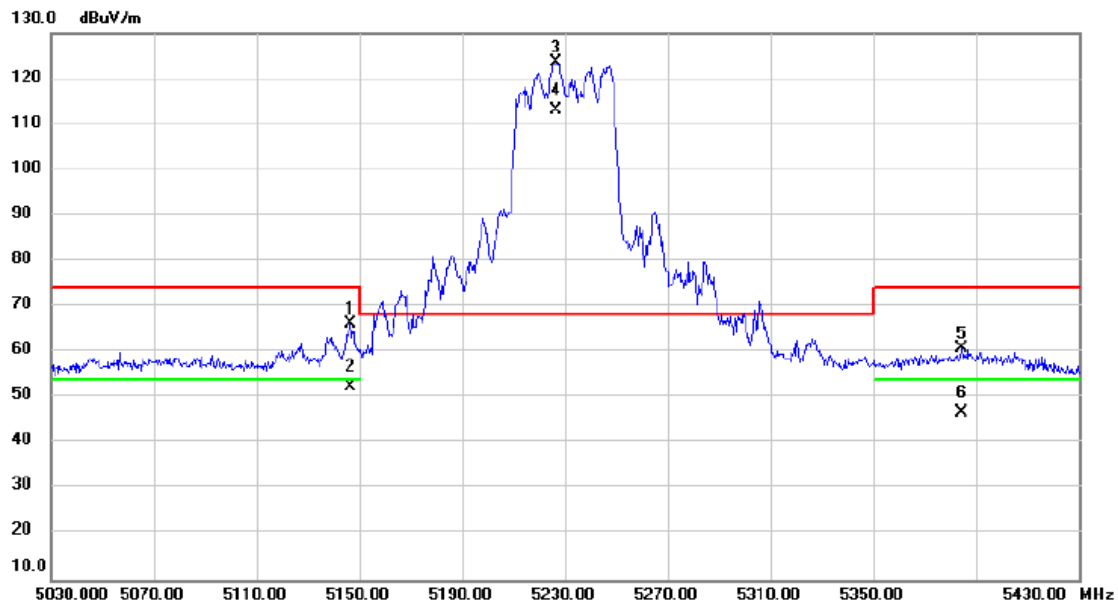


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5146.400	53.92	12.24	66.16	74.00	-7.84	peak	
2		5146.400	40.11	12.24	52.35	54.00	-1.65	AVG	
3	*	5226.400	111.2	12.33	123.56	68.20	55.36	peak	No Limit
4	X	5226.400	100.7	12.33	113.08	68.20	44.88	AVG	No Limit
5		5384.400	48.34	12.51	60.85	74.00	-13.15	peak	
6		5384.400	34.18	12.51	46.69	54.00	-7.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

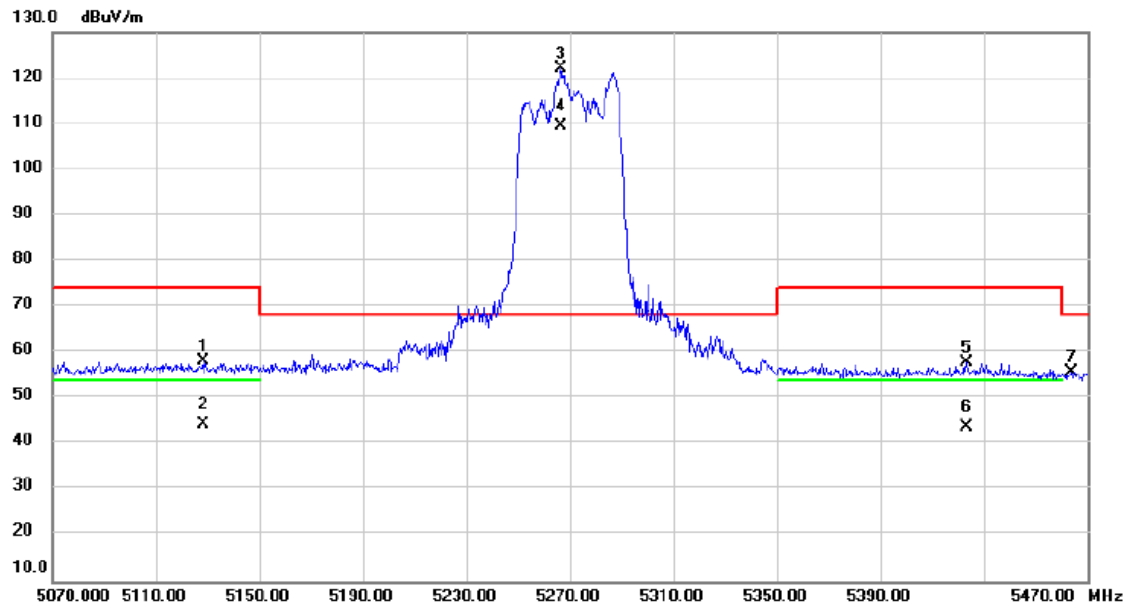


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5128.400	46.04	12.22	58.26	74.00	-15.74	peak	
2		5128.400	32.11	12.22	44.33	54.00	-9.67	AVG	
3	*	5266.400	109.6	12.37	122.03	68.20	53.83	peak	No Limit
4	X	5266.400	97.18	12.37	109.55	68.20	41.35	AVG	No Limit
5		5423.200	45.44	12.54	57.98	74.00	-16.02	peak	
6		5423.200	31.06	12.54	43.60	54.00	-10.40	AVG	
7		5464.000	43.27	12.59	55.86	68.20	-12.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

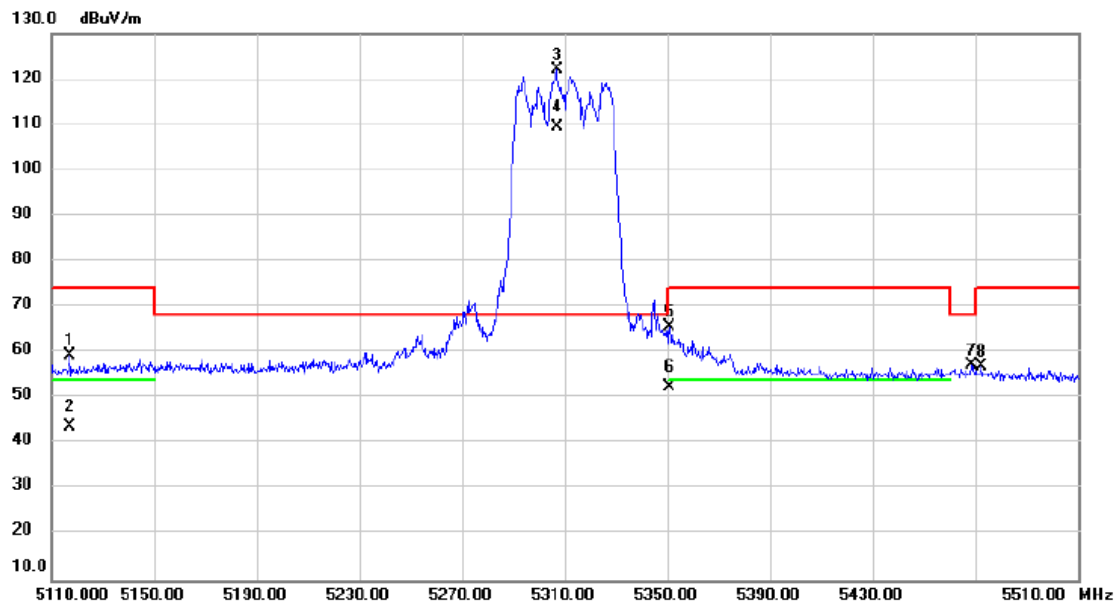


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5117.200	47.25	12.20	59.45	74.00	-14.55	peak	
2		5117.200	31.50	12.20	43.70	54.00	-10.30	AVG	
3	*	5306.800	109.5	12.42	121.94	68.20	53.74	peak	No Limit
4	X	5306.800	97.04	12.42	109.46	68.20	41.26	AVG	No Limit
5		5350.800	53.15	12.47	65.62	74.00	-8.38	peak	
6		5350.800	39.88	12.47	52.35	54.00	-1.65	AVG	
7		5468.800	44.61	12.60	57.21	68.20	-10.99	peak	
8		5472.400	44.24	12.60	56.84	74.00	-17.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

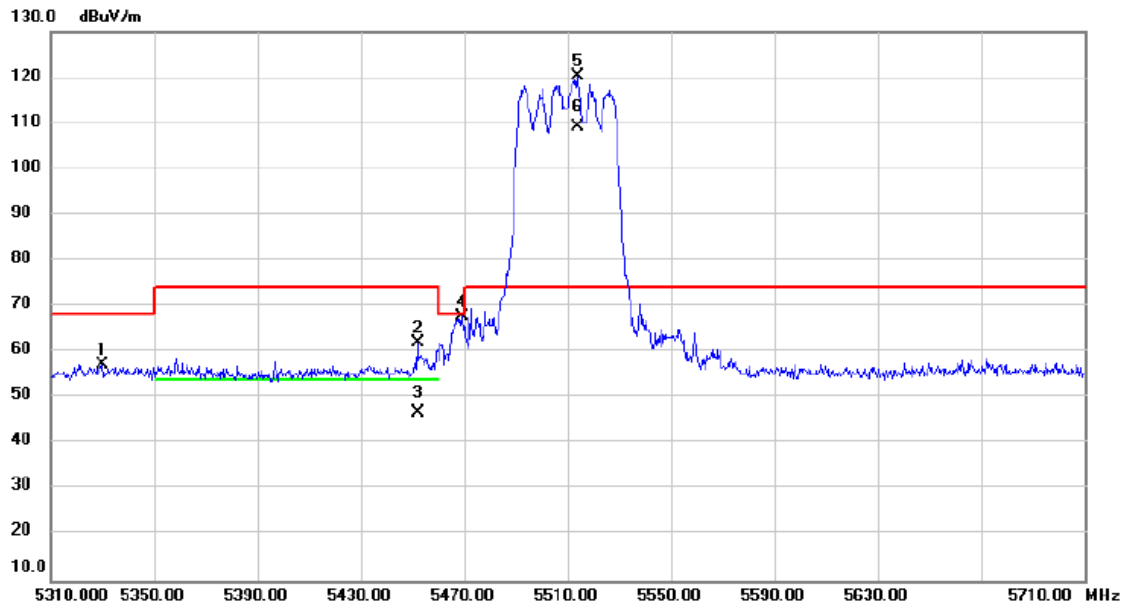


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5330.000	44.77	12.43	57.20	68.20	-11.00	peak	
2		5452.000	49.37	12.58	61.95	74.00	-12.05	peak	
3		5452.000	34.31	12.58	46.89	54.00	-7.11	AVG	
4		5469.200	55.07	12.60	67.67	68.20	-0.53	peak	
5	*	5514.000	107.6	12.66	120.27	74.00	46.27	peak	No Limit
6	X	5514.000	96.54	12.66	109.20	74.00	35.20	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

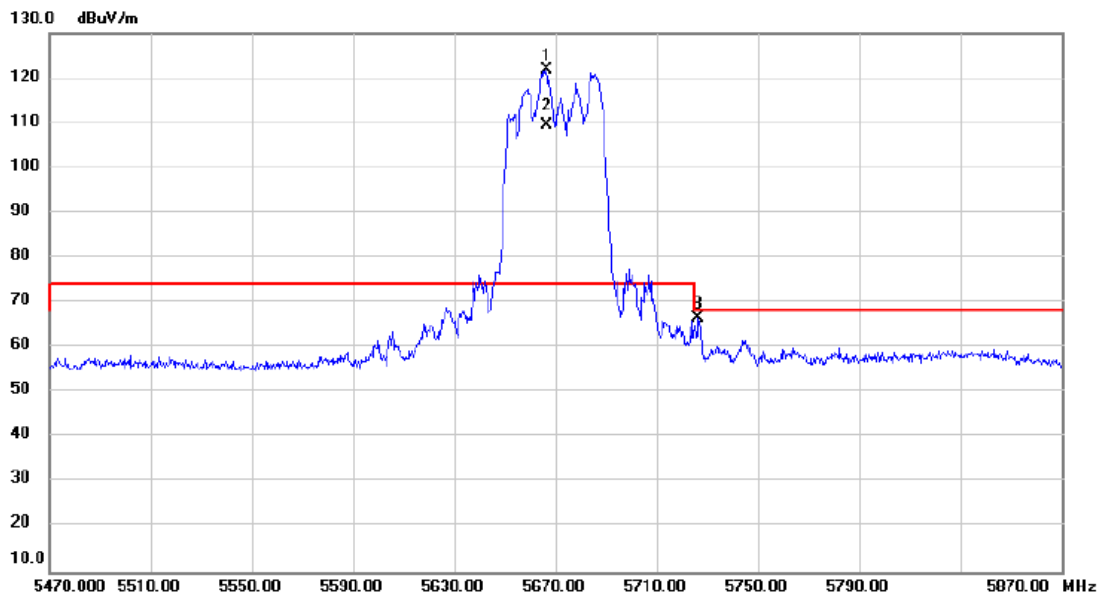


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5666.400	108.9	12.97	121.88	74.00	47.88	peak	No Limit
2	X	5666.400	96.42	12.97	109.39	74.00	35.39	AVG	No Limit
3		5726.400	53.57	13.10	66.67	68.20	-1.53	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

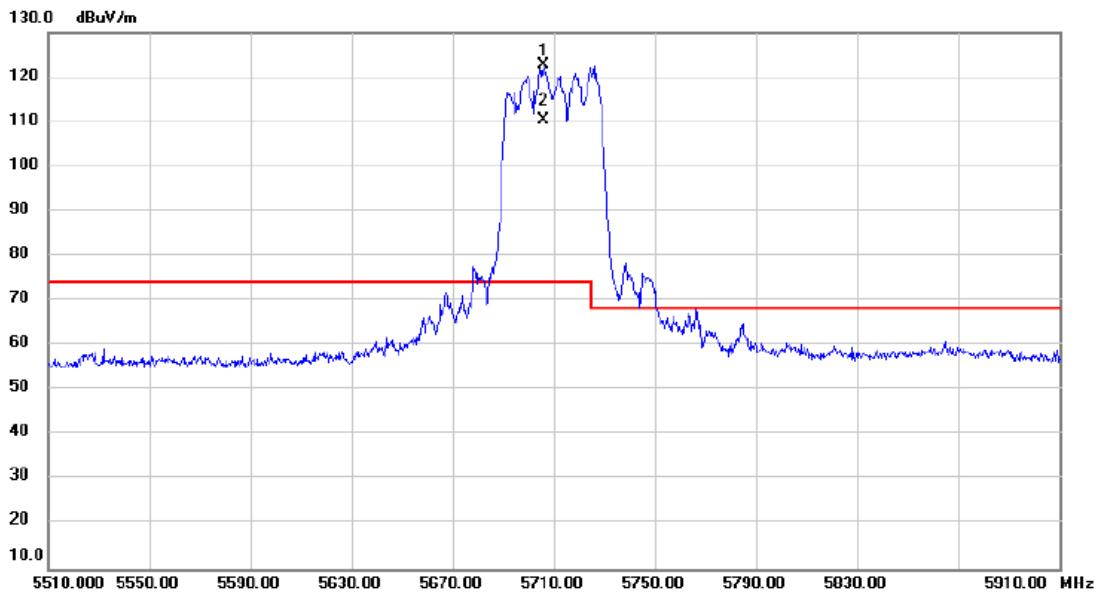


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5706.000	109.6	13.06	122.72	74.00	48.72	peak	No Limit
2	X	5706.000	97.23	13.06	110.29	74.00	36.29	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

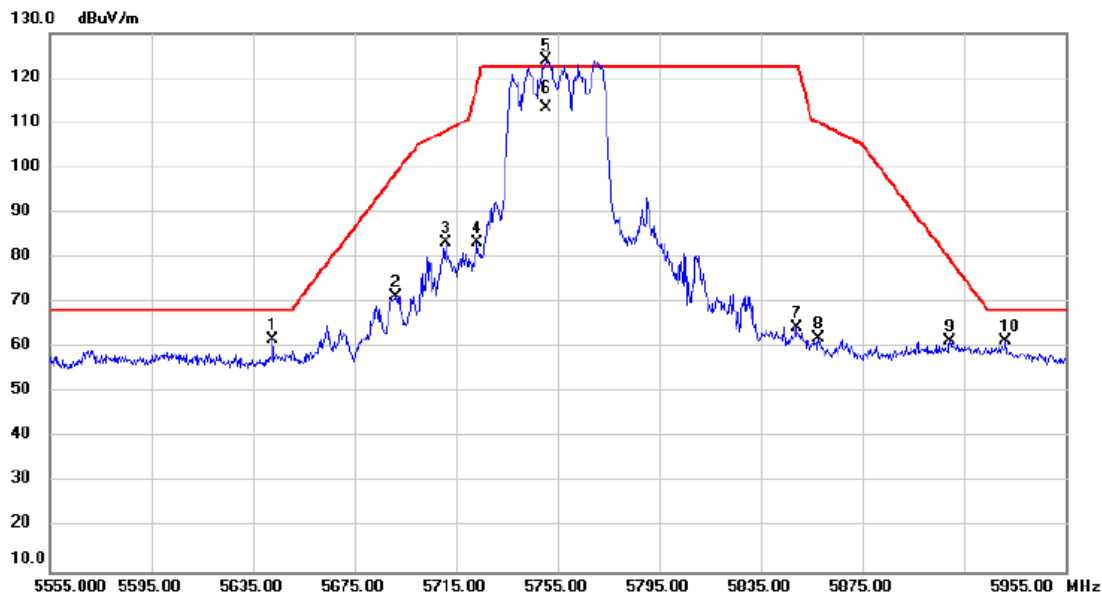


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5642.600	48.73	12.92	61.65	68.20	-6.55	peak	
2		5691.400	58.47	13.03	71.50	98.86	-27.36	peak	
3		5711.000	70.23	13.07	83.30	108.28	-24.98	peak	
4		5723.400	70.18	13.09	83.27	118.55	-35.28	peak	
5	*	5750.600	110.7	13.16	123.90	122.20	1.70	peak	No Limit
6		5750.600	100.2	13.16	113.42	122.20	-8.78	AVG	No Limit
7		5849.000	50.98	13.36	64.34	122.20	-57.86	peak	
8		5857.800	48.58	13.38	61.96	110.01	-48.05	peak	
9		5909.400	47.91	13.48	61.39	79.71	-18.32	peak	
10		5931.400	47.92	13.52	61.44	68.20	-6.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

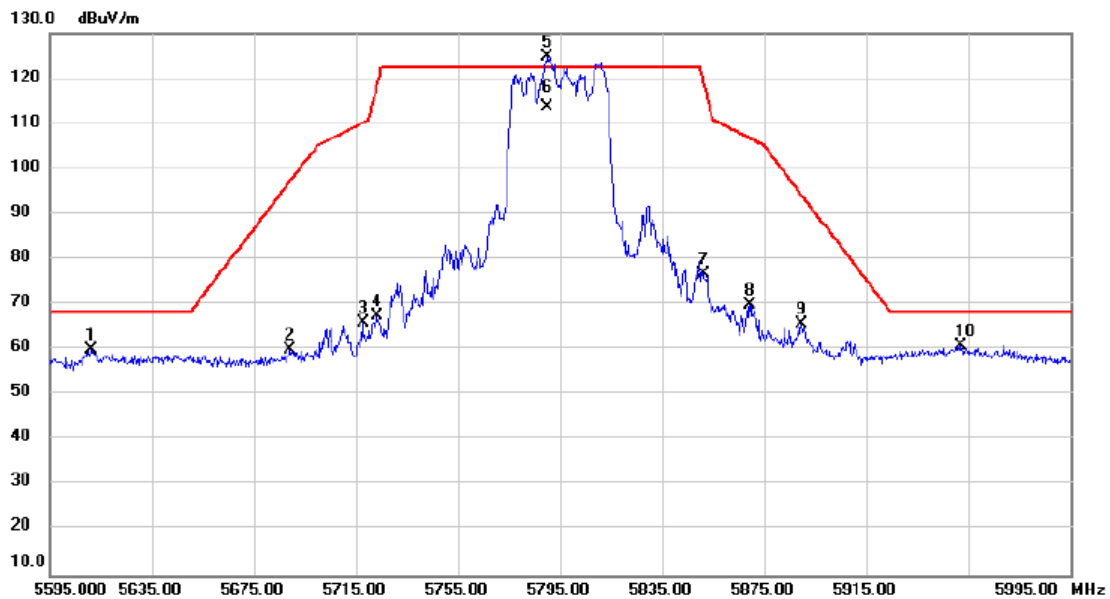


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5611.000	47.07	12.86	59.93	68.20	-8.27	peak	
2		5689.400	46.94	13.03	59.97	97.38	-37.41	peak	
3		5717.800	52.81	13.07	65.88	110.18	-44.30	peak	
4		5723.000	54.26	13.09	67.35	117.64	-50.29	peak	
5	*	5790.200	111.4	13.24	124.69	122.20	2.49	peak	No Limit
6		5790.200	100.4	13.24	113.68	122.20	-8.52	AVG	No Limit
7		5851.000	63.35	13.36	76.71	119.92	-43.21	peak	
8		5869.400	56.51	13.40	69.91	106.77	-36.86	peak	
9		5889.800	52.18	13.45	65.63	94.22	-28.59	peak	
10		5952.200	47.16	13.57	60.73	68.20	-7.47	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

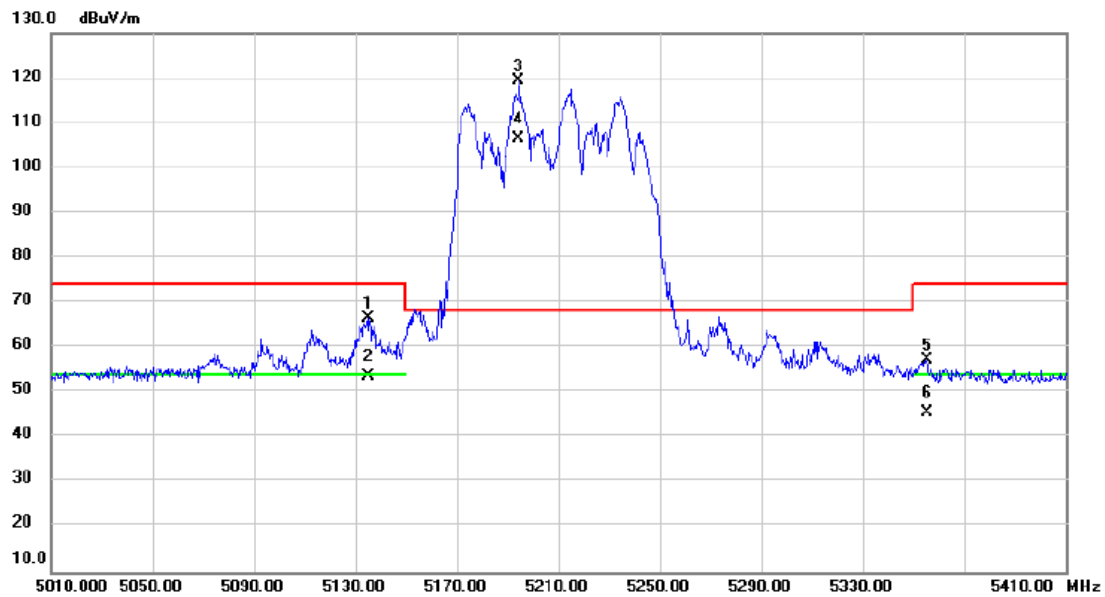


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5135.200	54.40	12.23	66.63	74.00	-7.37	peak	
2		5135.200	41.45	12.23	53.68	54.00	-0.32	AVG	
3	*	5194.400	106.9	12.30	119.23	68.20	51.03	peak	No Limit
4	X	5194.400	94.13	12.30	106.43	68.20	38.23	AVG	No Limit
5		5355.200	44.64	12.47	57.11	74.00	-16.89	peak	
6		5355.200	33.22	12.47	45.69	54.00	-8.31	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

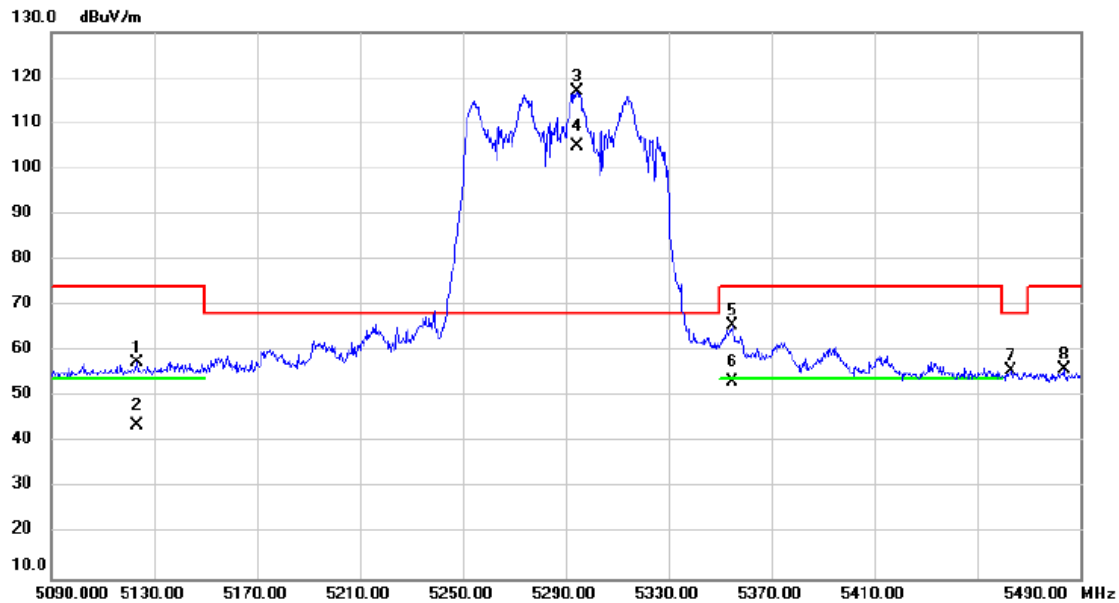


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5123.200	45.45	12.22	57.67	74.00	-16.33	peak	
2		5123.200	31.39	12.22	43.61	54.00	-10.39	AVG	
3	*	5294.400	104.6	12.41	117.02	68.20	48.82	peak	No Limit
4	X	5294.400	92.62	12.41	105.03	68.20	36.83	AVG	No Limit
5		5354.800	53.21	12.47	65.68	74.00	-8.32	peak	
6		5354.800	40.84	12.47	53.31	54.00	-0.69	AVG	
7		5463.200	43.30	12.59	55.89	68.20	-12.31	peak	
8		5483.600	43.33	12.62	55.95	74.00	-18.05	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

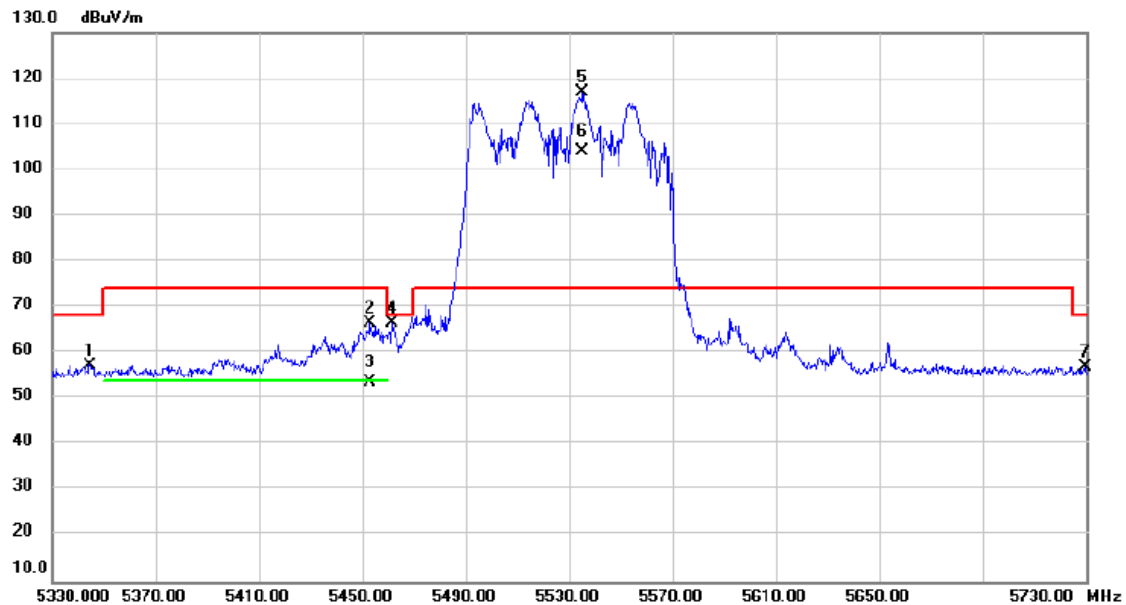


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5344.800	44.94	12.46	57.40	68.20	-10.80	peak	
2		5453.200	53.85	12.57	66.42	74.00	-7.58	peak	
3		5453.200	41.15	12.57	53.72	54.00	-0.28	AVG	
4		5461.600	53.86	12.59	66.45	68.20	-1.75	peak	
5	*	5535.200	104.1	12.70	116.85	74.00	42.85	peak	No Limit
6	X	5535.200	91.23	12.70	103.93	74.00	29.93	AVG	No Limit
7		5729.600	43.96	13.10	57.06	68.20	-11.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

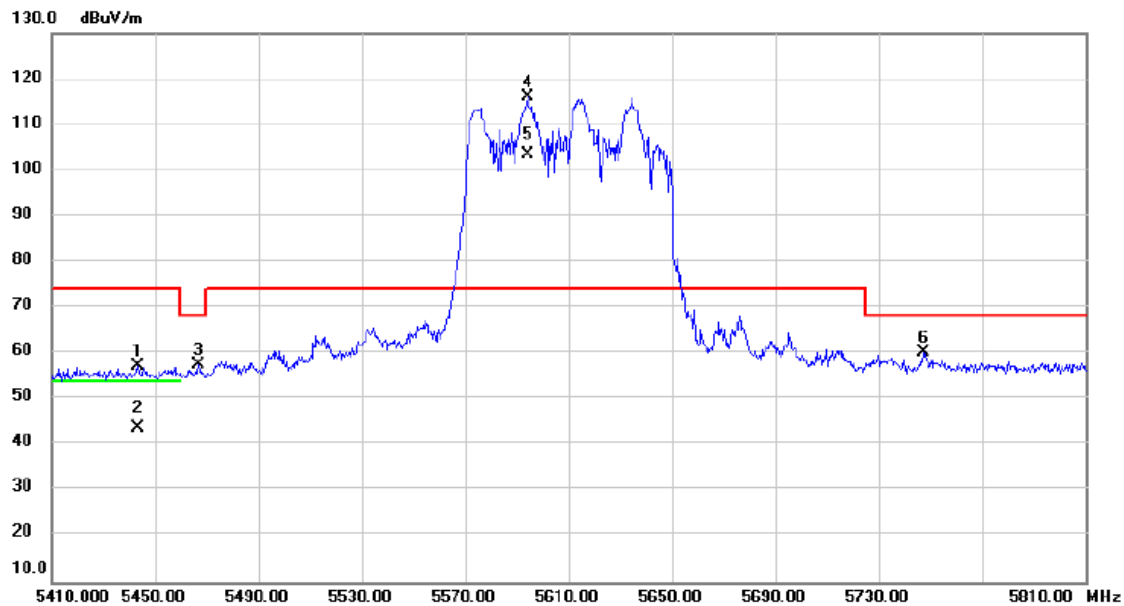


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5443.200	44.57	12.56	57.13	74.00	-16.87	peak	
2		5443.200	31.15	12.56	43.71	54.00	-10.29	AVG	
3		5466.800	44.92	12.59	57.51	68.20	-10.69	peak	
4	*	5594.000	103.2	12.82	116.08	74.00	42.08	peak	No Limit
5	X	5594.000	90.68	12.82	103.50	74.00	29.50	AVG	No Limit
6		5747.200	47.12	13.14	60.26	68.20	-7.94	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

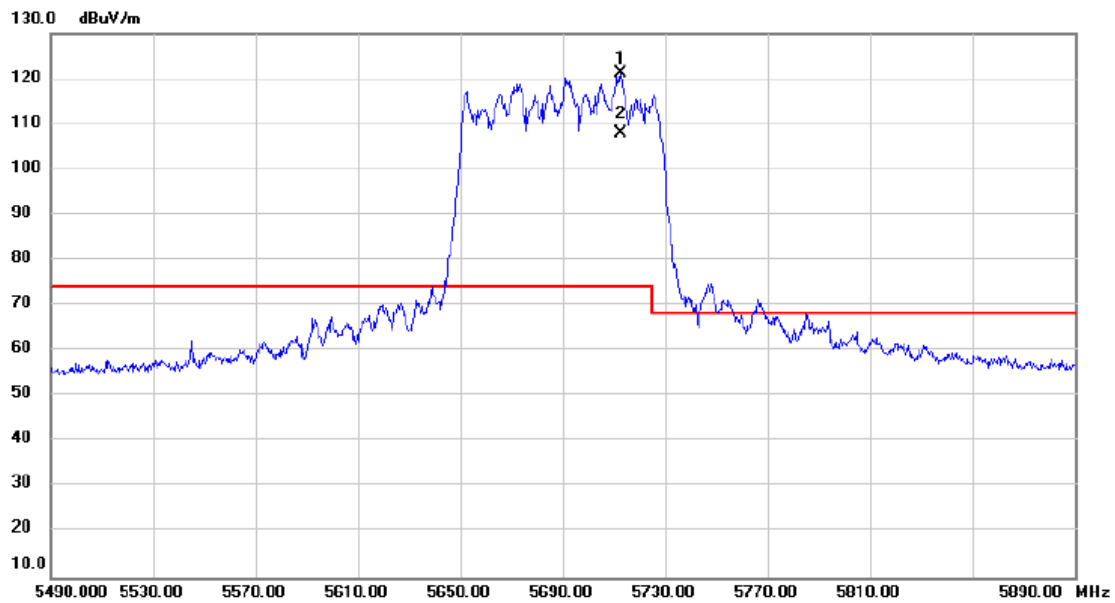


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5712.800	108.0	13.07	121.12	74.00	47.12	peak	No Limit
2	X	5712.800	94.87	13.07	107.94	74.00	33.94	AVG	No Limit

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

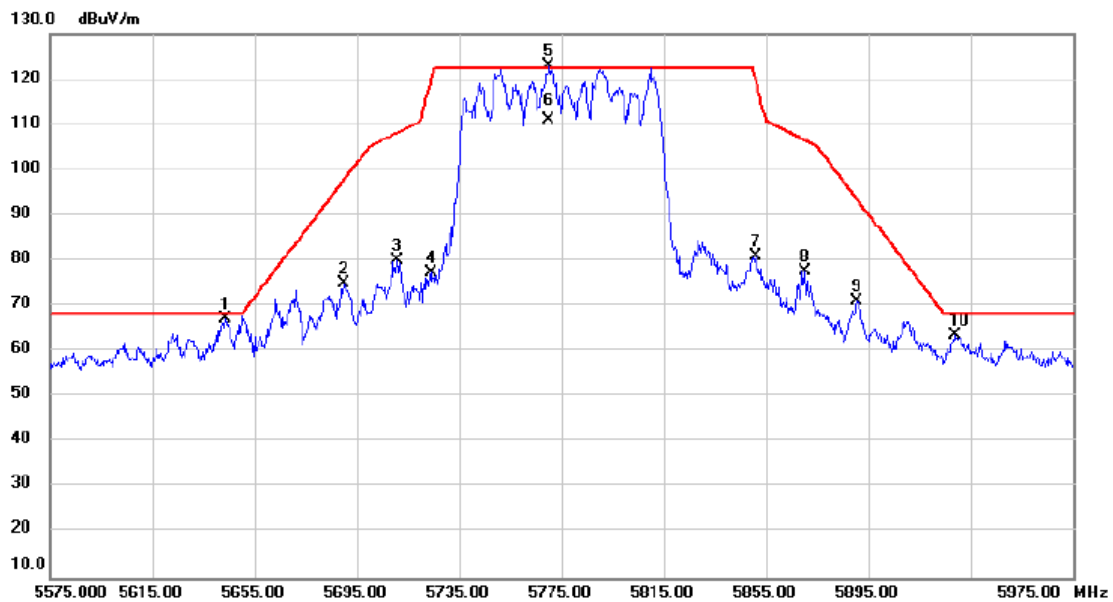


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5643.400	54.19	12.92	67.11	68.20	-1.09	peak	
2		5689.800	62.02	13.03	75.05	97.68	-22.63	peak	
3		5710.600	67.00	13.06	80.06	108.17	-28.11	peak	
4		5723.800	64.37	13.09	77.46	119.46	-42.00	peak	
5	*	5770.200	109.7	13.20	122.97	122.20	0.77	peak	No Limit
6		5770.200	97.83	13.20	111.03	122.20	-11.17	AVG	No Limit
7		5851.000	67.68	13.36	81.04	119.92	-38.88	peak	
8		5870.200	64.35	13.40	77.75	106.54	-28.79	peak	
9		5890.600	57.49	13.45	70.94	93.62	-22.68	peak	
10		5929.000	50.12	13.52	63.64	68.20	-4.56	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/10/31
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

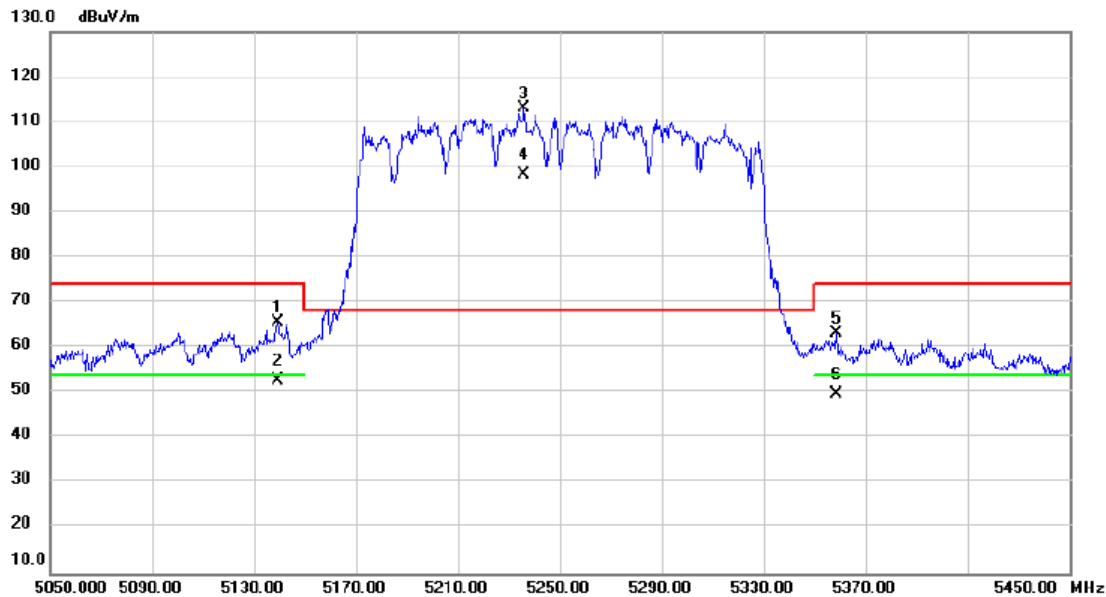


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5139.200	53.48	12.24	65.72	74.00	-8.28	peak	
2		5139.200	40.48	12.24	52.72	54.00	-1.28	AVG	
3	*	5236.000	100.7	12.34	113.04	68.20	44.84	peak	No Limit
4	X	5236.000	86.10	12.34	98.44	68.20	30.24	AVG	No Limit
5		5358.400	50.77	12.48	63.25	74.00	-10.75	peak	
6		5358.400	37.13	12.48	49.61	54.00	-4.39	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/10/31
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

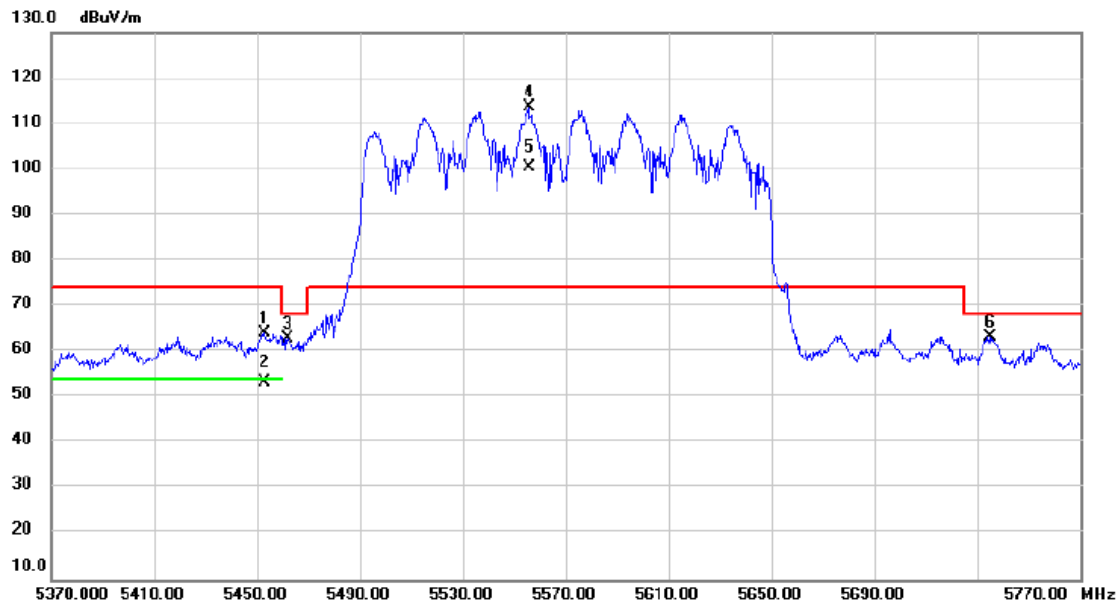


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5452.800	51.49	12.58	64.07	74.00	-9.93	peak	
2		5452.800	40.73	12.58	53.31	54.00	-0.69	AVG	
3		5462.000	50.27	12.59	62.86	68.20	-5.34	peak	
4	*	5555.600	100.8	12.75	113.55	74.00	39.55	peak	No Limit
5	X	5555.600	87.74	12.75	100.49	74.00	26.49	AVG	No Limit
6		5734.800	50.19	13.11	63.30	68.20	-4.90	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

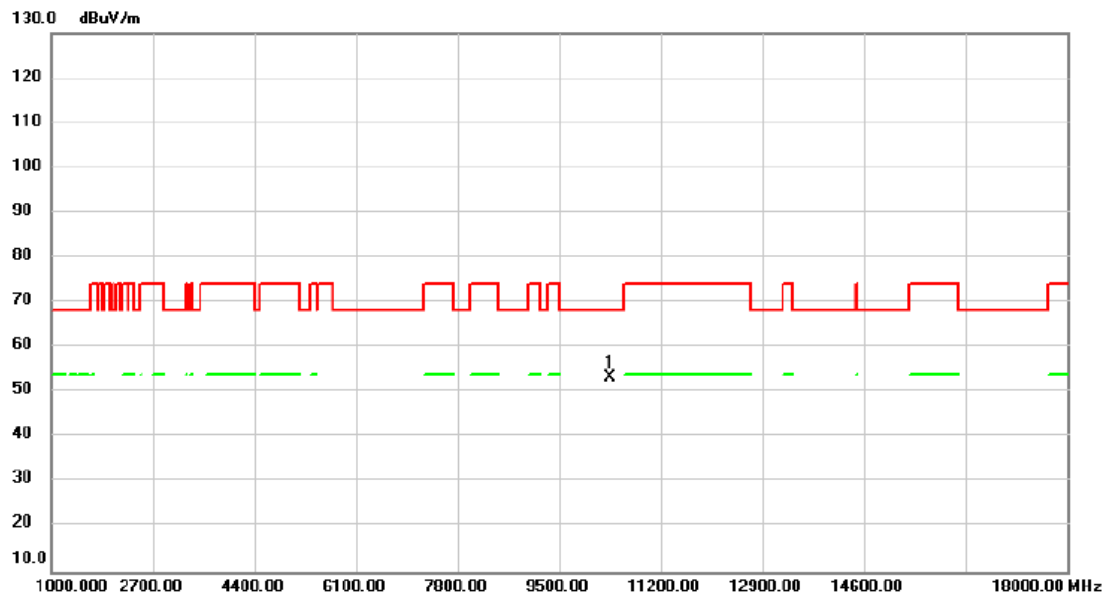


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	48.24	5.05	53.29	68.20	-14.91	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

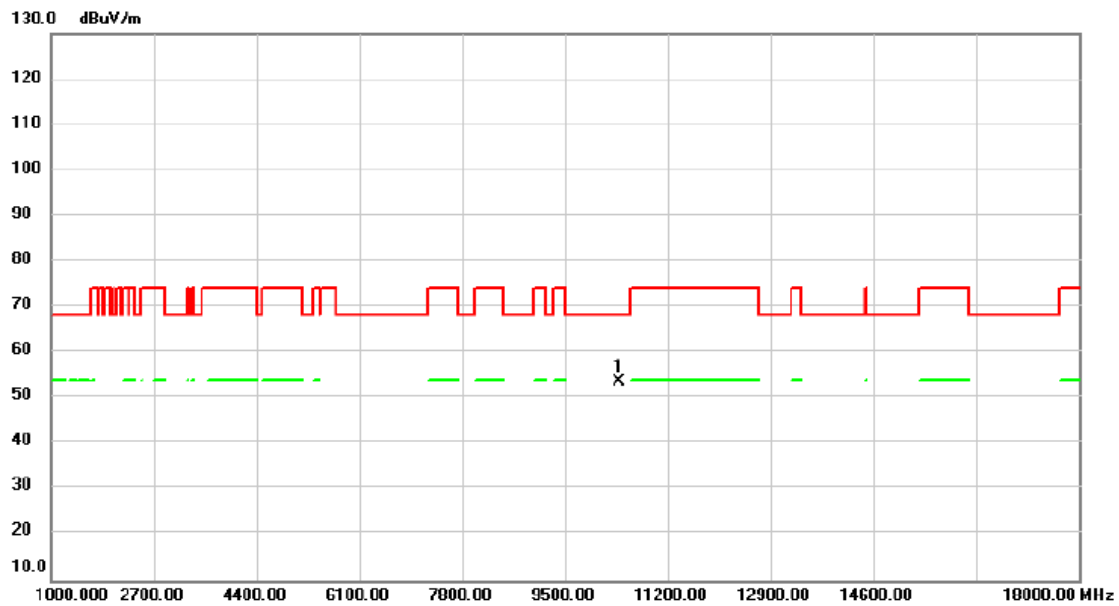


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	48.53	5.03	53.56	68.20	-14.64	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

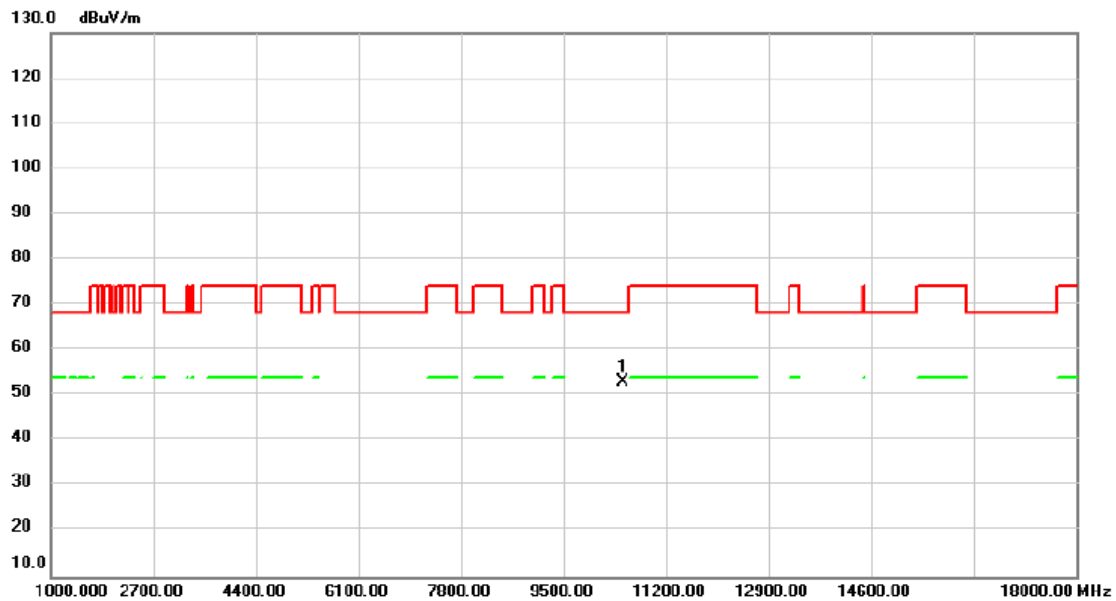


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	48.02	5.01	53.03	68.20	-15.17	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

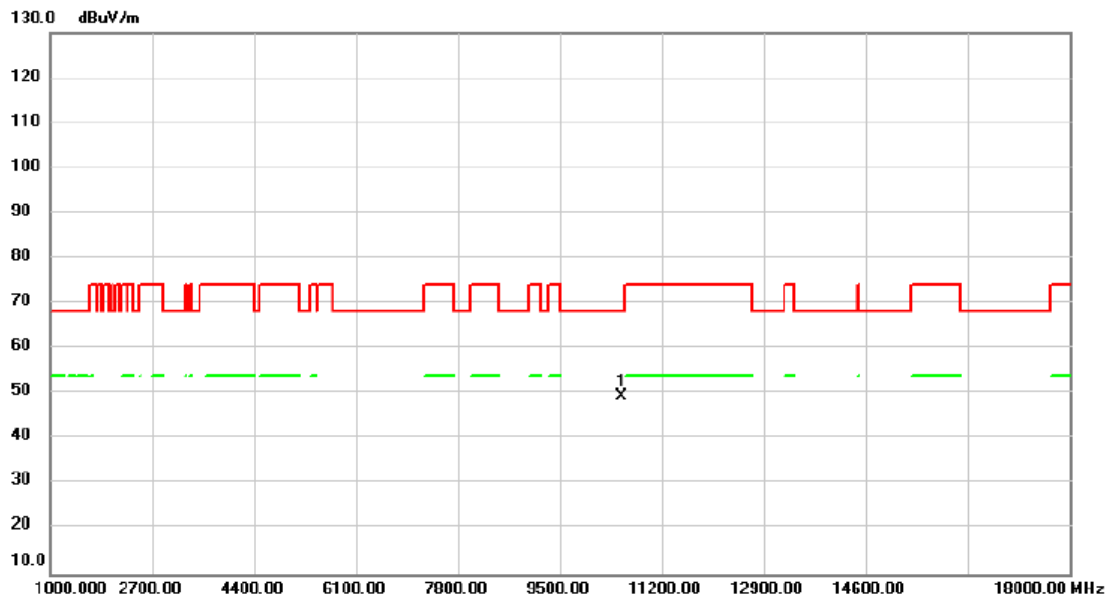


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	44.53	5.01	49.54	68.20	-18.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

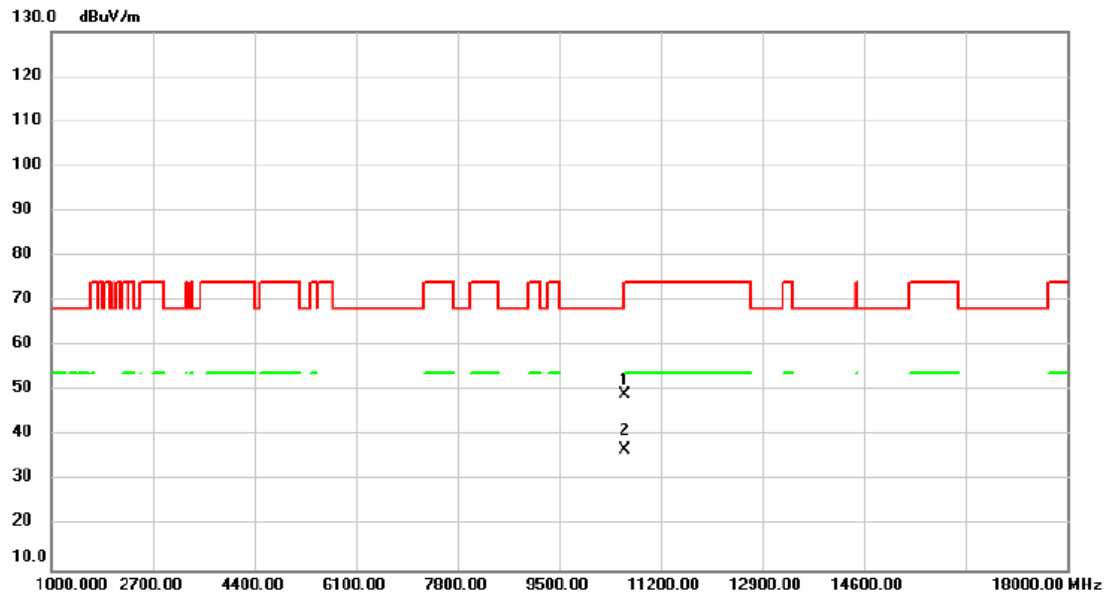


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	44.11	5.01	49.12	68.20	-19.08	peak	
2	*	10600.00	31.77	5.01	36.78	54.00	-17.22	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

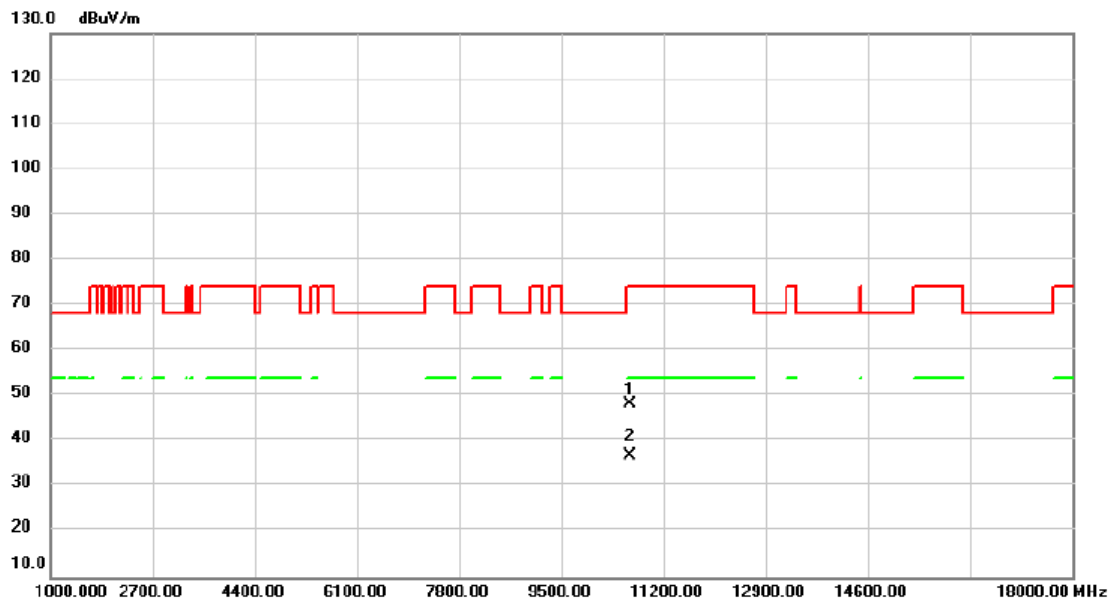


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	43.16	5.01	48.17	74.00	-25.83	peak	
2	*	10640.00	31.84	5.01	36.85	54.00	-17.15	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

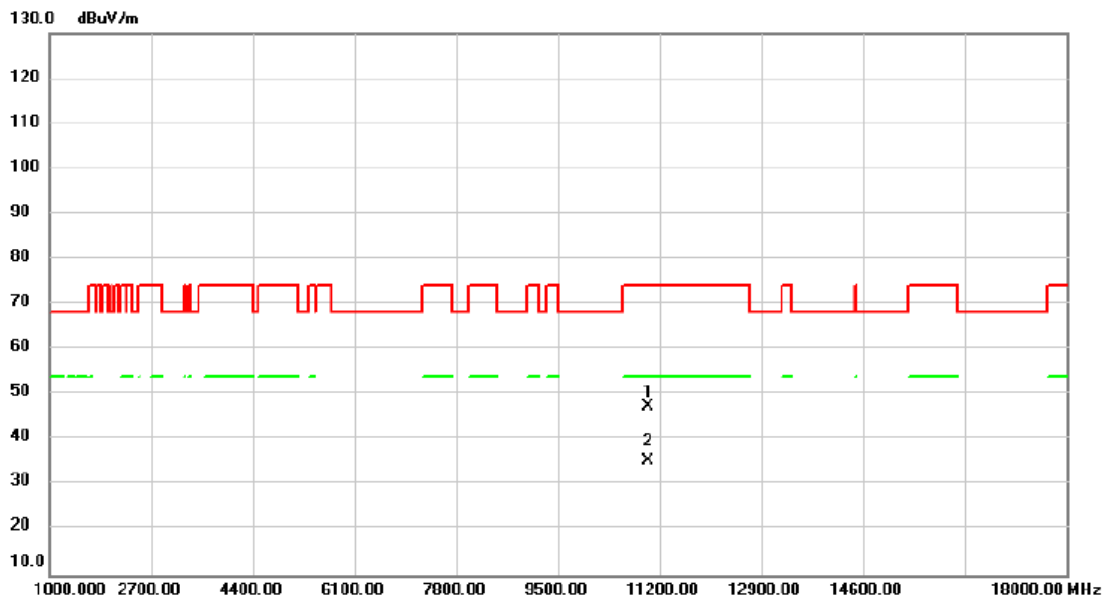


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	42.36	5.05	47.41	74.00	-26.59	peak	
2	*	11000.00	30.45	5.05	35.50	54.00	-18.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

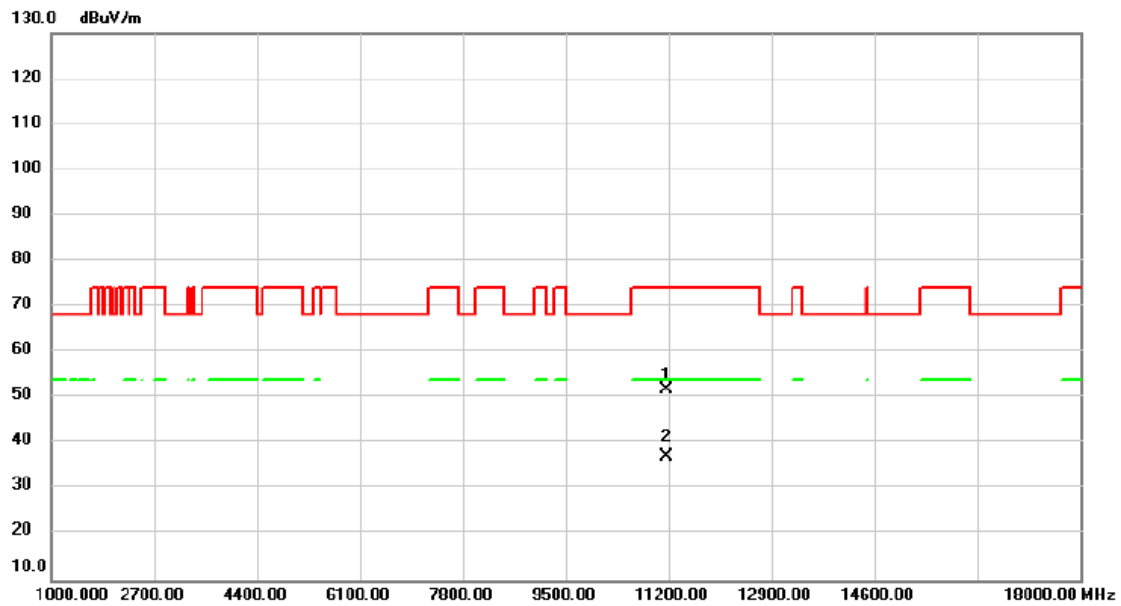


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11160.00	46.62	5.14	51.76	74.00	-22.24	peak	
2	*	11160.00	31.88	5.14	37.02	54.00	-16.98	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

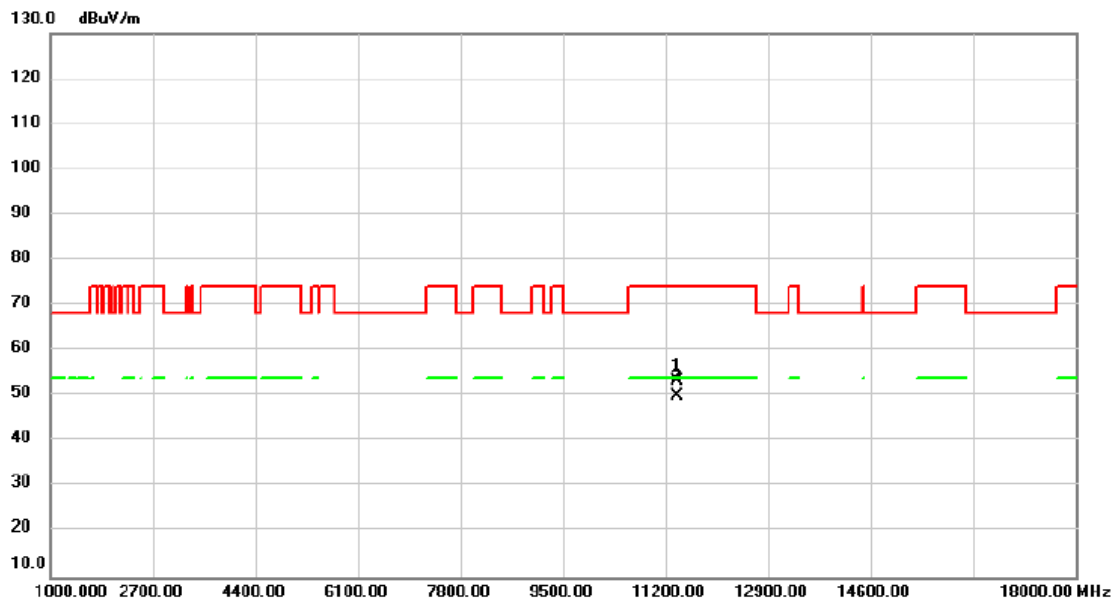


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	48.04	5.28	53.32	74.00	-20.68	peak	
2	*	11400.00	44.82	5.28	50.10	54.00	-3.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

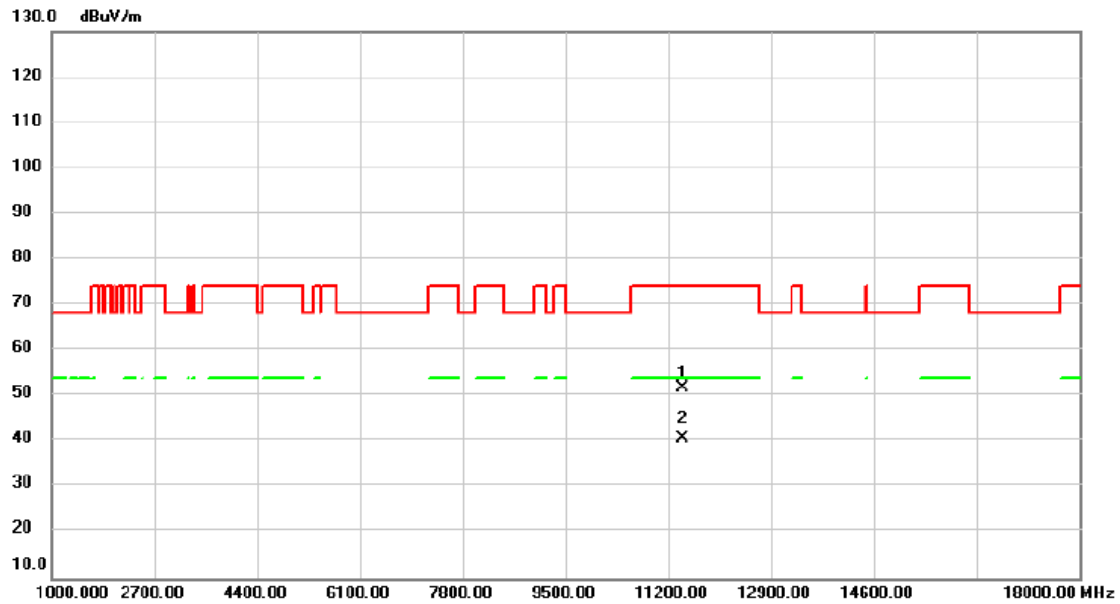


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	46.47	5.31	51.78	74.00	-22.22	peak	
2	*	11440.00	35.44	5.31	40.75	54.00	-13.25	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

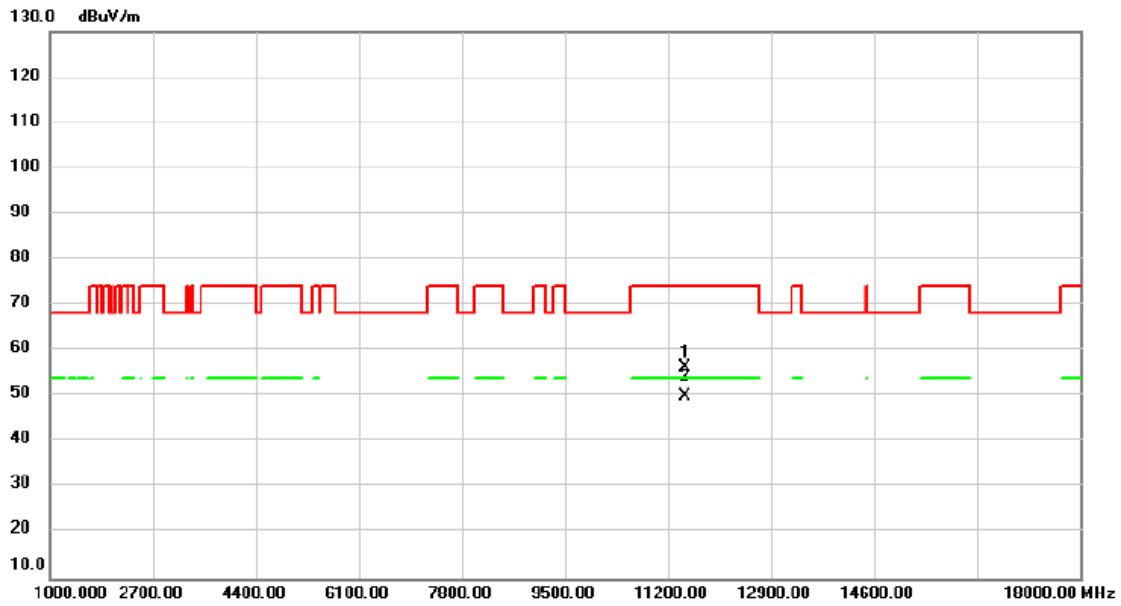


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	51.10	5.34	56.44	74.00	-17.56	peak	
2	*	11490.00	44.60	5.34	49.94	54.00	-4.06	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

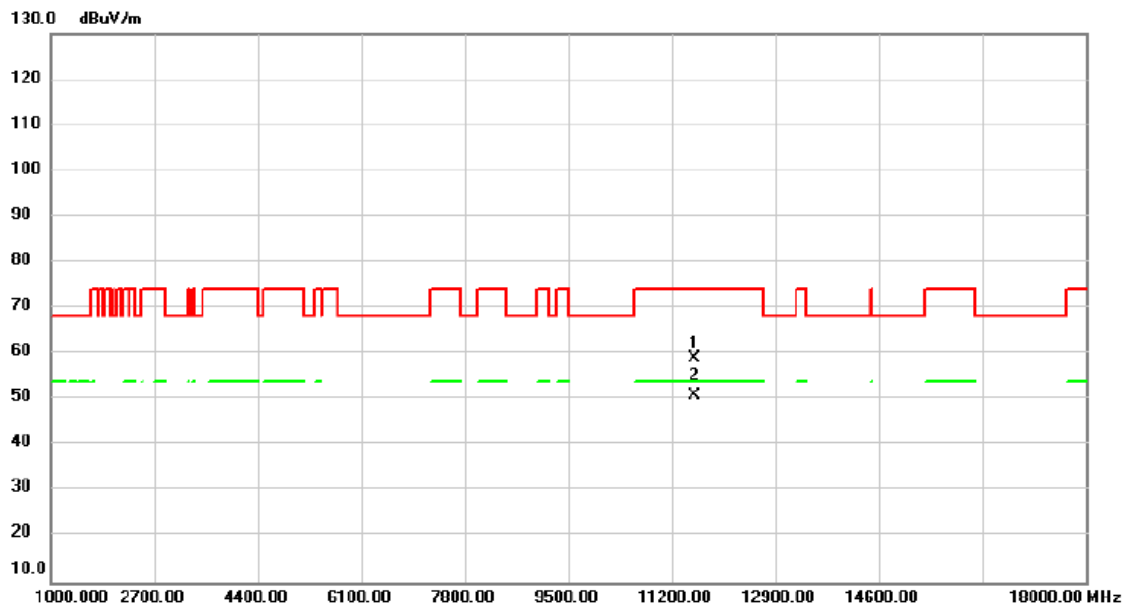


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11570.00	53.77	5.31	59.08	74.00	-14.92	peak	
2	*	11570.00	45.79	5.31	51.10	54.00	-2.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11a	Test Date	2025/10/31
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

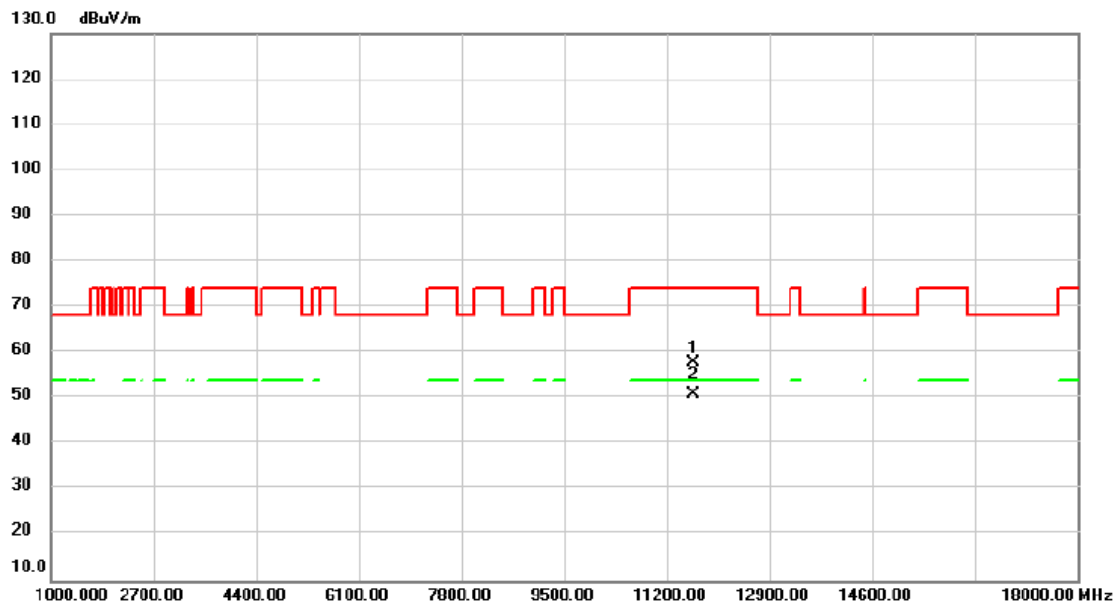


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	52.62	5.26	57.88	74.00	-16.12	peak	
2	*	11650.00	45.69	5.26	50.95	54.00	-3.05	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

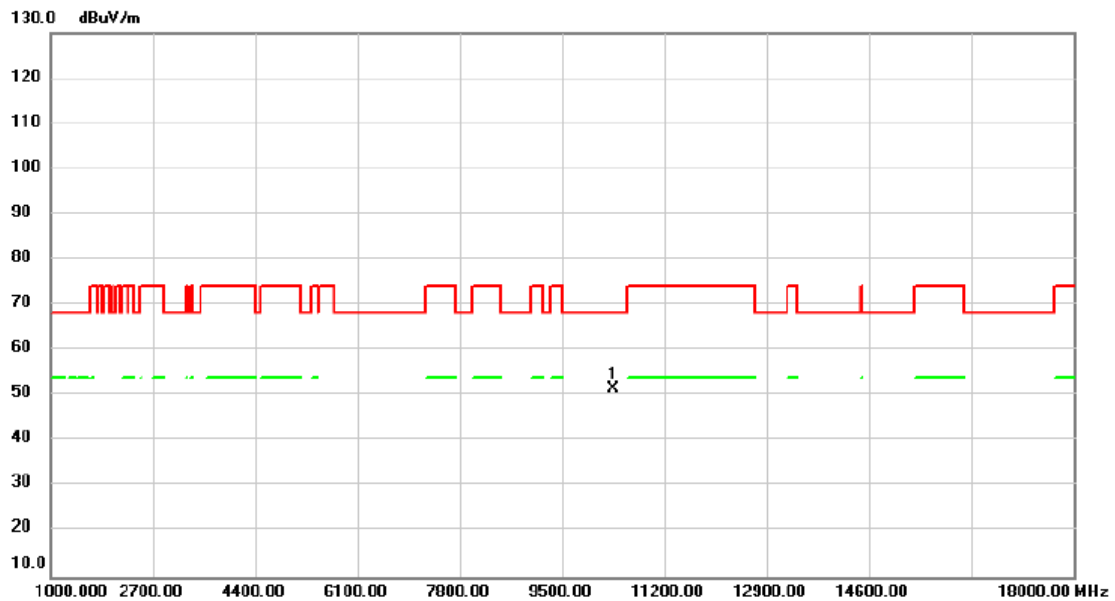


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	46.53	5.05	51.58	68.20	-16.62	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

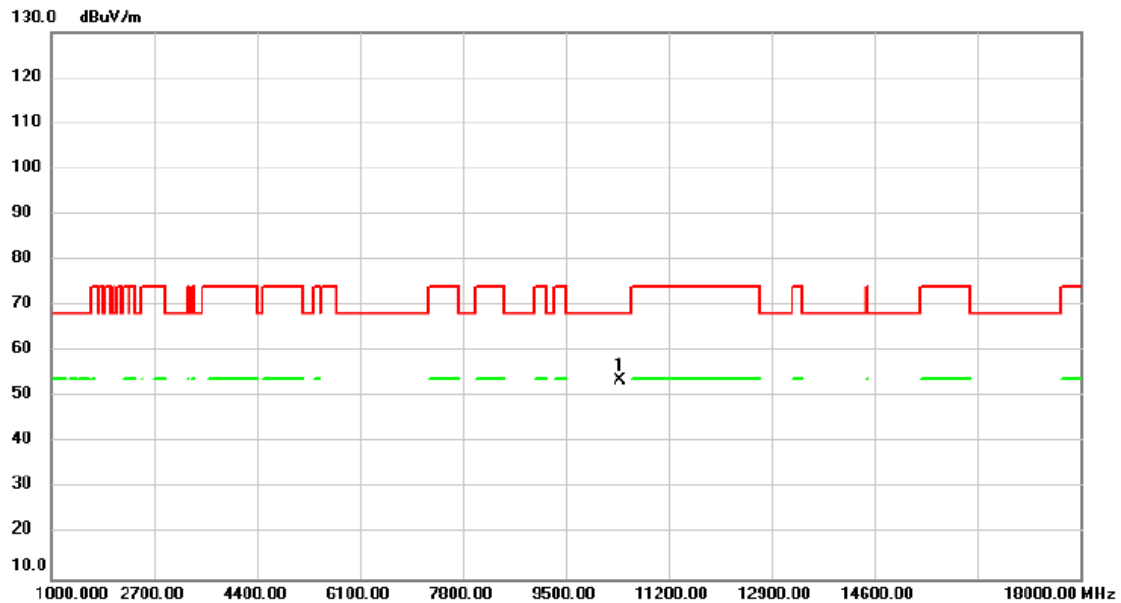


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10400.00	48.50	5.03	53.53	68.20	-14.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

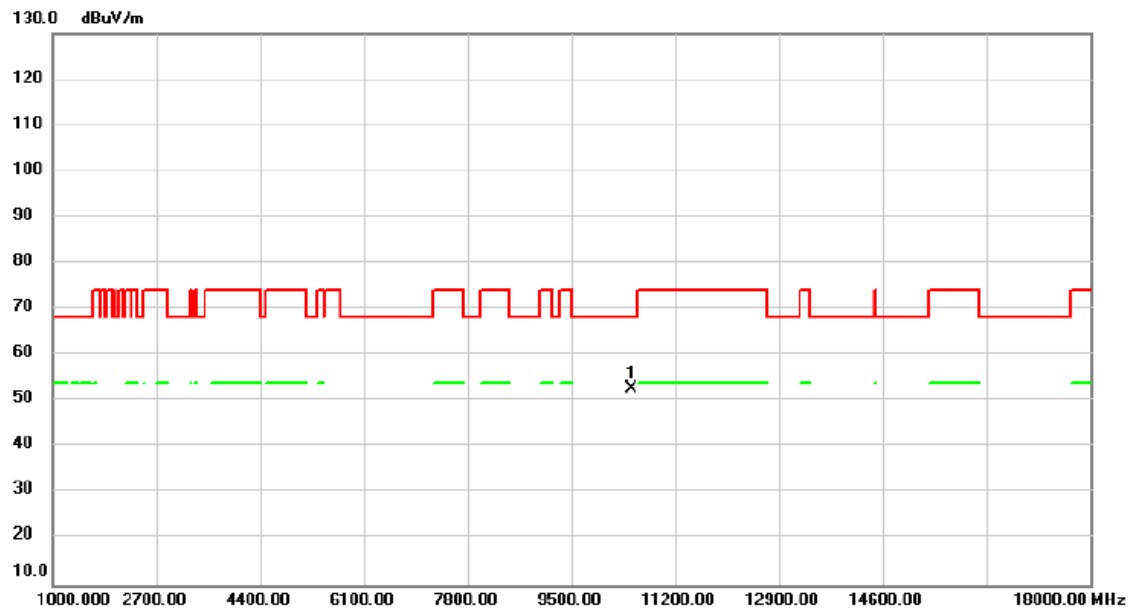


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10480.00	47.65	5.01	52.66	68.20	-15.54	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

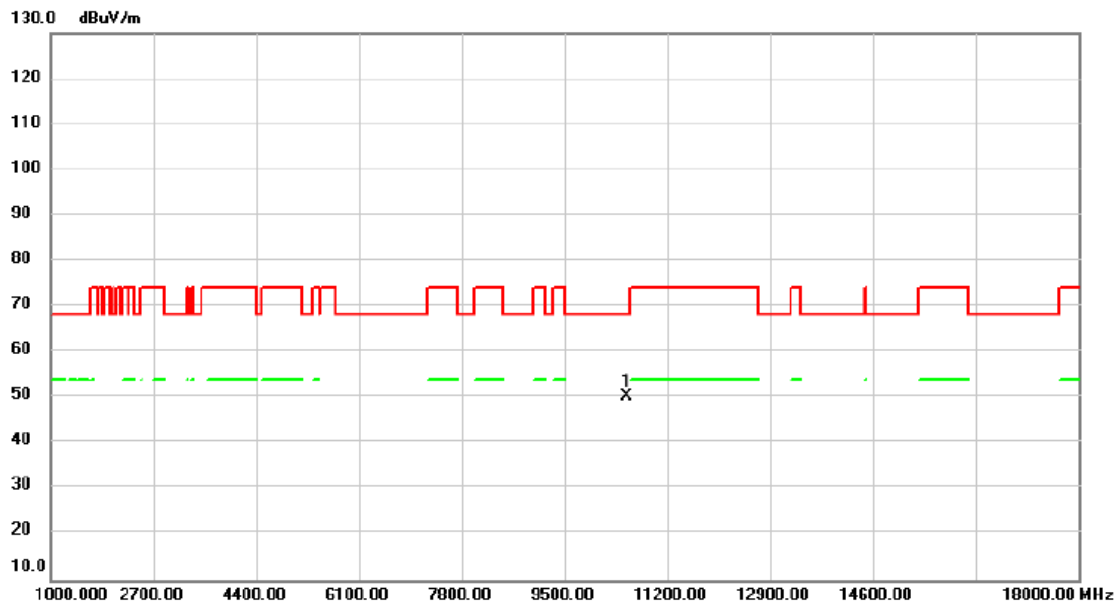


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	45.27	5.01	50.28	68.20	-17.92	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

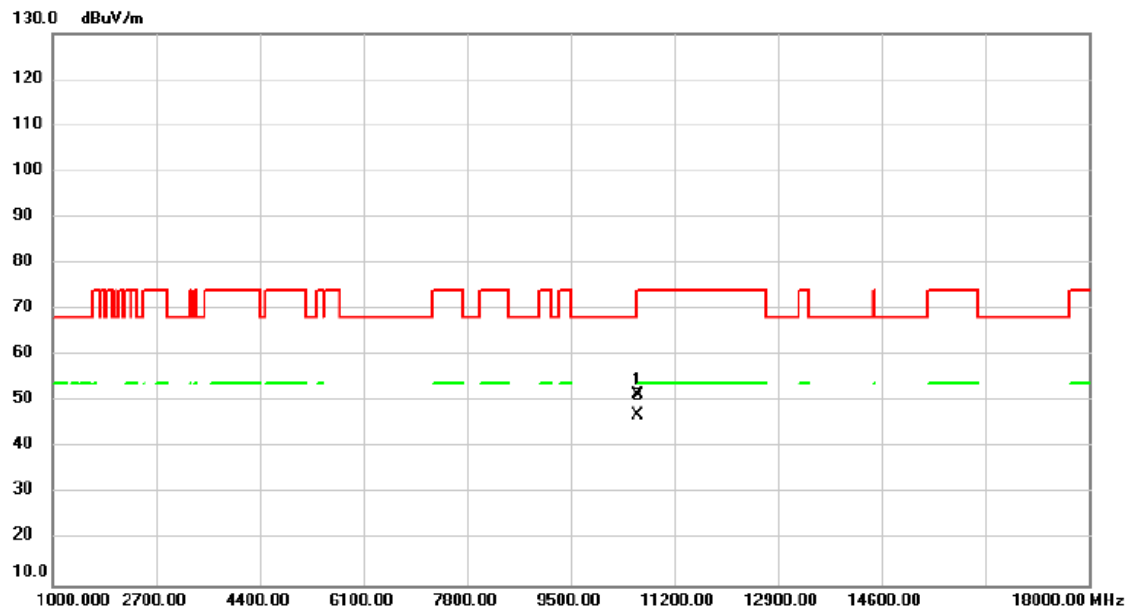


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	46.48	5.01	51.49	68.20	-16.71	peak	
2	*	10600.00	42.10	5.01	47.11	54.00	-6.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

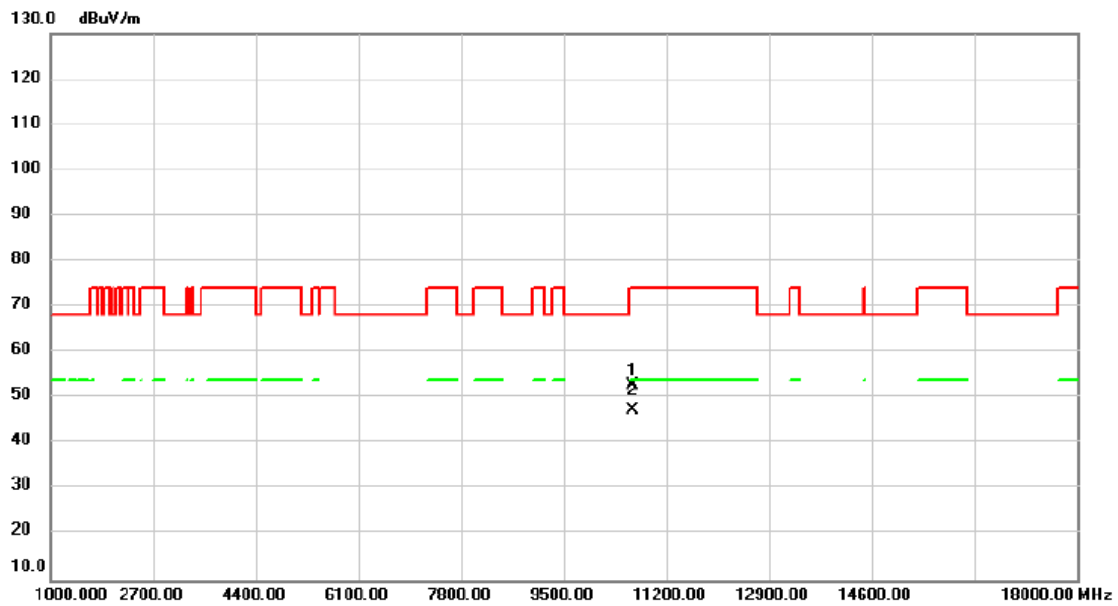


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	47.82	5.01	52.83	74.00	-21.17	peak	
2	*	10640.00	42.37	5.01	47.38	54.00	-6.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

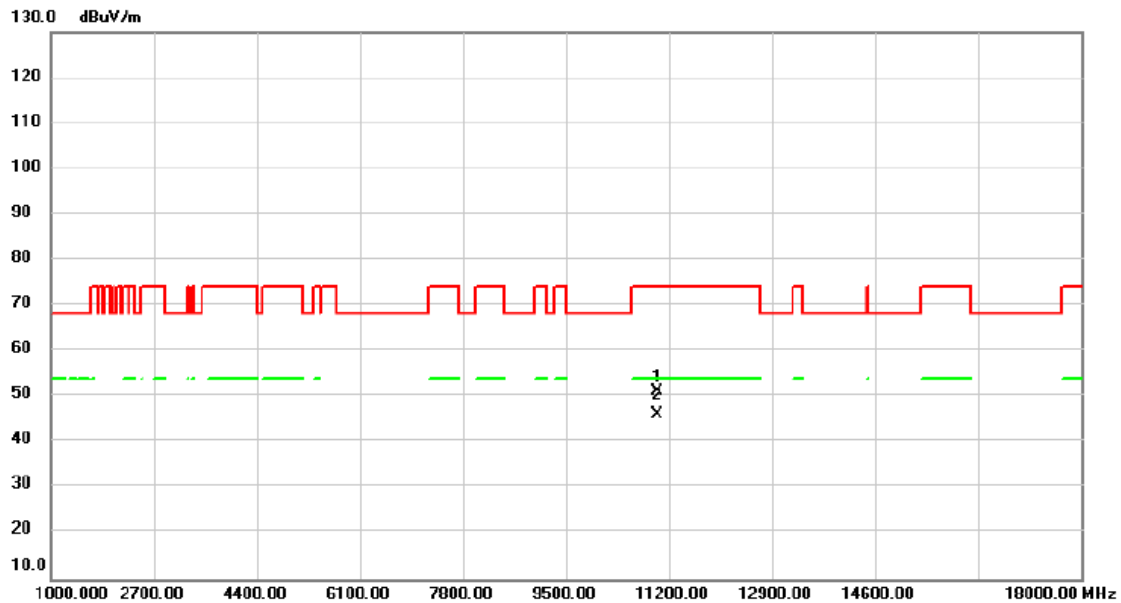


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	46.25	5.05	51.30	74.00	-22.70	peak	
2	*	11000.00	41.25	5.05	46.30	54.00	-7.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

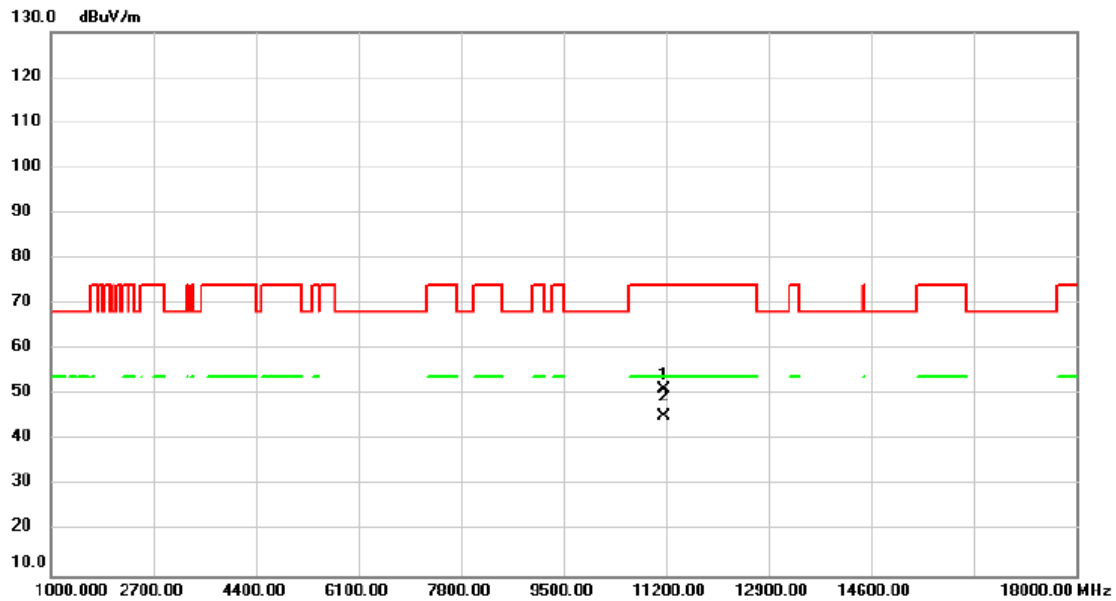


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.00	46.09	5.14	51.23	74.00	-22.77	peak	
2	*	11160.00	40.25	5.14	45.39	54.00	-8.61	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

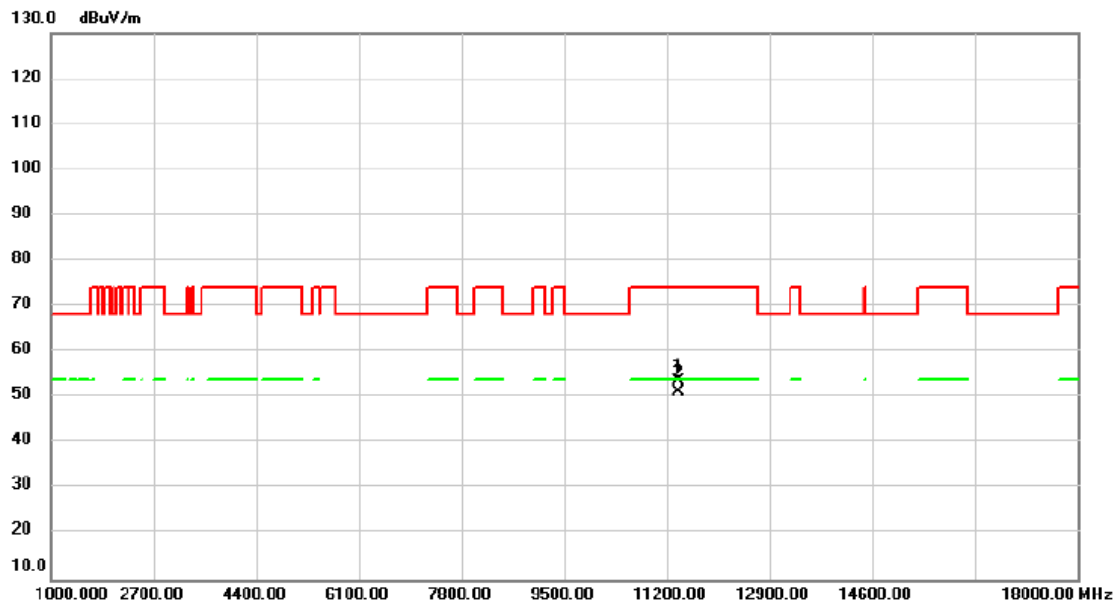


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	48.51	5.28	53.79	74.00	-20.21	peak	
2	*	11400.00	45.90	5.28	51.18	54.00	-2.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

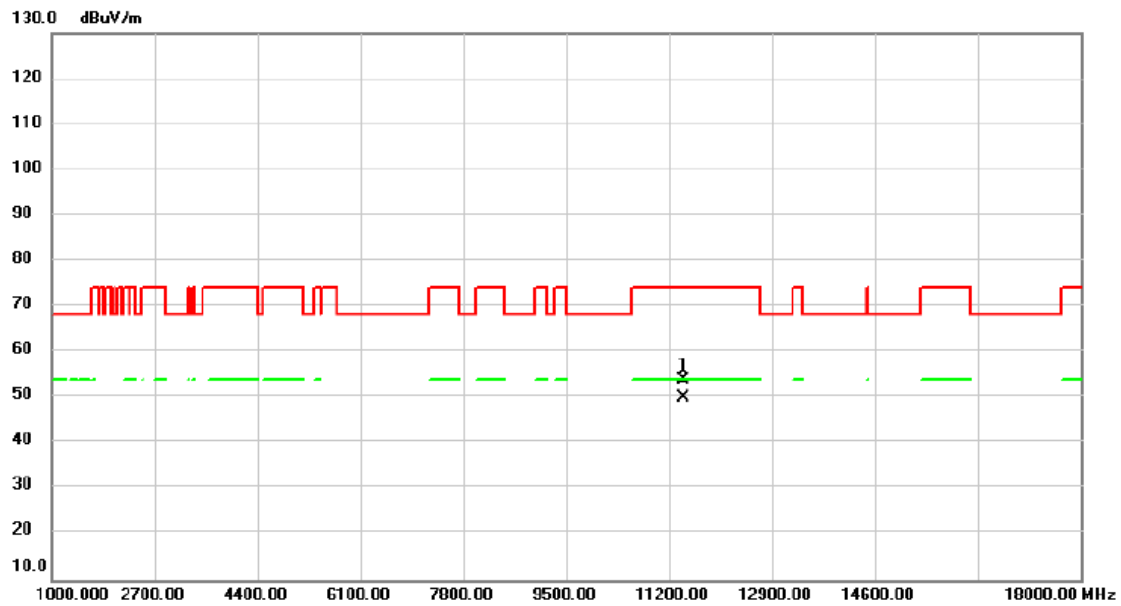


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	48.59	5.31	53.90	74.00	-20.10	peak	
2	*	11440.00	44.86	5.31	50.17	54.00	-3.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

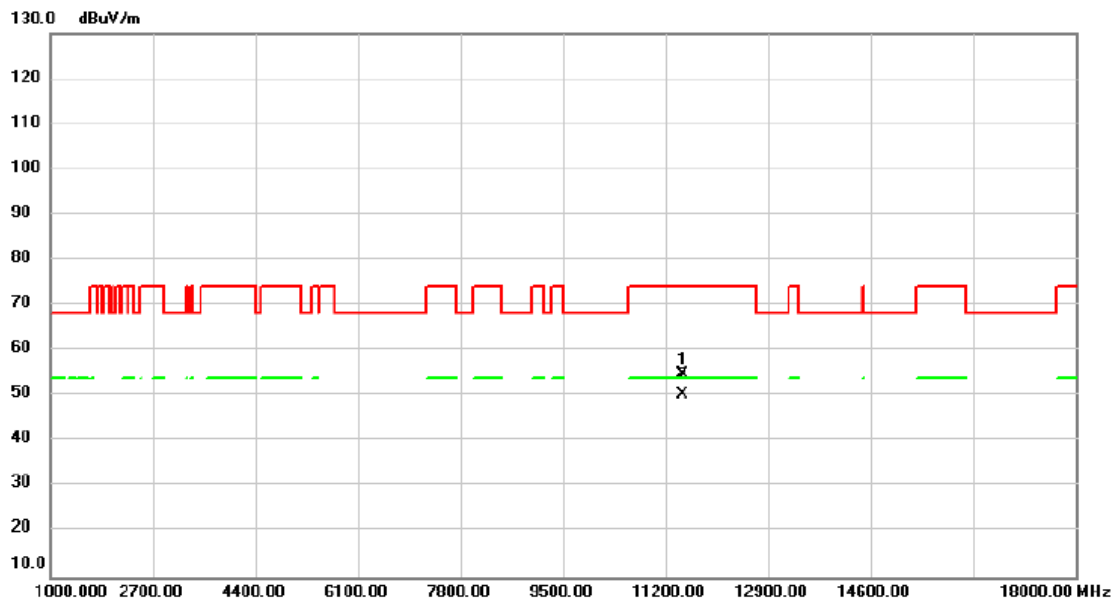


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	49.43	5.34	54.77	74.00	-19.23	peak	
2	*	11490.00	45.04	5.34	50.38	54.00	-3.62	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

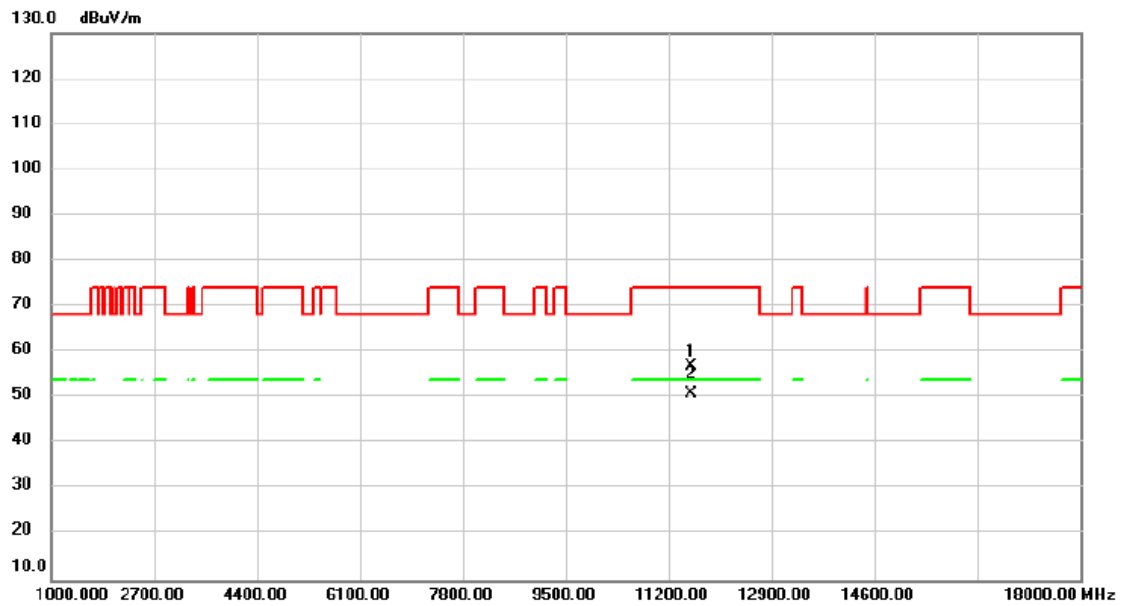


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	51.65	5.31	56.96	74.00	-17.04	peak	
2	*	11570.00	45.76	5.31	51.07	54.00	-2.93	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

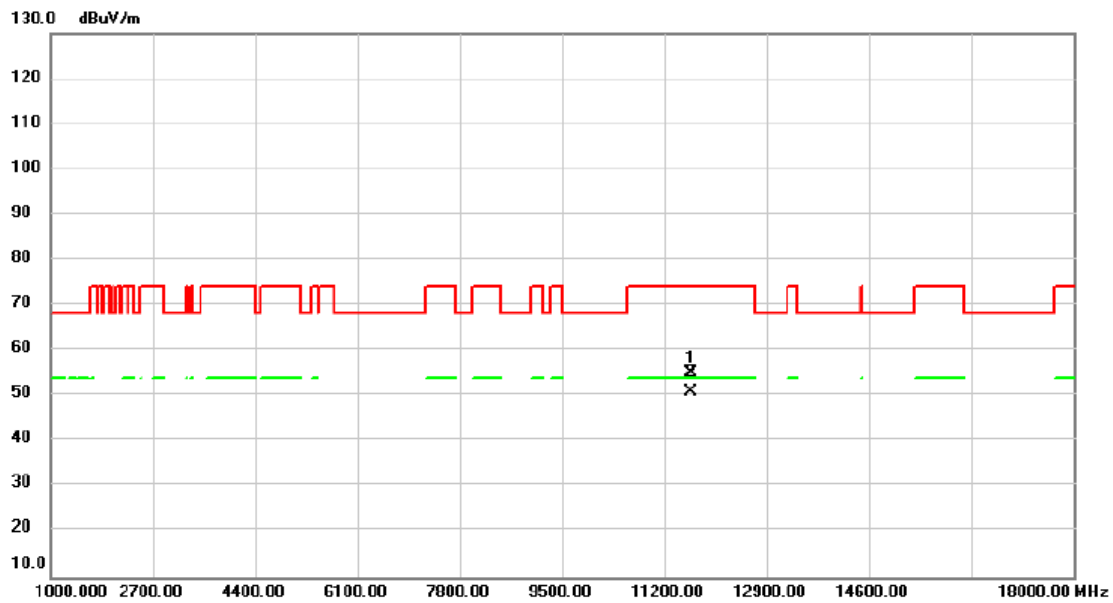


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	50.03	5.26	55.29	74.00	-18.71	peak	
2	*	11650.00	45.66	5.26	50.92	54.00	-3.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

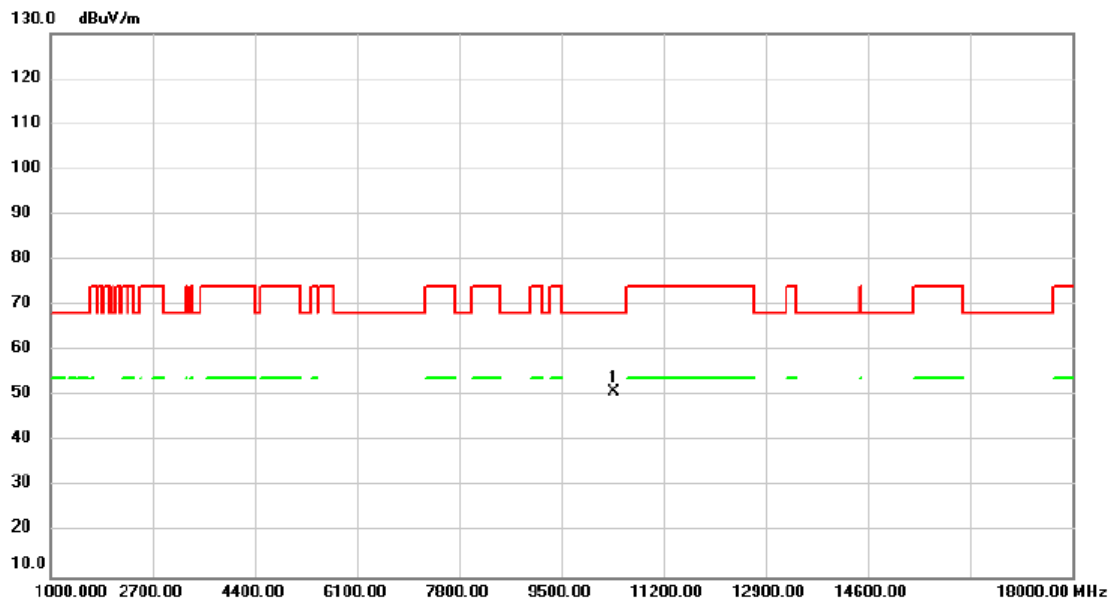


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10380.00	46.05	5.04	51.09	68.20	-17.11	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

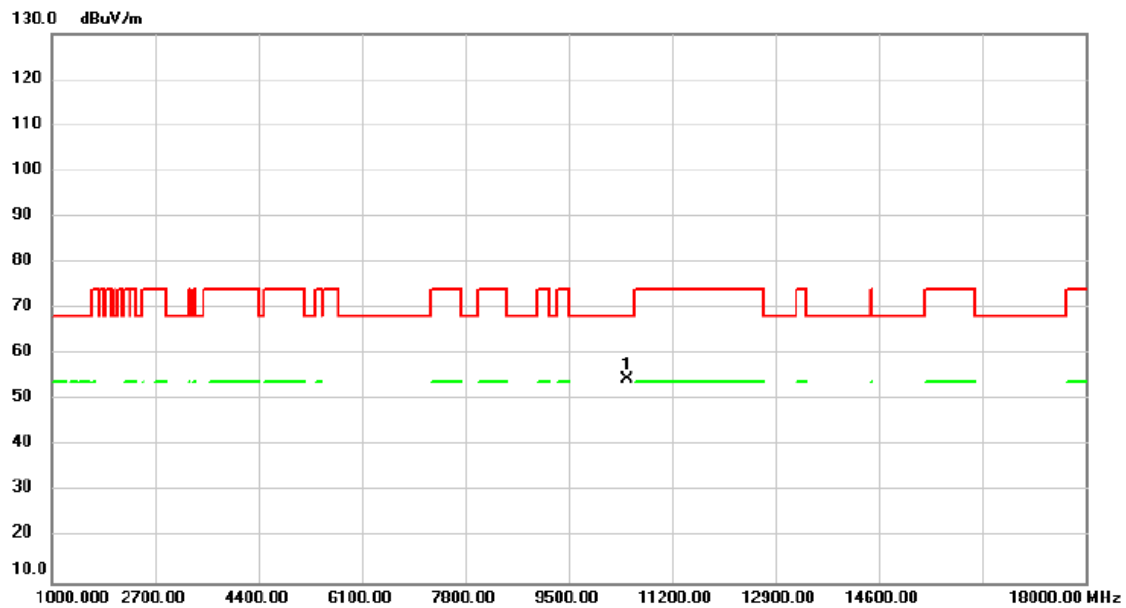


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10460.00	49.56	5.01	54.57	68.20	-13.63	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

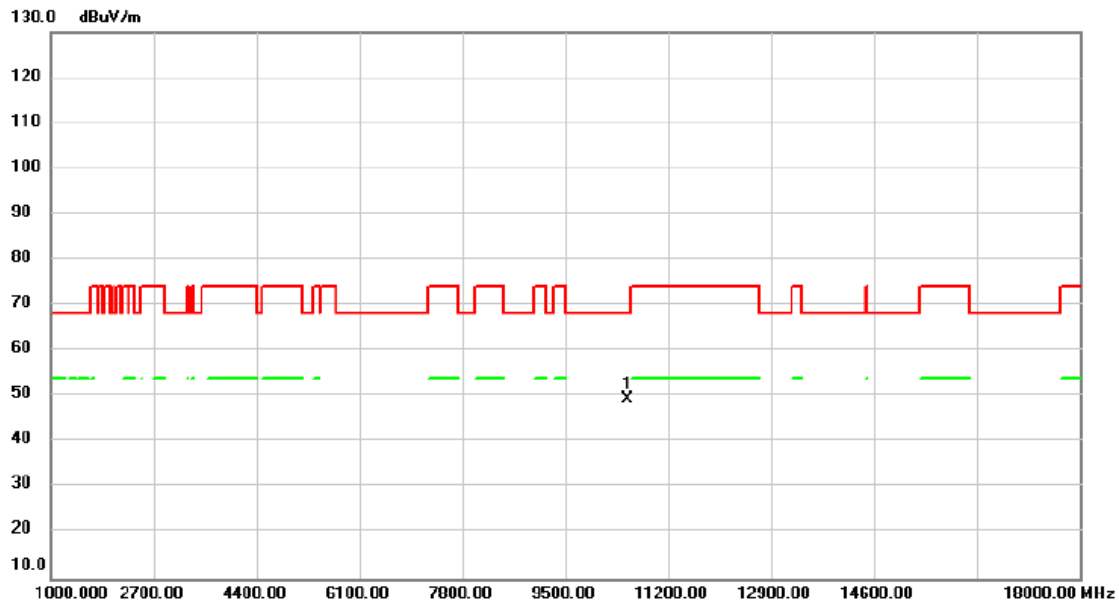


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10537.00	44.52	5.01	49.53	68.20	-18.67	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

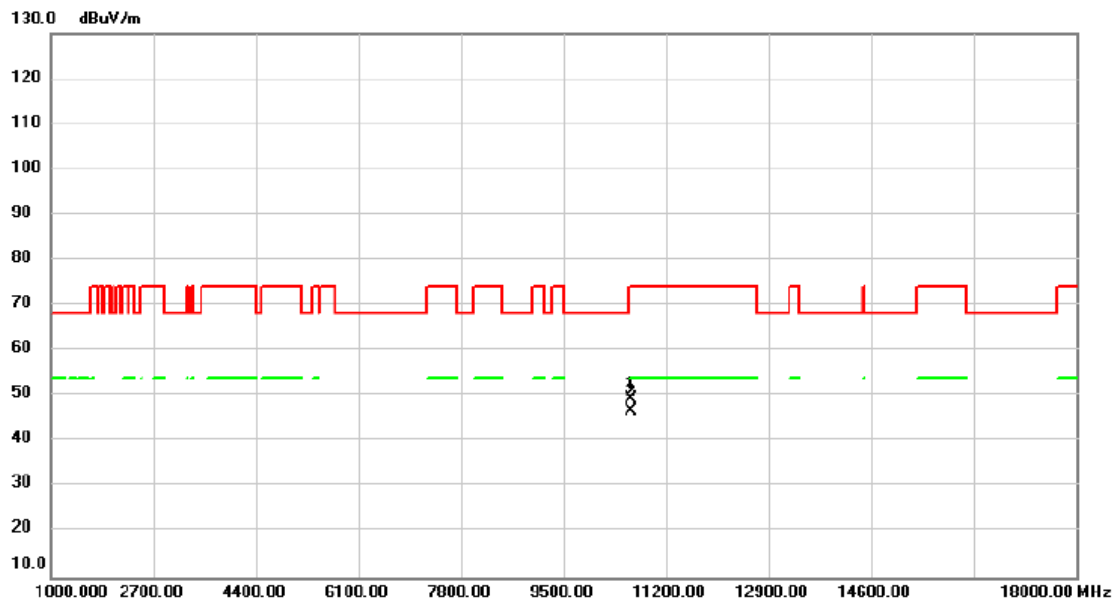


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	44.37	5.02	49.39	74.00	-24.61	peak	
2	*	10620.00	41.58	5.02	46.60	54.00	-7.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

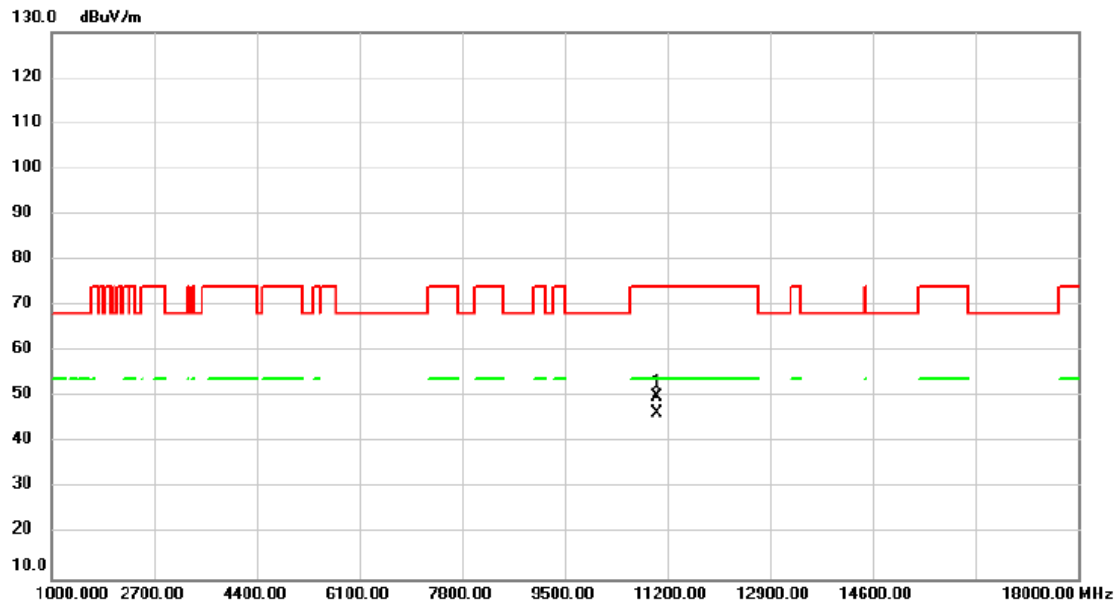


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	45.11	5.07	50.18	74.00	-23.82	peak	
2	*	11020.00	41.38	5.07	46.45	54.00	-7.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

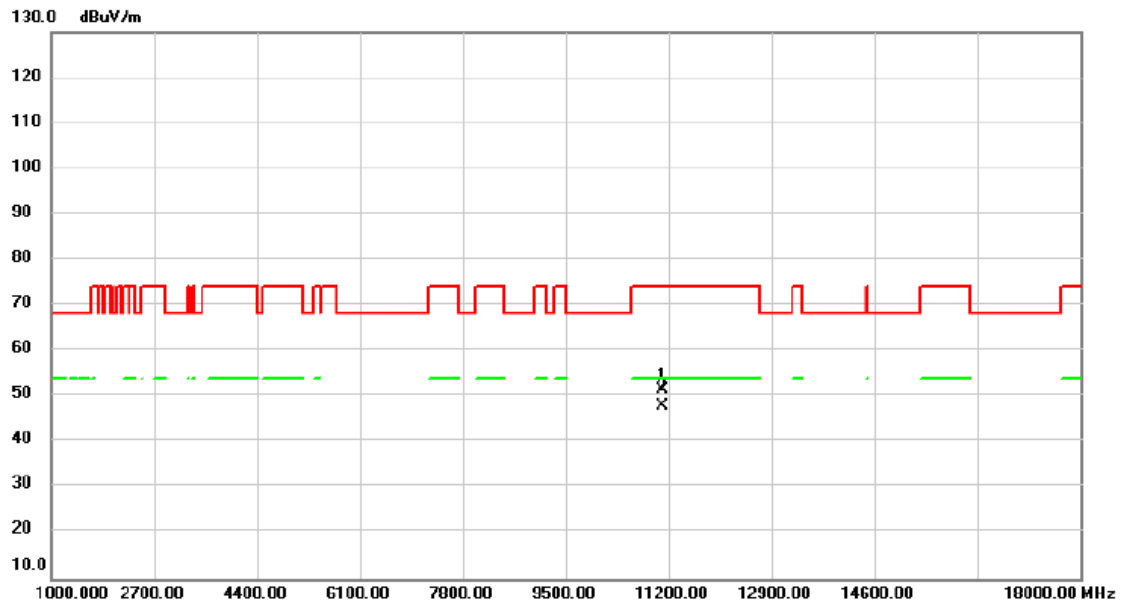


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	46.45	5.11	51.56	74.00	-22.44	peak	
2	*	11100.00	42.79	5.11	47.90	54.00	-6.10	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

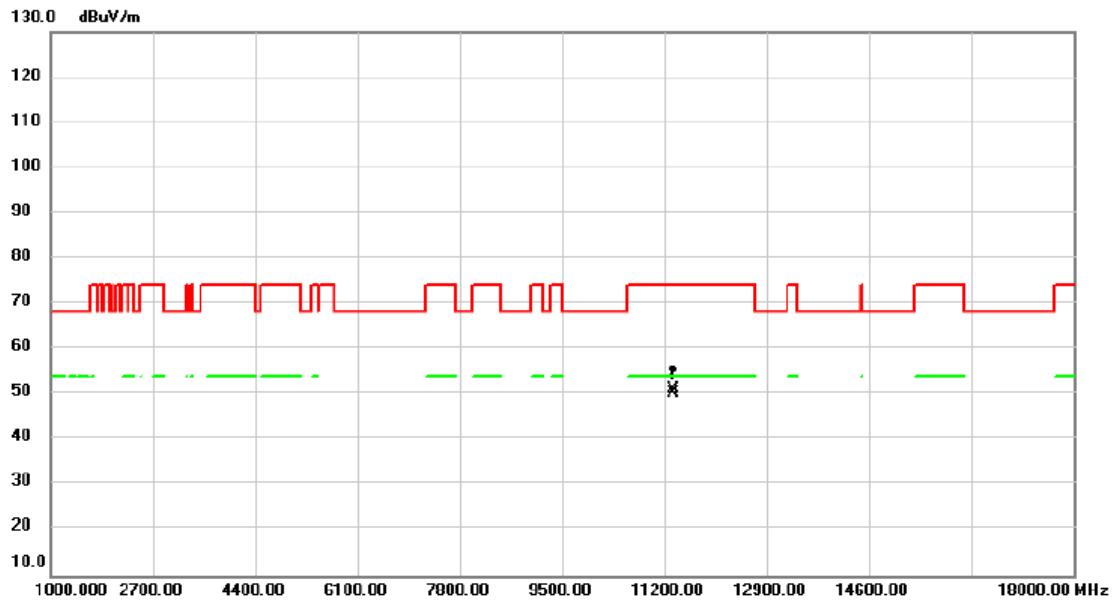


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	45.86	5.25	51.11	74.00	-22.89	peak	
2	*	11340.00	45.23	5.25	50.48	54.00	-3.52	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

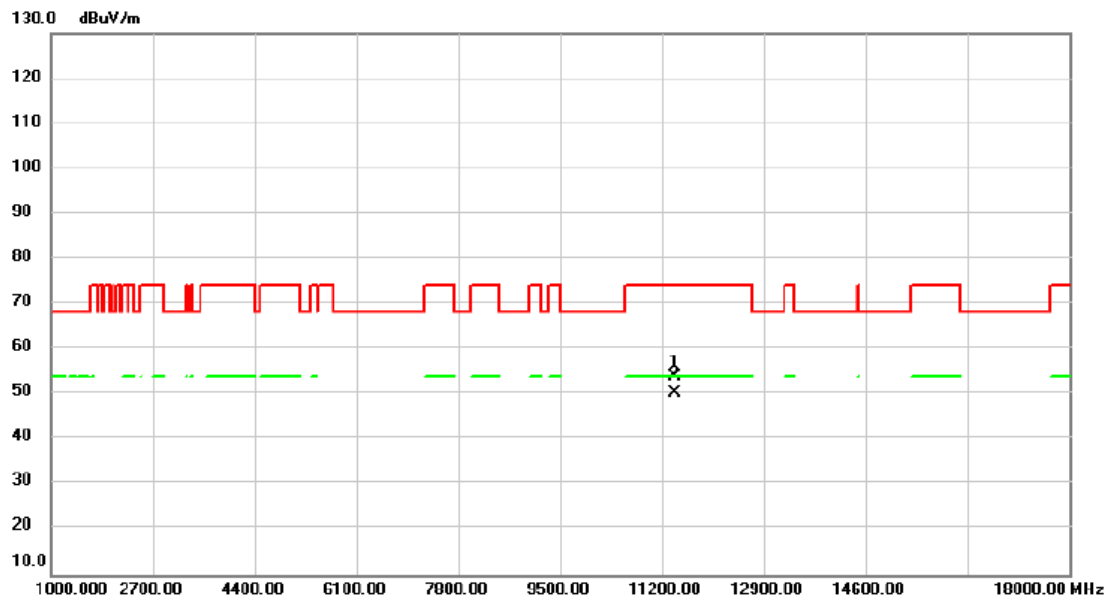


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11421.00	48.70	5.30	54.00	74.00	-20.00	peak	
2	*	11421.00	44.93	5.30	50.23	54.00	-3.77	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

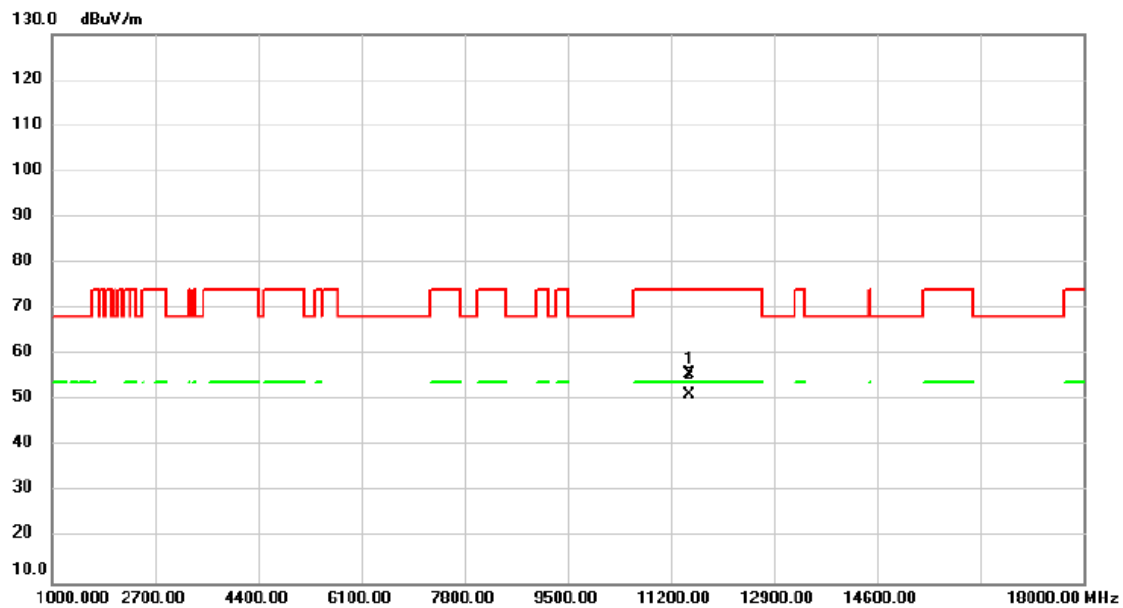


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		11510.00	50.32	5.34	55.66	74.00	-18.34	peak	
2	*	11510.00	46.03	5.34	51.37	54.00	-2.63	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT40)	Test Date	2025/10/31
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

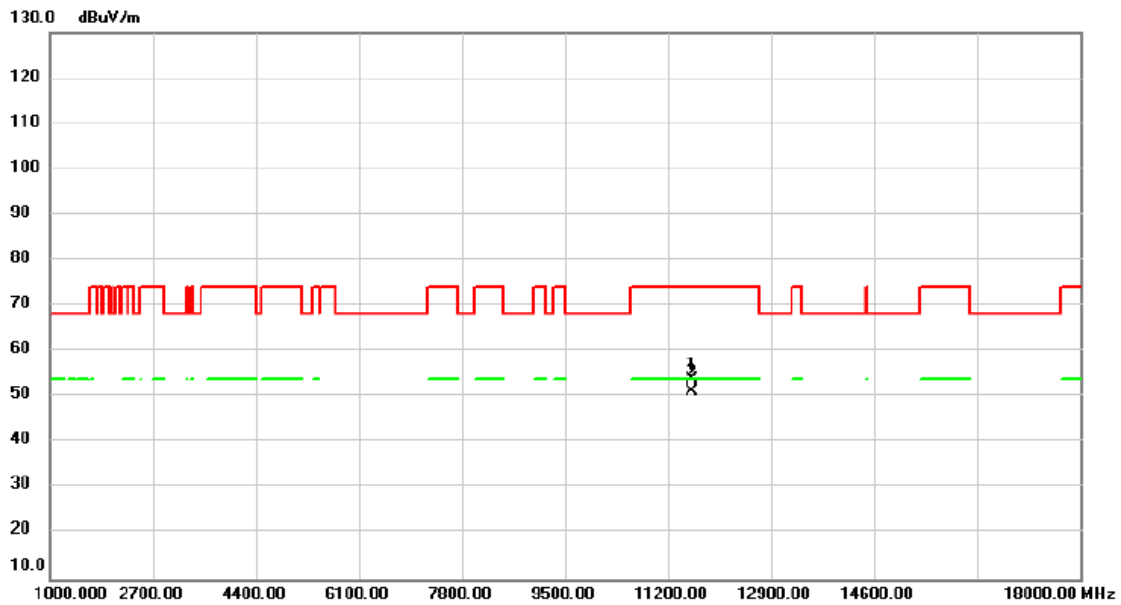


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	48.71	5.29	54.00	74.00	-20.00	peak	
2	*	11590.00	45.82	5.29	51.11	54.00	-2.89	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/31
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

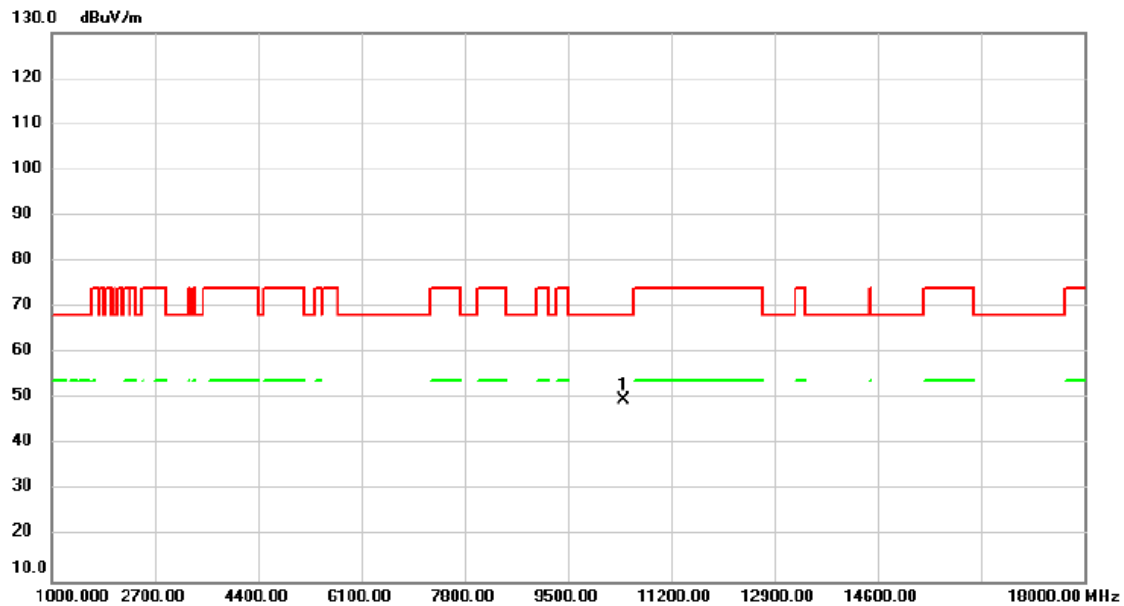


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10418.00	44.75	5.03	49.78	68.20	-18.42	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/31
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

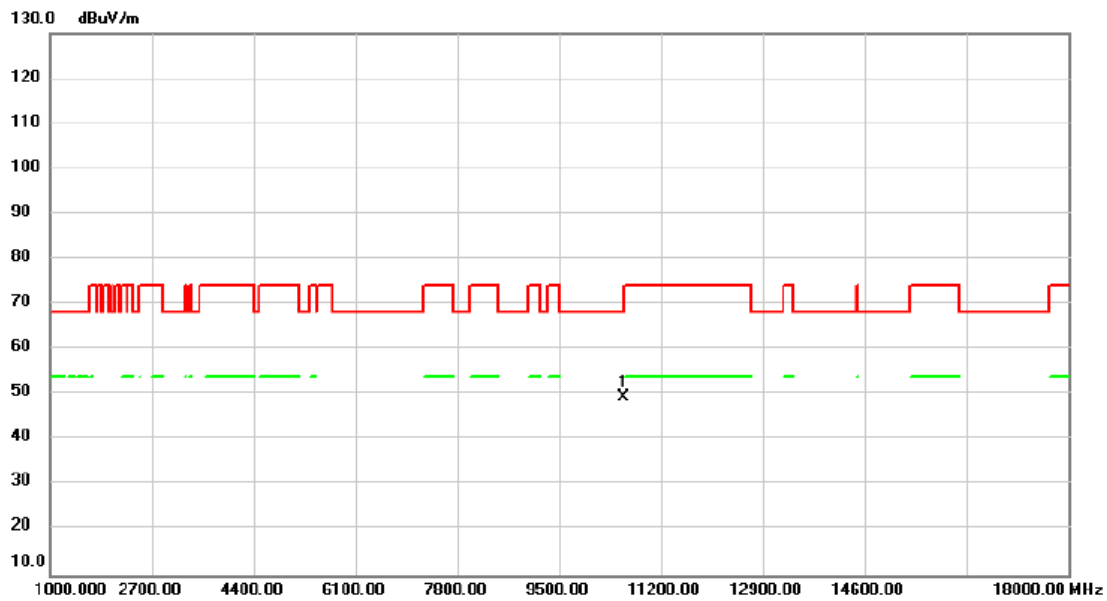


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	10571.00	44.40	5.01	49.41	68.20	-18.79	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/31
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

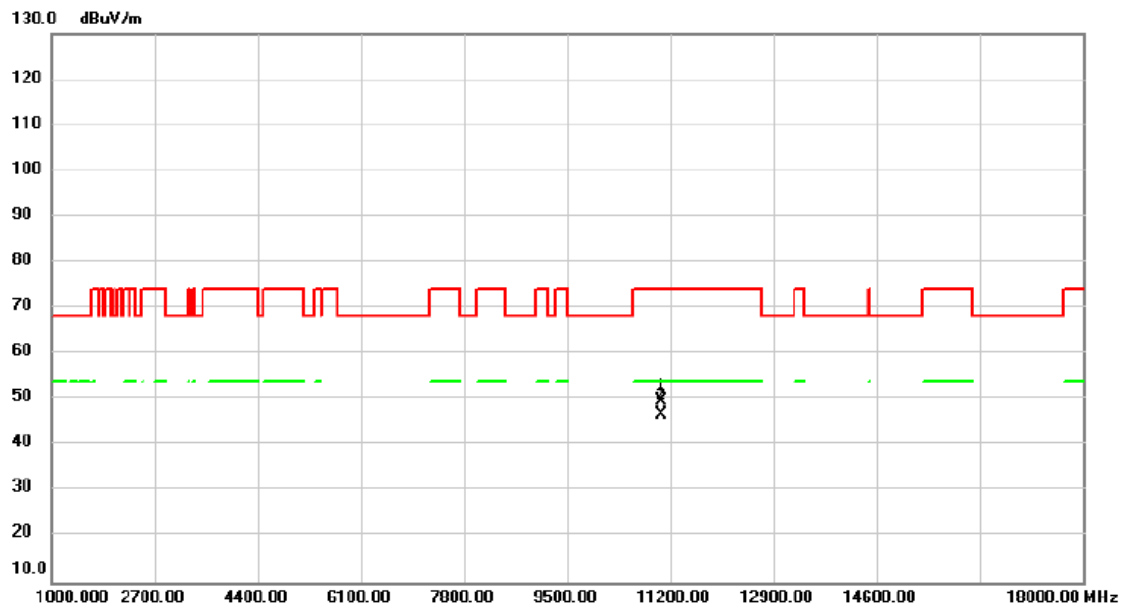


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	44.75	5.08	49.83	74.00	-24.17	peak	
2	*	11060.00	41.52	5.08	46.60	54.00	-7.40	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/31
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

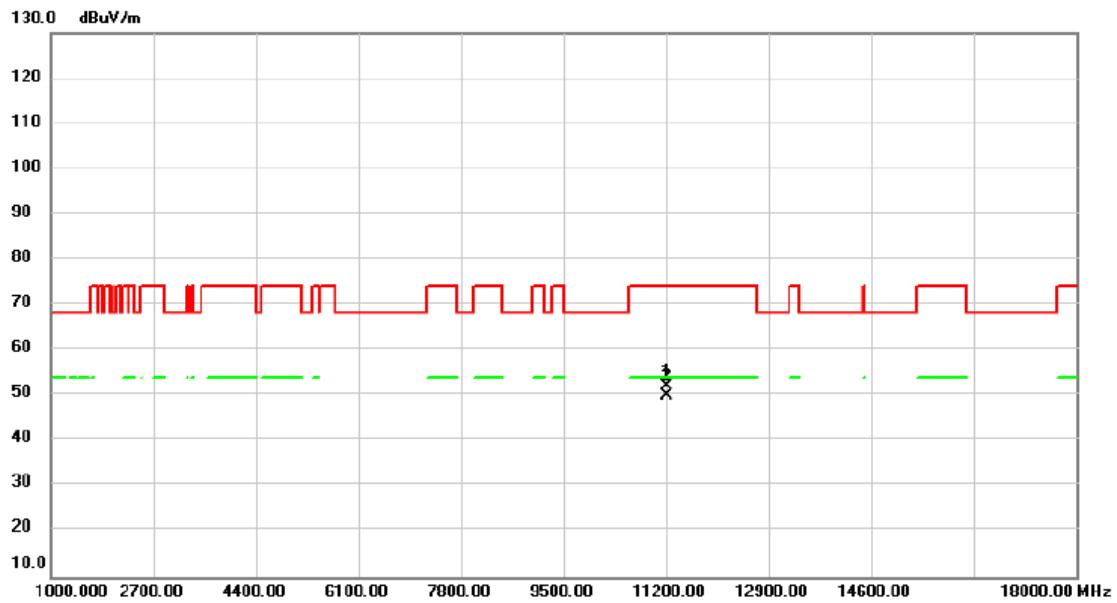


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	46.98	5.18	52.16	74.00	-21.84	peak	
2	*	11220.00	44.74	5.18	49.92	54.00	-4.08	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/31
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

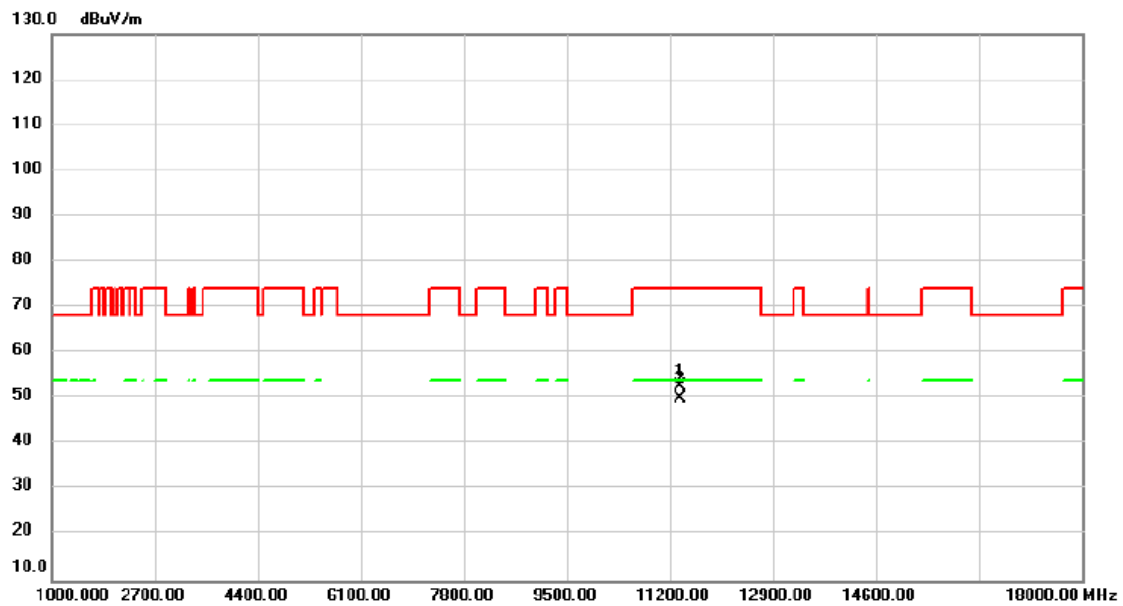


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	47.45	5.26	52.71	74.00	-21.29	peak	
2	*	11380.00	44.71	5.26	49.97	54.00	-4.03	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT80)	Test Date	2025/10/31
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

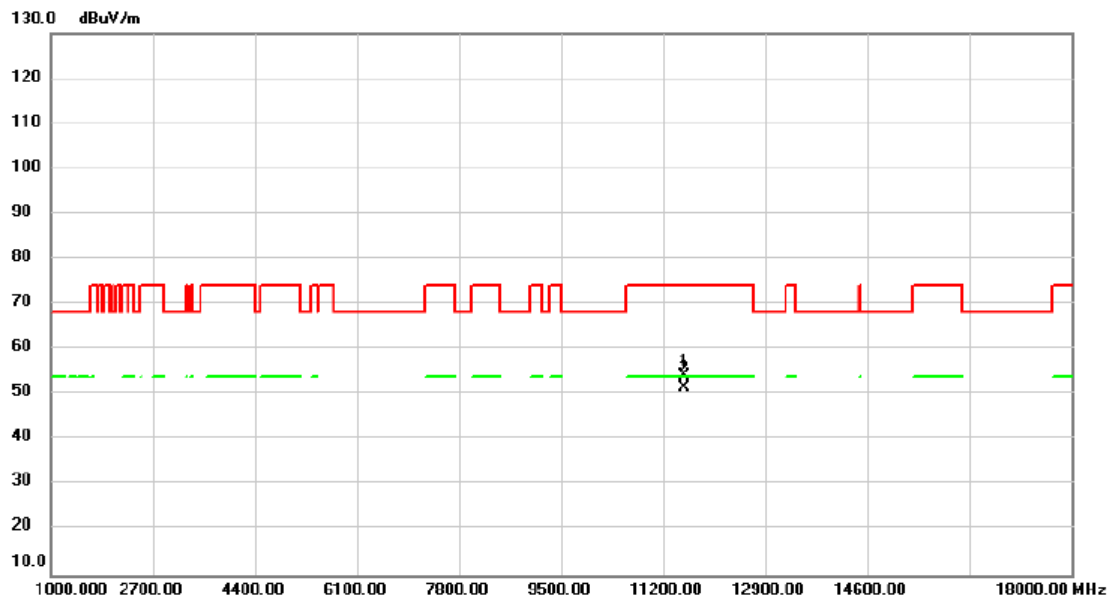


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	48.96	5.31	54.27	74.00	-19.73	peak	
2	*	11550.00	46.12	5.31	51.43	54.00	-2.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/10/31
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

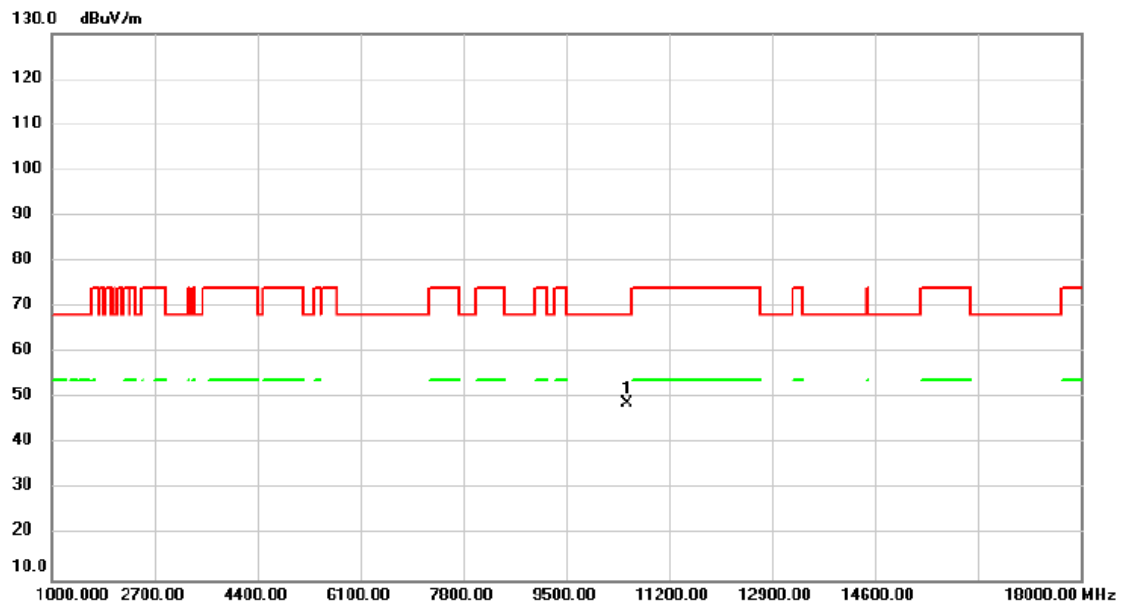


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10500.00	43.87	5.00	48.87	68.20	-19.33	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT160)	Test Date	2025/10/31
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

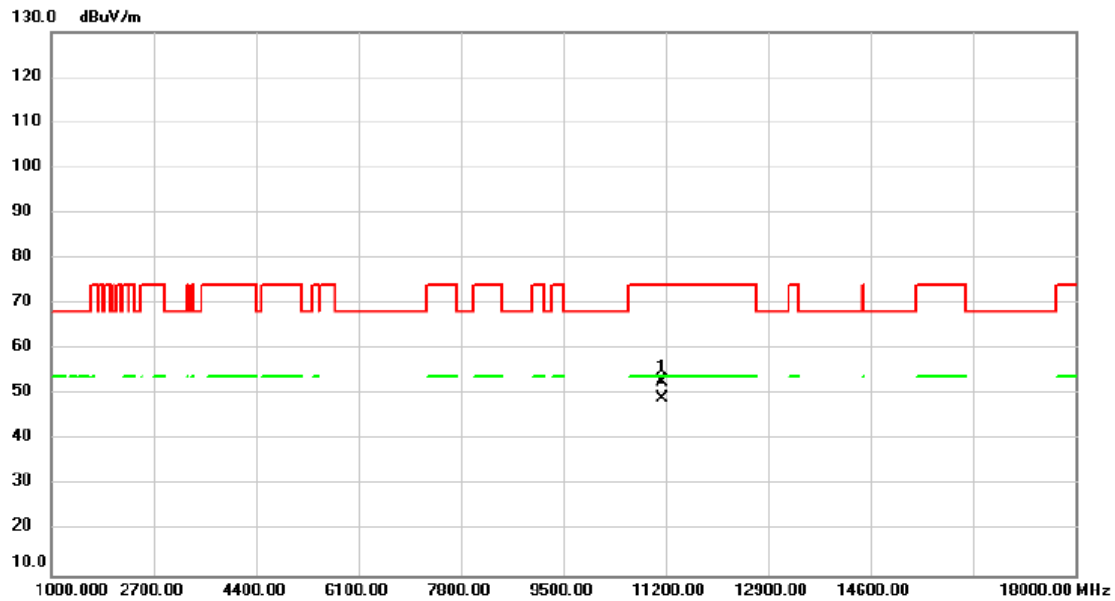


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	47.70	5.13	52.83	74.00	-21.17	peak	
2	*	11140.00	44.09	5.13	49.22	54.00	-4.78	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5180MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

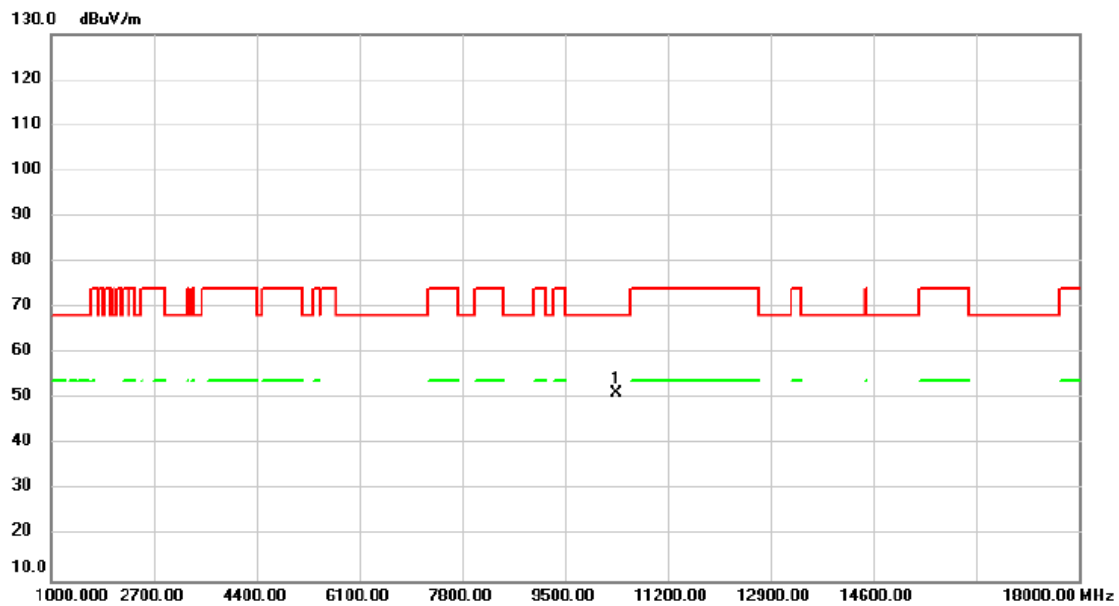


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	46.34	5.05	51.39	68.20	-16.81	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

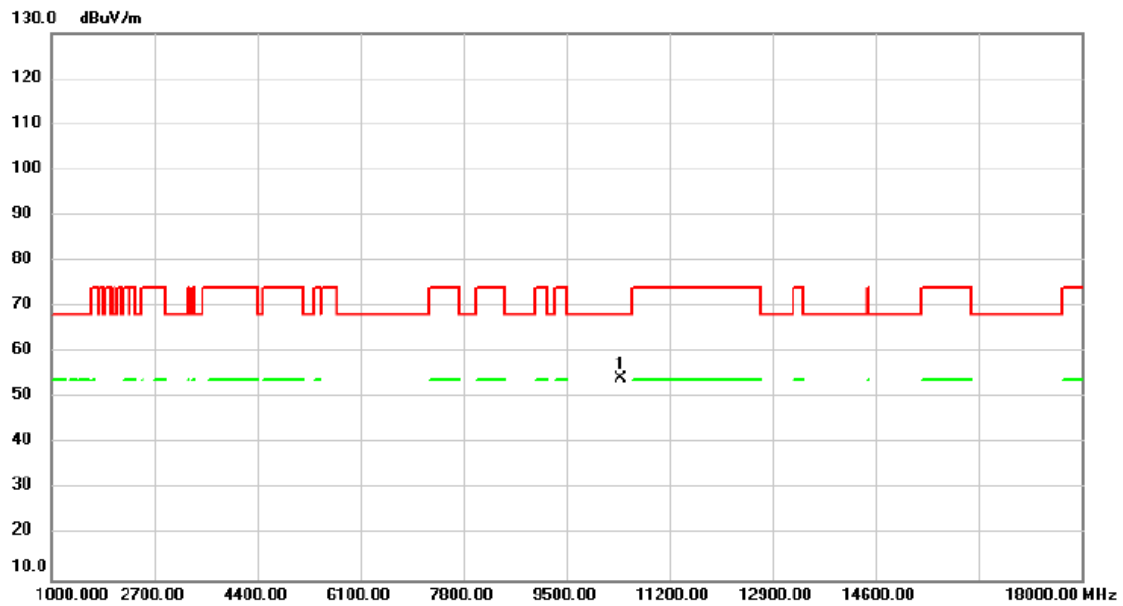


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10401.00	49.33	5.03	54.36	68.20	-13.84	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5240MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

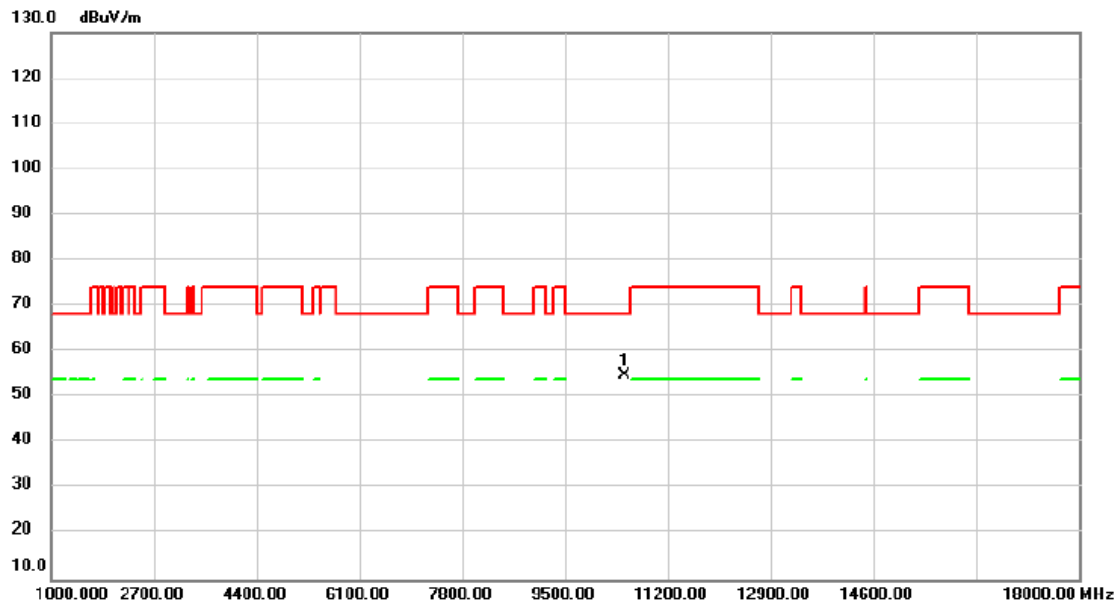


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10486.00	49.75	5.00	54.75	68.20	-13.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5260MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

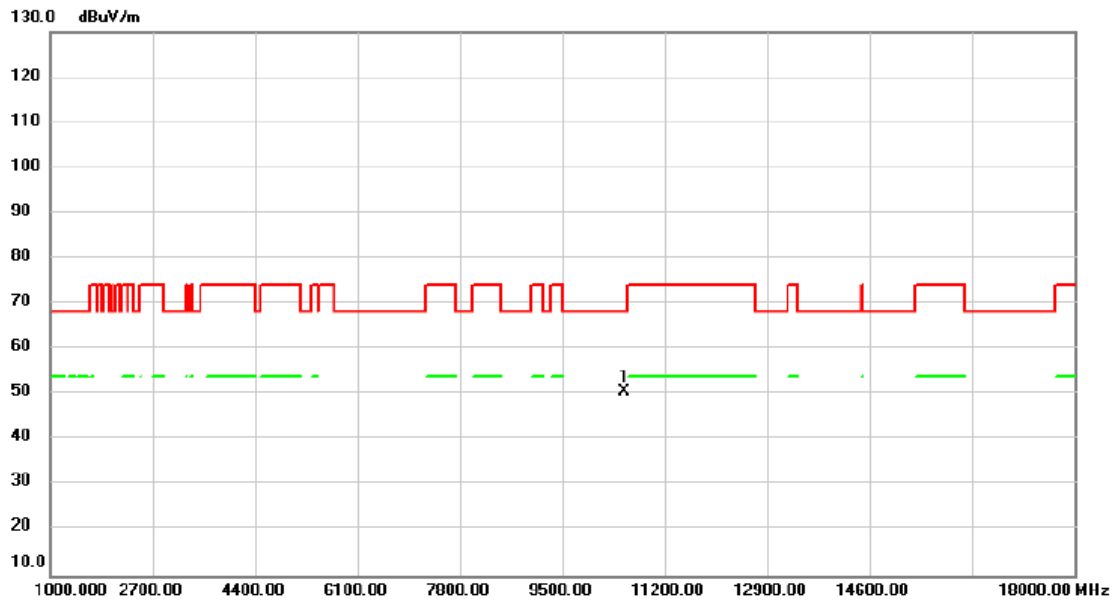


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10520.00	45.53	5.01	50.54	68.20	-17.66	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5300MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

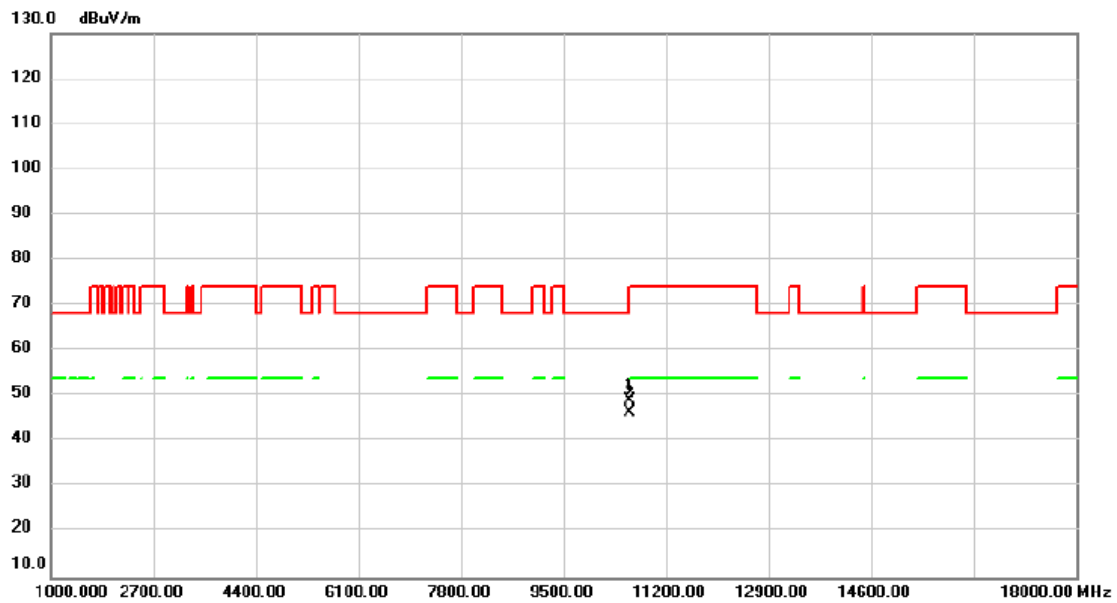


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10600.00	44.18	5.01	49.19	68.20	-19.01	peak	
2	*	10600.00	41.49	5.01	46.50	54.00	-7.50	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5320MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

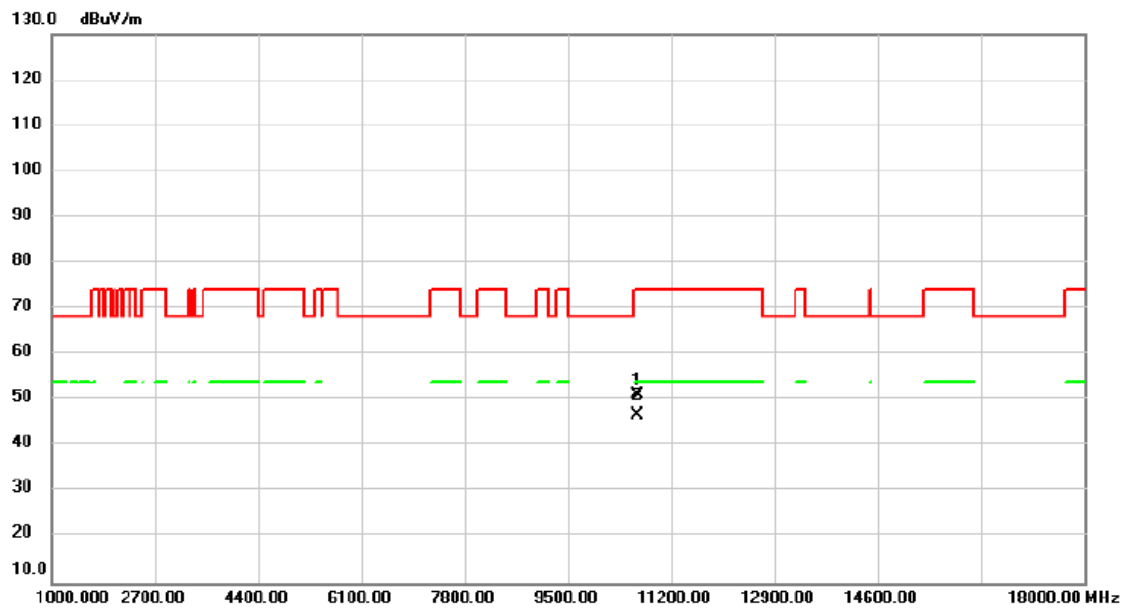


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10640.00	46.11	5.01	51.12	74.00	-22.88	peak	
2	*	10640.00	41.86	5.01	46.87	54.00	-7.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5500MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

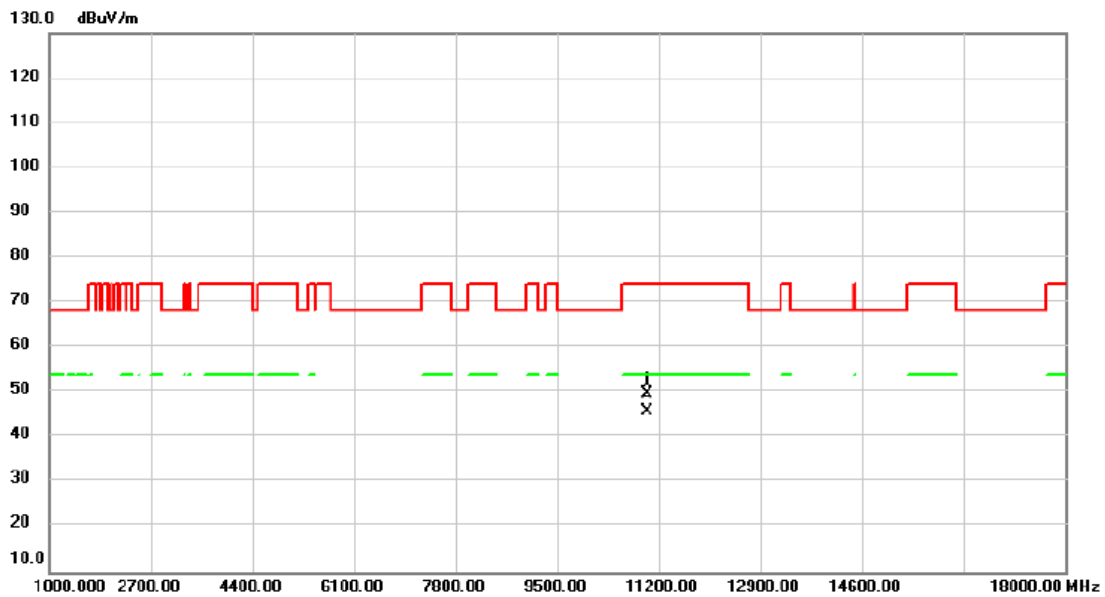


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11000.00	44.83	5.05	49.88	74.00	-24.12	peak	
2	*	11000.00	40.66	5.05	45.71	54.00	-8.29	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5580MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

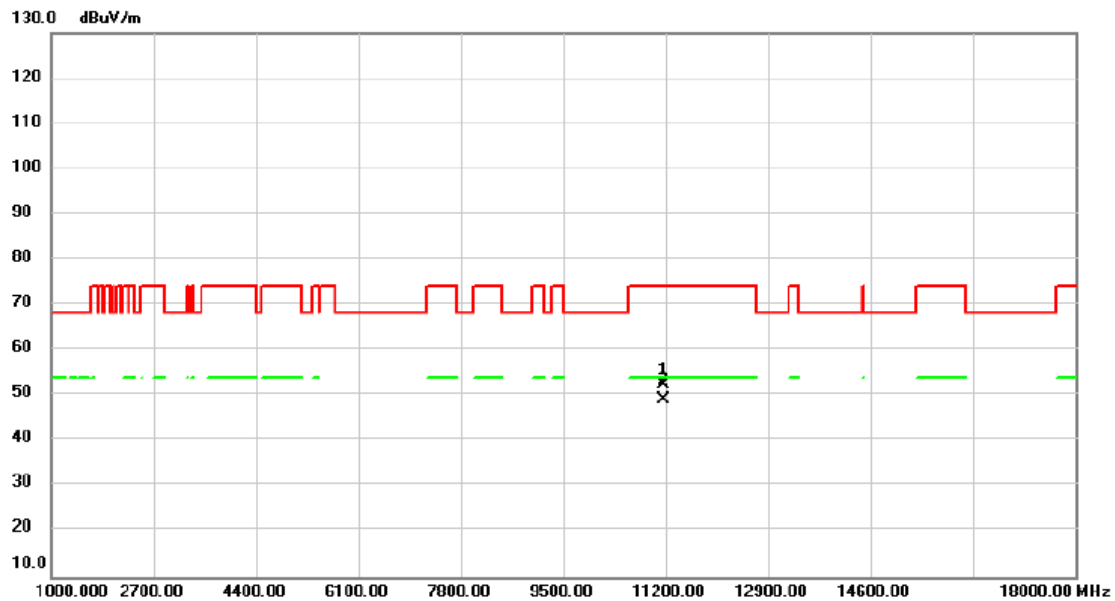


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11160.00	47.27	5.14	52.41	74.00	-21.59	peak	
2	*	11160.00	43.95	5.14	49.09	54.00	-4.91	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5700MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

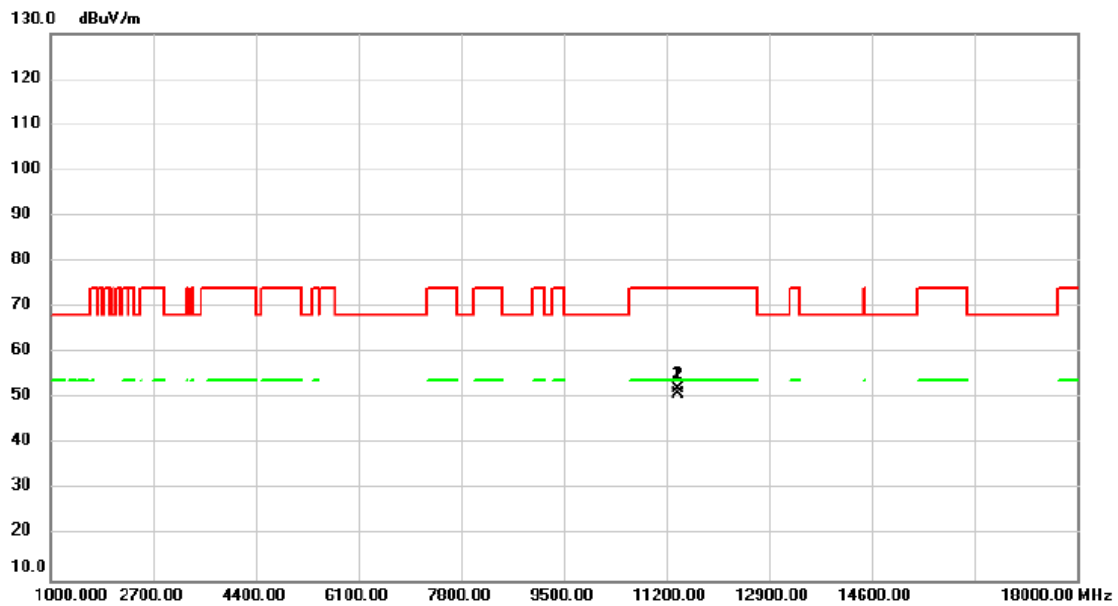


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11400.00	47.00	5.28	52.28	74.00	-21.72	peak	
2	*	11400.00	45.59	5.28	50.87	54.00	-3.13	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5720MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

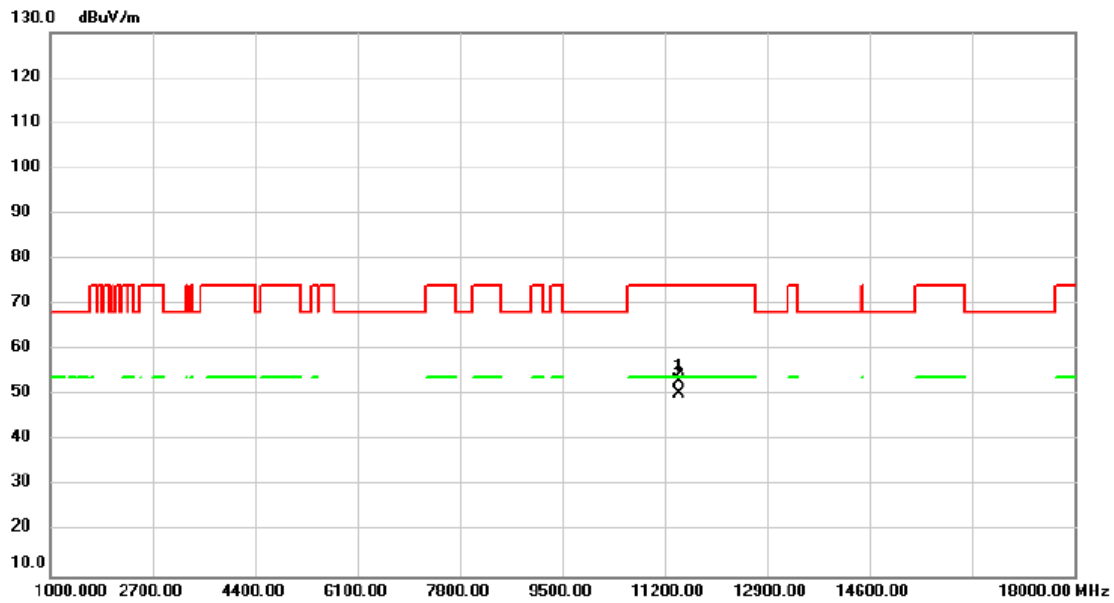


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11440.00	47.87	5.31	53.18	74.00	-20.82	peak	
2	*	11440.00	44.99	5.31	50.30	54.00	-3.70	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5745MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

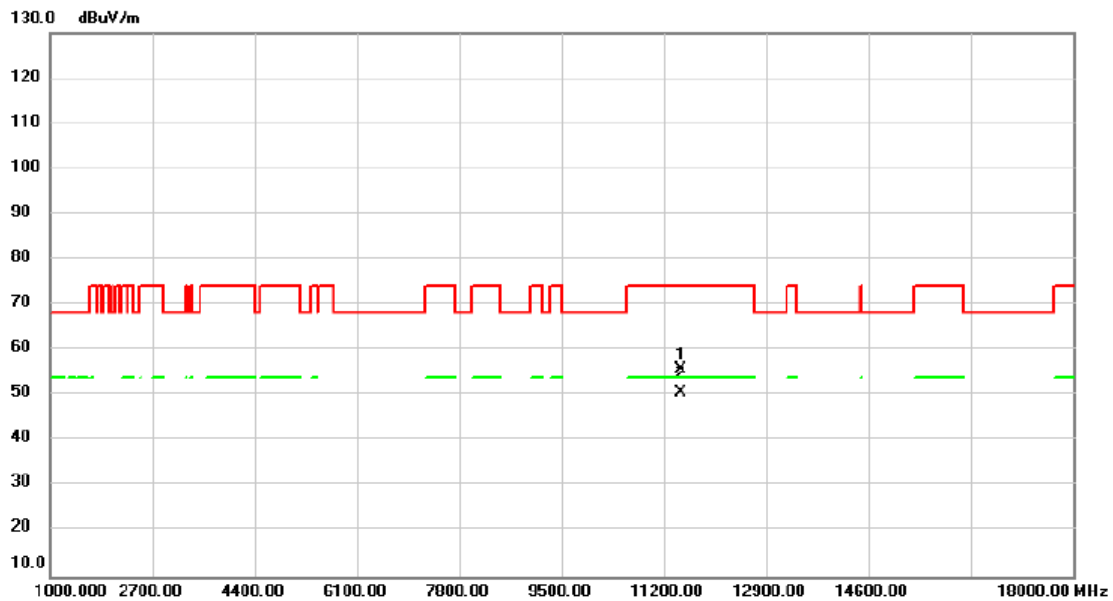


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11490.00	50.46	5.34	55.80	74.00	-18.20	peak	
2	*	11490.00	45.18	5.34	50.52	54.00	-3.48	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5785MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

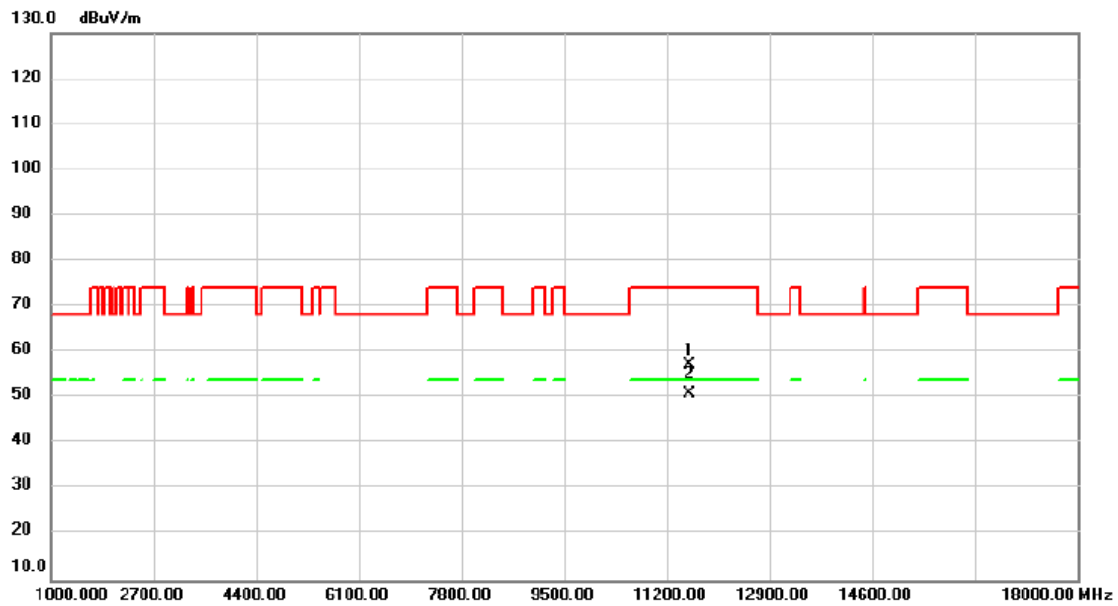


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11570.00	51.83	5.31	57.14	74.00	-16.86	peak	
2	*	11570.00	45.79	5.31	51.10	54.00	-2.90	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE20)	Test Date	2025/10/31
Test Frequency	5825MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

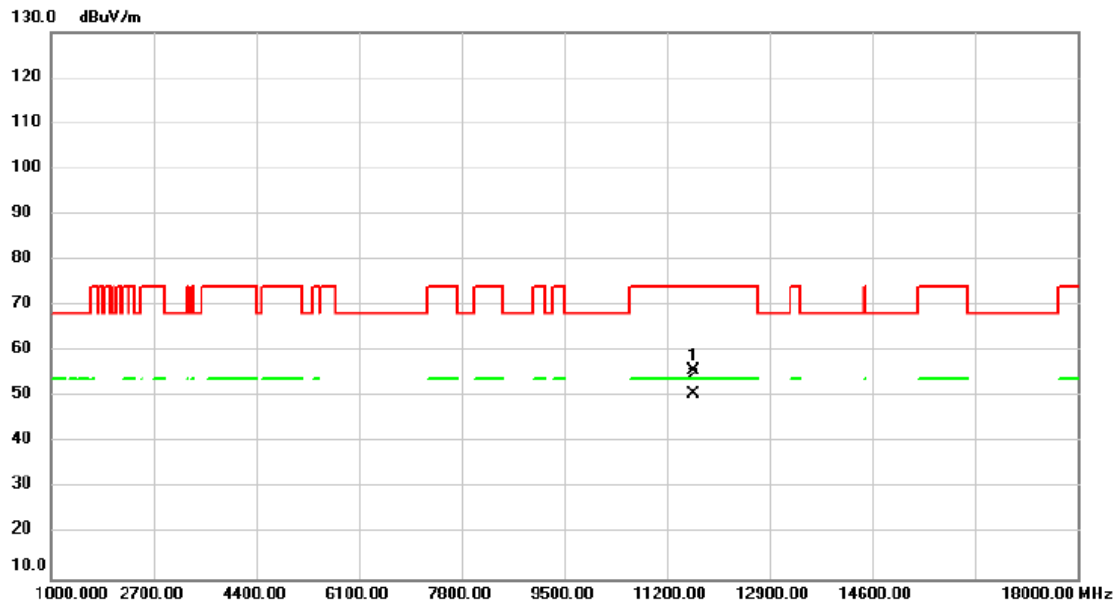


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11650.00	50.52	5.26	55.78	74.00	-18.22	peak	
2	*	11650.00	45.40	5.26	50.66	54.00	-3.34	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5190MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

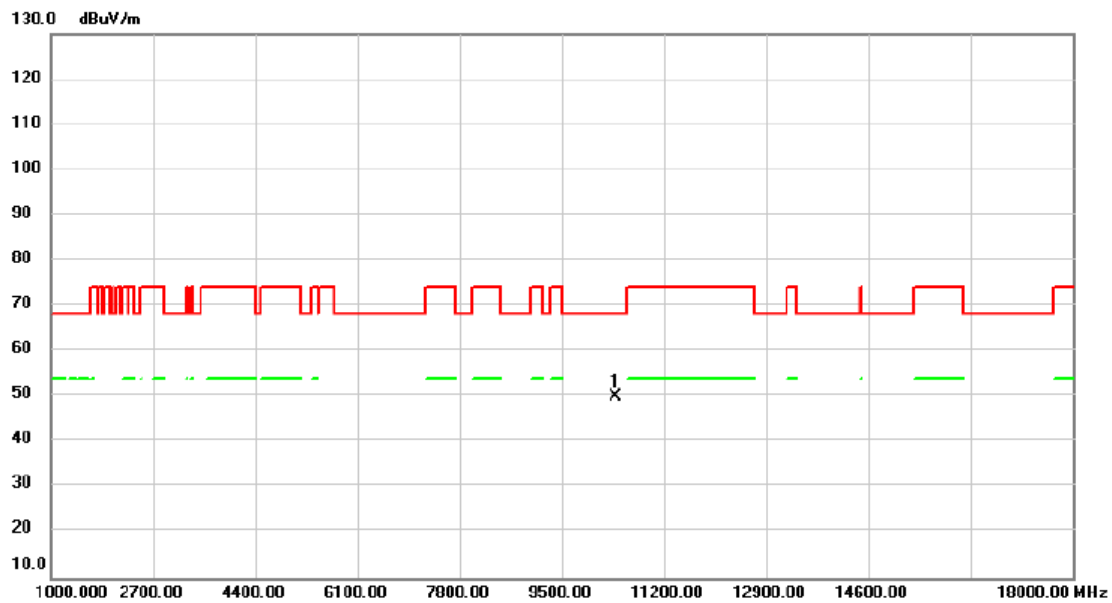


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10384.00	44.91	5.04	49.95	68.20	-18.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5230MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

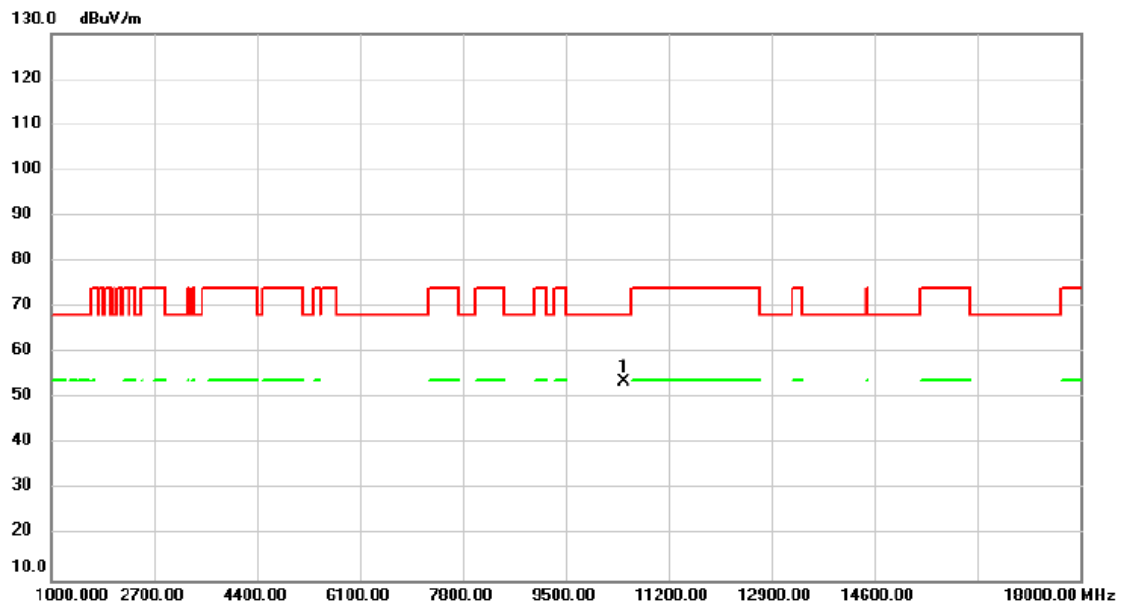


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10452.00	48.73	5.02	53.75	68.20	-14.45	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5270MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

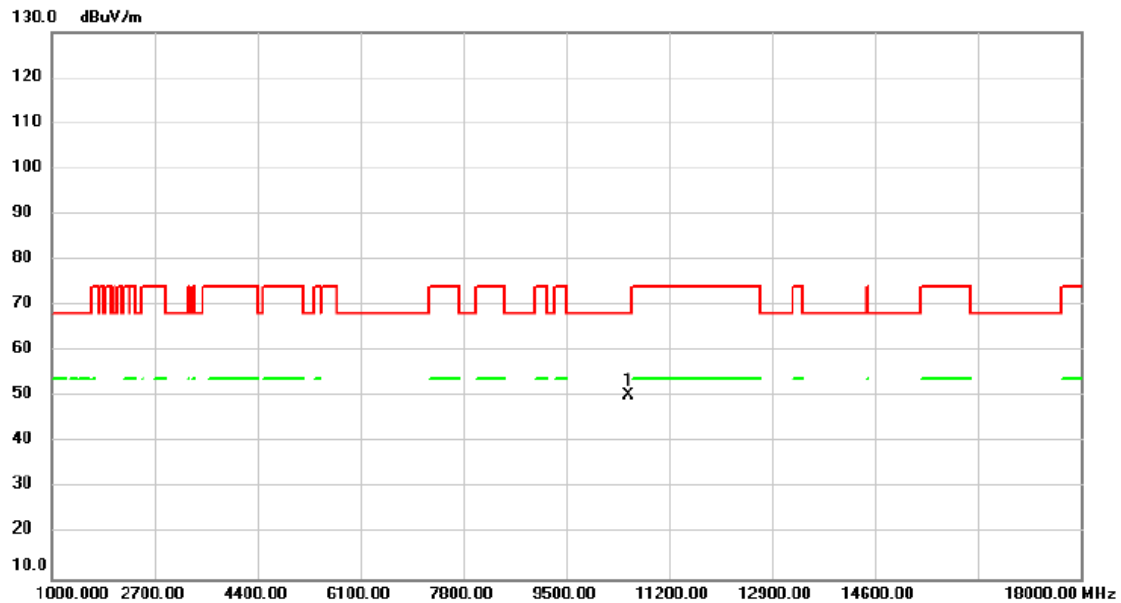


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10537.00	45.46	5.01	50.47	68.20	-17.73	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5310MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

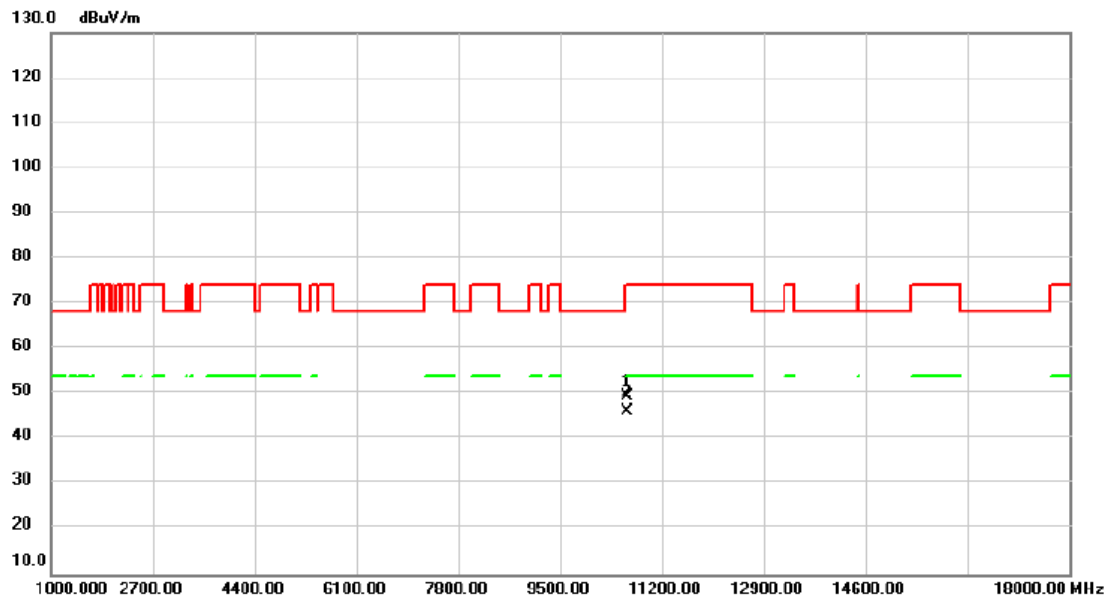


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		10620.00	44.54	5.02	49.56	74.00	-24.44	peak	
2	*	10620.00	41.19	5.02	46.21	54.00	-7.79	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5510MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

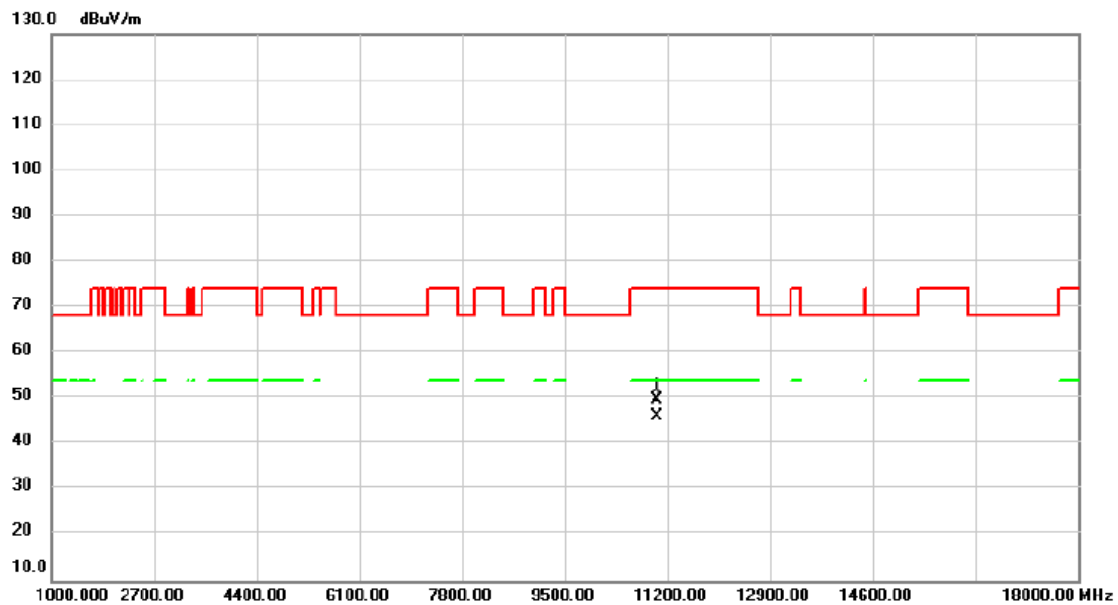


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11020.00	44.68	5.07	49.75	74.00	-24.25	peak	
2	*	11020.00	41.19	5.07	46.26	54.00	-7.74	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5550MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

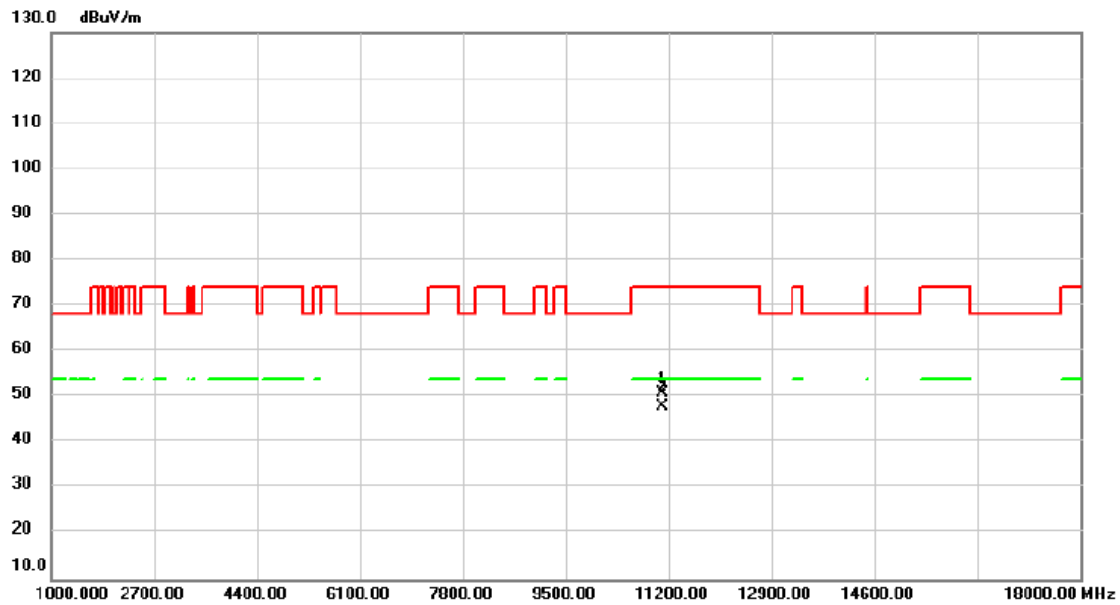


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11100.00	45.95	5.11	51.06	74.00	-22.94	peak	
2	*	11100.00	42.70	5.11	47.81	54.00	-6.19	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5670MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

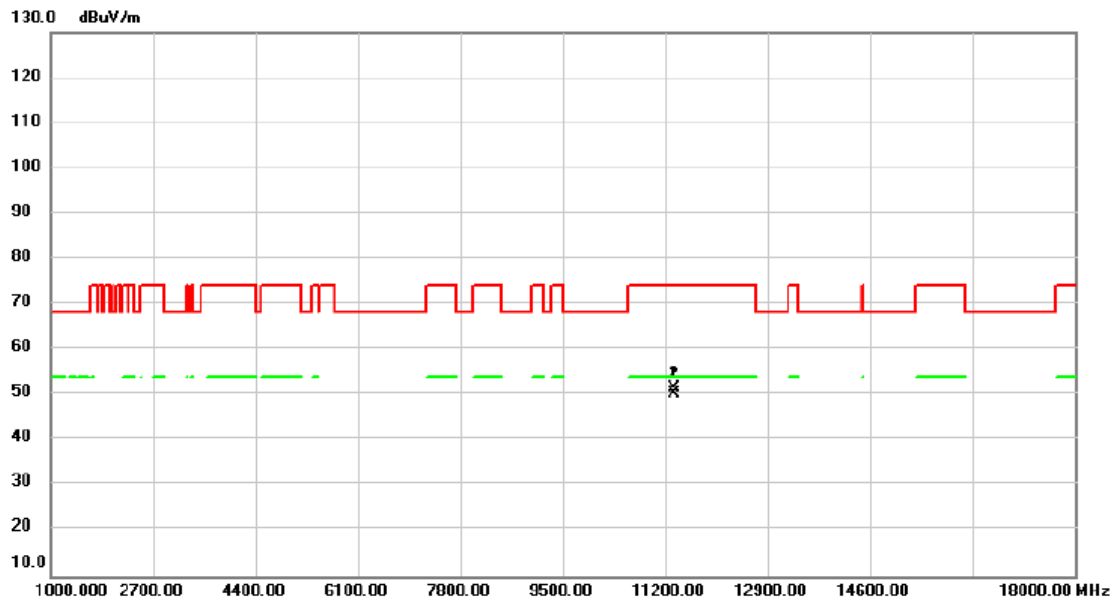


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11340.00	46.32	5.25	51.57	74.00	-22.43	peak	
2	*	11340.00	44.99	5.25	50.24	54.00	-3.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5710MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

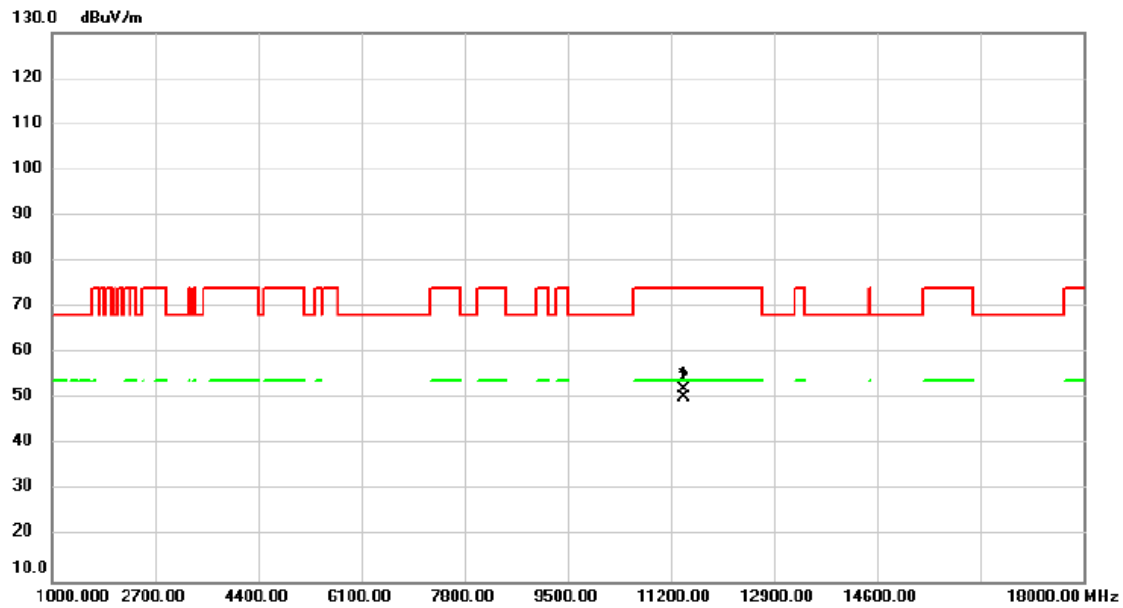


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11420.00	46.99	5.30	52.29	74.00	-21.71	peak	
2	*	11420.00	45.03	5.30	50.33	54.00	-3.67	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5755MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

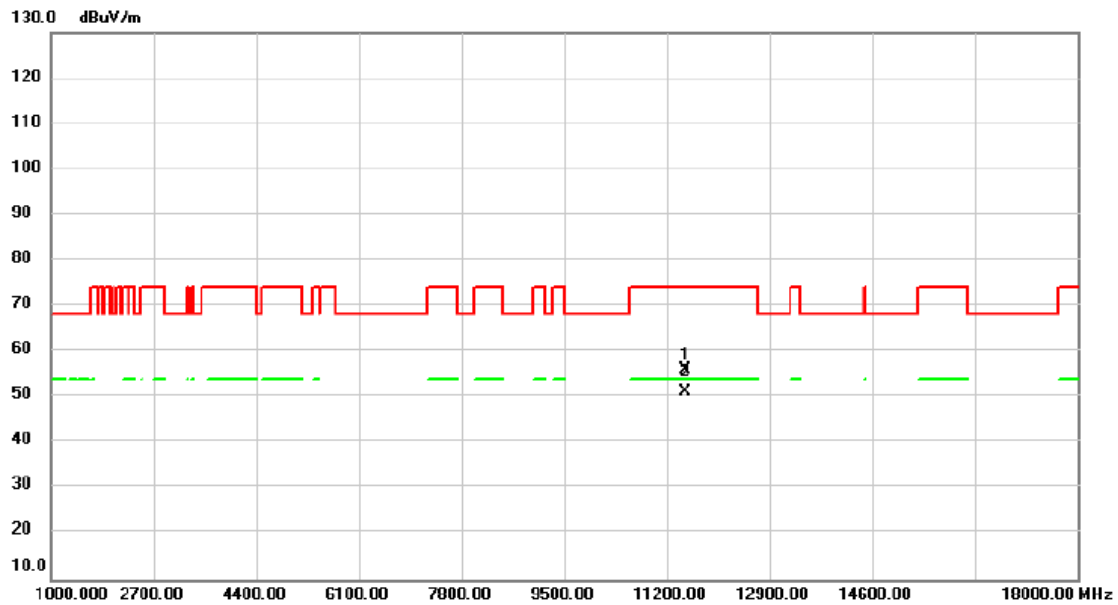


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11510.00	50.69	5.34	56.03	74.00	-17.97	peak	
2	*	11510.00	45.97	5.34	51.31	54.00	-2.69	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE40)	Test Date	2025/10/31
Test Frequency	5795MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

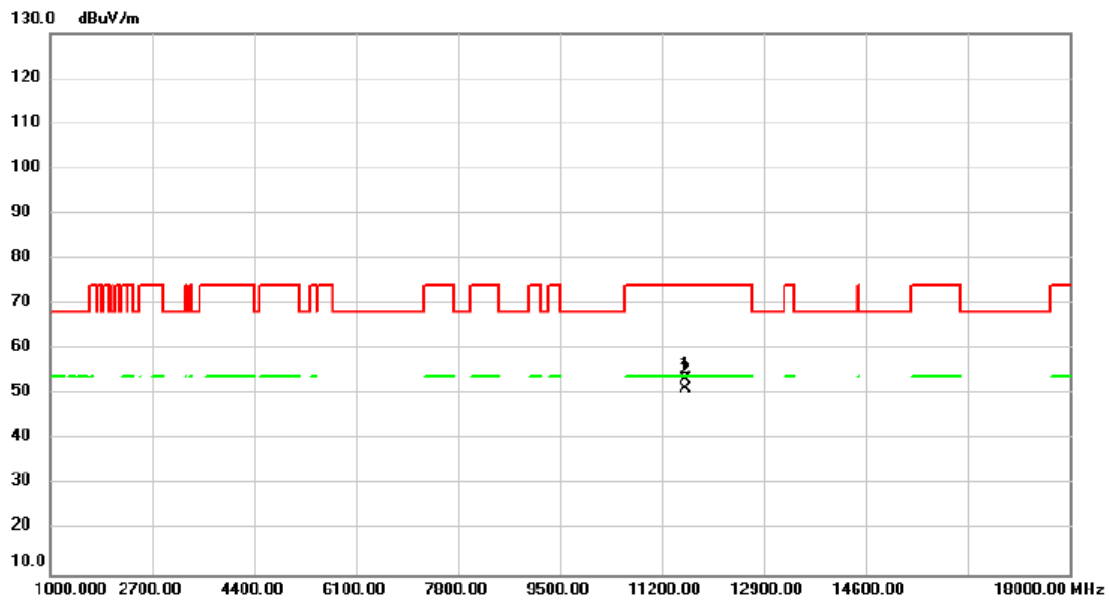


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	48.18	5.29	53.47	74.00	-20.53	peak	
2	*	11590.00	45.86	5.29	51.15	54.00	-2.85	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5210MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

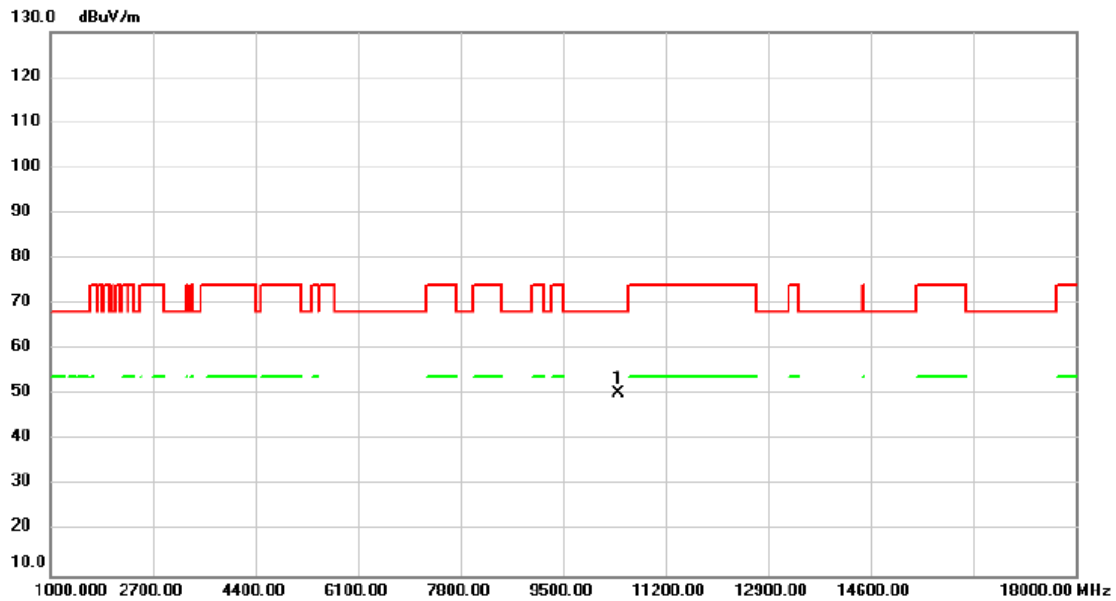


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10418.00	45.41	5.03	50.44	68.20	-17.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5290MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

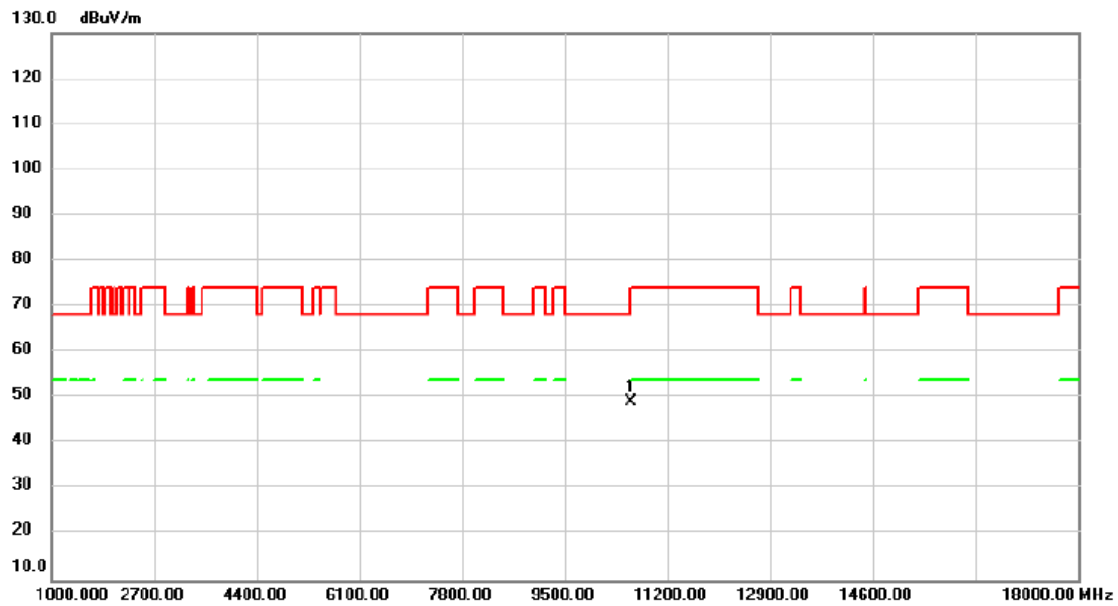


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10588.00	44.30	5.00	49.30	68.20	-18.90	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5530MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

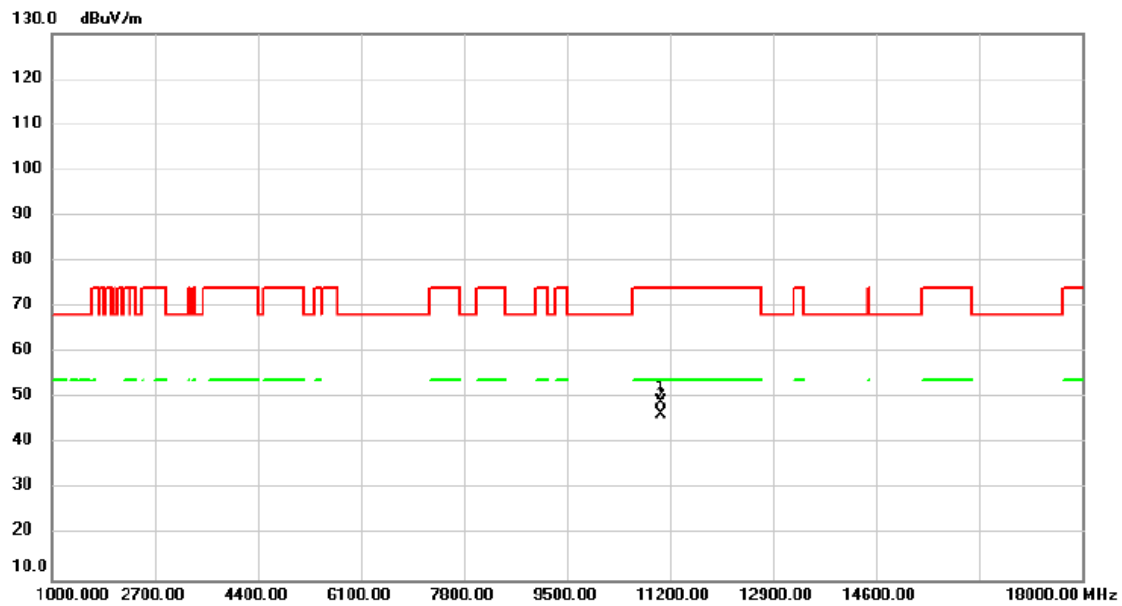


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11060.00	44.19	5.08	49.27	74.00	-24.73	peak	
2	*	11060.00	41.35	5.08	46.43	54.00	-7.57	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5610MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

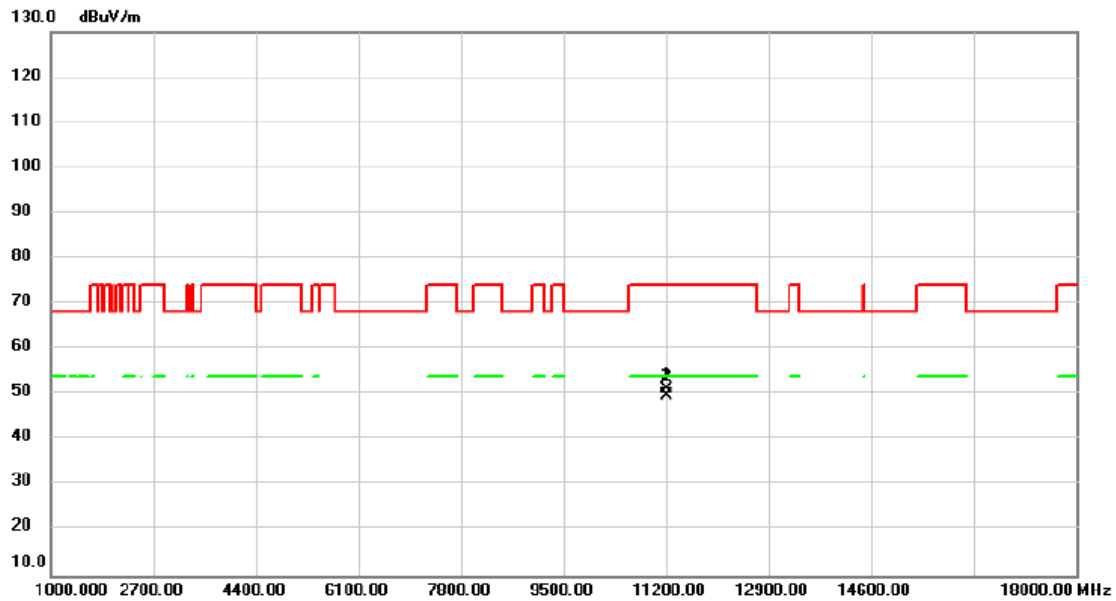


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11220.00	45.96	5.18	51.14	74.00	-22.86	peak	
2	*	11220.00	44.59	5.18	49.77	54.00	-4.23	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5690MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

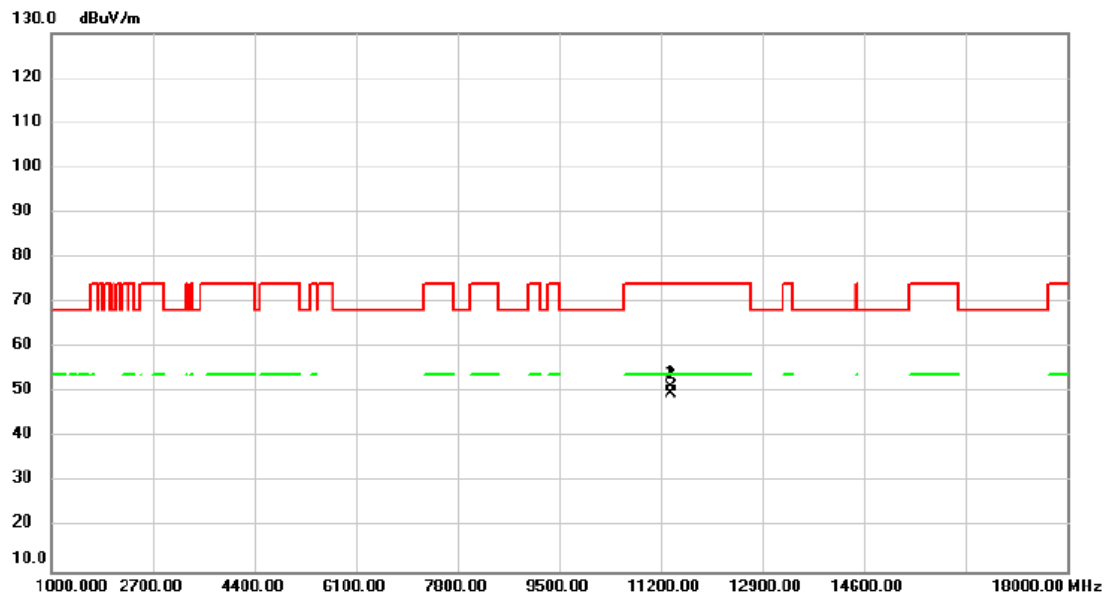


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11380.00	46.02	5.26	51.28	74.00	-22.72	peak	
2	*	11380.00	44.57	5.26	49.83	54.00	-4.17	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE80)	Test Date	2025/10/31
Test Frequency	5775MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

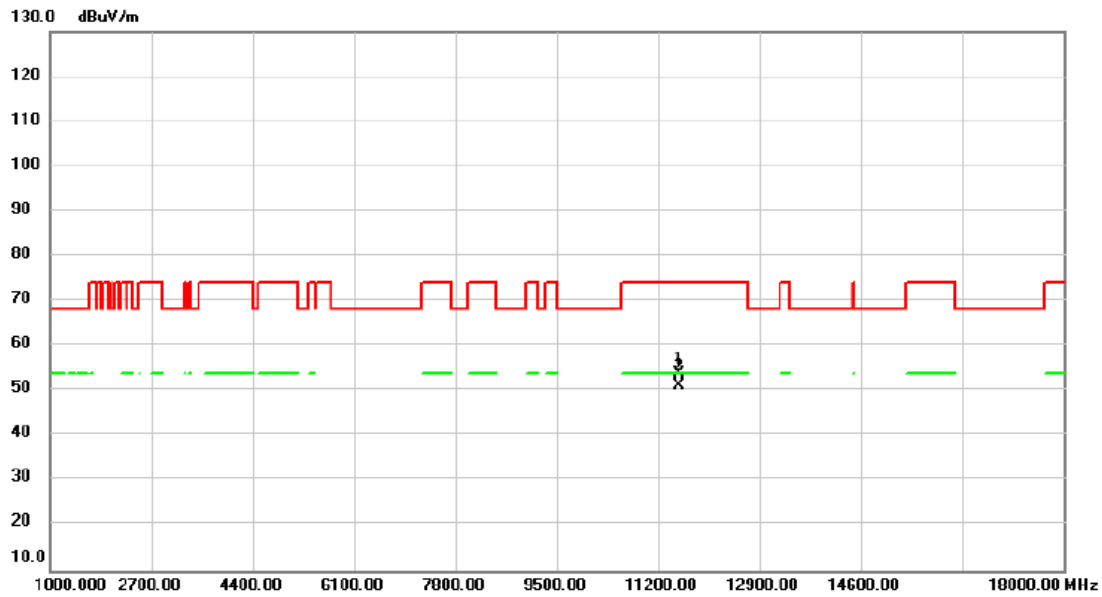


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11550.00	48.75	5.31	54.06	74.00	-19.94	peak	
2	*	11550.00	45.93	5.31	51.24	54.00	-2.76	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/10/31
Test Frequency	5250MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

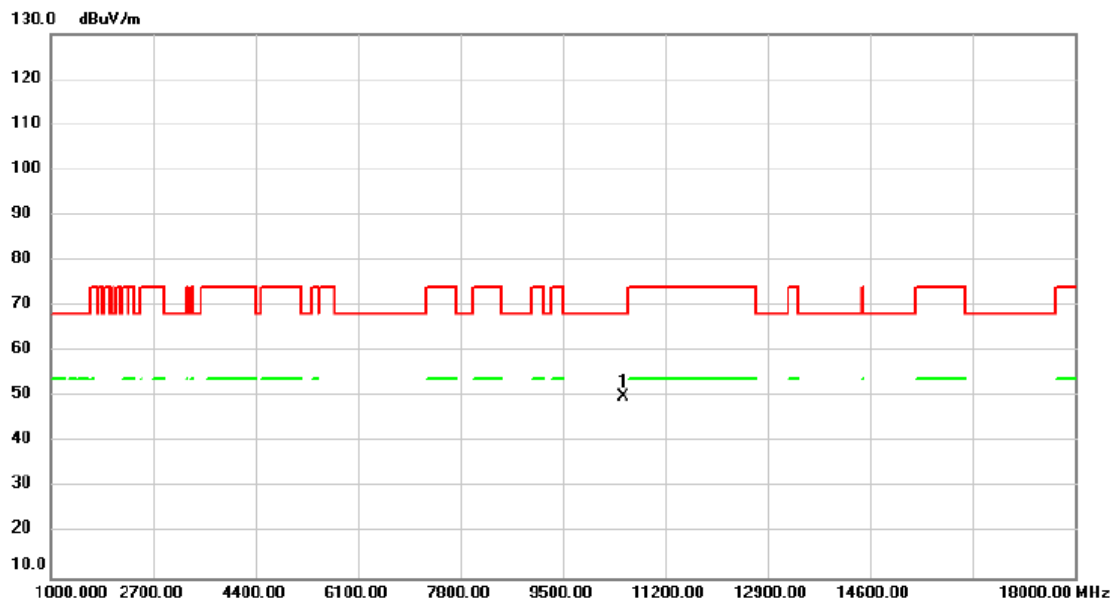


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10503.00	45.04	5.00	50.04	68.20	-18.16	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ax (HE160)	Test Date	2025/10/31
Test Frequency	5570MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

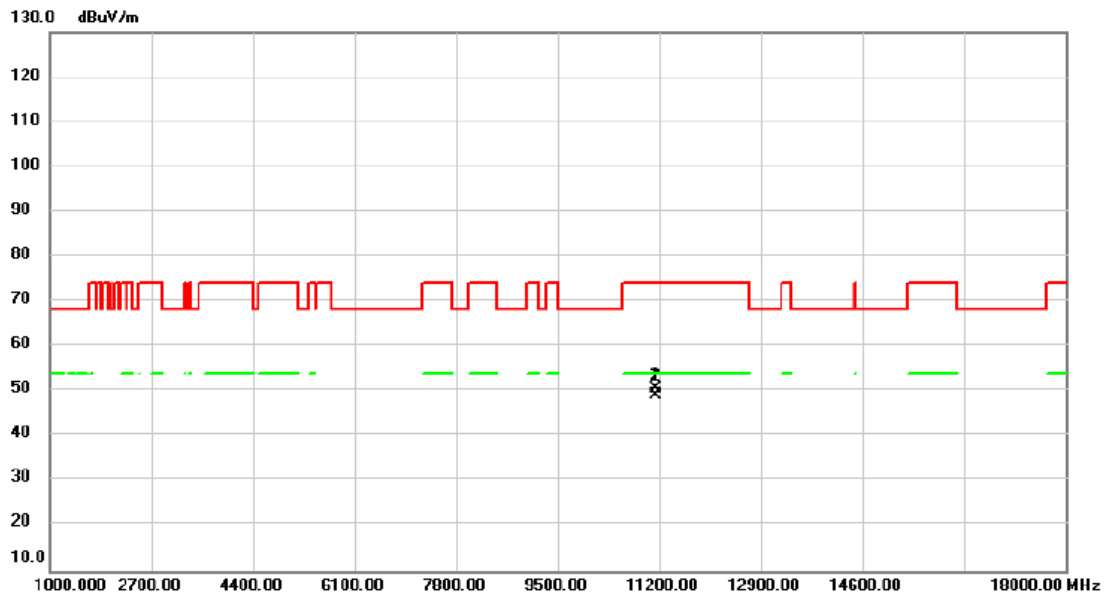


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11140.00	45.46	5.13	50.59	74.00	-23.41	peak	
2	*	11140.00	44.12	5.13	49.25	54.00	-4.75	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	IEEE 802.11ac (VHT20)	Test Date	2025/10/31
Test Frequency	5200MHz	Polarization	Vertical
Temp	25°C	Hum.	65%

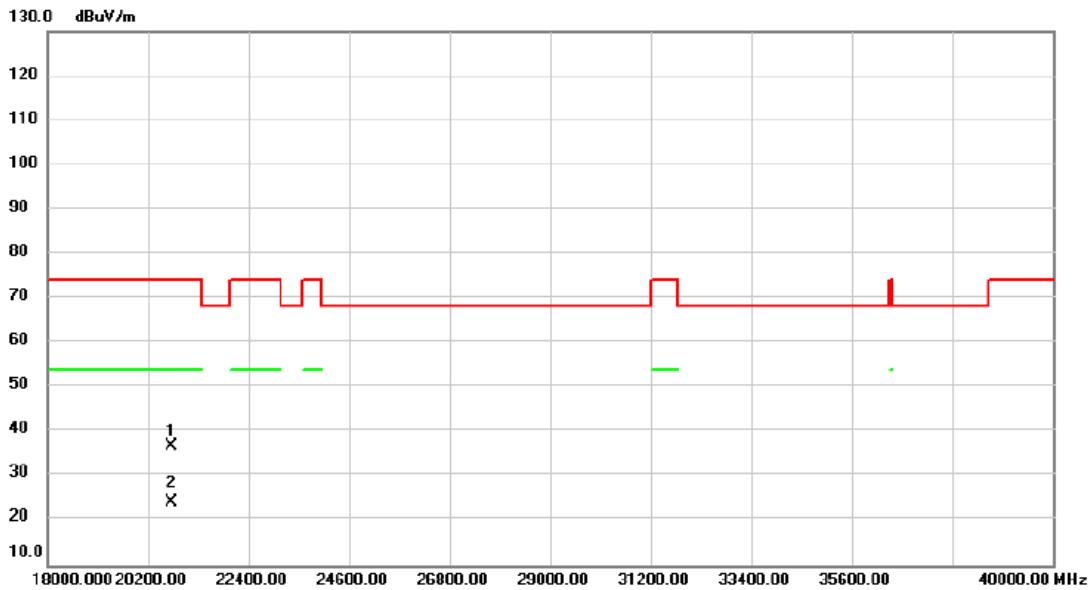

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		20720.00	45.75	-8.89	36.86	74.00	-37.14	peak	
2	*	20720.00	33.13	-8.89	24.24	54.00	-29.76	AVG	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D BANDWIDTH

Test Mode	UNII-1_ IEEE 802.11a
-----------	----------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	20.990	16.800
40	5200	20.750	16.700
48	5240	20.750	16.700

CH36

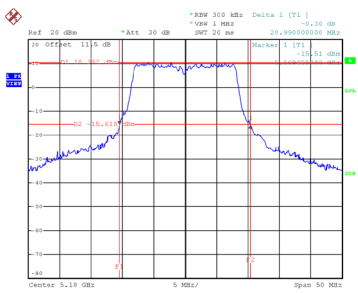


Date: 27.OCT.2025 10:15:20

CH40
26 dB Bandwidth

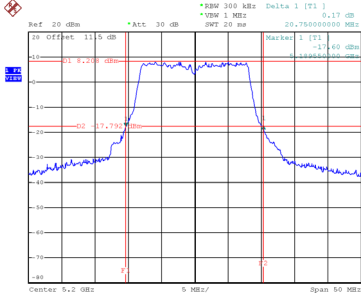


Date: 27.OCT.2025 10:21:57

CH48

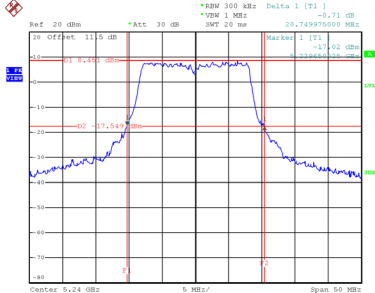


Date: 27.OCT.2025 10:23:22


99 % Occupied Bandwidth

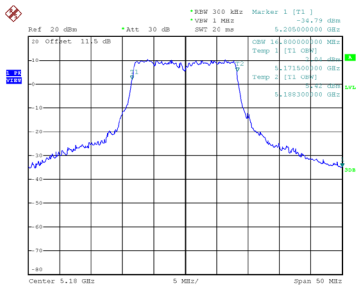

Date: 27.OCT.2025 10:14:54

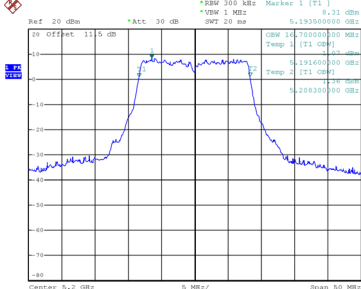

Date: 27.OCT.2025 10:21:31

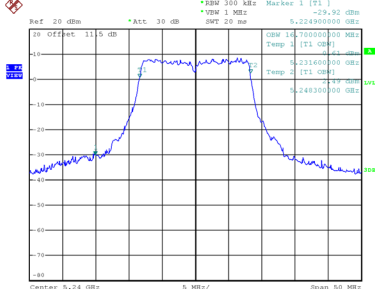


Date: 27.OCT.2025 10:22:56


Test Mode	UNII-1_ IEEE 802.11ac(VHT20)
-----------	------------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.450	17.800
40	5200	21.358	17.900
48	5240	21.599	17.800

CH36

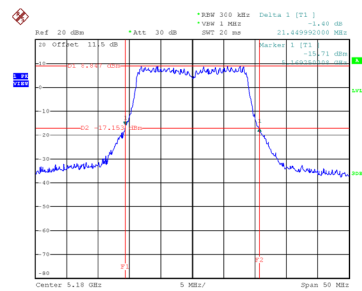


Date: 27.OCT.2025 11:05:13

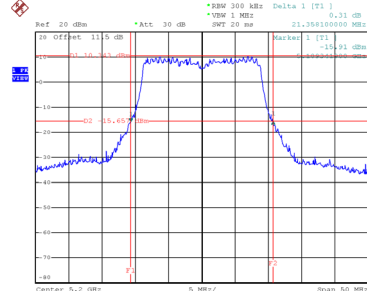CH40
26 dB Bandwidth


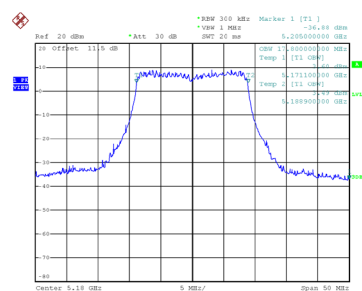
Date: 27.OCT.2025 11:13:25

CH48

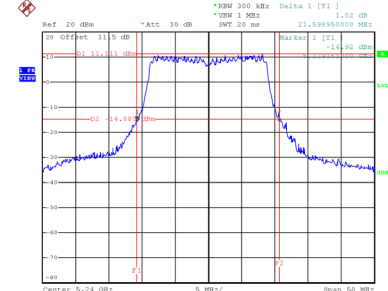


Date: 27.OCT.2025 11:16:11


99 % Occupied Bandwidth



Date: 27.OCT.2025 11:04:47

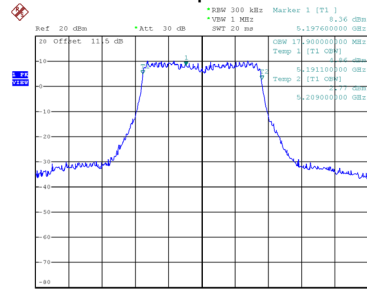

Date: 27.OCT.2025 11:12:50

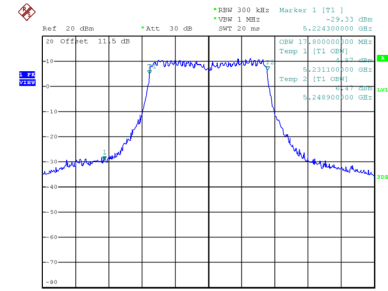


Date: 27.OCT.2025 11:15:45

Test Mode	UNII-1 IEEE 802.11ac(VHT40)
-----------	-----------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
38	5190	39.199	36.400
46	5230	39.200	36.400

CH38

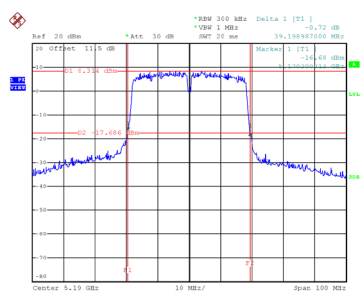


Date: 27.OCT.2025 12:06:30

CH46
26 dB Bandwidth

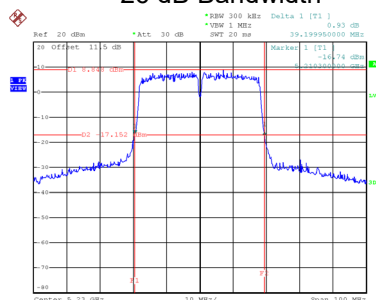


Date: 27 OCT 2025 12:09:01

99 % Occupied Bandwidth

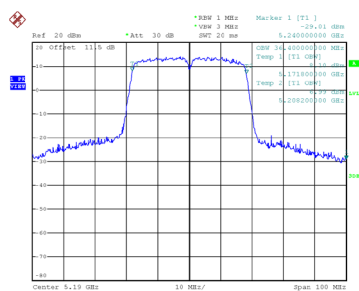

Date: 27.OCT.2025 12:05:54

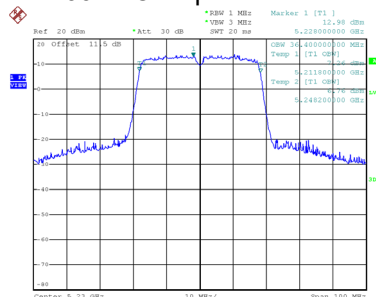


Date: 27.OCT.2025 12:08:25

Test Mode	UNII-1_ IEEE 802.11ac(VHT80)
-----------	------------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
42	5210	82.600	76.000

CH42 26 dB Bandwidth

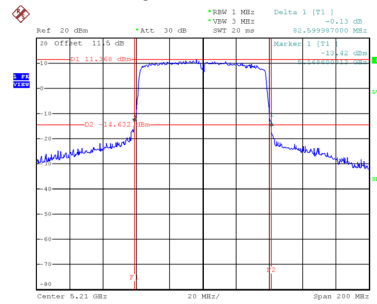

Date: 27.OCT.2025 16:12:40

99 % Occupied Bandwidth

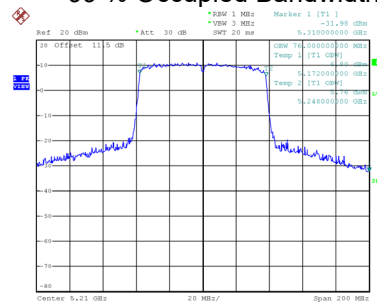


Date: 27.OCT.2025 16:12:07


Test Mode	UNII-1_ IEEE 802.11ax(HE20)
-----------	-----------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)	99 % Occupied Bandwidth (MHz)
36	5180	21.990	19.300
40	5200	22.200	19.300
48	5240	22.550	19.300

CH36

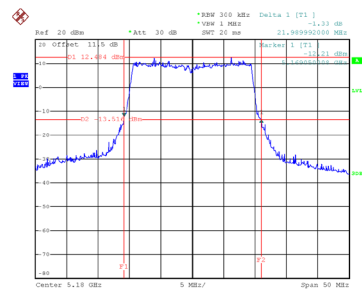


Date: 27.OCT.2025 16:48:20

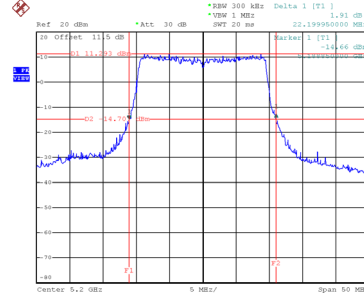CH40
26 dB Bandwidth


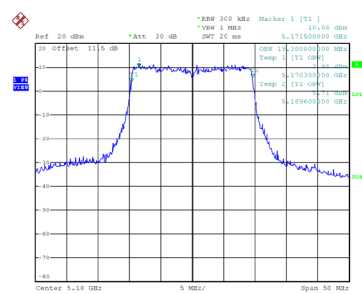
Date: 27.OCT.2025 16:50:27

CH48

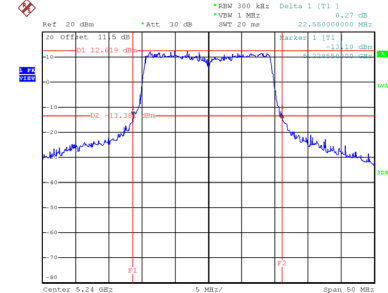


Date: 27.OCT.2025 16:51:08


99 % Occupied Bandwidth



Date: 27.OCT.2025 16:47:54

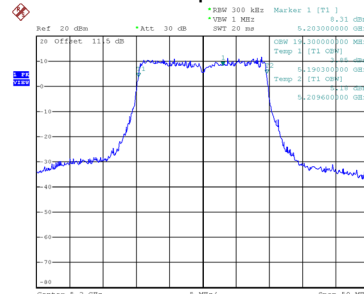

Date: 27.OCT.2025 16:50:01

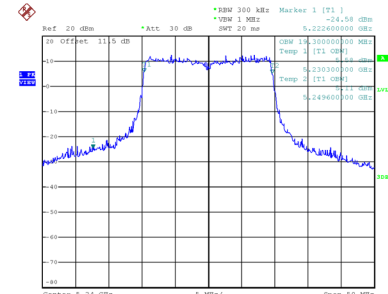

Date: 27.OCT.2025 16:53:43