Appendix B

RF Test Data for BT (BLE) (Conducted Measurement)

Product Name: AirBell Pro

Trade Mark: N/A

Test Model: AB_IC_G_01_22mm

Environmental Conditions

Temperature:	24.6° C
Relative Humidity:	52.4%
ATM Pressure:	100.0 kPa
Test Engineer:	Emiya lin
Supervised by:	Simba Haung

Contents

Page

COVER PAGE

1 Duty Cycle 3
1.1 Test Result 3
1.2 Test Graphs 4
2 Maximum Conducted Output Power 7
2.1 Test Result 7
2.2 Test Graphs 8
3 -6dB Bandwidth 11
3.1 Test Result 11
3.2 Test Graphs 12
4 Maximum Power Spectral Density Level 15
4.1 Test Result 15
4.2 Test Graphs 16
5 Band Edge 19
5.1 Test Result 19
5.2 Test Graphs 20
6 Conducted RF Spurious Emission 24
6.1 Test Result 24
6.2 Test Graphs 25
7 Restrict Band 31
7.1 Test Result 31
7.2 Test Graphs 32

1 Duty Cycle

1.1 Test Result

Mode	Frequency (MHz)	Duty Cycle (%)	Correction Factor	1/T (kHz)
BLE 1M	2402	64.8	1.88	2.5
BLE 1M	2440	64.8	1.88	2.5
BLE 1M	2480	64.8	1.88	2.56
BLE 2M	2402	35.2	4.54	4.76
BLE 2M	2440	35.21	4.53	4.76
BLE 2M	2480	35.21	4.53	4.76

1.2 Test Graphs

Test Graphs

BLE 1M 2402MHz

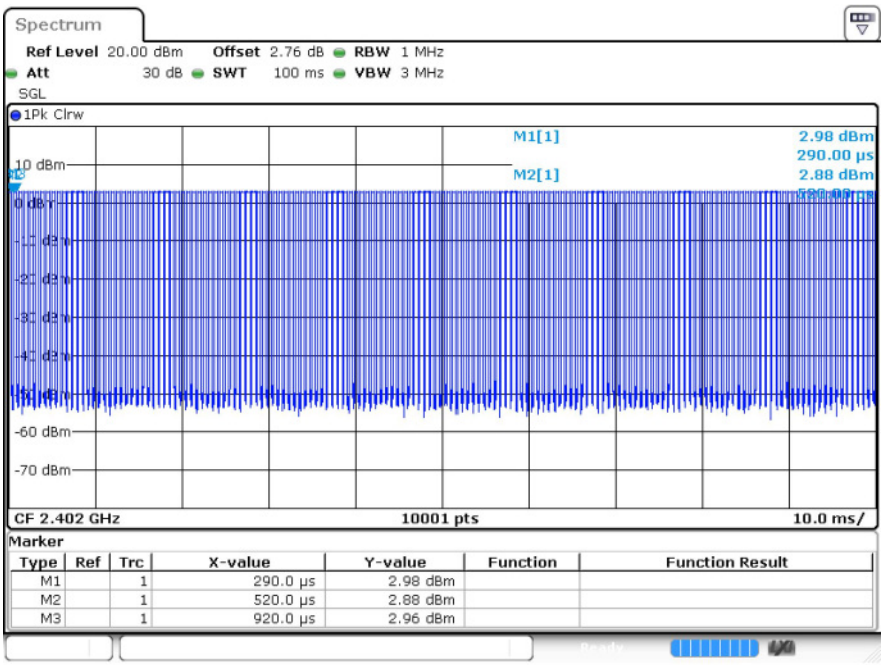

BLE 1M 2440MHz

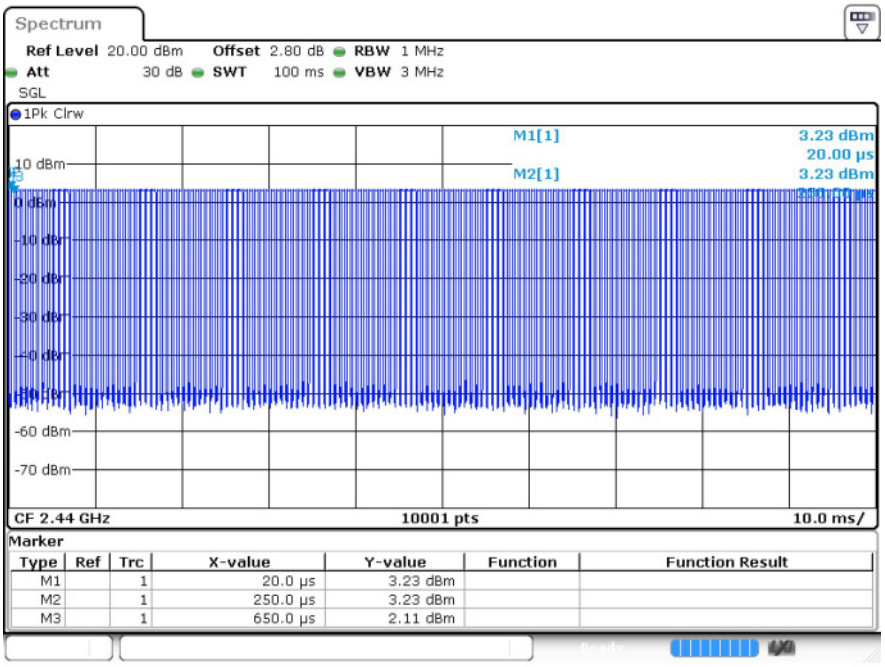

BLE 1M 2480MHz

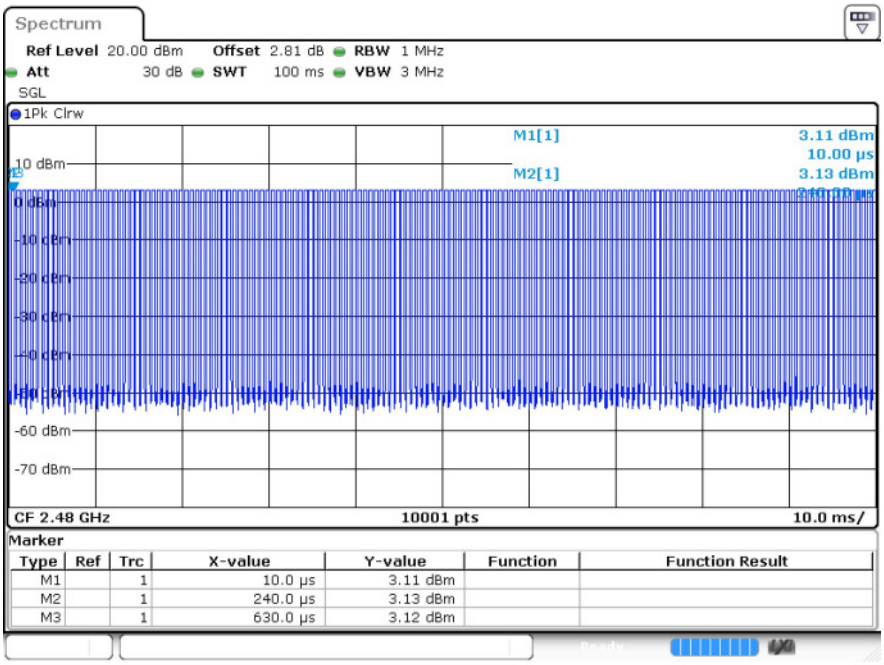

BLE 2M 2402MHz

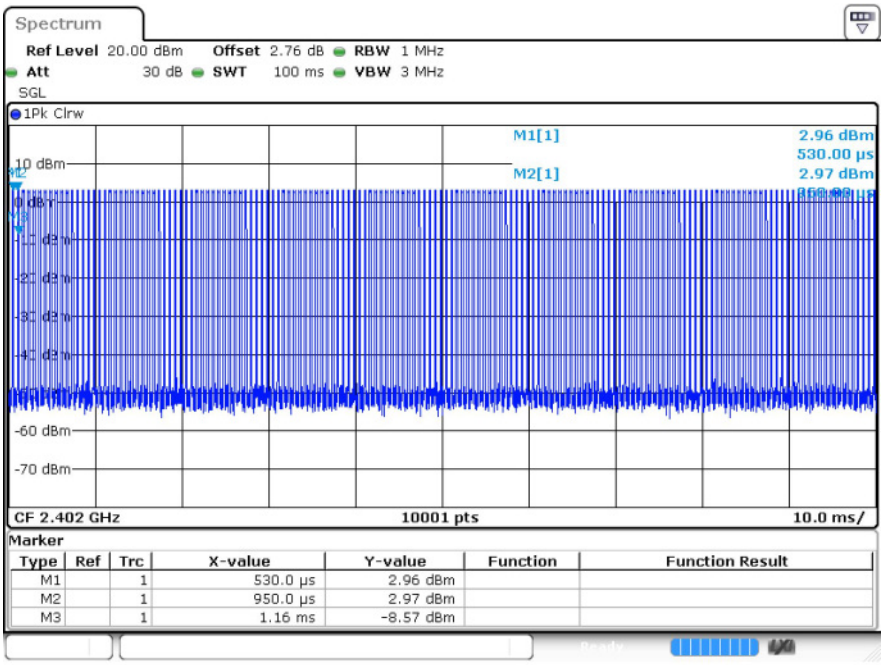

BLE 2M 2440MHz

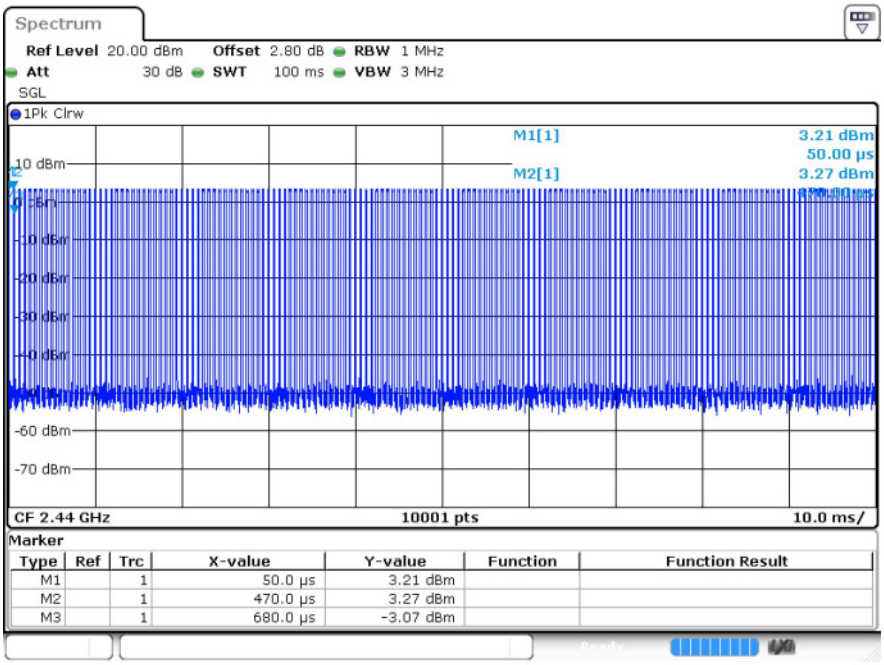

BLE 2M 2480MHz

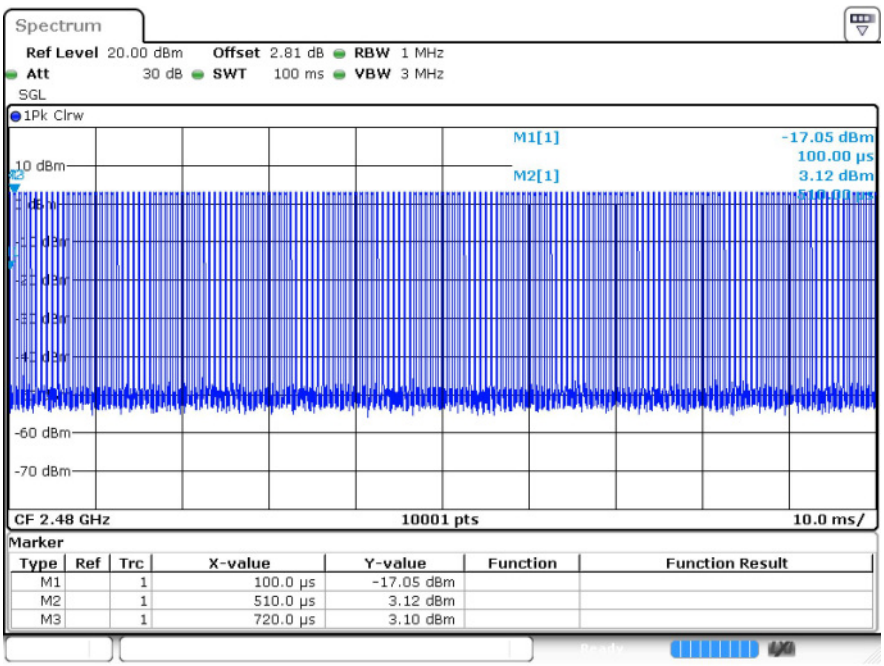

2 Maximum Conducted Output Power

2.1 Test Result

Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
BLE 1M	2402	2.99	30	Pass
BLE 1M	2440	3.28	30	Pass
BLE 1M	2480	3.12	30	Pass
BLE 2M	2402	3.03	30	Pass
BLE 2M	2440	3.29	30	Pass
BLE 2M	2480	3.15	30	Pass

2.2 Test Graphs

Test Graphs
BLE 1M 2402MHz

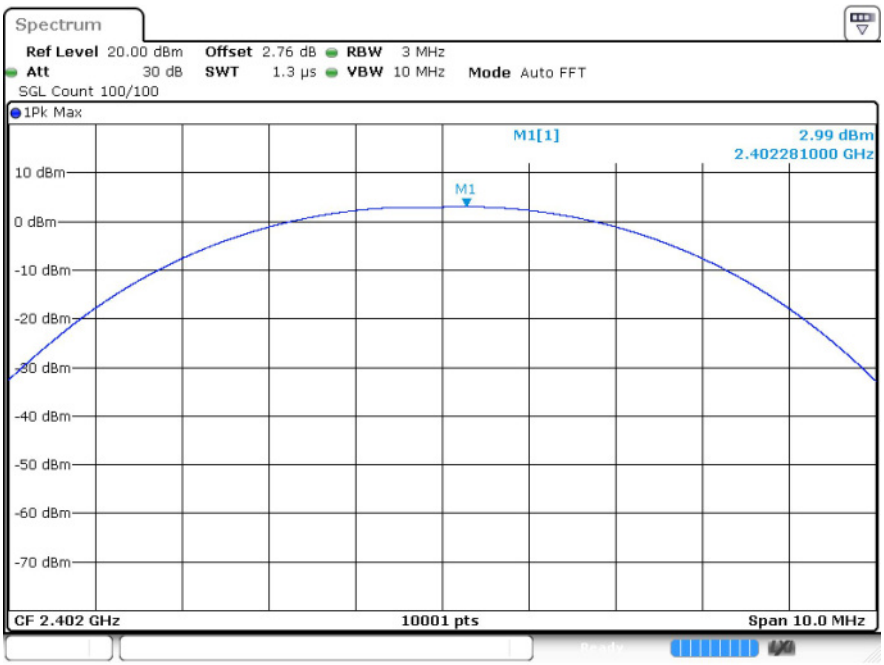

BLE 1M 2440MHz

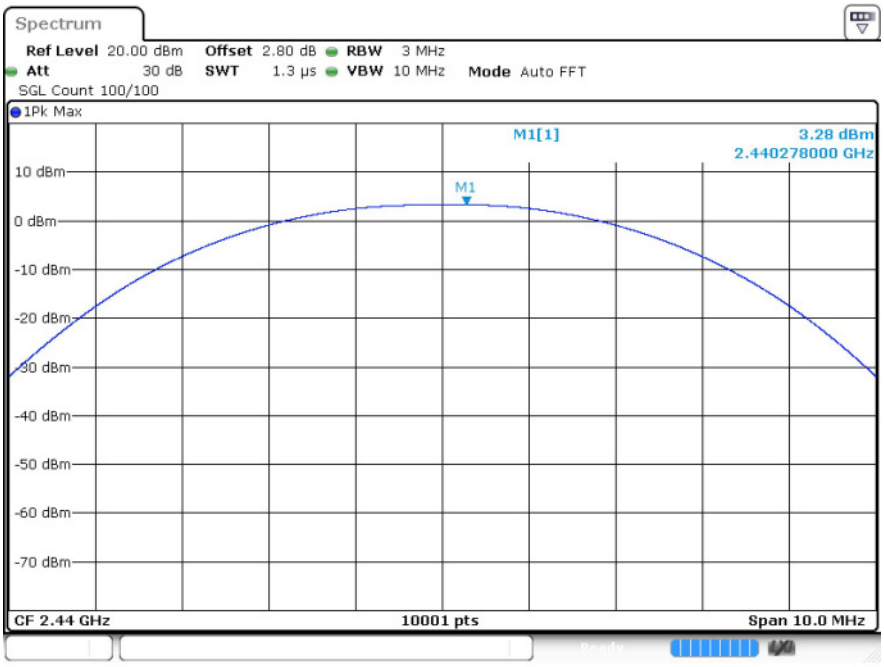

BLE 1M 2480MHz

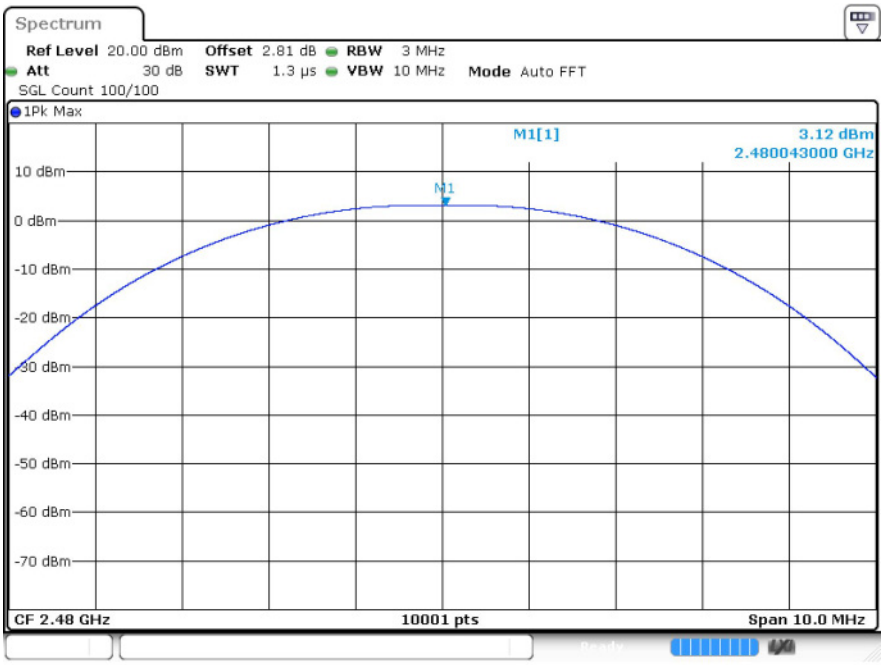

BLE 2M 2402MHz

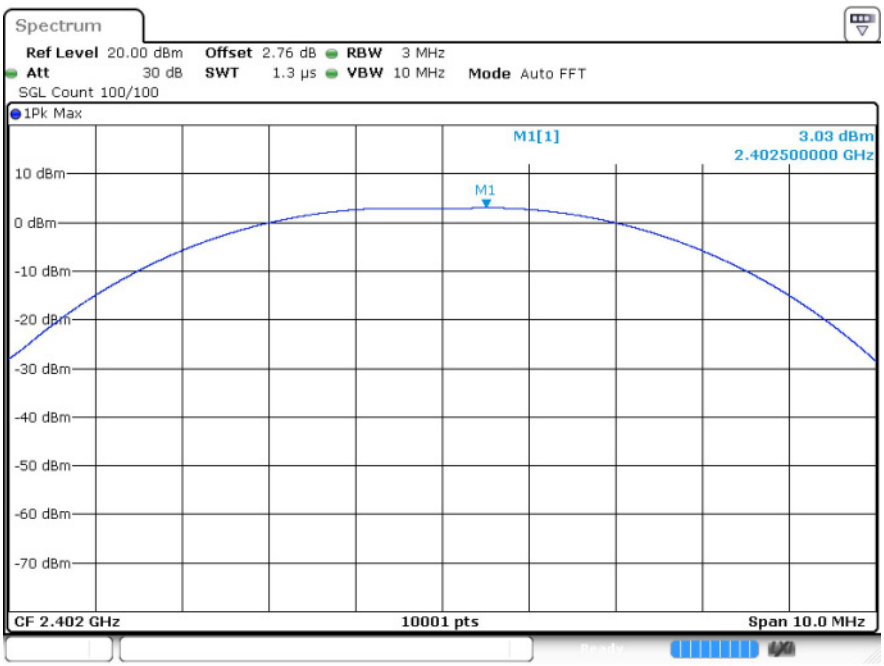

BLE 2M 2440MHz

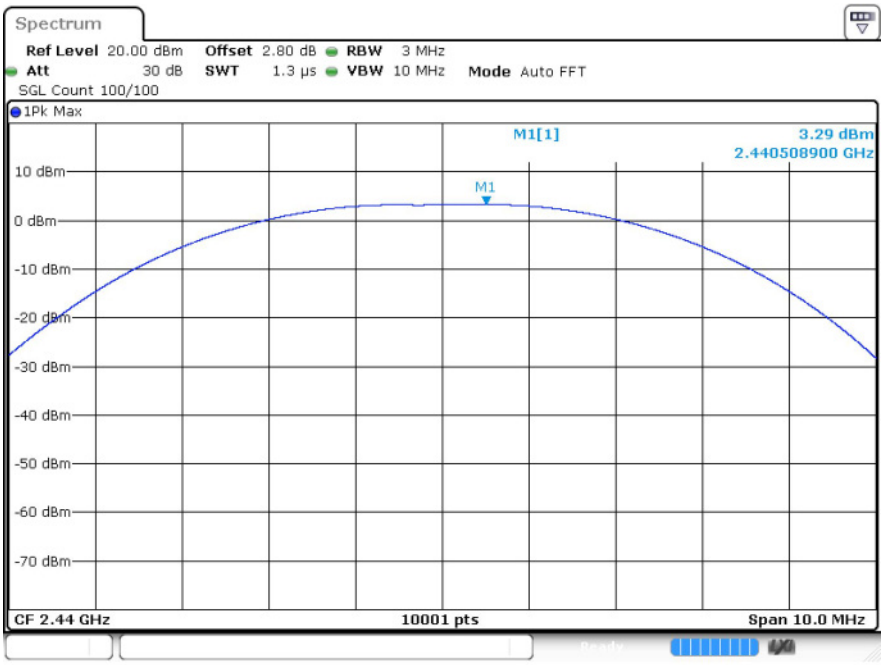

BLE 2M 2480MHz

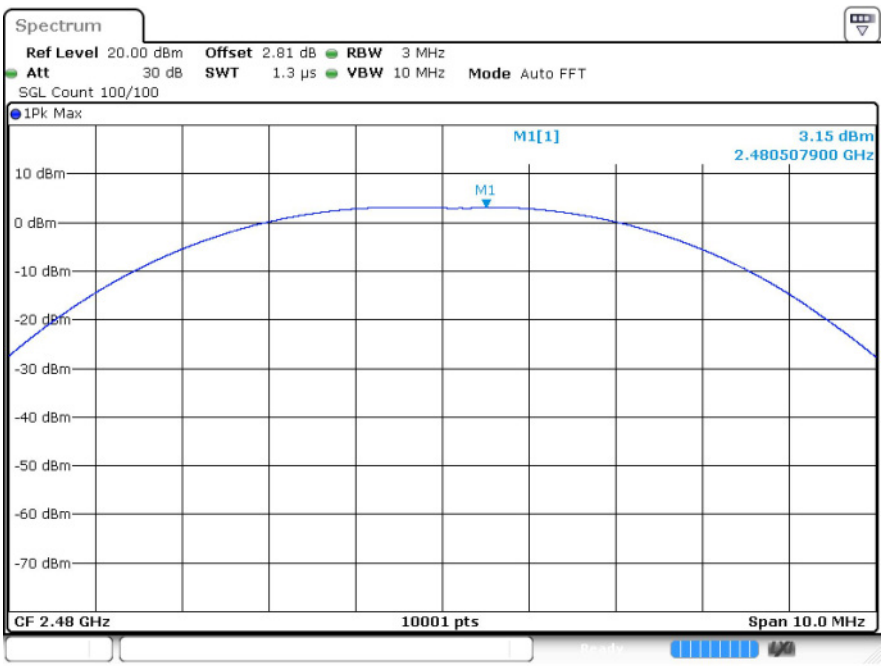

3 -6dB Bandwidth

3.1 Test Result

Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
BLE 1M	2402	0.685	0.5	Pass
BLE 1M	2440	0.656	0.5	Pass
BLE 1M	2480	0.712	0.5	Pass
BLE 2M	2402	1.066	0.5	Pass
BLE 2M	2440	0.924	0.5	Pass
BLE 2M	2480	1.151	0.5	Pass

3.2 Test Graphs

Test Graphs

BLE 1M 2402MHz

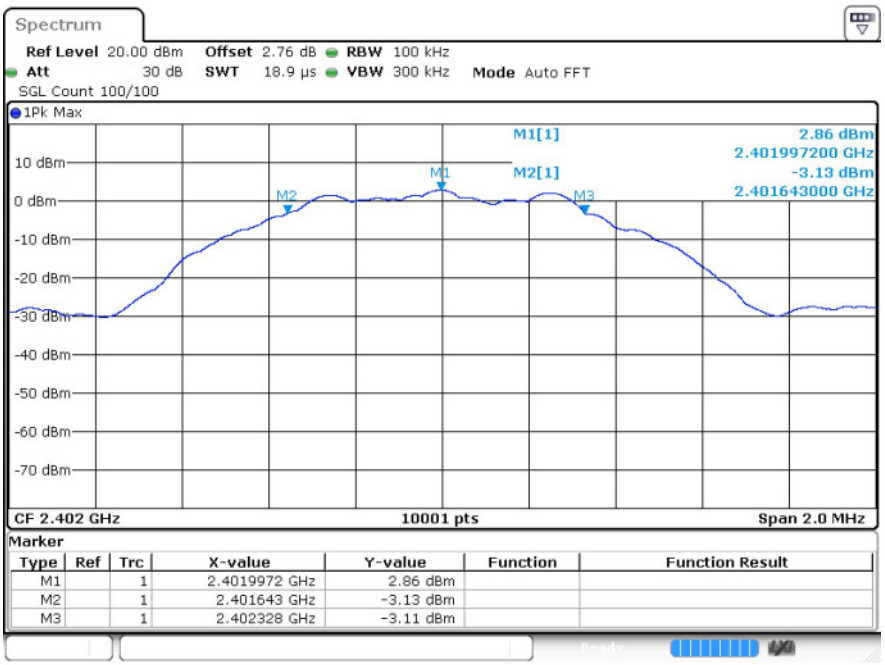

BLE 1M 2440MHz

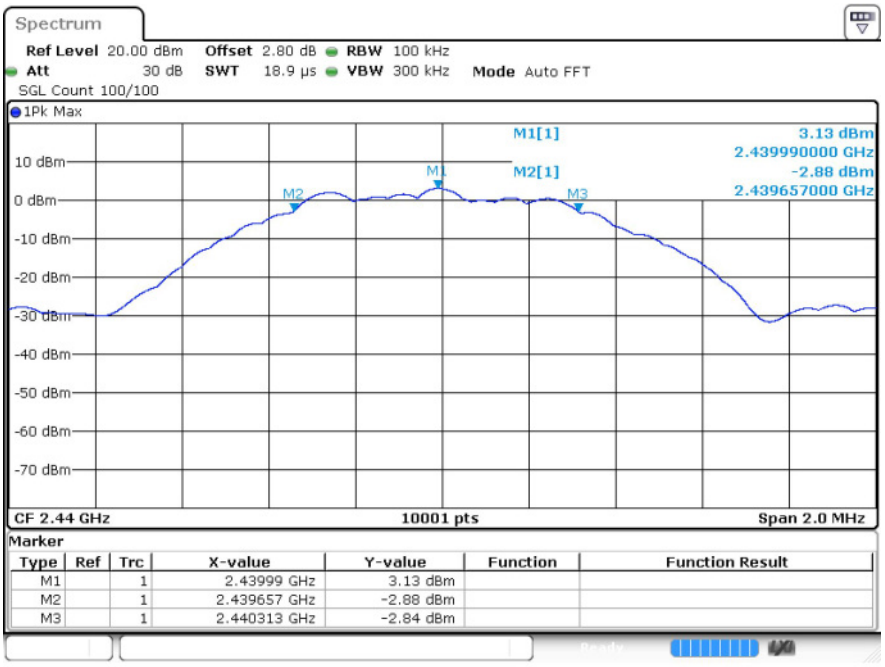

BLE 1M 2480MHz

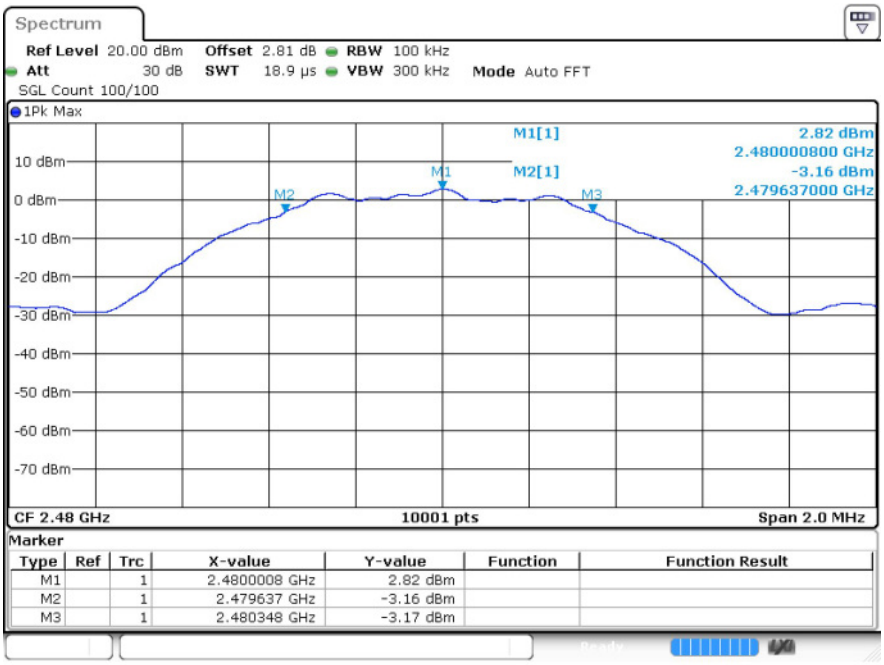

BLE 2M 2402MHz

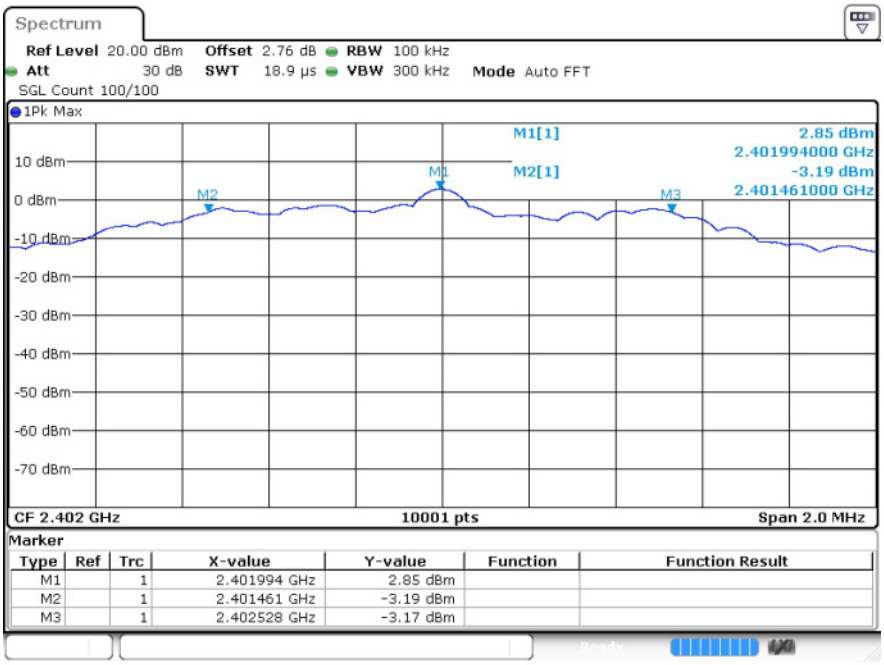

BLE 2M 2440MHz

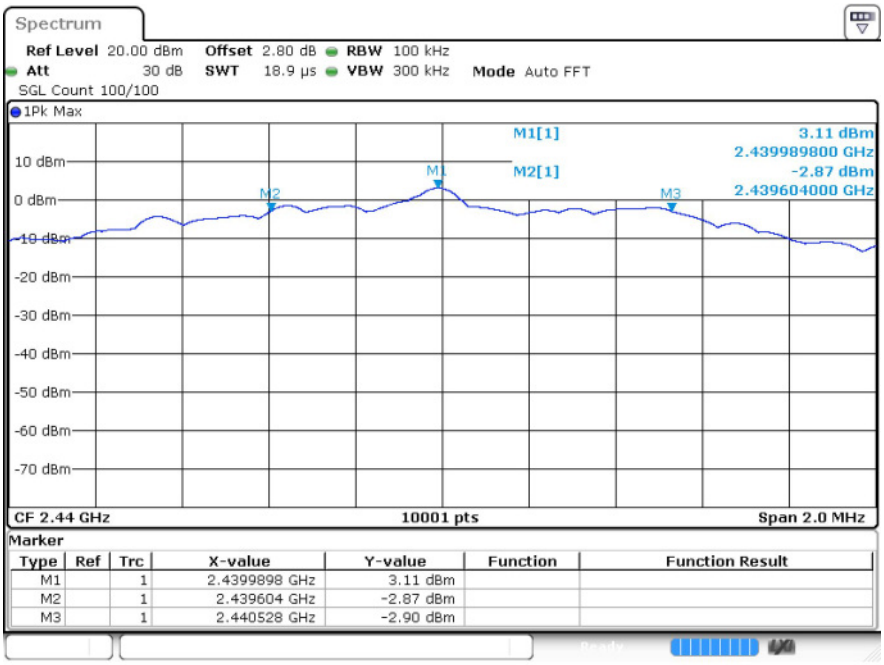

BLE 2M 2480MHz

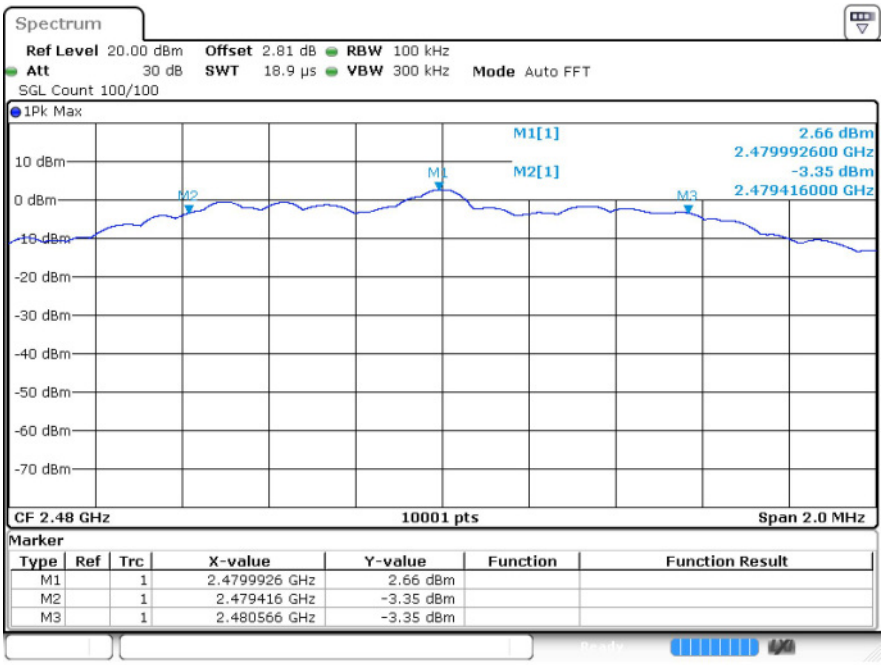

4 Maximum Power Spectral Density Level

4.1 Test Result

Mode	Frequency (MHz)	Conducted PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
BLE 1M	2402	-12.52	≤8	Pass
BLE 1M	2440	-12.25	≤8	Pass
BLE 1M	2480	-12.46	≤8	Pass
BLE 2M	2402	-14.82	≤8	Pass
BLE 2M	2440	-14.56	≤8	Pass
BLE 2M	2480	-14.93	≤8	Pass

4.2 Test Graphs

Test Graphs
BLE 1M 2402MHz

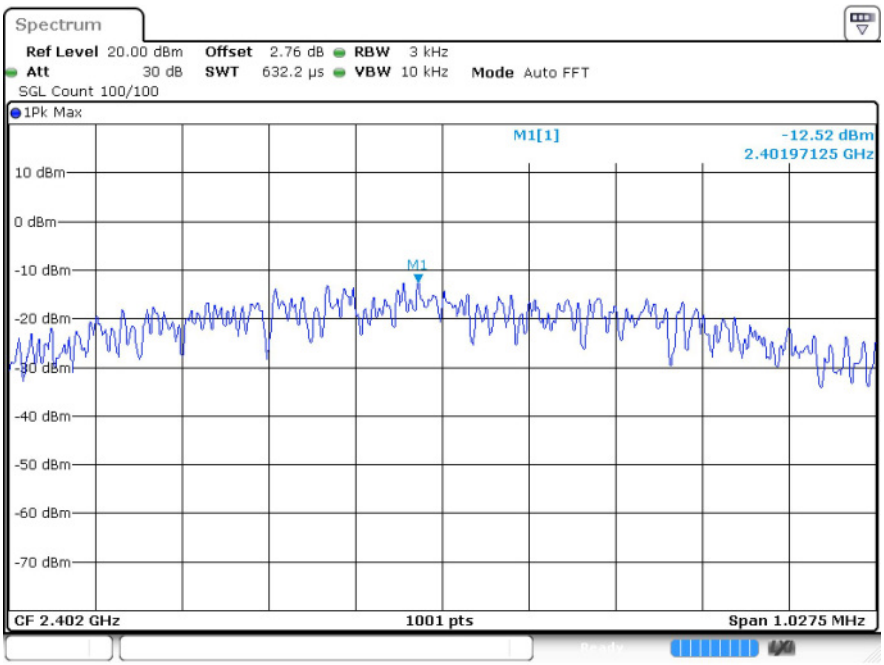

BLE 1M 2440MHz

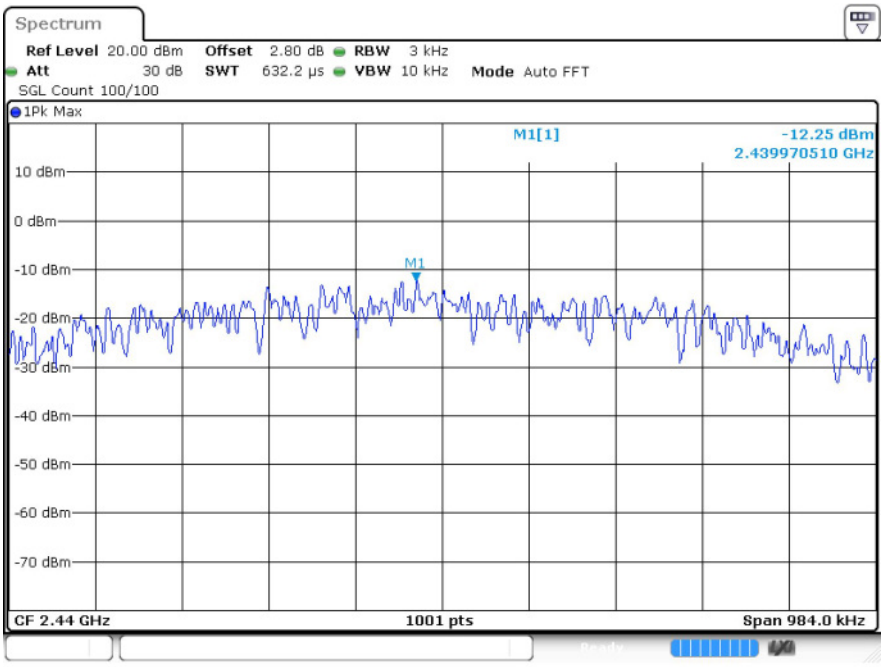

BLE 1M 2480MHz

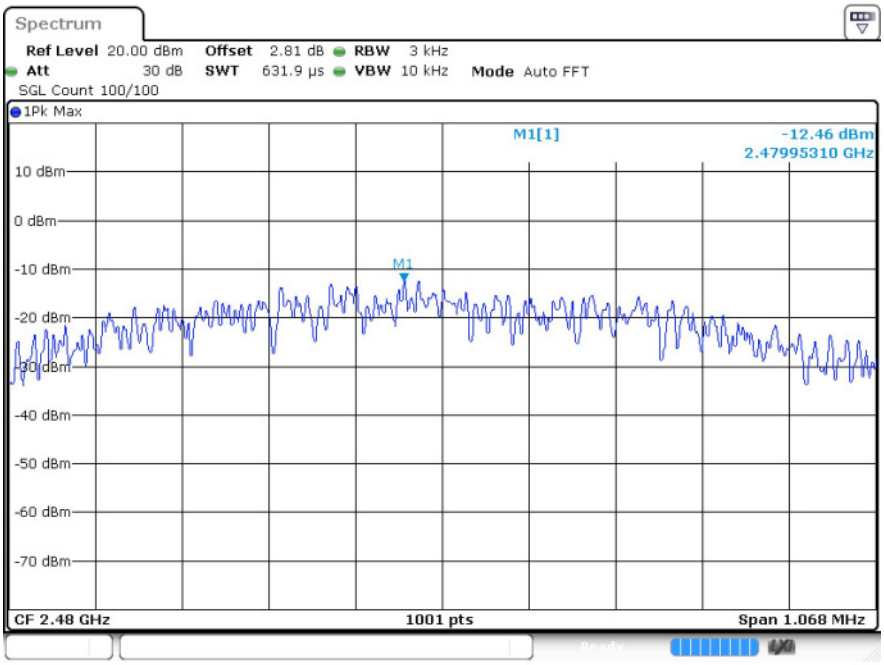

BLE 2M 2402MHz

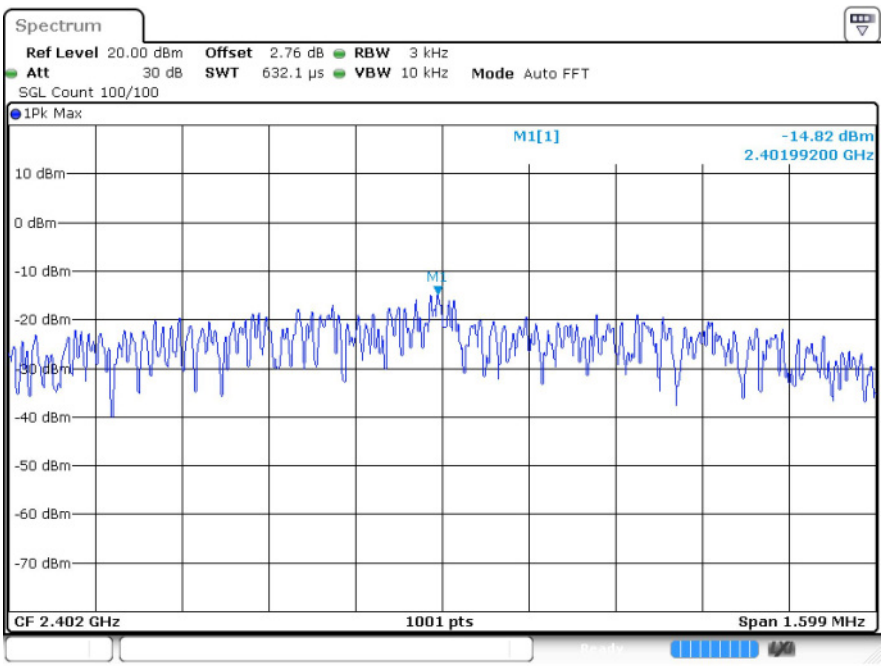

BLE 2M 2440MHz

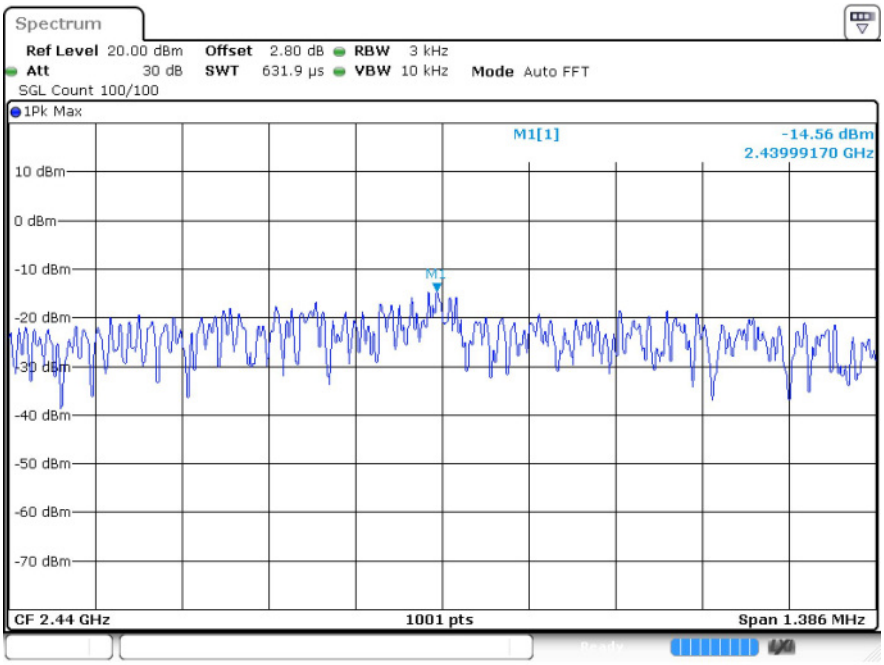

BLE 2M 2480MHz

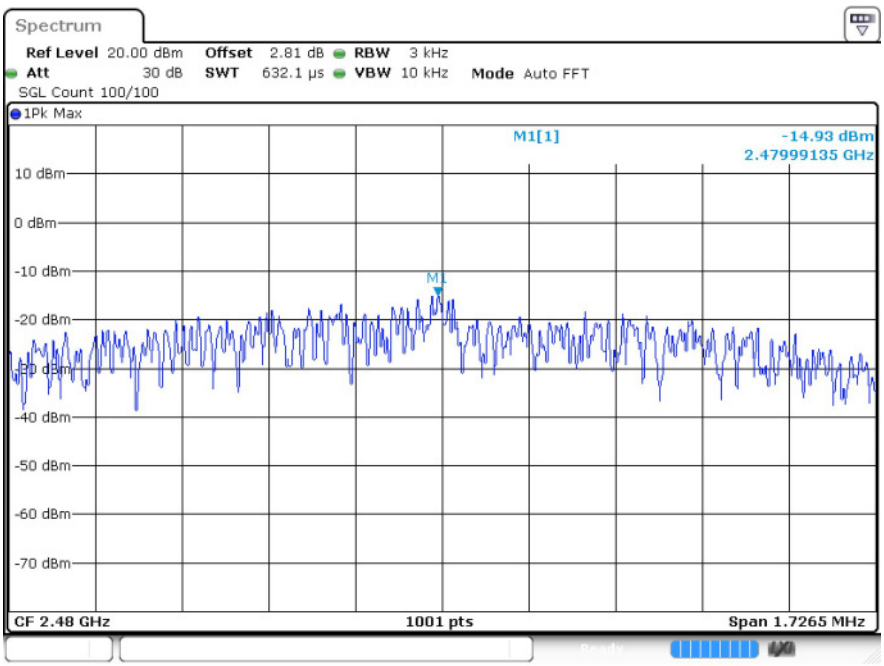

5 Band Edge

5.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-50.02	-20	Pass
BLE 1M	2480	-58.68	-20	Pass
BLE 2M	2402	-51.56	-20	Pass
BLE 2M	2480	-56.55	-20	Pass

5.2 Test Graphs

Test Graphs

BLE 1M 2402MHz Ref

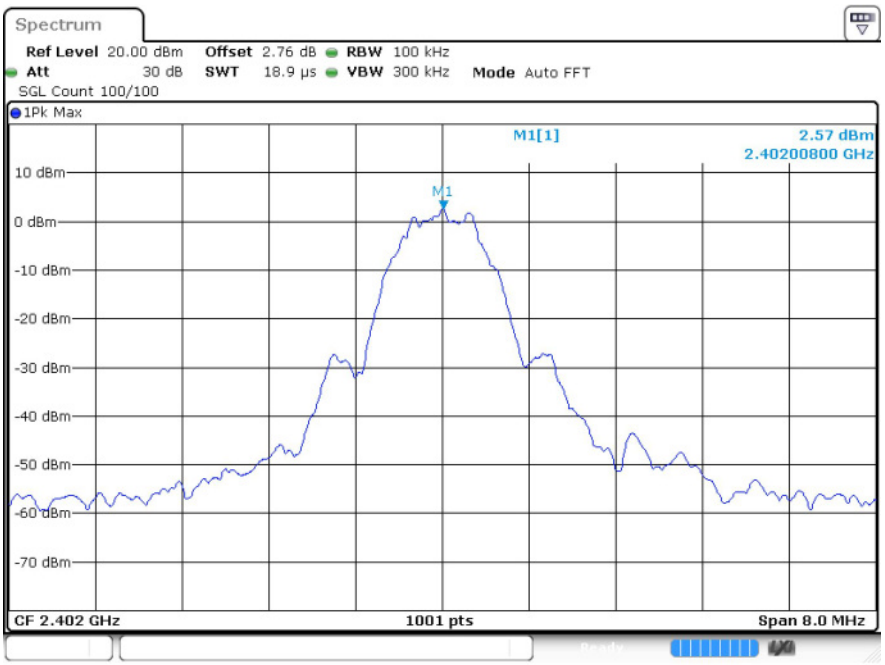

BLE 1M 2402MHz Emission

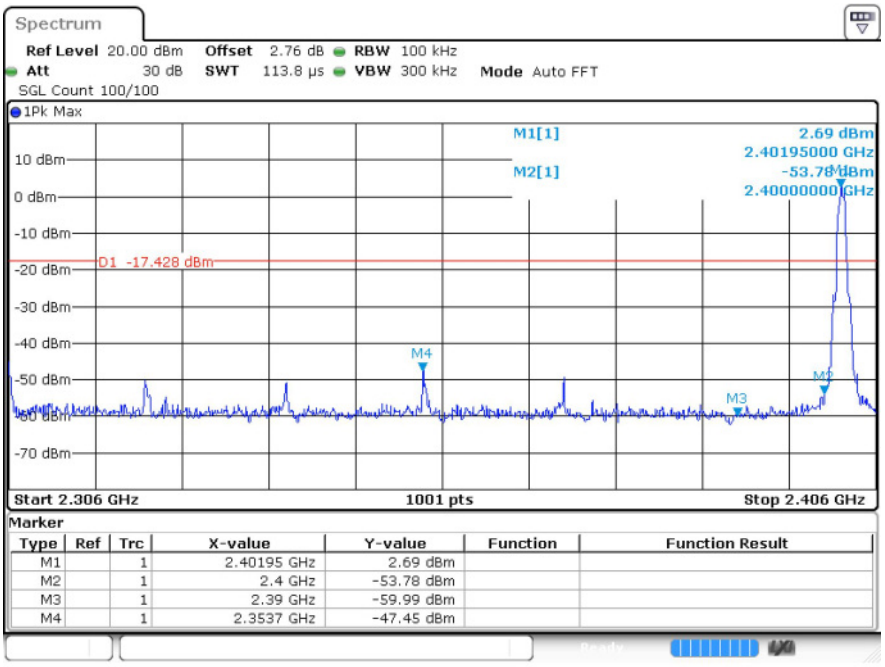

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40195 GHz	2.69 dBm		
M2		1	2.4 GHz	-53.78 dBm		
M3		1	2.39 GHz	-59.99 dBm		
M4		1	2.3537 GHz	-47.45 dBm		

BLE 1M 2480MHz Ref

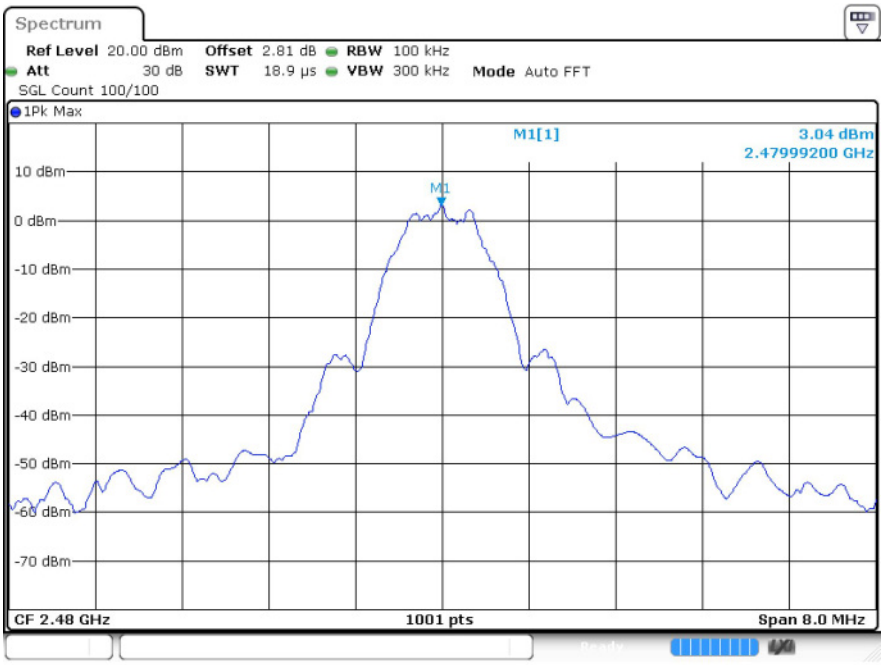

BLE 1M 2480MHz Emission

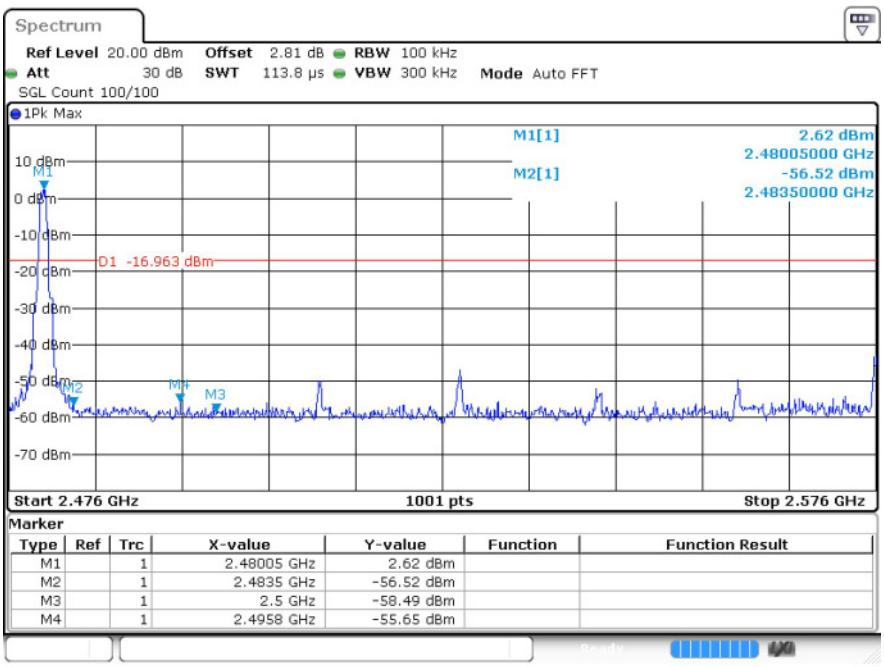

BLE 2M 2402MHz Ref

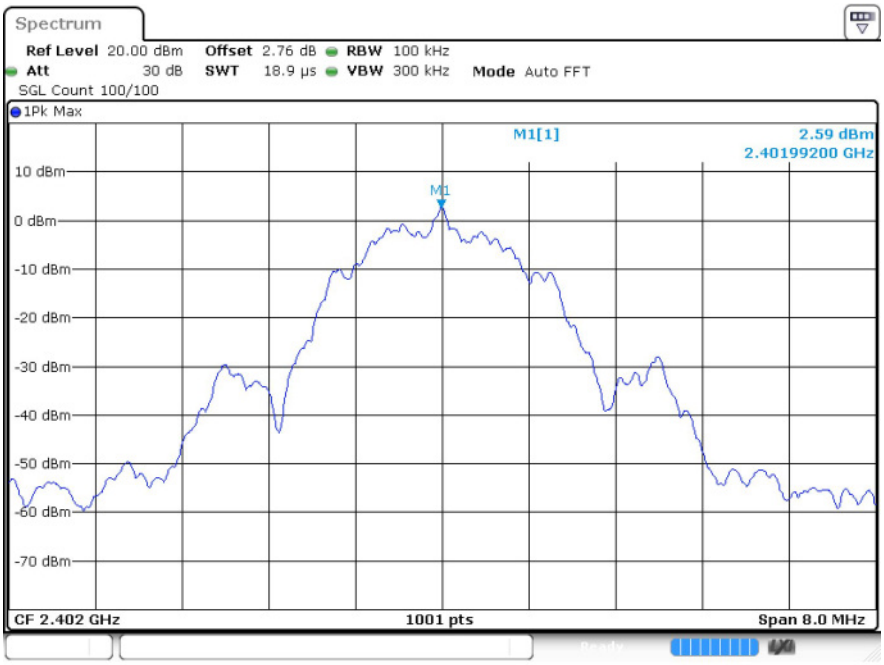

BLE 2M 2402MHz Emission

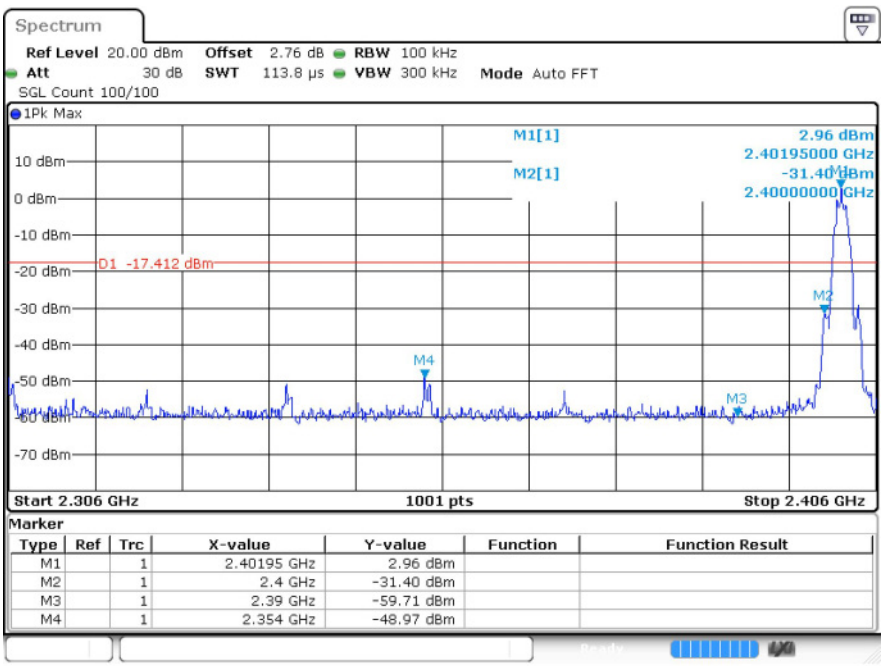

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.40195 GHz	2.96 dBm		
M2		1	2.4 GHz	-31.40 dBm		
M3		1	2.39 GHz	-59.71 dBm		
M4		1	2.354 GHz	-48.97 dBm		

BLE 2M 2480MHz Ref

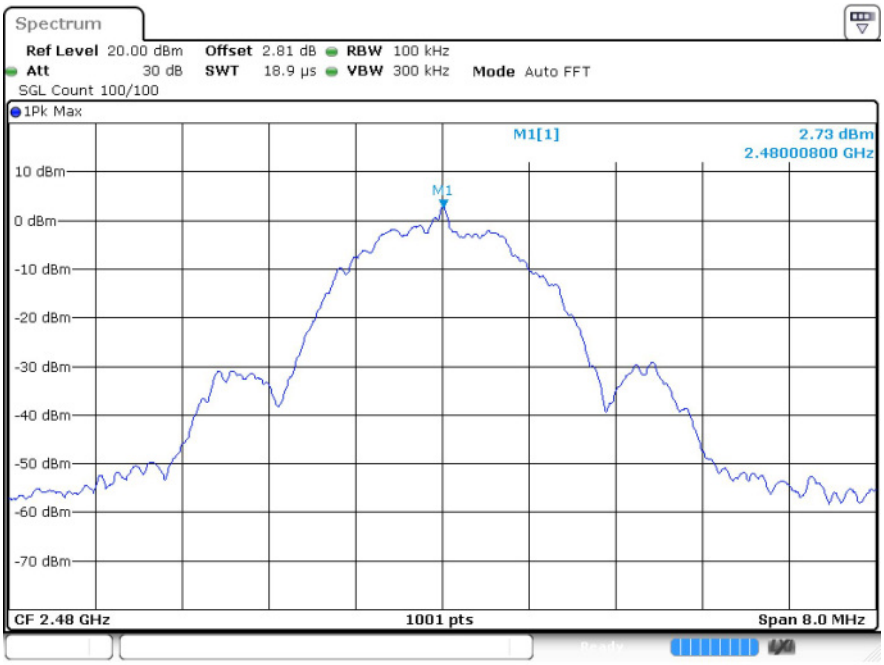

BLE 2M 2480MHz Emission

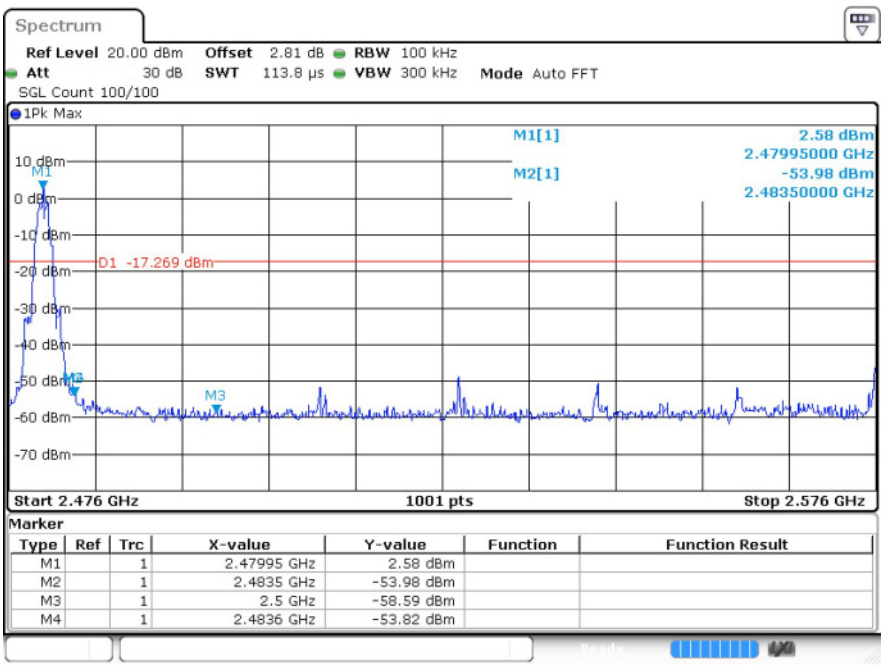

6 Conducted RF Spurious Emission

6.1 Test Result

Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
BLE 1M	2402	-43.93	-20	Pass
BLE 1M	2440	-46.19	-20	Pass
BLE 1M	2480	-46.44	-20	Pass
BLE 2M	2402	-45.97	-20	Pass
BLE 2M	2440	-44.83	-20	Pass
BLE 2M	2480	-45.02	-20	Pass

6.2 Test Graphs

Test Graphs

BLE 1M 2402MHz Ref

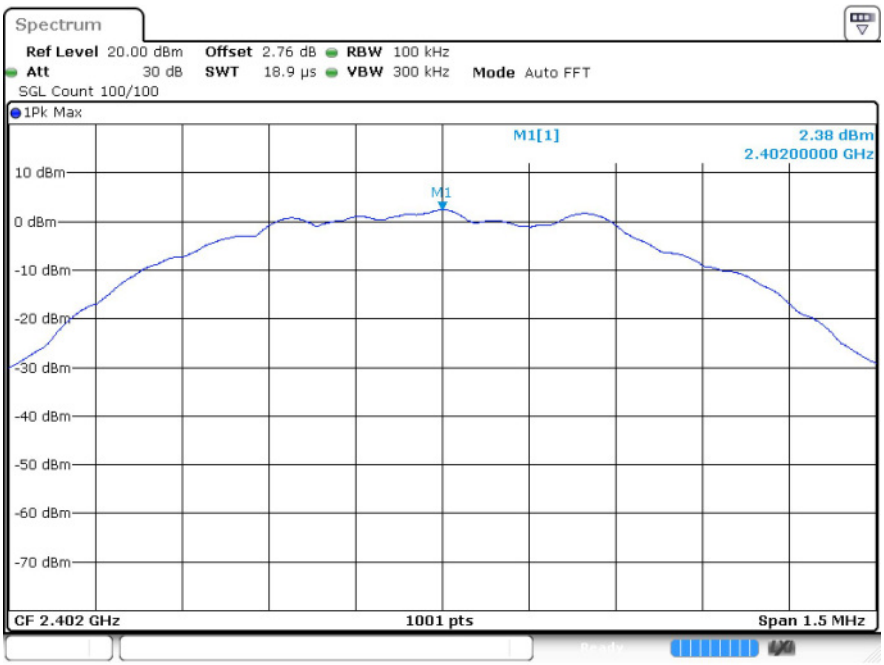

BLE 1M 2402MHz Emission

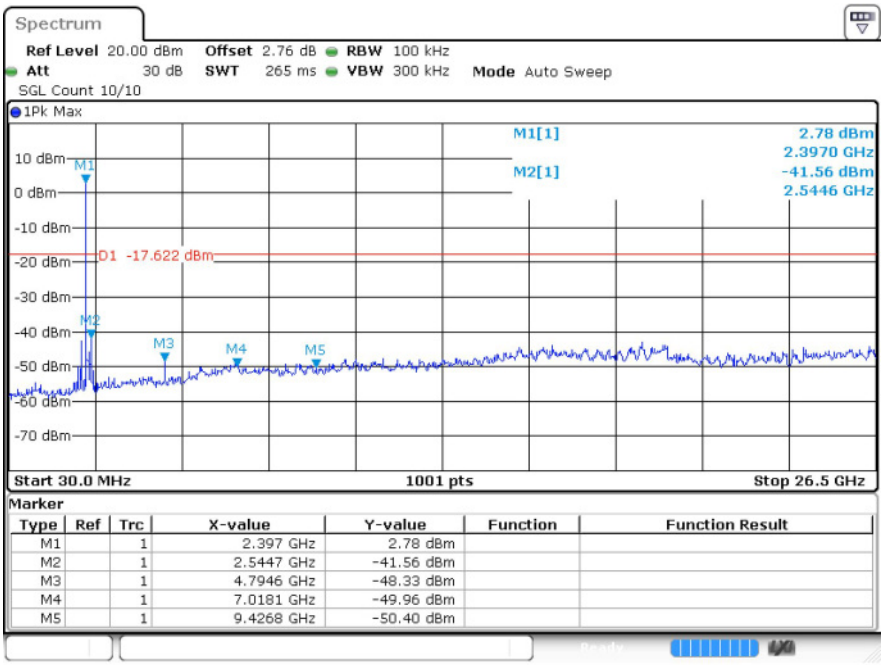

BLE 1M 2440MHz Ref

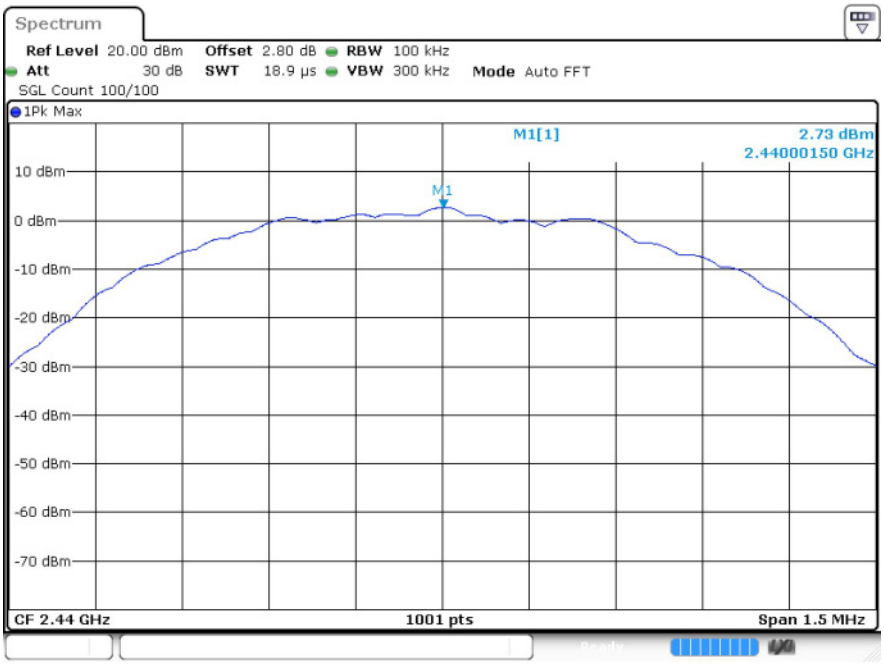

BLE 1M 2440MHz Emission

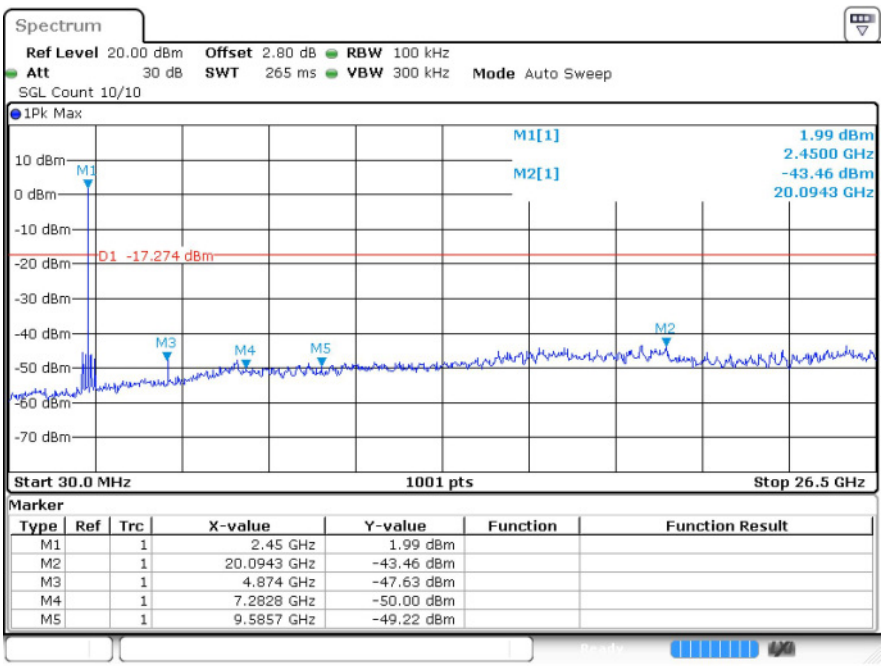

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.45 GHz	1.99 dBm		
M2		1	20.0943 GHz	-43.46 dBm		
M3		1	4.874 GHz	-47.63 dBm		
M4		1	7.2828 GHz	-50.00 dBm		
M5		1	9.5857 GHz	-49.22 dBm		

BLE 1M 2480MHz Ref

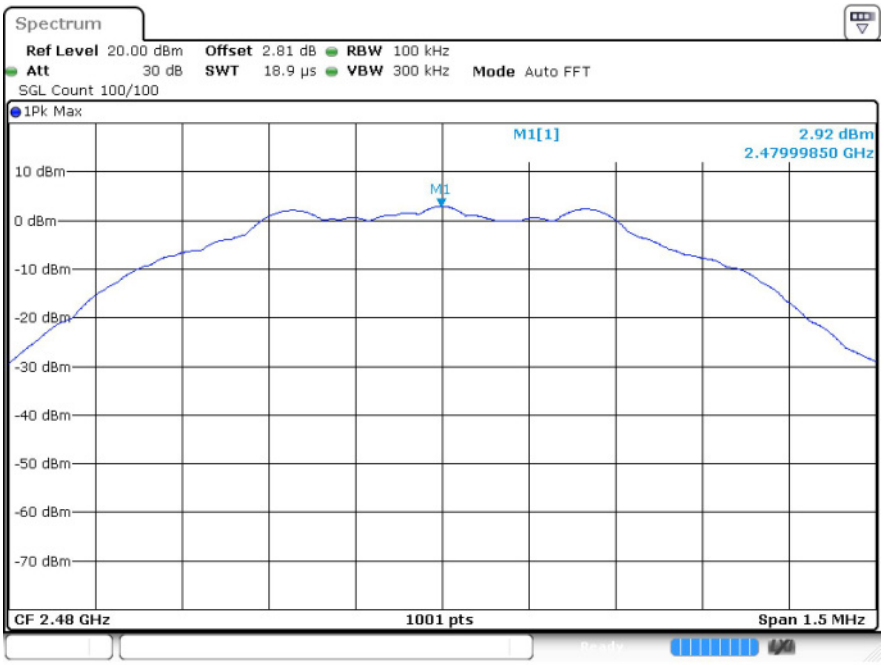

BLE 1M 2480MHz Emission

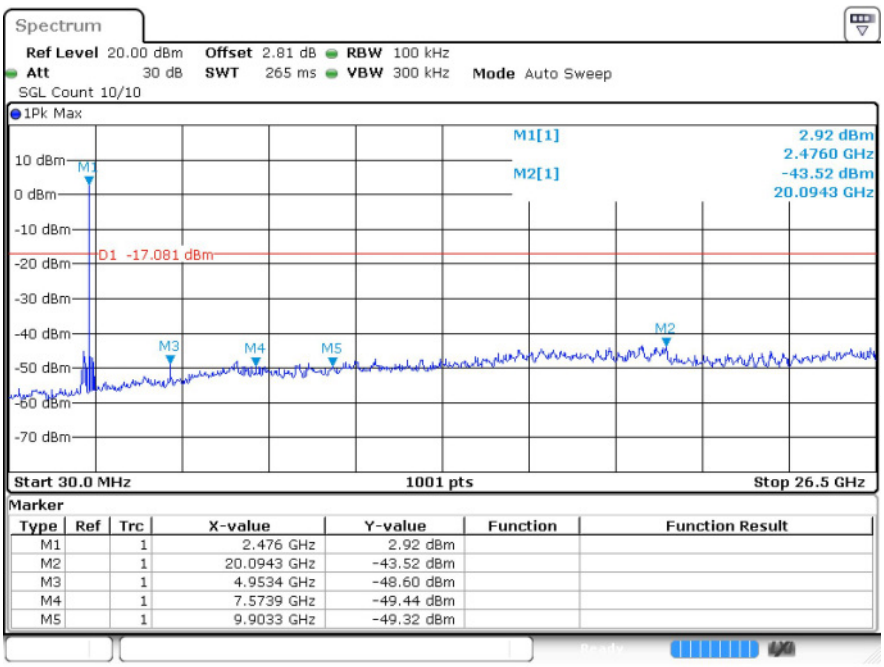

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.476 GHz	2.92 dBm		
M2		1	20.0943 GHz	-43.52 dBm		
M3		1	4.9534 GHz	-48.60 dBm		
M4		1	7.5739 GHz	-49.44 dBm		
M5		1	9.9033 GHz	-49.32 dBm		

BLE 2M 2402MHz Ref

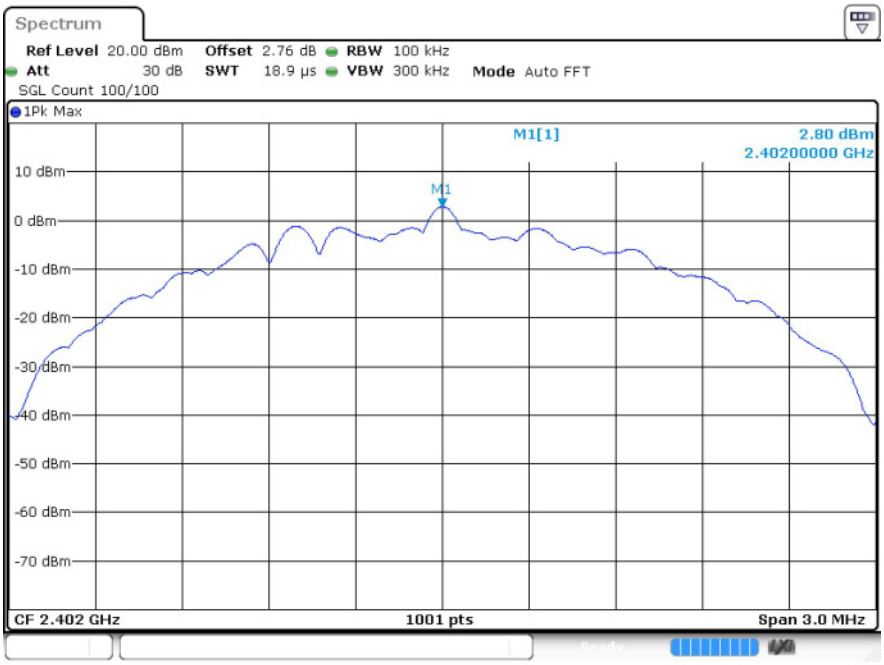

BLE 2M 2402MHz Emission

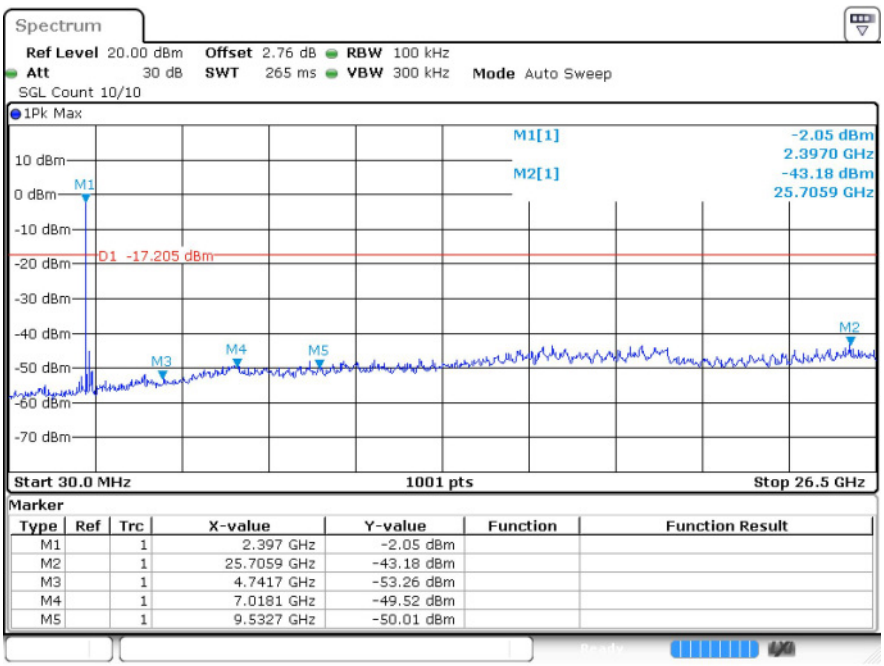

BLE 2M 2440MHz Ref

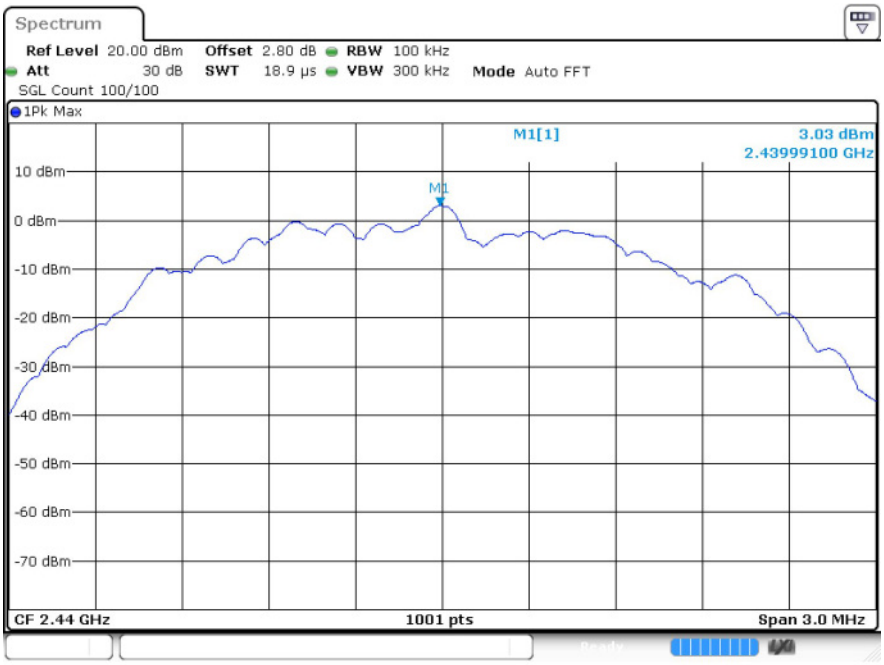

BLE 2M 2440MHz Emission

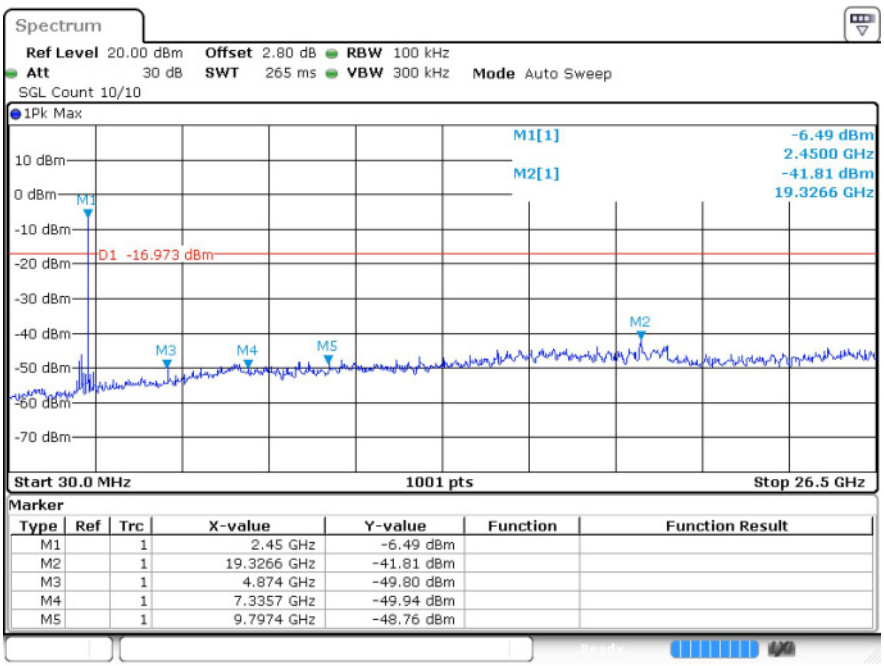

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.45 GHz	-6.49 dBm		
M2		1	19.3266 GHz	-41.81 dBm		
M3		1	4.874 GHz	-49.80 dBm		
M4		1	7.3357 GHz	-49.94 dBm		
M5		1	9.7974 GHz	-48.76 dBm		

BLE 2M 2480MHz Ref

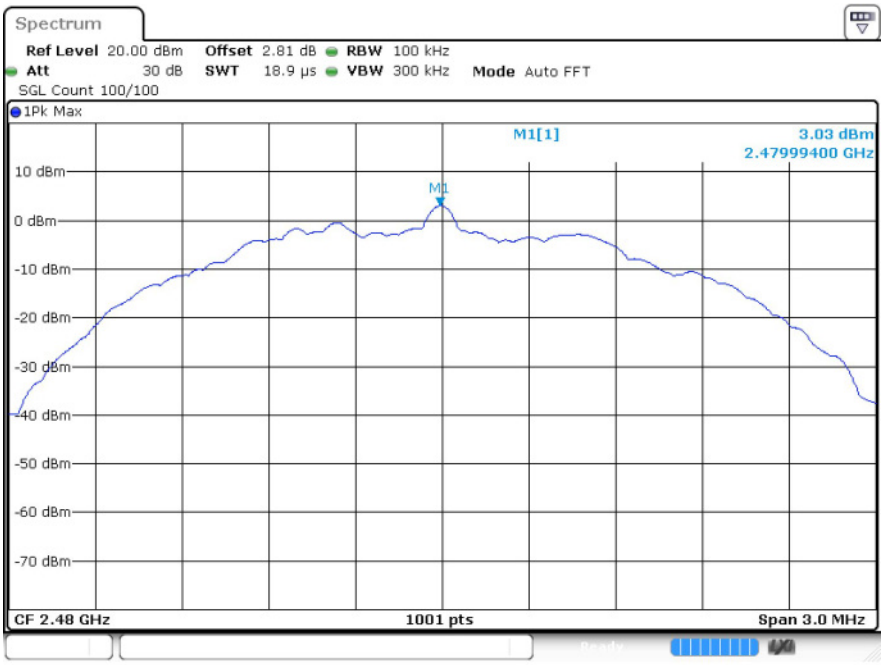

BLE 2M 2480MHz Emission

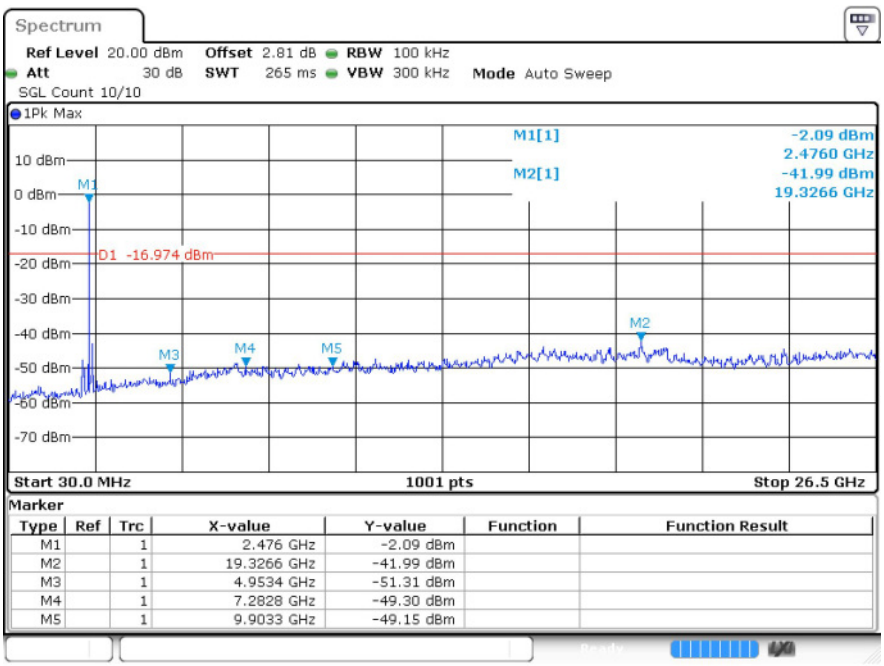

Marker

Type	Ref	Trc	X-value	Y-value	Function	Function Result
M1		1	2.476 GHz	-2.09 dBm		
M2		1	19.3266 GHz	-41.99 dBm		
M3		1	4.9534 GHz	-51.31 dBm		
M4		1	7.2828 GHz	-49.30 dBm		
M5		1	9.9033 GHz	-49.15 dBm		

7 Restrict Band

7.1 Test Result

Mode	Frequency (MHz)	Spur Freq (MHz)	Power (dBm)	Gain (dBi)	Duty Factor	E (dBuV/m)	Detector	Limit (dBuV/m)	Verdict
BLE 1M	2402	2310	-48.72	2.2	-	48.74	Peak	74	Pass
BLE 1M	2402	2310	-56.04	2.2	1.88	43.3	Average	54	Pass
BLE 1M	2402	2369.616	-45.06	2.2	-	52.4	Peak	74	Pass
BLE 1M	2402	2337.936	-53.28	2.2	1.88	46.06	Average	54	Pass
BLE 1M	2402	2390	-50.48	2.2	-	46.98	Peak	74	Pass
BLE 1M	2402	2390	-57.06	2.2	1.88	42.28	Average	54	Pass
BLE 1M	2480	2483.5	-48.43	2.2	-	49.03	Peak	74	Pass
BLE 1M	2480	2483.5	-55.05	2.2	1.88	44.29	Average	54	Pass
BLE 1M	2480	2490.616	-47.01	2.2	-	50.45	Peak	74	Pass
BLE 1M	2480	2483.512	-55.07	2.2	1.88	44.27	Average	54	Pass
BLE 1M	2480	2500	-49.52	2.2	-	47.94	Peak	74	Pass
BLE 1M	2480	2500	-56.93	2.2	1.88	42.41	Average	54	Pass
BLE 2M	2402	2310	-48.48	2.2	-	48.98	Peak	74	Pass
BLE 2M	2402	2310	-56.9	2.2	4.54	45.1	Average	54	Pass
BLE 2M	2402	2369.616	-44.02	2.2	-	53.44	Peak	74	Pass
BLE 2M	2402	2340.336	-54.38	2.2	4.54	47.62	Average	54	Pass
BLE 2M	2402	2390	-47.04	2.2	-	50.42	Peak	74	Pass
BLE 2M	2402	2390	-57.05	2.2	4.54	44.95	Average	54	Pass
BLE 2M	2480	2483.5	-37.55	2.2	-	59.91	Peak	74	Pass
BLE 2M	2480	2483.5	-54.37	2.2	4.53	47.62	Average	54	Pass
BLE 2M	2480	2483.512	-37.64	2.2	-	59.82	Peak	74	Pass
BLE 2M	2480	2483.944	-54.32	2.2	4.53	47.67	Average	54	Pass
BLE 2M	2480	2500	-50.03	2.2	-	47.43	Peak	74	Pass
BLE 2M	2480	2500	-56.94	2.2	4.53	45.05	Average	54	Pass

7.2 Test Graphs

Test Graphs

BLE 1M 2402MHz Peak

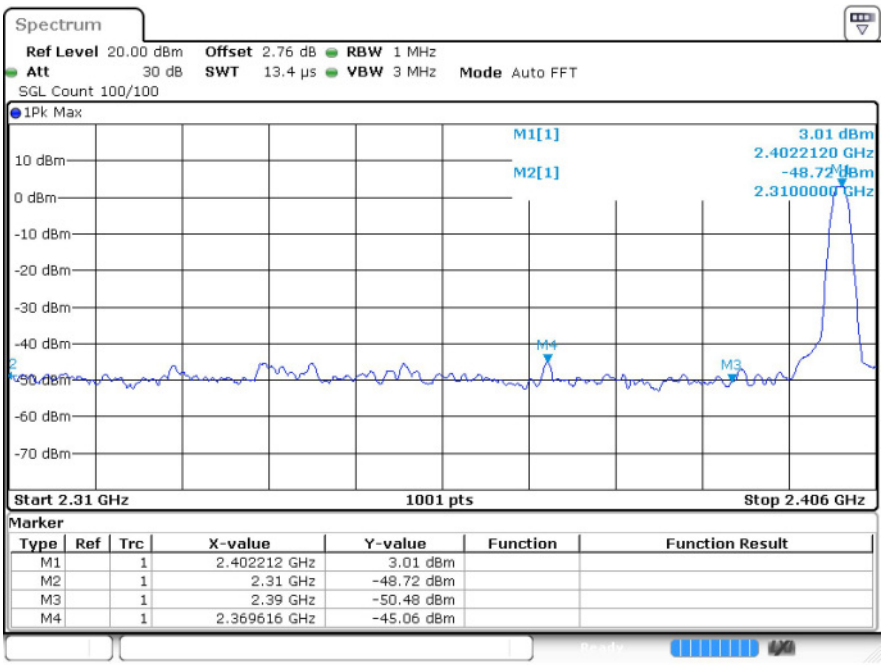

BLE 1M 2402MHz Average

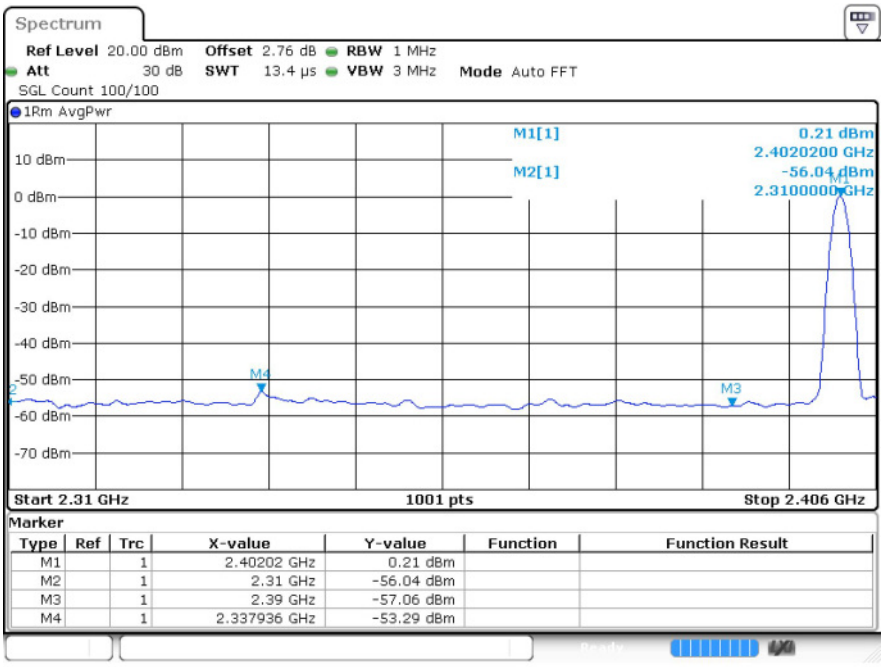

BLE 1M 2480MHz Peak

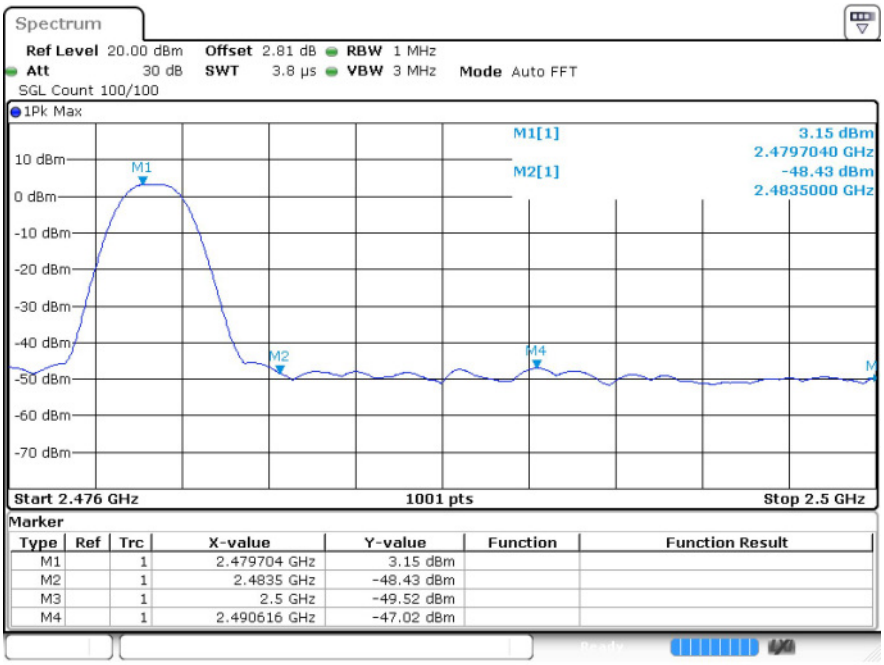

BLE 1M 2480MHz Average

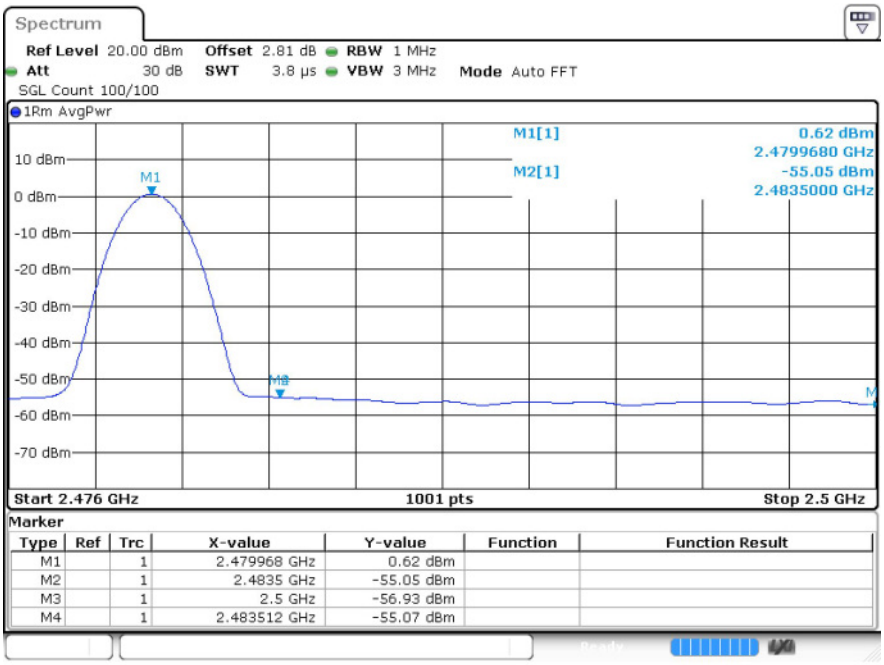

BLE 2M 2402MHz Peak

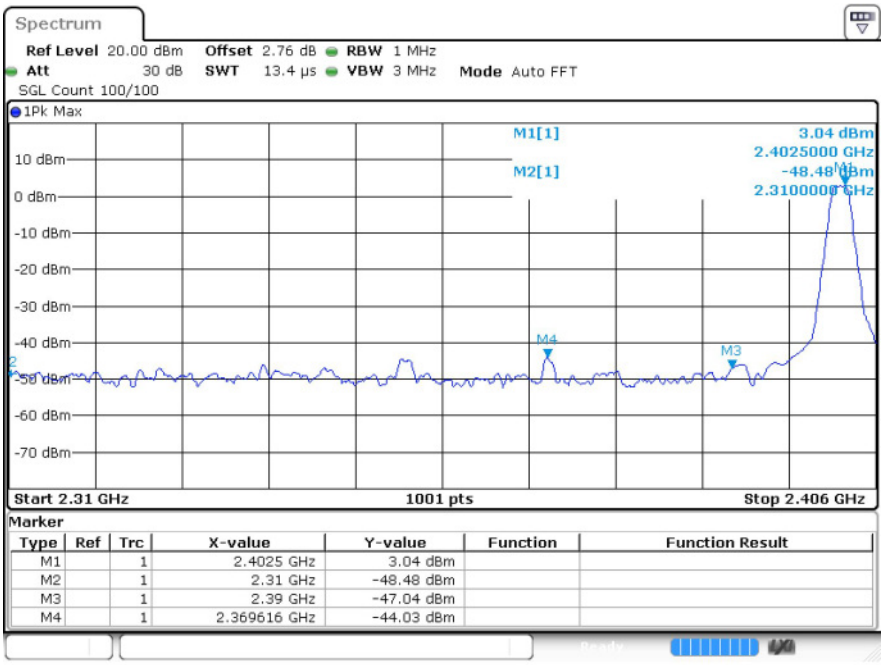

BLE 2M 2402MHz Average

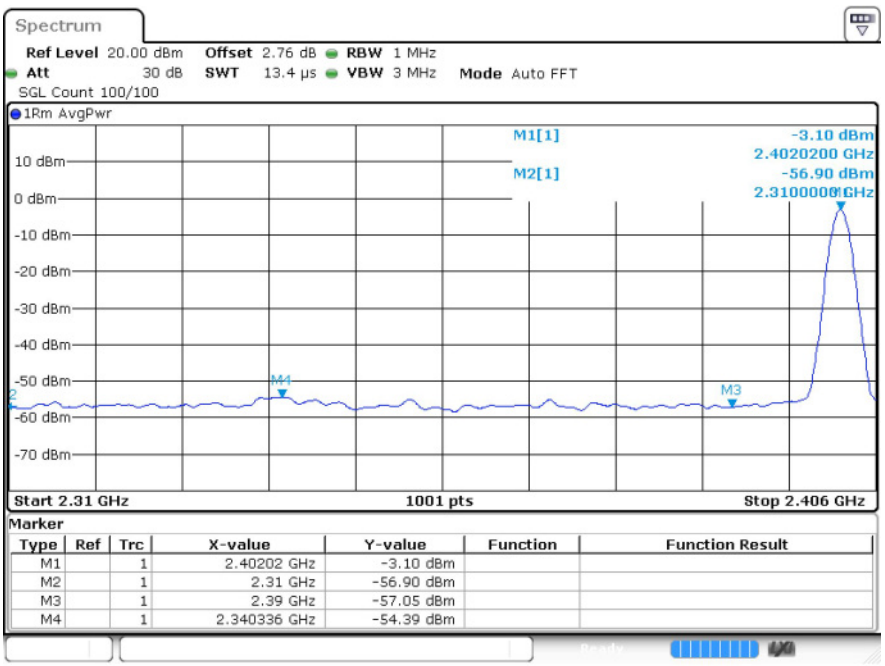

BLE 2M 2480MHz Peak

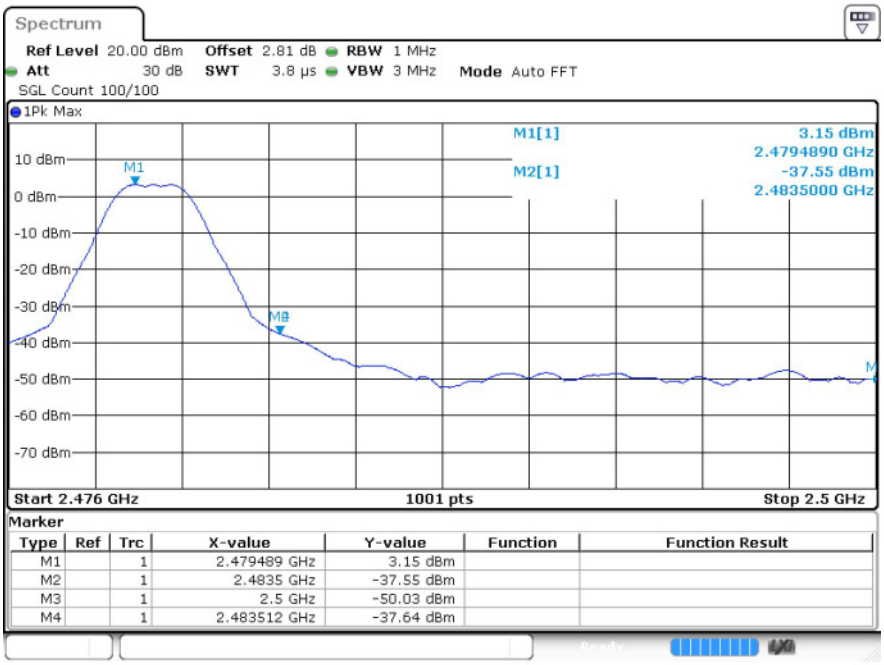

BLE 2M 2480MHz Average

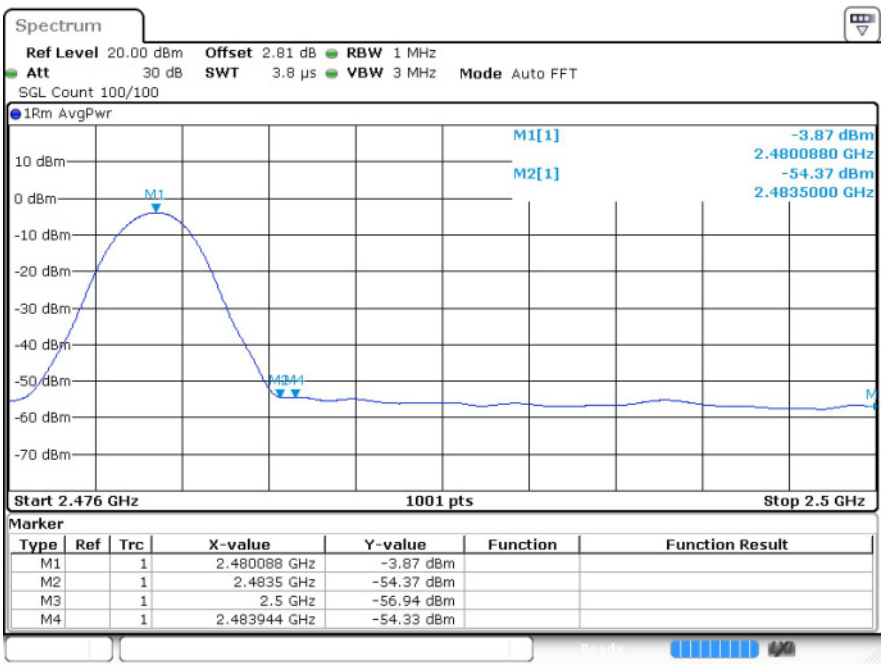

---The End---