




Plot 17:

Test Date	2026-04-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-2c
Signal	IEEE 802.11 n20
Frequency	5700
SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.261
ConvF	1.63
Relative permittivity	36.76
Conductivity (S/m)	5.09

Maximum location: X=-7.00, Y=-8.00 ; SAR Peak: 2.34 W/kg

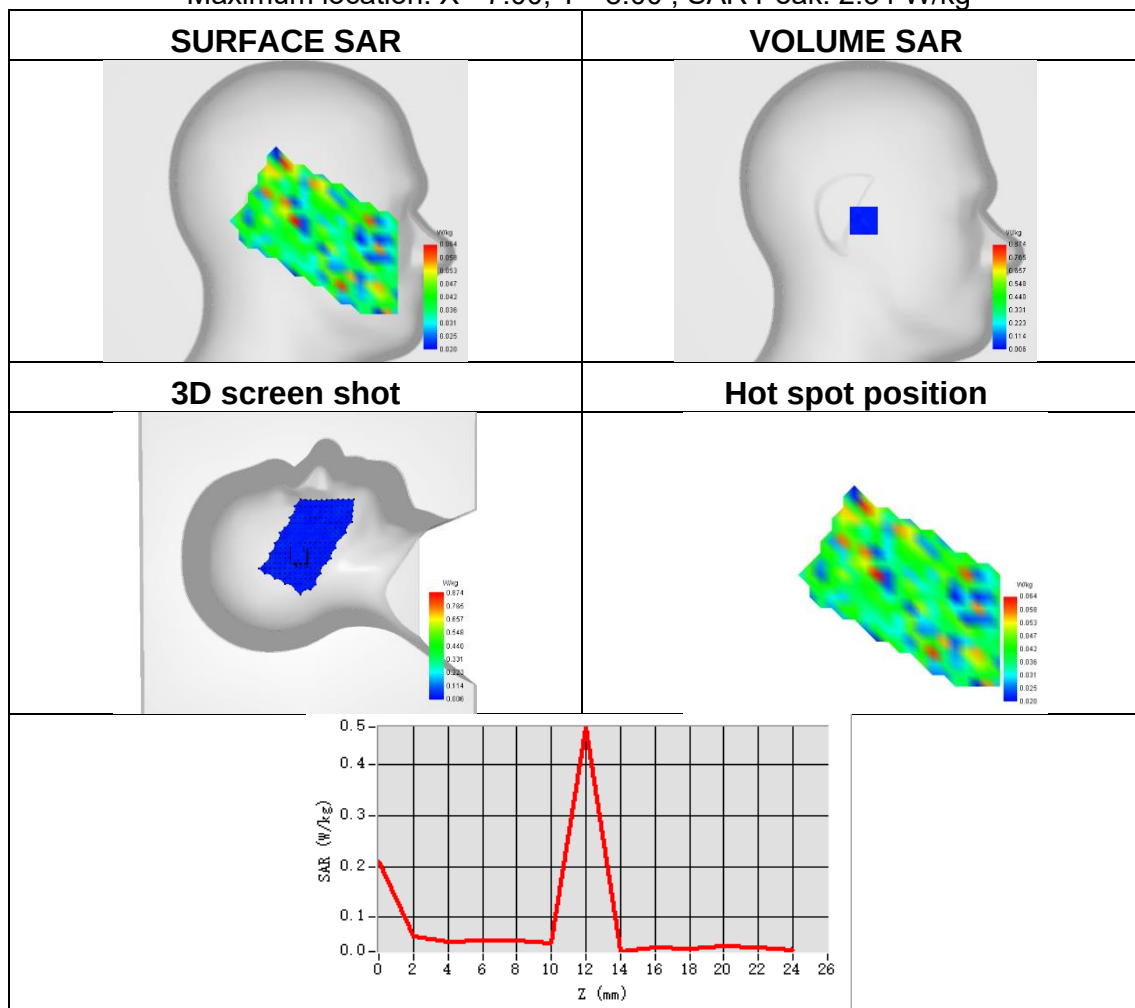




Plot 18:

Test Date	2026-04-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.026
SAR 1g (W/Kg)	0.063
ConvF	1.63
Relative permittivity	36.76
Conductivity (S/m)	5.09

Maximum location: X=-24.00, Y=48.00 ; SAR Peak: 0.32 W/kg

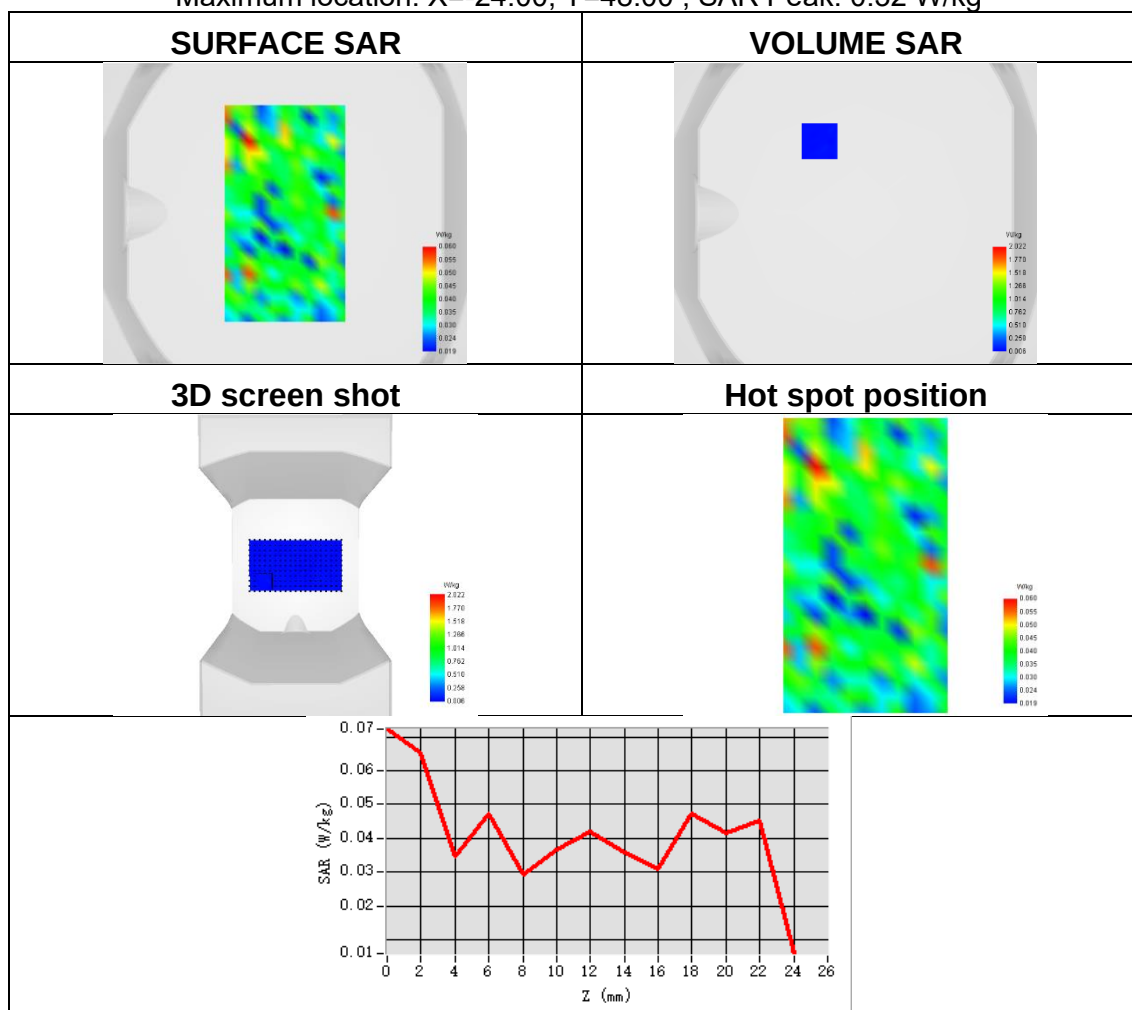




Plot 19:

Test Date	2026-04-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Left head
Device Position	Cheek
Band	U-NII-3
Signal	IEEE 802.11 ac
Frequency	5825
SAR 10g (W/Kg)	0.053
SAR 1g (W/Kg)	0.179
ConvF	1.62
Relative permittivity	36.55
Conductivity (S/m)	5.20

Maximum location: X=-72.00, Y=-56.00 ; SAR Peak: 1.85 W/kg

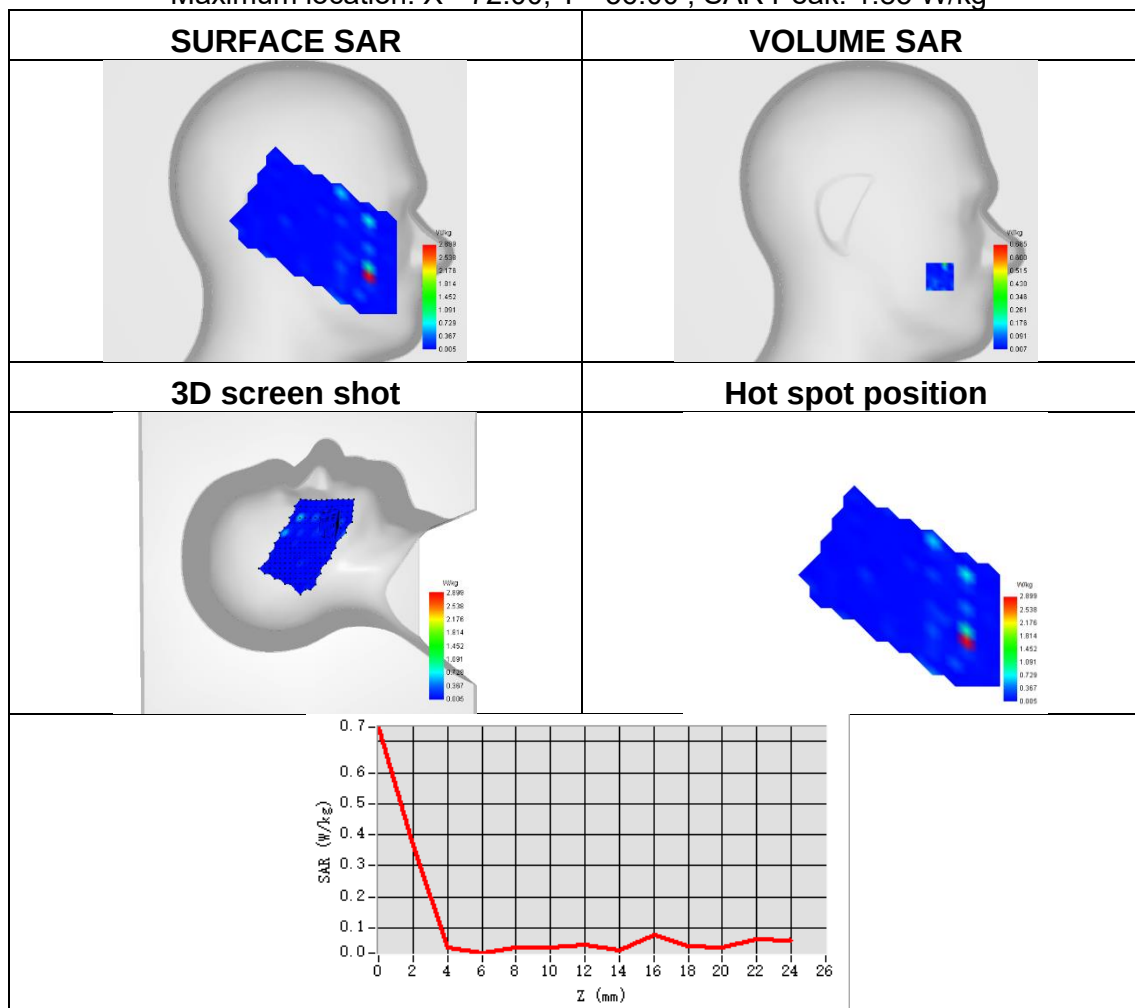




Plot 20:

Test Date	2026-04-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5825
SAR 10g (W/Kg)	0.051
SAR 1g (W/Kg)	0.179
ConvF	1.62
Relative permittivity	36.55
Conductivity (S/m)	5.20

Maximum location: X=0.00, Y=28.00 ; SAR Peak: 3.98 W/kg

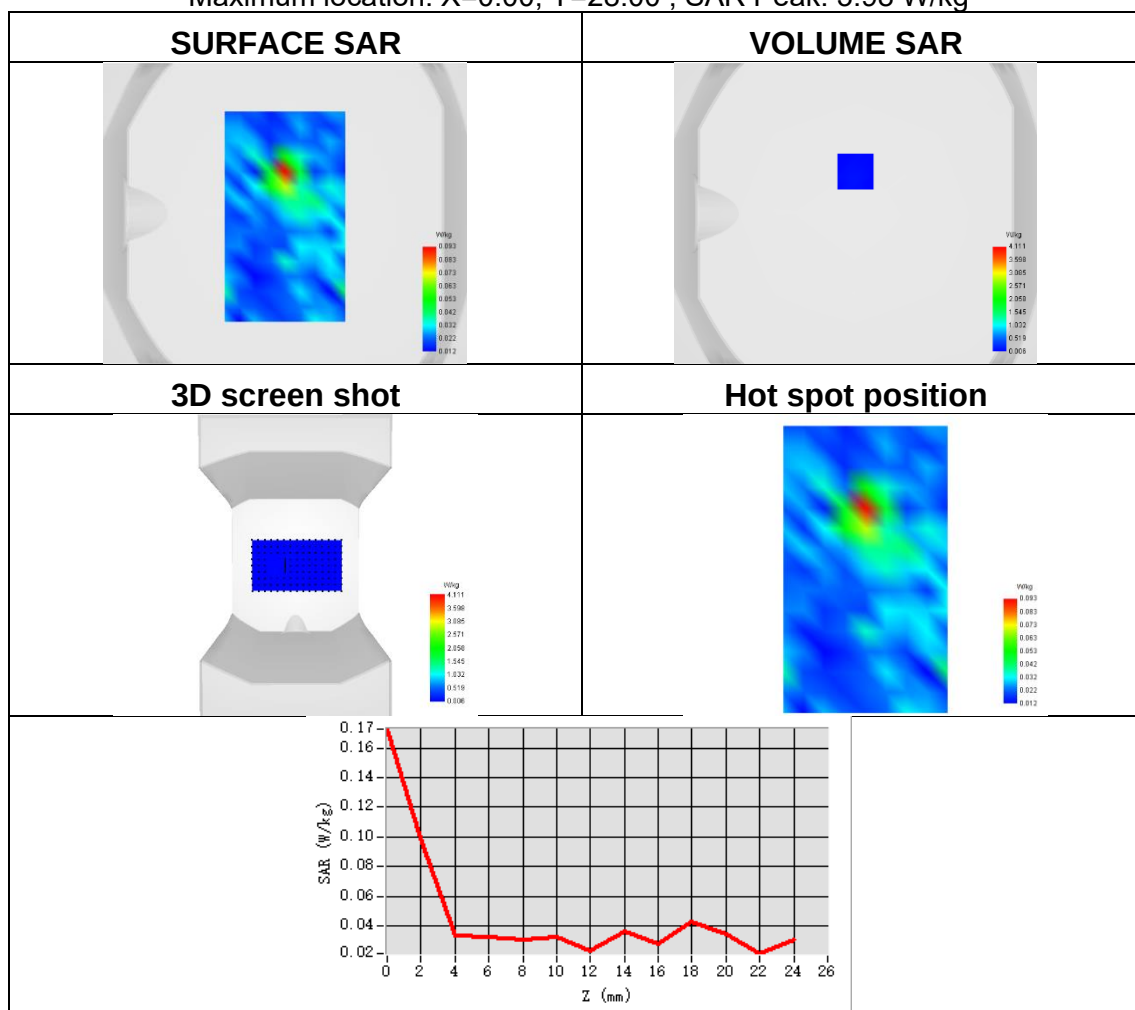




Plot 21:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 2
Signal	LTE FDD
Frequency	1900
SAR 10g (W/Kg)	0.340
SAR 1g (W/Kg)	0.548
ConvF	1.34
Relative permittivity	40.25
Conductivity (S/m)	1.39

Maximum location: X=-8.00, Y=5.00 ; SAR Peak: 0.81 W/kg

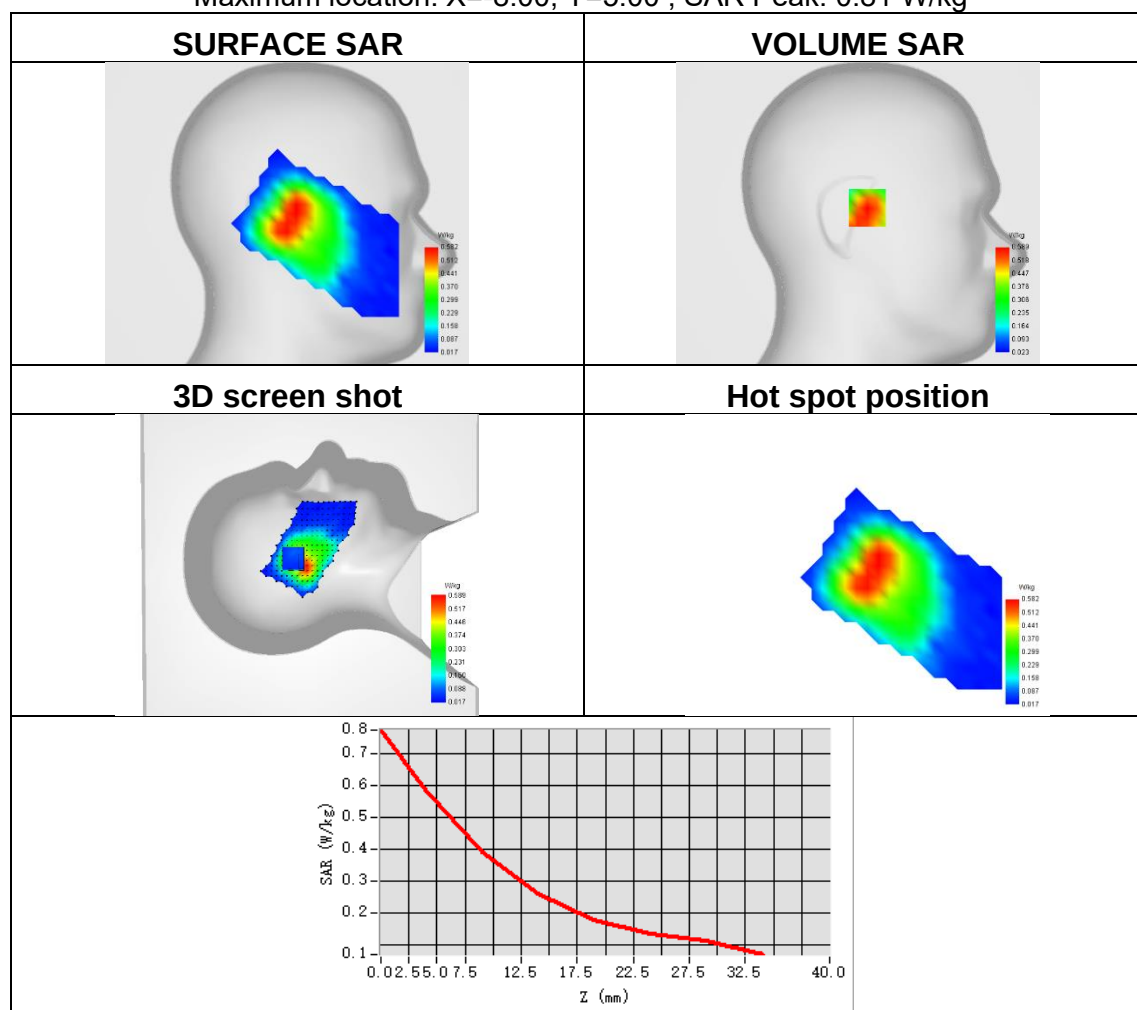




Plot 22:

Test Date	2026-04-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.459
SAR 1g (W/Kg)	0.709
ConvF	1.34
Relative permittivity	40.62
Conductivity (S/m)	1.35

Maximum location: X=11.00, Y=28.00 ; SAR Peak: 1.02 W/kg

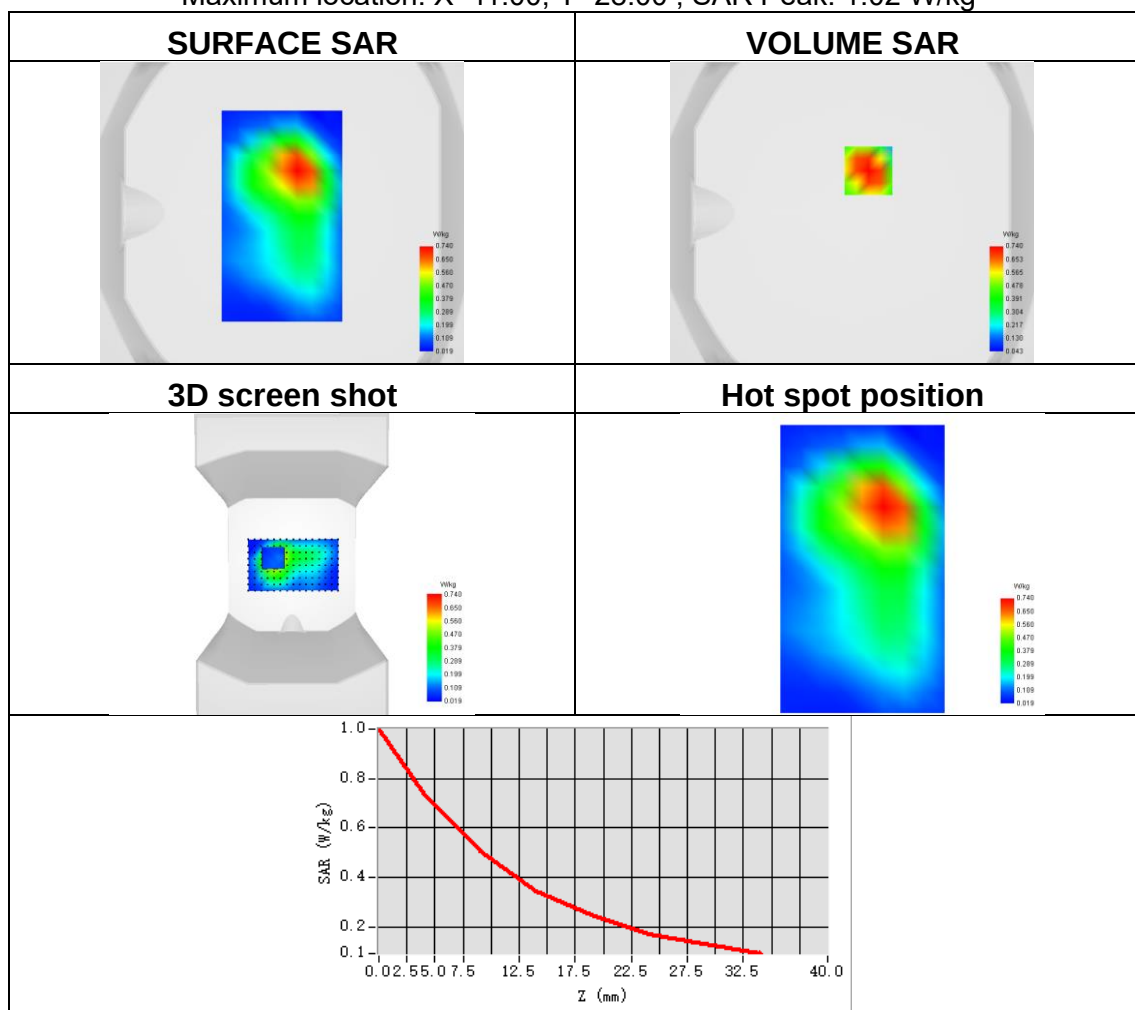




Plot 23:

Test Date	2026-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 4
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.292
SAR 1g (W/Kg)	0.410
ConvF	1.21
Relative permittivity	40.65
Conductivity (S/m)	1.46

Maximum location: X=-8.00, Y=-1.00 ; SAR Peak: 0.57 W/kg

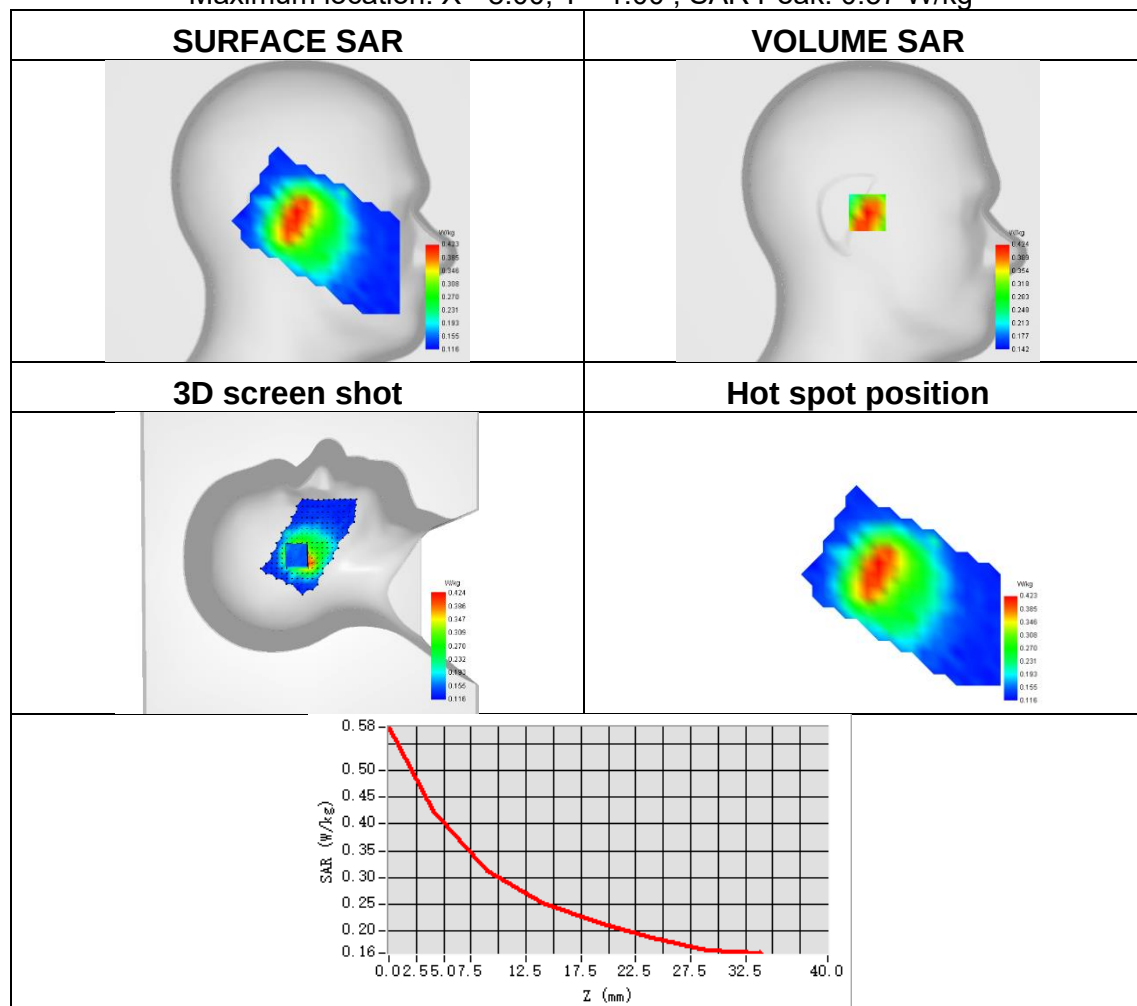




Plot 24:

Test Date	2026-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.509
SAR 1g (W/Kg)	0.776
ConvF	1.21
Relative permittivity	40.91
Conductivity (S/m)	1.37

Maximum location: X=17.00, Y=41.00 ; SAR Peak: 1.10 W/kg

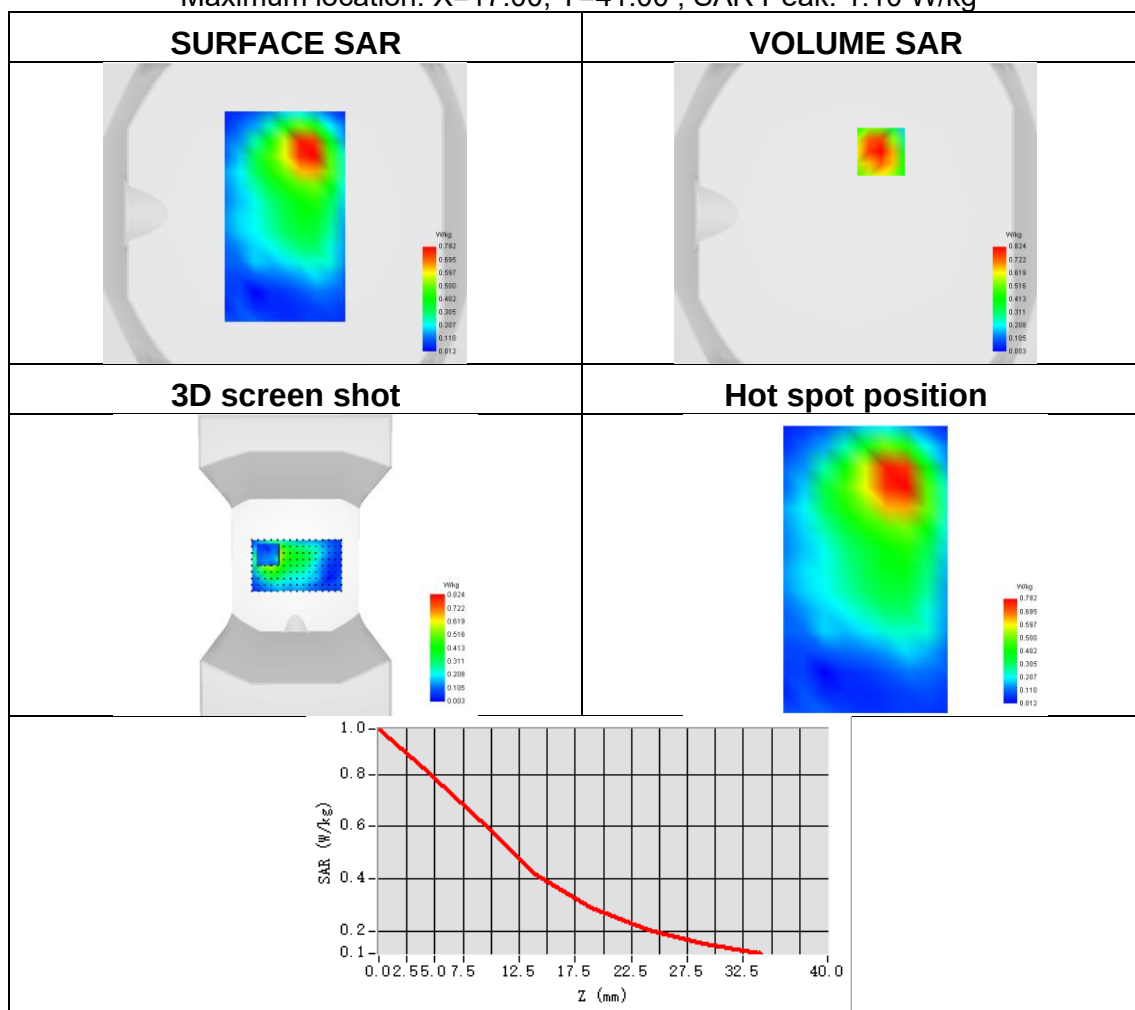




Plot 25:

Test Date	2026-04-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.186
SAR 1g (W/Kg)	0.228
ConvF	1.02
Relative permittivity	41.95
Conductivity (S/m)	0.87

Maximum location: X=-49.00, Y=-39.00 ; SAR Peak: 0.27 W/kg

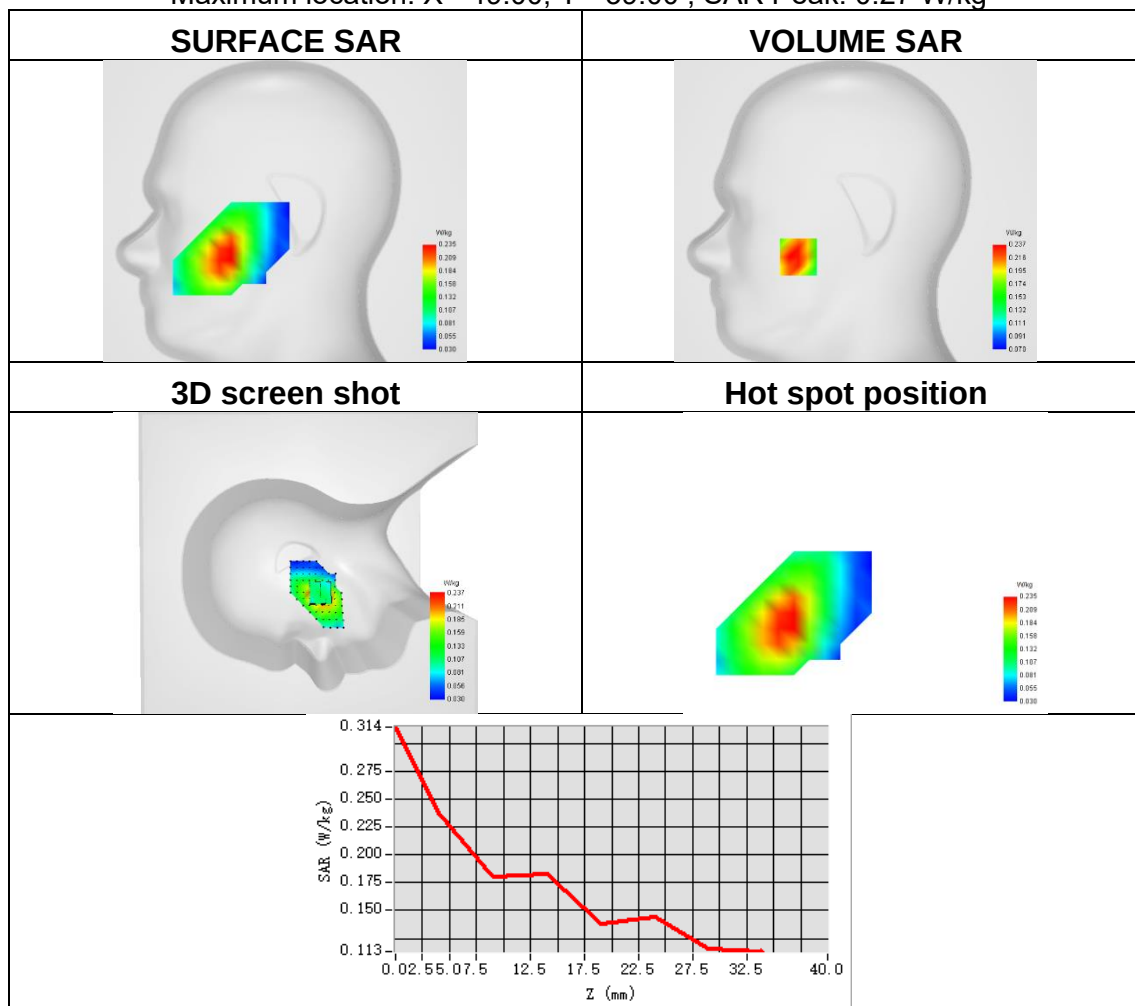




Plot 26:

Test Date	2026-04-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.140
SAR 1g (W/Kg)	0.215
ConvF	1.02
Relative permittivity	41.95
Conductivity (S/m)	0.87

Maximum location: X=11.00, Y=-52.00 ; SAR Peak: 0.31 W/kg

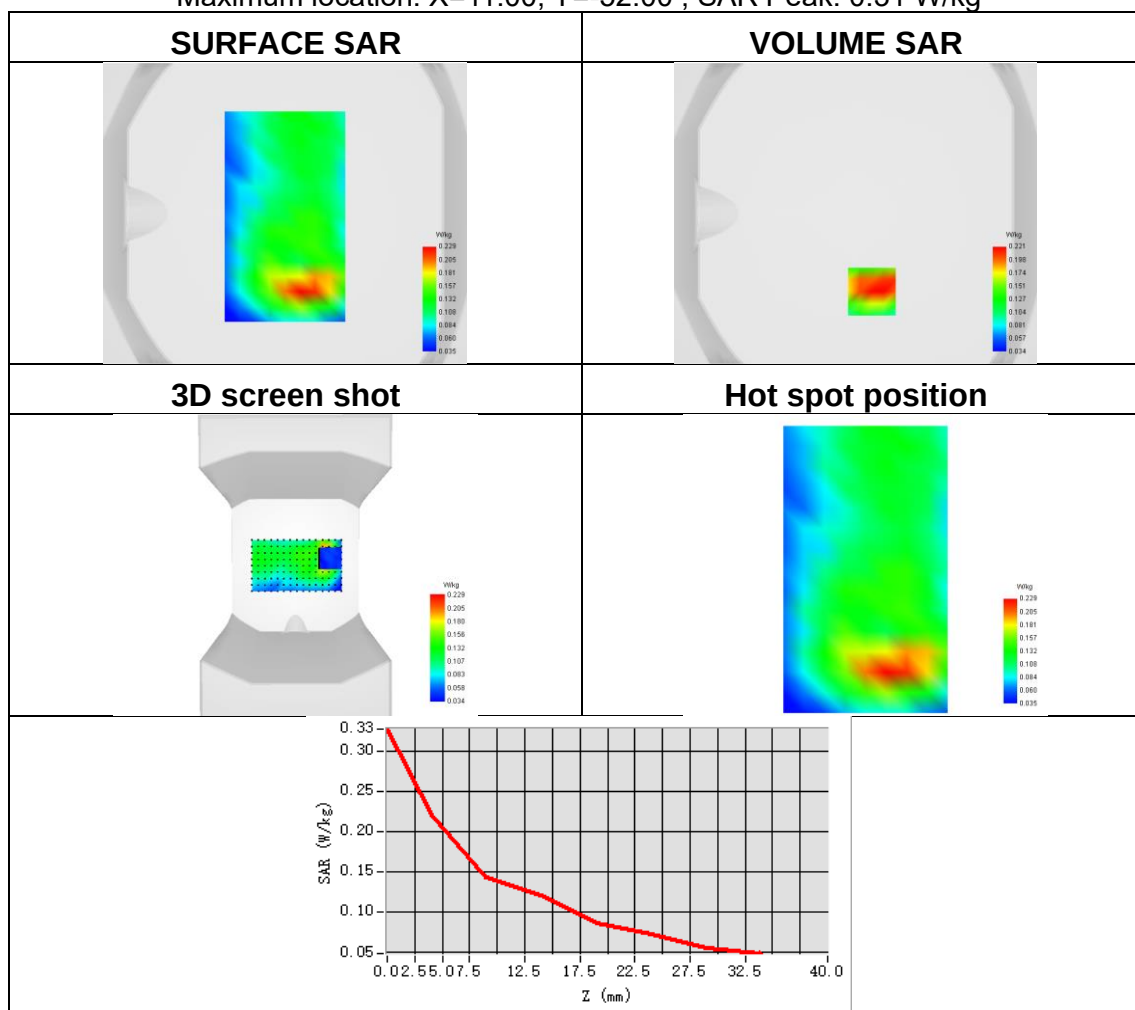




Plot 27:

Test Date	2026-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.121
SAR 1g (W/Kg)	0.176
ConvF	1.44
Relative permittivity	39.84
Conductivity (S/m)	1.81

Maximum location: X=8.00, Y=24.00 ; SAR Peak: 0.26 W/kg

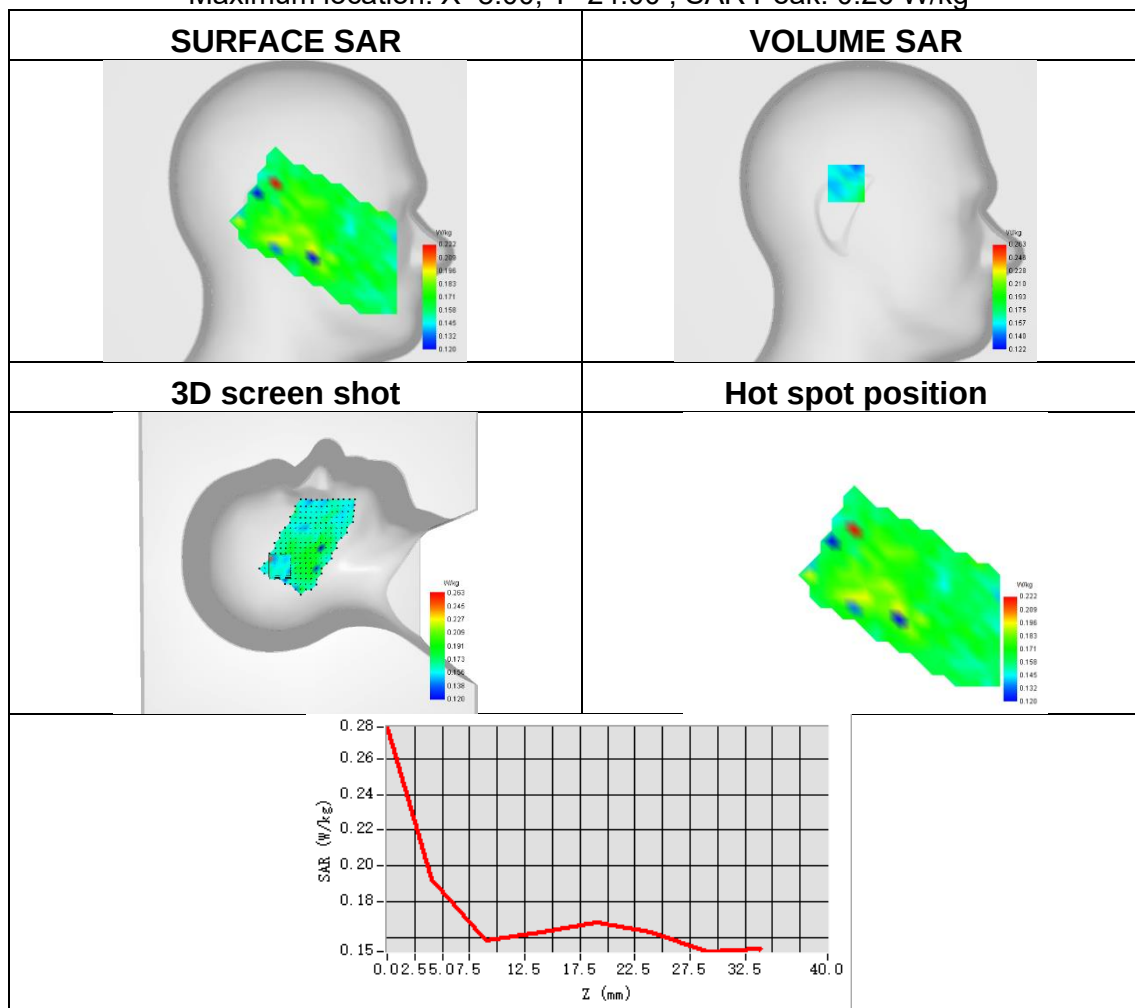




Plot 28:

Test Date	2026-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.106
SAR 1g (W/Kg)	0.218
ConvF	1.44
Relative permittivity	39.84
Conductivity (S/m)	1.81

Maximum location: X=22.00, Y=40.00 ; SAR Peak: 0.44 W/kg

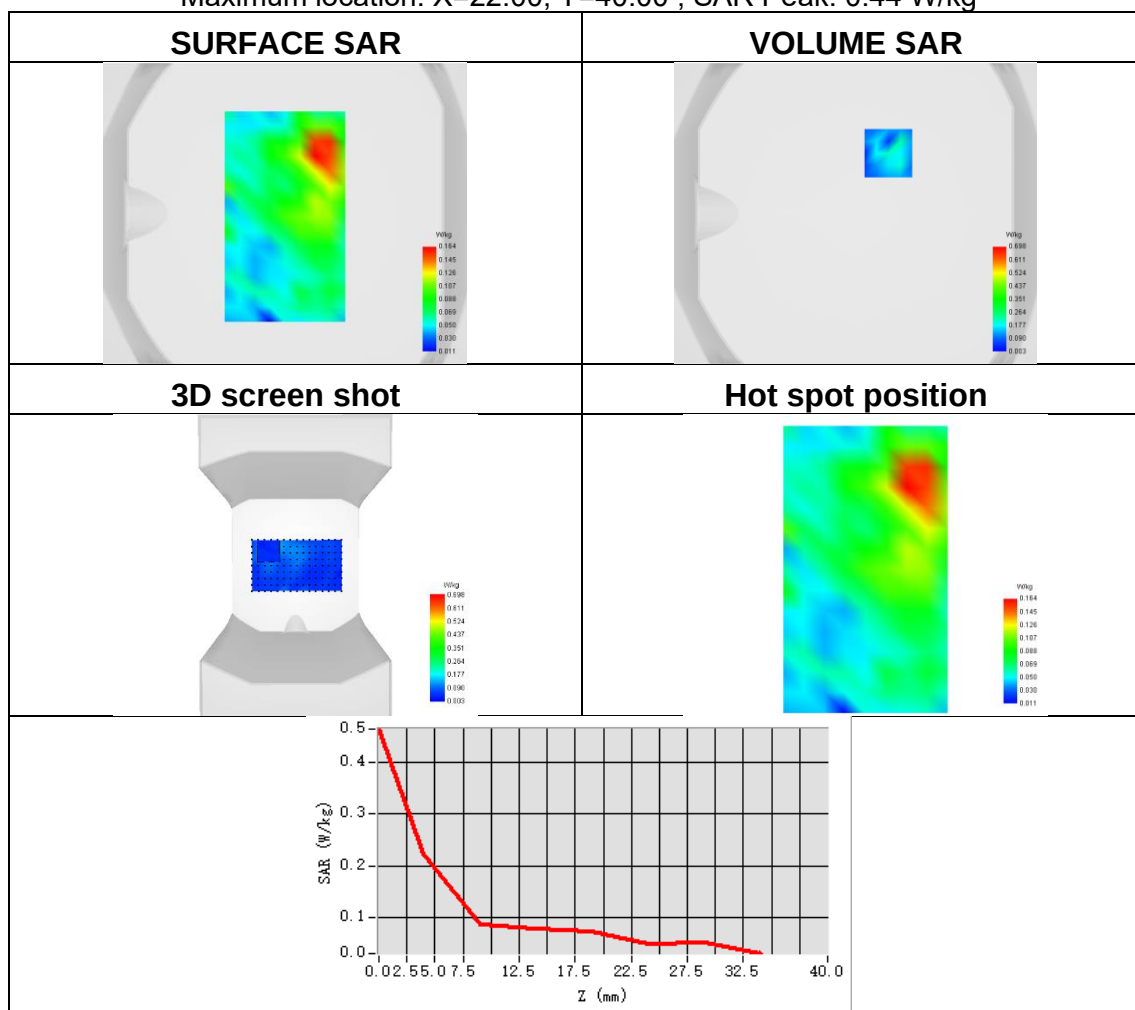




Plot 29:

Test Date	2026-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.152
SAR 1g (W/Kg)	0.214
ConvF	1.08
Relative permittivity	42.02
Conductivity (S/m)	0.90

Maximum location: X=-39.00, Y=-18.00 ; SAR Peak: 0.29 W/kg

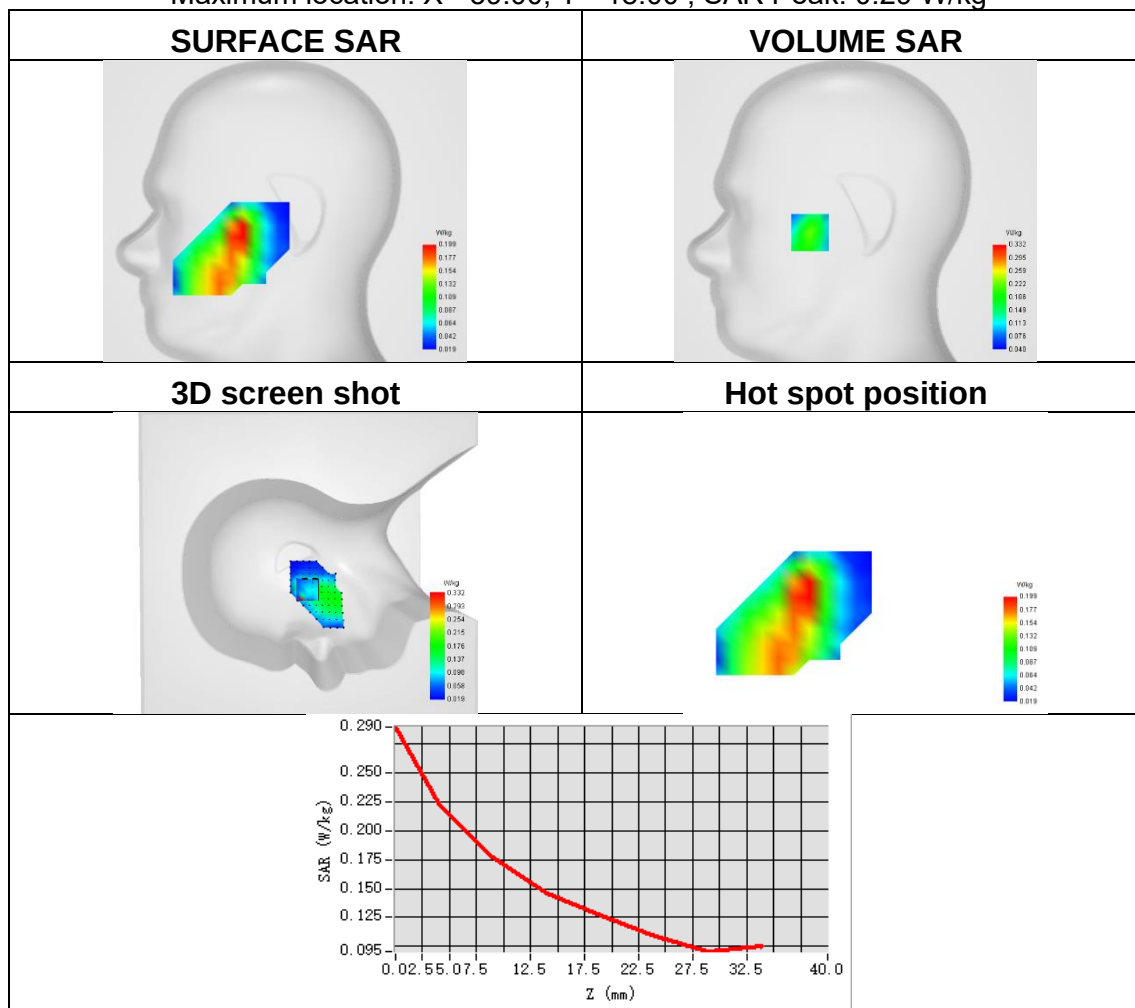




Plot 30:

Test Date	2026-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.127
SAR 1g (W/Kg)	0.259
ConvF	1.08
Relative permittivity	42.02
Conductivity (S/m)	0.90

Maximum location: X=10.00, Y=-53.00 ; SAR Peak: 0.57 W/kg

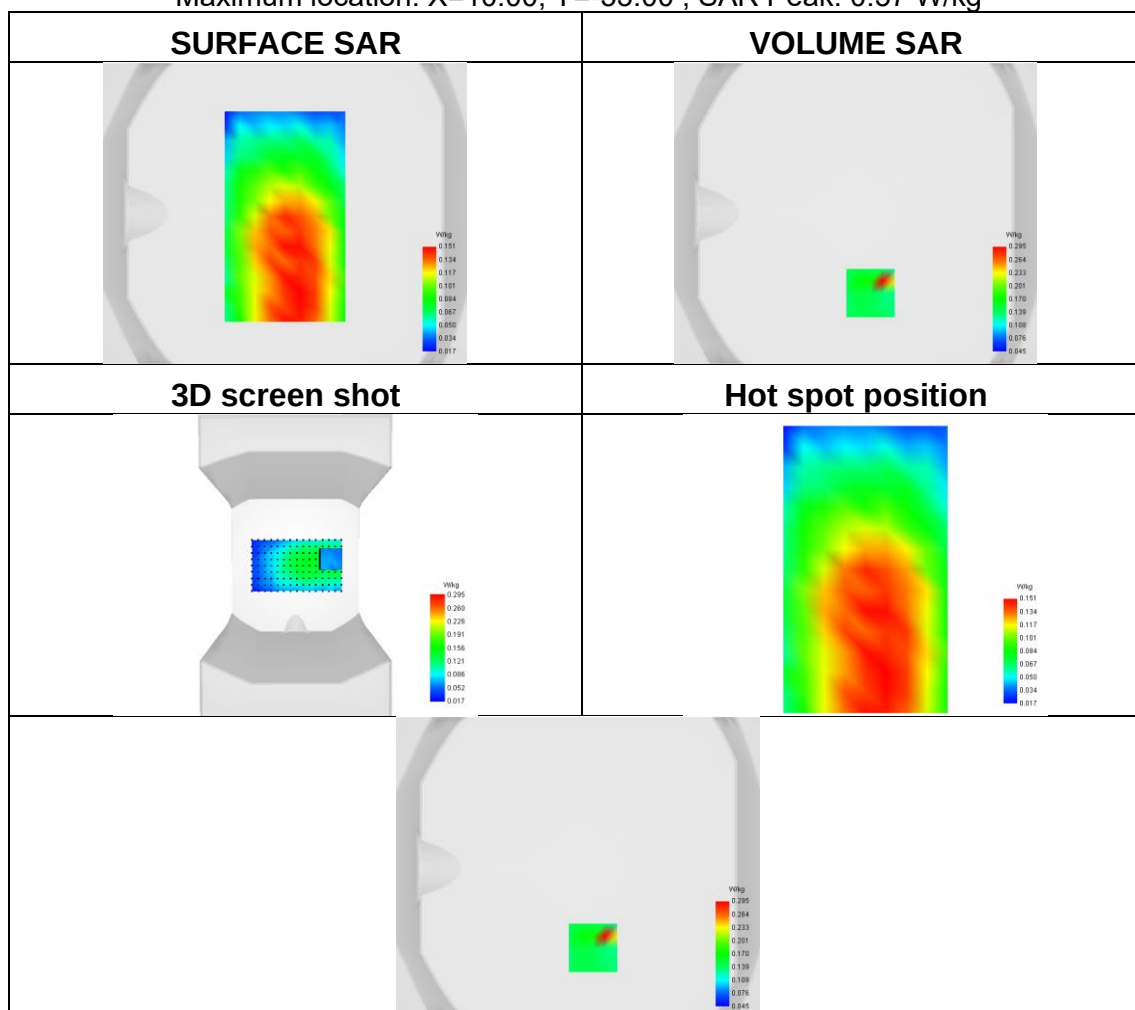




Plot 31:

Test Date	2026-04-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.162
SAR 1g (W/Kg)	0.224
ConvF	1.08
Relative permittivity	42.34
Conductivity (S/m)	0.87

Maximum location: X=-37.00, Y=-20.00 ; SAR Peak: 0.29 W/kg

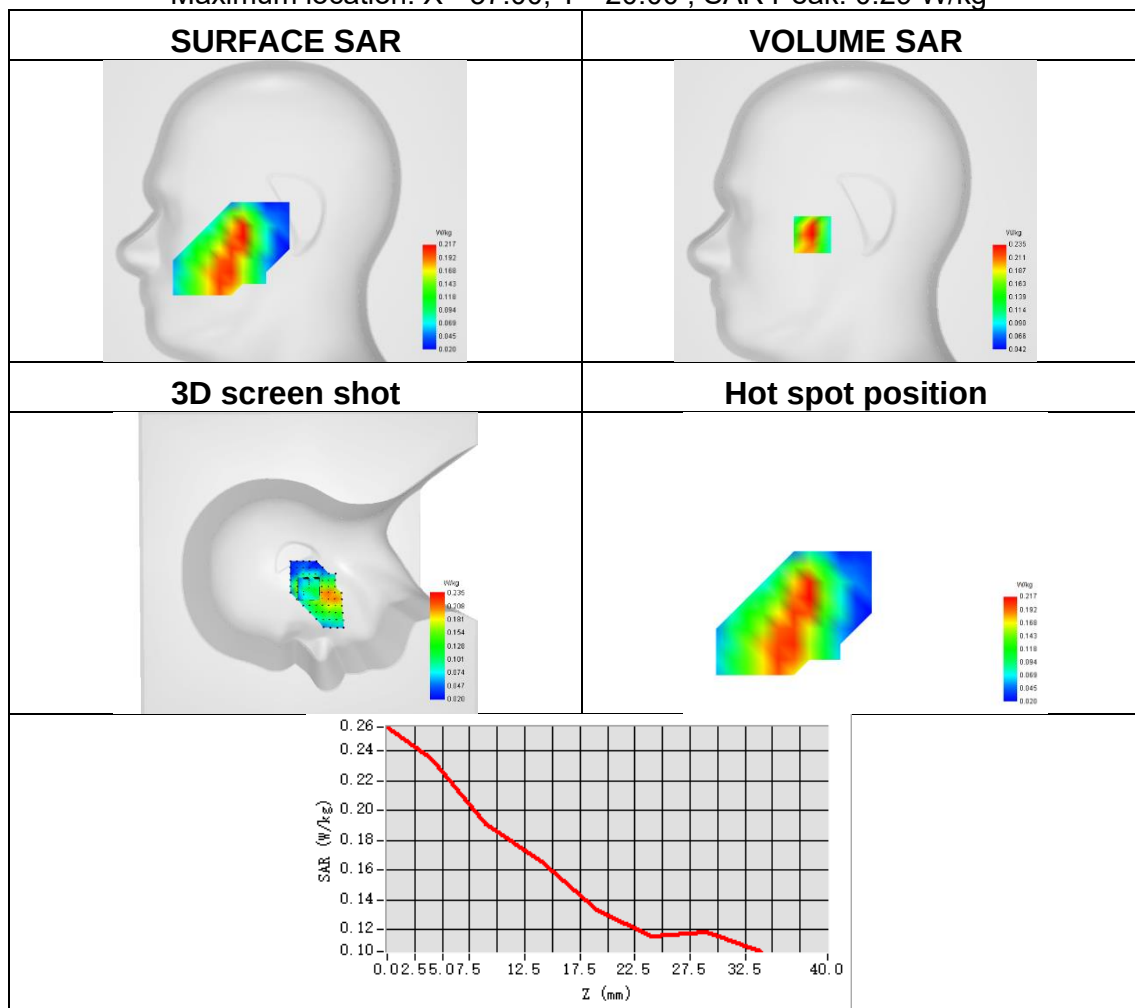




Plot 32:

Test Date	2026-04-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.090
SAR 1g (W/Kg)	0.170
ConvF	1.08
Relative permittivity	42.34
Conductivity (S/m)	0.87

Maximum location: X=18.00, Y=-55.00 ; SAR Peak: 0.45 W/kg

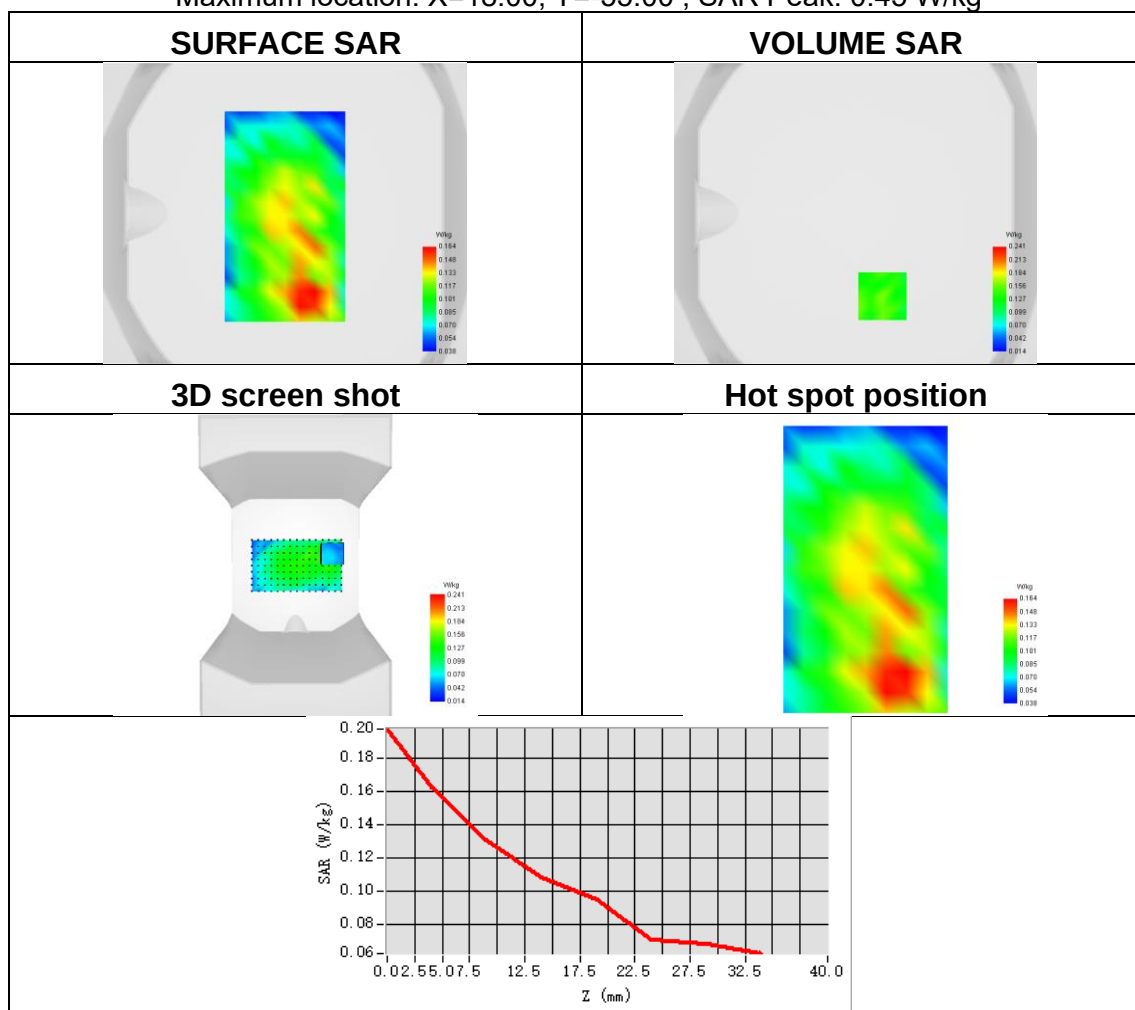




Plot 33:

Test Date	2026-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.142
SAR 1g (W/Kg)	0.198
ConvF	1.08
Relative permittivity	42.02
Conductivity (S/m)	0.90

Maximum location: X=-37.00, Y=-40.00 ; SAR Peak: 0.31 W/kg

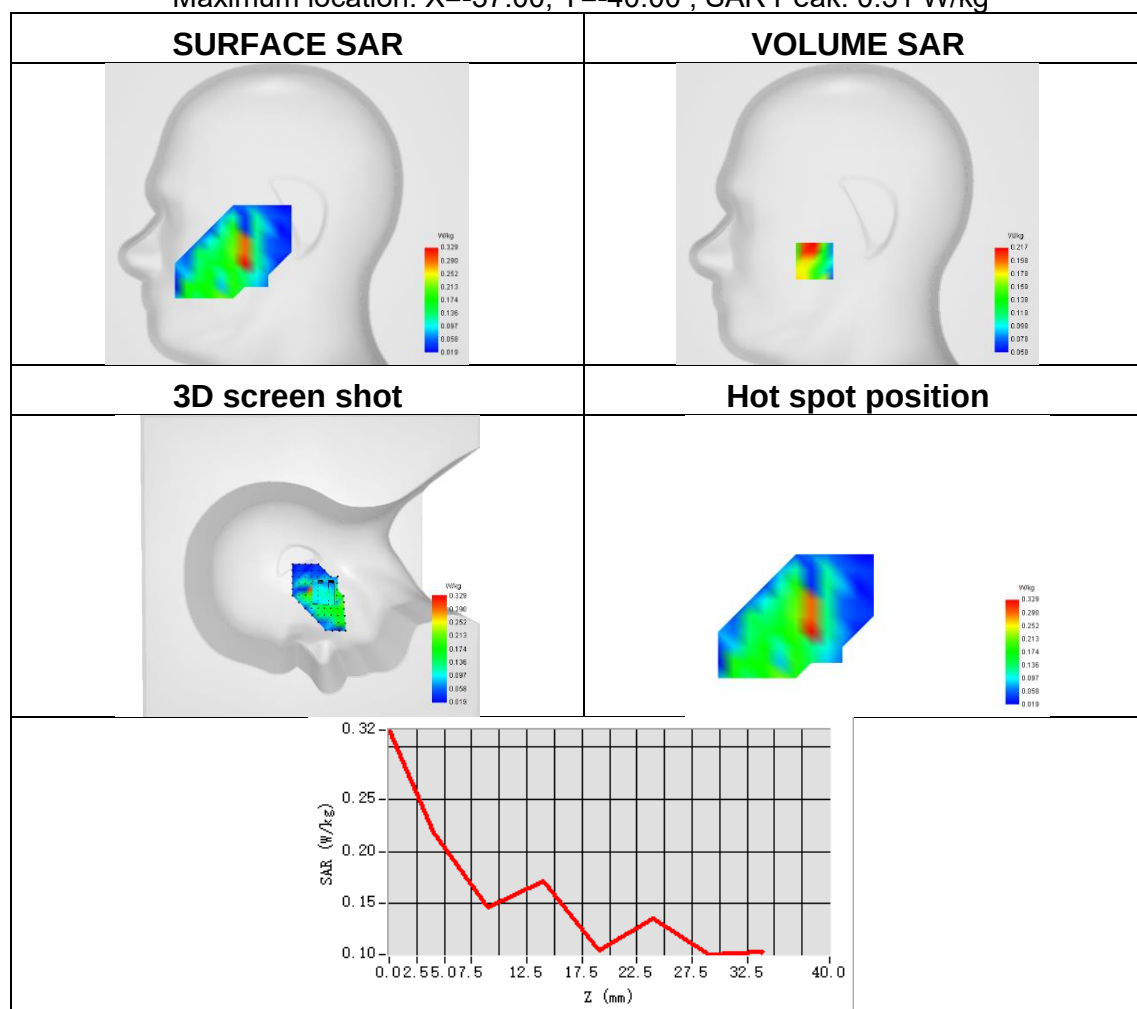




Plot 34:

Test Date	2026-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.233
ConvF	1.08
Relative permittivity	42.02
Conductivity (S/m)	0.90

Maximum location: X=-20.00, Y=-24.00 ; SAR Peak: 0.28 W/kg

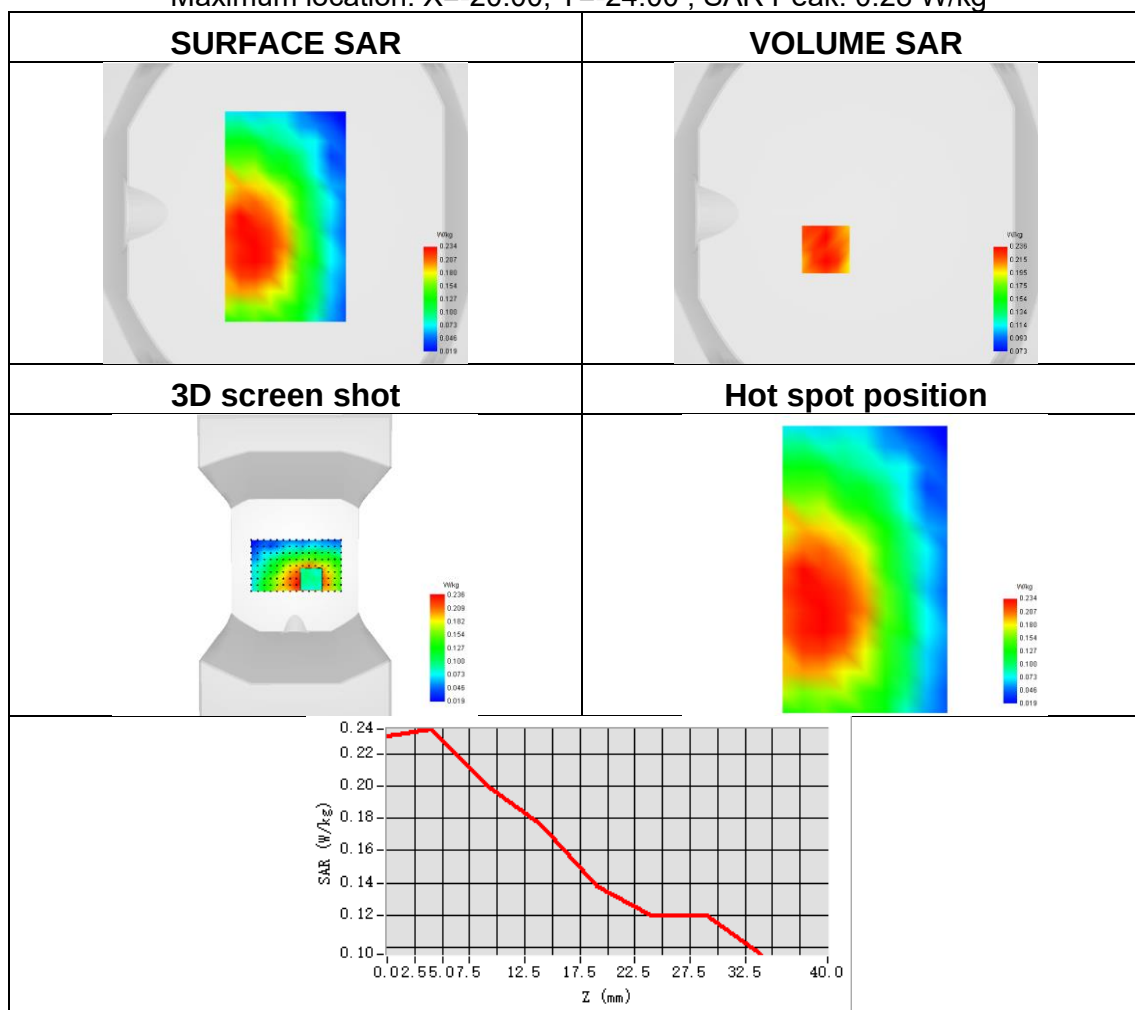




Plot 35:

Test Date	2026-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7,dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE FDD
Frequency	2610
SAR 10g (W/Kg)	0.332
SAR 1g (W/Kg)	0.588
ConvF	1.44
Relative permittivity	39.81
Conductivity (S/m)	1.99

Maximum location: X=-22.00, Y=-19.00 ; SAR Peak: 0.93 W/kg

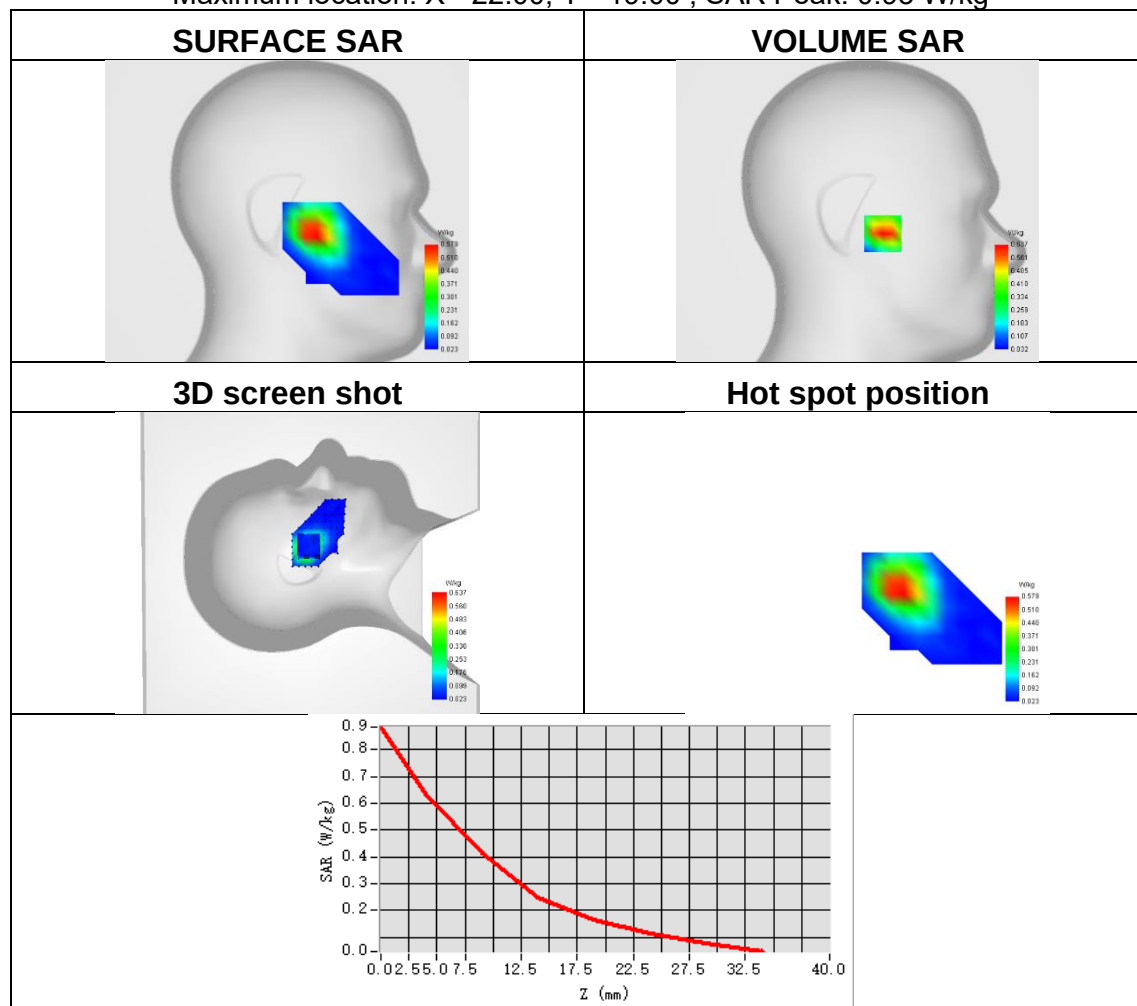




Plot 36:

Test Date	2026-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE FDD
Frequency	2595
SAR 10g (W/Kg)	0.166
SAR 1g (W/Kg)	0.215
ConvF	1.44
Relative permittivity	39.81
Conductivity (S/m)	1.99

Maximum location: X=19.00, Y=23.00 ; SAR Peak: 0.28 W/kg

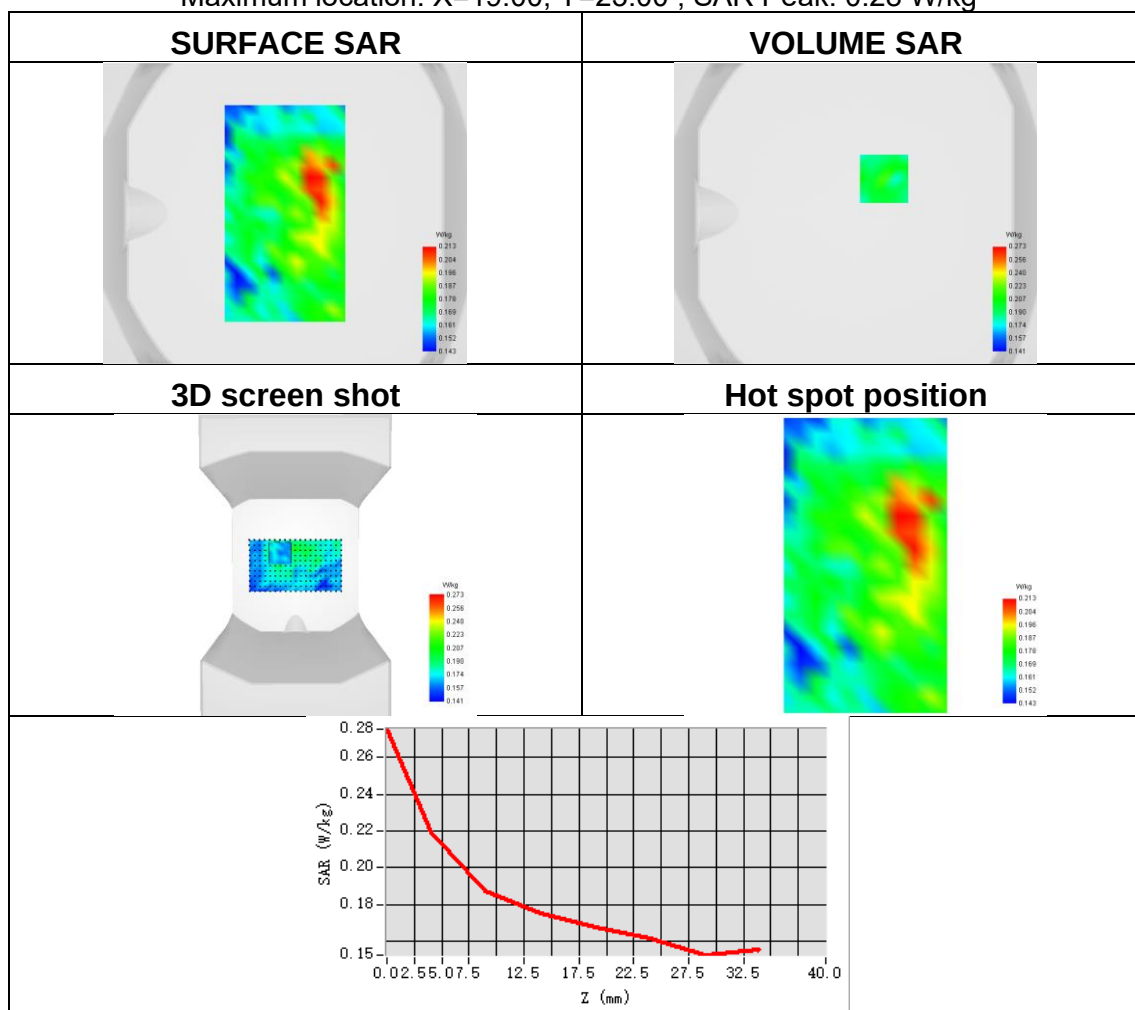




Plot 37:

Test Date	2026-04-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.265
SAR 1g (W/Kg)	0.420
ConvF	1.47
Relative permittivity	39.75
Conductivity (S/m)	1.64

Maximum location: X=-16.00, Y=-14.00 ; SAR Peak: 0.62 W/kg

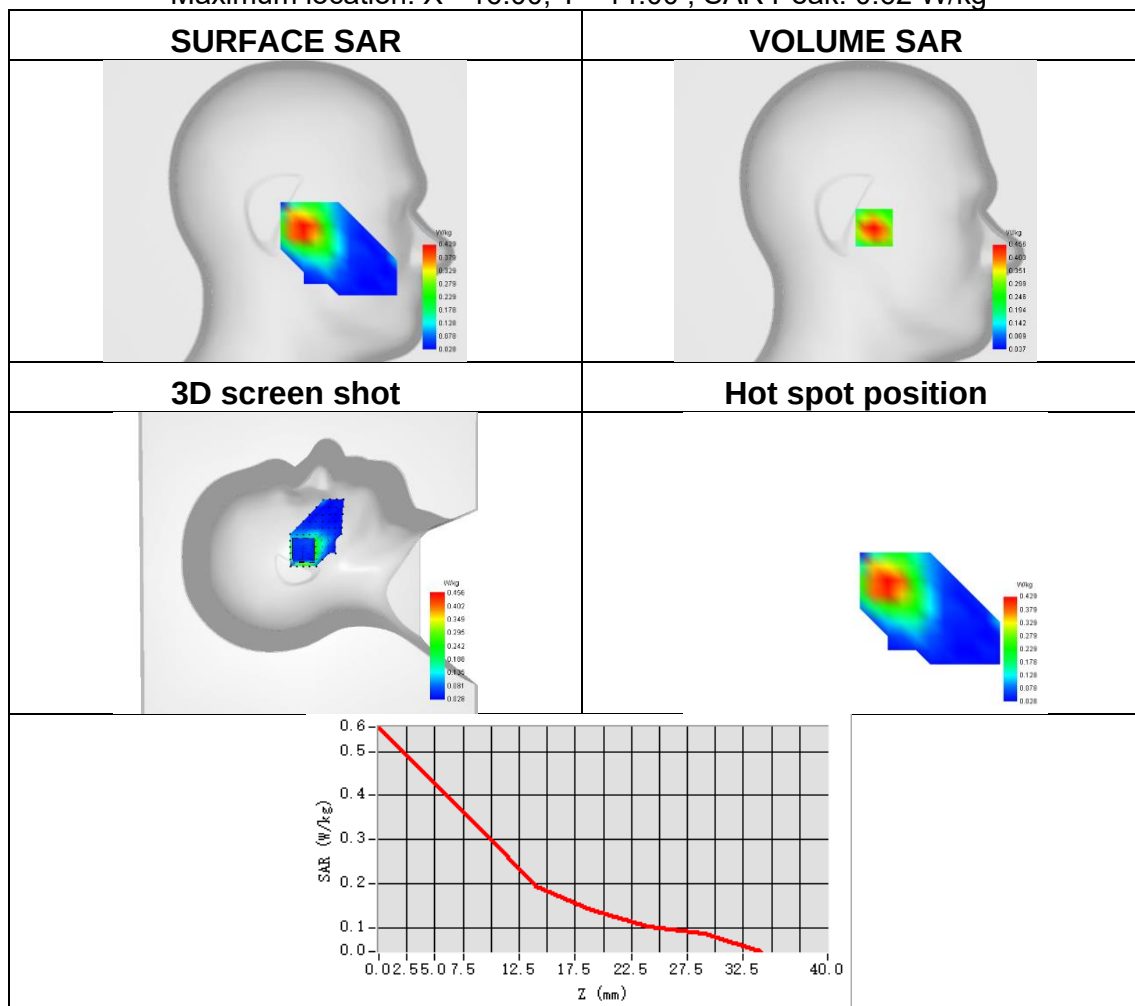




Plot 38:

Test Date	2026-04-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.140
SAR 1g (W/Kg)	0.183
ConvF	1.47
Relative permittivity	39.75
Conductivity (S/m)	1.64

Maximum location: X=17.00, Y=11.00 ; SAR Peak: 0.23 W/kg

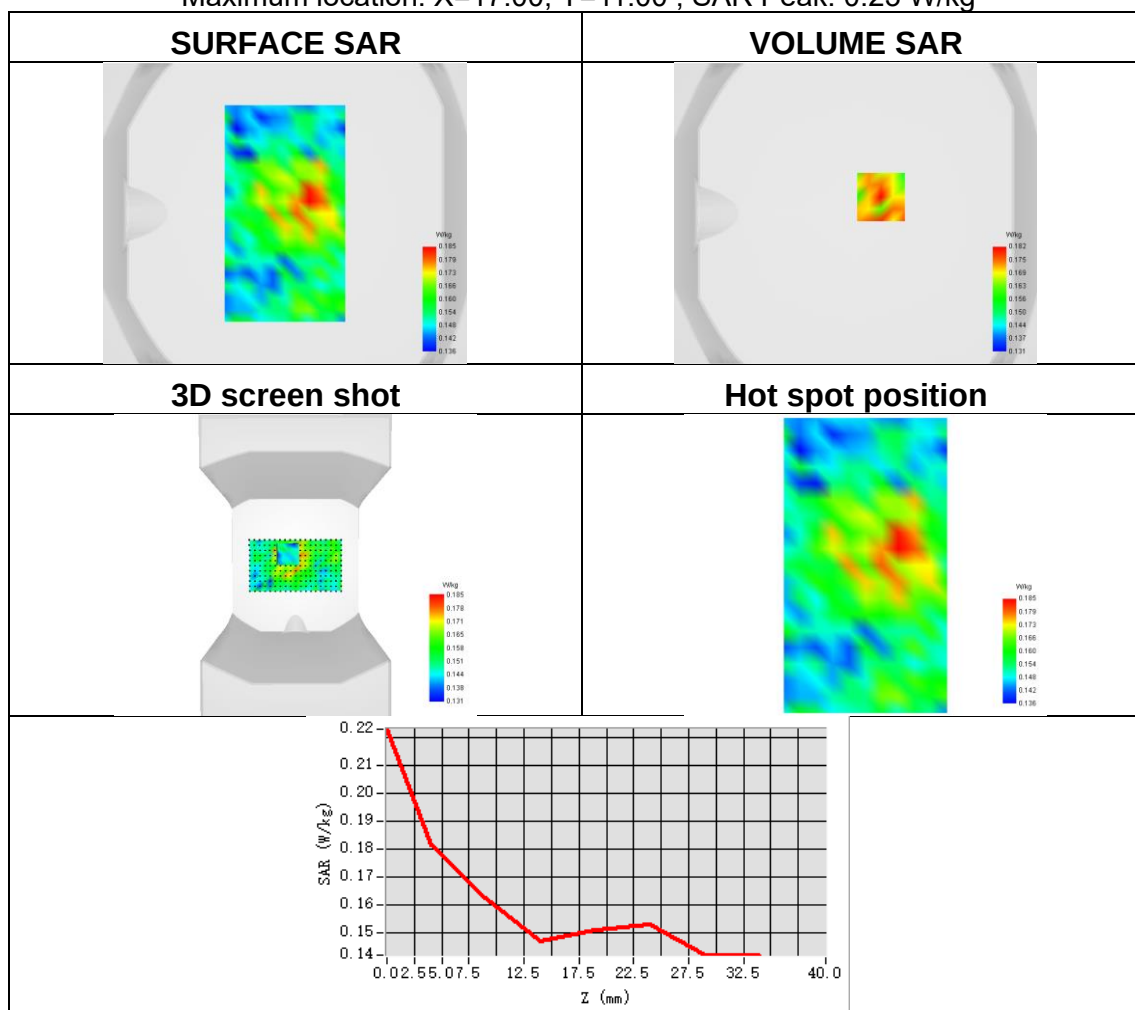




Plot 39:

Test Date	2026-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1745
SAR 10g (W/Kg)	0.308
SAR 1g (W/Kg)	0.430
ConvF	1.21
Relative permittivity	40.65
Conductivity (S/m)	1.46

Maximum location: X=-8.00, Y=-1.00 ; SAR Peak: 0.59 W/kg

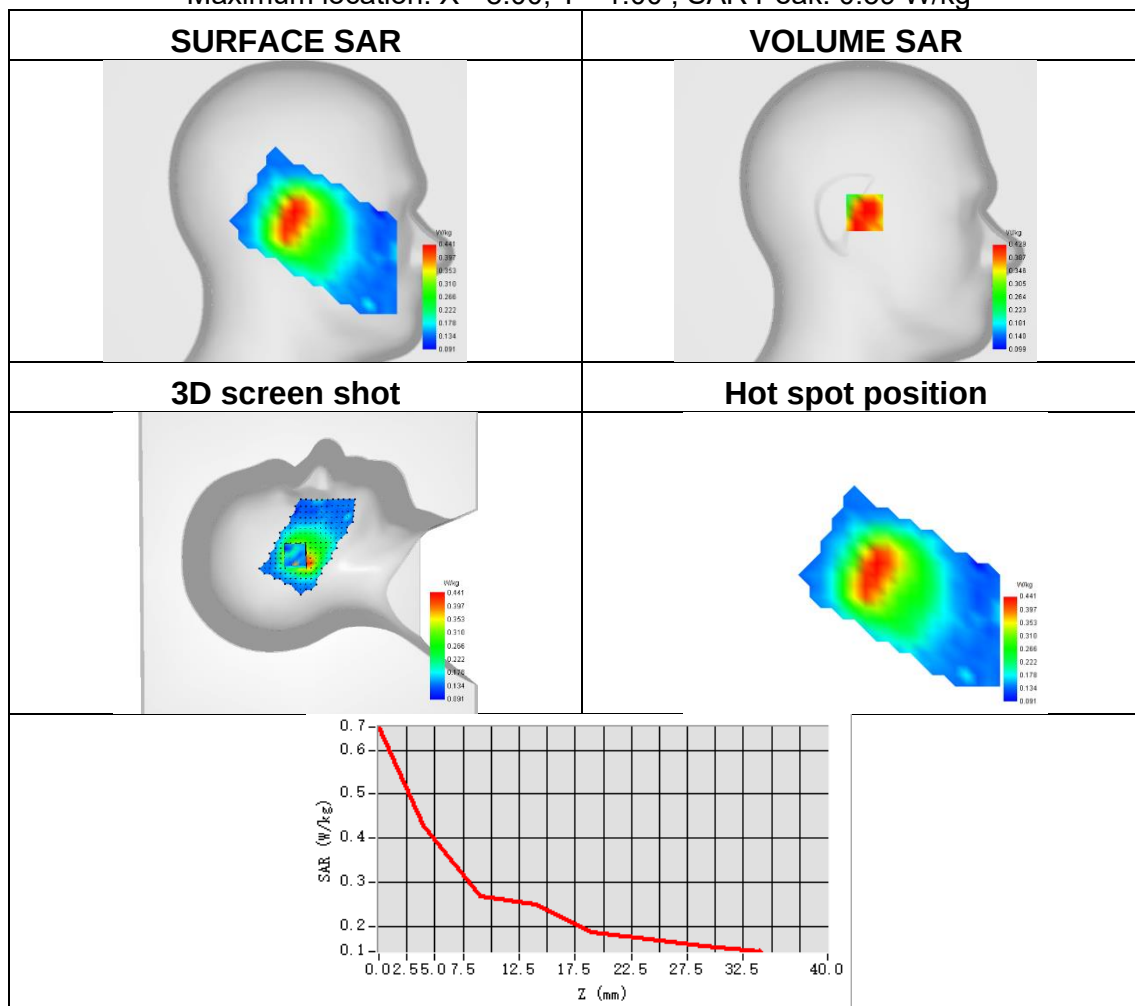




Plot 40:

Test Date	2026-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.447
SAR 1g (W/Kg)	0.693
ConvF	1.21
Relative permittivity	40.91
Conductivity (S/m)	1.37

Maximum location: X=9.00, Y=39.00 ; SAR Peak: 1.04 W/kg

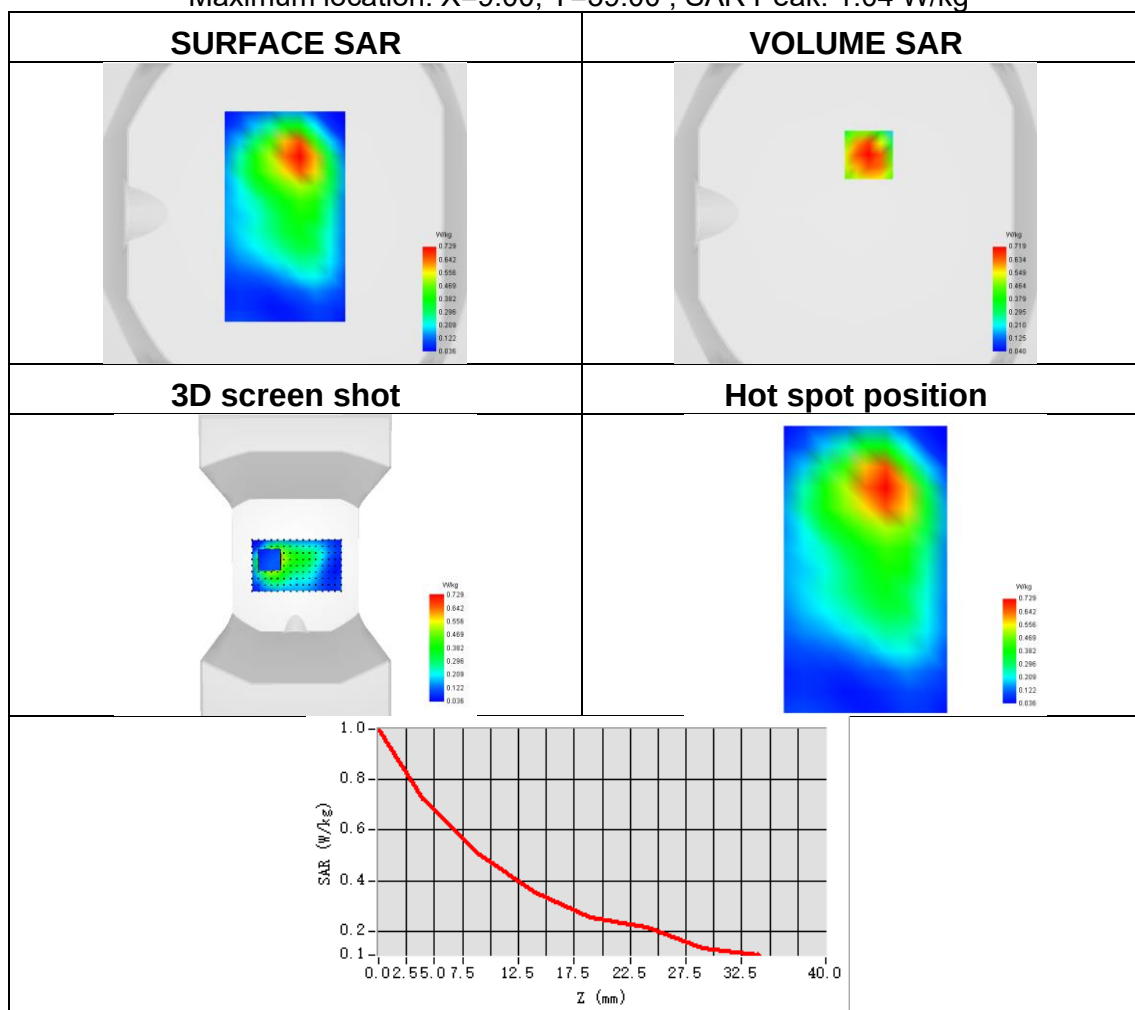




Plot 41:

Test Date	2026-04-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	824.2
SAR 10g (W/Kg)	0.146
SAR 1g (W/Kg)	0.262
ConvF	1.02
Relative permittivity	41.95
Conductivity (S/m)	0.87

Maximum location: X=16.00, Y=26.00 ; SAR Peak: 0.33 W/kg

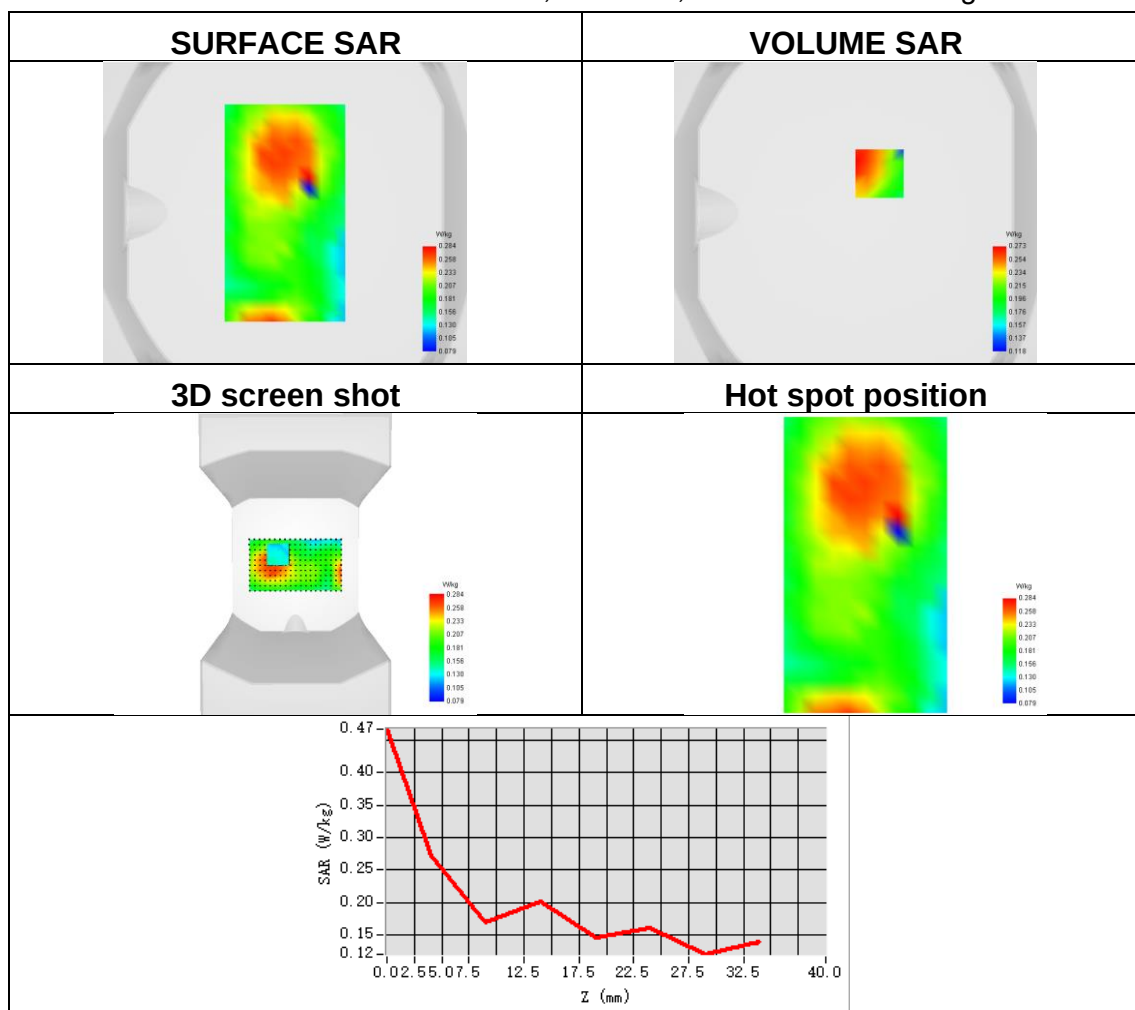




Plot 42:

Test Date	2026-04-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1850.2
SAR 10g (W/Kg)	0.156
SAR 1g (W/Kg)	0.253
ConvF	1.34
Relative permittivity	40.62
Conductivity (S/m)	1.35

Maximum location: X=21.00, Y=41.00 ; SAR Peak: 0.38 W/kg

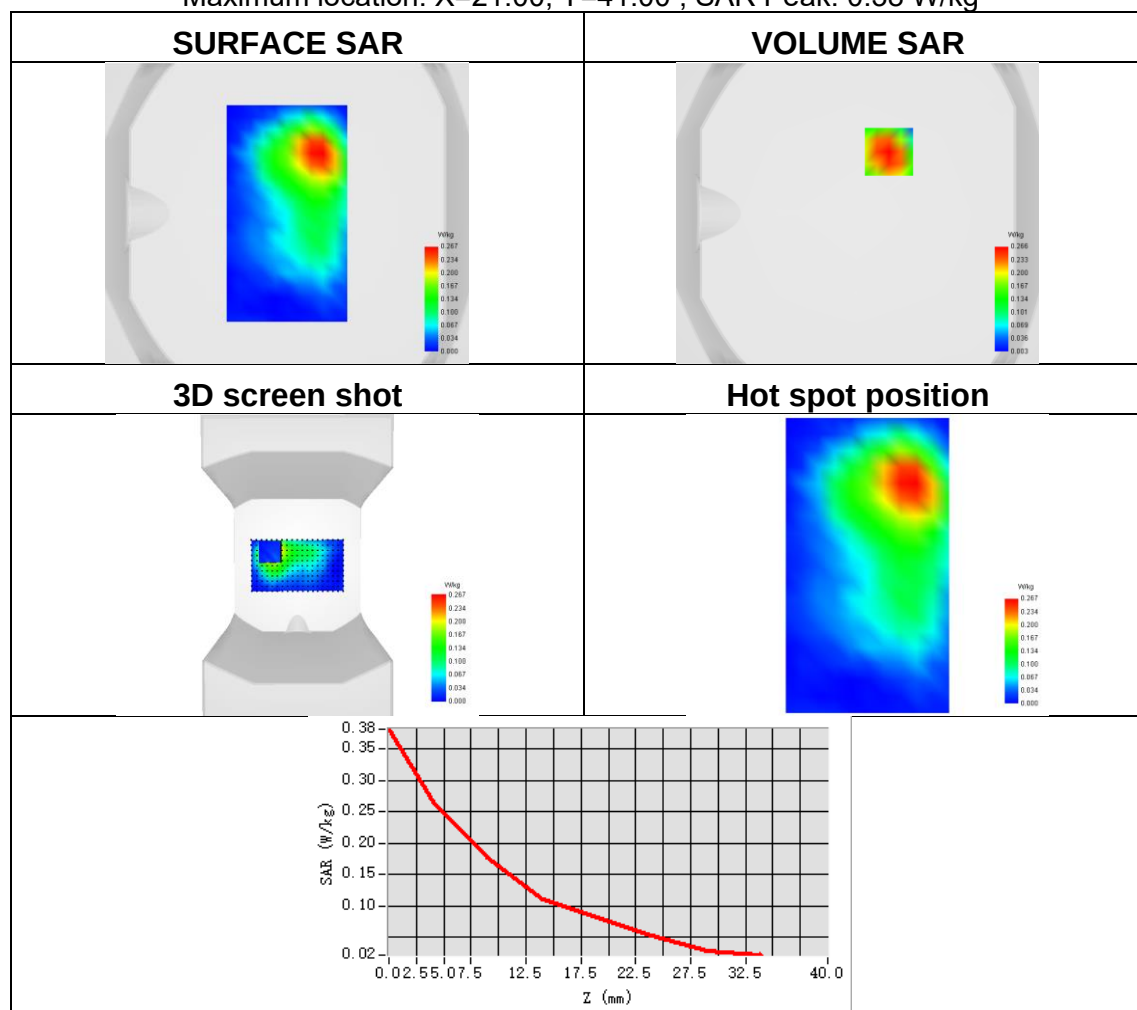




Plot 43:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1907.6
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.332
ConvF	1.34
Relative permittivity	40.25
Conductivity (S/m)	1.39

Maximum location: X=11.00, Y=49.00 ; SAR Peak: 0.49 W/kg

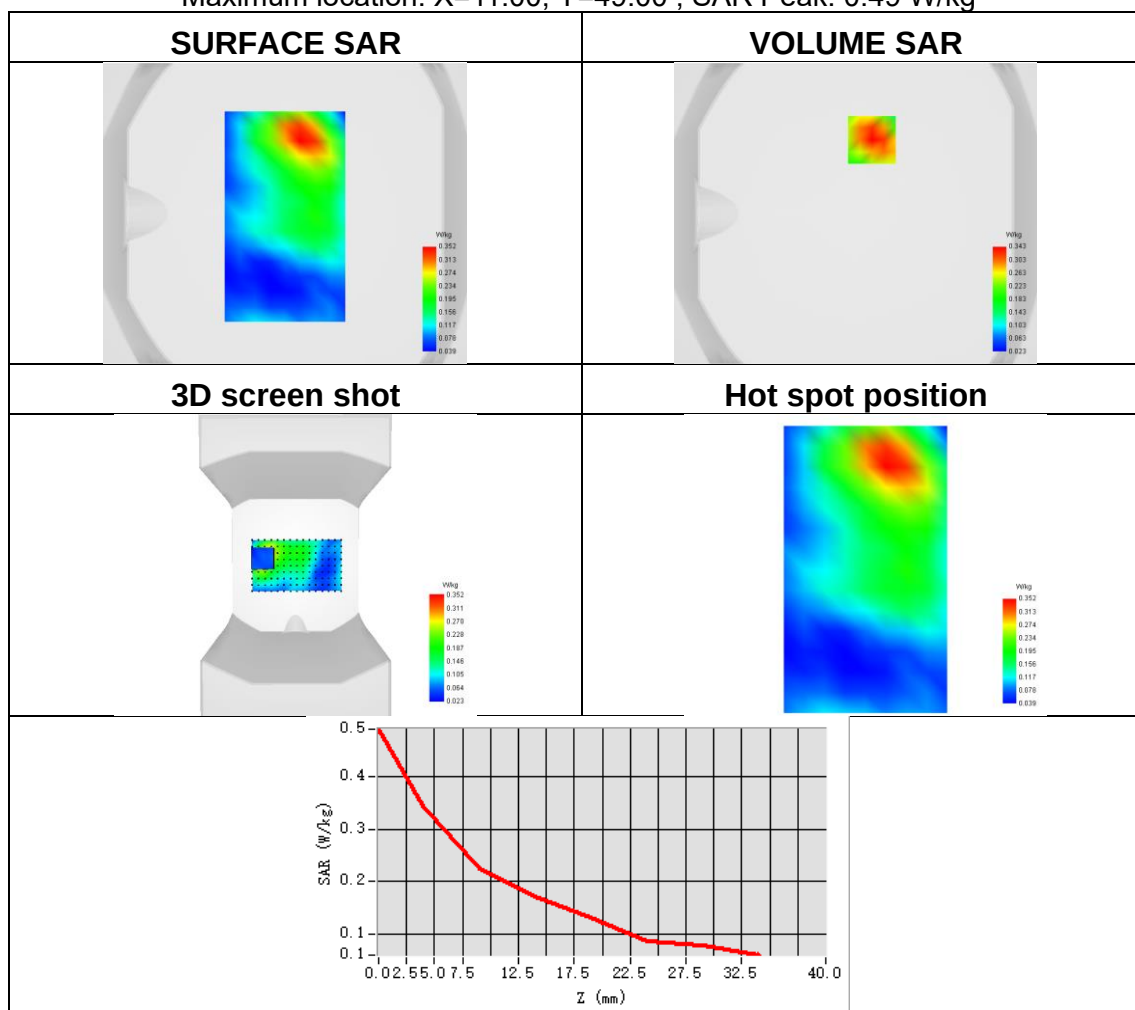




Plot 44:

Test Date	2026-04-22
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1752.4
SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.257
ConvF	1.21
Relative permittivity	40.65
Conductivity (S/m)	1.46

Maximum location: X=13.00, Y=51.00 ; SAR Peak: 0.44 W/kg

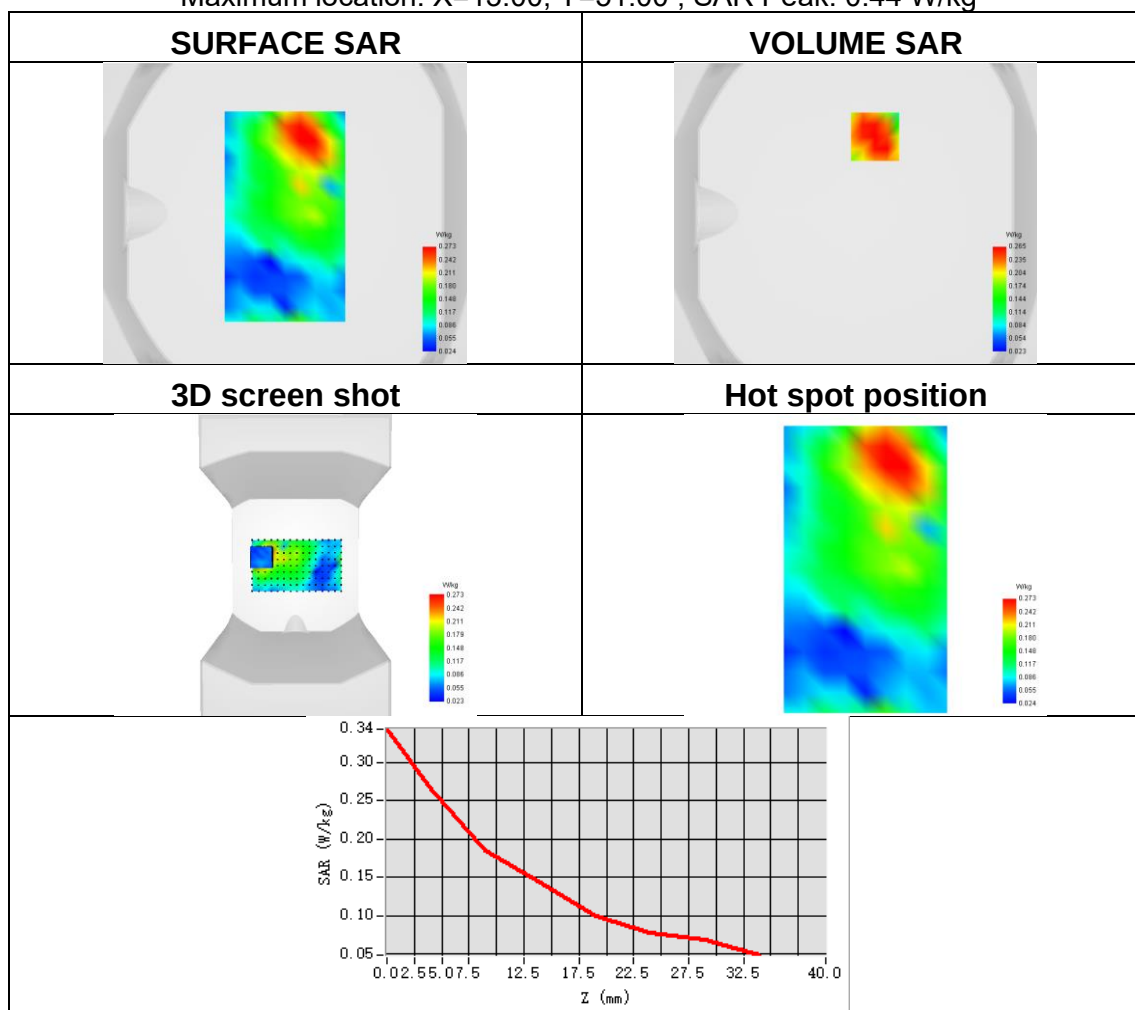




Plot 45:

Test Date	2026-04-04
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.130
ConvF	1.02
Relative permittivity	41.98
Conductivity (S/m)	0.93

Maximum location: X=-2.00, Y=-12.00 ; SAR Peak: 0.18 W/kg

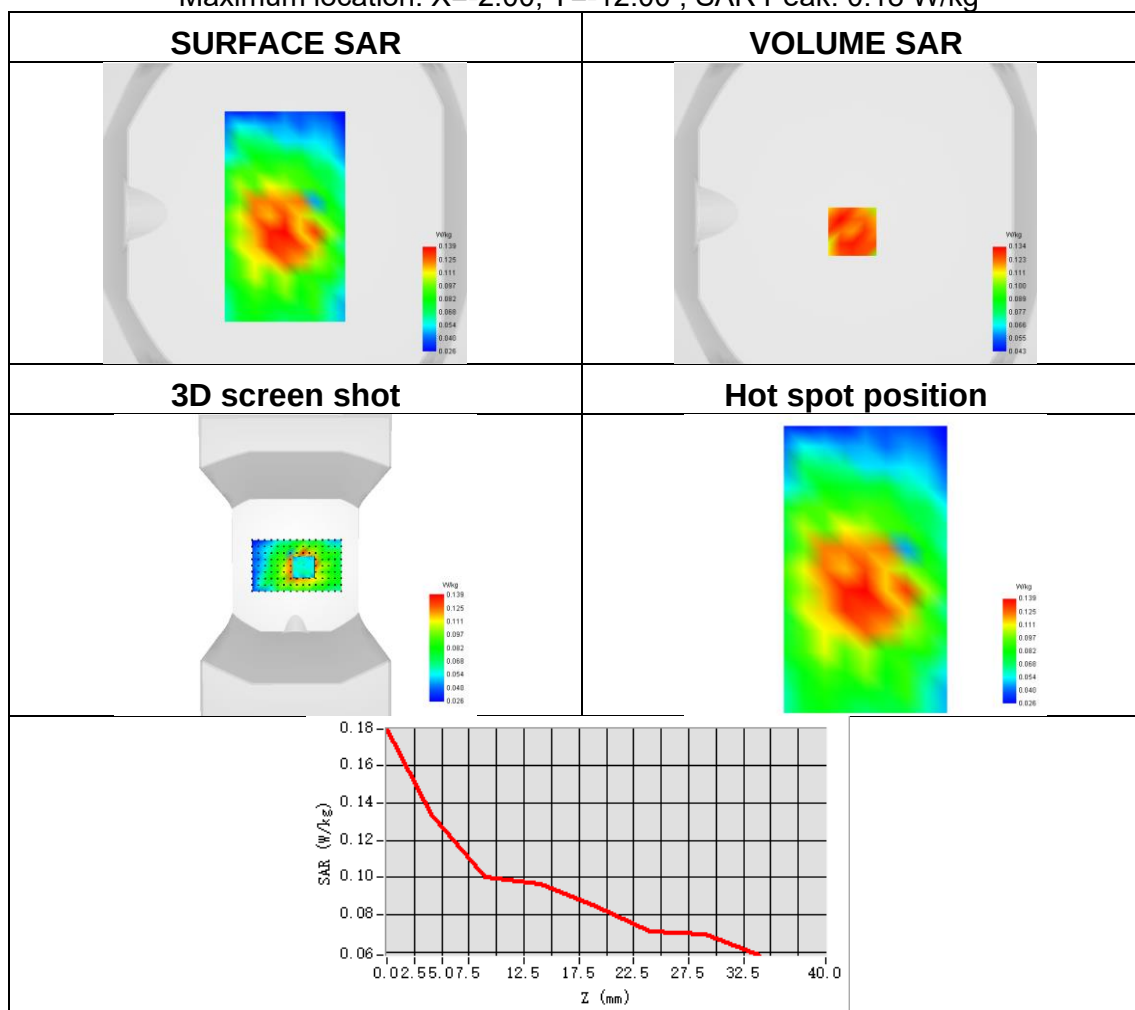




Plot 46:

Test Date	2026-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Front Side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2412
SAR 10g (W/Kg)	0.116
SAR 1g (W/Kg)	0.169
ConvF	1.51
Relative permittivity	39.84
Conductivity (S/m)	1.81

Maximum location: X=8.00, Y=-8.00 ; SAR Peak: 0.20 W/kg

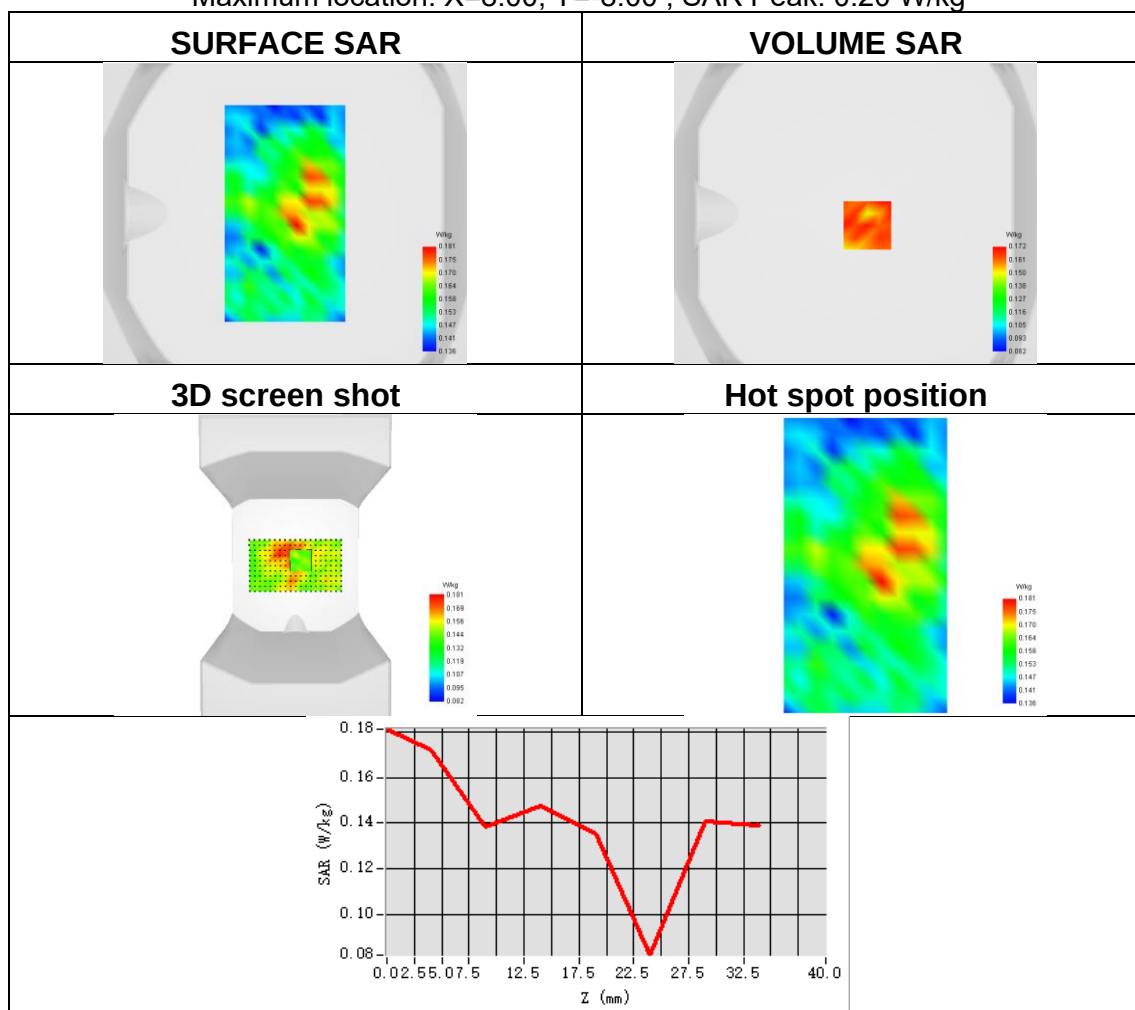




Plot 47:

Test Date	2026-03-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5180
SAR 10g (W/Kg)	0.029
SAR 1g (W/Kg)	0.040
ConvF	1.58
Relative permittivity	36.59
Conductivity (S/m)	4.64

Maximum location: X=-21.00, Y=-32.00 ; SAR Peak: 0.12 W/kg

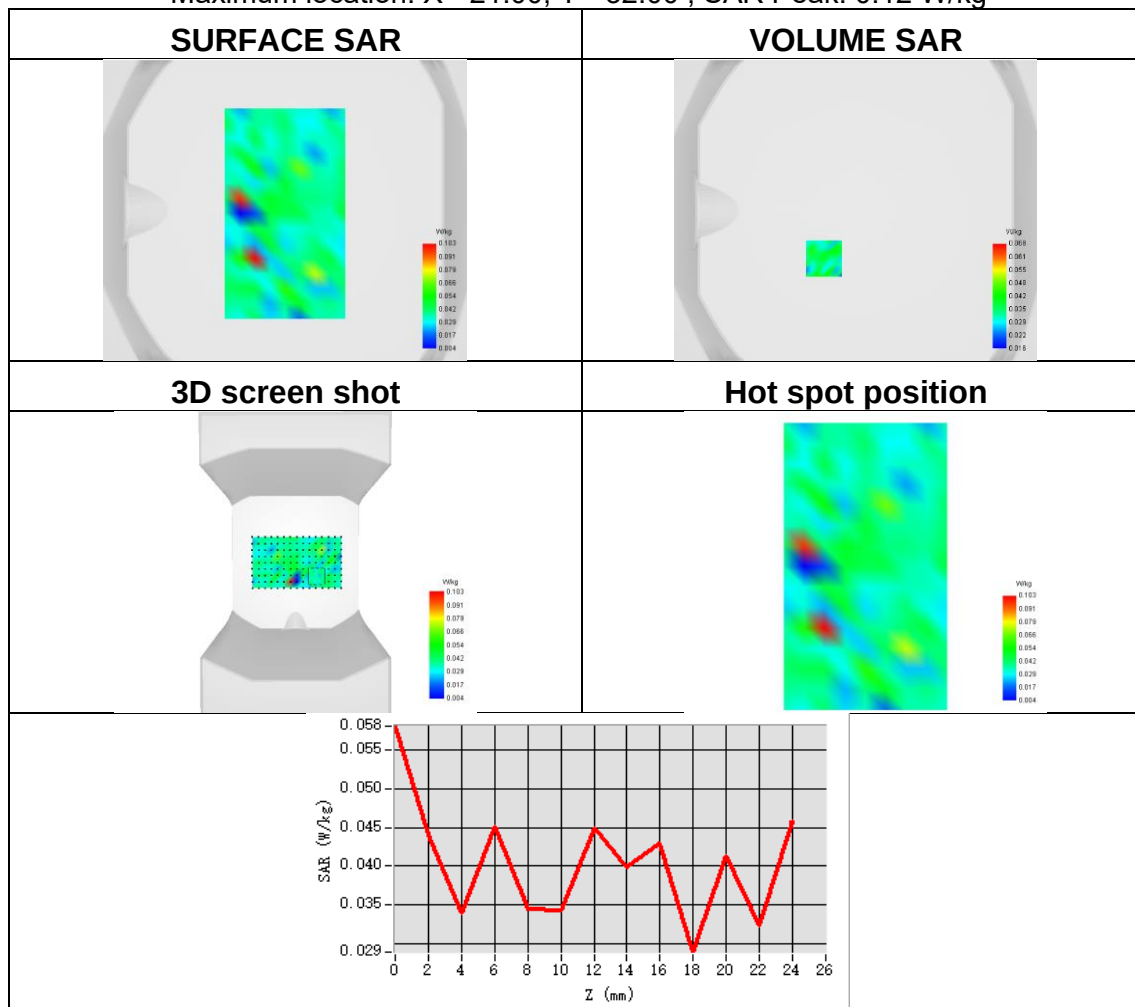




Plot 48:

Test Date	2026-03-20
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a
Signal	IEEE 802.11 a
Frequency	5260
SAR 10g (W/Kg)	0.026
SAR 1g (W/Kg)	0.039
ConvF	1.60
Relative permittivity	36.08
Conductivity (S/m)	4.87

Maximum location: X=16.00, Y=-8.00 ; SAR Peak: 0.11 W/kg

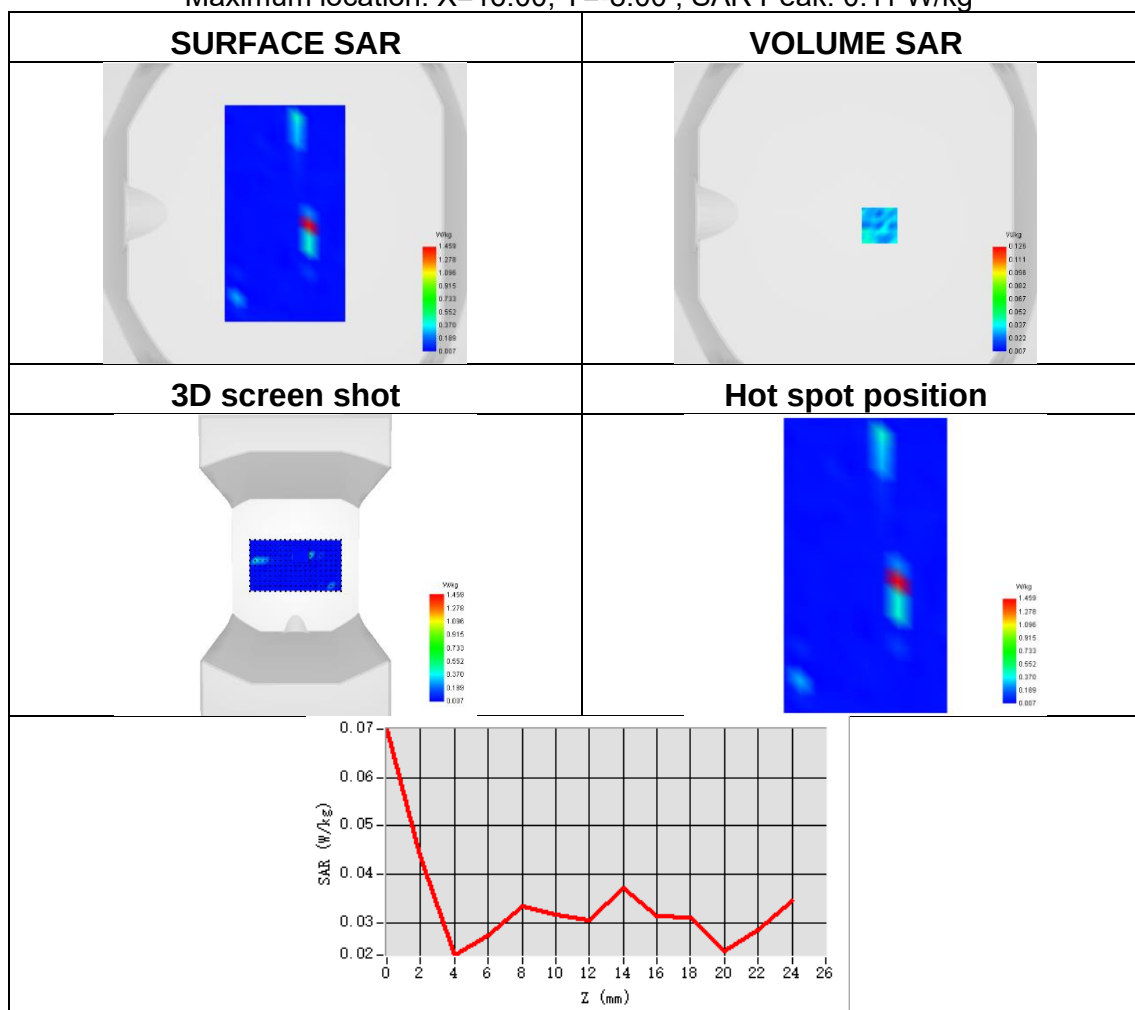




Plot 49:

Test Date	2026-04-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.023
SAR 1g (W/Kg)	0.046
ConvF	1.63
Relative permittivity	36.76
Conductivity (S/m)	5.09

Maximum location: X=16.00, Y=8.00 ; SAR Peak: 0.26 W/kg

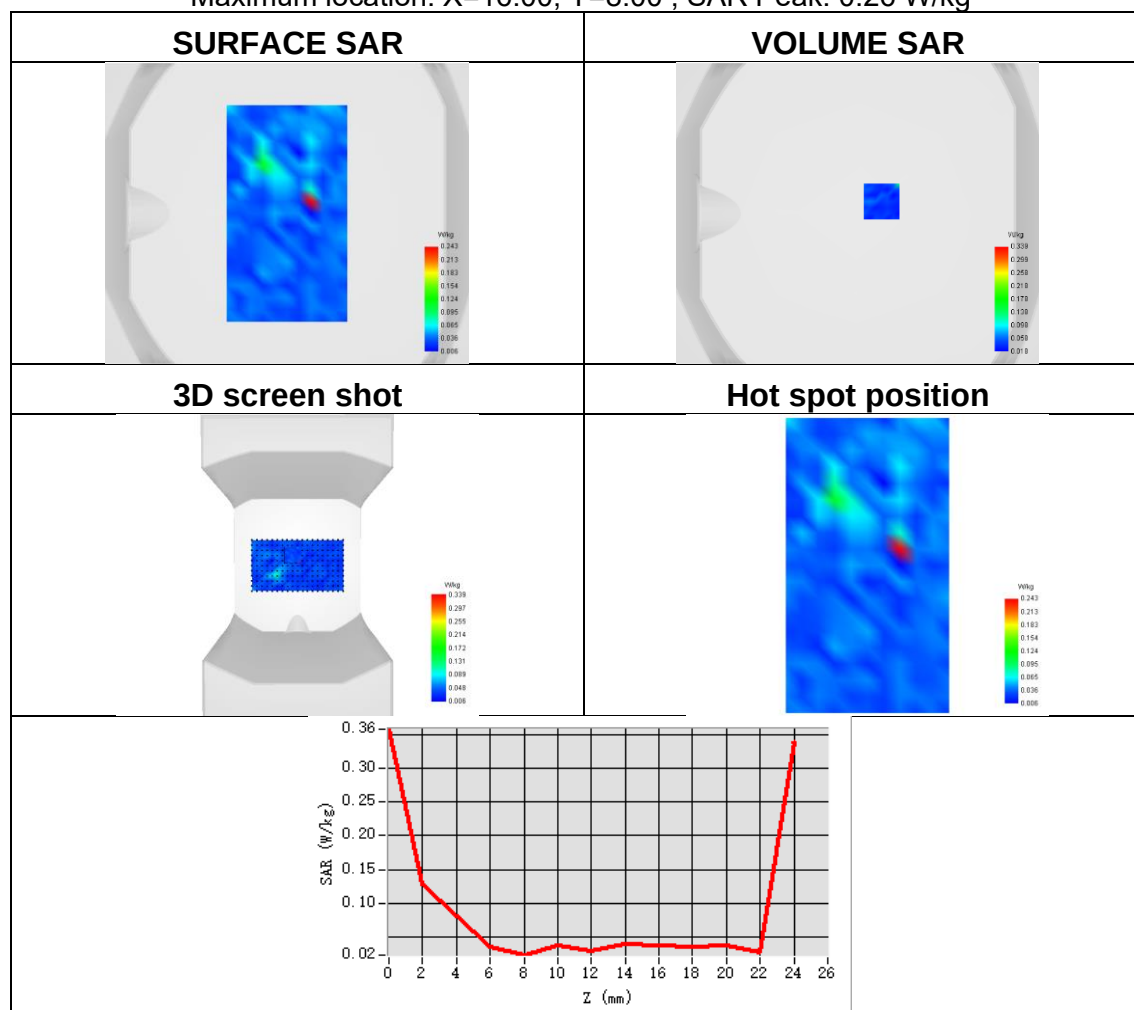




Plot 50:

Test Date	2026-04-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5825
SAR 10g (W/Kg)	0.029
SAR 1g (W/Kg)	0.077
ConvF	1.62
Relative permittivity	36.55
Conductivity (S/m)	5.20

Maximum location: X=0.00, Y=28.00 ; SAR Peak: 0.34 W/kg

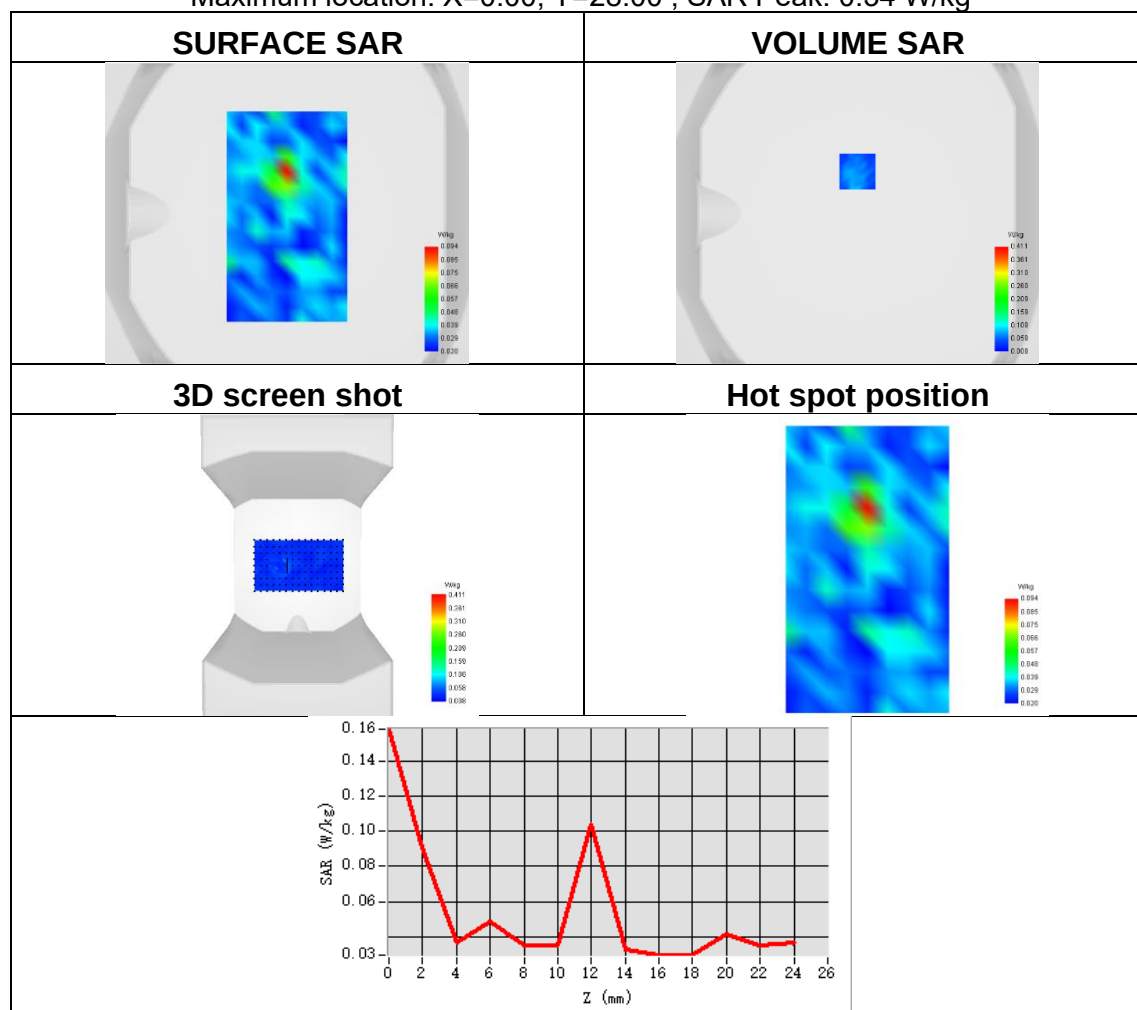




Plot 51:

Test Date	2026-04-21
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.328
ConvF	1.34
Relative permittivity	40.62
Conductivity (S/m)	1.35

Maximum location: X=11.00, Y=50.00 ; SAR Peak: 0.50 W/kg

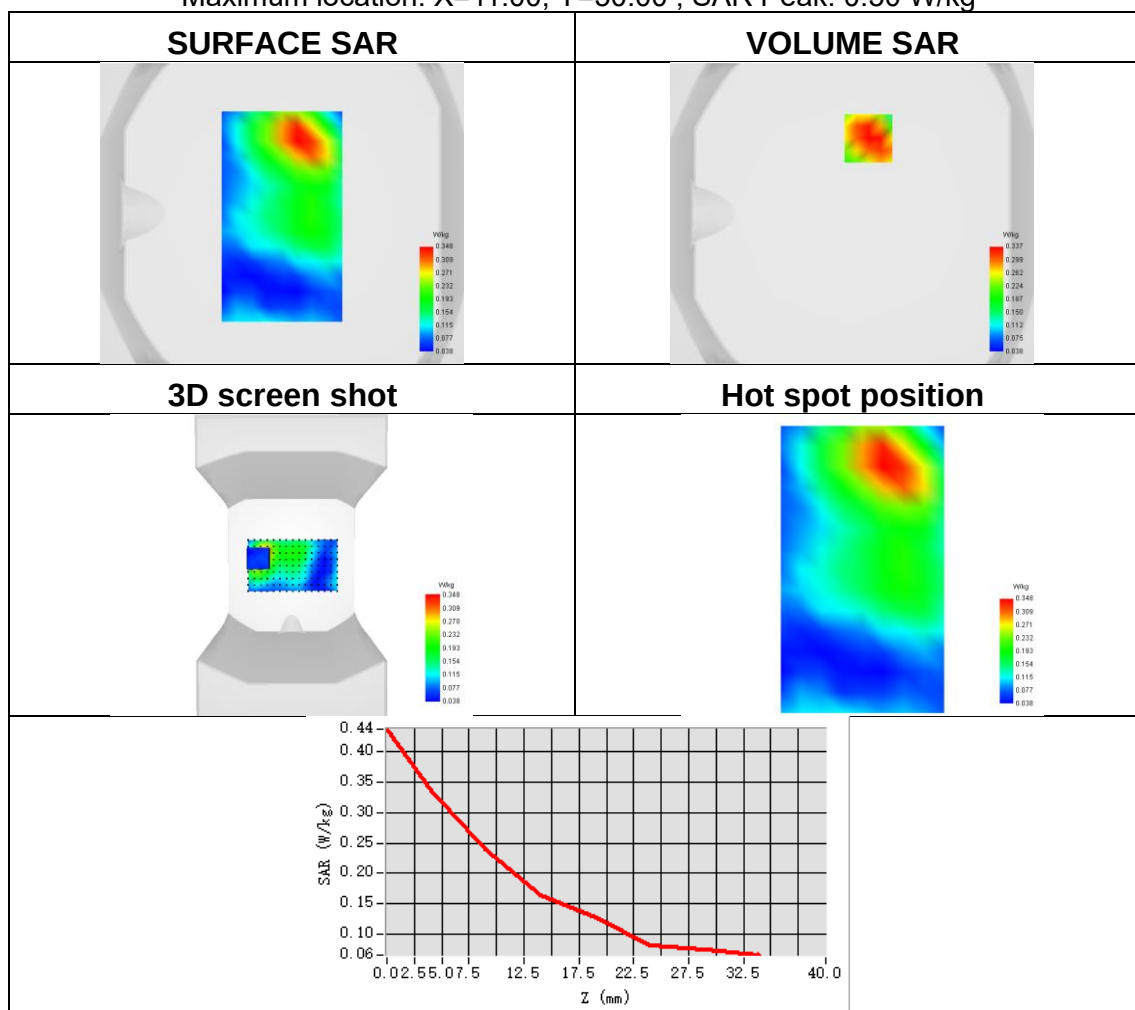




Plot 52:

Test Date	2026-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.266
ConvF	1.21
Relative permittivity	40.91
Conductivity (S/m)	1.37

Maximum location: X=12.00, Y=48.00 ; SAR Peak: 0.39 W/kg

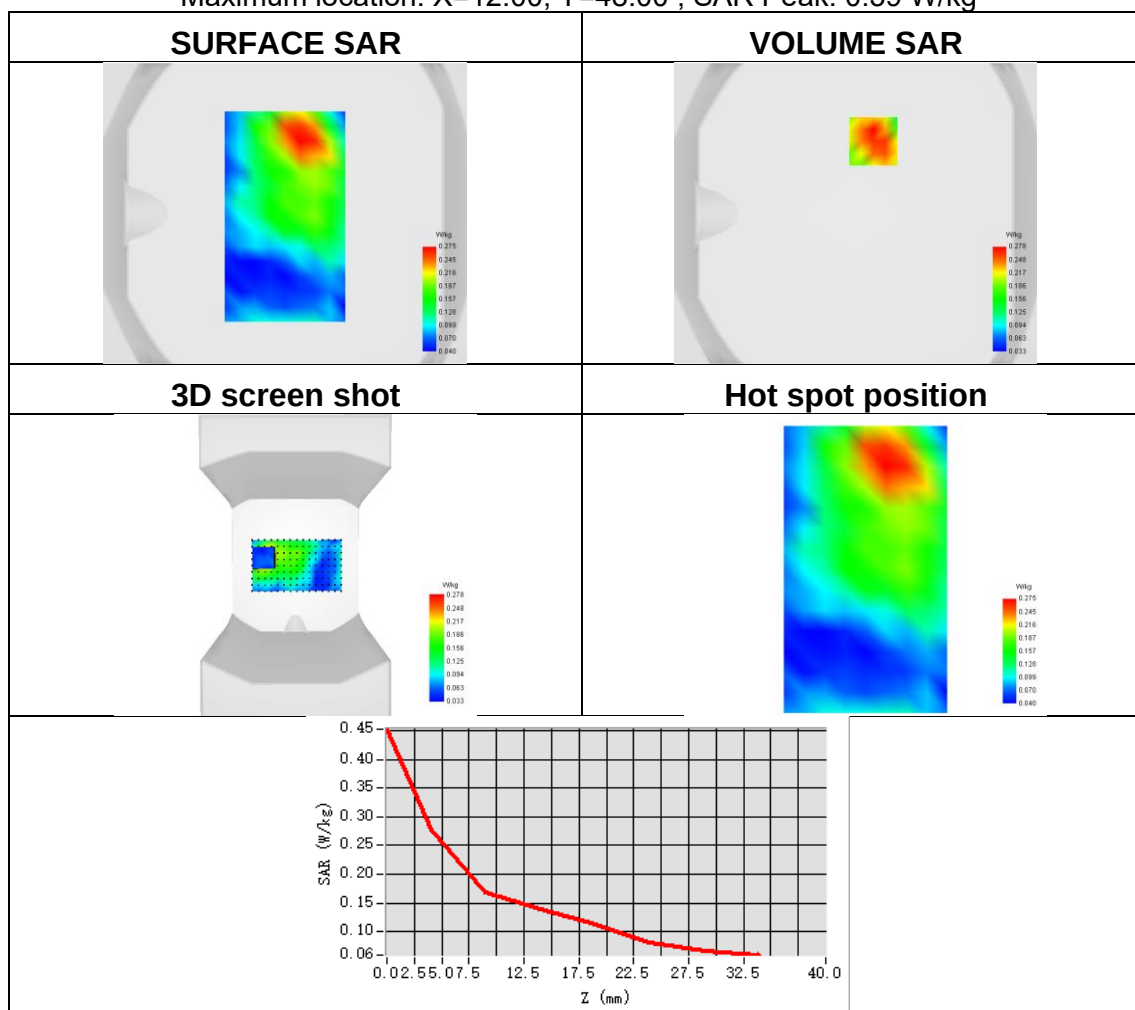




Plot 53:

Test Date	2026-04-19
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.123
ConvF	1.02
Relative permittivity	41.95
Conductivity (S/m)	0.87

Maximum location: X=-20.00, Y=-32.00 ; SAR Peak: 0.16 W/kg

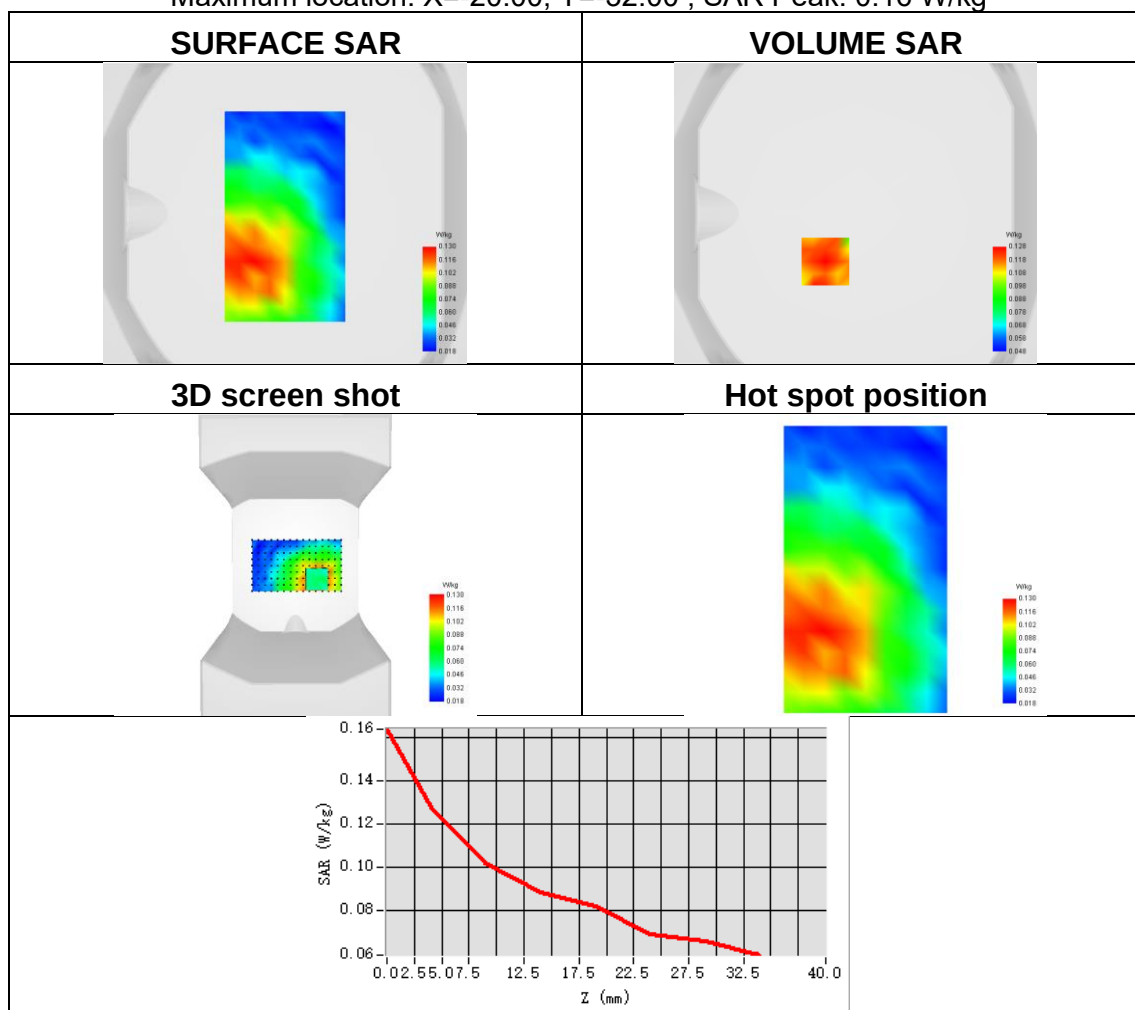




Plot 54:

Test Date	2026-04-23
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.217
ConvF	1.44
Relative permittivity	39.84
Conductivity (S/m)	1.81

Maximum location: X=10.00, Y=48.00 ; SAR Peak: 0.33 W/kg

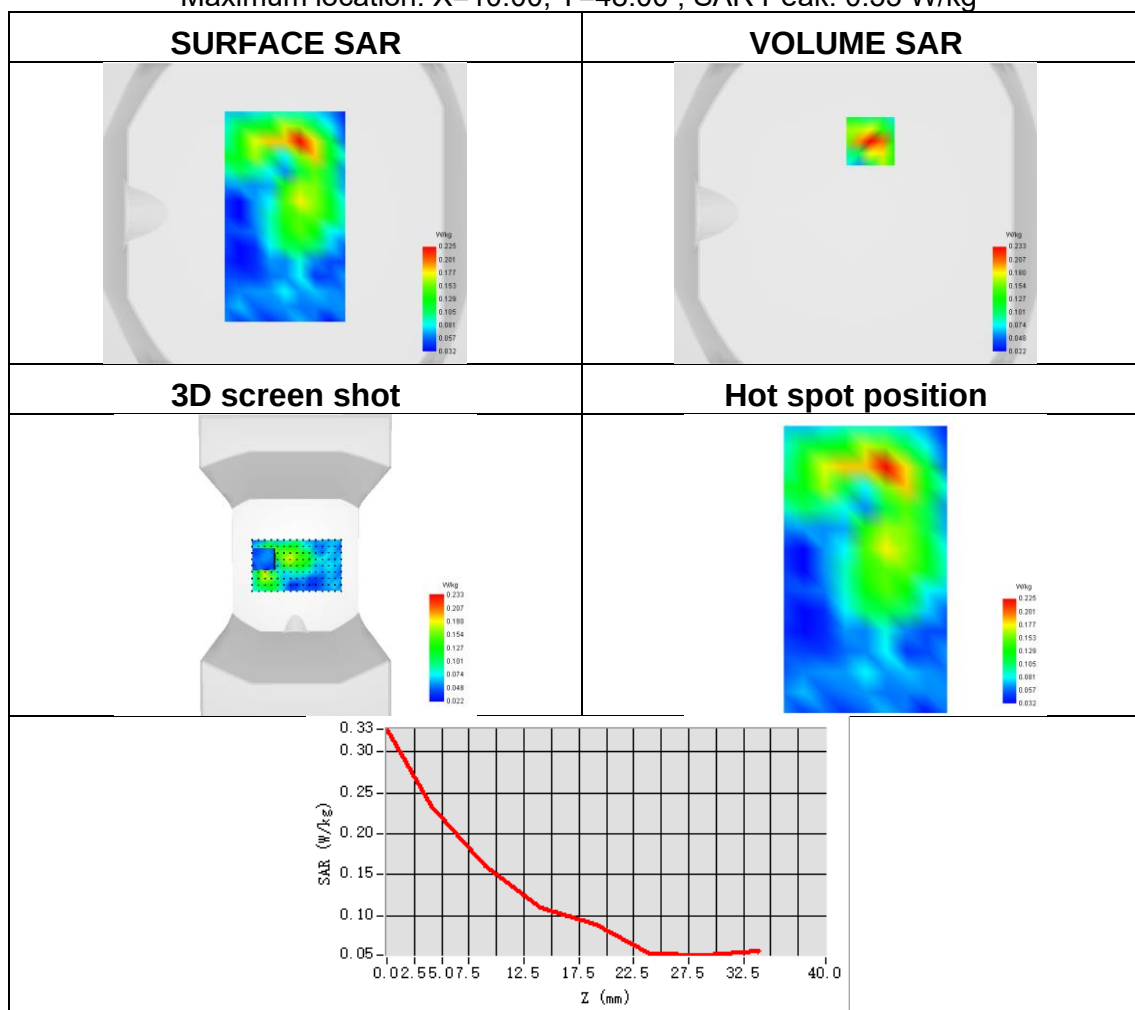




Plot 55:

Test Date	2026-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.215
ConvF	1.08
Relative permittivity	42.02
Conductivity (S/m)	0.90

Maximum location: X=-20.00, Y=-44.00 ; SAR Peak: 0.26 W/kg

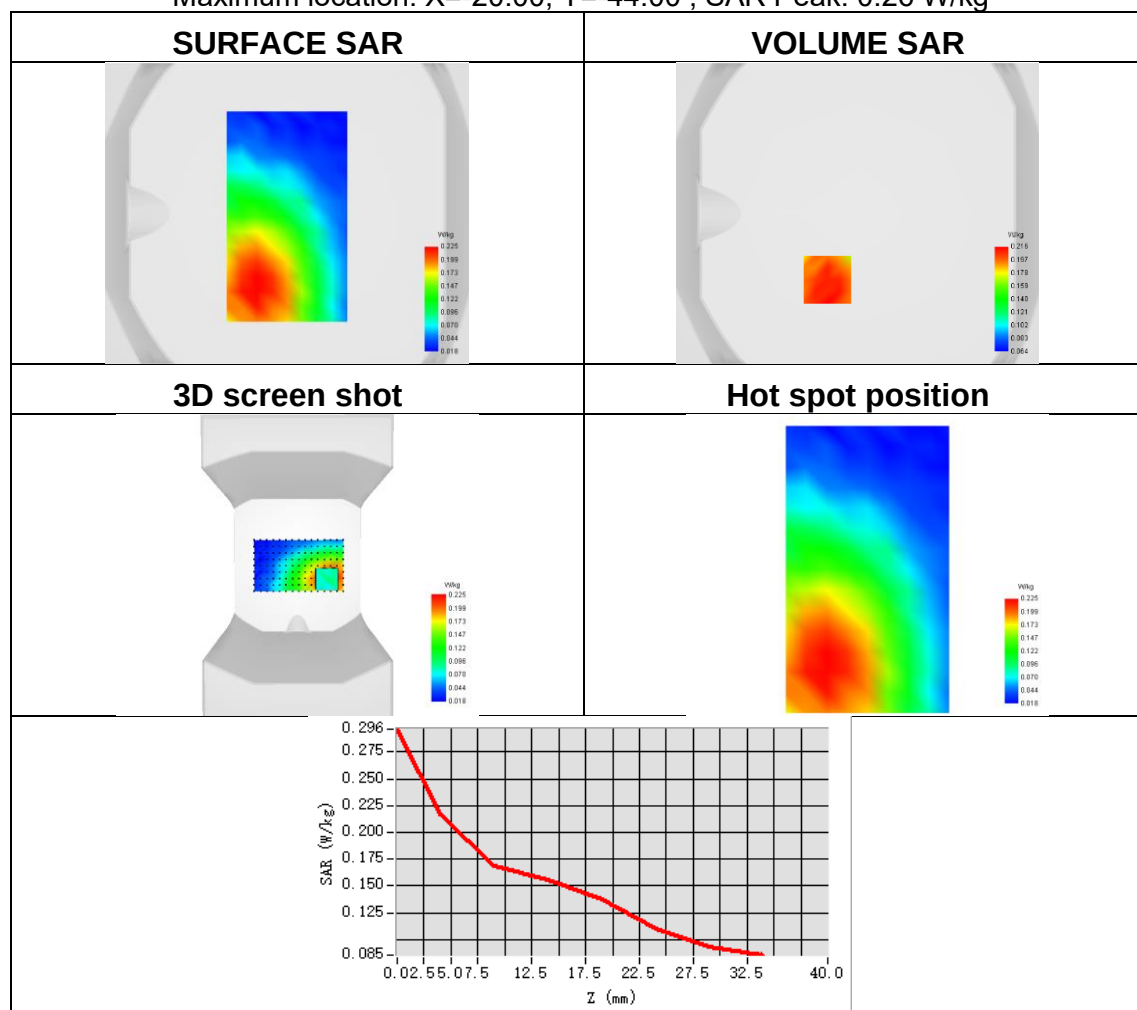




Plot 56:

Test Date	2026-04-18
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.153
ConvF	1.08
Relative permittivity	42.34
Conductivity (S/m)	0.87

Maximum location: X=-22.00, Y=-43.00 ; SAR Peak: 0.19 W/kg

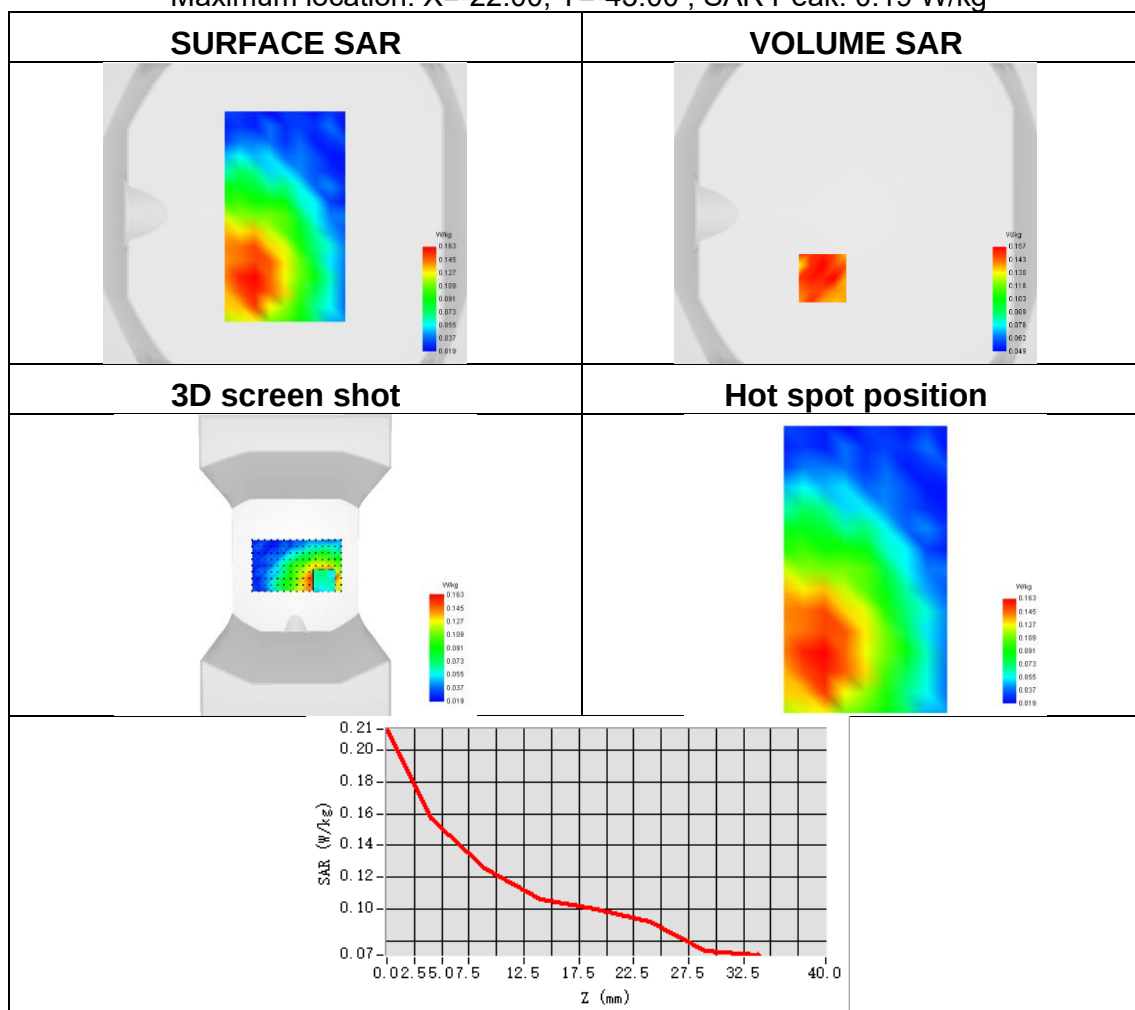




Plot 57:

Test Date	2026-04-07
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.156
ConvF	1.08
Relative permittivity	42.02
Conductivity (S/m)	0.90

Maximum location: X=10.00, Y=-41.00 ; SAR Peak: 0.22 W/kg

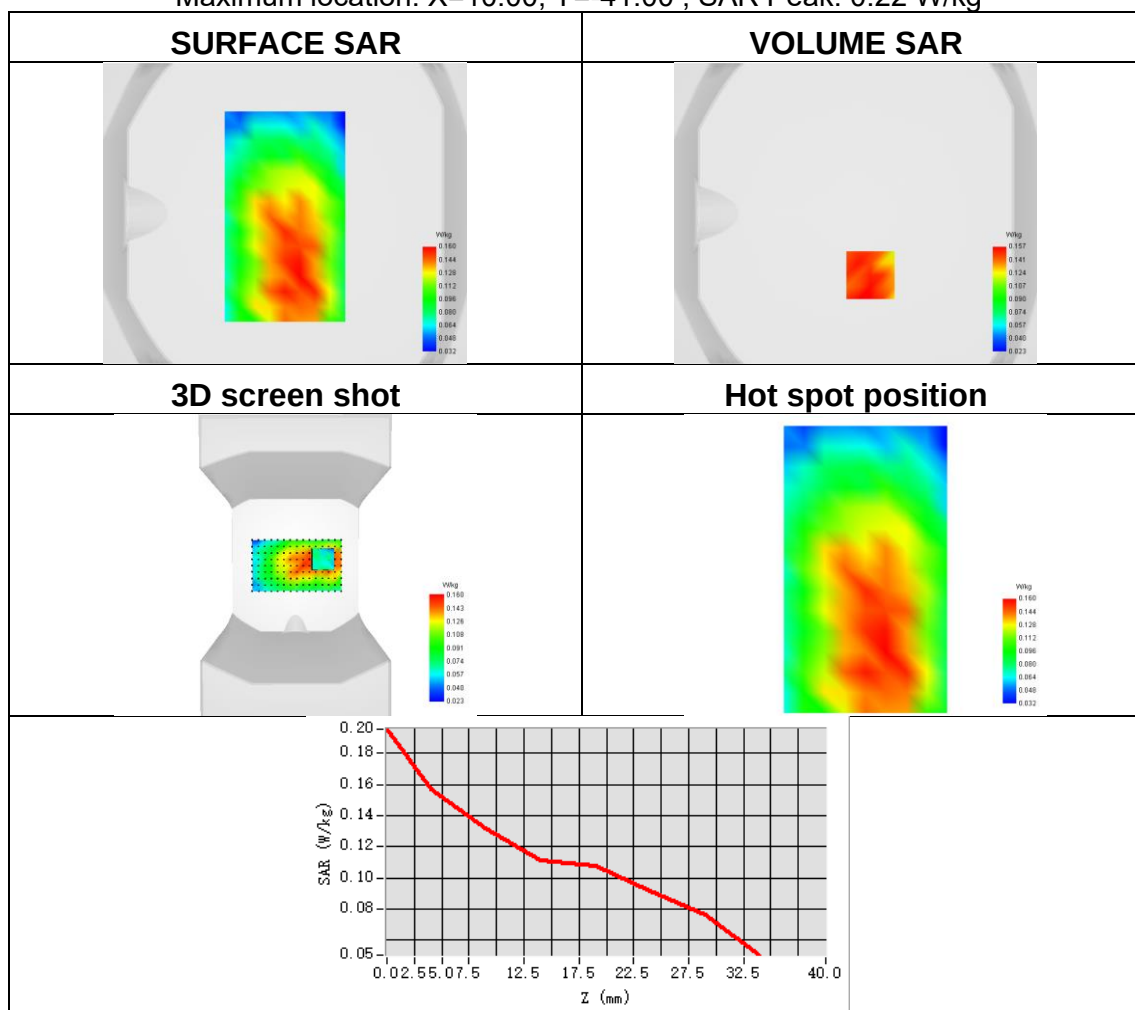




Plot 58:

Test Date	2026-03-31
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE FDD
Frequency	2610
SAR 10g (W/Kg)	0.071
SAR 1g (W/Kg)	0.125
ConvF	1.44
Relative permittivity	39.81
Conductivity (S/m)	1.99

Maximum location: X=-10.00, Y=7.00 ; SAR Peak: 0.20 W/kg

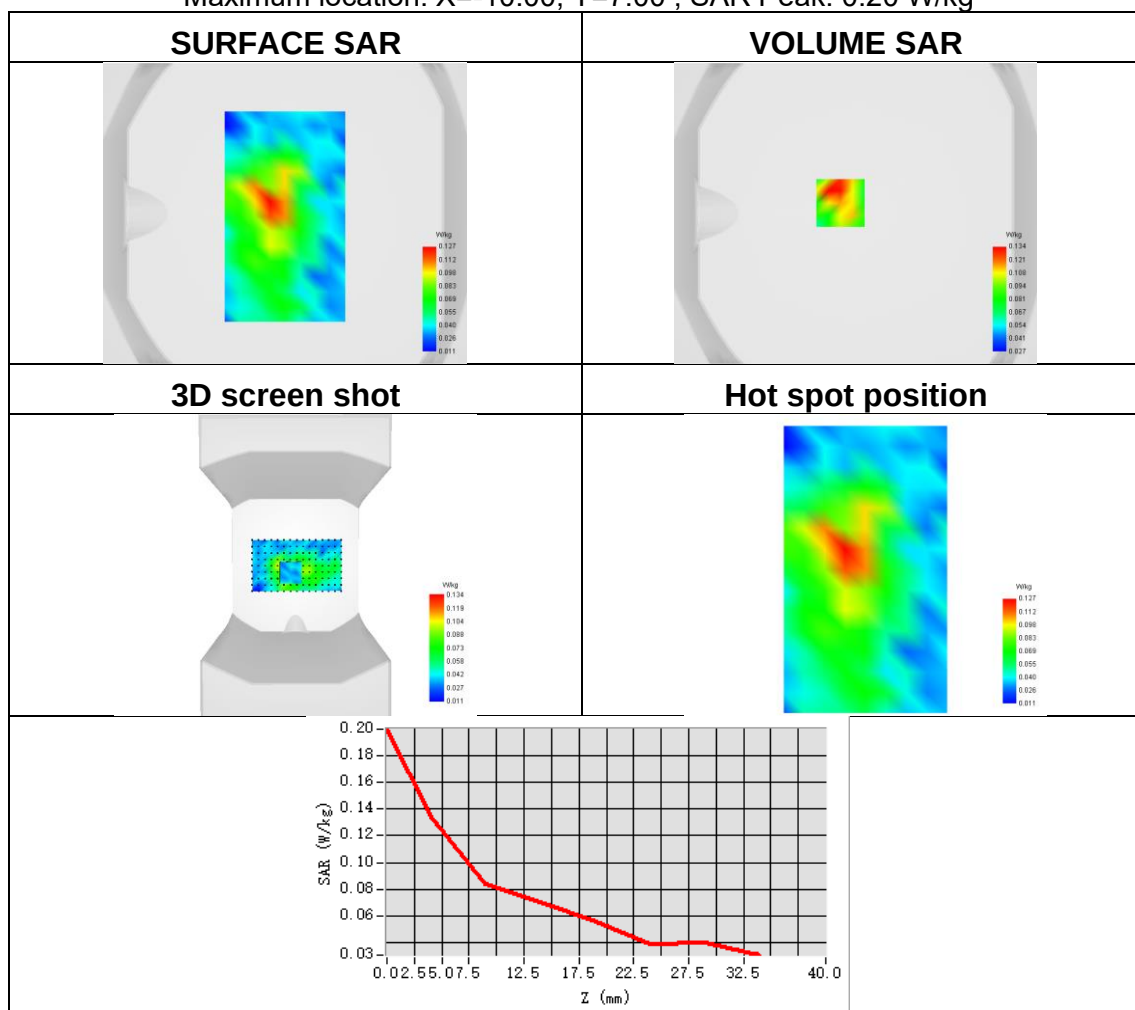




Plot 59:

Test Date	2026-04-15
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2310
SAR 10g (W/Kg)	0.066
SAR 1g (W/Kg)	0.108
ConvF	1.47
Relative permittivity	39.75
Conductivity (S/m)	1.64

Maximum location: X=17.00, Y=9.00 ; SAR Peak: 0.24 W/kg

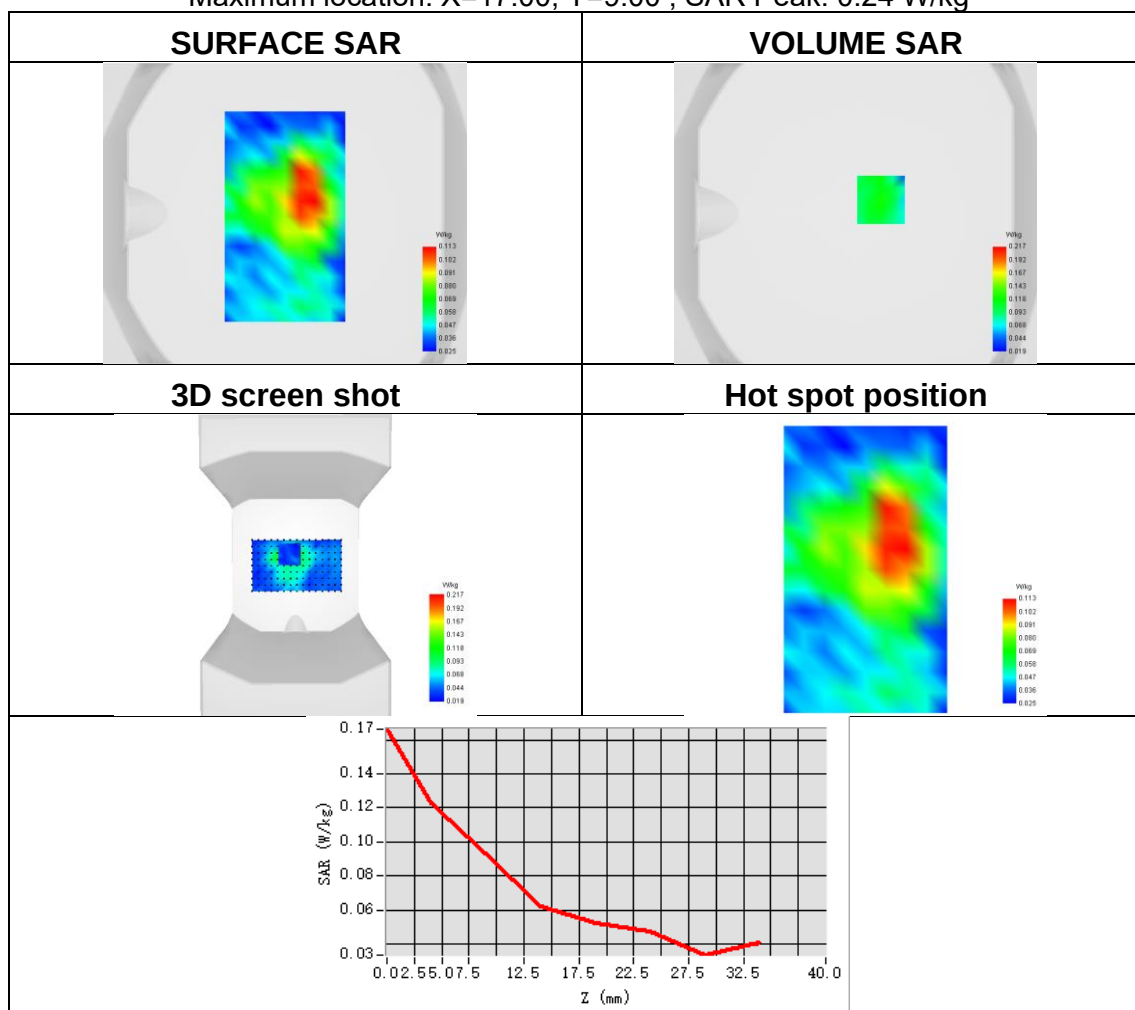




Plot 60:

Test Date	2026-03-24
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.239
SAR 1g (W/Kg)	0.371
ConvF	1.21
Relative permittivity	40.91
Conductivity (S/m)	1.37

Maximum location: X=10.00, Y=40.00 ; SAR Peak: 0.56 W/kg

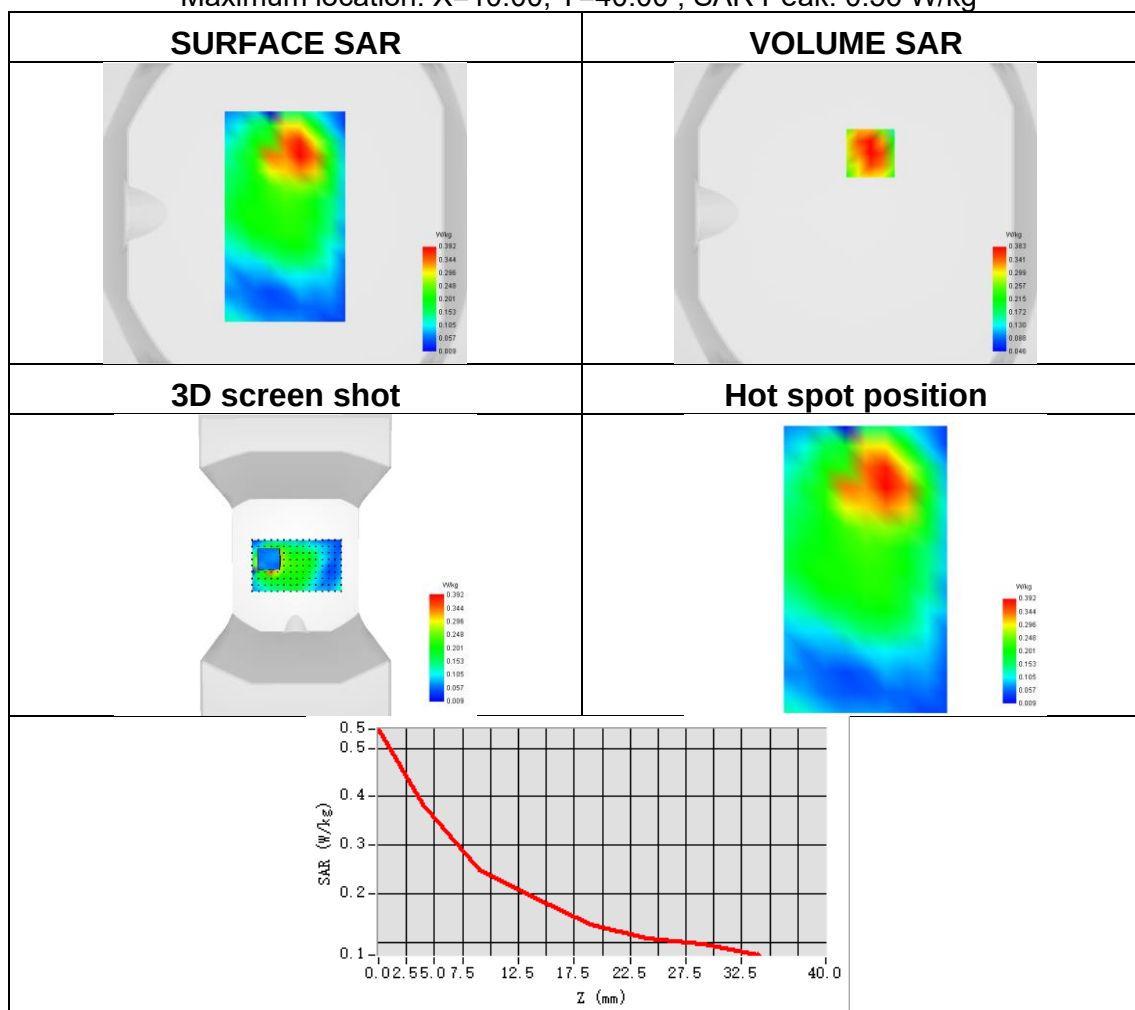



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※