




Plot 32:

Test Date	2026-04-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.168
ConvF	1.08
Relative permittivity	42.27
Conductivity (S/m)	0.93

Maximum location: X=-10.00, Y=-22.00 ; SAR Peak: 0.22 W/kg

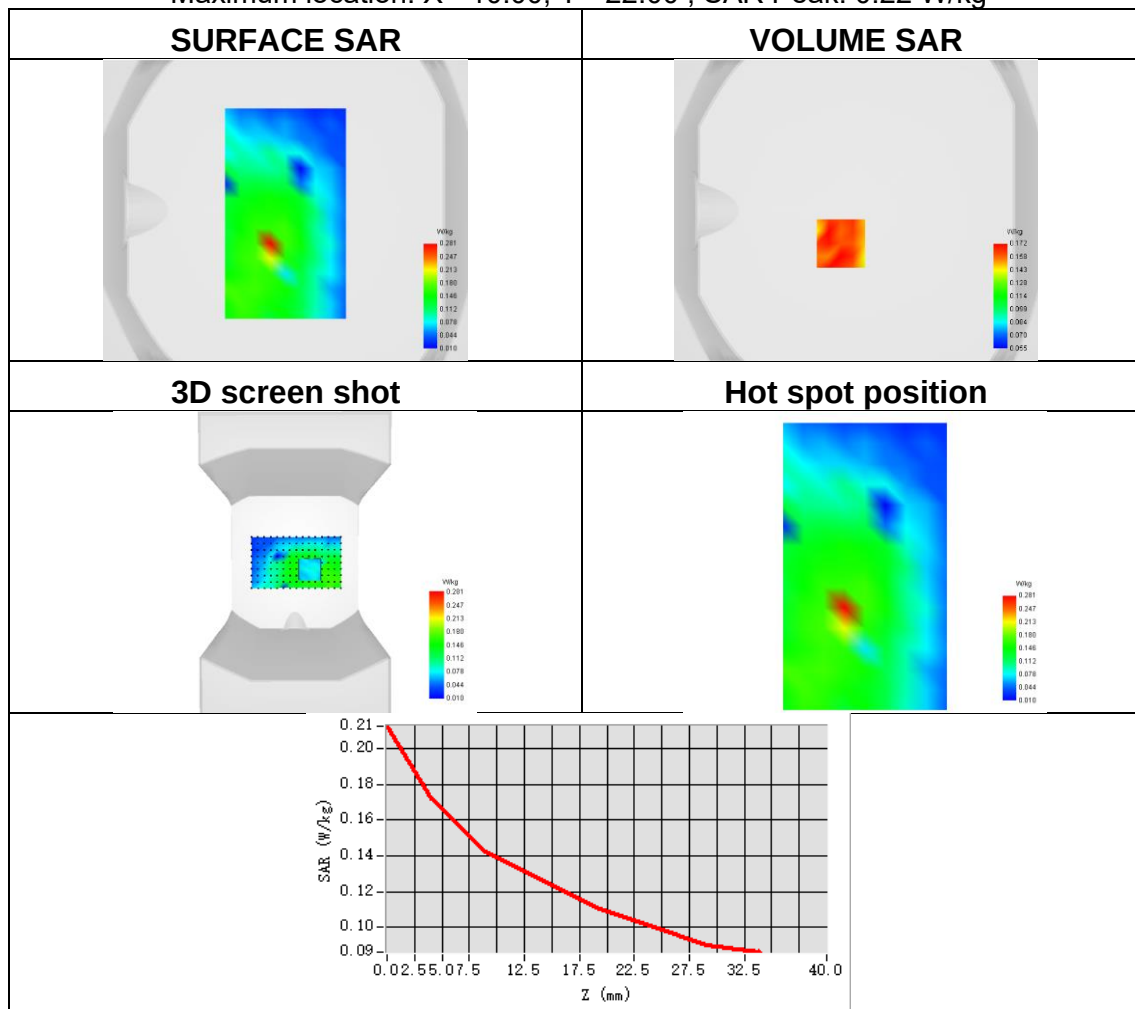




Plot 33:

Test Date	2026-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Right head
Device Position	Cheek
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.207
SAR 1g (W/Kg)	0.276
ConvF	1.08
Relative permittivity	42.23
Conductivity (S/m)	0.88

Maximum location: X=-48.00, Y=-38.00 ; SAR Peak: 0.35 W/kg

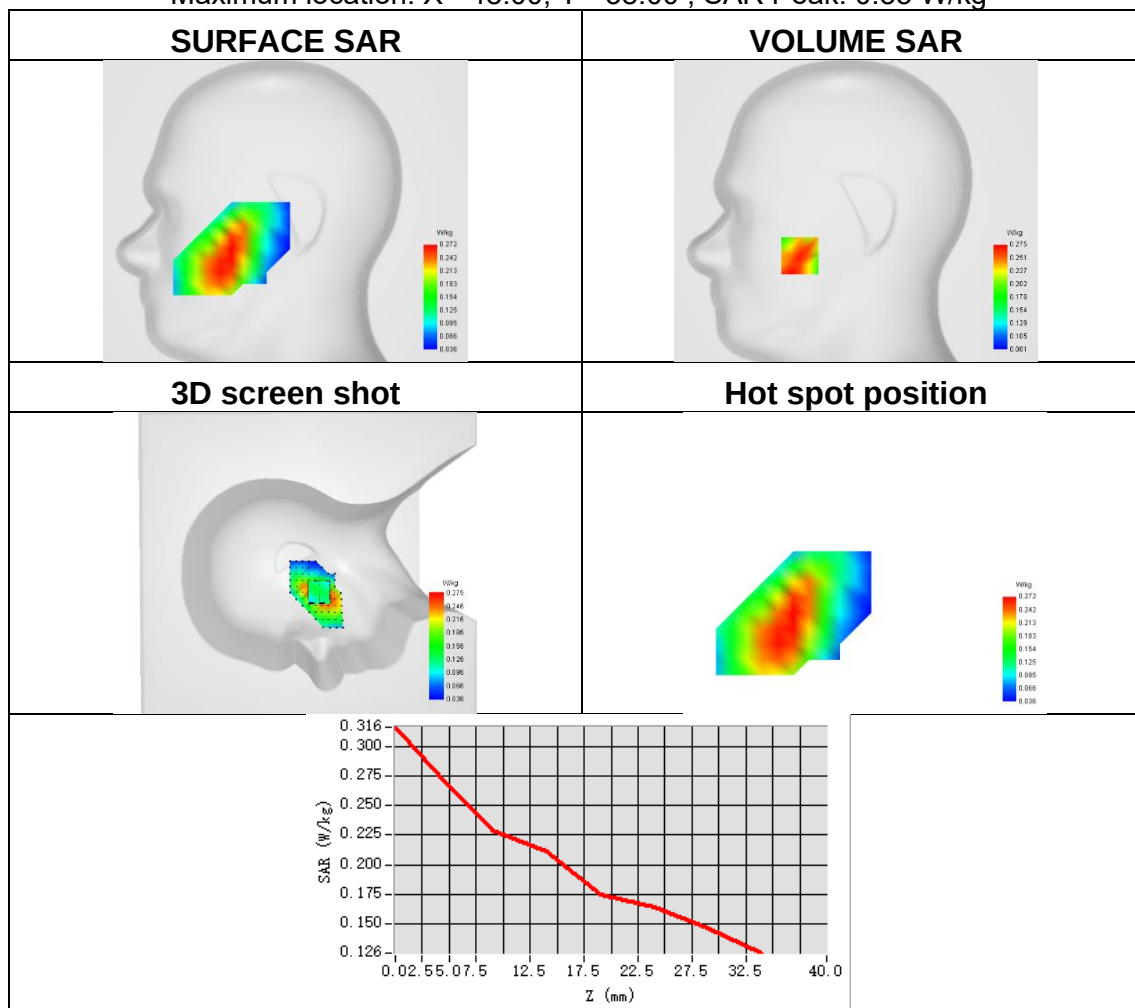




Plot 34:

Test Date	2026-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.175
SAR 1g (W/Kg)	0.271
ConvF	1.08
Relative permittivity	42.23
Conductivity (S/m)	0.88

Maximum location: X=-19.00, Y=-43.00 ; SAR Peak: 0.34 W/kg

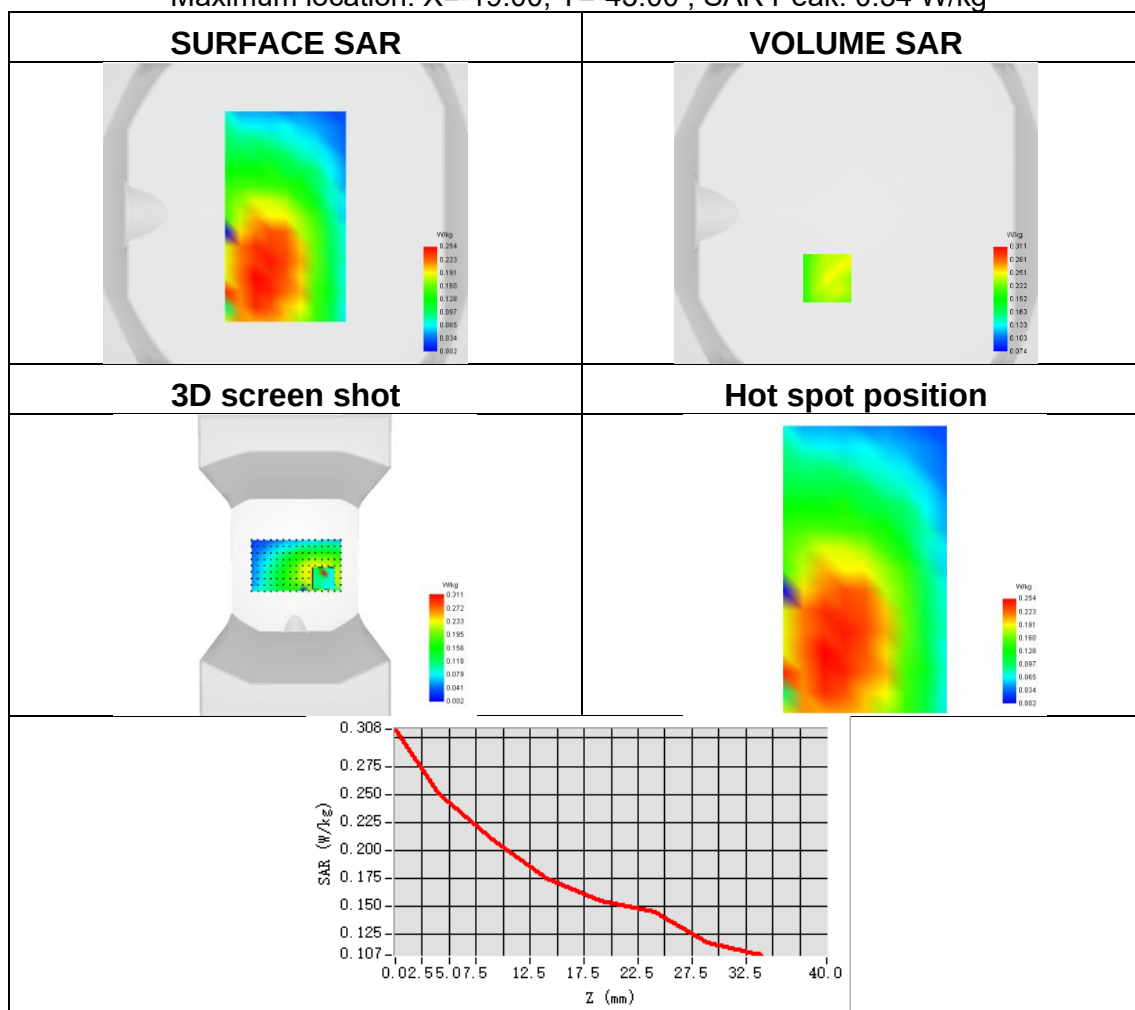




Plot 35:

Test Date	2026-03-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 38
Signal	LTE FDD
Frequency	2610
SAR 10g (W/Kg)	0.264
SAR 1g (W/Kg)	0.579
ConvF	1.44
Relative permittivity	39.25
Conductivity (S/m)	1.93

Maximum location: X=-16.00, Y=-2.00 ; SAR Peak: 1.10 W/kg

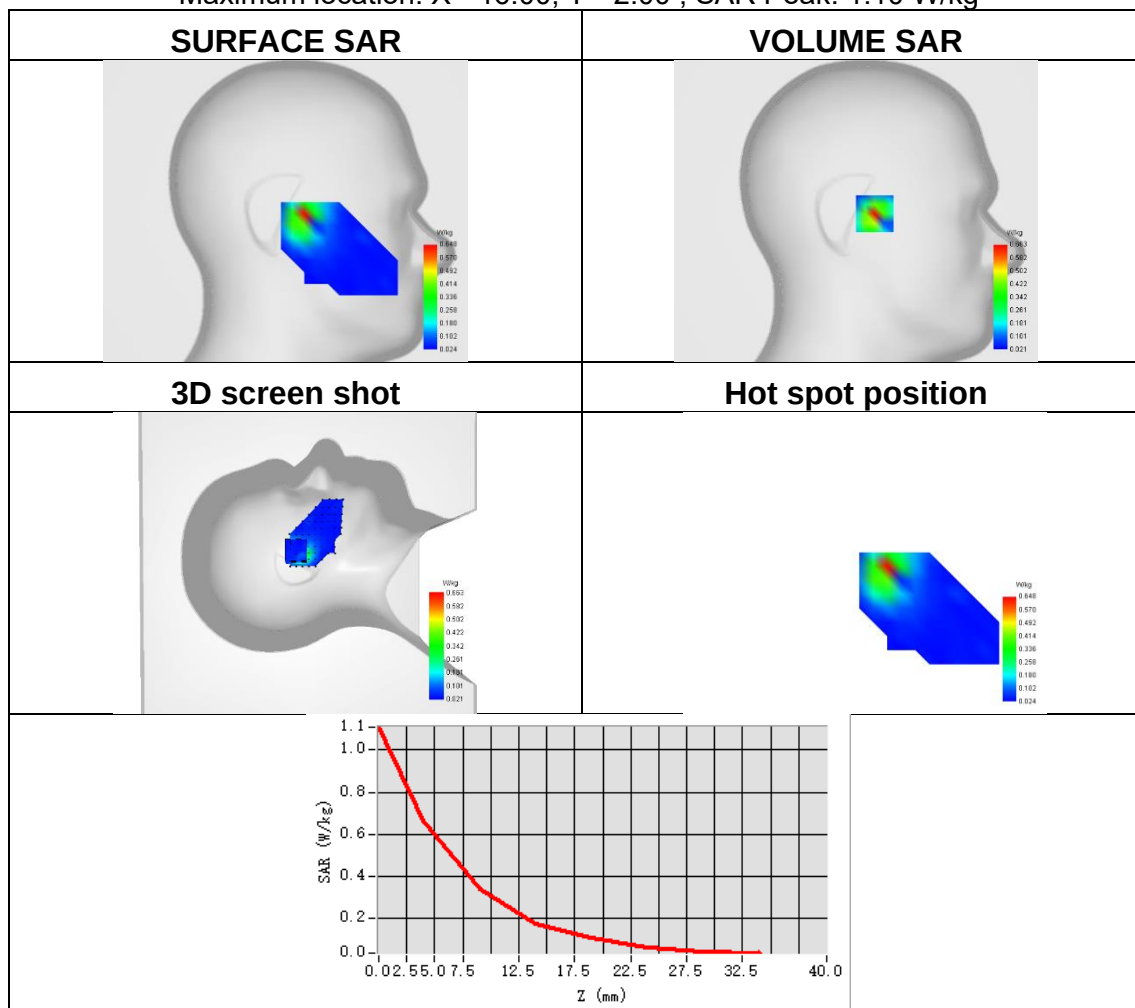




Plot 36:

Test Date	2026-03-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE FDD
Frequency	2595
SAR 10g (W/Kg)	0.098
SAR 1g (W/Kg)	0.160
ConvF	1.44
Relative permittivity	39.25
Conductivity (S/m)	1.93

Maximum location: X=9.00, Y=17.00 ; SAR Peak: 0.24 W/kg

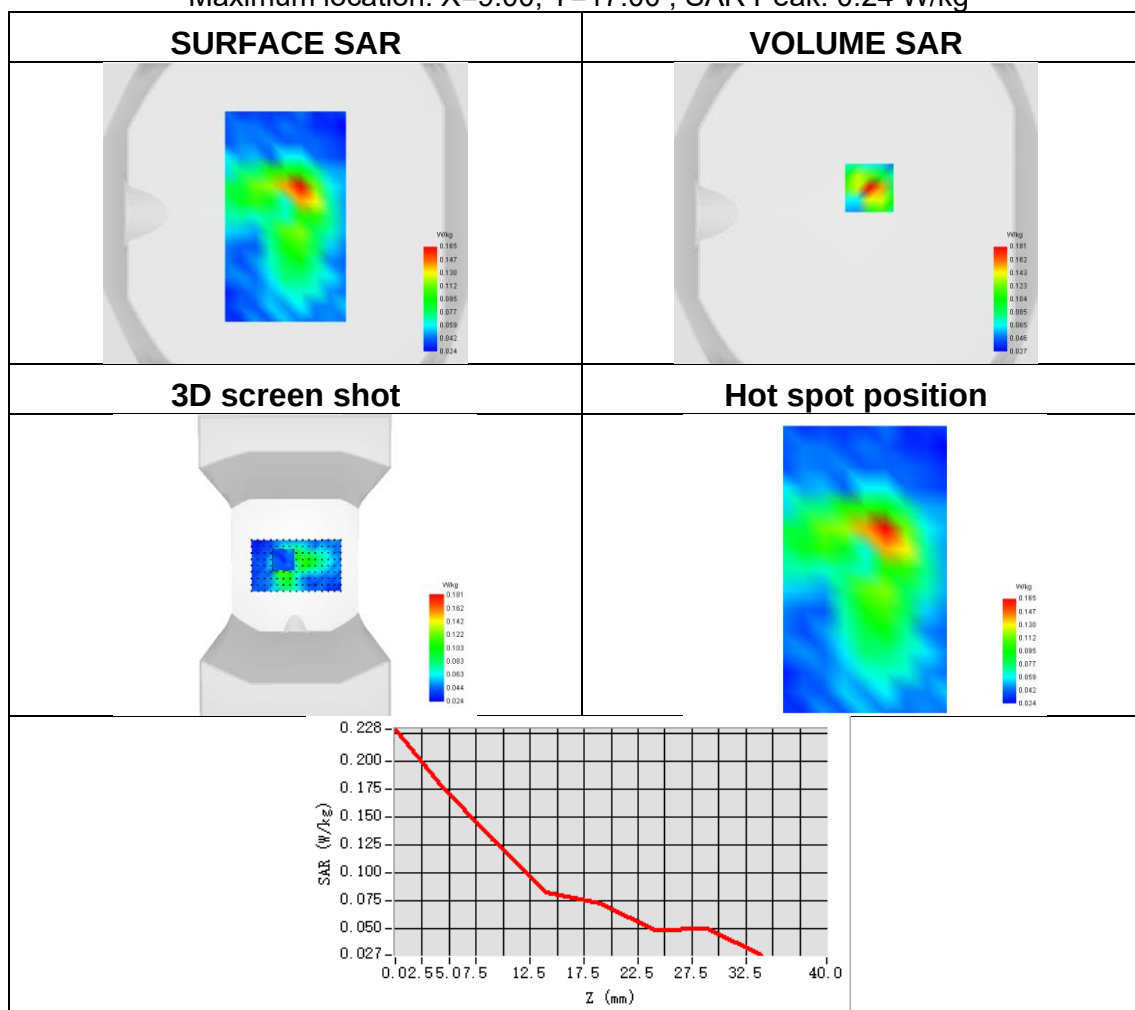




Plot 37:

Test Date	2026-03-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 40
Signal	LTE FDD
Frequency	2350
SAR 10g (W/Kg)	0.212
SAR 1g (W/Kg)	0.339
ConvF	1.47
Relative permittivity	39.34
Conductivity (S/m)	1.78

Maximum location: X=19.00, Y=-1.00 ; SAR Peak: 0.50 W/kg

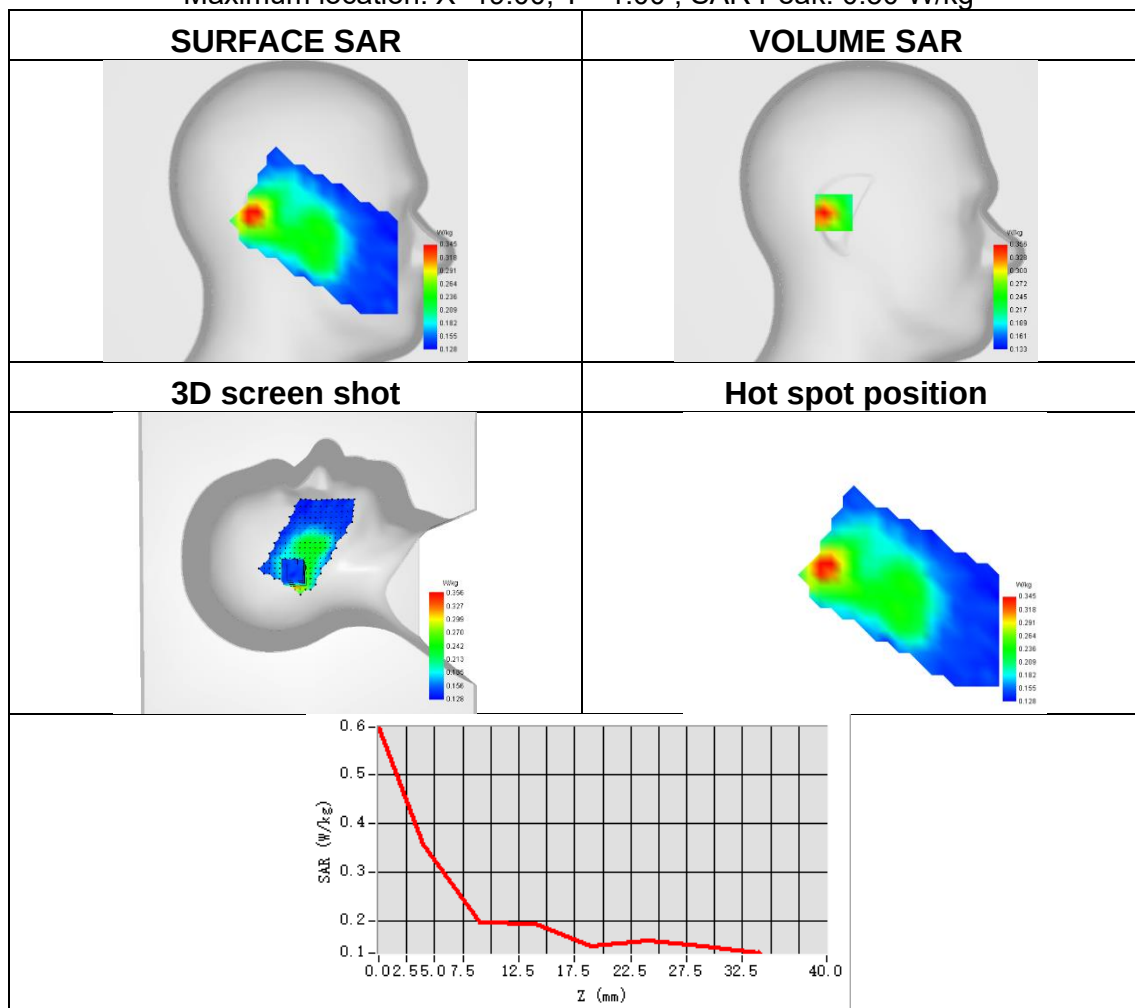




Plot 38:

Test Date	2026-03-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2350
SAR 10g (W/Kg)	0.133
SAR 1g (W/Kg)	0.201
ConvF	1.47
Relative permittivity	39.34
Conductivity (S/m)	1.78

Maximum location: X=11.00, Y=19.00 ; SAR Peak: 0.27 W/kg

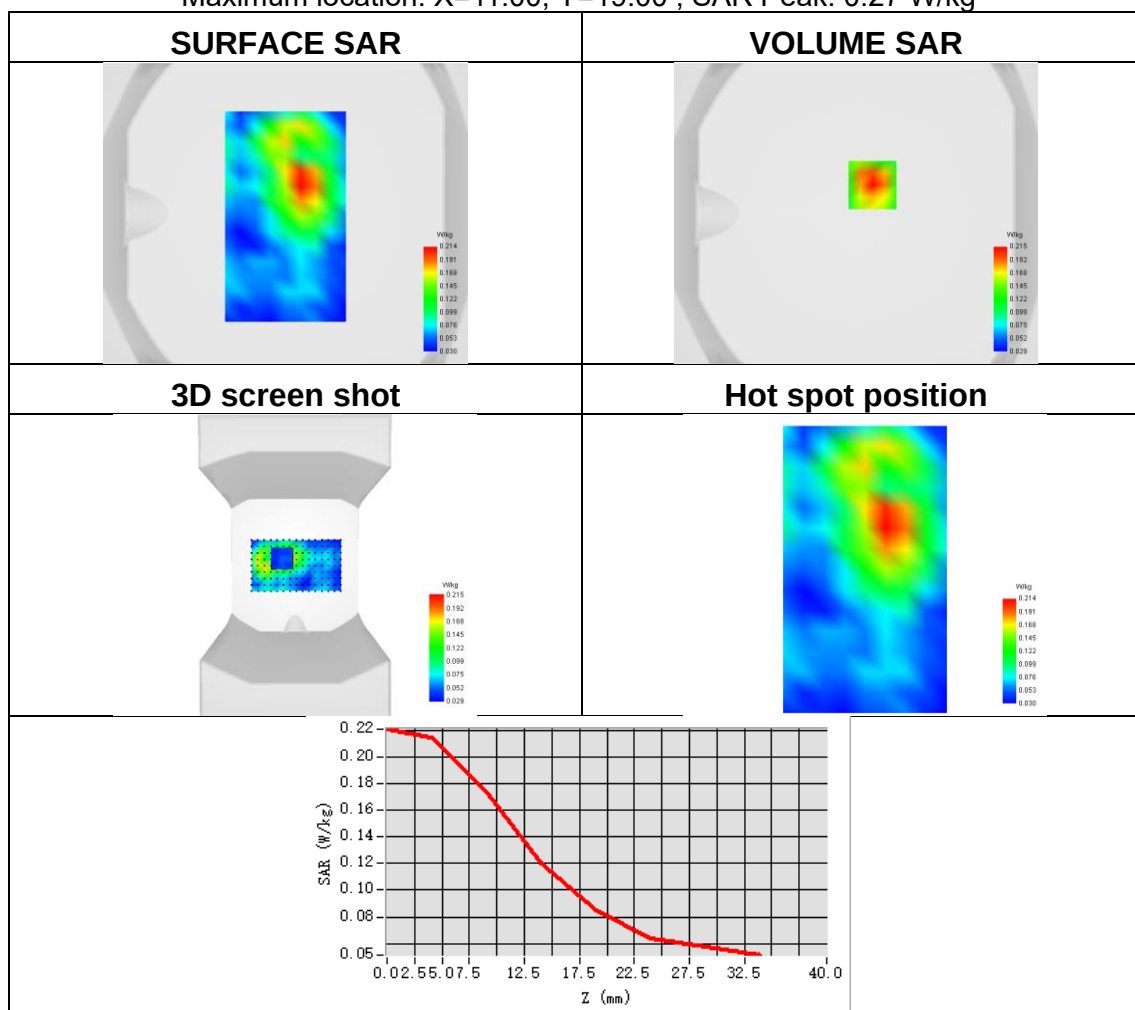




Plot 39:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Left head
Device Position	Cheek
Band	LTE band 66
Signal	LTE FDD
Frequency	1770
SAR 10g (W/Kg)	0.208
SAR 1g (W/Kg)	0.309
ConvF	1.21
Relative permittivity	40.56
Conductivity (S/m)	1.38

Maximum location: X=-13.00, Y=7.00 ; SAR Peak: 0.45 W/kg

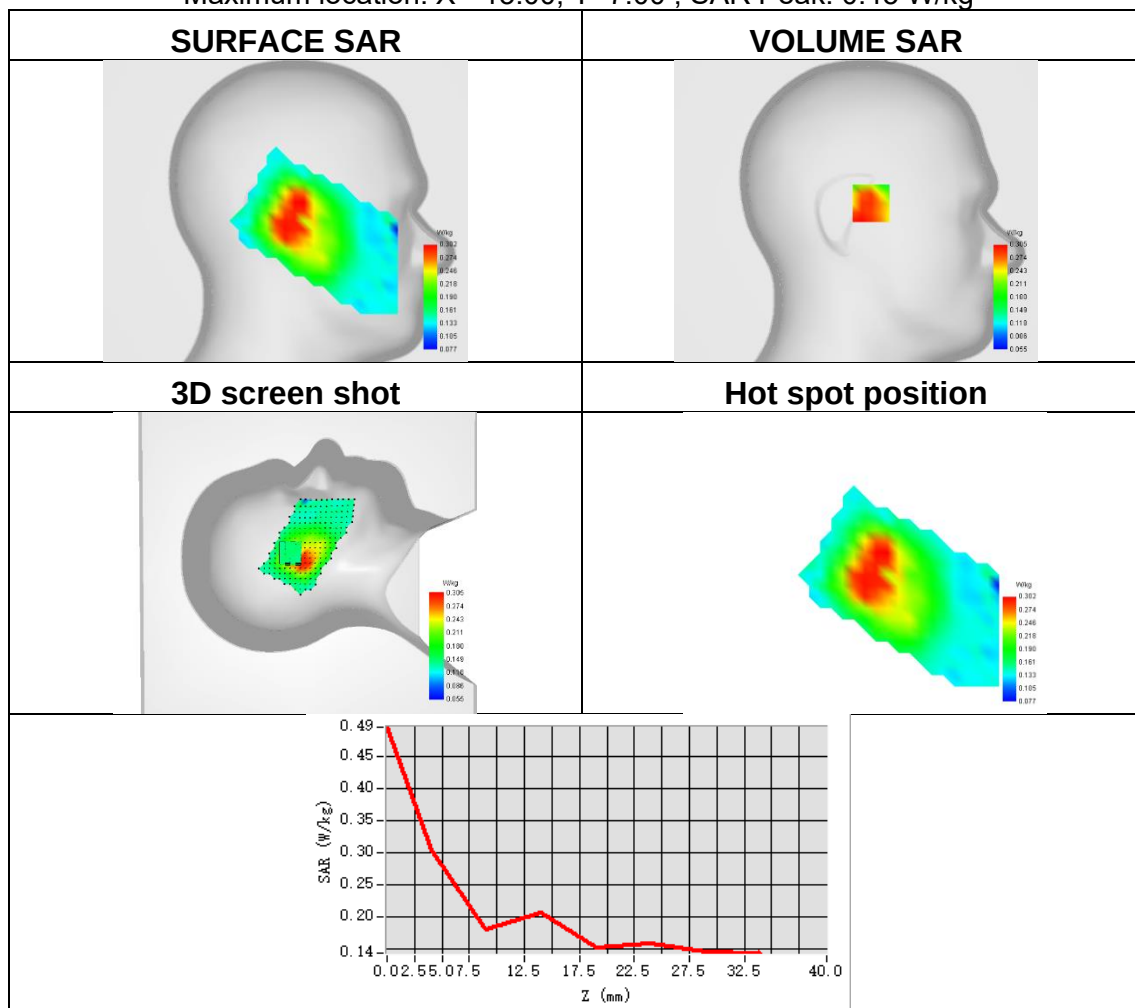




Plot 40:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.389
SAR 1g (W/Kg)	0.588
ConvF	1.21
Relative permittivity	40.56
Conductivity (S/m)	1.38

Maximum location: X=24.00, Y=17.00 ; SAR Peak: 0.85 W/kg

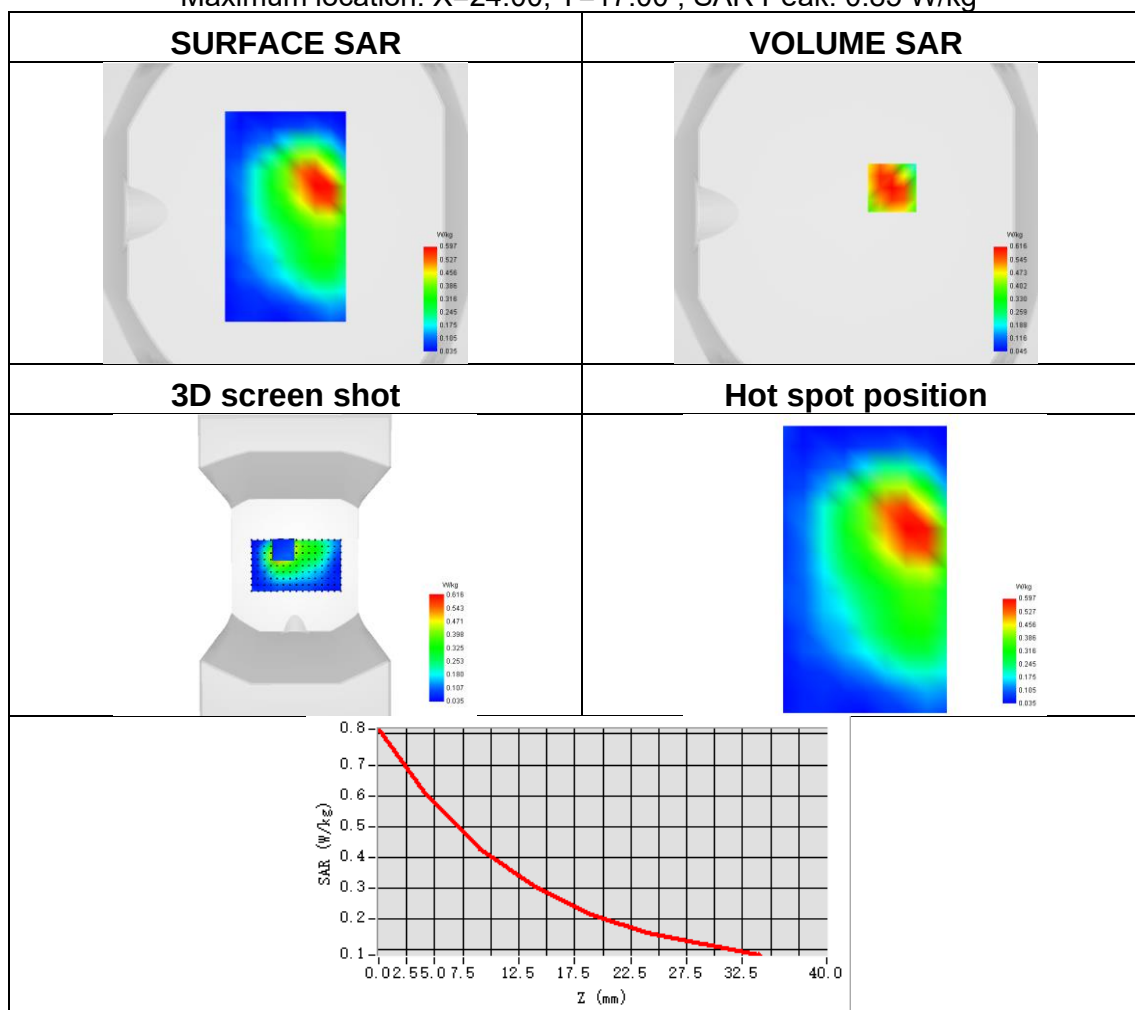




Plot 41:

Test Date	2026-04-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS850
Signal	TDMA (GPRS)
Frequency	836.6
SAR 10g (W/Kg)	0.100
SAR 1g (W/Kg)	0.183
ConvF	1.02
Relative permittivity	42.74
Conductivity (S/m)	0.86

Maximum location: X=-11.00, Y=-23.00 ; SAR Peak: 0.30 W/kg

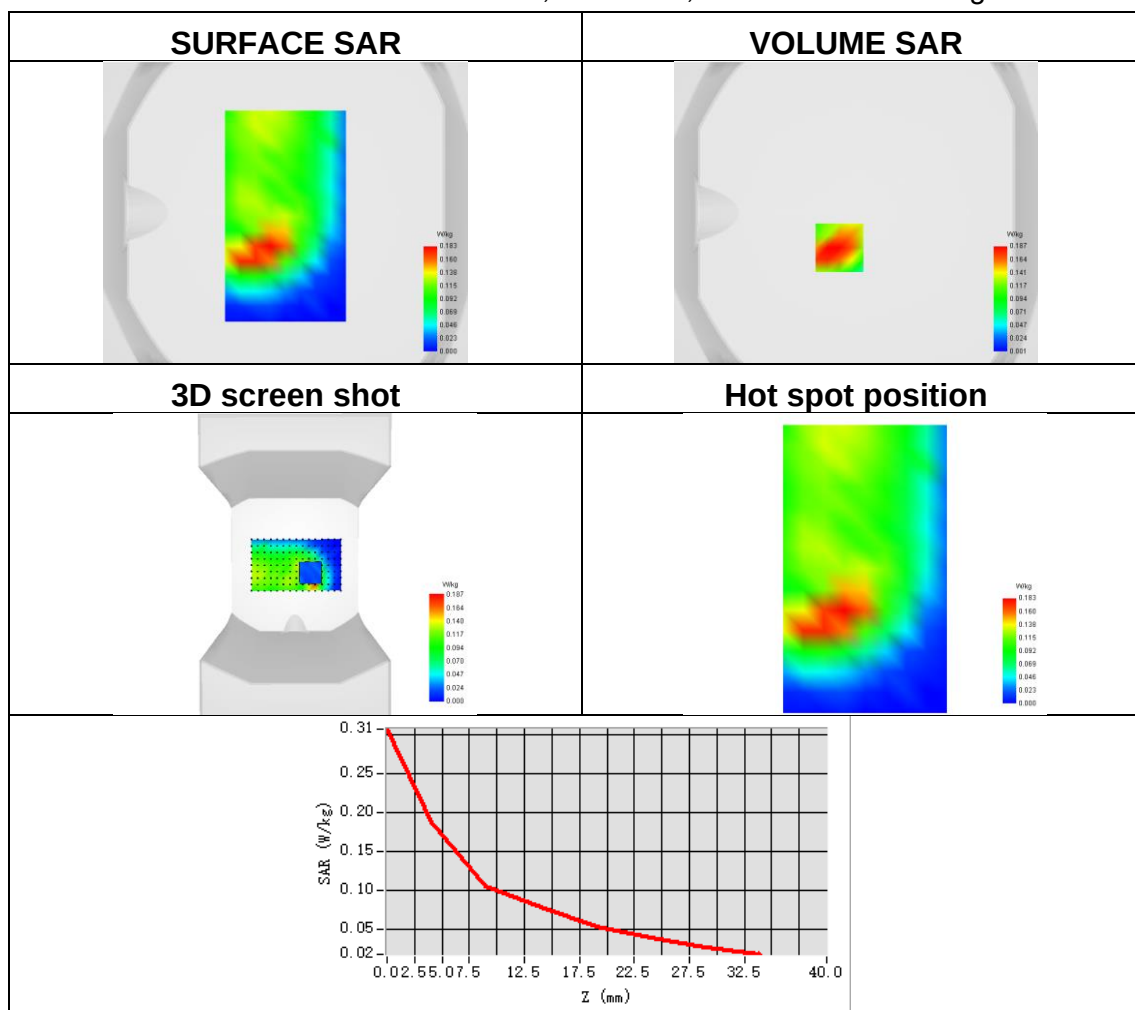




Plot 42:

Test Date	2026-03-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	GPRS1900
Signal	TDMA (GPRS)
Frequency	1909.8
SAR 10g (W/Kg)	0.225
SAR 1g (W/Kg)	0.365
ConvF	1.34
Relative permittivity	40.65
Conductivity (S/m)	1.43

Maximum location: X=10.00, Y=20.00 ; SAR Peak: 0.56 W/kg

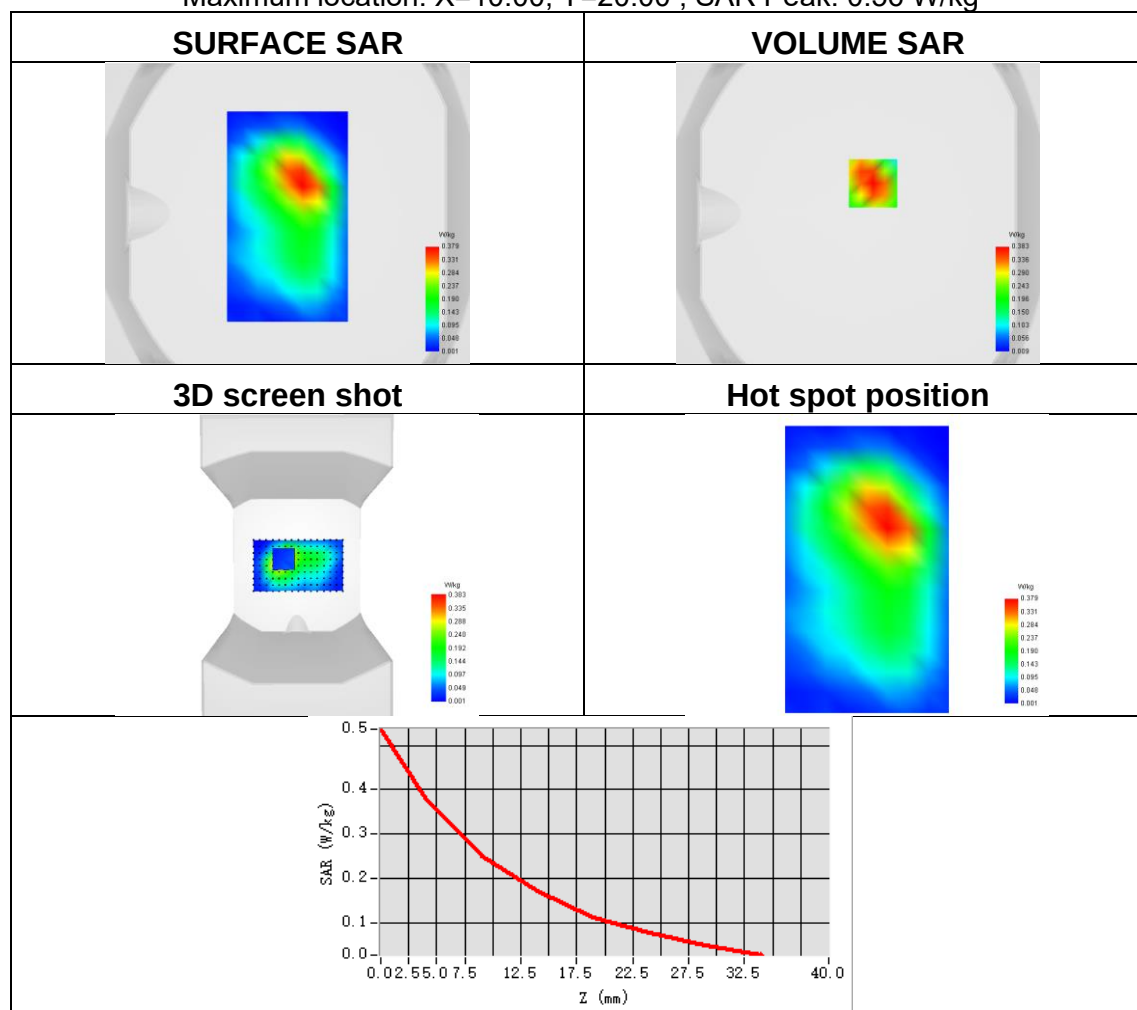




Plot 43:

Test Date	2026-03-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Left Side
Band	Band 2 (1900)
Signal	WCDMA
Frequency	1907.6
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.332
ConvF	1.34
Relative permittivity	40.65
Conductivity (S/m)	1.43

Maximum location: X=11.00, Y=49.00 ; SAR Peak: 0.49 W/kg

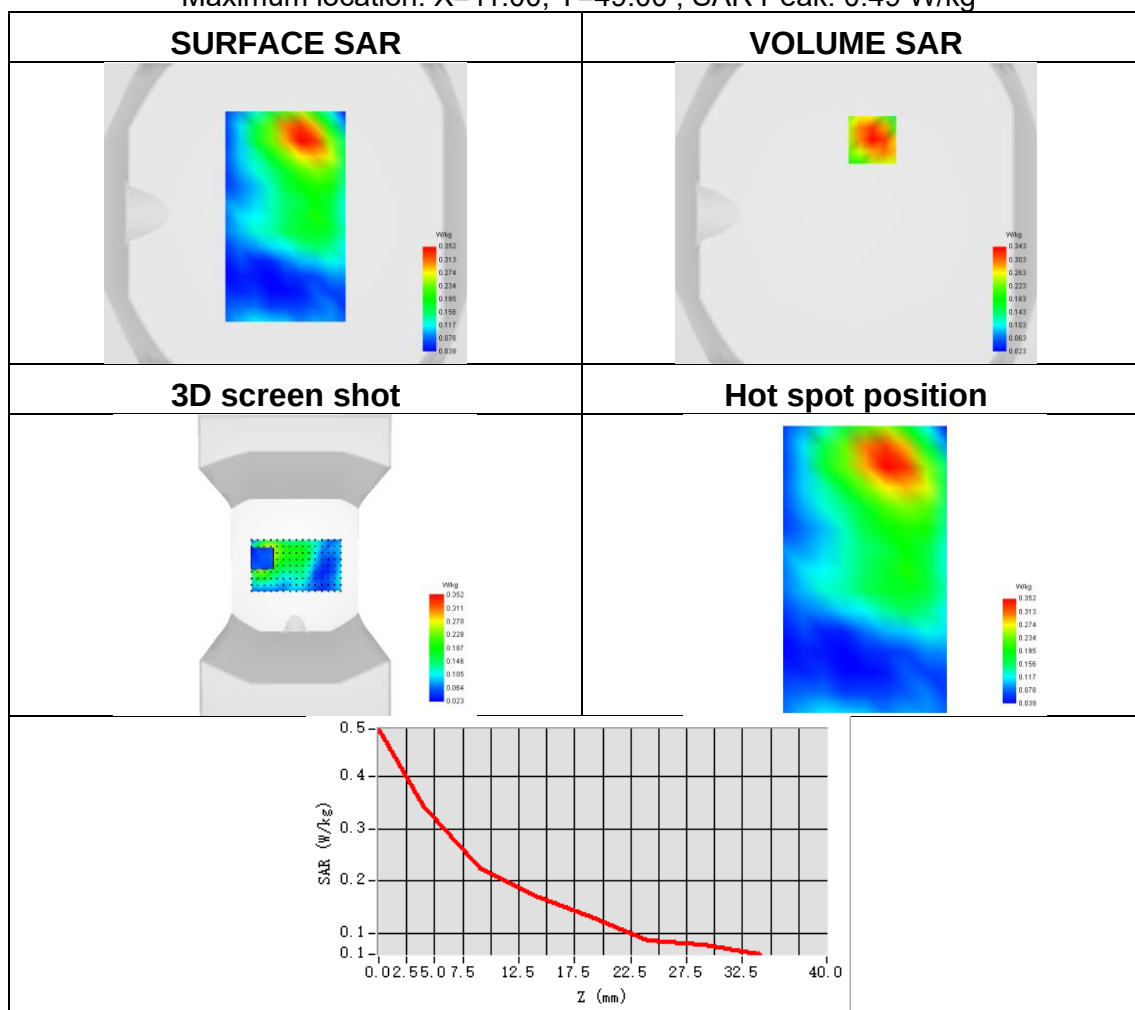




Plot 44:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 4 (1700)
Signal	WCDMA
Frequency	1712.6
SAR 10g (W/Kg)	0.159
SAR 1g (W/Kg)	0.257
ConvF	1.21
Relative permittivity	40.56
Conductivity (S/m)	1.38

Maximum location: X=13.00, Y=51.00 ; SAR Peak: 0.44 W/kg

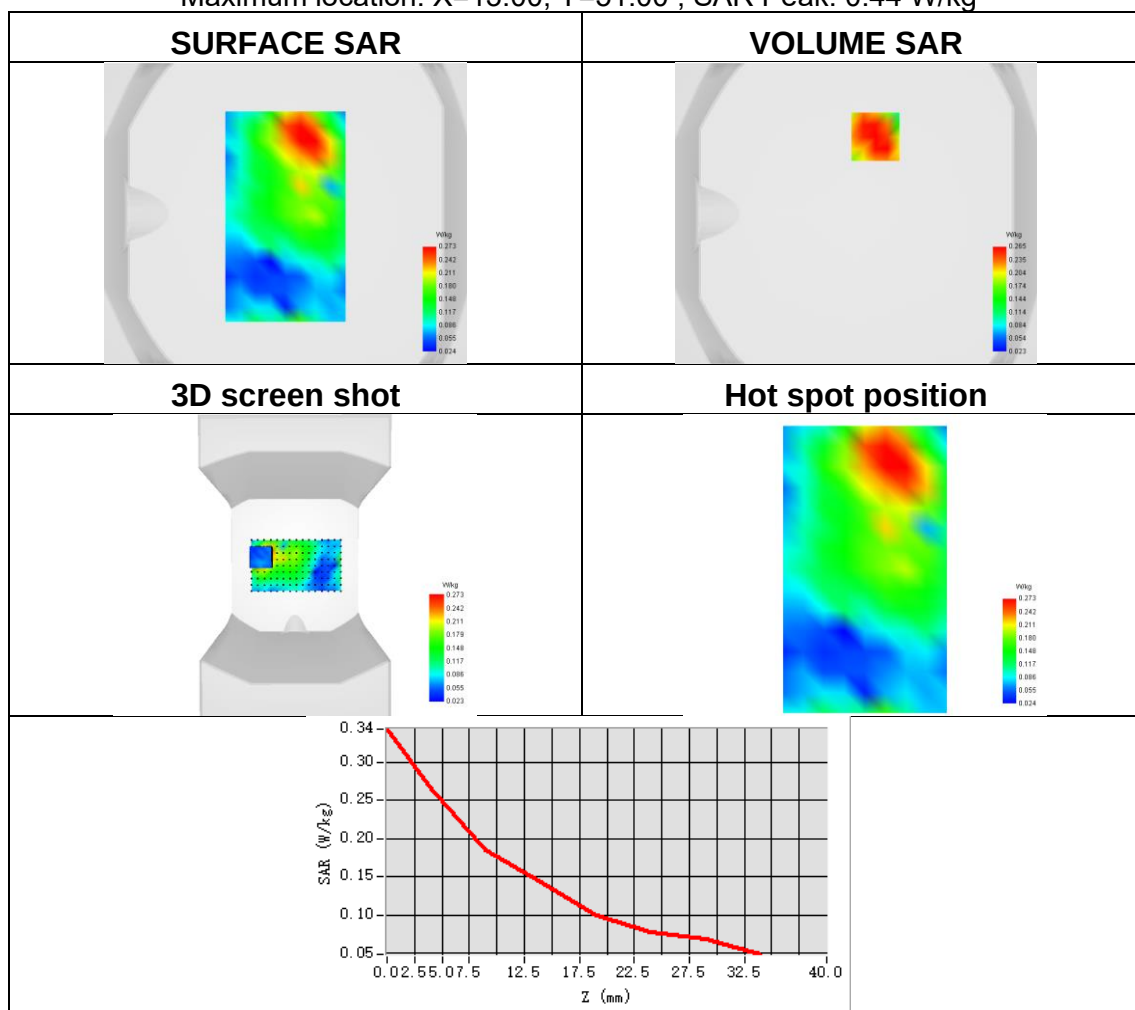




Plot 45:

Test Date	2026-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	Band 5 (850)
Signal	WCDMA
Frequency	846.6
SAR 10g (W/Kg)	0.095
SAR 1g (W/Kg)	0.130
ConvF	1.02
Relative permittivity	41.98
Conductivity (S/m)	0.89

Maximum location: X=-2.00, Y=-12.00 ; SAR Peak: 0.18 W/kg

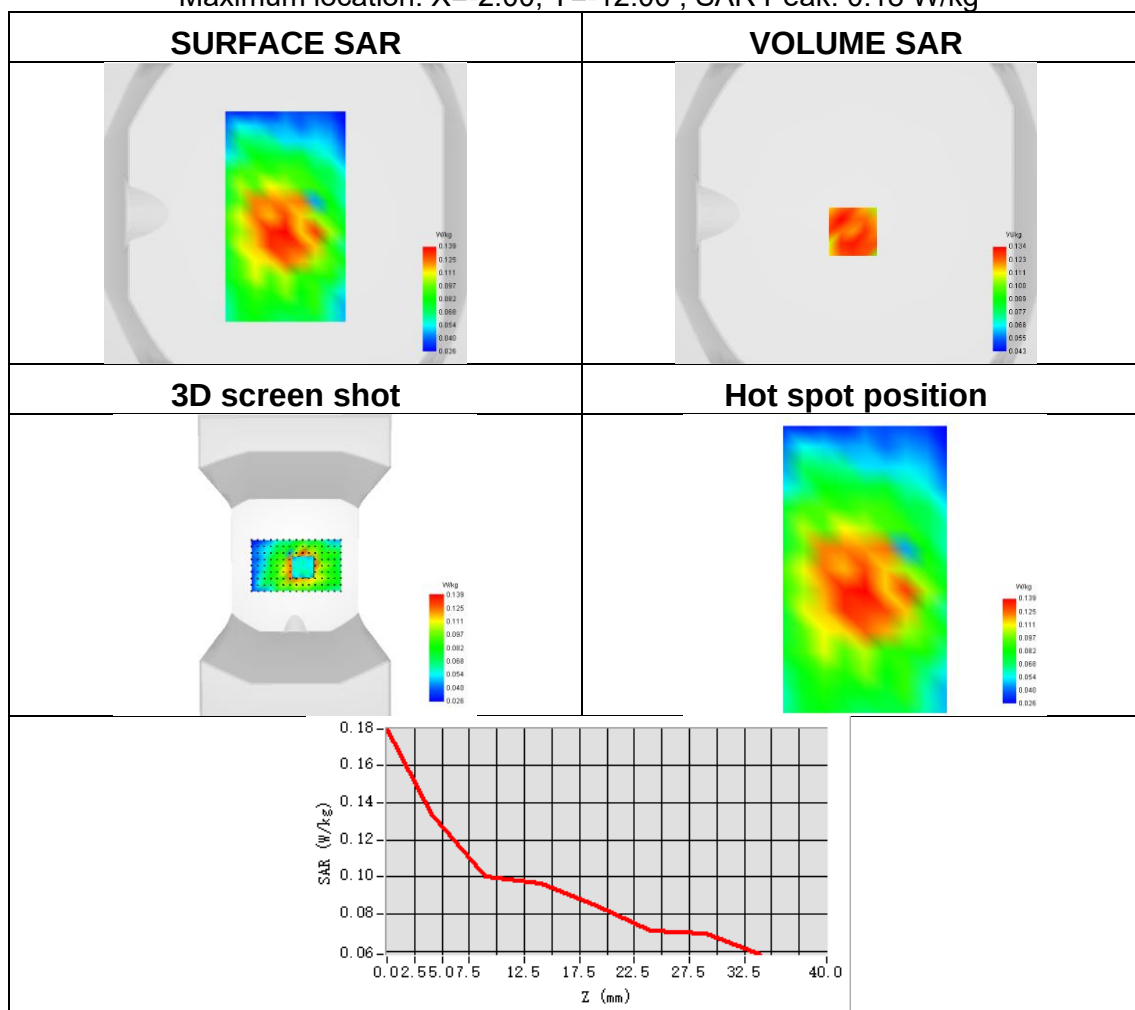




Plot 46:

Test Date	2026-03-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back side
Band	ISM
Signal	IEEE 802.11 b
Frequency	2437
SAR 10g (W/Kg)	0.131
SAR 1g (W/Kg)	0.173
ConvF	1.51
Relative permittivity	39.34
Conductivity (S/m)	1.78

Maximum location: X=-22.00, Y=34.00 ; SAR Peak: 0.21 W/kg

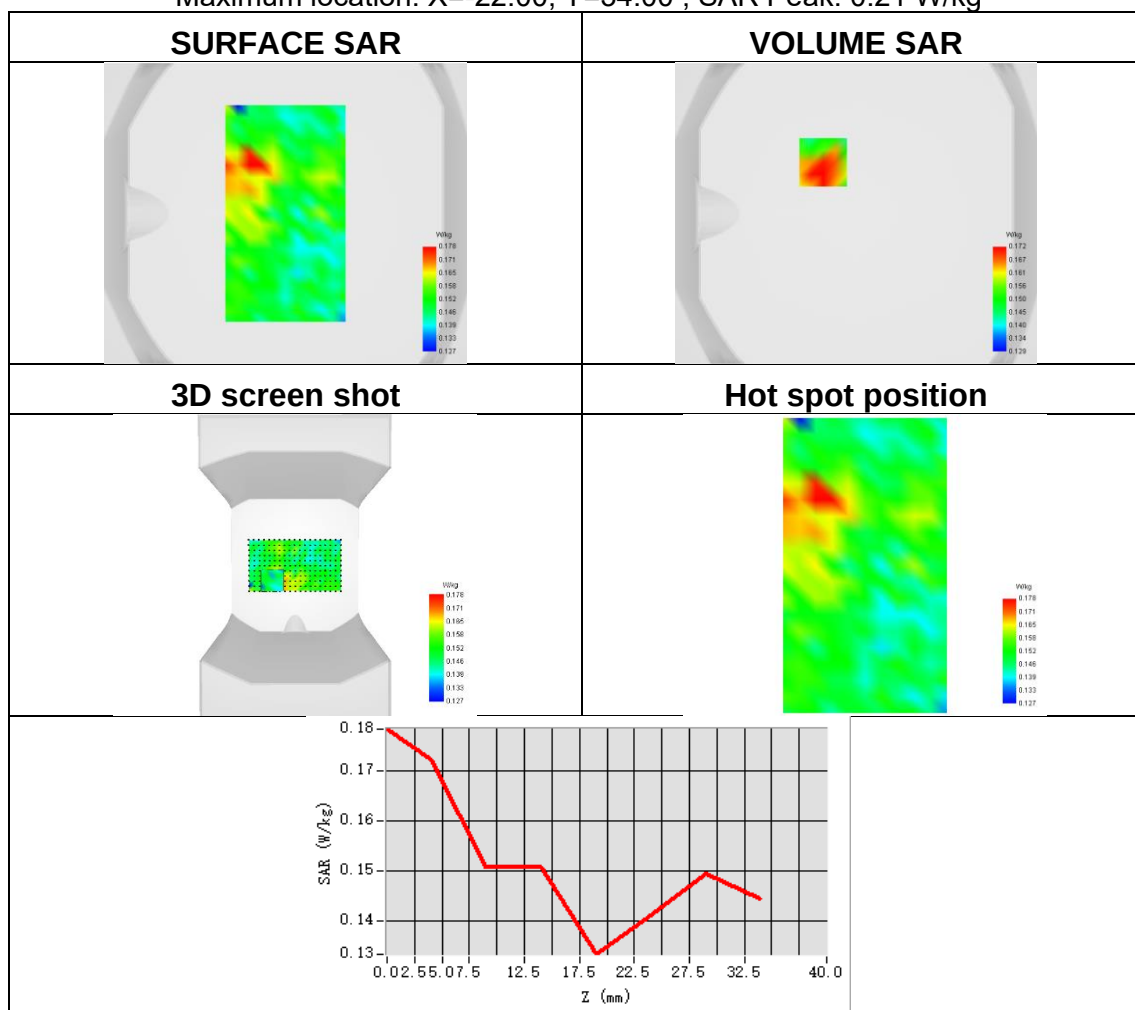




Plot 47:

Test Date	2026-03-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back side
Band	U-NII-1
Signal	IEEE 802.11a
Frequency	5200
SAR 10g (W/Kg)	0.284
SAR 1g (W/Kg)	0.686
ConvF	1.58
Relative permittivity	36.32
Conductivity (S/m)	4.68

Maximum location: X=-10.00, Y=35.00 ; SAR Peak: 5.64 W/kg

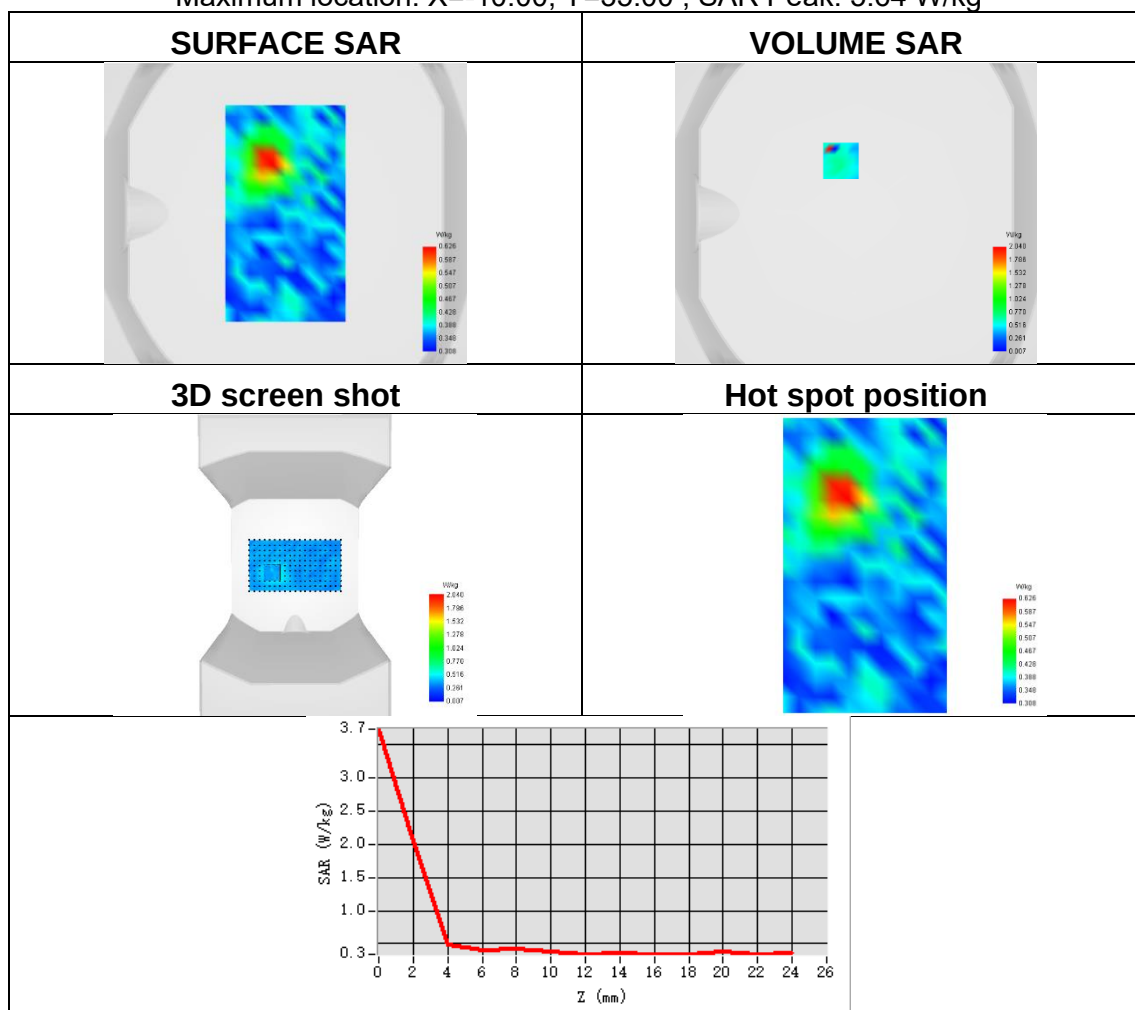




Plot 48:

Test Date	2026-03-26
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2a
Signal	IEEE 802.11 a
Frequency	5260
SAR 10g (W/Kg)	0.306
SAR 1g (W/Kg)	0.383
ConvF	1.60
Relative permittivity	36.54
Conductivity (S/m)	4.89

Maximum location: X=24.00, Y=56.00 ; SAR Peak: 1.38 W/kg

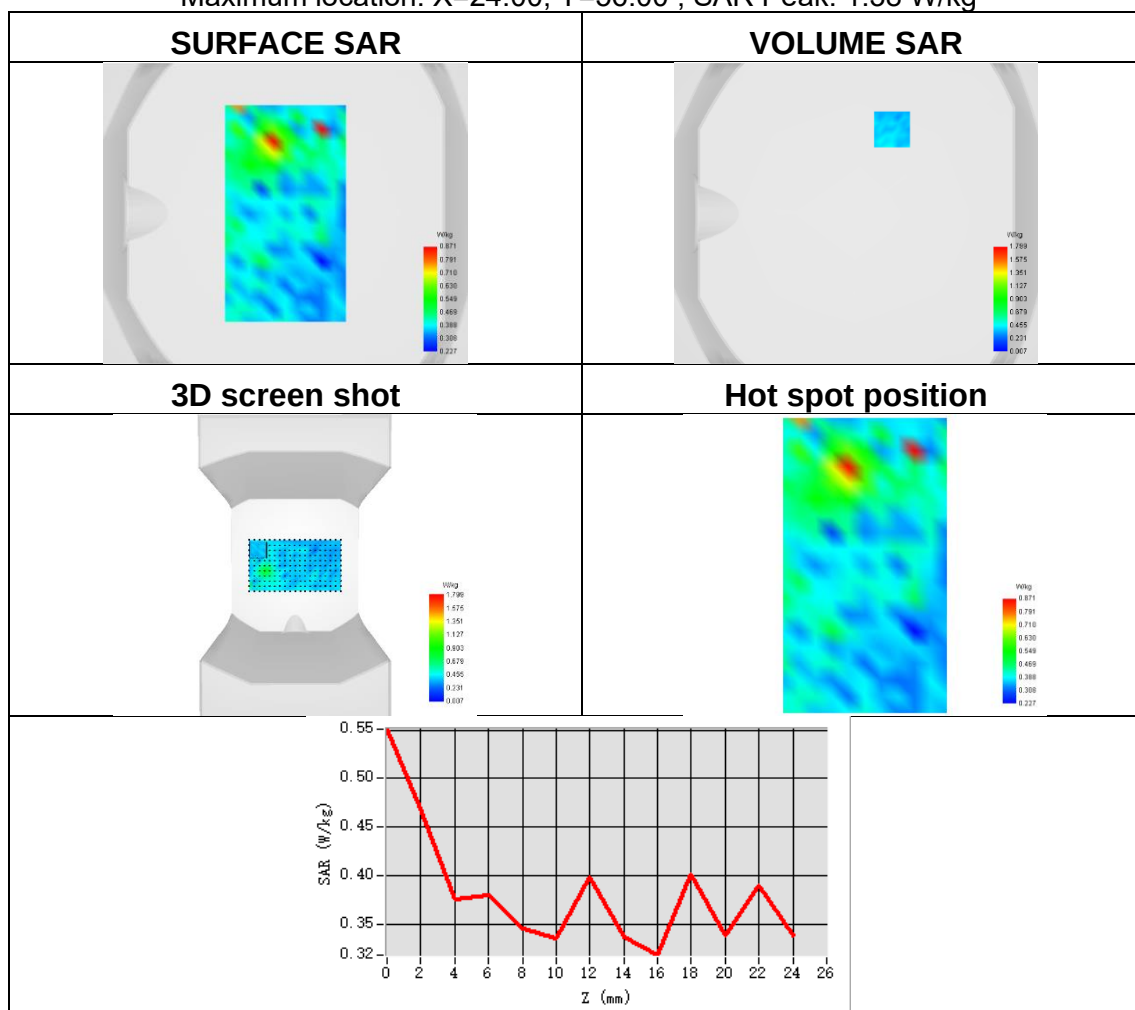




Plot 49:

Test Date	2026-03-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-2c
Signal	IEEE 802.11a
Frequency	5700
SAR 10g (W/Kg)	0.285
SAR 1g (W/Kg)	0.407
ConvF	1.63
Relative permittivity	36.02
Conductivity (S/m)	5.06

Maximum location: X=24.00, Y=48.00 ; SAR Peak: 0.90 W/kg

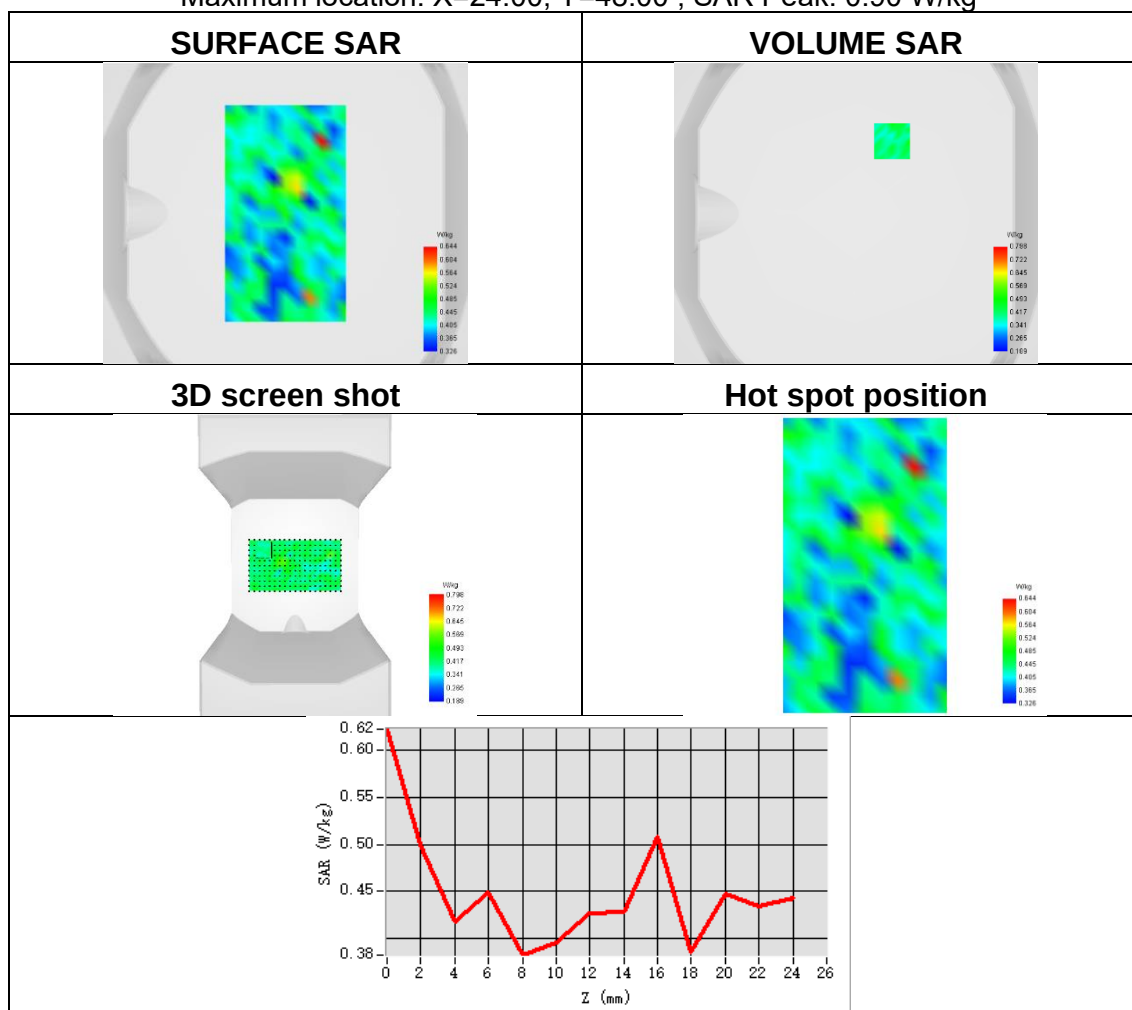




Plot 50:

Test Date	2026-03-27
Area Scan	dx=8mm dy=8mm
Zoom Scan	7x7x12,dx=4mm dy=4mm dz=2mm
Phantom	Validation plane
Device Position	Back Side
Band	U-NII-3
Signal	IEEE 802.11a
Frequency	5745
SAR 10g (W/Kg)	0.247
SAR 1g (W/Kg)	0.401
ConvF	1.62
Relative permittivity	35.83
Conductivity (S/m)	5.31

Maximum location: X=-24.00, Y=8.00 ; SAR Peak: 0.85 W/kg

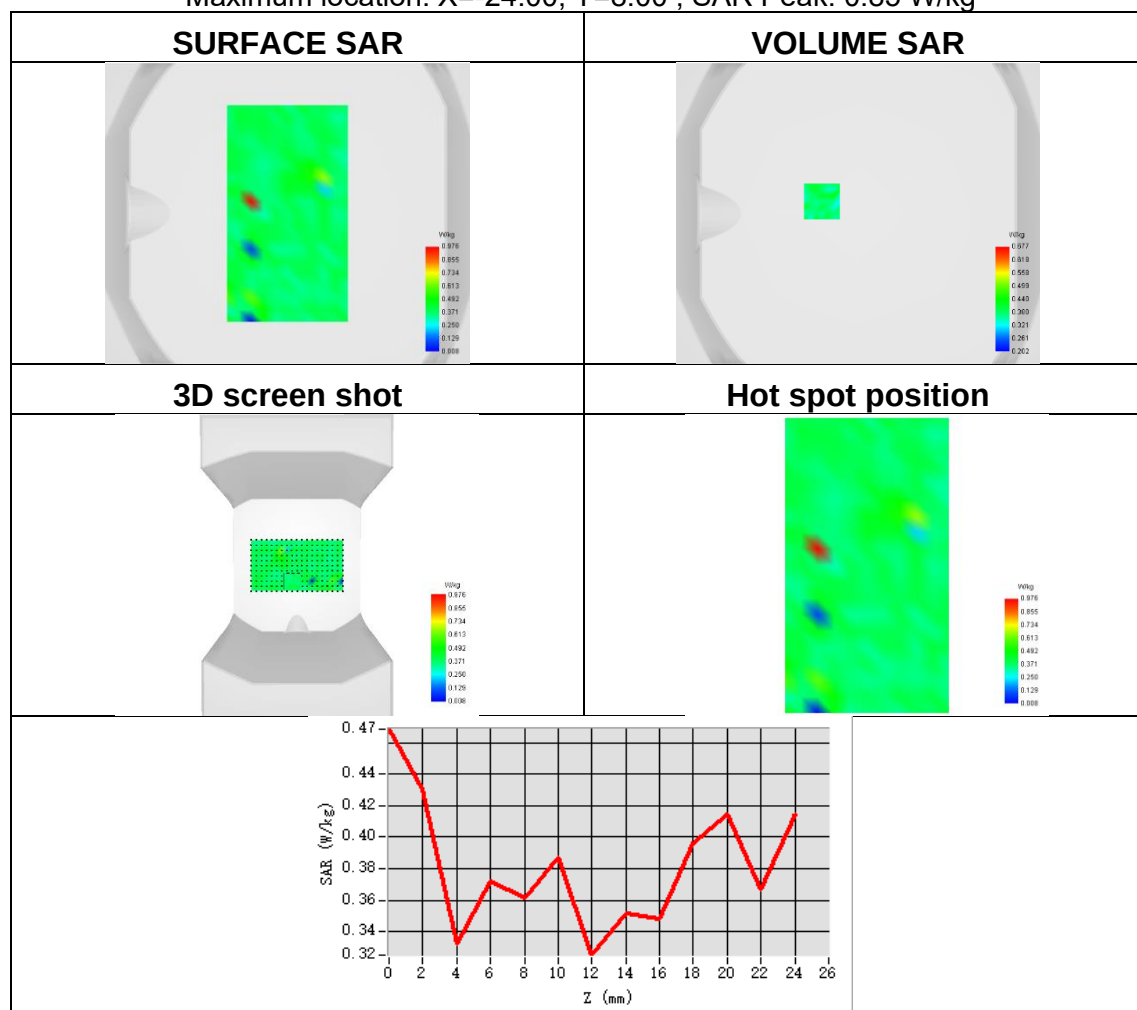




Plot 51:

Test Date	2026-03-30
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 2
Signal	LTE FDD
Frequency	1860
SAR 10g (W/Kg)	0.213
SAR 1g (W/Kg)	0.328
ConvF	1.34
Relative permittivity	40.65
Conductivity (S/m)	1.43

Maximum location: X=11.00, Y=50.00 ; SAR Peak: 0.50 W/kg

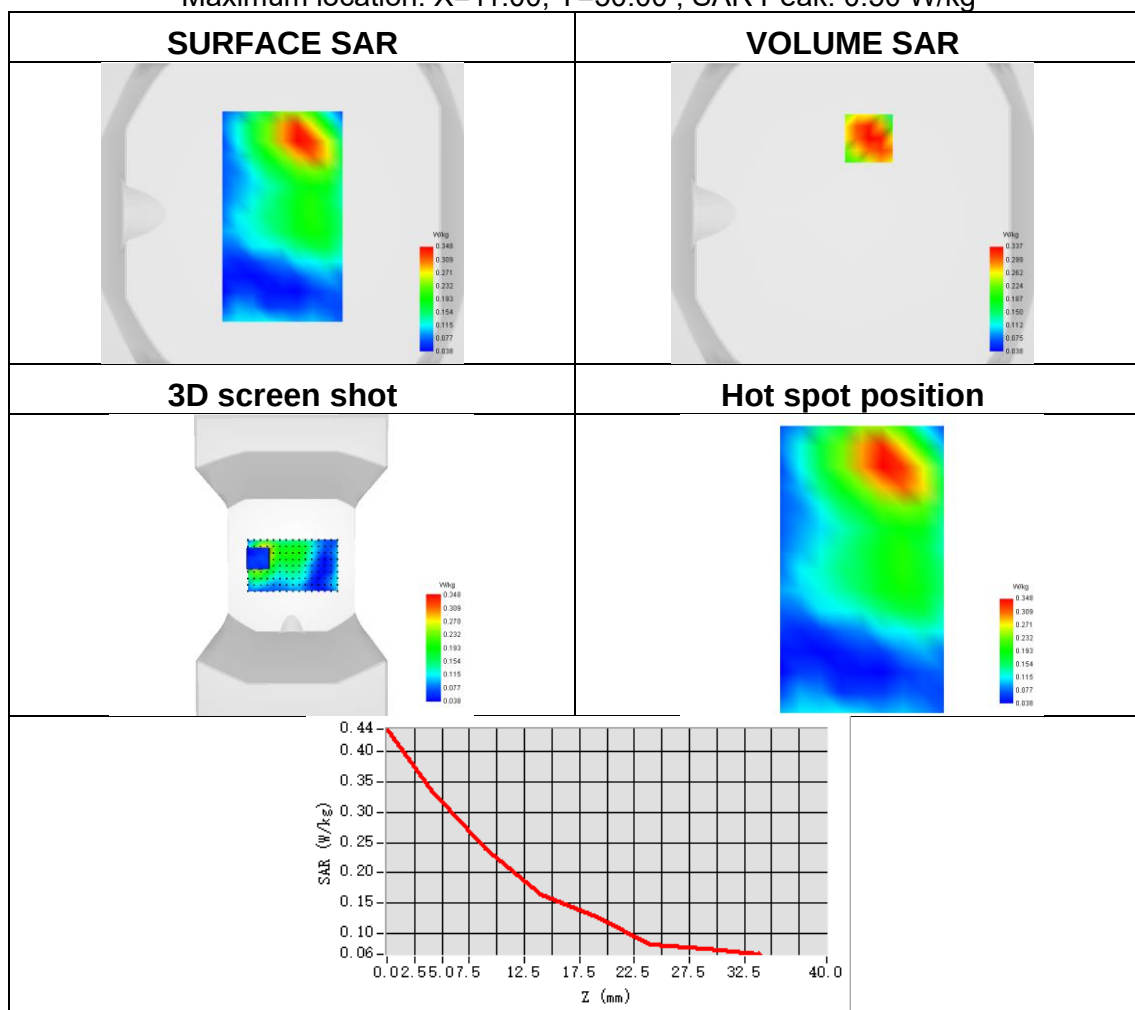




Plot 52:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 4
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.174
SAR 1g (W/Kg)	0.266
ConvF	1.21
Relative permittivity	40.56
Conductivity (S/m)	1.38

Maximum location: X=12.00, Y=48.00 ; SAR Peak: 0.39 W/kg

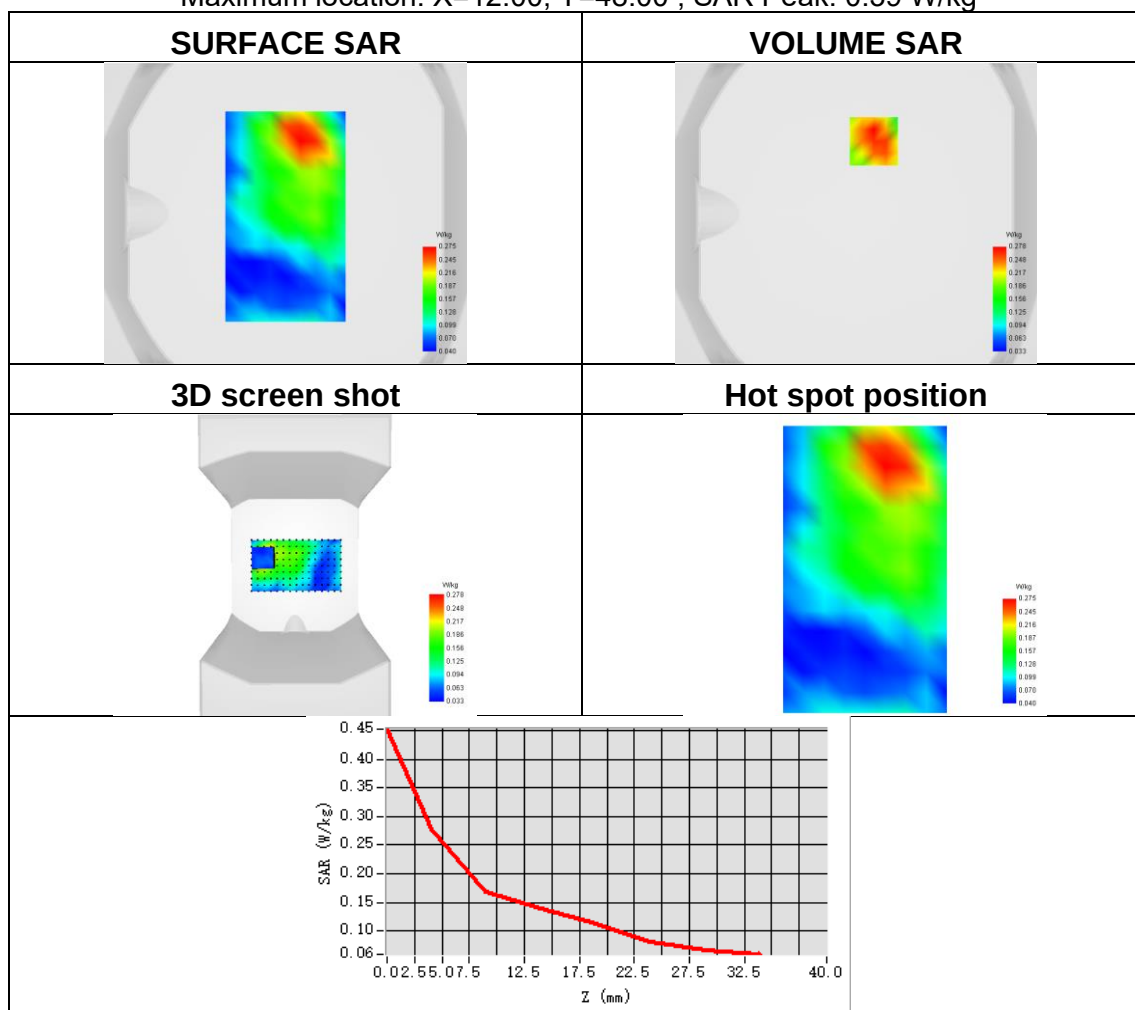




Plot 53:

Test Date	2026-04-02
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 5
Signal	LTE FDD
Frequency	844
SAR 10g (W/Kg)	0.092
SAR 1g (W/Kg)	0.123
ConvF	1.02
Relative permittivity	42.74
Conductivity (S/m)	0.86

Maximum location: X=-20.00, Y=-32.00 ; SAR Peak: 0.16 W/kg

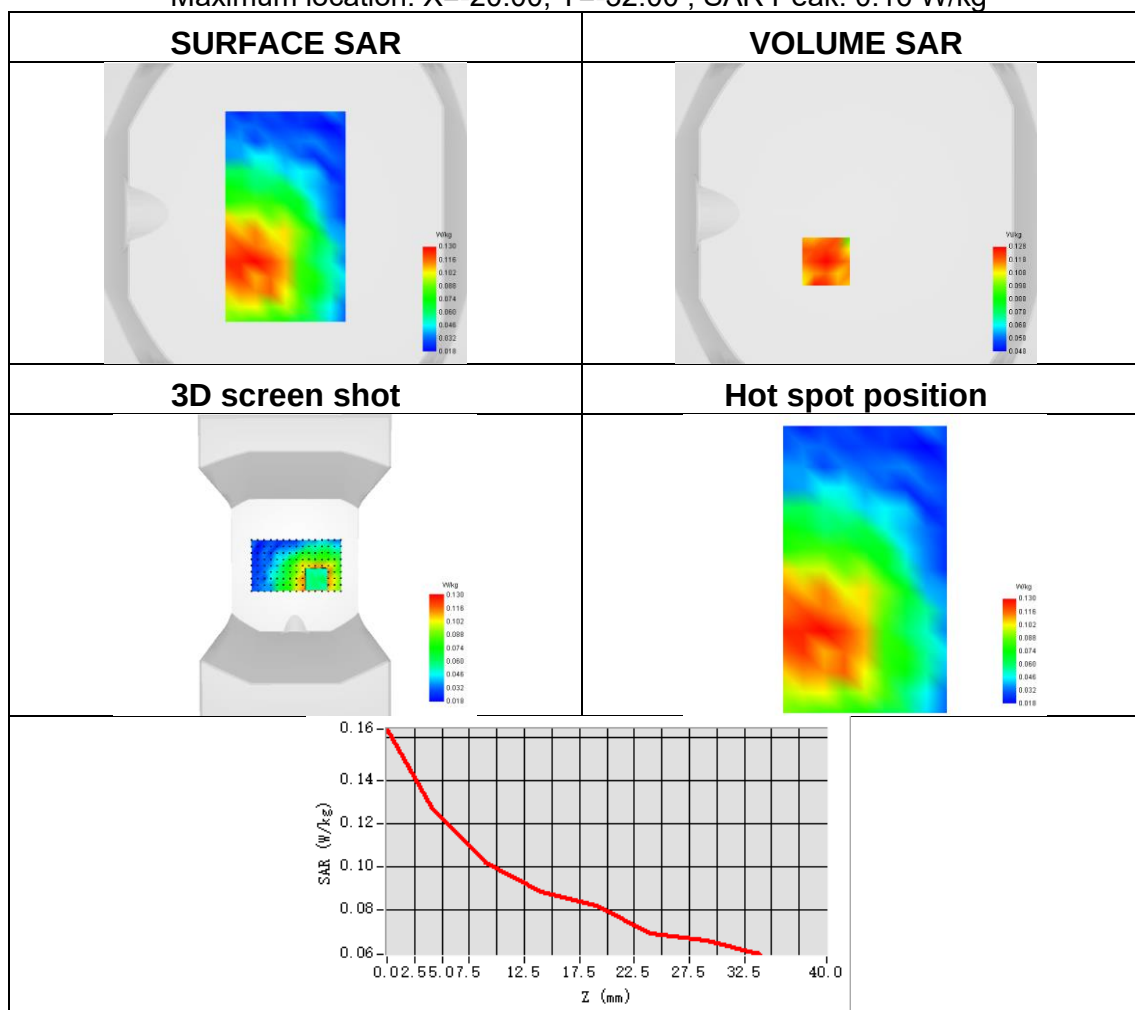




Plot 54:

Test Date	2026-03-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 7
Signal	LTE FDD
Frequency	2510
SAR 10g (W/Kg)	0.130
SAR 1g (W/Kg)	0.217
ConvF	1.44
Relative permittivity	39.25
Conductivity (S/m)	1.93

Maximum location: X=10.00, Y=48.00 ; SAR Peak: 0.33 W/kg

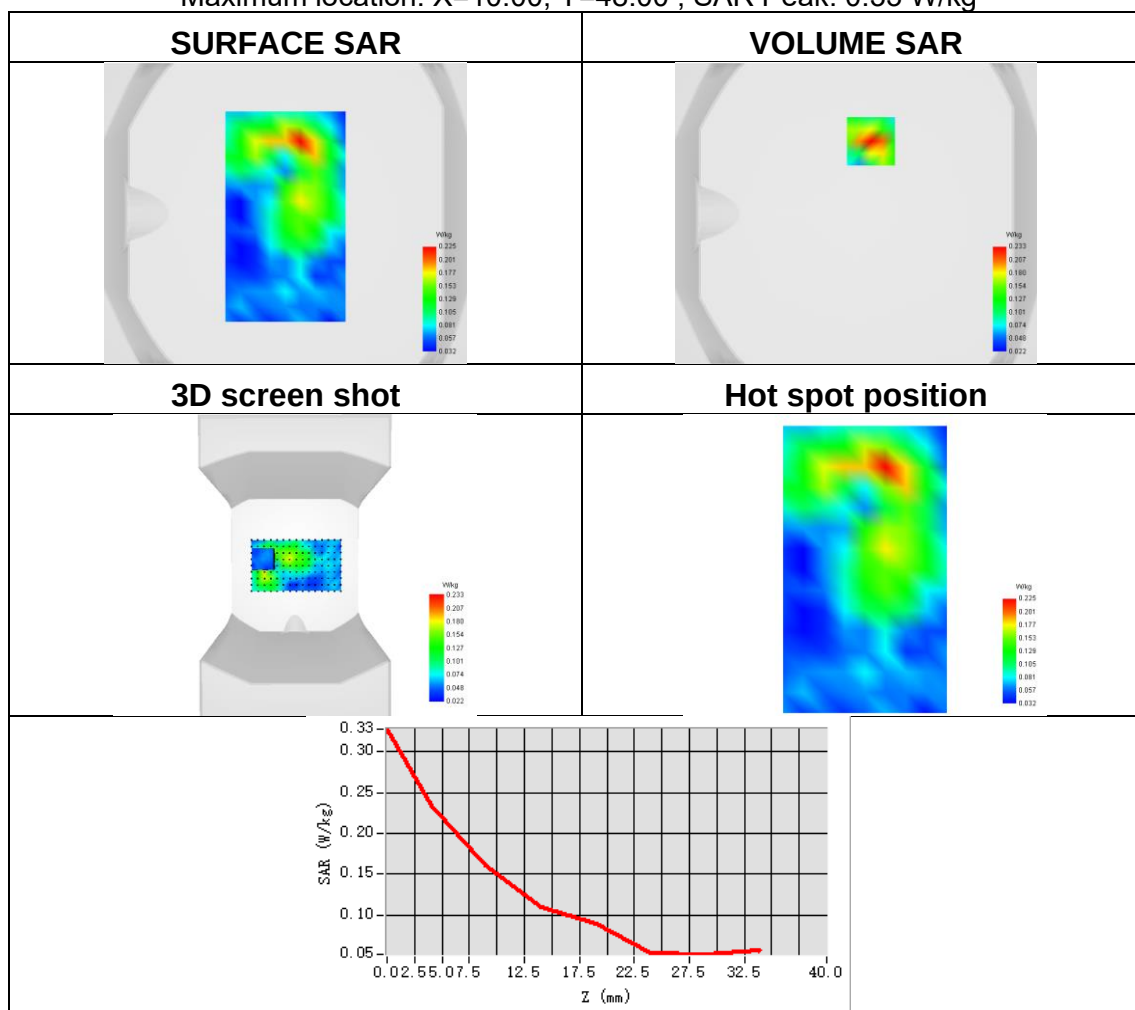




Plot 55:

Test Date	2026-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 12
Signal	LTE FDD
Frequency	704
SAR 10g (W/Kg)	0.155
SAR 1g (W/Kg)	0.215
ConvF	1.08
Relative permittivity	42.23
Conductivity (S/m)	0.88

Maximum location: X=-20.00, Y=-44.00 ; SAR Peak: 0.26 W/kg

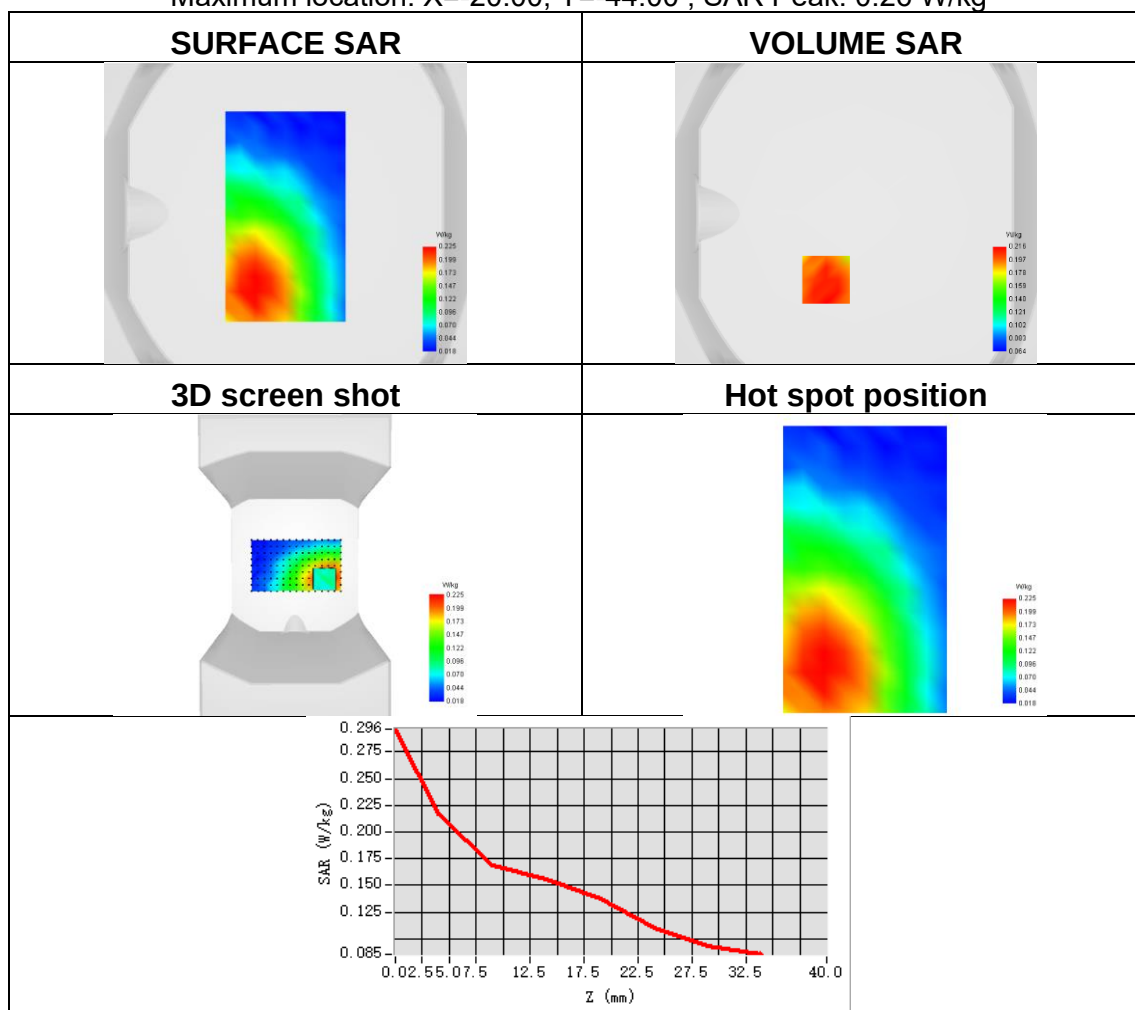




Plot 56:

Test Date	2026-04-06
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 13
Signal	LTE FDD
Frequency	782
SAR 10g (W/Kg)	0.120
SAR 1g (W/Kg)	0.153
ConvF	1.08
Relative permittivity	42.27
Conductivity (S/m)	0.93

Maximum location: X=-22.00, Y=-43.00 ; SAR Peak: 0.19 W/kg

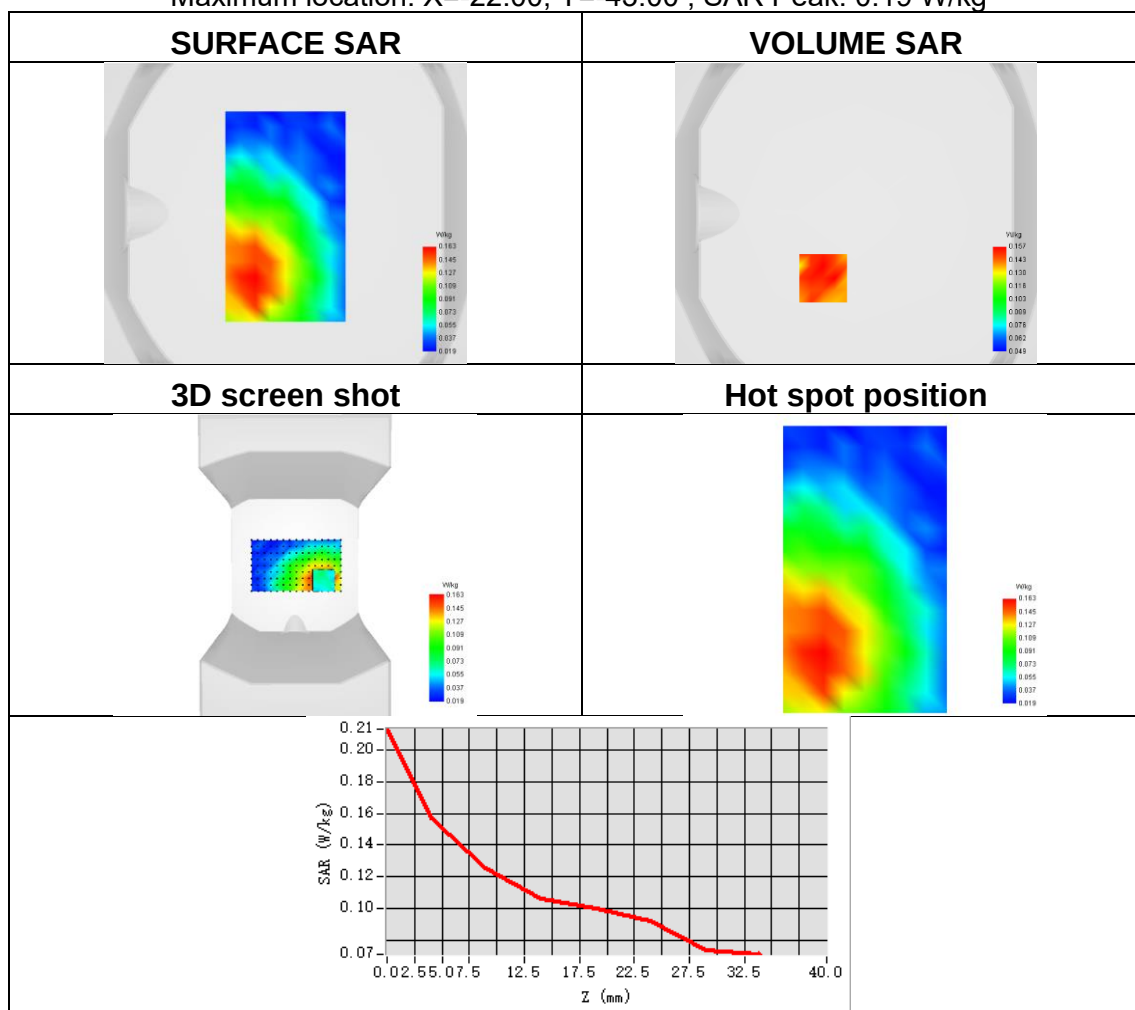




Plot 57:

Test Date	2026-04-01
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 17
Signal	LTE FDD
Frequency	709
SAR 10g (W/Kg)	0.180
SAR 1g (W/Kg)	0.233
ConvF	1.08
Relative permittivity	42.23
Conductivity (S/m)	0.88

Maximum location: X=-20.00, Y=-24.00 ; SAR Peak: 0.28 W/kg

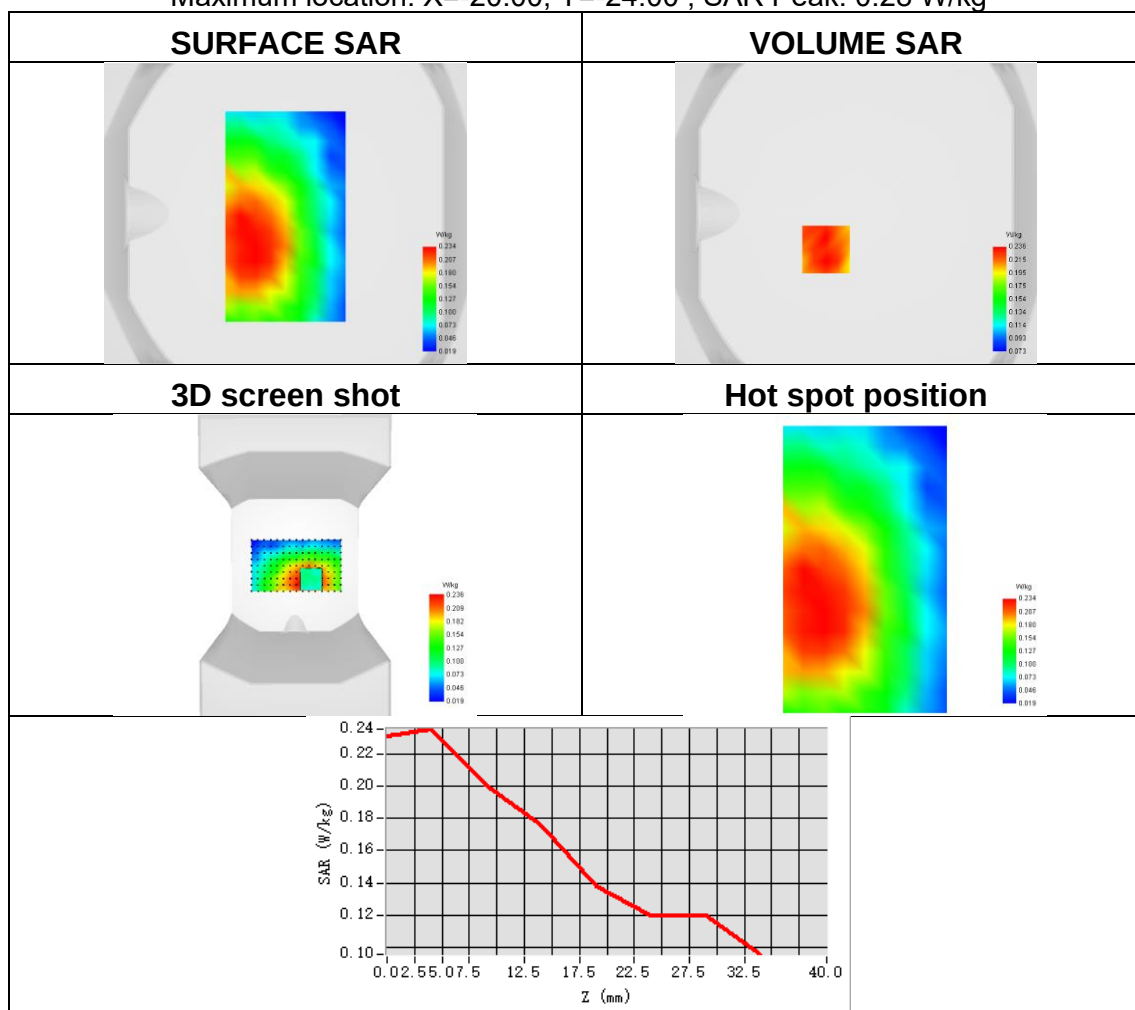




Plot 58:

Test Date	2026-03-28
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 38
Signal	LTE FDD
Frequency	2595
SAR 10g (W/Kg)	0.183
SAR 1g (W/Kg)	0.227
ConvF	1.44
Relative permittivity	39.25
Conductivity (S/m)	1.93

Maximum location: X=8.00, Y=24.00 ; SAR Peak: 0.28 W/kg

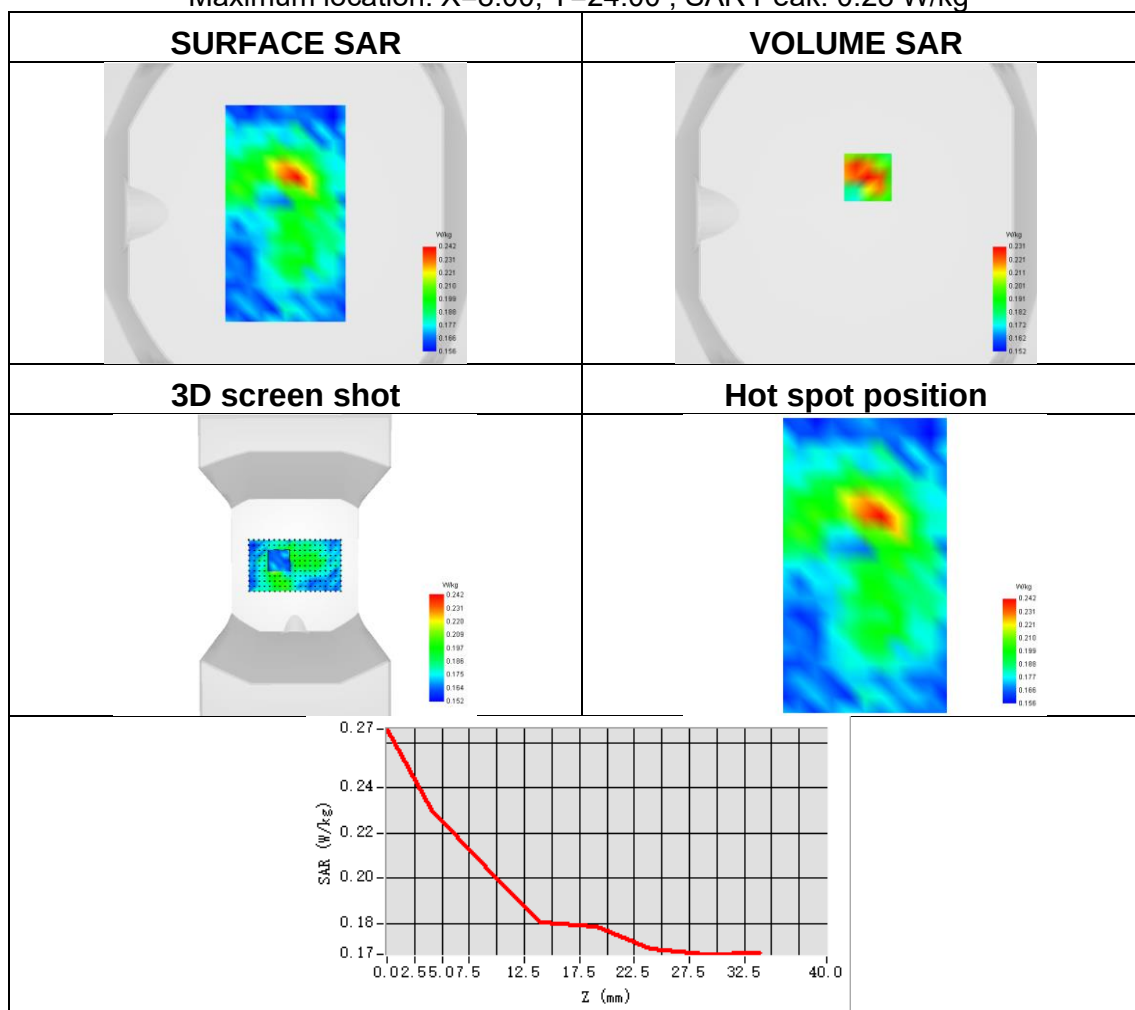




Plot 59:

Test Date	2026-03-29
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 40
Signal	LTE FDD
Frequency	2350
SAR 10g (W/Kg)	0.149
SAR 1g (W/Kg)	0.269
ConvF	1.47
Relative permittivity	39.34
Conductivity (S/m)	1.78

Maximum location: X=24.00, Y=24.00 ; SAR Peak: 0.42 W/kg

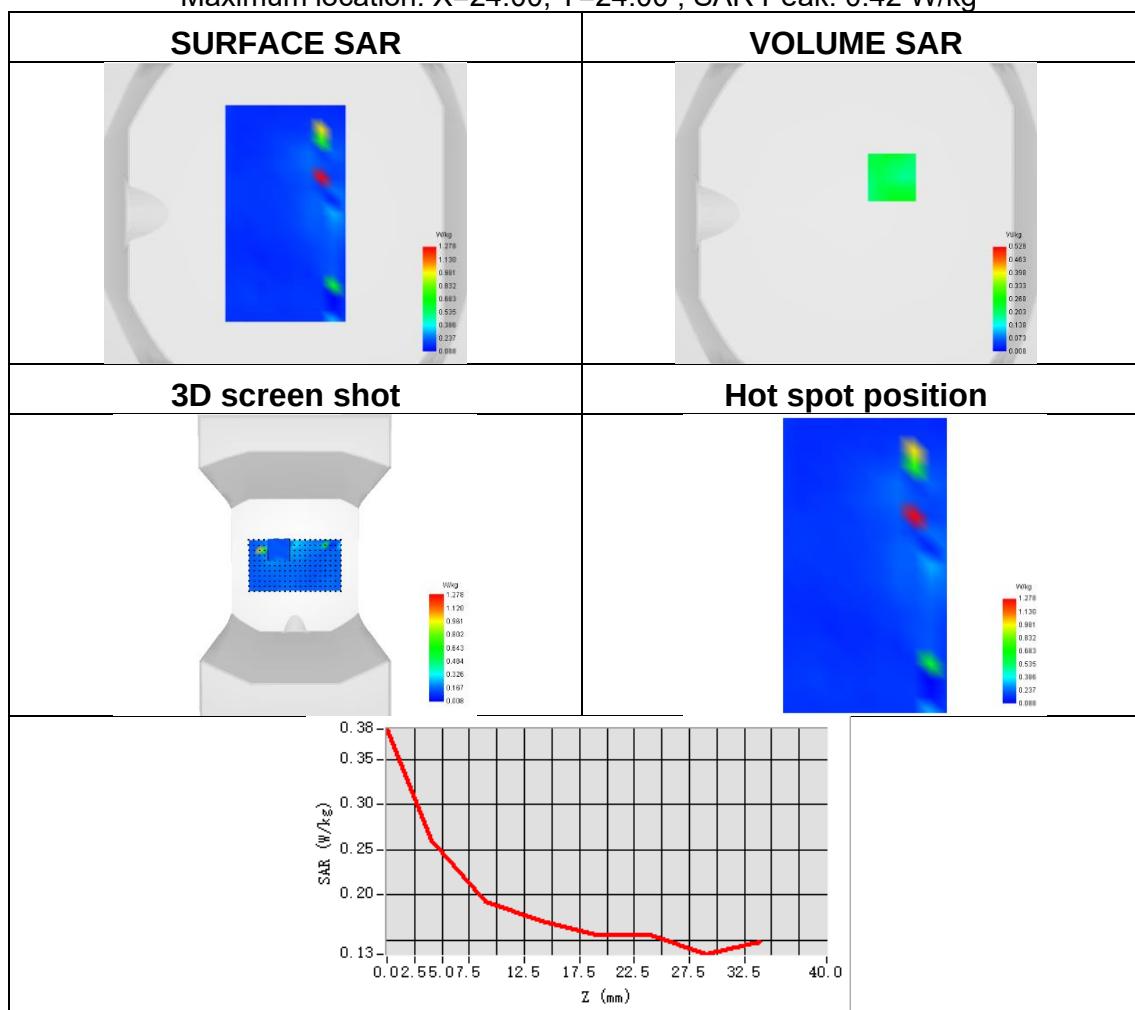




Plot 60:

Test Date	2026-04-05
Area Scan	dx=8mm dy=8mm
Zoom Scan	5x5x7, dx=8mm dy=8mm dz=5mm
Phantom	Validation plane
Device Position	Back Side
Band	LTE band 66
Signal	LTE FDD
Frequency	1720
SAR 10g (W/Kg)	0.327
SAR 1g (W/Kg)	0.515
ConvF	1.21
Relative permittivity	40.56
Conductivity (S/m)	1.38

Maximum location: X=7.00, Y=55.00 ; SAR Peak: 0.63 W/kg

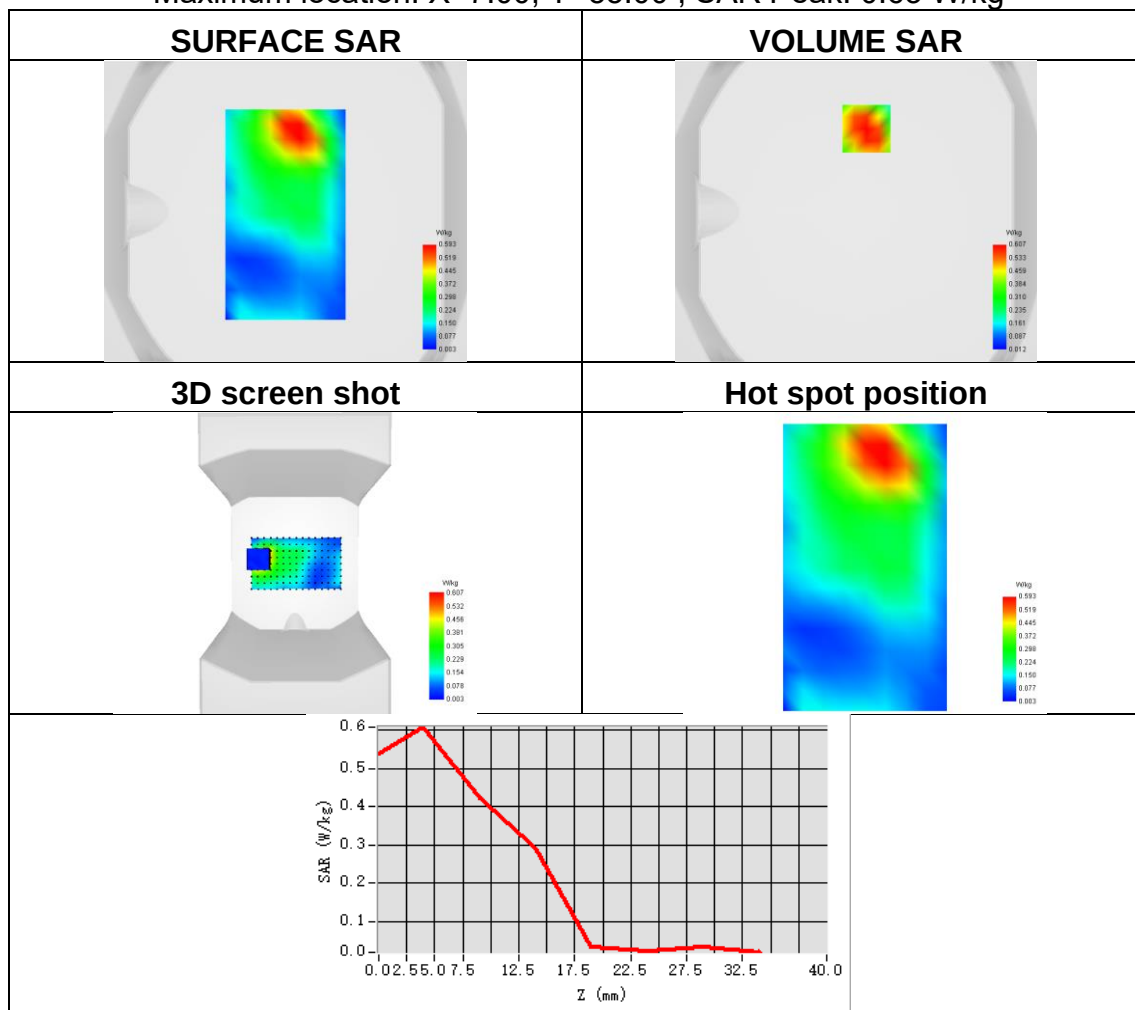



Appendix C. Probe Calibration and Dipole Calibration Report

Refer the appendix Calibration Report.

※※※※※END OF THE REPORT※※※※※