

TEST REPORT

Applicant Name: Shenzhen Tuko Technology Co., Ltd.
Address: 2 Floor, Plant 2, YouCheng Industry Area, Anlan Road,
No.9, GuanLanTown, Longhua District, Shenzhen, China
Report Number: 2504A37377E-RF-00A
FCC ID: 2BHBC-AP-1005

Test Standard (s)

FCC PART 20.21

Sample Description

Product Name: Cell phone Signal Amplifier
Model No.: IAMP-1005, IAMP-1005A, IAMP-1005B,
IAMP-1005C, IAMP-1005D
Trade Mark: N/A
Date Received: 2025-12-22
Report Date: 2026-04-15

Test Result:	The EUT complied with the standards above.
--------------	--

Prepared and Checked By:

Roger Ling

Roger.Ling
EMC Engineer

Approved By:

Bob. Liao

Bob.Liao
EMC Engineer

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA, or any agency of the Federal Government. The information marked “#” is provided by the applicant, the laboratory is not responsible for its authenticity and this information can affect the validity of the result in the test report. Customer model name, addresses, names, trademarks etc. are included but no need marked.
This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

Shenzhen Accurate Technology Co., Ltd.

Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Tel: +86 755-26503290

Web: www.atc-lab.com

TABLE OF CONTENTS

DOCUMENT REVISION HISTORY 4

GENERAL INFORMATION 5

 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT) 5

 OBJECTIVE 5

 TEST METHODOLOGY 5

 TEST FACILITY 6

 MEASUREMENT UNCERTAINTY 6

SYSTEM TEST CONFIGURATION 7

 DESCRIPTION OF TEST CONFIGURATION..... 7

 EUT EXERCISE SOFTWARE 7

 SPECIAL ACCESSORIES AND EQUIPMENT MODIFICATIONS 7

 SUPPORT EQUIPMENT LIST AND DETAILS 7

 EXTERNAL I/O CABLE..... 8

 BLOCK DIAGRAM OF TEST SETUP 8

SUMMARY OF TEST RESULTS 10

TEST EQUIPMENT LIST 11

7.1 AUTHORIZED FREQUENCY BAND VERIFICATION 13

 APPLICABLE STANDARD..... 13

 TEST PROCEDURE 13

 TEST DATA 13

7.2 MAXIMUM POWER MEASUREMENT 14

 APPLICABLE STANDARD..... 14

 TEST PROCEDURE 14

 TEST DATA 15

7.3 MAXIMUM BOOSTER GAIN COMPUTATION 16

 APPLICABLE STANDARDS..... 16

 TEST PROCEDURE 16

 TEST DATA 16

7.4 INTERMODULATION PRODUCT..... 17

 APPLICABLE STANDARDS..... 17

 TEST PROCEDURE 17

 TEST DATA 17

7.5 OUT OF BAND EMISSIONS..... 18

 APPLICABLE STANDARDS..... 18

 TEST PROCEDURE 18

 TEST DATA 19

7.7 NOISE LIMITS..... 20

 APPLICABLE STANDARDS..... 20

 TEST PROCEDURE 20

 TEST DATA 21

7.8 UPLINK INACTIVITY 22

 APPLICABLE STANDARDS..... 22

 TEST PROCEDURE 22

 TEST DATA 22

7.9 VARIABLE BOOSTER GAIN 23
 APPLICABLE STANDARDS..... 23
 TEST PROCEDURE 23
 TEST DATA 24

7.10 OCCUPIED BANDWIDTH 25
 APPLICABLE STANDARDS..... 25
 TEST PROCEDURE 25
 TEST DATA 25

7.11 OSCILLATION DETECTION 26
 APPLICABLE STANDARDS..... 26
 TEST PROCEDURE 26
 TEST DATA 26

7.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS 27
 APPLICABLE STANDARDS..... 27
 TEST PROCEDURE 27
 TEST DATA 28

7.12 RADIATED SPURIOUS EMISSIONS 29
 APPLICABLE STANDARDS..... 29
 TEST PROCEDURE 29
 TEST DATA 29

APPENDIX 32
 APPENDIX A: 7.1 AUTHORIZED FREQUENCY BAND VERIFICATION 33
 APPENDIX B: 7.2 MAXIMUM POWER MEASUREMENT 37
 APPENDIX C: 7.3 MAXIMUM BOOSTER GAIN COMPUTATION..... 40
 APPENDIX D: 7.4INTERMODULATION PRODUCT..... 42
 APPENDIX E: 7.5 TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN..... 49
 APPENDIX F: 7.7 NOISE LIMITS 50
 APPENDIX G: 7.8 UPLINK INACTIVITY..... 58
 APPENDIX H: 7.9 VARIABLE BOOSTER GAIN 60
 APPENDIX I: 7.10 OCCUPIED BANDWIDTH..... 65
 APPENDIX J: 7.11 OSCILLATION DETECTION..... 86
 APPENDIX K: 7.6 SPURIOUS EMISSION AT ANTENNA TERMINALS 96

EXHIBIT A-EUT PHOTOGRAPHS 108
EXHIBIT B-TEST SETUP PHOTOGRAPHS 109

DOCUMENT REVISION HISTORY

Revision Number	Report Number	Description of Revision	Date of Revision
Rev.00	2504A37377E-RF-00A	Original Report	2026-04-15

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product Name	Cell phone Signal Amplifier
Tested Model	IAMP-1005
Multiple Model	IAMP-1005A, IAMP-1005B, IAMP-1005C, IAMP-1005D
Model Difference [#]	The differences between the above models are the model name and the sales channels. Please refer to DOS letter for details. The applicant provided model “IAMP-1005” for testing.
Voltage Range [#]	DC 12V from adapter
Adapter Information [#]	Model: XSG-1202500HUS Input: 100-240V~ 50/60Hz 0.8A Output: 12.0V ---2.5A
Sample Serial Number	3EUN-1 (Assigned by ATC, Shenzhen)
Sample/EUT Status	Good condition

Note: This device is a fixed wideband consumer and the Booster Operating frequency bands list below:

Electrical specification	Uplink	Downlink
Frequency Range	698 ~ 716MHz	728 ~ 746MHz
	776 ~ 787MHz	746 ~ 757MHz
	824 ~ 849 MHz	869 ~ 894 MHz
	1850 ~ 1915MHz	1930 ~ 1995MHz
	1710 ~ 1755MHz	2110 ~ 2155MHz

Objective

This test report is in accordance with Part 2, Part 20.21 and Part 22, Part 24, Part 27 of the Federal Communication Commissions rules.

Test Methodology

All tests and measurements indicated in this document were performed in accordance with the Code of federal Regulations Title 47 Part 2, Sub-part J as well as the following individual parts:

Applicable Standards: KDB 935210 D03 Signal Booster Measurements v04r04.
ANSI C63.26-2015: American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services

Unless otherwise stated there are no any additions to, deviations, or exclusions from the method.

Test Facility

The test site used by Shenzhen Accurate Technology Co., Ltd. to collect test data is located on the Floor 1, KuMaKe Building, Dongzhou Community, Guangming Street, Guangming District, Shenzhen, Guangdong, China.

Accredited by American Association for Laboratory Accreditation (A2LA).The Certificate Number is 4297.01.

Measurement Uncertainty

Parameter		Uncertainty
Occupied Channel Bandwidth		5 %
RF Frequency		0.064×10^{-7}
RF output power, conducted		0.3 dB
Unwanted Emission, conducted		1.2 dB
AC Power Lines Conducted Emissions		2.7 dB
Emissions, Radiated	9kHz - 30MHz	2.1 dB
	30MHz - 1GHz	4.3 dB
	1GHz - 18GHz	4.9 dB
	18GHz - 26.5GHz	5.2 dB
	26.5GHz - 40GHz	4.6 dB
Temperature		1 °C
Humidity		7 %
Supply voltages		0.4 %

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a test mode which has been done in the factory.

Antenna kitting requirement: EUT has some antennas kitting for marketing, the antenna gain and cable loss for varies band were listed below, fulfill the requirement of FCC Part 20.21(e)(8)(i)(G), more detail information please refer to the user manuals.

Outside Antenna:

Frequency Range (MHz)	Antenna and Cable [#]			
	3D-FB 32.8feet Cable Loss (dB)	3D-FB 65.6feet Cable Loss (dB)	TXDS-1001 Ant Gain (dBi)	TXDS-5015 Ant Gain (dBi)
698-716	3	5.9	7	8.4
776-787	3.1	6.2	6.8	7.2
824-849	3.3	6.5	8	7.7
1850-1915	5.1	10.3	9.3	8.2
1710-1755	4.9	9.7	9.4	8.8

Inside Antenna:

Frequency Range (MHz)	Antenna and Cable [#]			
	3D-FB 32.8feet Cable Loss (dB)	3D-FB 98.4feet Cable Loss (dB)	TXXD-2001 Ant Gain (dBi)	TXBZ-3001 Ant Gain (dBi)
728-746	3	9	2.5	6
746-757	3	9	2.5	6
869-894	3.3	9.9	1.5	6.4
1930-1995	5.2	15.5	4.8	8.7
2110-2155	5.4	16.2	4.6	8.6

Note 1: The applicant declares that the inside antenna TXXD-2001 is only used with 3D-FB 32.8 feet cable, and the inside antenna TXBZ-3001 is only used with 3D-FB 98.4 feet cable.

Note 2: The antenna gain and cable loss list above was provided by applicant.

EUT Exercise Software

No exercise software was used.

Special Accessories and Equipment Modifications

No special accessories or modifications were used on the device under test (EUT) during the test.

Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
Unknown	Load	Unknown	Unknown

External I/O Cable


Cable Description	Shielding Type	Length (m)	From Port	To
DC Cable	No	1.45	Adapter	EUT
Coaxial Cable	No	0.8	EUT	Load
Coaxial Cable	No	8.0	Wideband Radio Communication Tester	EUT

Block Diagram of Test Setup

For Radiated Emissions(Below 1GHz):

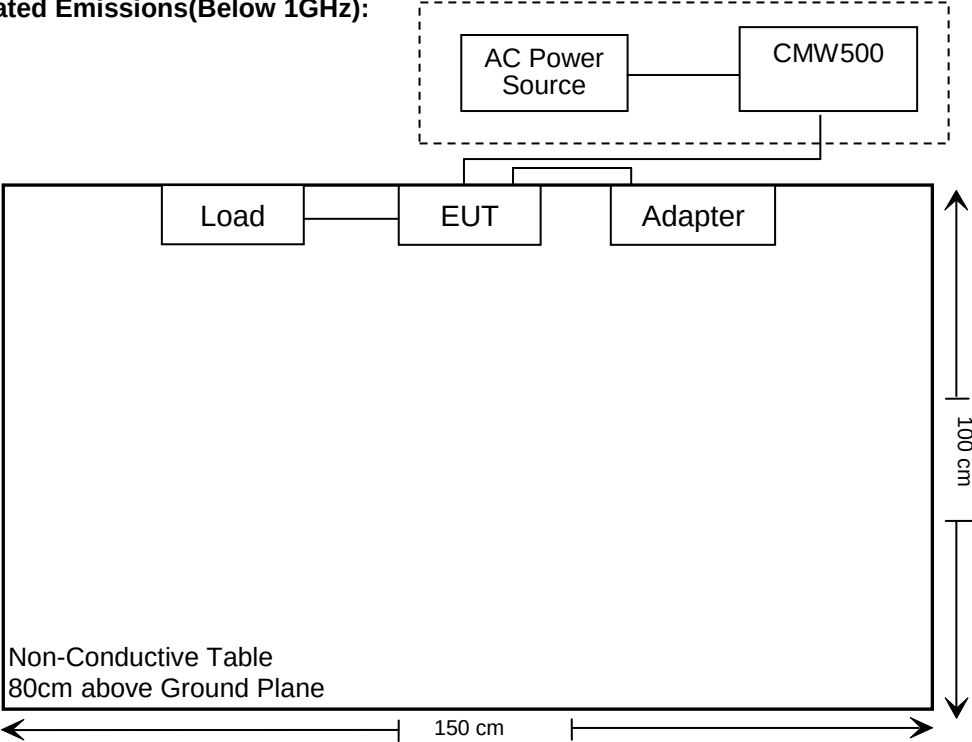

For Radiated Emissions(Above 1GHz):

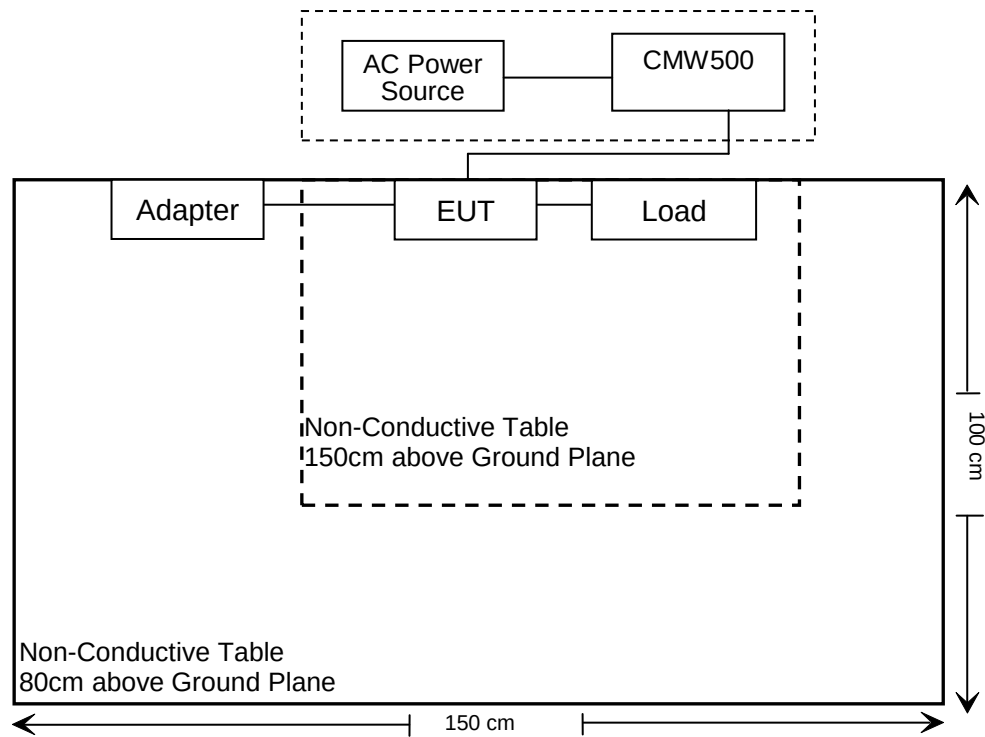

SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§20.21(e)(3)	7.1 Authorized Frequency Band Verification	Compliance
§20.21(e)(8)(i)(D) §20.21(e)(8)(i)(B) §20.21(e)(4)	7.2 Maximum Power Measurement	Compliance
§20.21(e)(8)(i)(C)(2) §20.21(e)(8)(i)(B) §20.21(e)(4)	7.3 Maximum Booster Gain Computation	Compliance
§20.21(e)(8)(i)(B) §20.21(e)(3)	7.13 Spectrum block filtering test procedure	Not applicable
§20.21(e)(8)(i)(F)	7.4 Intermodulation Product	Compliance
§20.21(e)(8)(i)(E)	7.5 Out Of Band Emissions	Compliance
§20.21(e)(8)(i)(A) §20.21(e)(8)(i)(H) §20.21(e)(4)	7.7 Noise Limits	Compliance
§20.21(e)(8)(i)(I) §20.21(e)(4)	7.8 Uplink Inactivity	Compliance
§20.21(e)(8)(i)(C)(1) §20.21(e)(8)(i)(H)	7.9 Variable Booster Gain	Compliance
§2.1049	7.10 Occupied Bandwidth	Compliance
§20.21(e)(8)(ii)(A) §20.21(e)(4)	7.11 Oscillation Detection	Compliance
§2.1051	7.6 Spurious Emissions At Antenna Terminals	Compliance
§2.1053	7.12 Radiated Spurious Emissions	Compliance

Not applicable: This item only for wideband consumer boosters utilizing spectrum block filtering.

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
Radiated Spurious Emission Test(Below 1GHz)					
Rohde & Schwarz	Test Receiver	ESR	102725	2025/09/18	2026/09/17
SONOMA INSTRUMENT	Amplifier	310N	186131	2025/03/26	2026/03/25
Schwarzbeck	Bilog Antenna	VULB9163	9163-323	2024/08/08	2027/08/07
Schwarzbeck	Bilog Antenna	VULB9163	9163-194	2026/01/23	2029/01/22
Agilent	Signal Generator	N5183A	MY47420360	2025/08/29	2026/08/28
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2025/09/17	2026/09/16
Unknown	RF Coaxial Cable	No.12	N040	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.13	N300	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.14	N800	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					
Radiated Spurious Emission Test(Above 1GHz)					
Rohde & Schwarz	Spectrum Analyzer	FSV40	101949	2025/09/17	2026/09/16
A.H. Systems, inc.	Preamplifier	PAM-0118	226	2025/03/20	2026/03/19
Schwarzbeck	Horn Antenna	BBHA9120D	837	2026/01/29	2029/01/30
Unknown	RF Coaxial Cable	No.10	N050	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.11	N1000	2025/05/30	2026/05/29
Schwarzbeck	HORN ANTENNA	BBHA9170	9170-359	2023/12/12	2026/12/11
BACL	Amplifier	BACL-1313-A1840	4012521	2025/05/30	2026/05/29
Agilent	Signal Generator	N5183A	MY47420360	2025/08/29	2026/08/28
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2025/09/17	2026/09/16
Schwarzbeck	Horn Antenna	BBHA9120D	9120D-655	2023/11/27	2026/11/26
PASTERNAK	Horn Antenna	PE9852/2F-20	1120-1	2026/01/29	2029/01/28
Unknown	RF Coaxial Cable	No.15	N600	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.16	N650	2025/05/30	2026/05/29
Test Software: e3 191218 (V9)					

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
RF Conducted Test					
Rohde & Schwarz	Spectrum Analyzer	FSV-40	101948	2025/09/18	2026/09/17
Rohde & Schwarz	Wideband Radio Communication Tester	CMW500	154606	2025/09/18	2026/09/17
BACL	Temp. & Humid. Chamber	BTH-150-40	30192	2025/09/18	2026/09/17
AGILENT	Vector Signal Generator	N5182A	MY50143401	2025/09/17	2026/09/16
Unknown	RF Coaxial Cable	No.31	RF-01	2025/05/30	2026/05/29
Unknown	RF Coaxial Cable	No.32	RF-02	2025/05/30	2026/05/29
Agilent	Attenuator	8496B	MY42141066	2025/09/18	2026/09/17
Agilent	Attenuator	8494B	MY42150993	2025/09/18	2026/09/17
WEINSCHEL	10dB Attenuator	5324	AU 3842	2025/03/26	2026/03/25
Mini-Circuits	Power Splitter	ZFRSC-183-S+	SF10944151S	2025/03/26	2026/03/25
Test Software: JDAutoTestSystem V1.0.0					

*** Statement of Traceability:** Shenzhen Accurate Technology Co., Ltd. attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

7.1 AUTHORIZED FREQUENCY BAND VERIFICATION

Applicable Standard

According to FCC § 20.21(e)(3) Frequency Bands

This test is intended to confirm that the signal booster only operates on the CMRS frequency bands authorized for use by the NPS. In addition, this test will identify the frequency at which the maximum gain is realized within each CMRS operational band, which then serves as a basis for subsequent tests.

Test Procedure

- Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW for 100 kHz with the VBW $\geq 3 \times$ the RBW using a PEAK detector with the MAX HOLD function.
- Set the center frequency of the spectrum analyzer to the center of the operational band under test with a span of 1 MHz.
- Set the signal generator for CW mode and tune to the center frequency of the operational band under test.
- Set the initial signal generator power to a level that is at least 6 dB below the AGC level specified by the manufacturer.
- Slowly increase the signal generator power level until the output signal reaches the AGC operational level.
- Reduce the signal generator power to a level that is 3 dB below the level noted above and manually reset the EUT.
- Reset the spectrum analyzer span to $2 \times$ the CMRS band under test. Adjust the tuned frequency of the signal generator to sweep $2 \times$ the CMRS band using the sweep function. The AGC must not be activated throughout the entire sweep.
- Using three markers, identify the CMRS band edges and the frequency with the highest power. Affirm that the values of all markers are visible on the display of the spectrum analyzer (e.g., marker table set to on).
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.1c) to 7.1j) for all operational uplink and downlink bands.

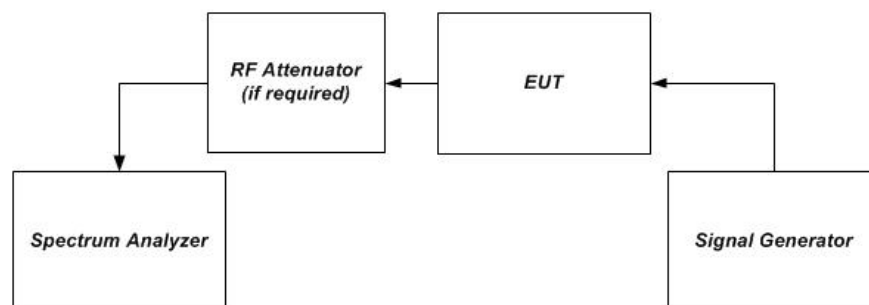


Figure 1 – Band verification test instrumentation setup

Test Data

Test Result: Please refer to the Appendix.

7.2 MAXIMUM POWER MEASUREMENT

Applicable Standard

According to § 20.21(e)(8)(i)(D) Power Limits; § 20.21(e)(8)(i)(B) Bidirectional Capability (uplink minimum conducted power output); § 20.21(e)(4) Self-monitoring.

This procedure shall be used to demonstrate compliance to the signal booster power limits and requirements as specified in §§ 20.21(e)(8)(i)(D) and 20.21(e)(8)(i)(B) for wideband consumer signal boosters.

- a) Compliance to authorized EIRP limits must be shown using the highest gains from the list of antennas, cabling, and coupling devices declared by the manufacturer for use with the consumer booster.
- b) In addition, the maximum power levels measured in this procedure will be utilized in calculating the maximum gain as described in the next subclause.
- c) The frequency with the highest power level in each operational band as determined in 7.1 is to be measured discretely by applying the following procedure utilizing the stated emission and power detector types independently.
- d) Use a signal generator to create a pulsed CW or GSM signal with a pulse width of 570 μ s and a duty cycle of 12.5% (i.e., one GSM timeslot), then measure utilizing the burst power function of the measuring instrument.
- e) Use a signal generator to create an AWGN signal with a 99% occupied bandwidth of 4.1 MHz, then measure utilizing the channel power or band power function of the measuring instrumentation.
- f) All modes of operation must be verified to maintain operation within authorized limits at the maximum uplink and downlink test levels per device type as defined in 5.4, by increasing the power level in 2 dB steps from the AGC level to the maximum input level specified in 5.5.

Test Procedure

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output (donor port) connected to the spectrum analyzer.
- b) Configure the signal generator and spectrum analyzer for operation on the frequency determined in 7.1 with the highest power level, but with the center frequency of the signal no closer than 2.5 MHz from the band edge. The spectrum analyzer span shall be set to at least 10 MHz.
- c) Set the initial signal generator power to a level well below that which causes AGC control.
- d) Slowly increase the signal generator power level until the output signal reaches the AGC operational limit (from observation of signal behavior on the spectrum analyzer; i.e., no further increase in output power as input power is increased).
- e) Reduce power sufficiently on the signal generator to ensure that the AGC is not controlling the power output.
- f) Slowly increase the signal generator power to a level just below (within 0.5 dB of) the AGC limit without triggering the AGC. Note the signal generator power level as P_{in} .
- g) Measure the output power P_{out} with the spectrum analyzer as follows.
 - 1) Set RBW = 100 kHz for AWGN signal type and 300 kHz for CW or GSM signal type.
 - 2) Set VBW $\geq 3 \times$ RBW.
 - 3) Select either the BURST POWER or CHANNEL POWER measurement tool, as required for each signal type. The channel power integration bandwidth shall be 99% occupied bandwidth (4.1 MHz).
 - 4) Select the RMS (power averaging) detector.
 - 5) Ensure that the number Note: This requirement
 - 6) Set sweep time = auto
 - 7) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

- h) Record the measured power level as P_{OUT} with one set of results for the GSM or CW input stimulus and another set of results for the AWGN input stimulus.
- i) Repeat step h) while increasing the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. If the booster has shut down at any point during the input power steps it should be noted and step h) shall be repeated at an input level 1 dB less than that found to cause the shutdown.
- j) Repeat the entire procedure for each operational uplink and downlink frequency band supported by the booster.
- k) Provide tabulated results in the test report.

Test Data

Test Result: Please refer to the Appendix.

7.3 MAXIMUM BOOSTER GAIN COMPUTATION

Applicable Standards

According to § 20.21(e)(8)(i)(C)(2) (ii) Booster Gain Limits (maximum gain); § 20.21(e)(8)(i)(B) Bidirectional Capability (equivalent uplink and downlink gain); § 20.21(e)(4) Self-monitoring.

This subclause provides guidance on the computation of the maximum gain based on the results obtained from previous measurements. The NPS limits on maximum gain for fixed and mobile wideband consumer signal boosters are provided in § 20.21(e)(8)(i)(C)(2). Additionally, § 20.21(e)(8)(i)(B) requires that wideband consumer signal boosters be able to provide equivalent uplink and downlink gain (within 9 dB)

Test Procedure

- a) Calculate the maximum gain of the booster as follows to demonstrate compliance to the applicable gain limits as specified.
- b) For both the uplink and downlink in each supported frequency band, use each of the POUT and PIN result pairs for all signal types used in 7.2 in the following equation to determine the maximum gain (G) of the booster:
$$G \text{ (dB)} = \text{POUT(dBm)} - \text{PIN(dBm)}.$$
- c) Record the maximum gain of the uplink and downlink paths for each supported frequency band, and verify that the each gain value complies with the applicable limit.
- d) Provide tabulated results in the test report.

Test Data

Test Result: Please refer to the Appendix.

7.4 INTERMODULATION PRODUCT

Applicable Standards

According to § 20.21(e)(8)(i)(f) Intermodulation Limits.

Test Procedure

The following procedures shall be used to demonstrate compliance to the intermodulation limit specified in § 20.21(e)(8)(i)(F) for wideband consumer signal boosters.

- Connect the signal booster to the test equipment as shown in **Figure 2**. Begin with the uplink output connected to the spectrum analyzer.
- Set the spectrum analyzer RBW = 3 kHz.
- Set the VBW $\geq 3 \times$ RBW.
- Select the RMS detector
- Set the spectrum analyzer center frequency to the center of the supported operational band under test.
- Set the span to 5 MHz. Affirm that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
- Configure the two signal generators for CW operation with generator 1 tuned 300 kHz below the operational band center frequency and generator 2 tuned 300 kHz above the operational band center frequency.
- Set the signal generator amplitudes so that the power from each into the RF combiner is equivalent, then turn on the RF output.
- Increase the signal generators' amplitudes equally until just before the EUT begins AGC and affirm that all intermodulation products (if any exist) are below the specified limit of -19 dBm.
- Utilize the trace averaging function of the spectrum analyzer and wait for the trace to stabilize. Place a marker at the highest amplitude intermodulation product.
- Record the maximum intermodulation product amplitude level that is observed.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.4e) to 7.4l) for all uplink and downlink operational bands.

Note: If using a single signal generator with dual outputs, affirm that intermodulation products are not the result of the generator.

- Increase the signal generator amplitude in 2 dB steps to 10 dB above the AGC threshold determined in 7.4i), but to not to exceed the maximum input level in 5.5, to affirm that the EUT maintains compliance with the intermodulation limit

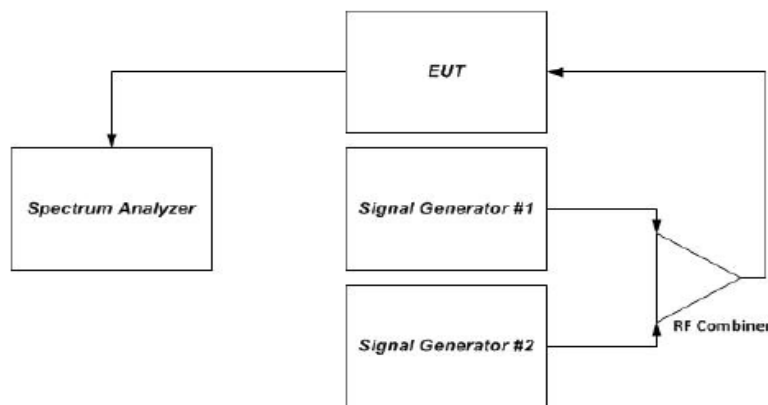


Figure 2 – Intermodulation product instrumentation test setup

Test Data

Test Result: Please refer to the Appendix.

7.5 OUT OF BAND EMISSIONS

Applicable Standards

According to § 20.21(e)(8)(i)(E) Out of Band Emission Limits.

Test Procedure

This measurement is intended to demonstrate compliance to the limit specified in § 20.21(e)(8)(i)(E). The mobile emission limit applicable to the supported band of operation can be determined from the applicable rule part as listed in Annex A for each authorized operating band.

a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.

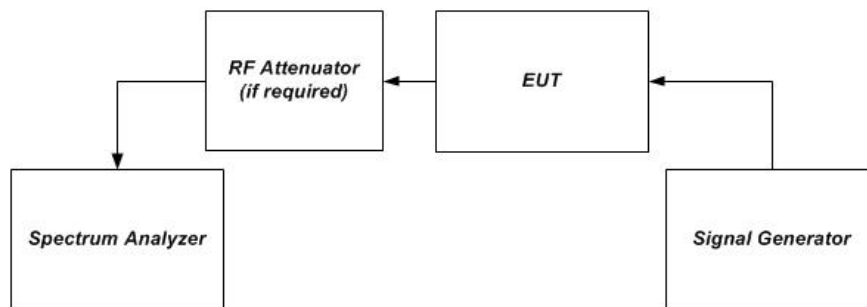


Figure 1 – Band verification test instrumentation setup

b) Configure the signal generator for the appropriate operation for all uplink and downlink bands:

- i) GSM: 0.2 MHz from upper and lower band edges.
- ii) LTE (5 MHz): 2.5 MHz from upper and lower band edges.
- iii) CDMA: 1.25 MHz from upper and lower band edges, except for cellular band as follows (only the upper and lower frequencies need to be tested):

824.88 MHz, 845.73 MHz, 836.52 MHz, 848.10 MHz, 869.88 MHz, 890.73 MHz, 881.52 MHz, 893.10 MHz.

Note 1: Alternative test modulation types:

- CDMA (alternative 1.25 MHz AWGN)
- LTE 5 MHz (alternative W-CDMA or 4.1 MHz AWGN)

Note 2: For LTE, the signal generator should utilize the uplink and downlink signal types for these modulations in uplink and downlink tests, respectively. LTE shall use 5 MHz signal, 25 resource blocks transmitting.

Note 3: When using an AWGN test signal, the bandwidth shall be the measured 99% occupied bandwidth.

c) Set the signal generator amplitude to the maximum power level prior to AGC similar to the procedures in 7.2.2e) to 7.2.2f) of power measurement procedure for appropriate modulations.

d) Set RBW = measurement bandwidth specified in the applicable rule section for the supported frequency band (see Annex A for cross-reference to applicable rule section).

e) Set VBW = 3 × RBW.

f) Select the RMS (power averaging) detector.

g) Sweep time = auto-couple.

h) Set the analyzer start frequency to the upper band/block edge frequency and the stop frequency to the upper band/block edge frequency plus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is ≥ 1 GHz).

i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.

- j) Use peak marker function to find the maximum power level.
- k) Capture the spectrum analyzer trace of the power level for inclusion in the test report.
- l) Increase the signal generator amplitude in 2 dB steps until the maximum input level indicated in 5.5 is reached. Affirm that the EUT maintains compliance with the OOB limits.
- m) Reset the analyzer start frequency to the lower band/block edge frequency minus 300 kHz (when operational frequency is < 1 GHz) or 3 MHz (when operational frequency is $\geq$ 1 GHz), and the stop frequency to the lower band/block edge frequency and repeat 7.5j) to 7.5l).
- n) Repeat 7.5b) through 7.5m) for each uplink and downlink operational band.

Test Data

Test Result: Please refer to the Appendix.

7.7 NOISE LIMITS


Applicable Standards

According to § 20.21(e)(8)(i)(A) Noise Limits; § 20.21(e)(8)(i)(H) Transmit Power Off Mode (uplink and downlink noise power); § 20.21(e)(4) Self-monitoring.


Test Procedure

Maximum transmitter noise power level

a) Connect the EUT to the test equipment as shown in Figure 3. Begin with the uplink output connected to the spectrum analyzer. When measuring downlink noise, connect the downlink output to the spectrum analyzer.

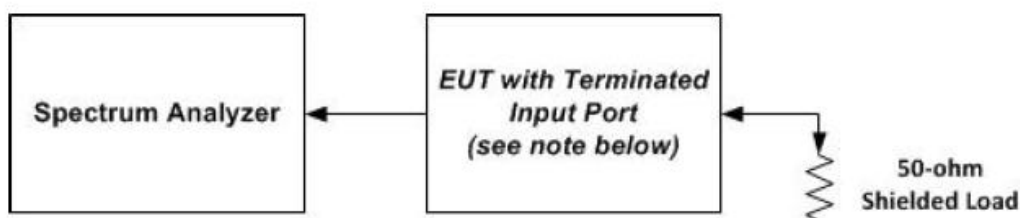

- b) Set the spectrum analyzer RBW to 1 MHz with the VBW $\geq 3 \times$ RBW.
- c) Select the power averaging (RMS) detector and trace average over at least 100 traces.
- d) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \times$ the CMRS band.
- e) Measure the maximum transmitter noise power level.
- f) Save the spectrum analyzer plot as necessary for inclusion in the final test report.
- g) Repeat 7.7b) to 7.7f) for all operational uplink and downlink bands.
- h) Connect the EUT to the test equipment as shown in Figure 4 for uplink. Affirm the coupled path of the RF coupler is connected to the spectrum analyzer.

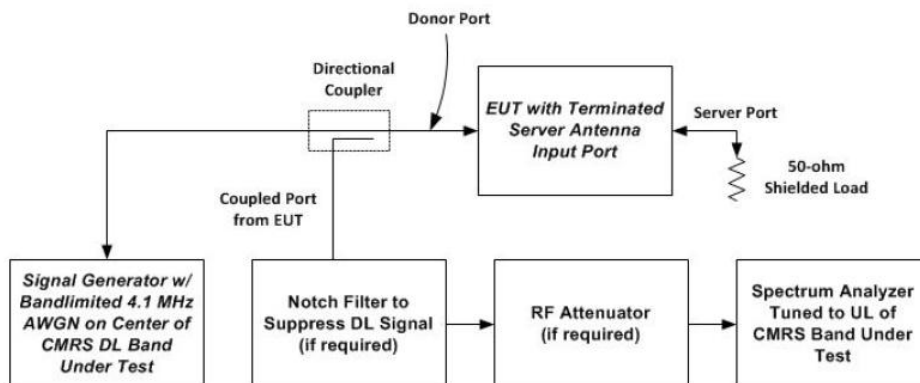

- i) Configure the signal generator for 4.1 MHz AWGN operation.
- j) Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3 \times$ RBW with a power averaging (rms) detector with at least 100 trace averages.
- k) Set the center frequency of the spectrum analyzer to the center of the CMRS band under test with the span $\geq 2 \times$ the CMRS band. This shall include all spectrum blocks in the particular CMRS band under test (see Annex A).

- l) For uplink noise measurements, set the spectrum analyzer center frequency for the uplink band under test and tune the signal generator to the center of the paired downlink band.
- m) Measure the maximum transmitter noise power level when varying the downlink signal generator output level from -90 dBm to -20 dBm, as measured at the input port, in 1 dB steps inside the RSSI-dependent region and in 10 dB steps outside the RSSI-dependent region. Report the six values closest to the limit with at least two points within the RSSI-dependent region of the limit. See noise limit in Annex D.
- n) Repeat 7.7.1h) through 7.7.1m) for all operational uplink.

Variable uplink noise timing

Variable uplink noise timing is to be measured as follows.

- a) Set the spectrum analyzer to the uplink frequency to be measured.
- b) Set the span to 0 Hz with a sweep time of 10 seconds.
- c) Set the power level of signal generator 1 to the lowest level of the RSSI-dependent noise.
- d) Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed boosters.
- e) Confirm that the uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices
- f) Repeat 7.7.2a) to 7.7.2e) for all operational uplink bands.
- g) Include plots and summary table in test report.

Note: Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a second signal generator and cycle the RF output to simulate this function.

Test Data

Test Result: Please refer to the Appendix.

7.8 UPLINK INACTIVITY


Applicable Standards

According to § 20.21(e)(8)(i)(I) Uplink Inactivity & § 20.21(e)(4); § 20.21(e)(4) Self-monitoring.

Test Procedure

This measurement procedure is intended to demonstrate compliance to the uplink inactivity requirements specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(I).

a) Connect the EUT to the test equipment as shown in Figure 3 with the uplink output connected to the spectrum analyzer.

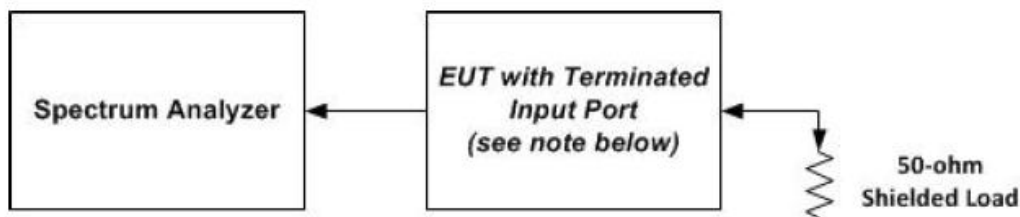

- b) Select the RMS power averaging detector.
- c) Set the spectrum analyzer RBW for 1 MHz with the VBW $\geq 3 \times$ RBW.
- d) Set the center frequency of the spectrum analyzer to the center of the uplink operational band.
- e) Set the span for 0 Hz with a single sweep time for a minimum of 330 seconds.
- f) Start to capture a new trace using MAX HOLD.
- g) After approximately 15 seconds turn on the EUT power.
- h) Once the full spectrum analyzer trace is complete place a MARKER on the leading edge of the pulse and use the DELTA MARKER METHOD to measure the time until the uplink becomes inactive.
- i) Affirm that the noise level for the squelched signal is below the uplink inactivity noise power limit, as specified by the rules.
- j) Capture the plot for inclusion in the test report.
- k) Measure noise using procedures in 7.7.1a) to 7.7.1f).
- l) Repeat 7.8d) through 7.8k) for all operational uplink bands.

Note: Some signal boosters will require a signal generator input because they will not operate unless a signal is received at the input terminals. If this is the case, connect a signal generator and cycle the RF output to simulate this function.

Test Data

Test Result: Please refer to the Appendix.

7.9 VARIABLE BOOSTER GAIN

Applicable Standards

Rule paragraph(s): § 20.21(e)(8)(i)(C)(1) *Booster Gain Limits* (variable gain); § 20.21(e)(8)(i)(H) *Transmit Power Off Mode* (uplink gain).

Test Procedure

Maximum gain

This procedure shall be used to demonstrate compliance to the booster gain limits specified for wideband consumer signal boosters in § 20.21(e)(8)(i)(C) or § 20.21(e)(8)(i)(H). The variable booster gain limits are expressed as a function of RSSI and MSCL. The RSSI is varied over a range of values as specified within the procedure. Refer to Annex B of this document for guidance on determining the applicable MSCL value.

- a) Connect the EUT to the test equipment as shown in **Figure 5** with the uplink output connected to signal generator 1. Confirm that the coupled path of the RF coupler is connected to the spectrum analyzer.
- b) Configure downlink signal generator 1 for AWGN operation with a 99% occupied bandwidth of 4.1 MHz tuned to the center of the operational band.
- c) Set the power level and frequency of signal generator 2 to a value 5 dB below the AGC level determined from 7.2. The signal type is AWGN with a 99% OBW of 4.1 MHz.
- d) Set RBW = 100 kHz.
- e) Set VBW ≥ 300 kHz.
- f) Select the CHANNEL POWER measurement mode.
- g) Select the RMS (power averaging) detector.
- h) Ensure that the number of measurement points per sweep $\geq (2 \times \text{span})/\text{RBW}$.
- i) Sweep time = auto couple or as necessary (but no less than auto couple value).
- j) Trace average at least 10 traces in power averaging (i.e., RMS) mode.
- k) Measure the maximum channel power and compute maximum gain when varying the signal generator 1 output to a level from -90 dBm to -20 dBm as measured at the input port in 1 dB steps inside the RSSI-dependent region and 10 dB steps outside the RSSI-dependent region and report the six values closest to the limit, including at least two points from within the RSSI-dependent region of operation. See gain limit in charts in Annex D for uplink gain requirements. Additionally, document that the EUT provides equivalent uplink and downlink gain, and when operating in shutoff mode the uplink and downlink gain is within the transmit power off mode gain limits.
- l) Repeat 7.9.1b) to 7.9.1k) for all operational uplink bands.

Variable uplink gain timing

Variable uplink gain timing is to be measured as follows.

- Set the spectrum analyzer to the uplink frequency to be measured.
- Set the span to 0 Hz with a sweep time of 10 seconds.
- Set the power level of signal generator 1 to the lowest level of the RSSI-dependent gain.
- Select MAX HOLD and increase the power level of signal generator 1 by 10 dB for mobile boosters and 20 dB for fixed indoor boosters. Signal generator 2 remains same, as described in 7.9.1c).
- Confirm that the uplink gain decreases to the specified levels within 1 second for mobile devices and 3 seconds for fixed devices.
- Repeat 7.9.2a) to 7.9.2e) for all operational uplink bands.

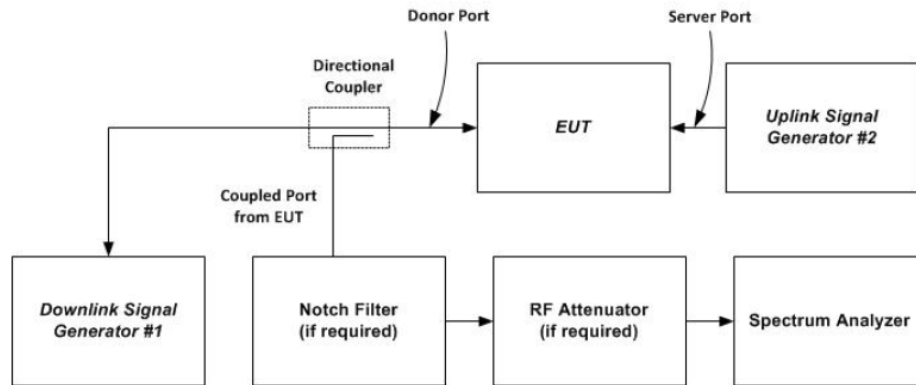


Figure 5 – Variable gain instrumentation test setup

Test Data

Test Result: Please refer to the Appendix.

7.10 OCCUPIED BANDWIDTH

Applicable Standards

According to § 2.1049 Measurements required: Occupied bandwidth.

Test Procedure

This measurement is required to compare the uniformity of the output signal relative to the input signal and to satisfy the requirements of § 2.1049.

- Connect the test equipment as shown in Figure 6 to measure the characteristics of the test signals produced by the signal generator.
- Set VBW to $\geq 3 \times \text{RBW}$.
- Set the center frequency of the spectrum analyzer to the center of the operational band. The span will be adjusted for each modulation type and occupied bandwidth as necessary for accurately viewing the signals.
- Set the signal generator for power level to match the values obtained in 7.2.
- Set the signal generator modulation type for GSM with a PRBS pattern and allow the trace on the signal generator to stabilize adjusting the span as necessary.
- Set the spectrum analyzer RBW for 1% to 5% of the emissions bandwidth.
- Capture the spectrum analyzer trace for inclusion in the test report.
- Repeat 7.10c) to 7.10g) for CDMA and W-CDMA modulation adjusting the span as necessary for all uplink and downlink operational bands. AWGN or LTE may be used in place of W-CDMA, as an option.
- Connect the test equipment as shown in **Figure 1**. Begin with the uplink output connected to the spectrum analyzer.
- Repeat 7.10c) to 7.10h) in this new configuration.

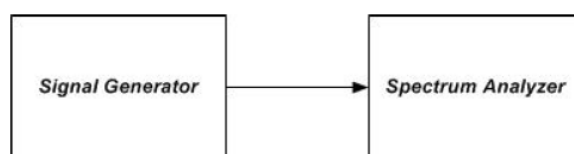


Figure 6 – Occupied bandwidth instrumentation test setup

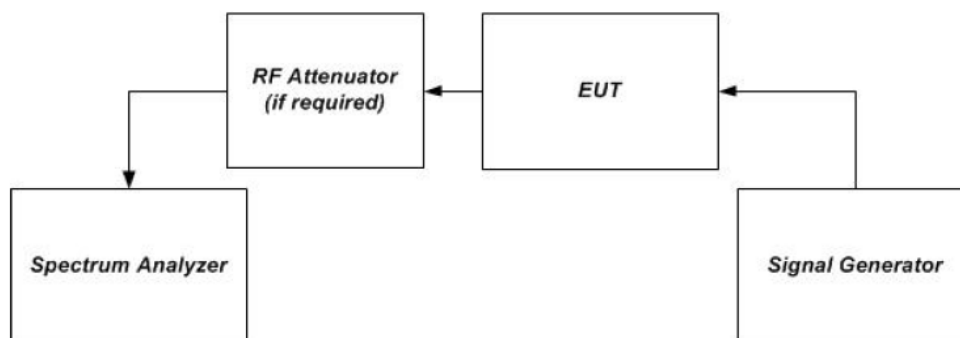


Figure 1 – Band verification test instrumentation setup

Test Data

Test Result: Please refer to the Appendix.

7.11 OSCILLATION DETECTION

Applicable Standards

Rule paragraph(s): § 20.21(e)(8)(ii)(A) Anti-Oscillation, §20.21(e)(4) Self-monitoring

For this measurement two EUTs will be permitted, one operating in a normal mode and the second operating in a test mode that is capable of disabling the uplink inactivity squelching and or a reduction of the time between restarts to 5 seconds. This will greatly decrease the test time required.

NOTE — Consumer boosters certified as direct connection mobile boosters having gain of less than or equal to 15 dB are exempt from compliance to testing procedures in 7.11.3 and 7.11.4.

Test Procedure

According to KDB 935210 D03 Signal Booster Measurements v04, §7.11.2 Oscillation restart tests and §7.11.3 Test procedure for measuring oscillation mitigation or shutdown

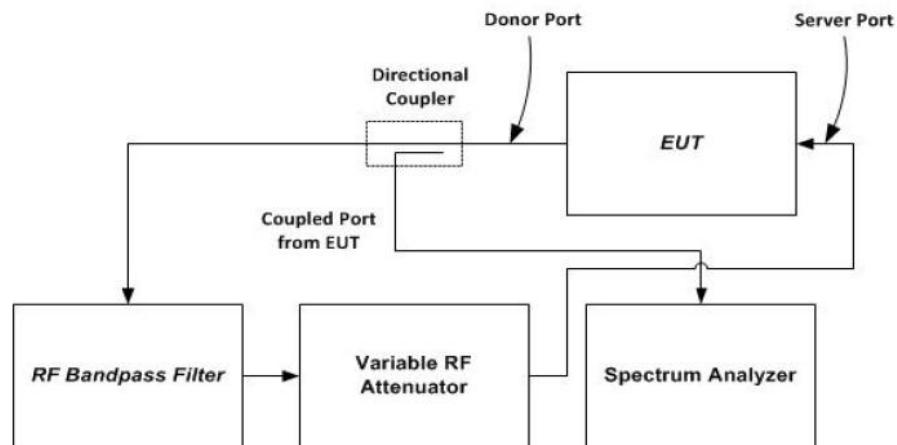


Figure 7 – Oscillation detection instrumentation test setup

Test Data

Test Result: Please refer to the Appendix.

7.6 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Applicable Standards

FCC §2.1051 Measurements required: Spurious emissions at antenna terminals.

§20.21(e)(8)(i)(E): Booster out of band emissions (OOBE) shall be at least 6 dB below the FCC's mobile emission limits for the supported bands of operation. Compliance to OOBE limits will utilize high peak-to-average CMRS signal types.

§22.917 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§24.238 (a) Out of band emissions. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB.

§27.53: the power of any emission shall be attenuated outside the band below the transmitter power (P) by at least $43 + 10 \log(P)$ dB;

Test Procedure

The following procedures shall be used to demonstrate compliance to the applicable conducted spurious emissions limits as per § 2.1051.

Note: For frequencies below 1 GHz, an RBW of 1 MHz may be used in a preliminary measurement. If non-compliant emissions are detected, a final measurement shall be made with a 100 kHz RBW. Additionally, a peak detector may also be used for the preliminary measurement. If non-compliant emissions are detected then a final measurement of these emissions shall be made with the power averaging (RMS) detector.

- a) Connect the EUT to the test equipment as shown in Figure 1. Begin with the uplink output connected to the spectrum analyzer.
- b) Configure the signal generator for AWGN with a 99% occupied bandwidth of 4.1 MHz with a center frequency corresponding to the center of the CMRS band under test.
- c) Set the signal generator amplitude to the level determined in the power measurement procedure in 7.2.
- d) Turn on the signal generator RF output and measure the spurious emission power levels with an appropriate measurement instrument as follows.
 - 1) Set RBW = measurement bandwidth specified in the applicable rule section for the operational frequency band under consideration (see Annex A for relevant cross-references). Note that many of the individual rule sections permit the use of a narrower RBW (typically $\geq 1\%$ of the emission bandwidth) to enhance measurement accuracy, but the result must then be integrated over the specified measurement bandwidth.
 - 2) Set VBW = $3 \times$ RBW.
 - 3) Select the power averaging (RMS) detector. (See above note regarding the use of a peak detector for preliminary measurements.)
 - 4) Sweep time = auto-couple.
 - 5) Set the analyzer start frequency to the lowest radio frequency signal generated in the equipment, without going below 9 kHz, and the stop frequency to the lower band/block edge frequency minus 100 kHz or 1 MHz, as specified in the applicable rule part. Note that the number of measurement points in each sweep

must be $\geq (2 \times \text{span/RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer. Trace average at least 10 traces in power averaging (i.e., RMS) mode.

6) Use the peak marker function to identify the highest amplitude level over each measured frequency range. Record the frequency and amplitude and capture a plot for inclusion in the test report.

7) Reset the analyzer start frequency to the upper band/block edge frequency plus 100 kHz or 1 MHz, as specified in the applicable rule part, and the analyzer stop frequency to $10 \times$ the highest frequency of the fundamental emission. Note that the number of measurement points in each sweep must be $\geq (2 \times \text{span/RBW})$ which may require that the measurement range defined by the start and stop frequencies above be subdivided, depending on the available number of measurement points provided by the spectrum analyzer.

8) Use the peak marker function to identify the highest amplitude level over each of the measured frequency ranges. Record the frequency and amplitude and capture a plot for inclusion in the test report.

e) Repeat 7.6b) through 7.6d) for each supported frequency band of operation.

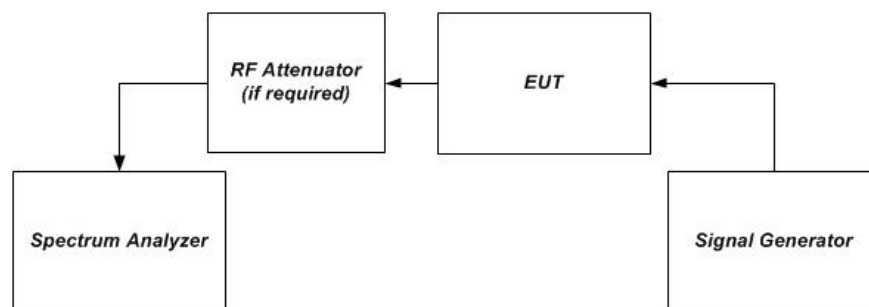


Figure 1 – Band verification test instrumentation setup

Test Data

Test Result: Please refer to the Appendix.

7.12 RADIATED SPURIOUS EMISSIONS

Applicable Standards

§ 2.1053 Measurements required: Field strength of spurious radiation.

Test Procedure

This procedure is intended to satisfy the requirements specified in § 2.1053. The applicable limits are those specified for mobile emissions in the rule part appropriate to the band of operation (see Annex A).

- a) Place the EUT on an OATS or semi-anechoic chamber turntable 3 m from the receiving antenna. 12
- b) Connect the EUT to the test equipment as shown in Figure 10beginning with the uplink output.
- c) Set the signal generator to produce a CW signal with the frequency set to the center of the operational band under test and the power level set at PIN as determined from 7.2.
- d) Measure the radiated spurious emissions from the EUT from lowest to the highest frequencies as specified in § 2.1057. Maximize the radiated emissions by utilizing the procedures described in Clause 8 of ANSI C63.4-2014.
- e) Capture the peak emissions plots using a peak detector with Max-Hold for inclusion in the test report. Tabular data is acceptable in lieu of spectrum analyzer plots.
- f) Repeat 7.12c) through 7.12e) for all operational bands.

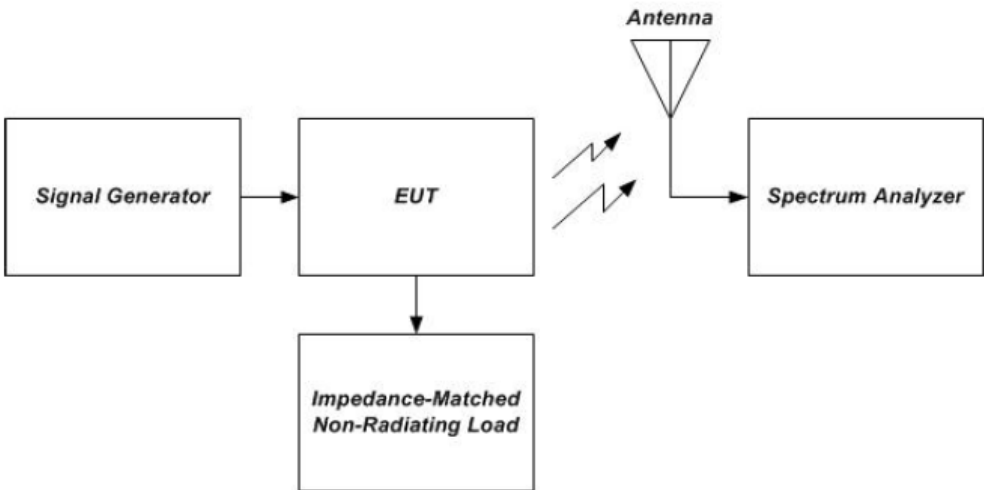


Figure 10 – Radiated spurious emissions test instrumentation setup

Test Data

Environmental Conditions

Test Item:	RSE Below 1GHz	RSE Above 1GHz
Temperature:	23.8 °C	22.7 °C
Relative Humidity:	56 %	53 %
ATM Pressure:	100.4 kPa	100.4 kPa
Test Engineer:	Jayden Luo	Max.Tao
Test Date:	2026-03-18	2026-03-09
EUT Operation Mode:	Transmitting	Transmitting

Test Result: Compliance, please refer to the below data.

Uplink

Frequency (MHz)	Reading Level (dBm)	Rx Antenna Polar (H/V)	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Lower 700MHz, Test Frequency 707MHz						
258.21	-60.62	H	3.2	-57.42	-19	-38.42
149.49	-53.53	V	-2.13	-55.66	-19	-36.66
1414	-52.35	H	-1.31	-53.66	-19	-34.66
1414	-52.74	V	-1.42	-54.16	-19	-35.16
2121	-42.62	H	1.07	-41.55	-19	-22.55
2121	-29.45	V	0.88	-28.57	-19	-9.57
Upper 700MHz, Test Frequency 781.5MHz						
258.21	-60.77	H	3.2	-57.57	-19	-38.57
149.49	-53.58	V	-2.13	-55.71	-19	-36.71
1563	-54.10	H	-2.18	-56.28	-46	-10.28
1563	-54.32	V	-1.95	-56.27	-46	-10.27
2344.5	-32.70	H	1.84	-30.86	-19	-11.86
2344.5	-31.27	V	1.58	-29.69	-19	-10.69
3907.5	-52.60	H	3.38	-49.22	-19	-30.22
3907.5	-49.25	V	3.36	-45.89	-19	-26.89
Cellular frequency Band, Test Frequency 836.5 MHz						
258.21	-60.49	H	3.2	-57.29	-19	-38.29
149.49	-53.71	V	-2.13	-55.84	-19	-36.84
2509.5	-40.25	H	1.07	-39.18	-19	-20.18
2509.5	-34.72	V	0.93	-33.79	-19	-14.79
PCS Band, Test Frequency 1882.5 MHz						
258.21	-60.75	H	3.2	-57.55	-19	-38.55
149.49	-52.94	V	-2.13	-55.07	-19	-36.07
3765	-57.74	H	3.44	-54.30	-19	-35.30
3765	-58.07	V	3.31	-54.76	-19	-35.76
AWS Band, Test Frequency 1732.5 MHz						
258.21	-60.57	H	3.2	-57.37	-19	-38.37
149.49	-53.12	V	-2.13	-55.25	-19	-36.25
3465	-51.24	H	2.53	-48.71	-19	-29.71
3465	-51.79	V	2.48	-49.31	-19	-30.31

Downlink

Frequency (MHz)	Reading Level (dBm)	Rx Antenna Polar (H/V)	Substituted Factor (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
Lower 700MHz, Test Frequency 737MHz						
256.86	-60.98	H	3.33	-57.65	-19	-38.65
144.21	-54.39	V	-2.13	-56.52	-19	-37.52
2211	-58.82	H	1.72	-57.10	-19	-38.10
2211	-58.26	V	2.06	-56.20	-19	-37.20
Upper 700MHz, Test Frequency 751.5MHz						
256.86	-60.59	H	3.33	-57.26	-19	-38.26
144.21	-54.00	V	-2.13	-56.13	-19	-37.13
2254.5	-58.34	H	0.92	-57.42	-19	-38.42
2254.5	-58.99	V	1.27	-57.72	-19	-38.72
Cellular Band, Test Frequency 881.5 MHz						
256.86	-60.79	H	3.33	-57.46	-19	-38.46
144.21	-53.95	V	-2.13	-56.08	-19	-37.08
2644.5	-57.93	H	1.35	-56.58	-19	-37.58
2644.5	-57.27	V	1.47	-55.80	-19	-36.80
PCS Band, Test Frequency 1962.5 MHz						
256.86	-61.05	H	3.33	-57.72	-19	-38.72
144.21	-54.68	V	-2.13	-56.81	-19	-37.81
3925	-57.78	H	3.7	-54.08	-19	-35.08
3925	-55.63	V	3.56	-52.07	-19	-33.07
AWS Band, Test Frequency 2132.5 MHz						
256.86	-61.26	H	3.33	-57.93	-19	-38.93
144.21	-54.61	V	-2.13	-56.74	-19	-37.74
4265	-51.43	H	3.72	-47.71	-19	-28.71
4265	-50.69	V	4	-46.69	-19	-27.69

Note1: Absolute Level = Reading Level + Substituted Factor

Note2: Substituted Factor Contains: SG Level - Cable Loss+ Antenna Gain

Note3: Margin = Absolute Level - Limit

APPENDIX

Test Information:


Sample No.:	3EUN-1	Test Date:	2025-12-30~2026-03-17
Test Site:	RF	Test Mode:	Transmitting
Tester:	Benny Li	Test Result:	Pass

Environmental Conditions:


Temperature: (°C)	24.3-25.6	Relative Humidity: (%)	42-58	ATM Pressure: (kPa)	100.9-100.4
----------------------	-----------	------------------------------	-------	------------------------	-------------

Appendix A: 7.1 Authorized Frequency Band Verification

Test Graphs

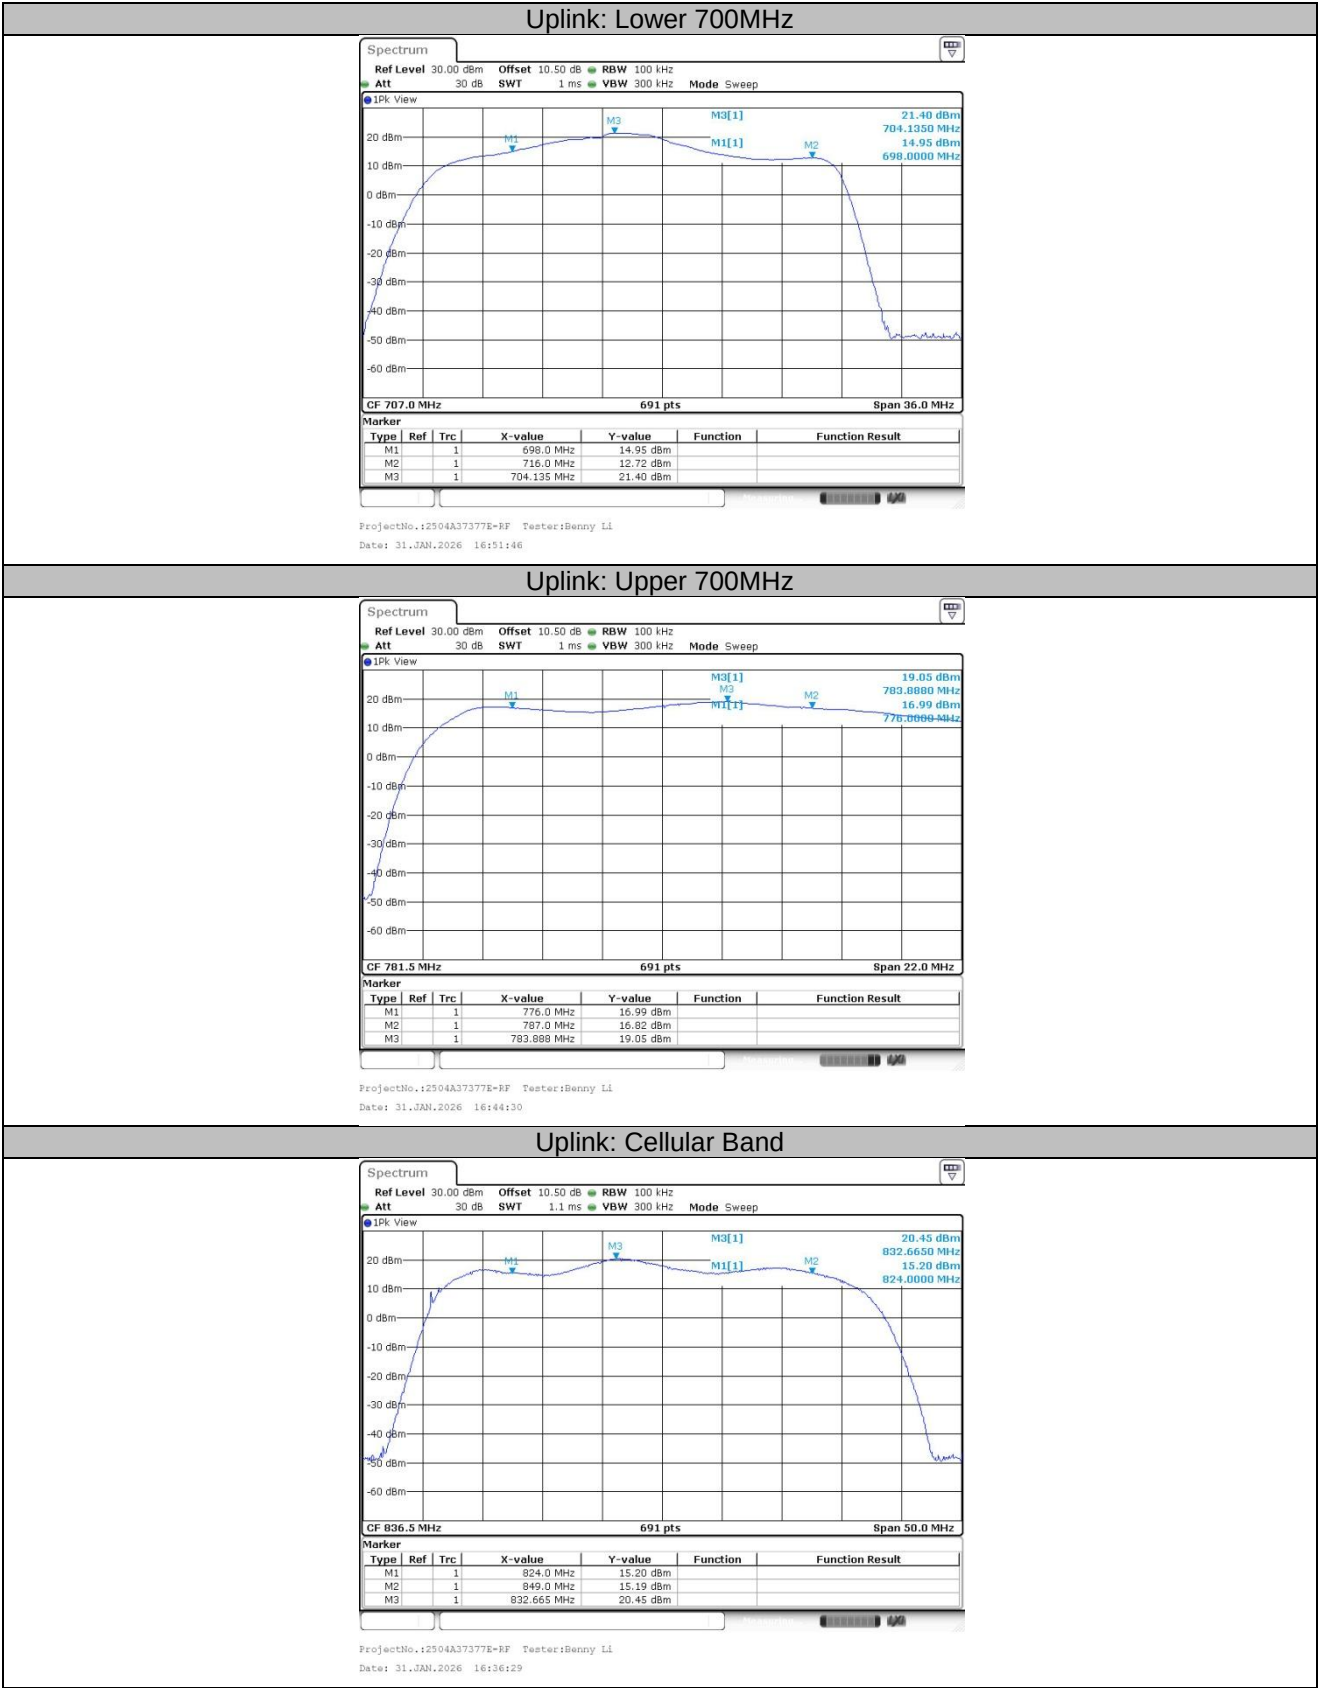


Uplink: PCS Band

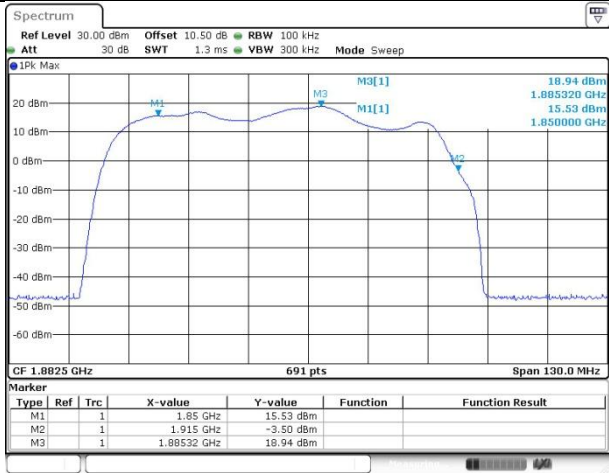

ProjectNo.:2504A37377E-RF Tester:Benny LI
Date: 31.JAN.2026 16:03:40

Uplink: AWS Band

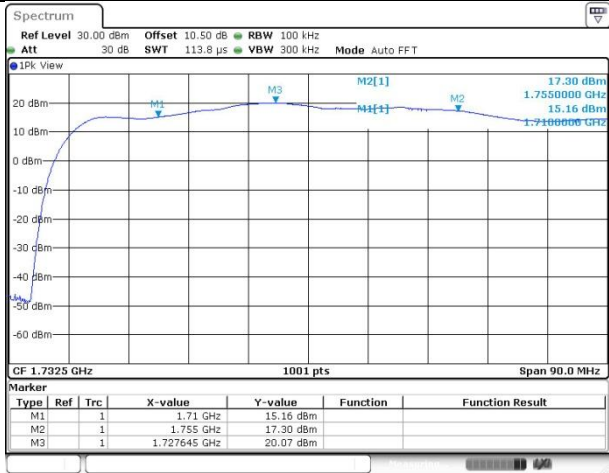


ProjectNo.:2504A37377E-RF Tester:Benny LI
Date: 30.DEC.2025 14:11:30

Downlink: Lower 700MHz




ProjectNo.:2504A37377E-RF Tester:Benny LI
Date: 30.DEC.2025 14:02:26


Downlink: Upper 700MHz

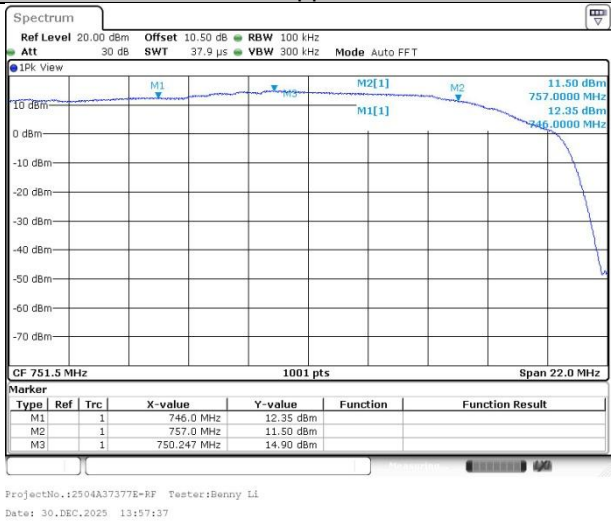


Downlink: Cellular Band

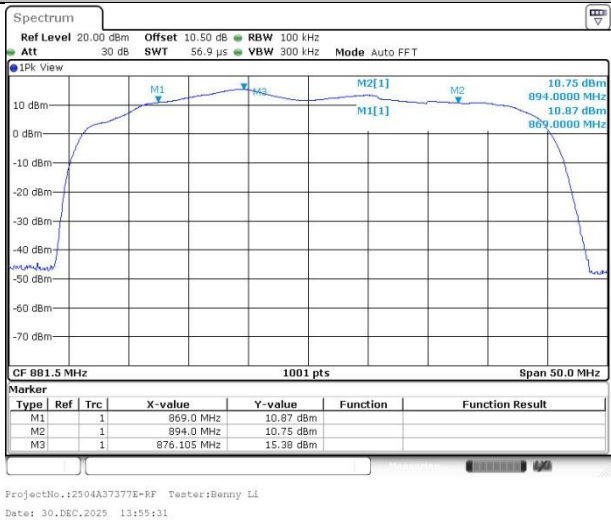

Downlink: PCS Band

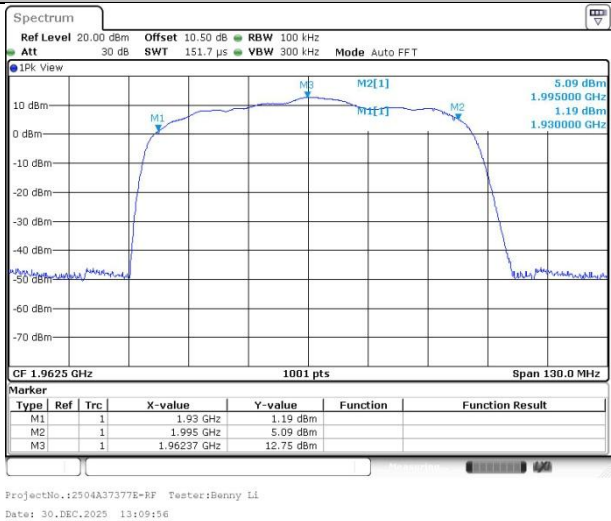

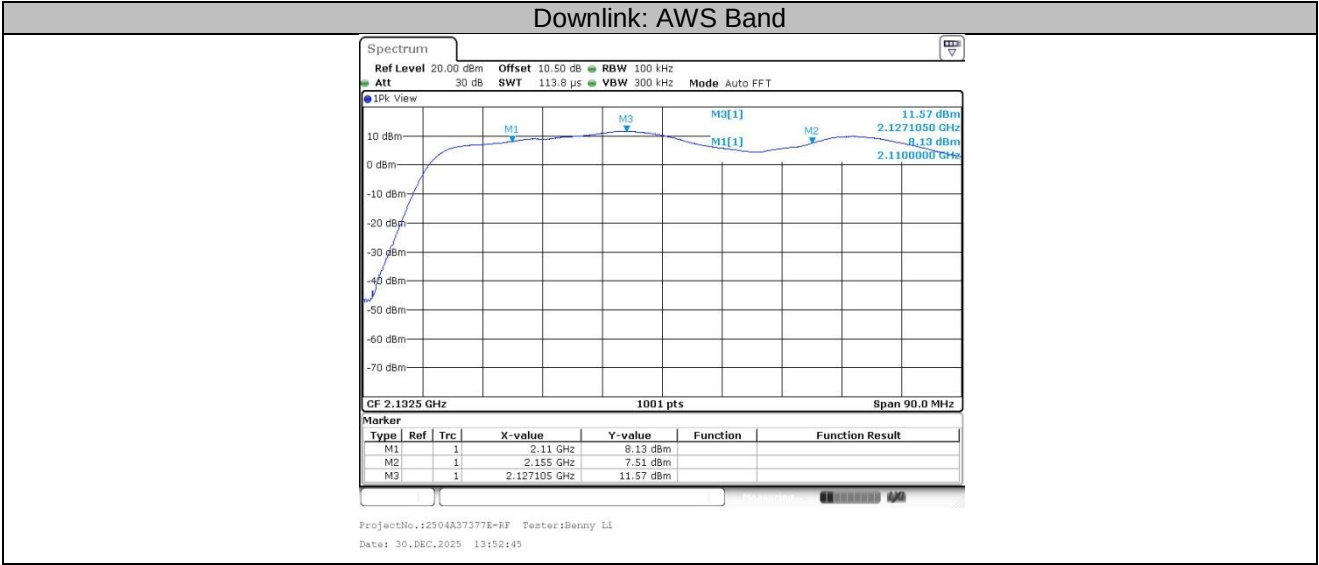

Appendix B: 7.2 Maximum Power Measurement

Test Result

AGC Level:

Mode	Operation Band	Signal Type	AGC input level (dBm)	Mode	Operation Band	Signal Type	AGC input level (dBm)
Uplink	Lower 700MHz	AWGN	-36.5	Downlink	Lower 700MHz	AWGN	-44.5
		GSM	-36.5			GSM	-44
	Upper 700MHz	AWGN	-39.5		Upper 700MHz	AWGN	-42.5
		GSM	-39			GSM	-42.5
	Cellular	AWGN	-39		Cellular	AWGN	-43.5
		GSM	-38.5			GSM	-43
	PCS	AWGN	-45		PCS	AWGN	-51
		GSM	-44.5			GSM	-50.5
	AWS	AWGN	-43.5		AWS	AWGN	-53
		GSM	-43.5			GSM	-52.5

Output Power:

Mode	Operation Band	Signal Type	Pre-AGC input level (dBm)	Conducted Output level (dBm)	Limit (dBm)	Gain (dBi)	Cable (dB)	EIRP (dBm)	EIRP Limit (dBm)
Uplink	Lower 700MHz	AWGN	-37	21.54	17-30	8.4	3	26.94	≤30
		GSM	-37	21.69				27.09	
	Upper 700MHz	AWGN	-40	21.33		7.2	3.1	25.43	
		GSM	-39.5	21.52				25.62	
	Cellular	AWGN	-39.5	22.79		8	3.3	27.49	
		GSM	-39	22.92				27.62	
	PCS	AWGN	-45.5	20.46		9.3	5.1	24.66	
		GSM	-45	20.79				24.99	
	AWS	AWGN	-44	22.21		9.4	4.9	26.71	
		GSM	-44	22.3				26.8	
Downlink	Lower 700MHz	AWGN	-45	12.56	≤17	2.5	3	12.06	≤17
		GSM	-44.5	12.98				12.48	
	Upper 700MHz	AWGN	-43	14.63		2.5	3	14.13	
		GSM	-43	14.94				14.44	
	Cellular	AWGN	-44	14.11		1.5	3.3	12.31	
		GSM	-43.5	14.49				12.69	
	PCS	AWGN	-51.5	14.06		4.8	5.2	13.66	
		GSM	-51	14.43				14.03	
	AWS	AWGN	-53.5	13.25		4.6	5.4	12.45	
		GSM	-53	13.52				12.72	

Note: The worst-case combination of antenna and cable was used for EIRP calculation.

Mode	Operation Band	Signal Type	Maximum Input level (dBm)	Conducted Output level (dBm)	Limit (dBm)	EIRP (dBm)	EIRP Limit (dBm)
Uplink	Lower 700MHz	AWGN	-5.53	21.42	17-30	26.82	≤30
		GSM	-5.24	21.57		26.97	
	Upper 700MHz	AWGN	-5.47	21.25		25.35	
		GSM	-5.52	21.34		25.44	
	Cellular	AWGN	-6.72	22.57		27.27	
		GSM	-6.77	22.62		27.32	
	PCS	AWGN	-12.58	20.26		24.46	
		GSM	-12.6	20.51		24.71	
	AWS	AWGN	-10.15	22.04		26.54	
		GSM	-10.11	22.18		26.68	
Downlink	Lower 700MHz	AWGN	-20	12.34	≤17	11.84	≤17
		GSM	-20	12.79		12.29	
	Upper 700MHz	AWGN	-20	14.45		13.95	
		GSM	-20	14.73		14.23	
	Cellular	AWGN	-20	14.07		12.27	
		GSM	-20	14.33		12.53	
	PCS	AWGN	-20	14.12		13.72	
		GSM	-20	14.47		14.07	
	AWS	AWGN	-20	13.36		12.56	
		GSM	-20	13.68		12.88	

Note: The EIRP= Conducted Output level + Gain - Cable.

Appendix C: 7.3 Maximum Booster Gain Computation**Test Result****Maximum gain:**

Mode	Operation Band	Signal Type	Pre-AGC input level (dBm)	Conducted Output level (dBm)	Gain (dB)	Limit (dB)
Uplink	Lower 700MHz	AWGN	-37	21.54	58.54	63.49
		GSM	-37	21.69	58.69	
	Upper 700MHz	AWGN	-40	21.33	61.33	64.36
		GSM	-39.5	21.52	61.02	
	Cellular	AWGN	-39.5	22.79	62.29	64.95
		GSM	-39	22.92	61.92	
	PCS	AWGN	-45.5	20.46	65.96	71.99
		GSM	-45	20.79	65.79	
	AWS	AWGN	-44	22.21	66.21	71.27
		GSM	-44	22.3	66.3	
Downlink	Lower 700MHz	AWGN	-45	12.56	57.56	63.49
		GSM	-44.5	12.98	57.48	
	Upper 700MHz	AWGN	-43	14.63	57.63	64.36
		GSM	-43	14.94	57.94	
	Cellular	AWGN	-44	14.11	58.11	64.95
		GSM	-43.5	14.49	57.99	
	PCS	AWGN	-51.5	14.06	65.56	71.99
		GSM	-51	14.43	65.43	
	AWS	AWGN	-53.5	13.25	66.75	71.27
		GSM	-53	13.52	66.52	

Note 1: Gain= Conducted Output level- Pre-AGC input level.

Note 2: Fixed Booster maximum gain shall not exceed 6.5 dB+20 Log10 (Frequency), Where, Frequency is the uplink mid-band frequency of the supported spectrum bands in MHz.


Equivalent Uplink and downlink gain:

Operation Band	Signal type	Uplink Gain (dB)	Downlink Gain (dB)	Calculated Value (dB)	Limit (dB)
Lower 700 MHz	AWGN	58.54	57.56	-0.98	9.00
	GSM	58.69	57.48	-1.21	
Upper 700 MHz	AWGN	61.33	57.63	-3.7	
	GSM	61.02	57.94	-3.08	
Cellular	AWGN	62.29	58.11	-4.18	
	GSM	61.92	57.99	-3.93	
PCS	AWGN	65.96	65.56	-0.4	
	GSM	65.79	65.43	-0.36	
AWS	AWGN	66.21	66.75	0.54	
	GSM	66.3	66.52	0.22	


Note: Calculated Value =Downlink Gain - Uplink Gain

Appendix D: 7.4Intermodulation Product

Test Graphs

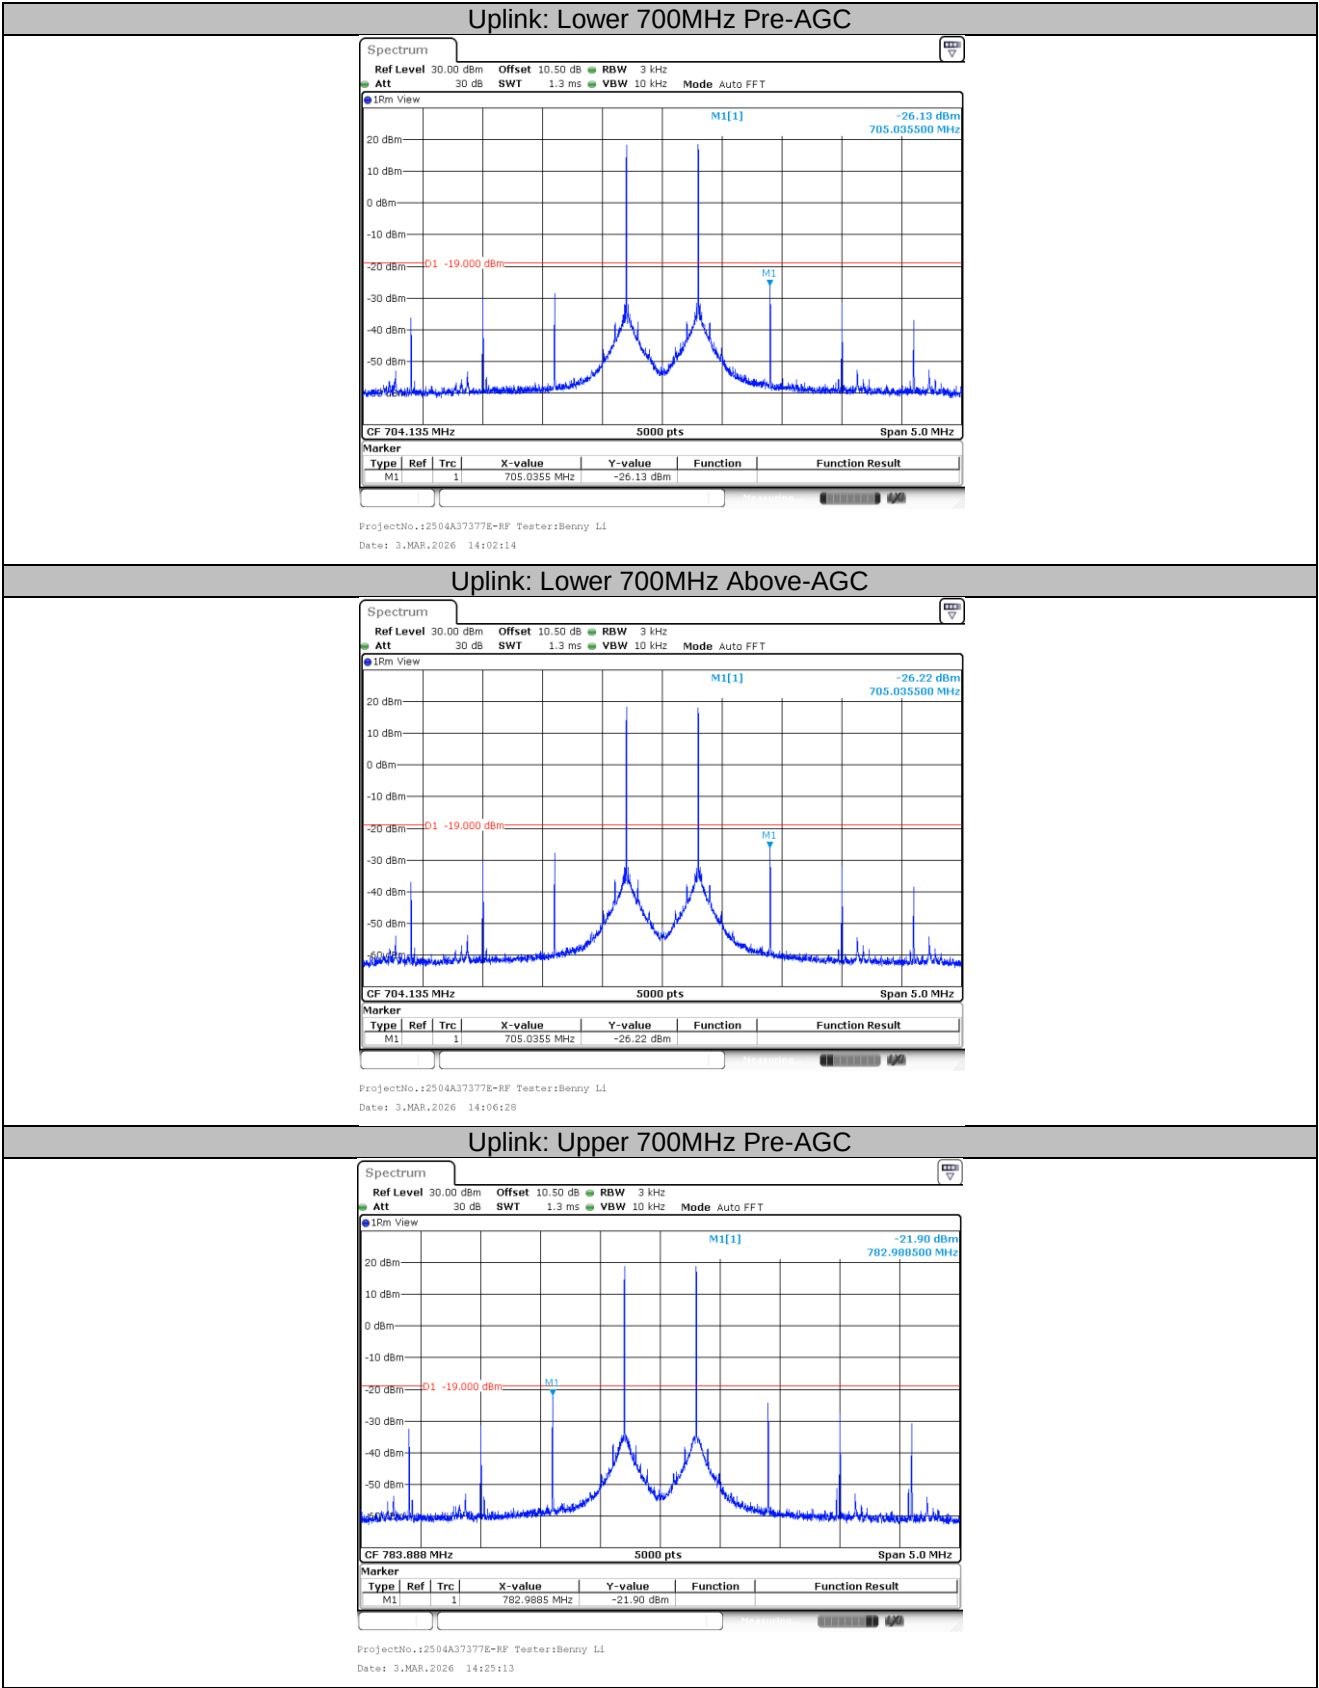


Uplink: Upper 700MHz Above-AGC

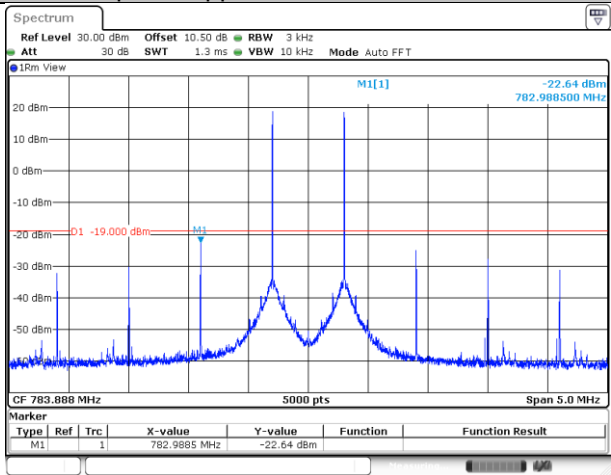


ProjectNo.:2504A37377E-RF Tester:Benny Li
Date: 3.MAR.2026 16:15:57

Uplink: Cellular Pre-AGC

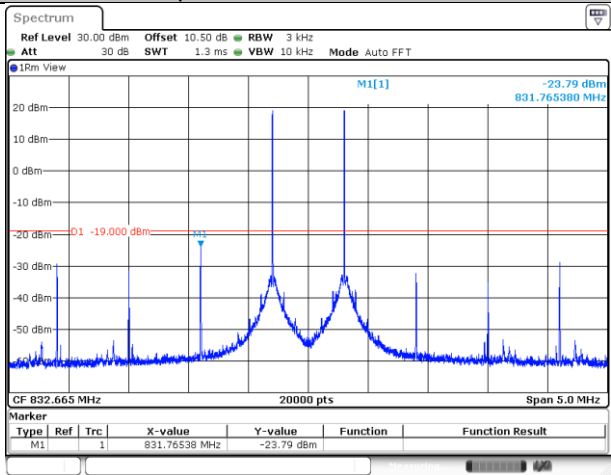


ProjectNo.:2504A37377E-RF Tester:Benny Li
Date: 3.MAR.2026 15:35:18


Uplink: Cellular Above-AGC

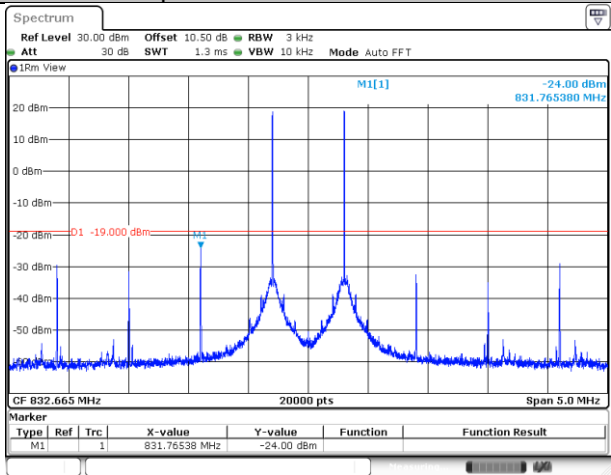


ProjectNo.:2504A37377E-RF Tester:Benny Li
Date: 3.MAR.2026 15:39:26

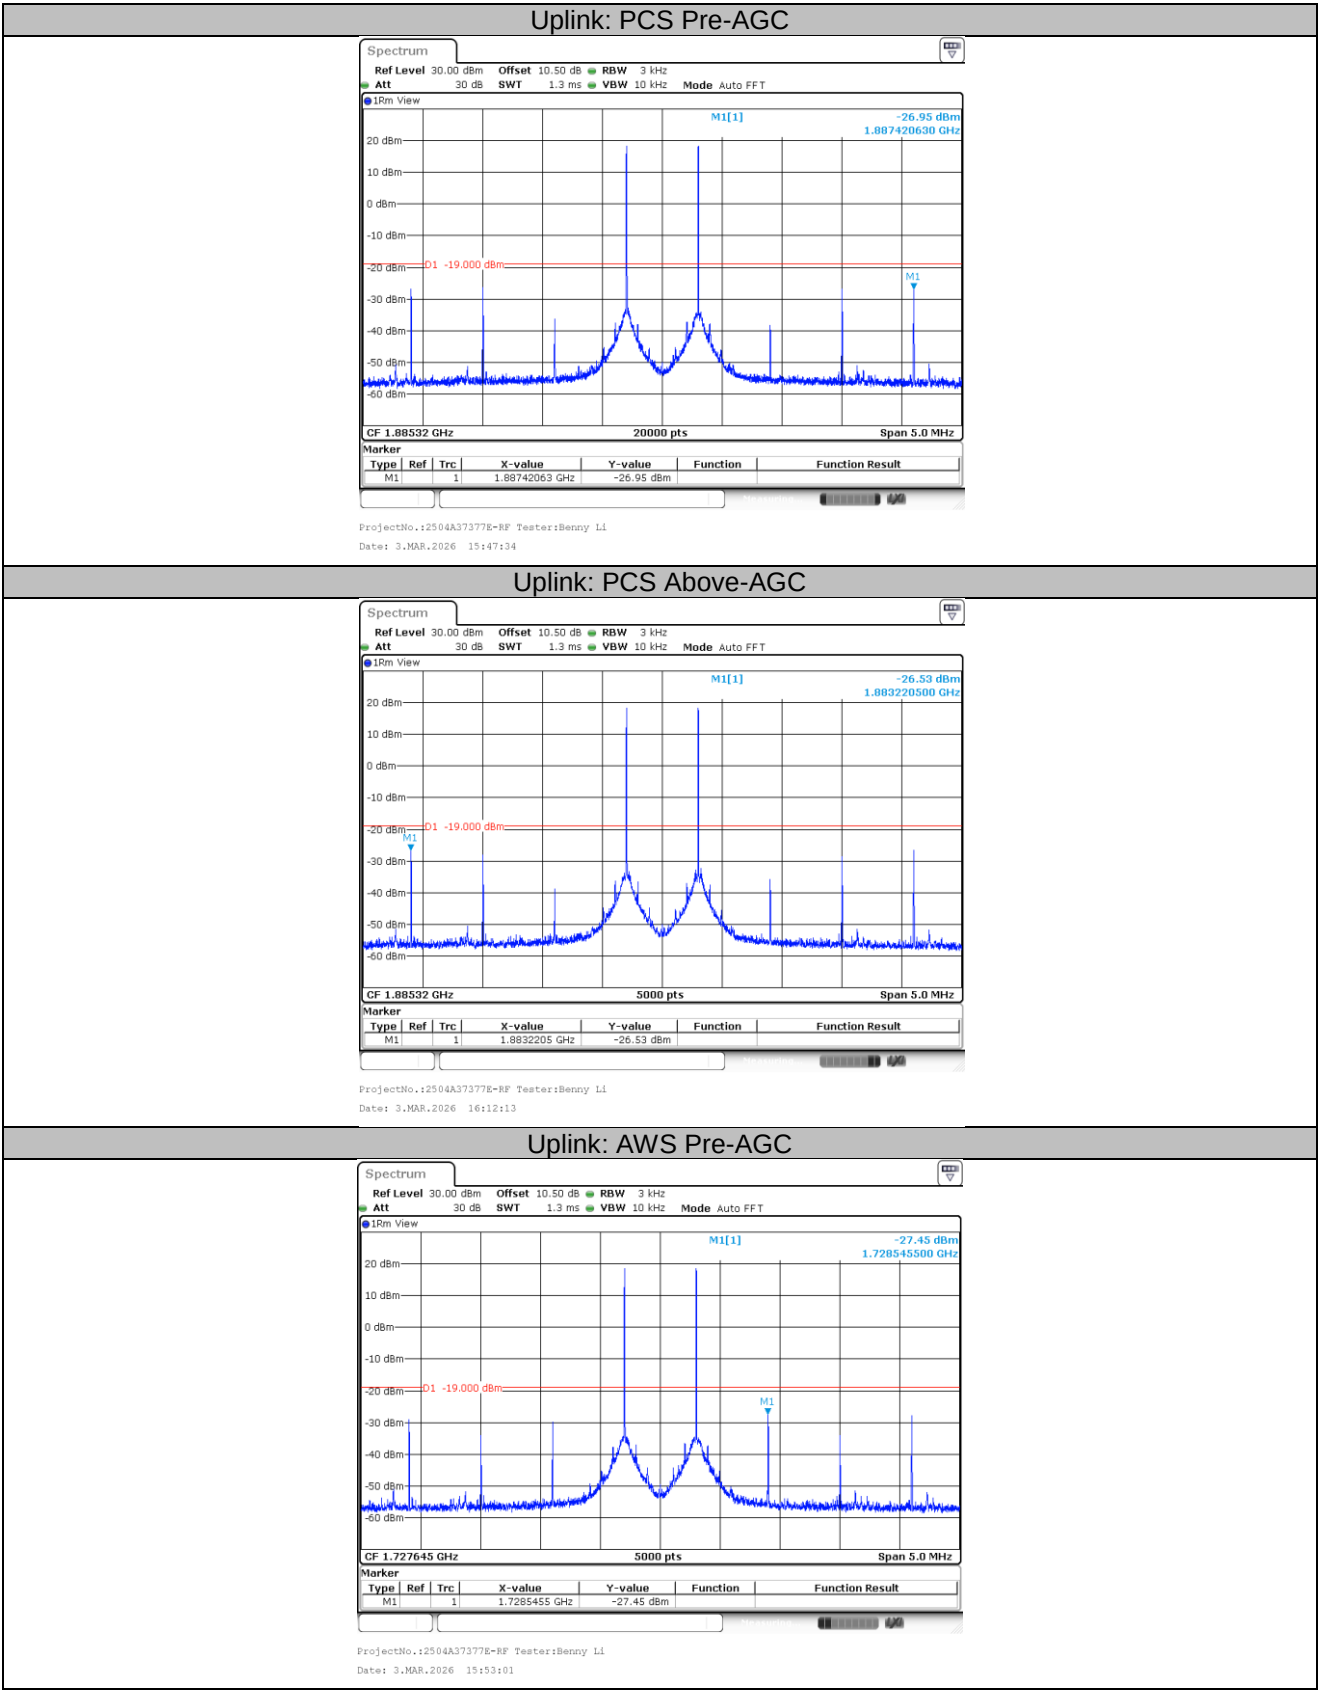


Uplink: AWS Above-AGC

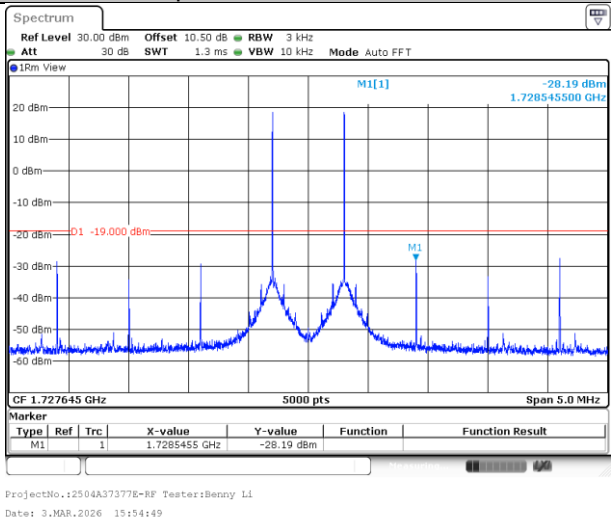


Downlink: Lower Pre-AGC

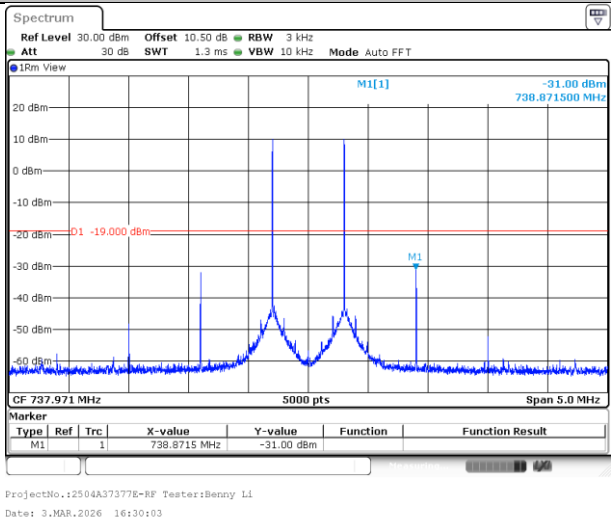


Downlink: Lower Above-AGC

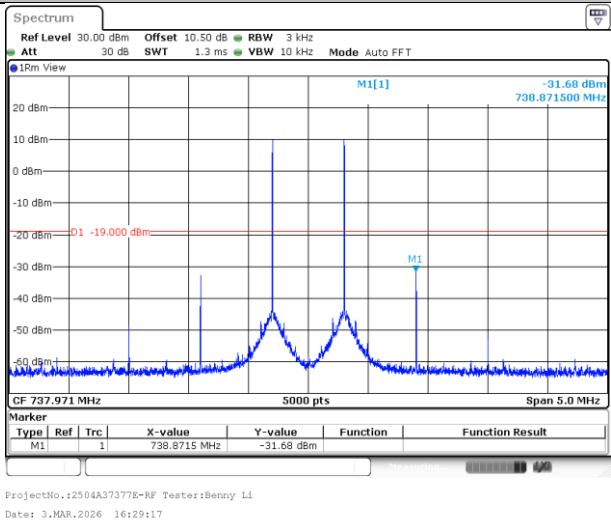


Downlink: Upper Pre-AGC

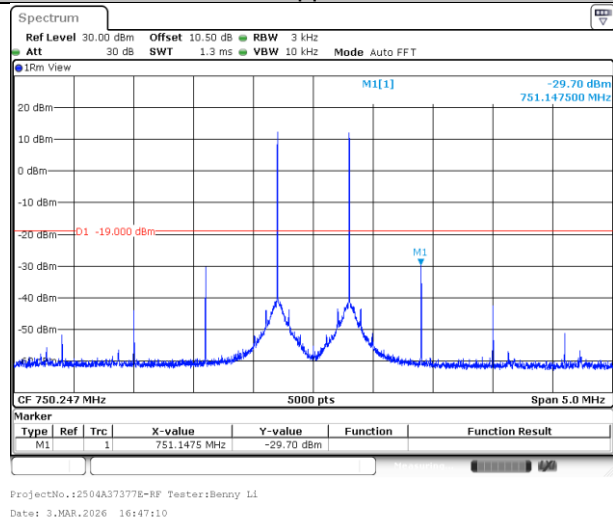


Downlink: Upper Above-AGC

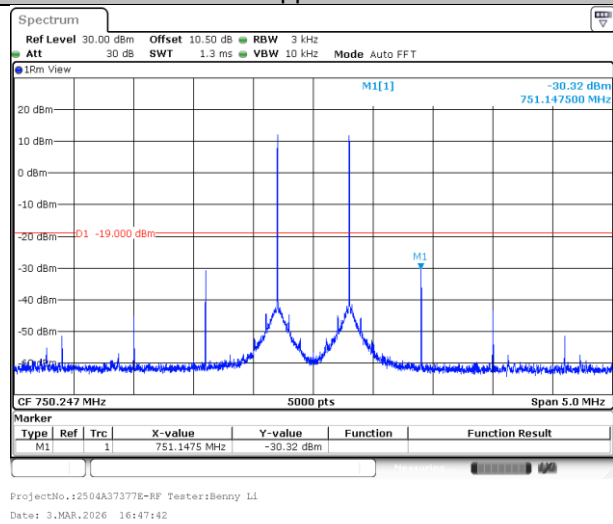

Downlink: Cellular Pre-AGC

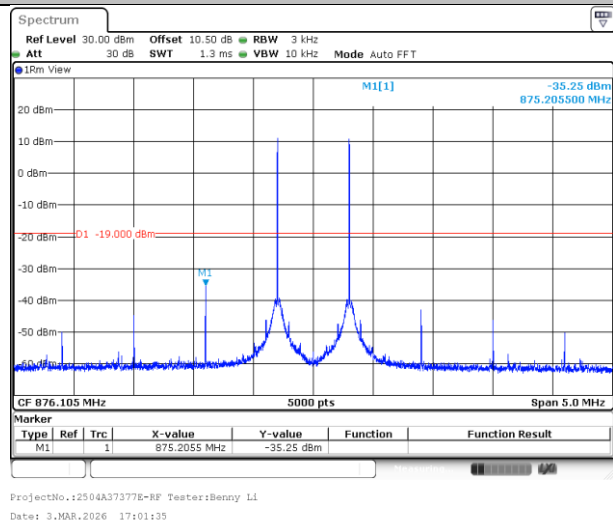


Downlink: Cellular Above-AGC

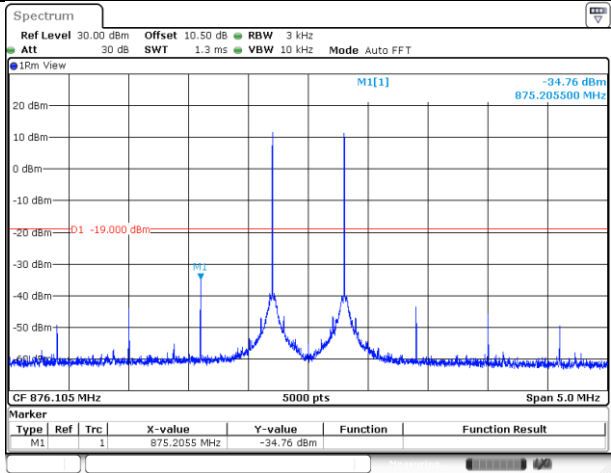


ProjectNo.:2504A37377E-RF Tester:Benny Li
Date: 3.MAR.2026 17:02:32

Downlink: PCS Pre-AGC

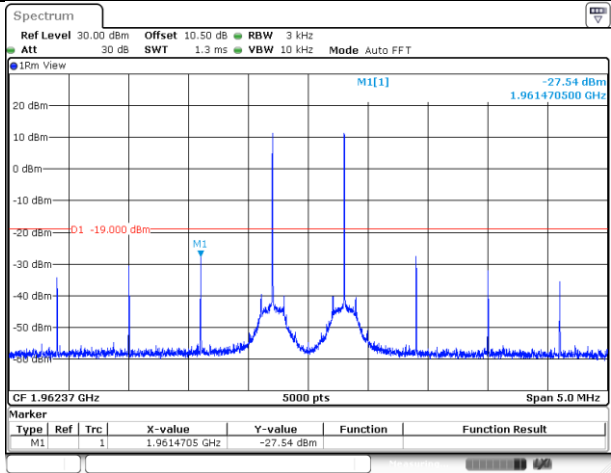


ProjectNo.:2504A37377E-RF Tester:Benny Li
Date: 3.MAR.2026 17:08:54

Downlink: PCS Above-AGC

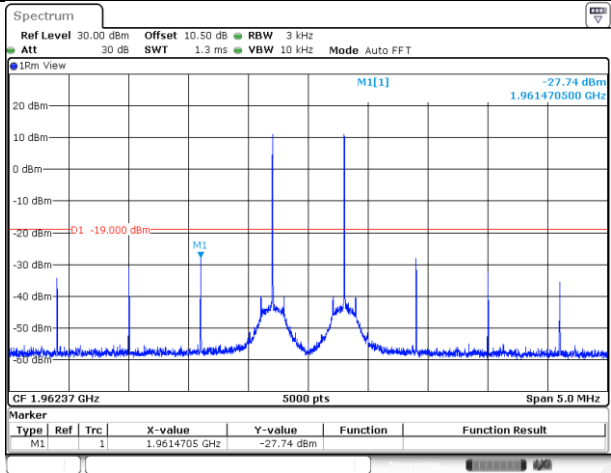

ProjectNo.:2504A37377E-RF Tester:Benny Li
Date: 3.MAR.2026 17:09:44

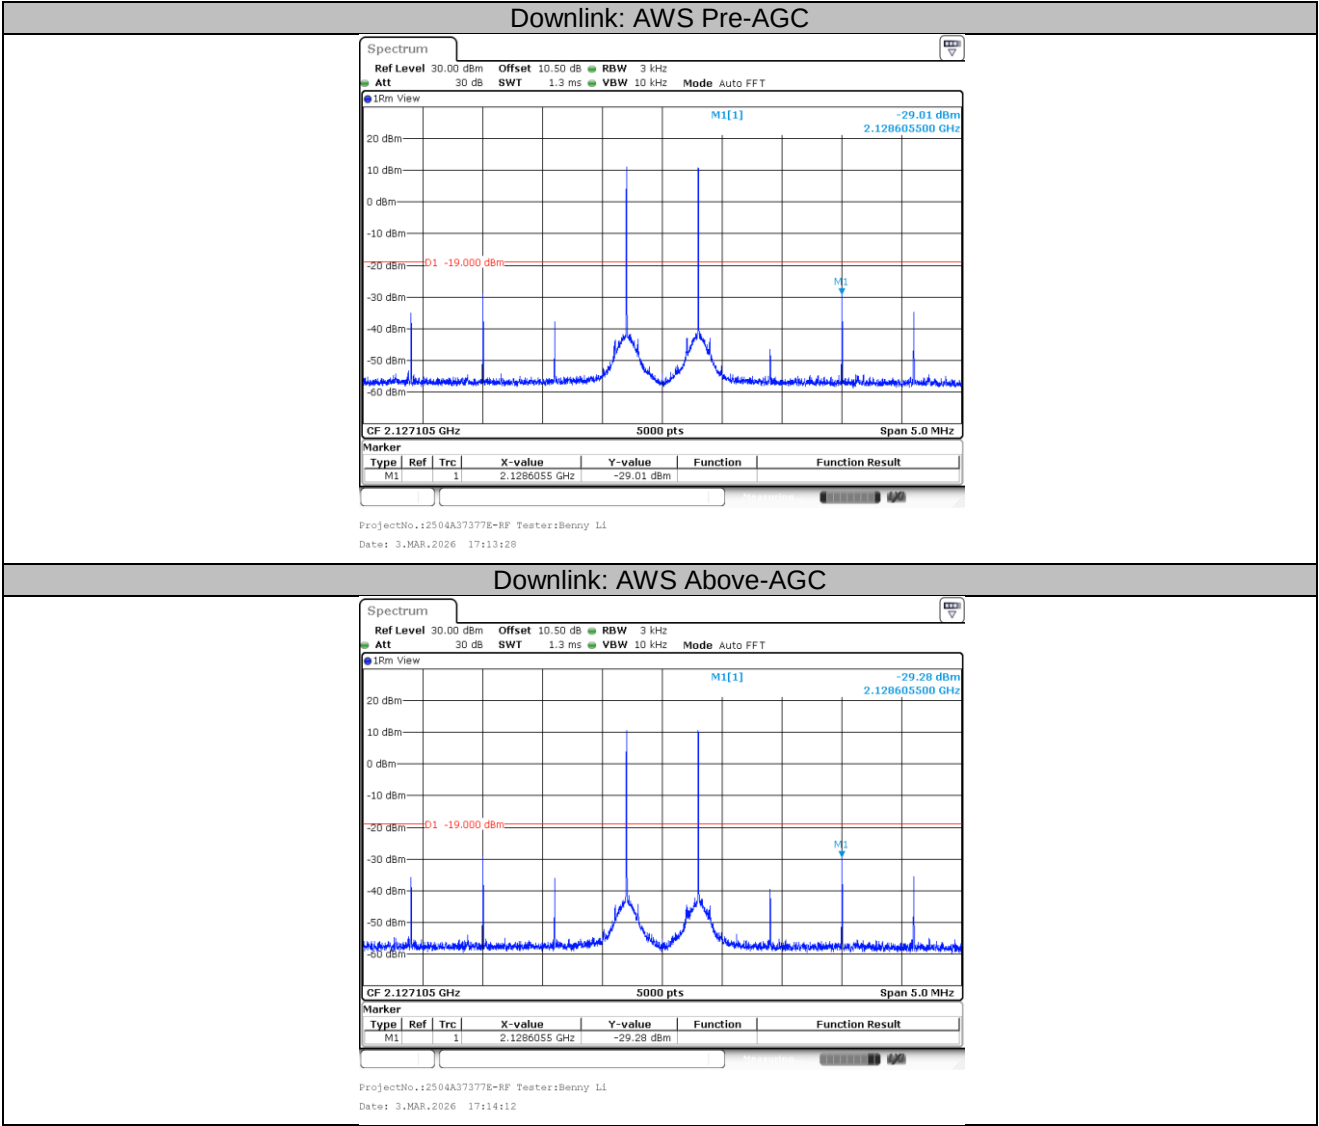

Appendix E: 7.5 Transmitter Unwanted Emissions In The Out-Of-Band Domain

Please refer Attachment of “2504A37377E-RF-00A_Appendix E-OOB”.

Appendix F: 7.7 Noise Limits

Maximum Noise:

Mode	Operation Band	Measured Value (dBm/MHz)	Limit (dBm/MHz)	Result
Uplink	Lower 700MHz	-45.79	-45.51	Compliance
	Upper 700MHz	-47.54	-44.64	Compliance
	Cellular	-45.65	-44.05	Compliance
	PCS	-37.30	-37.01	Compliance
	AWS	-38.70	-37.73	Compliance
Downlink	Lower 700MHz	-46.85	-45.51	Compliance
	Upper 700MHz	-46.93	-44.64	Compliance
	Cellular	-45.91	-44.05	Compliance
	PCS	-40.19	-37.01	Compliance
	AWS	-40.27	-37.73	Compliance

Note: The maximum noise power of the fixed booster shall not exceed $-102.5 \text{ dBm/MHz} + 20 \text{ Log}_{10}(\text{Frequency})$, where Frequency represents the uplink mid-band frequency of the supported spectrum bands in MHz.


Variable Uplink Noise limit test result:


Operation Band	RSSI (dBm)	Measured Value (dBm/MHz)	Limit (dBm/MHz)	Result
Lower 700MHz (698-716MHz)	-61	-47.94	-45.51	Compliance
	-60	-48.87	-45.51	Compliance
	-59	-49.88	-45.51	Compliance
	-58	-51.15	-45.51	Compliance
	-57	-52.13	-46	Compliance
	-56	-53.13	-47	Compliance
Upper 700MHz (776-787MHz)	-61	-49.65	-44.64	Compliance
	-60	-50.49	-44.64	Compliance
	-59	-51.23	-44.64	Compliance
	-58	-52.47	-45.00	Compliance
	-57	-52.95	-46.00	Compliance
	-56	-53.73	-47.00	Compliance
Cellular (824-849MHz)	-60	-52.36	-44.05	Compliance
	-59	-53.24	-44.05	Compliance
	-58	-54.2	-45	Compliance
	-57	-54.84	-46.00	Compliance
	-56	-55.35	-47.00	Compliance
	-55	-57.29	-48.00	Compliance
PCS (1850-1915MHz)	-65	-41.84	-38.00	Compliance
	-64	-42.93	-39.00	Compliance
	-63	-44.14	-40.00	Compliance
	-62	-45.07	-41.00	Compliance
	-61	-46.16	-42.00	Compliance
	-60	-47.02	-43.00	Compliance
AWS (1710-1755MHz)	-66	-47.77	-37.73	Compliance
	-65	-48.53	-38.00	Compliance
	-64	-49.23	-39.00	Compliance
	-63	-50.19	-40.00	Compliance
	-62	-51.79	-41.00	Compliance
	-61	-52.81	-42.00	Compliance

Note: The Limit refers to KDB935210 D03 APPENDIX D Figure D1.

Test Graphs

Maximum Noise:

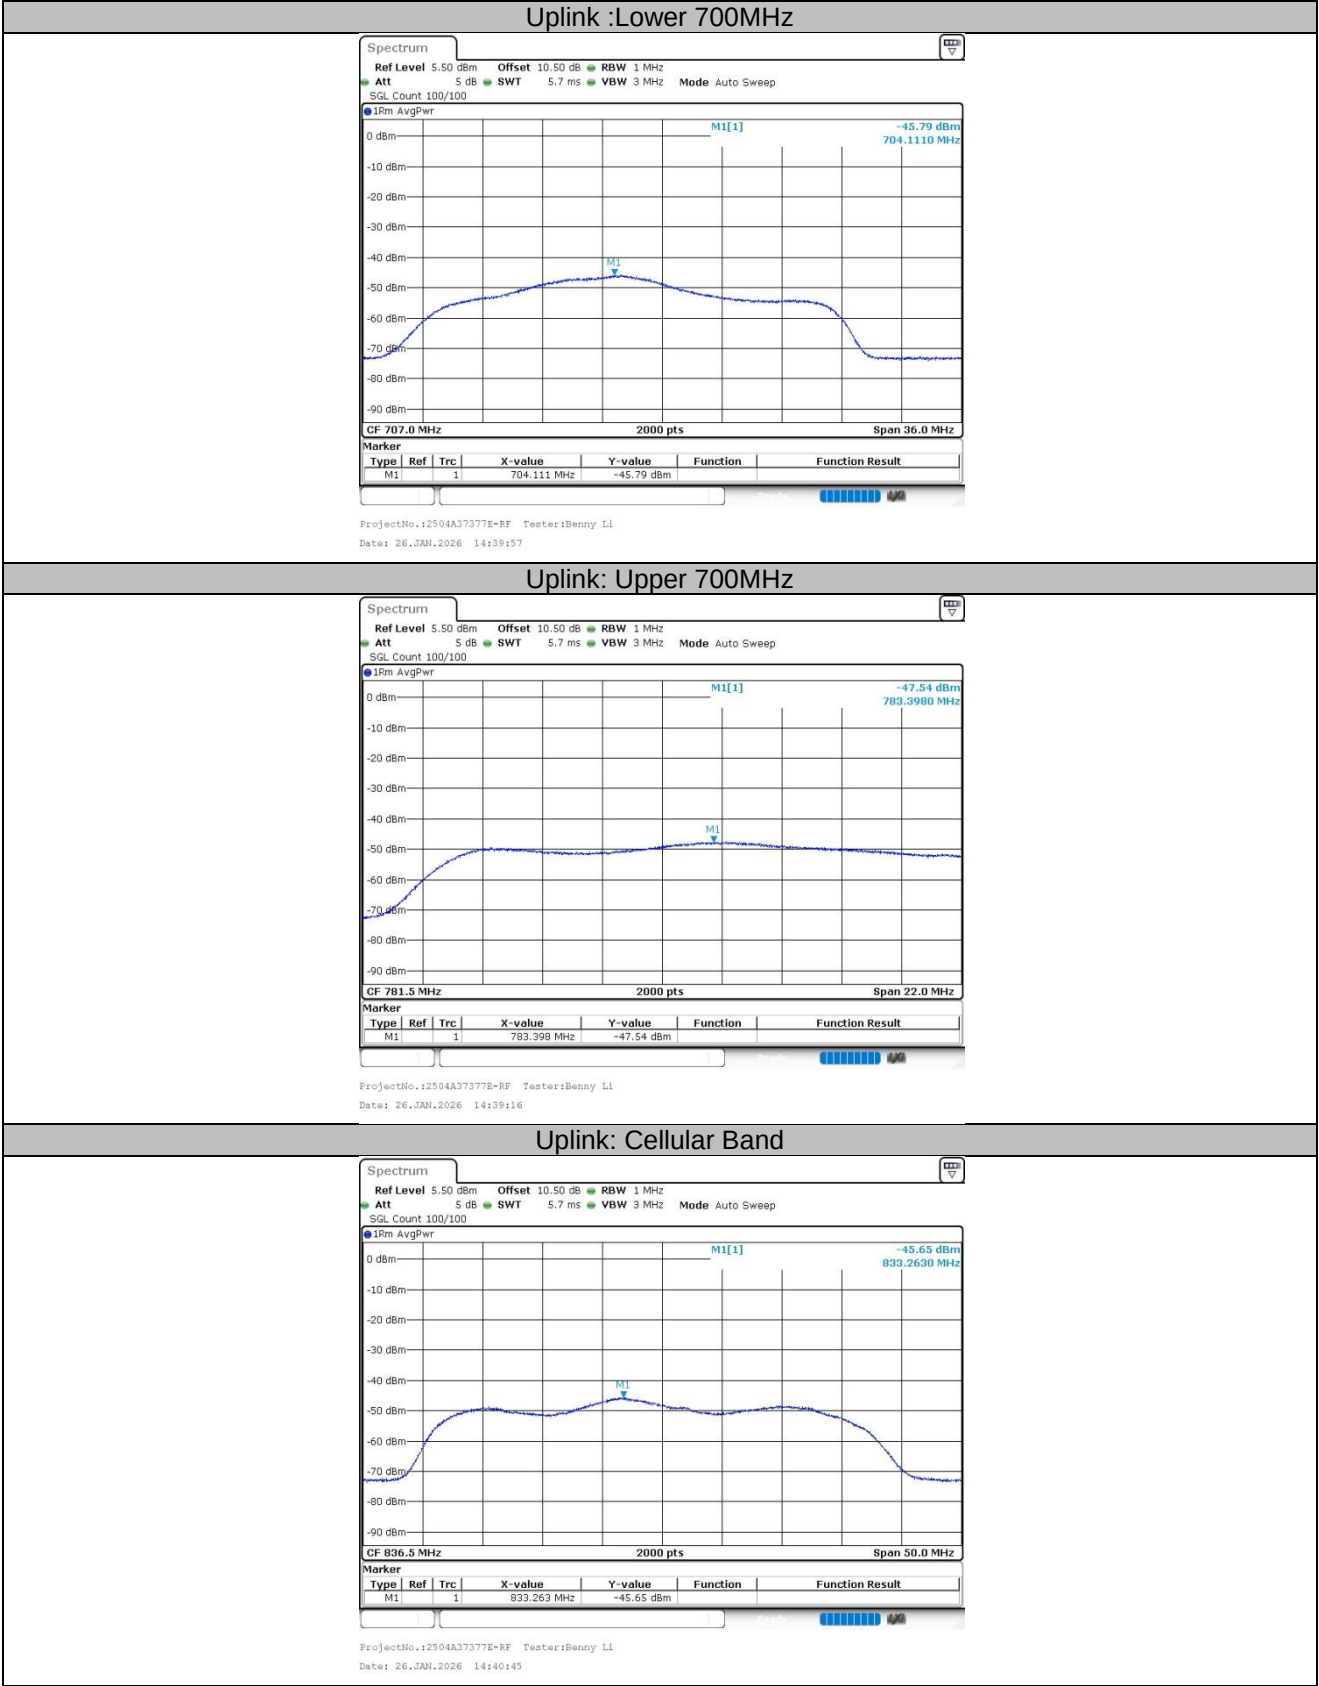

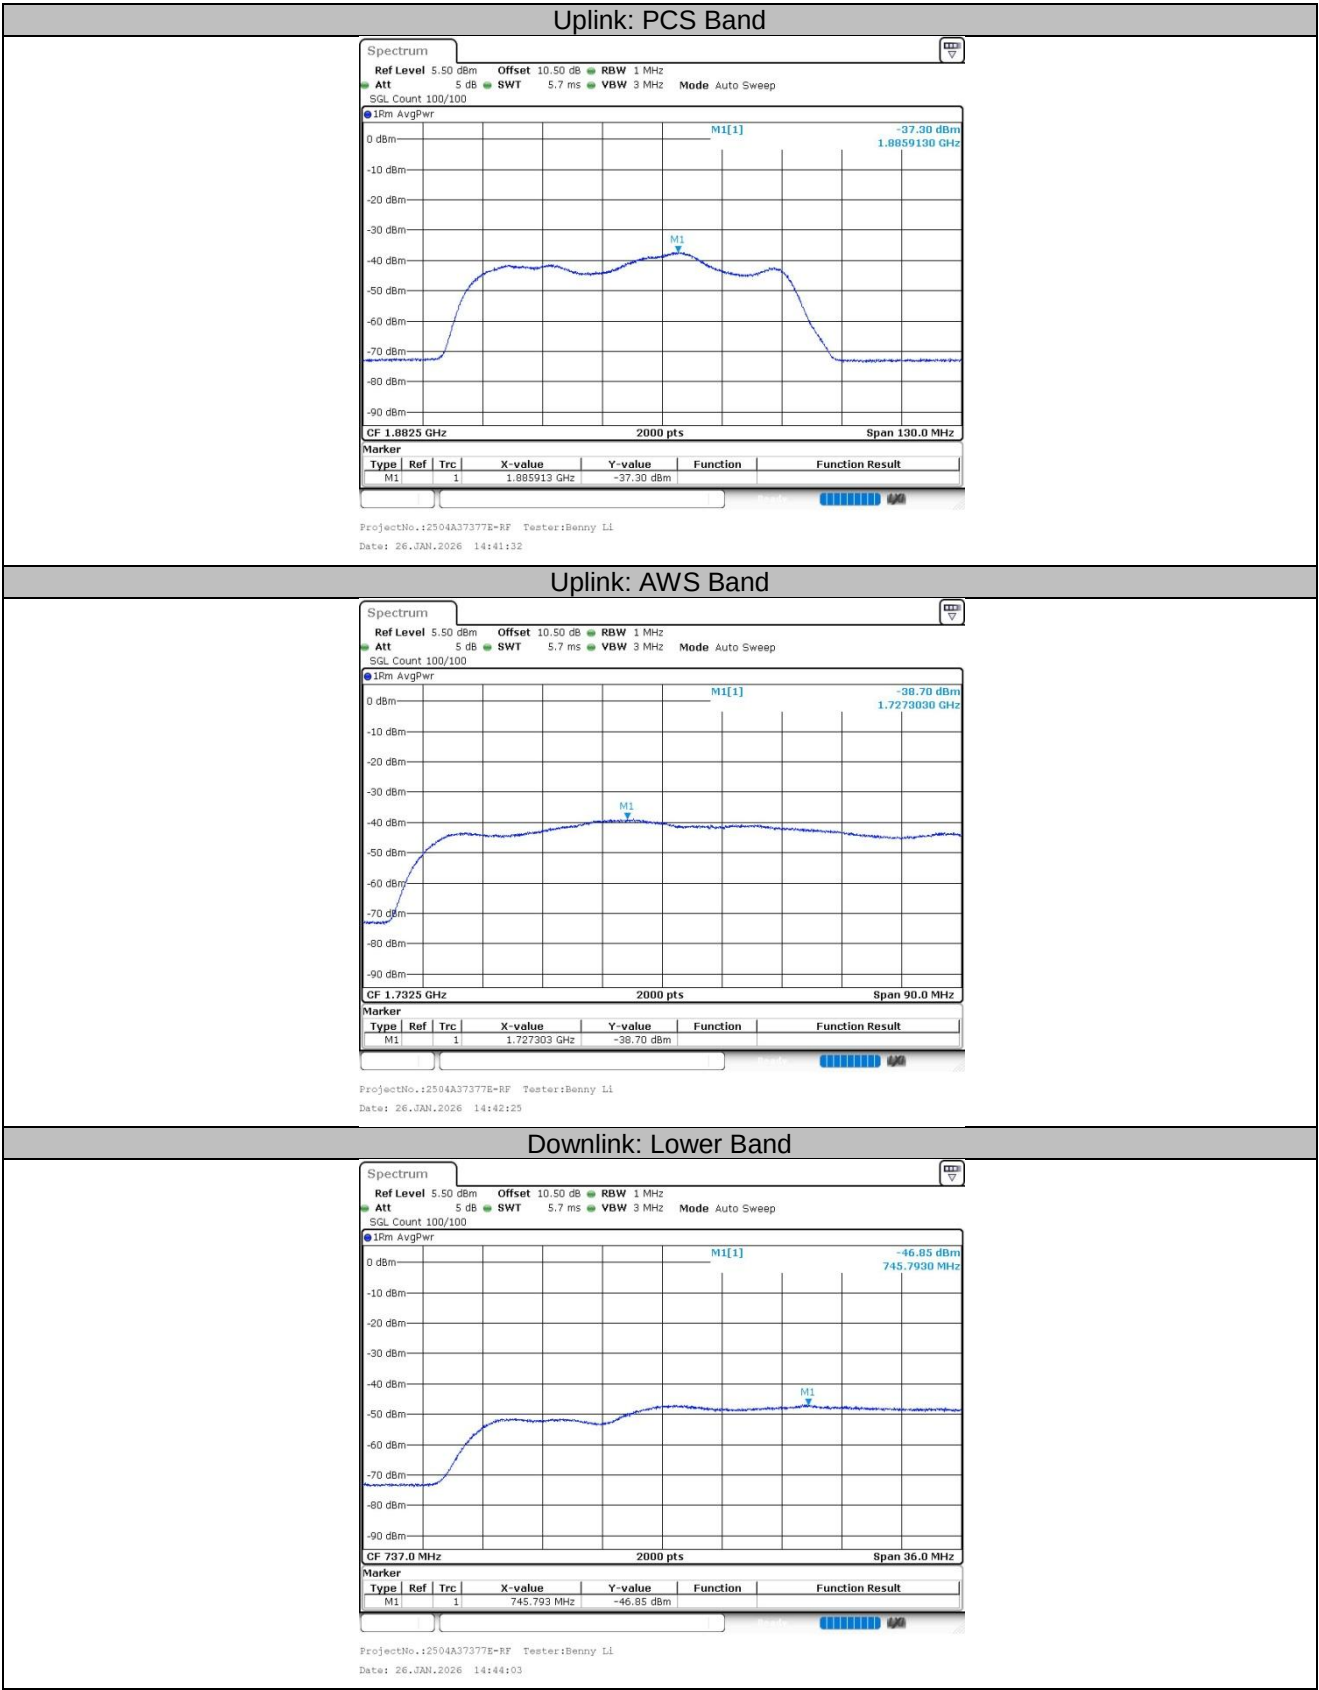


Downlink: Upper Band




Downlink: Cellular Band



Downlink: PCS Band

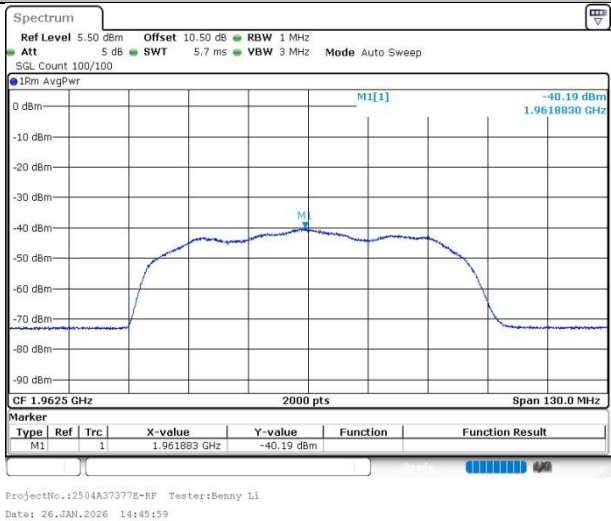

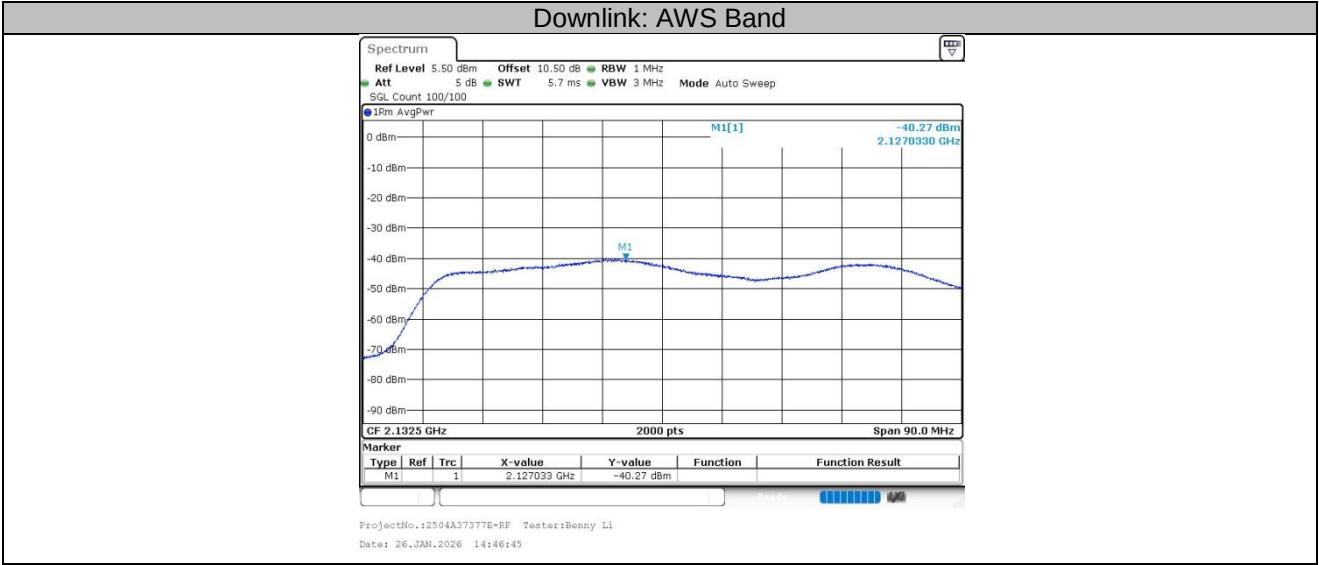



Variable Uplink Noise Timing:

Operation Band	Measured Value (s)	Limit (s)	Result
698-716MHz	0.0725	3	Compliance
776-787MHz	0.087	3	Compliance
824-849MHz	0.087	3	Compliance
1850-1915MHz	0.087	3	Compliance
1710-1755MHz	0.058	3	Compliance

Note: The uplink noise decreases to the specified level within 1 second for mobile devices and 3 seconds for fixed devices.

Test Graphs

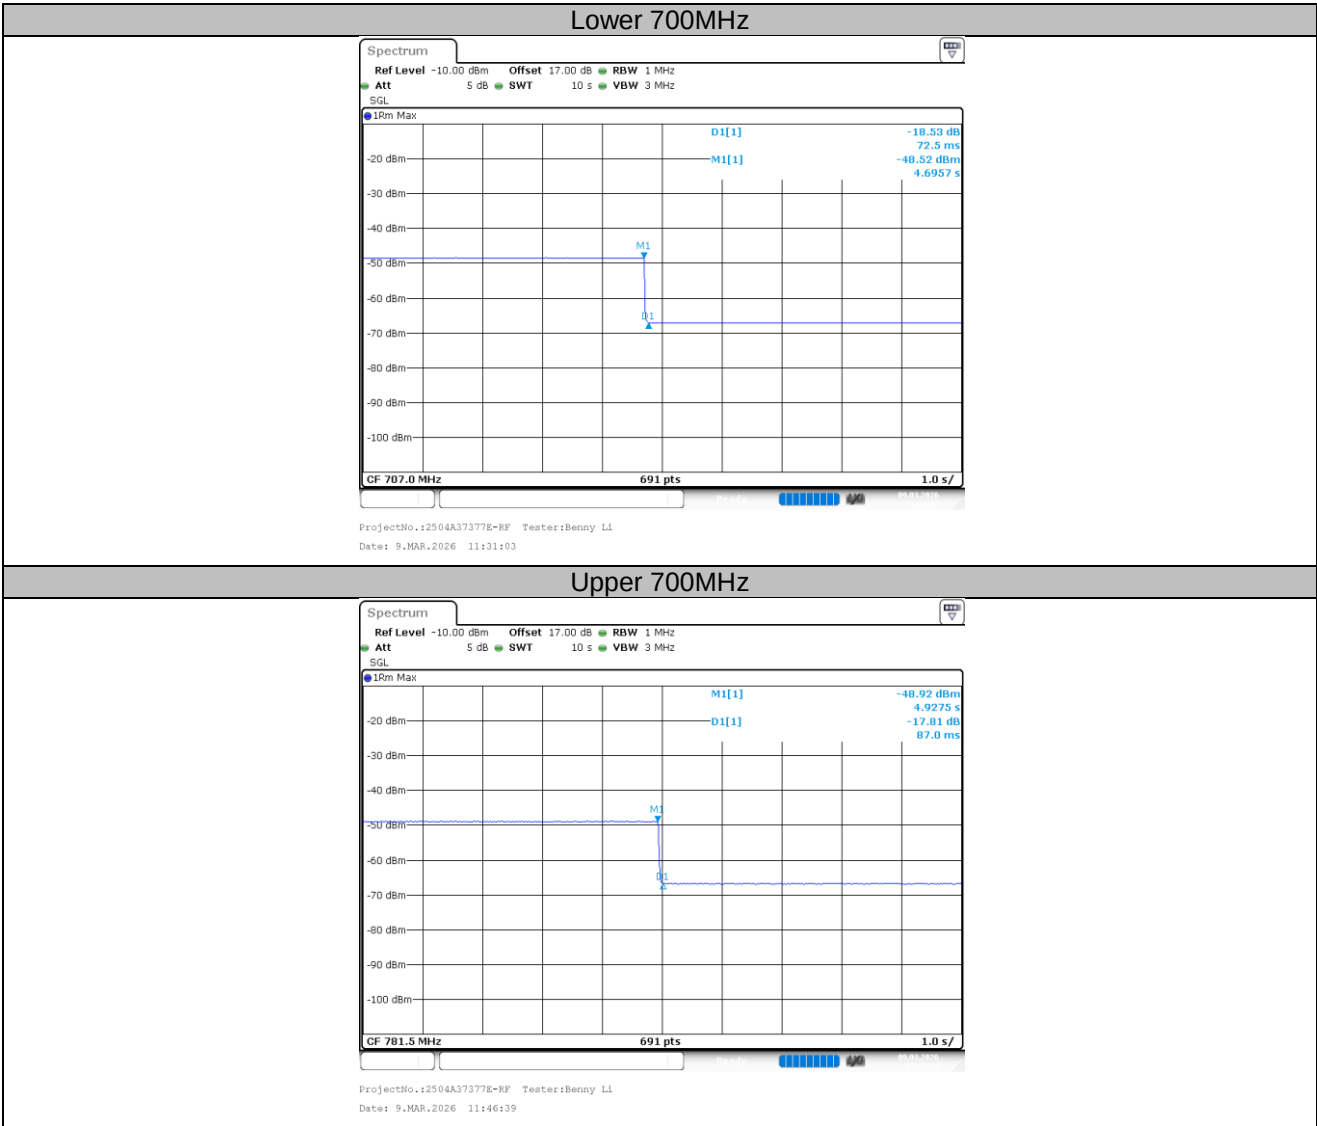

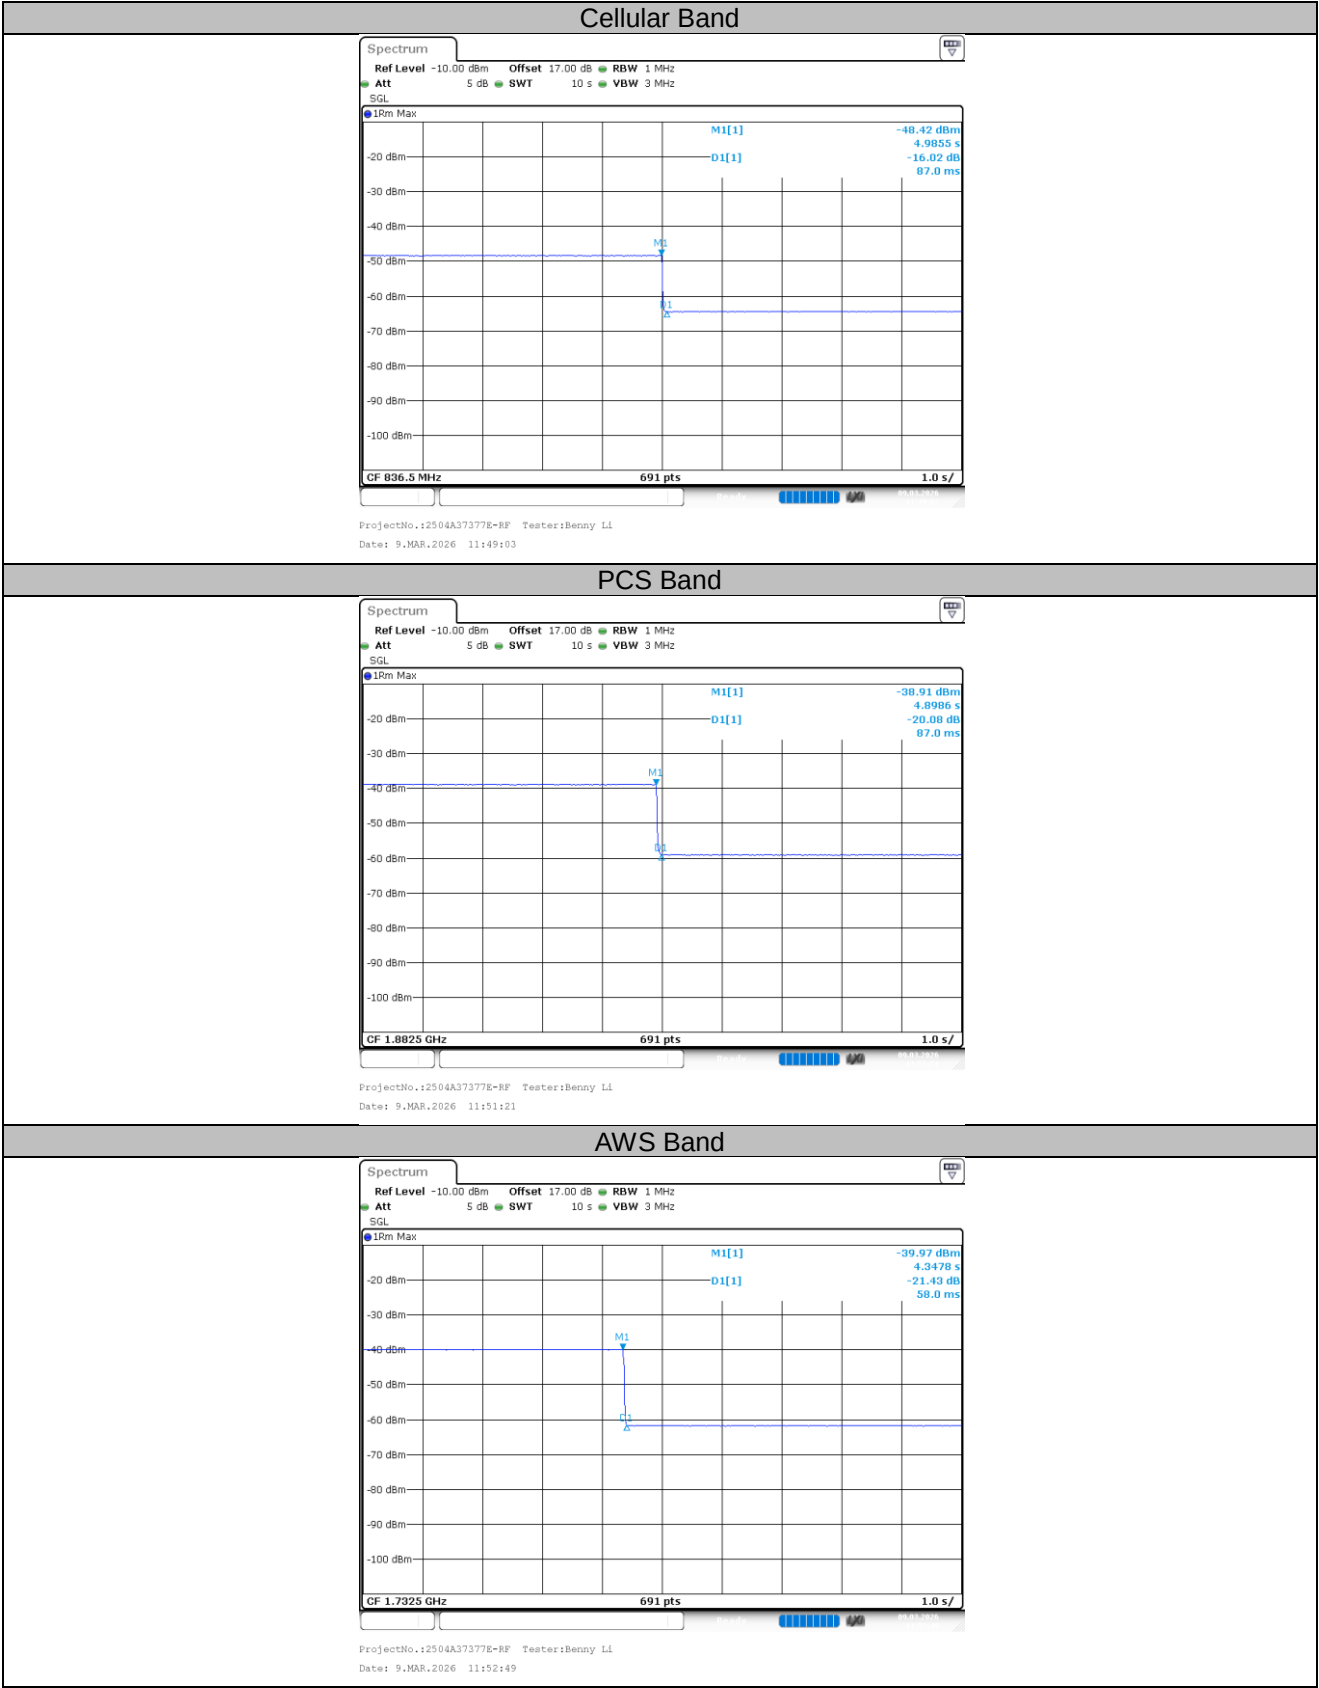

Appendix G: 7.8 Uplink Inactivity

Test Result


Operation Band	Measured Value (s)	Limit (s)	Result
698-716MHz	283.942	300	Compliance
776-787MHz	283.932		Compliance
824-849MHz	283.932		Compliance
1850-1915MHz	283.932		Compliance
1710-1755MHz	283.932		Compliance

Note: When the consumer booster is not serving an active device connection after 5 minutes the uplink noise power not exceed -70 dBm/MHz.

Test Graphs




Cellular Band

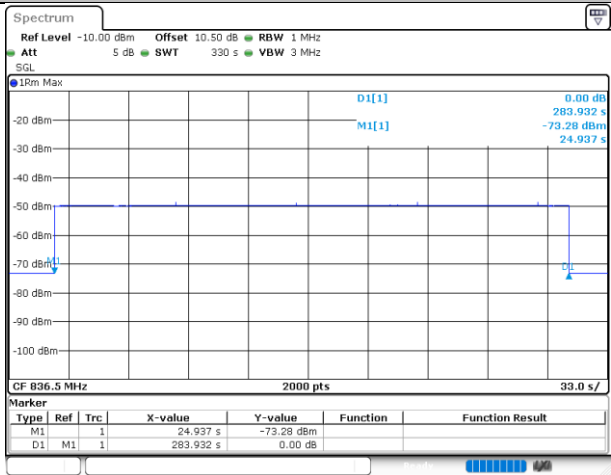


ProjectNo.:2504A37377E-RF Tester:Benny LI
Date: 28.FEB.2026 16:37:03

PCS Band

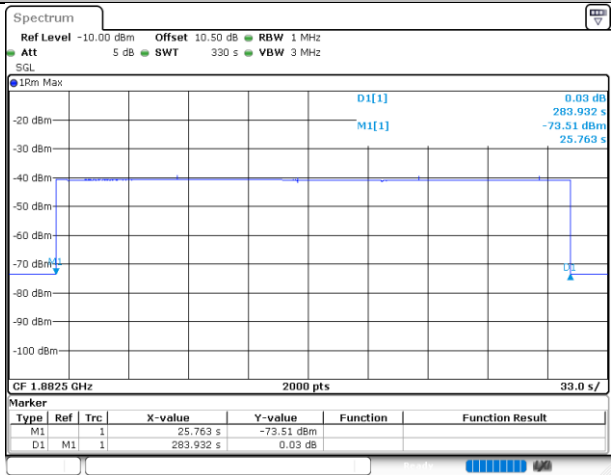

ProjectNo.:2504A37377E-RF Tester:Benny LI
Date: 28.FEB.2026 16:46:51

AWS Band

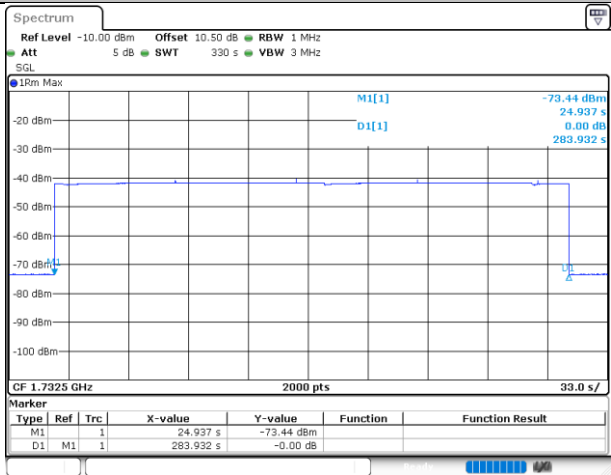

ProjectNo.:2504A37377E-RF Tester:Benny LI
Date: 28.FEB.2026 16:53:42

Appendix H: 7.9 Variable Booster Gain

Test Result

MSCL calculation:

Operation Bands	Frequency (MHz)	Distance (m)	Path Loss (dB)	Indoor Antenna Gain (dBi)	Indoor Cable Loss (dB)	Polarity (dB)	MSCL
Lower 700MHz	707	1	29.49	2.5	3	3.01	33.00
Upper 700MHz	781.5	1	30.36	2.5	3	3.01	33.87
Cellular	836.5	1	30.95	1.5	3.3	3.01	35.76
PCS	1882.5	1	37.99	4.8	5.2	3.01	41.40
AWS	1732.5	1	37.27	4.6	5.4	3.01	41.08

Note 1: Path loss = $20\log f + 20\log d - 27.50$

Note 2: Polarity loss = $20\log(1/\sin(45)) = 3.01$

Note 3: MSCL = Path loss + Indoor Cable Loss - Mobile Antenna Gain - Indoor Antenna Gain + Polarity Loss

Note 4: Mobile Antenna Gain = 0

Variable booster gain:

Operation Bands	RSSI (dBm)	P _{in} (dBm)	P _{out} (dBm)	MSCL (dB)	Measured Value (dB)	Limit (dB)	Result
Lower 700MHz	-60	-41.5	-0.6	33.00	40.90	59.00	Compliance
	-59	-41.5	-1.09	33.00	40.41	58.00	Compliance
	-58	-41.5	-1.97	33.00	39.53	57.00	Compliance
	-57	-41.5	-3.22	33.00	38.28	56.00	Compliance
	-56	-41.5	-4.32	33.00	37.18	55.00	Compliance
	-55	-41.5	-5.67	33.00	35.83	54.00	Compliance
Upper 700MHz	-60	-44.5	-1.68	33.87	42.82	59.87	Compliance
	-59	-44.5	-2.76	33.87	41.74	58.87	Compliance
	-58	-44.5	-3.94	33.87	40.56	57.87	Compliance
	-57	-44.5	-4.99	33.87	39.51	56.87	Compliance
	-56	-44.5	-5.43	33.87	39.07	55.87	Compliance
	-55	-44.5	-6.98	33.87	37.52	54.87	Compliance
Cellular	-60	-44	-3.46	35.76	40.54	61.76	Compliance
	-59	-44	-4.19	35.76	39.81	60.76	Compliance
	-58	-44	-5.14	35.76	38.86	59.76	Compliance
	-57	-44	-5.77	35.76	38.23	58.76	Compliance
	-56	-44	-7.31	35.76	36.69	57.76	Compliance
	-55	-44	-8.38	35.76	35.62	56.76	Compliance
PCS	-64	-50	-3.49	41.40	46.51	71.40	Compliance
	-63	-50	-4.64	41.40	45.36	70.40	Compliance
	-62	-50	-5.65	41.40	44.35	69.40	Compliance
	-61	-50	-6.58	41.40	43.42	68.40	Compliance
	-60	-50	-7.58	41.40	42.42	67.40	Compliance
	-59	-50	-8.2	41.40	41.80	66.40	Compliance
AWS	-64	-48.5	-7.38	41.08	41.12	71.08	Compliance
	-63	-48.5	-8.34	41.08	40.16	70.08	Compliance
	-62	-48.5	-9.17	41.08	39.33	69.08	Compliance
	-61	-48.5	-10.42	41.08	38.08	68.08	Compliance
	-60	-48.5	-11.19	41.08	37.31	67.08	Compliance
	-59	-48.5	-12.29	41.08	36.21	66.08	Compliance

Note: Variable booster gain Limit= -34 dB - RSSI+MSCL.

Variable gain timing:

Operation Bands	Measured Value (s)	Limit (s)	Results
Lower 700MHz	0.010	3	Compliance
Upper 700MHz	0.013		Compliance
Cellular	0.012		Compliance
PCS	0.009		Compliance
AWS	0.012		Compliance

Test Graphs

