


**Shenzhen Kexin Wireless Technology Co., Ltd.**

Building H, Shabei Hongyongli Industrial Zone, Longxin Community, Baolong Street,  
Longgang District, Shenzhen, Guangdong

| NO. | 内容<br>(Contents)       | 页数<br>(Number<br>of Page) | 页码<br>(Page<br>Code) |
|-----|------------------------|---------------------------|----------------------|
| 1   | 承认书封面 (Spec Cover)     | 1                         | 1                    |
| 2   | 承认书项目表 (Spec Item )    | 1                         | 2                    |
| 3   | 工程成品图 (Drawing)        | 1                         | 3                    |
| 4   | 电性测试报告 (Test Reports ) | 1                         | 4                    |
| 5   | S 参数测试 (S Parameter )  | 1                         | 5                    |
| 6   | 增益测试 (Gain Test )      | 1                         | 6                    |
| 7   |                        |                           |                      |
| 8   |                        |                           |                      |
| 9   |                        |                           |                      |
| 10  | -                      | -                         | -                    |
| 11  | -                      | -                         | -                    |
| 12  | -                      | -                         | -                    |

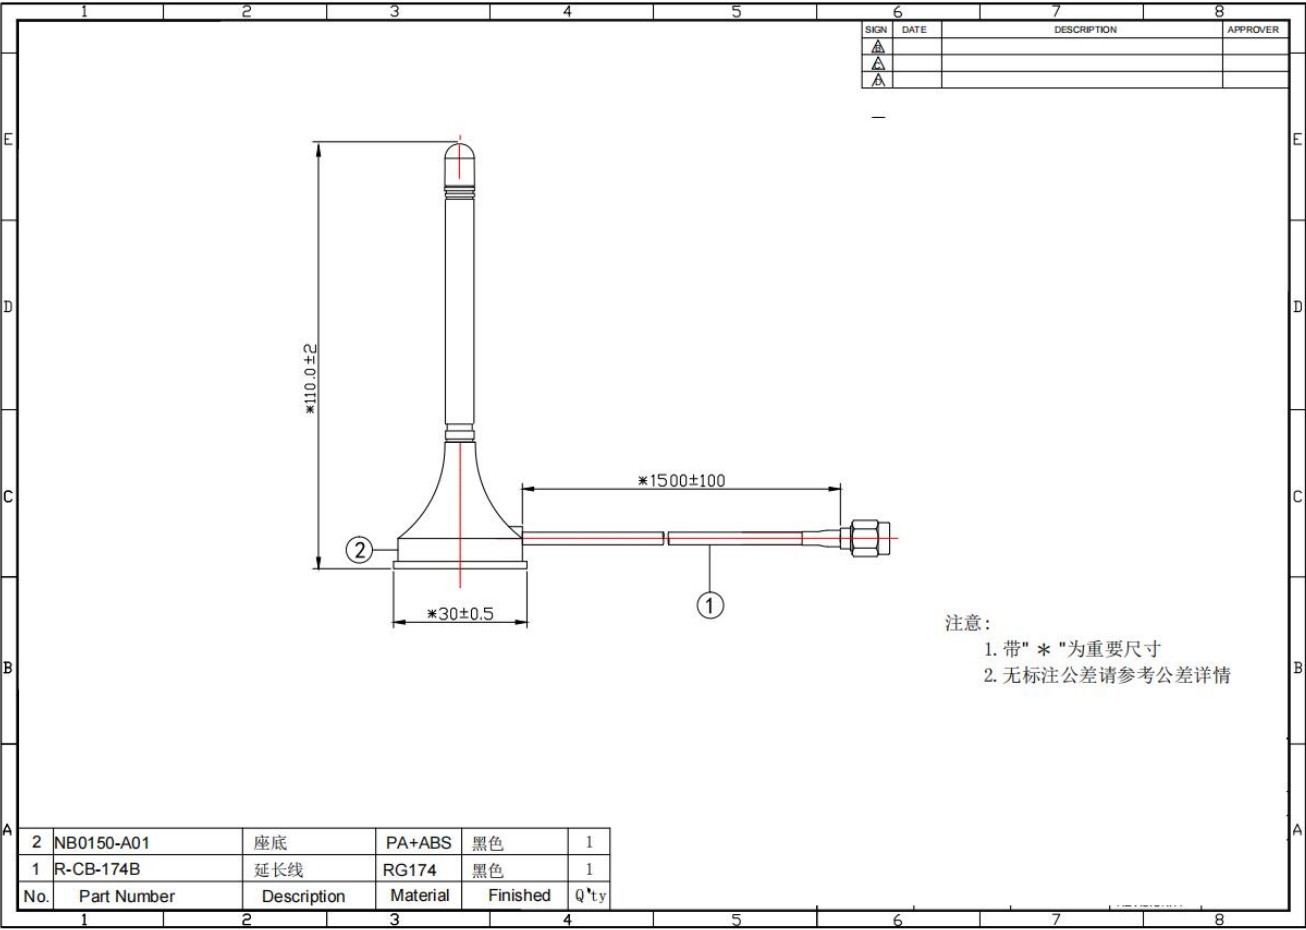

# 电性测试报告



## Test Reports

| Sample Photo                                                                      |                   |
|-----------------------------------------------------------------------------------|-------------------|
|  |                   |
| A. Electrical Characteristics                                                     |                   |
| Frequency                                                                         | 850-950MHz        |
| S.W.R.                                                                            | $\leq 2.0$        |
| Gain(dBi)                                                                         | 2.0               |
| Cable Type                                                                        | O.D.2.8mm//3m     |
| Polarization                                                                      | Linear            |
| Impedance                                                                         | 50 Ohm            |
| B. Material & Mechanical Characteristics                                          |                   |
| Material of Plastic                                                               | Body: PA+ABS      |
| Connector Type                                                                    | SMA Male Reverse  |
| Connector Pull Test                                                               | $\geq 2$ Kg       |
| C. Environmental                                                                  |                   |
| Operation Temperature                                                             | - 40 °C ~ + 65 °C |
| Storage Temperature                                                               | - 40 °C ~ + 80 °C |

# S 参数测试

## S Parameter Test

*Agilent E5071C*

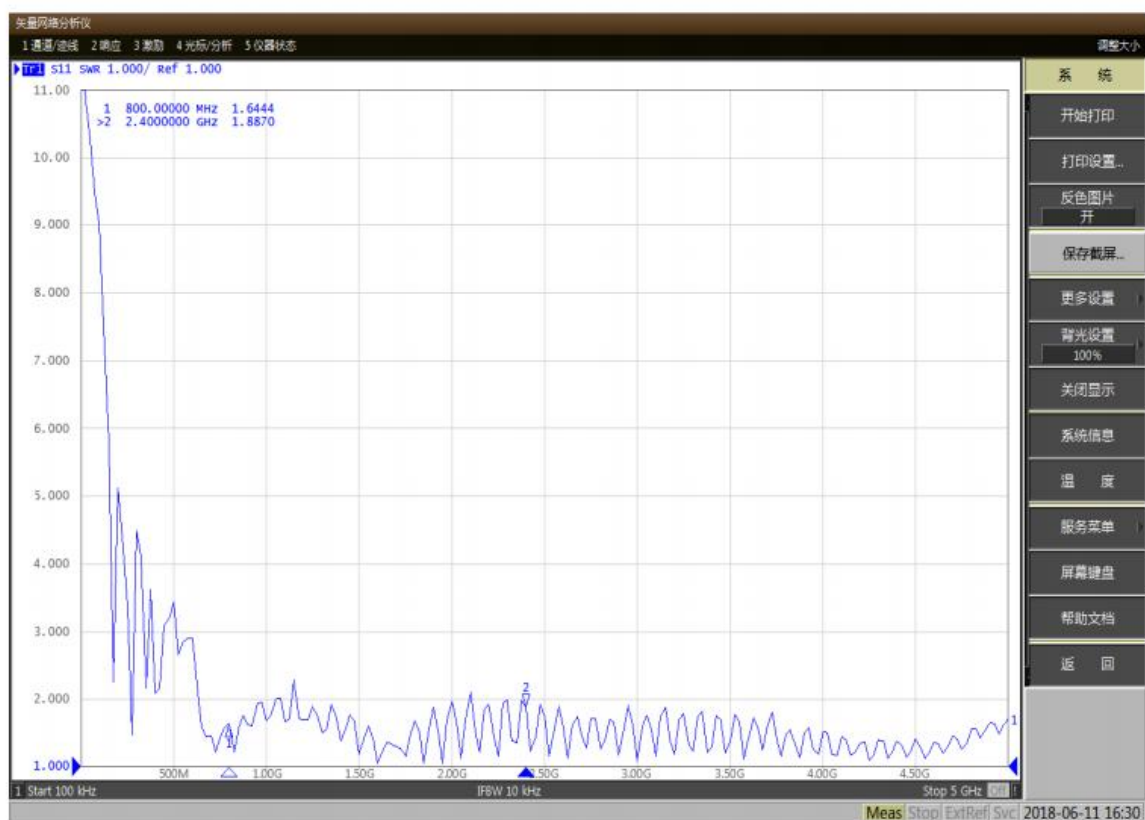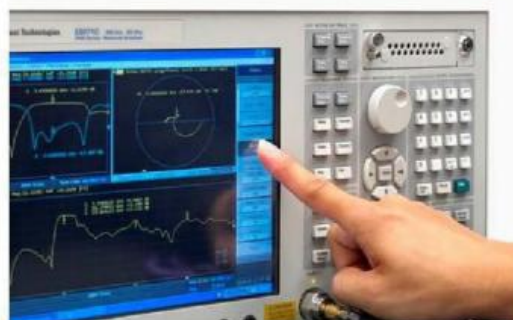

# 增益测试

## Gain Test

*Antenna  
Radiation  
Pattern  
VS  
Gain*

