




APPLIED
INFORMATION

IDENTIFICATION LABELS

IDENTIFICATION LABEL

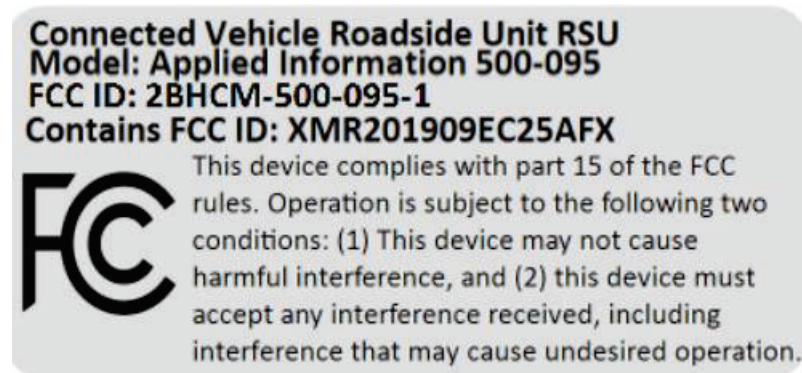

IDENTIFICATION LABEL MATERIAL

The material used for the FCC ID label is Zebra Z-Ultimate 4000T High -Tack which is a gloss polyester thermal transfer label with a high performance permanent acrylic adhesive. These thermal labels are UL-approved and CSA-accepted for indoor/outdoor use.

Features :


MATERIAL CONSTRUCTION

Component	Description	Caliper
Facestock	White or silver coated polyester	2.3 mil
Adhesive	High-tack, acrylic-based	2.0 mil
Liner	50 lb. semi-bleached, kraft stock	3.2 mil
TOTAL ± 10%		7.5 mil

TEMPERATURE PERFORMANCE

Minimum Application Temperature	Service Temperature	Optimal Storage Conditions
50° F (10° C)	-40° F to 302° F (-40° C to 150° C)	72° F (22° C) at 50% RH

ADHESIVE STRENGTH

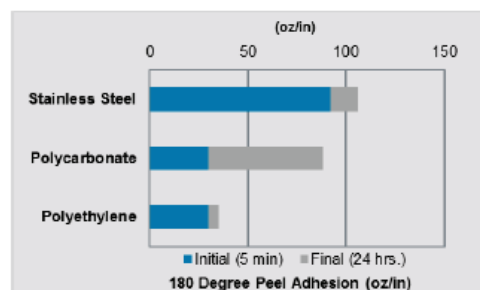

IDENTIFICATION LABEL LOCATION INFORMATION

