


Test Mode	TX G Mode Channel 01	Phase	Neutral
-----------	----------------------	-------	---------

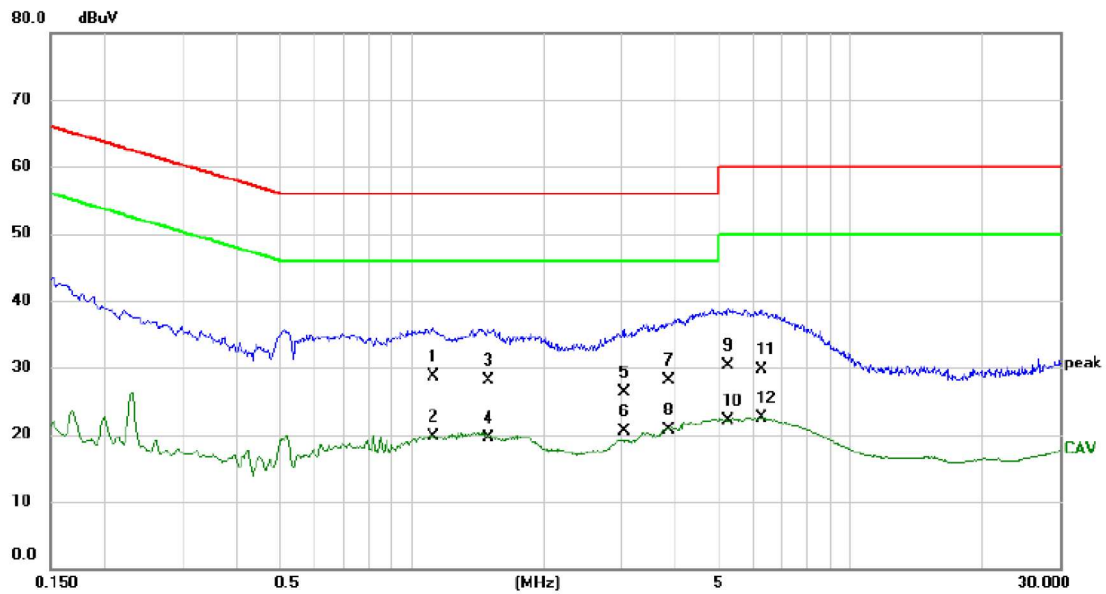

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1		1.1174	9.20	19.48	28.68	56.00	-27.32	QP	
2		1.1174	0.30	19.48	19.78	46.00	-26.22	AVG	
3		1.4955	8.60	19.49	28.09	56.00	-27.91	QP	
4		1.4955	0.10	19.49	19.59	46.00	-26.41	AVG	
5		3.0458	6.60	19.64	26.24	56.00	-29.76	QP	
6		3.0458	0.80	19.64	20.44	46.00	-25.56	AVG	
7		3.8535	8.40	19.77	28.17	56.00	-27.83	QP	
8	*	3.8535	1.00	19.77	20.77	46.00	-25.23	AVG	
9		5.2755	10.30	20.03	30.33	60.00	-29.67	QP	
10		5.2755	2.10	20.03	22.13	50.00	-27.87	AVG	
11		6.2723	9.60	20.11	29.71	60.00	-30.29	QP	
12		6.2723	2.30	20.11	22.41	50.00	-27.59	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX G Mode Channel 01	Polarization	Vertical
-----------	----------------------	--------------	----------

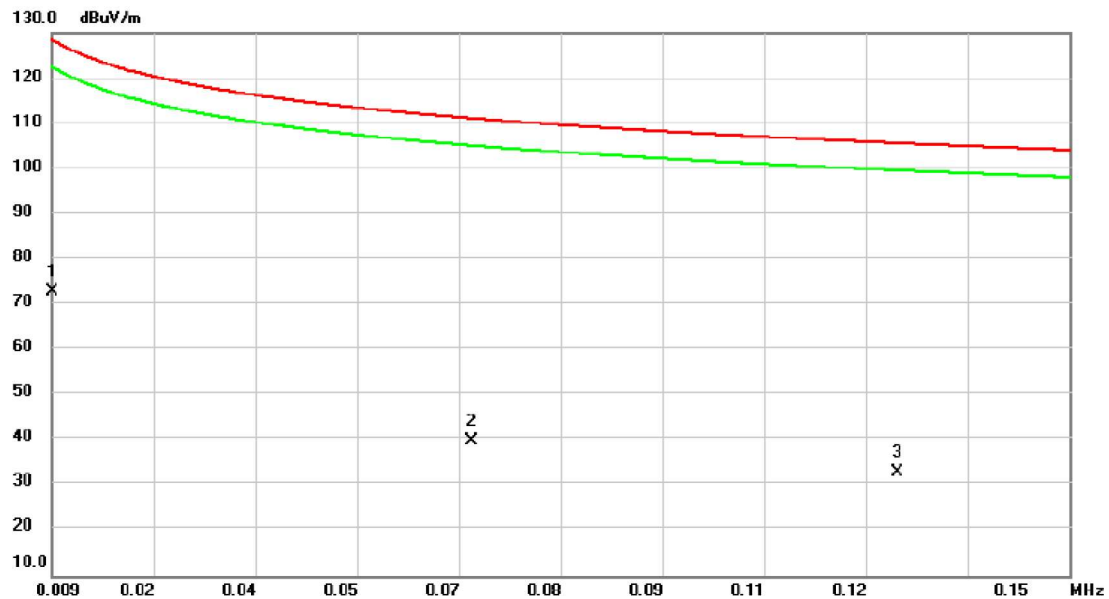


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.0090	2.74	70.07	72.81	128.52	-55.71	AVG	
2		0.0672	3.18	36.66	39.84	111.06	-71.22	AVG	
3		0.1262	7.14	25.92	33.06	105.59	-72.53	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

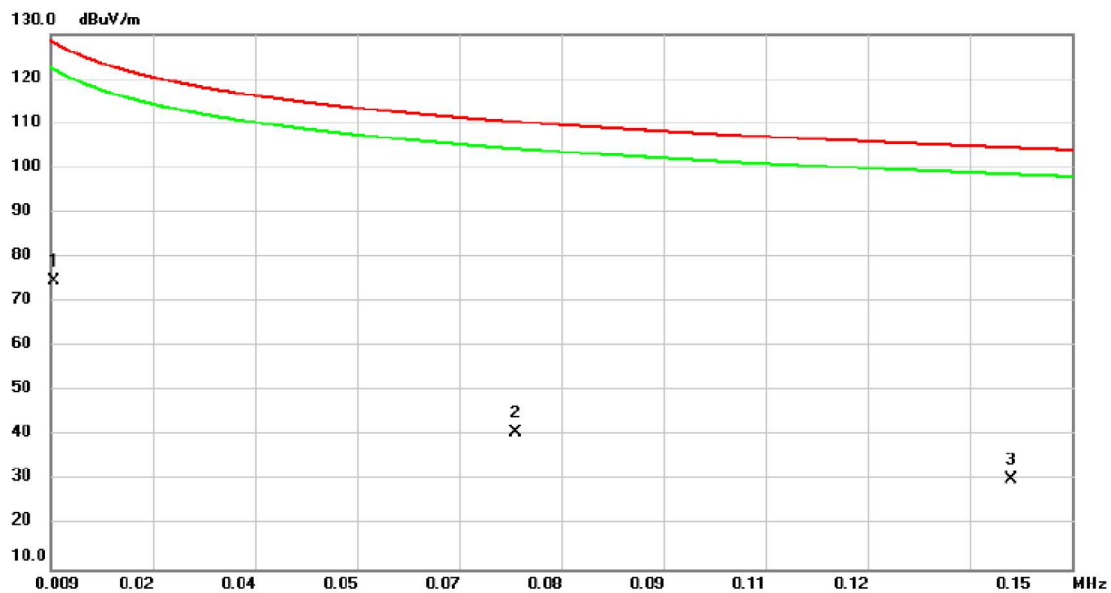


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	*	0.0094	5.20	69.46	74.66	128.14	-53.48	AVG	
2		0.0732	5.64	35.08	40.72	110.31	-69.59	AVG	
3		0.1416	5.78	24.59	30.37	104.59	-74.22	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 01	Polarization	Vertical
-----------	----------------------	--------------	----------

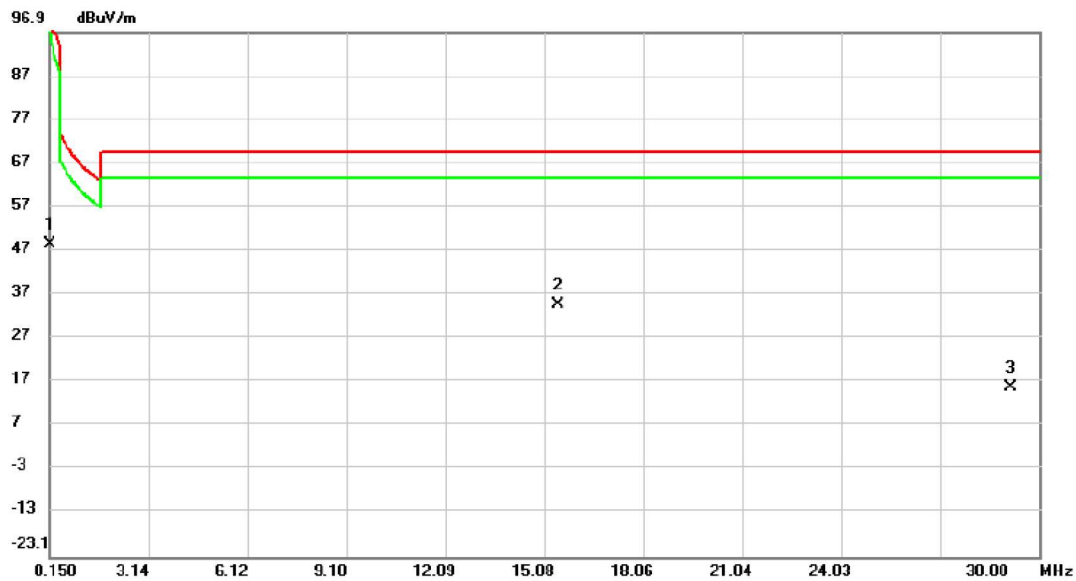


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.1500	24.60	23.80	48.40	104.09	-55.69	AVG	
2	*	15.4780	37.66	-2.94	34.72	69.54	-34.82	QP	
3		29.1493	19.02	-3.18	15.84	69.54	-53.70	QP	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

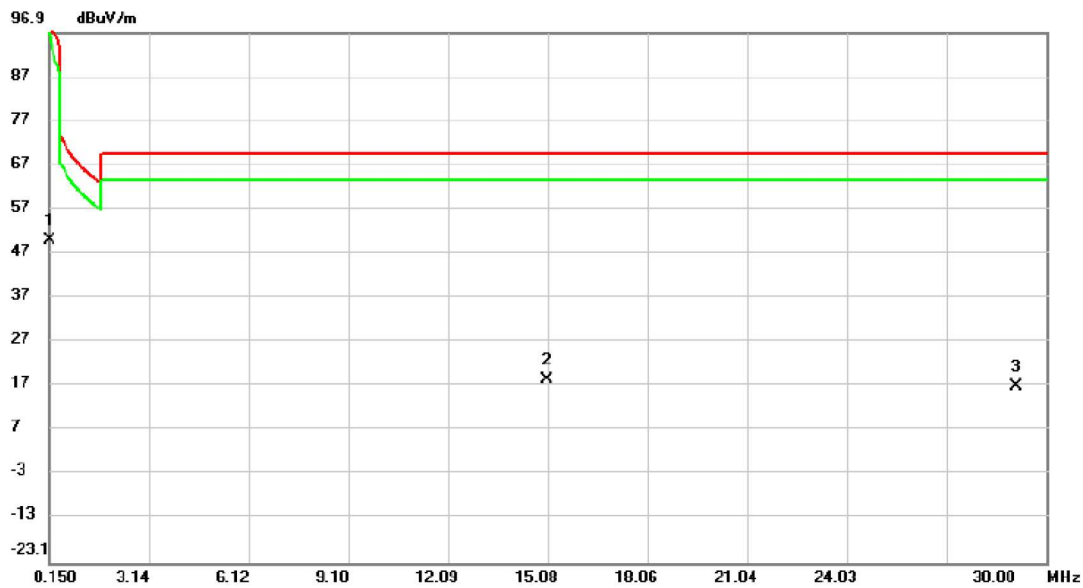


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		0.1500	26.08	23.80	49.88	104.09	-54.21	AVG	
2	*	15.0451	21.09	-2.76	18.33	69.54	-51.21	QP	
3		29.1045	20.11	-3.26	16.85	69.54	-52.69	QP	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX G Mode Channel 01	Polarization	Vertical
-----------	----------------------	--------------	----------

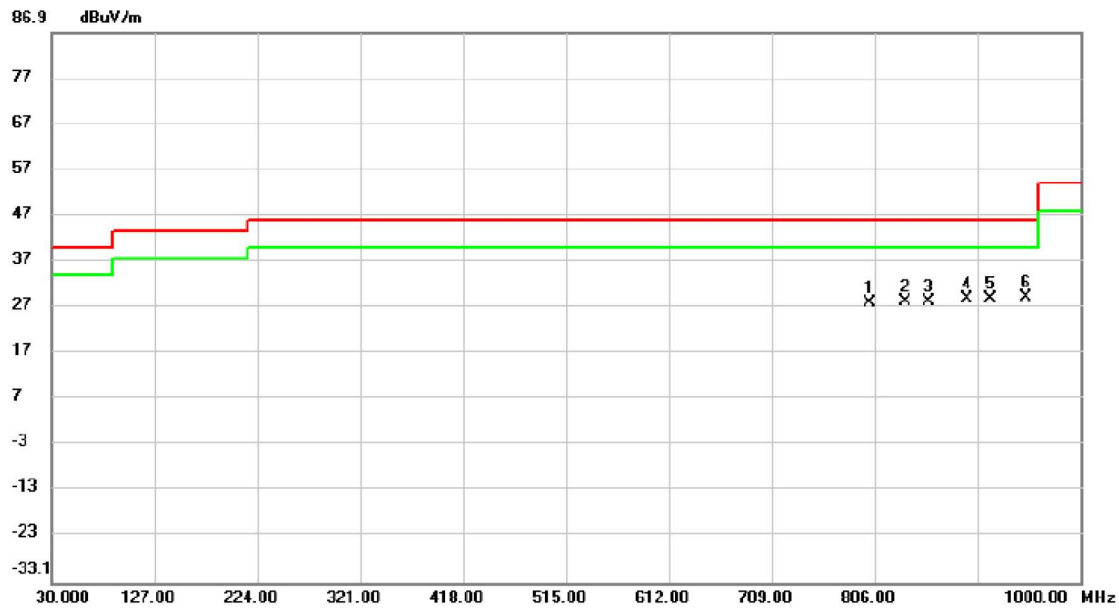


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		801.1500	32.92	-5.09	27.83	46.00	-18.17	peak	
2		835.1000	33.63	-5.40	28.23	46.00	-17.77	peak	
3		856.9250	33.69	-5.44	28.25	46.00	-17.75	peak	
4		893.3000	33.83	-4.96	28.87	46.00	-17.13	peak	
5		914.6400	33.52	-4.66	28.86	46.00	-17.14	peak	
6	*	949.0750	33.43	-4.14	29.29	46.00	-16.71	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode Channel 01	Polarization	Horizontal
-----------	----------------------	--------------	------------

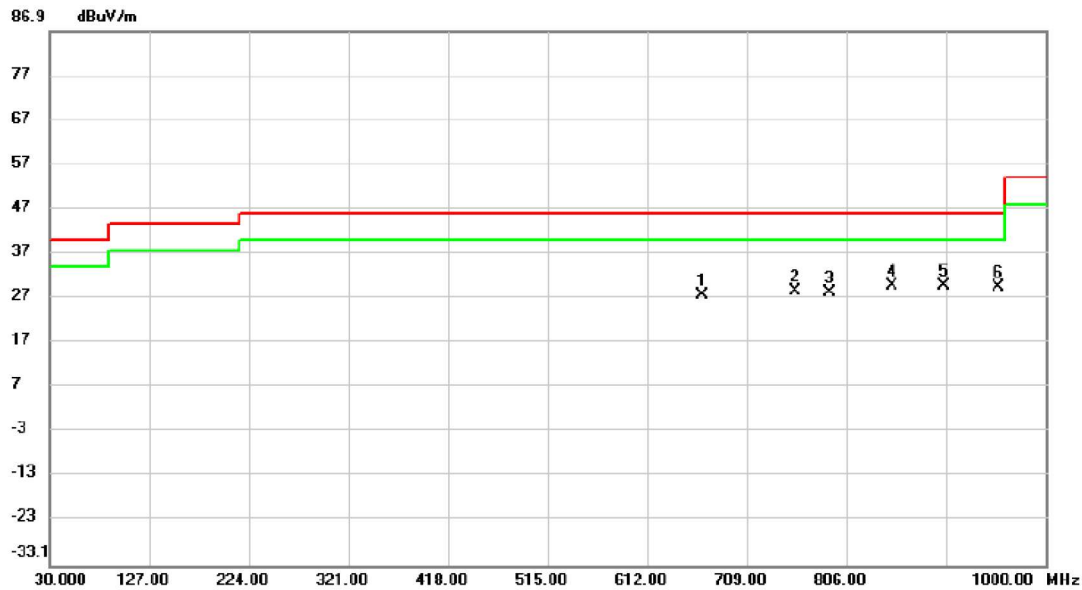

No. Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1	665.8350	35.12	-7.34	27.78	46.00	-18.22	peak	
2	755.5600	34.36	-5.81	28.55	46.00	-17.45	peak	
3	789.9950	33.60	-5.25	28.35	46.00	-17.65	peak	
4	850.1350	35.29	-5.54	29.75	46.00	-16.25	peak	
5 *	901.5450	34.63	-4.85	29.78	46.00	-16.22	peak	
6	953.9250	33.63	-4.14	29.49	46.00	-16.51	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION- ABOVE 1000 MHZ

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

106 dBuV/m

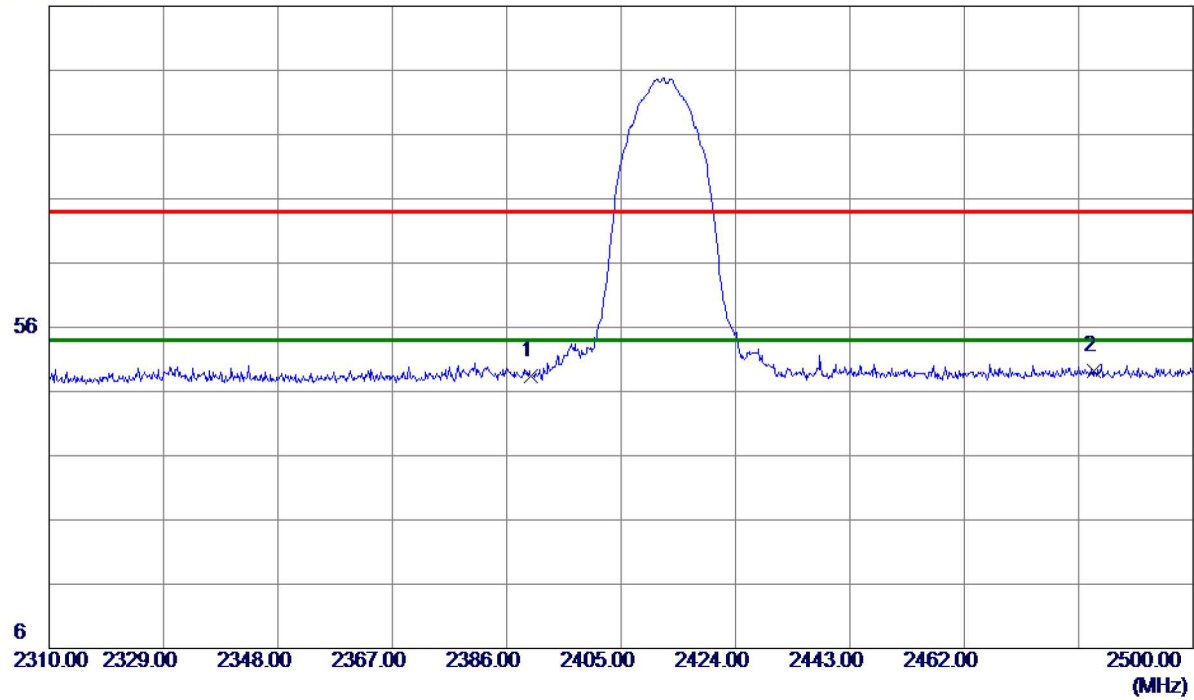


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	42.33	6.15	48.48	74.00	-25.52	Peak	
2 *	2483.5000	42.63	6.52	49.15	74.00	-24.85	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

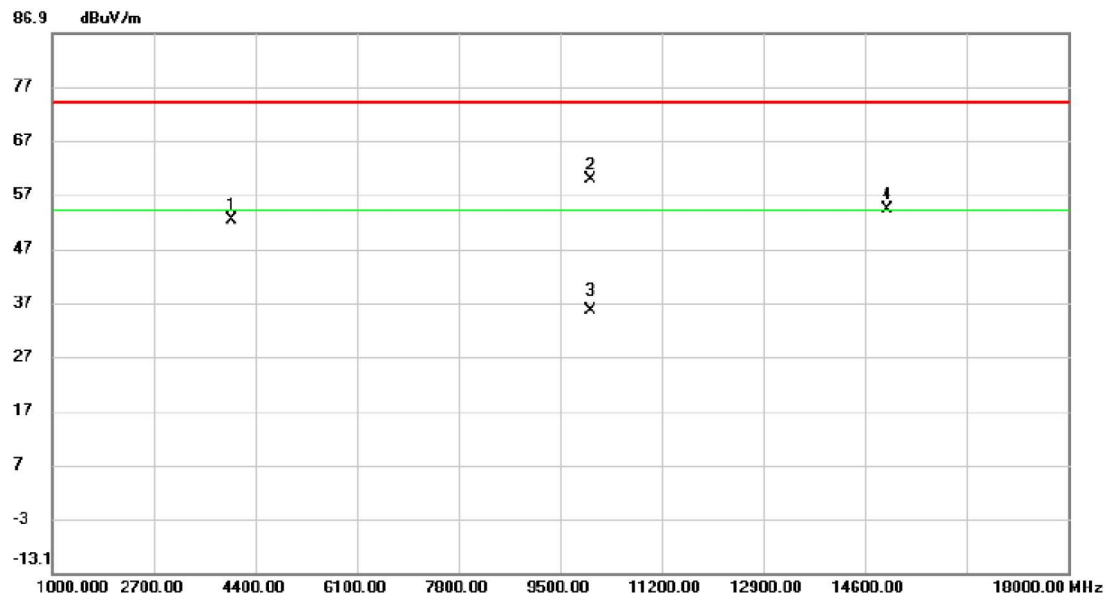


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Comment
1		3996.250	52.88	-0.71	52.17	74.00	-21.83	peak	
2	*	9998.950	51.23	8.60	59.83	74.00	-14.17	peak	
3		9998.950	26.98	8.60	35.58	54.00	-18.42	AVG	
4		14973.150	45.04	9.35	54.39	74.00	-19.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

106 dBuV/m

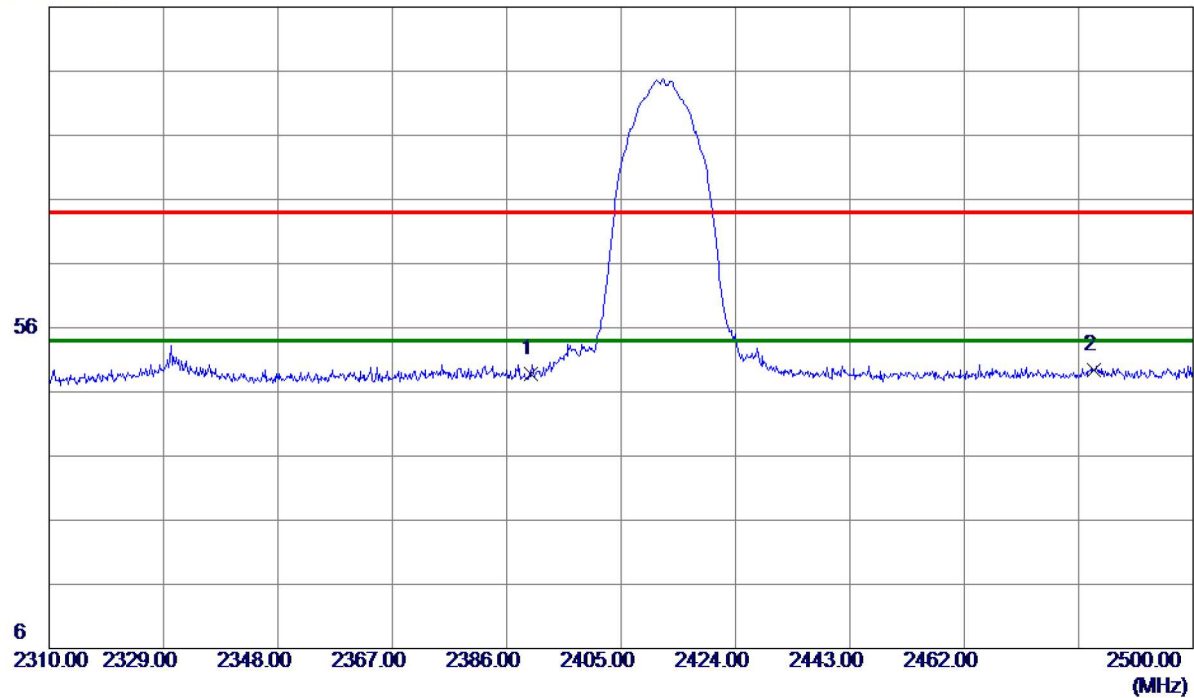


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	42.69	6.15	48.84	74.00	-25.16	Peak	
2 *	2483.5000	42.81	6.52	49.33	74.00	-24.67	Peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

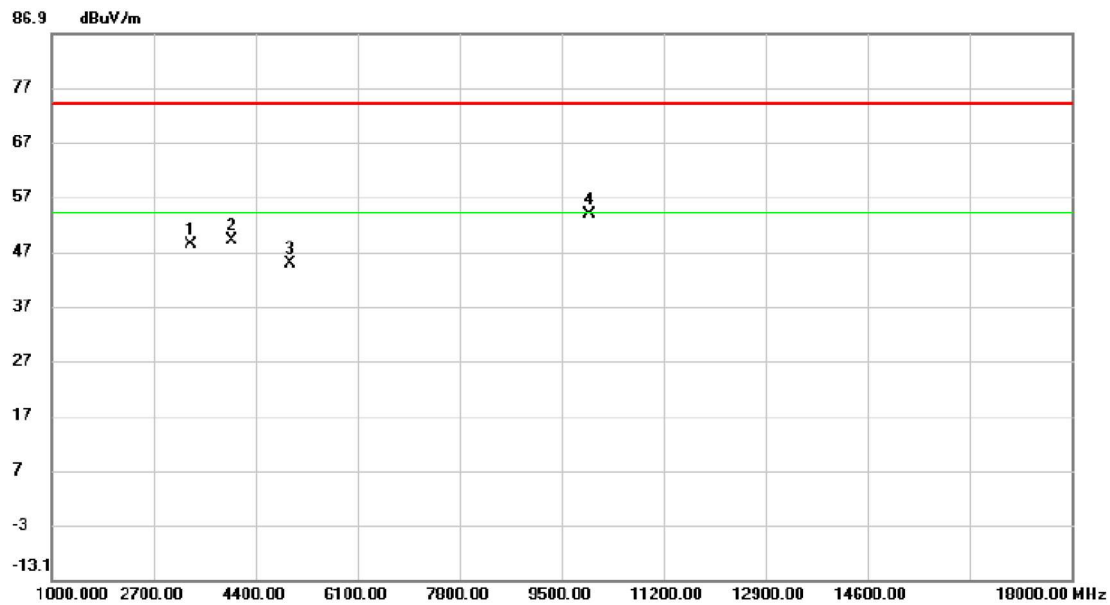


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over		
		MHz	dBuV		dBuV/m	dBuV/m	dB	Detector	Comment
1		3330.700	50.02	-1.82	48.20	74.00	-25.80	peak	
2		3996.250	49.78	-0.71	49.07	74.00	-24.93	peak	
3		4988.200	43.24	1.44	44.68	74.00	-29.32	peak	
4	*	9968.350	45.22	8.63	53.85	74.00	-20.15	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

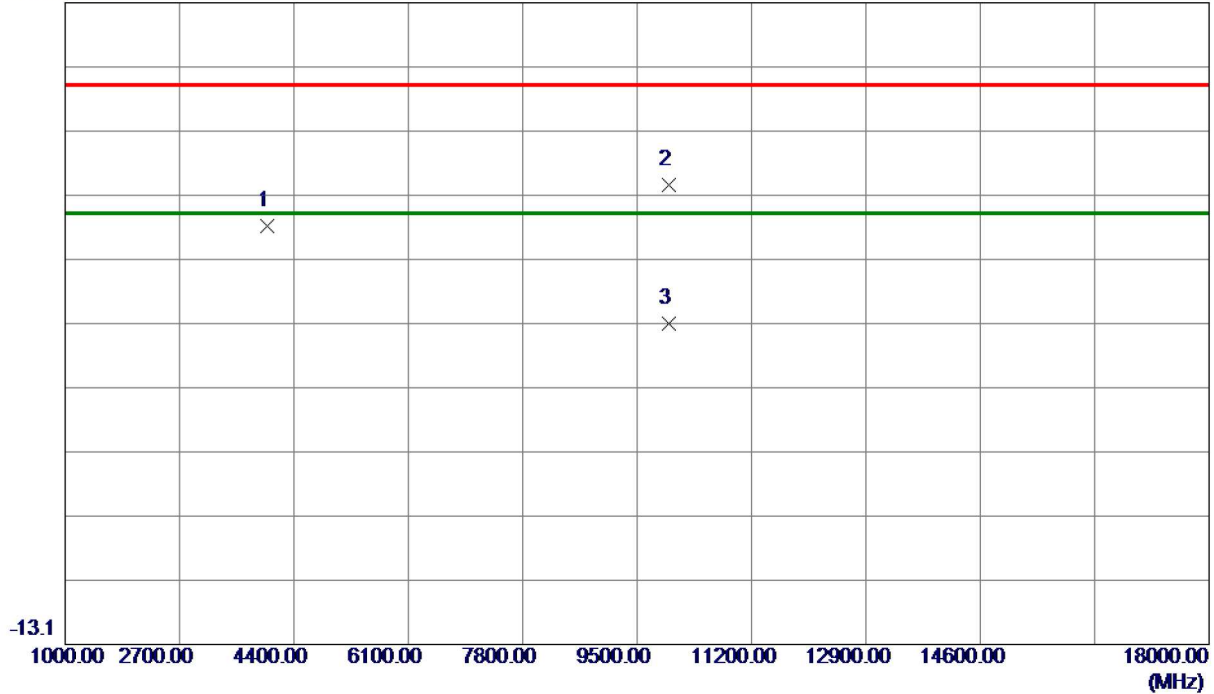

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3996.2500	52.84	-0.71	52.13	74.00	-21.87	Peak	
2 *	9963.2500	49.94	8.64	58.58	74.00	-15.42	Peak	
3	9963.2500	28.25	8.64	36.89	54.00	-17.11	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

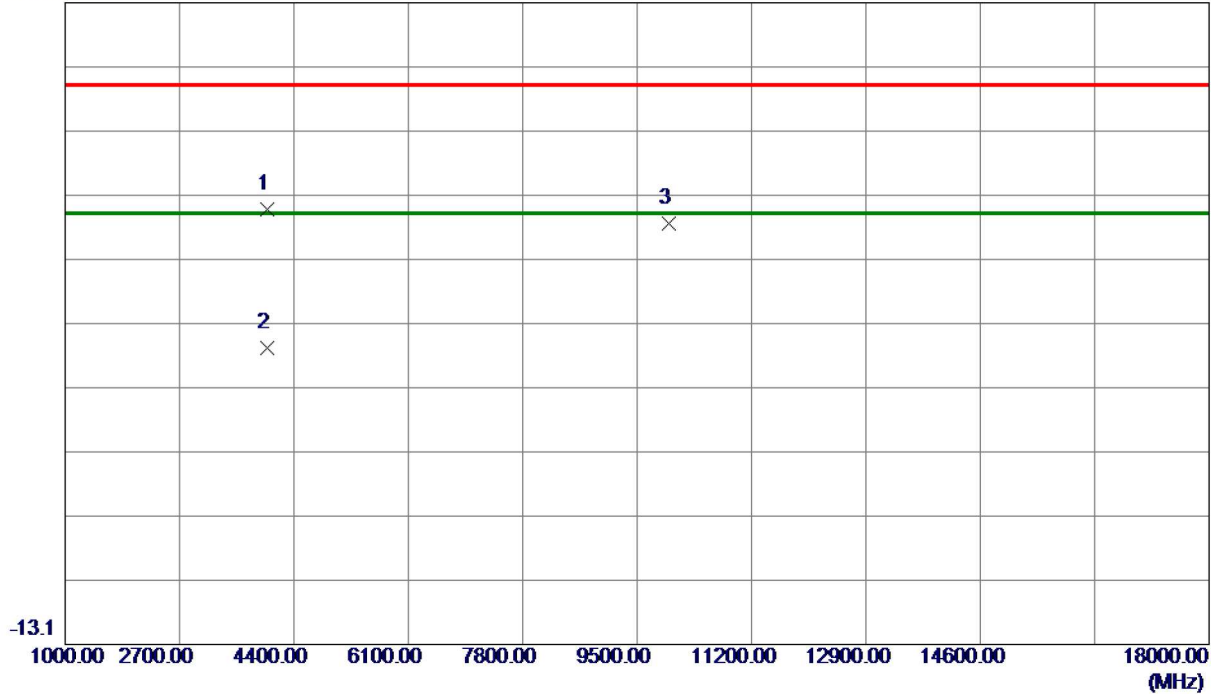

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3997.9500	55.46	-0.70	54.76	74.00	-19.24	Peak	
2	3997.9500	33.71	-0.70	33.01	54.00	-20.99	AVG	
3	9978.5500	43.97	8.62	52.59	74.00	-21.41	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

106 dBuV/m

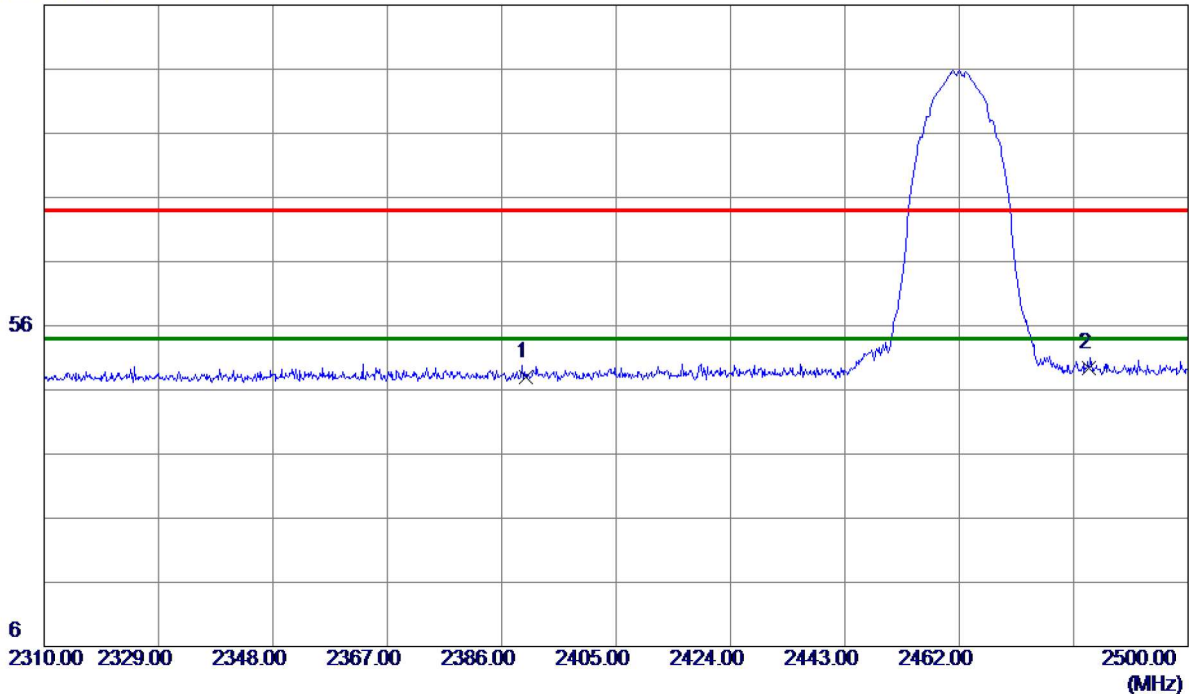

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2390.0000	41.91	6.15	48.06	74.00	-25.94	Peak	
2 *	2483.5000	42.85	6.52	49.37	74.00	-24.63	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

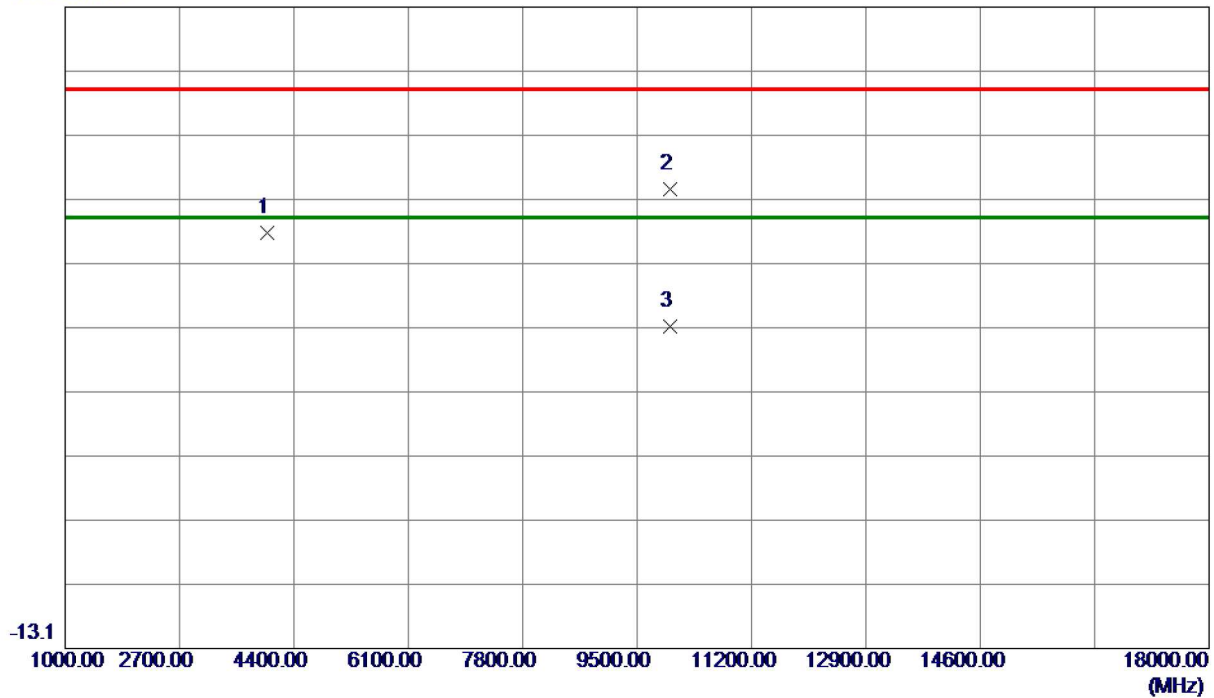

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3995.4000	52.34	-0.71	51.63	74.00	-22.37	Peak	
2 *	9998.9500	49.94	8.60	58.54	74.00	-15.46	Peak	
3	9998.9500	28.59	8.60	37.19	54.00	-16.81	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

106 dBuV/m

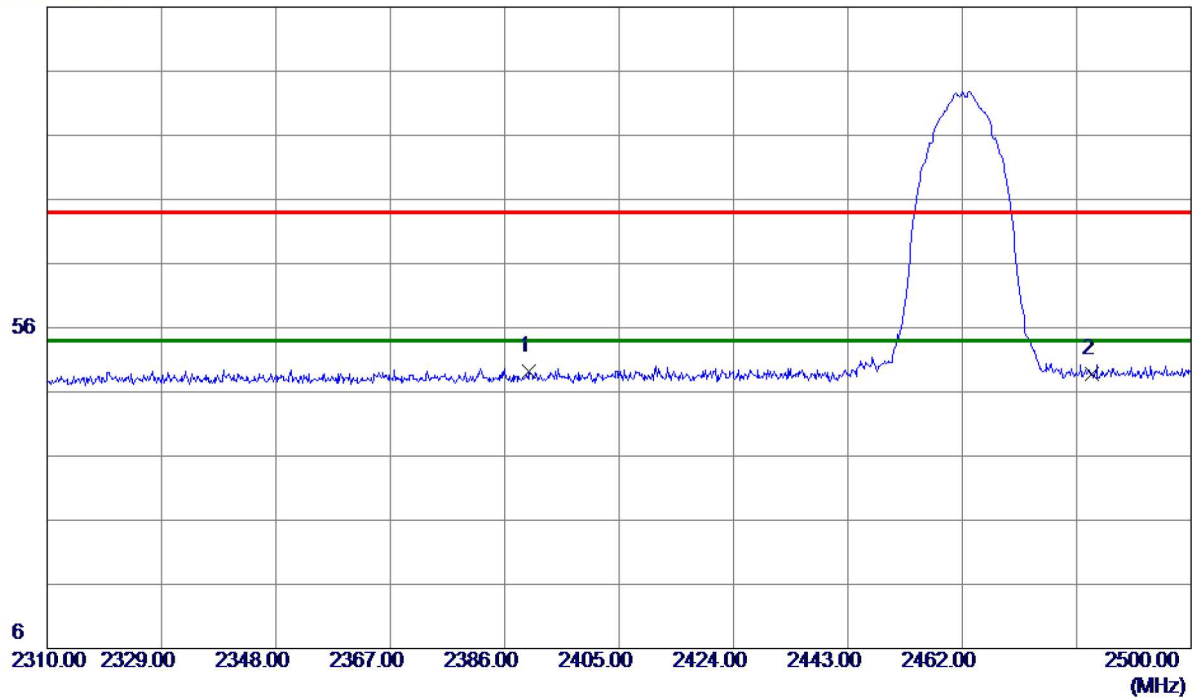

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2390.0000	42.96	6.15	49.11	74.00	-24.89	Peak	
2	2483.5000	42.20	6.52	48.72	74.00	-25.28	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX B Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

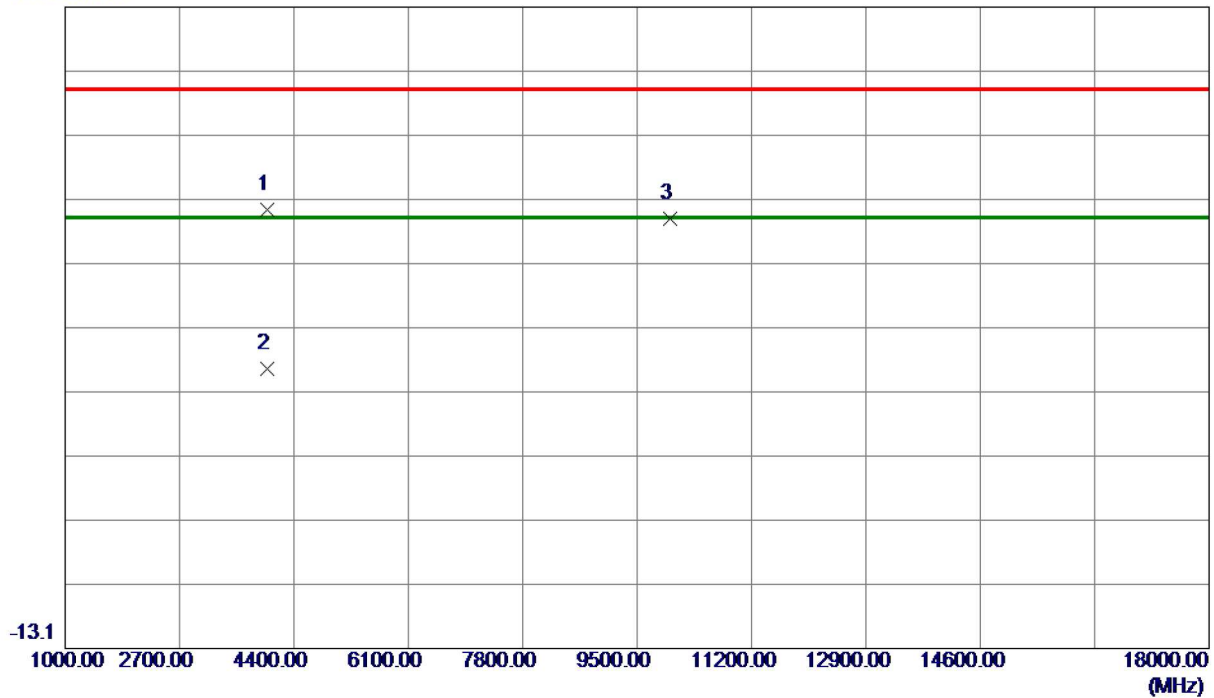


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	3994.5500	56.06	-0.71	55.35	74.00	-18.65	Peak	
2	3994.5500	31.23	-0.71	30.52	74.00	-43.48	Peak	
3	9988.7500	45.35	8.61	53.96	74.00	-20.04	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

106 dBuV/m

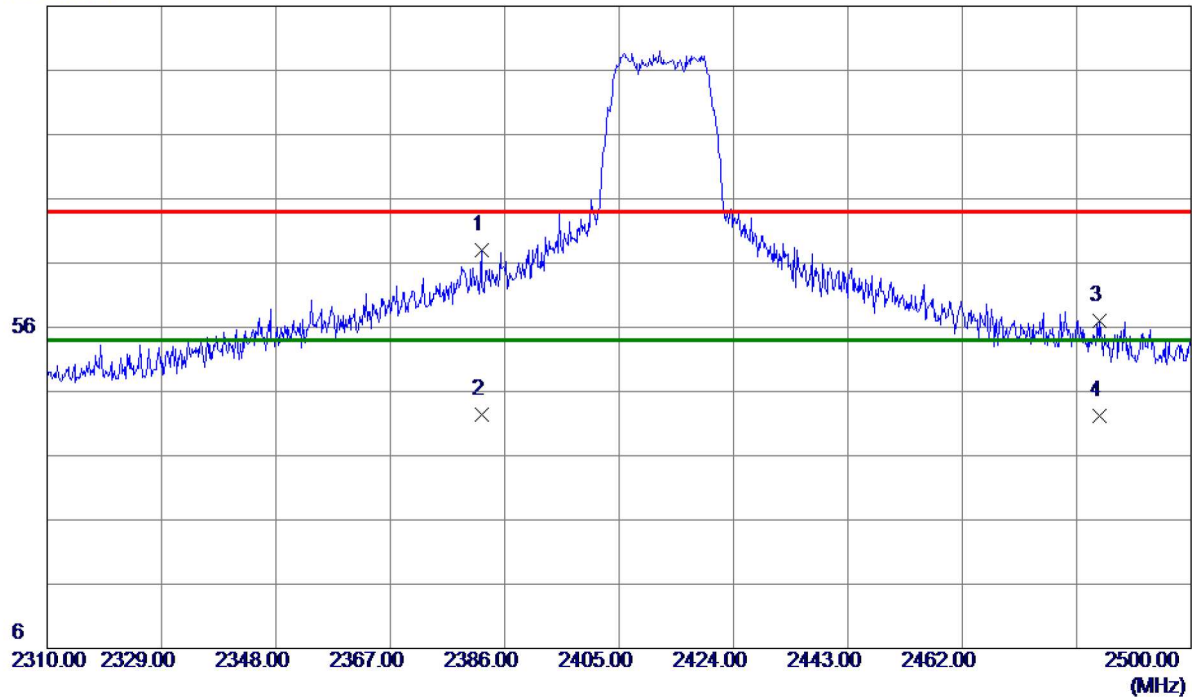

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2382.1240	61.82	6.12	67.94	74.00	-6.06	Peak	
2	2382.1240	36.27	6.12	42.39	54.00	-11.61	AVG	
3	2484.8190	50.43	6.53	56.96	74.00	-17.04	Peak	
4	2484.8190	35.65	6.53	42.18	54.00	-11.82	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

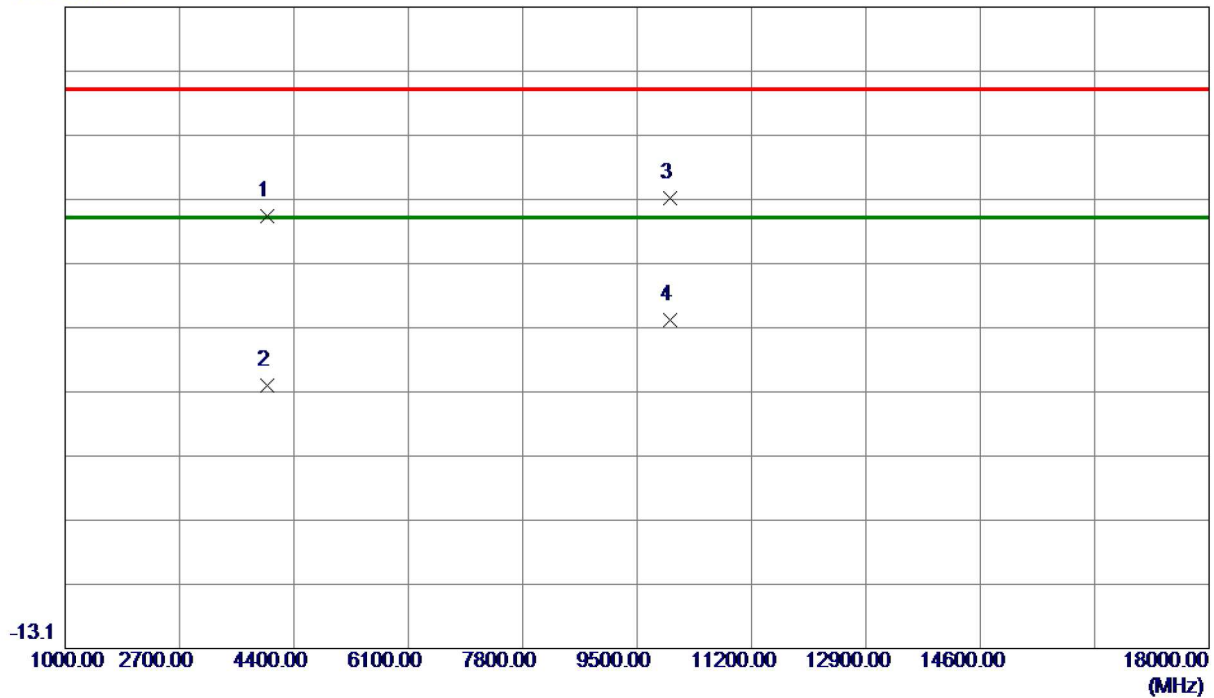

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3997.9500	55.04	-0.70	54.34	74.00	-19.66	Peak	
2	3997.9500	28.56	-0.70	27.86	54.00	-26.14	AVG	
3	9994.7000	48.51	8.61	57.12	74.00	-16.88	Peak	
4 *	9994.7000	29.57	8.61	38.18	54.00	-15.82	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

106 dBuV/m

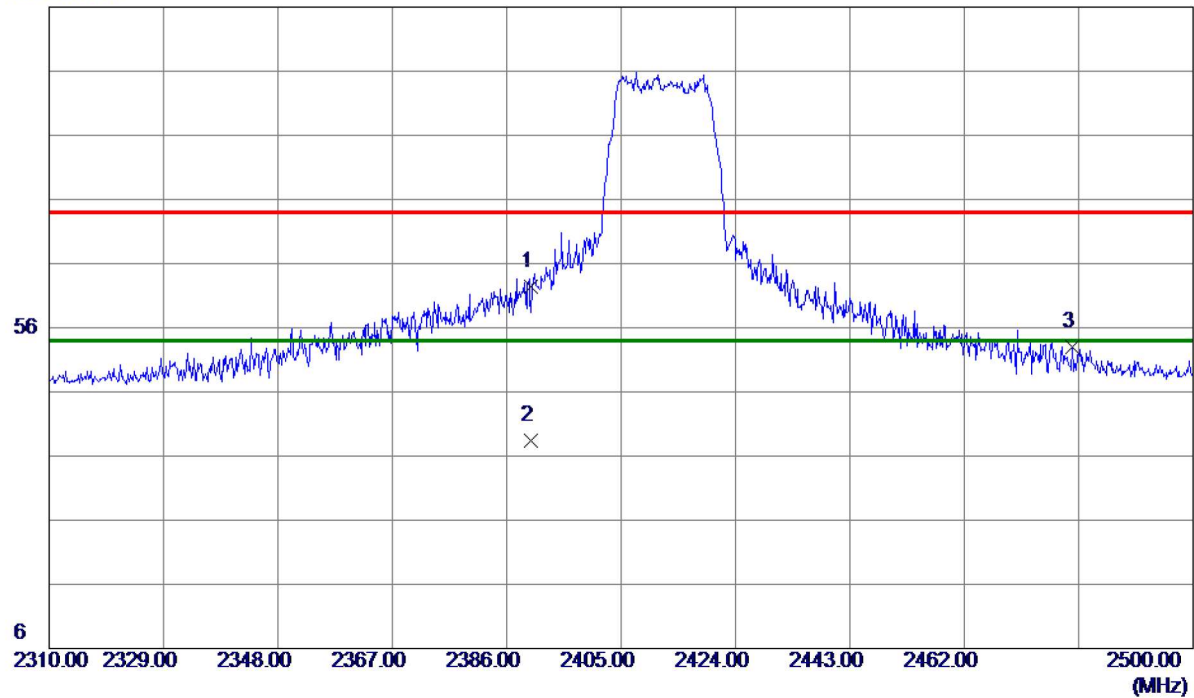

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	2390.0000	56.18	6.15	62.33	74.00	-11.67	Peak	
2	2390.0000	32.26	6.15	38.41	54.00	-15.59	AVG	
3	2479.9360	46.49	6.51	53.00	74.00	-21.00	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2412 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

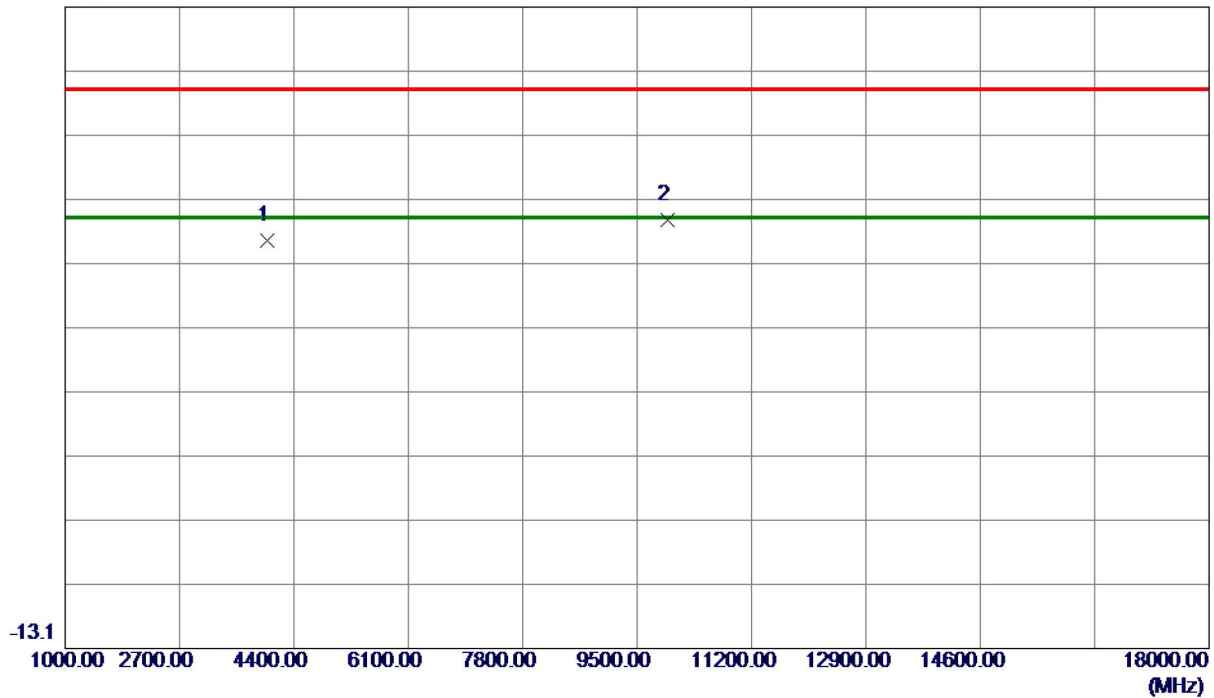

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3996.2500	51.29	-0.71	50.58	74.00	-23.42	Peak	
2 *	9962.4000	45.03	8.64	53.67	74.00	-20.33	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

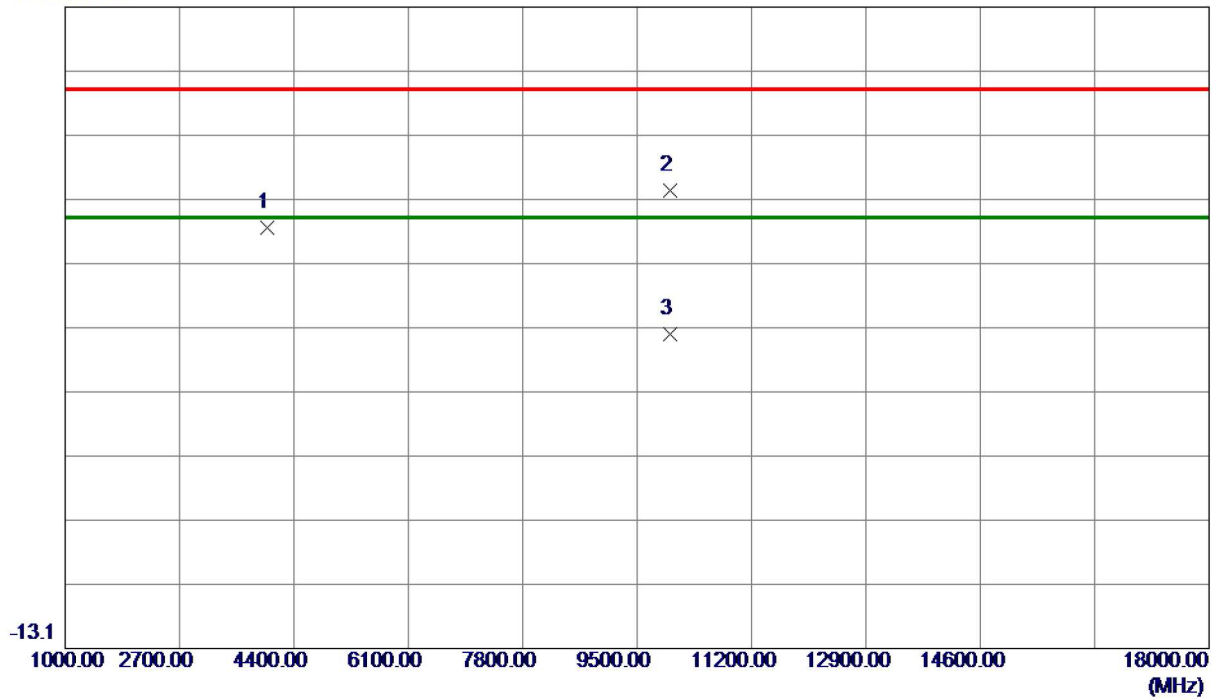


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3996.2500	53.15	-0.71	52.44	74.00	-21.56	Peak	
2 *	9989.6000	49.63	8.61	58.24	74.00	-15.76	Peak	
3	9989.6000	27.23	8.61	35.84	74.00	-38.16	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2437 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

86.9 dBuV/m

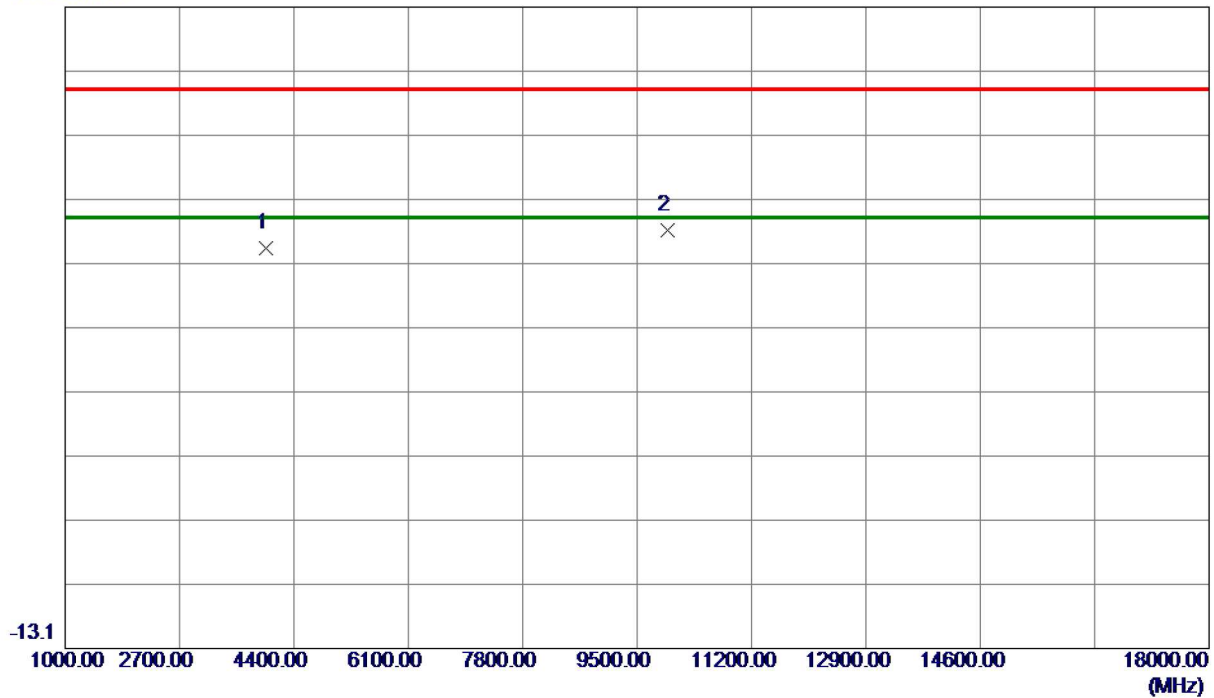


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3993.7000	50.10	-0.71	49.39	74.00	-24.61	Peak	
2 *	9962.4000	43.49	8.64	52.13	74.00	-21.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

106 dBuV/m

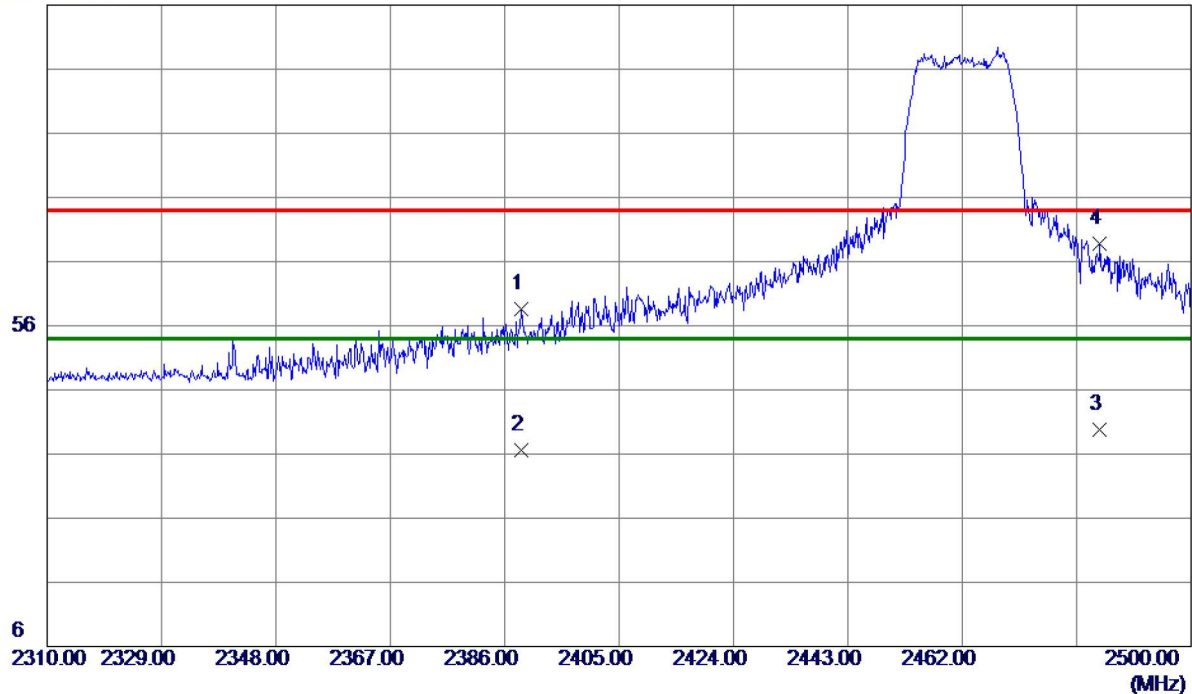

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2388.8500	52.38	6.15	58.53	74.00	-15.47	Peak	
2	2388.8500	30.44	6.15	36.59	54.00	-17.41	AVG	
3	2484.8950	33.32	6.53	39.85	54.00	-14.15	AVG	
4 *	2484.8950	62.28	6.53	68.81	74.00	-5.19	Peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Vertical
-----------	--------------------	--------------	----------

86.9 dBuV/m

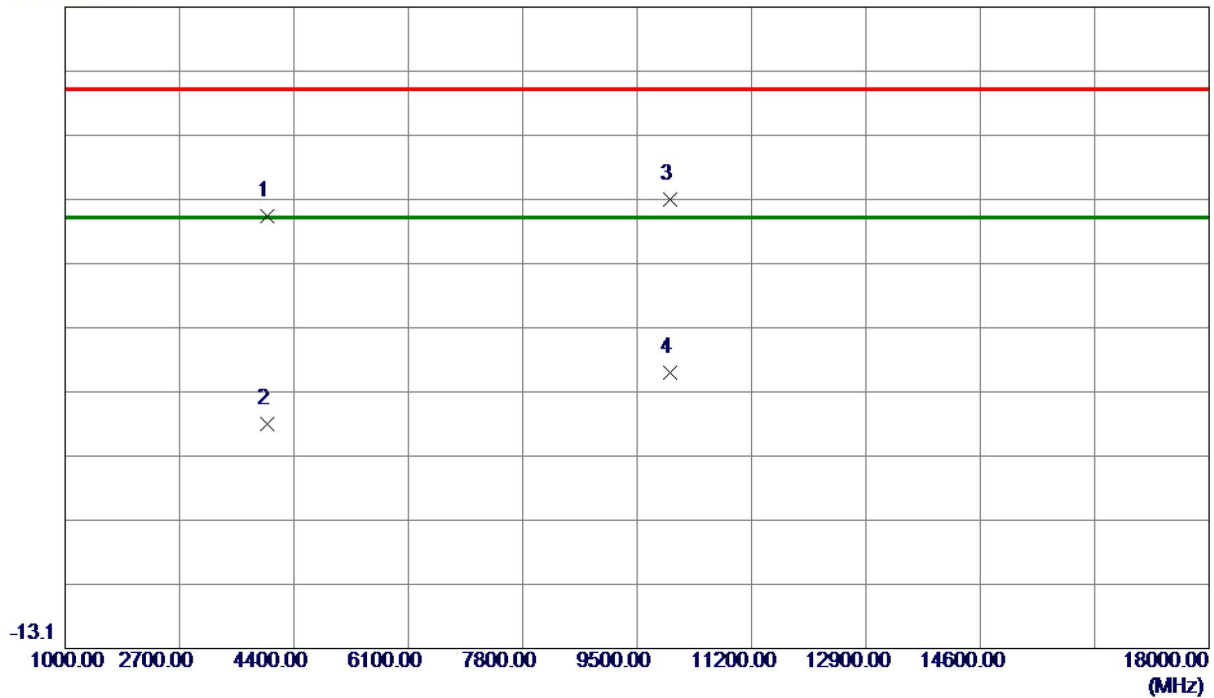


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	3997.9500	54.95	-0.70	54.25	74.00	-19.75	Peak	
2	3997.9500	22.65	-0.70	21.95	54.00	-32.05	AVG	
3 *	9983.6500	48.24	8.62	56.86	74.00	-17.14	Peak	
4	9983.6500	21.27	8.62	29.89	54.00	-24.11	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX G Mode 2462 MHz	Polarization	Horizontal
-----------	--------------------	--------------	------------

106 dBuV/m

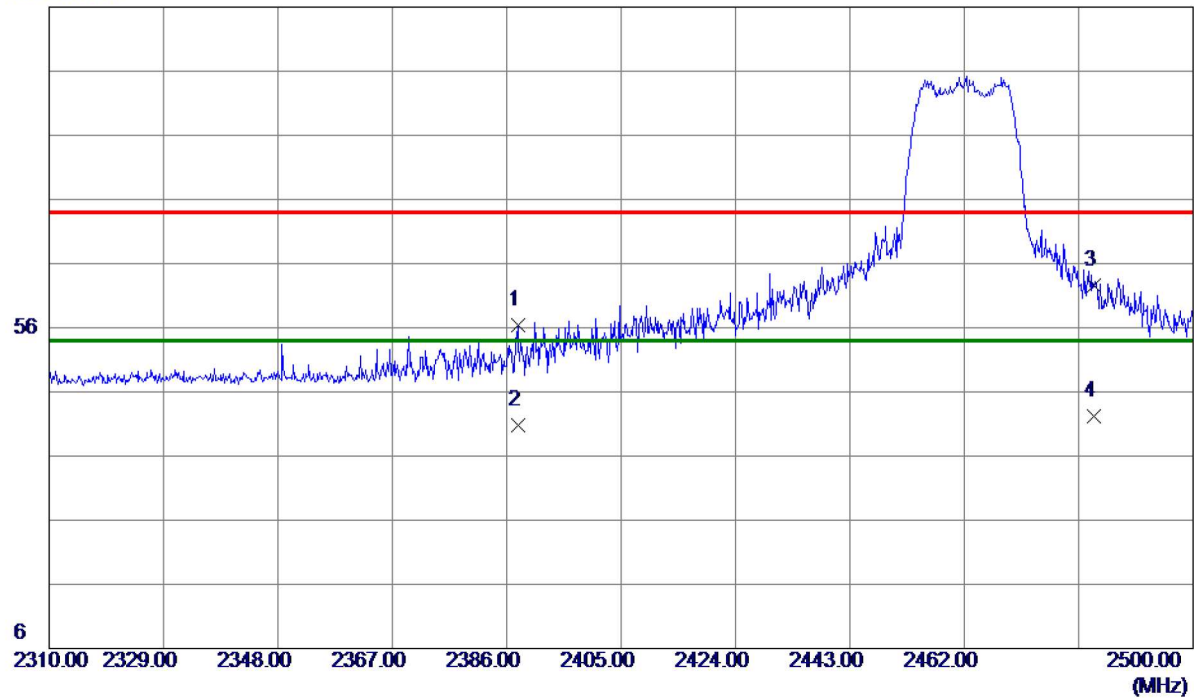

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	2387.8620	50.24	6.14	56.38	74.00	-17.62	Peak	
2	2387.8620	34.66	6.14	40.80	54.00	-13.20	AVG	
3 *	2483.5000	56.14	6.52	62.66	74.00	-11.34	Peak	
4	2483.5000	35.69	6.52	42.21	54.00	-11.79	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.