



11ax(HE20)_TX_CH_64_Horizontal_Average

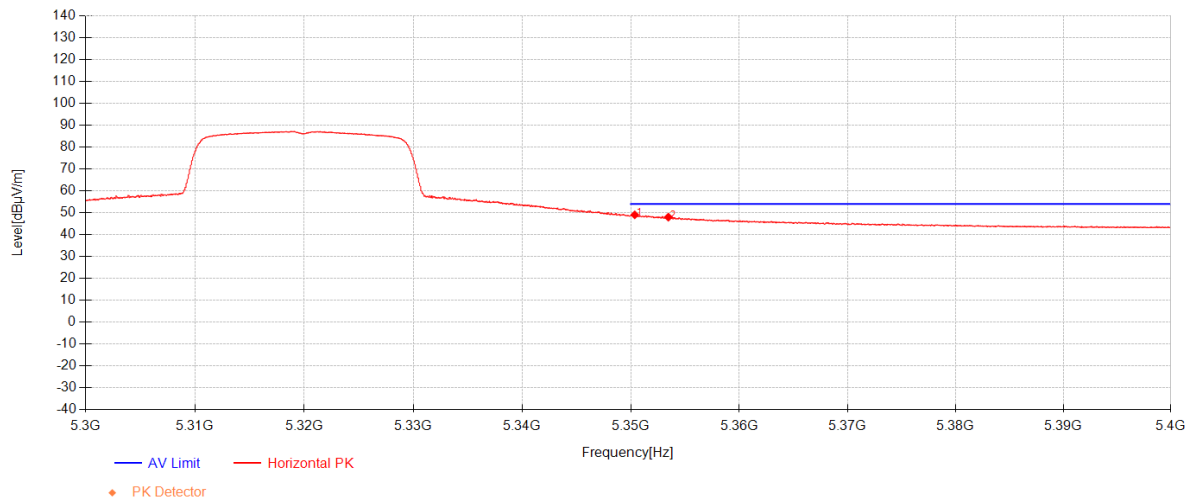


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.375	33.80	32.18	-16.93	49.05	54.00	4.95	Horizontal
2	5353.475	32.72	32.19	-16.91	48.00	54.00	6.00	Horizontal

11ax(HE20)_TX_CH_64_Veritical_Peak

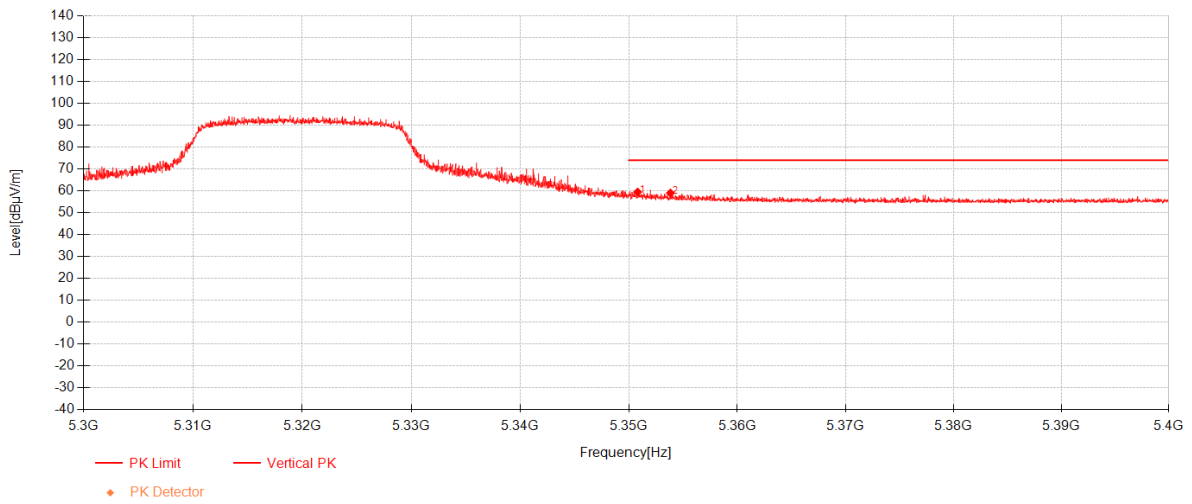


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.825	44.24	32.18	-16.93	59.50	74.00	14.50	Vertical
2	5353.85	43.78	32.19	-16.91	59.06	74.00	14.94	Vertical

11ax(HE20)_TX_CH_64_Veritical_Average

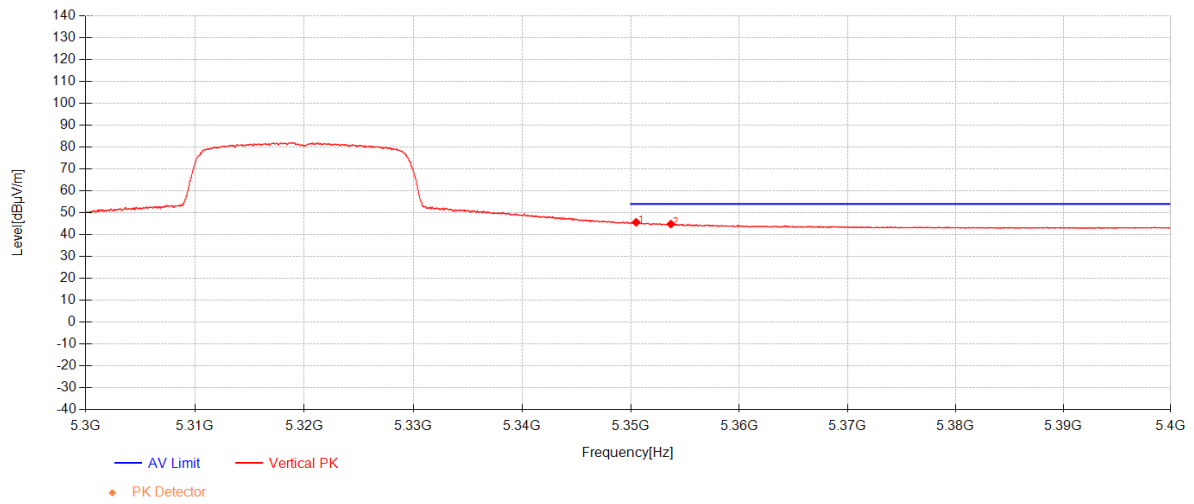


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5350.5	30.38	32.18	-16.93	45.63	54.00	8.37	Vertical
2	5353.7	29.54	32.19	-16.91	44.82	54.00	9.18	Vertical

11ax(HE20)_TX_CH_100_Horizontal_Peak

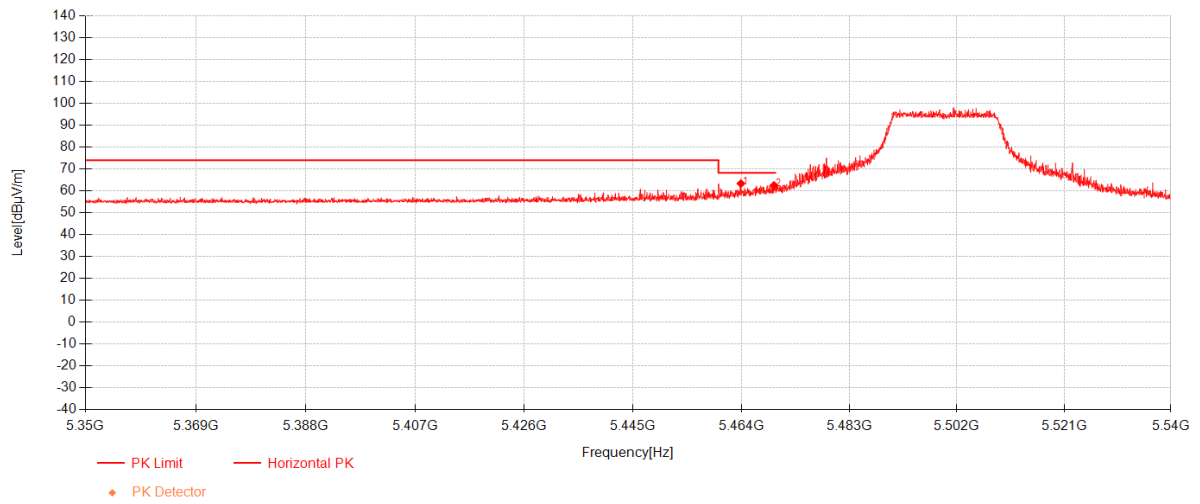

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5463.9525	47.91	32.50	-17.03	63.38	68.30	4.92	Horizontal
2	5469.7475	47.06	32.52	-17.06	62.52	68.30	5.78	Horizontal


11ax(HE20)_TX_CH_100_Horizontal_Average

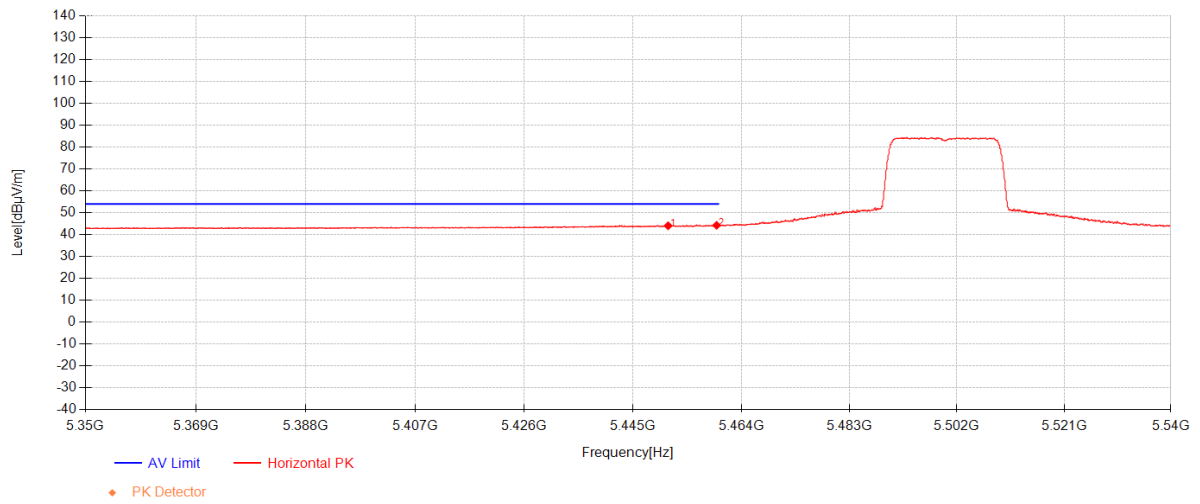

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5451.175	28.55	32.46	-16.96	44.06	54.00	9.94	Horizontal
2	5459.6775	28.78	32.49	-17.00	44.26	54.00	9.74	Horizontal




11ax(HE20)_TX_CH_100_Vertical_Peak

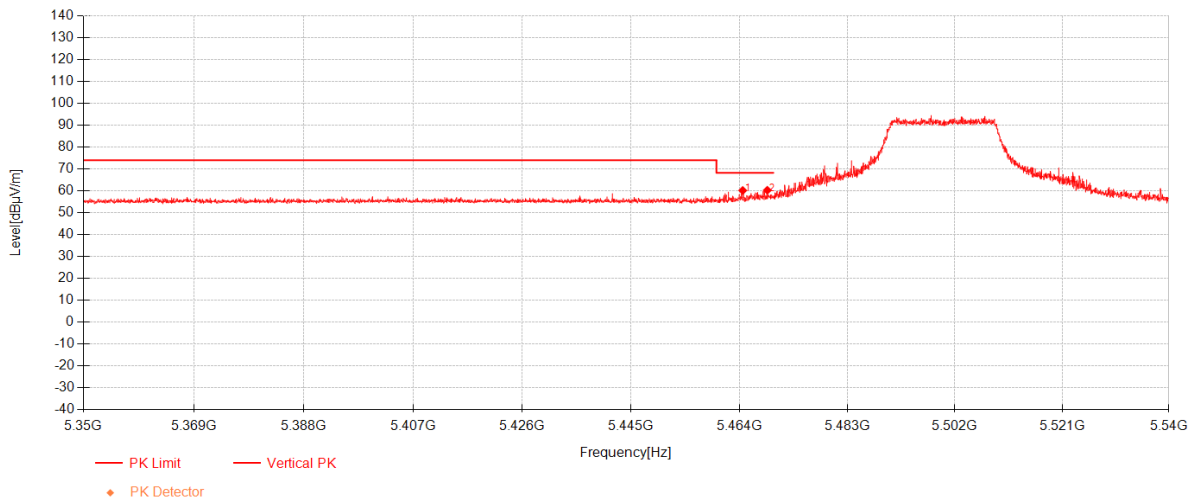


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5464.6175	44.73	32.50	-17.03	60.20	68.30	8.10	Vertical
2	5468.94	44.84	32.51	-17.05	60.30	68.30	8.00	Vertical

11ax(HE20)_TX_CH_100_Vertical_Average

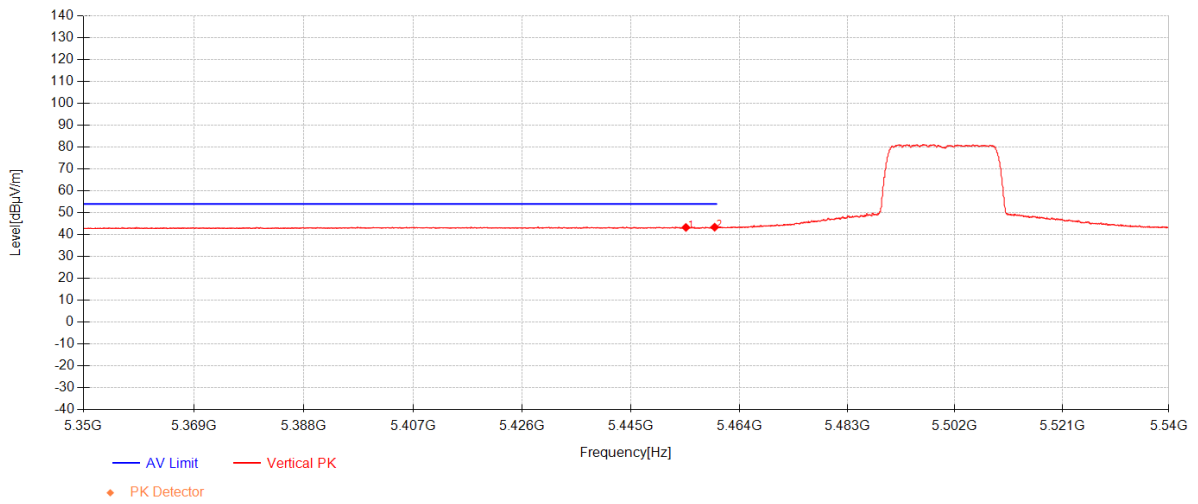


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5454.6425	27.79	32.47	-16.98	43.29	54.00	10.71	Vertical
2	5459.6775	27.92	32.49	-17.00	43.40	54.00	10.60	Vertical

11ax(HE20)_TX_CH_140_Horizontal_Peak

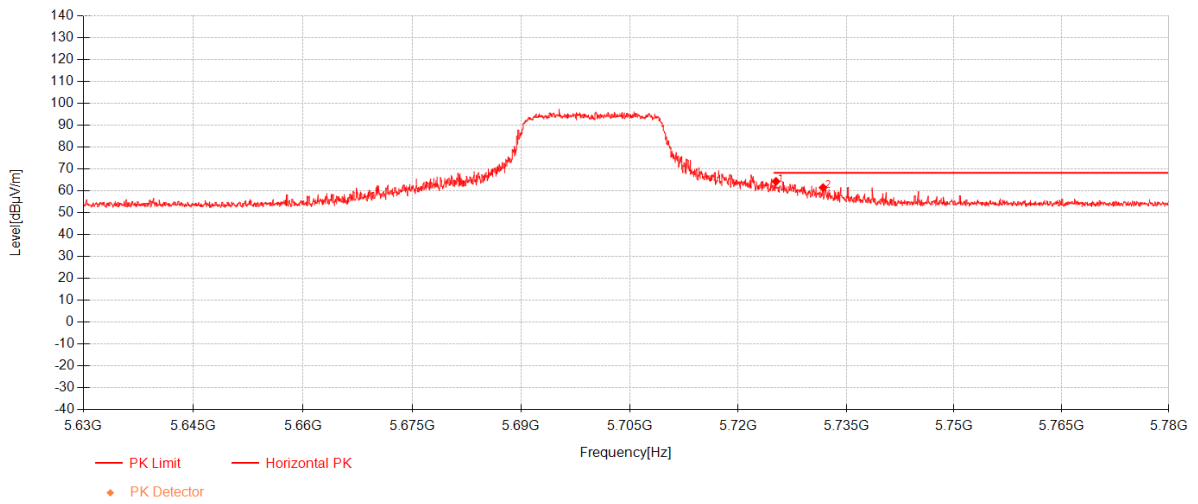


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.25	48.52	32.69	-16.86	64.35	68.30	3.95	Horizontal
2	5731.775	45.66	32.69	-16.83	61.52	68.30	6.78	Horizontal

11ax(HE20)_TX_CH_140_Vertical_Peak

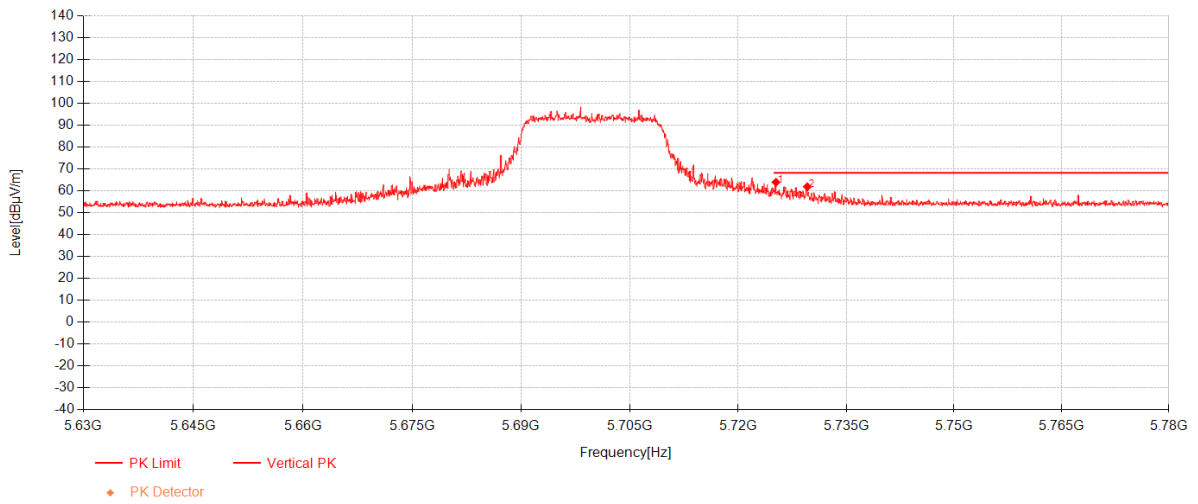


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5725.25	48.13	32.69	-16.86	63.96	68.30	4.34	Vertical
2	5729.6	46.08	32.69	-16.84	61.93	68.30	6.37	Vertical

11ax(HE20)_TX_CH_149_Horizontal_Peak

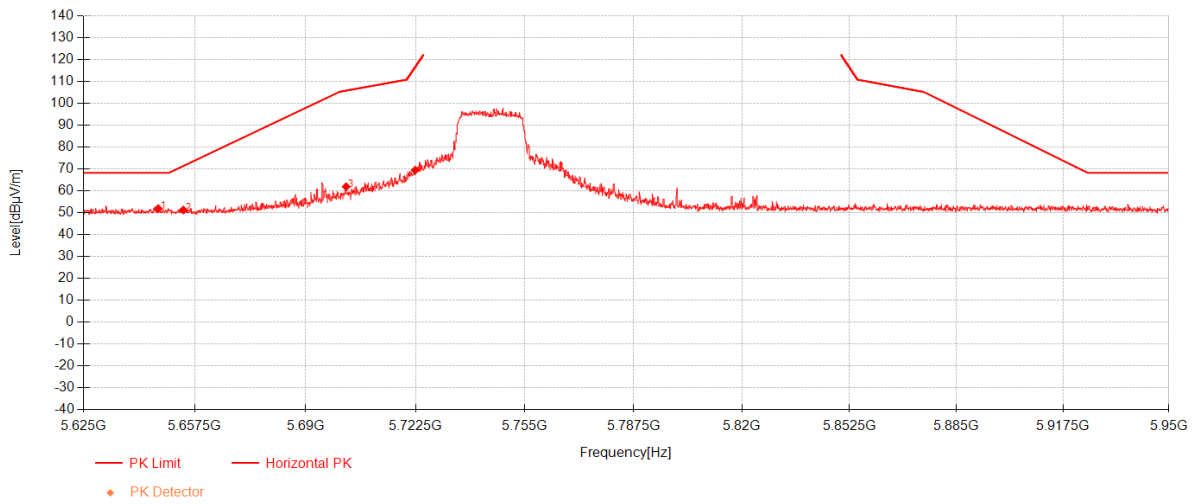


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5646.8562	38.73	32.66	-19.46	51.93	68.30	16.37	Horizontal
2	5654.1688	38.07	32.66	-19.46	51.27	71.40	20.13	Horizontal
3	5702.025	48.71	32.68	-19.46	61.93	105.87	43.94	Horizontal
4	5722.4188	56.14	32.69	-19.33	69.50	116.42	46.92	Horizontal

11ax(HE20)_TX_CH_149_Verical_Peak

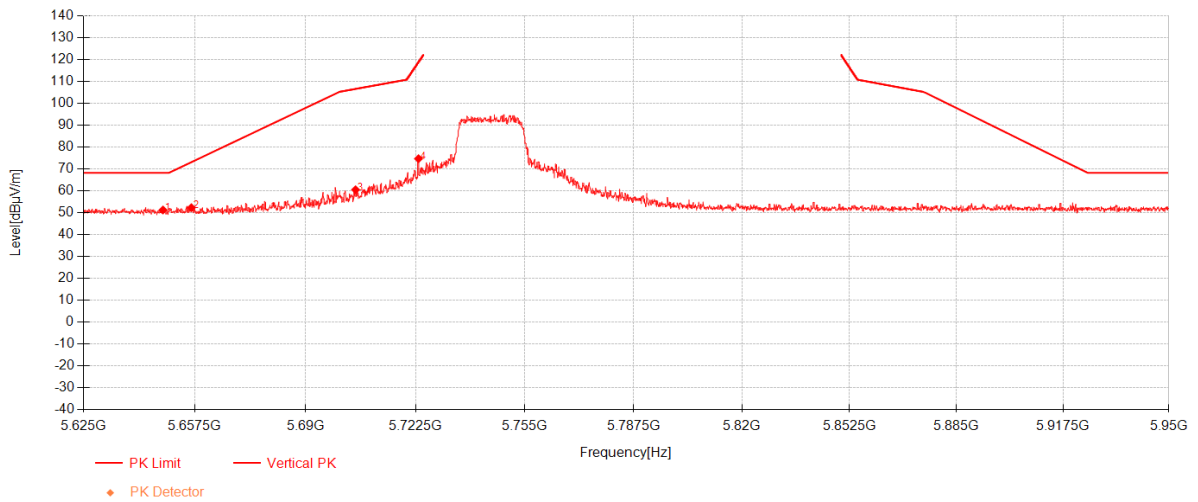


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5648.2375	38.07	32.66	-19.46	51.27	68.30	17.03	Vertical
2	5656.525	39.13	32.66	-19.46	52.33	73.15	20.82	Vertical
3	5704.7875	47.30	32.68	-19.44	60.54	106.64	46.10	Vertical
4	5723.3938	61.37	32.69	-19.32	74.74	118.64	43.90	Vertical

11ax(HE20)_TX_CH_165_Horizontal_Peak

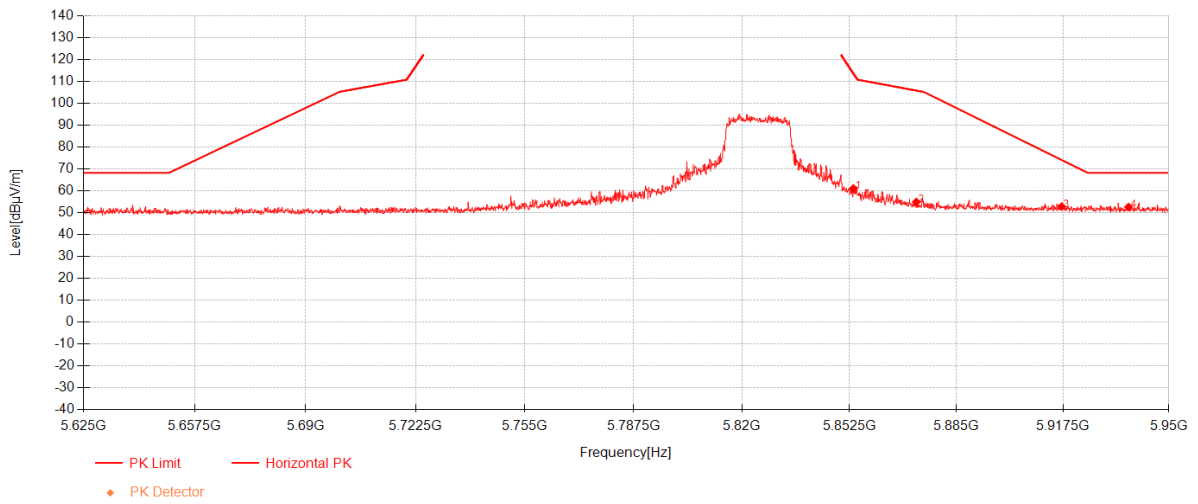


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5853.6375	47.22	32.74	-18.81	61.15	114.01	52.86	Horizontal
2	5872.7312	41.00	32.75	-18.80	54.95	105.93	50.98	Horizontal
3	5917.0938	39.00	32.77	-18.91	52.86	74.13	21.27	Horizontal
4	5937.5688	38.90	32.78	-19.05	52.63	68.30	15.67	Horizontal

11ax(HE20)_TX_CH_165_Verical_Peak

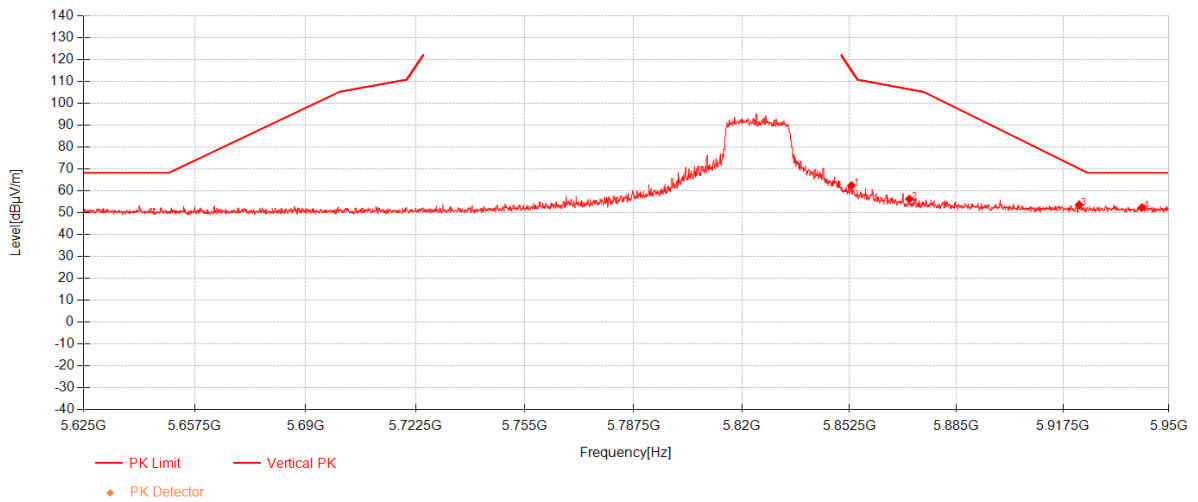

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5853.0688	48.54	32.74	-18.81	62.47	115.30	52.83	Vertical
2	5870.6188	42.33	32.75	-18.80	56.28	106.53	50.25	Vertical
3	5922.4562	39.86	32.77	-18.94	53.68	70.17	16.49	Vertical
4	5941.7125	38.67	32.78	-19.08	52.37	68.30	15.93	Vertical


11ax(HE40)_TX_CH_38_Horizontal_Peak

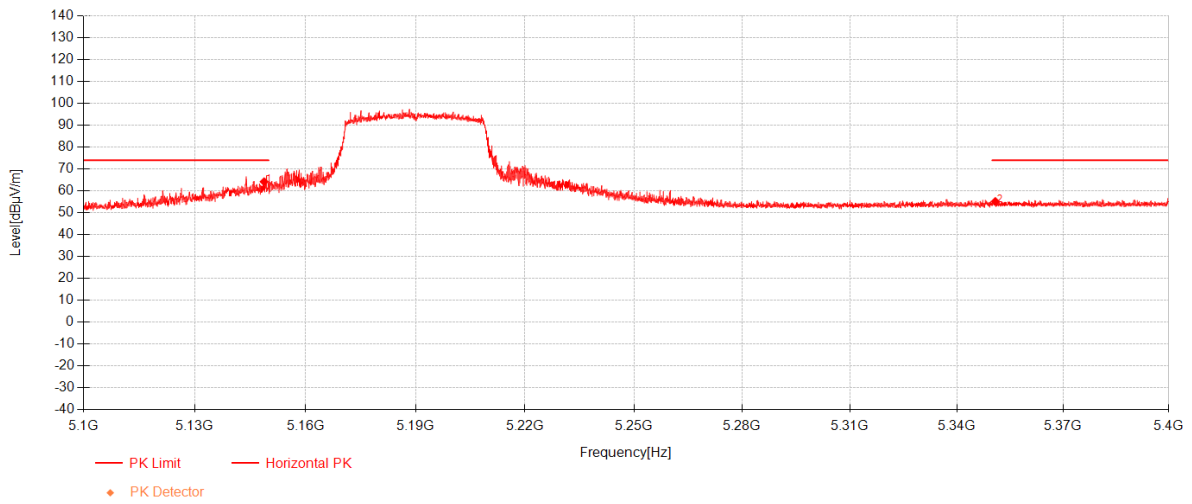

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.76	50.35	31.62	-17.76	64.21	74.00	9.79	Horizontal
2	5350.86	39.95	32.18	-16.93	55.21	74.00	18.79	Horizontal




11ax(HE40)_TX_CH_38_Horizontal_Average

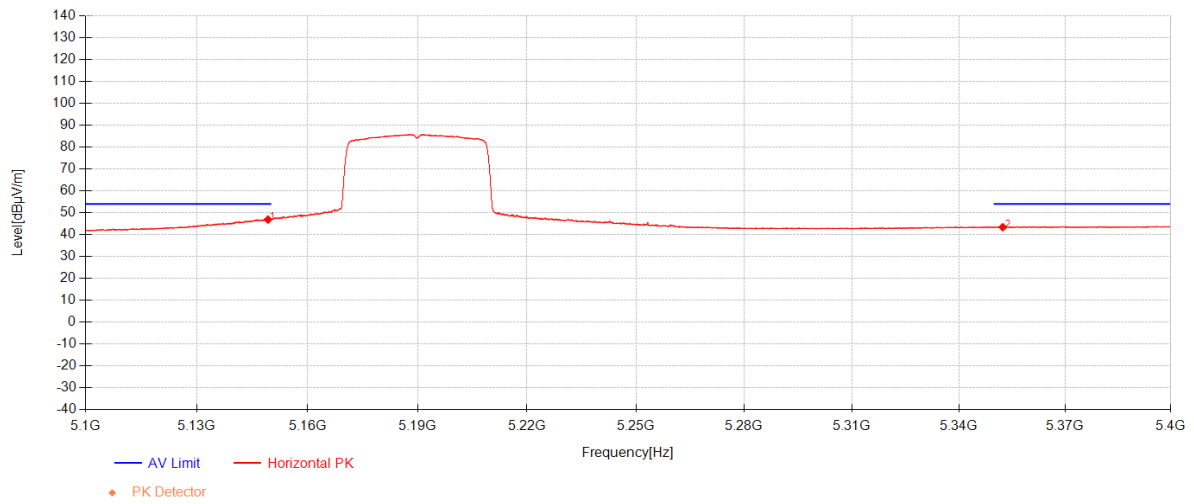

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5149.28	33.02	31.62	-17.76	46.88	54.00	7.12	Horizontal
2	5352.4	28.13	32.19	-16.92	43.40	54.00	10.60	Horizontal


11ax(HE40)_TX_CH_38_Veritical_Peak

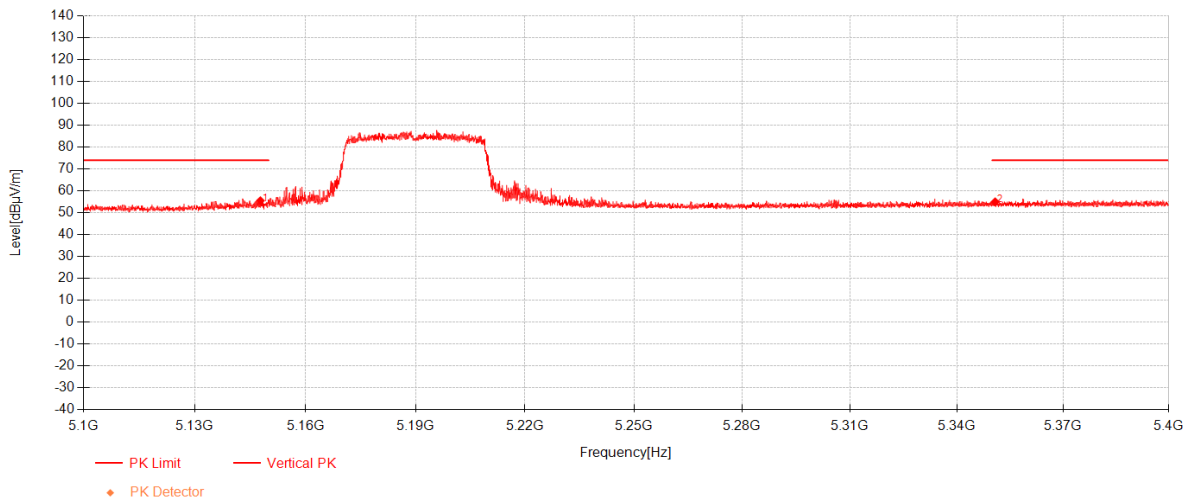

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.76	41.70	31.61	-17.76	55.55	74.00	18.45	Vertical
2	5350.825	39.77	32.18	-16.93	55.03	74.00	18.97	Vertical



11ax(HE40)_TX_CH_38_Vertical_Average

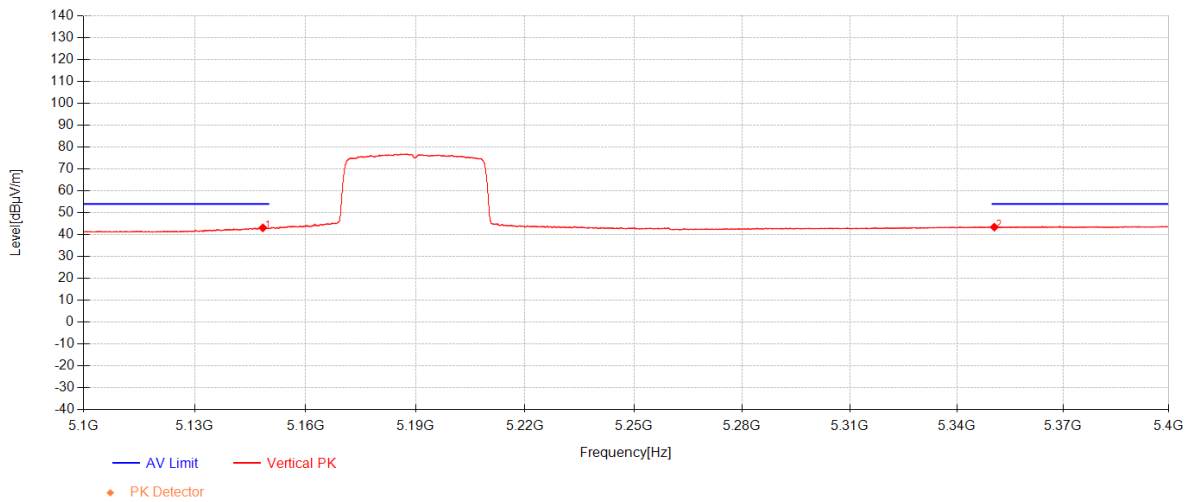


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.44	29.25	31.62	-17.76	43.11	54.00	10.89	Vertical
2	5350.58	28.19	32.18	-16.93	43.44	54.00	10.56	Vertical



Report No.: KSCR260600155503


Page: 136 of 352

11ax(HE40)_TX_CH_62_Horizontal_Peak

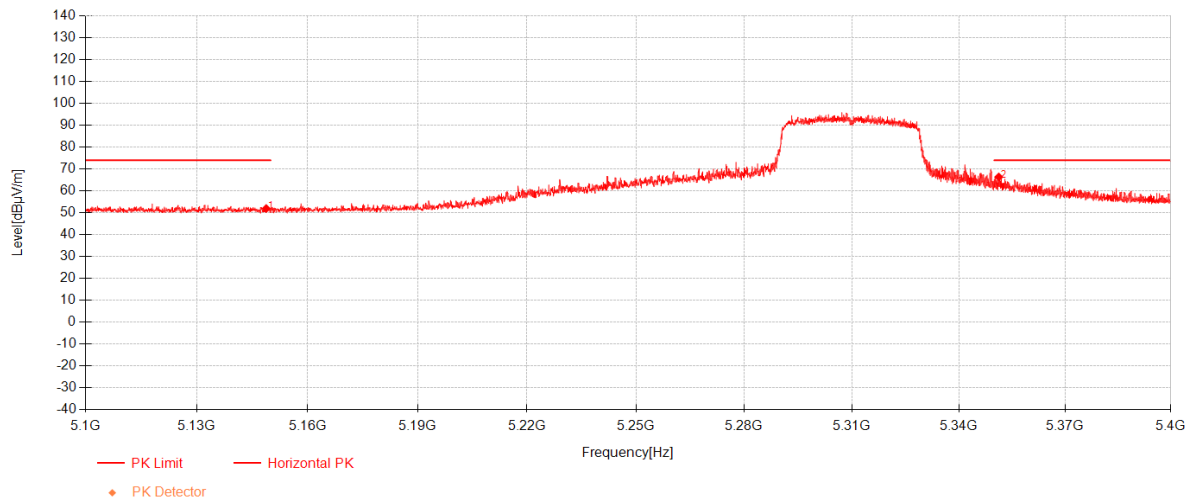


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.8	38.09	31.62	-17.76	51.95	74.00	22.05	Horizontal
2	5351.275	51.11	32.18	-16.92	66.37	74.00	7.63	Horizontal

11ax(HE40)_TX_CH_62_Horizontal_Average

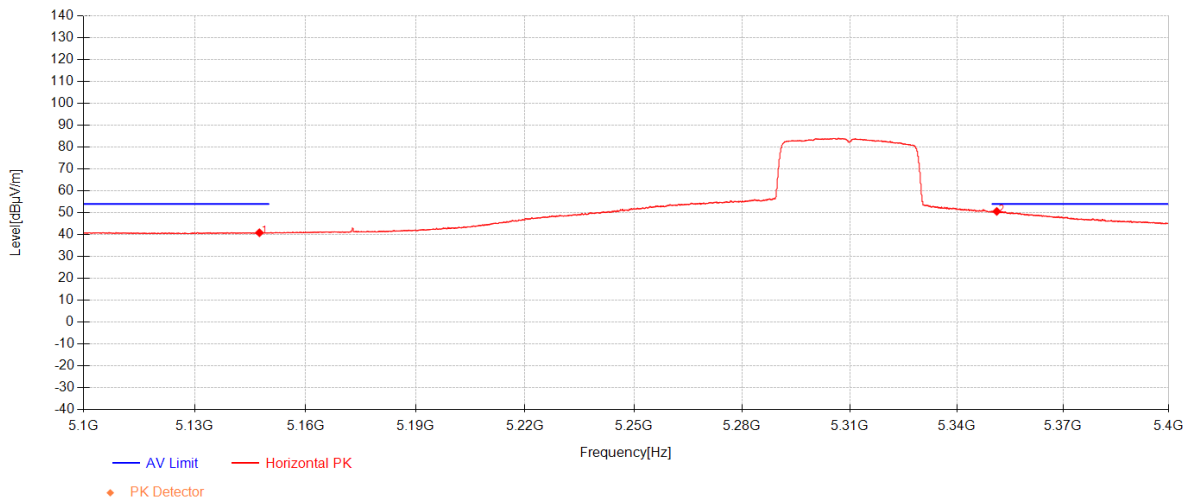

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.5	27.01	31.61	-17.76	40.86	54.00	13.14	Horizontal
2	5351.275	35.37	32.18	-16.92	50.63	54.00	3.37	Horizontal


11ax(HE40)_TX_CH_62_Vertical_Peak

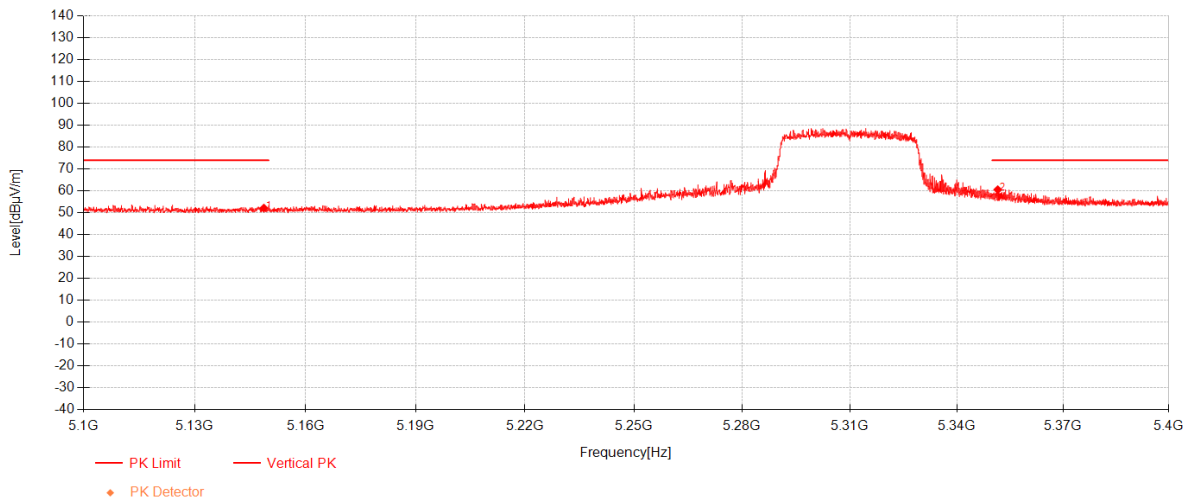

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5148.7	38.29	31.62	-17.76	52.15	74.00	21.85	Vertical
2	5351.55	45.30	32.18	-16.92	60.56	74.00	13.44	Vertical




11ax(HE40)_TX_CH_62_Vertical_Average

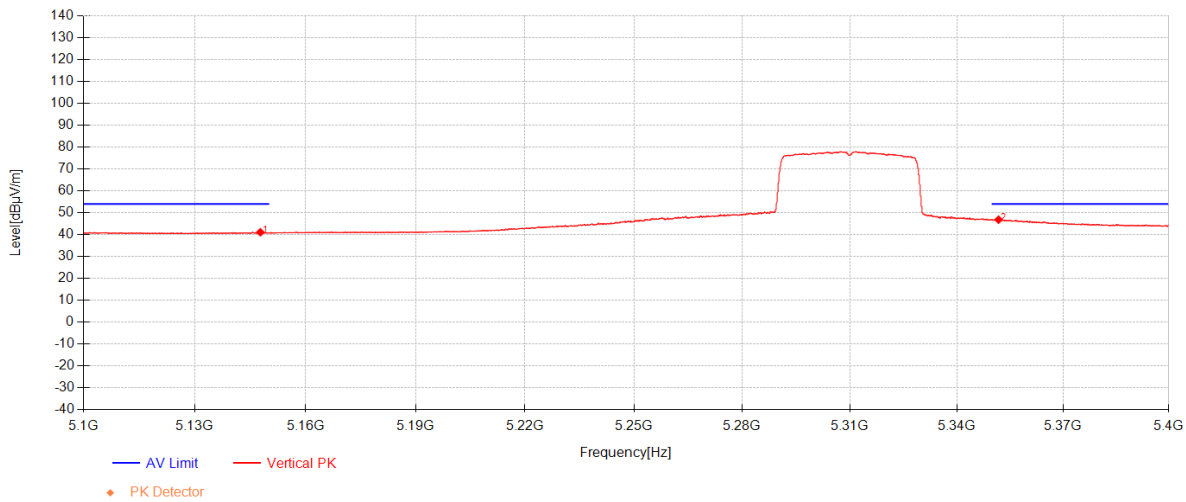


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5147.75	27.23	31.61	-17.76	41.08	54.00	12.92	Vertical
2	5351.775	31.59	32.18	-16.92	46.85	54.00	7.15	Vertical

11ax(HE40)_TX_CH_102_Horizontal_Peak

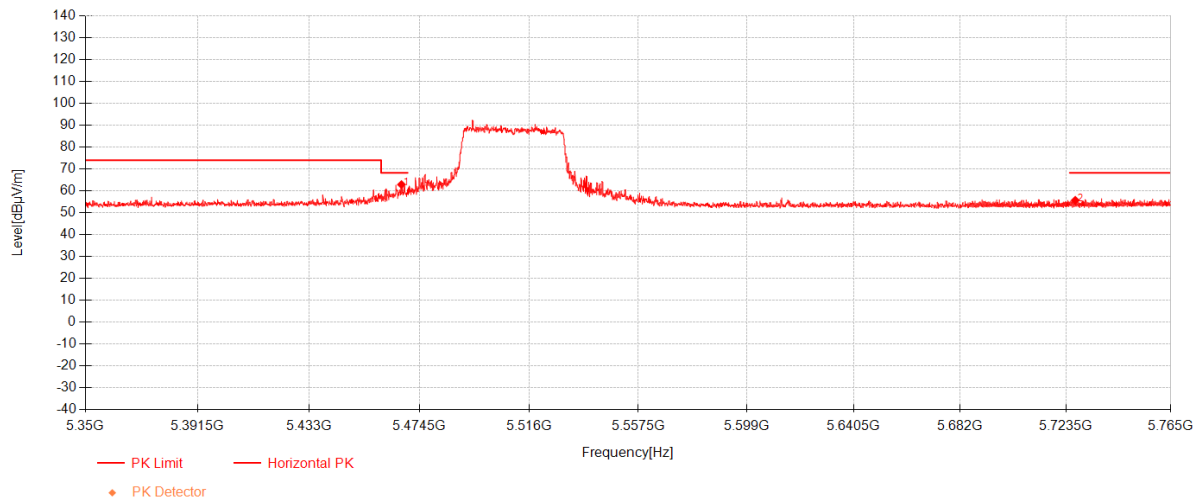

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5467.6688	47.44	32.51	-17.05	62.90	68.30	5.40	Horizontal
2	5727.16	39.86	32.69	-16.85	55.70	68.30	12.60	Horizontal


11ax(HE40)_TX_CH_102_Horizontal_Average

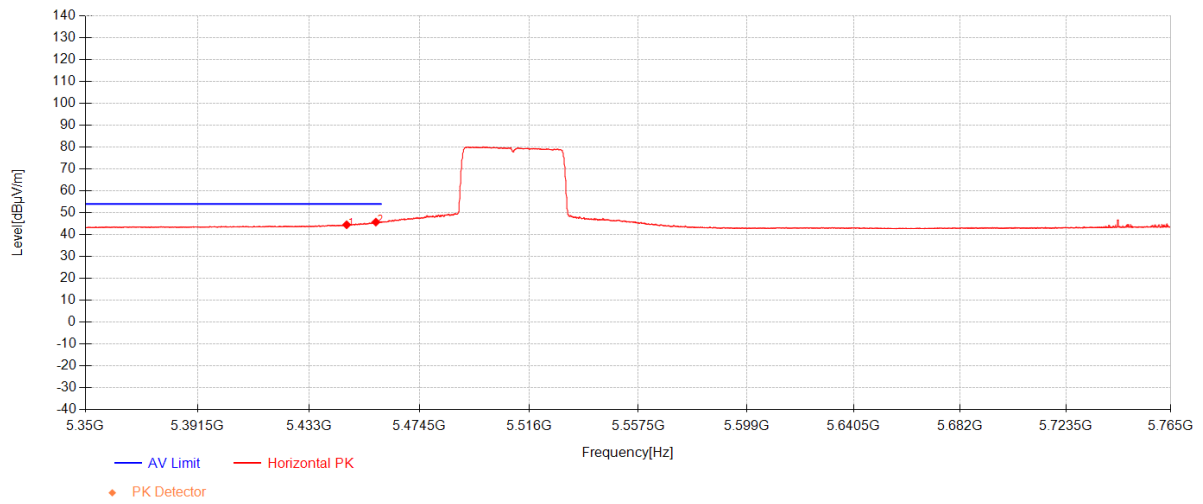

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.0662	28.99	32.45	-16.93	44.51	54.00	9.49	Horizontal
2	5458.0375	30.24	32.48	-16.99	45.73	54.00	8.27	Horizontal




11ax(HE40)_TX_CH_102_Vertical_Peak

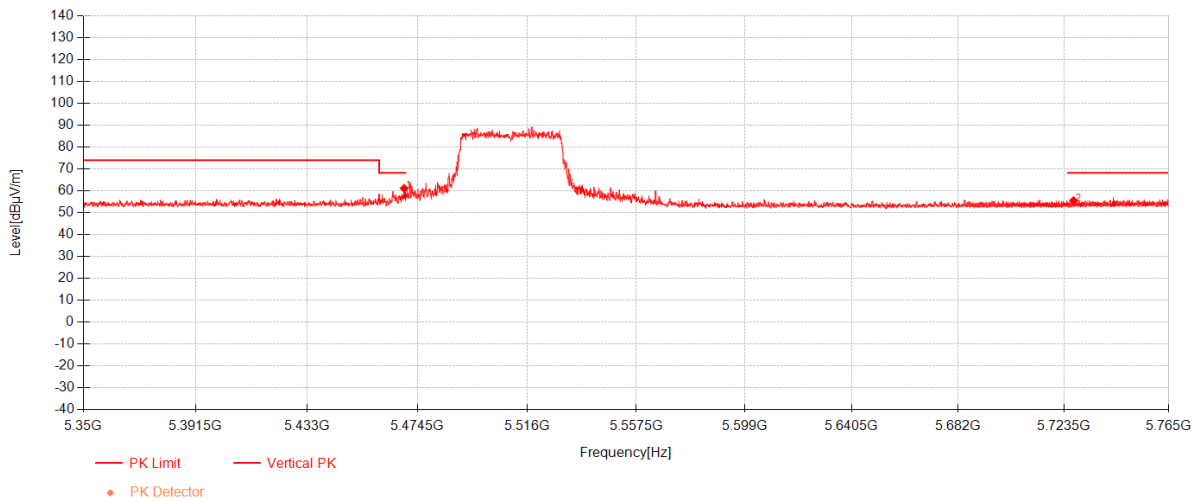


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5469.4275	45.71	32.51	-17.05	61.17	68.30	7.13	Vertical
2	5727.28	39.73	32.69	-16.85	55.57	68.30	12.73	Vertical

11ax(HE40)_TX_CH_102_Vetical_Average

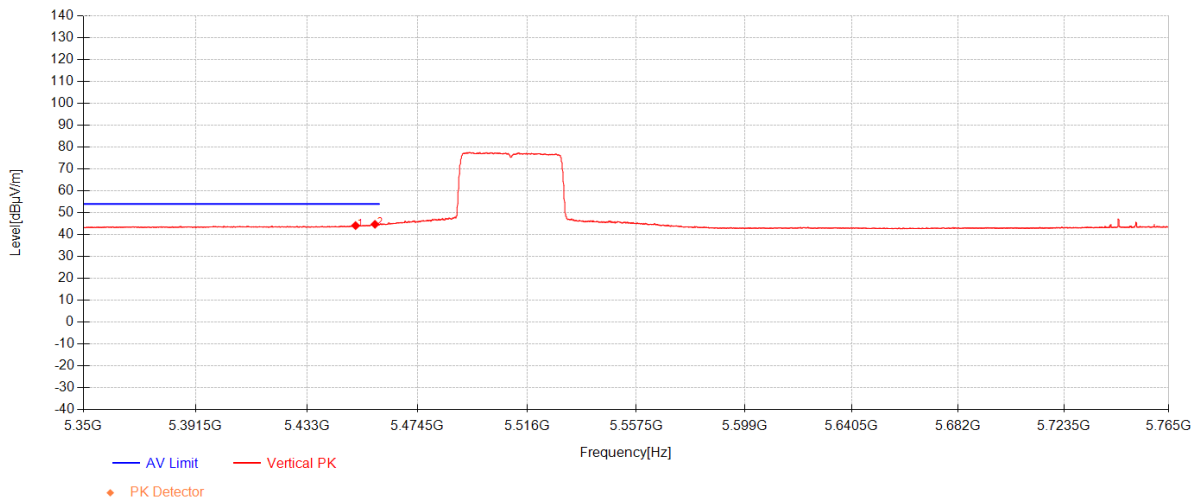

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5451.17	28.63	32.46	-16.96	44.14	54.00	9.86	Vertical
2	5458.4562	29.24	32.48	-17.00	44.73	54.00	9.27	Vertical


11ax(HE40)_TX_CH_134_Horizontal_Peak

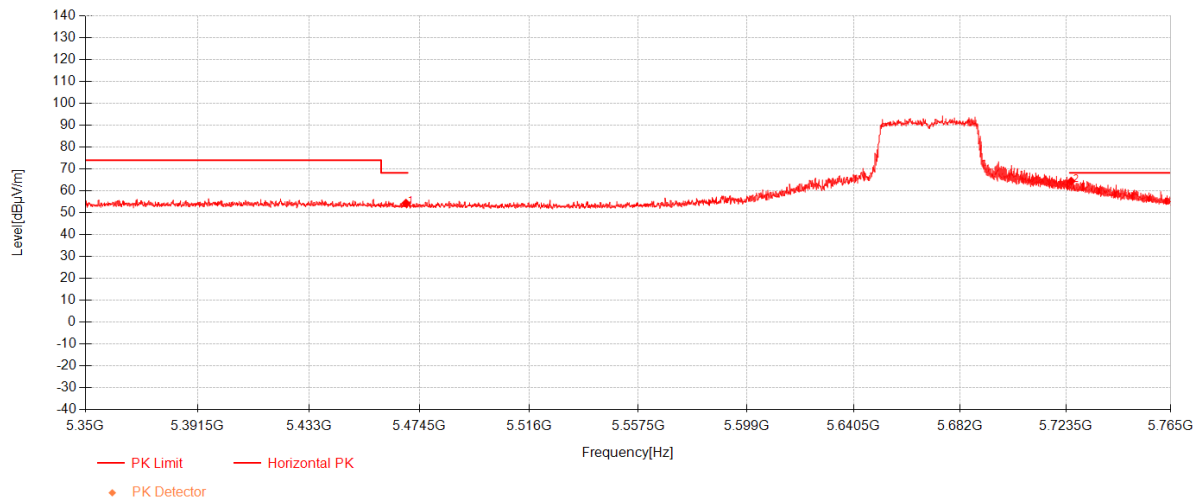

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5469.3438	38.94	32.51	-17.05	54.40	68.30	13.90	Horizontal
2	5725.56	48.62	32.69	-16.86	64.45	68.30	3.85	Horizontal




11ax(HE40)_TX_CH_134_Horizontal_Average

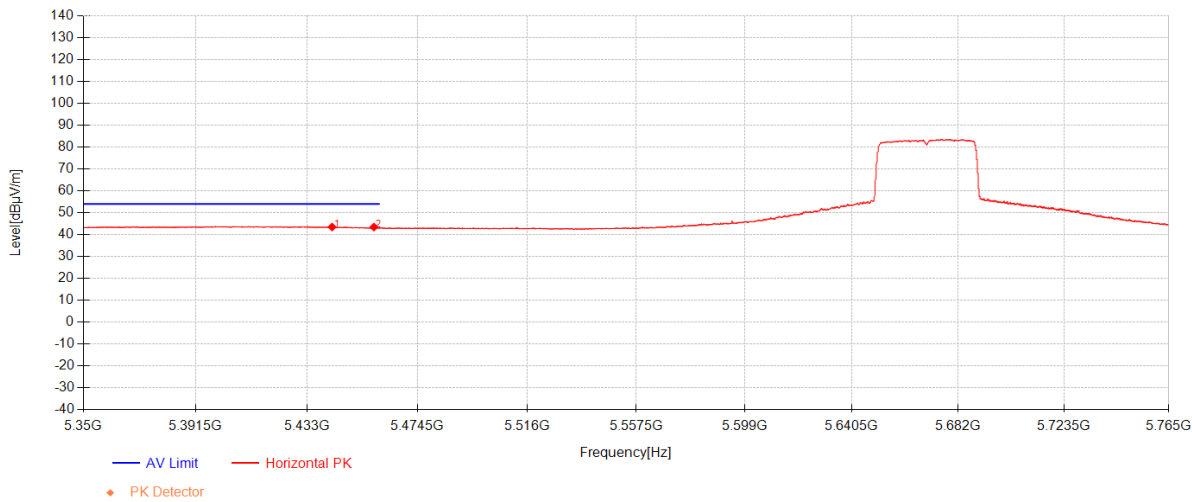


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5442.3762	27.96	32.44	-16.91	43.49	54.00	10.51	Horizontal
2	5458.0375	27.96	32.48	-16.99	43.45	54.00	10.55	Horizontal

11ax(HE40)_TX_CH_134_Vertical_Peak

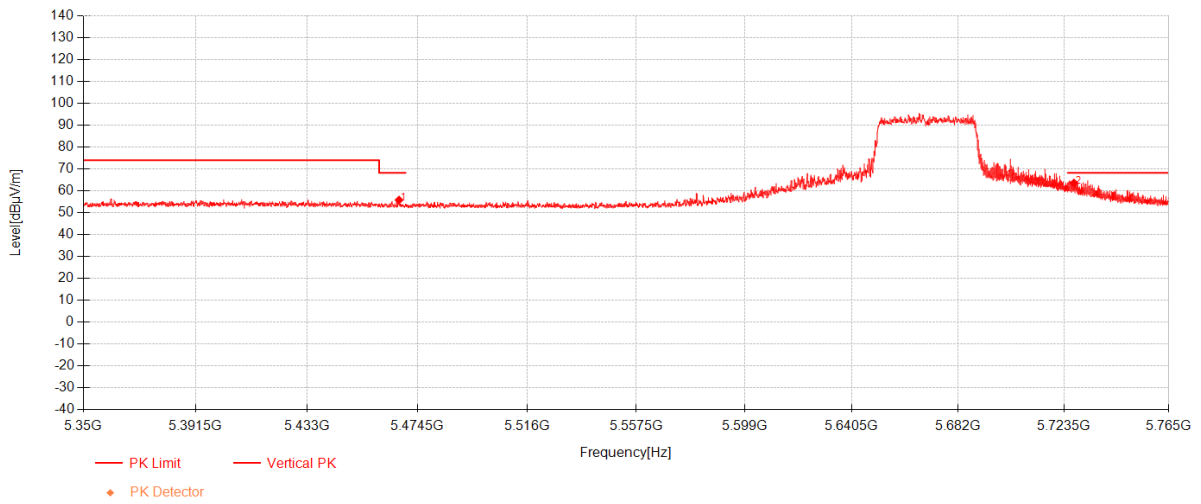


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5467.5012	40.37	32.51	-17.04	55.83	68.30	12.47	Vertical
2	5727.44	47.78	32.69	-16.85	63.62	68.30	4.68	Vertical

11ax(HE40)_TX_CH_134_Vertical_Average

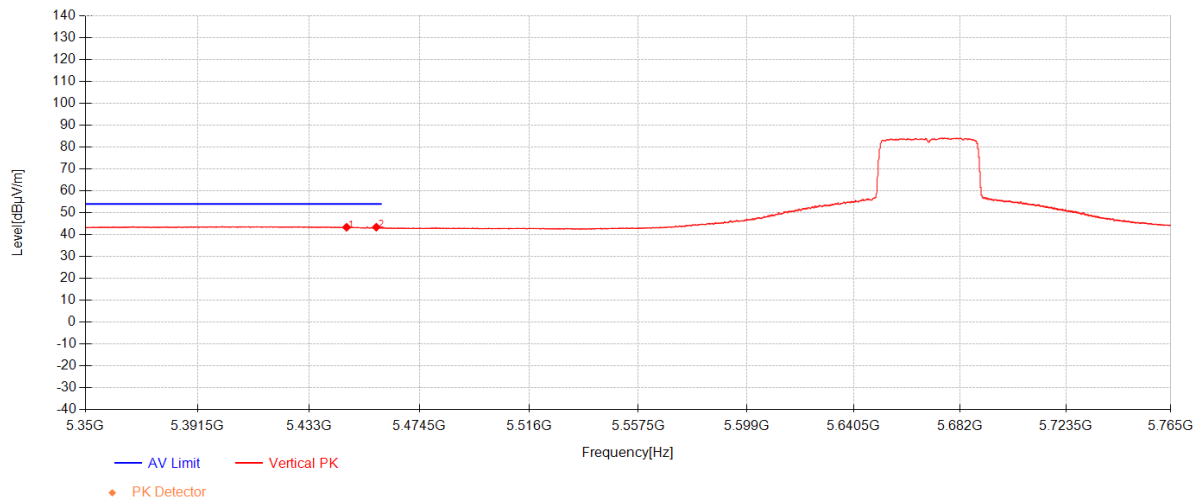


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5447.0662	27.86	32.45	-16.93	43.38	54.00	10.62	Vertical
2	5458.205	27.93	32.48	-16.99	43.42	54.00	10.58	Vertical

11ax(HE40)_TX_CH_151_Horizontal_Peak

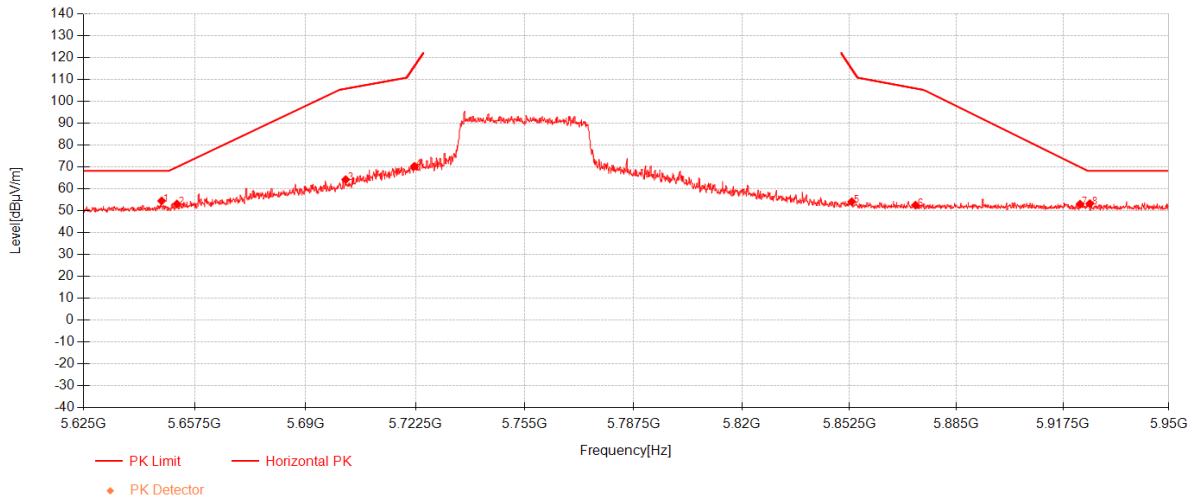


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5647.8312	41.33	32.66	-19.46	54.53	68.30	13.77	Horizontal
2	5652.3	39.89	32.66	-19.46	53.09	70.01	16.92	Horizontal
3	5701.8625	51.04	32.68	-19.46	64.26	105.82	41.56	Horizontal
4	5722.175	57.00	32.69	-19.33	70.36	115.86	45.50	Horizontal
5	5853.15	40.22	32.74	-18.81	54.15	115.12	60.97	Horizontal
6	5872.4875	38.62	32.75	-18.80	52.57	106.00	53.43	Horizontal
7	5922.7	39.23	32.77	-18.95	53.05	70.00	16.95	Horizontal
8	5925.7062	39.49	32.77	-18.97	53.29	68.30	15.01	Horizontal

11ax(HE40)_TX_CH_151_Vertical_Peak

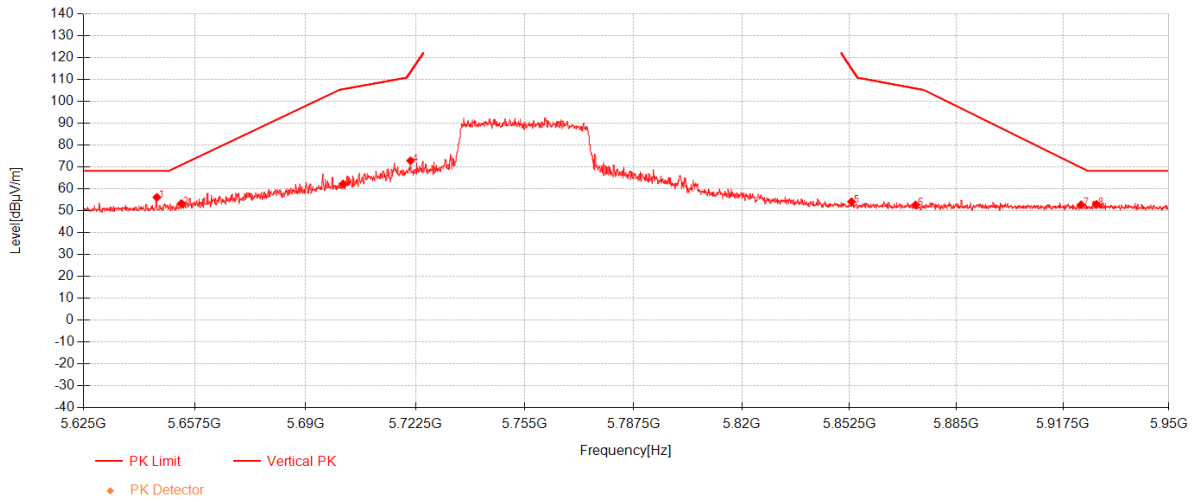


Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5646.45	42.96	32.66	-19.46	56.16	68.30	12.14	Vertical
2	5653.6	40.11	32.66	-19.46	53.31	70.97	17.66	Vertical
3	5701.1312	49.10	32.68	-19.46	62.32	105.62	43.30	Vertical
4	5721.0375	59.55	32.69	-19.34	72.90	113.27	40.37	Vertical
5	5853.0688	40.23	32.74	-18.81	54.16	115.30	61.14	Vertical
6	5872.4875	38.73	32.75	-18.80	52.68	106.00	53.32	Vertical
7	5923.025	38.95	32.77	-18.95	52.77	69.76	16.99	Vertical
8	5927.7375	39.18	32.77	-18.98	52.97	68.30	15.33	Vertical

11ax(HE40)_TX_CH_159_Horizontal_Peak

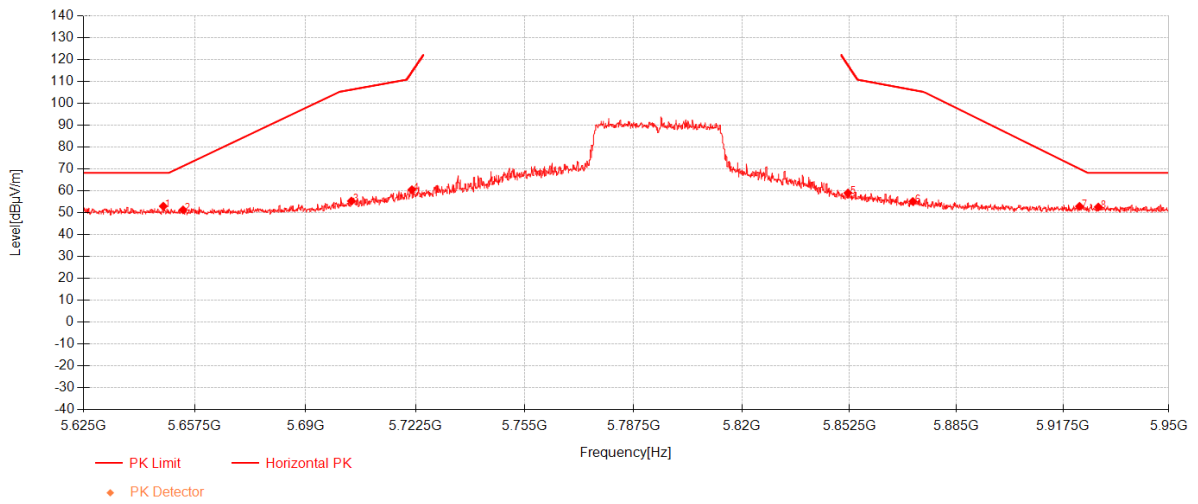

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5648.3188	39.79	32.66	-19.46	52.99	68.30	15.31	Horizontal
2	5654.0875	38.12	32.66	-19.46	51.32	71.34	20.02	Horizontal
3	5703.5688	42.13	32.68	-19.45	55.36	106.30	50.94	Horizontal
4	5721.4438	47.20	32.69	-19.33	60.56	114.19	53.63	Horizontal
5	5852.0125	45.13	32.74	-18.81	59.06	117.71	58.65	Horizontal
6	5871.675	41.24	32.75	-18.80	55.19	106.23	51.04	Horizontal
7	5922.5375	39.13	32.77	-18.95	52.95	70.11	17.16	Horizontal
8	5928.3062	38.83	32.77	-18.99	52.62	68.30	15.68	Horizontal

11ax(HE40)_TX_CH_159_Vertical_Peak

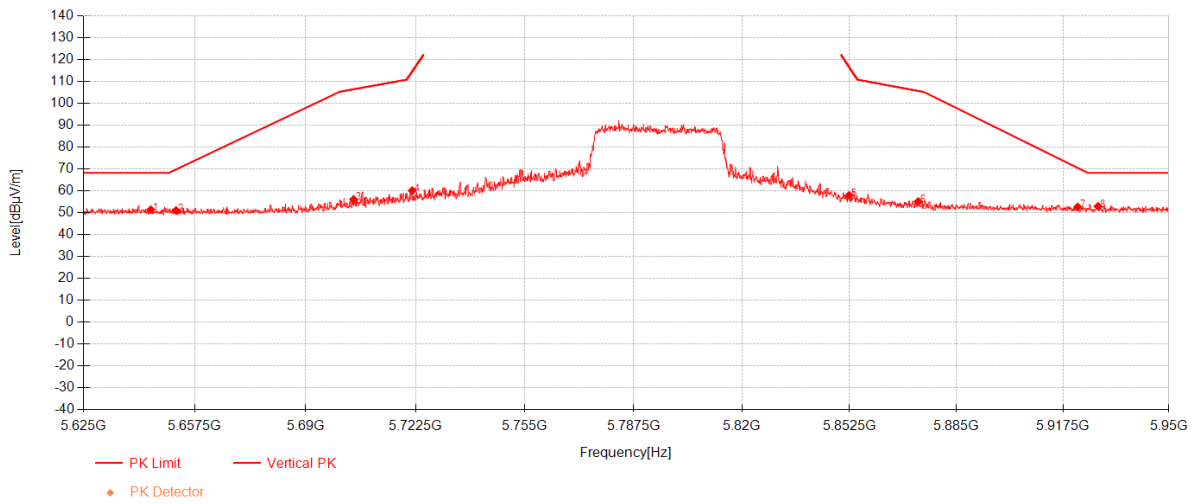

Data List								
NO.	Frequency [MHz]	Reading [dBμV]	AF [dB/m]	Factor [dB]	Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]	Polarity
1	5644.6625	38.21	32.66	-19.46	51.41	68.30	16.89	Vertical
2	5652.0562	37.85	32.66	-19.46	51.05	69.83	18.78	Vertical
3	5704.2188	42.89	32.68	-19.44	56.13	106.48	50.35	Vertical
4	5721.525	46.79	32.69	-19.33	60.15	114.38	54.23	Vertical
5	5852.3375	44.05	32.74	-18.81	57.98	116.97	58.99	Vertical
6	5873.3	41.19	32.75	-18.80	55.14	105.78	50.64	Vertical
7	5921.9688	38.81	32.77	-18.94	52.64	70.53	17.89	Vertical
8	5928.225	39.15	32.77	-18.98	52.94	68.30	15.36	Vertical

7.5 Duty Cycle

Test Requirement ANSI C63.10-2020+Cor.1-2023 Section 12.2

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 12.2

7.5.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.5.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.5.3 Test Setup Diagram

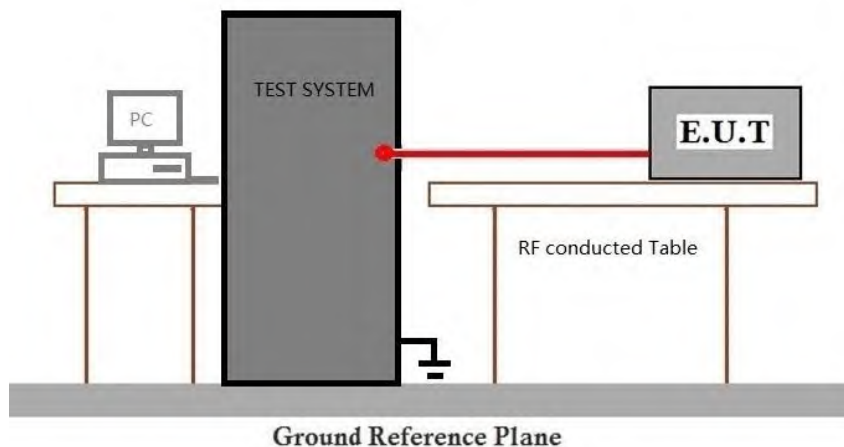



Report No.: KSCR260600155503

Page: 153 of 352

7.5.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.6 99% Bandwidth

Test Requirement ANSI C63.10-2020+Cor.1-2023 Section 12.5.3

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.9.3

7.6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.6.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.6.3 Test Setup Diagram

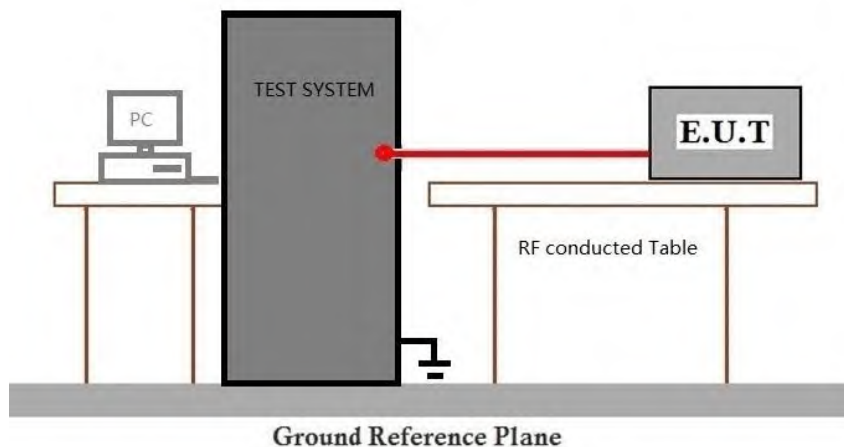



Report No.: KSCR260600155503

Page: 155 of 352

7.6.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.7 26dB Emission Bandwidth

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 12.5.2

7.7.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.7.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.7.3 Test Setup Diagram

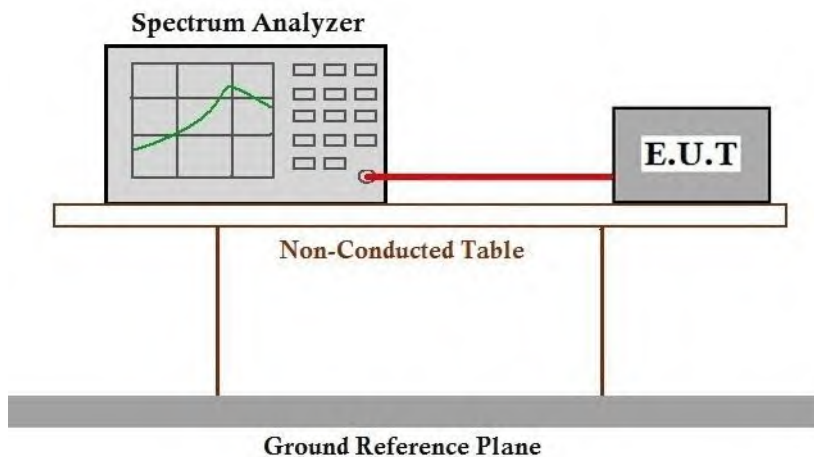

7.7.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.8 Minimum 6 dB Bandwidth (5.725-5.85 GHz band)

Test Requirement 47 CFR Part 15, Subpart E 15.407 (e)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 12.5.1

Limit:

Frequency band(MHz)	Limit
5725-5850	≥ 500 kHz

7.8.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.8.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.8.3 Test Setup Diagram

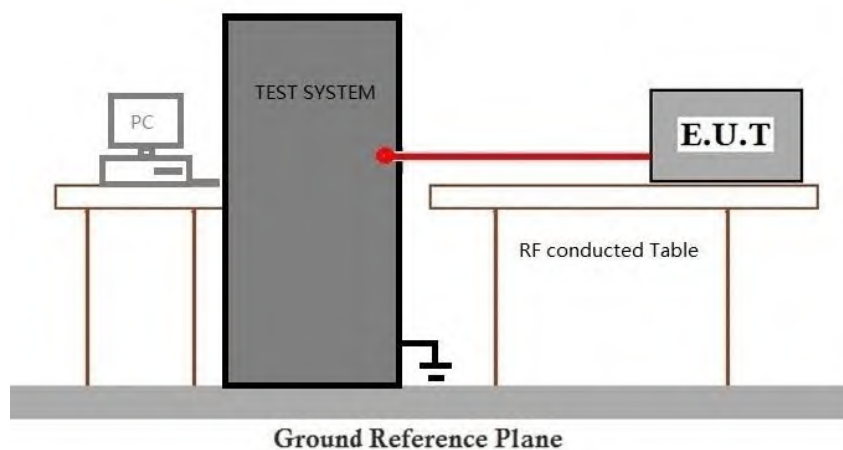

7.8.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.9 Maximum Conducted Output Power

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 12.4

Limit:

Frequency band(MHz)	Limit
5150-5250	$\leq 1\text{W}(30\text{dBm})$ for master device
	$\leq 250\text{mW}(24\text{dBm})$ for client device
5250-5350	$\leq 250\text{mW}(24\text{dBm})$ or $11\text{dBm}+10\log B^*$
5470-5725	$\leq 250\text{mW}(24\text{dBm})$ or $11\text{dBm}+10\log B^*$
5725-5850	$\leq 1\text{W}(30\text{dBm})$
Remark:	* Where B is the 26dB emission bandwidth in MHz. The maximum conducted output power must be measured over any interval of continuous transmission using instrumentation calibrated in terms of an rms-equivalent voltage.

7.9.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.9.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.9.3 Test Setup Diagram

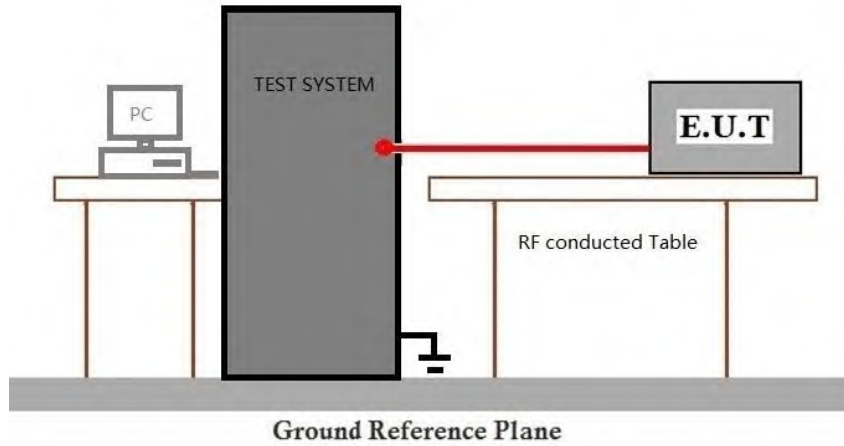

7.9.4 Measurement Procedure and Data

Note: Since the verify power the same operating range bandwidth and smaller power can be covered by the higher power.

AV Output power Level = Reading level + Cable loss + DCCF

Please Refer to Appendix for Details

7.10 Power Spectral Density

Test Requirement 47 CFR Part 15, Subpart E 15.407 (a)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 12.6

Limit:

Frequency band(MHz)	Limit
5150-5250	≤17dBm in 1MHz for master device
	≤11dBm in 1MHz for client device
5250-5350	≤11dBm in 1MHz for client device
5470-5725	≤11dBm in 1MHz for client device
5725-5850	≤30dBm in 500 kHz
Remark:	The maximum power spectral density is measured as a conducted emission by direct connection of a calibrated test instrument to the equipment under test.

7.10.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.10.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1)_Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.10.3 Test Setup Diagram

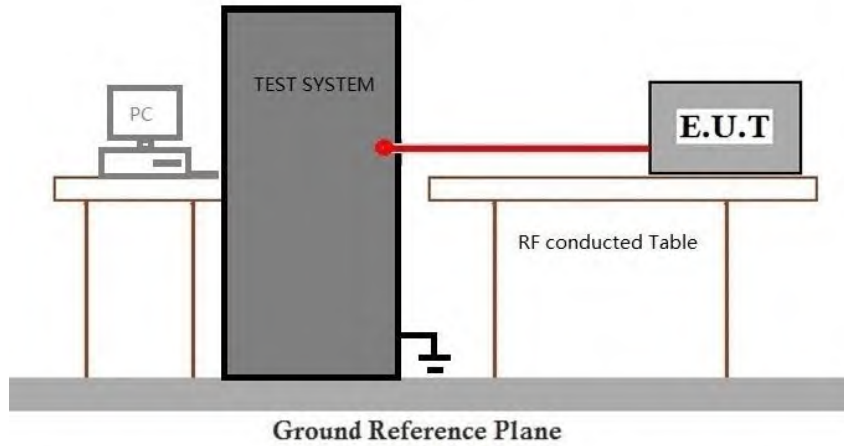

7.10.4 Measurement Procedure and Data

RBW conversion factor from 300kHz to 500kHz (2.22dB) for UNII Band 3 has been considered.

Please Refer to Appendix for Details

7.11 Frequency Stability

Test Requirement 47 CFR Part 15, Subpart E 15.407 (g)

Test Method: ANSI C63.10-2020+Cor.1-2023 Section 6.8

7.11.1 E.U.T. Operation

Operating Environment:

Temperature: 25.4 °C


Humidity: 59.0 % RH

Atmospheric Pressure: 1010 mbar

7.11.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
Final test	03	TX mode (U-NII-1) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	04	TX mode (U-NII-2A) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	05	TX mode (U-NII-2C) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.
Final test	06	TX mode (U-NII-3) _Keep the EUT in continuously transmitting mode with all modulation types. All data rates for each modulation type have been tested and found the data rate @ 6Mbps is the worst case of IEEE 802.11a; data rate @ MCS0 is the worst case of IEEE 802.11n/ac/ax 20/40, Only the data of worst case is recorded in the report.

7.11.3 Test Setup Diagram

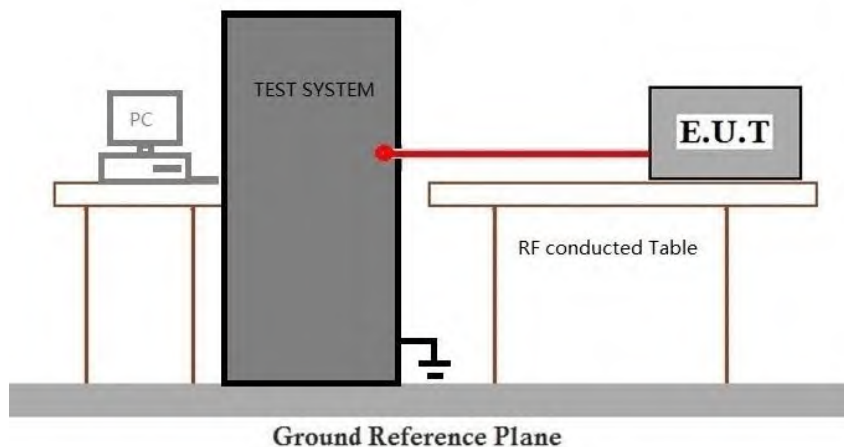



Report No.: KSCR260600155503

Page: 163 of 352

7.11.4 Measurement Procedure and Data

Please Refer to Appendix for Details

7.12 Non-occupancy Period

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.			

7.12.1 E.U.T. Operation

Operating Environment:


Temperature: 25.4 °C Humidity: 59.0 % RH Atmospheric Pressure: 1010 mbar

7.12.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
-----------------------	-----------	-------------

Final test	07	Normal operating_Keep the EUT communication with the companion device.
------------	----	--

7.12.3 Test Setup Diagram

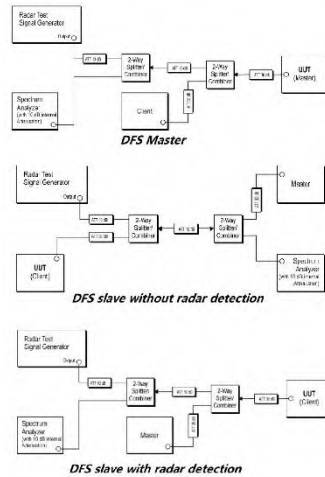

7.12.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.13 Channel Move Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.			

7.13.1 E.U.T. Operation

Operating Environment:


Temperature: 25.4 °C Humidity: 59.0 % RH Atmospheric Pressure: 1010 mbar

7.13.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
-----------------------	-----------	-------------

Final test	07	Normal operating_Keep the EUT communication with the companion device.
------------	----	--

7.13.3 Test Setup Diagram

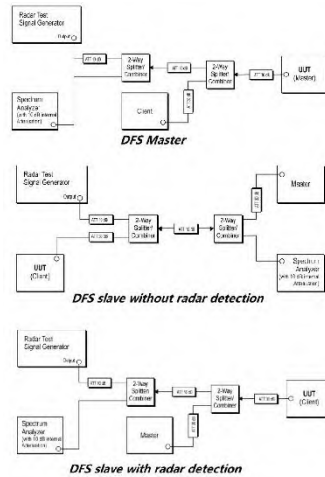

7.13.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details

7.14 Channel Closing Transmission Time

Test Requirement KDB 905462 D02 Section 5.1
Test Method: KDB 905462 D02 Section 7.8.3

Limit:

Test item	Limit	Applicability	
		Master Device or client with Radar Detection	Client without Radar Detection
Non-occupancy period	Minimum 30 minutes	Yes	Not required
Channel Availability Check Time	60 seconds	Yes	Not required
Channel Move Time	10 seconds See Note 1.	Yes	Yes
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.	Yes	Yes
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.	Yes	Not required
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.			

7.14.1 E.U.T. Operation

Operating Environment:


Temperature: 25.4 °C Humidity: 59.0 % RH Atmospheric Pressure: 1010 mbar

7.14.2 Test Mode Description

Pre-scan / Final test	Mode Code	Description
-----------------------	-----------	-------------

Final test	07	Normal operating_Keep the EUT communication with the companion device.
------------	----	--

7.14.3 Test Setup Diagram

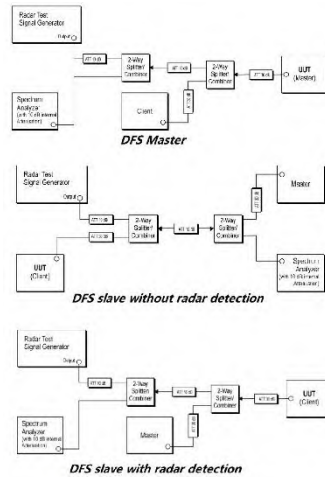

7.14.4 Measurement Procedure and Data

- 1) The radar pulse generator is setup to provide a pulse at frequency that the master and client are operating. A type 0 radar pulse with a 1us pulse width and a 1428us PRI is used for the testing.
- 2) The vector signal generator is adjusted to provide the radar burst (18 pulses) at the level of approximately -61dBm at the antenna port of the master device.
- 3) A trigger is provided from the pulse generator to the DFS monitoring system in order to capture the traffic and the occurrence of the radar pulse.
- 4) EUT will associate with the master at channel. The file "iperf.exe" specified by the FCC is streamed from the PC 2 through the master and the client device to the PC 1 and played in full motion video using Media Player Classic Ver. 6.4.8.6 in order to properly load the network for the entire period of the test.
- 5) When radar burst with a level equal to the DFS Detection Threshold +1dB is generated on the operating channel of the U-NII device. At time T0 the radar waveform generator sends a burst of pulse of the radar waveform at Detection Threshold +1dB.
- 6) Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). One 15 seconds plot is reported for the Short Pulse Radar Type 0. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the zoom in 600ms plot of the Short Pulse Radar Type.
- 7) Measurement of the aggregate duration of the Channel Closed Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (0.3ms) = S (12000ms) / B (4000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C (ms) = N \times Dwell (0.3ms)$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins (intermittent control signals) showing a U-NII transmission and Dwell is the dwell time per bin.
- 8) Measurement the EUT for more than 30 minutes following the channel move time to verify that no transmission or beacons occur on this channel.

Please Refer to Appendix for Details



Report No.: KSCR260600155503

Page: 170 of 352

8 Test Setup Photo

Refer to Appendix - Test Setup Photo for KSCR2606001555AT

9 EUT Constructional Details (EUT Photos)

Refer to Appendix_Photographs of EUT Constructional Details for KSCR2606001555AT

10 Appendix

1. Duty Cycle

1.1 Test Result

1.1.1 Ant1


Ant1									
Mode	TX Type	Frequency (MHz)	RU	RU Pos	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
802.11a	SISO	5180	/	/	1.396	1.499	93.13	0.31	0.03
		5200	/	/	1.396	1.432	97.49	0.11	0.03
		5240	/	/	1.396	1.432	97.49	0.11	0.03
		5260	/	/	1.396	1.498	93.19	0.31	0.03
		5300	/	/	1.397	1.499	93.20	0.31	0.03
		5320	/	/	1.396	1.499	93.13	0.31	0.03
		5500	/	/	1.396	1.500	93.07	0.31	0.03
		5580	/	/	1.396	1.499	93.13	0.31	0.03
		5700	/	/	1.396	1.499	93.13	0.31	0.03
		5745	/	/	1.396	1.432	97.49	0.11	0.03
		5785	/	/	50.197	52.660	95.32	0.21	0.00
		5825	/	/	1.396	1.432	97.49	0.11	0.03
802.11ac (VHT20)	SISO	5180	/	/	5.098	5.132	99.34	0.03	0.04
		5200	/	/	5.098	5.132	99.34	0.03	0.04
		5240	/	/	5.098	5.133	99.32	0.03	0.04
		5260	/	/	5.098	5.132	99.34	0.03	0.04
		5300	/	/	5.098	5.132	99.34	0.03	0.00
		5320	/	/	5.097	5.132	99.32	0.03	0.04
		5500	/	/	5.098	5.134	99.30	0.03	0.04
		5580	/	/	5.097	5.131	99.34	0.03	0.00
		5700	/	/	5.097	5.200	98.02	0.09	0.04
		5745	/	/	5.097	5.132	99.32	0.03	0.00
		5785	/	/	5.098	5.132	99.34	0.03	0.04
		5825	/	/	5.098	5.284	96.48	0.16	1.59
802.11ac (VHT40)	SISO	5190	/	/	4.905	4.939	99.31	0.03	0.04
		5230	/	/	4.905	4.939	99.31	0.03	0.00
		5270	/	/	4.905	5.007	97.96	0.09	0.04
		5310	/	/	4.905	5.006	97.98	0.09	0.00
		5510	/	/	4.905	5.006	97.98	0.09	0.00
		5550	/	/	4.905	5.007	97.96	0.09	0.04
		5670	/	/	4.904	5.007	97.94	0.09	0.04
		5755	/	/	4.905	5.005	98.00	0.09	0.00
		5795	/	/	4.905	4.940	99.29	0.03	0.04
802.11ax (HEW20)	SISO	5180	SU	/	3.877	3.913	99.08	0.04	0.07
		5200	SU	/	3.876	3.912	99.08	0.04	0.03
		5240	SU	/	3.876	3.912	99.08	0.04	0.03
		5260	SU	/	3.877	3.913	99.08	0.04	0.07

		5300	SU	/	3.878	3.912	99.13	0.04	0.03
		5320	SU	/	3.877	3.980	97.41	0.11	0.07
		5500	SU	/	3.877	3.913	99.08	0.04	0.03
		5580	SU	/	3.877	3.979	97.44	0.11	0.04
		5700	SU	/	3.876	3.912	99.08	0.04	0.07
		5745	SU	/	3.877	3.913	99.08	0.04	0.04
		5785	SU	/	3.877	3.913	99.08	0.04	0.04
		5825	SU	/	3.876	3.912	99.08	0.04	0.03
802.11ax (HEW40)	SISO	5190	SU	/	3.873	3.976	97.41	0.11	0.03
		5230	SU	/	3.873	3.908	99.10	0.04	0.04
		5270	SU	/	3.874	3.976	97.43	0.11	0.03
		5310	SU	/	3.872	3.974	97.43	0.11	0.04
		5510	SU	/	3.872	3.907	99.10	0.04	0.04
		5550	SU	/	3.873	3.975	97.43	0.11	0.04
		5670	SU	/	3.873	3.909	99.08	0.04	0.03
		5755	SU	/	3.873	3.909	99.08	0.04	0.03
		5795	SU	/	3.873	3.976	97.41	0.11	0.04


1.2 Test Graph

1.2.1 Ant1


802.11a_LCH_5180MHz_Ant1_NTNV

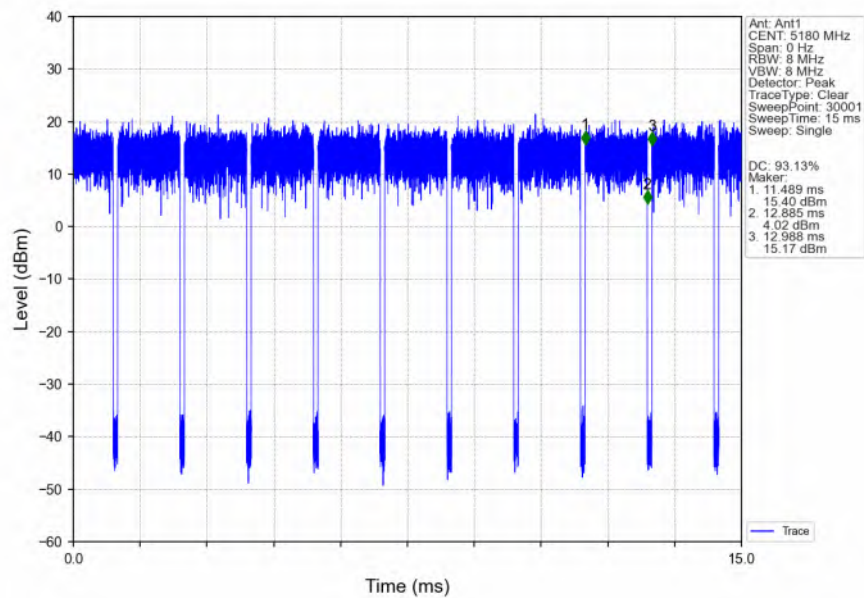


802.11a_MCH_5200MHz_Ant1_NTNV

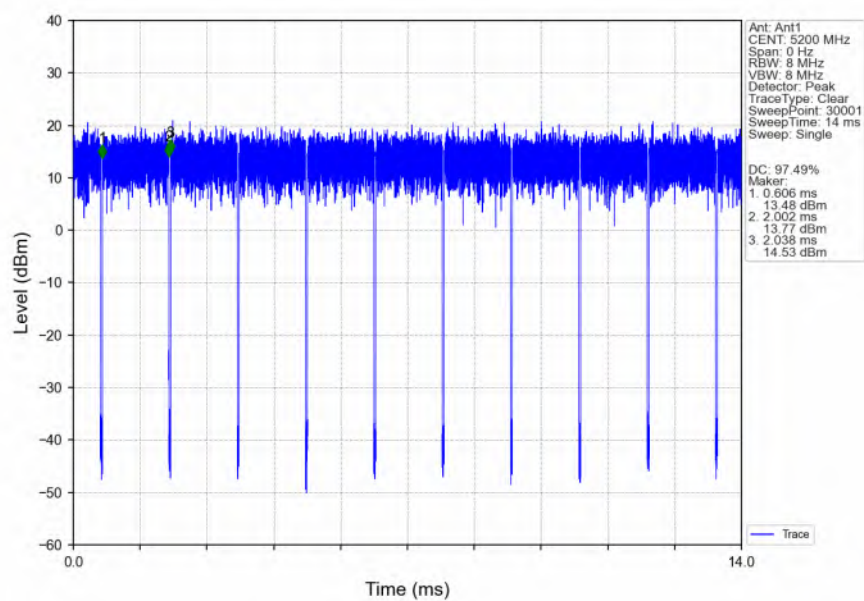


802.11a_HCH_5240MHz_Ant1_NTNV

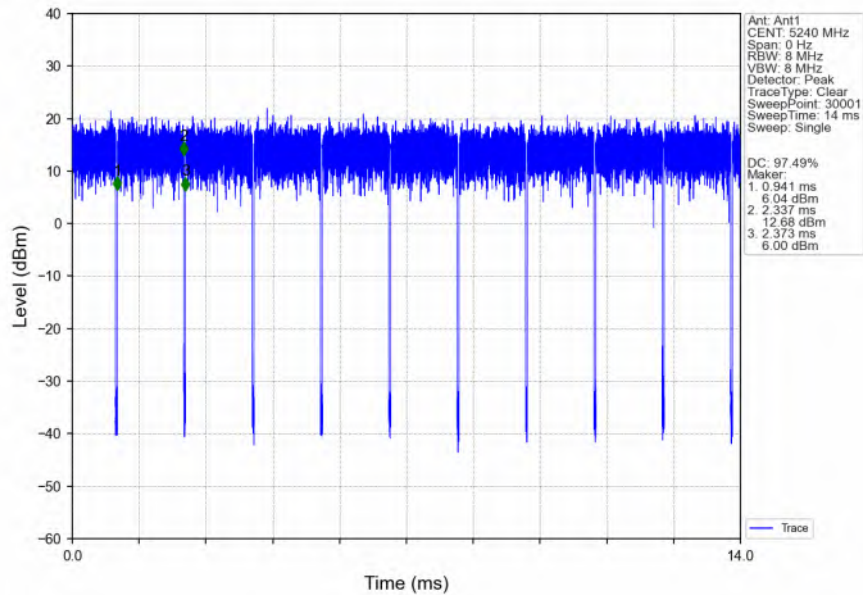


802.11a_LCH_5260MHz_Ant1_NTNV

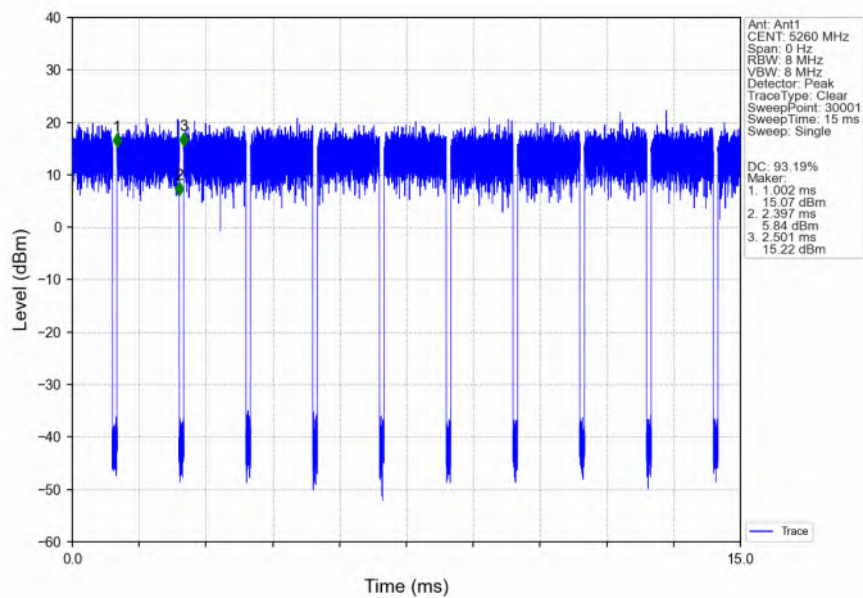


802.11a_MCH_5300MHz_Ant1_NTNV

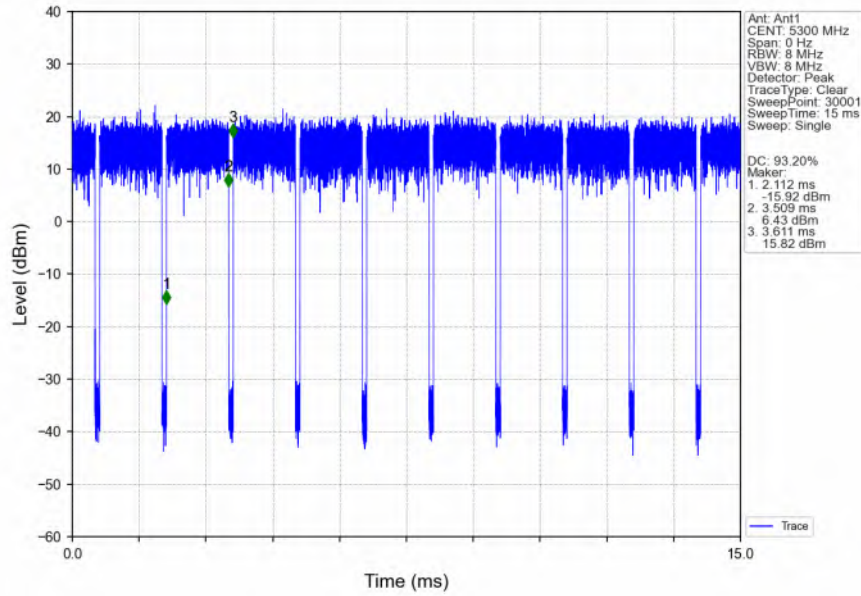


802.11a_HCH_5320MHz_Ant1_NTNV

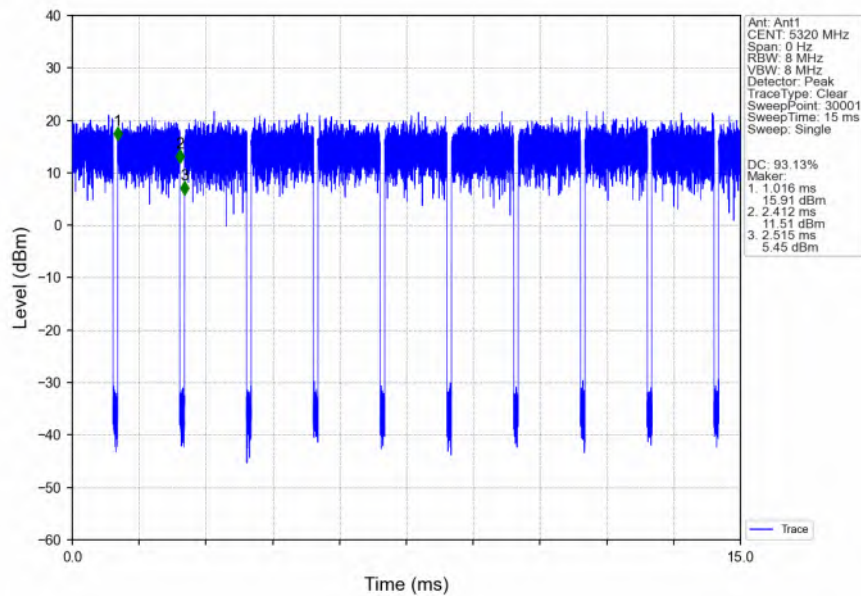


802.11a_LCH_5500MHz_Ant1_NTNV

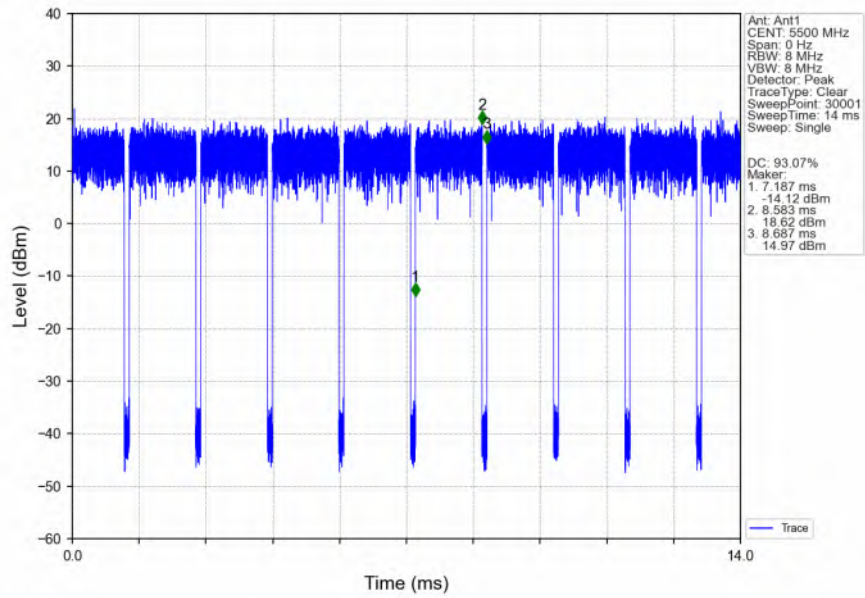


802.11a_MCH_5580MHz_Ant1_NTNV

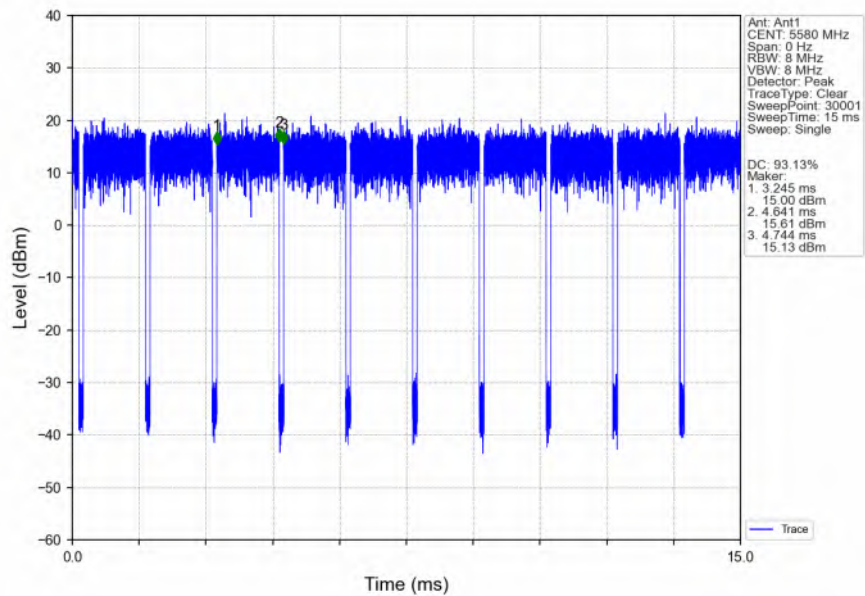


802.11a_HCH_5700MHz_Ant1_NTNV

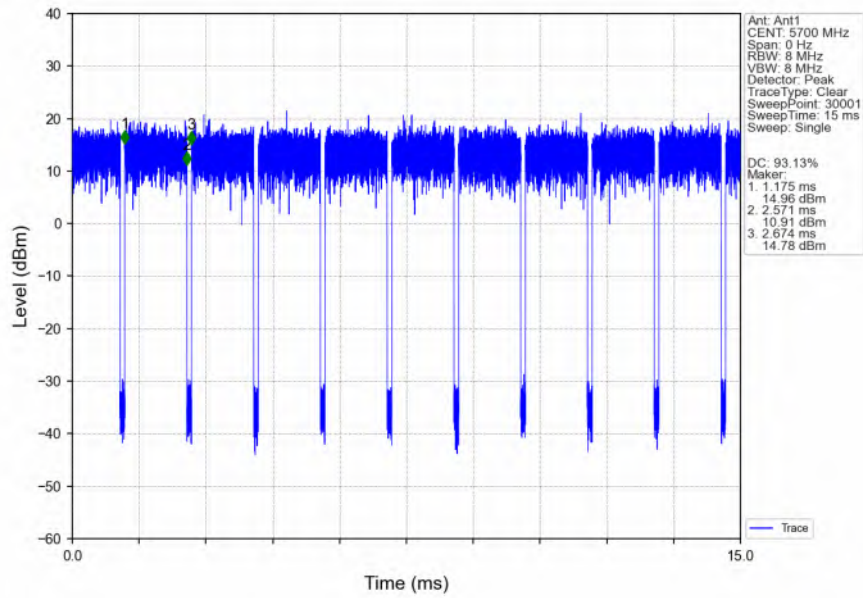


802.11a_LCH_5745MHz_Ant1_NTNV

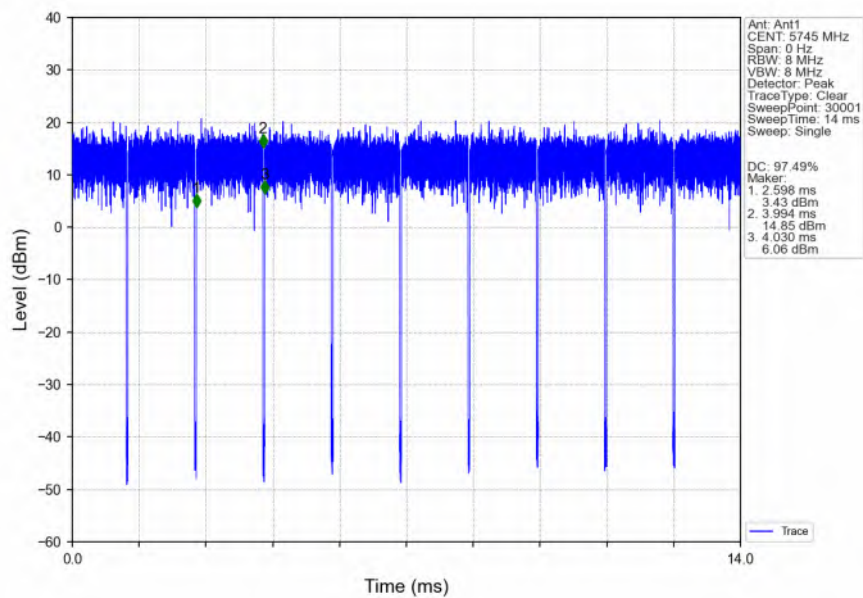


802.11a_MCH_5785MHz_Ant1_NTNV

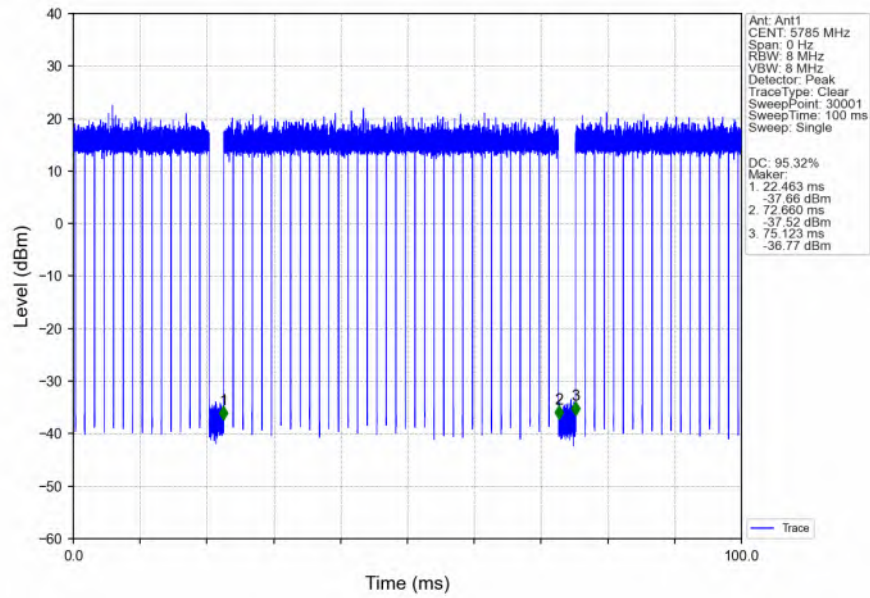


802.11a_HCH_5825MHz_Ant1_NTNV

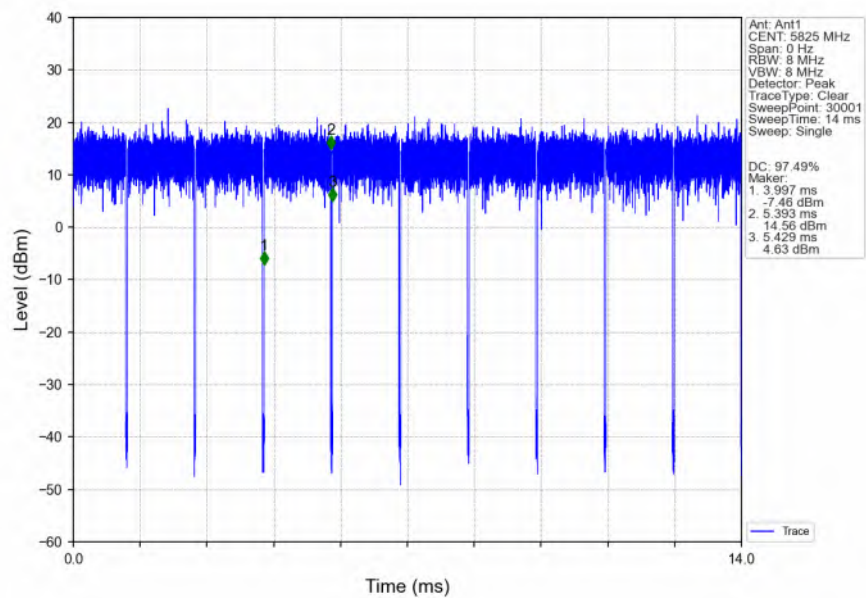


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

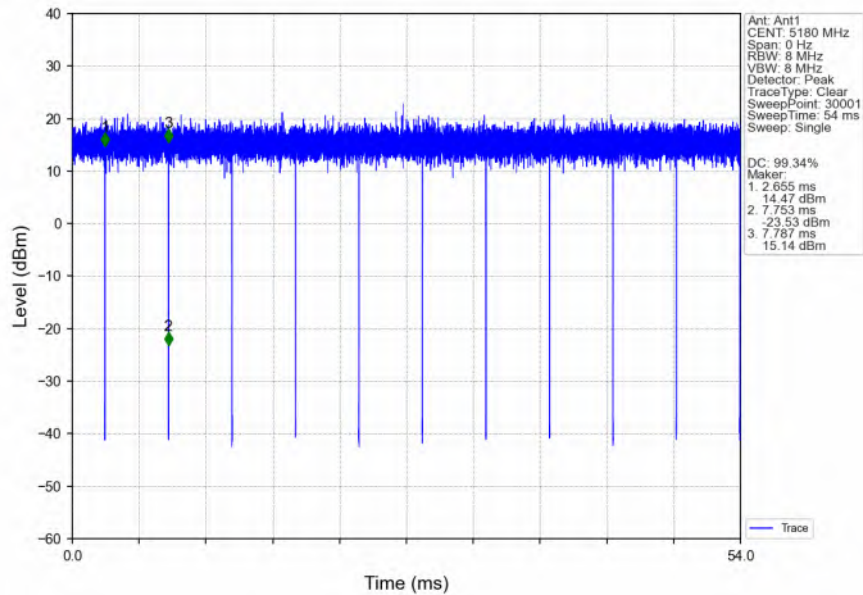


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

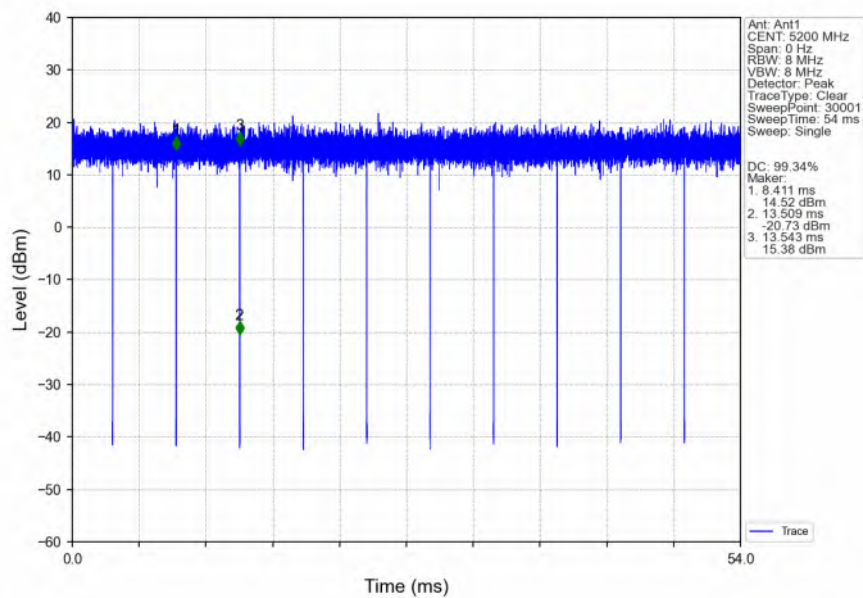


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

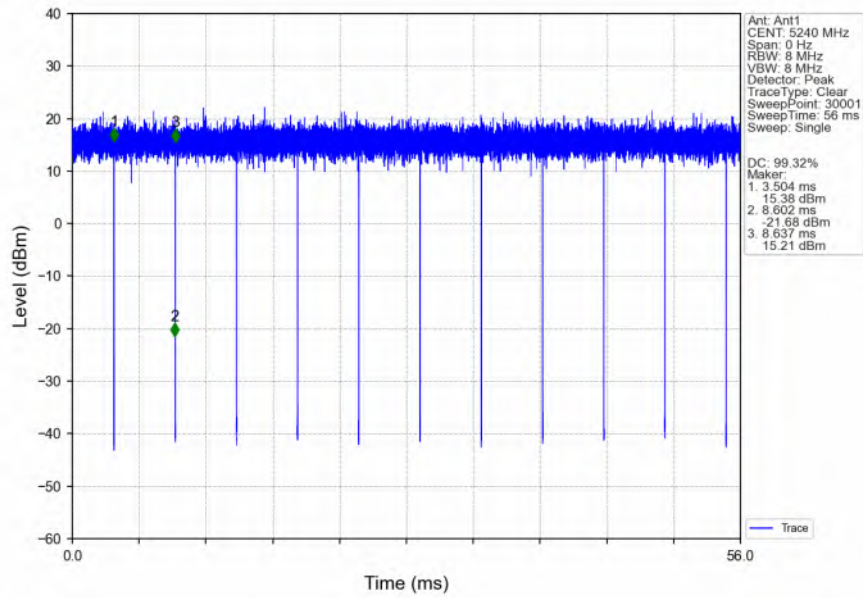


802.11ac(VHT20)_LCH_5260MHz_Ant1_NTNV

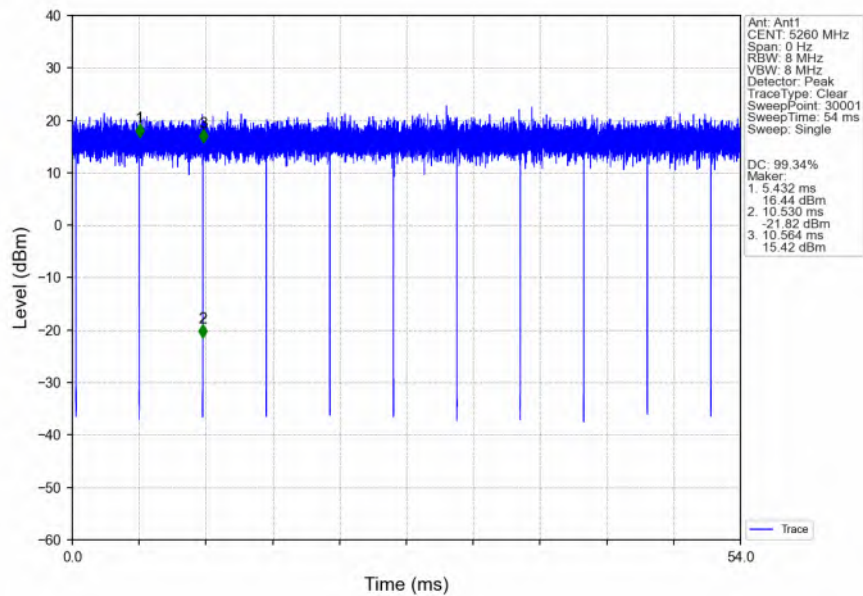


802.11ac(VHT20)_MCH_5300MHz_Ant1_NTNV

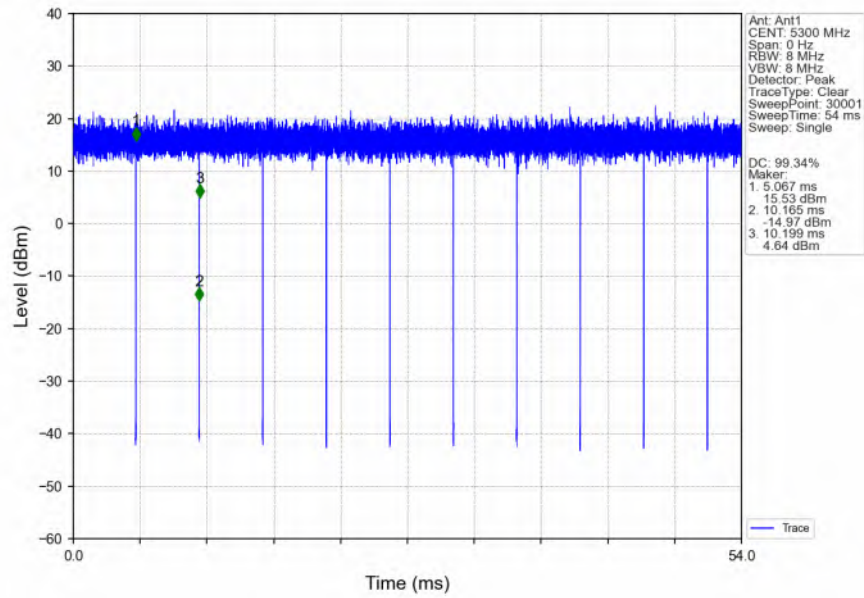


802.11ac(VHT20)_HCH_5320MHz_Ant1_NTNV

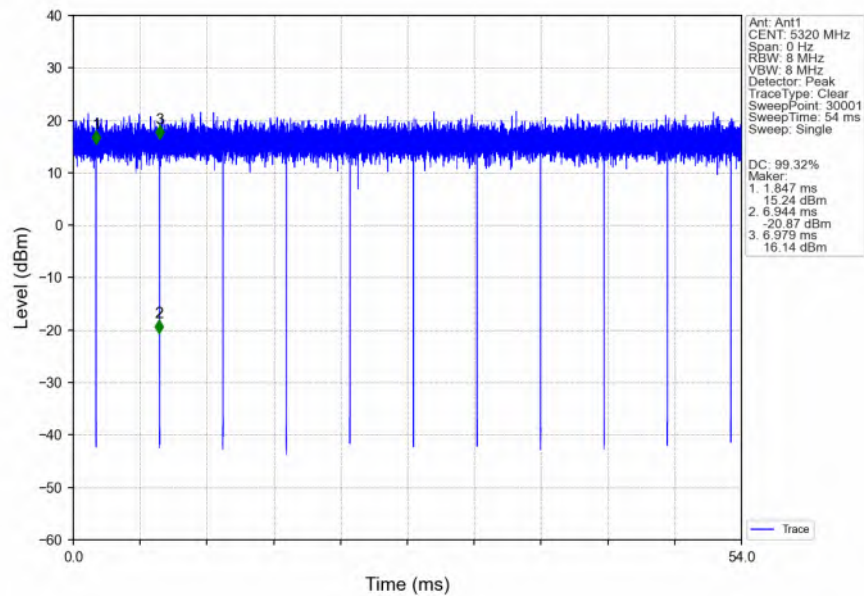


802.11ac(VHT20)_LCH_5500MHz_Ant1_NTNV

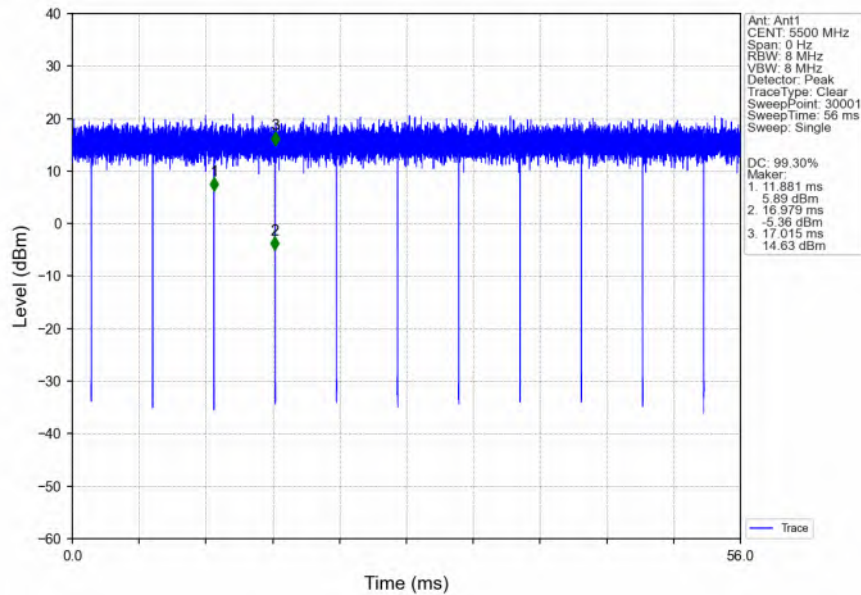


802.11ac(VHT20)_MCH_5580MHz_Ant1_NTNV

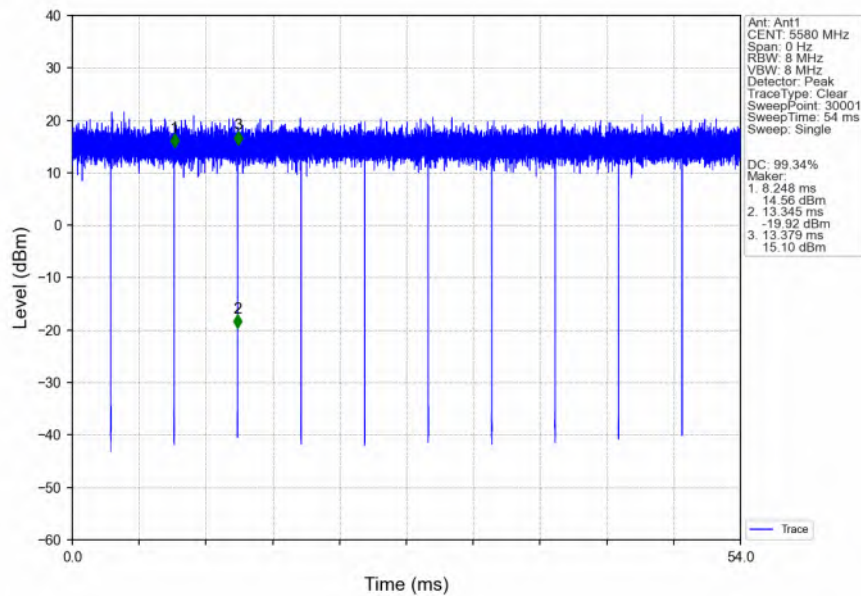


802.11ac(VHT20)_HCH_5700MHz_Ant1_NTNV

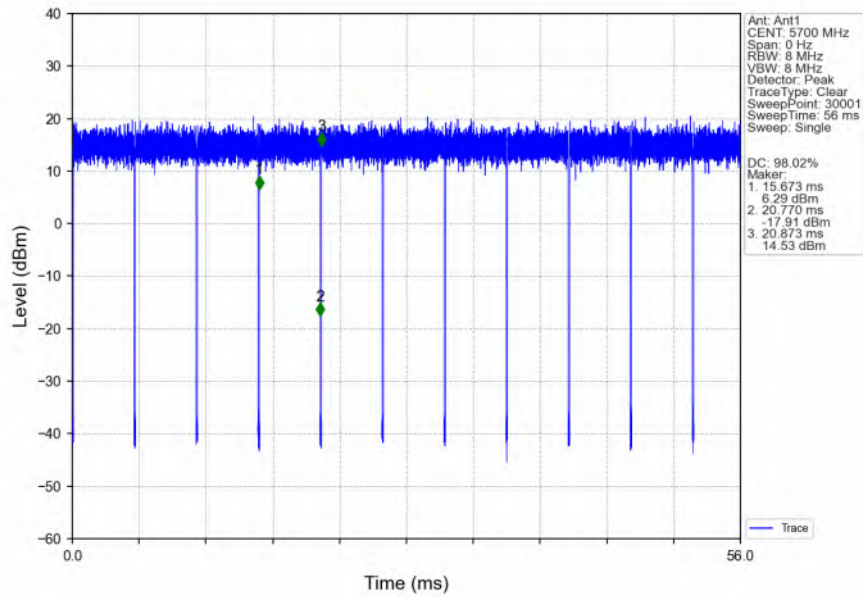


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

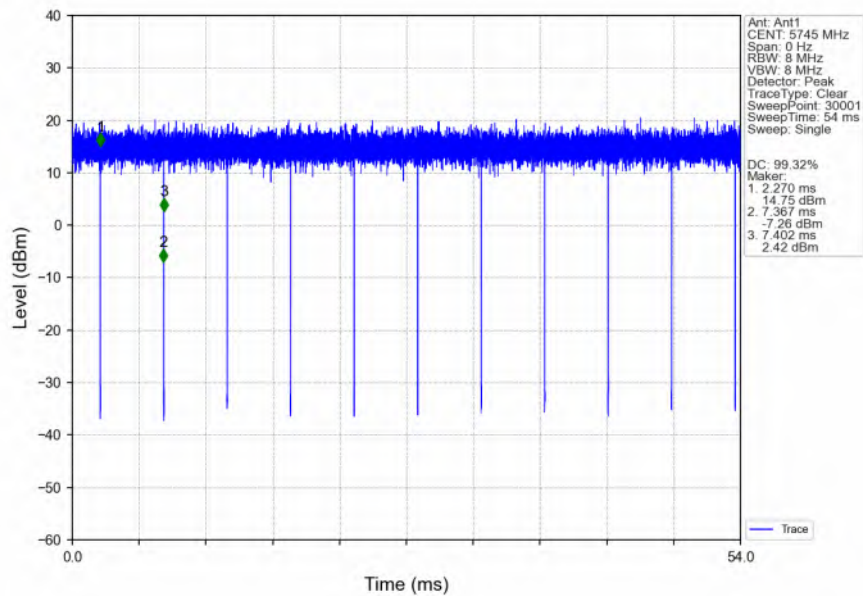


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

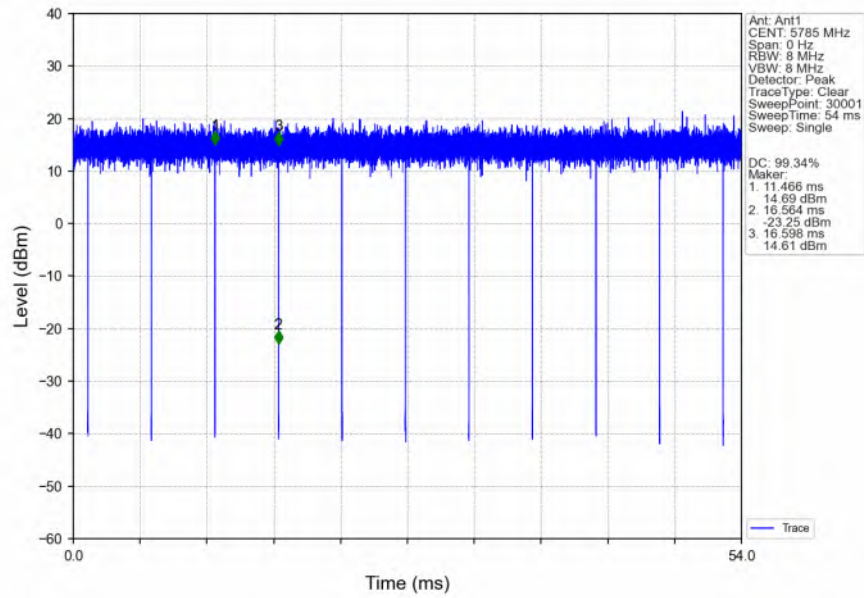


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

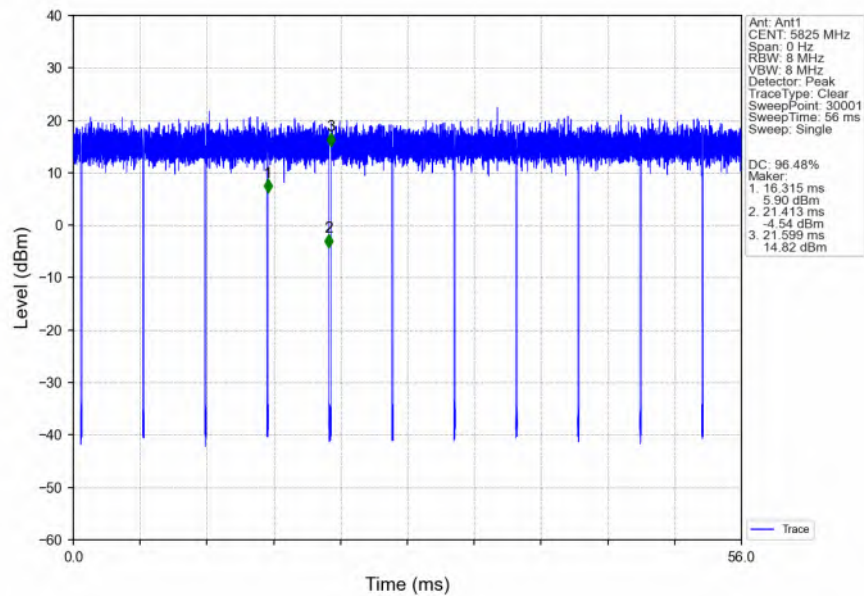


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

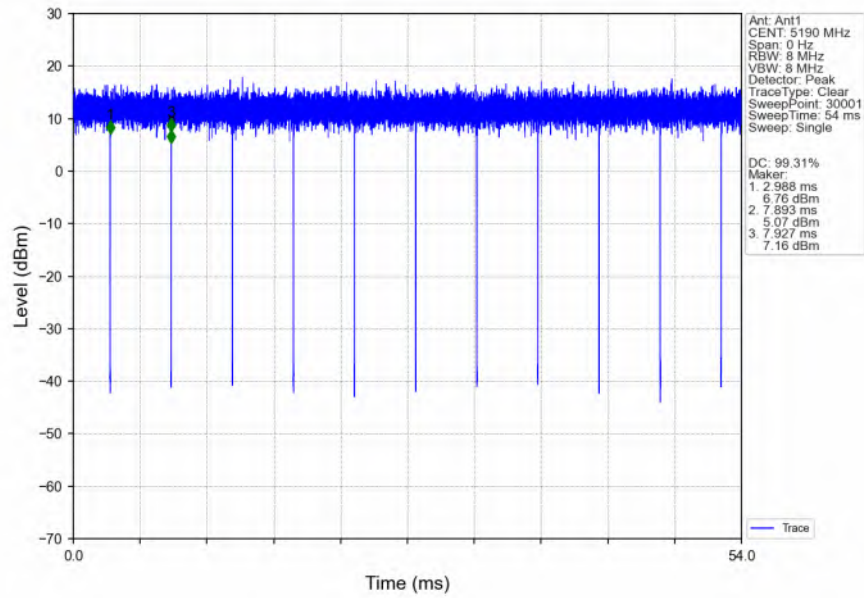


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

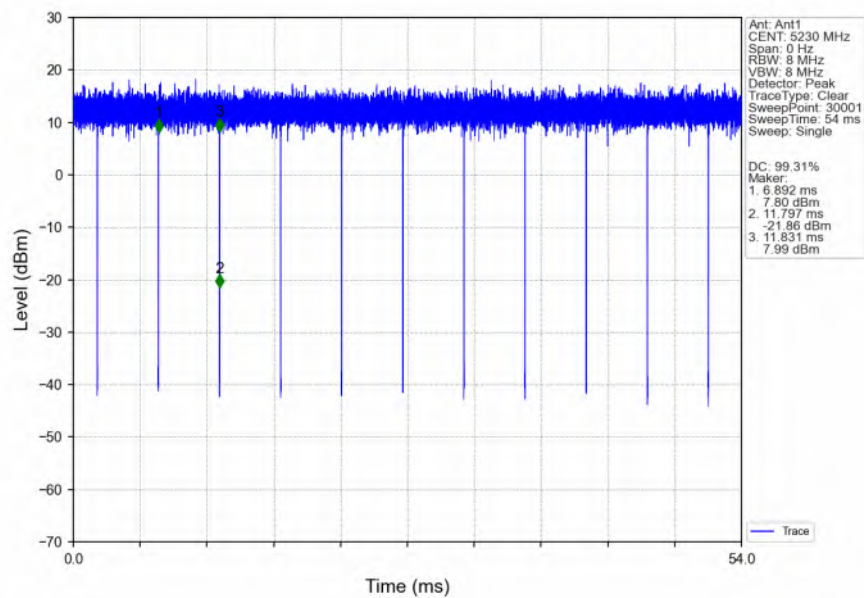


802.11ac(VHT40)_LCH_5270MHz_Ant1_NTNV

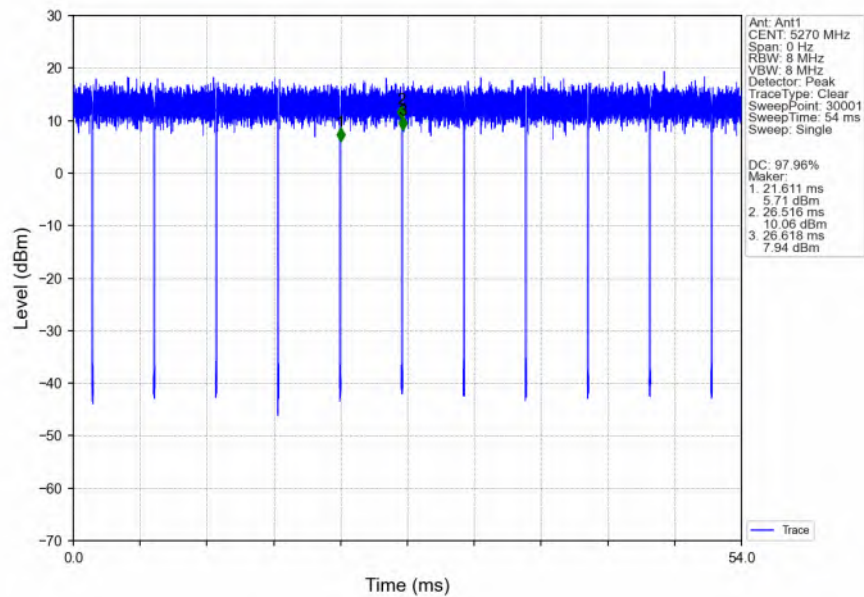


802.11ac(VHT40)_HCH_5310MHz_Ant1_NTNV

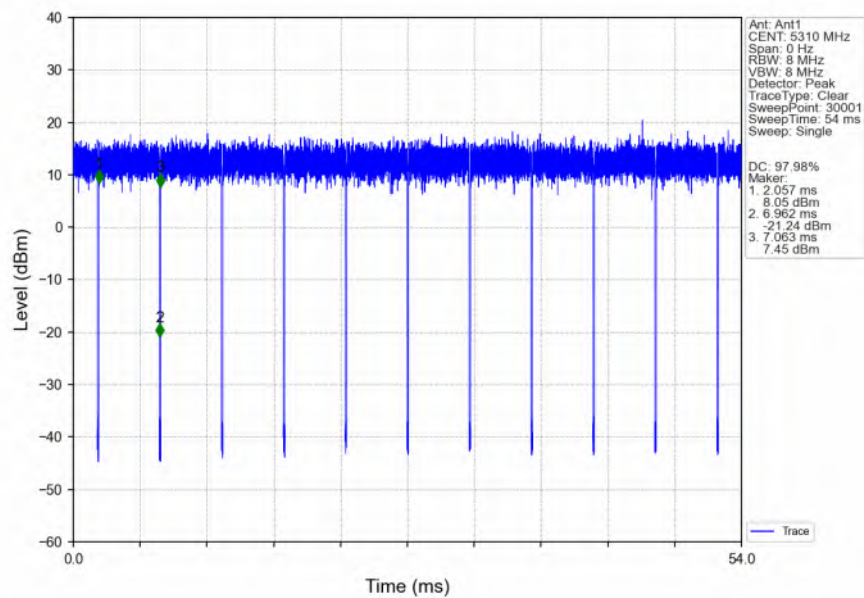


802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

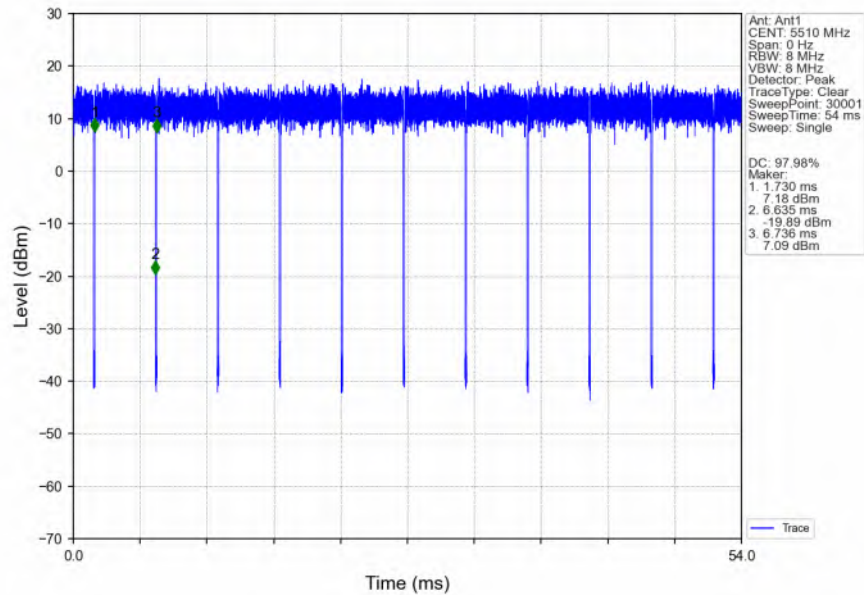


802.11ac(VHT40)_MCH_5550MHz_Ant1_NTNV

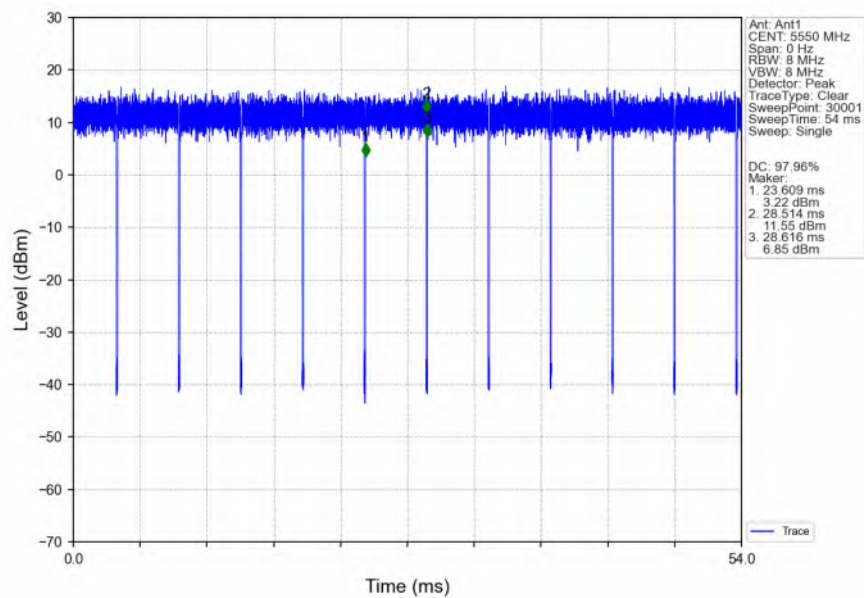


802.11ac(VHT40)_HCH_5670MHz_Ant1_NTNV

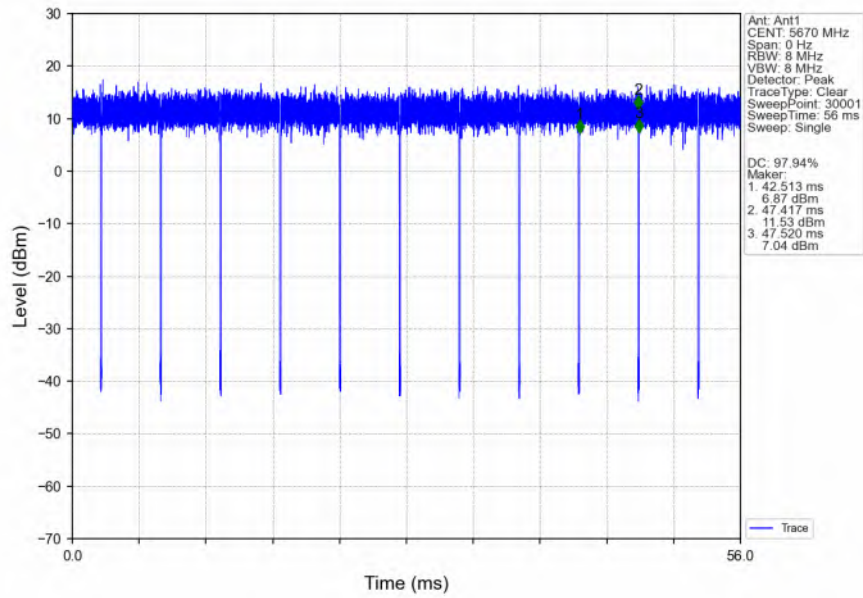


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

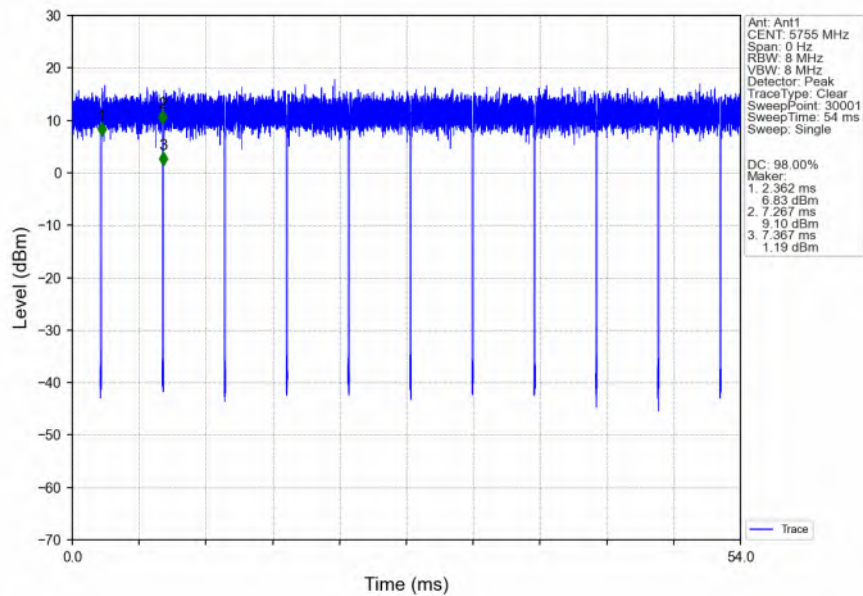


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

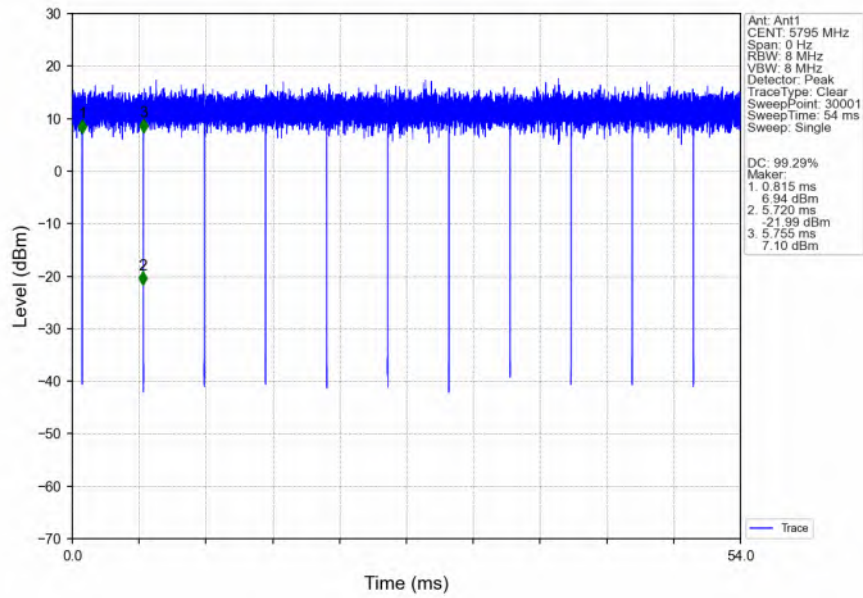


802.11ax(HEW20)_LCH_5180MHz_SU / Ant1_NTNV

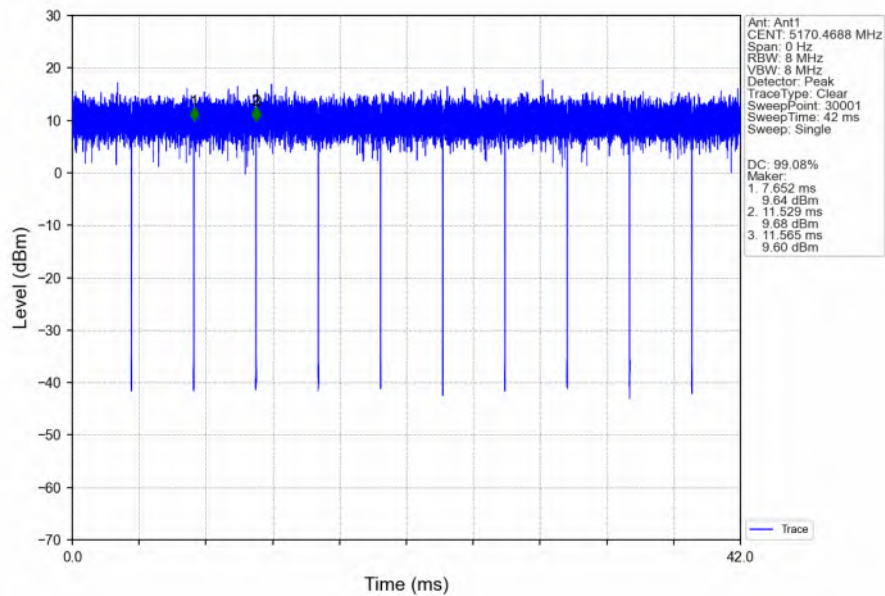


802.11ax(HEW20)_MCH_5200MHz_SU / Ant1_NTNV

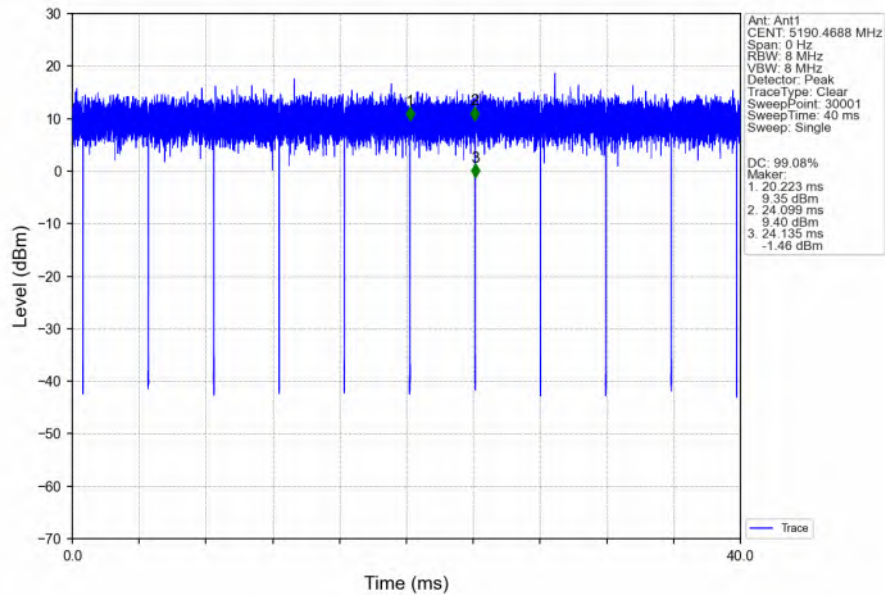


802.11ax(HEW20)_HCH_5240MHz_SU / Ant1_NTNV

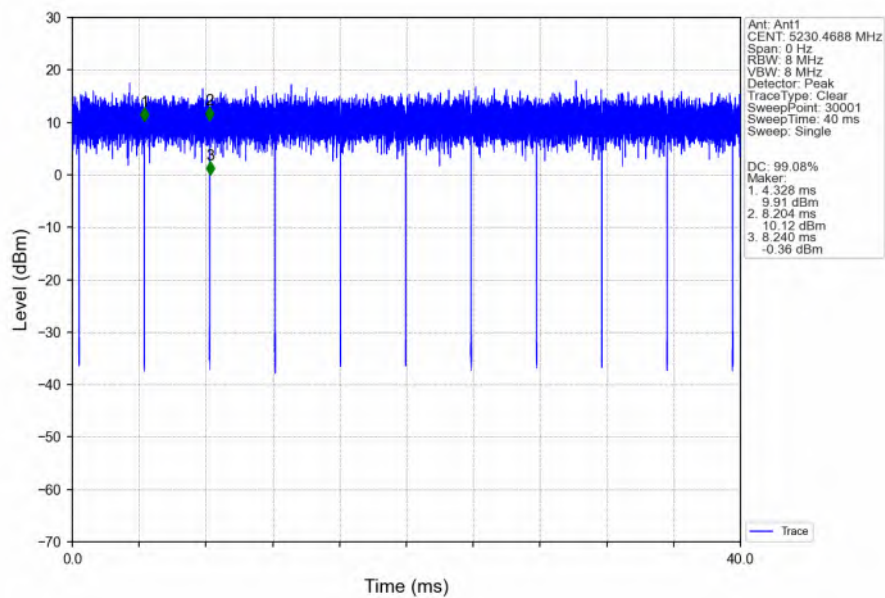


802.11ax(HEW20)_LCH_5260MHz_SU / Ant1_NTNV

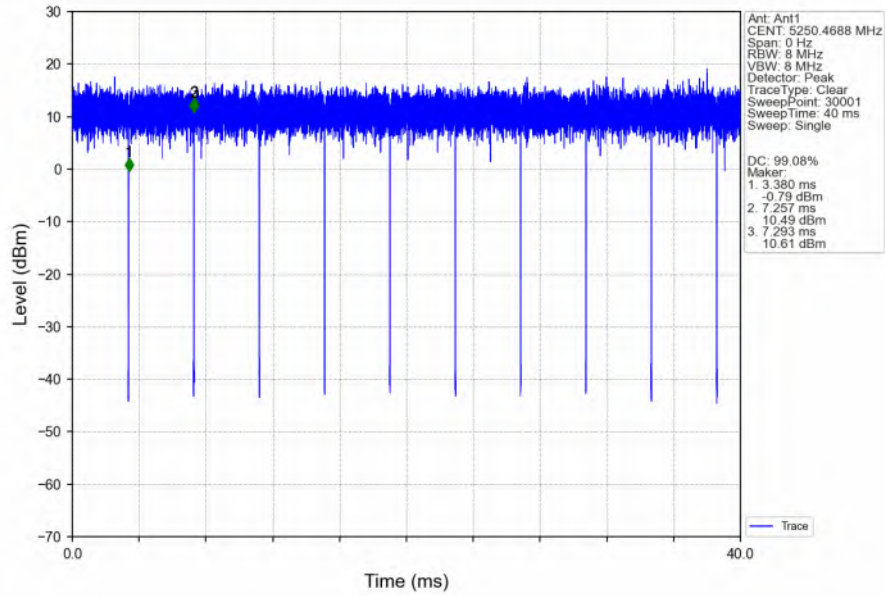


802.11ax(HEW20)_MCH_5300MHz_SU / Ant1_NTNV

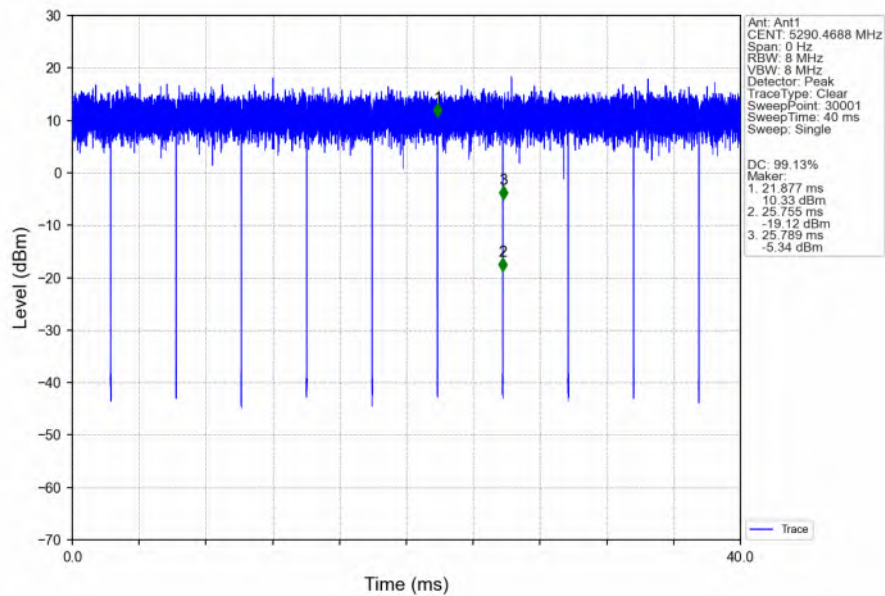


802.11ax(HEW20) HCH 5320MHz SU / Ant1 NTN

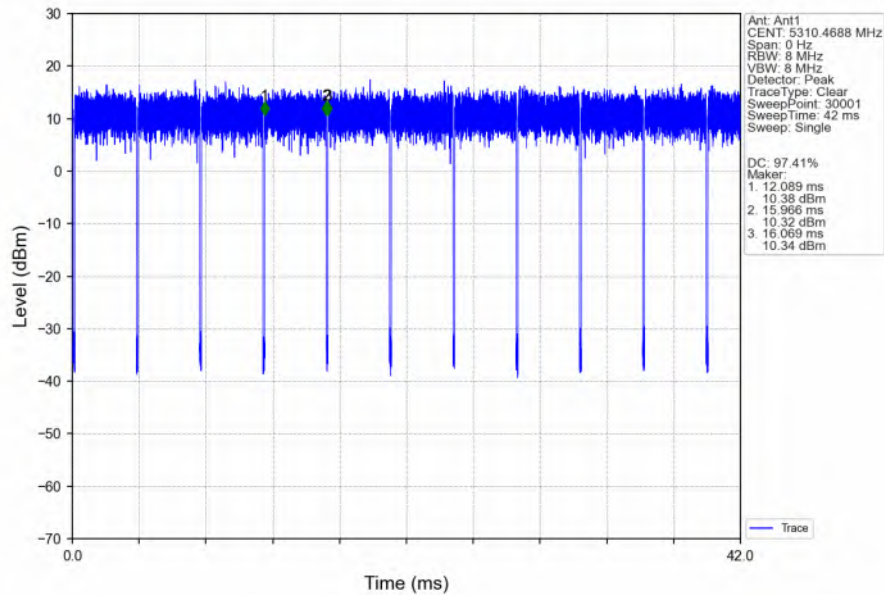


802.11ax(HEW20) LCH 5500MHz SU / Ant1 NTN

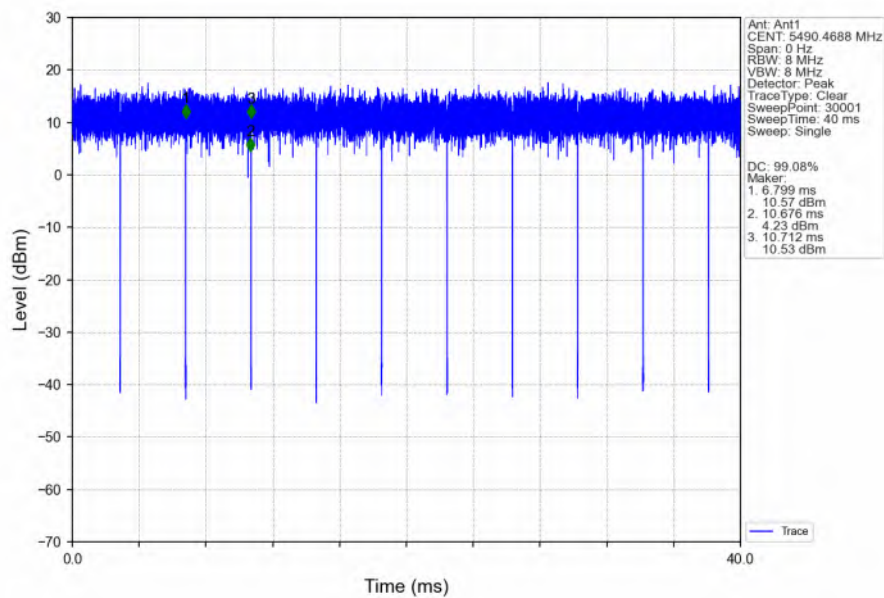


802.11ax(HEW20) MCH 5580MHz SU / Ant1 NTN

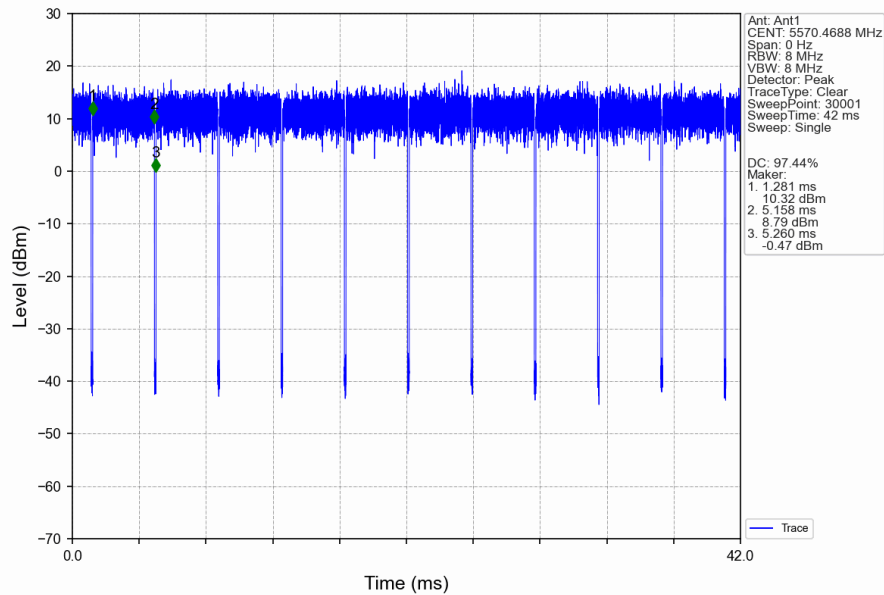


802.11ax(HEW20) HCH 5700MHz SU / Ant1 NTN

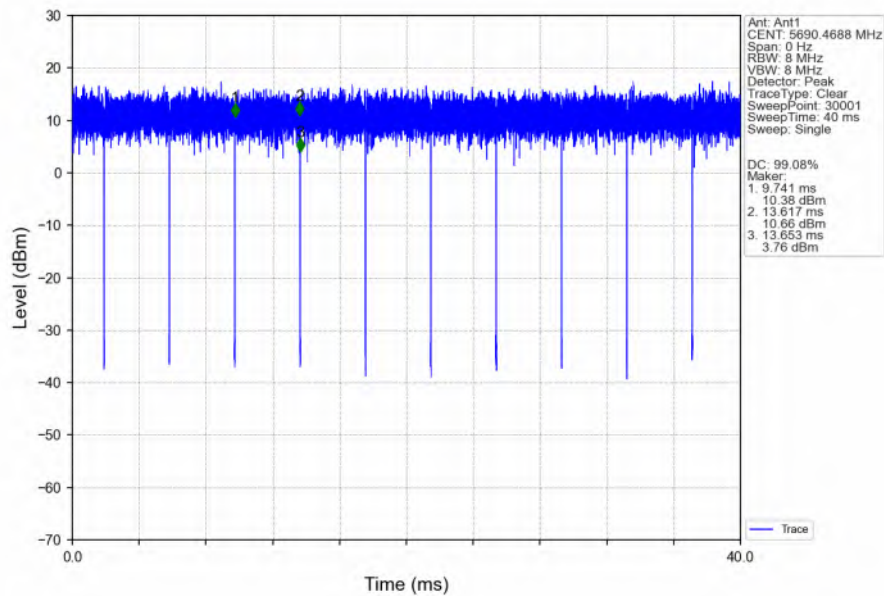


802.11ax(HEW20)_LCH_5745MHz_SU / Ant1_NTNV

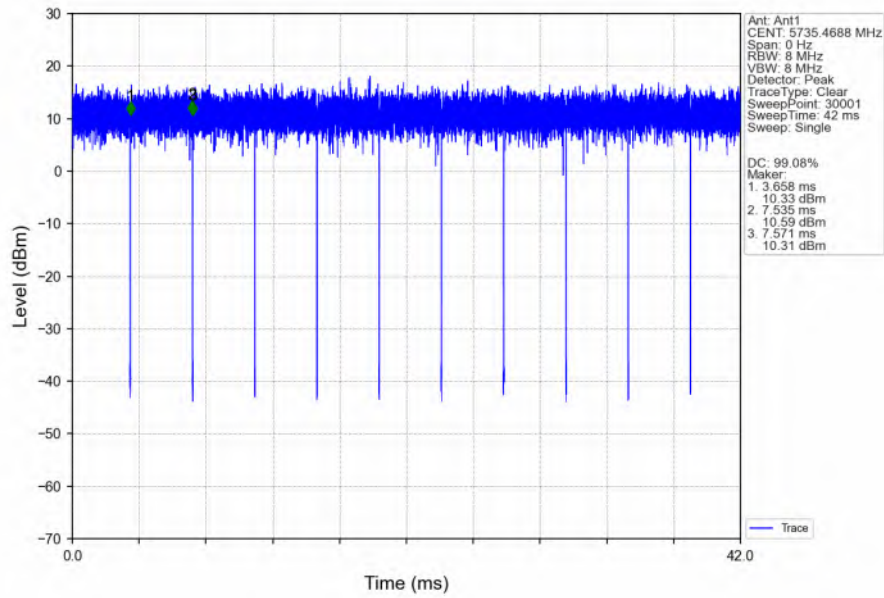


802.11ax(HEW20)_MCH_5785MHz_SU / Ant1_NTNV

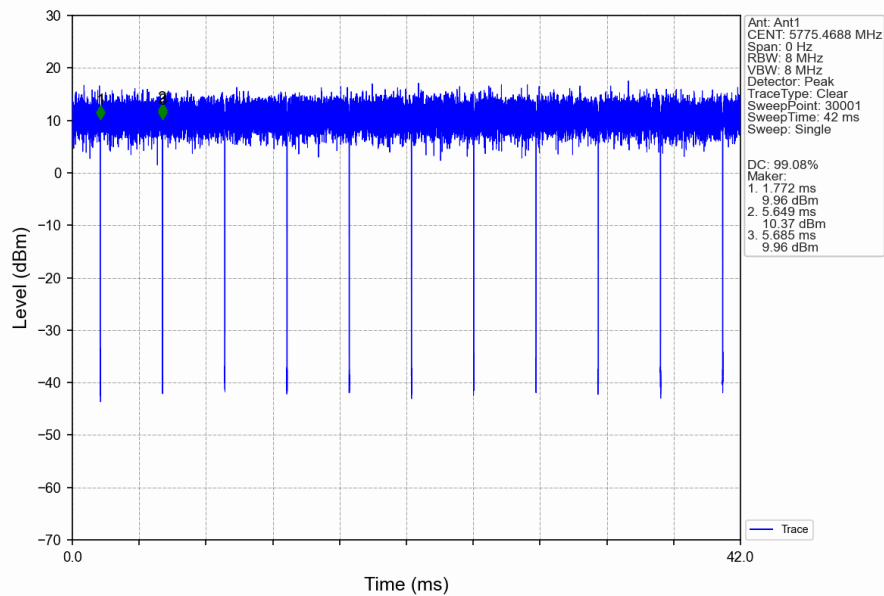


802.11ax(HEW20)_HCH_5825MHz_SU / Ant1_NTNV

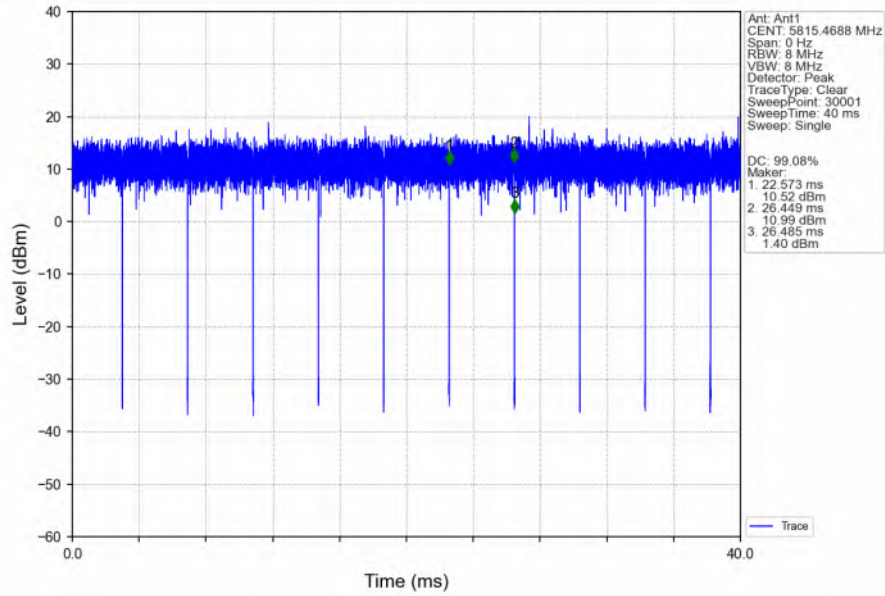


802.11ax(HEW40)_LCH_5190MHz_SU / Ant1_NTNV

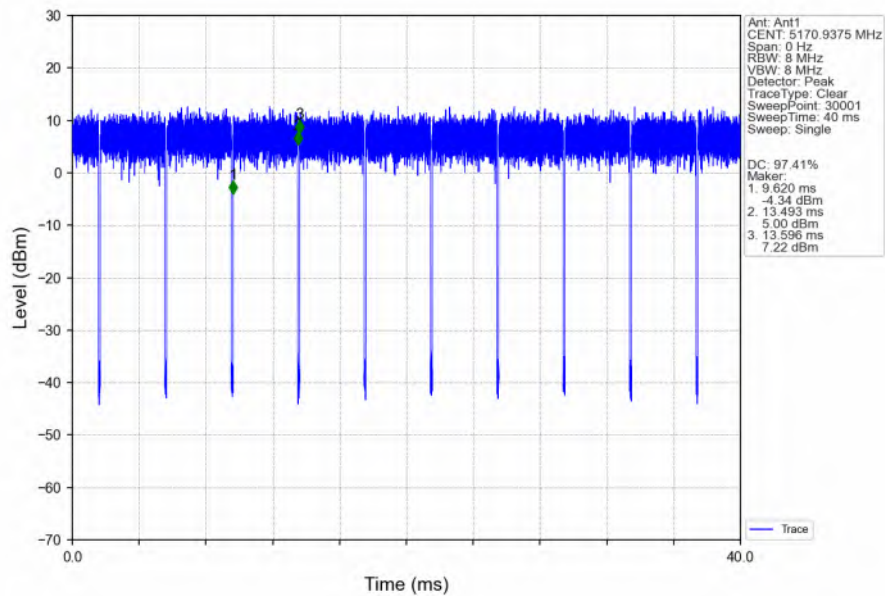


802.11ax(HEW40) HCH 5230MHz SU / Ant1 NTN

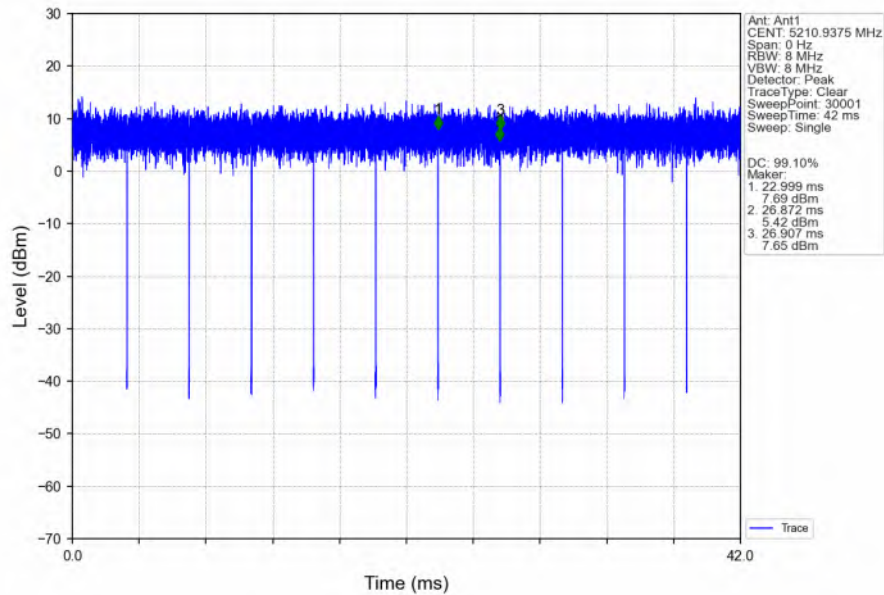


802.11ax(HEW40) LCH 5270MHz SU / Ant1 NTN

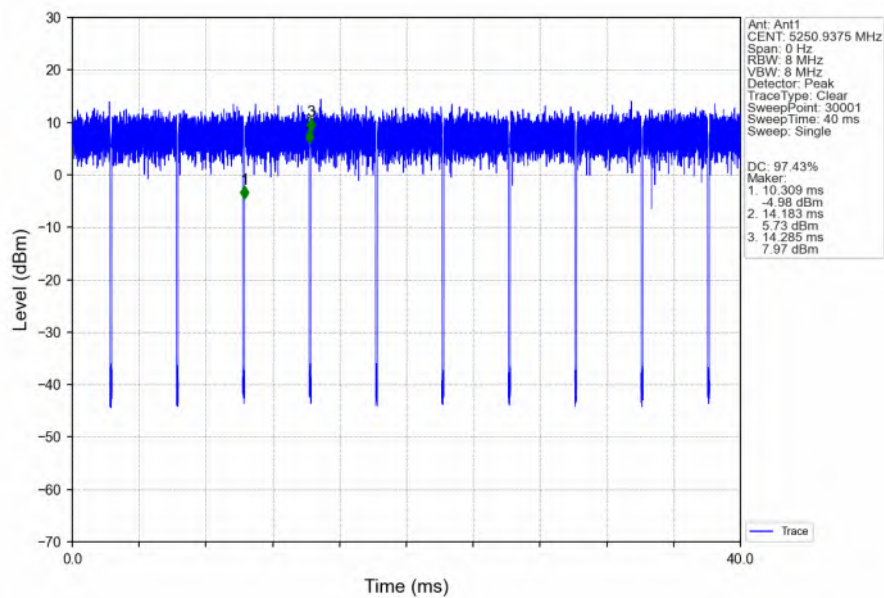


802.11ax(HEW40) HCH 5310MHz SU / Ant1 NTN

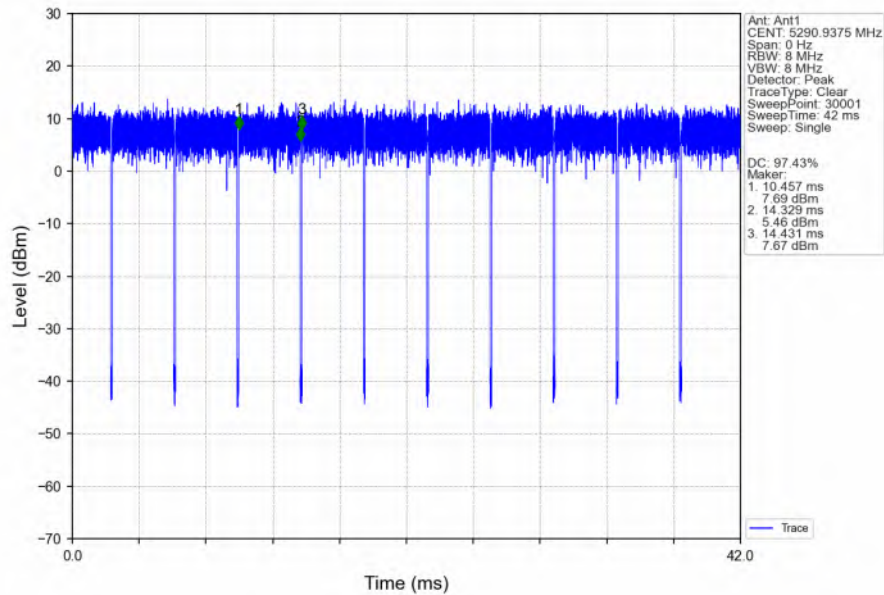


802.11ax(HEW40) LCH 5510MHz SU / Ant1 NTN

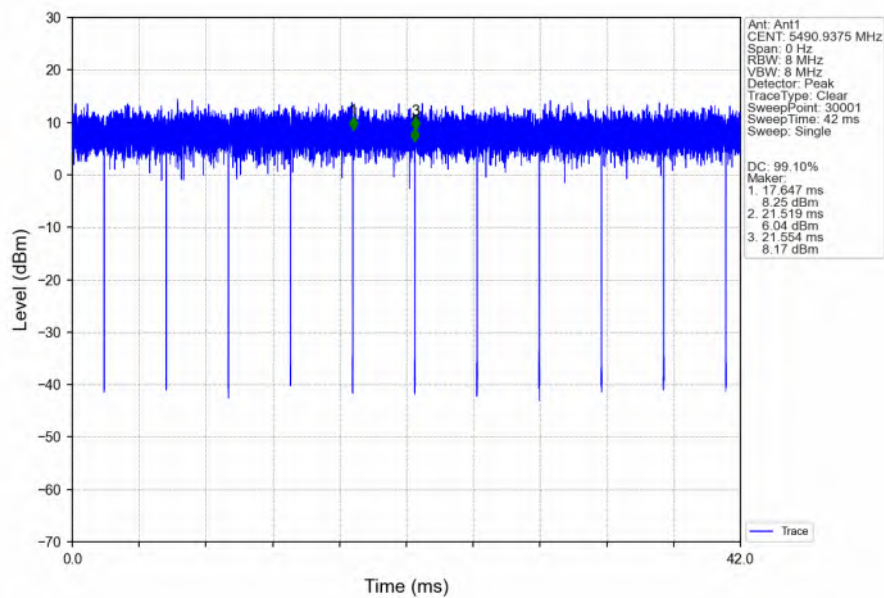


802.11ax(HEW40) MCH 5550MHz SU / Ant1 NTN

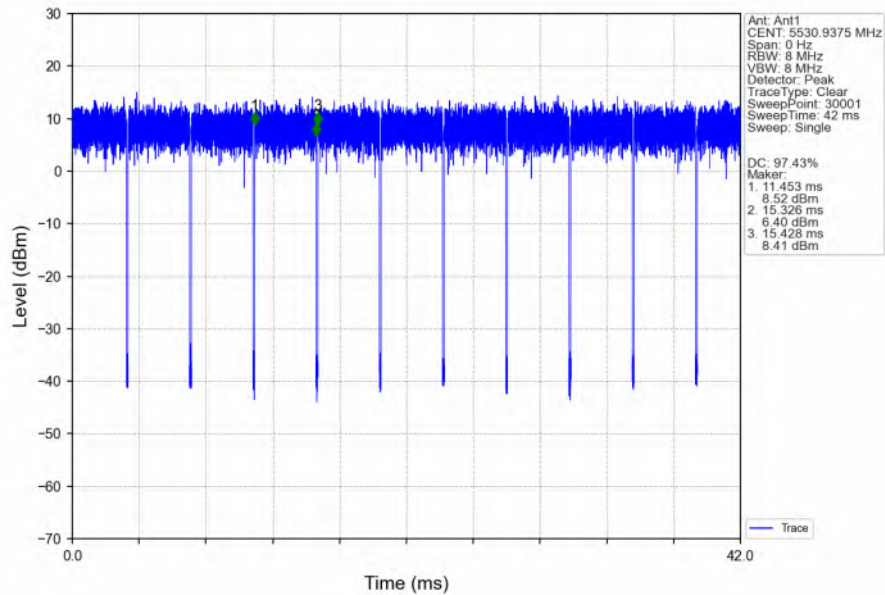


802.11ax(HEW40) HCH 5670MHz SU / Ant1 NTN

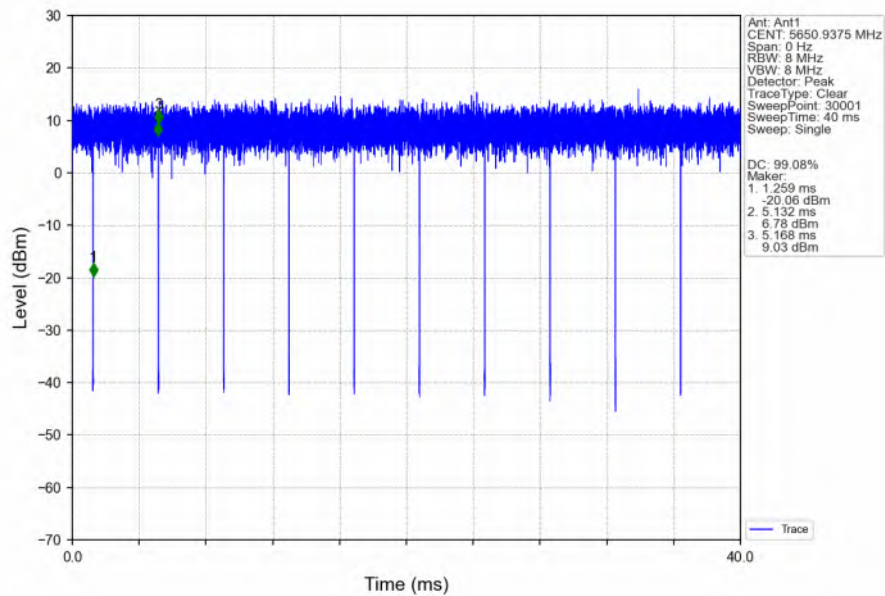

802.11ax(HEW40) LCH 5755MHz SU / Ant1 NTNV

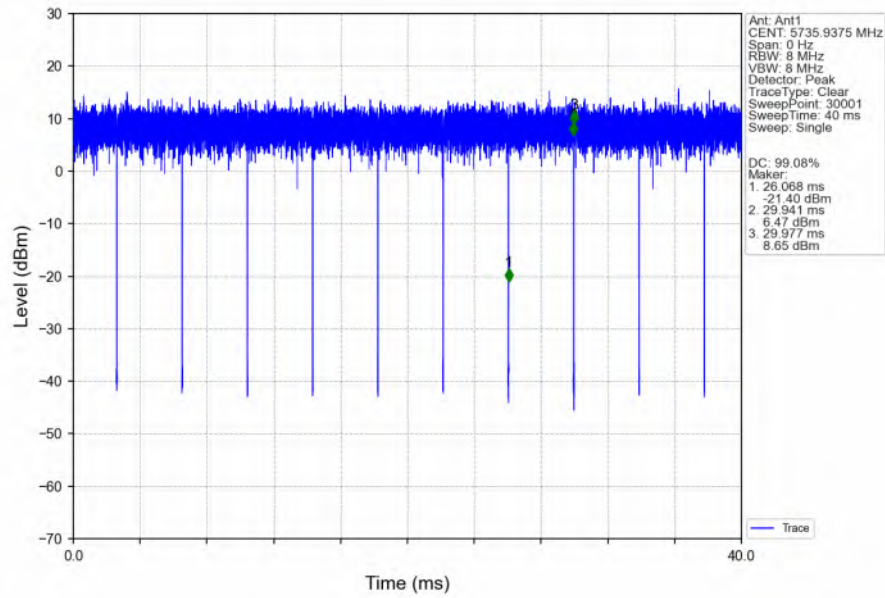

802.11ax(HEW40) HCH 5795MHz SU / Ant1 NTNV

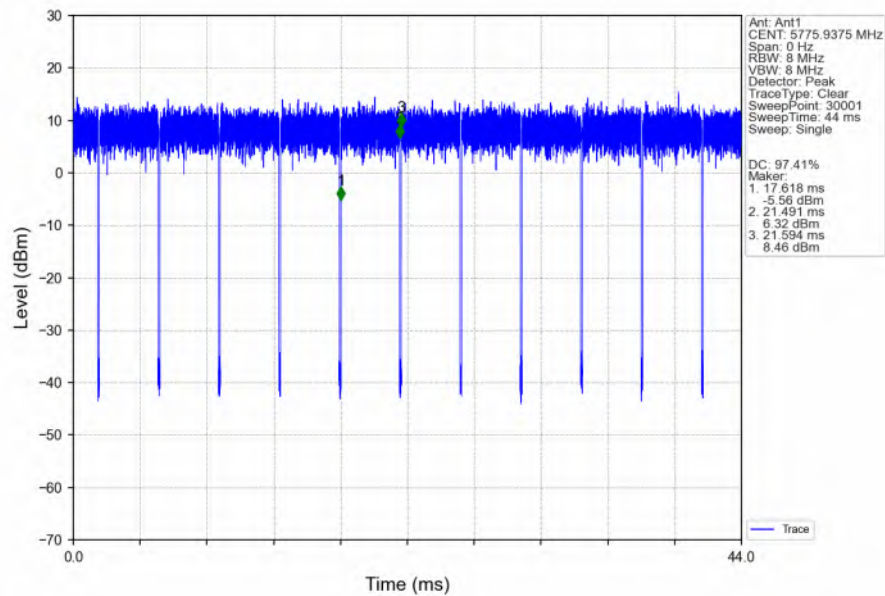

2. Bandwidth

2.1 Test Result

2.1.1 OBW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	99% Occupied Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5180	/	/	1	16.693	/	Pass
		5200	/	/	1	16.736	/	Pass
		5240	/	/	1	16.768	/	Pass
		5260	/	/	1	16.679	/	Pass
		5300	/	/	1	16.725	/	Pass
		5320	/	/	1	16.750	/	Pass
		5500	/	/	1	16.759	/	Pass
		5580	/	/	1	16.784	/	Pass
		5700	/	/	1	16.797	/	Pass
		5745	/	/	1	16.816	/	Pass
		5785	/	/	1	16.769	/	Pass
		5825	/	/	1	16.781	/	Pass
802.11ac (VHT20)	SISO	5180	/	/	1	17.871	/	Pass
		5200	/	/	1	17.951	/	Pass
		5240	/	/	1	17.919	/	Pass
		5260	/	/	1	17.929	/	Pass
		5300	/	/	1	17.905	/	Pass
		5320	/	/	1	17.978	/	Pass
		5500	/	/	1	18.021	/	Pass
		5580	/	/	1	17.996	/	Pass
		5700	/	/	1	18.062	/	Pass
		5745	/	/	1	18.027	/	Pass
		5785	/	/	1	18.060	/	Pass
		5825	/	/	1	18.052	/	Pass
802.11ac (VHT40)	SISO	5190	/	/	1	37.305	/	Pass
		5230	/	/	1	37.182	/	Pass
		5270	/	/	1	37.082	/	Pass
		5310	/	/	1	37.312	/	Pass
		5510	/	/	1	37.425	/	Pass
		5550	/	/	1	37.409	/	Pass
		5670	/	/	1	37.502	/	Pass
		5755	/	/	1	37.481	/	Pass
		5795	/	/	1	37.560	/	Pass
		5825	/	/	1	37.560	/	Pass
802.11ax (HEW20)	SISO	5180	SU	/	1	19.085	/	Pass
		5200	SU	/	1	19.040	/	Pass
		5240	SU	/	1	19.091	/	Pass
		5260	SU	/	1	19.064	/	Pass
		5300	SU	/	1	19.054	/	Pass
		5320	SU	/	1	19.103	/	Pass
		5500	SU	/	1	19.202	/	Pass

		5580	SU	/	1	19.175	/	Pass
		5700	SU	/	1	19.167	/	Pass
		5745	SU	/	1	19.210	/	Pass
		5785	SU	/	1	19.232	/	Pass
		5825	SU	/	1	19.203	/	Pass
802.11ax (HEW40)	SISO	5190	SU	/	1	38.282	/	Pass
		5230	SU	/	1	38.278	/	Pass
		5270	SU	/	1	38.270	/	Pass
		5310	SU	/	1	38.393	/	Pass
		5510	SU	/	1	38.670	/	Pass
		5550	SU	/	1	38.553	/	Pass
		5670	SU	/	1	38.565	/	Pass
		5755	SU	/	1	38.687	/	Pass
		5795	SU	/	1	38.571	/	Pass

2.1.2 26dB BW

Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	26dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5180	/	/	1	25.424	/	Pass
		5200	/	/	1	25.336	/	Pass
		5240	/	/	1	24.467	/	Pass
		5260	/	/	1	25.057	/	Pass
		5300	/	/	1	24.921	/	Pass
		5320	/	/	1	26.715	/	Pass
		5500	/	/	1	25.290	/	Pass
		5580	/	/	1	25.540	/	Pass
		5700	/	/	1	24.895	/	Pass
802.11ac (VHT20)	SISO	5180	/	/	1	26.091	/	Pass
		5200	/	/	1	26.640	/	Pass
		5240	/	/	1	26.042	/	Pass
		5260	/	/	1	25.242	/	Pass
		5300	/	/	1	25.922	/	Pass
		5320	/	/	1	26.011	/	Pass
		5500	/	/	1	27.634	/	Pass
		5580	/	/	1	25.952	/	Pass
		5700	/	/	1	26.690	/	Pass
802.11ac (VHT40)	SISO	5190	/	/	1	47.521	/	Pass
		5230	/	/	1	49.130	/	Pass
		5270	/	/	1	47.705	/	Pass
		5310	/	/	1	49.049	/	Pass
		5510	/	/	1	48.481	/	Pass
		5550	/	/	1	48.633	/	Pass
		5670	/	/	1	50.069	/	Pass
802.11ax (HEW20)	SISO	5180	SU	/	1	25.427	/	Pass
		5200	SU	/	1	26.952	/	Pass
		5240	SU	/	1	24.586	/	Pass
		5260	SU	/	1	24.833	/	Pass
		5300	SU	/	1	25.047	/	Pass
		5320	SU	/	1	26.750	/	Pass


		5500	SU	/	1	24.842	/	Pass
		5580	SU	/	1	26.080	/	Pass
		5700	SU	/	1	26.391	/	Pass
802.11ax (HEW40)	SISO	5190	SU	/	1	46.105	/	Pass
		5230	SU	/	1	46.700	/	Pass
		5270	SU	/	1	45.873	/	Pass
		5310	SU	/	1	47.524	/	Pass
		5510	SU	/	1	46.892	/	Pass
		5550	SU	/	1	47.719	/	Pass
		5670	SU	/	1	48.805	/	Pass

2.1.3 6dB BW


Mode	TX Type	Frequency (MHz)	RU	RU Pos	ANT	6dB Bandwidth (MHz)		Verdict
						Result	Limit	
802.11a	SISO	5745	/	/	1	16.434	>=0.5	Pass
		5785	/	/	1	16.413	>=0.5	Pass
		5825	/	/	1	16.438	>=0.5	Pass
802.11ac (VHT20)	SISO	5745	/	/	1	17.663	>=0.5	Pass
		5785	/	/	1	17.658	>=0.5	Pass
		5825	/	/	1	17.673	>=0.5	Pass
802.11ac (VHT40)	SISO	5755	/	/	1	36.406	>=0.5	Pass
		5795	/	/	1	36.379	>=0.5	Pass
802.11ax (HEW20)	SISO	5745	SU	/	1	18.927	>=0.5	Pass
		5785	SU	/	1	19.037	>=0.5	Pass
		5825	SU	/	1	19.025	>=0.5	Pass
802.11ax (HEW40)	SISO	5755	SU	/	1	38.055	>=0.5	Pass
		5795	SU	/	1	38.042	>=0.5	Pass

2.2 Test Graph


2.2.1 OBW

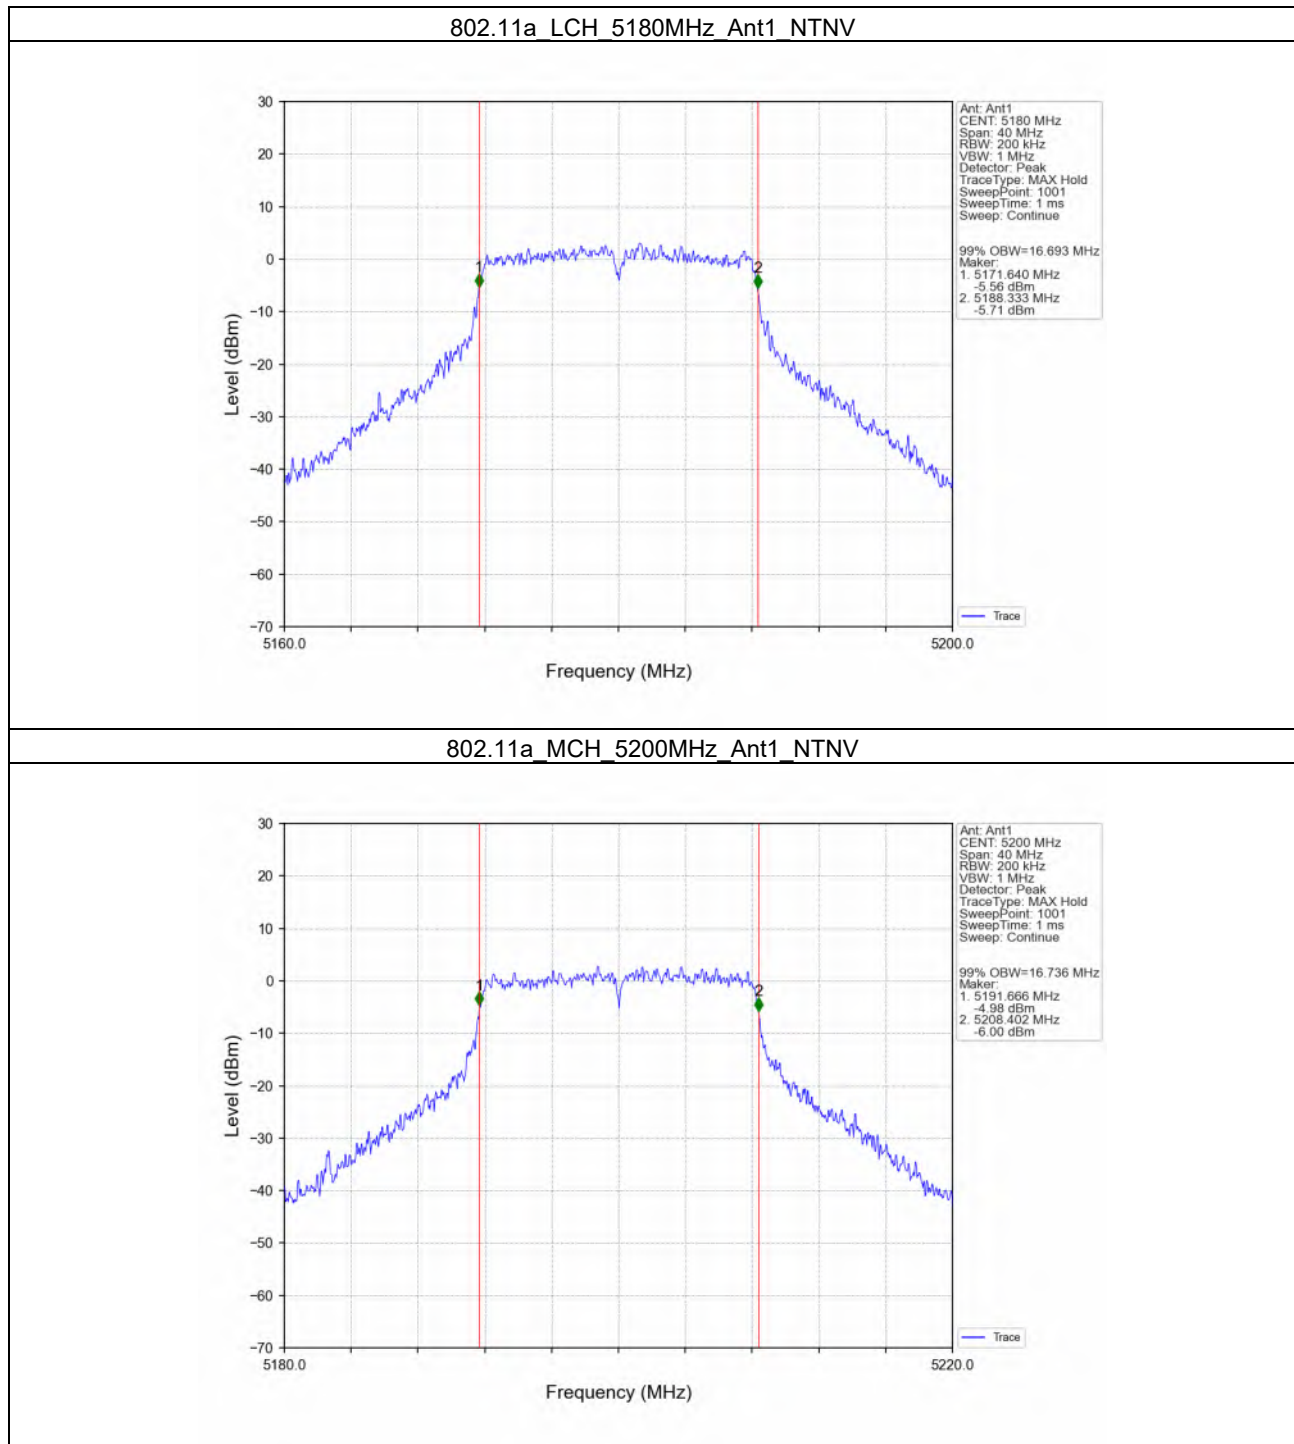


802.11a_HCH_5240MHz_Ant1_NTNV

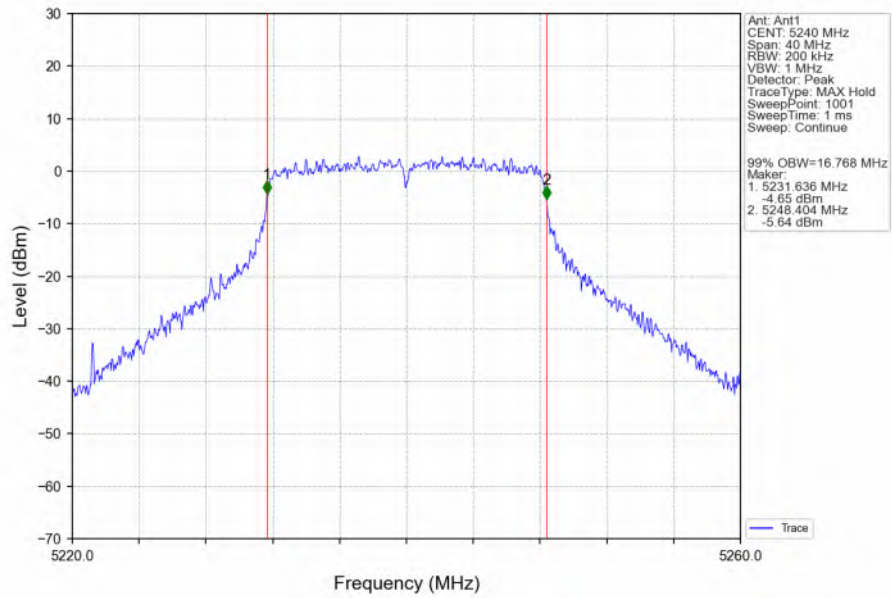


802.11a_LCH_5260MHz_Ant1_NTNV

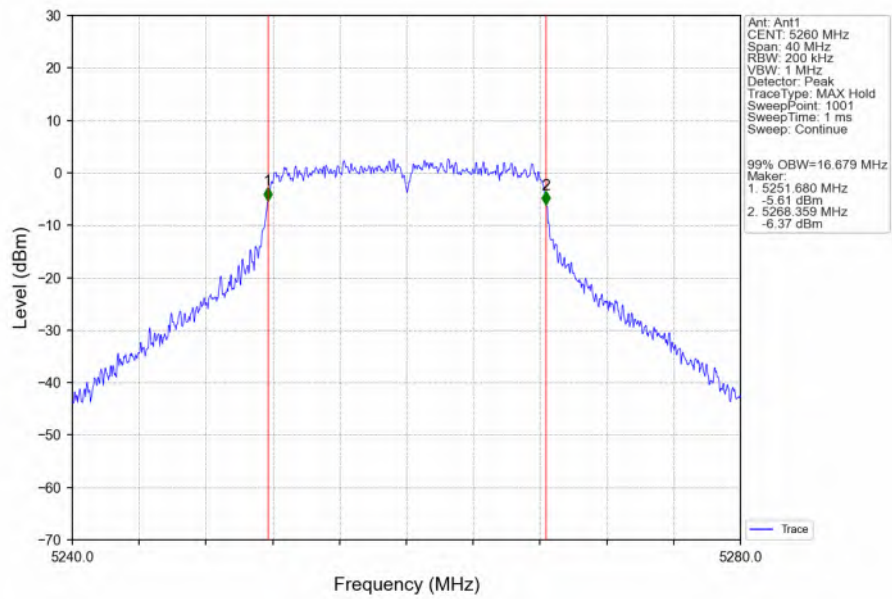


802.11a_MCH_5300MHz_Ant1_NTNV

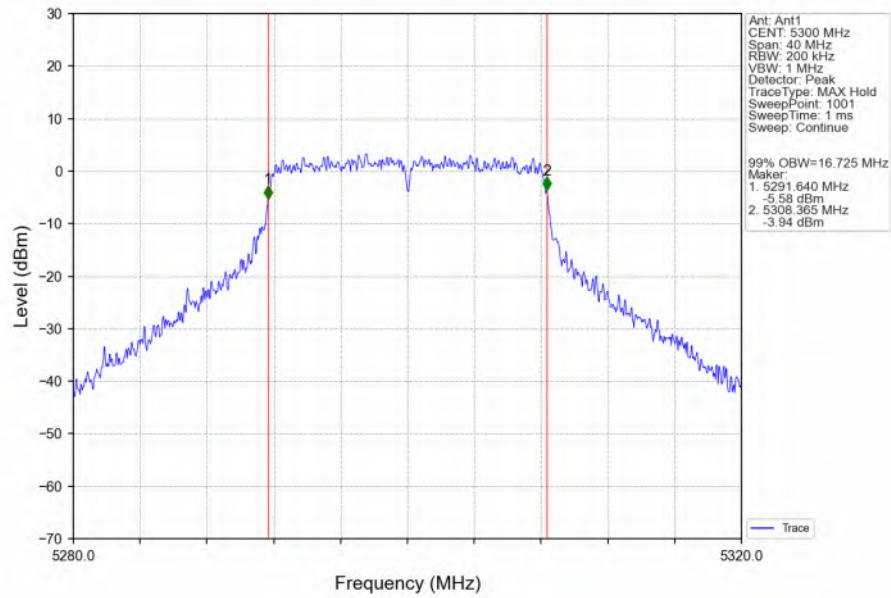


802.11a_HCH_5320MHz_Ant1_NTNV

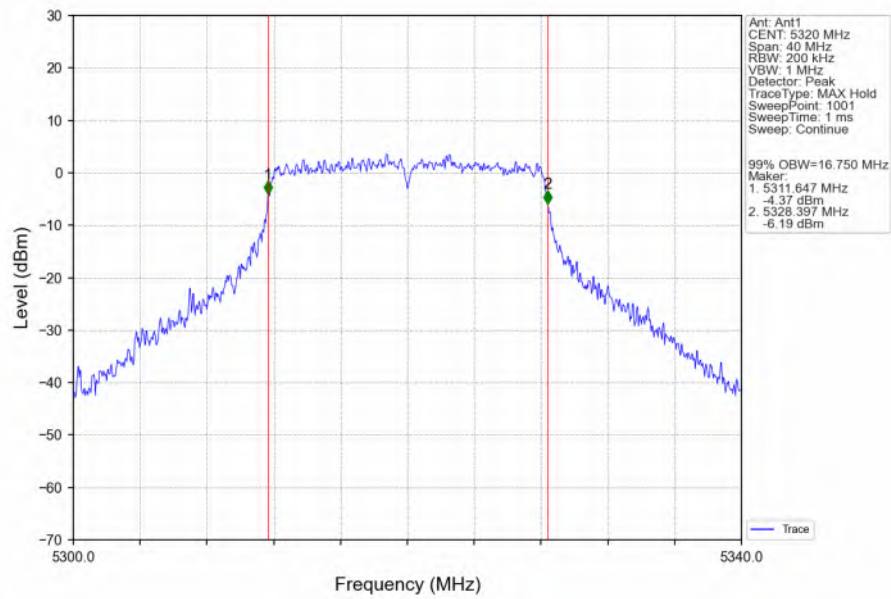


802.11a_LCH_5500MHz_Ant1_NTNV

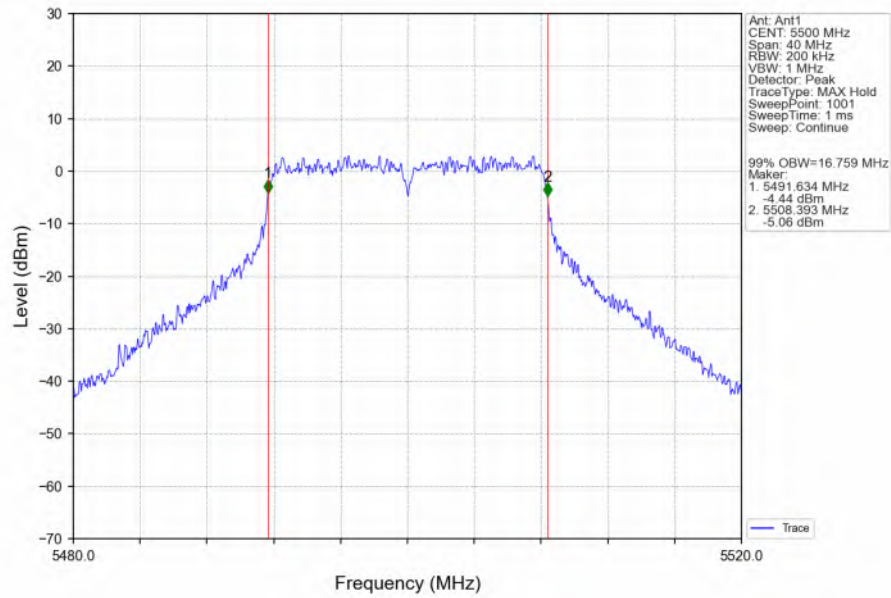


802.11a_MCH_5580MHz_Ant1_NTNV

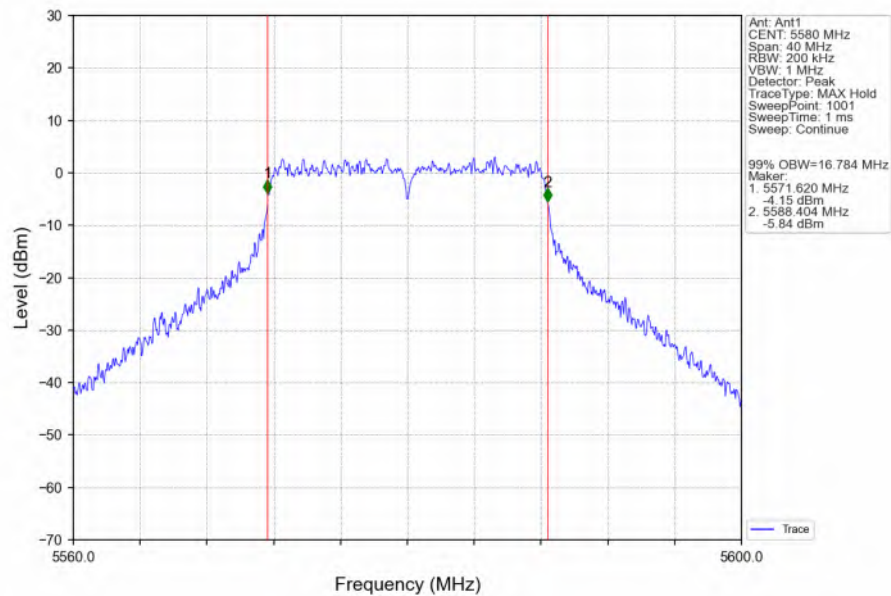


802.11a_HCH_5700MHz_Ant1_NTNV

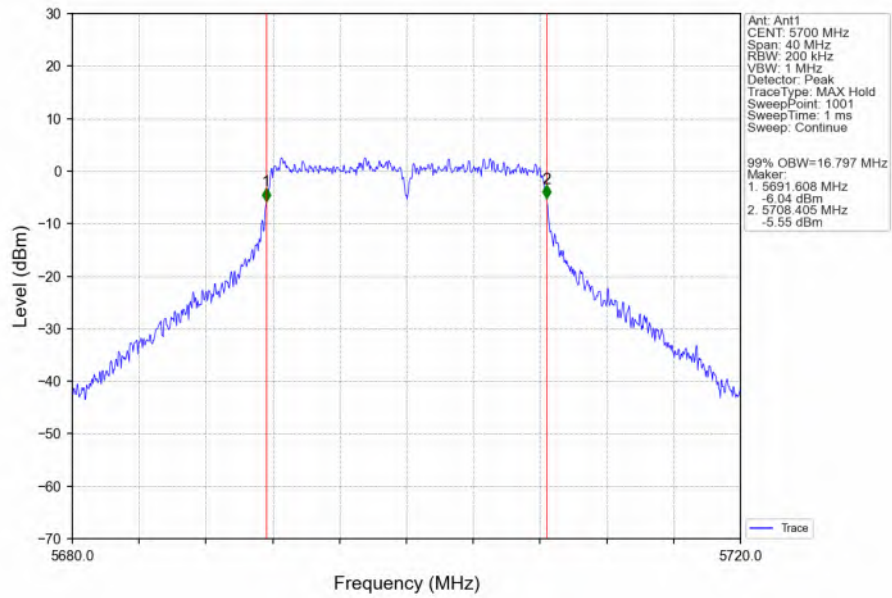


802.11a_LCH_5745MHz_Ant1_NTNV

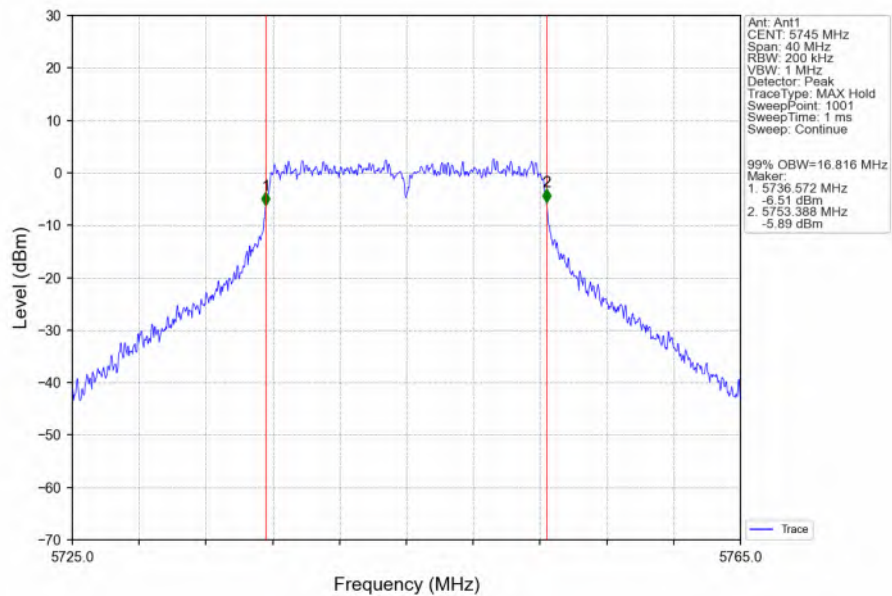


802.11a_MCH_5785MHz_Ant1_NTNV

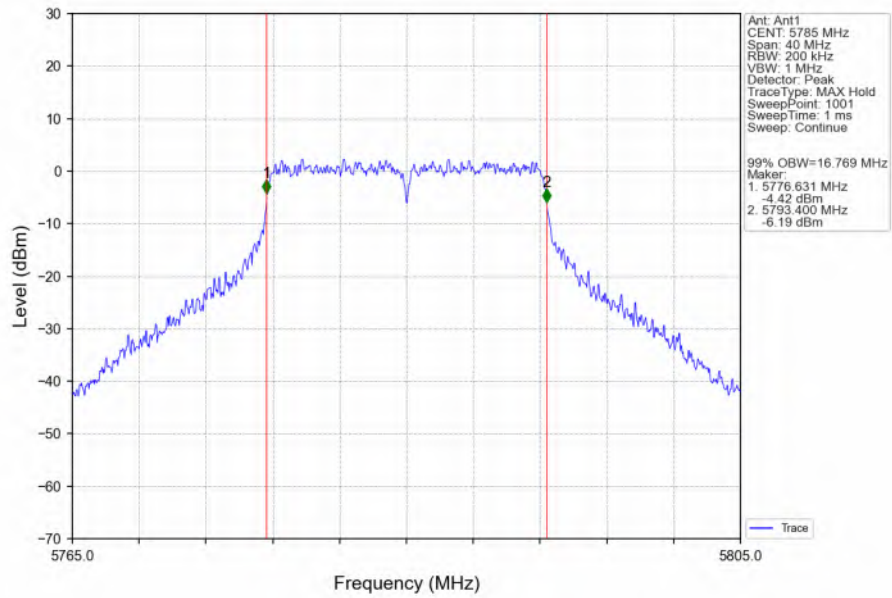


802.11a_HCH_5825MHz_Ant1_NTNV

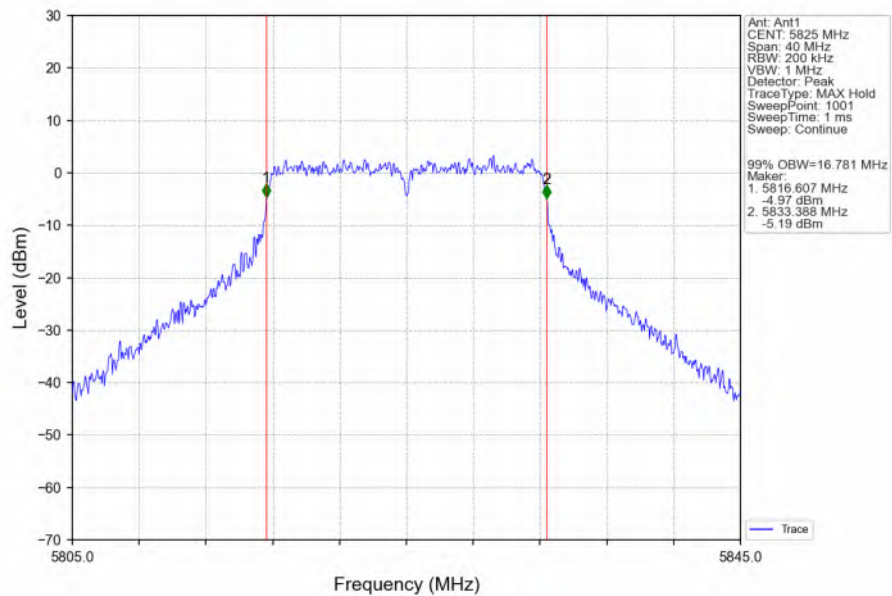


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

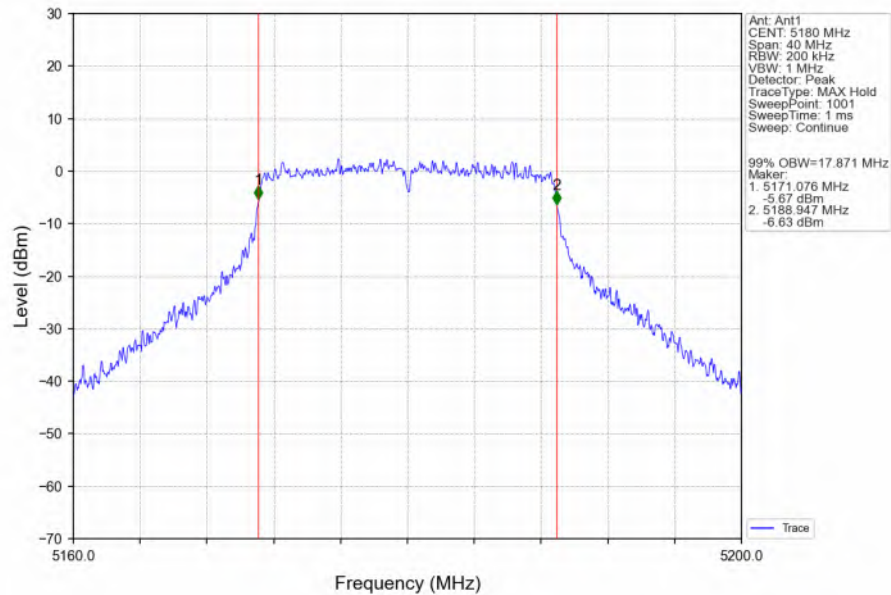


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

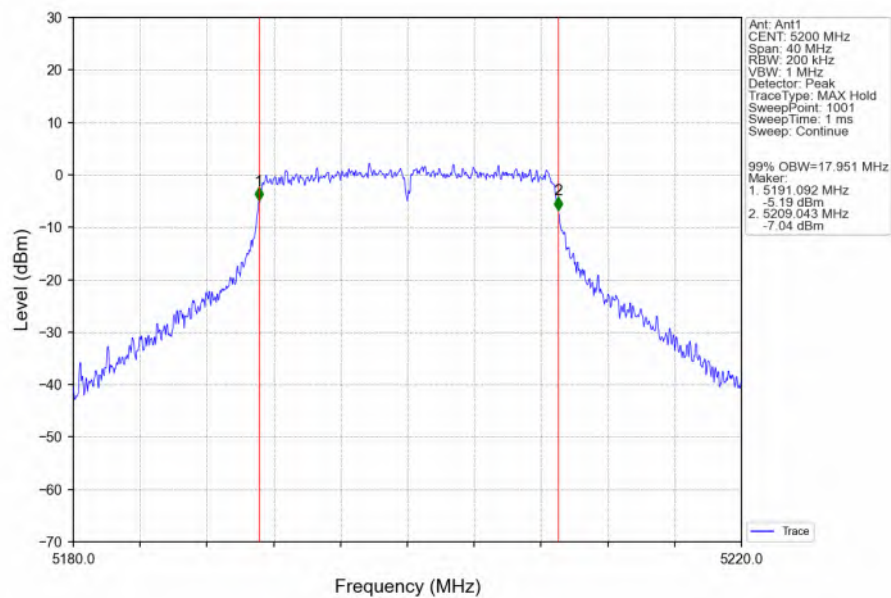


802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

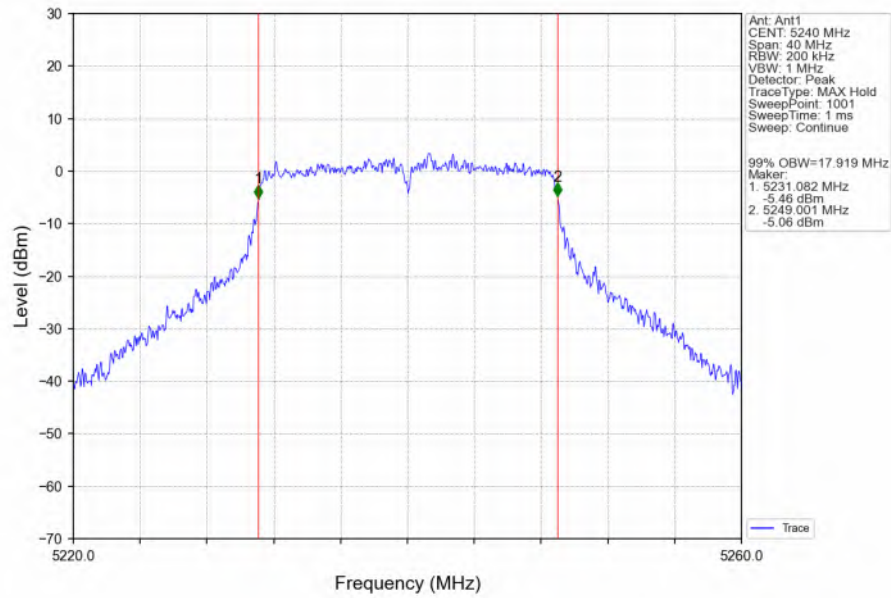


802.11ac(VHT20)_LCH_5260MHz_Ant1_NTNV

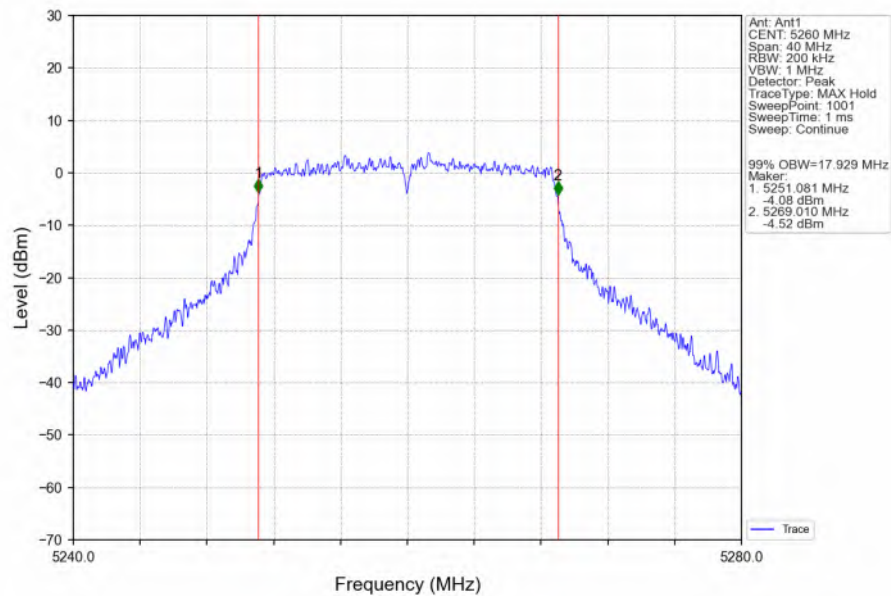


802.11ac(VHT20)_MCH_5300MHz_Ant1_NTNV

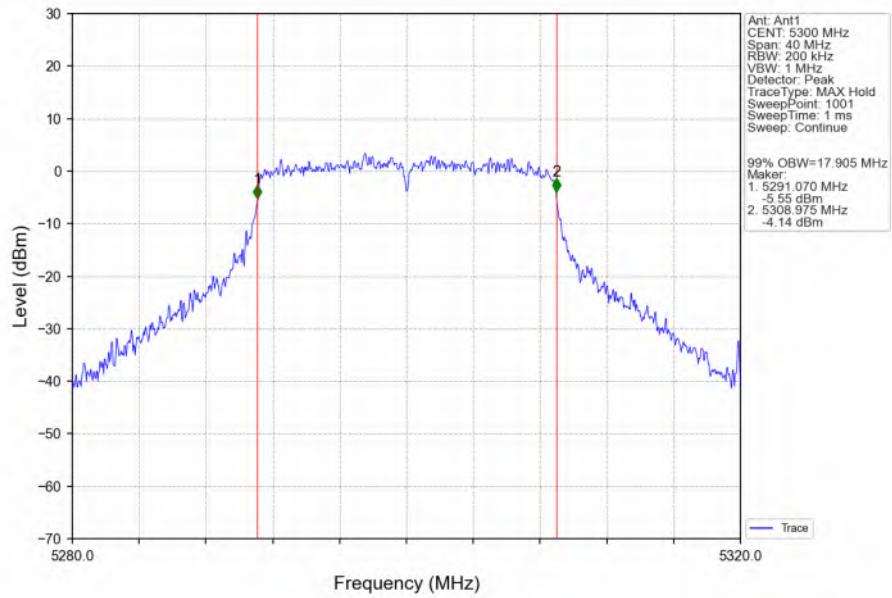


802.11ac(VHT20)_HCH_5320MHz_Ant1_NTNV

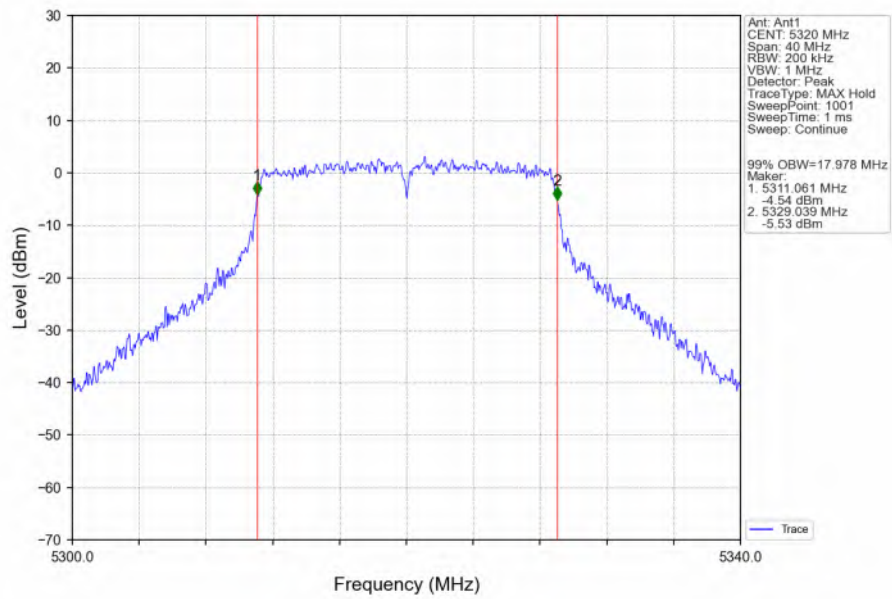


802.11ac(VHT20)_LCH_5500MHz_Ant1_NTNV

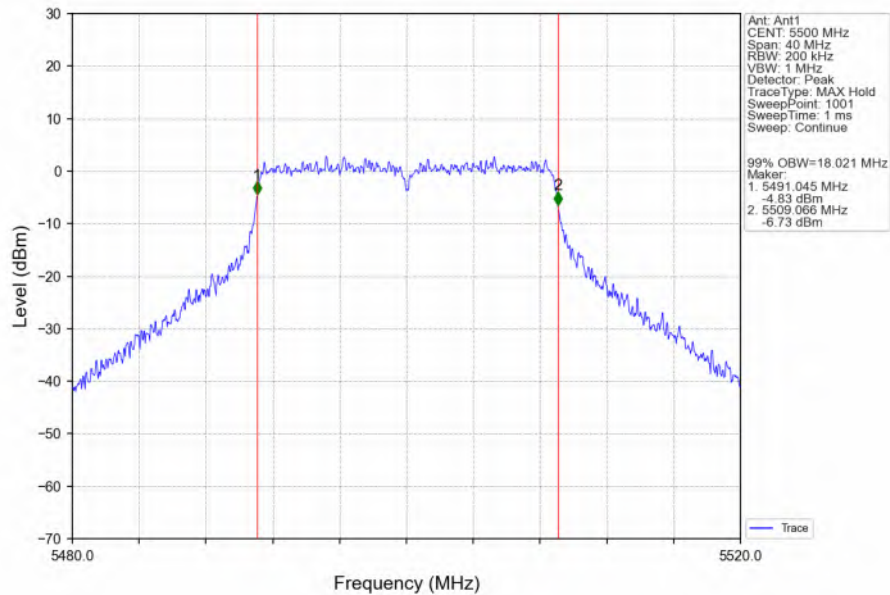


802.11ac(VHT20)_MCH_5580MHz_Ant1_NTNV

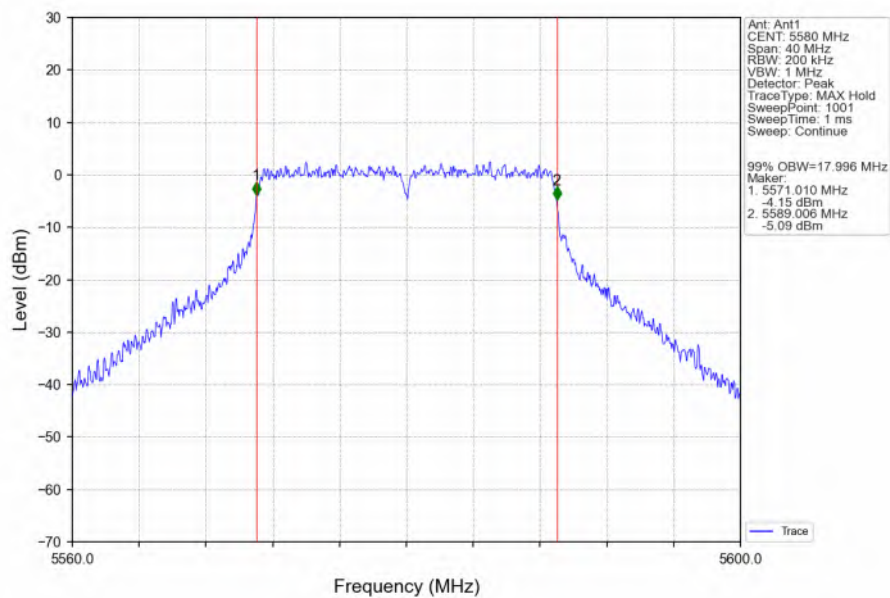


802.11ac(VHT20)_HCH_5700MHz_Ant1_NTNV

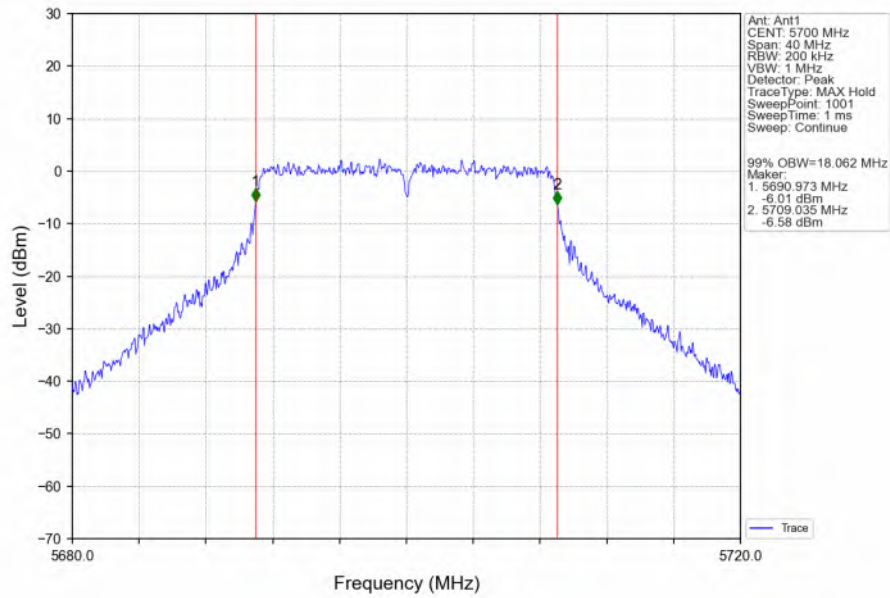


802.11ac(VHT20)_LCH_5745MHz_Ant1_NTNV

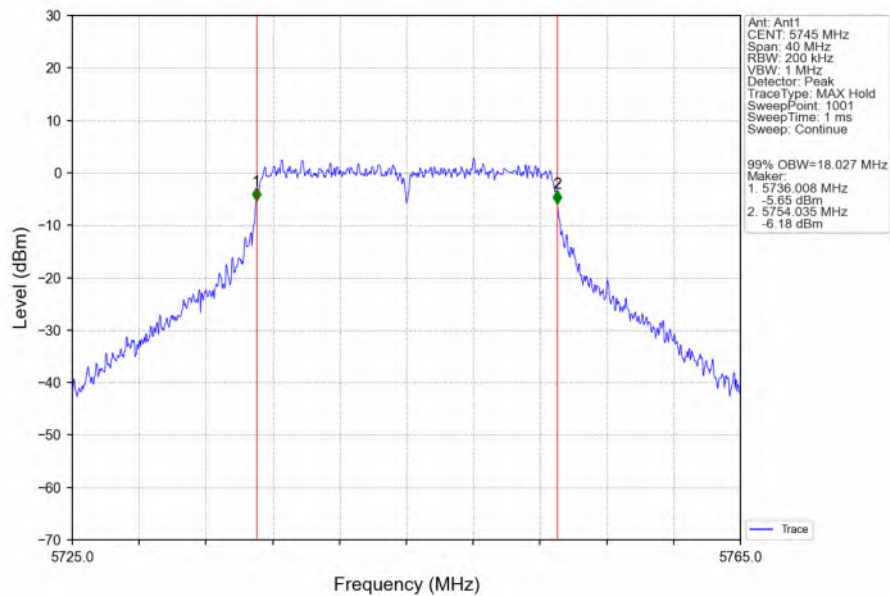


802.11ac(VHT20)_MCH_5785MHz_Ant1_NTNV

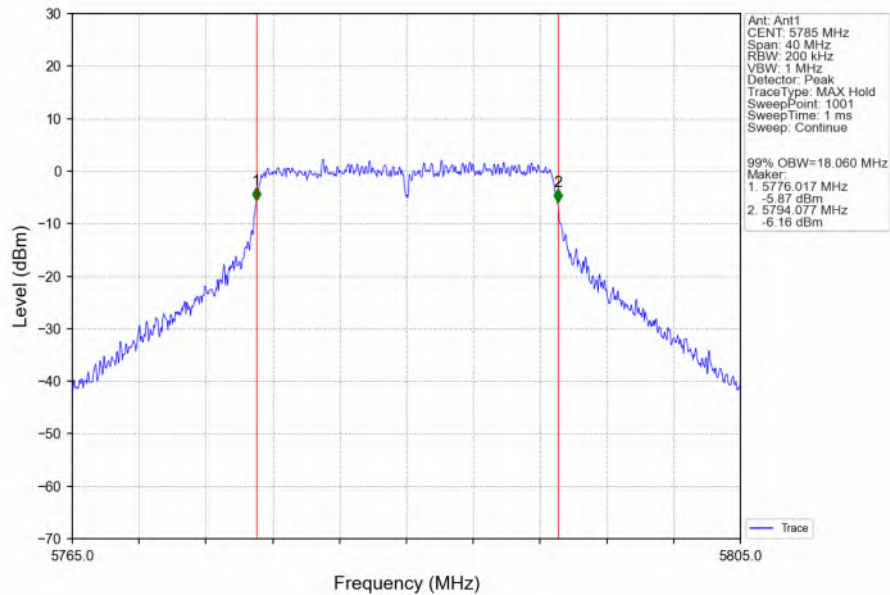


802.11ac(VHT20)_HCH_5825MHz_Ant1_NTNV

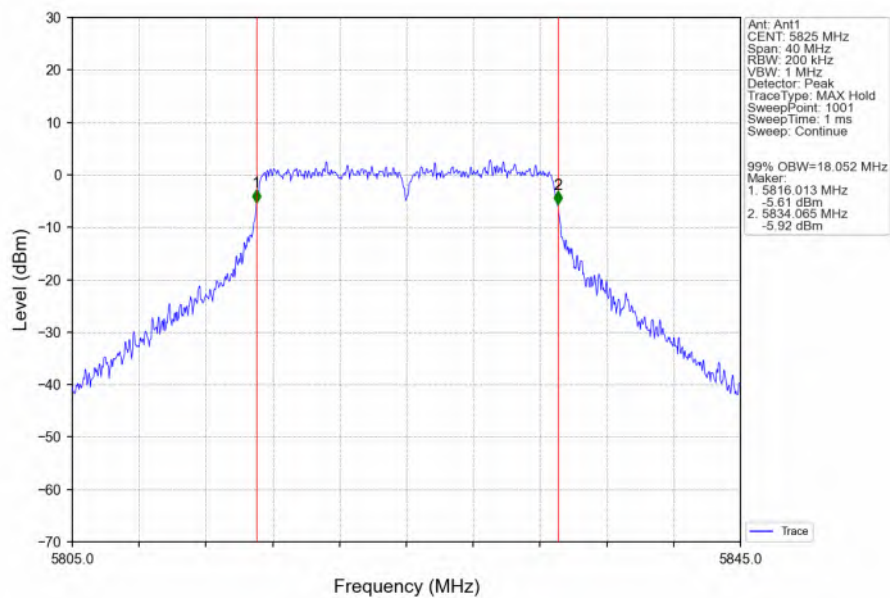


802.11ac(VHT40)_LCH_5190MHz_Ant1_NTNV

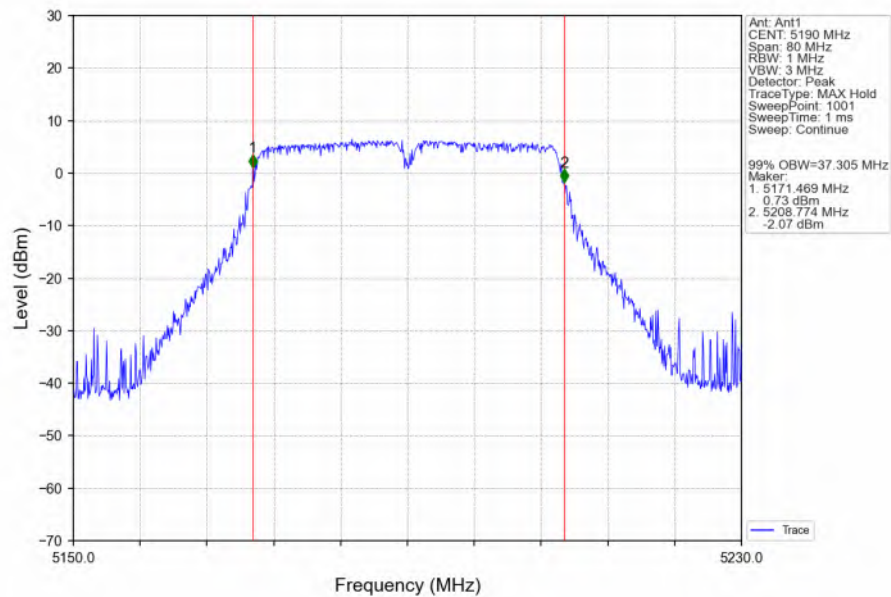


802.11ac(VHT40)_HCH_5230MHz_Ant1_NTNV

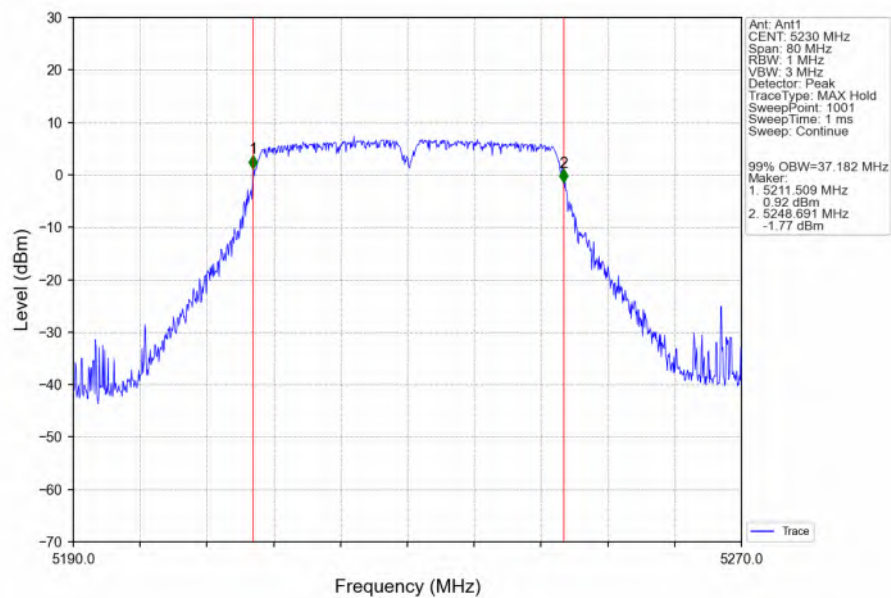


802.11ac(VHT40)_LCH_5270MHz_Ant1_NTNV

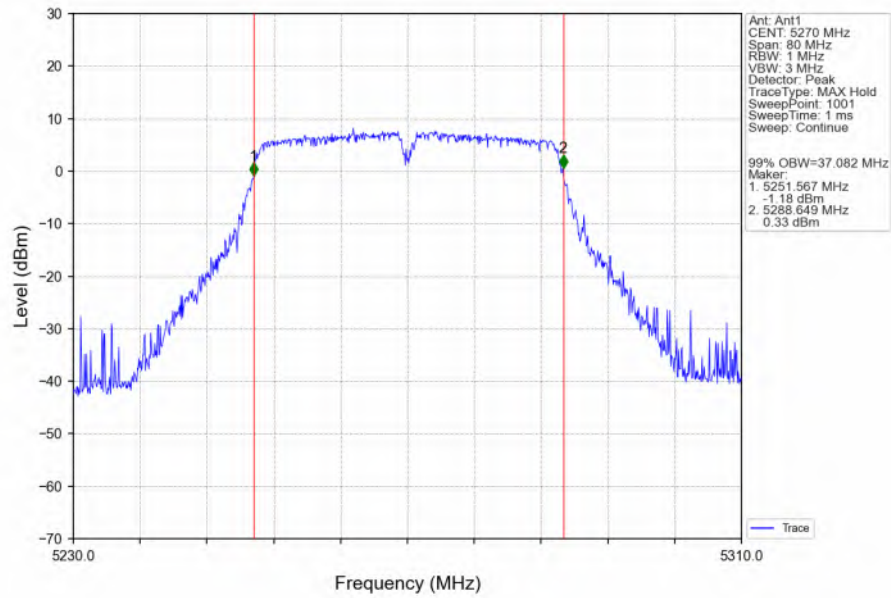


802.11ac(VHT40)_HCH_5310MHz_Ant1_NTNV

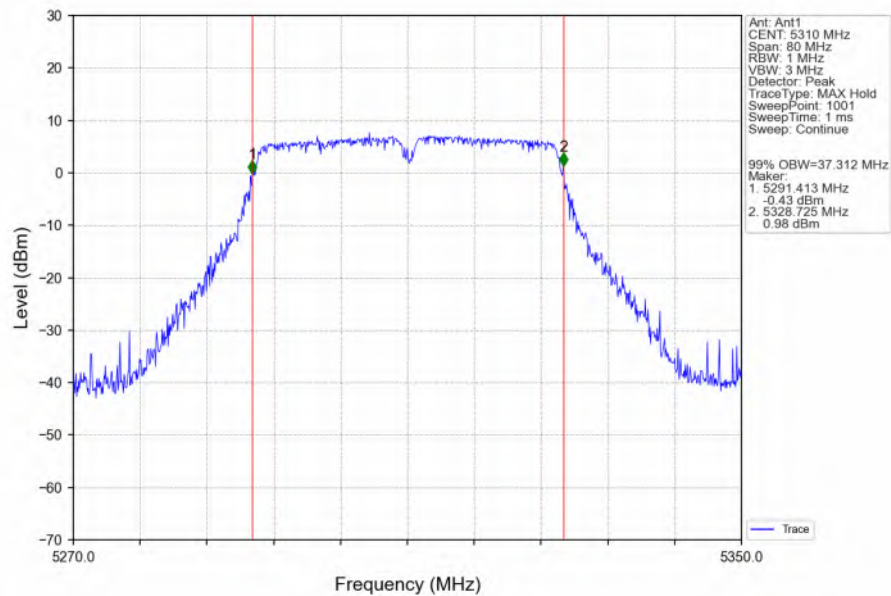


802.11ac(VHT40)_LCH_5510MHz_Ant1_NTNV

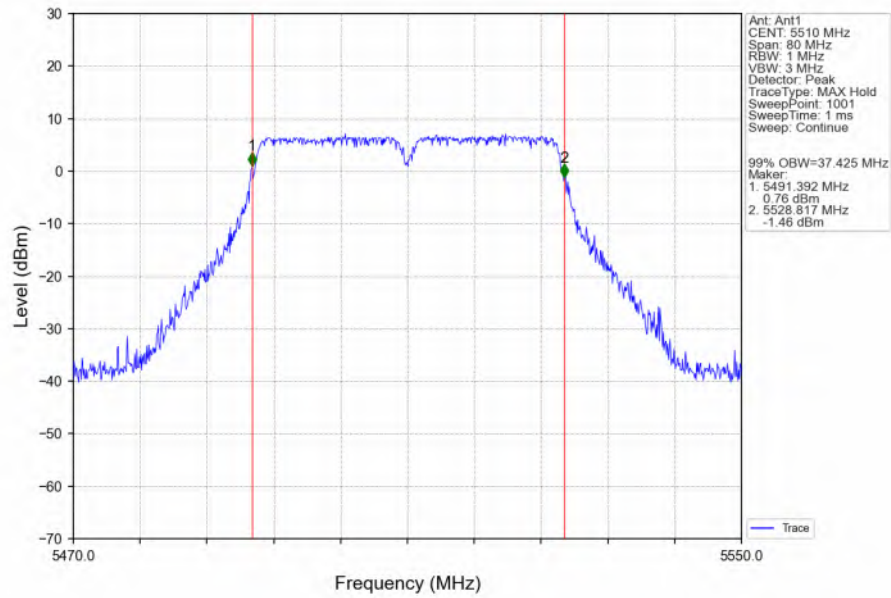


802.11ac(VHT40)_MCH_5550MHz_Ant1_NTNV

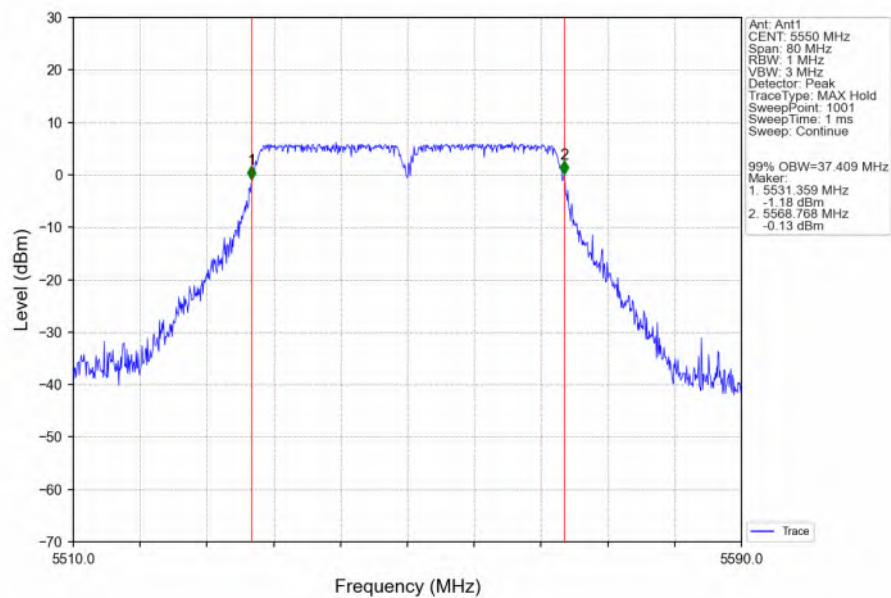


802.11ac(VHT40)_HCH_5670MHz_Ant1_NTNV

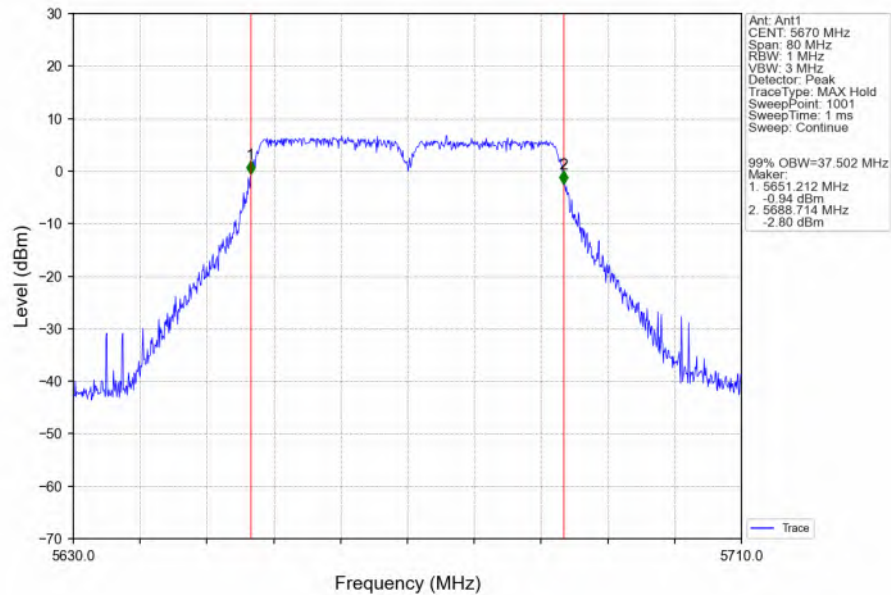


802.11ac(VHT40)_LCH_5755MHz_Ant1_NTNV

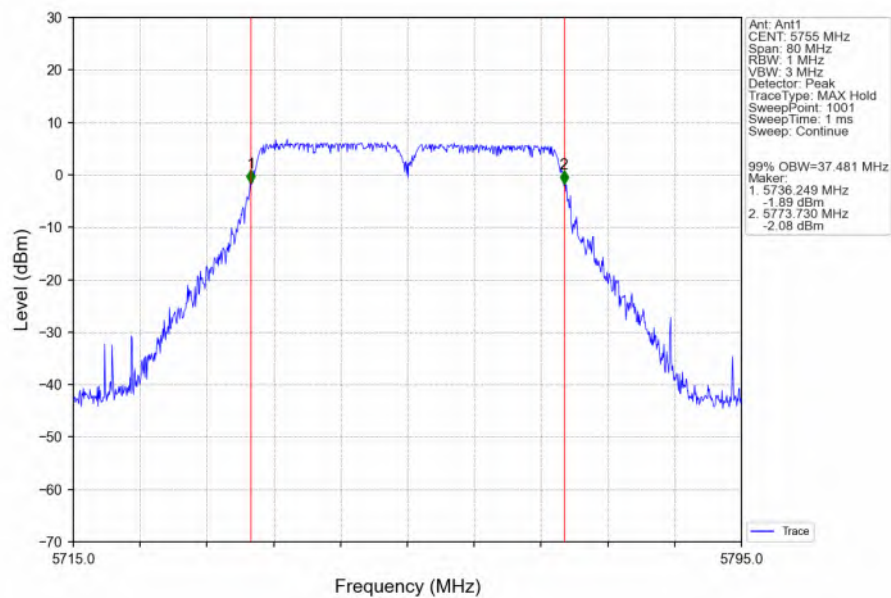


802.11ac(VHT40)_HCH_5795MHz_Ant1_NTNV

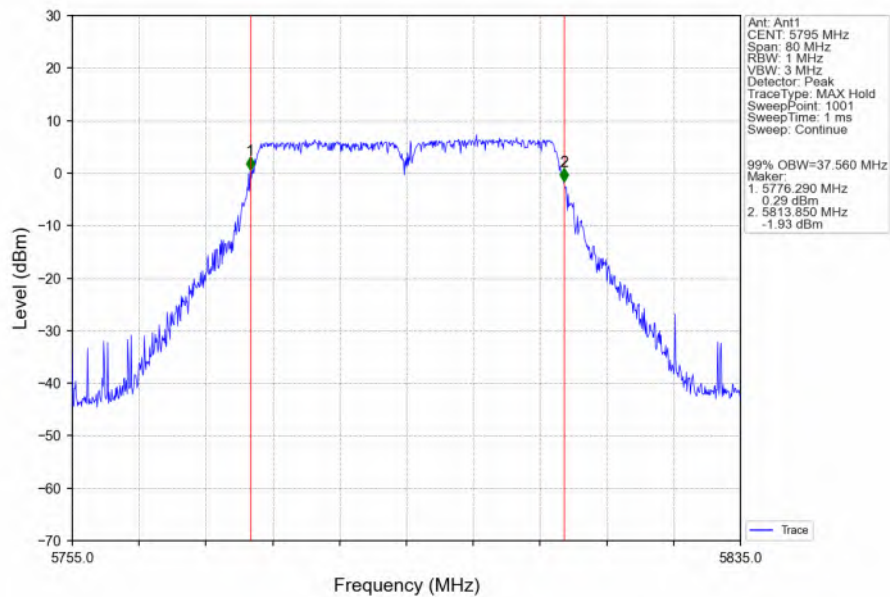


802.11ax(HEW20)_LCH_5180MHz_SU / Ant1_NTNV

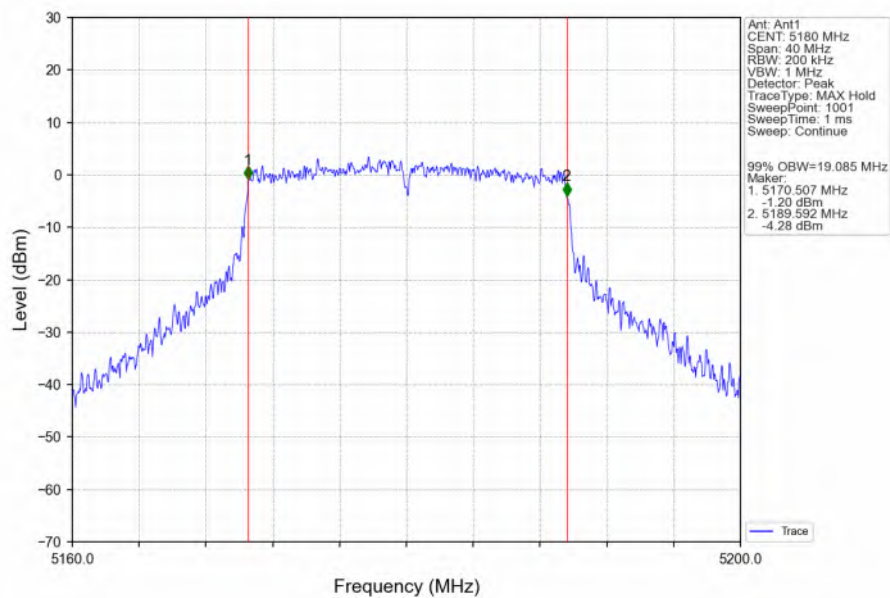


802.11ax(HEW20) MCH 5200MHz SU / Ant1 NTNV

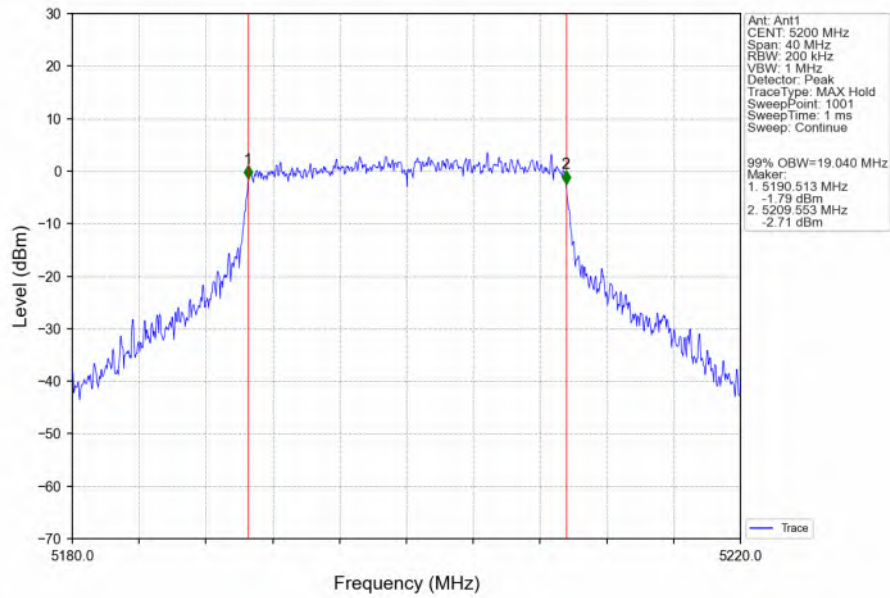


802.11ax(HEW20) HCH 5240MHz SU / Ant1 NTNV

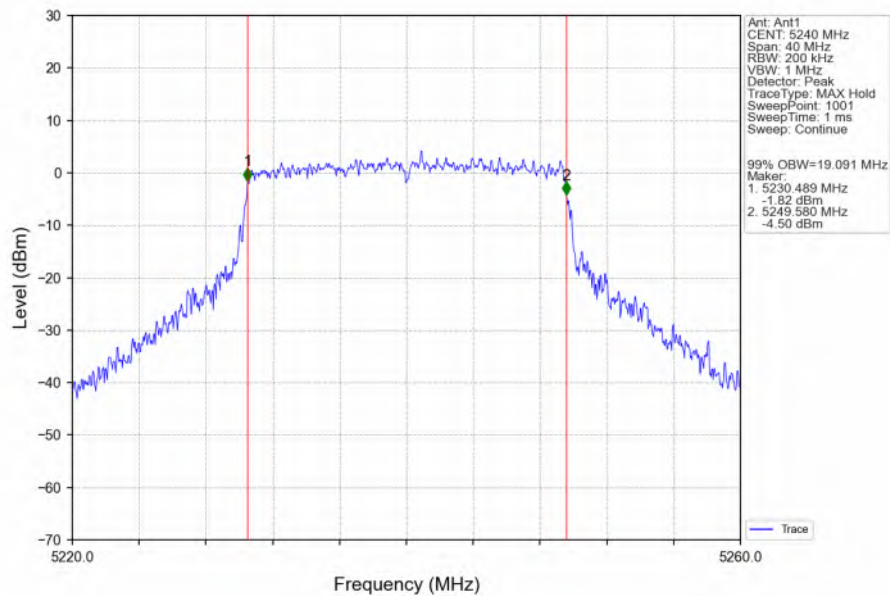


802.11ax(HEW20)_LCH_5260MHz_SU / Ant1_NTNV

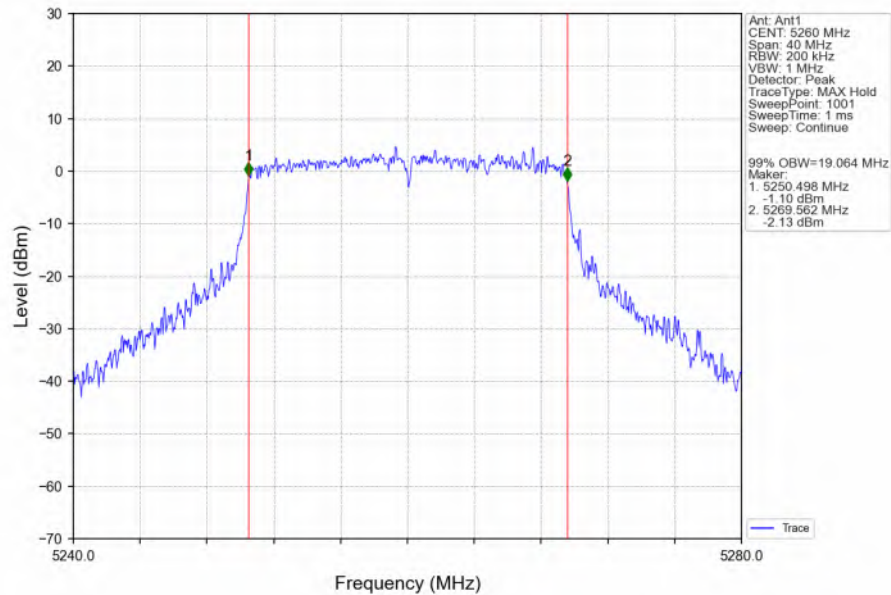


802.11ax(HEW20)_MCH_5300MHz_SU / Ant1_NTNV

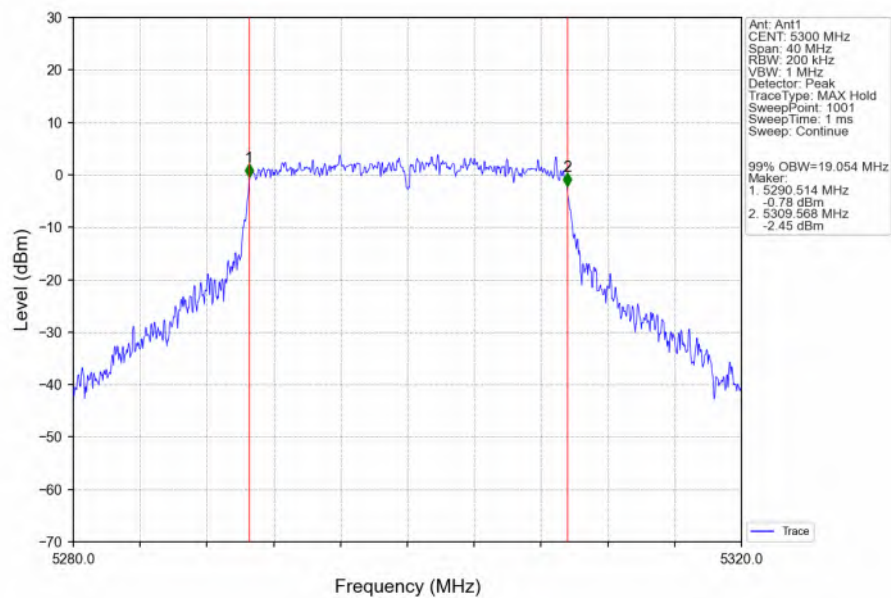


802.11ax(HEW20) HCH 5320MHz SU / Ant1 NTN

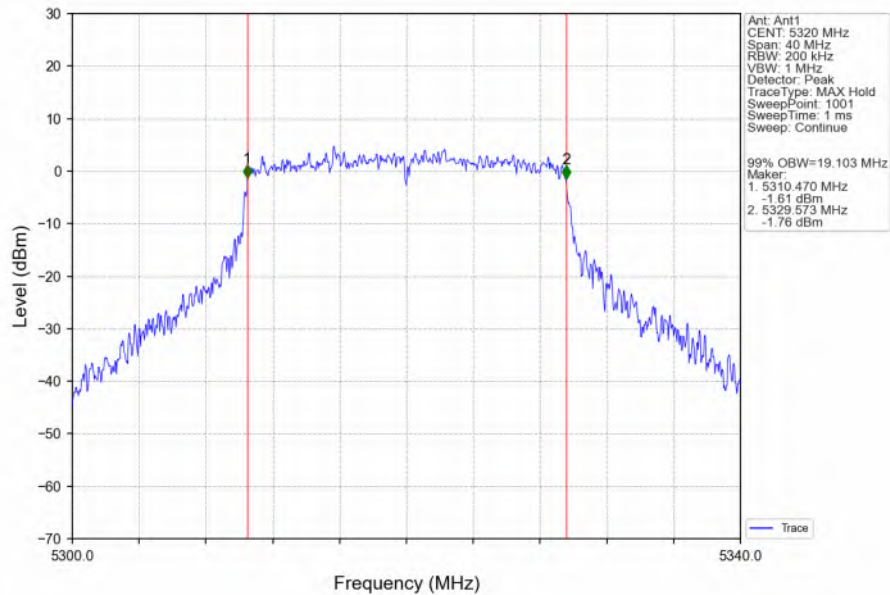


802.11ax(HEW20) LCH 5500MHz SU / Ant1 NTN

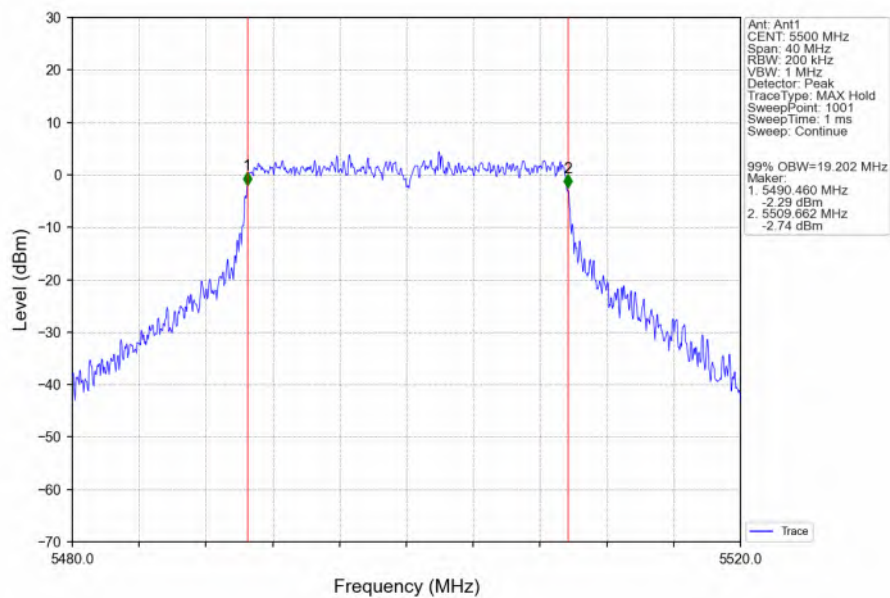


802.11ax(HEW20) MCH 5580MHz SU / Ant1 NTN

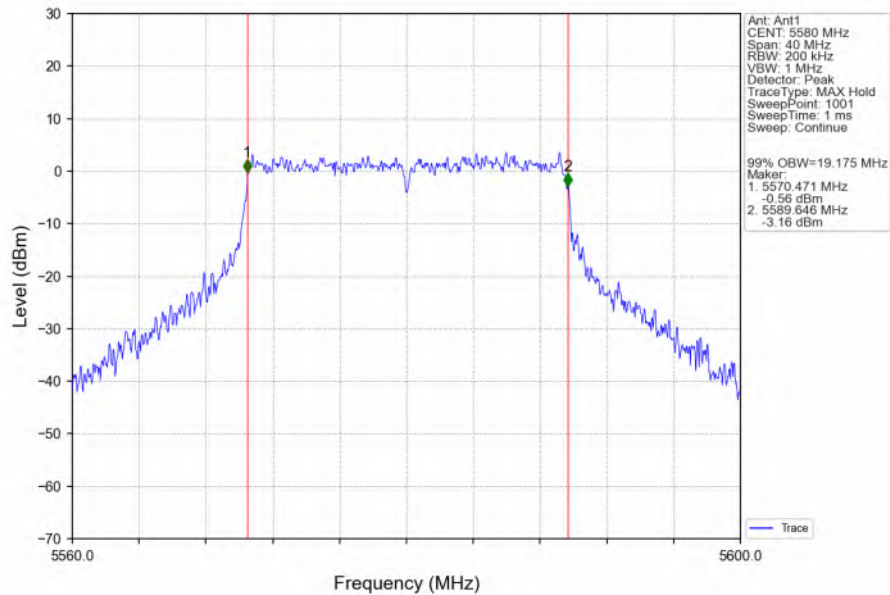


802.11ax(HEW20) HCH 5700MHz SU / Ant1 NTN

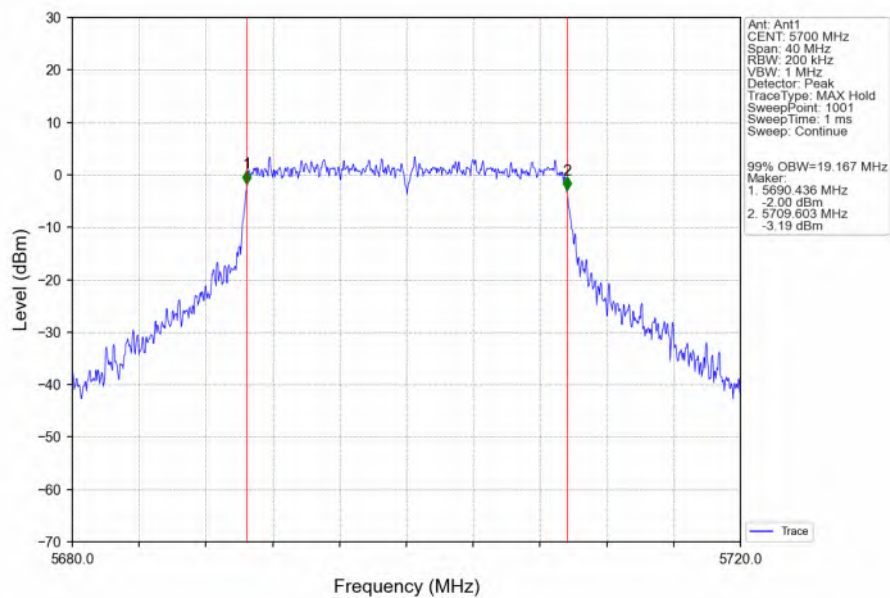


802.11ax(HEW20) LCH 5745MHz SU / Ant1 NTN

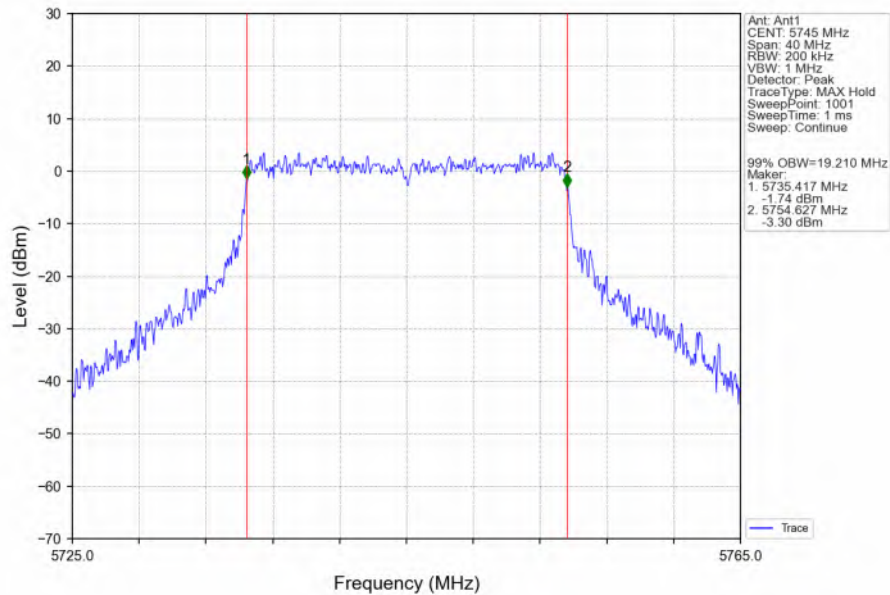


802.11ax(HEW20) MCH 5785MHz SU / Ant1 NTN

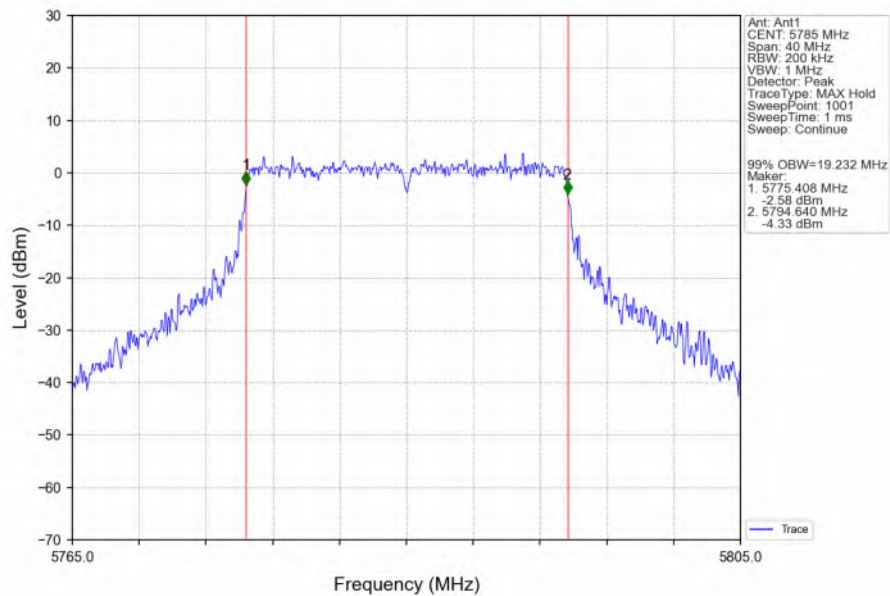


802.11ax(HEW20)_HCH_5825MHz_SU / Ant1_NTNV

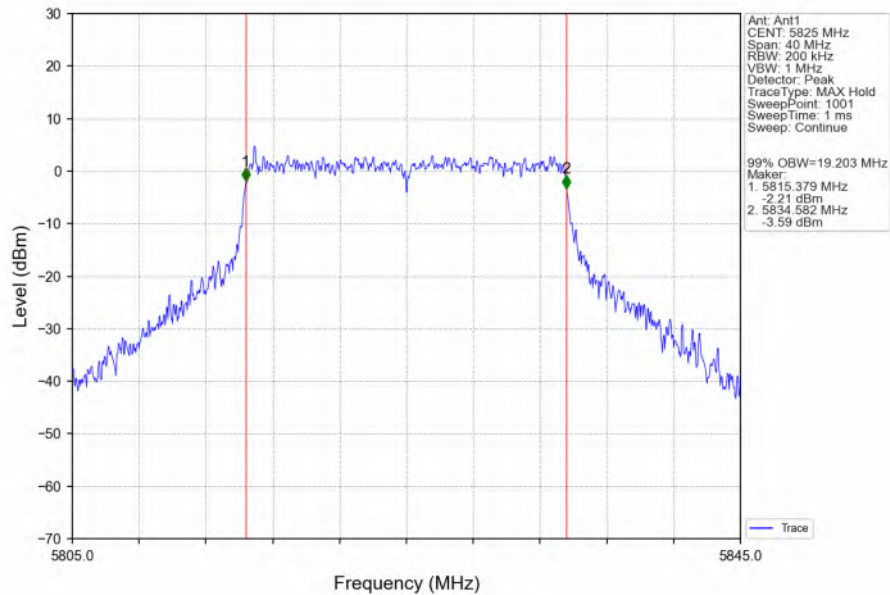


802.11ax(HEW40)_LCH_5190MHz_SU / Ant1_NTNV

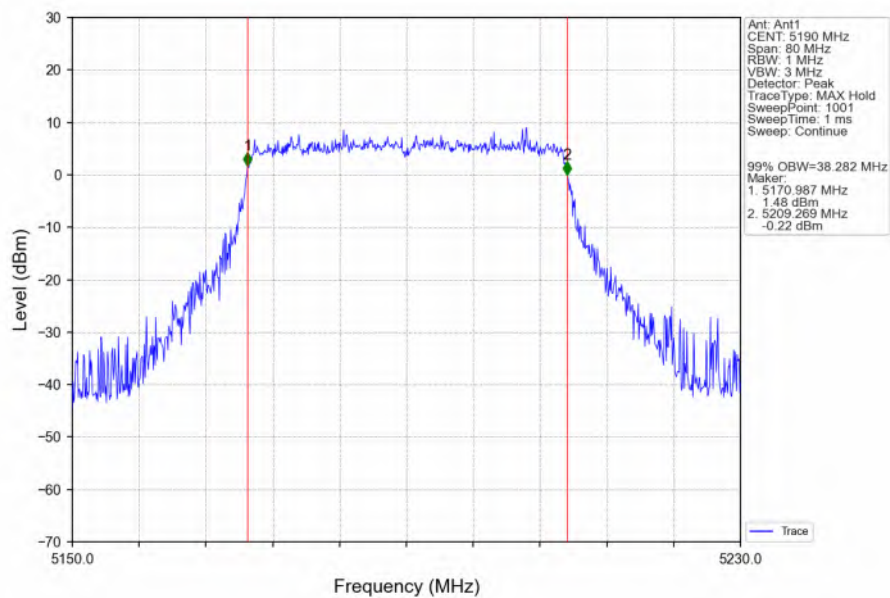


802.11ax(HEW40) HCH 5230MHz SU / Ant1 NTN

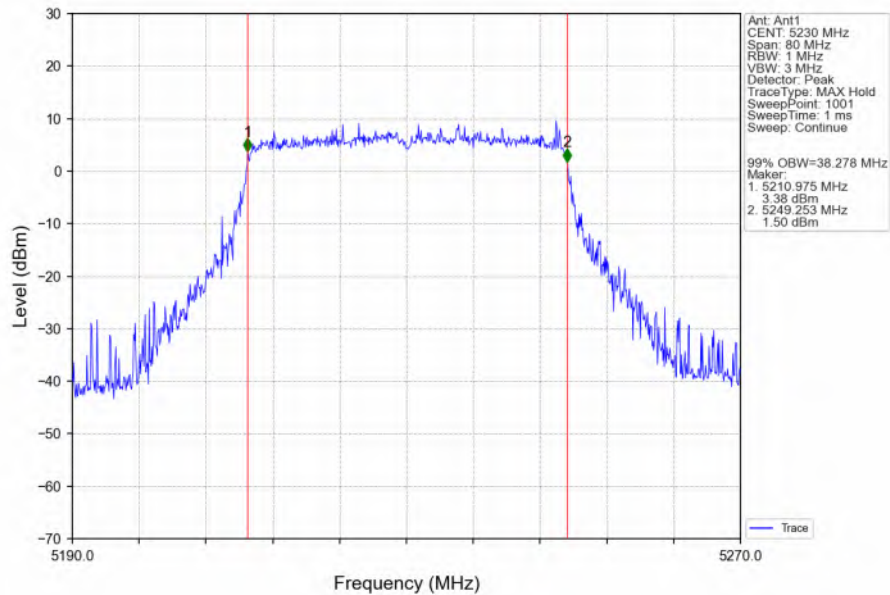


802.11ax(HEW40) LCH 5270MHz SU / Ant1 NTN

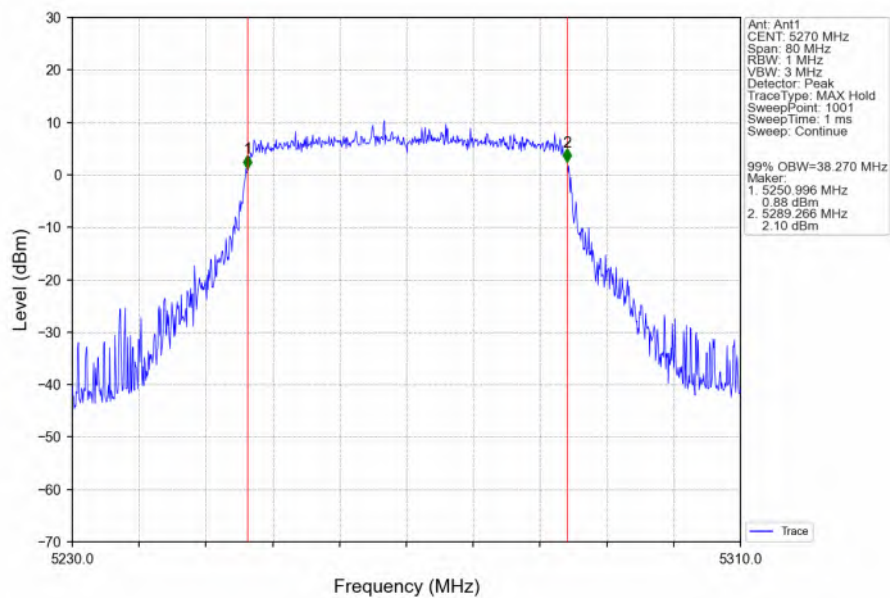


802.11ax(HEW40) HCH 5310MHz SU / Ant1 NTN

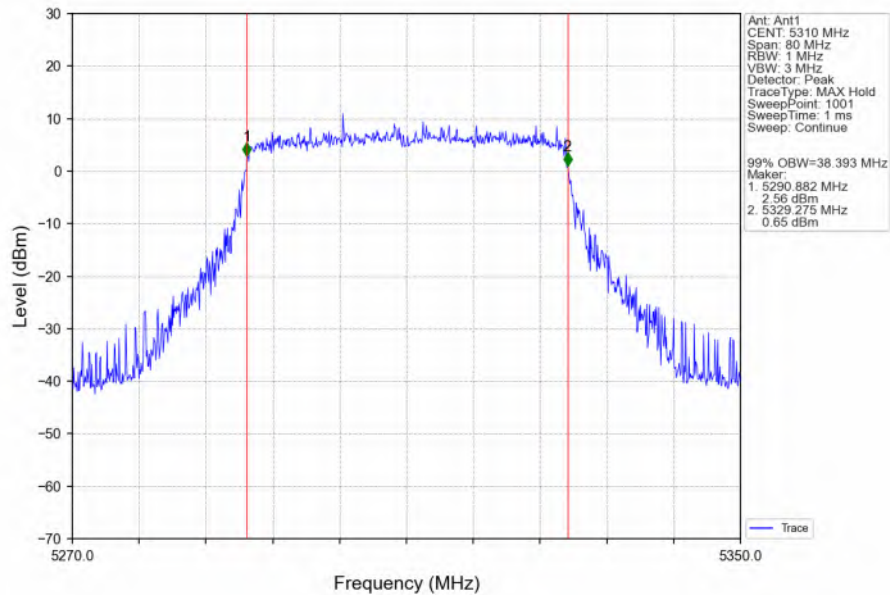


802.11ax(HEW40) LCH 5510MHz SU / Ant1 NTN

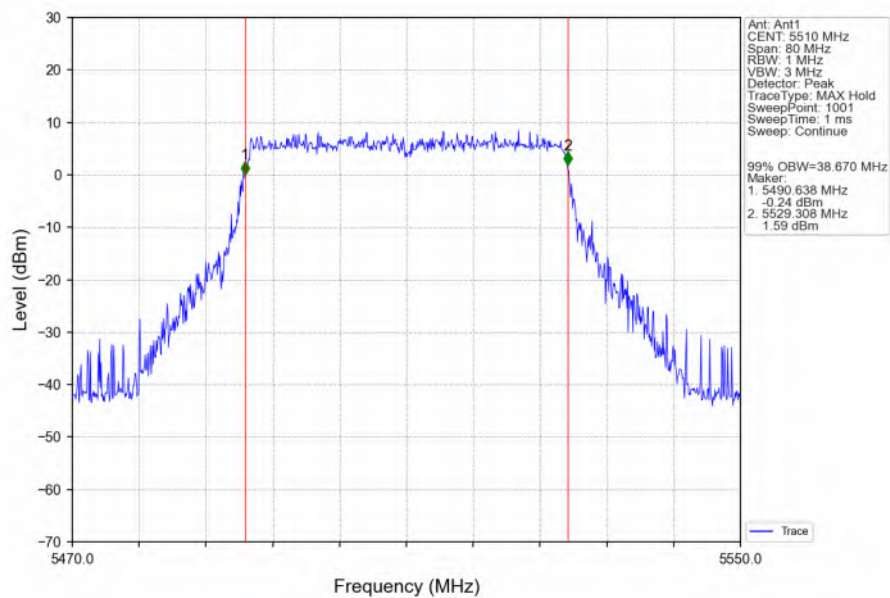


802.11ax(HEW40) MCH 5550MHz SU / Ant1 NTN

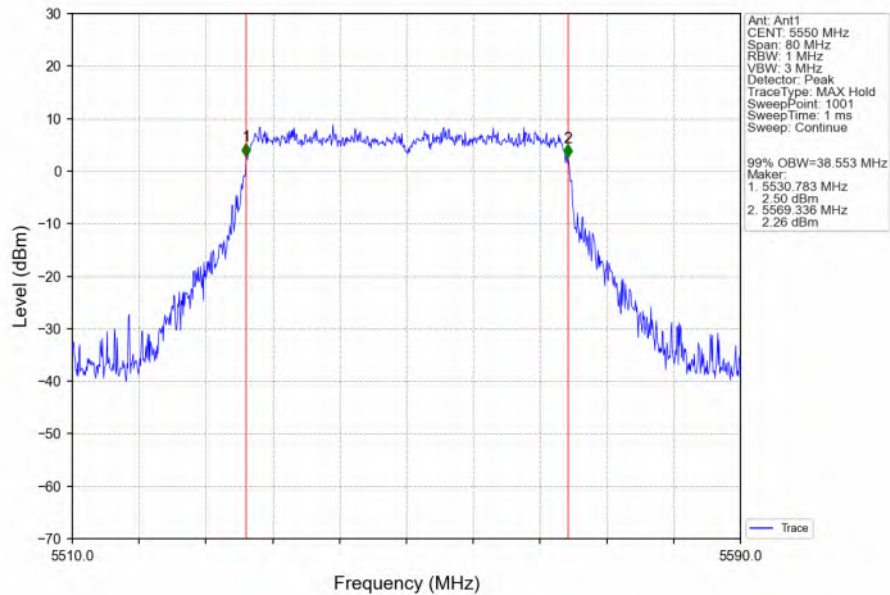


802.11ax(HEW40) HCH 5670MHz SU / Ant1 NTN

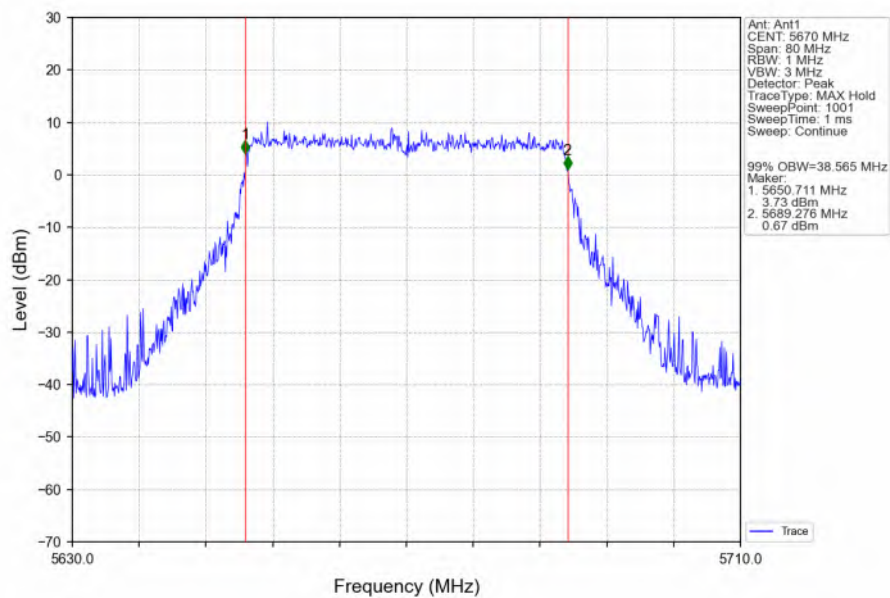

802.11ax(HEW40) LCH 5755MHz SU / Ant1 NTN

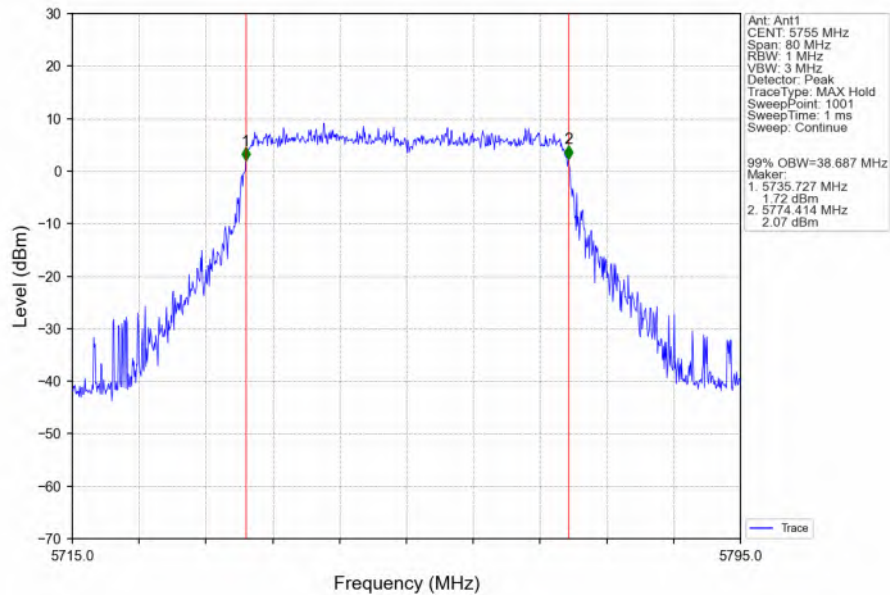


802.11ax(HEW40) HCH 5795MHz SU / Ant1 NTN

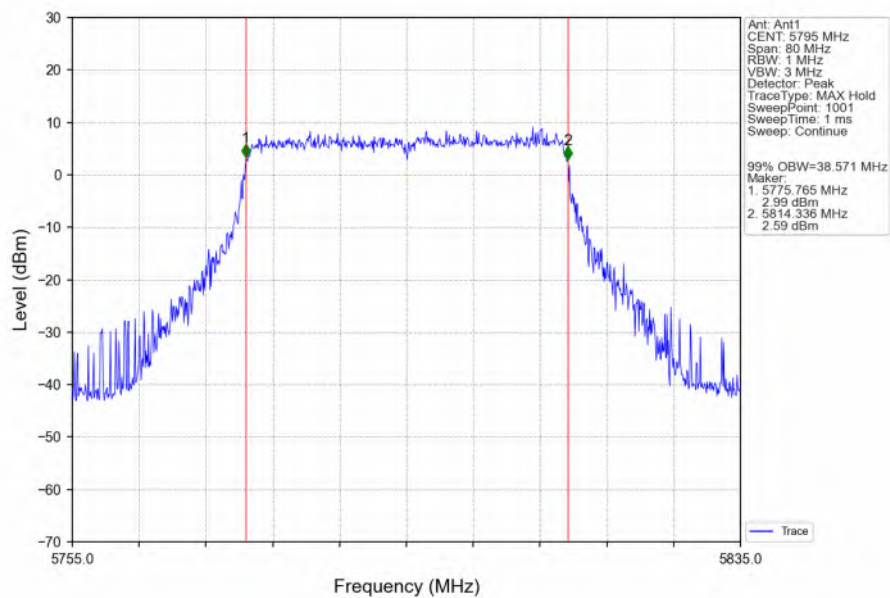


2.2.2 26dB BW


802.11a_LCH_5180MHz_Ant1_NTNV

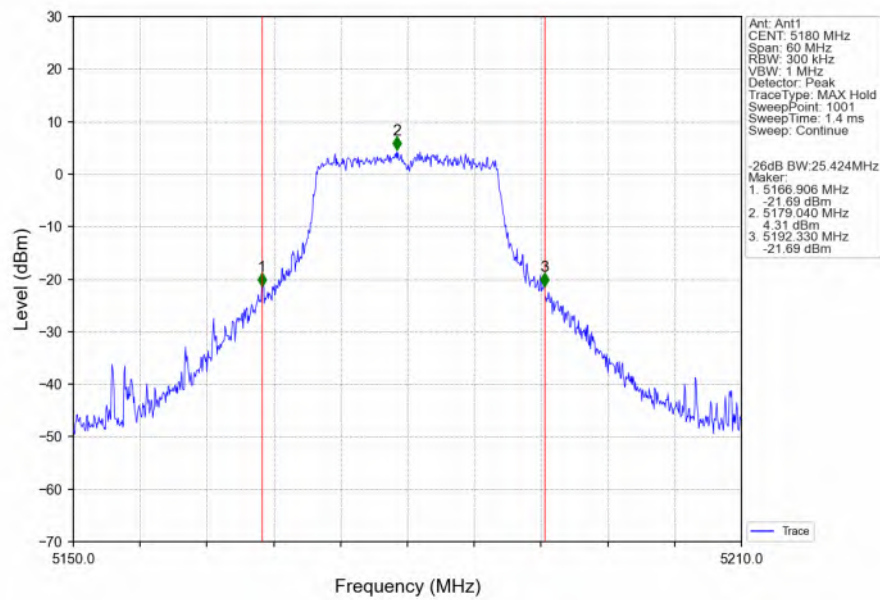


802.11a_MCH_5200MHz_Ant1_NTNV

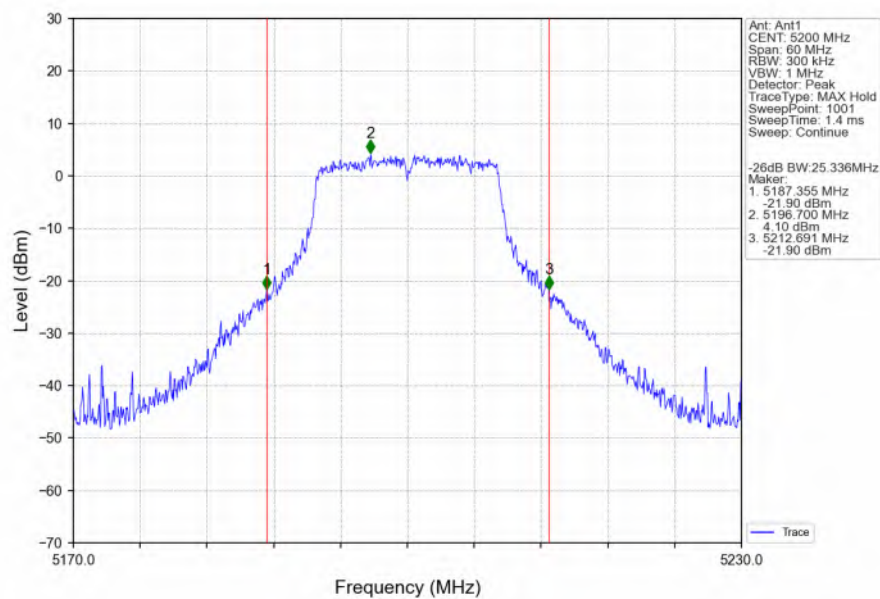


802.11a_HCH_5240MHz_Ant1_NTNV

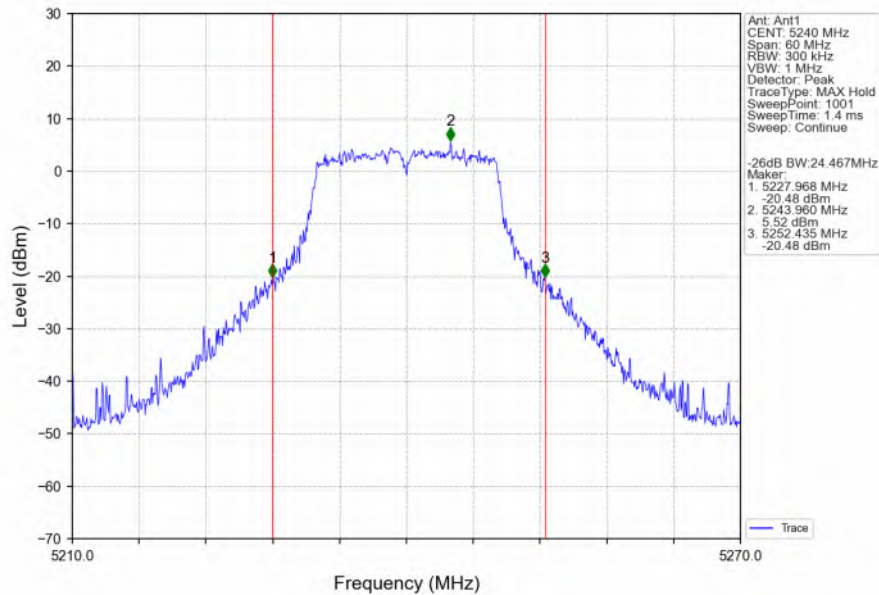


802.11a_LCH_5260MHz_Ant1_NTNV

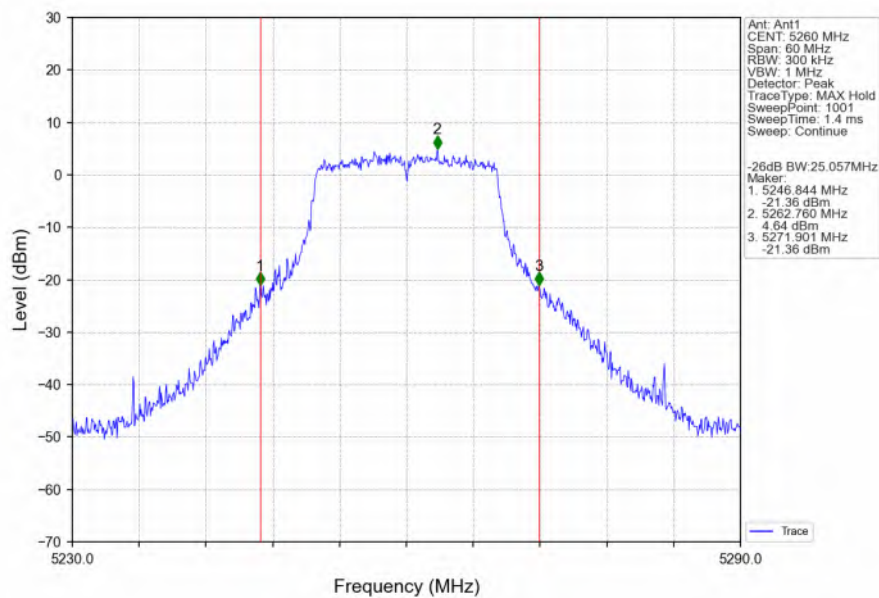


802.11a_MCH_5300MHz_Ant1_NTNV

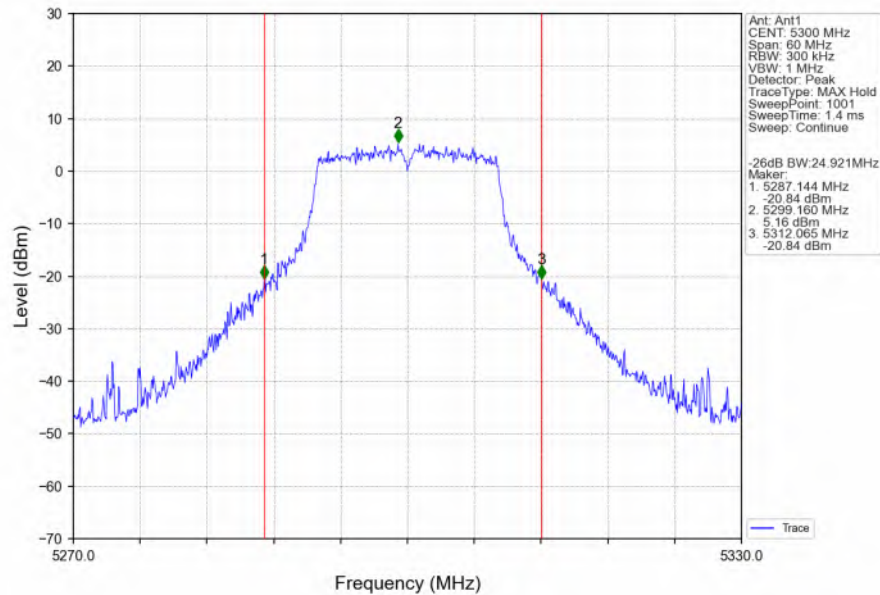


802.11a_HCH_5320MHz_Ant1_NTNV

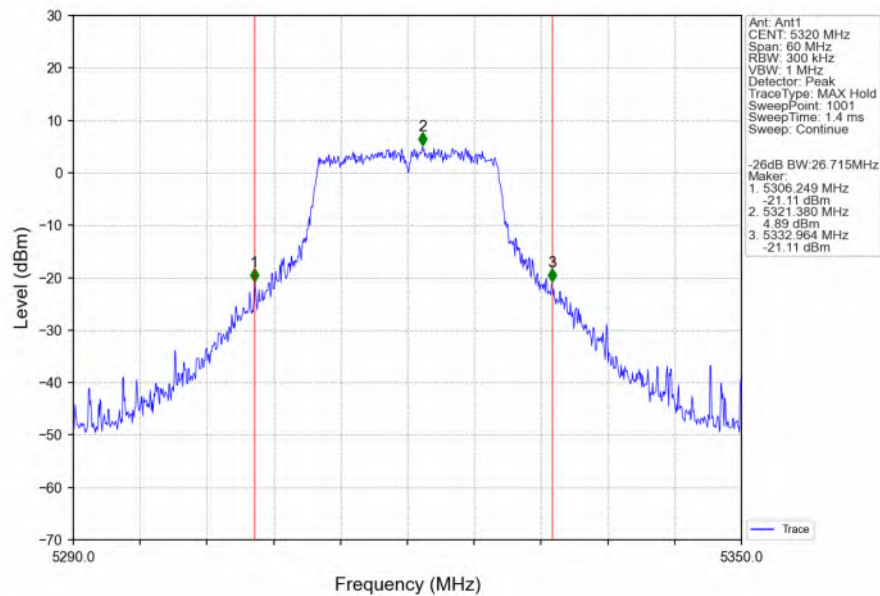


802.11a_LCH_5500MHz_Ant1_NTNV

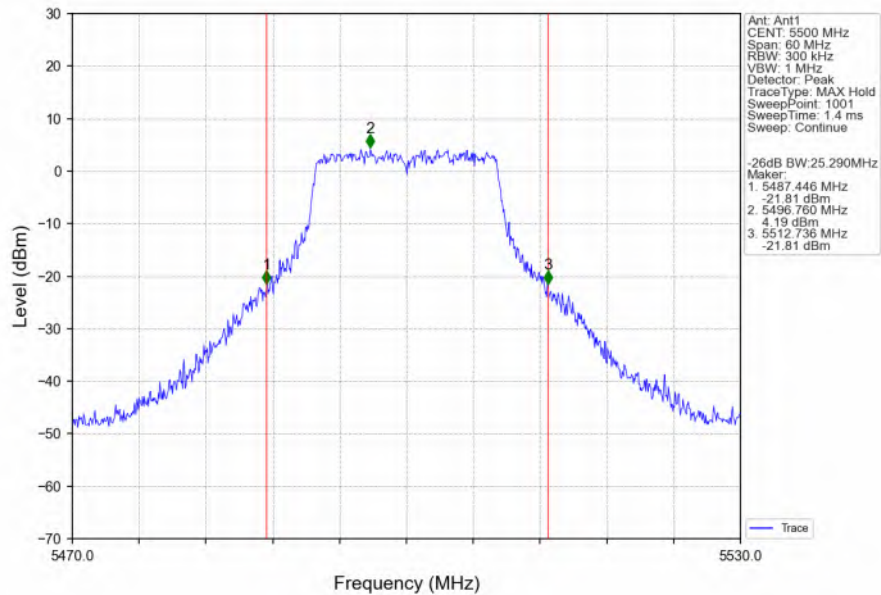


802.11a_MCH_5580MHz_Ant1_NTNV

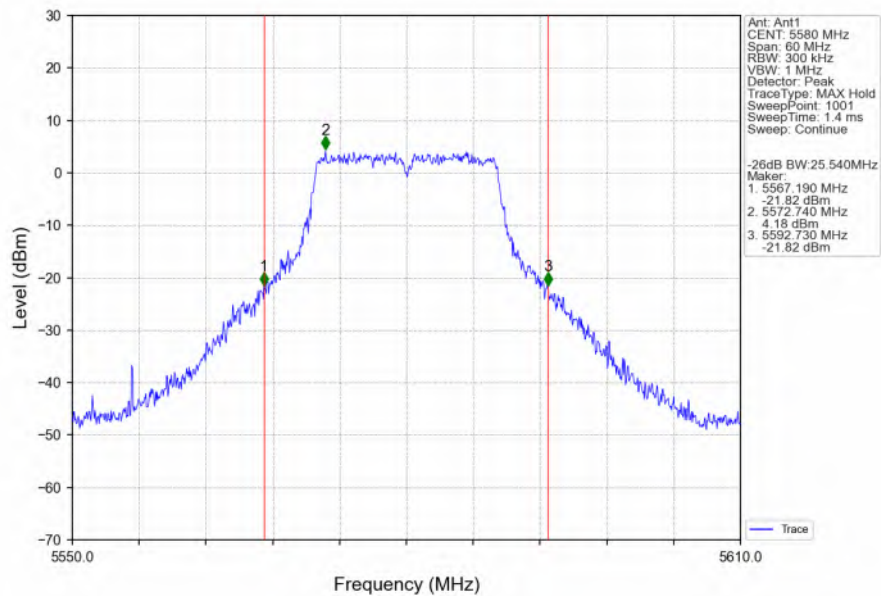


802.11a_HCH_5700MHz_Ant1_NTNV

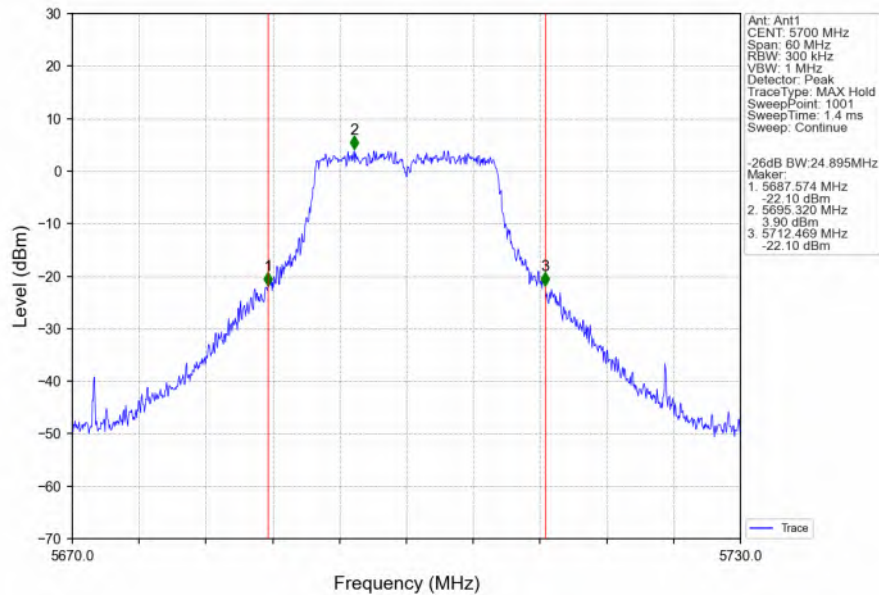


802.11ac(VHT20)_LCH_5180MHz_Ant1_NTNV

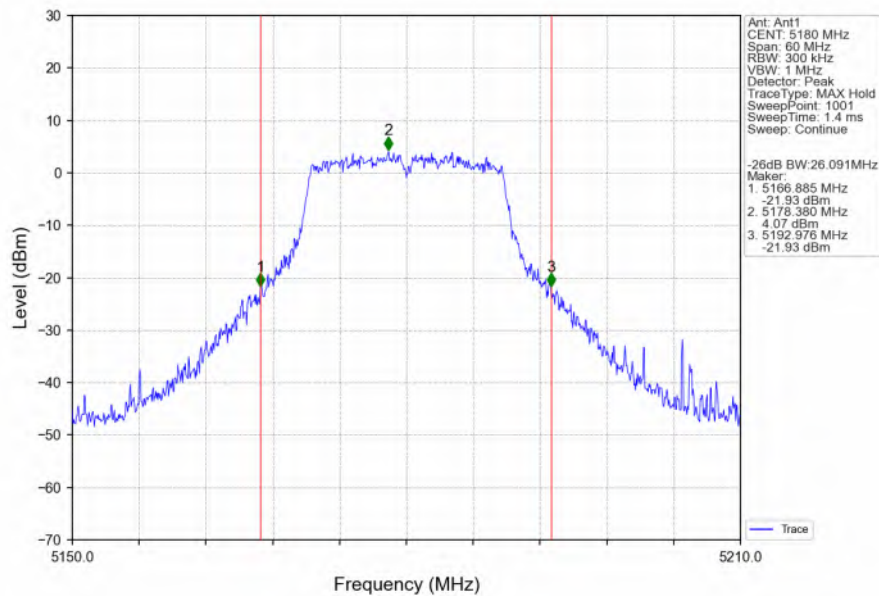


802.11ac(VHT20)_MCH_5200MHz_Ant1_NTNV

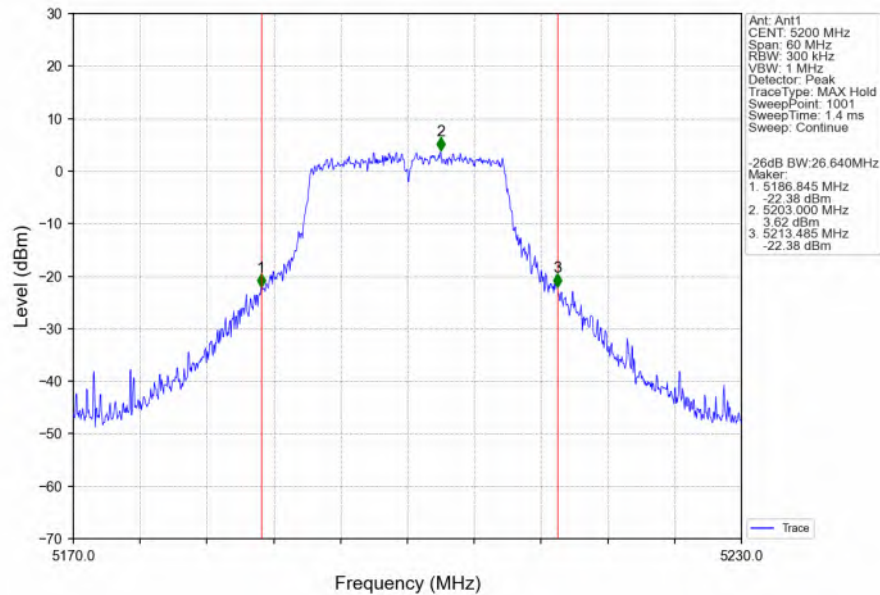

802.11ac(VHT20)_HCH_5240MHz_Ant1_NTNV

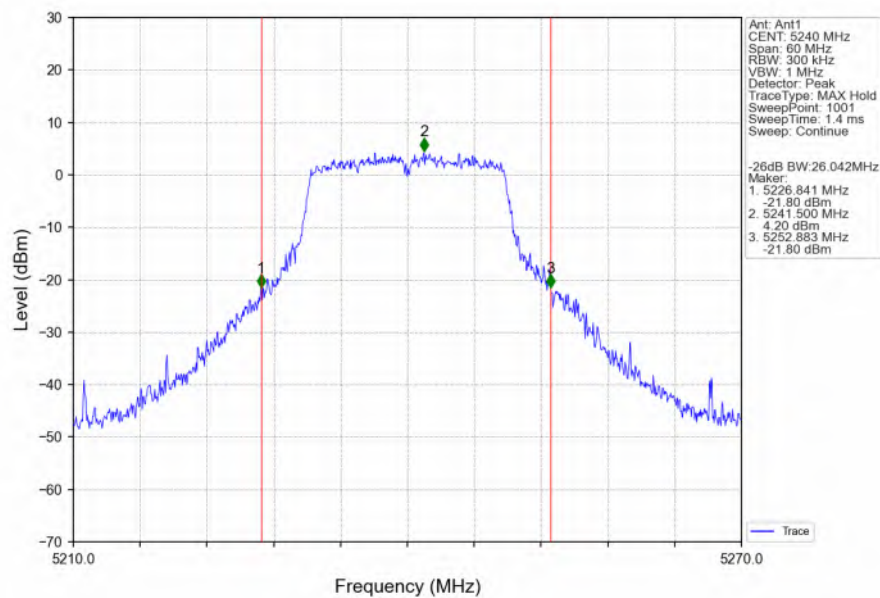

802.11ac(VHT20)_LCH_5260MHz_Ant1_NTNV

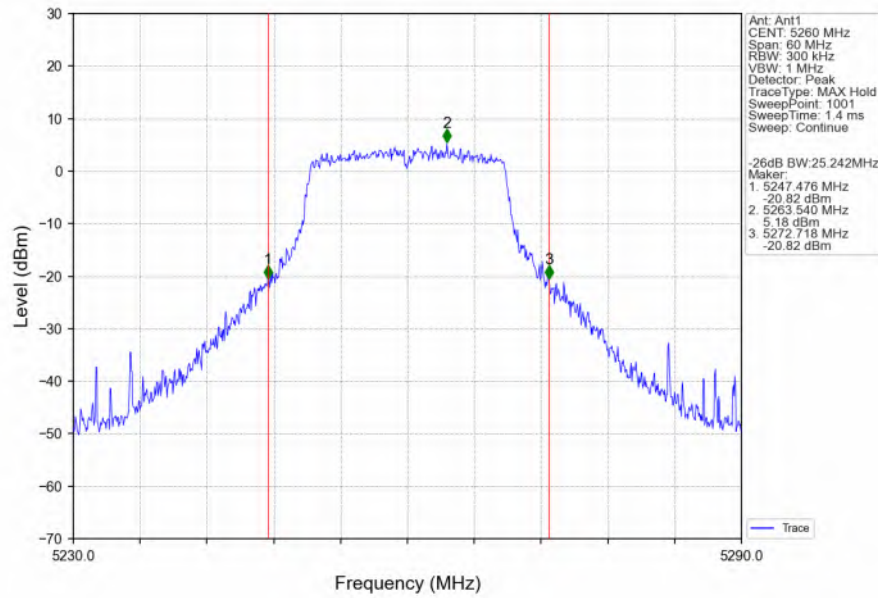

802.11ac(VHT20)_MCH_5300MHz_Ant1_NTNV

