



FCC Radio Test Report

FCC ID: 2BHFC-RFID3

This report concerns: Original Grant

Project No. : 2603C130
Equipment : RFID Module
Brand Name : **mindray**
Model Name : HyBase RFID Module-3
Applicant : Nanjing Mindray Bio-Medical Electronics Co., Ltd.
Address : 666 Middle Zhengfang Road, Jiangning, 211111 Nanjing, Jiangsu, P.R.China
Manufacturer : Nanjing Mindray Bio-Medical Electronics Co., Ltd.
Address : 666 Middle Zhengfang Road, Jiangning, 211111 Nanjing, Jiangsu, P.R.China
Factory : Nanjing Mindray Bio-Medical Electronics Co., Ltd.
Address : 666 Middle Zhengfang Road, Jiangning, 211111 Nanjing, Jiangsu, P.R.China
Date of Receipt : Mar. 12, 2026
Date of Test : Mar. 13, 2026 ~ Mar. 22, 2026
Issued Date : Apr. 22, 2026
Test Sample : Engineering Sample No.: DG920260312346
Standard(s) : FCC CFR Title 47, Part 15, Subpart C

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc. (Dongguan)

Prepared by

: Chella Zheng
Chella Zheng

Approved by

: Chay Cai
Chay Cai

No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

Tel: +86-769-8318-3000

Web: www.newbtl.com

Service mail: btl_qa@newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. BTL assumes no responsibility for the data provided by the customer, any statements, inferences or generalizations drawn by the customer or others from the reports issued by BTL.

The report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the ISO/IEC 17025: 2017 requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REVISION HISTORY	5
1 . APPLICABLE STANDARDS	6
2 . SUMMARY OF TEST RESULTS	6
2.1 TEST FACILITY	7
2.2 MEASUREMENT UNCERTAINTY	7
2.3 TEST ENVIRONMENT CONDITIONS	7
3 . GENERAL INFORMATION	8
3.1 GENERAL DESCRIPTION OF EUT	8
3.2 DESCRIPTION OF TEST MODES	9
3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	10
3.4 SUPPORT UNITS	10
4 . AC POWER LINE CONDUCTED EMISSIONS TEST	11
4.1 LIMIT	11
4.2 TEST PROCEDURE	11
4.3 DEVIATION FROM TEST STANDARD	11
4.4 TEST SETUP	12
4.5 EUT OPERATING CONDITIONS	12
4.6 TEST RESULTS	12
5 . RADIATED EMISSION TEST	13
5.1 LIMIT	13
5.2 TEST PROCEDURE	13
5.3 DEVIATION FROM TEST STANDARD	13
5.4 TEST SETUP	14
5.5 EUT OPERATING CONDITIONS	15
5.6 TEST RESULT - 9 KHZ TO 30 MHZ	15
5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ	15
6 . BANDWIDTH	16
6.1 LIMIT	16
6.2 TEST PROCEDURE	16
6.3 DEVIATION FROM STANDARD	16
6.4 TEST SETUP	16
6.5 EUT OPERATION CONDITIONS	16
6.6 TEST RESULTS	16

Table of Contents**Page**

7 . MEASUREMENT INSTRUMENTS LIST	17
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	18
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	21
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ	26
APPENDIX D - BANDWIDTH	29

REVISION HISTORY

Report No.	Version	Description	Issued Date	Note
BTL-FCCP-1-2603C130	R00	Original Report.	Apr. 22, 2026	Valid

1. APPLICABLE STANDARDS

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standard:

ANSI C63.10-2020

2. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC CFR Title 47, Part 15, Subpart C				
Standard(s) Section	Test Item	Test Result	Judgment	Remark
15.207	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C	PASS	-----
15.215(c)	Bandwidth	APPENDIX D	PASS	-----
15.203	Antenna Requirement	-----	PASS	Note(2)

NOTE:

- (1) "N/A" denotes test is not applicable to this device.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.

2.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No.3, Jinshagang 1st Road, Dalang, Dongguan, Guangdong People's Republic of China.

BTL's Registration Number for FCC: 747969

BTL's Designation Number for FCC: CN1377

2.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95.45% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. AC power line conducted emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLC02	CISPR	150kHz ~ 30MHz	2.66

B. Radiated emissions Measurement:

Test Site	Method	Measurement Frequency Range	U_1 (dB)
DGDLCB03	CISPR	9kHz ~ 30MHz	2.26

Test Site	Method	Measurement Frequency Range	Ant. H / V	U_1 (dB)
DGDLCB03 (3m)	CISPR	30MHz ~ 200MHz	V	4.40
		30MHz ~ 200MHz	H	3.62
		200MHz ~ 1,000MHz	V	4.58
		200MHz ~ 1,000MHz	H	3.98

C. Other Measurement:

Test Item	Uncertainty
Bandwidth	0.75 %
Temperature	0.7 °C
Humidity	1.7 %

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

2.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By	Test Date
AC Power Line Conducted Emissions	23°C	52%	AC 120V/60Hz	Hayden Chen	Mar. 19, 2026
Radiated Emissions-9kHz to 30MHz	23°C	44%	DC 5V	Hayden Chen	Mar. 19, 2026
Radiated Emissions-30MHz to 1000MHz	23°C	45%	DC 5V	Torin Long	Mar. 21, 2026
Bandwidth	28°C	49%	DC 5V	Jensen Zhou	Mar. 19, 2026

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

Equipment	RFID Module
Brand Name	mindray
Test Model	HyBase RFID Module-3
Model Name	HyBase RFID Module-3
Model Difference(s)	N/A
Power Source	DC power supply.
Power Rating	DC 5V
Operation Frequency	127.5kHz

Note:

1. The above EUT information is declared by manufacturer and for more detailed features description, please refers to the manufacturer's specifications or user's manual.

2. Channel List:

Test Channel	Test Frequency (kHz)
01	127.5

3.2 DESCRIPTION OF TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX Mode_127.5kHz


Following mode(s) was (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 1	TX Mode_127.5kHz

Radiated emissions test	
Final Test Mode	Description
Mode 1	TX Mode_127.5kHz

Bandwidth test	
Final Test Mode	Description
Mode 1	TX Mode_127.5kHz

3.3 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

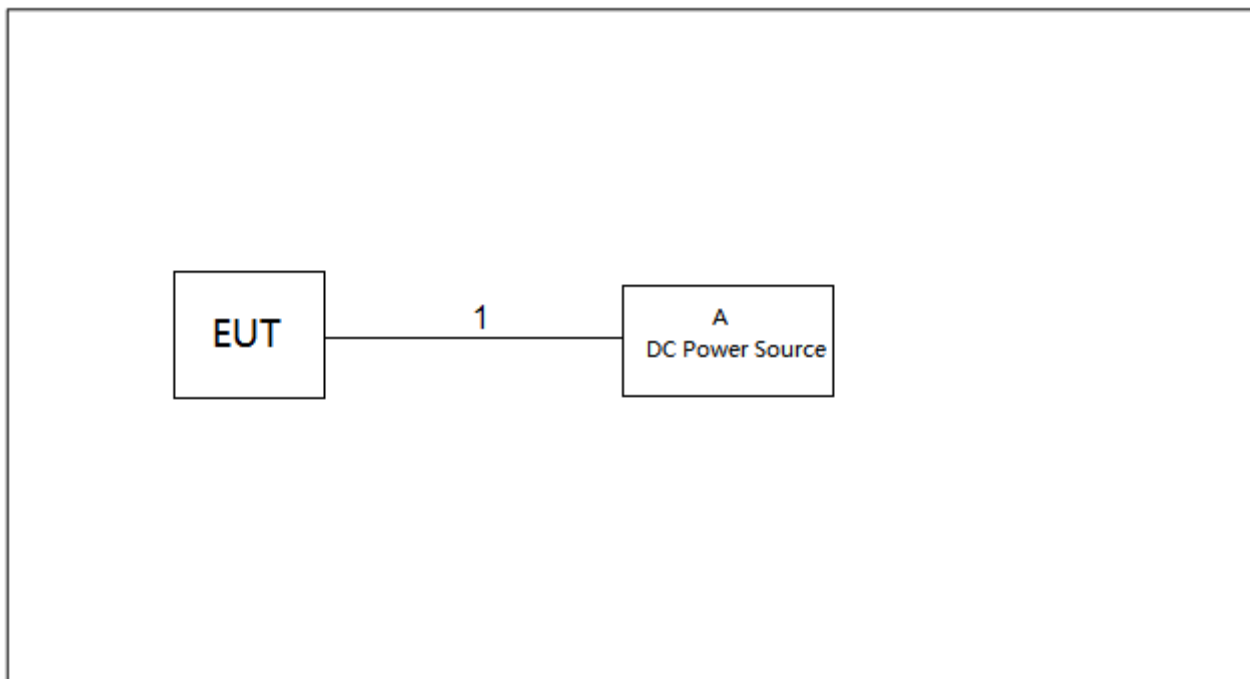

3.4 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	DC Power Source	TRUE-POWER	GPC30300N	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.2m

4. AC POWER LINE CONDUCTED EMISSIONS TEST

4.1 LIMIT

Frequency of Emission (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.50	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.


4.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD

No deviation

4.4 TEST SETUP

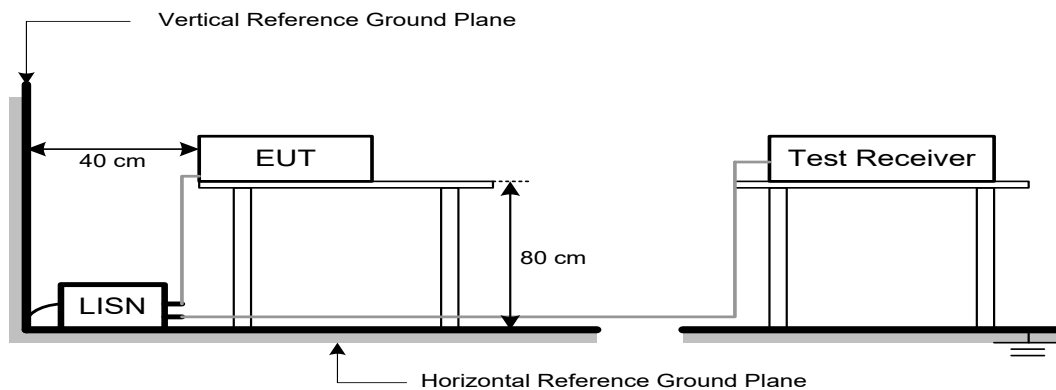

4.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

4.6 TEST RESULTS

Please refer to the APPENDIX A.

Remark:

- (1) All readings are QP Mode value unless otherwise stated AVG in column of 『Note』 . If the QP Mode Measured value compliance with the QP Limits and lower than AVG Limits, the EUT shall be deemed to meet both QP & AVG Limits and then only QP Mode was measured, but AVG Mode didn't perform..In this case, a " * " marked in AVG Mode column of Interference Voltage Measured.
- (2) Measuring frequency range from 150 kHz to 30 MHz.

5. RADIATED EMISSION TEST

5.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSION MEASUREMENT(9 kHz-1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

Note:

- (1) The limit for radiated test was performed according to FCC CFR Title 47, Part 15, Subpart C.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

5.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1 GHz)
- b. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- c. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- d. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- e. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform. (below 1 GHz)
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

5.3 DEVIATION FROM TEST STANDARD


No deviation.

5.4 TEST SETUP

9 kHz to 30 MHz

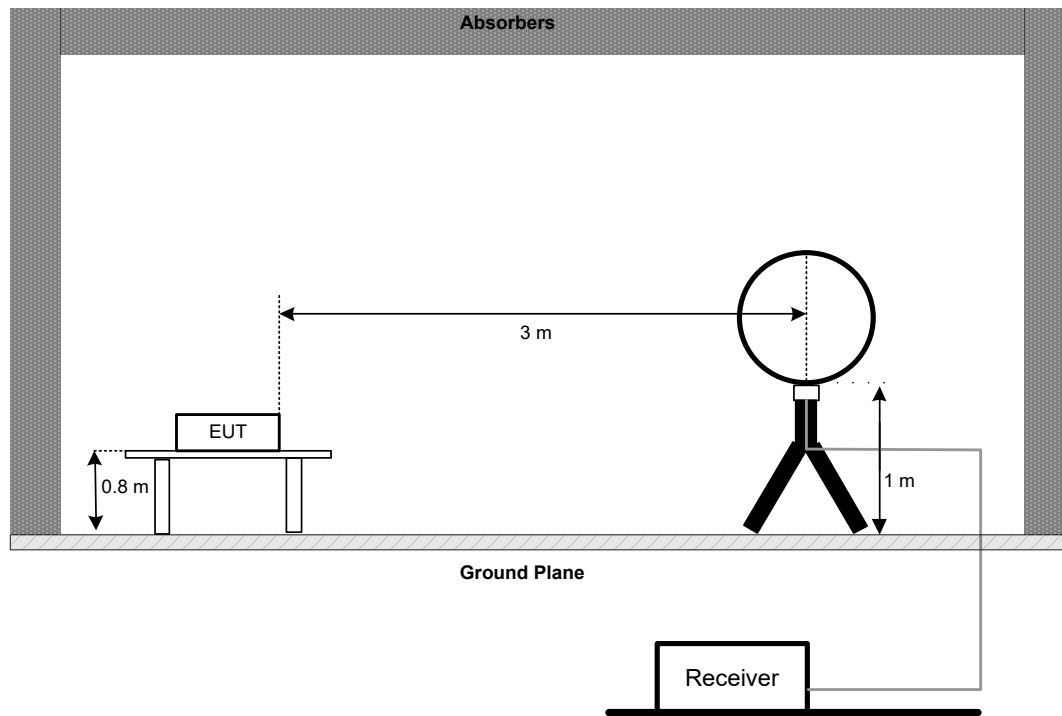

30 MHz to 1 GHz

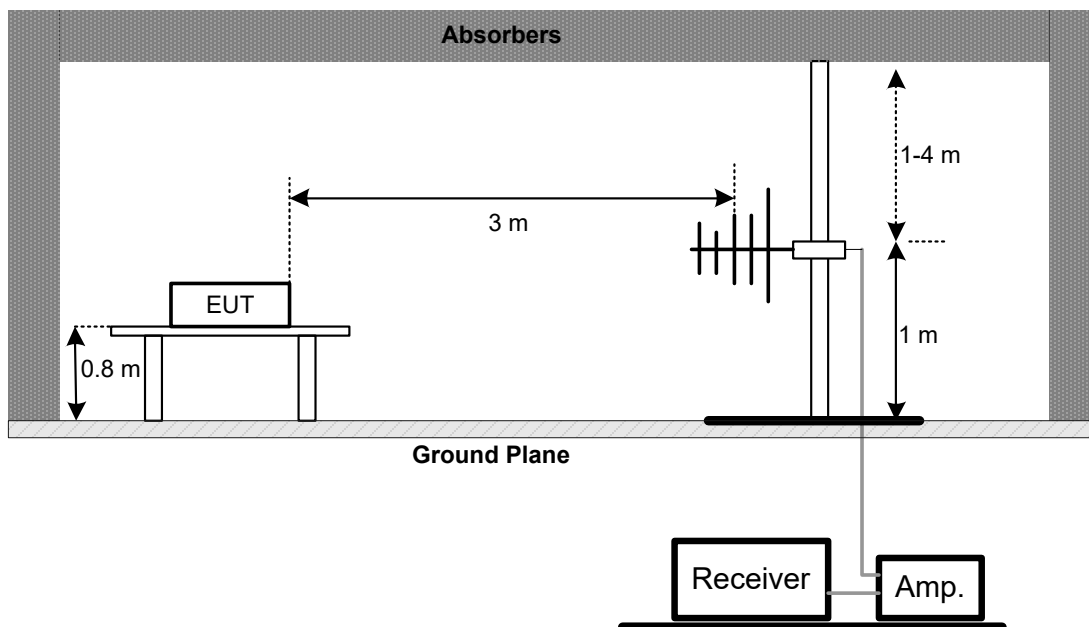

5.5 EUT OPERATING CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULT - 9 kHz TO 30 MHz

Please refer to the APPENDIX B

Remark:

- (1) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (2) Limit line = specific limits (dBuV) + distance extrapolation factor.

5.7 TEST RESULTS - 30 MHZ TO 1000 MHZ

Please refer to the APPENDIX C.

6. BANDWIDTH

6.1 LIMIT

Section	Test Item	Limit
15.215(c)	20 dB Bandwidth	-

6.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Span Frequency	Between 2 times and 5 times the BW
RBW	Range of 1% to 5% of the BW
VBW	Approximately 3 times RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP



6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX D.

7. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	EMI TEST RECEIVER	R&S	ESCI	100382	Nov. 21, 2026
2	TWO-LINE V-NETWORK	R&S	ENV216	101447	Nov. 21, 2026
3	BTL_RE_System	BTL	BTL_RE_System	N/A	N/A
4	Cable	N/A	SFT205-NMNM-9M-001	9M	Jul. 08, 2026
5	643 Shield Room	ETS	6*4*3	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Active Loop Antenna	Schwarzbeck	FMZB 1513-60B	00034	Apr. 11, 2026
2	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
3	Cable	RegalWay	LMR400-NMNM-6m	N/A	Apr. 26, 2026
4	Cable	RegalWay	LMR400-NMRANM-3.5m	N/A	Apr. 26, 2026
5	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
6	966 Chamber room	CM	9*6*6	N/A	May 15, 2026

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Trilog-Broadband Antenna	Schwarzbeck	VULB 9168	01462	Dec. 07, 2026
2	Attenuator	EMC INSTRUMENT	EMCI-N-6-06	AT-06009	Dec. 07, 2026
3	Preamplifier	EMC INSTRUMENT	EMC001330	980998	May 17, 2026
4	Cable	RegalWay	LMR400-NMNM-12.5m	N/A	Jun. 04, 2026
5	Cable	RegalWay	LMR400-NMNM-3m	N/A	Jun. 04, 2026
6	Cable	RegalWay	LMR400-NMNM-0.5m	N/A	Jun. 04, 2026
7	Receiver	Agilent	N9038A	MY52130039	Jul. 25, 2026
8	Positioning Controller	MF	MF-7802	N/A	N/A
9	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
10	966 Chamber room	CM	9*6*6	N/A	May 15, 2026


Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	FSV Signal & Spectrum Analyzer	R&S	FSV3044	101682	Oct. 17, 2026

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode	TX Mode_127.5kHz	Phase	Line
-----------	------------------	-------	------

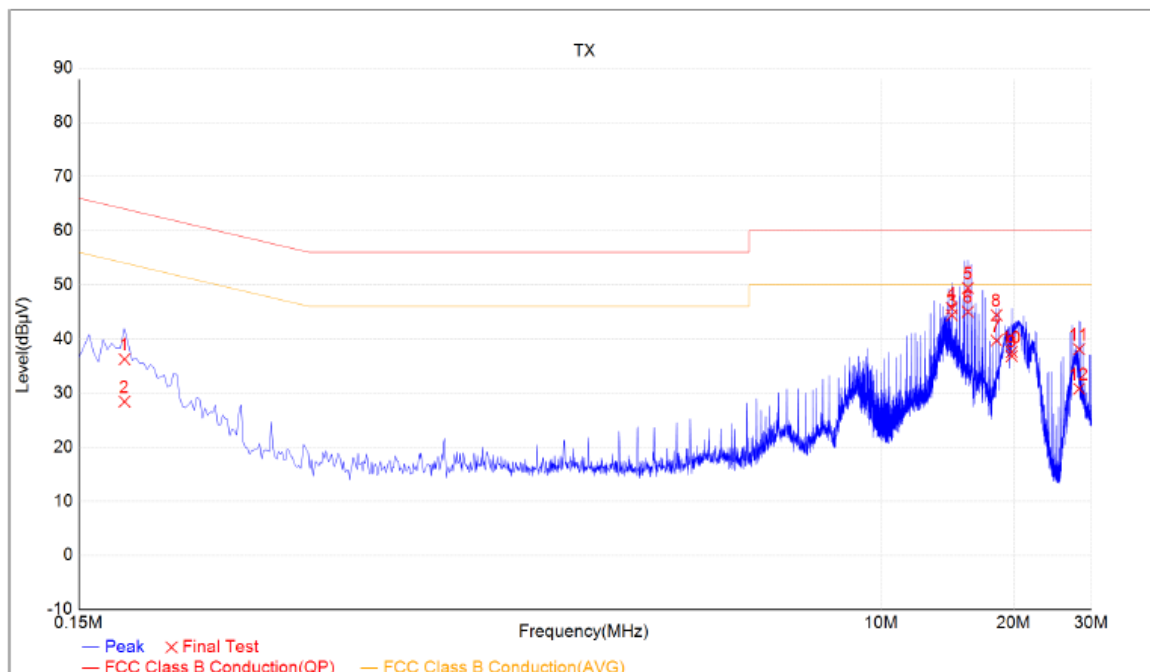


Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1903	25.97	10.28	36.25	64.04	-27.78	QP	
	2	0.1903	18.16	10.28	28.43	54.04	-25.6	AVG	
	3	14.446	33.87	10.52	44.39	60	-15.61	QP	
*	4	14.446	35.12	10.52	45.64	50	-4.36	AVG	
	5	15.7103	38.89	10.53	49.42	60	-10.58	QP	
	6	15.7103	34.47	10.53	45.01	50	-4.99	AVG	
	7	18.2459	29.13	10.57	39.7	60	-20.3	QP	
	8	18.2459	33.85	10.57	44.42	50	-5.58	AVG	
	9	19.7659	26.21	10.6	36.81	60	-23.19	QP	
	10	19.7659	26.97	10.6	37.57	50	-12.43	AVG	
	11	28.13	27.9	10.2	38.1	60	-21.9	QP	
	12	28.13	20.58	10.2	30.79	50	-19.21	AVG	

REMARKS:

- (1) Level = Reading + Factor.
- (2) Margin = Level - Limit.

Test Mode	TX Mode_127.5kHz	Phase	Neutral
-----------	------------------	-------	---------

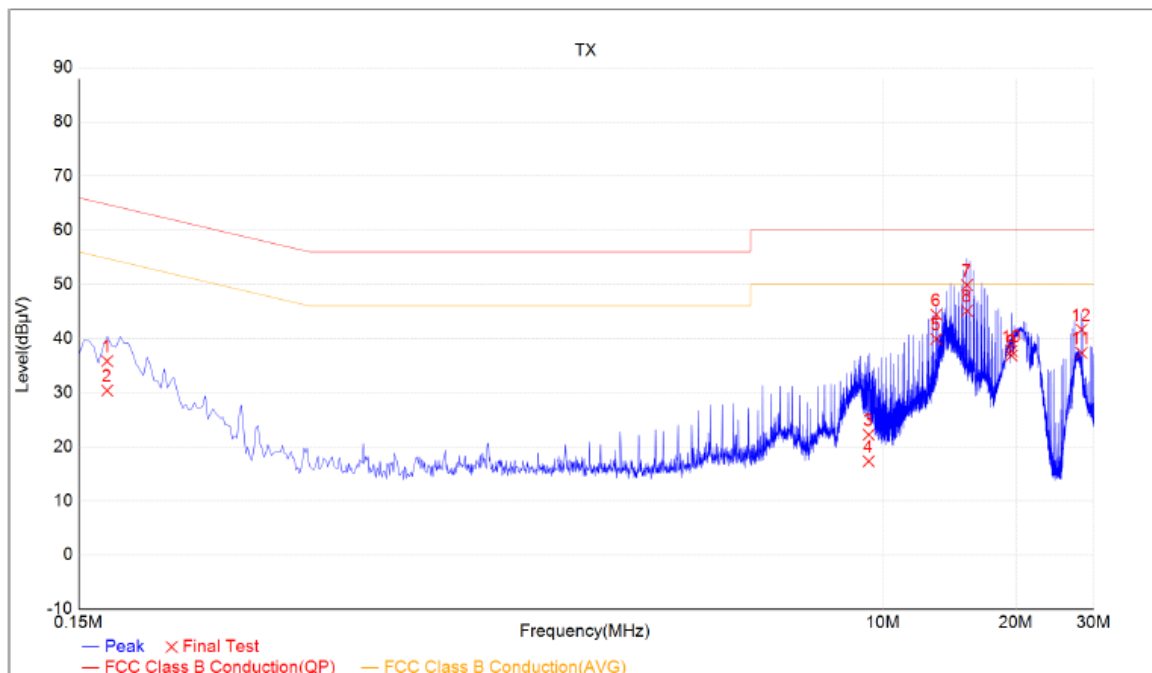

Suspected Note List									
	NO.	Freq. [MHz]	Reading [dBμV]	Factor [dB]	Level [dBμV]	Limit [dBμV]	Margin [dB]	Detector	Content
	1	0.1738	26.2	9.62	35.82	64.77	-28.95	QP	
	2	0.1738	20.77	9.62	30.39	54.77	-24.38	AVG	
	3	9.2615	12.21	10.02	22.23	60	-37.77	QP	
	4	9.2615	7.34	10.02	17.35	50	-32.65	AVG	
	5	13.1779	29.71	10.21	39.92	60	-20.08	QP	
	6	13.1779	34.21	10.21	44.42	50	-5.58	AVG	
	7	15.4582	39.55	10.31	49.86	60	-10.14	QP	
*	8	15.4582	34.8	10.31	45.11	50	-4.89	AVG	
	9	19.5138	26.44	10.43	36.86	60	-23.14	QP	
	10	19.5138	27.25	10.43	37.68	50	-12.32	AVG	
	11	28.126	26.75	10.56	37.32	60	-22.68	QP	
	12	28.126	31.09	10.56	41.65	50	-8.35	AVG	


REMARKS:

(1) Level = Reading + Factor.

(2) Margin = Level - Limit.

APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Test Mode	TX Mode_127.5kHz	Polarization	Ant 0°
-----------	------------------	--------------	--------

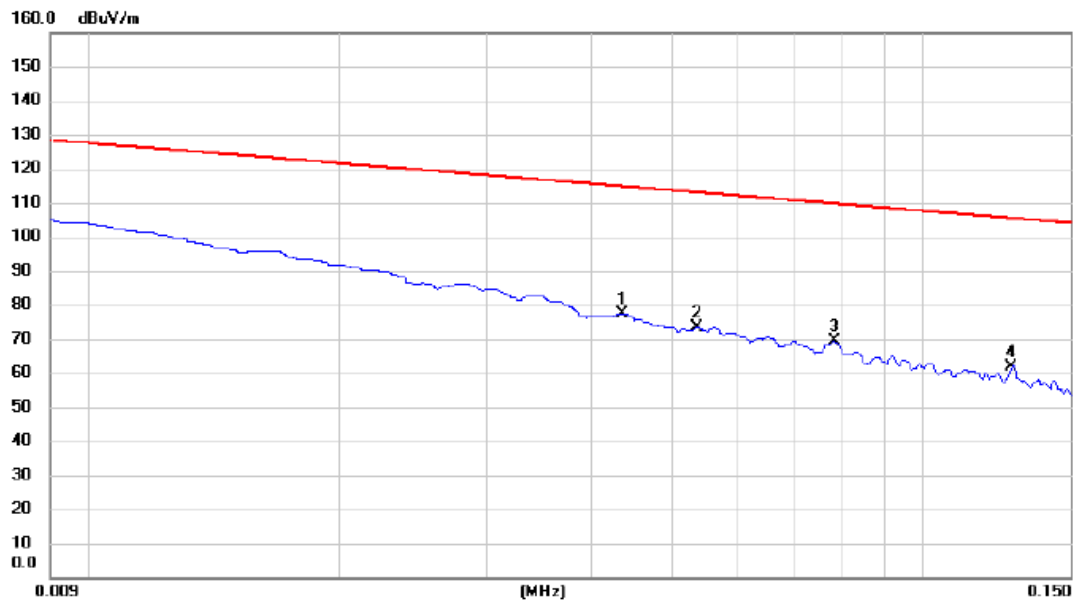


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.043	56.46	21.08	77.54	114.84	-37.30	peak	
2		0.054	52.19	21.14	73.33	113.02	-39.69	peak	
3		0.078	48.10	21.14	69.24	109.74	-40.50	peak	
4		0.128	40.82	20.96	61.78	105.50	-43.72	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_127.5kHz	Polarization	Ant 0°
-----------	------------------	--------------	--------

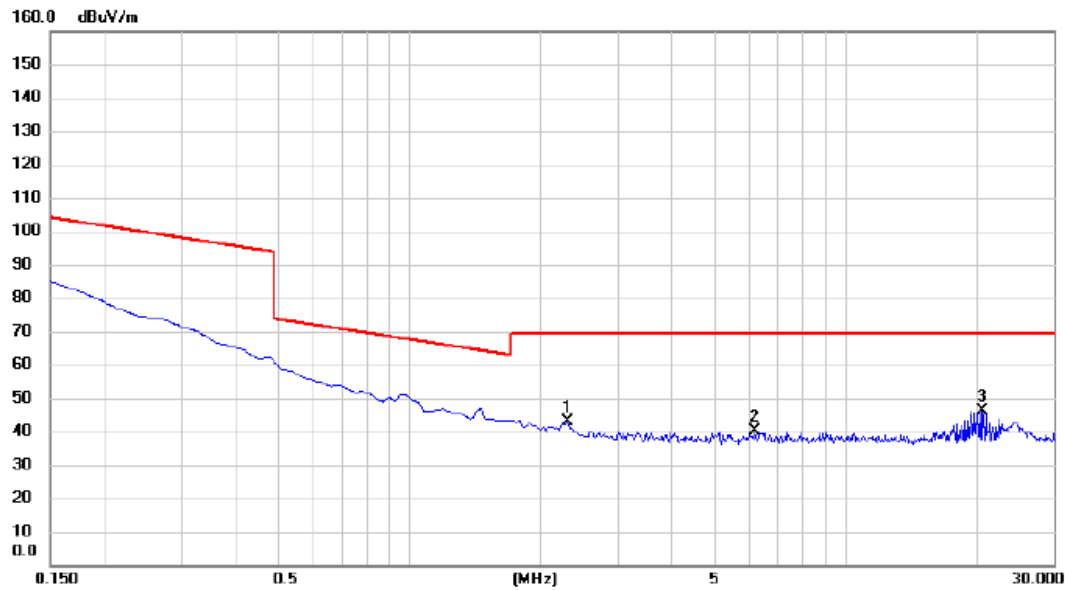


No. Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin	Detector	Comment
	MHz	dBuV	dB	dBuV/m	dBuV/m	dB		
1	2.299	22.35	20.64	42.99	69.54	-26.55	peak	
2	6.180	19.50	20.57	40.07	69.54	-29.47	peak	
3 *	20.508	26.13	20.10	46.23	69.54	-23.31	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_127.5kHz	Polarization	Ant 90°
-----------	------------------	--------------	---------

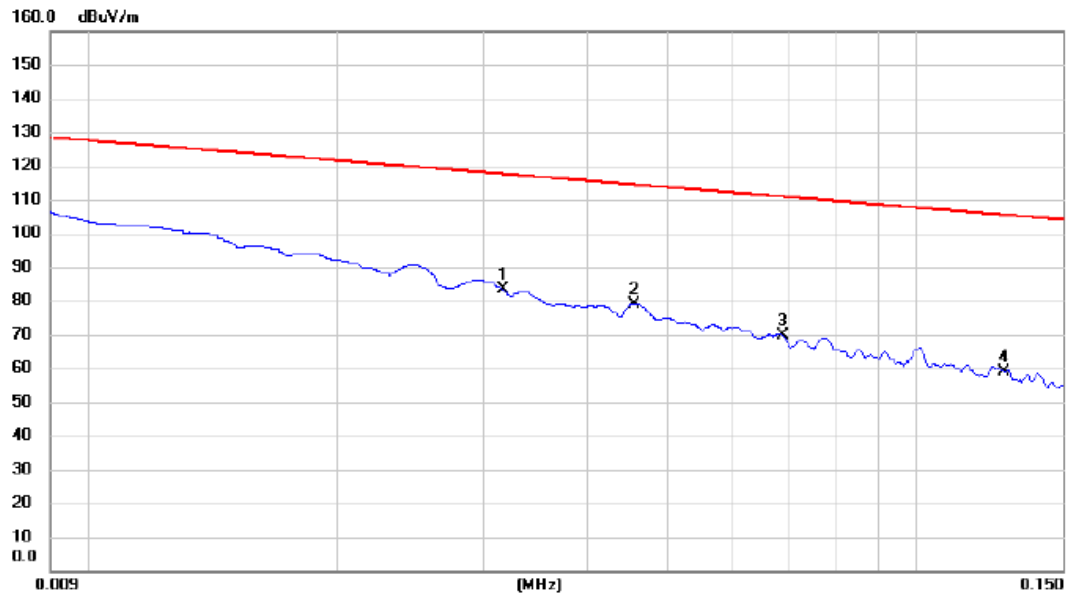


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	0.032	62.36	20.96	83.32	117.58	-34.26	peak	
2		0.046	58.07	21.10	79.17	114.43	-35.26	peak	
3		0.069	48.59	21.14	69.73	110.83	-41.10	peak	
4		0.128	37.96	20.96	58.92	105.50	-46.58	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_127.5kHz	Polarization	Ant 90°
-----------	------------------	--------------	---------

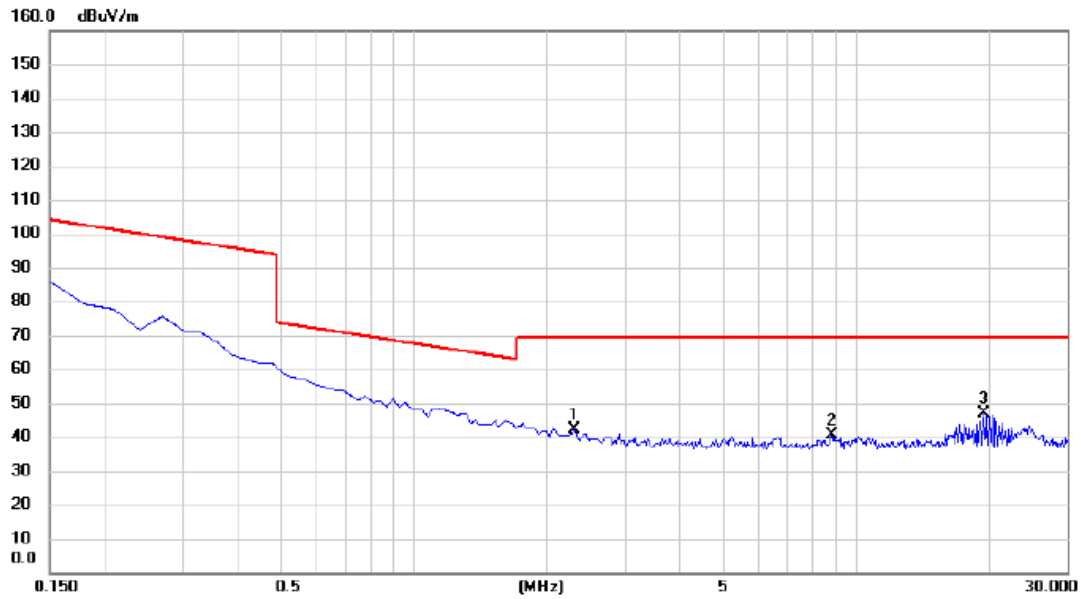

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2.299	21.76	20.64	42.40	69.54	-27.14	peak	
2		8.777	19.86	20.63	40.49	69.54	-29.05	peak	
3	*	19.493	26.69	20.16	46.85	69.54	-22.69	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1000 MHZ

Test Mode	TX Mode_127.5kHz	Polarization	Vertical
-----------	------------------	--------------	----------

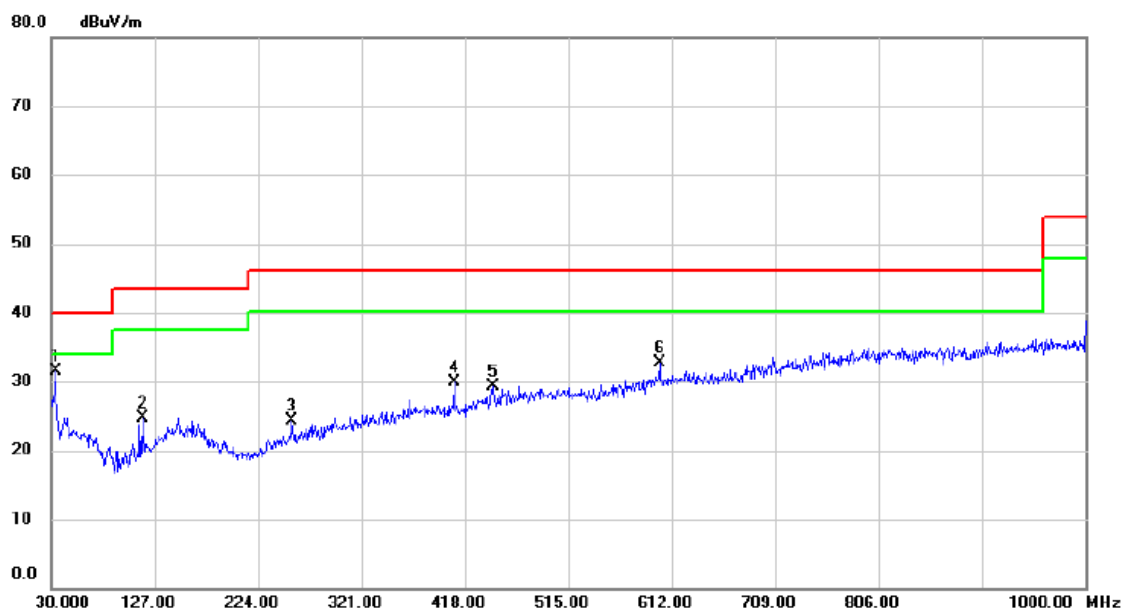


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.880	44.63	-13.08	31.55	40.00	-8.45	peak	
2		115.360	39.65	-15.00	24.65	43.52	-18.87	peak	
3		256.010	37.50	-13.21	24.29	46.02	-21.73	peak	
4		408.300	39.55	-9.59	29.96	46.02	-16.06	peak	
5		444.190	37.80	-8.46	29.34	46.02	-16.68	peak	
6		600.360	38.18	-5.43	32.75	46.02	-13.27	peak	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode	TX Mode_127.5kHz	Polarization	Horizontal
-----------	------------------	--------------	------------

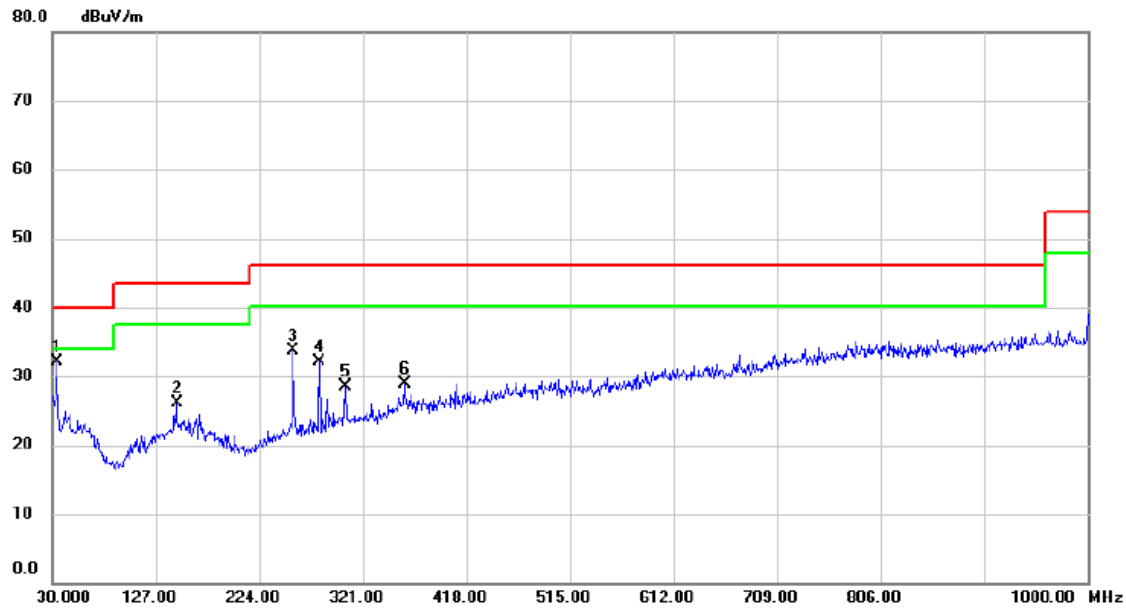

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	33.880	45.15	-13.08	32.07	40.00	-7.93	peak	
2		146.400	38.29	-12.17	26.12	43.52	-17.40	peak	
3		256.010	46.89	-13.21	33.68	46.02	-12.34	peak	
4		280.260	44.29	-12.28	32.01	46.02	-14.01	peak	
5		304.510	40.15	-11.67	28.48	46.02	-17.54	peak	
6		359.800	39.59	-10.69	28.90	46.02	-17.12	peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - BANDWIDTH

Test Mode	TX Mode_127.5kHz
-----------	------------------


Frequency (kHz)	20 dB Bandwidth (kHz)	99 % Occupied Bandwidth (kHz)	Result
127.5	26.40	22.70	Complies

20 dB Bandwidth

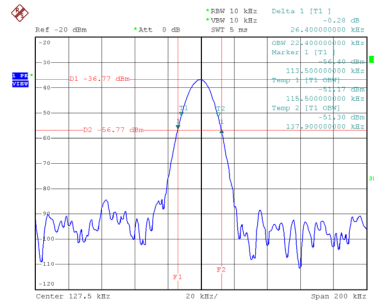

Date: 19.MAR.2026 15:03:32

99 % Occupied Bandwidth

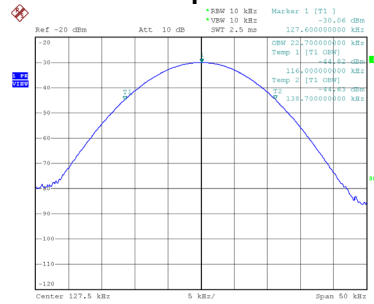

Date: 19.MAR.2026 14:57:06

End of Test Report