

Antenna Specification


NO.	内 容 (Contents)	页数 (Number of Page)	页码 (Page Code)
1	承认书封面 (Spec Cover)	1	1
2	承认书项目表 (Spec Item)	1	2
3	工程成品图 (Drawing)	1	3
4	电性测试报告 (Test Reports)	1	4
5	S 参数测试 (S Parameter)	1	5
6	增益测试 (Gain Test)	1	6
7			
8			
9			
10	-	-	-
11	-	-	-
12	-	-	-

Manufacturer: Dongguan Chuangjie Electronics Co., Ltd.

ADD: No. 6, Qilin East Road, Daining, Humen Town, Dongguan City

Tel:15818375487

SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

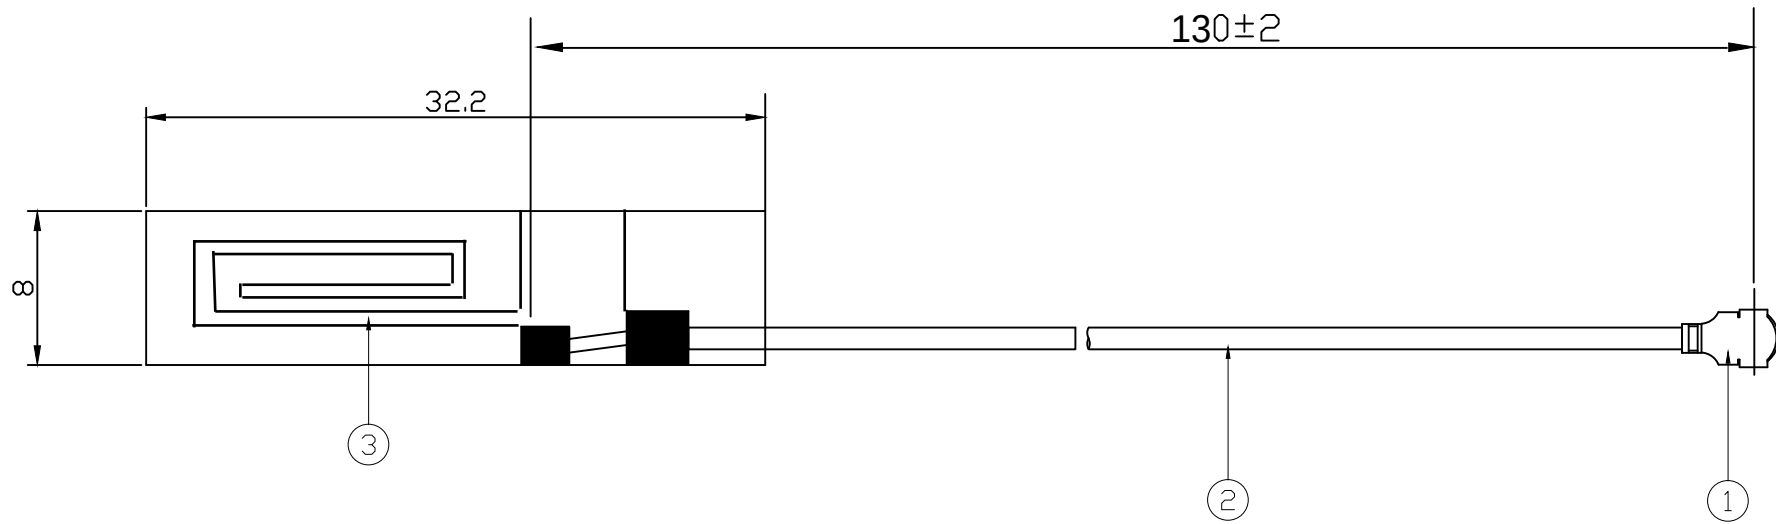

Note:

- 1.Take" * "is the important dimension.
- 2.Tolerance:Unmarked tolerance refer to the standard tolerance please.
- 3.Pull Strength of the connector must be >=1.0kg.
- 4.Note Connector orientation.

3	NB0020-A01	FPC	FPC 32*8mm	1
2	R-CB-113B	Coaxial Cable	SHOWA-O.D. 1.13mm Black	1
1	CI-113	Connector	Mini Connector	1
No.	Part Number	Name	Material	Q'ty

东莞市创捷电子有限公司 Tel :86-0769-33691210 Fax:86-0769-82381572				
TITLE:3G GSM ANTENNA				
PART NO.: GF3208-ipex 1-13CM			DWG NAME:NB0020-113B-080IX.DWG	
APPROVED BY	CHECKED BY	DESIGNED BY		Tolerance
jeff 2016-05-05	leon 2016-05-05	YD 2016-05-05	UNITS: mm	X.X ̸0.20 X.XX ̸0.10 X.A ̸0.A
			SCALE: 1/1	
			REVISION: A	

电性测试报告



Test Reports

Electrical Properties	
Frequency	2400~2500MHz
Impedance	50 Ohm
V.S.W.R	≤3.0
Radiation	Omni-directional
Gain (Peak)	1.23 dBi
Polarization	Linear
Admitted Power	1 W
Connector	ipex
Physical Properties	
Antenna Material	FPC
Cable Type	O.D. 1.13mm // 120 mm
Operating Temp.	-10 ~ +60 °C
Storage Temp.	-10 ~ +70 °C

S 参数测试

S Parameter Test

Agilent E5071C

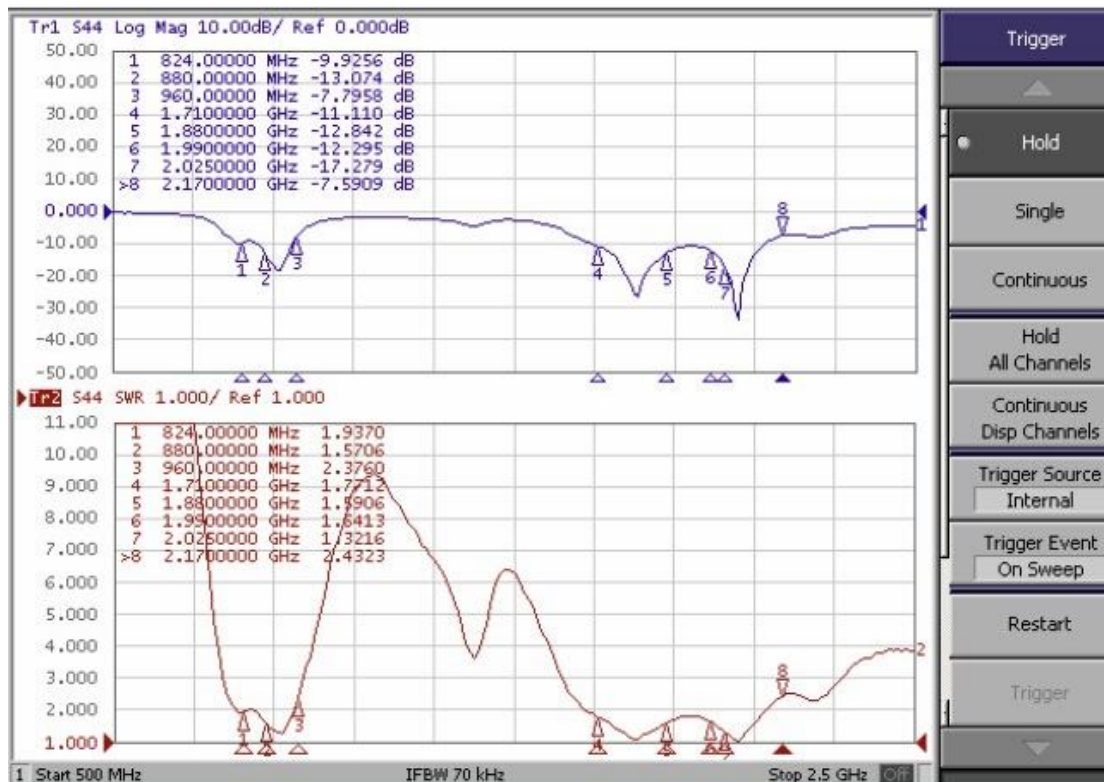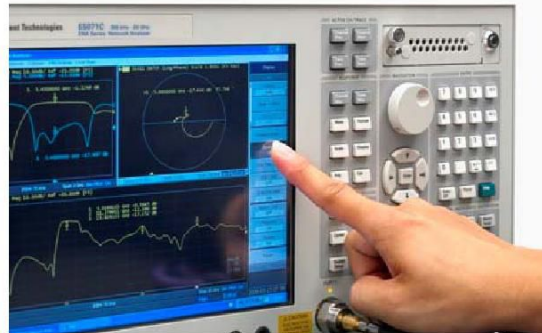

增益测试

Gain Test

*Antenna
Radiation
Pattern
VS
Gain*

