

ANNEX TEST DATA BLE

FCC ID: 2BH HH-M26

Applicant: Shenzhen Pinjin Technology Co., Ltd.

Address: Room 401, Building 7, Anhua Community, Shatou Street, Futian District, Shenzhen

Manufacturer: Shenzhen Pinjin Technology Co., Ltd.

Address: Room 401, Building 7, Anhua Community, Shatou Street, Futian District, Shenzhen

Product Name: Smartphone

Trade Mark: MSEVC

Model Number: M26 Ultra, M26, M26 Pro, S25 Ultra, S26 Ultra, S26 Pro, A56, A71, W26 Ultra, G26 Ultra

Date of Receipt: Jan. 27, 2026

Test Date: Jan. 27, 2026 - Mar. 13, 2026

Date of Report: Mar. 13, 2026

Prepared By: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

Applicable Standards: FCC PART 15 C 15.247
ANSI C63.10-2020+Cor.1-2023

Test Result: Pass

1. Duty Cycle


1.1 Test Result

1.1.1 Ant1


Ant1							
Mode	TX Type	Frequency (MHz)	T_on (ms)	Period (ms)	Duty Cycle (%)	Duty Cycle Correction Factor (dB)	Max. DC Variation (%)
1M	SISO	2402	2.158	2.500	86.32	0.64	0.03
		2440	2.158	2.500	86.32	0.64	0.03
		2480	2.158	2.500	86.32	0.64	0.03

1.2 Test Graph

1.2.1 Ant1

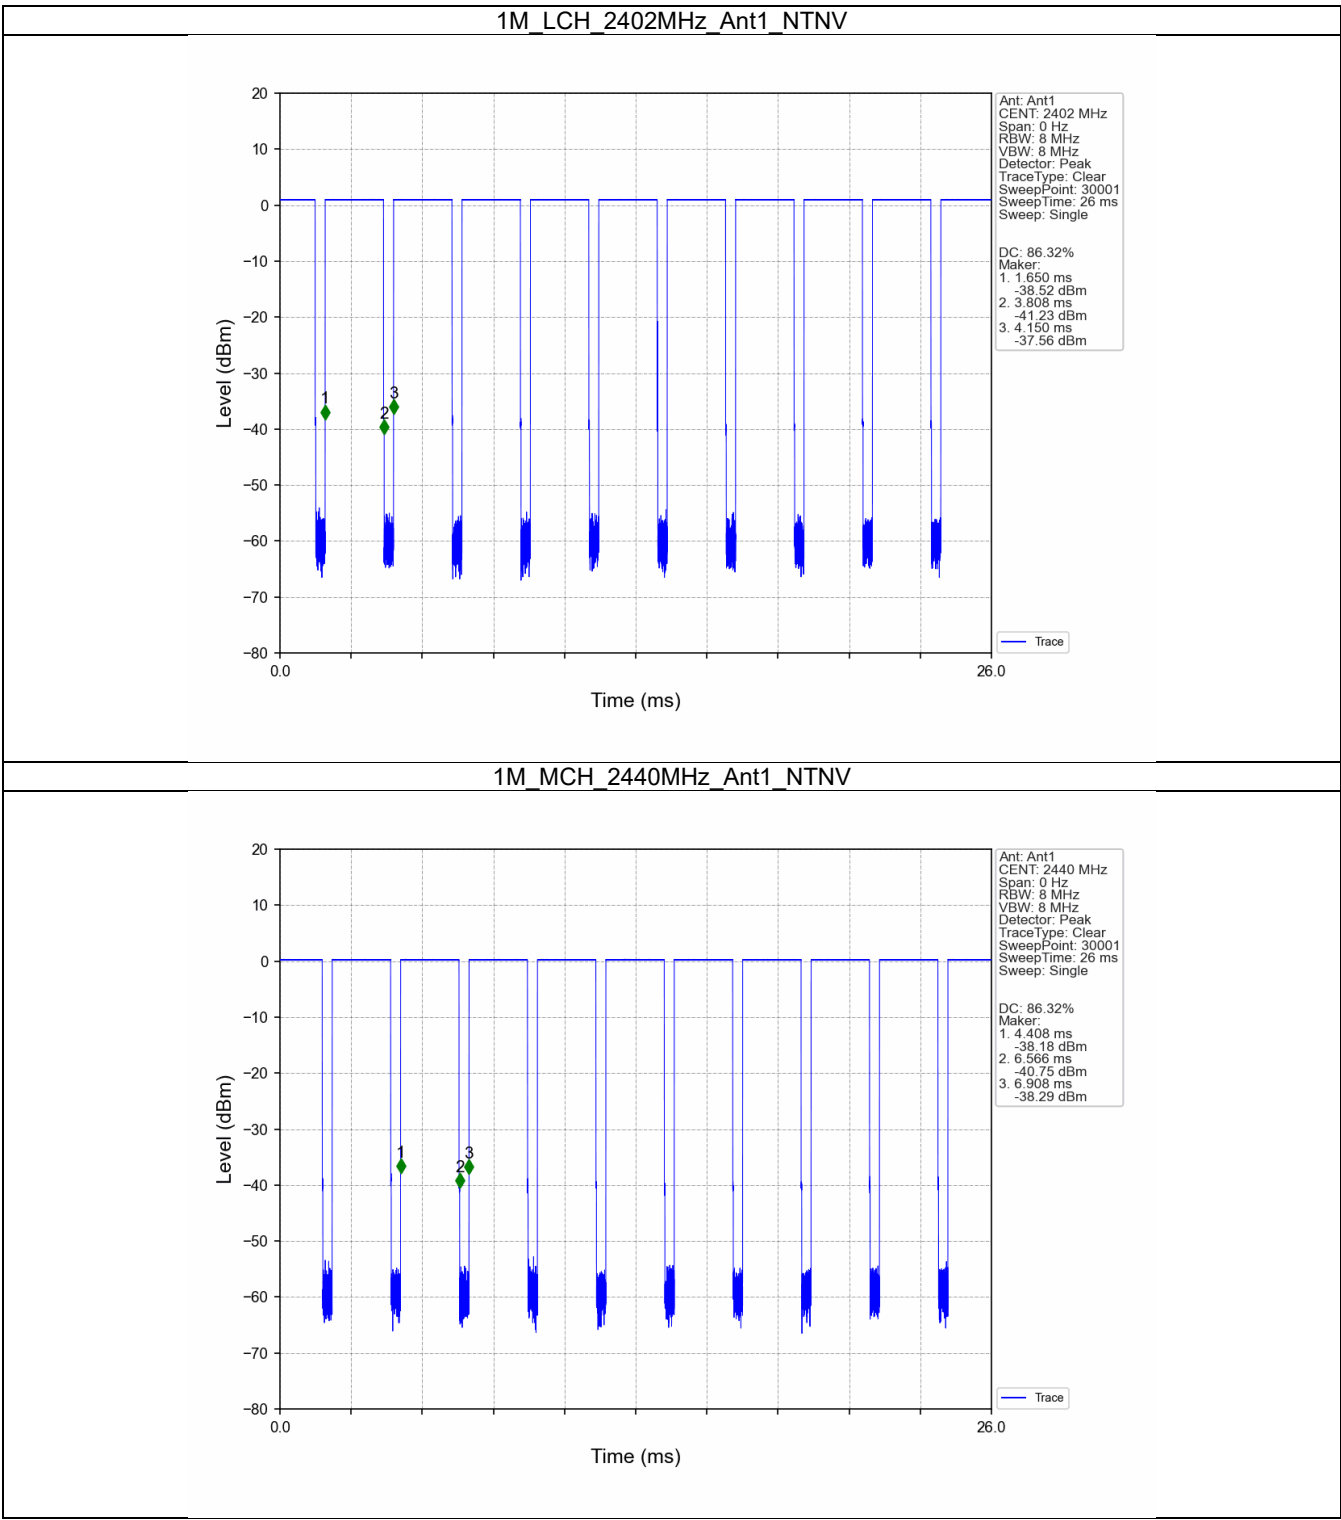

1M HCH 2480MHz Ant1 NTN

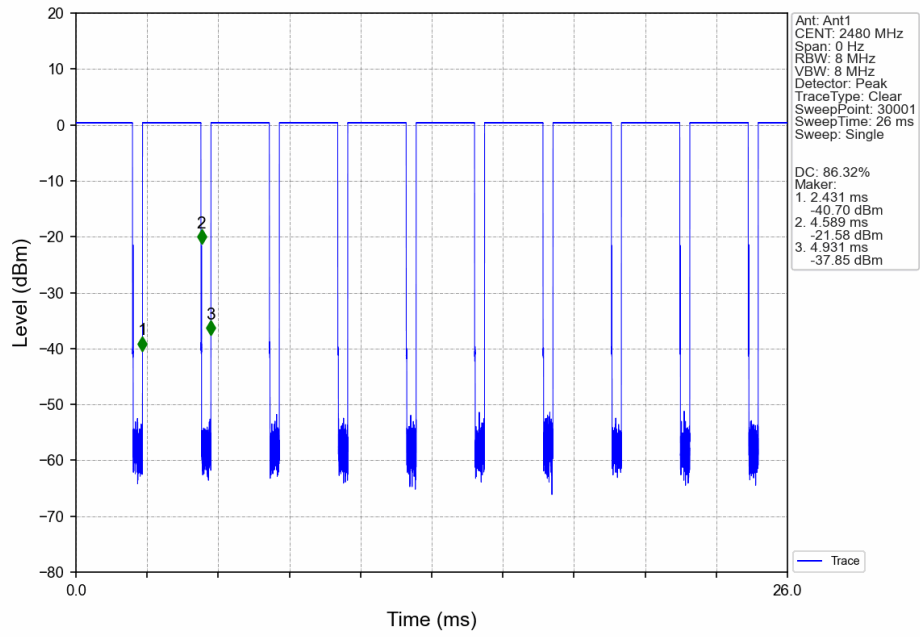

2. Bandwidth


2.1 Test Result

2.1.1 6dB BW


Mode	TX Type	Frequency (MHz)	ANT	6dB Bandwidth (MHz)		Verdict
				Result	Limit	
1M	SISO	2402	1	0.672	≥ 0.5	Pass
		2440	1	0.667	≥ 0.5	Pass
		2480	1	0.670	≥ 0.5	Pass

2.2 Test Graph

2.2.1 6dB BW

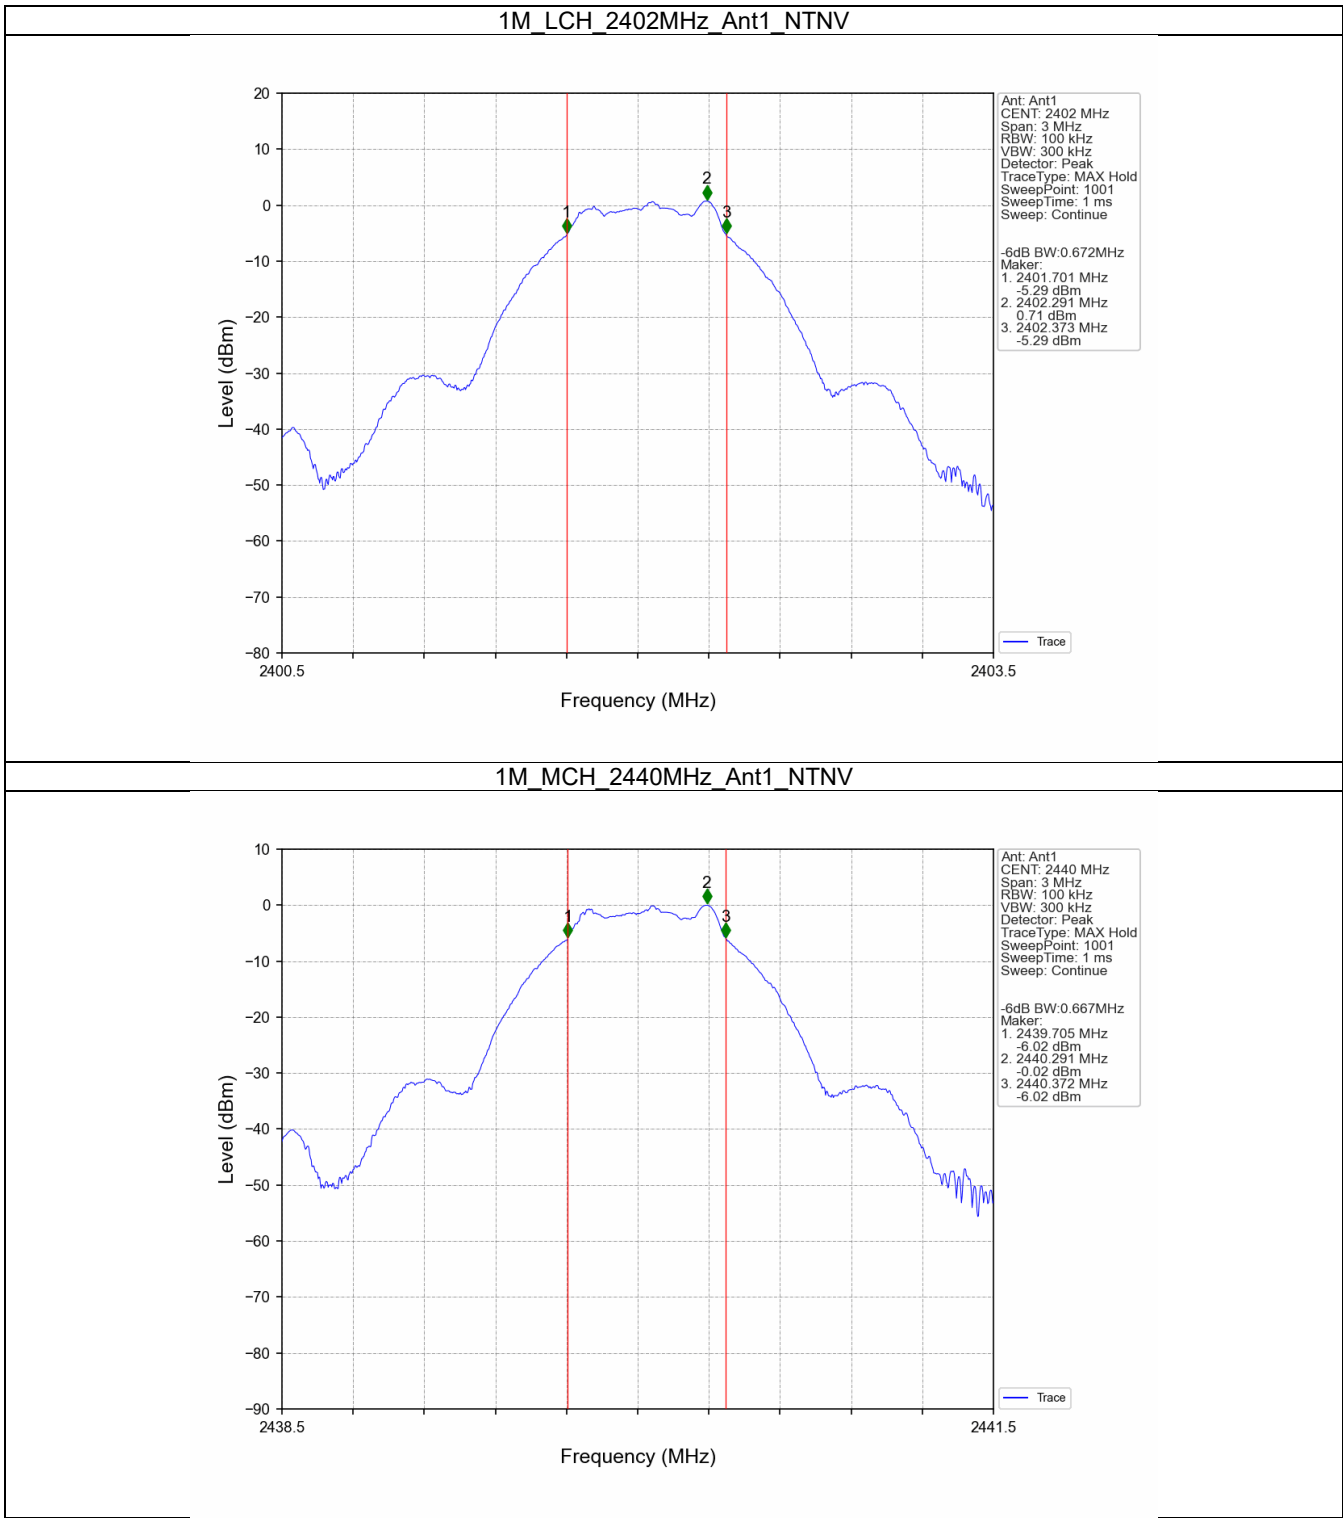

1M HCH 2480MHz Ant1 NTN

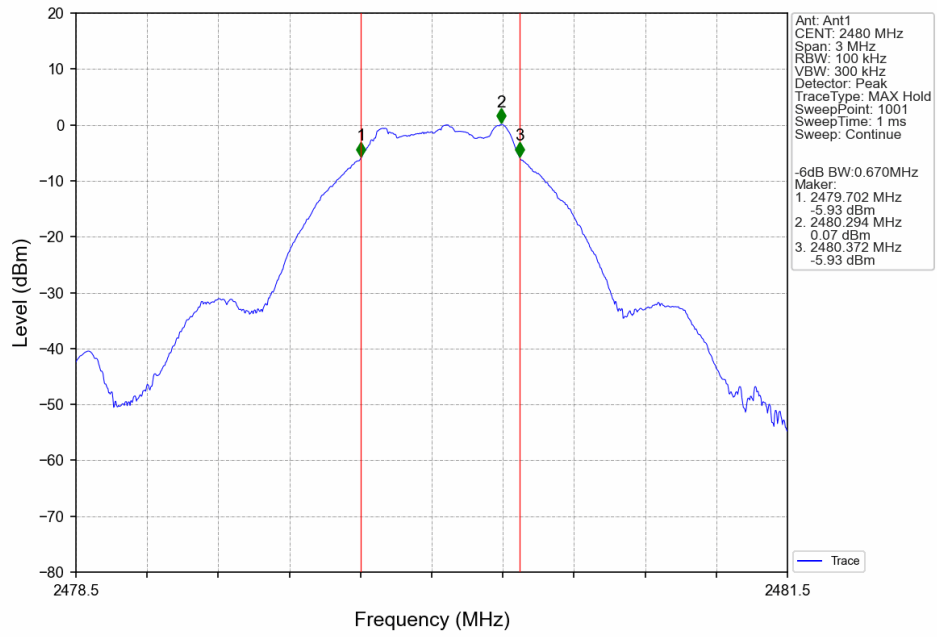

3. Maximum Conducted Output Power


3.1 Test Result

3.1.1 Power


Mode	TX Type	Frequency (MHz)	Maximum Peak Conducted Output Power (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	1.00	<=30	Pass
		2440	0.30	<=30	Pass
		2480	0.39	<=30	Pass

3.2 Test Graph

3.2.1 Power

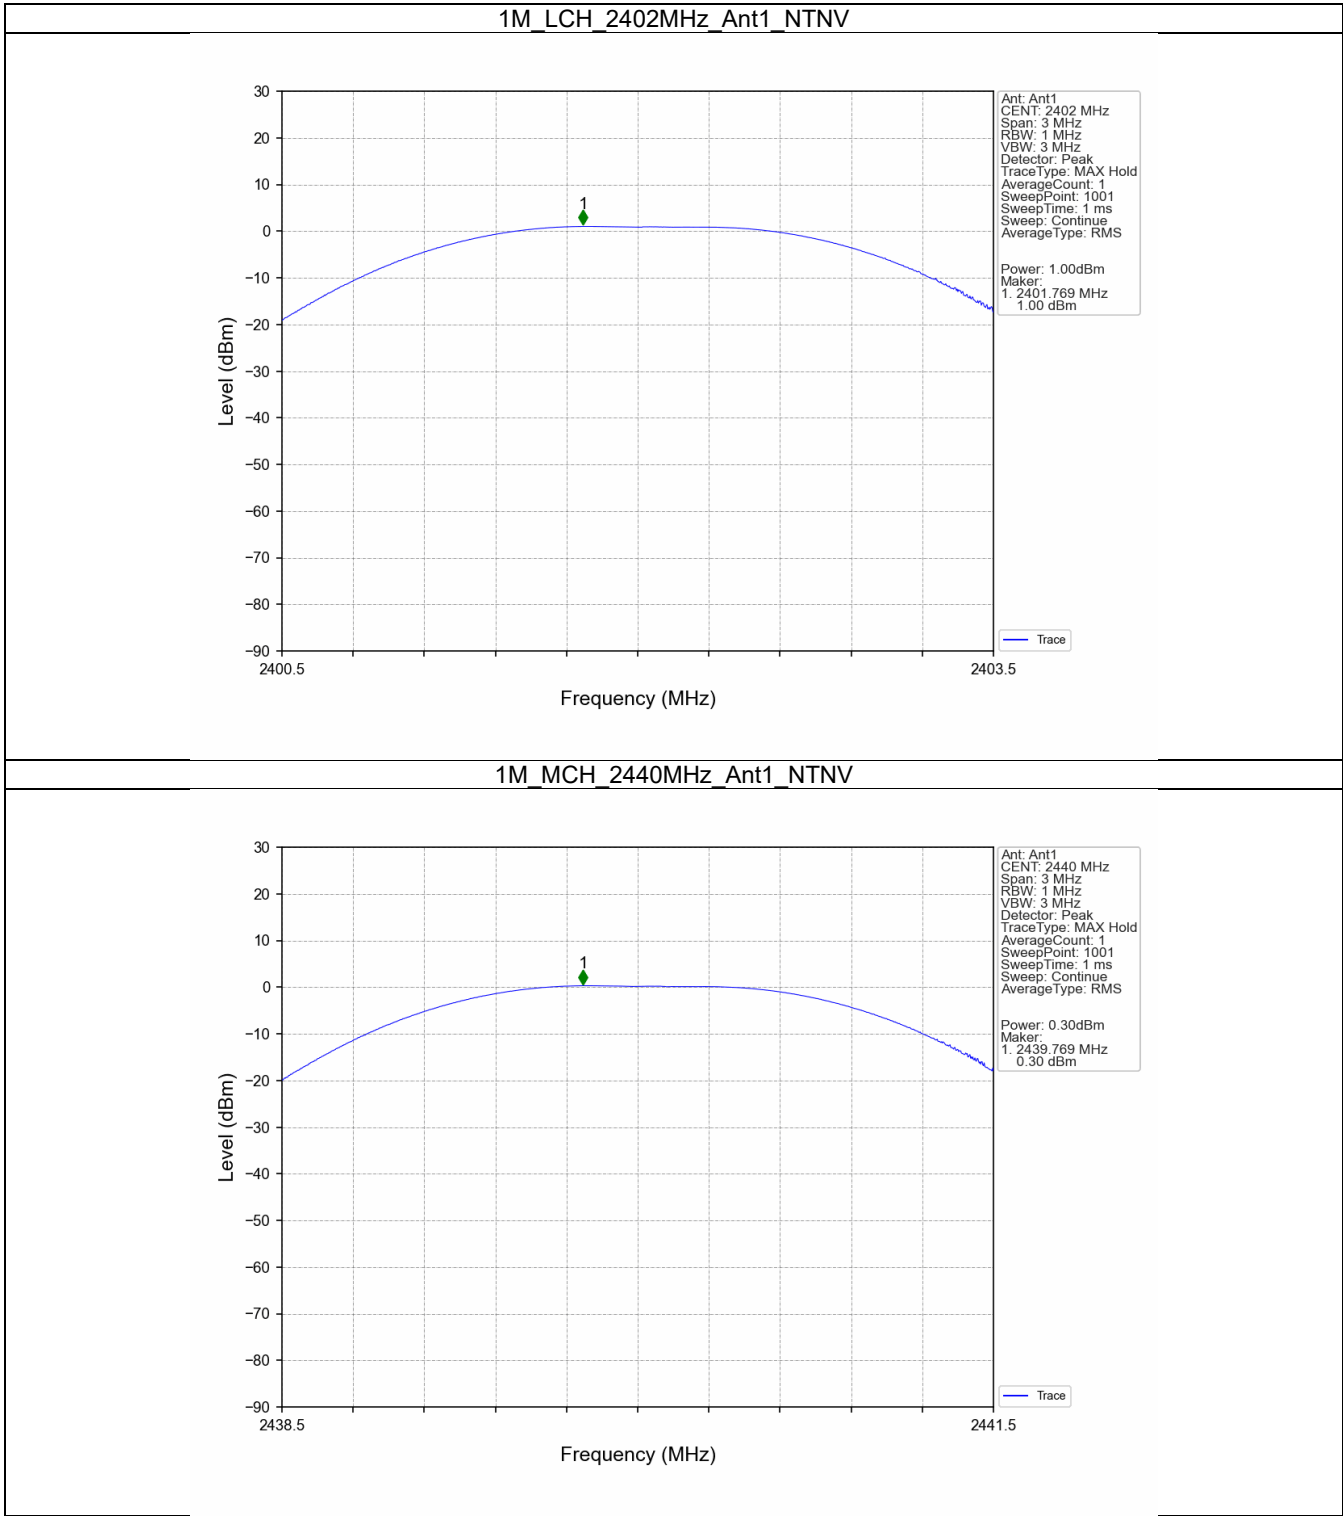

1M HCH 2480MHz Ant1 NTN

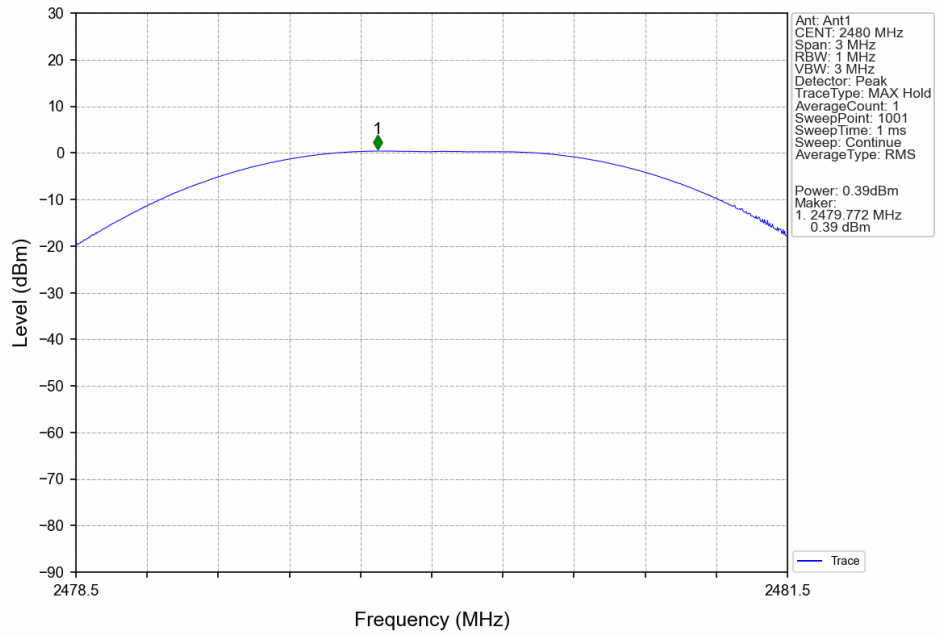

4. Maximum Power Spectral Density


4.1 Test Result

4.1.1 PSD


Mode	TX Type	Frequency (MHz)	Maximum PSD (dBm)		Verdict
			ANT1	Limit	
1M	SISO	2402	-14.97	<=8	Pass
		2440	-15.82	<=8	Pass
		2480	-15.71	<=8	Pass

4.2 Test Graph

4.2.1 PSD

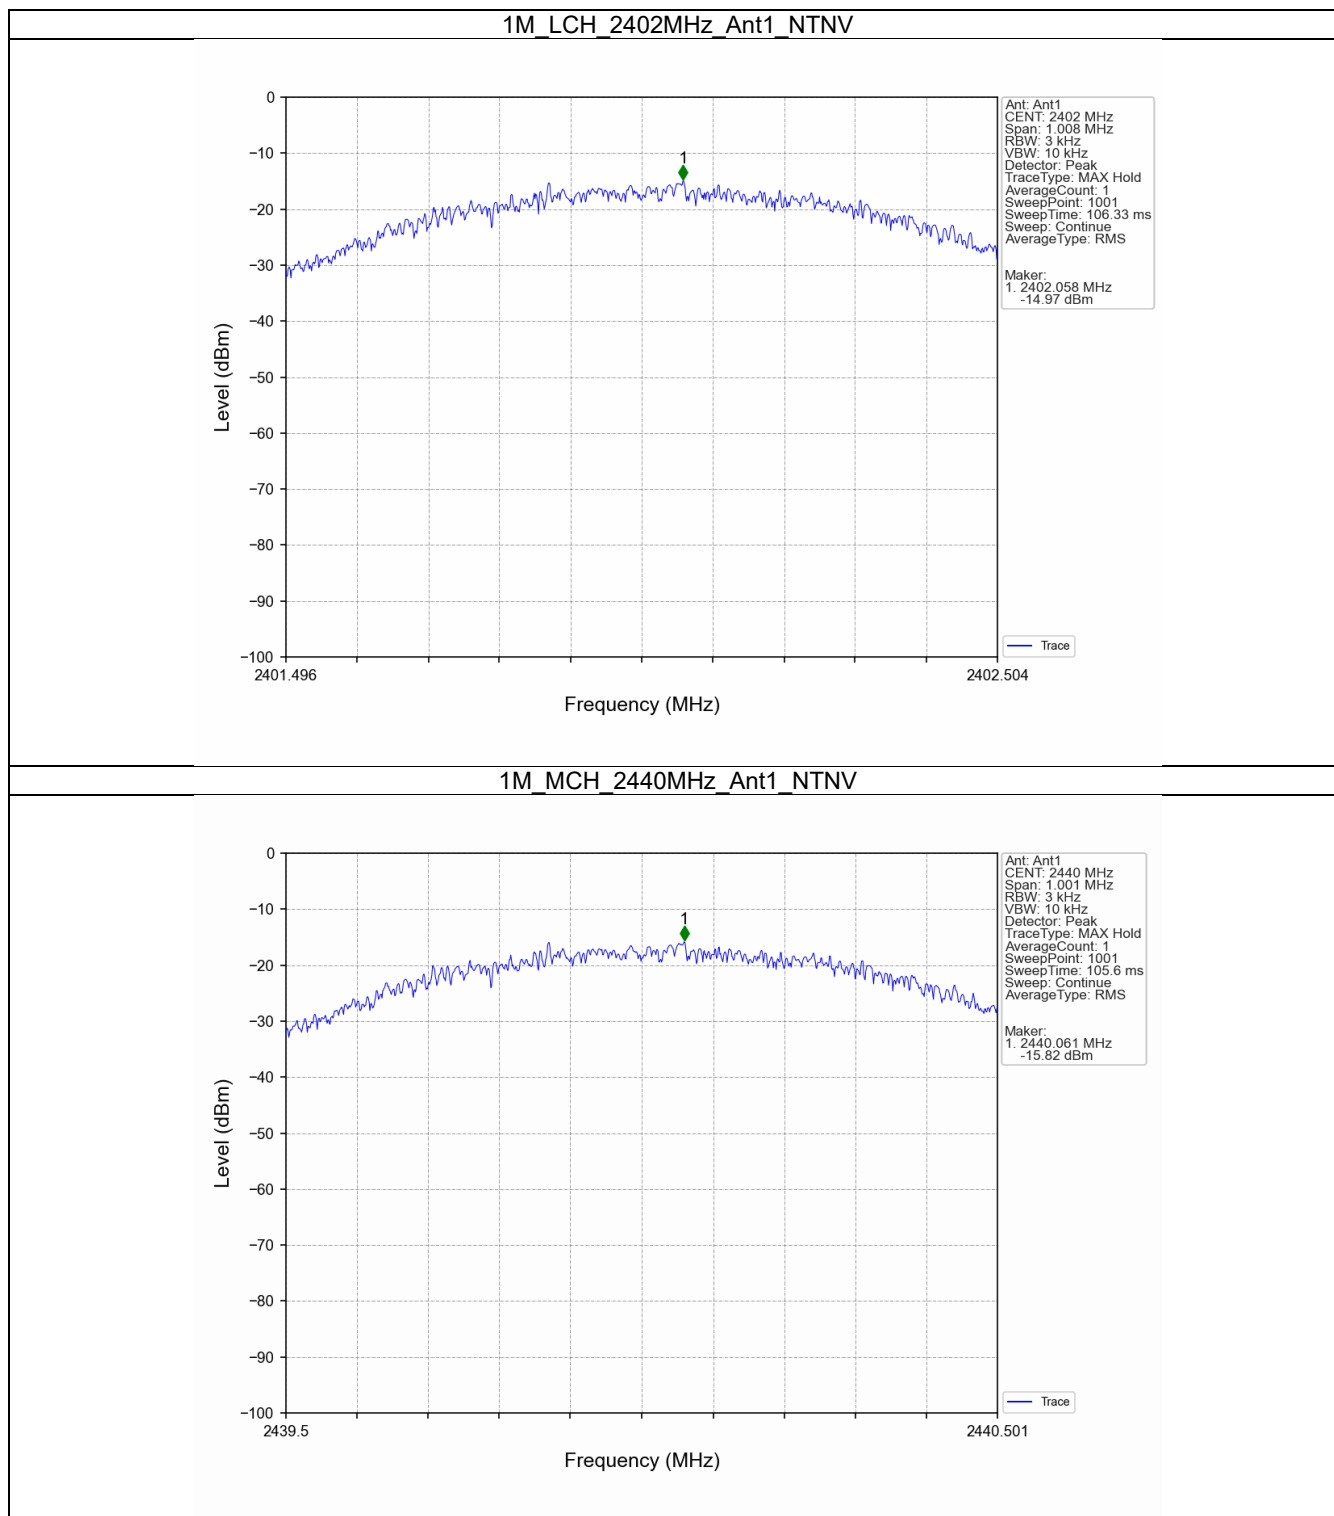

1M HCH 2480MHz Ant1 NTN

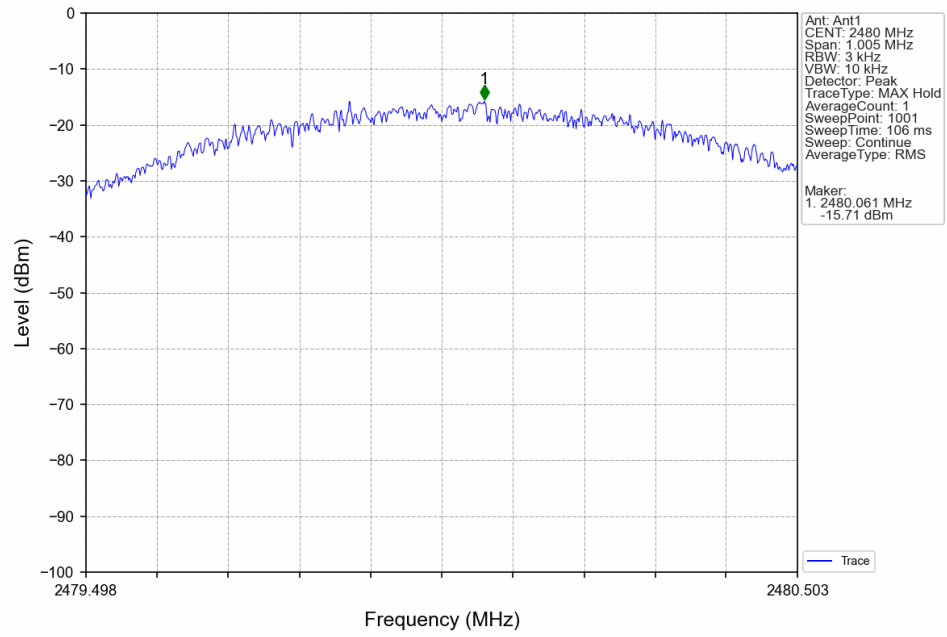

5. Unwanted Emissions In Non-restricted Frequency Bands

5.1 Test Result

5.1.1 Ref


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)
1M	SISO	2402	1	0.75
		2440	1	0.00
		2480	1	0.13
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020+Cor.1-2023, the channel contains the maximum PSD level was used to establish the reference level.				

5.1.2 CSE


Mode	TX Type	Frequency (MHz)	ANT	Level of Reference (dBm)	Limit (dBm)	Verdict
1M	SISO	2402	1	0.75	-19.25	Pass
		2440	1	0.00	-20.00	Pass
		2480	1	0.13	-19.87	Pass
Note1: Refer to FCC Part 15.247 (d) and ANSI C63.10-2020+Cor.1-2023, the channel contains the maximum PSD level was used to establish the reference level.						

5.2 Test Graph


5.2.1 Ref

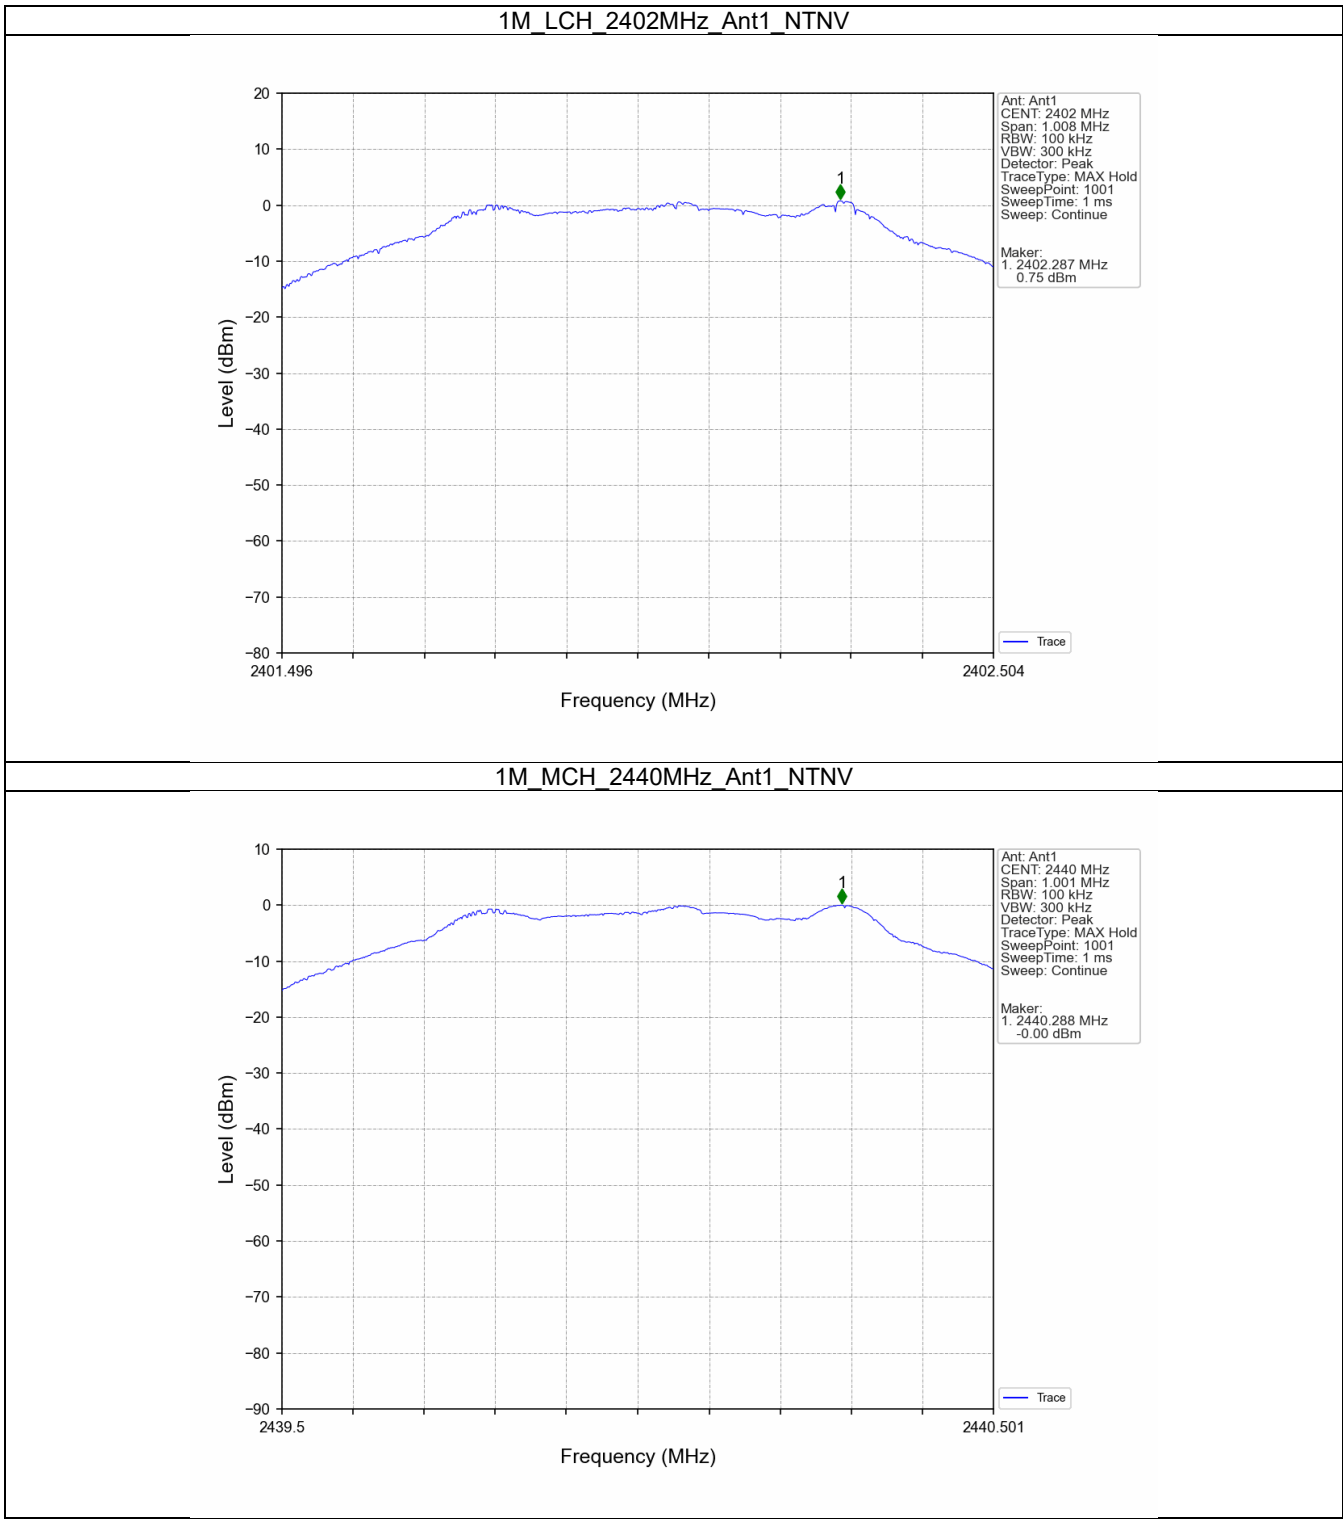


1M HCH 2480MHz Ant1 NTN

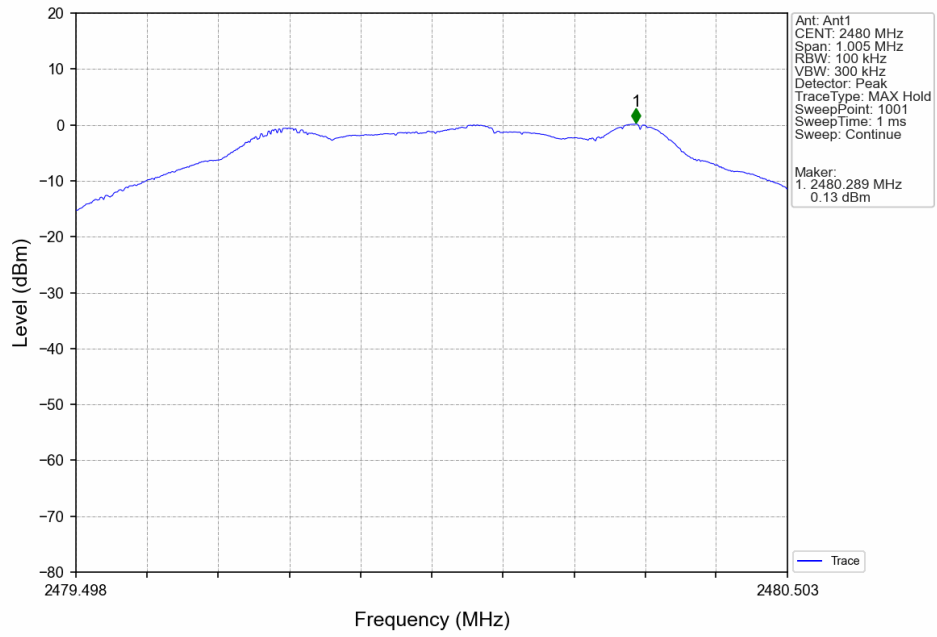


5.2.2 CSE

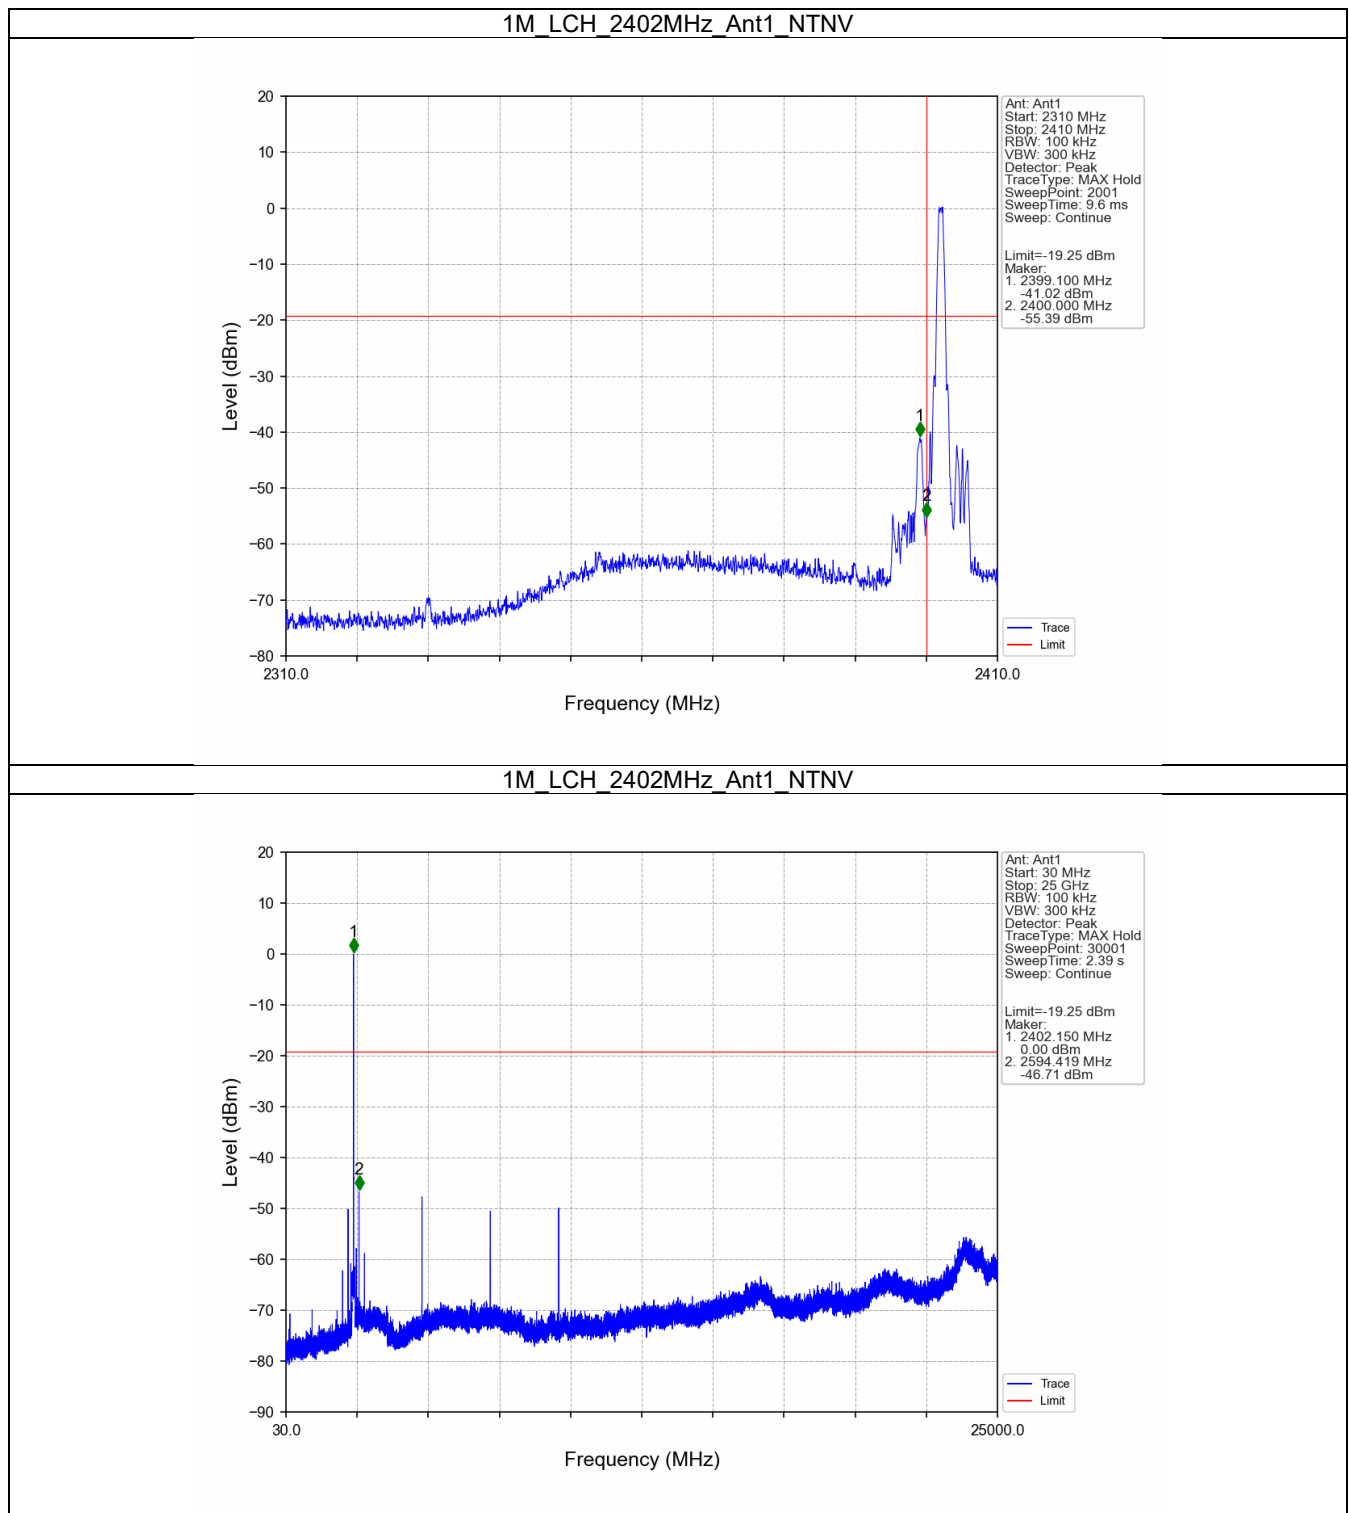

1M MCH 2440MHz Ant1 NTN

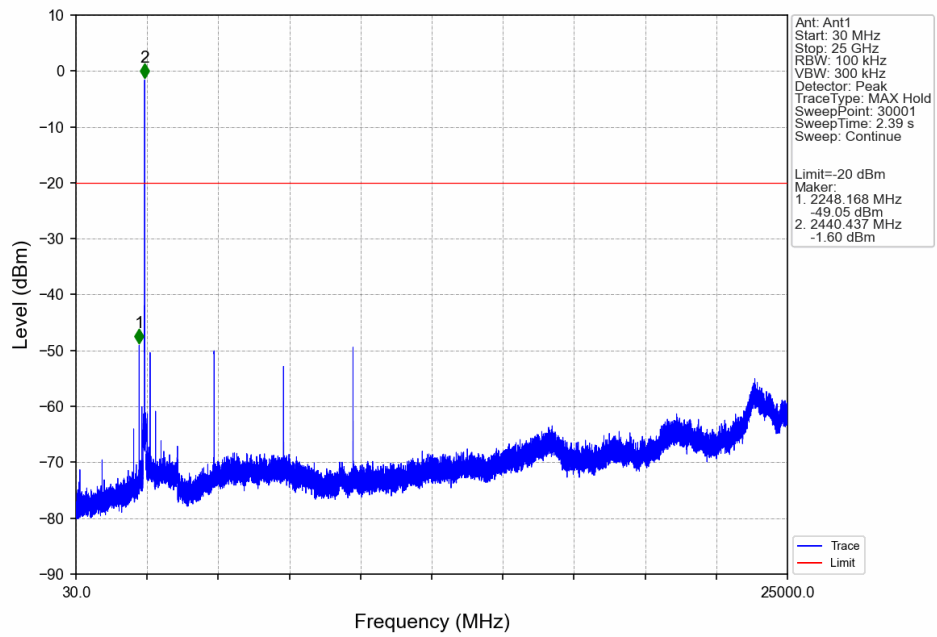

1M HCH 2480MHz Ant1 NTN

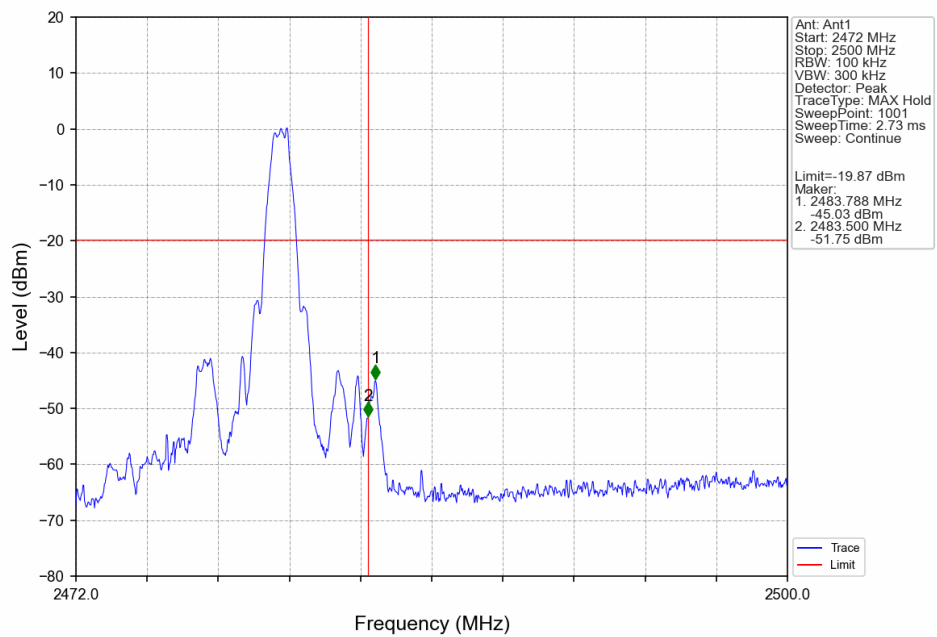

1M HCH 2480MHz Ant1 NTN

