FCC Part 15E Test Report
FCC ID: 2BHHH-M26

Applicant:	Shenzhen Pinjin Technology Co., Ltd.
Address:	Room 401, Building 7, Anhua Community, Shatou Street, Futian District, Shenzhen
Manufacturer:	Shenzhen Pinjin Technology Co., Ltd.
Address:	Room 401, Building 7, Anhua Community, Shatou Street, Futian District, Shenzhen
Product Name:	Smartphone
Trade Mark:	MSEVC
Model Number:	M26 Ultra, M26, M26 Pro, S25 Ultra, S26 Ultra, S26 Pro, A56, A71, W26 Ultra, G26 Ultra
Date of Receipt:	Jan. 27, 2026
Test Date:	Jan. 27, 2026 - Mar. 13, 2026
Date of Report:	Mar. 13, 2026
Prepared By:	Shenzhen DL Testing Technology Co., Ltd.
Address:	101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China
Applicable Standards:	FCC PART 15 E 15.407 ANSI C63.10-2020+Cor.1-2023
Test Result:	Pass
Report Number:	DLE-260127047R

Prepared (Test Engineer):	Alisa Song
Reviewer (Supervisor):	Jack Bu
Approved (Manager):	Jade Yang

This test report is based on a single evaluation of one sample of above mentioned products. It is not permitted to be duplicated in extracts without written approval of Shenzhen DL Testing Technology Co., Ltd.

Table of Contents **Page**

1 . SUMMARY OF TEST RESULTS 4
1.1 MEASUREMENT UNCERTAINTY 4
2 . GENERAL INFORMATION 5
2.1 GENERAL DESCRIPTION OF EUT 5
2.2 DESCRIPTION OF TEST MODES 7
2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED 8
2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE) 8
2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING 8
2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS 9
3 . EMC EMISSION TEST 10
3.1 CONDUCTED EMISSION MEASUREMENT 10
3.1.1 POWER LINE CONDUCTED EMISSION LIMITS 10
3.1.2 TEST PROCEDURE 10
3.1.3 DEVIATION FROM TEST STANDARD 10
3.1.4 TEST SETUP 11
3.1.5 EUT OPERATING CONDITIONS 11
3.1.6 TEST RESULTS 11
3.2 RADIATED EMISSION MEASUREMENT 14
3.2.1 RADIATED EMISSION LIMITS 14
3.2.2 TEST PROCEDURE 15
3.2.3 DEVIATION FROM TEST STANDARD 15
3.2.4 TEST SETUP 16
3.2.5 EUT OPERATING CONDITIONS 17
3.2.6 TEST RESULTS (BETWEEN 9KHZ – 30 MHZ) 18
3.2.7 TEST RESULTS (BETWEEN 30MHZ – 1GHZ) 19
3.2.8 TEST RESULTS (1GHZ~40GHZ) 21
3.3 RADIATED BAND EMISSION MEASUREMENT 45
3.3.1 TEST REQUIREMENT: 45
3.3.2 TEST PROCEDURE 45
3.3.3 DEVIATION FROM TEST STANDARD 45
3.3.4 TEST SETUP 45
3.3.5 EUT OPERATING CONDITIONS 45
4 . PEAK OUTPUT POWER 46
4.1 APPLIED PROCEDURES / LIMIT 46
4.1.1 TEST PROCEDURE 46
4.1.2 DEVIATION FROM STANDARD 46
4.1.3 TEST SETUP 46
4.1.4 EUT OPERATION CONDITIONS 46
4.1.5 TEST RESULTS 46
5 . POWER SPECTRAL DENSITY TEST 47
5.1 APPLIED PROCEDURES / LIMIT 47
5.1.1 TEST PROCEDURE 47
5.1.2 DEVIATION FROM STANDARD 47
5.1.3 TEST SETUP 47
5.1.4 EUT OPERATION CONDITIONS 47
5.1.5 TEST RESULTS 47
6 . 6DB&26DB&99% BANDWIDTH TEST 48

Table of Contents **Page**

6.1 APPLIED PROCEDURES / LIMIT 48
6.1.1 TEST PROCEDURE 48
6.1.2 DEVIATION FROM STANDARD 48
6.1.3 TEST SETUP 48
6.1.4 EUT OPERATION CONDITIONS 49
6.1.5 TEST RESULTS 49
7 . DUTY CYCLE TEST SIGNAL 50
7.1 APPLIED PROCEDURES / LIMIT 50
7.1.1 TEST PROCEDURE 50
7.1.2 DEVIATION FROM STANDARD 50
7.1.3 TEST SETUP 50
7.1.4 EUT OPERATION CONDITIONS 50
7.1.5 TEST RESULTS 50
8 . FREQUENCY STABILITY 51
8.1 APPLIED PROCEDURES / LIMIT 51
8.1.1 TEST PROCEDURE 51
8.1.2 DEVIATION FROM STANDARD 51
8.1.3 TEST SETUP 51
8.1.4 EUT OPERATION CONDITIONS 51
8.1.5 TEST RESULTS 52
9 . TRANSMISSION IN THE ABSENCE OF DATA 55
9.1 STANDARD REQUIREMENT 55
9.2 TEST RESULT 55
10 . ANTENNA REQUIREMENT 55
10.1 STANDARD REQUIREMENT 55
10.2 EUT ANTENNA 55
11 . TEST SEUUP PHOTO 55
12 . EUT PHOTO 55

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

FCC Part15 (15.407) , Subpart E			
Standard Section	Test Item	Judgment	Remark
15.207	Conducted Emission	PASS	
15.407(b), 15.209	Radiated Spurious Emission	PASS	
15.407 (b)	Band Edge Emission	PASS	
15.407 (a)	Peak Output Power	PASS	
15.407 (a)	Power Spectral Density	PASS	
15.407(a) (e)	26dB bandwidth and 99%dB Bandwidth 6dB bandwidth and 99%dB Bandwidth	PASS	
15.407(g)	Frequency Stability	PASS	
15.407(c)	Transmission in case of Absence of Information	PASS	
15.203	Antenna Requirement	PASS	

NOTE:

(1)" N/A" denotes test is not applicable in this Test Report

Test lab: Shenzhen DL Testing Technology Co., Ltd.

Address: 101-201, Comprehensive Building, Tongzhou Electronics Longgang Factory Area, No.1 Baolong Fifth Road, Baolong Community, Baolong Street, Longgang District, Shenzhen, China

FCC Test Firm Registration Number: 854456
Designation Number: CN1307
IC Registered No.: 27485
CAB ID.: CN0118

1.1 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement **y ± U**, where expended uncertainty **U** is based on a standard uncertainty multiplied by a coverage factor of **k=2**，providing a level of confidence of approximately **95** %。

No.	Item	Uncertainty
1	Conducted Emission Test	±2.56dB
2	RF power,conducted	±0.42dB
3	Spurious emissions,conducted	±2.76dB
4	All emissions,radiated(<30MHz)	±3.54dB
5	All emissions,radiated(<1G)	±3.65dB
6	All emissions,radiated(>1G)	±4.89dB
7	Occupied bandwidth	±1.28MHz
8	PSD	±0.69dB
9	Temperature	±0.5°C
10	Humidity	±2%

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product Name:	Smartphone
Trade Mark:	MSEVC
Model Number:	M26 Ultra, M26, M26 Pro, S25 Ultra, S26 Ultra, S26 Pro, A56, A71, W26 Ultra, G26 Ultra
Test Model:	M26 Ultra
Model Difference	All models are same as the samples except model name, appearance color, they have the same structure and circuit.
Operation Frequency:	5180-5240, 5745-5825MHz(802.11a/n/ac(HT20)) 5190-5230, 5755-5795MHz(802.11n/ac(HT40)) 5210MHz , 5775MHz (802.11ac(HT80))
Channel numbers:	See channel list
Channel separation:	20MHz/40MHz/80MHz
Modulation technology:	64QAM, 16QAM, QPSK, BPSK for OFDM
Rate of Transmitter	802.11a: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 24Mbps, 36Mbps, 48Mbps,54Mbps 802.11n: Up to 300Mbps 802.11ac: up to 867Mbps
Antenna Type:	Internal Antenna
Antenna gain:	5.1GWIFI:0.6dBi, 5.8GWIFI:0.6dBi
Power Supply:	DC 5V from adapter DC 3.85V from battery

Note:

1.For a more detailed features description, please refer to the manufacturer’s specifications or the User's Manual.

2.The EUT’s all information provided by client.

2. Channel List

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	44	5220
40	5200	48	5240

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
38	5190	46	5230

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
42	5210	/	/

Channel List for 802.11a/n(HT20)/ac(HT20)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	161	5805
153	5765	165	5825
157	5785		

Channel List for 802.11n(HT40)/ac(HT40)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
151	5755	159	5795

Channel List for 802.11ac(HT80)			
Channel	Frequency (MHz)	Channel	Frequency (MHz)
155	5775	/	/

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was e-scanning tested base on the consideration of following EUT operation mode or test configuration mode hich possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration ode(s) mentioned above was evaluated respectively.

Band 1:

Pretest Mode	Modulation	Channel
Mode 1	802.11a	CH36
Mode 2		CH44
Mode 3		CH48
Mode 4	802.11n HT20	CH36
Mode 5		CH44
Mode 6		CH48
Mode 7	802.11ac HT20	CH36
Mode 8		CH44
Mode 9		CH48
Mode 10	802.11n HT40	CH38
Mode 11		CH46
Mode 12	802.11ac HT40	CH38
Mode 13		CH46
Mode 14	802.11ac HT80	CH42

Band 4:

Pretest Mode	Modulation	Channel
Mode 15	802.11a	CH149
Mode 16		CH157
Mode 17		CH165
Mode 18	802.11n HT20	CH149
Mode 19		CH157
Mode 20		CH165
Mode 21	802.11ac HT20	CH149
Mode 22		CH157
Mode 23		CH165
Mode 24	802.11n HT40	CH151
Mode 25		CH159
Mode 26	802.11ac HT40	CH151
Mode 27		CH159
Mode 28	802.11ac HT80	CH155

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) During the test, the test voltage was tuned from 85% to 115% of the nominal rated supply voltage, and und that the worst case was under the nominal rated supply condition. So the report just shows that ondition's data.
(3) For the two items of conducted disturbance at the power supply end and space radiation below 1GHz, all modes have undergone pre-tests. The report only shows the worst test results of mode 1, mode 20.

2.3 BLOCK DIGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

Radiated Spurious Emission Test



Power Line Conducted Emission Test



2.4 DESCRIPTION OF SUPPORT UNITS(CONDUCTED MODE)

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Model/Type No.	Series No.	Note
E-1	Adapter	HW-0501000E	N/A	Adapter (Provide by test lab): Manufacturer: XIAOMI Model: HW-0501000E I/P: AC 100-240V 50/60Hz O/P: DC 5V 1A

Item	Shielded Type	Ferrite Core	Length	Note

Note:

(1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.

2.5 TABLE OF PARAMETERS OF TEST SOFTWARE SETTING

During testing, channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the end product.

Max output power Setting				
Test software Version	Test program: Built-in software 1.0			
Mode	802.11a	802.11n HT20	802.11n HT40	802.11ac HT20/HT40/HT80
Data Rate	6Mbps	MSC0	MSC0	MSC0
Power Setting of Softwave	60	60	66	66

2.6 EQUIPMENTS LIST FOR ALL TEST ITEMS

Radiation test, Band-edge test and 6db bandwidth test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	Spectrum Analyzer (9kHz-26.5GHz)	Agilent	E4408B	MY50140780	Oct. 25, 2025	Oct. 24, 2026
2	Test Receiver (9kHz-7GHz)	R&S	ESRP7	101393	Oct. 25, 2025	Oct. 24, 2026
3	Bilog Antenna (30MHz-1GHz)	R&S	VULB9162	00306	Oct. 25, 2025	Oct. 24, 2026
4	Horn Antenna (1GHz-18GHz)	Schwarzbeck	BBHA9120D	02139	Oct. 25, 2025	Oct. 24, 2026
5	Horn Antenna (18GHz-40GHz)	A.H. Systems	SAS-574	588	Oct. 25, 2025	Oct. 24, 2026
6	Amplifier (9KHz-6GHz)	Schwarzbeck	BBV9743B	00153	Oct. 25, 2025	Oct. 24, 2026
7	Amplifier (1GHz-18GHz)	EMEC	EM01G8GA	00270	Oct. 25, 2025	Oct. 24, 2026
8	Amplifier (18GHz-40GHz)	Quanjuda	DLE-161	97	Oct. 25, 2025	Oct. 24, 2026
9	Loop Antenna (9KHz-30MHz)	Schwarzbeck	FMZB1519B	00014	Oct. 25, 2025	Oct. 24, 2026
10	RF cables1 (9kHz-1GHz)	ChengYu	966	004	Oct. 25, 2025	Oct. 24, 2026
11	RF cables2 (1GHz-40GHz)	ChengYu	966	003	Oct. 25, 2025	Oct. 24, 2026
12	Antenna connector	Florida RF Labs	N/A	RF 01#	Oct. 25, 2025	Oct. 24, 2026
13	Power probe	KEYSIGHT	U2021XA	MY55210018	Oct. 25, 2025	Oct. 24, 2026
14	Signal Analyzer 9kHz-26.5GHz	Agilent	N9020A	MY55370280	Oct. 25, 2025	Oct. 24, 2026
15	Test Receiver 20kHz-40GHz	R&S	ESU 40	100376	Oct. 25, 2025	Oct. 24, 2026
16	D.C. Power Supply	LongWei	PS-305D	010964729	Oct. 25, 2025	Oct. 24, 2026

Conduction Test equipment

Item	Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
1	843 Shielded Room	YIHENG	843 Room	843	Nov. 05, 2023	Nov. 04, 2026
2	EMI Receiver	R&S	ESR	101421	Oct. 25, 2025	Oct. 24, 2026
3	LISN	R&S	ENV216	102417	Oct. 25, 2025	Oct. 24, 2026
4	843 Cable 1#	ChengYu	CE Cable	001	Oct. 25, 2025	Oct. 24, 2026

Other

Item	Name	Manufacturer	Model	Software version
1	EMC Conduction Test System	FALA	EZ_EMC	EMC-CON 3A1.1
2	EMC radiation test system	FALA	EZ_EMC	FA-03A2
3	RF test system	MAIWEI	MTS8310	2.0.0.0
4	RF communication test system	MAIWEI	MTS8200	2.0.0.0

3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Limit (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.5 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

(1) The tighter limit applies at the band edges.

(2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz

3.1.2 TEST PROCEDURE

a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.

b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.

c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.

d. LISN at least 80 cm from nearest part of EUT chassis.

e. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

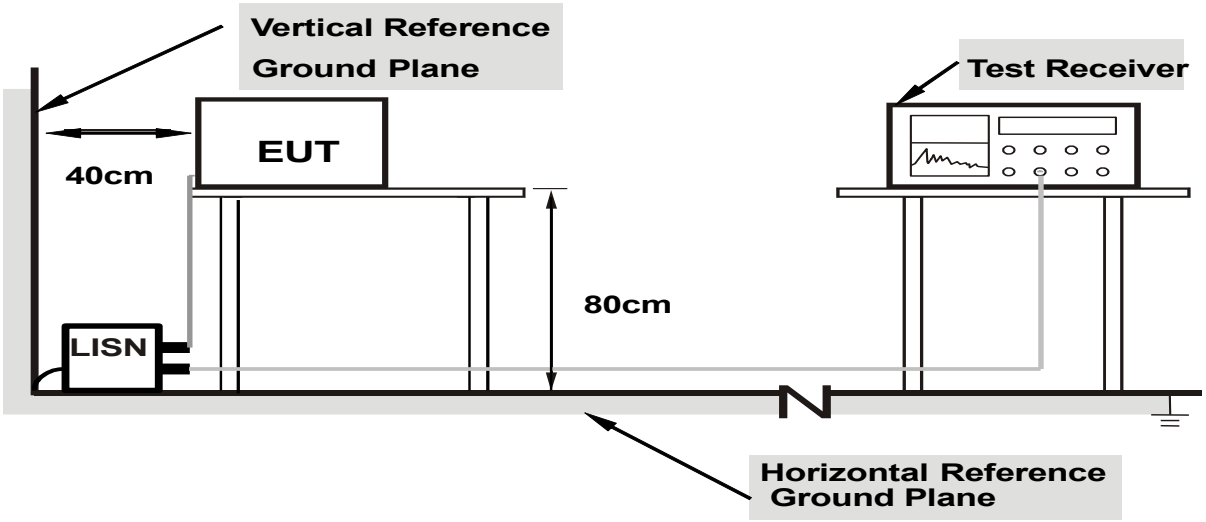

Note: 1.Support units were connected to second LISN.
2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.
We pretest AC 120V and AC 230V, the worst voltage was AC 120V and the data recording in the report.

3.1.6 TEST RESULTS

Temperature:	25 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	L
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

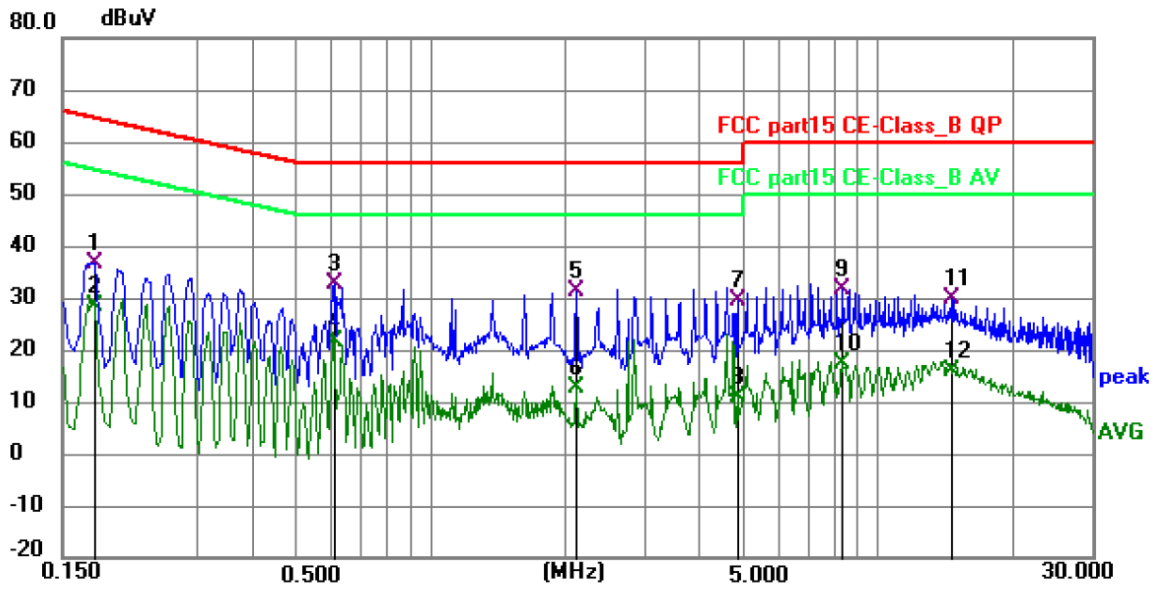

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1770	26.69	9.93	36.62	64.63	-28.01	QP	P	
2	0.1770	18.42	9.93	28.35	54.63	-26.28	AVG	P	
3 *	0.6090	22.73	9.88	32.61	56.00	-23.39	QP	P	
4	0.6090	11.76	9.88	21.64	46.00	-24.36	AVG	P	
5	2.1164	21.28	9.92	31.20	56.00	-24.80	QP	P	
6	2.1164	2.76	9.92	12.68	46.00	-33.32	AVG	P	
7	4.8570	19.32	10.15	29.47	56.00	-26.53	QP	P	
8	4.8570	0.60	10.15	10.75	46.00	-35.25	AVG	P	
9	8.3354	21.54	10.24	31.78	60.00	-28.22	QP	P	
10	8.3354	7.02	10.24	17.26	50.00	-32.74	AVG	P	
11	14.5320	19.59	10.26	29.85	60.00	-30.15	QP	P	
12	14.5320	5.61	10.26	15.87	50.00	-34.13	AVG	P	

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

Temperature:	25 ℃	Relative Humidity:	54%
Pressure:	1010hPa	Phase :	N
Test Voltage :	AC 120V/60Hz	Test Mode:	Mode 1

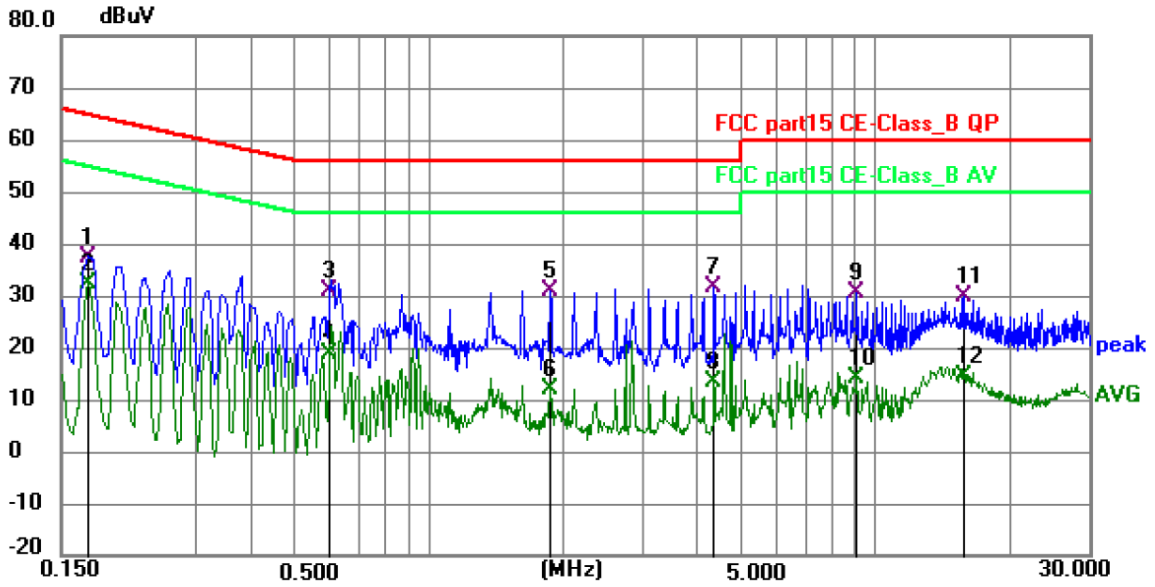

No.	Frequency (MHz)	Reading (dBuV)	Factor (dB)	Level (dBuV)	Limit (dBuV)	Margin (dB)	Detector	P/F	Remark
1	0.1725	27.49	9.91	37.40	64.84	-27.44	QP	P	
2 *	0.1725	22.51	9.91	32.42	54.84	-22.42	AVG	P	
3	0.6000	21.20	9.85	31.05	56.00	-24.95	QP	P	
4	0.6000	8.77	9.85	18.62	46.00	-27.38	AVG	P	
5	1.8690	20.94	10.01	30.95	56.00	-25.05	QP	P	
6	1.8690	1.88	10.01	11.89	46.00	-34.11	AVG	P	
7	4.3575	21.59	10.12	31.71	56.00	-24.29	QP	P	
8	4.3575	3.17	10.12	13.29	46.00	-32.71	AVG	P	
9	9.0960	20.15	10.26	30.41	60.00	-29.59	QP	P	
10	9.0960	3.92	10.26	14.18	50.00	-35.82	AVG	P	
11	15.8190	19.51	10.25	29.76	60.00	-30.24	QP	P	
12	15.8190	4.23	10.25	14.48	50.00	-35.52	AVG	P	

Remark:

Margin = Limit – Level, Correct Factor = Cable lose + LISN insertion loss, Level= Reading + Correct factor

3.2 RADIATED EMISSION MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

15.407(b)Undesirable emission limits. Except as shown in paragraph (b) (10) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

(1)For transmitters operating in the 5.15-5.25GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(2)For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(3)For transmitters operating in the 5.47-5.725GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.

(4)For transmitters operating solely in the 5.725-5.850GHz band:
All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to10dBm/MHzat25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40GHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

3.2.2 TEST PROCEDURE

Below 1GHz test procedure as below:

a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.
b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters (for the test frequency of below 30MHz, the antenna was tuned to heights 1 meter) and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Above 1GHz test procedure as below:

g. Different between above is the test site, change from Semi- Anechoic Chamber to fully Anechoic Chamber and change form table 0.8 metre to 1.5 metre.
h. Test the EUT in the lowest channel, the middle channel, the Highest channel

Note:
The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

3.2.3 DEVIATION FROM TEST STANDARD

No deviation

3.2.4 TEST SETUP

（A）Radiated Emission Test-Up Frequency Below 30MHz

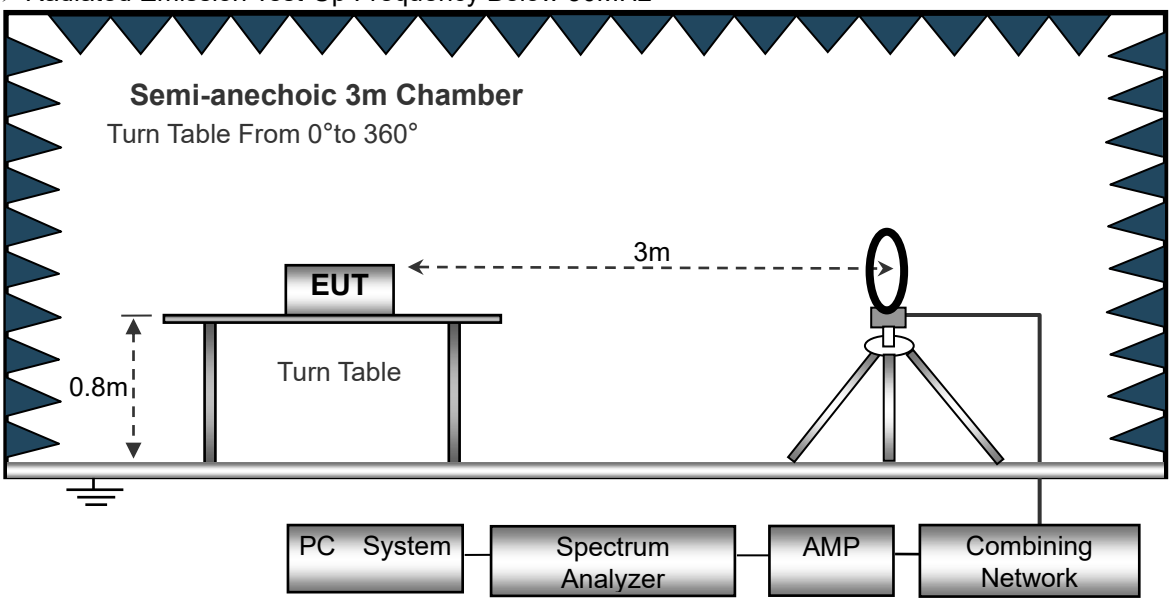

（B）Radiated Emission Test-Up Frequency 30MHz~1GHz

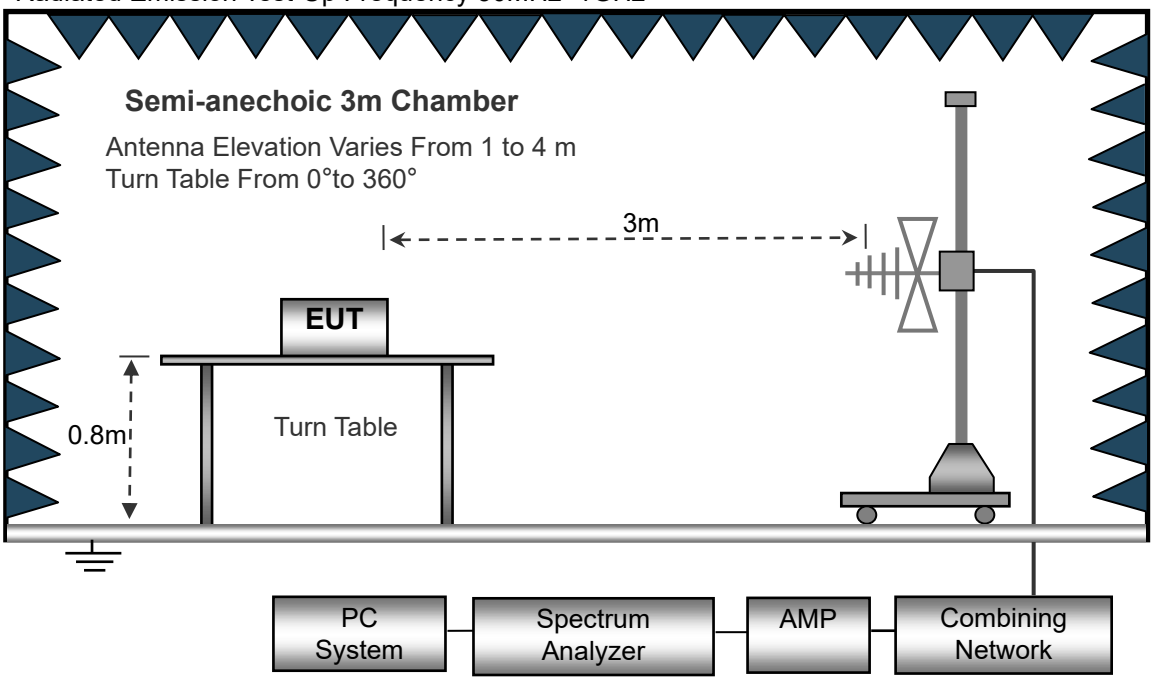

（C）Radiated Emission Test-Up Frequency Above 1GHz

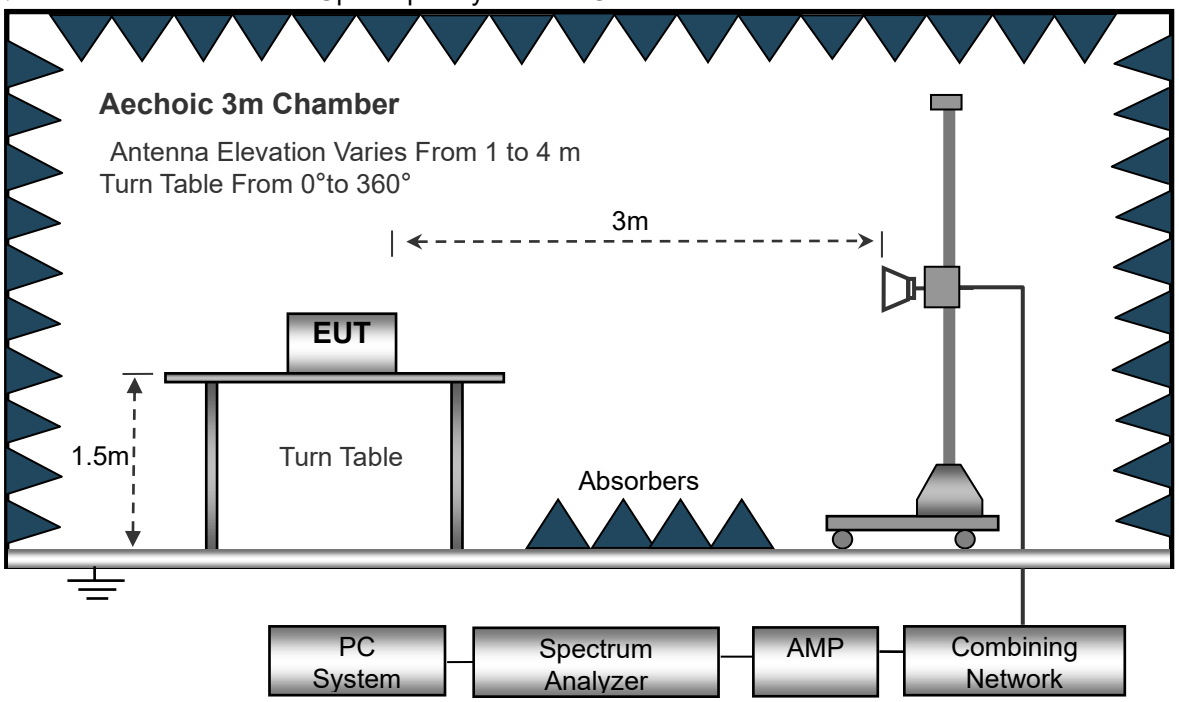

3.2.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	20℃	Relative Humidtity:	48%
Pressure:	1010 hPa	Test Voltage :	AC 120V/60Hz
Test Mode :	Mode 1	Polarization :	--

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

NOTE:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.
Distance extrapolation factor =40 log (specific distance/test distance)(dB);
Limit line = specific limits(dBuv) + distance extrapolation factor.

3.2.7 TEST RESULTS (Between 30MHz – 1GHz)

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Horizontal
Test Voltage :	DC 3.85V		
Test Mode :	Mode 1		

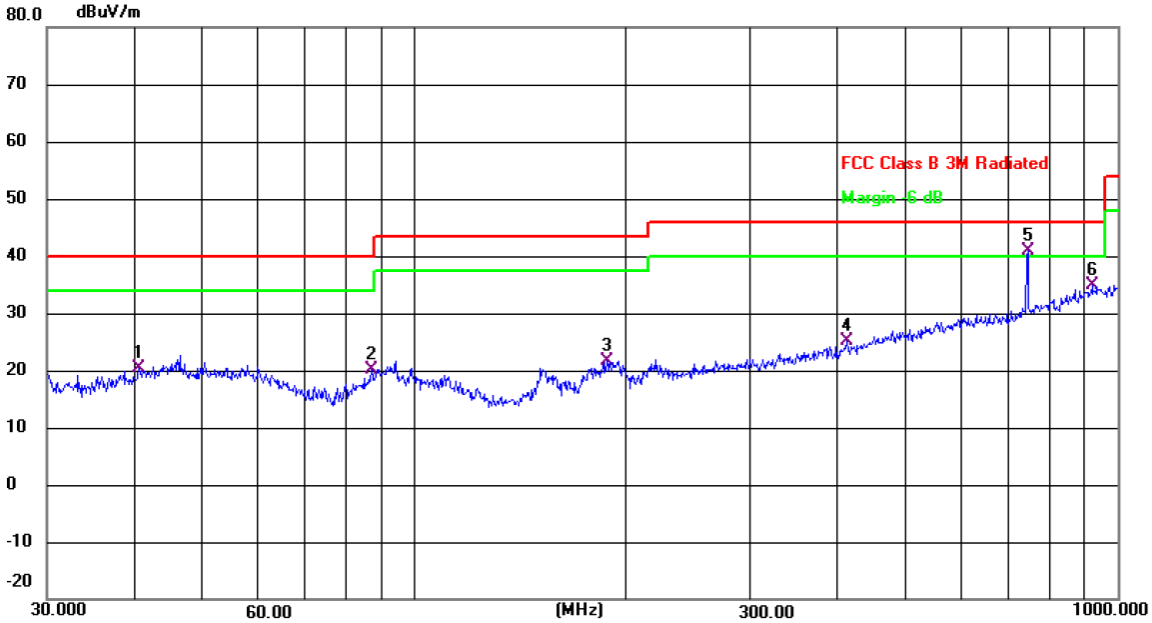

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		40.5591	28.18	-7.78	20.40	40.00	-19.60	QP	
2		86.8068	31.80	-11.70	20.10	40.00	-19.90	QP	
3		187.7530	31.16	-9.44	21.72	43.50	-21.78	QP	
4		411.8240	28.94	-3.78	25.16	46.00	-20.84	QP	
5	*	744.8661	38.12	2.75	40.87	46.00	-5.13	QP	
6		919.2866	28.86	5.95	34.81	46.00	-11.19	QP	

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

Temperature:	26℃	Relative Humidity:	54%
Pressure:	1010 hPa	Polarization :	Vertical
test voltage :	DC 3.85V		
Test Mode :	Mode 1		

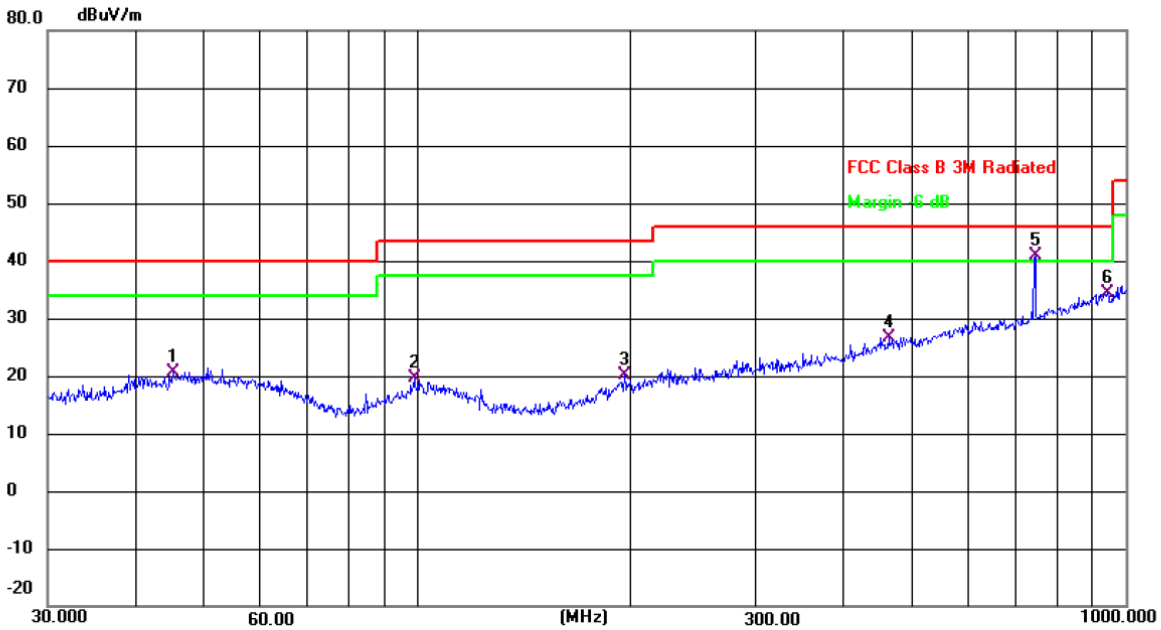

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Margin		
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	Detector	Comment
1		45.0583	27.65	-6.91	20.74	40.00	-19.26	QP	
2		98.8326	28.69	-9.08	19.61	43.50	-23.89	QP	
3		195.8220	29.81	-9.56	20.25	43.50	-23.25	QP	
4		462.3455	28.82	-2.12	26.70	46.00	-19.30	QP	
5	*	744.8661	38.25	2.75	41.00	46.00	-5.00	QP	
6		942.1305	28.43	5.88	34.31	46.00	-11.69	QP	

Remark:

Correct Factor = Cable loss + Antenna factor – Preamplifier;

Level = Reading Level + Correct Factor; Margin = Level - Limit;

3.2.8 TEST RESULTS (1ghz~40ghZ)

802.11a band 1

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	10360	56.37	49.05	15.3	37.39	60.01	68.2	-8.19	PK
V	10360	41.42	49.05	15.3	37.39	45.06	54	-8.94	AV
V	15540	52.44	49.16	15.27	40.45	59.00	74	-15.00	PK
V	15540	39.86	49.16	15.27	40.45	46.42	54	-7.58	AV
H	10360	56.77	49.05	15.3	37.39	60.41	68.2	-7.79	PK
H	10360	40.46	49.05	15.3	37.39	44.10	54	-9.90	AV
H	15540	51.42	49.16	15.27	40.45	57.98	74	-16.02	PK
H	15540	38.86	49.16	15.27	40.45	45.42	54	-8.58	AV
operation frequency:5200									
V	10400	57.45	49.09	15.34	37.42	61.12	68.2	-7.08	PK
V	10400	39.84	49.09	15.34	37.42	43.51	54	-10.49	AV
V	15600	52.49	49.18	15.29	40.47	59.07	74	-14.93	PK
V	15600	38.41	49.18	15.29	40.47	44.99	54	-9.01	AV
H	10400	56.77	49.09	15.34	37.42	60.44	68.2	-7.76	PK
H	10400	39.56	49.09	15.34	37.42	43.23	54	-10.77	AV
H	15600	53.51	49.18	15.29	40.47	60.09	74	-13.91	PK
H	15600	38.58	49.18	15.29	40.47	45.16	54	-8.84	AV
operation frequency:5240									
V	10480	58.41	49.11	15.37	37.46	62.13	68.2	-6.07	PK
V	10480	39.53	49.11	15.37	37.46	43.25	54	-10.75	AV
V	15720	53.47	49.21	15.34	40.51	60.11	74	-13.89	PK
V	15720	38.46	49.21	15.34	40.51	45.10	54	-8.90	AV
H	10480	57.53	49.11	15.37	31.31	55.10	68.2	-13.10	PK
H	10480	45.54	49.11	15.37	31.31	43.11	54	-10.89	AV
H	15720	54.54	49.21	15.34	40.51	61.18	74	-12.82	PK
H	15720	37.63	49.21	15.34	40.51	44.27	54	-9.73	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	10360	56.66	49.05	15.3	37.39	60.30	68.2	-7.90	PK
V	10360	38.46	49.05	15.3	37.39	42.10	54	-11.90	AV
V	15540	52.45	49.16	15.27	40.45	59.01	74	-14.99	PK
V	15540	38.78	49.16	15.27	40.45	45.34	54	-8.66	AV
H	10360	56.22	49.05	15.3	37.39	59.86	68.2	-8.34	PK
H	10360	39.46	49.05	15.3	37.39	43.10	54	-10.90	AV
H	15540	51.42	49.16	15.27	40.45	57.98	74	-16.02	PK
H	15540	38.66	49.16	15.27	40.45	45.22	54	-8.78	AV
operation frequency:5200									
V	10400	56.22	49.09	15.34	37.42	59.89	68.2	-8.31	PK
V	10400	39.64	49.09	15.34	37.42	43.31	54	-10.69	AV
V	15600	52.55	49.18	15.29	40.47	59.13	74	-14.87	PK
V	15600	38.48	49.18	15.29	40.47	45.06	54	-8.94	AV
H	10400	55.32	49.09	15.34	37.42	58.99	68.2	-9.21	PK
H	10400	40.56	49.09	15.34	37.42	44.23	54	-9.77	AV
H	15600	53.41	49.18	15.29	40.47	59.99	74	-14.01	PK
H	15600	39.67	49.18	15.29	40.47	46.25	54	-7.75	AV
operation frequency:5240									
V	10480	57.42	49.11	15.37	37.46	61.14	68.2	-7.06	PK
V	10480	40.57	49.11	15.37	37.46	44.29	54	-9.71	AV
V	15720	52.23	49.21	15.34	40.51	58.87	74	-15.13	PK
V	15720	38.64	49.21	15.34	40.51	45.28	54	-8.72	AV
H	10480	57.57	49.11	15.37	31.31	55.14	68.2	-13.06	PK
H	10480	44.52	49.11	15.37	31.31	42.09	54	-11.91	AV
H	15720	51.34	49.21	15.34	40.51	57.98	74	-16.02	PK
H	15720	39.76	49.21	15.34	40.51	46.40	54	-7.60	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5190									
V	10380	56.42	49.07	15.33	37.41	60.09	68.2	-8.11	PK
V	10380	39.36	49.07	15.33	37.41	43.03	54	-10.97	AV
V	15570	52.85	49.17	15.28	40.46	59.42	74	-14.58	PK
V	15570	38.84	49.17	15.28	40.46	45.41	54	-8.59	AV
H	10380	56.82	49.07	15.33	37.41	60.49	68.2	-7.71	PK
H	10380	40.37	49.07	15.33	37.41	44.04	54	-9.96	AV
H	15570	52.66	49.17	15.28	40.46	59.23	74	-14.77	PK
H	15570	38.68	49.17	15.28	40.46	45.25	54	-8.75	AV
operation frequency:5230									
V	10460	57.42	49.11	15.37	37.46	61.14	68.2	-7.06	PK
V	10460	39.57	49.11	15.37	37.46	43.29	54	-10.71	AV
V	15690	52.76	49.21	15.34	40.51	59.40	74	-14.60	PK
V	15690	38.74	49.21	15.34	40.51	45.38	54	-8.62	AV
H	10460	57.53	49.11	15.37	31.31	55.10	68.2	-13.10	PK
H	10460	44.21	49.11	15.37	31.31	41.78	54	-12.22	AV
H	15690	52.83	49.21	15.34	40.51	59.47	74	-14.53	PK
H	15690	39.69	49.21	15.34	40.51	46.33	54	-7.67	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	10360	56.42	49.05	15.3	37.39	60.06	68.2	-8.14	PK
V	10360	39.36	49.05	15.3	37.39	43.00	54	-11.00	AV
V	15540	51.56	49.16	15.27	40.45	58.12	74	-15.88	PK
V	15540	38.46	49.16	15.27	40.45	45.02	54	-8.98	AV
H	10360	56.42	49.05	15.3	37.39	60.06	68.2	-8.14	PK
H	10360	38.66	49.05	15.3	37.39	42.30	54	-11.70	AV
H	15540	52.15	49.16	15.27	40.45	58.71	74	-15.29	PK
H	15540	39.58	49.16	15.27	40.45	46.14	54	-7.86	AV
operation frequency:5200									
V	10400	56.33	49.09	15.34	37.42	60.00	68.2	-8.20	PK
V	10400	41.83	49.09	15.34	37.42	45.50	54	-8.50	AV
V	15600	52.46	49.18	15.29	40.47	59.04	74	-14.96	PK
V	15600	40.69	49.18	15.29	40.47	47.27	54	-6.73	AV
H	10400	55.65	49.09	15.34	37.42	59.32	68.2	-8.88	PK
H	10400	40.82	49.09	15.34	37.42	44.49	54	-9.51	AV
H	15600	53.63	49.18	15.29	40.47	60.21	74	-13.79	PK
H	15600	41.84	49.18	15.29	40.47	48.42	54	-5.58	AV
operation frequency:5240									
V	10480	57.26	49.11	15.37	37.46	60.98	68.2	-7.22	PK
V	10480	40.64	49.11	15.37	37.46	44.36	54	-9.64	AV
V	15720	51.56	49.21	15.34	40.51	58.20	74	-15.80	PK
V	15720	39.88	49.21	15.34	40.51	46.52	54	-7.48	AV
H	10480	57.44	49.11	15.37	31.31	55.01	68.2	-13.19	PK
H	10480	44.41	49.11	15.37	31.31	41.98	54	-12.02	AV
H	15720	52.27	49.21	15.34	40.51	58.91	74	-15.09	PK
H	15720	40.22	49.21	15.34	40.51	46.86	54	-7.14	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac 40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5190									
V	10380	56.37	49.07	15.33	37.41	60.04	68.2	-8.16	PK
V	10380	40.69	49.07	15.33	37.41	44.36	54	-9.64	AV
V	15570	52.36	49.17	15.28	40.46	58.93	74	-15.07	PK
V	15570	39.32	49.17	15.28	40.46	45.89	54	-8.11	AV
H	10380	56.65	49.07	15.33	37.41	60.32	68.2	-7.88	PK
H	10380	40.59	49.07	15.33	37.41	44.26	54	-9.74	AV
H	15570	51.64	49.17	15.28	40.46	58.21	74	-15.79	PK
H	15570	39.65	49.17	15.28	40.46	46.22	54	-7.78	AV
operation frequency:5230									
V	10460	57.22	49.11	15.37	37.46	60.94	68.2	-7.26	PK
V	10460	41.83	49.11	15.37	37.46	45.55	54	-8.45	AV
V	15690	52.69	49.21	15.34	40.51	59.33	74	-14.67	PK
V	15690	39.44	49.21	15.34	40.51	46.08	54	-7.92	AV
H	10460	57.29	49.11	15.37	31.31	54.86	68.2	-13.34	PK
H	10460	44.21	49.11	15.37	31.31	41.78	54	-12.22	AV
H	15690	52.67	49.21	15.34	40.51	59.31	74	-14.69	PK
H	15690	40.45	49.21	15.34	40.51	47.09	54	-6.91	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5210									
V	10420	56.59	49.07	15.33	37.41	60.26	68.2	-7.94	PK
V	10420	41.47	49.07	15.33	37.41	45.14	54	-8.86	AV
V	15630	51.12	49.17	15.28	40.46	57.69	74	-16.31	PK
V	15630	39.41	49.17	15.28	40.46	45.98	54	-8.02	AV
H	10420	56.57	49.07	15.33	37.41	60.24	68.2	-7.96	PK
H	10420	41.74	49.07	15.33	37.41	45.41	54	-8.59	AV
H	15630	52.67	49.17	15.28	40.46	59.24	74	-14.76	PK
H	15630	40.53	49.17	15.28	40.46	47.10	54	-6.90	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11a band 4

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	54.25	49.05	15.3	37.39	57.89	74	-16.11	PK
V	11490	41.47	49.05	15.3	37.39	45.11	54	-8.89	AV
V	17235	55.24	49.16	15.27	40.45	61.80	68.2	-6.40	PK
V	17235	40.89	49.16	15.27	40.45	47.45	54	-6.55	AV
H	11490	52.86	49.05	15.3	37.39	56.50	74	-17.50	PK
H	11490	42.41	49.05	15.3	37.39	46.05	54	-7.95	AV
H	17235	51.54	49.16	15.27	40.45	58.10	68.2	-10.10	PK
H	17235	40.69	49.16	15.27	40.45	47.25	54	-6.75	AV
operation frequency:5785									
V	11570	51.42	49.09	15.34	37.42	55.09	74	-18.91	PK
V	11570	41.64	49.09	15.34	37.42	45.31	54	-8.69	AV
V	17355	50.86	49.18	15.29	40.47	57.44	68.2	-10.76	PK
V	17355	40.64	49.18	15.29	40.47	47.22	54	-6.78	AV
H	11570	50.35	49.09	15.34	37.42	54.02	74	-19.98	PK
H	11570	42.84	49.09	15.34	37.42	46.51	54	-7.49	AV
H	17355	48.11	49.18	15.29	40.47	54.69	68.2	-13.51	PK
H	17355	40.64	49.18	15.29	40.47	47.22	54	-6.78	AV
operation frequency:5825									
V	11650	52.85	49.11	15.37	37.46	56.57	74	-17.43	PK
V	11650	41.37	49.11	15.37	37.46	45.09	54	-8.91	AV
V	17475	49.24	49.21	15.34	40.51	55.88	68.2	-12.32	PK
V	17475	40.73	49.21	15.34	40.51	47.37	54	-6.63	AV
H	11650	57.37	49.11	15.37	31.31	54.94	74	-19.06	PK
H	11650	48.41	49.11	15.37	31.31	45.98	54	-8.02	AV
H	17475	49.31	49.21	15.34	40.51	55.95	68.2	-12.25	PK
H	17475	40.75	49.21	15.34	40.51	47.39	54	-6.61	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	49.63	49.05	15.3	37.39	53.27	74	-20.73	PK
V	11490	42.85	49.05	15.3	37.39	46.49	54	-7.51	AV
V	17235	48.72	49.16	15.27	40.45	55.28	68.2	-12.92	PK
V	17235	40.34	49.16	15.27	40.45	46.90	54	-7.10	AV
H	11490	49.25	49.05	15.3	37.39	52.89	74	-21.11	PK
H	11490	41.22	49.05	15.3	37.39	44.86	54	-9.14	AV
H	17235	48.85	49.16	15.27	40.45	55.41	68.2	-12.79	PK
H	17235	40.64	49.16	15.27	40.45	47.20	54	-6.80	AV
operation frequency:5785									
V	11570	52.56	49.09	15.34	37.42	56.23	74	-17.77	PK
V	11570	42.22	49.09	15.34	37.42	45.89	54	-8.11	AV
V	17355	49.23	49.18	15.29	40.47	55.81	68.2	-12.39	PK
V	17355	40.85	49.18	15.29	40.47	47.43	54	-6.57	AV
H	11570	49.41	49.09	15.34	37.42	53.08	74	-20.92	PK
H	11570	43.86	49.09	15.34	37.42	47.53	54	-6.47	AV
H	17355	49.87	49.18	15.29	40.47	56.45	68.2	-11.75	PK
H	17355	40.35	49.18	15.29	40.47	46.93	54	-7.07	AV
operation frequency:5825									
V	11650	51.53	49.11	15.37	37.46	55.25	74	-18.75	PK
V	11650	41.37	49.11	15.37	37.46	45.09	54	-8.91	AV
V	17475	48.44	49.21	15.34	40.51	55.08	68.2	-13.12	PK
V	17475	40.22	49.21	15.34	40.51	46.86	54	-7.14	AV
H	11650	57.47	49.11	15.37	31.31	55.04	74	-18.96	PK
H	11650	44.52	49.11	15.37	31.31	42.09	54	-11.91	AV
H	17475	49.73	49.21	15.34	40.51	56.37	68.2	-11.83	PK
H	17475	40.42	49.21	15.34	40.51	47.06	54	-6.94	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5755									
V	11510	49.48	49.07	15.33	37.41	53.15	74	-20.85	PK
V	11510	41.67	49.07	15.33	37.41	45.34	54	-8.66	AV
V	17265	49.41	49.17	15.28	40.46	55.98	68.2	-12.22	PK
V	17265	40.67	49.17	15.28	40.46	47.24	54	-6.76	AV
H	11510	48.45	49.07	15.33	37.41	52.12	74	-21.88	PK
H	11510	41.19	49.07	15.33	37.41	44.86	54	-9.14	AV
H	17265	49.22	49.17	15.28	40.46	55.79	68.2	-12.41	PK
H	17265	40.75	49.17	15.28	40.46	47.32	54	-6.68	AV
operation frequency:5795									
V	11590	49.63	49.11	15.37	37.46	53.35	74	-20.65	PK
V	11590	41.49	49.11	15.37	37.46	45.21	54	-8.79	AV
V	17385	48.35	49.21	15.34	40.51	54.99	68.2	-13.21	PK
V	17385	40.34	49.21	15.34	40.51	46.98	54	-7.02	AV
H	11590	57.42	49.11	15.37	31.31	54.99	74	-19.01	PK
H	11590	44.46	49.11	15.37	31.31	42.03	54	-11.97	AV
H	17385	48.52	49.21	15.34	40.51	55.16	68.2	-13.04	PK
H	17385	40.87	49.21	15.34	40.51	47.51	54	-6.49	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	11490	49.58	49.05	15.3	37.39	53.22	74	-20.78	PK
V	11490	42.83	49.05	15.3	37.39	46.47	54	-7.53	AV
V	17235	48.41	49.16	15.27	40.45	54.97	68.2	-13.23	PK
V	17235	40.47	49.16	15.27	40.45	47.03	54	-6.97	AV
H	11490	48.52	49.05	15.3	37.39	52.16	74	-21.84	PK
H	11490	41.64	49.05	15.3	37.39	45.28	54	-8.72	AV
H	17235	48.11	49.16	15.27	40.45	54.67	68.2	-13.53	PK
H	17235	40.37	49.16	15.27	40.45	46.93	54	-7.07	AV
operation frequency:5785									
V	11570	48.52	49.09	15.34	37.42	52.19	74	-21.81	PK
V	11570	41.37	49.09	15.34	37.42	45.04	54	-8.96	AV
V	17355	49.12	49.18	15.29	40.47	55.70	68.2	-12.50	PK
V	17355	40.69	49.18	15.29	40.47	47.27	54	-6.73	AV
H	11570	49.41	49.09	15.34	37.42	53.08	74	-20.92	PK
H	11570	43.23	49.09	15.34	37.42	46.90	54	-7.10	AV
H	17355	49.35	49.18	15.29	40.47	55.93	68.2	-12.27	PK
H	17355	40.64	49.18	15.29	40.47	47.22	54	-6.78	AV
operation frequency:5825									
V	11650	49.58	49.11	15.37	37.46	53.30	74	-20.70	PK
V	11650	41.63	49.11	15.37	37.46	45.35	54	-8.65	AV
V	17475	48.41	49.21	15.34	40.51	55.05	68.2	-13.15	PK
V	17475	40.84	49.21	15.34	40.51	47.48	54	-6.52	AV
H	11650	57.66	49.11	15.37	31.31	55.23	74	-18.77	PK
H	11650	44.13	49.11	15.37	31.31	41.70	54	-12.30	AV
H	17475	48.85	49.21	15.34	40.51	55.49	68.2	-12.71	PK
H	17475	40.45	49.21	15.34	40.51	47.09	54	-6.91	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5755									
V	11510	49.63	49.07	15.33	37.41	53.30	74	-20.70	PK
V	11510	42.34	49.07	15.33	37.41	46.01	54	-7.99	AV
V	17265	48.41	49.17	15.28	40.46	54.98	68.2	-13.22	PK
V	17265	41.44	49.17	15.28	40.46	48.01	54	-5.99	AV
H	11510	48.58	49.07	15.33	37.41	52.25	74	-21.75	PK
H	11510	42.52	49.07	15.33	37.41	46.19	54	-7.81	AV
H	17265	48.56	49.17	15.28	40.46	55.13	68.2	-13.07	PK
H	17265	40.55	49.17	15.28	40.46	47.12	54	-6.88	AV
operation frequency:5795									
V	11590	49.56	49.11	15.37	37.46	53.28	74	-20.72	PK
V	11590	41.74	49.11	15.37	37.46	45.46	54	-8.54	AV
V	17385	48.46	49.21	15.34	40.51	55.10	68.2	-13.10	PK
V	17385	40.54	49.21	15.34	40.51	47.18	54	-6.82	AV
H	11590	57.22	49.11	15.37	31.31	54.79	74	-19.21	PK
H	11590	44.68	49.11	15.37	31.31	42.25	54	-11.75	AV
H	17385	48.41	49.21	15.34	40.51	55.05	68.2	-13.15	PK
H	17385	40.37	49.21	15.34	40.51	47.01	54	-6.99	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5775									
V	11550	48.21	49.07	15.33	37.41	51.88	74	-22.12	PK
V	11550	42.56	49.07	15.33	37.41	46.23	54	-7.77	AV
V	17325	49.68	49.17	15.28	40.46	56.25	68.2	-11.95	PK
V	17325	40.25	49.17	15.28	40.46	46.82	54	-7.18	AV
H	11550	48.25	49.07	15.33	37.41	51.92	74	-22.08	PK
H	11550	41.57	49.07	15.33	37.41	45.24	54	-8.76	AV
H	17325	48.65	49.17	15.28	40.46	55.22	68.2	-12.98	PK
H	17325	40.65	49.17	15.28	40.46	47.22	54	-6.78	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

3.3 RADIATED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

15.407 (b)

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Limit (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

(1) The limit for radiated test was performed according to FCC PART 15C.

(2) The tighter limit applies at the band edges.

(3) Emission level (dBuV/m)=20log Emission level (uV/m).

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	5000MHz
Stop Frequency	5420MHz
RB / VB (emission in restricted band)	1 MHz / 1 MHz for Peak, 1 MHz / 10Hz for Average

3.3.2 TEST PROCEDURE

Above 1GHz test procedure as below:

a. 1. The EUT was placed on the top of a rotating table 0.1 meters above the ground at a 3 meter camber. The table was rotated 360 degrees to determine the position of the highest radiation.

b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.

c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.

d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading.

e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

g. Test the EUT in the lowest channel,the Highest channel

Note:
The horizontal and vertical polarities of the antenna were tested, and a pre-test was conducted on the EUT placement as three orthogonal axes X,Y,Z. The worst display of the test results was the Y-axis. The worst case emissions were reported.

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

Radiated Emission Test-Up Frequency Above 1GHz

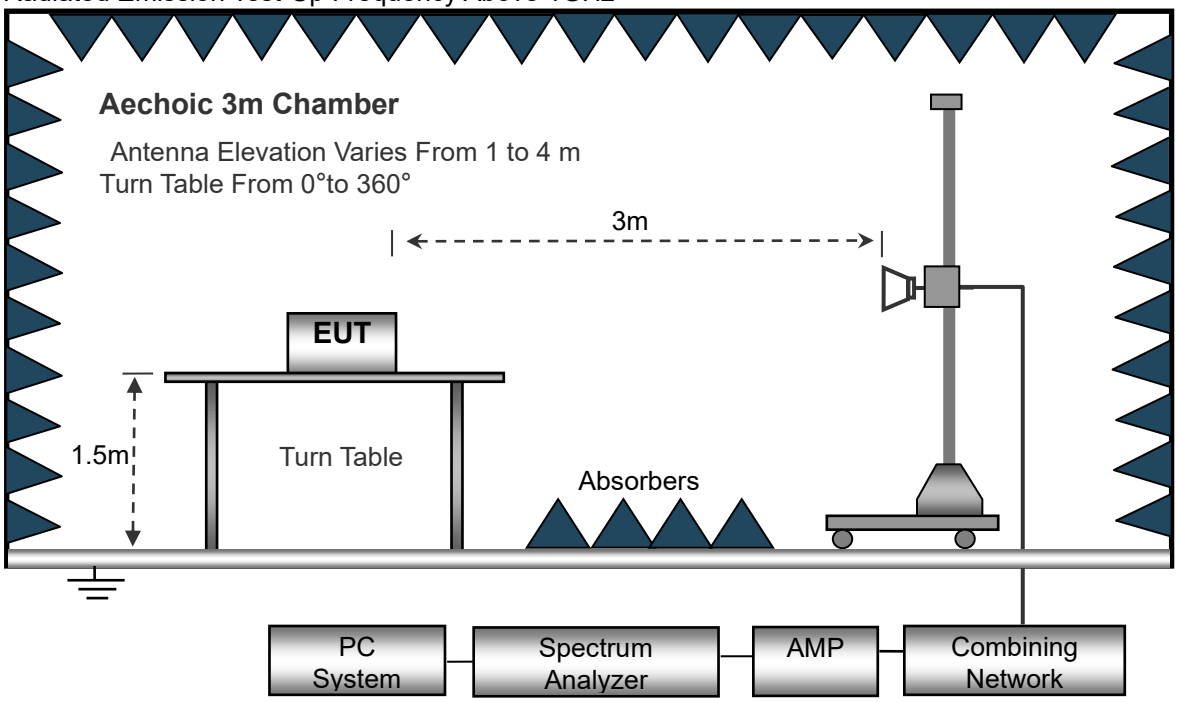

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULT

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	5150	53.36	49.12	15.6	37.34	57.18	74	-16.82	PK
V	5150	39.41	49.12	15.6	37.34	43.23	54	-10.77	AV
V	5145	54.43	49.19	15.24	40.43	60.91	74	-13.09	PK
V	5145	36.48	49.19	15.24	40.43	42.96	54	-11.04	AV
H	5150	52.45	49.12	15.6	37.34	56.27	74	-17.73	PK
H	5150	37.15	49.12	15.6	37.34	40.97	54	-13.03	AV
H	5145	54.28	49.19	15.24	40.43	60.76	74	-13.24	PK
H	5145	33.45	49.19	15.24	40.43	39.93	54	-14.07	AV
operation frequency:5240									
V	5350	53.63	49.13	15.32	37.46	57.28	74	-16.72	PK
V	5350	35.53	49.13	15.32	37.46	39.18	54	-14.82	AV
V	5370	53.44	49.24	15.36	40.51	60.07	74	-13.93	PK
V	5370	32.11	49.24	15.36	40.51	38.74	54	-15.26	AV
H	5350	52.77	49.13	15.32	31.31	50.27	74	-23.73	PK
H	5350	40.69	49.13	15.32	31.31	38.19	54	-15.81	AV
H	5370	52.53	49.24	15.36	40.51	59.16	74	-14.84	PK
H	5370	32.43	49.24	15.36	40.51	39.06	54	-14.94	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	5150	51.42	49.12	15.6	37.34	55.24	74	-18.76	PK
V	5150	33.26	49.12	15.6	37.34	37.08	54	-16.92	AV
V	5145	51.48	49.19	15.24	40.43	57.96	74	-16.04	PK
V	5145	33.52	49.19	15.24	40.43	40.00	54	-14.00	AV
H	5150	51.57	49.12	15.6	37.34	55.39	74	-18.61	PK
H	5150	33.22	49.12	15.6	37.34	37.04	54	-16.96	AV
H	5145	50.67	49.19	15.24	40.43	57.15	74	-16.85	PK
H	5145	32.36	49.19	15.24	40.43	38.84	54	-15.16	AV
operation frequency:5240									
V	5350	53.58	49.13	15.32	37.46	57.23	74	-16.77	PK
V	5350	34.35	49.13	15.32	37.46	38.00	54	-16.00	AV
V	5370	50.64	49.24	15.36	40.51	57.27	74	-16.73	PK
V	5370	33.42	49.24	15.36	40.51	40.05	54	-13.95	AV
H	5350	54.36	49.13	15.32	31.31	51.86	74	-22.14	PK
H	5350	36.67	49.13	15.32	31.31	34.17	54	-19.83	AV
H	5370	51.56	49.24	15.36	40.51	58.19	74	-15.81	PK
H	5370	33.63	49.24	15.36	40.51	40.26	54	-13.74	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5180									
V	5150	52.22	49.12	15.33	37.41	55.84	74	-18.16	PK
V	5150	34.37	49.12	15.33	37.41	37.99	54	-16.01	AV
V	5145	51.55	49.19	15.28	40.46	58.10	74	-15.90	PK
V	5145	33.47	49.19	15.28	40.46	40.02	54	-13.98	AV
H	5150	52.67	49.12	15.33	37.41	56.29	74	-17.71	PK
H	5150	34.76	49.12	15.33	37.41	38.38	54	-15.62	AV
H	5145	50.83	49.19	15.28	40.46	57.38	74	-16.62	PK
H	5145	33.57	49.19	15.28	40.46	40.12	54	-13.88	AV
operation frequency:5240									
V	5350	52.27	49.12	15.33	37.41	55.89	74	-18.11	PK
V	5350	34.53	49.12	15.33	37.41	38.15	54	-15.85	AV
V	5370	51.54	49.19	15.28	40.46	58.09	74	-15.91	PK
V	5370	33.65	49.19	15.28	40.46	40.20	54	-13.80	AV
H	5350	52.47	49.12	15.33	37.41	56.09	74	-17.91	PK
H	5350	34.85	49.12	15.33	37.41	38.47	54	-15.53	AV
H	5370	50.34	49.19	15.28	40.46	56.89	74	-17.11	PK
H	5370	33.68	49.19	15.28	40.46	40.23	54	-13.77	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5190									
V	5150	52.26	49.12	15.6	37.39	56.13	74	-17.87	PK
V	5150	35.64	49.12	15.6	37.39	39.51	54	-14.49	AV
V	5145	51.12	49.19	15.24	40.45	57.62	74	-16.38	PK
V	5145	34.44	49.19	15.24	40.45	40.94	54	-13.06	AV
H	5150	52.59	49.12	15.60	37.39	56.46	74	-17.54	PK
H	5150	34.56	49.12	15.60	37.39	38.43	54	-15.57	AV
H	5145	50.47	49.19	15.24	40.45	56.97	74	-17.03	PK
H	5145	35.38	49.19	15.24	40.45	41.88	54	-12.12	AV
operation frequency:5230									
V	5350	53.21	49.13	15.34	37.46	56.88	74	-17.12	PK
V	5350	37.33	49.13	15.34	37.46	41.00	54	-13.00	AV
V	5370	50.59	49.24	15.35	40.51	57.21	74	-16.79	PK
V	5370	36.46	49.24	15.35	40.51	43.08	54	-10.92	AV
H	5350	54.41	49.13	15.34	31.31	51.93	74	-22.07	PK
H	5350	41.57	49.13	15.34	31.31	39.09	54	-14.91	AV
H	5370	52.85	49.24	15.35	40.51	59.47	74	-14.53	PK
H	5370	36.62	49.24	15.35	40.51	43.24	54	-10.76	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5190									
V	5150	52.42	49.12	15.32	37.41	56.03	74	-17.97	PK
V	5150	37.83	49.12	15.32	37.41	41.44	54	-12.56	AV
V	5145	52.29	49.19	15.36	40.46	58.92	74	-15.08	PK
V	5145	36.63	49.19	15.36	40.46	43.26	54	-10.74	AV
H	5150	52.26	49.12	15.32	37.41	55.87	74	-18.13	PK
H	5150	37.21	49.12	15.32	37.41	40.82	54	-13.18	AV
H	5145	51.77	49.19	15.36	40.46	58.40	74	-15.60	PK
H	5145	36.41	49.19	15.36	40.46	43.04	54	-10.96	AV
operation frequency:5230									
V	5350	54.36	49.13	15.34	37.34	57.91	74	-16.09	PK
V	5350	36.38	49.13	15.34	37.34	39.93	54	-14.07	AV
V	5370	51.42	49.24	15.35	40.43	57.96	74	-16.04	PK
V	5370	36.53	49.24	15.35	40.43	43.07	54	-10.93	AV
H	5350	54.41	49.13	15.34	37.34	57.96	74	-16.04	PK
H	5350	41.47	49.13	15.34	37.34	45.02	54	-8.98	AV
H	5370	50.89	49.24	15.35	40.43	57.43	74	-16.57	PK
H	5370	35.84	49.24	15.35	40.43	42.38	54	-11.62	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5210									
V	5150	52.22	49.13	15.32	37.48	55.89	74	-18.11	PK
V	5150	35.57	49.13	15.32	37.48	39.24	54	-14.76	AV
V	5145	51.65	49.24	15.36	40.42	58.19	74	-15.81	PK
V	5145	35.86	49.24	15.36	40.42	42.40	54	-11.60	AV
H	5150	52.34	49.13	15.32	37.48	56.01	74	-17.99	PK
H	5150	36.65	49.13	15.32	37.48	40.32	54	-13.68	AV
H	5145	50.55	49.24	15.36	40.42	57.09	74	-16.91	PK
H	5145	35.67	49.24	15.36	40.42	42.21	54	-11.79	AV
operation frequency:5210									
V	5350	52.70	49.13	15.32	37.48	56.37	74	-17.63	PK
V	5350	35.42	49.13	15.32	37.48	39.09	54	-14.91	AV
V	5370	51.34	49.24	15.36	40.42	57.88	74	-16.12	PK
V	5370	35.12	49.24	15.36	40.42	41.66	54	-12.34	AV
H	5350	52.37	49.13	15.32	37.48	56.04	74	-17.96	PK
H	5350	36.21	49.13	15.32	37.48	39.88	54	-14.12	AV
H	5370	50.60	49.24	15.36	40.42	57.14	74	-16.86	PK
H	5370	35.75	49.24	15.36	40.42	42.29	54	-11.71	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11a

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	5725	51.37	46.38	12.43	35.65	53.07	68.2	-15.13	PK
V	5725	40.49	46.38	12.43	35.65	42.19	54	-11.81	AV
V	5720	51.33	46.56	12.47	35.76	53.00	68.2	-15.20	PK
V	5720	40.29	46.56	12.47	35.76	41.96	54	-12.04	AV
H	5725	51.85	46.38	12.43	35.65	53.55	68.2	-14.65	PK
H	5725	40.22	46.38	12.43	35.65	41.92	54	-12.08	AV
H	5720	51.67	46.56	12.47	35.76	53.34	68.2	-14.86	PK
H	5720	40.75	46.56	12.47	35.76	42.42	54	-11.58	AV
operation frequency:5825									
V	5850	56.27	46.55	12.65	35.87	58.24	68.2	-9.96	PK
V	5850	42.32	46.55	12.65	35.87	44.29	54	-9.71	AV
V	5870	56.57	46.58	12.67	35.93	58.59	68.2	-9.61	PK
V	5870	42.35	46.58	12.67	35.93	44.37	54	-9.63	AV
H	5850	56.29	46.55	12.65	35.87	58.26	68.2	-9.94	PK
H	5850	42.24	46.55	12.65	35.87	44.21	54	-9.79	AV
H	5870	55.67	46.58	12.67	35.93	57.69	68.2	-10.51	PK
H	5870	42.22	46.58	12.67	35.93	44.24	54	-9.76	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	5725	50.40	47.36	13.18	36.26	52.48	68.2	-15.72	PK
V	5725	40.42	47.36	13.18	36.26	42.50	54	-11.50	AV
V	5720	51.45	47.38	13.2	36.29	53.56	68.2	-14.64	PK
V	5720	41.26	47.38	13.2	36.29	43.37	54	-10.63	AV
H	5725	51.22	47.36	13.18	36.26	53.30	68.2	-14.90	PK
H	5725	41.47	47.36	13.18	36.26	43.55	54	-10.45	AV
H	5720	51.85	47.38	13.2	36.29	53.96	68.2	-14.24	PK
H	5720	40.70	47.38	13.2	36.29	42.81	54	-11.19	AV
operation frequency:5825									
V	5850	51.43	48.32	15.24	37.37	55.72	68.2	-12.48	PK
V	5850	40.67	48.32	15.24	37.37	44.96	54	-9.04	AV
V	5870	51.78	48.36	15.27	37.39	56.08	68.2	-12.12	PK
V	5870	41.45	48.36	15.27	37.39	45.75	54	-8.25	AV
H	5850	51.62	48.32	15.24	37.37	55.91	68.2	-12.29	PK
H	5850	40.54	48.32	15.24	37.37	44.83	54	-9.17	AV
H	5870	50.42	48.36	15.27	37.39	54.72	68.2	-13.48	PK
H	5870	40.47	48.36	15.27	37.39	44.77	54	-9.23	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT20

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5745									
V	5725	51.26	46.38	12.43	35.65	52.96	68.2	-15.24	PK
V	5725	40.27	46.38	12.43	35.65	41.97	54	-12.03	AV
V	5720	51.55	46.56	12.47	35.76	53.22	68.2	-14.98	PK
V	5720	40.87	46.56	12.47	35.76	42.54	54	-11.46	AV
H	5725	51.65	46.38	12.43	35.65	53.35	68.2	-14.85	PK
H	5725	40.22	46.38	12.43	35.65	41.92	54	-12.08	AV
H	5720	51.86	46.56	12.47	35.76	53.53	68.2	-14.67	PK
H	5720	40.67	46.56	12.47	35.76	42.34	54	-11.66	AV
operation frequency:5825									
V	5850	55.21	46.55	12.65	35.87	57.18	68.2	-11.02	PK
V	5850	43.66	46.55	12.65	35.87	45.63	54	-8.37	AV
V	5870	55.85	46.58	12.67	35.93	57.87	68.2	-10.33	PK
V	5870	43.77	46.58	12.67	35.93	45.79	54	-8.21	AV
H	5850	56.26	46.55	12.65	35.87	58.23	68.2	-9.97	PK
H	5850	43.46	46.55	12.65	35.87	45.43	54	-8.57	AV
H	5870	56.65	46.58	12.67	35.93	58.67	68.2	-9.53	PK
H	5870	43.87	46.58	12.67	35.93	45.89	54	-8.11	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11n HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5755									
V	5725	51.37	47.36	13.18	36.26	53.45	68.2	-14.75	PK
V	5725	41.74	47.36	13.18	36.26	43.82	54	-10.18	AV
V	5720	51.33	47.38	13.2	36.29	53.44	68.2	-14.76	PK
V	5720	41.42	47.38	13.2	36.29	43.53	54	-10.47	AV
H	5725	51.23	47.36	13.18	36.26	53.31	68.2	-14.89	PK
H	5725	41.37	47.36	13.18	36.26	43.45	54	-10.55	AV
H	5720	51.65	47.38	13.2	36.29	53.76	68.2	-14.44	PK
H	5720	41.59	47.38	13.2	36.29	43.70	54	-10.30	AV
operation frequency:5795									
V	5850	51.33	48.32	15.24	37.37	55.62	68.2	-12.58	PK
V	5850	40.53	48.32	15.24	37.37	44.82	54	-9.18	AV
V	5870	51.87	48.36	15.27	37.39	56.17	68.2	-12.03	PK
V	5870	41.35	48.36	15.27	37.39	45.65	54	-8.35	AV
H	5850	51.62	48.32	15.24	37.37	55.91	68.2	-12.29	PK
H	5850	41.59	48.32	15.24	37.37	45.88	54	-8.12	AV
H	5870	51.54	48.36	15.27	37.39	55.84	68.2	-12.36	PK
H	5870	41.42	48.36	15.27	37.39	45.72	54	-8.28	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT40

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5755									
V	5725	51.34	46.38	12.43	35.65	53.04	68.2	-15.16	PK
V	5725	40.33	46.38	12.43	35.65	42.03	54	-11.97	AV
V	5720	51.72	46.56	12.47	35.76	53.39	68.2	-14.81	PK
V	5720	41.47	46.56	12.47	35.76	43.14	54	-10.86	AV
H	5725	51.38	46.38	12.43	35.65	53.08	68.2	-15.12	PK
H	5725	40.53	46.38	12.43	35.65	42.23	54	-11.77	AV
H	5720	51.44	46.56	12.47	35.76	53.11	68.2	-15.09	PK
H	5720	40.65	46.56	12.47	35.76	42.32	54	-11.68	AV
operation frequency:5795									
V	5850	55.36	46.55	12.65	35.87	57.33	68.2	-10.87	PK
V	5850	43.44	46.55	12.65	35.87	45.41	54	-8.59	AV
V	5870	55.82	46.58	12.67	35.93	57.84	68.2	-10.36	PK
V	5870	42.69	46.58	12.67	35.93	44.71	54	-9.29	AV
H	5850	55.53	46.55	12.65	35.87	57.50	68.2	-10.70	PK
H	5850	43.23	46.55	12.65	35.87	45.20	54	-8.80	AV
H	5870	55.55	46.58	12.67	35.93	57.57	68.2	-10.63	PK
H	5870	42.14	46.58	12.67	35.93	44.16	54	-9.84	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

802.11ac HT80

Polar (H/V)	Frequency (MHz)	Meter Reading (dBuV)	Pre-amplifier (dB)	Cable Loss (dB)	Antenna Factor (dB/m)	Emission Level (dBuV/m)	Limits (dBuV/m)	Margin (dB)	Detector Type
operation frequency:5775									
V	5725	51.37	47.36	13.18	36.26	53.45	68.2	-14.75	PK
V	5725	41.85	47.36	13.18	36.26	43.93	54	-10.07	AV
V	5720	51.87	47.38	13.2	36.29	53.98	68.2	-14.22	PK
V	5720	40.55	47.38	13.2	36.29	42.66	54	-11.34	AV
H	5725	51.33	47.36	13.18	36.26	53.41	68.2	-14.79	PK
H	5725	40.54	47.36	13.18	36.26	42.62	54	-11.38	AV
H	5720	51.42	47.38	13.2	36.29	53.53	68.2	-14.67	PK
H	5720	40.84	47.38	13.2	36.29	42.95	54	-11.05	AV
V	5850	51.29	48.32	15.24	37.37	55.58	68.2	-12.62	PK
V	5850	41.37	48.32	15.24	37.37	45.66	54	-8.34	AV
V	5870	51.86	48.36	15.27	37.39	56.16	68.2	-12.04	PK
V	5870	40.35	48.36	15.27	37.39	44.65	54	-9.35	AV
H	5850	51.54	48.32	15.24	37.37	55.83	68.2	-12.37	PK
H	5850	40.54	48.32	15.24	37.37	44.83	54	-9.17	AV
H	5870	51.55	48.36	15.27	37.39	55.85	68.2	-12.35	PK
H	5870	40.68	48.36	15.27	37.39	44.98	54	-9.02	AV

Remark:

1. Emission Level = Meter Reading + Antenna Factor + Cable Loss – Pre-amplifier,
   Margin= Emission Level - Limit
2. If peak below the average limit, the average emission was no test.
3. The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Note:1. The antenna gain is compensated in the test data.

3.3 CONDUCTED BAND EMISSION MEASUREMENT

3.3.1 TEST REQUIREMENT:

FCC Part15 C Section 15.209 and 15.407

(1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of −27 dBm/MHz.
(4) For transmitters operating in the 5.725-5.85 GHz band: All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Spectrum Parameter	Setting	
Attenuation	Auto	
Start Frequency	5150MHz	5725MHz
Stop Frequency	5250MHz	5850MHz
RB / VB (emission in restricted band)	1 MHz / 3 MHz for Peak, 1 MHz / 10Hz for Average	

3.3.2 TEST PROCEDURE

Test method: FCC KDB 789033 G)& Parts 15.407(b)(4) & 15.209(a)

3.3.3 DEVIATION FROM TEST STANDARD

No deviation

3.3.4 TEST SETUP

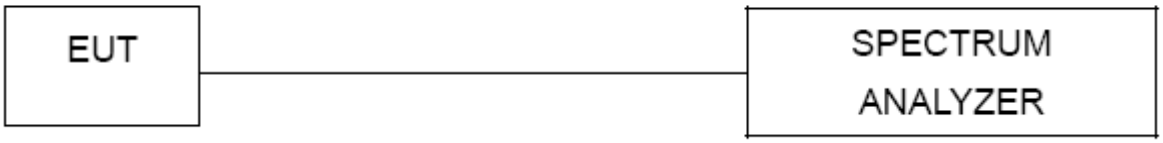

3.3.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

3.3.6 TEST RESULT

The antenna gain is compensated in the test data.
Please see annex 4.

4. AVERAGING OUTPUT POWER

4.1 APPLIED PROCEDURES / LIMIT

For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi.
For the band 5.725-5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

4.1.1 TEST PROCEDURE

a. The EUT was directly connected to the power meter and antenna output port as show in the block diagram below,
b. Spectrum Setting : RBW = 1MHz
Span⩾99%OBW(30MHz/60MHz/120MHz etc.)
VBW⩾3*RBW
Sweep = auto
Detector function = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
Trace = max hold

4.1.2 DEVIATION FROM STANDARD

No deviation.

4.1.3 TEST SETUP

4.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

4.1.5 TEST RESULTS

Please see annex 4.

5. POWER SPECTRAL DENSITY TEST

5.1 APPLIED PROCEDURES / LIMIT

In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.
In addition, the maximum power spectral density shall not exceed 30 dBm in any 500 kHz band.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	= the frequency band of operation
RB	RBW ≥ 1MHz for band 1 RBW ≥ 510KHz for band 4
VB	VBW ≥ 3RBW
Detector	RMS (i.e., power averaging).
Trace	Max Hold
Sweep Time	Auto

5.1.1 TEST PROCEDURE

1. Place the EUT on the table and set it in transmitting mode.
2. The testing follows FCC KDB 789033 D02.
3. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to Spectrum.
4. For U-NII1, U-NII-2A, U-NII-2C Band:
Set RBW=1MHz, VBW=3MHz, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
For U-NII-3 Band:
Set RBW=510 kHz, VBW=3*RBW, where span is enough to capture the entire bandwidth, Sweep time = Auto (601 pts), detector = sample, traces 100 sweeps of video averaging. (SA-2 with the omission of procedure x, the integration with 26dB EBW bandwidth)
5. User the cursor on spectrum to peak search the highest level of trace
6. Record the max. reading and add 10 log(1/duty cycle).
   we test all antennas, the antenna 1 was worst mode and the data recording in the report.
7. Duty factor Reference is made to the test results in Section 7.1.5.

5.1.2 DEVIATION FROM STANDARD

No deviation.

5.1.3 TEST SETUP

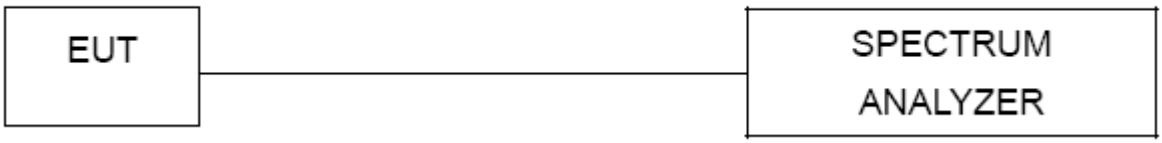

5.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

5.1.5 TEST RESULTS

Please see annex 4.

6. 6DB&26DB&99% BANDWIDTH TEST

6.1 APPLIED PROCEDURES / LIMIT

The 26 dB bandwidth is used to determine the conducted power limits.

There is no limit bandwidth for U-NII-1, U-NII-2-A and U-NII-2-C.

The minimum of 6dB Bandwidth measurement is 0.5 MHz for U-NII-3

6.1.1 TEST PROCEDURE

6dB Bandwidth	
Spectrum Parameters	Setting
RBW	100KHz
VBW	300KHz
Span	30MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

26dB Bandwidth	
Spectrum Parameters	Setting
RBW	1%-5%*OBW
VBW	>RBW
Span	30MHz(20MHz Bandwidth mode) 60MHz(40MHz Bandwidth mode) 120MHz(80MHz Bandwidth mode)
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

99% Occupied Bandwidth	
Spectrum Parameters	Setting
RBW	1% to 5% of the OBW
VBW	Approximately three times the RBW
Span	between 1.5 times and 5.0 times the OBW
Sweep Time	Auto
Detector	Peak
Trace Mode	Max Hold

6.1.2 DEVIATION FROM STANDARD

No deviation.

6.1.3 TEST SETUP

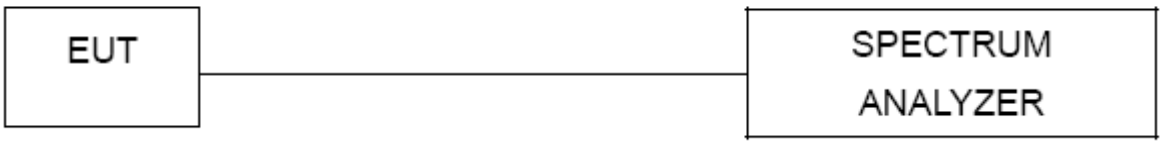

6.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

6.1.5 TEST RESULTS

Please see annex 4.

7. DUTY CYCLE TEST SIGNAL

7.1 APPLIED PROCEDURES / LIMIT

Pre-analysis Check: While conducting average power measurement, duty cycle of each mode shall be checked to ensure its duty cycle in order to compensate for the loss due to insufficient ratio of duty cycle. All duty cycle is pre-scanned, and result as obtained below shows only the most representative ones where duty cycle is conducted as the given transmission with given virtual operation that expresses the percentage.

7.1.1 TEST PROCEDURE

1. Set RBW = 1 MHz.
2. Set the video bandwidth (VBW) ≥RBW.
3. Detector = Peak.
4. Sweep = auto couple.
5. Allow the trace to stabilize.
6. Span=0

7.1.2 DEVIATION FROM STANDARD

No deviation.

7.1.3 TEST SETUP

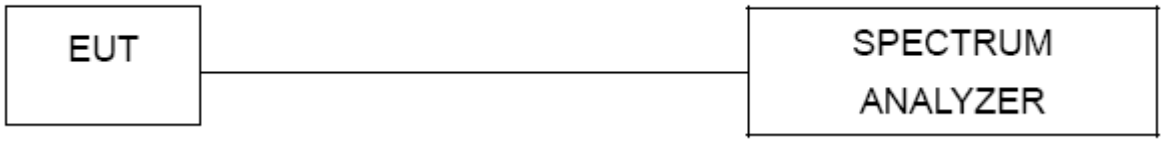

7.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

7.1.5 TEST RESULTS

Please see annex 4.

8. FREQUENCY STABILITY

8.1 APPLIED PROCEDURES / LIMIT

Manufacturers of U-NII devices are responsible for ensuring frequency stability such that an emission is maintained within the band of operation under all conditions of normal operation as specified in the user's manual.

8.1.1 TEST PROCEDURE

1. The EUT was placed inside temperature chamber and powered and powered by nominal DC voltage.
2. Set EUT as normal operation.
3. Turn the EUT on and couple its output to spectrum.
4. Turn the EUT off and set the chamber to the highest temperature specified.
5. Allow sufficient time (approximately 30 min) for the temperature of the chamber to stabilize, turn the EUT and measure the operating frequency.
6. Repeat step with the temperature chamber set to the lowest temperature.

8.1.2 DEVIATION FROM STANDARD

No deviation.

8.1.3 TEST SETUP

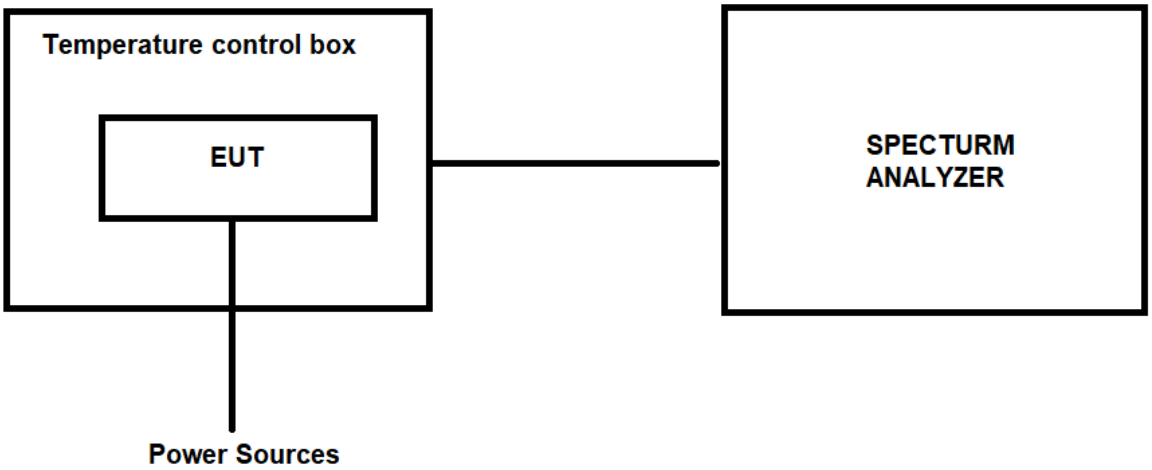

8.1.4 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

8.1.5 TEST RESULTS

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz) 802.11a	802.11n HT20	802.11ac HT20	Δ Frequency (PPM) 802.11a	802.11n HT20	802.11ac HT20
4.24V	-20℃	5180	5180.0042	5180.0065	5180.0032	0.8133	1.2573	0.6203
		5220	5220.0041	5220.0020	5220.0033	0.7906	0.3883	0.6374
		5240	5240.0029	5240.0034	5240.0021	0.5599	0.6553	0.4073
		5745	5745.0025	5745.0021	5745.0028	0.4370	0.3674	0.4893
		5785	5785.0030	5785.0033	5785.0035	0.5229	0.5747	0.6093
		5825	5825.0061	5825.0024	5825.0023	1.0539	0.4187	0.4015
3.47V		5180	5180.0060	5180.0023	5180.0031	1.1608	0.4465	0.6010
		5220	5220.0024	5220.0059	5220.0039	0.4649	1.1354	0.7523
		5240	5240.0019	5240.0027	5240.0029	0.3691	0.5218	0.5599
		5745	5745.0018	5745.0026	5745.0021	0.3152	0.4544	0.3674
		5785	5785.0050	5785.0025	5785.0032	0.8686	0.4364	0.5574
		5825	5825.0023	5825.0059	5825.0020	0.4015	1.0195	0.3500
3.85V	25℃	5180	5180.0030	5180.0020	5180.0035	0.5817	0.3886	0.6782
		5220	5220.0023	5220.0044	5220.0022	0.4458	0.8481	0.4266
		5240	5240.0063	5240.0022	5240.0029	1.2088	0.4263	0.5599
		5745	5745.0070	5745.0040	5745.0062	1.2203	0.6981	1.0811
		5785	5785.0078	5785.0031	5785.0067	1.3526	0.5401	1.1624
		5825	5825.0030	5825.0035	5825.0064	0.5217	0.6075	1.1054
4.24V	50℃	5180	5180.0021	5180.0028	5180.0029	0.4079	0.5431	0.5624
		5220	5220.0044	5220.0037	5220.0031	0.8481	0.7140	0.5990
		5240	5240.0062	5240.0017	5240.0027	1.1897	0.3309	0.5218
		5745	5745.0032	5745.0041	5745.0030	0.5589	0.7155	0.5241
		5785	5785.0023	5785.0017	5785.0034	0.4019	0.2981	0.5920
		5825	5825.0059	5825.0035	5825.0032	1.0195	0.6075	0.5560
3.47V	50℃	5180	5180.0092	5180.0018	5180.0028	1.7786	0.3500	0.5431
		5220	5220.0063	5220.0009	5220.0030	1.2121	0.1776	0.5799
		5240	5240.0091	5240.0022	5240.0051	1.7431	0.4263	0.9798
		5745	5745.0019	5745.0023	5745.0033	0.3326	0.4022	0.5763
		5785	5785.0066	5785.0018	5785.0031	1.1452	0.3154	0.5401
		5825	5825.0028	5825.0031	5825.0049	0.4873	0.5388	0.8479

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)		Δ Frequency (PPM)	
			802.11n HT40	802.11ac HT40	802.11n HT40	802.11ac HT40
4.24V	-20℃	5190	5190.0033	5190.0033	0.6390	0.6390
		5230	5230.0041	5230.0041	0.7898	0.7898
		5755	5755.0035	5755.0025	0.6106	0.4369
		5795	5795.0058	5795.0033	1.0057	0.5743
3.47V		5190	5190.0023	5190.0032	0.4463	0.6197
		5230	5230.0047	5230.0053	0.9045	1.0192
		5755	5755.0046	5755.0033	0.8018	0.5759
		5795	5795.0052	5795.0050	0.9022	0.8677
3.85V	25℃	5190	5190.0029	5190.0059	0.5619	1.1400
		5230	5230.0052	5230.0042	1.0001	0.8089
		5755	5755.0030	5755.0022	0.5238	0.3848
		5795	5795.0028	5795.0038	0.4881	0.6606
4.24V	50℃	5190	5190.0021	5190.0035	0.4078	0.6776
		5230	5230.0024	5230.0022	0.4647	0.4265
		5755	5755.0043	5755.0032	0.7497	0.5585
		5795	5795.0036	5795.0048	0.6261	0.8332
3.47V	50℃	5190	5190.0040	5190.0031	0.7739	0.6005
		5230	5230.0028	5230.0030	0.5412	0.5794
		5755	5755.0003	5754.9996	0.0546	-0.0670
		5795	5794.9993	5794.9992	0.1159	0.1332

Test Voltage	Test Temp.	Measured Frequency (MHz)	Spectrum Frequency (MHz)	Δ Frequency (PPM)
			802.11ac HT80	802.11ac HT80
4.24V	-20℃	5210	5210.0013	0.2540
		5775	5775.0025	0.4366
3.47V		5210	5210.0032	0.6187
		5775	5775.0050	0.8695
3.85V	25℃	5210	5210.0024	0.4652
		5775	5775.0042	0.7310
4.24V	50℃	5210	5210.0070	1.3481
		5775	5775.0043	0.7483
3.47V	50℃	5210	5210.0044	0.8490
		5775	5775.0052	0.9041

Note:The test result is PASS.

Only the data at normal temperature and the highest and lowest operating temperatures are presented.

9. TRANSMISSION IN THE ABSENCE OF DATA

9.1 STANDARD REQUIREMENT

According to §15.407(c)
The device shall automatically discontinue transmission in case of either absence of information to transmit or operational failure. These provisions are not intended to preclude the transmission of control or signaling information or the use of repetitive codes used by certain digital technologies to complete frame or burst intervals. Applicants shall include in their application for equipment authorization a description of how this requirement is met.

9.2 TEST RESULT

No non-compliance noted:
Refer to the theory of operation.

10. ANTENNA REQUIREMENT

10.1 STANDARD REQUIREMENT

15.203 requirement: For intentional device, according to 15.203: an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

10.2 EUT ANTENNA

The EUT antenna is Internal Antenna, It comply with the standard requirement.

11. TEST SEUUP PHOTO

Reference to the appendix I for details.

12. EUT PHOTO

Reference to the appendix II for details.

※※※※※ **END OF REPORT** ※※※※※