



Application Information	
O4Version	5.245.351
TotalTime	5m 9s 437ms
AdditionalInfor	NULL

Passive Test For BT2.4												
Freq (MHz)	Effi (%)	Effi (dB)	Gain (dBi)	Gain (dBd)	UHS (%)	DHS (%)	Max (dB)	Min (dB)	irectivity (dBi)	Beamwidth (3dB)	AttH (dB)	AttV (dB)
2400	32.27	-4.91	0.75	-1.4	0	0	0.75	-19.08	4.91	0	47.36	46.86
2410	34.52	-4.62	1.01	-1.14	0	0	1.01	-19.29	4.62	0	47.4	46.9
2420	31.32	-5.04	0.53	-1.62	0	0	0.53	-20	5.04	0	47.28	46.76
2430	29.94	-5.24	0.3	-1.85	0	0	0.3	-22	5.24	0	47.35	46.78
2440	33.08	-4.8	0.66	-1.49	0	0	0.66	-21.42	4.8	0	47.15	46.65
2450	35.3	-4.52	0.9	-1.25	0	0	0.9	-19.23	4.52	0	47.33	46.85
2460	34.55	-4.61	0.77	-1.38	0	0	0.77	-19.74	4.61	0	47.72	47.22
2470	32	-4.95	0.44	-1.71	0	0	0.44	-22.45	4.95	0	47.36	46.93
2480	38.59	-4.14	1.25	-0.9	0	0	1.25	-22.02	4.14	0	47.56	47.1
2490	33.31	-4.77	0.55	-1.6	0	0	0.55	-23.25	4.77	0	47.05	46.67
2500	31.09	-5.07	0.26	-1.89	0	0	0.26	-25.91	5.07	0	47.01	46.63



2400.00MHz - 2500.00MHz Gain

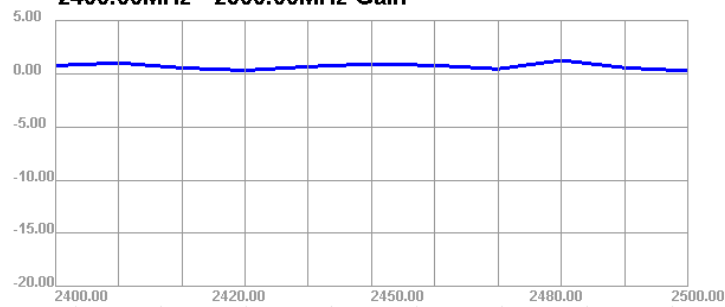


2400.00MHz - 2500.00MHz Efficiency

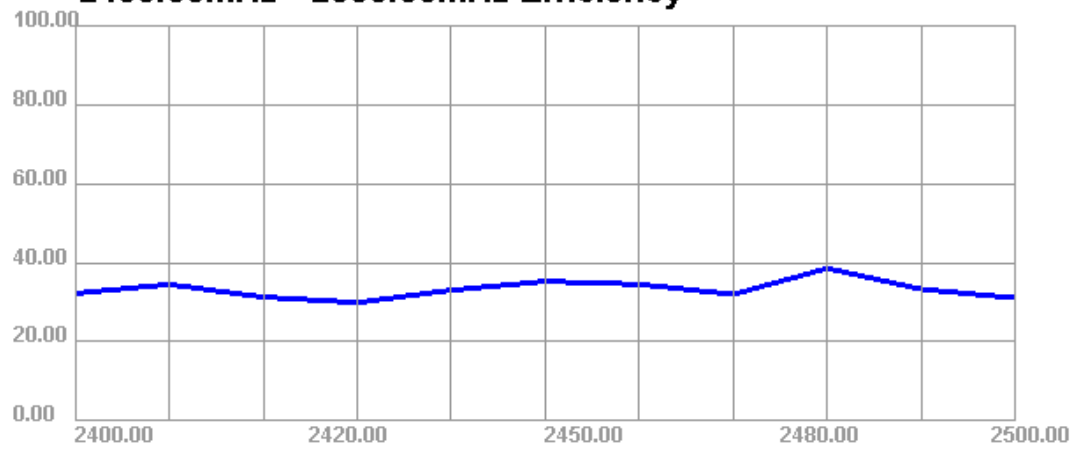


2400.000MHz




2400.000MHz H

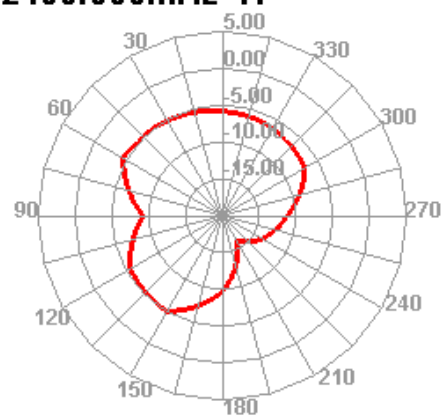


2400.000MHz E1

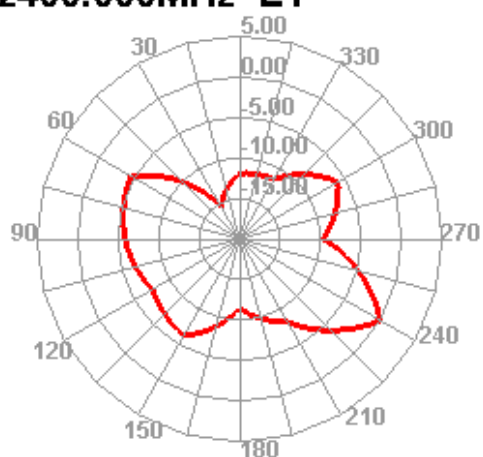


2400.000MHz E2

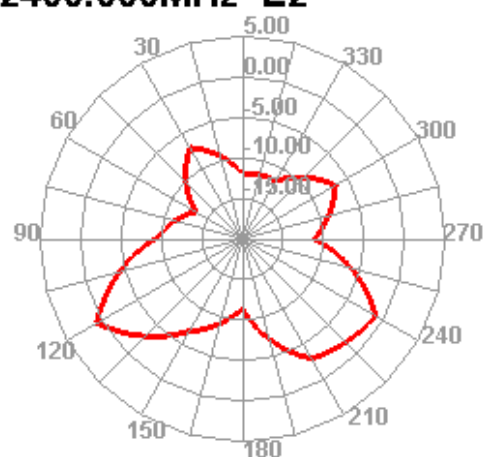


2450.000MHz

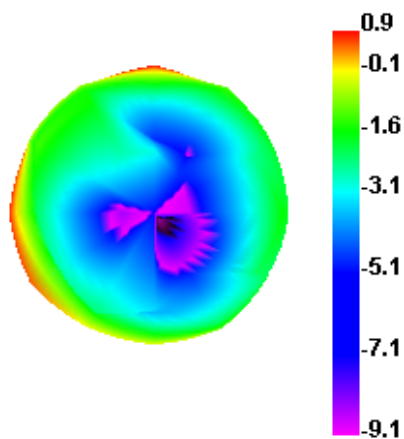


2450.000MHz H

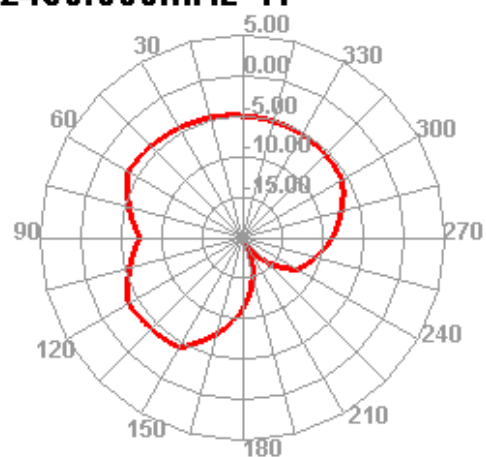


2450.000MHz E1

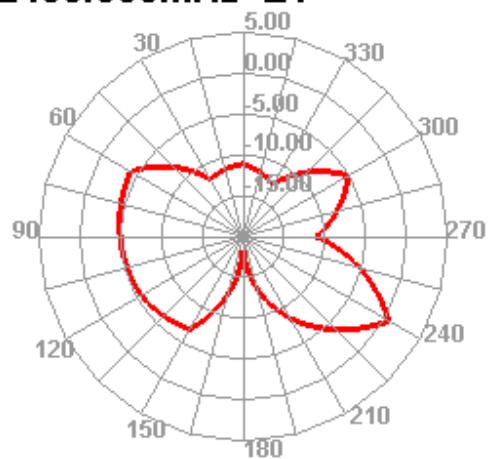


2450.000MHz E2

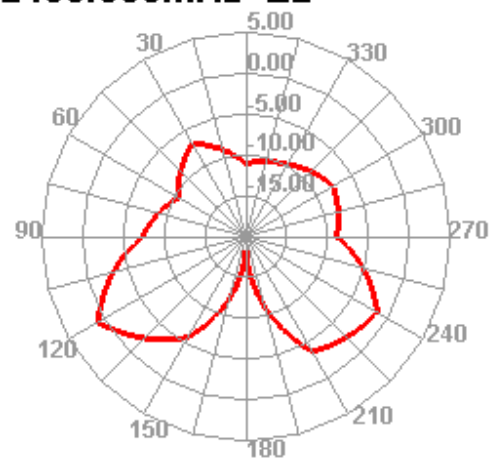


2500.000MHz

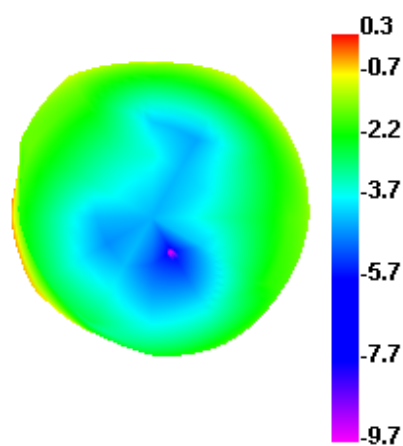


2500.000MHz H

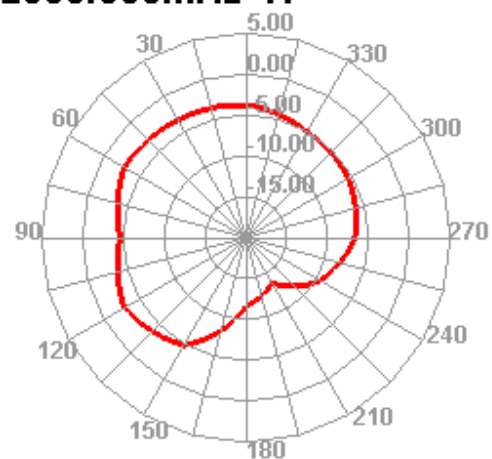


2500.000MHz E1

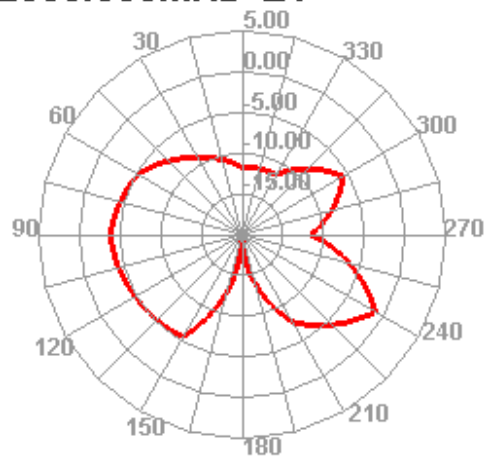

2500.000MHz E2

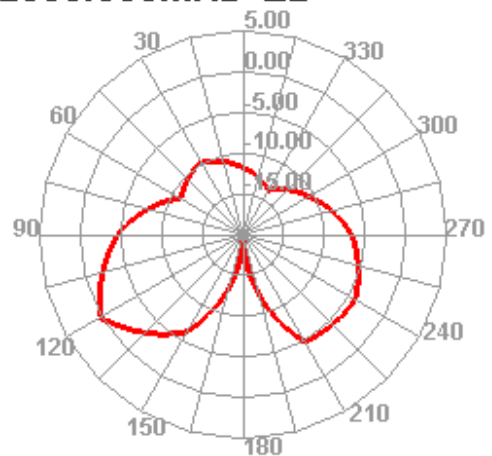

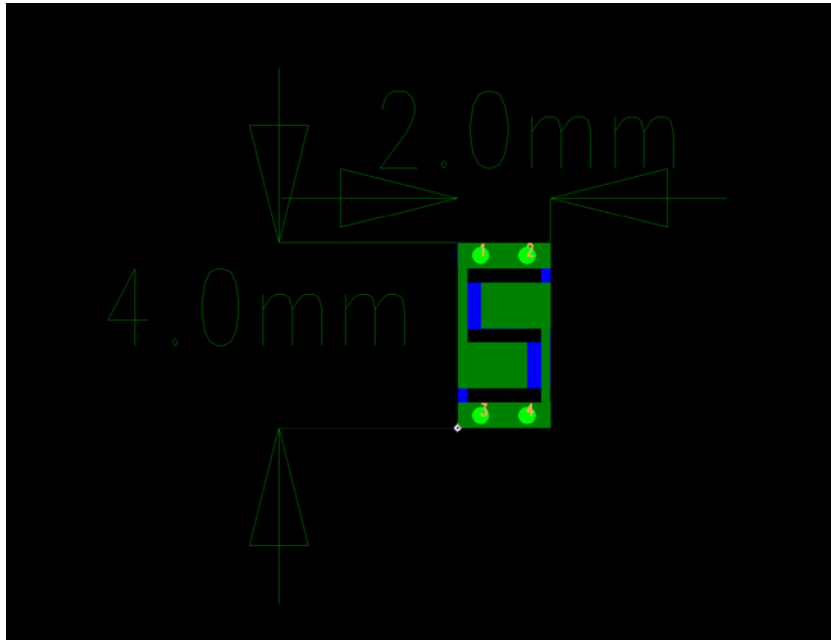

深圳市惠芯通科技有限公司

深圳市宝安区固戍顺昌路华丰第一科技园B区2栋3楼

SHENZHEN HUIXINTONG TECHNOLOGY CO.,LTD.

3rd Floor, Building 2, Zone B, Huafeng No.1 Science and Technology Park, Shunchang Road, Gushu, Bao'an District, Shenzhen, Guangdong Province, China